



# FCC RF Test Report

APPLICANT : PAX Technology Limited  
EQUIPMENT : Wireless POS Terminal  
BRAND NAME : PAX  
MODEL NAME : D210  
MARKETING NAME : D210  
FCC ID : V5PD210BT  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Mar. 07, 2013 and completely tested on Mar. 25, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by:



\_\_\_\_\_  
Jones Tsai / Manager

**SPORTON INTERNATIONAL (SHENZHEN) INC.**

**No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.**



## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test .....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Testing Site.....	6
1.6 Applied Standards .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Descriptions of Test Mode.....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system.....	10
2.5 Description of RF Function Operation Test Setup.....	10
2.6 Measurement Results Explanation Example.....	11
<b>3 TEST RESULT .....</b>	<b>12</b>
3.1 Number of Channel Measurement .....	12
3.2 Hopping Channel Separation Measurement .....	14
3.3 Dwell Time Measurement.....	21
3.4 20dB Bandwidth Measurement .....	23
3.5 Peak Output Power Measurement .....	30
3.6 Conducted Band Edges Measurement .....	33
3.7 Conducted Spurious Emission Measurement .....	40
3.8 Radiated Band Edges and Spurious Emission Measurement .....	44
3.9 AC Conducted Emission Measurement.....	54
3.10 Antenna Requirements.....	58
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>59</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>60</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b>	
<b>APPENDIX B. SETUP PHOTOGRAPHS</b>	



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330704A	Rev. 01	Initial issue of report	May 03, 2013

### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1 w for 1Mbps ≤ 125 Mw for 2, 3Mbps	Pass	-
3.6	15.247(d)	A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.21 dB at 528.250 MHz for Quasi-Peak
3.9	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 14.82 dB at 0.160 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**PAX Technology Limited**

Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

## 1.2 Manufacturer

**PAX Computer Technology (Shenzhen) Co., Ltd.**

4/F No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.

## 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Wireless POS Terminal
<b>Brand Name</b>	PAX
<b>Model Name</b>	D210
<b>Marketing Name</b>	D210
<b>FCC ID</b>	V5PD210BT
<b>EUT supports Radios application</b>	Bluetooth / RFID
<b>HW Version</b>	D210-XXX-XXX
<b>SW Version</b>	V1.XX
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth BDR (1Mbps) : 4.37 dBm (0.0027 W) Bluetooth EDR (2Mbps) : 1.87 dBm (0.0015 W) Bluetooth EDR (3Mbps) : 2.21 dBm (0.0017 W)
<b>Antenna Type</b>	Ceramic SMD Antenna type with gain 0.50 dBi
<b>Type of Modulation</b>	Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

## 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.			
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-SZ	CO01-SZ	03CH01-SZ	831040/4086F-1

The test site complies with ANSI C63.4 2003 requirement.

## 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	3.49 dBm	1.21 dBm	1.53 dBm
Ch39	2441MHz	<b>4.37 dBm</b>	1.87 dBm	2.21 dBm
Ch78	2480MHz	3.54 dBm	0.78 dBm	1.10 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
  2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- 
- a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
  - b. AC power line Conducted Emission was tested under maximum output power.

## 2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BDR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :Adapter + Bluetooth Link		
<p><b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.</p>			




## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

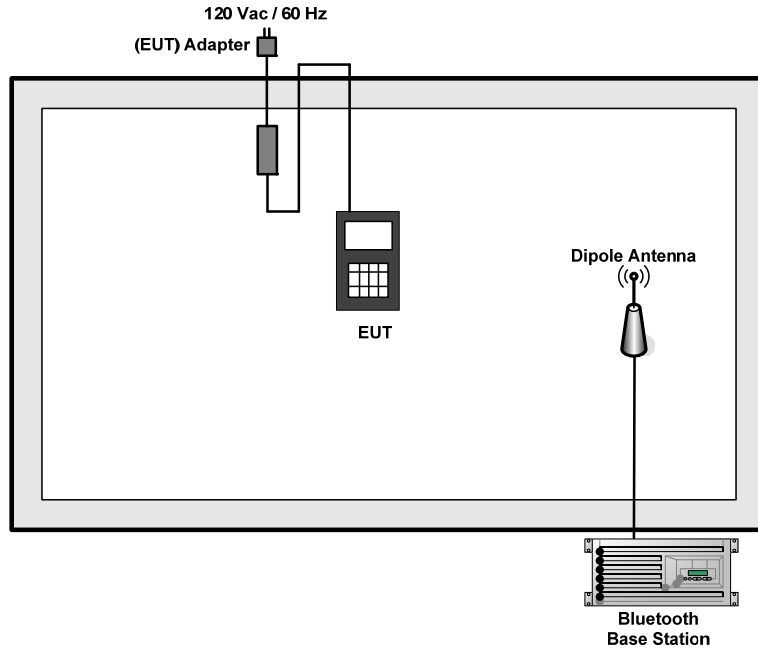

<AC Conducted Emission Mode>

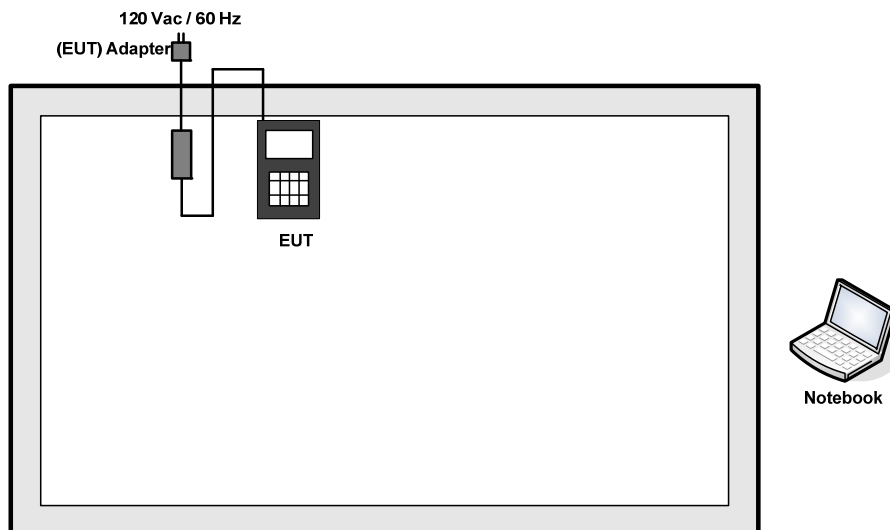

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	ANRITSU	MT8852B	FCC DoC	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m

## 2.5 Description of RF Function Operation Test Setup

For Bluetooth function, the RF utility, "PAXEMI" software in Notebook which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

### For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.6 + 10 = 15.6 \text{ (dB)}\end{aligned}$$

### For radiated band edges and spurious emission test :

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

$$\text{Average Emission Level(dBuV/m)} = \text{Peak Emission Level(dBuV/m)} + \text{Duty cycle correction factor(dB)}$$

$$\text{Duty cycle correction factor(dB)} = 20 * \log(\text{Duty cycle}).$$

$$\text{Duty cycle} = \text{On time} / 100 \text{ milliseconds}$$

$$\text{On time} = \text{dwell time} * \text{hopping number in } 100 \text{ ms}$$

For example : bluetooth with dwell time 2.9ms and 2 hops in 100 ms, then

$$\text{Duty cycle correction factor(dB)} = 20 * \log( (2.9 * 2) / 100 ) = -24.73 \text{ dB}$$

Following shows an average computation example with duty cycle correction factor = -24.73dB, and the peak emission level is 45.61 dBuV/m.

Example :

$$\begin{aligned}\text{Average Emission Level(dBuV/m)} &= \text{Peak Emission Level(dBuV/m)} + \text{duty cycle correction factor(dB)} \\ &= 45.61 + ( -24.73 ) = 20.88 \text{ (dBuV/m)}\end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

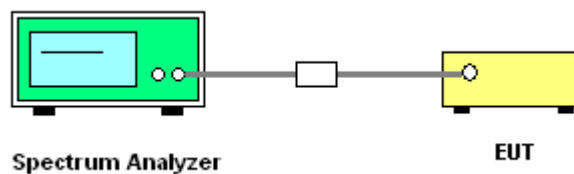


##### 3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	$\geq 20$	$> 15$	Pass



Number of Hopping Channel Plot on Channel 00 - 78

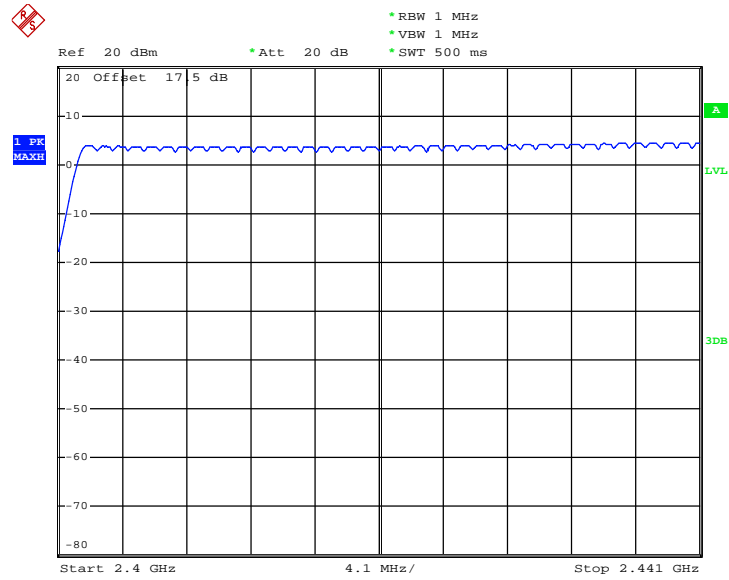

Date: 14.MAR.2013 00:05:52

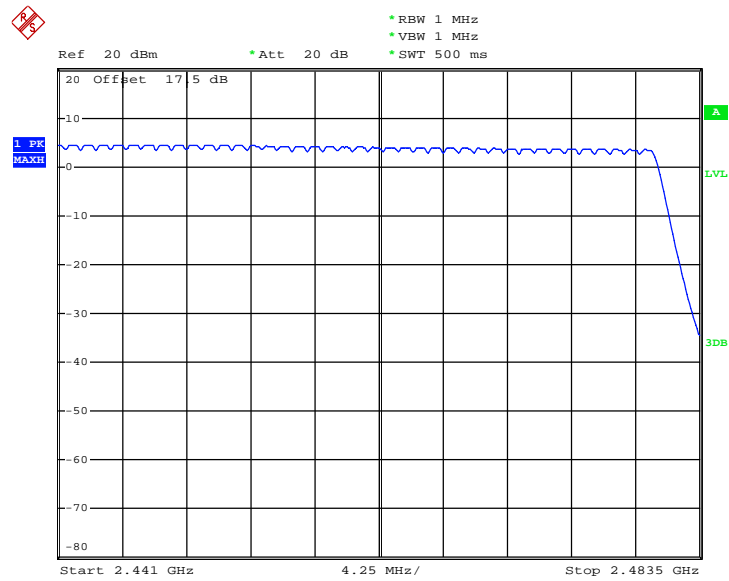

Date: 14.MAR.2013 00:11:12

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
 $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

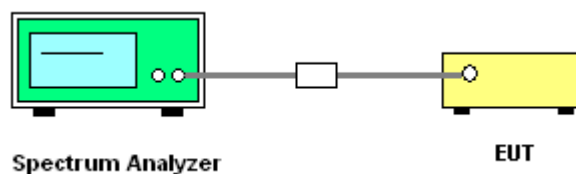


### 3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6267	Pass
39	2441	1.002	0.6267	Pass
78	2480	1.002	0.6240	Pass


Channel Separation Plot on Channel 00 - 01

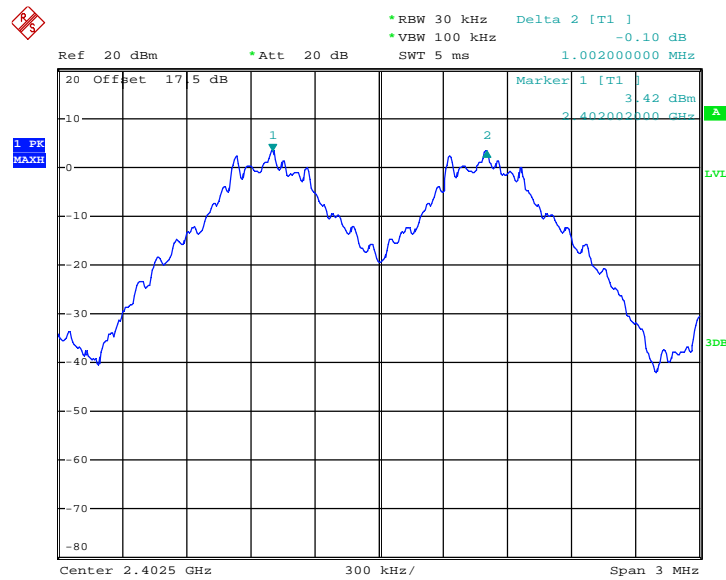

Date: 13.MAR.2013 23:54:48




### Channel Separation Plot on Channel 39 - 40

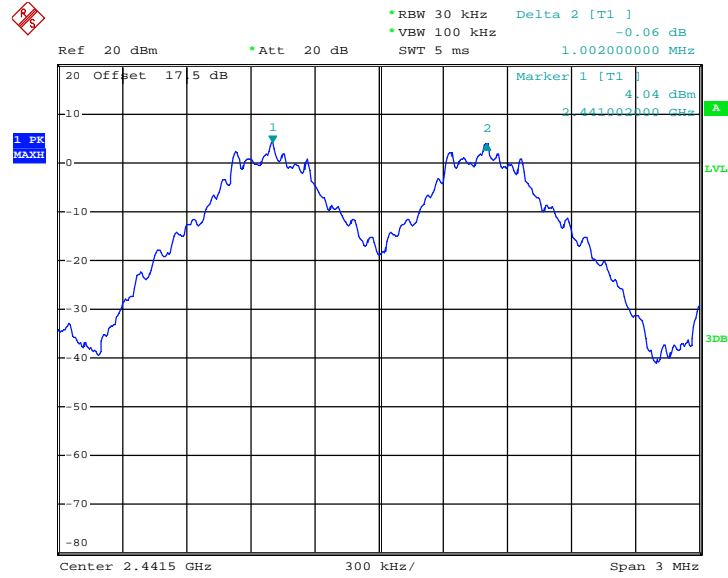

Date: 13.MAR.2013 23:56:20

### Channel Separation Plot on Channel 77 - 78

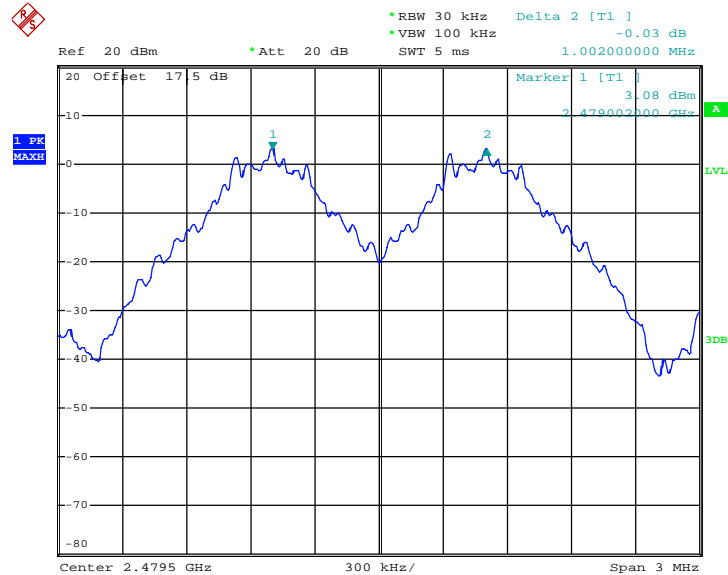

Date: 13.MAR.2013 23:58:12






Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8320	Pass
39	2441	1.002	0.8347	Pass
78	2480	1.002	0.8347	Pass


Channel Separation Plot on Channel 00 - 01

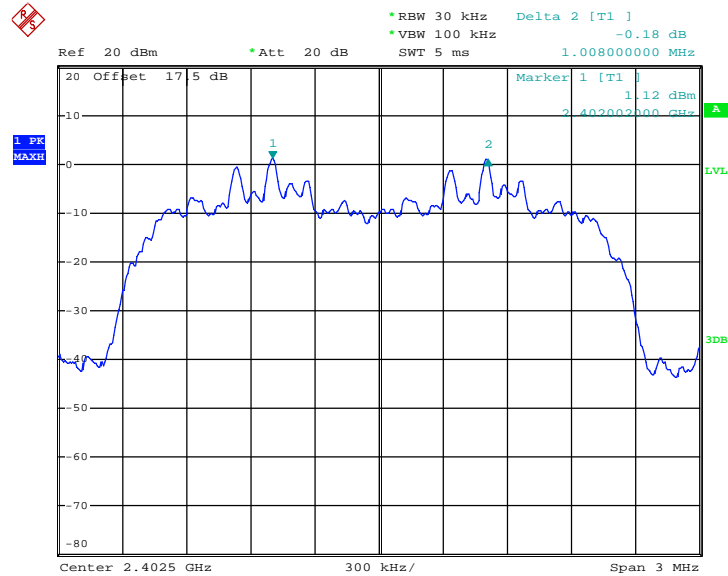

Date: 13.MAR.2013 23:42:08




### Channel Separation Plot on Channel 39 - 40

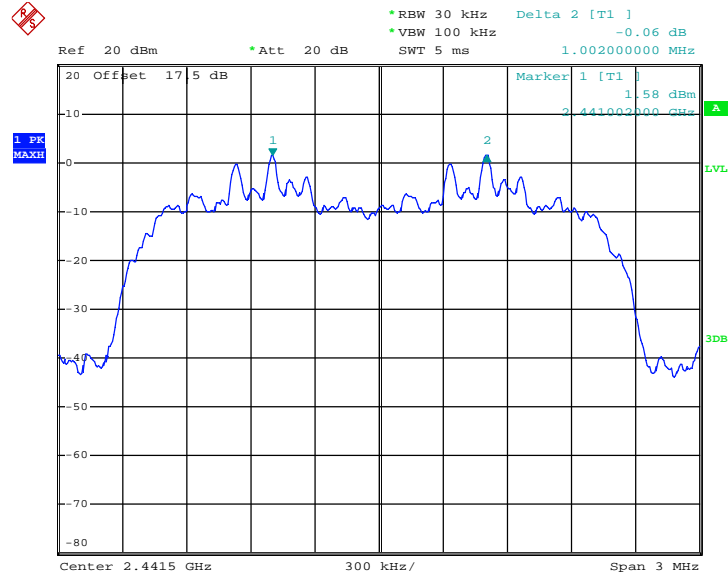

Date: 13.MAR.2013 23:44:00

### Channel Separation Plot on Channel 77 - 78

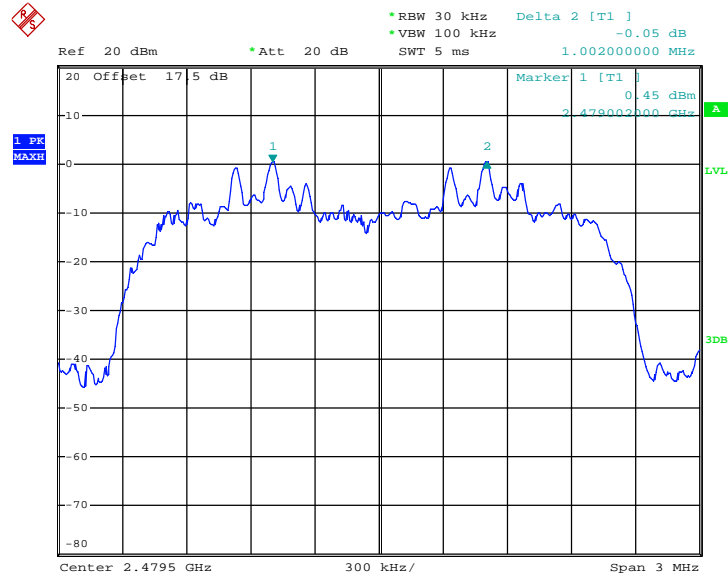


Date: 13.MAR.2013 23:45:55



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8373	Pass
39	2441	1.002	0.8400	Pass
78	2480	1.002	0.8400	Pass


Channel Separation Plot on Channel 00 - 01

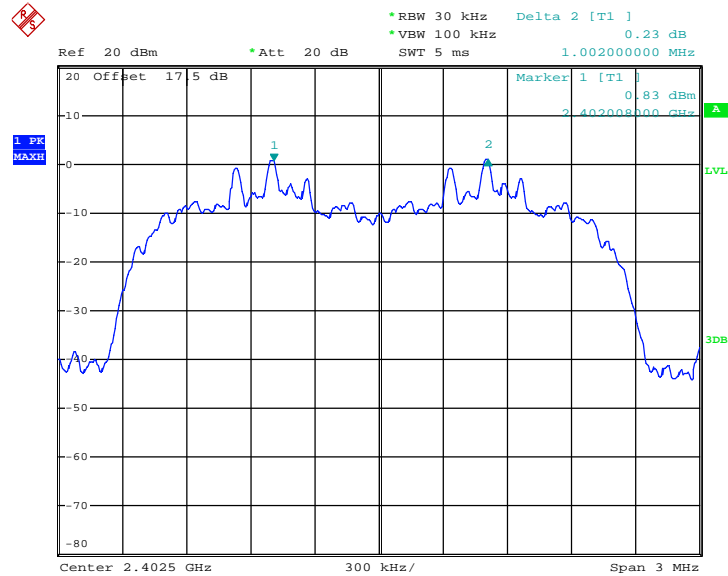

Date: 13.MAR.2013 23:51:49




Channel Separation Plot on Channel 39 - 40

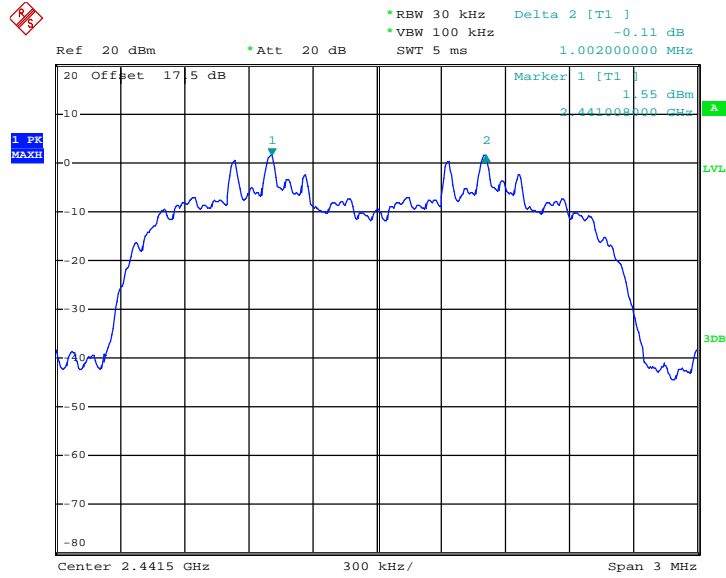

Date: 13.MAR.2013 23:49:26

Channel Separation Plot on Channel 77 - 78

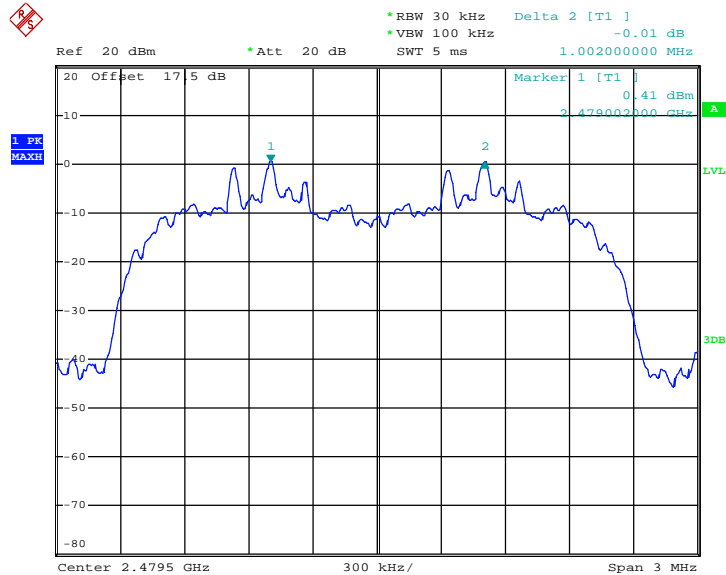

Date: 13.MAR.2013 23:47:30

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

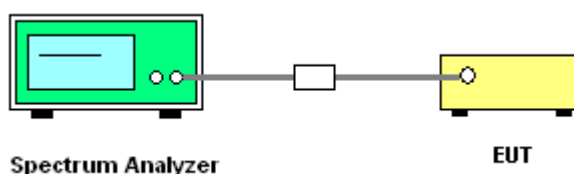

#### 3.3.5 Test Result of Dwell Time


<b>Test Mode :</b>	DH5	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Blithe Li	<b>Relative Humidity :</b>	50~53%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.912	0.31	0.4	Pass
AFH	20	53.34	2.912	0.16	0.4	Pass

**Remark:**

1. In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.  
 With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
 Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
  
2. In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.  
 With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
 Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.34 hops.
  
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

**Package Transfer Time Plot**

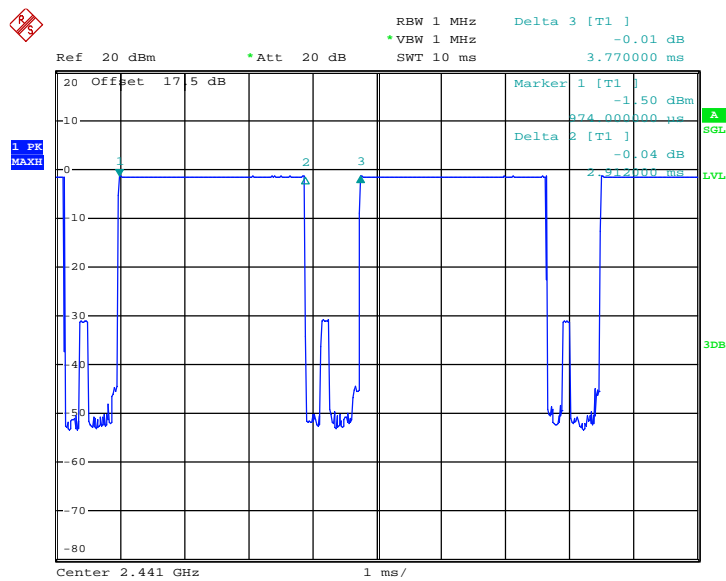

Date: 13.MAR.2013 15:21:07

### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

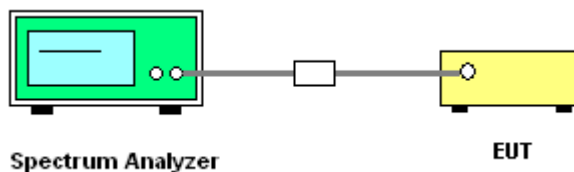




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.940
39	2441	0.940
78	2480	0.936

20 dB Bandwidth Plot on Channel 00

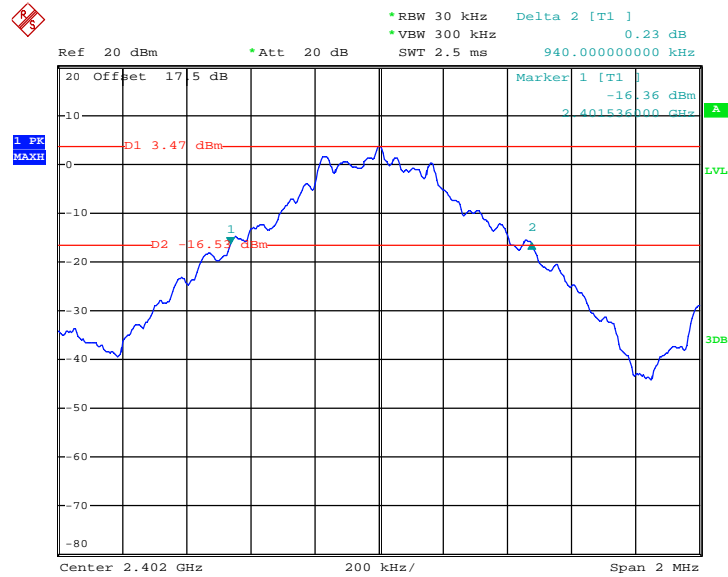


Date: 13.MAR.2013 22:30:21






20 dB Bandwidth Plot on Channel 39

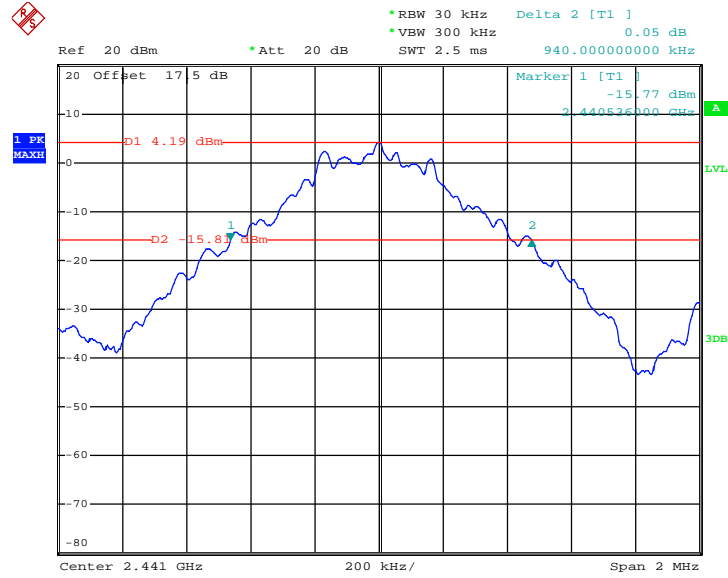

Date: 13.MAR.2013 22:33:46

20 dB Bandwidth Plot on Channel 78

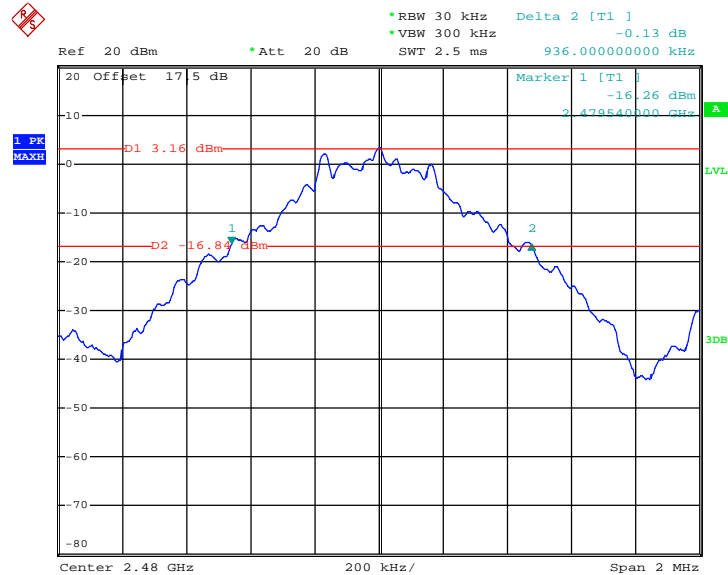


Date: 13.MAR.2013 22:35:45



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.248
39	2441	1.252
78	2480	1.252


20 dB Bandwidth Plot on Channel 00

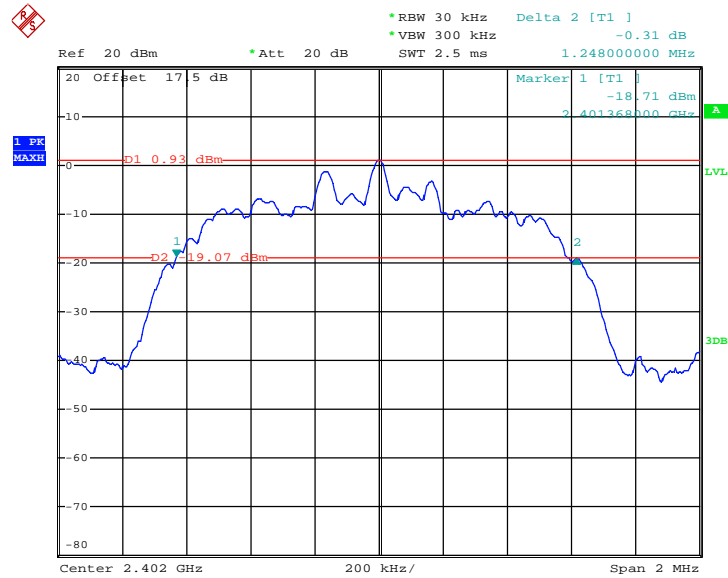

Date: 13.MAR.2013 22:45:37




### 20 dB Bandwidth Plot on Channel 39

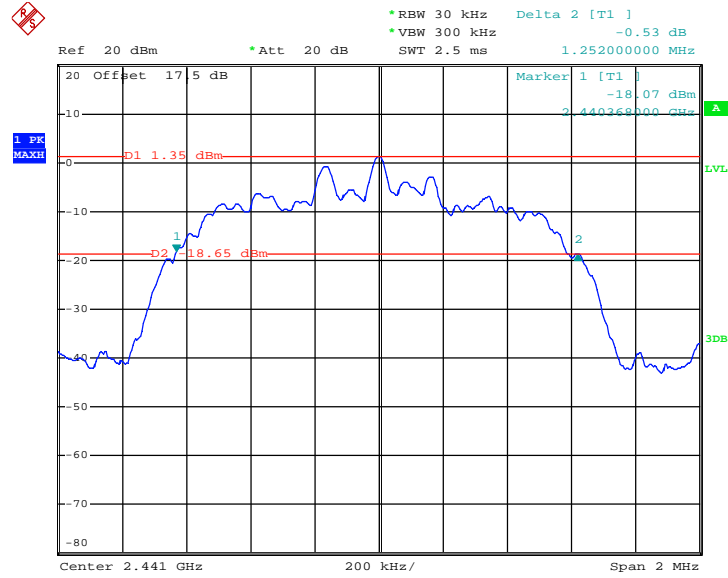

Date: 13.MAR.2013 22:43:27

### 20 dB Bandwidth Plot on Channel 78

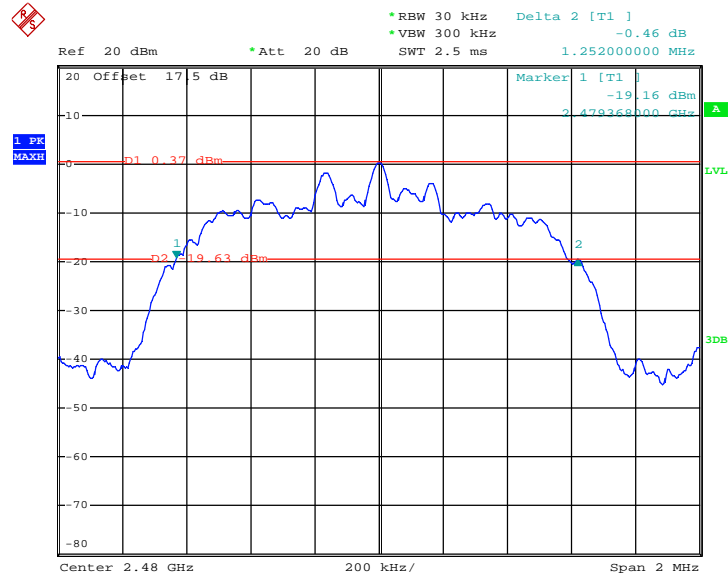


Date: 13.MAR.2013 22:41:05



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.256
39	2441	1.260
78	2480	1.260


20 dB Bandwidth Plot on Channel 00

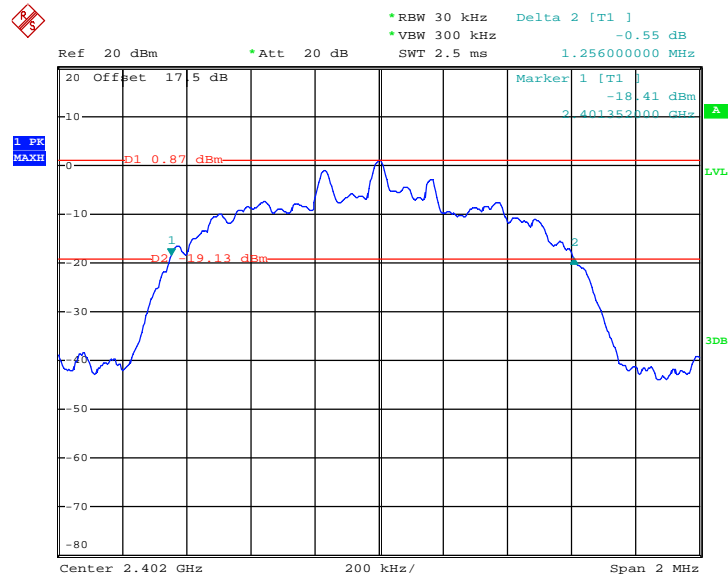

Date: 13.MAR.2013 22:48:03




### 20 dB Bandwidth Plot on Channel 39

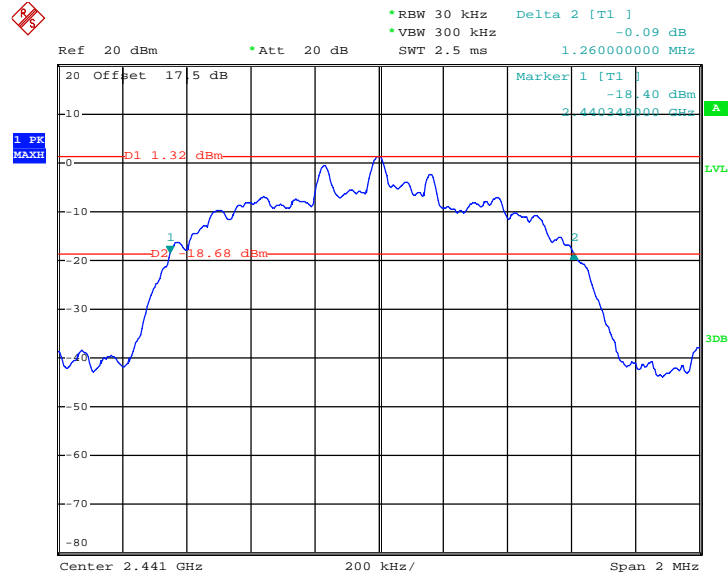

Date: 13.MAR.2013 22:49:45

### 20 dB Bandwidth Plot on Channel 78

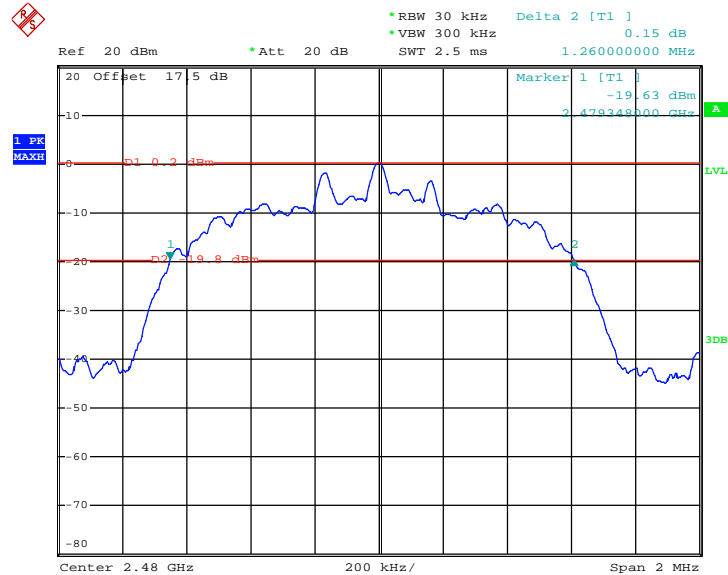

Date: 13.MAR.2013 22:51:31

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### 3.5.4 Test Setup

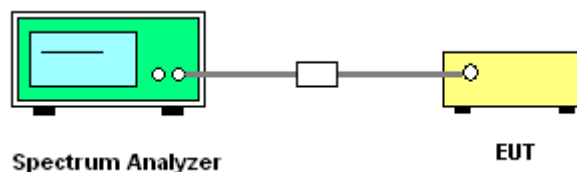




3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	3.49	30.00	Pass
39	2441	4.37	30.00	Pass
78	2480	3.54	30.00	Pass


Peak Output Power Plot on Channel 00

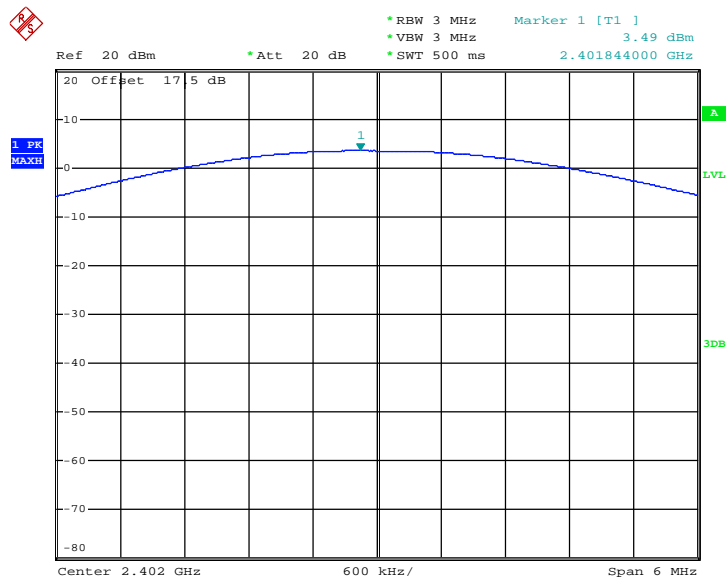

Date: 13.MAR.2013 15:02:40




Peak Output Power Plot on Channel 39

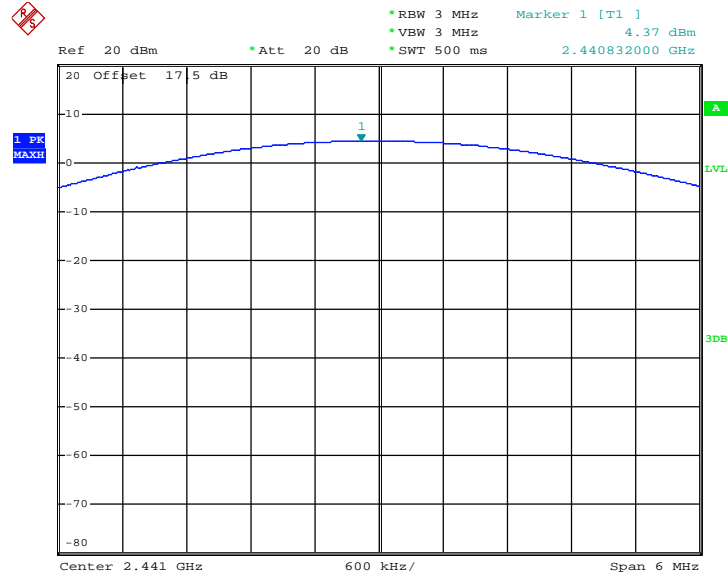

Date: 13.MAR.2013 15:03:18

Peak Output Power Plot on Channel 78

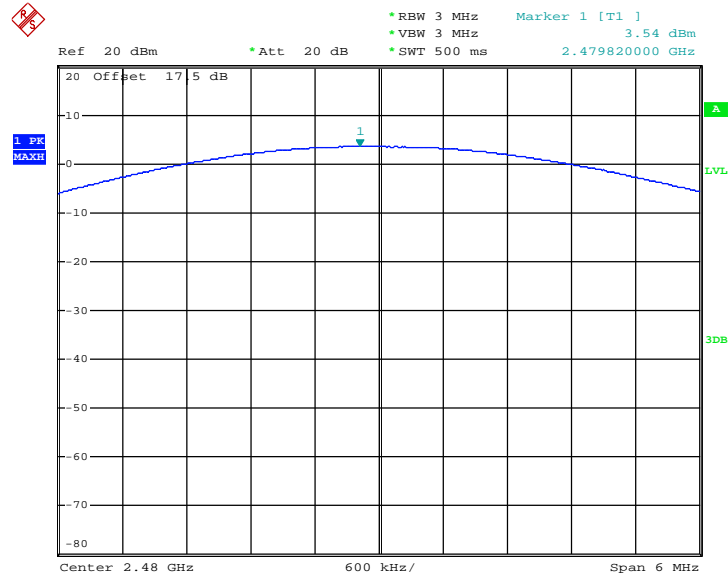

Date: 13.MAR.2013 15:03:41



## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ( $\geq 1\%$  span=30MHz ), VBW = 300KHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


### 3.6.4 Test Setup

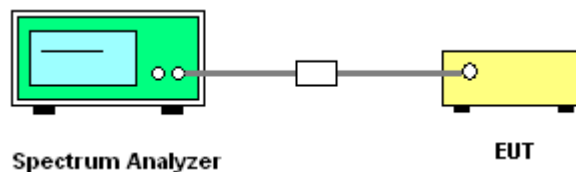

### 3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Blithe Li

#### Low Band Edge Plot on Channel 00

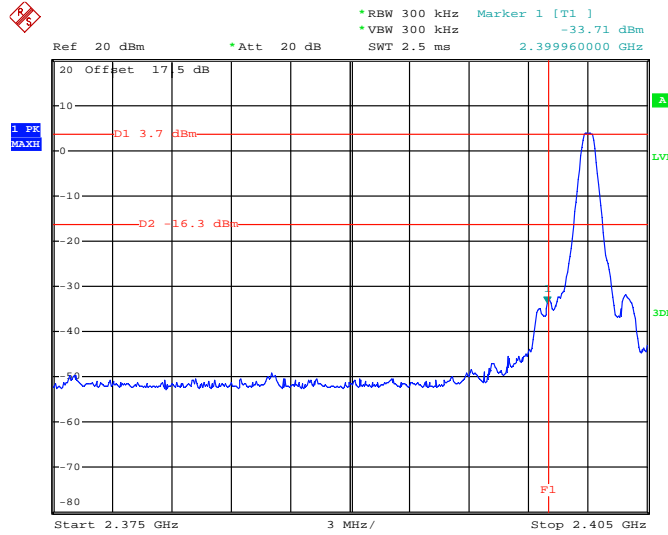

Date: 14.MAR.2013 00:26:54

#### High Band Edge Plot on Channel 78

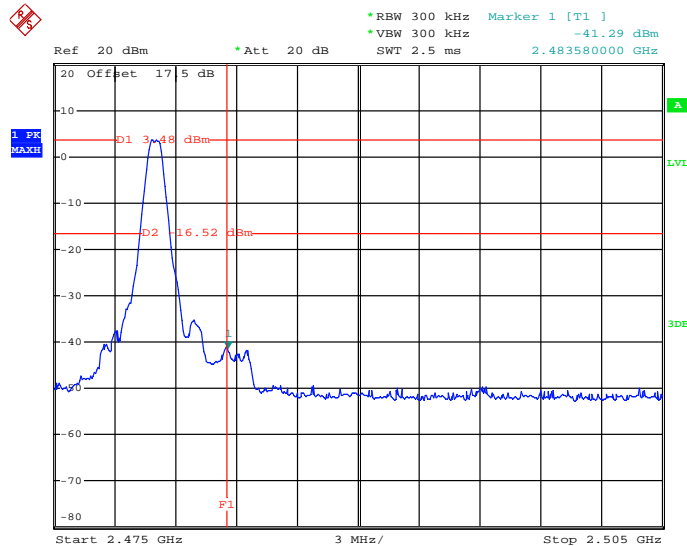


Date: 14.MAR.2013 00:31:14




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Blithe Li

**Low Band Edge Plot on Channel 00**

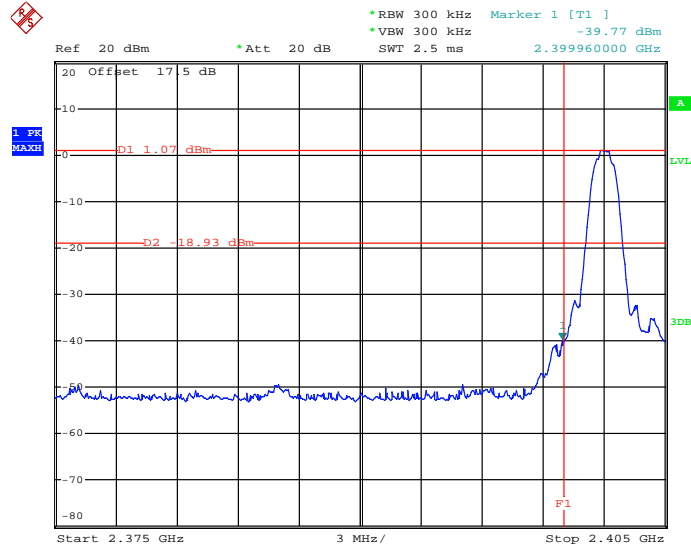

Date: 14.MAR.2013 00:52:00

**High Band Edge Plot on Channel 78**

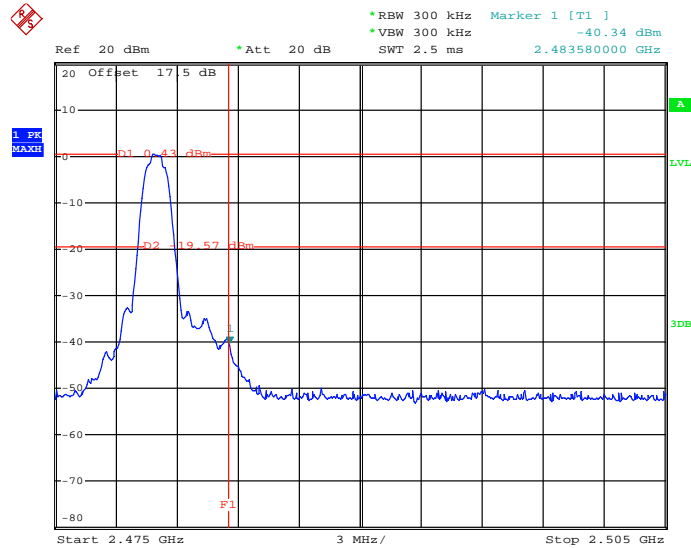


Date: 14.MAR.2013 00:50:25




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Blithe Li

Low Band Edge Plot on Channel 00

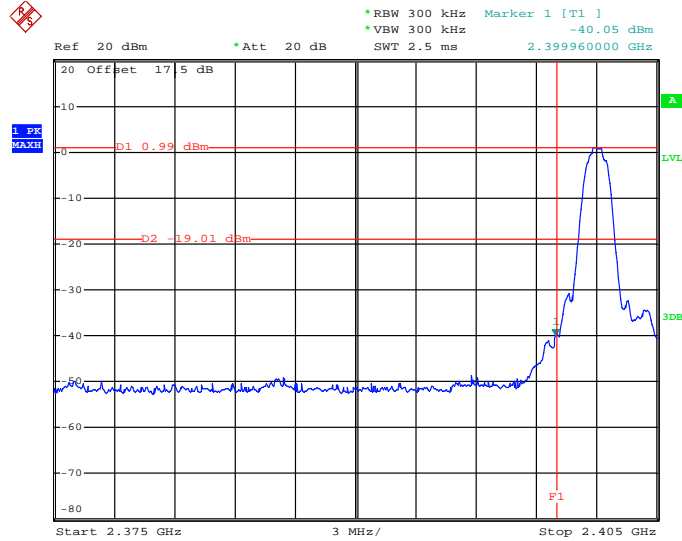

Date: 14.MAR.2013 00:56:12

High Band Edge Plot on Channel 78

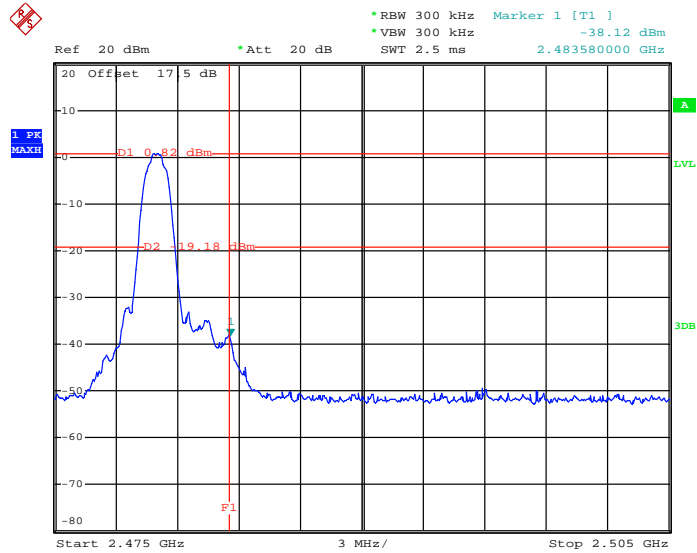


Date: 14.MAR.2013 01:00:44



### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Hopping Mode Low Band Edge Plot on Channel 00

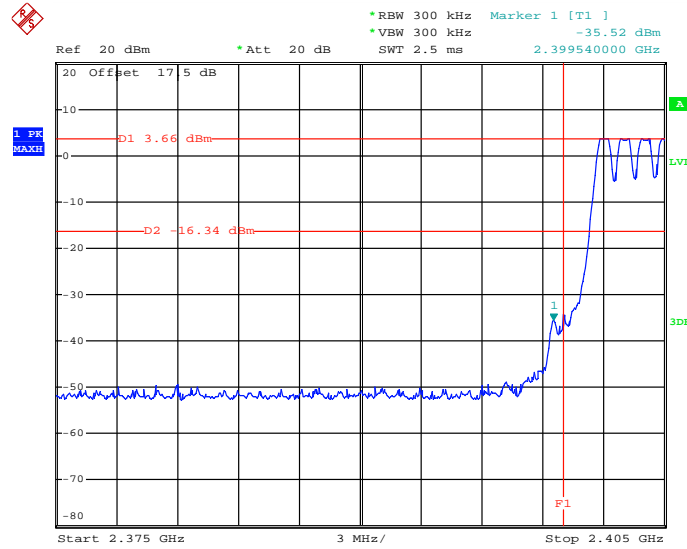

Date: 14.MAR.2013 00:36:58

Hopping Mode High Band Edge Plot on Channel 78

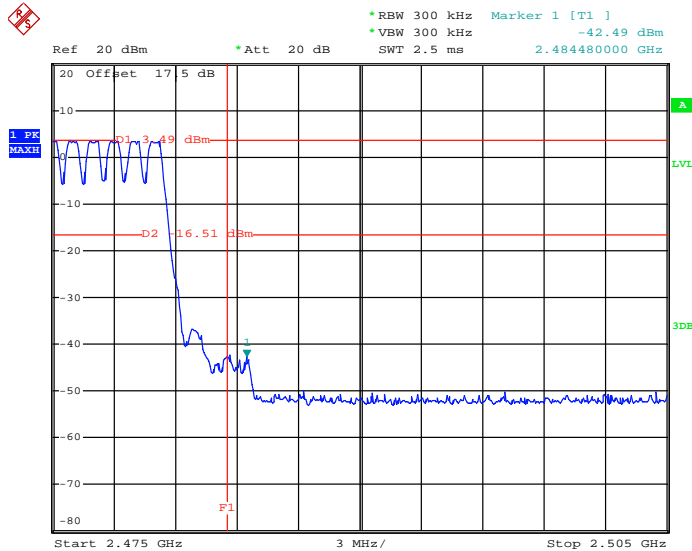


Date: 14.MAR.2013 00:33:54




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Hopping Mode Low Band Edge Plot on Channel 00

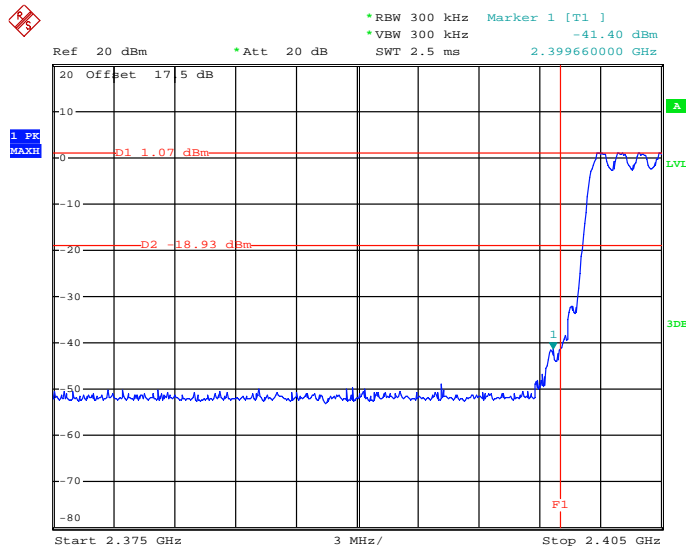

Date: 14.MAR.2013 00:43:06

Hopping Mode High Band Edge Plot on Channel 78

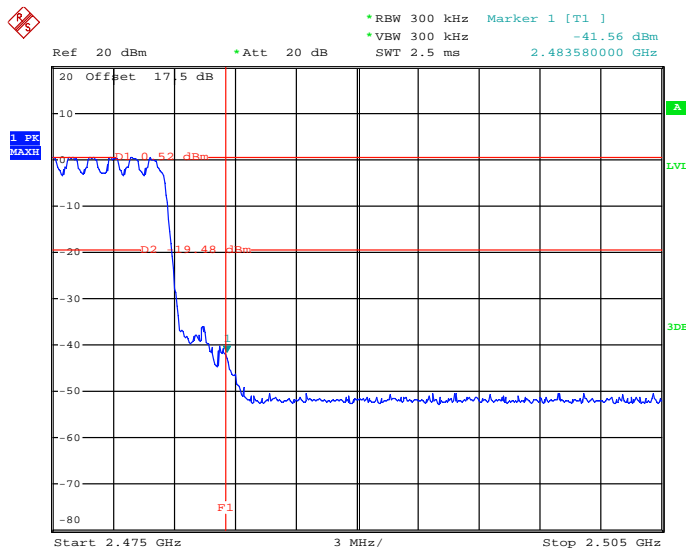


Date: 14.MAR.2013 00:47:46




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Hopping Mode Low Band Edge Plot on Channel 00

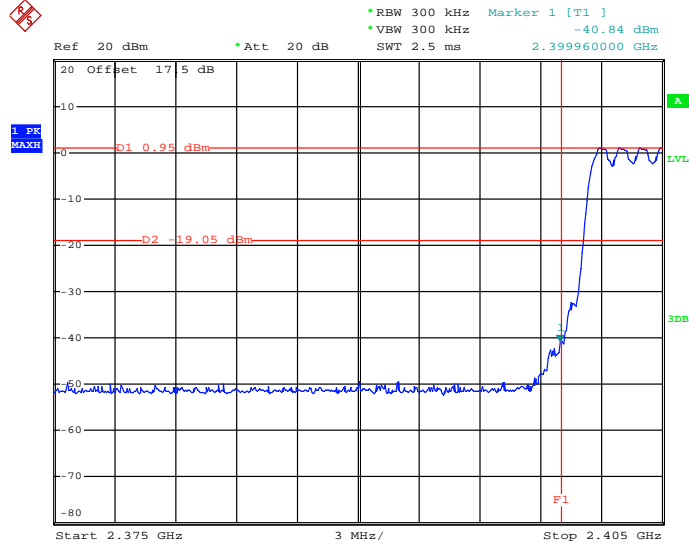

Date: 14.MAR.2013 01:11:14

Hopping Mode High Band Edge Plot on Channel 78

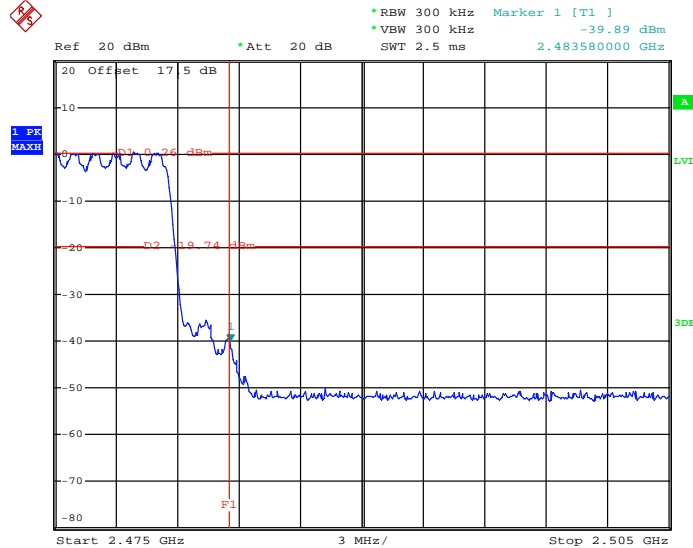

Date: 14.MAR.2013 01:03:53

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.

### 3.7.4 Test Setup

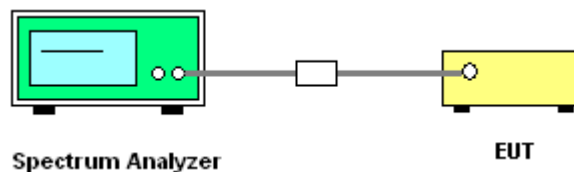




### 3.7.5 Test Results


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Blithe Li

#### Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

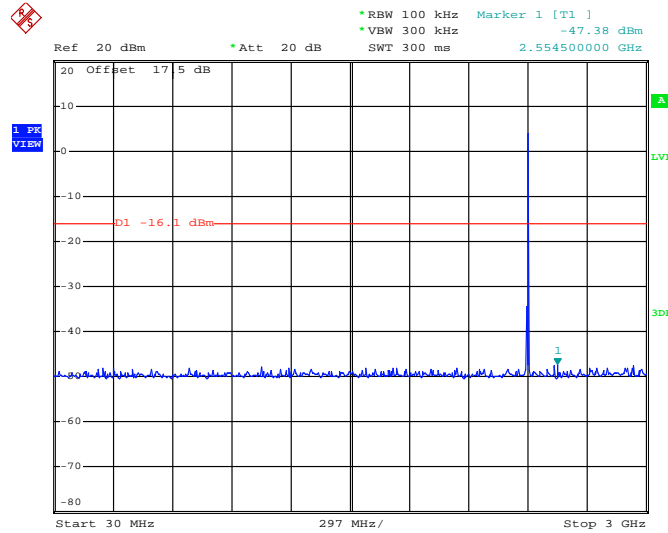

Date: 14.MAR.2013 00:14:54

#### Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

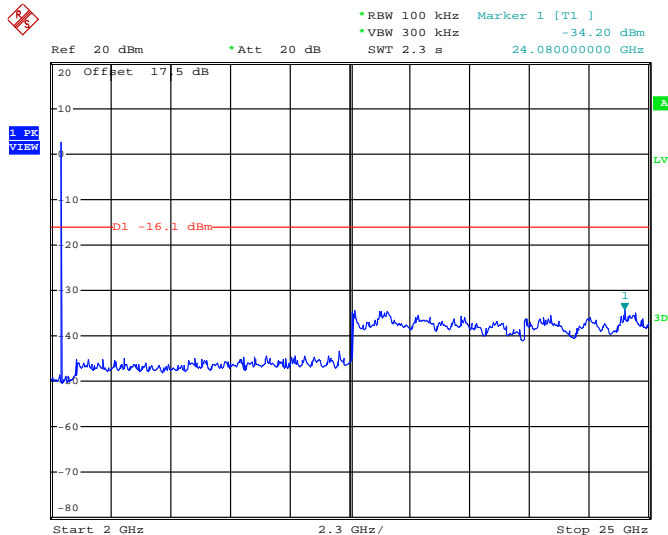


Date: 14.MAR.2013 00:16:42




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Blithe Li

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

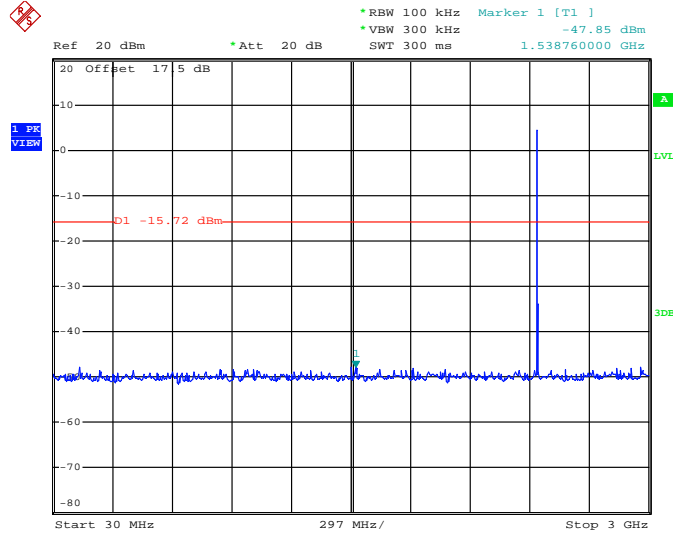

Date: 14.MAR.2013 00:18:10

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

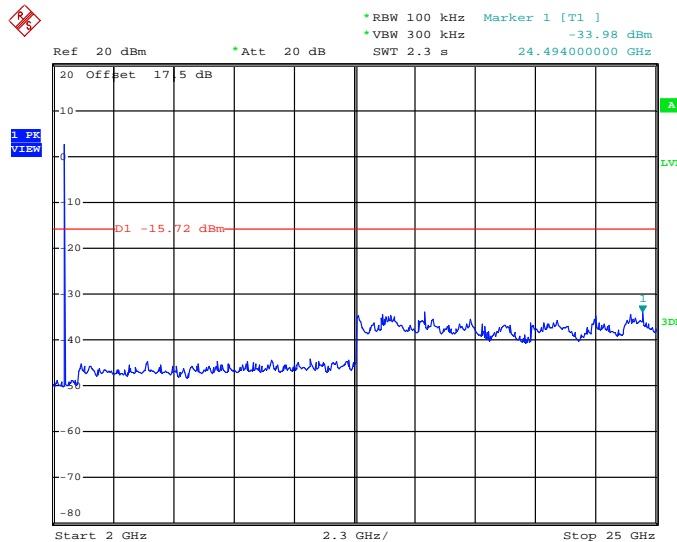


Date: 14.MAR.2013 00:19:01




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Blithe Li

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

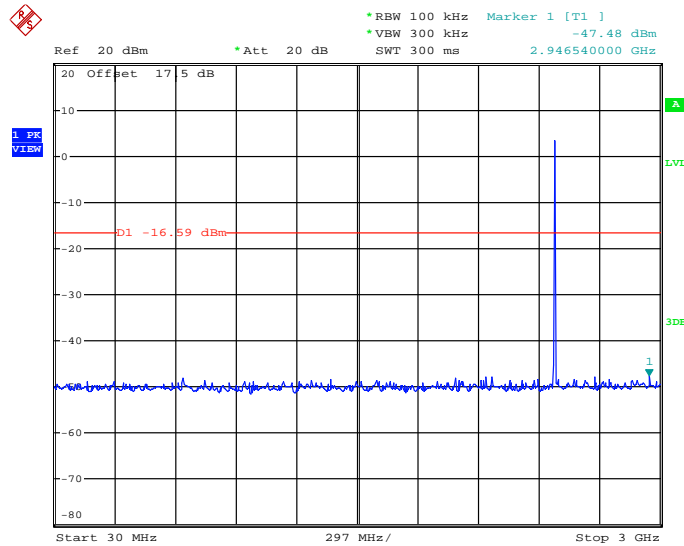

Date: 14.MAR.2013 00:20:23

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

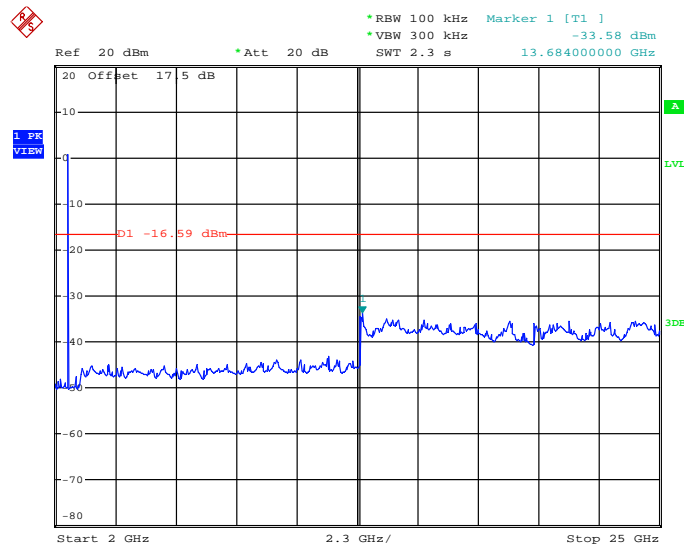

Date: 14.MAR.2013 00:21:32

### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Level = Peak Level +  $20 * \log(\text{Duty cycle})$
8. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.76dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ .

### 3.8.4 Test Setup


For radiated emissions below 30MHz

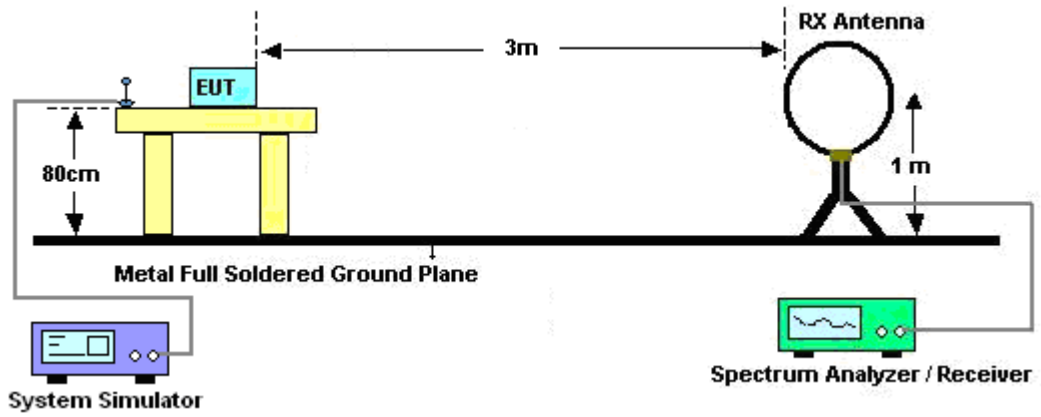

For radiated emissions from 30MHz to 1GHz

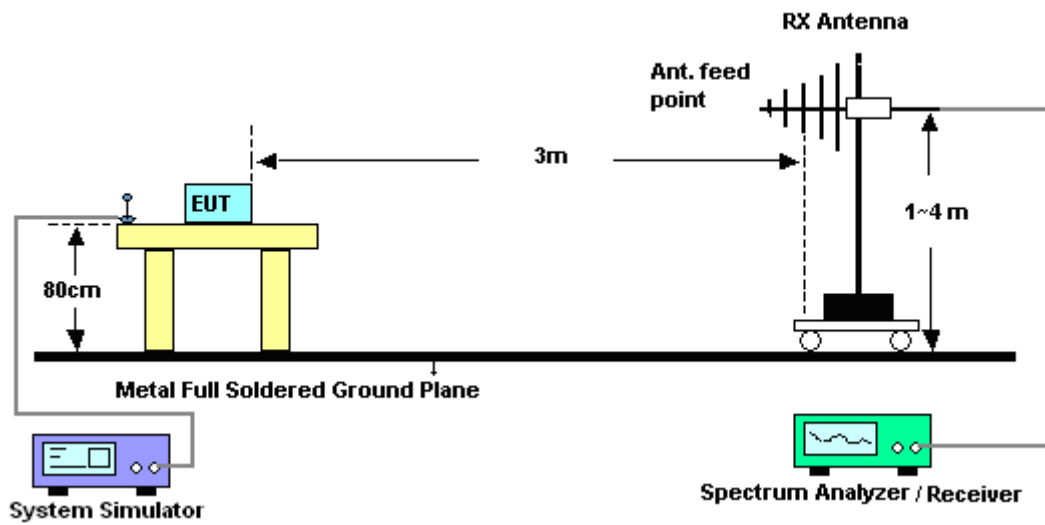

For radiated emissions above 1GHz

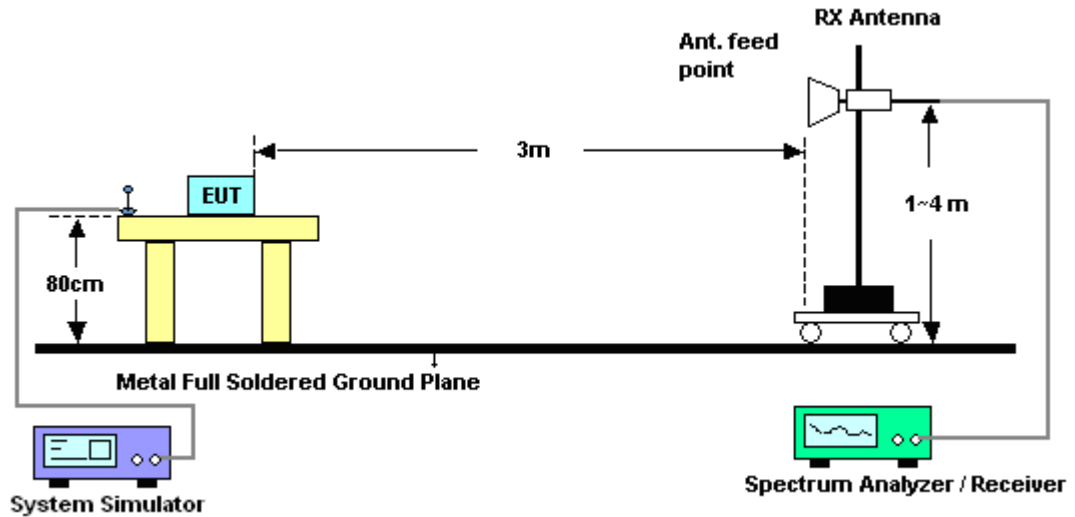


### 3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### 3.8.6 Duty cycle correction factor for average measurement

#### DH5 on time/100ms (One Pulse) Plot on Channel 39

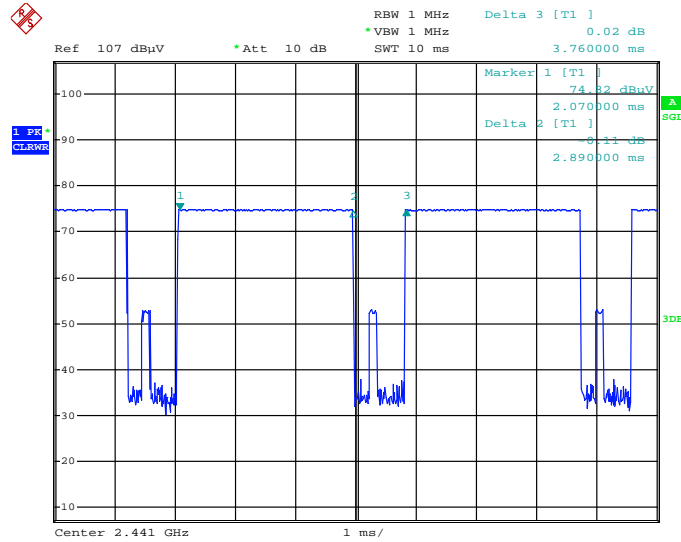

Date: 25.MAR.2013 21:18:57

#### DH5 on time/100ms (Count Pulses) Plot on Channel 39

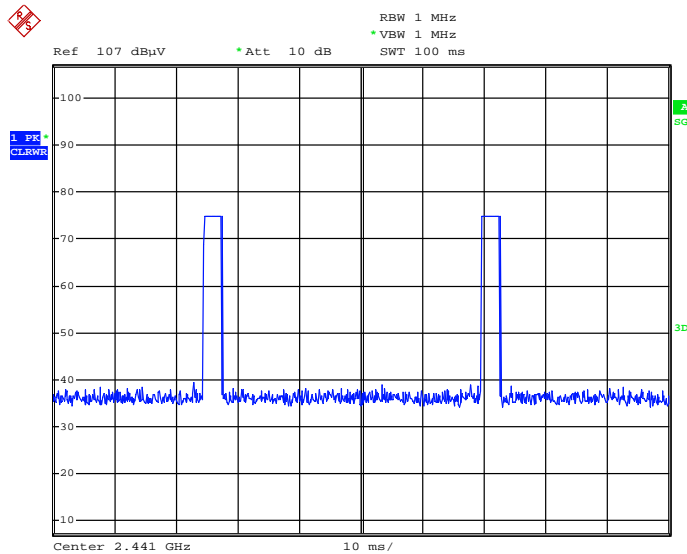

Date: 25.MAR.2013 21:20:39

**Note:**

1. Duty cycle = on time/100 milliseconds =  $2 * 2.89 / 100 = 5.78 \%$
2. Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.



3.8.7 Test Result of Radiated Band Edges

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	00	Relative Humidity :	49~50%
		Test Engineer :	Johu Yuan

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2340.6	52.84	-21.16	74	47.33	32.07	4.34	30.9	107	89	Peak
2340.6	28.08	-25.92	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2361.12	52.2	-21.8	74	46.59	32.1	4.38	30.87	108	72	Peak
2361.12	27.44	-26.56	54	-	-	-	-	-	-	Average

**Note:** The average levels were calculated from the peak level corrected with duty cycle correction factor (24.76dB) derived from 20log (dwell time/100ms).

For example: Average level = 52.84dBuV/m – 24.76 (dB) = 28.08dBuV/m.

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	78	Relative Humidity :	49~50%
		Test Engineer :	Johu Yuan

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2489.26	52.22	-21.78	74	46.21	32.29	4.49	30.77	108	60	Peak
2489.26	27.46	-26.54	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.55	52.7	-21.3	74	46.74	32.27	4.47	30.78	105	10	Peak
2484.55	27.94	-26.06	54	-	-	-	-	-	-	Average



**3.8.8 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)**

NOTE: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	49~50%
<b>Test Engineer :</b>	Johu Yuan	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7206 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. For example, 83.43 dBuV/m - 20dB = 63.43 dBuV/m.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
104.17	39.65	-3.85	43.5	57.33	11.8	1.17	30.65	176	318	QP
383.93	44.94	-1.06	46	56.7	16.08	1.88	29.72	100	315	QP
528.25	45.79	-0.21	46	54.89	18	2.19	29.29	200	206	QP
625.08	42.77	-3.23	46	50.57	19.05	2.32	29.17	-	-	Peak
815.97	42.52	-3.48	46	47.56	21.22	2.65	28.91	200	0	QP
912.86	42.68	-3.32	46	47.12	21.62	2.73	28.79	154	337	QP
2399	51.51	-11.92	63.43	45.8	32.14	4.42	30.85	114	334	Peak
2402	83.43	-	-	77.7	32.14	4.44	30.85	114	334	Peak
2402	58.67	-	-	-	-	-	-	114	334	Average
4804	62.71	-11.29	74	51.25	33.63	5.95	28.12	107	54	Peak
4804	37.95	-16.05	54	-	-	-	-	107	54	Average
7206	49.01	-14.42	63.43	34.46	35.27	7.47	28.19	112	56	Peak

**Note:** Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	00	Relative Humidity :	49~50%
Test Engineer :	Johu Yuan	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7206 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
107.89	35.07	-8.43	43.5	52.45	12.07	1.19	30.64	-	-	Peak
383.93	42.17	-3.83	46	53.93	16.08	1.88	29.72	-	-	Peak
432.55	37.06	-8.94	46	47.92	16.74	1.96	29.56	-	-	Peak
528.25	45.34	-0.66	46	54.44	18	2.19	29.29	100	350	QP
625.08	42.06	-3.94	46	49.86	19.05	2.32	29.17	-	-	Peak
912.86	39.31	-6.69	46	43.75	21.62	2.73	28.79	-	-	Peak
2399	53.97	-9.71	63.68	48.26	32.14	4.42	30.85	100	92	Peak
2402	83.68	-	-	77.95	32.14	4.44	30.85	100	92	Peak
2402	58.92	-	-	-	-	-	-	100	92	Average
4804	68.1	-5.9	74	56.64	33.63	5.95	28.12	100	19	Peak
4804	43.34	-10.66	54	-	-	-	-	100	19	Average
7206	44.69	-18.99	63.68	30.14	35.27	7.47	28.19	125	74	Peak

**Note:** Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	39	Relative Humidity :	49~50%
Test Engineer :	Johu Yuan	Polarization :	Horizontal
Remark :	1. 2441 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	85.23	-	-	79.37	32.22	4.45	30.81	141	310	Peak
2441	60.47	-	-	-	-	-	-	141	310	Average
4882	67.16	-6.84	74	55.14	33.8	6.02	27.8	104	312	Peak
4882	42.4	-11.6	54	-	-	-	-	107	54	Average
7323	50.54	-23.46	74	35.33	35.32	7.9	28.01	100	112	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	39	Relative Humidity :	49~50%
Test Engineer :	Johu Yuan	Polarization :	Vertical
Remark :	1. 2441 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	85.29	-	-	79.43	32.22	4.45	30.81	124	53	Peak
2441	60.53	-	-	-	-	-	-	100	53	Average
4882	67.8	-6.2	74	55.78	33.8	6.02	27.8	100	339	Peak
4882	43.04	-10.96	54	-	-	-	-	100	19	Average
7323	51.17	-22.83	74	35.96	35.32	7.9	28.01	100	25	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	78	Relative Humidity :	49~50%
Test Engineer :	Johu Yuan	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2480	85.82	-	-	79.86	32.27	4.47	30.78	111	64	Peak
2480	61.06	-	-	-	-	-	-	111	64	Average
4960	63.42	-10.58	74	50.77	34.01	6.13	27.49	123	360	Peak
4960	38.66	-15.34	54	-	-	-	-	107	54	Average
7440	50.91	-23.09	74	35.33	35.37	8.08	27.87	100	75	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	1Mbps	Temperature :	26~27°C
Test Channel :	78	Relative Humidity :	49~50%
Test Engineer :	Johu Yuan	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2480	85.21	-	-	79.25	32.27	4.47	30.78	100	0	Peak
2480	60.45	-	-	-	-	-	-	100	0	Average
4960	65.99	-8.01	74	53.34	34.01	6.13	27.49	100	25	Peak
4960	41.23	-12.77	54	-	-	-	-	100	19	Average
7440	50.83	-23.17	74	35.25	35.37	8.08	27.87	100	225	Peak

Note: Other harmonics are lower than background noise.

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.9.4 Test Setup

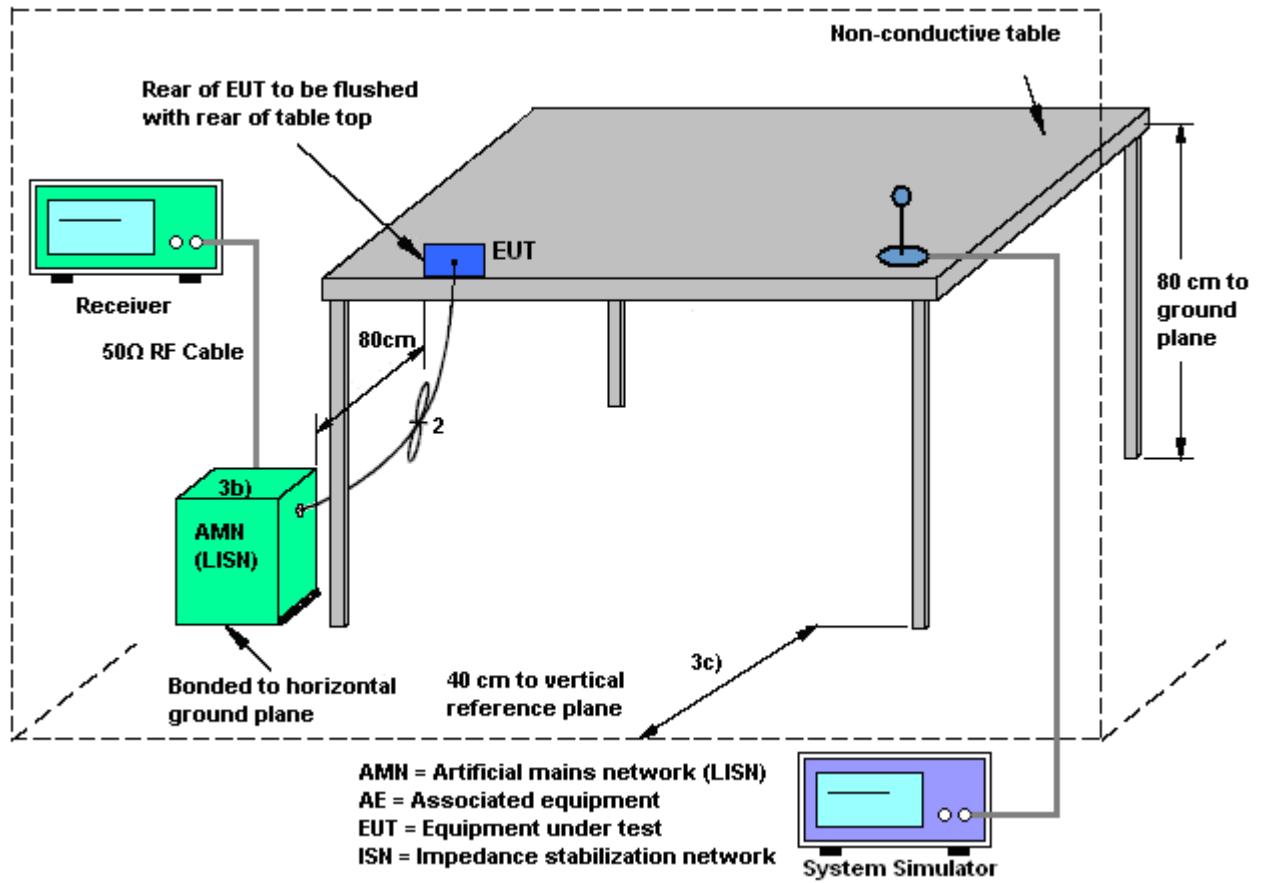

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Leo Liao	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Adapter + Bluetooth Link		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

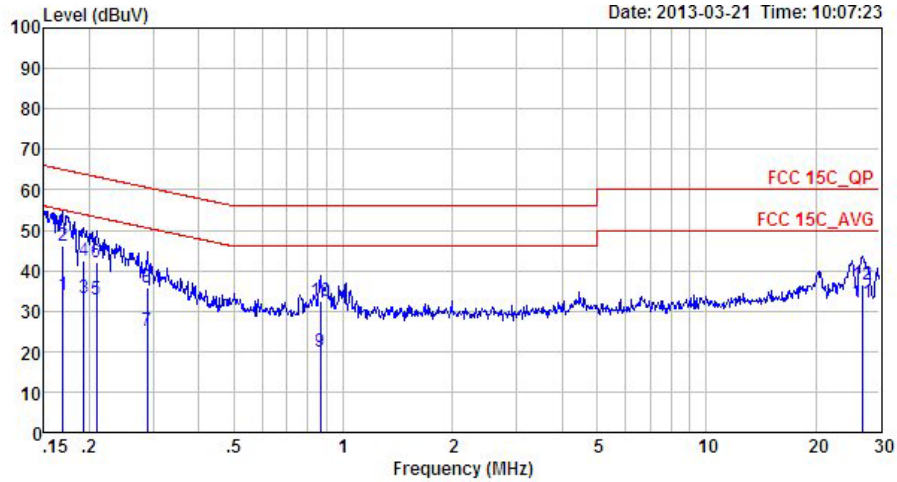


Site : C001-SZ  
 Condition: FCC 15C\_QP LISN\_L\_2000601 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	33.78	-21.21	54.99	23.70	0.03	10.05	Average
2	0.17	46.28	-18.71	64.99	36.20	0.03	10.05	QP
3	0.19	33.08	-20.81	53.89	23.00	0.03	10.05	Average
4	0.19	42.48	-21.41	63.89	32.40	0.03	10.05	QP
5	0.21	32.68	-20.55	53.23	22.60	0.02	10.06	Average
6	0.21	42.08	-21.15	63.23	32.00	0.02	10.06	QP
7	0.29	25.19	-25.35	50.54	15.11	0.02	10.06	Average
8	0.29	35.69	-24.85	60.54	25.61	0.02	10.06	QP
9	0.87	19.93	-26.07	46.00	9.80	0.02	10.11	Average
10	0.87	32.63	-23.37	56.00	22.50	0.02	10.11	QP
11 *	26.98	32.10	-17.90	50.00	21.10	0.57	10.43	Average
12	26.98	36.60	-23.40	60.00	25.60	0.57	10.43	QP





Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Leo Liao	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Adapter + Bluetooth Link		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

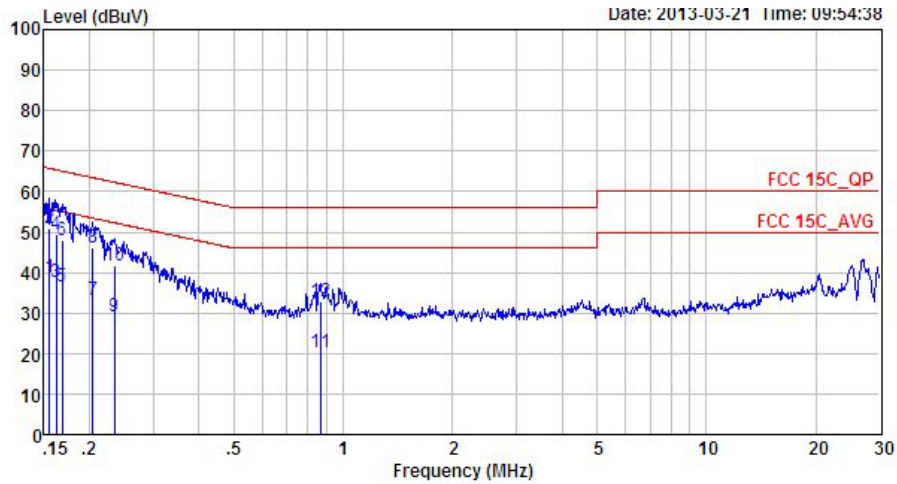

Site : C001-SZ  
 Condition: FCC 15C\_QP LISN\_N\_2000601 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	38.87	-16.82	55.69	28.80	0.02	10.05	Average
2 *	0.16	50.87	-14.82	65.69	40.80	0.02	10.05	QP
3	0.16	37.57	-17.77	55.34	27.50	0.02	10.05	Average
4	0.16	49.27	-16.07	65.34	39.20	0.02	10.05	QP
5	0.17	36.48	-18.55	55.03	26.41	0.02	10.05	Average
6	0.17	47.88	-17.15	65.03	37.81	0.02	10.05	QP
7	0.20	33.07	-20.38	53.45	22.99	0.02	10.06	Average
8	0.20	46.07	-17.38	63.45	35.99	0.02	10.06	QP
9	0.23	28.98	-23.32	52.30	18.90	0.02	10.06	Average
10	0.23	41.68	-20.62	62.30	31.60	0.02	10.06	QP
11	0.87	20.33	-25.67	46.00	10.20	0.02	10.11	Average
12	0.87	32.93	-23.07	56.00	22.80	0.02	10.11	QP



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

Non-standard connector used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jun. 01, 2012	Mar. 13, 2013~ Mar. 14, 2013	May 31, 2013	Conducted (TH01-SZ)
Power meter	Anritsu	ML2495A	1218010	N/A	Mar. 29, 2012	Mar. 13, 2013~ Mar. 14, 2013	Mar. 28, 2013	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 29, 2012	Mar. 13, 2013~ Mar. 14, 2013	Mar. 28, 2013	Conducted (TH01-SZ)
DC Power Supply	TOPWORD	3303DR	714621	N/A	Nov. 19, 2012	Mar. 13, 2013~ Mar. 14, 2013	Nov. 18, 2013	Conducted (TH01-SZ)
Thermal Chamber	Hongzhan	LP-150U	HD20120425	N/A	Jun. 11, 2012	Mar. 13, 2013~ Mar. 14, 2013	Jun. 10, 2013	Conducted (TH01-SZ)
BT Base Station	ANRITSU	MT8852B	6K00004935	BT EDR	Oct. 12, 2012	Mar. 13, 2013~ Mar. 14, 2013	Oct. 11, 2013	Conducted (TH01-SZ)
ESCI TEST Receiver	R&S	ESCI	100724	9K-3GHz	Mar. 29, 2012	Mar. 25, 2013	Mar. 28, 2013	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP30	101362	9kHz~30GHz	Mar. 29, 2012	Mar. 25, 2013	Mar. 28, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30Mhz~2Ghz	Nov. 03, 2012	Mar. 25, 2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100321	9KHZ-30MHZ	Jul. 03, 2012	Mar. 25, 2013	Jul. 02, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Mar. 25, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9K-3000MHz GAIN 30db	Mar. 29, 2012	Mar. 25, 2013	Mar. 28, 2013	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 29, 2012	Mar. 25, 2013	Mar. 28, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Mar. 25, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Mar. 25, 2013	Nov. 22, 2013	Radiation (03CH01-SZ)
BT Base Station	ANRITSU	MT8852B	6K00004935	BT EDR	Oct. 12, 2012	Mar. 25, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.0 3	100724	9K-3GHz	Mar. 29, 2012	Mar. 21, 2013	Mar. 28, 2013	Conduction (CO01-SZ)
AC LISN	ETS-LINDGREN	3816/2SH	00103912	9KHz~30MHz	Mar. 29, 2012	Mar. 21, 2013	Mar. 28, 2013	Conduction (CO01-SZ)
AC LISN	ETS-LINDGREN	3816/2SH	00103892	9KHz~30MHz	Mar. 29, 2012	Mar. 21, 2013	Mar. 28, 2013	Conduction (CO01-SZ)
AC Source	Chroma	61602	616020000891	N/A	Nov.20, 2012	Mar. 21, 2013	Nov. 19, 2013	Conduction (CO01-SZ)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP330704 as below.