# **FCC PART 15.227**

# MEASUREMENT AND TEST REPORT FOR

# ITA Electronic (Shen Zhen) Co., Ltd.

5th Floor, Block C1, Yintian Industrial Zone, Yintian, Xixiang Town, Baoan

District, Shenzhen, Guangdong, China

FCC ID: V5VSTRF14

Report Concerns:	Equipment Type:
Original Report	27MHz Wireless Mouse
Model:	ST-RF14
Report No.:	STR09058095I
Test/Witness Engineer:	Susom Su
Test Date:	2009-05-25 to 2009-05-27
Issue Date:	2009-06-02
Prepared By:	
SEM.Test Compli	ance Service Co., Ltd.
	erce Building, Xin'an Fanshen Road, enzhen, P.R.C. (518101)
Approved & Authorized By:	Jumlyso
	PSQ Manager / Jandy So

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

# TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
1.2 TEST STANDARDS	
1.3 RELATED SUBMITTAL(S)/GRANT(S)	4
1.4 Test Methodology	4
1.5 TEST FACILITY	
1.6 EUT Exercise Software	
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.8 EUT CABLE LIST AND DETAILS	4
2. SUMMARY OF TEST RESULTS	5
3. §15.203 - ANTENNA REQUIREMENT	
3.1 STANDARD APPLICABLE	
3.2 TEST RESULT	
4. §15.205, §15.209, §15.227- RADIATED EMISSION	
4.1 Measurement Uncertainty	
4.2 STANDARD APPLICABLE	
4.3 TEST EQUIPMENT LIST AND DETAILS	
4.4 Test Procedure	7
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	8
4.6 Environmental Conditions	88 o
5. §15.227(B) OUT OF BAND EMISSIONS	11
5.1 STANDARD APPLICABLE	11
5.2 TEST EQUIPMENT LIST AND DETAILS	11
5.3 TEST PROCEDURE	
5.4 Environmental Conditions	
5.5 SUMMARY OF TEST RESULTS/PLOTS	11

#### 1. GENERAL INFORMATION

# 1.1 Product Description for Equipment Under Test (EUT)

#### **Client Information**

Applicant: ITA Electronic (Shen Zhen) Co., Ltd.

Address of applicant: 5th Floor, Block C1, Yintian Industrial Zone, Yintian, Xixiang

Town, Baoan District, Shenzhen, Guangdong, China

Manufacturer: ITA Electronic (Shen Zhen) Co., Ltd.

Address of manufacturer: 5th Floor, Block C1, Yintian Industrial Zone, Yintian, Xixiang

Town, Baoan District, Shenzhen, Guangdong, China

#### **General Description of E.U.T**

Items	Description			
EUT Description:	27MHz Wireless Mouse			
Trade Name:	1			
Model No.:	ST-RF14			
Adding Models:	SR-RF03, SR-RF05, SR-RF09, ST-RF15,			
	ST-RF16			
Rated Voltage:	DC 3V Battery			
Output Power:	<-30 dBm			
Frequency Range:	27.045MHz			
Antenna Type:	Integral Antenna			
Size: 9.5X5.5X3.5 cm				
For more information refer to the circuit diagram form and the user's manual.				

The test data gathered are from a production sample, provided by the manufacturer. The other models listed in the report have different appearance only of ST-RF14 without circuit and electronic construction changed, declared by the manufacturer.

#### 1.2 Test Standards

The following report of is prepared on behalf of the ITA Electronic (Shen Zhen) Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203,15.205,15.209 and 15.227 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203,15.205,15.209 and 15.227 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

#### 1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

#### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard

for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

#### 1.5 Test Facility

#### • FCC – Registration No.: 994117

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

#### • Industry Canada (IC) Registration No.: 7673A

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

#### 1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

# 1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number	
/	/	/	/	

#### 1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Cord/Without Cord
/	/	/	/

# 2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission Limit	Compliant
§15.227(a)	Field Strength	Compliant
§15.227(b)	Out of Band Emission	Compliant

# 3. §15.203 - ANTENNA REQUIREMENT

# 3.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.2 Test Result

This product has a permanent antenna, fulfill the requirement of this section.

# 4. §15.205, §15.209, §15.227- RADIATED EMISSION

# **4.1 Measurement Uncertainty**

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ±4.0 dB.

#### 4.2 Standard Applicable

According to \$15.227(a), The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in \$15.35 for limiting peak emissions apply.

According to §15.227(b) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

# **4.3 Test Equipment List and Details**


Manufacturer	ncturer Description Model		Serial Number	Cal. Date	Due. Date	
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2008-07-08	2009-07-07	
Positioning	C %-C	CC C 1E	NI/A	2000 07 00	2000 07 07	
Controller	C&C	CC-C-1F	N/A	2008-07-08	2009-07-07	
Trilog Broadband	CCHWADZDECK	VIII D0162	0162 222	2009 07 09	2000 07 07	
Antenna	SCHWARZBECK	VULB9163	9163-333	2008-07-08	2009-07-07	
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2008-07-08	2009-07-07	
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2008-07-08	2009-07-07	
RF Switch	EM	EMSW18	SW060023	2008-07-08	2009-07-07	
Amplifier	Agilent	8447F	3113A06717	2008-07-08	2009-07-07	
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2008-07-08	2009-07-07	
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2008-07-08	2009-07-07	

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

#### **4.4 Test Procedure**

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.227(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

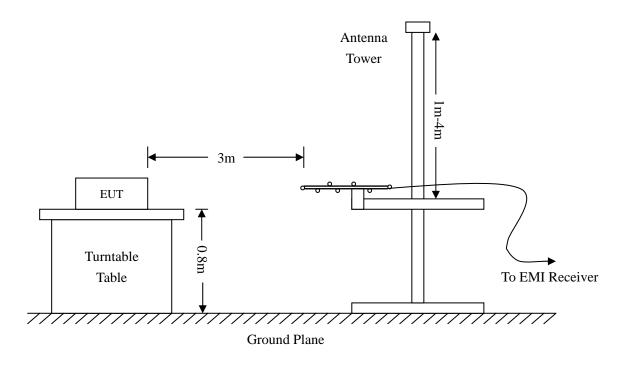

# 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6dB\mu V$  means the emission is  $6dB\mu V$  below the maximum limit for Class B. The equation for margin calculation is as follows:

#### **4.6 Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	52%
ATM Pressure:	1020 mbar

# 4.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.227 standards, and had the worst margin of:

-1.38 dB $\mu$ V at 81.3740 MHz in the Horizontal polarization, 30 MHz to 1 GHz, 3Meters

Test Mode: Transmitting


# **Plot of Radiation Emissions Test**

#### Horizontal:

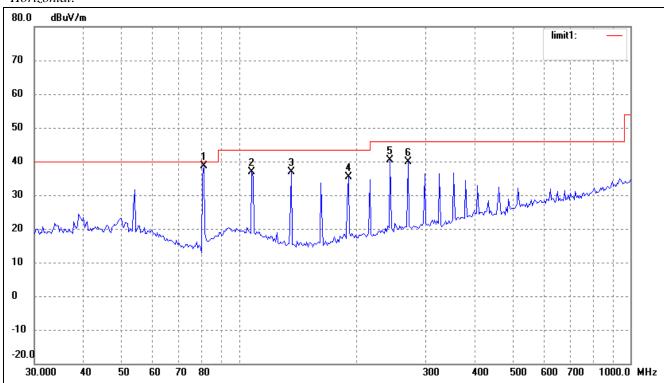

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(•)	(cm)	
Fundamental	27.045	39.91	6.85	46.76	100.00	-53.64	22	100	peak
Fundamental	27.045	31.04	6.85	37.89	80.00	-42.11	64	100	Ave
1	81.3740	34.99	3.63	38.62	40.00	-1.38	99	100	QP
2	107.7854	29.68	7.13	36.81	43.50	-6.69	120	100	peak
3	135.9163	33.34	3.48	36.82	43.50	-6.68	341	100	peak
4	190.4411	29.81	5.66	35.47	43.50	-8.03	156	100	peak
5	243.5431	32.87	7.53	40.40	46.00	-5.60	20	200	QP
6	270.6162	31.71	8.20	39.91	46.00	-6.09	36	100	peak

# Vertical:

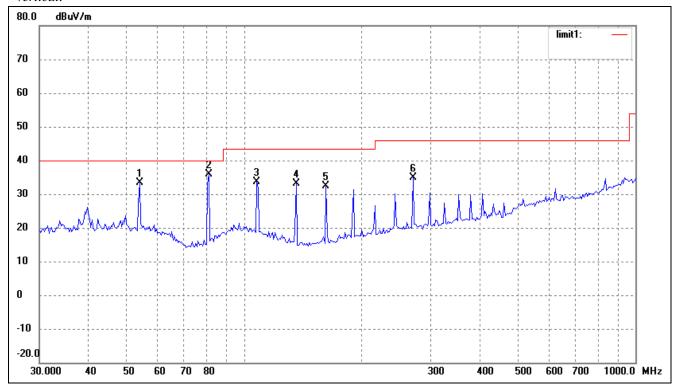

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(•)	(cm)	
Fundamental	27.045	42.72	6.85	49.57	100.00	-50.43	15	100	peak
Fundamental	27.045	33.26	6.85	40.11	80.00	-39.89	226	100	Ave
1	54.1349	25.77	7.50	33.27	40.00	-6.73	15	100	peak
2	81.3740	32.31	3.63	35.94	40.00	-4.06	135	100	QP
3	107.7854	26.38	7.13	33.51	43.50	-9.99	100	100	peak
4	135.9163	29.73	3.48	33.21	43.50	-10.29	189	100	peak
5	162.0197	28.62	3.80	32.42	43.50	-11.08	51	100	peak
6	270.6162	26.80	8.20	35.00	46.00	-11.00	36	100	peak

# 5. §15.227(b) OUT OF BAND EMISSIONS

# **5.1 Standard Applicable**

According to FCC 15.227 (b) The field strength of any emissions which appear outside of 26.96MHz to 27.28MHz shall not exceed the general radiated emission limits in §15.209.

# 5.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2008-07-08	2009-07-07
Positioning Controller	C&C	C&C CC-C-1F N/A		2008-07-08	2009-07-07
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2008-07-08	2009-07-07
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2008-07-08	2009-07-07
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2008-07-08	2009-07-07
RF Switch	EM	EMSW18	SW060023	2008-07-08	2009-07-07
Amplifier	Agilent	8447F	3113A06717	2008-07-08	2009-07-07
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2008-07-08	2009-07-07
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2008-07-08	2009-07-07

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

#### **5.3 Test Procedure**

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 26.96MHz to 27.28MHz, than mark the higher-level emission for comparing with the FCC rules.

#### **5.4 Environmental Conditions**

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1022 mbar


# 5.5 Summary of Test Results/Plots

Frequency	Emission	Limit		
MHz	dBμV/m	dBμV/m		
25.0600	16.68	50		
26.9600	2.75	50		
27.2800	1.60	50		
28.6432	8.19	50		

**Test Result: Pass** 


# Refer to the attached plots.

# Horizontal

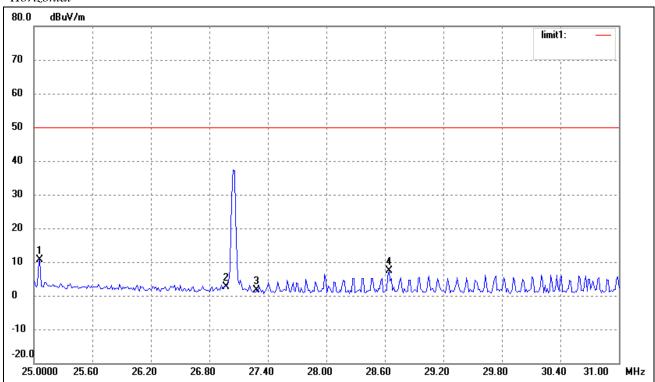

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(•)	(cm)	
1	25.0600	2.24	8.29	10.53	50.00	-39.47	0	100	peak
2	26.9600	-4.07	6.82	2.75	50.00	-47.25	20	100	peak
3	27.2800	-5.18	6.78	1.60	50.00	-48.40	34	100	peak
4	28.6432	0.74	6.70	7.44	50.00	-42.56	0	100	peak

#### Vertical

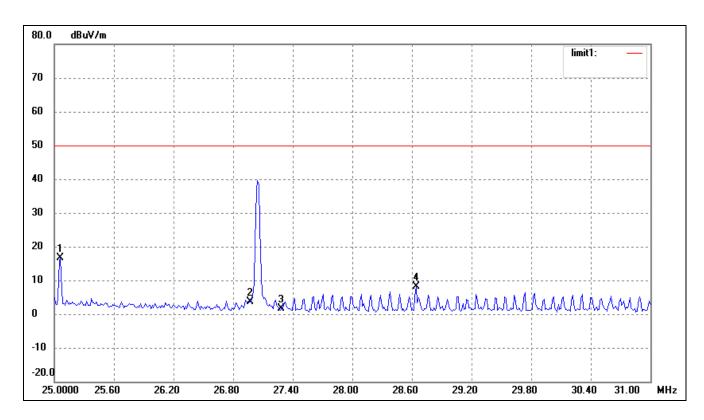

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(•)	(cm)	
1	25.0600	8.39	8.29	16.68	50.00	-33.32	0	100	peak
2	26.9600	-3.18	6.82	3.64	50.00	-46.36	15	100	peak
3	27.2800	-5.18	6.78	1.60	50.00	-48.40	33	100	peak
4	28.6432	1.49	6.70	8.19	50.00	-41.81	0	100	peak

# \*\*\*\*\* END OF REPORT \*\*\*\*\*