



RADIATED SPURIOUS EMISSIONS PORTIONS OF

FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT
FOR

Dual Band 1xRTT CDMA with Bluetooth

MODEL NUMBER: S3015

FCC ID: V65S3015

REPORT NUMBER: 11U13873-1

ISSUE DATE: JULY 15, 2011

Prepared for

KYOCERA COMMUNICATIONS, INC.
9520 TOWNE CENTER DRIVE
SAN DIEGO, CA 92121, USA

Prepared by

COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	07/15/11	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	<i>6</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. <i>RADIATED OUTPUT POWER.....</i>	<i>11</i>
7.2. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	<i>14</i>
8. SETUP PHOTOS.....	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: KYOCERA COMMUNICATIONS, INC.
9520 TOWNE CENTER DRIVE
SAN DIEGO, CA 92121, USA

EUT DESCRIPTION: Dual Band 1xRTT CDMA with Bluetooth

MODEL: S3015

SERIAL NUMBER: 268435457816723867

DATE TESTED: JULY 07 AND 14, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H AND 24E	PASS (Radiated Portion)

Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For UL CCS By:



THU CHAN
ENGINEERING MANAGER
UL CCS

Tested By:



CHIN PANG
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22, and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) +
Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth featured dual band CDMA Phone that manufactured by Kyocera Corporations.

5.2. MAXIMUM OUTPUT POWER

The transmitter maximum peak ERP and average EIRP output powers are as follows:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Communications Test Set	Agilent / HP	E5515C	C01086	07/17/11
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06/30/12
Antenna, Horn, 18 GHz	EMCO	3115	C00943	CNR
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/16/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	07/14/12
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Dipole	Speag	D900V2	N/A	11/16/11
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	N/A	09/28/11

5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated on X, Y, and Z Positions, and the worst position among X, Y, and Z with an AC Adapter and headset. After the investigations the worst-cases were turned out to be Y position with AC/DC adapter and headset for both cell and PCS bands.

PROCEDURE USED TO ESTABLISH TEST SIGNAL

3G-CDMA2000 1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
CDMA2000 Mobil Test	B.10.11, L

1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 2
> Network ID (NID) > 0

Once "Active Cell" show "Connected" then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	SCP-31ADT	SSW 2001	N/A
Headset	N/A	N/A	N/A	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	NA
2	DC	1	DC	Un-shielded	2m	NA
3	Jack	1	Headset	Un-shielded	2m	NA
4	RF in/Out	1	Horn	Un-shielded	2m	NA

TEST SETUP

The EUT is a CDMA phone and is tested as a standalone configuration. Communications Test Set is used to link the device under test.

SETUP DIAGRAM FOR TESTS

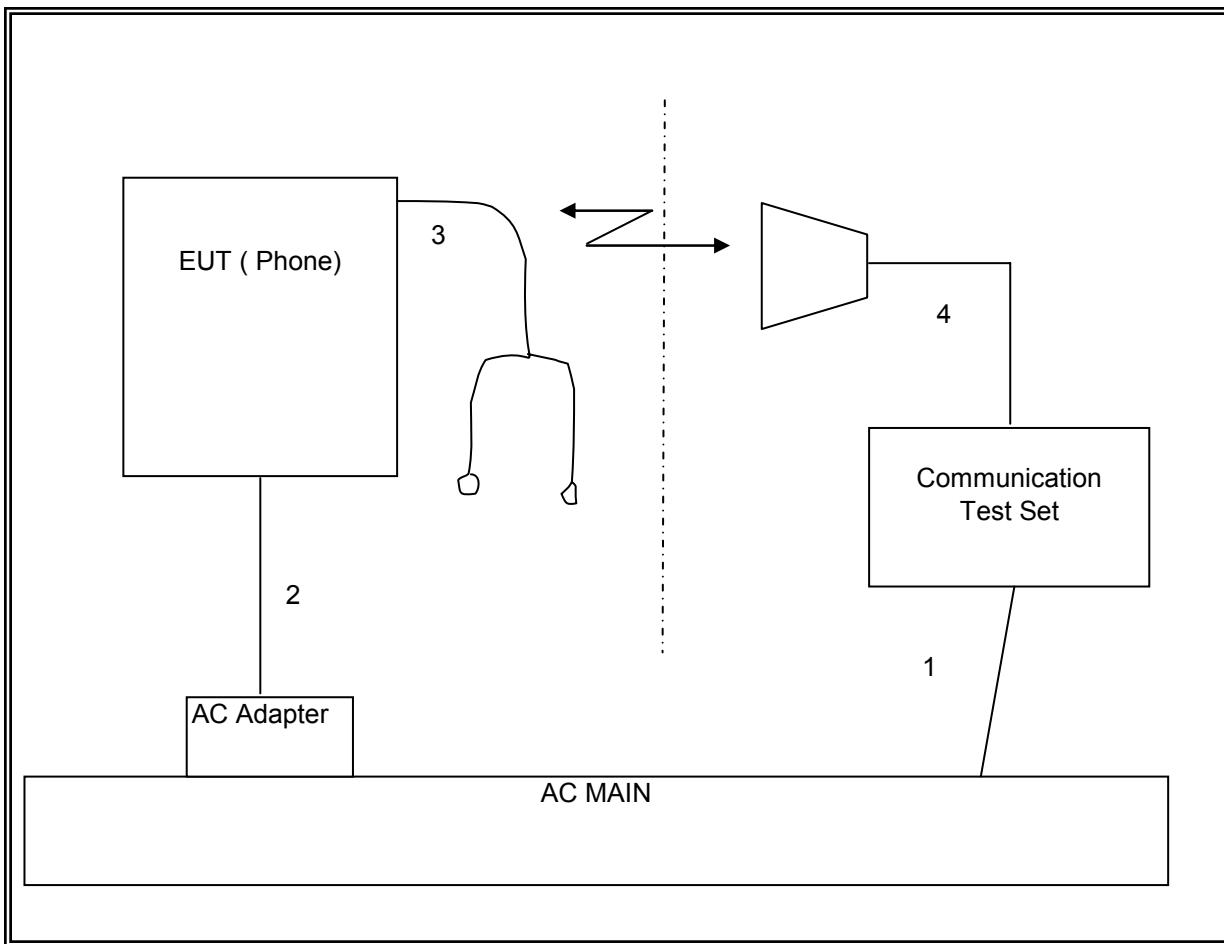

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Communications Test Set	Agilent / HP	E5515C	C01086	07/17/11
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06/30/12
Antenna, Horn, 18 GHz	EMCO	3115	C00943	CNR
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/16/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	07/14/12
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Dipole	Speag	D900V2	N/A	11/16/11
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	N/A	09/28/11

7. LIMITS AND RESULTS

7.1. RADIATED OUTPUT POWER

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) & RSS133 § 6.4 Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17

RESULTS

CELL OUTPUT POWER (ERP)

High Frequency Substitution Measurement Compliance Certification Services Chamber B																
Company:	KYOCERA															
Project #:	11U13873															
Date:	07-07-11															
Test Engineer:	Chin Pang															
Configuration:	EUT with AC Adapter															
Mode:	TX, CELL BAND CDMA MODE															
<u>Test Equipment:</u>																
Receiving: Sunol T130, and 3m Chamber N-type Cable (Setup this one for testing EUT)																
Substitution: Dipole S/N: 00022117, 6ft SMA Cable (SN # 208947003) Warehouse.																
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
824.70	29.43	V	0.5	0.0	28.93	38.5	-9.5									
824.70	22.30	H	0.5	0.0	21.80	38.5	-16.6									
Mid Ch																
836.52	30.17	V	0.5	0.0	29.67	38.5	-8.8									
836.52	21.62	H	0.5	0.0	21.12	38.5	-17.3									
High Ch																
848.31	29.20	V	0.5	0.0	28.70	38.5	-9.7									
848.31	22.53	H	0.5	0.0	22.03	38.5	-16.4									
Rev. 3.17.11																

PCS OUTPUT POWER (EIRP)

High Frequency Fundamental Measurement Compliance Certification Services Chamber B																
Company:	KYOCERA															
Project #:	11U13873															
Date:	07/15/11															
Test Engineer:	MENGISTU MEKURIA															
Configuration:	EUT ALONE															
Mode:	TX, PCS BAND CDMA MODE															
<u>Test Equipment:</u>																
Receiving: Horn T59, and Camber B SMA Cables																
Substitution: Horn T60 Substitution, 6ft SMA Cable (208947003) Warehouse																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes								
1.851	12.1	V	0.85	8.01	19.28	33.0	-13.7									
1.851	17.4	H	0.85	8.01	24.58	33.0	-8.4									
1.880	11.8	V	0.85	8.13	19.06	33.0	-13.9									
1.880	17.0	H	0.85	8.13	24.31	33.0	-8.7									
1.909	12.4	V	0.85	8.13	19.64	33.0	-13.4									
1.909	17.1	H	0.85	8.13	24.40	33.0	-8.6									

Rev. 3.17.11

7.2. FIELD STRENGTH OF SPURIOUS RADIATION

LIMIT

§22.917 (e) and §24.238 (a), RSS-132 § 4.5.1, & RSS-133 § 6.5.1 (a) (i) & (b): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 22.917 (b) & FCC 24.238 (b)(g)(1)(2)

RESULTS

CELL SPURIOUS & HARMONIC (ERP)

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		KYOCERA							
Project #:		11U13873							
Date:		07-07-11							
Test Engineer:		Chin Pang							
Configuration:		EUT with AC Adapter							
Mode:		TX, CELL BAND CDMA MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T145 8449B		Filter 1		FCC Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Channel (824.7MHz)									
1.649	-20.6	V	3.0	35.5	1.0	-55.1	-13.0	-42.1	
2.474	-19.6	V	3.0	35.4	1.0	-54.0	-13.0	-41.0	
3.299	-18.9	V	3.0	35.5	1.0	-53.4	-13.0	-40.4	
1.649	-21.4	H	3.0	35.5	1.0	-55.9	-13.0	-42.9	
2.474	-20.6	H	3.0	35.4	1.0	-55.0	-13.0	-42.0	
3.299	-18.2	H	3.0	35.5	1.0	-52.8	-13.0	-39.8	
Mid Channel (836.52MHz)									
1.673	-17.5	V	3.0	35.5	1.0	-52.0	-13.0	-39.0	
2.510	-17.3	V	3.0	35.4	1.0	-51.7	-13.0	-38.7	
3.526	-15.8	V	3.0	35.4	1.0	-50.2	-13.0	-37.2	
1.673	-18.9	H	3.0	35.5	1.0	-53.5	-13.0	-40.5	
2.510	-20.1	H	3.0	35.4	1.0	-54.5	-13.0	-41.5	
3.346	-19.4	H	3.0	35.5	1.0	-53.9	-13.0	-40.9	
High Channel (848.31MHz)									
1.697	-18.8	V	3.0	35.5	1.0	-53.3	-13.0	-40.3	
2.545	-18.7	V	3.0	35.4	1.0	-53.2	-13.0	-40.2	
3.393	-17.9	V	3.0	35.5	1.0	-52.4	-13.0	-39.4	
1.697	-20.4	H	3.0	35.5	1.0	-54.9	-13.0	-41.9	
2.545	-23.4	H	3.0	35.4	1.0	-57.8	-13.0	-44.8	
3.393	-18.7	H	3.0	35.5	1.0	-53.2	-13.0	-40.2	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

PCS SPURIOUS & HARMONIC (EIRP)

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company: KYOCERA	Project #: 11U13873	Date: 07/15/11							
Test Engineer: MENGISTU MEKURIA	Configuration: EUT ALONE	Mode: TX, PCS BAND CDMA MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T145 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25MHz									
3.70	-9.9	V	3.0	35.4	1.0	44.3	-13.0	-31.3	
5.55	-13.6	V	3.0	35.4	1.0	48.0	-13.0	-35.0	
7.41	-13.2	V	3.0	35.7	1.0	48.0	-13.0	-35.0	
9.26	-11.6	V	3.0	35.6	1.0	46.1	-13.0	-33.1	
3.70	-16.9	H	3.0	35.4	1.0	51.3	-13.0	-38.3	
5.55	-11.5	H	3.0	35.4	1.0	45.9	-13.0	-32.9	
7.41	-13.7	H	3.0	35.7	1.0	48.4	-13.0	-35.4	
9.26	-10.6	H	3.0	35.6	1.0	45.1	-13.0	-32.1	
Mid Ch, 1880MHz									
3.76	-3.7	V	3.0	35.3	1.0	38.1	-13.0	-25.1	
5.64	-10.3	V	3.0	35.4	1.0	44.8	-13.0	-31.8	
7.52	-11.2	V	3.0	35.7	1.0	45.9	-13.0	-32.9	
9.40	-13.9	V	3.0	35.6	1.0	48.5	-13.0	-35.5	
3.76	-8.7	H	3.0	35.3	1.0	43.0	-13.0	-30.0	
5.64	-9.2	H	3.0	35.4	1.0	43.6	-13.0	-30.6	
7.52	-14.1	H	3.0	35.7	1.0	48.8	-13.0	-35.8	
9.40	-10.6	H	3.0	35.6	1.0	45.2	-13.0	-32.2	
High Ch, 1908.75MHz									
3.82	-3.3	V	3.0	35.3	1.0	37.6	-13.0	-24.6	
5.73	-13.4	V	3.0	35.4	1.0	47.8	-13.0	-34.8	
7.64	-8.8	V	3.0	35.7	1.0	43.5	-13.0	-30.5	
9.54	-13.0	V	3.0	35.6	1.0	47.6	-13.0	-34.6	
3.82	-5.8	H	3.0	35.3	1.0	40.1	-13.0	-27.1	
5.73	-8.4	H	3.0	35.4	1.0	42.9	-13.0	-29.9	
7.64	-7.7	H	3.0	35.7	1.0	42.4	-13.0	-29.4	
9.54	-10.7	H	3.0	35.6	1.0	45.3	-13.0	-32.3	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.