



Test report

23-0149RP15-003-A

Product / EUT: *RFID Reader*

Type designation: *ARE i9x*

Tested type: *ARE i9x*

EUT authorization: Certification
 Suppliers Declaration of Conformity

Production level: *n/a*

S/N: *n/a*

FCC ID: *V71AREI9XHF*

Manufacturer: *AEG Identifikationssysteme GmbH
Hörvelsinger Weg 47
89081 Ulm / Germany*

Test remit: 47 CFR Part 15 – Subpart C – Intentional radiators

in accordance with the procedures given in
ANSI C63.10-2013 and ANSI C63.4a-2017


The standards were: kept
 kept, for the limited scope of testing
 not kept

Remark: Validation covered by the accredited scope
 Validation not covered by the accredited scope
according: _____
 Validation of the EMC-requirements partly proceeded

Applicant: AEG Identifikationssysteme GmbH
Hörvelsinger Weg 47
89081 Ulm / Germany

EUT-
Date of arrival: 02/21/2024
Test ID: 23-0149PR08-003
Date(s) of test: 03/07/2024 – 03/12/2024

Burgrieden, 26/05/2024

Released by:

Principal Engineer - Christian Vogelmann

Test laboratory: EMCE GmbH
Ingenieurbüro für EMV-Prüfungen und
Schaltungsentwicklung
Untere Wiesen 1 / 88483 Burgrieden / Germany

DAkkS-Registration No: D-PL-12122-01-00
CAB-Registration No.: BNetzA-CAB-02/21-01/4
FCC-Registration No.: 239304

Accredited by:

Bundesnetzagentur



BNetzA-CAB-02/21-01

Deutsche Akkreditierungsstelle GmbH





Scope:

1	General information	4
2	EUT information.....	5
3	Decision rules for conformity assessment	8
4	Test equipment list of EMCE GmbH.....	9
5	Testplan provided by customer	13
6	Test(s) according 47 CFR Part 15 Subpart C - 03/08/2024.....	14
6.1	Requirements and conformance test specifications.....	14
6.2	Antenna requirements	15
6.3	Restricted bands of operation	16
6.3.1	Test set up	18
6.4	Terminal voltage on powerline.....	21
6.4.1	Test set up	23
6.4.2	Test.....	27
6.5	Radiated emissions H-Field of intentional radiators	37
6.5.1	Test set up	40
6.5.2	Test.....	43
6.6	Radiated emissions E-Field of intentional radiators.....	48
6.6.1	Test set up	51
6.6.2	Test.....	56
6.7	Emission bandwidth inside the operating frequency band	63
6.7.1	Test set up	65
6.7.2	Test.....	70
6.8	Field strength mask within the operation band 13.110-14.010 MHz	72
6.8.1	Test set up	74
6.8.2	Test.....	78
6.9	Frequency stability.....	82
6.9.1	Test set up	84
6.9.2	Test.....	86
7	Summary.....	88

1 General information

Project manager: Mr. S. Vogelmann
Inspector: Mr. S. Vogelmann

EMCE GmbH
Ingenieurbüro für EMV-Prüfungen und Schaltungsentwicklung

Contact person: Mr. Waitzinger / AEG Identifikationssysteme GmbH

Remarks: n/a

State of revision:

Source document	New Document	Date / Reviser	Modifications
23-0149PR15-003	23-0149PR15-003-A	05/23/2024 Steffen Vogelmann	The measurement performed in the OATS to evaluate the fundamental has been moved from chapter 6.5 to chapter 6.8. Adjustment of the test setup to ANSI C63.10-2013.



2 EUT information

Sampling:	The device was selected and provided by the customer.
Description:	<i>RFID Reader operating in the frequency range 13.56 MHz with an external antenna.</i>
Voltage supply:	120 V / 60 Hz
Frequency list:	13.56 MHz
Max. clock frequency:	n/a
Temperature range:	n/a
Dimension:	$(L \times W \times H) / \text{mm}^3$ - 90 x 40 x 25

Used antennas:

Antenna designation	Manufacturer	Connector / cable length	Gain (dBi) @ f / GHz
AAN Xi9F – HF Ser. 000580	AEG Identifikationssysteme GmbH	2.0 m	n/a

Supplied / used equipment:

Designation	Type	Manufacturer	S/N
Laptop	W25CSW	Terra	n/a
Power supply – Laptop	A12-065N2A	Chicony	F134091506009041
USB A Converter	151801	Manhattan	n/a
Power supply – EUT	SITP PSU3600	Siemens	n/a

Configuration: As-delivered condition
 Modified
* _____



Cable designation	Type	Length	Remarks
<i>Antenna cable</i>	<i>n/a</i>	<i>2.0 m</i>	<i>n/a</i>
<i>Interconnection cable</i>	<i>5-core</i>	<i>1.6 m</i>	<i>n/a</i>
<i>Power cord (AC) Notebook</i>	<i>3-core</i>	<i>1.0 m</i>	<i>n/a</i>
<i>Power cord (DC) Notebook</i>	<i>2-core</i>	<i>1.8 m</i>	<i>n/a</i>
<i>Power Cord (AC) PSU</i>	<i>3-core</i>	<i>1.8 m</i>	<i>n/a</i>
<i>Data cable</i>	<i>Sub-D 9-core</i>	<i>1.4 m</i>	<i>n/a</i>
<i>USB to SUB-D converter</i>	<i>151801</i>	<i>1.6 m</i>	<i>Ferrite with 2 turns WE 742 712 21</i>

Software designation	Type	Manufacturer	Version
<i>Evaluation software</i>	<i>ARE i9 Terminal</i>	<i>AEG Identifikationssysteme GmbH</i>	<i>1.084</i>

Pictures of the EUT








3 Decision rules for conformity assessment

"Binary" decision rule - pass / fail

Unless otherwise stated in the test module, the following specifications apply:

Interference emission

No measurement uncertainties are taken into account for the statement of conformity. In the case of conducted and radiated interference emission, the measurement is considered passed if the measurement result is below the permitted limit value. The accepted measurement uncertainties for a direct statement of conformity, determined for the U_{Lab} laboratory, must be less than the U_{CISPR} values determined in the CISPR16-4-2 standard. The measurement uncertainties are stated with a confidence level of 95 %. In this case the uncertainty of measurement is not taken into account for the conformity statement.

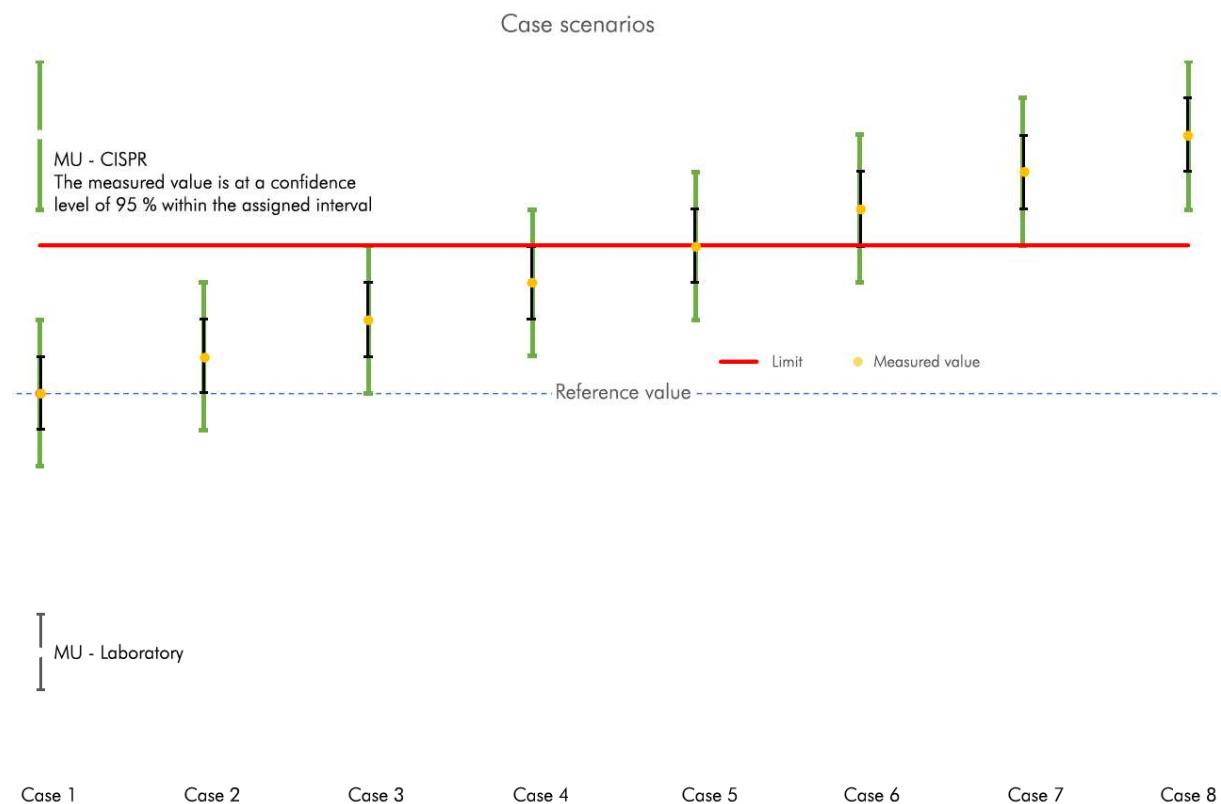

The test is passed for case 1 - 5. A rejection is made in case 6 - 8.

The test is considered as passed if the evaluation criteria for immunity to interference and the limits of emitted interference of the specified standard are met. Measurement uncertainties are not considered.



4 Test equipment list of EMCE GmbH

Inv.-No.	Designation	Type	Manufacturer	S/N	Calibration: Interval /valid until
002	Passive probe	ESH2-Z3	Rohde & Schwarz		1 Year(s)/ 2024-12-31
003	LISN 1	ESH3-Z5	Rohde & Schwarz	835268/007	1 Year(s)/ 2025-03-31
004	LISN 2	ESH3-Z5	Rohde & Schwarz	835268/003	1 Year(s)/ 2025-03-31
006	LISN	NNBM 8125	Schwarzbeck	8125371	1 Year(s)/ 2025-02-28
007	Absorbing clamp	MDS 21	Schwarzbeck	942436	1 Year(s)/ 2025-01-31
008	Loop antenna 9kHz-30MHz	HFH2-Z2	Rohde & Schwarz	835776/0002	3 Year(s)/ 2026-02-28
009	Antenna 30-300MHz	VHBA9123 / BBA9106	Schwarzbeck	435	3 Year(s)/ 2024-12-22
010	Antenna 250-1200MHz	UHALP 9108A	Schwarzbeck	108	3 Year(s)/ 2025-12-20
013	Antenna 9 kHz-30 MHz	Ø 1.5 m	EMCE GmbH		1 Year(s)/ 2024-12-31
014	OATS	Test site 3 m referred to ANSI C63.4a-2017	EMCE GmbH		3 Year(s)/ 2024-04-23
015	OATS	Test site 10 m referred to ANSI C63.4a-2017	EMCE GmbH		3 Year(s)/ 2024-04-26
041	Loop antenna shielded	HZ-10 0816.2511.02	Rohde & Schwarz	849788/0020	3 Year(s)/ 2026-01-10
042-2	AC-Source	EMV D 5000/PAS/SyCore	Spitzenberger & Spies	A274700 / 00501	3 Year(s)/ 2026-02-10
042-1	Analyser Reference System	ARS 16/3	Spitzenberger & Spies	A274707 / 00501	3 Year(s)/ 2024-12-28
043	Receiver	3DH/E Fieldmeter ESM-100	Maschek	971521	3 Year(s)/ 2026-09-11
058	Receiver	ESIB 40	Rohde & Schwarz	100200/ Firmware 4.35	1 Year(s)/ 2024-08-18
059	Log.-per. antenna	HL050	Rohde & Schwarz	100006	3 Year(s)/ 2025-10-21
067	LISN	ESH2-Z5	Rohde & Schwarz	872460/043	1 Year(s)/ 2025-03-31
068	LISN	ESH2-Z5	Rohde & Schwarz	872460/042	1 Year(s)/ 2025-03-31



Inv.-No.	Designation	Type	Manufacturer	S/N	Calibration: Interval /valid until
070	Pulse limiter + 10 dB Attenuator	ESH3-Z2	Rohde & Schwarz	n/a	1 Year(s)/ 2024-08-31
116	Vertical rod antenna	VAMP 9243	Schwarzbeck	9243-205	3 Year(s)/ 2026-05-19
117	LISN	ESH3-Z6	Rohde & Schwarz	100521	1 Year(s)/ 2025-02-28
118	Current Probe	F-52	Fischer Customs Communication, Inc.	08398	1 Year(s)/ 2025-01-31
151	DSO Infiniium 2500 MHz	DSO9254A	Agilent Technologies	MY52090137	2 Year(s)/ 2024-05-18
155	Impedance stabilisation network	ISN T400A	Teseq GmbH	26541	3 Year(s)/ 2025-01-31
174	LISN	ESH3-Z6	Rohde & Schwarz	101003	1 Year(s)/ 2025-02-28
175	EMI Test receiver	ESR7	Rohde & Schwarz	101108 Firmware: FW V3.46 SP3	1 Year(s)/ 2024-11-15
178	V-LISN 5 μ H	NNHV 8123-400	Schwarzbeck	018	1 Year(s)/ 2025-02-28
184	V-LISN 5 μ H	NNHV8123-400	Schwarzbeck	019	1 Year(s)/ 2025-02-28
222	Broadband Preamplifier 0.5-18 GHz	BBV 9718	Schwarzbeck	9718-316	1 Year(s)/ 2024-07-31
223	Broadband Preamplifier 12-28 GHz	BBV 9719	Schwarzbeck	9719-024	1 Year(s)/ 2024-07-31
224	SMB100A Signal Generator	SMB100A	Rohde & Schwarz	108055	3 Year(s)/ 2026-01-25
225	Electric and Magnetic Field Probe-Analyzer	EHP-200A	Narda S.T.S. / PMM	170WX70205	3 Year(s)/ 2025-07-22
226	HL050 Log.-Per. Antenna 850 MHz to 26.5 GHz	HL050 4062.4063.02	Rohde & Schwarz	100829	3 Year(s)/ 2026-07-27
229	Test receiver	ESS 5 Hz - 1000 MHz	Rohde & Schwarz	845420/0005	1 Year(s)/ 2025-01-19
230	FSV40 Signal Analyzer 40 GHz	FSV40	Rohde & Schwarz	101717	2 Year(s)/ 2026-02-06
236	Broad-Band Horn Antenna 0.5-6 GHz	BBHA 9120 E	Schwarzbeck	00831	5 Year(s)/ 2024-05-13
237	Exposure Level Tester	ELT-400	Narda Safety Test Solutions	O-0028	3 Year(s)/ 2026-03-03



Inv.-No.	Designation	Type	Manufacturer	S/N	Calibration: Interval /valid until
239	Broadband Horn Antenna 15-40 GHz	BBHA 9170	Schwarzbeck	00932	5 Year(s)/ 2024-05-23
240	Broadband Preamplifier 18-40 GHz	BBV 9721	Schwarzbeck	54	1 Year(s)/ 2024-07-31
253	Broadband Preamplifier 20-1000 MHz	ESV-Z3	Rohde & Schwarz	881 909/030	1 Year(s)/ 2024-08-31
257	Pulse limiter + 10 dB Attenuator	ESH3-Z2	Rohde & Schwarz	102769	1 Year(s)/ 2024-08-31
262	EM Clamp	KEMZ 801A	Teseq	78033	1 Year(s)/ 2025-01-31
718	EMC-Software	BAT-EMC Vers. 3.18.0.19	Nexio	n/a	
997	EMC Software	EMC32 Vers. 10.60.20	Rohde & Schwarz	n/a	
1046	Environmental Simulation Chamber	MKF 115 (E3.1)	Binder GmbH	12-02215	3 Year(s)/ 2026-03-24
1212	EMC Software	WMS32 Vers. 10.60.20	Rohde & Schwarz	n/a	
1341	Multimeter	8845A	Fluke	5905001	3 Year(s)/ 2025-11-30
8004	Broadband Preamplifier 18-40 GHz	BLMA 1840-5G	BONN Elektronik GmbH	2113300	1 Year(s)/ 2024-07-31
8007	LPDA Broadband Antenna 180 - 1500 MHz	VULP 9118A	Schwarzbeck	899	3 Year(s)/ 2024-10-27
8008	LPDA Broadband Antenna 180 - 1500 MHz	VULP 9118A	Schwarzbeck	900	3 Year(s)/ 2024-10-27
8009	Field Monitoring Loop	FESP 5134-1	Schwarzbeck	00078	3 Year(s)/ 2024-12-20
8013	Antenna 9 - 150 kHz	Ø 120 mm, 20 Turns	EMCE GmbH	n/a	
8015	Amplifier 2.5 - 6 GHz	BBA150-E100	Rohde & Schwarz	105302	1 Year(s)/ 2024-08-31
8016	Circular Loop Antenna 0.01 - 120 MHz	HFRA 5164	Schwarzbeck	00152	
8017	Compensation network for 13.56 MHz	NFCN 1356	Schwarzbeck	00122	
8025	Monopole Antenna 144 - 148 MHz	HLC 146	Schwarzbeck	00057	3 Year(s)/ 2026-02-28



Inv.-No.	Designation	Type	Manufacturer	S/N	Calibration: Interval /valid until
8033	Antenna 30-300 MHz	VHBB9124 / BBA9106	Schwarzbeck	1808	3 Year(s)/ 2026-04-21
8034	Antenna 30-300 MHz	VHBB9124 / BBA9106	Schwarzbeck	1812	3 Year(s)/ 2026-04-21
8039	Impedance Stabilisation Network	Pilot ISN	Schwarzbeck	82	1 Year(s)/ 2024-08-31
8042	Manual Attenuator	8494B+8495B	Keysight	TH61358076+ TH61354943	1 Year(s)/ 2025-02-28
8044	EMI Test Receiver	ESW44	Rohde & Schwarz	103371	1 Year(s)/ 2025-02-28

5 Testplan provided by customer

- Test according to the test plan provided by the customer
- Deviation from the test plan authorised by the customer
- Test according standard

Source document	Date / Reviser	Modifications



6 Test(s) according 47 CFR Part 15 Subpart C - 03/08/2024

6.1 Requirements and conformance test specifications

Standard

47 CFR Part 15 Subpart C

ANSI C63.10-2013

KDB n/a

Requirement	Regulation section
	47 CFR Part 15 Subpart C
<input checked="" type="checkbox"/> Antenna requirement	§ 15.203
<input checked="" type="checkbox"/> Restricted bands of operation	§ 15.205 (a) (b) (c) (d)(7))
<input checked="" type="checkbox"/> Terminal voltage on powerline	§ 15.207 (a)
<input checked="" type="checkbox"/> Radiated emissions H-Field of intentional radiators	§ 15.209 (a) (b) (c) (d) (e) (f)
<input checked="" type="checkbox"/> Radiated emissions E-Field of intentional radiators	§ 15.209 (a) (b) (c) (d) (e) (f)
<input checked="" type="checkbox"/> Emission bandwidth inside the operating frequency band	§ 15.215 (c)
<input checked="" type="checkbox"/> Field strength mask within the operation band 13.110-14.010 MHz	§ 15.225 (a) (b) (c) (d)
<input checked="" type="checkbox"/> Frequency stability	§ 15.225 (e) (f)

6.2 Antenna requirements

- No deviation from the standard
- Deviation from the standard*
- Test not requested*
- Test not carried out*

* _____

Measurement procedure:
 Rules and specification
 Guide

47 CFR Part 15 Section 15.203
 n/a

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficiently to comply with the provisions of this section.

Antenna:

- Print antenna
- Internal antenna
- External antenna

<input checked="" type="checkbox"/> Single Antenna	<input type="checkbox"/> Antenna array
<input type="checkbox"/> MIMO	<input type="checkbox"/> _____

Antenna connector:

<input type="checkbox"/> Permanent attached	<input type="checkbox"/> _____
<input checked="" type="checkbox"/> Unique coupling to the intentional radiator	<input type="checkbox"/> _____
<input type="checkbox"/> SMA	<input type="checkbox"/> UFL
<input type="checkbox"/> _____	<input type="checkbox"/> _____

Test result

Requirement:

- kept
- not kept

Remarks: n/a



6.3 Restricted bands of operation

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

* _____

Requirement: 47 CFR Part 15 Section 15.205 (a)(b)(c)(d)(7))
Guide n/a

Restricted bands


f / MHz	f / MHz	f / MHz	f / GHz
0.090-0.110	12.57675-12.57725	322-335.4	4.500-5.150
0.495 – 0.505	13.36-13.41	399.9-410	5.350-5.460
2.1735-2.1905	16.42-16.423	608-614	7.250-7.750
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.500
4.17725-4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.20725-4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
12.51975-12.52025	240-285	3500-4400	above 38.6



Only spurious emissions are permitted in any of the frequency bands listed before. The field strength of emissions appearing within these frequency bands shall not exceed the radiated emission limits; general requirements. At frequencies equal to or less than 1000 MHz, compliance with the radiated emission limits; general requirements shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions.

Basic structure - Setup

OATS / SAC

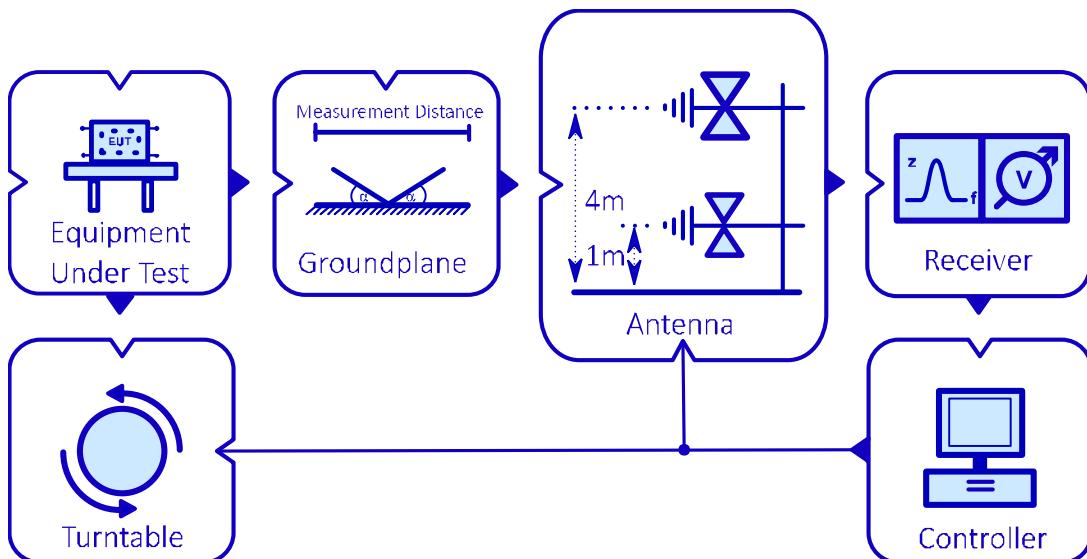



6.3.1 Test set up

See test for radiated emissions of intentional radiators.

Test location

See test for radiated emissions of intentional radiators.

Used test equipment

See test for radiated emissions of intentional radiators.



Test

Used frequency band: 13.110-14.010 MHz

Nearest restricted band: 13.360-13.410 MHz

Limits for radiated emissions in the restricted bands

Technical requirements			
Detector	Frequency / MHz	Limit / μ V/m	Measurement distance / m
AV	0.009 – 0.09	2400/F(kHz)	300
QP	0.09 – 0.110	2400/F(kHz)	300
AV	0.110 – 0.49	2400/F(kHz)	300
QP	0.49 – 1.705	24000/F(kHz)	30
QP	1.705 – 30.0	30	30
Detector	Frequency / MHz	Limit / $dB\mu$ V/m	Measurement distance / m
QP	30.0 – 88.0	40.0	3
QP	88.0 – 216.0	43.5	3
QP	216.0 – 960.0	46.0	3
QP	960.0 – 1000.0	54.0	3
AV	> 1000	54.0	3
PK	> 1000	74.0	3

The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

Devices operated pursuant to §15.225 [13.110-14.010 MHz] are exempt from complying with this section for the 13.36-13.41 MHz band only.



Test procedure

See test for radiated emissions of intentional radiators.

Test result

Used frequency range outside of restricted bands

kept*
 not kept

General emission limits for restricted frequency bands:

See test for radiated emissions of intentional radiators.

kept*
 not kept

Limits for next restricted frequency band:

See test for spectrum mask within the operation band.

kept*
 not kept

*Devices operated pursuant to §15.225 [13.110-14.010 MHz]
are exempt from complying with this section for the 13.36-13.41 MHz band only.

Remarks: n/a



6.4 Terminal voltage on powerline

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

* _____

Measurement procedure:

Rules and specification
Guide

47 CFR Part 15 Section 15.207 (a)
ANSI C63.10-2013

The conducted disturbances are recorded in the frequency range from 150 kHz to 30 MHz. For this purpose line impedance stabilization networks (LISNs) are used which are inserted between the DUT and the mains supply. The output of one LISN is connected directly to a receiver according to CISPR 16 guidelines via a pulse limiter and 10 dB fixed attenuator. Not used ports of the LISN are terminated by 50Ω . The Average- and Quasi-Peak-Detectors are provided to evaluate the spectrum. To speed up the measurement process, a pre-measurement is performed with the Peak- and Average-Detectors. The 10 frequencies with the smallest distance to the limit and priority with the highest exceeding are selected and re-measured. The Average and Quasi-Peak-Detectors are used for the final measurement. This measurement procedure is performed for each individual current conductor.

Depending on the limit lines, 6 final measurements are documented. The highest limit exceeding or, in case of compliance with the limit, the emissions found with the smallest distance to the limit are documented.

If less than six emission frequencies with a distance of 20 dB are below the limit value, the noise level of the measuring device at representative frequencies is indicated.

For the measurement, it may be necessary to terminate the antenna output to distinguish the interference level caused by the unintentional part from the intentional part (see ANSI C63.4 section 13.1.3.1).



The documented final test results are calculated using the following formula:

$$U(f) \text{ (dB}\mu\text{V)} = \text{Measured Value (dB}\mu\text{V)} + \text{ATF (dB)} + \text{CF (dB)}$$

$U(f) =$	Final result of the terminal voltage at the test frequency
Measured Value =	Reading of the uncorrected measured value
ATF =	Correction factor for the pulse limiter + 10 dB attenuator
CF =	Correction factor for the cable attenuation


Example:

Test frequency	13.56 MHz
Reading	31.5 dB μ V
AFT _(13.56 MHz)	10.2 dB
CF _(13.56 MHz)	0.4 dB

Calculated final result for the terminal voltage $U(f)$:

$$U_{(13.56 \text{ MHz})} = 31.5 \text{ dB}\mu\text{V} + 10.2 \text{ dB} + 0.4 \text{ dB} = 42.1 \text{ dB}\mu\text{V}$$

Basic structure – Setup

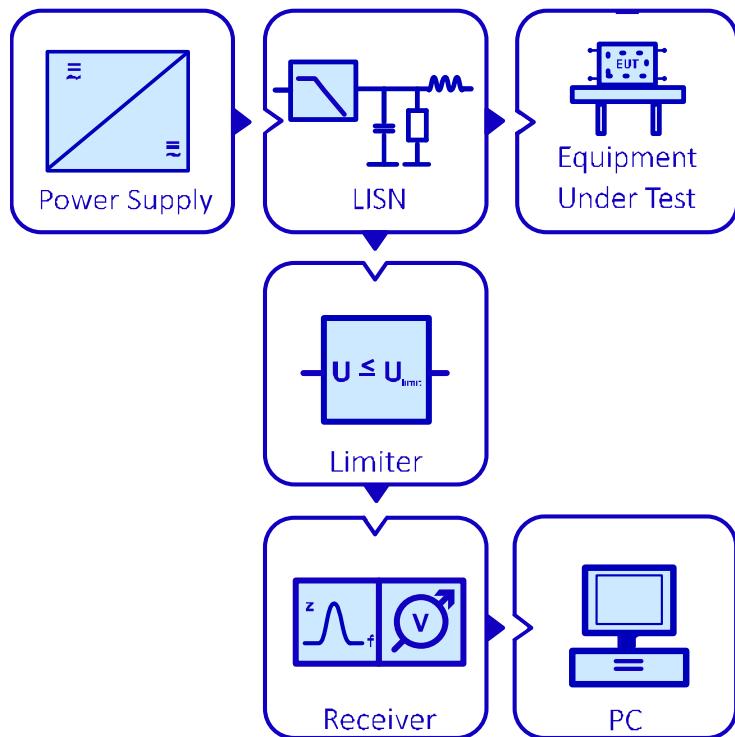




6.4.1 Test set up

According ANSI C63.10-2013



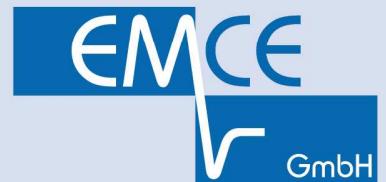



Test location

<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	588	Shielded room # 2	8.3/5.8 x 5.5/2.9 x 3.4 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	1319	Shielded room #5	5.6 x 5.0 x 3.8 m	Albatross Projects GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden

Used test equipment

<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	003	LISN 1	ESH3-Z5	Rohde & Schwarz	835268/007
	004	LISN 2	ESH3-Z5	Rohde & Schwarz	835268/003
	005	LISN 3	NNB 4/32T	Rolf Heine HF-Technik	4/32T-96015
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	067	LISN 5	ESH2-Z5	Rohde & Schwarz	0872460/043
<input checked="" type="checkbox"/>	068	LISN 4	ESH2-Z5	Rohde & Schwarz	0872460/042
<input checked="" type="checkbox"/>	070	Pulse limiter / 10 dB attenuator	ESH3-Z2	Rohde & Schwarz	357.8810.52
<input checked="" type="checkbox"/>	175	EMI Test receiver	ESR7	Rohde & Schwarz	101108
	229	Test receiver	ESS 5 Hz – 1000 MHz	Rohde & Schwarz	845420/0005
<input checked="" type="checkbox"/>	997	Software	EMC32	Rohde & Schwarz	n/a

All used test equipment are checked resp. calibrated periodically.

Test equipment was checked and complied to the requirements

Test-/Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the terminal voltage with an extended coverage factor of $k = 2$:

Frequency	Measurement uncertainty
9 kHz – 150 kHz	4.0 dB
150 kHz – 30 MHz	3.6 dB



6.4.2 Test

Requirement 47 CFR Part 15 Section 15.207 (a)

Frequency range: 150 kHz – 30 MHz

Limits for conducted emissions

Technical requirements			
3	Frequency / MHz	Limit QP-Detector / dB μ V	Limit AV-Detector / dB μ V
QP AV	0.15 – 0.5	66.0 – 56.0	56.0 – 46.0
QP AV	0.5 – 5.0	56.0	46.0
QP AV	5.0 – 30.0	60	50.0

Rationale for selecting the EUT test set up

Equipment units:

Minimal setup with EUT and external power supply unit. The DIN rail housing of the power supply unit was mounted on a metal plate. The metal plate was earthed via the power supply unit. The ground terminal and the cable shield of the reader's connection cable were connected to this metal plate. This design was chosen because it corresponds to the later intended use. The antenna was positioned away from the metal plate above a non-conductive surface. A remote laptop was provided for displaying the data from the reader.

Cabling:

- Standard cables
- Special cables provided by the manufacturer

Port #	Designation	Remarks
# 1	AC power line (EUT)	L1/N/PE
# 2	AC power line (AE)	L1/N/PE
# 3		



Operation mode

EUT arrangement:

Tabletop

Floor standing

Power supply:

120 V/60 Hz

240 V/60 Hz

The EUT was operated in read mode at maximum read speed, where the ID of a tag was read out cyclically every 80 ms. This ID was sent to a remote PC which was connected to the EUT via a USB interface. The tag was placed at a distance of 2 cm in front of the antenna.

Environmental conditions

Temperature [10 – 40 °C]:

25 °C

Relative humidity [10 – 90 %]:

31 %

Environmental conditions during the test:

kept

not kept

Test result

Limits for conducted powerline emissions:

kept

not kept

not relevant

Remarks: n/a


Records

- Readings – emissions for EUT
- Diagrams - emissions for EUT
- Readings - emissions for AE
- Diagrams - emissions for AE



EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG Identifikationssysteme GmbH
Operational condition: Reading mode (cyclical reading every 80 ms)
Test specification: 47 CFR Part 15 Subpart C §15.207
LISN port N / EUT
Operator: S. Vogelmann
File #: 23-0149RC10-003-002
Comment #1:
Comment #2:

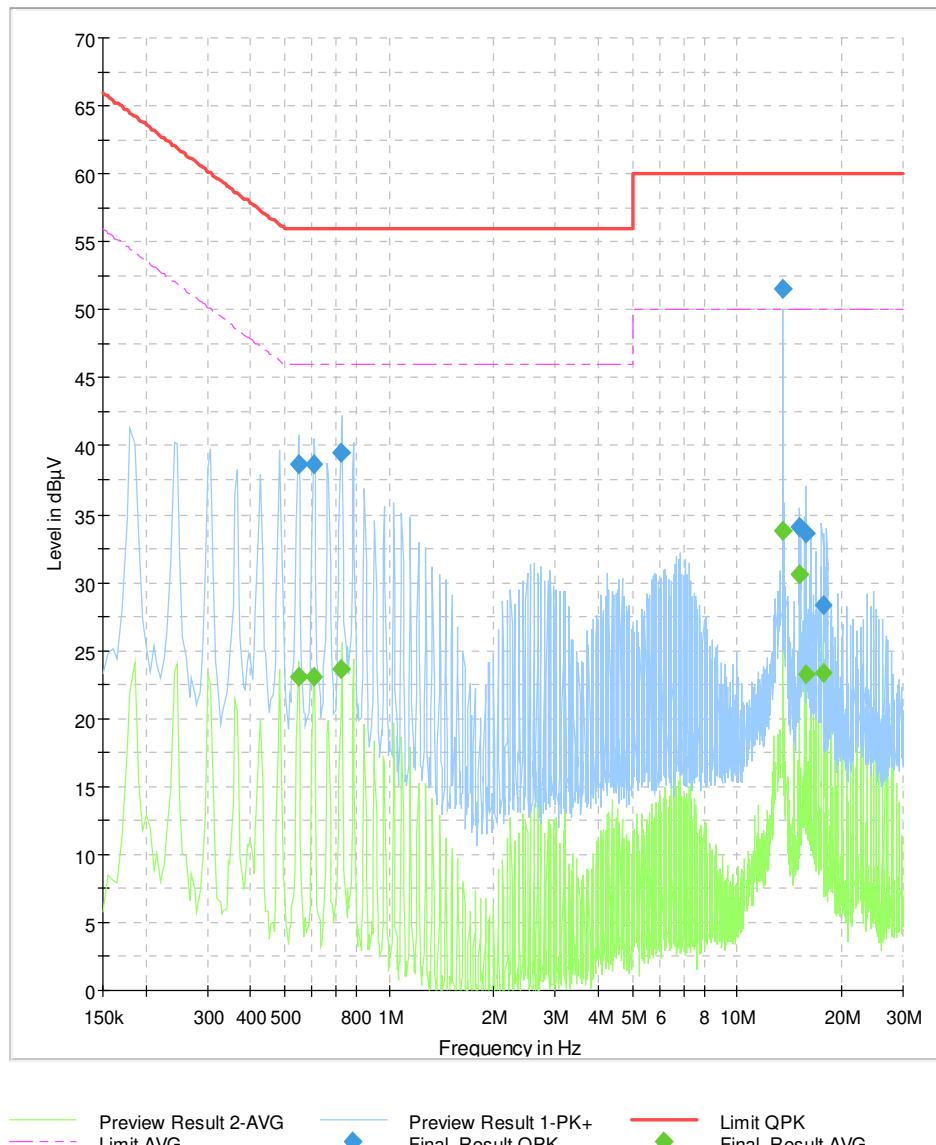


Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.545000	---	23.14	46.00	22.86	15000.0	9.000	N	10.1
0.545000	38.71	---	56.00	17.29	15000.0	9.000	N	10.1
0.605000	---	23.08	46.00	22.92	15000.0	9.000	N	10.1
0.605000	38.64	---	56.00	17.36	15000.0	9.000	N	10.1
0.728000	39.56	---	56.00	16.44	15000.0	9.000	N	10.2
0.728000	---	23.63	46.00	22.37	15000.0	9.000	N	10.2
13.563000	51.50	---	60.00	8.50	15000.0	9.000	N	10.7
13.563000	---	33.87	50.00	16.13	15000.0	9.000	N	10.7
15.155000	34.01	---	60.00	25.99	15000.0	9.000	N	10.8
15.155000	---	30.62	50.00	19.38	15000.0	9.000	N	10.8
15.750000	33.54	---	60.00	26.46	15000.0	9.000	N	10.8
15.750000	---	23.20	50.00	26.80	15000.0	9.000	N	10.8
17.604000	28.38	---	60.00	31.62	15000.0	9.000	N	10.8
17.604000	---	23.33	50.00	26.67	15000.0	9.000	N	10.8



EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG Identifikationssysteme GmbH
Operational condition: Reading mode (cyclical reading every 80 ms)
Test specification: 47 CFR Part 15 Subpart C §15.207
LISN port L1 / EUT
Operator: S. Vogelmann
File #: 23-0149RC10-003-003
Comment #1:
Comment #2:

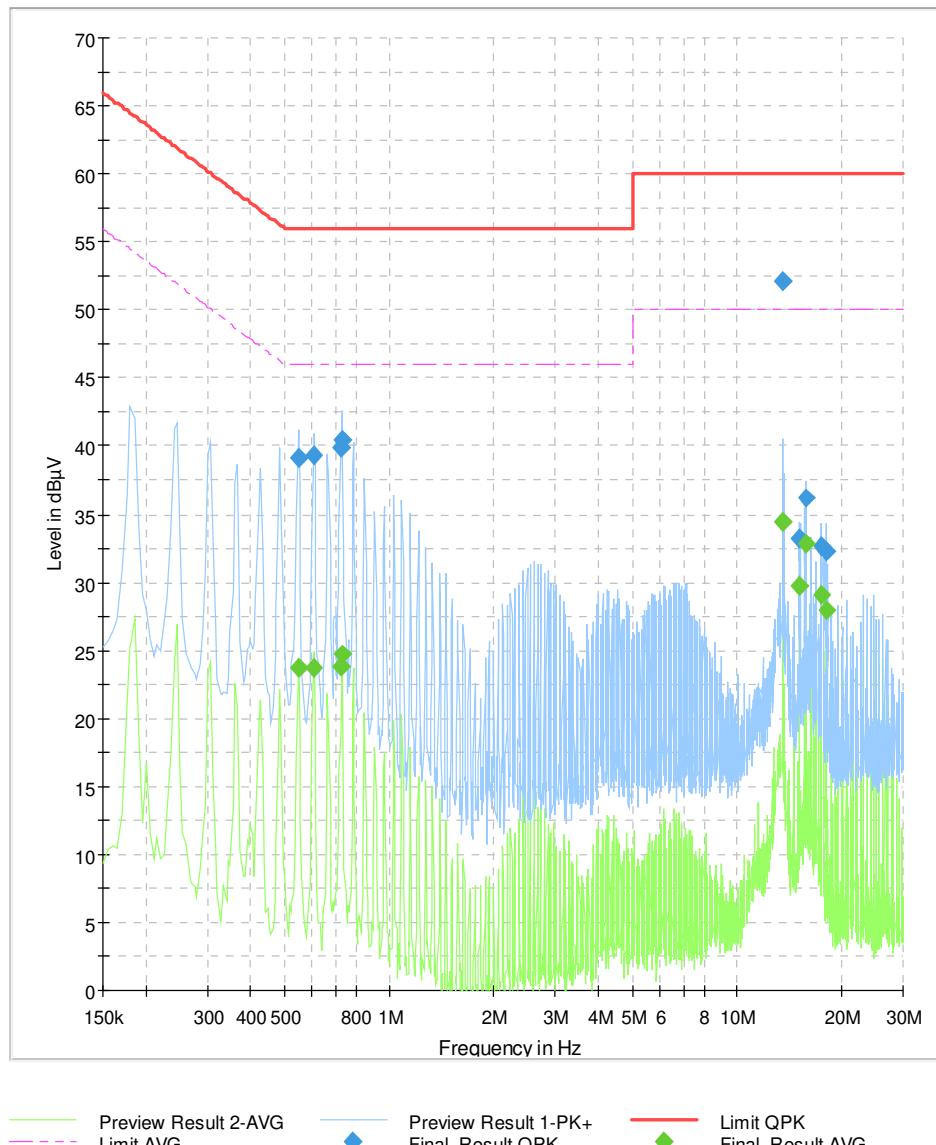




Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.545000	39.22	---	56.00	16.78	15000.0	9.000	L1	10.1
0.545000	---	23.74	46.00	22.26	15000.0	9.000	L1	10.1
0.607000	39.32	---	56.00	16.68	15000.0	9.000	L1	10.1
0.607000	---	23.76	46.00	22.24	15000.0	9.000	L1	10.1
0.728000	39.92	---	56.00	16.08	15000.0	9.000	L1	10.1
0.728000	---	23.86	46.00	22.14	15000.0	9.000	L1	10.1
0.730000	40.44	---	56.00	15.56	15000.0	9.000	L1	10.1
0.730000	---	24.72	46.00	21.28	15000.0	9.000	L1	10.1
13.558000	---	34.43	50.00	15.57	15000.0	9.000	L1	10.7
13.558000	52.16	---	60.00	7.84	15000.0	9.000	L1	10.7
15.139000	---	29.67	50.00	20.33	15000.0	9.000	L1	10.8
15.139000	33.23	---	60.00	26.77	15000.0	9.000	L1	10.8
15.743000	---	32.82	50.00	17.18	15000.0	9.000	L1	10.8
15.743000	36.21	---	60.00	23.79	15000.0	9.000	L1	10.8
17.560000	---	29.11	50.00	20.89	15000.0	9.000	L1	10.8
17.560000	32.65	---	60.00	27.35	15000.0	9.000	L1	10.8
18.169000	---	27.98	50.00	22.02	15000.0	9.000	L1	10.8
18.169000	32.28	---	60.00	27.72	15000.0	9.000	L1	10.8



EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG Identifikationssysteme GmbH
Operational condition: Reading mode (cyclical reading every 80 ms)
Test specification: 47 CFR Part 15 Subpart C §15.207
LISN port N / AE
Operator: S. Vogelmann
File #: 23-0149RC10-003-004
Comment #1:
Comment #2:

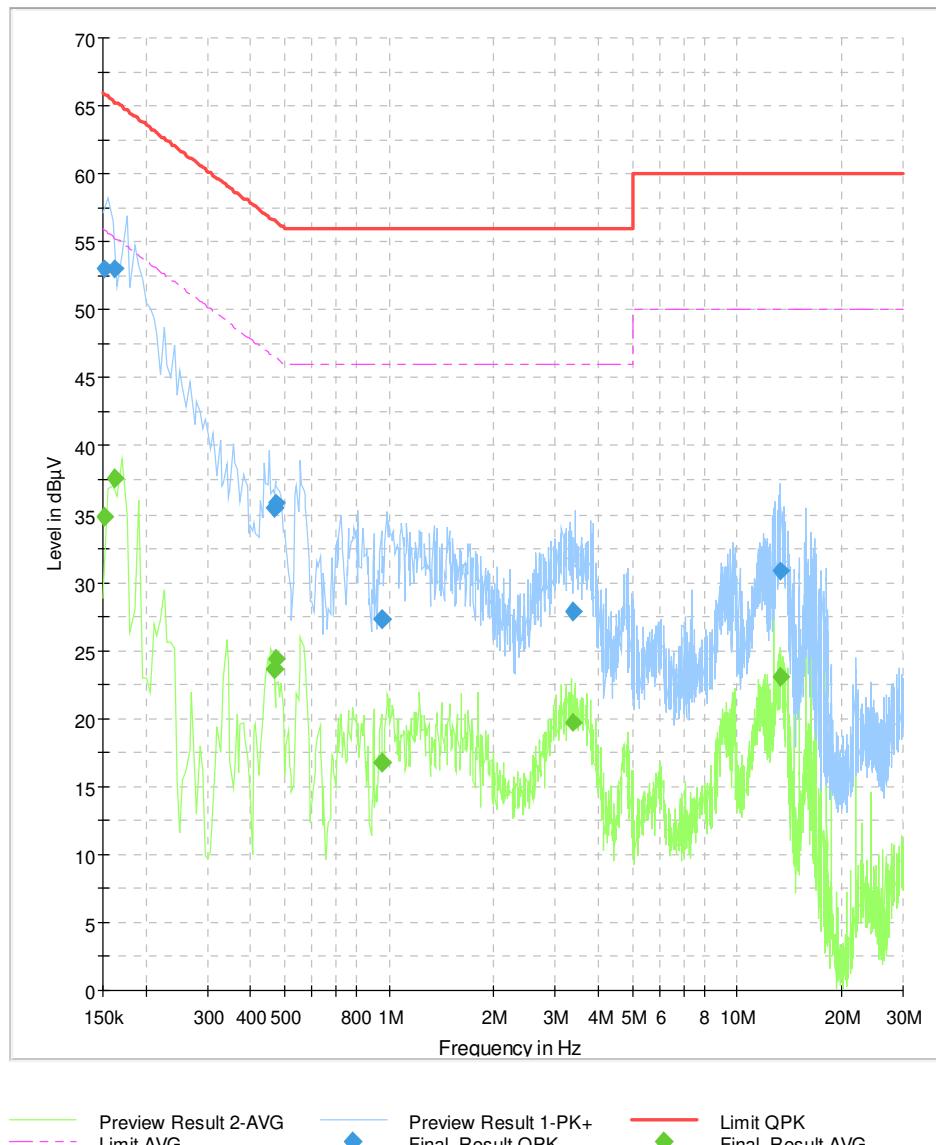




Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.152000	---	34.82	55.89	21.07	15000.0	9.000	N	10.0
0.152000	53.06	---	65.89	12.83	15000.0	9.000	N	10.0
0.162000	---	37.74	55.36	17.62	15000.0	9.000	N	10.0
0.162000	53.00	---	65.36	12.36	15000.0	9.000	N	10.0
0.468000	35.41	---	56.55	21.13	15000.0	9.000	N	10.1
0.468000	---	23.63	46.55	22.92	15000.0	9.000	N	10.1
0.471000	35.86	---	56.50	20.64	15000.0	9.000	N	10.1
0.471000	---	24.37	46.50	22.12	15000.0	9.000	N	10.1
0.944000	27.29	---	56.00	28.71	15000.0	9.000	N	10.2
0.944000	---	16.74	46.00	29.26	15000.0	9.000	N	10.2
3.391000	27.86	---	56.00	28.14	15000.0	9.000	N	10.3
3.391000	---	19.71	46.00	26.29	15000.0	9.000	N	10.3
13.386000	30.81	---	60.00	29.19	15000.0	9.000	N	10.7
13.386000	---	23.09	50.00	26.91	15000.0	9.000	N	10.7



EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG Identifikationssysteme GmbH
Operational condition: Reading mode (cyclical reading every 80 ms)
Test specification: 47 CFR Part 15 Subpart C §15.207
LISN port L1 / AE
Operator: S. Vogelmann
File #: 23-0149RC10-003-005
Comment #1:
Comment #2:

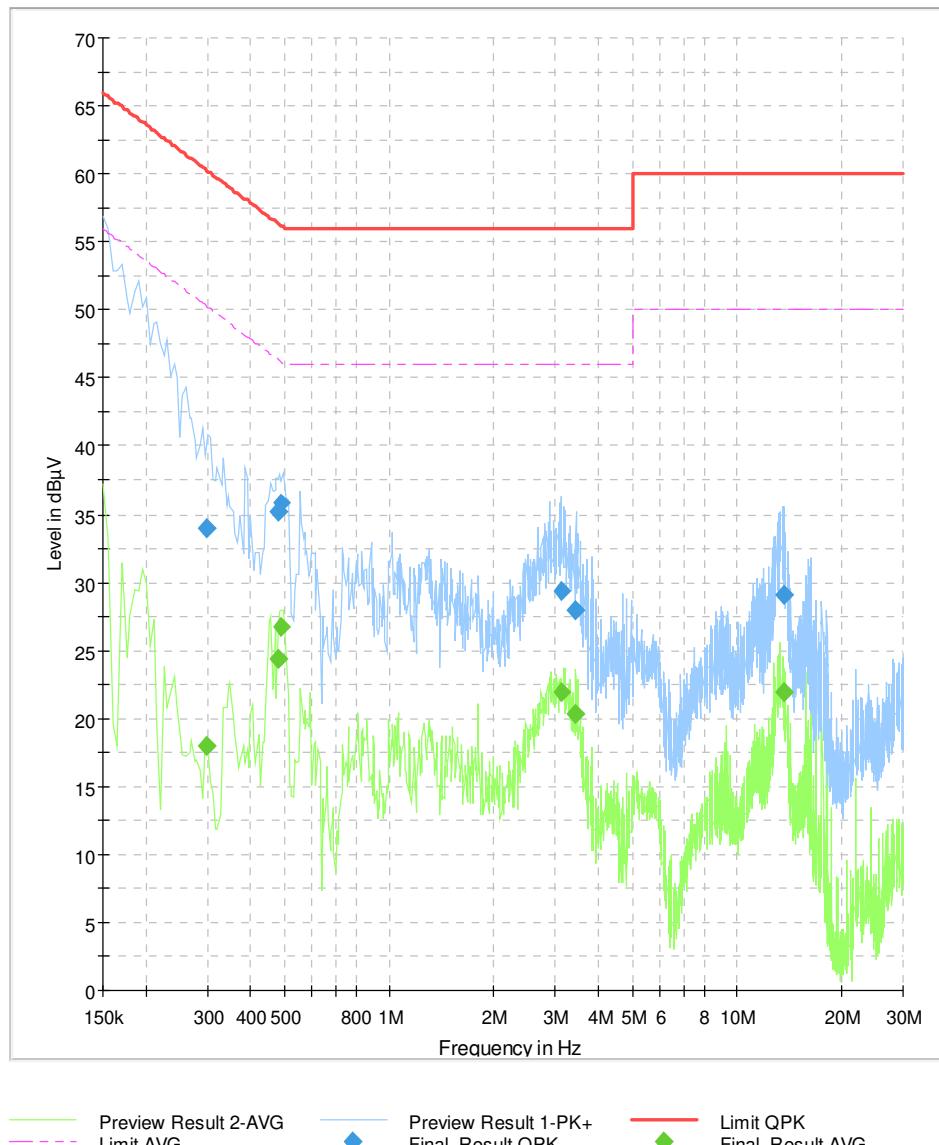

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.297000	33.98	---	60.33	26.34	15000.0	9.000	L1	10.1
0.297000	---	17.96	50.33	32.37	15000.0	9.000	L1	10.1
0.477000	35.19	---	56.39	21.20	15000.0	9.000	L1	10.1
0.477000	---	24.37	46.39	22.02	15000.0	9.000	L1	10.1
0.489000	35.87	---	56.19	20.32	15000.0	9.000	L1	10.1
0.489000	---	26.67	46.19	19.52	15000.0	9.000	L1	10.1
3.142000	29.30	---	56.00	26.70	15000.0	9.000	L1	10.3
3.142000	---	21.91	46.00	24.09	15000.0	9.000	L1	10.3
3.407000	27.96	---	56.00	28.04	15000.0	9.000	L1	10.3
3.407000	---	20.32	46.00	25.68	15000.0	9.000	L1	10.3
13.614000	29.11	---	60.00	30.89	15000.0	9.000	L1	10.7
13.614000	---	22.02	50.00	27.98	15000.0	9.000	L1	10.7



6.5 Radiated emissions H-Field of intentional radiators

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

*

Measurement procedure:

Rules and specification
Guide

47 CFR Part 15 Section 15.209 (a)(b)(c)(d)(e)(f)
ANSI C63.10-2013

The radiated magnetic fields are measured in a frequency range from 9 kHz to 30 MHz. For this purpose, a shielded active loop antenna is used, which is directly connected to a receiver according to CISPR 16 specifications. For the measurement, the loop antenna is successively aligned once parallel to the DUT and once perpendicular to the DUT. The center of the loop antenna is 1 m above the ground. This setup is also used to determine the spectrum of intentional radiators.

The test is performed at a distance of 3 m between the antenna and the EUT in the frequency range up to 30MHz. A Quasi-Peak or Average-Detector is used, depending on the frequency range. The Average-Detector is used in the frequency bands 9-90 kHz and 110-490 kHz, otherwise the quasi-peak is determined. For pulse modulated devices with a pulse repetition frequency of 20 Hz or less, the Peak-Detector is used (§15.35a Note).

To speed up the measurement process, a pre-measurement is performed with the Peak- and Average-Detectors. The spectrum is determined by rotating the EUT by 360° and the antenna orientation changed accordingly. The maxhold function is used. Hand-held or body-worn devices are rotated through three orthogonal axes to determine maximum emanation. Also the placement and layout of the equipment and the cables are arranged to maximize the disturbance level.

For the re-measurement, the 10 frequencies with the highest exceedance or the smallest distance to the limit are selected. The Average and Quasi-Peak-Detectors are used for the final measurement. Depending on the limit lines, 6 final measurements are documented. The highest limit exceeding or, in case of compliance with the limit, the emissions found with the smallest distance to the limit are documented.

If less than six emission frequencies with a distance of 20 dB are below the limit value, the noise level of the measuring device at representative frequencies is indicated.



The final measurement is performed at a test distance of 3 m. In case the regulation requires testing at different distances, the result is extrapolated by an extrapolation factor 40 dB / decade to the required distance. Frequency, the measured value, antenna information and the limit will be printed out.

The reported test results are calculated using the following formula to normalize the results for the requested test distance:

$$\text{Field strength (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)} + 40 * (\text{DT/DR}) \text{ (dB)}$$

AF = Correction factor for the antenna

CF = Correction factor for the cable loss


DT = Test distance

DR = Reference distance for the limit defined in the standard



Basic structure - Setup

OATS / SAC

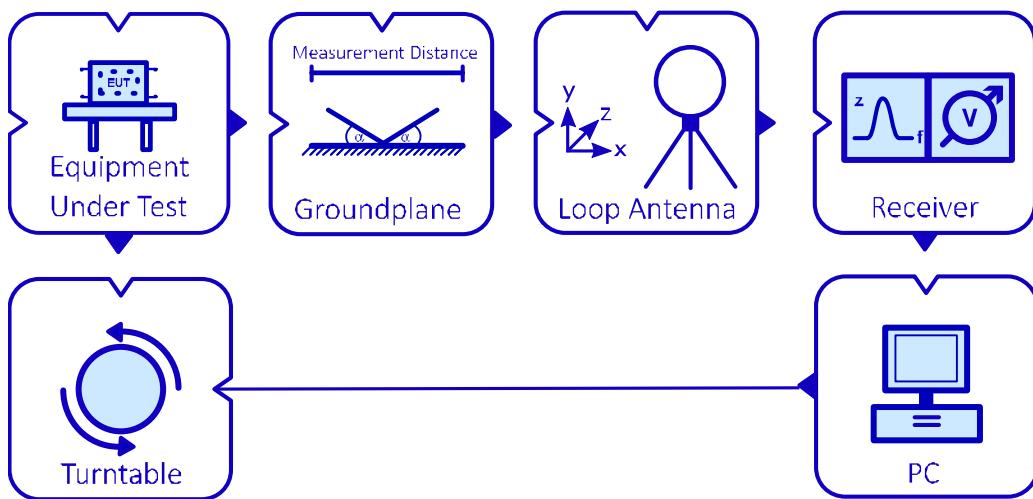




6.5.1 Test set up

According ANSI C63.10-2013

Photo(s) showing the interconnection of the major function units

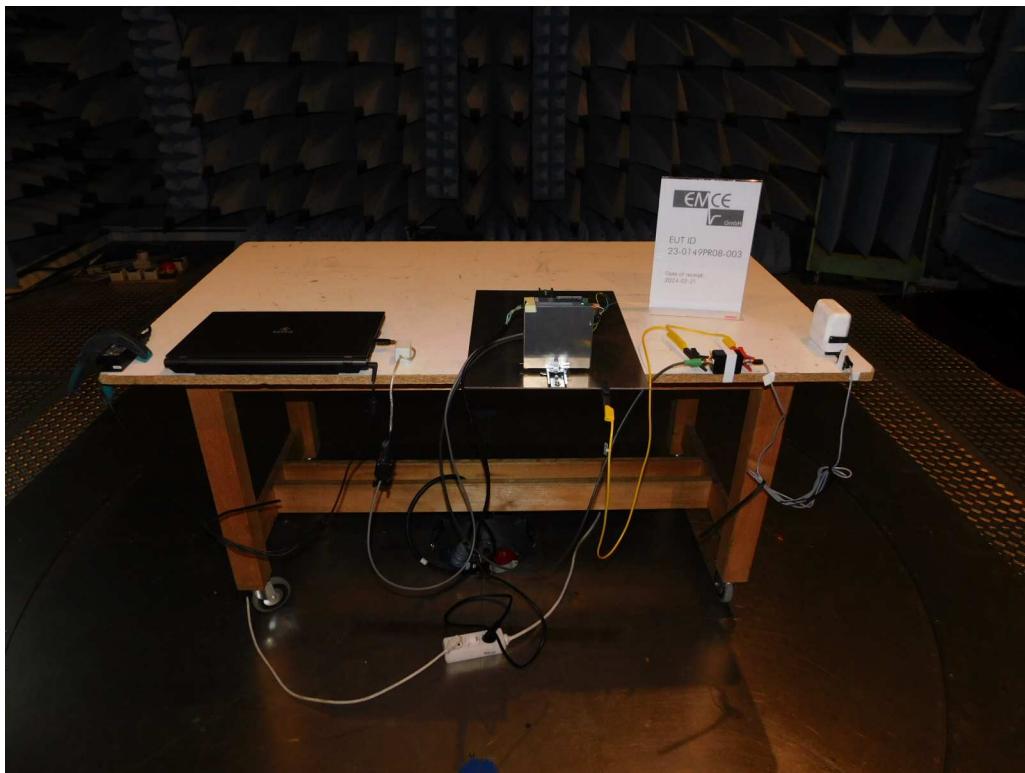



Test location

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	1345	Open area test site	3 - 30 m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden



Used test equipment

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
<input checked="" type="checkbox"/>	997	Software	EMC32	Rohde & Schwarz	n/a

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	229	Test receiver	ESS 5 Hz – 1000 MHz	Rohde & Schwarz	845420/0005
	997	Software	EMC32	Rohde & Schwarz	n/a

All used test equipment are checked resp. calibrated periodically.

Test equipment was checked and complied to the requirements

Test-/Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the radiated emission with an extended coverage factor of $k = 2$:

Frequency
9 kHz – 30 MHz

Measurement uncertainty
on request



6.5.2 Test

Rules and specification 47 CFR Part 15 Section 15.209 (a)(b)(c)(d)(e)(f)

Frequency range: 9 kHz – 30 MHz

Limits for radiated emissions

Technical requirements			
Detector	Frequency / MHz	Limit / μ V/m	Measurement distance / m
AV	0.009 – 0.09	2400/F(kHz)	300
QP	0.09 – 0.110	2400/F(kHz)	300
AV	0.110 – 0.49	2400/F(kHz)	300
QP	0.49 – 1.705	24000/F(kHz)	30
QP	1.705 – 30.0	30	30

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz

The level of any unwanted emissions shall not exceed the level of the fundamental frequency.

Antenna Orientation

Parallel to EUT Orthogonal to EUT

Antenna Height

1 m - Loop center above ground

Antenna Distance - EUT

3 m 10 m 30 m

EUT Orientation to Antenna

X-Axis Y-Axis Z-Axis



Rationale for selecting the EUT test set up

Equipment units:

Minimal setup with EUT and external power supply unit. The DIN rail housing of the power supply unit was mounted on a metal plate. The metal plate was earthed via the power supply unit. The ground terminal and the cable shield of the reader's connection cable were connected to this metal plate. This design was chosen because it corresponds to the later intended use. The antenna was positioned away from the metal plate above a non-conductive surface. A remote laptop was provided for displaying the data from the reader.

Operation mode

EUT arrangement: Tabletop Floor standing
Power supply: 120 V/60 Hz Internal battery

The EUT was operated in read mode at maximum read speed, with a read cycle being started every 80 ms. The data read was sent to a PC connected to the EUT via a USB interface. No tag was used during the measurement.

Environmental conditions - OATS

Temperature [10 – 40 °C]: 24 °C
Relative humidity [10 – 90 %]: 35 %

Environmental conditions during the test: kept
 not kept

Test result

Limits for unwanted radiated emissions: kept
 not kept

No unwanted radiated emissions exceed the level of the fundamental frequency: kept
 not kept

Remarks: n/a



Records

Pre-compliance measurement

- Readings
- Diagram

Final measurement


- Readings
- Diagram



Pre-compliance measurement

EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG Identifikationssysteme GmbH
Operational condition: Reading mode (cyclical reading every 80 ms)
Test specification: 47 CFR Part 15 Subpart C §15.209
Antenna information: Distance EUT-Ant.: 3.0 m / Polarization: Paral./Orth./ Ant.Height: 1.0 m.
Operator: S. Vogelmann
File #: 23-0149RC12-003-009
Comment #1: Test results normalized to antenna distances according to §15.209.
Comment #2:

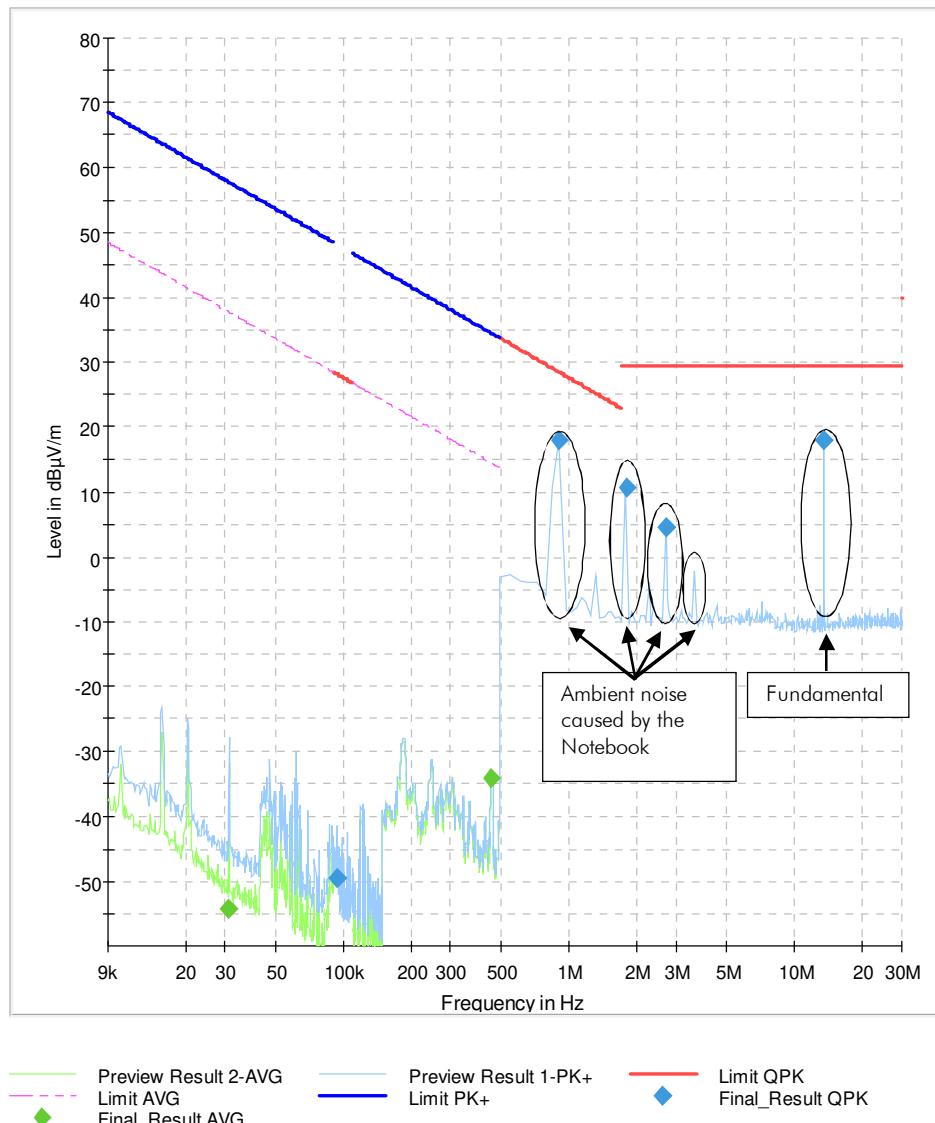



Pre-Test Result – SAC @3.0 m antenna distance

Frequency (MHz)	QuasiPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.030683	---	-54.35	37.87 @300m	92.22	5000.0	0.200	Parallel	318.0	-59.9
0.093269	-49.64	---	28.21 @300m	77.85	5000.0	0.200	Parallel	333.0	-60.0
0.450597	---	-34.18	14.53 @300m	48.71	5000.0	9.000	Parallel	296.0	-60.1
0.902866*	18.05	---	28.49 @30m	10.44	5000.0	9.000	Parallel	293.0	-20.1
1.805571*	10.75	---	29.54 @30m	18.79	5000.0	9.000	Parallel	300.0	-20.1
2.707675*	4.66	---	29.54 @30m	24.88	5000.0	9.000	Parallel	305.0	-20.1
13.568295**	18.01	---	---	---	5000.0	9.000	Parallel	25.0	-19.8

Test results normalized to reference distance for limit value with 40 dB/Dec.

* Ambient noise caused by notebook inside the field.

** Evaluation of the fundamental in chapter 6.8

Final Result

No result. Margin \geq 20 dB.



6.6 Radiated emissions E-Field of intentional radiators

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

* _____

Measurement procedure:

Rules and specification
Guide

47 CFR Part 15 Section 15.209 (a)(b)(c)(d)(e)(f)
ANSI C63.10-2013

The radiated interference emission is measured on an alternative open area test site OATS in the frequency range 30 - 1000 MHz. The measurement distance is 3 m or 10 m, depending on the standard. Above 1 GHz, the measurement is performed in a 3 m semi-anechoic chamber with floor absorber to reduce ground reflections. For the measurement of the field strength a biconical antenna up to 200 MHz, a logperiodic antenna from 200 MHz to 1 GHz and horn antennas or double stacked logperiodic antenna above 1 GHz are used. All antennas are linearly polarized. External low-noise preamplifiers are used in the range above 1 GHz to improve measurement sensitivity. Special measures, such as filters or attenuators, are taken to avoid overloading the amplifiers. The antenna height is varied between 1 m and 4 m as required. The elevation angle of the antenna can be corrected via the antenna mast to ensure that the main lobe of the antenna is always directed at the EUT. A turntable allows the alignment of the EUT towards the antenna to maximize the radiated emission. The test sites are located above a metallic ground plane. Table-top devices are placed on a non-conductive wooden table. Hand-held, body-worn, or ceiling-mounted devices are examined in 3 orthogonal axis orientations to determine the maximum emission level. Floor-standing devices are placed directly on the grounded metal turntable/reference insulated from ground plane by an insulating material <12 mm.

During an initial automated pre-test run in a semi-anechoic chamber, the desired frequency range is measured. The receiver is operated as an analyzer and the frequency ranges are run sequentially depending on the antenna. For the measurement, the turntable is continuously rotated from 0° - 360° and back, and the antenna height is changed in 0.5 m increments after each complete turntable cycle. The antenna position is then changed from 1.0 m to 4.0 m in 0.5 m steps for vertical polarization and back for horizontal polarization. During a cycle, the frequency range is continuously swept with peak detector and max hold function. Depending on the test specification, an average detector is also used if required. For each discrete antenna polarization over all positions, the maximum peak values are recorded with frequency, level, turntable position, antenna height and antenna



polarization. Significant peaks or clock frequencies are marked and re-measured with increased frequency accuracy. The recordings are used to determine the exact frequency and to optimize the interference level. At the predefined position, the turntable position is fine-adjusted in the range of $\pm 20^\circ$ and then the antenna height is varied by ± 0.3 m. At the maximized position, the emission is measured with quasi-peak or average detector and listed. The six highest emissions are selected for final measurement in the OATS.

In a final test run, an open area test site measurement is made at selected frequencies determined by the previous test procedure. For each selected frequency, the frequency setting is optimized again in the OATS and the field strength value is maximized, rotating the EUT 360° at an antenna height of 1.0 m for vertical antenna polarization and 2.0 m for horizontal antenna polarization. At the azimuth position of the EUT for the highest radiation, the antenna height is varied within 1.0 m and 4.0 m until the highest interference level is reached. To maximize the interference level at the determined position, the turntable azimuth is fine-adjusted by $\pm 45^\circ$ and the antenna height is fine-adjusted by ± 0.3 m. The setup of the instrument and the cables are manipulated within the range to produce the highest emission.

Final measurement is made using a receiver conforming to CISPR 16 guidelines with a quasi-peak and average detector.

The identified frequency and amplitude of the six highest radiated emissions relative to the limit lines are listed. If fewer than six emission frequencies are within 20 dB of the limit, the noise level of the instrument at representative frequencies is reported. For documentation of final testing below 1 GHz on the OATS the plots recorded in den SAC are indicated as pre-compliance.

In case the regulation requires testing at different distances, the result is extrapolated by an extrapolation factor 20 dB / decade to the required distance.

The reported test results are calculated using the following formula to normalize the results to the requested test distance:

$$\text{Result (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)} + 20 * (\text{D}_T / \text{D}_R) \text{ (dB)}$$

AF = Correction factor for the antenna

CF = Correction factor for the cable loss

D_T = Test distance

D_R = Reference distance for the limit defined in the standard



Example:


Test frequency	500.00 MHz
Reading	12.3 dB μ V
AF _(500.00 MHz)	17.1 dB/m
CF _(500.00 MHz)	1.4 dB
DT =	3 m
DR =	3 m

Calculated final result for the electrical field strength E(f):

$$E_{(500.00 \text{ MHz})} = 12.3 \text{ dB}\mu\text{V} + 17.1 \text{ dB/m} + 1.4 \text{ dB} + 0 \text{ dB} = 30.8 \text{ dB}\mu\text{V/m}$$

Basic structure - Setup

OATS / SAC

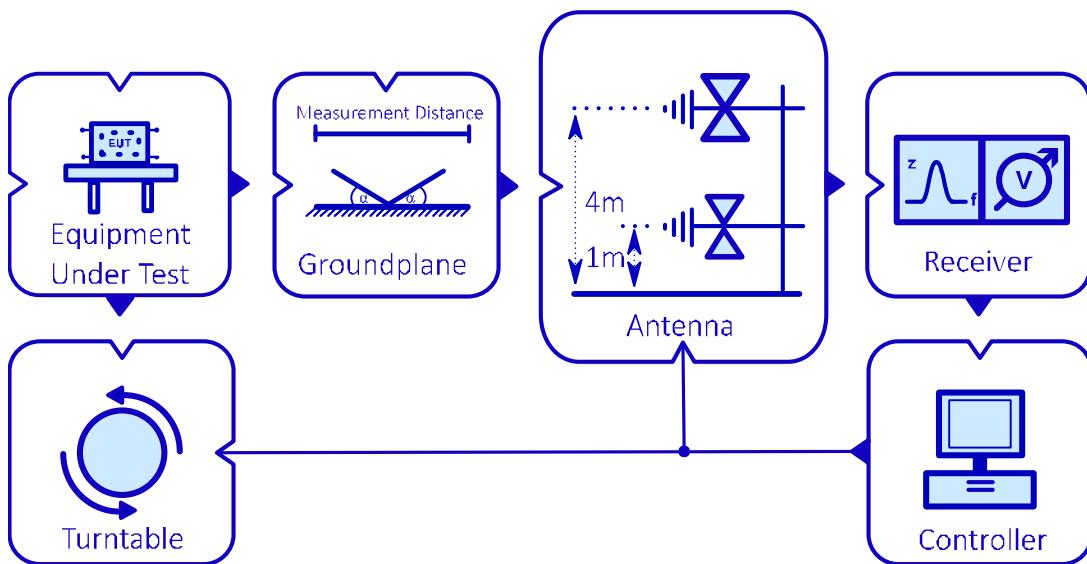



6.6.1 Test set up

According ANSI C63.10-2013


Photo(s) showing the interconnection of the major function units


Final test setup





Precompliance test setup

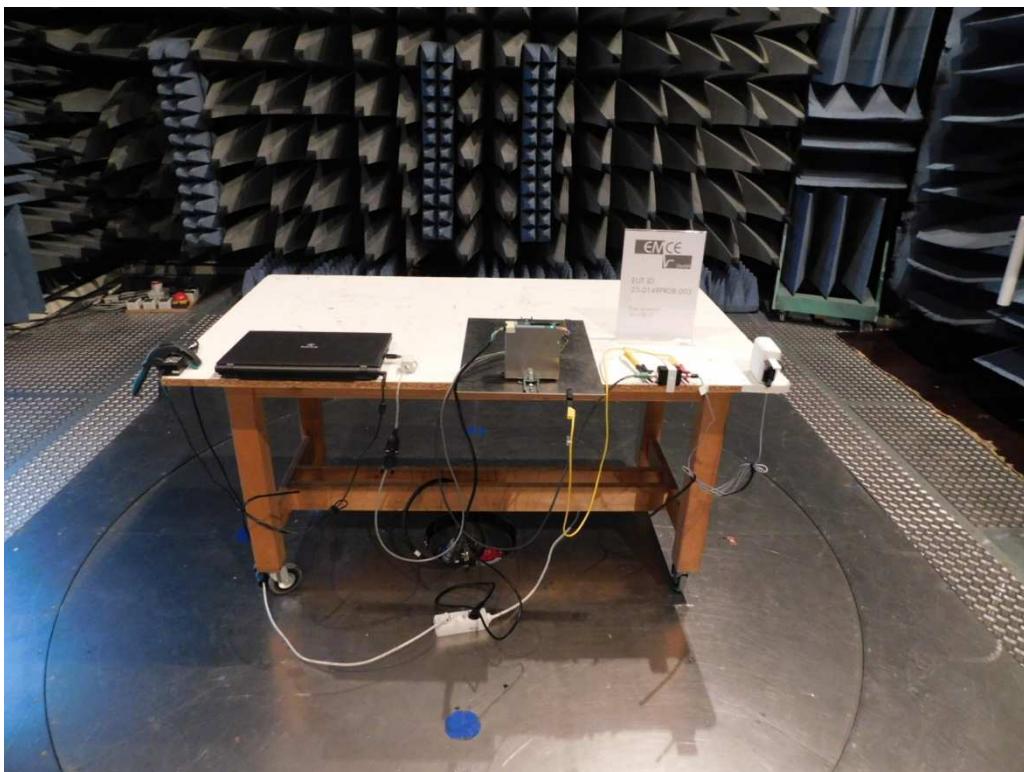

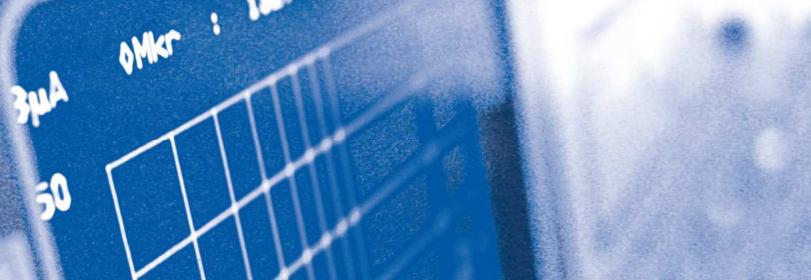

Test location

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	014	Open area test site	10 m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
<input checked="" type="checkbox"/>	015	Open area test site	3 m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden



Used test equipment

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	059	Logper. Antenna	HL050	Rohde & Schwarz	100006
<input checked="" type="checkbox"/>	997	Software	EMC32	Rohde & Schwarz	n/a
<input checked="" type="checkbox"/>	8008	Logarithmic Periodic Broadband Antenna 180 - 1500 MHz	VULP 9118A	Schwarzbeck	900
<input checked="" type="checkbox"/>	8034	Antenna 30-300 MHz	VHBB9124 / BBA9106	Schwarzbeck	1812

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	059	Logper. Antenna	HL050	Rohde & Schwarz	100006
<input checked="" type="checkbox"/>	229	Test receiver	ESS 5 Hz – 1000 MHz	Rohde & Schwarz	845420/0005
	236	Broad-Band Horn Antenna 0.5-6 GHz	BBHA 9120 E	Schwarzbeck	00831
	997	Software	EMC32	Rohde & Schwarz	n/a
<input checked="" type="checkbox"/>	8007	Logarithmic Periodic Broadband Antenna 180 - 1500 MHz	VULP 9118A	Schwarzbeck	899
<input checked="" type="checkbox"/>	8033	Antenna 30-300 MHz	VHBB9124 / BBA9106	Schwarzbeck	1808

All used test equipment are checked resp. calibrated periodically.

Test equipment was checked and complied to the requirements

Test-/Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the radiated emission with an extended coverage factor of $k = 2$:

Frequency	Measurement uncertainty
30 MHz – 225 MHz	4.8 dB (valid for 10 m-OATS)
225 MHz – 1 GHz	4.9 dB (valid for 10 m-OATS)
30 MHz – 225 MHz	4.8 dB (valid for 3 m-OATS)
225 MHz – 1 GHz	6.2 dB (valid for 3 m-OATS)



6.6.2 Test

Rules and specification 47 CFR Part 15 Section 15.209 (a)(b)(c)(d)(e)(f)

Highest frequency generated or used in the device or on which the device operates or tunes:

<10 GHz

Upper frequency of measurement:

10th harmonic of the highest frequency or 40 GHz, whichever is lower

10 GHz – 30 GHz

5th harmonic of the highest frequency or 100 GHz, whichever is lower

30 GHz – 95 GHz

5th harmonic of the highest frequency or 200 GHz, whichever is lower

≥95 GHz

3rd harmonic of the highest frequency or 750 GHz, whichever is lower

Frequency range:

9 kHz – 30 MHz

30 MHz – 1000 MHz

1 – 5 GHz

5 – 18 GHz

18 – 26 GHz

26 – 40 GHz

Limits for radiated emissions

Technical requirements			
Detector	Frequency / MHz	Limit / dB μ V/m	Measurement distance / m
QP	30.0 – 88.0	40.0	3
QP	88.0 – 216.0	43.5	3
QP	216.0 – 960.0	46.0	3
QP	960.0 – 1000.0	54.0	3
AV	> 1000	54.0	3
PK	> 1000	74.0	3

The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.



Rationale for selecting the EUT test set up

Equipment units:

Minimal setup with EUT and external power supply unit. The DIN rail housing of the power supply unit was mounted on a metal plate. The metal plate was earthed via the power supply unit. The ground terminal and the cable shield of the reader's connection cable were connected to this metal plate. This design was chosen because it corresponds to the later intended use. The antenna was positioned away from the metal plate above a non-conductive surface. A remote laptop was provided for displaying the data from the reader.

EUT Orientation

X-Direction Y-Direction Z-Direction

Operation mode

EUT arrangement: Tabletop Floor standing
Power supply: 120 V/60 Hz Internal battery

The EUT was operated in read mode at maximum read speed, where the ID of a tag was read out cyclically every 80 ms. This ID was sent to a remote PC which was connected to the EUT via a USB interface. The tag was placed at a distance of 2 cm in front of the antenna.

Environmental conditions - SAC

Temperature [10 – 40 °C]: 24 °C
Relative humidity [10 – 90 %]: 35 %

Environmental conditions during the test: kept
 not kept

Environmental conditions - OATS

Temperature [10 – 40 °C]: 14 °C
Relative humidity [10 – 90 %]: 48 %

Environmental conditions during the test: kept
 not kept

Test result

Limits for unwanted radiated emissions:

- kept
- not kept

Remarks: n/a

Records

Pre-compliance measurement

- Readings
- Diagram

Final measurement


- Readings
- Diagram



Pre-compliance measurement

EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG ID GmbH
Operational condition: Reading mode (cyclical reading every 80 ms)
Test specification: 47 CFR Part 15 Subpart C §15.209 SAC @3m
Antenna information: Distance EUT-Ant.: 3.0 m / Polarization: H/V / Ant.Height: 1.0-4.0 m.
Operator: S. Vogelmann
File #: 23-0149RC12-003-006
Comment #1:
Comment #2:

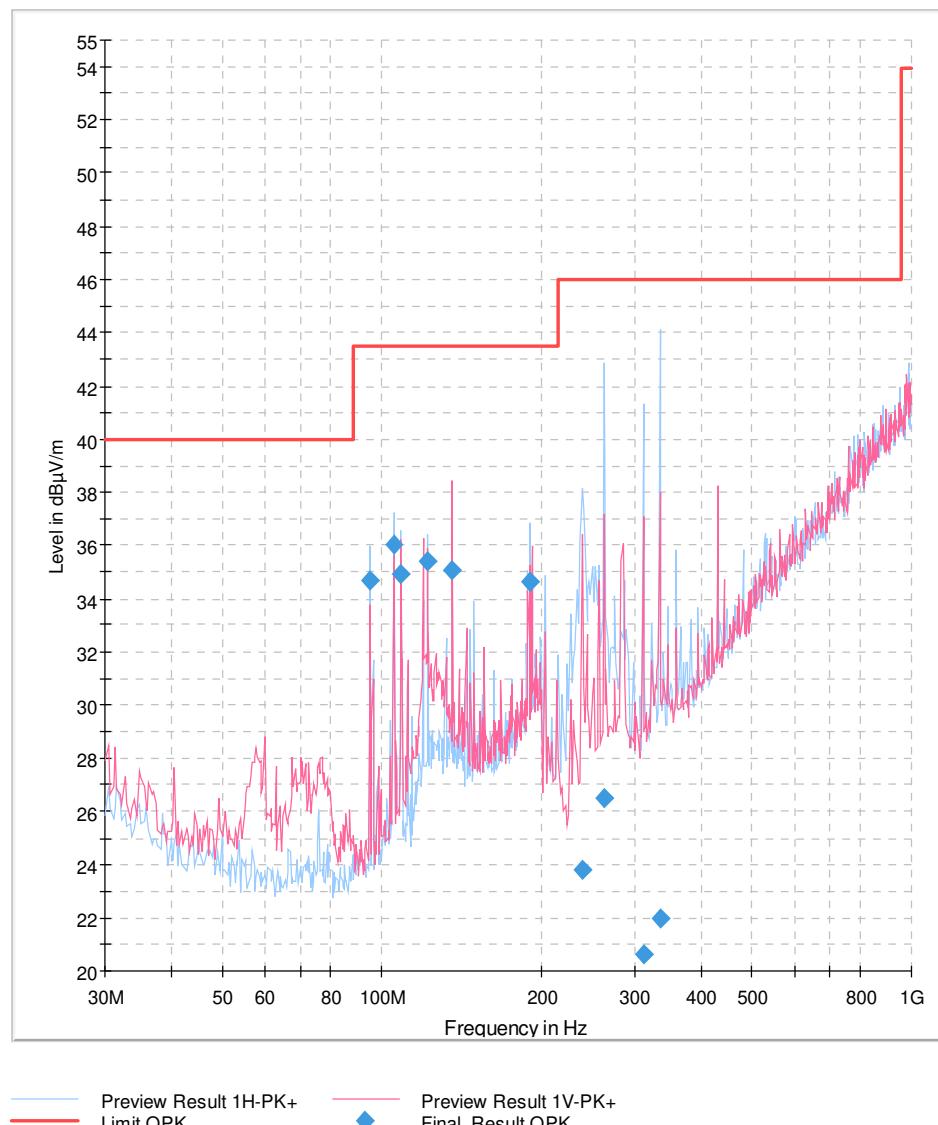



Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
94.931863	34.72	43.50	8.78	5000.0	120.000	185.0	H	28.0	10.2
105.030461	36.05	43.50	7.45	5000.0	120.000	212.0	H	14.0	10.7
108.513427	34.95	43.50	8.55	5000.0	120.000	176.0	H	37.0	10.9
122.052505	35.38	43.50	8.12	5000.0	120.000	235.0	H	92.0	11.8
135.607615	35.09	43.50	8.41	5000.0	120.000	120.0	V	110.0	12.6
189.856913	34.62	43.50	8.88	5000.0	120.000	180.0	H	240.0	15.1
238.713828	23.83	46.00	22.17	5000.0	120.000	157.0	H	348.0	12.4
262.639279	26.51	46.00	19.49	5000.0	120.000	103.0	H	0.0	13.4
311.216433	20.67	46.00	25.33	5000.0	120.000	156.0	H	22.0	14.7
334.393988	21.96	46.00	24.04	5000.0	120.000	105.0	H	274.0	15.4



Final measurement


Readings – Antenna horizontal / vertical polarized

Frequency	Readings	+ AF Antenna correction factor	+ KF Cable correction factor	Field strength	Limit	Margin	Antenna- Polarization	Antenna- Height	Turn Table- Position
MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB	hor./ver.	m	Degree
104.924	22.6	9.8	1.2	33.7	43.5	9.8	H	2.00	0
108.481	21.7	10.1	1.2	33.0	43.5	10.5	H	3.00	0
122.042	22.5	10.7	1.3	34.6	43.5	8.9	H	1.60	90
135.602	21.0	11.5	1.4	33.9	43.5	9.6	V	1.00	90
189.860	18.6	13.9	1.7	34.1	43.5	9.4	H	1.80	250
262.439	14.6	11.9	2.0	28.4	46.5	18.1	H	1.24	180



Diagram radio disturbances – Antenna horizontal / vertical polarized

Limit: 47 CFR Part 15 Subpart C §15.209

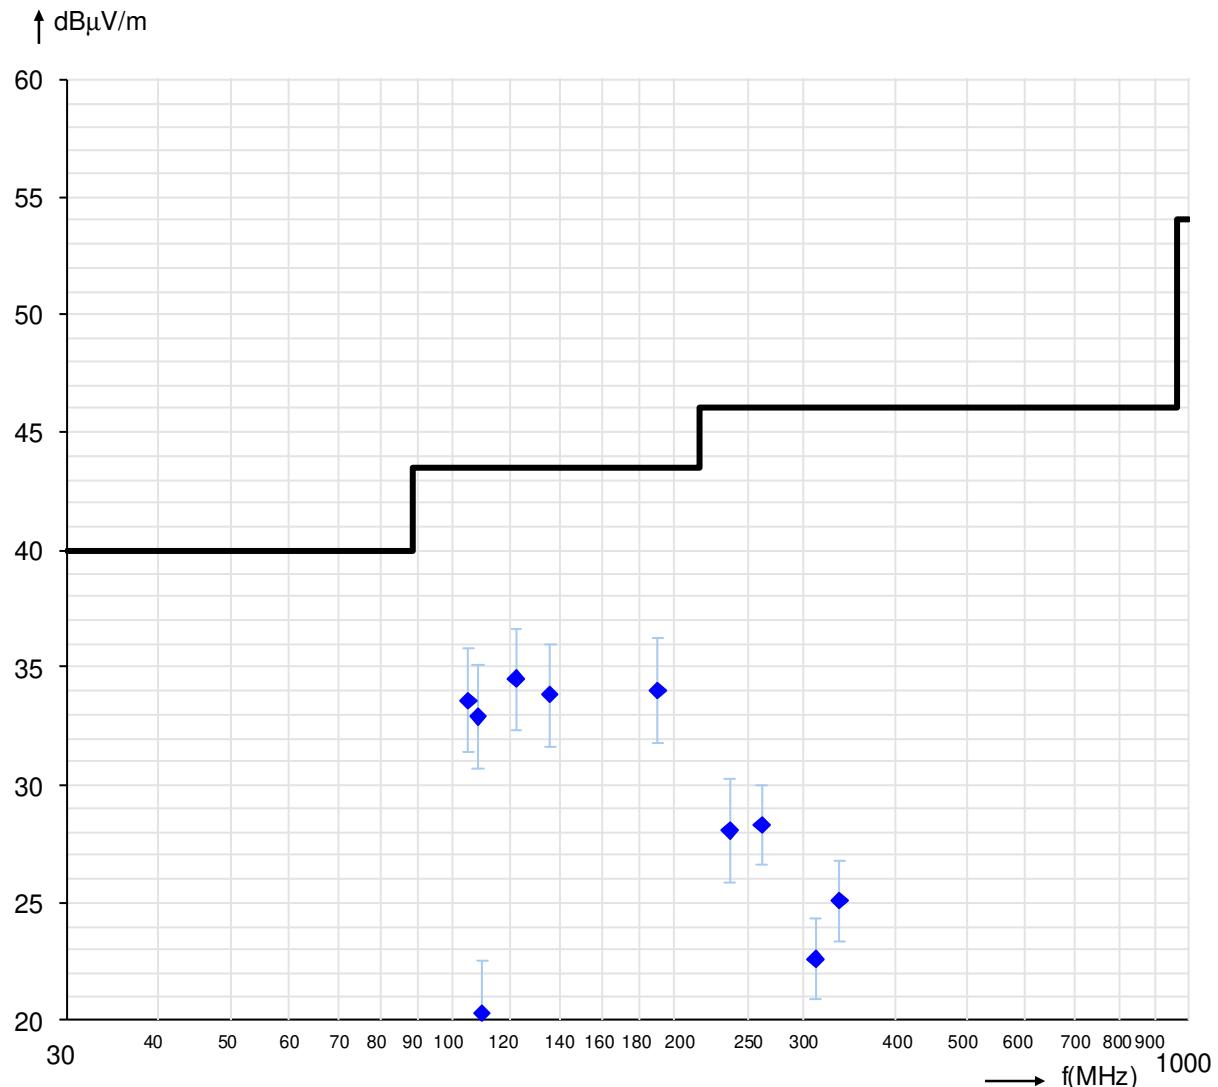

6.7 Emission bandwidth inside the operating frequency band

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

*

Measurement procedure:

Rules and specification
Guide

47 CFR Part 15 Section 15.215 (c)
ANSI C63.10-2013


The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by 20 dB. The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. The test is performed in a semi anechoic chamber while the EUT is positioned to a receiving antenna for maximum output power. The modulated signal is recorded with an analyzer.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. After the trace of the spectrum analyzer is stabilized the envelope of the signal the amplitude -20 dB below the reference value is determined. The occupied bandwidth is the calculated value between both specific - 20 dB frequency positions.



Basic structure - Setup

OATS / SAC

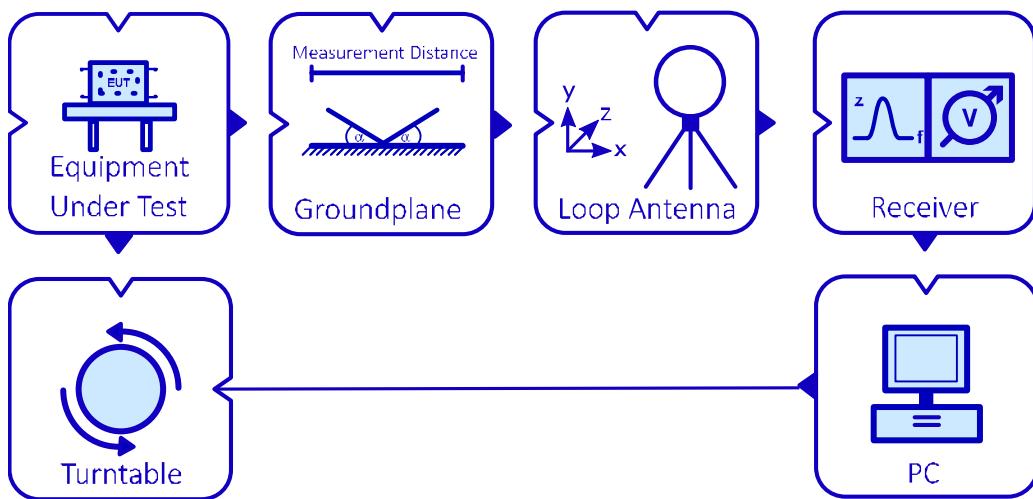






6.7.1 Test set up

According ANSI C63.10-2013

Photo(s) showing the interconnection of the major function units

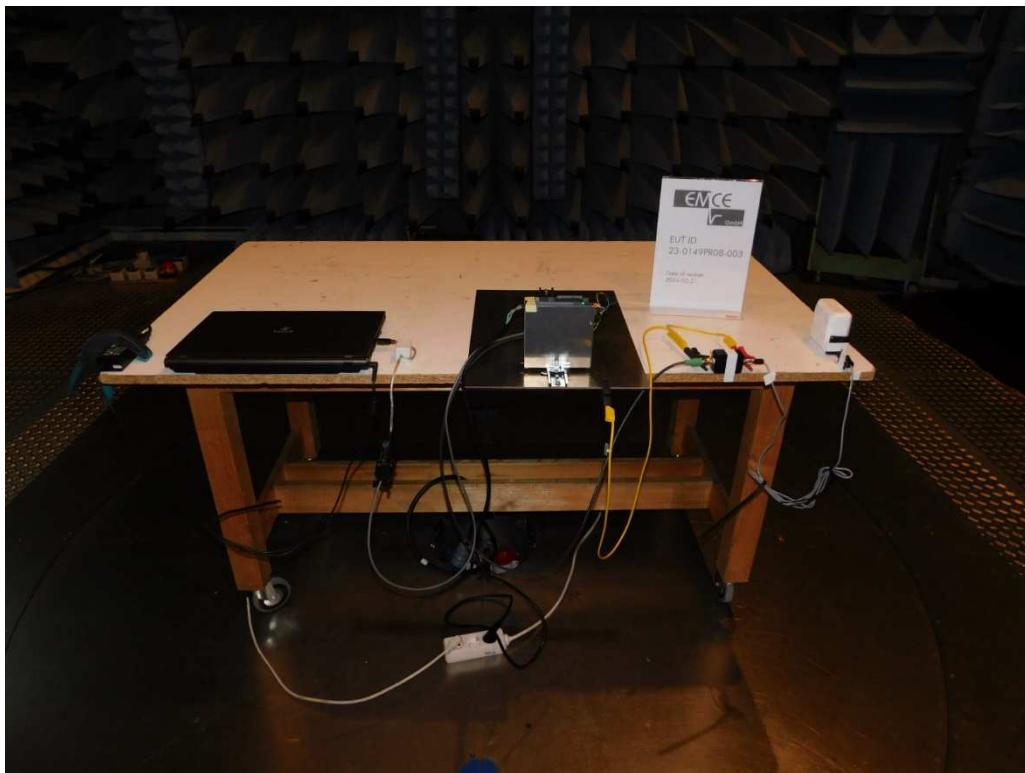

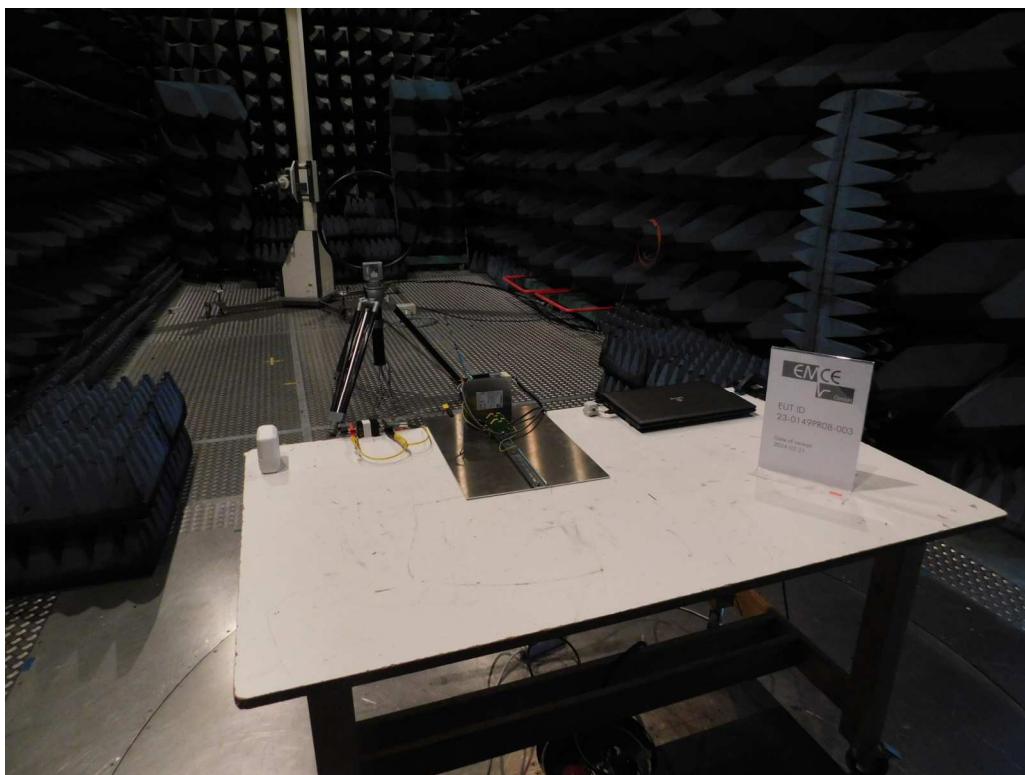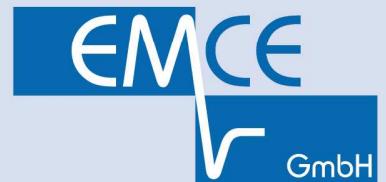

Test location

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	014	Open area test site	10 m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
	015	Open area test site	3 m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden



Used test equipment

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	997	Software	EMC32	Rohde & Schwarz	n/a

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
	230	FSV40 Signal Analyzer 40 GHz	FSV40	Rohde & Schwarz	101717
<input checked="" type="checkbox"/>	997	Software	EMC32	Rohde & Schwarz	n/a

All used test equipment are checked resp. calibrated periodically.

Test equipment was checked and complied to the requirements



Test-/Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the radiated emission with an extended coverage factor of $k = 2$:

Frequency	Measurement uncertainty
9 kHz – 30 MHz	on request



6.7.2 Test

Rules and specification 47 CFR Part 15 Section 15.215 (c)
Frequency range: 9 kHz – 30 MHz
20 dB Emission BW Inside operating frequency band

Operation mode

EUT arrangement: Tabletop Floor standing
Power supply: 120 V/60 Hz Internal battery

The EUT was operated in read mode at maximum read speed, where the ID of a tag was read out cyclically every 80 ms. This ID was sent to a remote PC which was connected to the EUT via a USB interface. The tag was placed at a distance of 2 cm in front of the antenna.

Environmental conditions

Temperature [10 – 40 °C]: 24 °C
Relative humidity [10 – 90 %]: 35 %

Environmental conditions during the test: kept
 not kept

Test result

Nominal frequency / MHz	-20 dBc @ lower frequency / MHz	-20 dBc @ upper frequency / MHz	20 dB BW / kHz
13.560000	13.557772	13.562682	4.910



20 dB BW within the used frequency band

13.110 – 14.010 MHz: kept
 not kept.

Remarks: n/a

Records

Readings
 Diagram

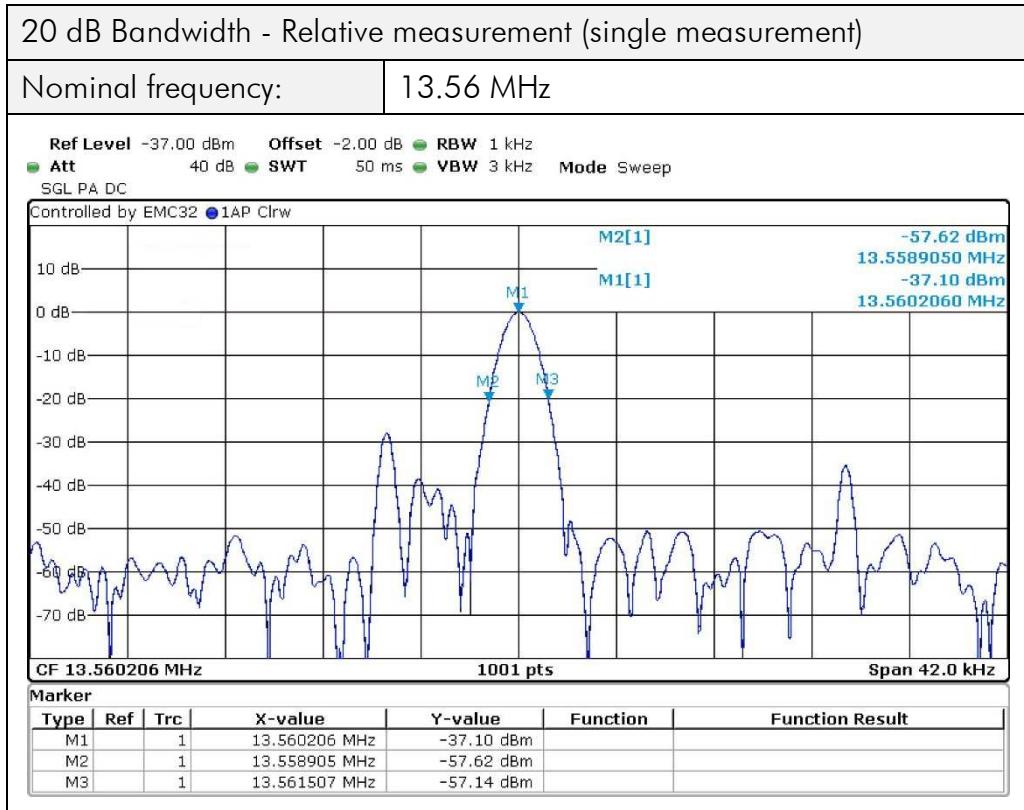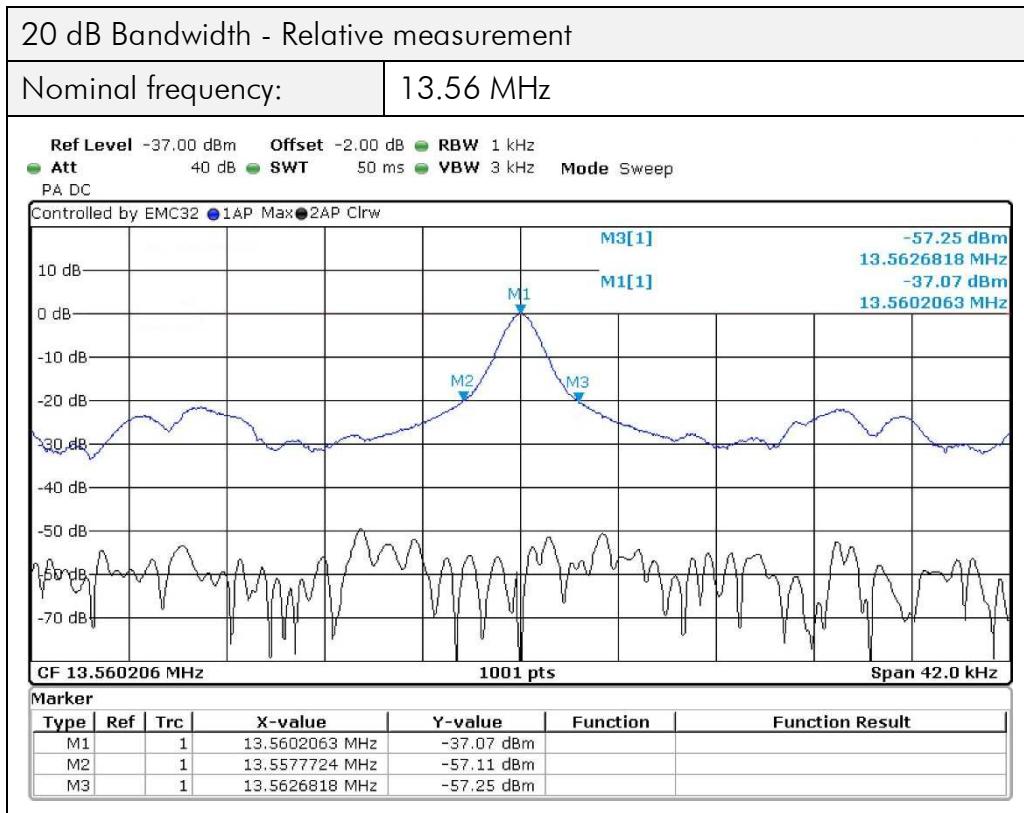



6.8 Field strength mask within the operation band 13.110-14.010 MHz

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

*

Measurement procedure:

Rules and specification
Guide

47 CFR Part 15 Section 15.225 (a)(b)(c)(d)(f)
ANSI C63.10-2013


The radiated magnetic fields are measured in a frequency range from 9 kHz to 30 MHz. For this purpose, a shielded active loop antenna is used, which is directly connected to a receiver according to CISPR 16 specifications. For the measurement, the loop antenna is successively aligned once parallel to the DUT and once perpendicular to the DUT. The center of the loop antenna is 1 m above the ground. This setup is also used to determine the field strength mask.

Measurements shall be made around the EUT and the orientation of the measurement antenna shall be investigated to determine the maximum radiated emission level. Cables or wires shall be manipulated within the range of likely arrangements to maximize the measured emission levels. External antenna(s) shall be positioned for maximum radiated emissions. If the EUT is equipped with or uses an adjustable antenna, then the EUT antenna shall be manipulated through typical positions and lengths during exploratory testing to maximize emission levels. Where EUTs are designed to be installed in one of two orientations (be located horizontally on a table or mounted vertically to the wall), these devices shall be tested in both orientations. EUTs that can be operated in multiple orientations (such as handheld, portable, or modular devices) shall be tested in three orientations. However, in all cases, the antenna shall be adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. When rotating the EUT, the maximum antenna coupling between the EUT and the measurement antenna must be achieved at some point during the rotation.



Basic structure - Setup

OATS / SAC

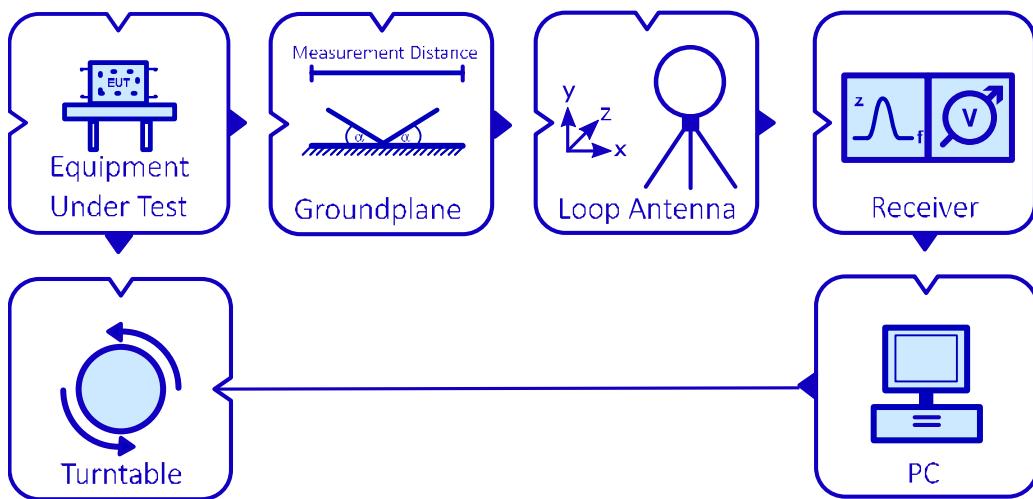



6.8.1 Test set up


According ANSI C63.10-2013

Photo(s) showing the interconnection of the major function units





Pre-compliance test setup
Test setup 3 m – Antenna orientation vertical / parallel

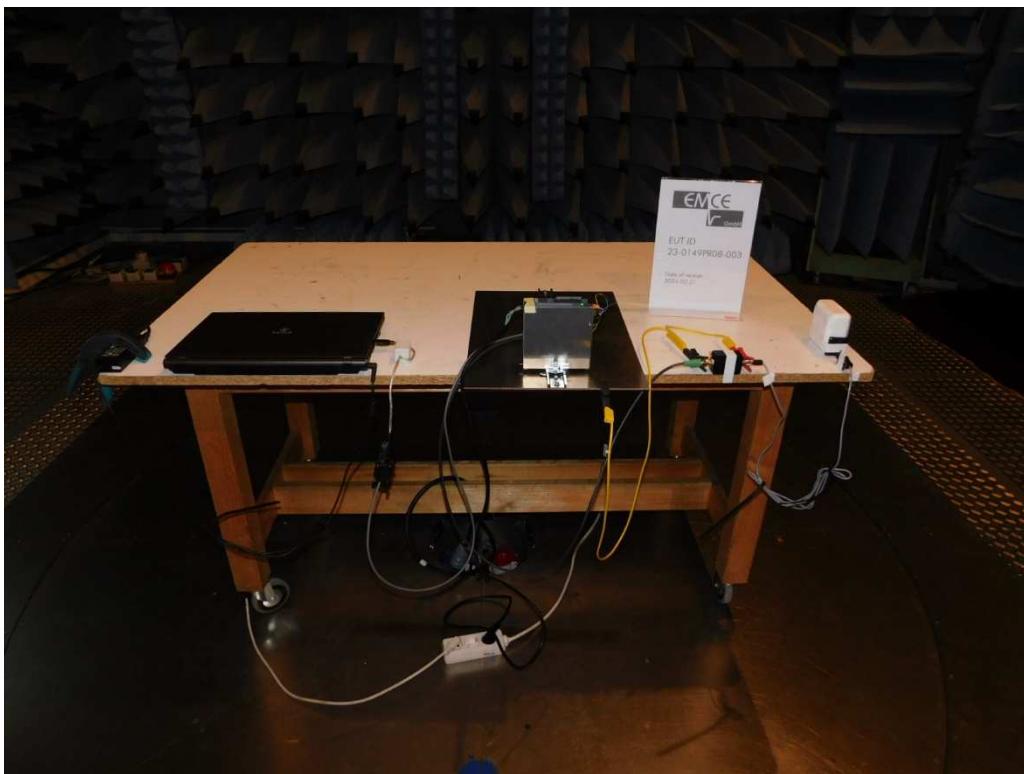



Test location

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	062	Semi anechoic chamber # 2	13.5 x 6.1 x 5.5 m	EMC-Technik & Consulting GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden
<input checked="" type="checkbox"/>	1345	Open area test site	3 - 30 m	EMCE GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden



Used test equipment

Pre-compliance test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	058	Test receiver	ESIB 40	Rohde & Schwarz	100200
<input checked="" type="checkbox"/>	997	Software	EMC32	Rohde & Schwarz	n/a

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	229	Test receiver	ESS 5 Hz – 1000 MHz	Rohde & Schwarz	845420/0005
<input checked="" type="checkbox"/>	997	Software	EMC32	Rohde & Schwarz	n/a

All used test equipment are checked resp. calibrated periodically.

Test equipment was checked and complied to the requirements

Test-/Measurement uncertainty

The measurement uncertainty in the test met the guideline of CISPR16-4-2 or better.

Measurement uncertainty of the radiated emission with an extended coverage factor of $k = 2$:

Frequency
9 kHz – 30 MHz

Measurement uncertainty
on request



6.8.2 Test

Rules and specification 47 CFR Part 15 Section 15.225 (a)(b)(c)(d)(f)

Limits for radiated emissions

Technical requirements				
Detector	Frequency / MHz	QP-Limit / dB μ V/m	RBW / kHz	Measurement distance / m
QP	13.110 – 13.410	40.5	10	30
QP	13.410 – 13.553	50.5	10	30
QP	13.553 – 13.567	84.0	10	30
QP	13.567 – 13.710	50.5	10	30
QP	13.710 – 14.010	40.5	10	30

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Operation mode

EUT arrangement:

Tabletop

Floor standing

Power supply:

120 V/60 Hz

Internal battery

The EUT was operated in read mode at maximum read speed, where the ID of a tag was read out cyclically every 80 ms. This ID was sent to a remote PC which was connected to the EUT via a USB interface. The tag was placed at a distance of 2 cm in front of the antenna.

Environmental conditions

Temperature [10 – 40 °C]:

16 °C

Relative humidity [10 – 90 %]:

46 %

Environmental conditions during the test:

kept

not kept



Test result

Limits for the field strength mask:

13.110 – 14.010 MHz: kept
 not kept.

| Remarks: n/a

Records


Readings
 Diagram



Pre-compliance measurement

EUT Information

EUT Name: ARE i9x
Test_ID: / SN: 23-0149PR08-003
Customer: AEG Identifikationssysteme GmbH
Operational condition: Continious reading operatipon with tag at 2 cm distance
Test specification: 47 CFR Part 15 Subpart C §15.225 SAC @30 m
Antenna information: Distance EUT-Ant.: 3.0 m / Polarisation: Paral./Orth./ Ant.Height: 1.0 m.
Operator: S. Vogelmann
File #: 23-0149RC12-003-008
Comment #1: Test results normalized to 30 m test distance.
Comment #2:

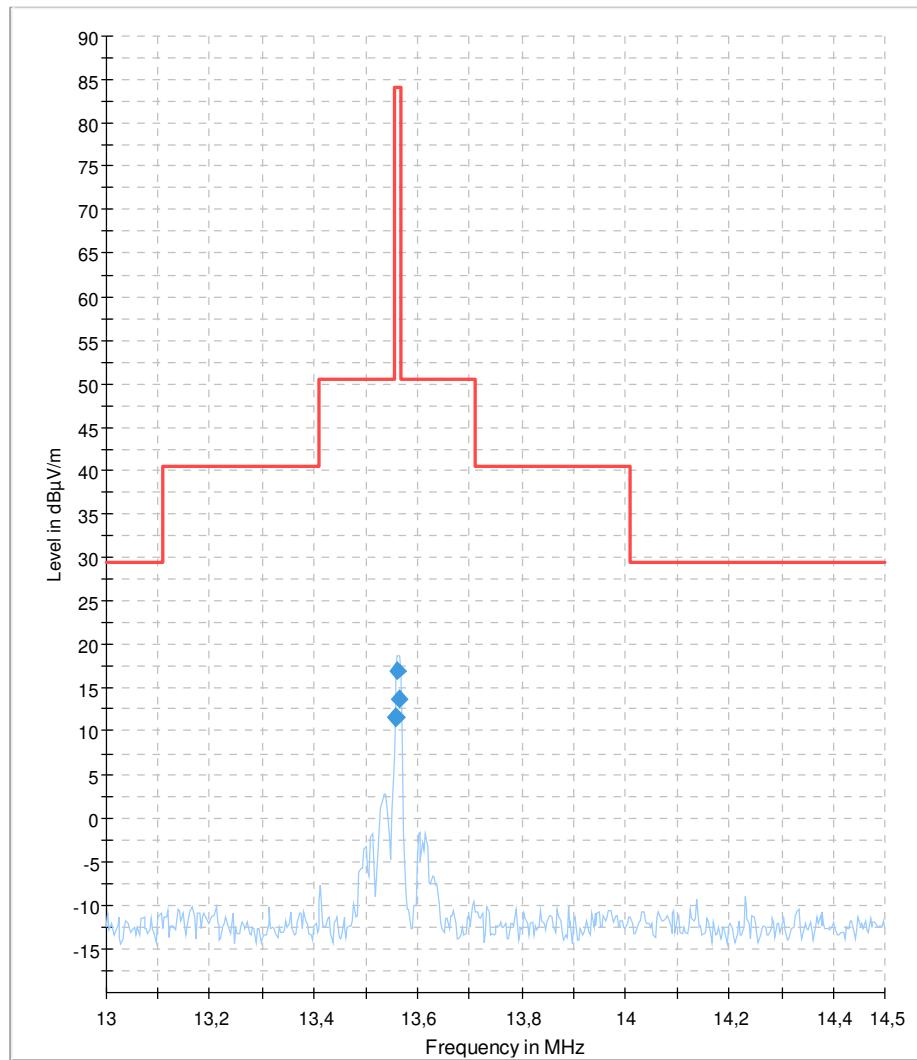

— Preview Result 1-PK+ — Limit QPK ♦ Final_Result QPK



Pre-Test Result – SAC @3.0 m antenna distance

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.556208	11.54	84.00	72.46	5000.0	9.000	Orthogonal	325.0	-19.8
13.560064	16.92	84.00	67.08	5000.0	9.000	Orthogonal	348.0	-19.8
13.563130	13.76	84.00	70.24	5000.0	9.000	Orthogonal	351.0	-19.8

Final Result of the fundamental - OATS @10.0 m antenna distance

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Receiver 6dB BW (kHz)	Ant.-Orientation	Azimuth (deg)	Corr. (dB/m)
13.5570	21.32	84.00 @30m	62.68	5000.0	9.000	Orthogonal	104	0.92

Test results normalized to reference distance for limit value with 40 dB/Dec.



6.9 Frequency stability

- No deviation from the standard
- Deviation from the standard
- Test not requested
- Test not carried out

* _____

Measurement procedure:

Rules and specification
Guide

47 CFR Part 15 Section 15.225 (e)(f)
ANSI C63.10-2013


The frequency stability of the carrier frequency of an intentional radiator is determined over a temperature range of -20° C to + 50° C and at supply voltages of 85 % to 115 % of the nominal voltage at 20 °C ambient temperature. For battery-powered devices, a new battery is used or, if possible, an external power supply is used to set 115 %, 100% and 85 % of the battery normal voltage. If an antenna connection is available, the transmitter is connected directly to the input of a spectrum analyzer. If necessary, an impedance matching network and a DC blocking filter are also connected in between. Alternatively, a test fixture is used. The transmitter is operated unmodulated. The peak detector of the spectrum analyzer is used, whereby the resolution bandwidth and video bandwidth are selected accordingly to achieve the highest possible accuracy. Starting from the highest temperature, the temperature range is lowered in 10° steps to the lowest temperature. At each temperature, the DUT is switched on after reaching a stable value and the carrier frequency is determined at switch-on, after 2, 5 and 10 minutes.

Frequency stability test with respect to supply voltage variation is performed when, the EUT is supplied by nominal voltage at ambient temperature of +20 °C. The EUT is turned on and its output coupled to a spectrum analyzer by a test antenna placed near (approx.. 15 cm) the EUT. The spectrum analyzer is adjusted to obtain a suitable signal. The frequency is recorded at 85 %; 100 % and 115 % nominal voltage.



Basic structure - Setup

OATS / SAC

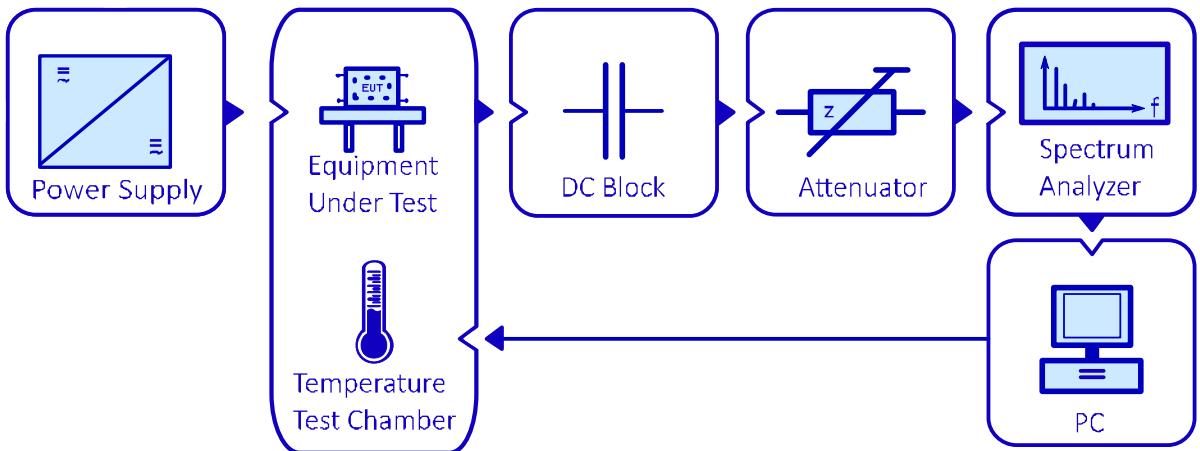




6.9.1 Test set up

According ANSI C63.10-2013

Photo(s) showing the interconnection of the major function units

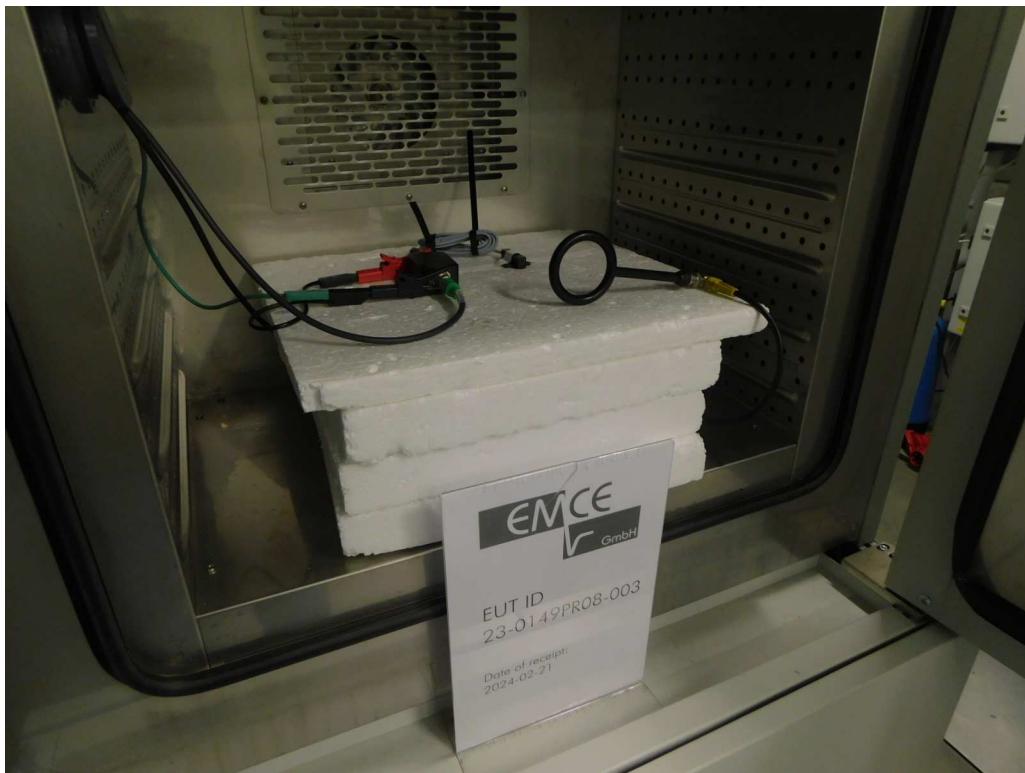



Test location

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type (L x W x H)	Manufacturer	Location
<input checked="" type="checkbox"/>	1046	Environmental Simulation Chamber -40 - +180 °C 10 % - 98 % r.H.	Indoor 0.6 x 0.4 x 0.48 m	Binder GmbH	EMCE GmbH Untere Wiesen 1 88483 Burgrieden

Used test equipment

Final test					
<input checked="" type="checkbox"/>	Inv.-No.	Designation	Type	Manufacturer	S/N
	008	Antenna 9 kHz – 30 MHz	HFH2-Z2	Rohde & Schwarz	835776/0002
<input checked="" type="checkbox"/>	042	AC-Source / Analyzer / Norm impedance	EMV D5000/PAS	Spitzenberger + Spies	A274700/ 0 0501
<input checked="" type="checkbox"/>	230	FSV40 Signal Analyzer 40 GHz	FSV40	Rohde & Schwarz	101717
	997	Software	EMC32	Rohde & Schwarz	n/a

All used test equipment are checked resp. calibrated periodically.

Test equipment was checked and complied to the requirements



6.9.2 Test

Rules and specification	47 CFR Part 15 Section 15.225 (e)(f)
Frequency range:	13.110 - 14.010 MHz
Temperature range:	+50 °C down to -20 °C
Voltage range:	85 % to 115 % of the rated supply voltage
Frequency tolerance:	±0.01% of the operating frequency

Operation mode

EUT arrangement: Tabletop Floor standing
Power supply: 120 V/60 Hz Internal battery

The EUT was operated in read mode at maximum read speed, with a read cycle being started every 80 ms. The data read was sent to a PC connected to the EUT via a USB interface. No tag was used during the measurement.

Test result

Limits for frequency tolerance over

Temperature variations: kept
 not kept

Supply voltage variations: kept
 not kept

Remarks: n/a

Records

Readings



Carrier Frequency Stability vs. Temperature

Fundamental frequency at

Temp. / °C	Frequency of fundamental / kHz				Max. frequency tolerance / ppm	Limit / ppm
	at start	after 2 min	after 5 min	after 10 min		
50	13,560.188	13,560.186	13,560.188	13,560.189	5	±100
40	13,560.206	13,560.196	13,560.193	13,560.192	4	±100
30	13,560.237	13,560.223	13,560.217	13,560.214	2	±100
20	13,560.276	13,560.260	13,560.252	13,560.248	2	±100
10	13,560.310	13,560.298	13,560.291	13,560.287	5	±100
0	13,560.328	13,560.325	13,560.322	13,560.321	6	±100
-10	13,560.319	13,560.326	13,560.328	13,560.329	6	±100
-20	13,560.279	13,560.299	13,560.306	13,560.309	4	±100

Carrier Frequency Stability vs. Supply Voltage Variation

Fundamental frequency at 20 °C, 35 % rH

Nominal Voltage U_N	Frequency of fundamental / kHz			Max. frequency tolerance / ppm	Limit / ppm
	85 % U_N	100 % U_N	115 % U_N		
120 V / 60 Hz	13,560.243	13,560.243	13,560.243	0	±100



7 Summary

47 CFR Part 15 Subpart C

Requirement	Regulation section	Result	Remarks
Antenna requirement	§ 15.203	Pass	n/a
Restricted bands of operation	§ 15.205 (a) (b) (c) (d)(7))	Pass	n/a
Terminal voltage on powerline	§ 15.207 (a)	Pass	n/a
Radiated emissions H-Field of intentional radiators	§ 15.209 (a) (b) (c) (d) (e) (f)	Pass	n/a
Radiated emissions E-Field of intentional radiators	§ 15.209 (a) (b) (c) (d) (e) (f)	Pass	n/a
Emission bandwidth inside the operating frequency band	§ 15.215 (c)	Pass	n/a
Field strength mask within the operation band 13.110-14.010 MHz	§ 15.225 (a) (b) (c) (d) (f)	Pass	n/a
Frequency stability	§ 15.225 (e) (f)	Pass	n/a

Burgrieden, 05/26/2024

Responsible inspector:

Project manager – Steffen Vogelmann

- End of Test Report -