



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Address: 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

FCC ID: V7TW30E

Product Name: AX3000 Dual Band Wi-Fi6 Wireless Hotspot Router

Standard(s): 47 CFR Part 15, Subpart E(15.407)

ANSI C63.10-2013

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230206428-00B

Date Of Issue: 2023/3/24

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:	8
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	11
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 AC LINE CONDUCTED EMISSIONS.....	14
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	15
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	16
3.1.5 Corrected Amplitude & Margin Calculation.....	16
3.2 RADIATION SPURIOUS EMISSIONS.....	17
3.2.1 Applicable Standard.....	17
3.2.2 EUT Setup.....	18
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	19
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 EMISSION BANDWIDTH:	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 MAXIMUM CONDUCTED OUTPUT POWER:	22
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY:	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	24
3.7 DUTY CYCLE:.....	25
3.7.1 EUT Setup.....	25
3.7.2 Test Procedure	25
3.8 ANTENNA REQUIREMENT	26

3.8.1 Applicable Standard.....	26
3.8.2 Judgment.....	26
4. Test DATA AND RESULTS.....	27
4.1 AC LINE CONDUCTED EMISSIONS.....	27
4.2 RADIATION SPURIOUS EMISSIONS.....	30
4.3 EMISSION BANDWIDTH:	62
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	110
4.5 MAXIMUM POWER SPECTRAL DENSITY:	114
4.6 DUTY CYCLE:.....	162
5. RF EXPOSURE EVALUATION	167
5.1 APPLICABLE STANDARD.....	167
5.2 MEASUREMENT RESULT	168

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230206428-00B	Original Report	2023/3/24

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	AX3000 Dual Band Wi-Fi6 Wireless Hotspot Router
EUT Model:	W30E
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20/ax he20) 5190-5230 MHz(802.11n ht40/ac vht40/ax he40) 5210 MHz(802.11ac vht80/ax he80) 5260-5320 MHz (802.11a/n ht20/ac vht20/ax he20) 5270-5310 MHz(802.11n ht40/ac vht40/ax he40) 5290 MHz(802.11ac vht80/ax he80) 5250 MHz(802.11ac vht160/ax he160) 5745-5825 MHz (802.11a/n ht20/ac vht20/ax he20) 5755-5795 MHz(802.11n ht40/ac vht40/ax he40) 5775 MHz(802.11ac vht80/ax he80)
Maximum Average Output Power (Conducted):	21.37 dBm (5150-5250 MHz) 23.21 dBm (5250-5350 MHz) 24.75 dBm (5725-5850 MHz)
Modulation Type:	802.11a/n/ac/ax:OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM, 1024QAM
Rated Input Voltage:	DC 12V from Adapter
Serial Number:	21EC
EUT Received Date:	2023/2/16
EUT Received Status:	Good

1.1.2 Operation Frequency Detail: For 802.11a/n ht20/ac vht20/ax he20:

5150-5250MHz Band		5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	149	5745
40	5200	56	5280	153	5765
44	5220	60	5300	157	5785
48	5240	64	5320	161	5805
/	/	/	/	165	5825
Per section 15.31(m), the above in bold frequencies were performed the test.					

For 802.11n ht40/ac vht40/ax he40:

5150-5250MHz Band		5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	151	5755
46	5230	62	5310	159	5795
Per section 15.31(m), the above in bold frequencies were performed the test.					

For 802.11ac vht80/ax he80:

5150-5250MHz Band		5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	155	5775
Per section 15.31(m), the above in bold frequencies were performed the test.					

For 802.11ac vht160/ax he160:

5150-5250MHz Band~5250-5350 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
50	5250	/	/
Per section 15.31(m), the above in bold frequencies were performed the test.			

1.1.3 Antenna Information Detail▲:

Antenna Chain	Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chain 0	SHENZHEN TENDA TECHNOLOGY CO.,LTD.	Dipole	50	5150-5250MHz	5.93 dBi
				5250-5350MHz	6.02 dBi
				5725-5850MHz	5.34 dBi
Chain 1		Dipole	50	5150-5250MHz	5.93 dBi
				5250-5350MHz	6.02 dBi
				5725-5850MHz	5.34 dBi

The Method of §15.203 Compliance:

- ☒ Antenna must be permanently attached to the unit.
☐ Antenna must use a unique type of connector to attach to the EUT.
☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	SHENZHEN HEWEISHUN NETWORK TECHNOLOGY CO.,LTD	BN074-A18012U	Input: 100-240Vac, 50/60Hz, 0.6A Output: DC12V, 1.5A

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:			No		
EUT Exercise Software:			AccessMtool		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:					
5150-5250 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5180	6Mbps	95	85
	Middle	5200	6Mbps	100	95
	Highest	5240	6Mbps	95	85
802.11n ht20	Lowest	5180	MCS0	80	80
	Middle	5200	MCS0	90	90
	Highest	5240	MCS0	80	80
802.11n ht40	Lowest	5190	MCS0	73	73
	Highest	5230	MCS0	73	73
802.11ac vht20	Lowest	5180	MCS0	77	77
	Middle	5200	MCS0	85	85
	Highest	5240	MCS0	80	80
802.11ac vht40	Lowest	5190	MCS0	68	68
	Highest	5230	MCS0	73	73
802.11ac vht80	Middle	5210	MCS0	65	65
802.11ax he20	Lowest	5180	MCS0	78	78
	Middle	5200	MCS0	85	85
	Highest	5240	MCS0	80	80
802.11ax he40	Lowest	5190	MCS0	63	63
	Highest	5230	MCS0	70	70
802.11ax he80	Middle	5210	MCS0	60	60

5250-5350 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5260	6Mbps	90	80
	Middle	5280	6Mbps	99	90
	Highest	5320	6Mbps	90	80
802.11n ht20	Lowest	5260	MCS0	65	65
	Middle	5280	MCS0	64	64
	Highest	5320	MCS0	62	62
802.11n ht40	Lowest	5270	MCS0	70	70
	Highest	5310	MCS0	70	70
802.11ac vht20	Lowest	5260	MCS0	64	64
	Middle	5280	MCS0	63	63
	Highest	5320	MCS0	61	61
802.11ac vht40	Lowest	5270	MCS0	70	70
	Highest	5310	MCS0	65	65
802.11ac vht80	Middle	5290	MCS0	65	65
802.11ax he20	Lowest	5260	MCS0	64	64
	Middle	5280	MCS0	63	63
	Highest	5320	MCS0	61	61
802.11ax he40	Lowest	5270	MCS0	70	70
	Highest	5310	MCS0	65	65
802.11ax he80	Middle	5290	MCS0	65	65
Cross Band 5150-5250 MHz&5250-5350 MHz Band:					
802.11ac vht160	Middle	5250	MCS0	70	70
802.11ax he160	Middle	5250	MCS0	67	67

5725-5850 MHz Band:

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5745	6Mbps	110	100
	Middle	5785	6Mbps	110	100
	Highest	5825	6Mbps	110	100
802.11n ht20	Lowest	5745	MCS0	100	100
	Middle	5785	MCS0	100	100
	Highest	5825	MCS0	100	100
802.11n ht40	Lowest	5755	MCS0	90	90
	Highest	5795	MCS0	90	90
802.11ac vht20	Lowest	5745	MCS0	100	100
	Middle	5785	MCS0	100	100
	Highest	5825	MCS0	100	100
802.11ac vht40	Lowest	5755	MCS0	95	95
	Highest	5795	MCS0	95	95
802.11ac vht80	Middle	5775	MCS0	73	73
802.11ax he20	Lowest	5745	MCS0	100	100
	Middle	5785	MCS0	100	100
	Highest	5825	MCS0	95	95
802.11ax he40	Lowest	5755	MCS0	90	90
	Highest	5795	MCS0	95	95
802.11ax he80	Middle	5775	MCS0	70	70

The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac/ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac/ax modes.

The system supports Beamforming and Non-beamforming modes at 802.11n/ac/ax modes. The two modes have same output power, and the Beamforming mode has an additional 3dBi gain▲, which are declared by manufacturer. Therefore, the all RF conducted test were performed at Non-beamforming mode only.

1.2.2 Support Equipment List and Details

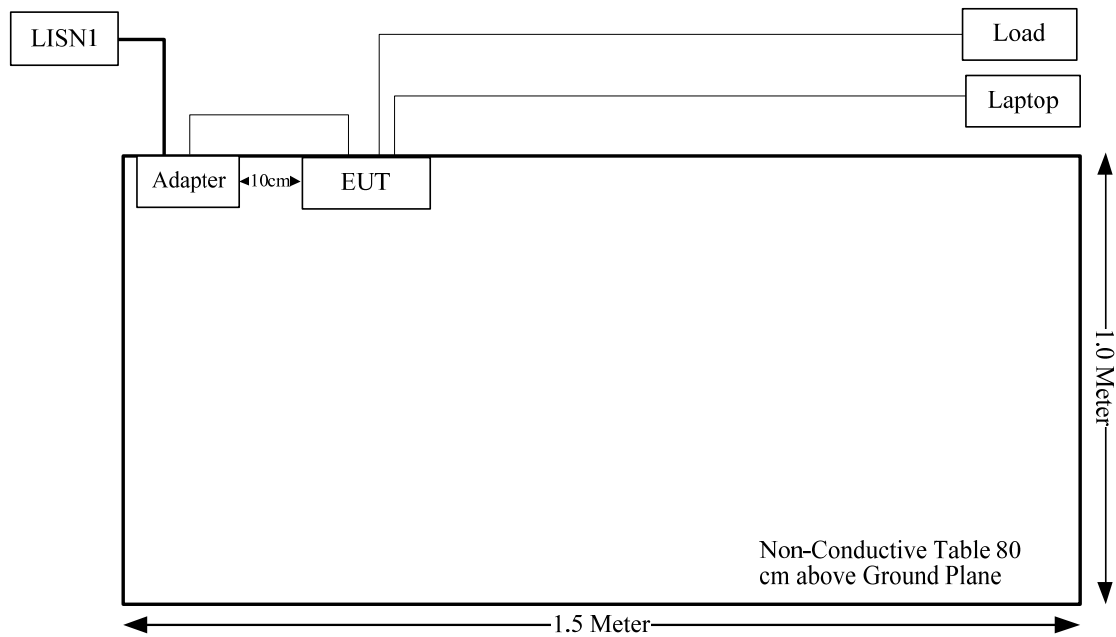
Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8
Unknown	RJ 45 Load	Unknown	RJ 45 Load-1
Kingston	USB Flash Disk	16G	U-16G

1.2.3 Support Cable List and Details

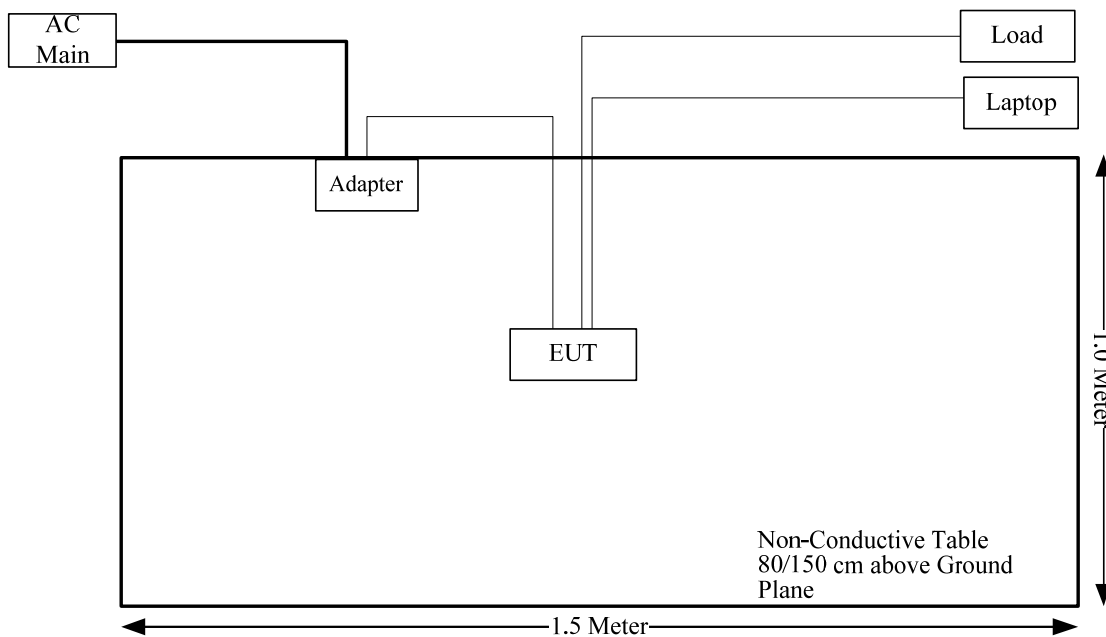
Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable*3	Yes	No	10	EUT	Load
DC Cable	No	No	1.2	Adapter	EUT
RJ45 Cable	Yes	No	10	EUT	Laptop

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:



Spurious Emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Conducted Transmitter Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.203	Antenna Requirement	Compliant
FCC§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant ^{Note}
§15.407 (f) & §1.1307 & §2.1091	RF Exposure Evaluation	Compliant
Note: Dynamic Frequency Selection (DFS) test please refer to the DFS report: CR230206428-00D.		

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

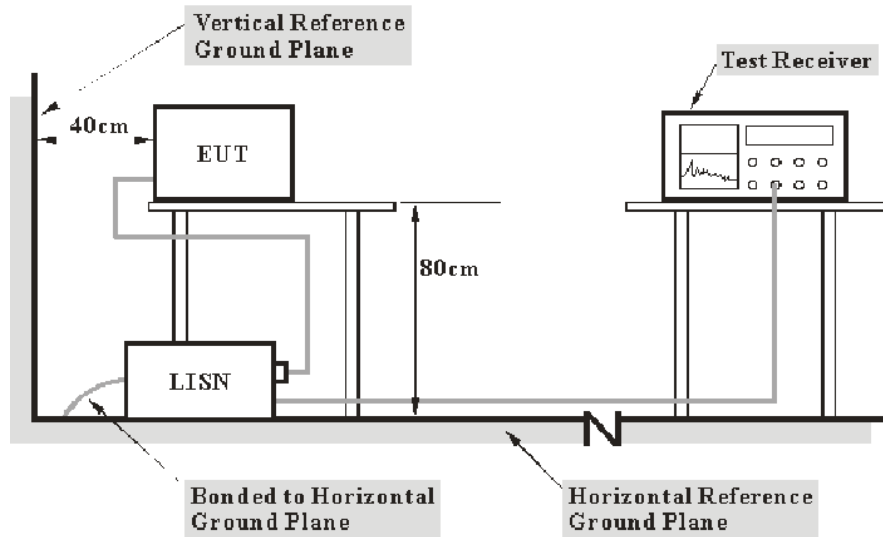
(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

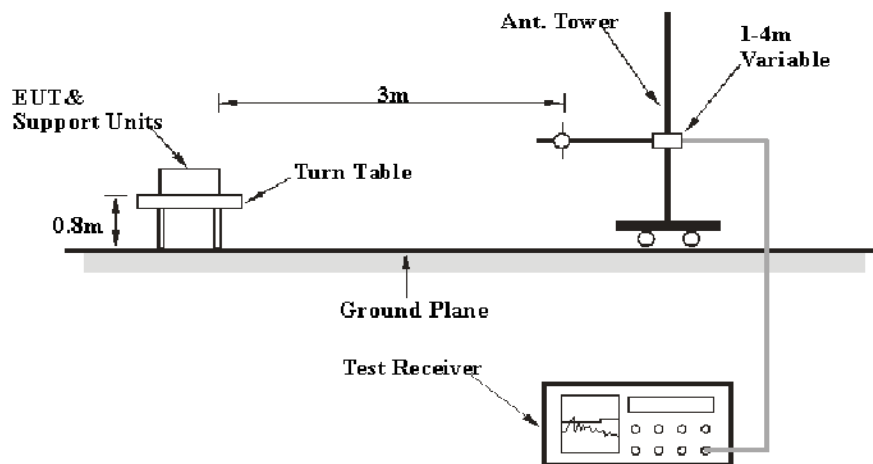
FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

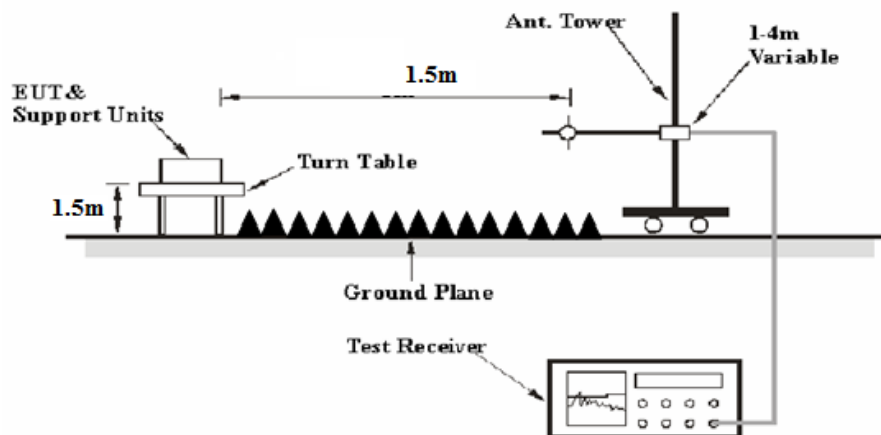
- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

Below 1GHz:



1-40 GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.407 (a)

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

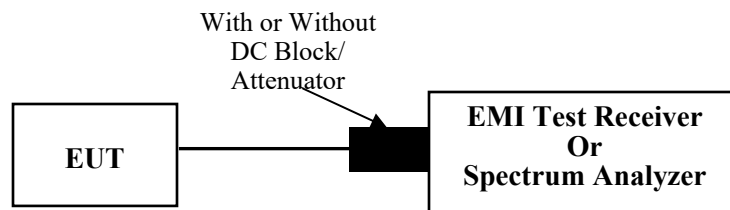
FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

FCC §15.407 (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) ≥ 3 RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power:

3.4.1 Applicable Standard

FCC §15.407(a) (1)

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

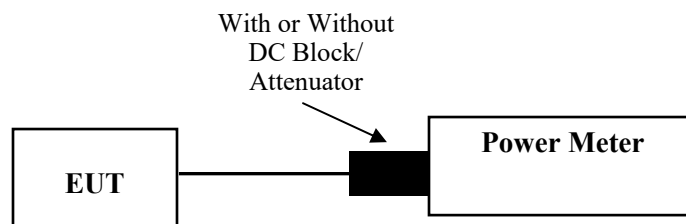
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup



3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density:

3.5.1 Applicable Standard

FCC §15.407(a) (1)

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

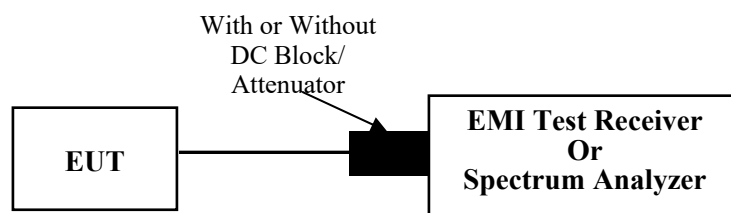
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 **Alternative** should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

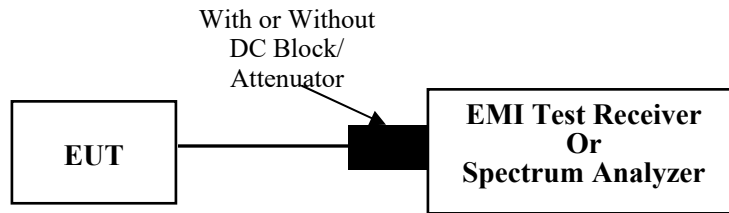
KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 **Alternative** should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.7 Duty Cycle:

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	21EC	Test Date:	2023/02/23
Test Site:	CE	Test Mode:	Transmitting (802.11a chain 0 5785MHz was the worst)
Tester:	Bob Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.4	Relative Humidity: (%)	49	ATM Pressure: (kPa)	101.8
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

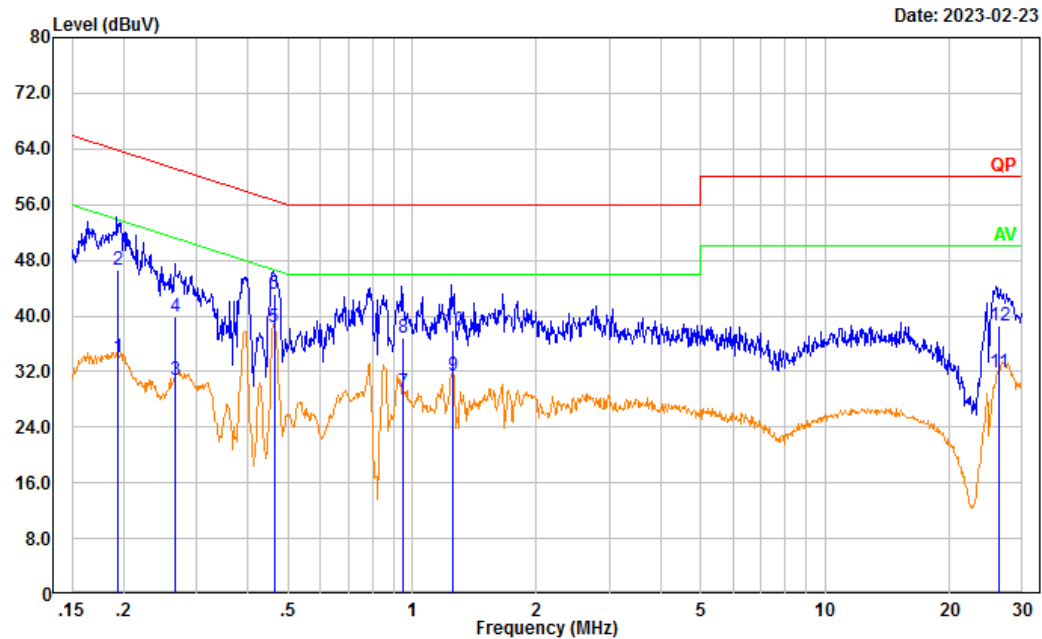
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Mode: Transmitting

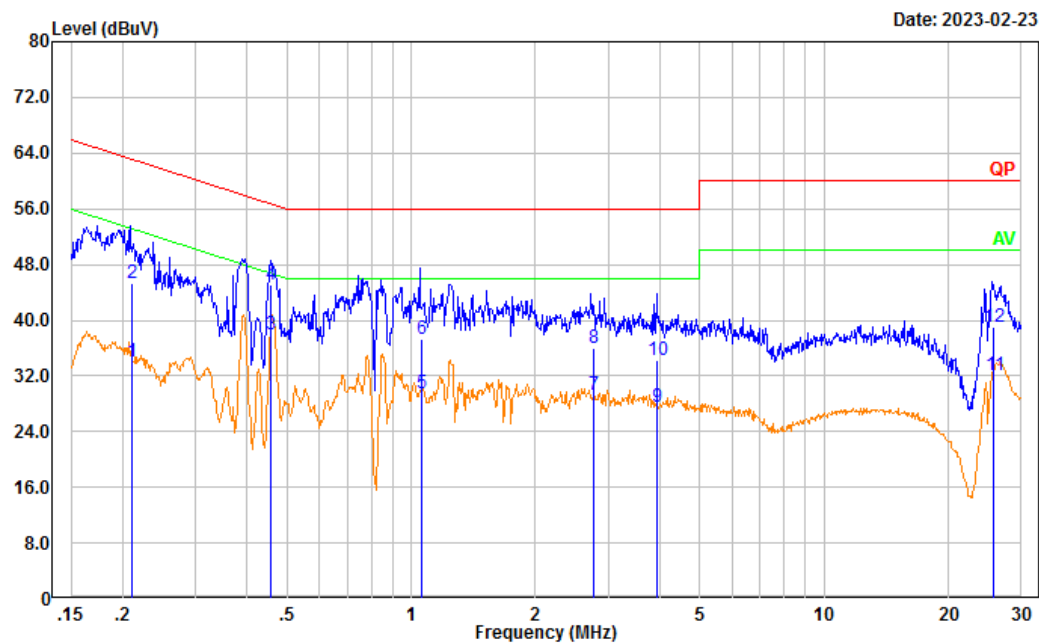
Port: Line

Note:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.193	24.44	9.61	34.05	53.89	19.84	Average
2	0.193	36.92	9.61	46.53	63.89	17.36	QP
3	0.266	21.23	9.61	30.84	51.24	20.40	Average
4	0.266	30.18	9.61	39.79	61.24	21.45	QP
5	0.463	28.87	9.61	38.48	46.64	8.16	Average
6	0.463	33.64	9.61	43.25	56.64	13.39	QP
7	0.948	19.46	9.62	29.08	46.00	16.92	Average
8	0.948	27.30	9.62	36.92	56.00	19.08	QP
9	1.256	21.91	9.62	31.53	46.00	14.47	Average
10	1.256	28.29	9.62	37.91	56.00	18.09	QP
11	26.381	22.01	9.82	31.83	50.00	18.17	Average
12	26.381	28.81	9.82	38.63	60.00	21.37	QP

Test Mode: Transmitting
Port: neutral
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.211	24.43	9.61	34.04	53.18	19.14	Average
2	0.211	35.80	9.61	45.41	63.18	17.77	QP
3	0.456	28.43	9.61	38.04	46.77	8.73	Average
4	0.456	35.42	9.61	45.03	56.77	11.74	QP
5	1.059	19.81	9.62	29.43	46.00	16.57	Average
6	1.059	27.56	9.62	37.18	56.00	18.82	QP
7	2.768	19.60	9.65	29.25	46.00	16.75	Average
8	2.768	26.28	9.65	35.93	56.00	20.07	QP
9	3.928	17.86	9.65	27.51	46.00	18.49	Average
10	3.928	24.59	9.65	34.24	56.00	21.76	QP
11	25.747	22.37	9.78	32.15	50.00	17.85	Average
12	25.747	29.28	9.78	39.06	60.00	20.94	QP

4.2 Radiation Spurious Emissions

Serial Number:	21EC	Test Date:	2023/02/23 ~2023/02/28
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Vic Du, Mack Huang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	22.8~24.4	Relative Humidity: (%)	39~42	ATM Pressure: (kPa)	101.8~102.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/02/05	2024/02/04

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

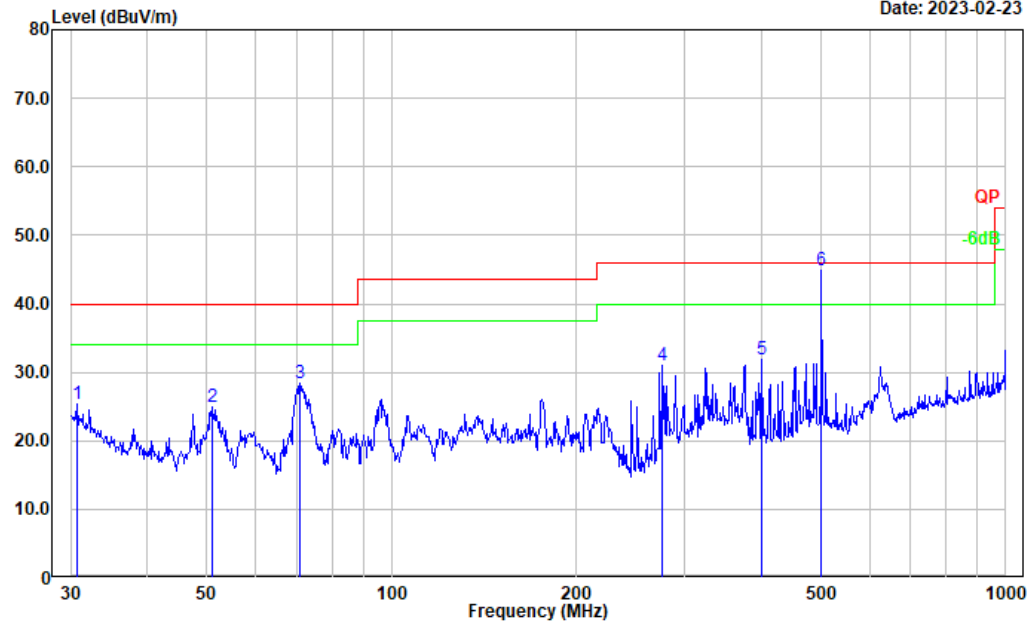
Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.

1) 30MHz-1GHz(802.11a chain 0 5785MHz was the worst)

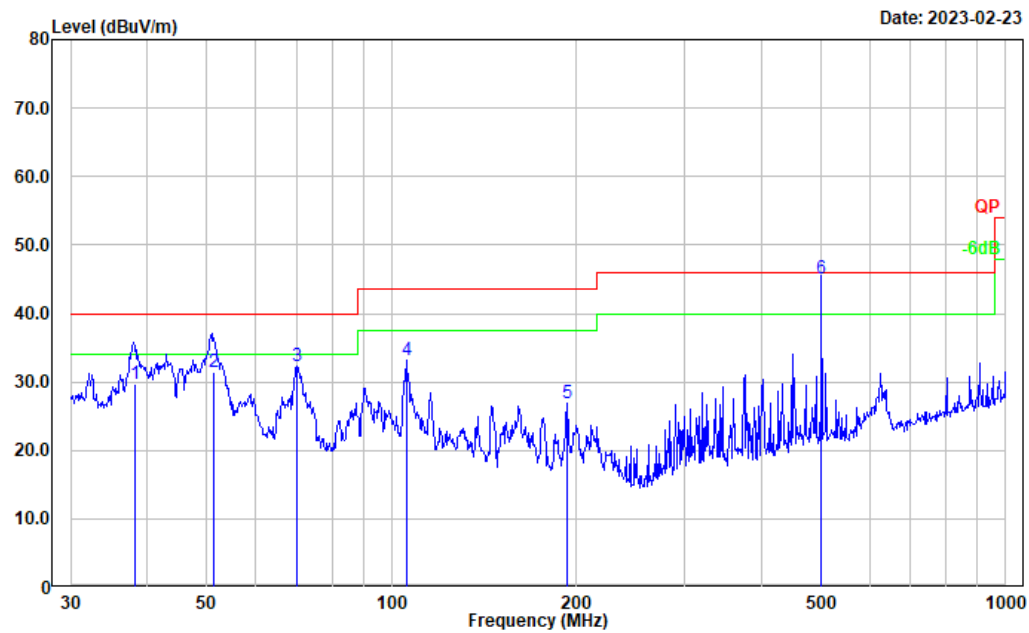
Test Mode: Transmitting
Polarization: horizontal
Note:

Date: 2023-02-23



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.745	29.60	-4.17	25.43	40.00	14.57	Peak
2	50.942	42.23	-17.21	25.02	40.00	14.98	Peak
3	70.832	44.87	-16.55	28.32	40.00	11.68	Peak
4	276.124	42.89	-11.84	31.05	46.00	14.95	Peak
5	400.432	40.63	-8.74	31.89	46.00	14.11	Peak
6	500.017	50.78	-5.99	44.79	46.00	1.21	QP

Test Mode: Transmitting
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	38.226	39.65	-9.92	29.73	40.00	10.27	QP
2	51.417	48.64	-17.21	31.43	40.00	8.57	QP
3	70.090	48.70	-16.47	32.23	40.00	7.77	Peak
4	105.642	46.46	-13.23	33.23	43.50	10.27	Peak
5	193.095	39.95	-13.04	26.91	43.50	16.59	Peak
6	499.997	51.01	-5.99	45.02	46.00	0.98	QP

2) 1GHz-40GHz:**5150-5250MHz****802.11a Chain 0:**

02714 Channel 6:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 5180MHz							
5180.000	74.49	PK	H	38.68	107.15	N/A	N/A
5180.000	64.37	AV	H	38.68	97.03	N/A	N/A
5180.000	82.33	PK	V	38.68	114.99	N/A	N/A
5180.000	72.26	AV	V	38.68	104.92	N/A	N/A
5150.000	37.65	PK	V	38.64	70.27	74.00	3.73
5150.000	19.98	AV	V	38.64	52.60	54.00	1.40
10360.000	33.87	PK	V	19.18	47.03	68.20	21.17
15540.000	46.39	PK	V	22.44	62.81	74.00	11.19
15540.000	33.20	AV	V	22.44	49.62	54.00	4.38
Middle Channel: 5200 MHz							
5200.000	76.41	PK	H	38.70	109.09	N/A	N/A
5200.000	56.13	AV	H	38.70	88.81	N/A	N/A
5200.000	83.59	PK	V	38.70	116.27	N/A	N/A
5200.000	73.24	AV	V	38.70	105.92	N/A	N/A
10400.000	34.26	PK	V	19.16	47.40	68.20	20.80
15600.000	48.99	PK	V	22.41	65.38	74.00	8.62
15600.000	35.50	AV	V	22.41	51.89	54.00	2.11
High Channel: 5240 MHz							
5240.000	74.90	PK	H	38.85	107.73	N/A	N/A
5240.000	64.24	AV	H	38.85	97.07	N/A	N/A
5240.000	81.18	PK	V	38.85	114.01	N/A	N/A
5240.000	71.11	AV	V	38.85	103.94	N/A	N/A
5350.000	30.09	PK	V	39.03	63.10	74.00	10.90
5350.000	16.93	AV	V	39.03	49.94	54.00	4.06
10480.000	35.97	PK	V	18.86	48.81	68.20	19.39
15720.000	47.87	PK	V	22.28	64.13	74.00	9.87
15720.000	34.44	AV	V	22.28	50.70	54.00	3.30

802.11a Chain 1:

021114 Channel 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 5180MHz							
5180.000	74.81	PK	H	38.68	107.47	N/A	N/A
5180.000	64.37	AV	H	38.68	97.03	N/A	N/A
5180.000	83.37	PK	V	38.68	116.03	N/A	N/A
5180.000	73.17	AV	V	38.68	105.83	N/A	N/A
5150.000	39.40	PK	V	38.64	72.02	74.00	1.98
5150.000	19.59	AV	V	38.64	52.21	54.00	1.79
10360.000	34.24	PK	V	19.18	47.40	68.20	20.80
15540.000	44.74	PK	V	22.44	61.16	74.00	12.84
15540.000	31.37	AV	V	22.44	47.79	54.00	6.21
Middle Channel: 5200 MHz							
5200.000	77.53	PK	H	38.70	110.21	N/A	N/A
5200.000	67.42	AV	H	38.70	100.10	N/A	N/A
5200.000	85.43	PK	V	38.70	118.11	N/A	N/A
5200.000	75.21	AV	V	38.70	107.89	N/A	N/A
10400.000	34.47	PK	V	19.16	47.61	68.20	20.59
15600.000	48.38	PK	V	22.41	64.77	74.00	9.23
15600.000	35.19	AV	V	22.41	51.58	54.00	2.42
High Channel: 5240 MHz							
5240.000	74.62	PK	H	38.85	107.45	N/A	N/A
5240.000	64.23	AV	H	38.85	97.06	N/A	N/A
5240.000	83.63	PK	V	38.85	116.46	N/A	N/A
5240.000	73.69	AV	V	38.85	106.52	N/A	N/A
5350.000	29.89	PK	V	39.03	62.90	74.00	11.10
5350.000	16.95	AV	V	39.03	49.96	54.00	4.04
10480.000	34.09	PK	V	18.86	46.93	68.20	21.27
15720.000	45.09	PK	V	22.28	61.35	74.00	12.65
15720.000	32.05	AV	V	22.28	48.31	54.00	5.69

802.11n ht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.000	76.12	PK	H	38.68	108.78	N/A	N/A
5180.000	64.25	AV	H	38.68	96.91	N/A	N/A
5180.000	85.72	PK	V	38.68	118.38	N/A	N/A
5180.000	73.94	AV	V	38.68	106.60	N/A	N/A
5150.000	34.95	PK	V	38.64	67.57	74.00	6.43
5150.000	20.12	AV	V	38.64	52.74	54.00	1.26
10360.000	35.79	PK	V	19.18	48.95	68.20	19.25
15540.000	45.51	PK	V	22.44	61.93	74.00	12.07
15540.000	32.26	AV	V	22.44	48.68	54.00	5.32
Middle Channel: 5200 MHz							
5200.000	78.59	PK	H	38.70	111.27	N/A	N/A
5200.000	66.47	AV	H	38.70	99.15	N/A	N/A
5200.000	87.98	PK	V	38.70	120.66	N/A	N/A
5200.000	75.46	AV	V	38.70	108.14	N/A	N/A
10400.000	33.90	PK	V	19.16	47.04	68.20	21.16
15600.000	47.46	PK	V	22.41	63.85	74.00	10.15
15600.000	34.23	AV	V	22.41	50.62	54.00	3.38
High Channel: 5240 MHz							
5240.000	75.19	PK	H	38.85	108.02	N/A	N/A
5240.000	63.34	AV	H	38.85	96.17	N/A	N/A
5240.000	84.74	PK	V	38.85	117.57	N/A	N/A
5240.000	73.06	AV	V	38.85	105.89	N/A	N/A
5350.000	30.29	PK	V	39.03	63.30	74.00	10.70
5350.000	17.16	AV	V	39.03	50.17	54.00	3.83
10480.000	33.80	PK	V	18.86	46.64	68.20	21.56
15720.000	46.21	PK	V	22.28	62.47	74.00	11.53
15720.000	33.11	AV	V	22.28	49.37	54.00	4.63

802.11ac vht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.000	73.42	PK	H	38.68	106.08	N/A	N/A
5180.000	61.37	AV	H	38.68	94.03	N/A	N/A
5180.000	86.16	PK	V	38.68	118.82	N/A	N/A
5180.000	74.10	AV	V	38.68	106.76	N/A	N/A
5150.000	36.99	PK	V	38.64	69.61	74.00	4.39
5150.000	20.14	AV	V	38.64	52.76	54.00	1.24
10360.000	32.11	PK	V	19.18	45.27	68.20	22.93
15540.000	42.59	PK	V	22.44	59.01	74.00	14.99
15540.000	30.30	AV	V	22.44	46.72	54.00	7.28
Middle Channel: 5200 MHz							
5200.000	75.23	PK	H	38.70	107.91	N/A	N/A
5200.000	63.12	AV	H	38.70	95.80	N/A	N/A
5200.000	87.47	PK	V	38.70	120.15	N/A	N/A
5200.000	75.49	AV	V	38.70	108.17	N/A	N/A
10400.000	31.48	PK	V	19.16	44.62	68.20	23.58
15600.000	45.28	PK	V	22.41	61.67	74.00	12.33
15600.000	33.14	AV	V	22.41	49.53	54.00	4.47
High Channel: 5240 MHz							
5240.000	73.58	PK	H	38.85	106.41	N/A	N/A
5240.000	61.25	AV	H	38.85	94.08	N/A	N/A
5240.000	86.79	PK	V	38.85	119.62	N/A	N/A
5240.000	74.24	AV	V	38.85	107.07	N/A	N/A
5350.000	30.15	PK	V	39.03	63.16	74.00	10.84
5350.000	17.34	AV	V	39.03	50.35	54.00	3.65
10480.000	33.12	PK	V	18.86	45.96	68.20	22.24
15720.000	44.09	PK	V	22.28	60.35	74.00	13.65
15720.000	32.05	AV	V	22.28	48.31	54.00	5.69

802.11ax he20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.000	76.01	PK	H	38.68	108.67	N/A	N/A
5180.000	64.24	AV	H	38.68	96.90	N/A	N/A
5180.000	85.63	PK	V	38.68	118.29	N/A	N/A
5180.000	73.07	AV	V	38.68	105.73	N/A	N/A
5150.000	35.05	PK	V	38.64	67.67	74.00	6.33
5150.000	19.99	AV	V	38.64	52.61	54.00	1.39
10360.000	32.02	PK	V	19.18	45.18	68.20	23.02
15540.000	43.77	PK	V	22.44	60.19	74.00	13.81
15540.000	31.39	AV	V	22.44	47.81	54.00	6.19
Middle Channel: 5200 MHz							
5200.000	77.45	PK	H	38.70	110.13	N/A	N/A
5200.000	65.23	AV	H	38.70	97.91	N/A	N/A
5200.000	86.94	PK	V	38.70	119.62	N/A	N/A
5200.000	74.48	AV	V	38.70	107.16	N/A	N/A
10400.000	32.18	PK	V	19.16	45.32	68.20	22.88
15600.000	45.51	PK	V	22.41	61.90	74.00	12.10
15600.000	33.26	AV	V	22.41	49.65	54.00	4.35
High Channel: 5240 MHz							
5240.000	75.04	PK	H	38.85	107.87	N/A	N/A
5240.000	63.19	AV	H	38.85	96.02	N/A	N/A
5240.000	85.29	PK	V	38.85	118.12	N/A	N/A
5240.000	73.49	AV	V	38.85	106.32	N/A	N/A
5350.000	29.95	PK	V	39.03	62.96	74.00	11.04
5350.000	17.11	AV	V	39.03	50.12	54.00	3.88
10480.000	33.95	PK	V	18.86	46.79	68.20	21.41
15720.000	44.36	PK	V	22.28	60.62	74.00	13.38
15720.000	32.18	AV	V	22.28	48.44	54.00	5.56

802.11n ht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.000	70.86	PK	H	38.69	103.53	N/A	N/A
5190.000	58.43	AV	H	38.69	91.10	N/A	N/A
5190.000	80.68	PK	V	38.69	113.35	N/A	N/A
5190.000	68.04	AV	V	38.69	100.71	N/A	N/A
5150.000	33.89	PK	V	38.64	66.51	74.00	7.49
5150.000	20.20	AV	V	38.64	52.82	54.00	1.18
10380.000	34.46	PK	V	19.17	47.61	68.20	20.59
15570.000	40.74	PK	V	22.43	57.15	74.00	16.85
15570.000	27.37	AV	V	22.43	43.78	54.00	10.22
High Channel: 5230 MHz							
5230.000	71.08	PK	H	38.81	103.87	N/A	N/A
5230.000	59.34	AV	H	38.81	92.13	N/A	N/A
5230.000	80.29	PK	V	38.81	113.08	N/A	N/A
5230.000	68.72	AV	V	38.81	101.51	N/A	N/A
5350.000	30.36	PK	V	39.03	63.37	74.00	10.63
5350.000	17.03	AV	V	39.03	50.04	54.00	3.96
10460.000	33.24	PK	V	18.94	46.16	68.20	22.04
15690.000	41.88	PK	V	22.29	58.15	74.00	15.85
15690.000	28.44	AV	V	22.29	44.71	54.00	9.29

802.11ac vht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.000	68.77	PK	H	38.69	101.44	N/A	N/A
5190.000	56.12	AV	H	38.69	88.79	N/A	N/A
5190.000	78.48	PK	V	38.69	111.15	N/A	N/A
5190.000	66.23	AV	V	38.69	98.90	N/A	N/A
5150.000	33.10	PK	V	38.64	65.72	74.00	8.28
5150.000	20.28	AV	V	38.64	52.90	54.00	1.10
10380.000	33.04	PK	V	19.17	46.19	68.20	22.01
15570.000	38.46	PK	V	22.43	54.87	74.00	19.13
15570.000	25.23	AV	V	22.43	41.64	54.00	12.36
High Channel: 5230 MHz							
5230.000	70.10	PK	H	38.81	102.89	N/A	N/A
5230.000	58.46	AV	H	38.81	91.25	N/A	N/A
5230.000	80.26	PK	V	38.81	113.05	N/A	N/A
5230.000	68.81	AV	V	38.81	101.60	N/A	N/A
5350.000	30.02	PK	V	39.03	63.03	74.00	10.97
5350.000	17.16	AV	V	39.03	50.17	54.00	3.83
10460.000	33.21	PK	V	18.94	46.13	68.20	22.07
15690.000	42.25	PK	V	22.29	58.52	74.00	15.48
15690.000	30.13	AV	V	22.29	46.40	54.00	7.60

802.11ax he40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.000	69.45	PK	H	38.69	102.12	N/A	N/A
5190.000	57.12	AV	H	38.69	89.79	N/A	N/A
5190.000	79.07	PK	V	38.69	111.74	N/A	N/A
5190.000	67.35	AV	V	38.69	100.02	N/A	N/A
5150.000	34.75	PK	V	38.64	67.37	74.00	6.63
5150.000	20.12	AV	V	38.64	52.74	54.00	1.26
10380.000	32.17	PK	V	19.17	45.32	68.20	22.88
15570.000	39.45	PK	V	22.43	55.86	74.00	18.14
15570.000	26.23	AV	V	22.43	42.64	54.00	11.36
High Channel: 5230 MHz							
5230.000	71.79	PK	H	38.81	104.58	N/A	N/A
5230.000	59.36	AV	H	38.81	92.15	N/A	N/A
5230.000	80.62	PK	V	38.81	113.41	N/A	N/A
5230.000	68.41	AV	V	38.81	101.20	N/A	N/A
5350.000	29.88	PK	V	39.03	62.89	74.00	11.11
5350.000	17.21	AV	V	39.03	50.22	54.00	3.78
10460.000	33.24	PK	V	18.94	46.16	68.20	22.04
15690.000	41.70	PK	V	22.29	57.97	74.00	16.03
15690.000	28.35	AV	V	22.29	44.62	54.00	9.38

802.11ac vht80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5210 MHz							
5210.000	64.27	PK	H	38.74	96.99	N/A	N/A
5210.000	53.64	AV	H	38.74	86.36	N/A	N/A
5210.000	76.82	PK	V	38.74	109.54	N/A	N/A
5210.000	65.52	AV	V	38.74	98.24	N/A	N/A
5150.000	33.48	PK	V	38.64	66.10	74.00	7.90
5150.000	20.24	AV	V	38.64	52.86	54.00	1.14
5350.000	31.03	PK	V	39.03	64.04	74.00	9.96
5350.000	17.84	AV	V	39.03	50.85	54.00	3.15
10420.000	33.04	PK	V	19.09	46.11	68.20	22.09
15630.000	38.41	PK	V	22.37	54.76	74.00	19.24
15630.000	26.21	AV	V	22.37	42.56	54.00	11.44

802.11ax he80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5210 MHz							
5210.000	65.79	PK	H	38.74	98.51	N/A	N/A
5210.000	53.12	AV	H	38.74	85.84	N/A	N/A
5210.000	76.65	PK	V	38.74	109.37	N/A	N/A
5210.000	64.24	AV	V	38.74	96.96	N/A	N/A
5150.000	34.10	PK	V	38.64	66.72	74.00	7.28
5150.000	20.12	AV	V	38.64	52.74	54.00	1.26
5350.000	30.41	PK	V	39.03	63.42	74.00	10.58
5350.000	17.61	AV	V	39.03	50.62	54.00	3.38
10420.000	32.45	PK	V	19.09	45.52	68.20	22.68
15630.000	38.11	PK	V	22.37	54.46	74.00	19.54
15630.000	26.05	AV	V	22.37	42.40	54.00	11.60

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

5250-5350MHz**802.11a Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.000	70.97	PK	H	38.90	103.85	N/A	N/A
5260.000	60.26	AV	H	38.90	93.14	N/A	N/A
5260.000	82.12	PK	V	38.90	115.00	N/A	N/A
5260.000	72.19	AV	V	38.90	105.07	N/A	N/A
5150.000	30.55	PK	V	38.64	63.17	74.00	10.83
5150.000	17.27	AV	V	38.64	49.89	54.00	4.11
10520.000	37.99	PK	V	18.93	50.90	68.20	17.30
15780.000	47.23	PK	V	22.26	63.47	74.00	10.53
15780.000	35.12	AV	V	22.26	51.36	54.00	2.64
Middle Channel: 5280 MHz							
5280.000	73.30	PK	H	38.91	106.19	N/A	N/A
5280.000	63.45	AV	H	38.91	96.34	N/A	N/A
5280.000	84.67	PK	V	38.91	117.56	N/A	N/A
5280.000	74.25	AV	V	38.91	107.14	N/A	N/A
10560.000	39.14	PK	V	19.20	52.32	68.20	15.88
15840.000	49.20	PK	V	22.34	65.52	74.00	8.48
15840.000	36.10	AV	V	22.34	52.42	54.00	1.58
High Channel: 5320 MHz							
5320.000	70.97	PK	H	38.97	103.92	N/A	N/A
5320.000	60.41	AV	H	38.97	93.36	N/A	N/A
5320.000	82.04	PK	V	38.97	114.99	N/A	N/A
5320.000	72.80	AV	V	38.97	105.75	N/A	N/A
5350.000	37.19	PK	V	39.03	70.20	74.00	3.80
5350.000	19.86	AV	V	39.03	52.87	54.00	1.13
10640.000	41.86	PK	V	19.50	55.34	74.00	18.66
10640.000	29.43	AV	V	19.50	42.91	54.00	11.09
15960.000	42.40	PK	V	22.22	58.60	74.00	15.40
15960.000	30.20	AV	V	22.22	46.40	54.00	7.60

802.11a Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.000	73.68	PK	H	38.90	106.56	N/A	N/A
5260.000	63.26	AV	H	38.90	96.14	N/A	N/A
5260.000	83.21	PK	V	38.90	116.09	N/A	N/A
5260.000	73.12	AV	V	38.90	106.00	N/A	N/A
5150.000	31.05	PK	V	38.64	63.67	74.00	10.33
5150.000	17.49	AV	V	38.64	50.11	54.00	3.89
10520.000	34.67	PK	V	18.93	47.58	68.20	20.62
15780.000	43.40	PK	V	22.26	59.64	74.00	14.36
15780.000	31.20	AV	V	22.26	47.44	54.00	6.56
Middle Channel: 5280 MHz							
5280.000	76.59	PK	H	38.91	109.48	N/A	N/A
5280.000	66.34	AV	H	38.91	99.23	N/A	N/A
5280.000	85.08	PK	V	38.91	117.97	N/A	N/A
5280.000	75.24	AV	V	38.91	108.13	N/A	N/A
10560.000	36.55	PK	V	19.20	49.73	68.20	18.47
15840.000	46.37	PK	V	22.34	62.69	74.00	11.31
15840.000	34.19	AV	V	22.34	50.51	54.00	3.49
High Channel: 5320 MHz							
5320.000	72.58	PK	H	38.97	105.53	N/A	N/A
5320.000	62.13	AV	H	38.97	95.08	N/A	N/A
5320.000	82.65	PK	V	38.97	115.60	N/A	N/A
5320.000	72.57	AV	V	38.97	105.52	N/A	N/A
5350.000	34.51	PK	V	39.03	67.52	74.00	6.48
5350.000	19.61	AV	V	39.03	52.62	54.00	1.38
10640.000	38.70	PK	V	19.50	52.18	74.00	21.82
10640.000	26.35	AV	V	19.50	39.83	54.00	14.17
15960.000	42.25	PK	V	22.22	58.45	74.00	15.55
15960.000	30.13	AV	V	22.22	46.33	54.00	7.67

802.11n ht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.000	73.96	PK	H	38.90	106.84	N/A	N/A
5260.000	61.32	AV	H	38.90	94.20	N/A	N/A
5260.000	84.82	PK	V	38.90	117.70	N/A	N/A
5260.000	72.85	AV	V	38.90	105.73	N/A	N/A
5150.000	30.86	PK	V	38.64	63.48	74.00	10.52
5150.000	17.54	AV	V	38.64	50.16	54.00	3.84
10520.000	35.49	PK	V	18.93	48.40	68.20	19.80
15780.000	42.82	PK	V	22.26	59.06	74.00	14.94
15780.000	30.41	AV	V	22.26	46.65	54.00	7.35
Middle Channel: 5280 MHz							
5280.000	75.98	PK	H	38.91	108.87	N/A	N/A
5280.000	63.41	AV	H	38.91	96.30	N/A	N/A
5280.000	86.71	PK	V	38.91	119.60	N/A	N/A
5280.000	74.25	AV	V	38.91	107.14	N/A	N/A
10560.000	37.22	PK	V	19.20	50.40	68.20	17.80
15840.000	46.50	PK	V	22.34	62.82	74.00	11.18
15840.000	34.25	AV	V	22.34	50.57	54.00	3.43
High Channel: 5320 MHz							
5320.000	72.14	PK	H	38.97	105.09	N/A	N/A
5320.000	60.37	AV	H	38.97	93.32	N/A	N/A
5320.000	84.76	PK	V	38.97	117.71	N/A	N/A
5320.000	72.03	AV	V	38.97	104.98	N/A	N/A
5350.000	33.32	PK	V	39.03	66.33	74.00	7.67
5350.000	19.65	AV	V	39.03	52.66	54.00	1.34
10640.000	39.27	PK	V	19.50	52.75	74.00	21.25
10640.000	27.14	AV	V	19.50	40.62	54.00	13.38
15960.000	40.67	PK	V	22.22	56.87	74.00	17.13
15960.000	28.34	AV	V	22.22	44.54	54.00	9.46

802.11ac vht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.000	72.77	PK	H	38.90	105.65	N/A	N/A
5260.000	61.42	AV	H	38.90	94.30	N/A	N/A
5260.000	84.09	PK	V	38.90	116.97	N/A	N/A
5260.000	73.36	AV	V	38.90	106.24	N/A	N/A
5150.000	30.72	PK	V	38.64	63.34	74.00	10.66
5150.000	17.48	AV	V	38.64	50.10	54.00	3.90
10520.000	34.93	PK	V	18.93	47.84	68.20	20.36
15780.000	41.38	PK	V	22.26	57.62	74.00	16.38
15780.000	29.19	AV	V	22.26	45.43	54.00	8.57
Middle Channel: 5280 MHz							
5280.000	74.04	PK	H	38.91	106.93	N/A	N/A
5280.000	62.32	AV	H	38.91	95.21	N/A	N/A
5280.000	85.25	PK	V	38.91	118.14	N/A	N/A
5280.000	73.46	AV	V	38.91	106.35	N/A	N/A
10560.000	37.87	PK	V	19.20	51.05	68.20	17.15
15840.000	45.25	PK	V	22.34	61.57	74.00	12.43
15840.000	33.13	AV	V	22.34	49.45	54.00	4.55
High Channel: 5320 MHz							
5320.000	71.52	PK	H	38.97	104.47	N/A	N/A
5320.000	59.37	AV	H	38.97	92.32	N/A	N/A
5320.000	83.47	PK	V	38.97	116.42	N/A	N/A
5320.000	71.32	AV	V	38.97	104.27	N/A	N/A
5350.000	33.73	PK	V	39.03	66.74	74.00	7.26
5350.000	19.49	AV	V	39.03	52.50	54.00	1.50
10640.000	39.59	PK	V	19.50	53.07	74.00	20.93
10640.000	27.30	AV	V	19.50	40.78	54.00	13.22
15960.000	40.11	PK	V	22.22	56.31	74.00	17.69
15960.000	28.06	AV	V	22.22	44.26	54.00	9.74

802.11ax he20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.000	74.28	PK	H	38.90	107.16	N/A	N/A
5260.000	62.36	AV	H	38.90	95.24	N/A	N/A
5260.000	85.60	PK	V	38.90	118.48	N/A	N/A
5260.000	73.69	AV	V	38.90	106.57	N/A	N/A
5150.000	29.92	PK	V	38.64	62.54	74.00	11.46
5150.000	17.51	AV	V	38.64	50.13	54.00	3.87
10520.000	34.14	PK	V	18.93	47.05	68.20	21.15
15780.000	35.33	PK	V	22.26	51.57	74.00	22.43
15780.000	23.17	AV	V	22.26	39.41	54.00	14.59
Middle Channel: 5280 MHz							
5280.000	75.35	PK	H	38.91	108.24	N/A	N/A
5280.000	63.41	AV	H	38.91	96.30	N/A	N/A
5280.000	86.47	PK	V	38.91	119.36	N/A	N/A
5280.000	74.26	AV	V	38.91	107.15	N/A	N/A
10560.000	35.95	PK	V	19.20	49.13	68.20	19.07
15840.000	45.15	PK	V	22.34	61.47	74.00	12.53
15840.000	33.08	AV	V	22.34	49.40	54.00	4.60
High Channel: 5320 MHz							
5320.000	72.51	PK	H	38.97	105.46	N/A	N/A
5320.000	60.28	AV	H	38.97	93.23	N/A	N/A
5320.000	84.15	PK	V	38.97	117.10	N/A	N/A
5320.000	72.61	AV	V	38.97	105.56	N/A	N/A
5350.000	33.36	PK	V	39.03	66.37	74.00	7.63
5350.000	19.78	AV	V	39.03	52.79	54.00	1.21
10640.000	37.20	PK	V	19.50	50.68	74.00	23.32
10640.000	25.10	AV	V	19.50	38.58	54.00	15.42
15960.000	38.86	PK	V	22.22	55.06	74.00	18.94
15960.000	26.43	AV	V	22.22	42.63	54.00	11.37

802.11n ht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.000	68.64	PK	H	38.91	101.53	N/A	N/A
5270.000	56.25	AV	H	38.91	89.14	N/A	N/A
5270.000	78.09	PK	V	38.91	110.98	N/A	N/A
5270.000	66.37	AV	V	38.91	99.26	N/A	N/A
5150.000	30.65	PK	V	38.64	63.27	74.00	10.73
5150.000	17.25	AV	V	38.64	49.87	54.00	4.13
10540.000	33.47	PK	V	19.07	46.52	68.20	21.68
15810.000	38.45	PK	V	22.28	54.71	74.00	19.29
15810.000	26.23	AV	V	22.28	42.49	54.00	11.51
High Channel: 5310 MHz							
5310.000	69.37	PK	H	38.95	102.30	N/A	N/A
5310.000	57.46	AV	H	38.95	90.39	N/A	N/A
5310.000	78.68	PK	V	38.95	111.61	N/A	N/A
5310.000	66.23	AV	V	38.95	99.16	N/A	N/A
5350.000	34.53	PK	V	39.03	67.54	74.00	6.46
5350.000	19.83	AV	V	39.03	52.84	54.00	1.16
10620.000	35.64	PK	V	19.49	49.11	74.00	24.89
10620.000	23.32	AV	V	19.49	36.79	54.00	17.21
15930.000	37.90	PK	V	22.33	54.21	74.00	19.79
15930.000	25.45	AV	V	22.33	41.76	54.00	12.24

802.11ac vht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.000	69.34	PK	H	38.91	102.23	N/A	N/A
5270.000	57.41	AV	H	38.91	90.30	N/A	N/A
5270.000	77.49	PK	V	38.91	110.38	N/A	N/A
5270.000	65.12	AV	V	38.91	98.01	N/A	N/A
5150.000	31.41	PK	V	38.64	64.03	74.00	9.97
5150.000	17.42	AV	V	38.64	50.04	54.00	3.96
10540.000	32.12	PK	V	19.07	45.17	68.20	23.03
15810.000	39.17	PK	V	22.28	55.43	74.00	18.57
15810.000	27.08	AV	V	22.28	43.34	54.00	10.66
High Channel: 5310 MHz							
5310.000	68.12	PK	H	38.95	101.05	N/A	N/A
5310.000	56.33	AV	H	38.95	89.26	N/A	N/A
5310.000	76.01	PK	V	38.95	108.94	N/A	N/A
5310.000	64.66	AV	V	38.95	97.59	N/A	N/A
5350.000	32.35	PK	V	39.03	65.36	74.00	8.64
5350.000	19.57	AV	V	39.03	52.58	54.00	1.42
10620.000	33.48	PK	V	19.49	46.95	74.00	27.05
10620.000	21.24	AV	V	19.49	34.71	54.00	19.29
15930.000	37.46	PK	V	22.33	53.77	74.00	20.23
15930.000	25.23	AV	V	22.33	41.54	54.00	12.46

802.11ax he40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.000	70.81	PK	H	38.91	103.70	N/A	N/A
5270.000	58.46	AV	H	38.91	91.35	N/A	N/A
5270.000	80.40	PK	V	38.91	113.29	N/A	N/A
5270.000	68.25	AV	V	38.91	101.14	N/A	N/A
5150.000	30.38	PK	V	38.64	63.00	74.00	11.00
5150.000	17.38	AV	V	38.64	50.00	54.00	4.00
10540.000	33.36	PK	V	19.07	46.41	68.20	21.79
15810.000	37.42	PK	V	22.28	53.68	74.00	20.32
15810.000	25.21	AV	V	22.28	41.47	54.00	12.53
High Channel: 5310 MHz							
5310.000	68.47	PK	H	38.95	101.40	N/A	N/A
5310.000	56.23	AV	H	38.95	89.16	N/A	N/A
5310.000	78.30	PK	V	38.95	111.23	N/A	N/A
5310.000	66.87	AV	V	38.95	99.80	N/A	N/A
5350.000	33.42	PK	V	39.03	66.43	74.00	7.57
5350.000	19.82	AV	V	39.03	52.83	54.00	1.17
10620.000	33.01	PK	V	19.49	46.48	74.00	27.52
10620.000	21.05	AV	V	19.49	34.52	54.00	19.48
15930.000	36.87	PK	V	22.33	53.18	74.00	20.82
15930.000	24.44	AV	V	22.33	40.75	54.00	13.25

802.11ac vht80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5290 MHz							
5290.000	65.37	PK	H	38.92	98.27	N/A	N/A
5290.000	54.12	AV	H	38.92	87.02	N/A	N/A
5290.000	71.81	PK	V	38.92	104.71	N/A	N/A
5290.000	60.25	AV	V	38.92	93.15	N/A	N/A
5150.000	31.47	PK	V	38.64	64.09	74.00	9.91
5150.000	17.68	AV	V	38.64	50.30	54.00	3.70
5350.000	32.58	PK	V	39.03	65.59	74.00	8.41
5350.000	19.34	AV	V	39.03	52.35	54.00	1.65
10580.000	33.35	PK	V	19.34	46.67	68.20	21.53
15870.000	38.02	PK	V	22.39	54.39	74.00	19.61
15870.000	26.12	AV	V	22.39	42.49	54.00	11.51

802.11ax he80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5290 MHz							
5290.000	66.29	PK	H	38.92	99.19	N/A	N/A
5290.000	55.46	AV	H	38.92	88.36	N/A	N/A
5290.000	72.84	PK	V	38.92	105.74	N/A	N/A
5290.000	61.37	AV	V	38.92	94.27	N/A	N/A
5150.000	30.32	PK	V	38.64	62.94	74.00	11.06
5150.000	17.71	AV	V	38.64	50.33	54.00	3.67
5350.000	32.54	PK	V	39.03	65.55	74.00	8.45
5350.000	19.40	AV	V	39.03	52.41	54.00	1.59
10580.000	33.24	PK	V	19.34	46.56	68.20	21.64
15870.000	37.62	PK	V	22.39	53.99	74.00	20.01
15870.000	25.31	AV	V	22.39	41.68	54.00	12.32

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

Cross Band 5150-5250 MHz&5250-5350 MHz Band:
802.11ac vht160(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5250 MHz							
5250.000	64.58	PK	H	38.89	97.45	N/A	N/A
5250.000	52.31	AV	H	38.89	85.18	N/A	N/A
5250.000	70.85	PK	V	38.89	103.72	N/A	N/A
5250.000	58.24	AV	V	38.89	91.11	N/A	N/A
5150.000	32.03	PK	V	38.64	64.65	74.00	9.35
5150.000	18.87	AV	V	38.64	51.49	54.00	2.51
5350.000	33.02	PK	V	39.03	66.03	74.00	7.97
5350.000	19.71	AV	V	39.03	52.72	54.00	1.28
10500.000	32.78	PK	V	18.79	45.55	68.20	22.65
15750.000	39.45	PK	V	22.27	55.70	74.00	18.30
15750.000	27.23	AV	V	22.27	43.48	54.00	10.52

802.11ax vht160(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5250 MHz							
5250.000	63.84	PK	H	38.89	96.71	N/A	N/A
5250.000	51.27	AV	H	38.89	84.14	N/A	N/A
5250.000	70.83	PK	V	38.89	103.70	N/A	N/A
5250.000	58.35	AV	V	38.89	91.22	N/A	N/A
5150.000	32.51	PK	V	38.64	65.13	74.00	8.87
5150.000	18.95	AV	V	38.64	51.57	54.00	2.43
5350.000	33.08	PK	V	39.03	66.09	74.00	7.91
5350.000	19.50	AV	V	39.03	52.51	54.00	1.49
10500.000	33.12	PK	V	18.79	45.89	68.20	22.31
15750.000	38.37	PK	V	22.27	54.62	74.00	19.38
15750.000	26.19	AV	V	22.27	42.44	54.00	11.56

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]}) \text{ dB} = 6.02 \text{ dB}$

5725-5850MHz:**802.11a Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.000	76.12	PK	H	39.46	109.56	N/A	N/A
5745.000	66.43	AV	H	39.46	99.87	N/A	N/A
5745.000	88.08	PK	V	39.46	121.52	N/A	N/A
5745.000	78.19	AV	V	39.46	111.63	N/A	N/A
5725.000	62.65	PK	V	39.48	96.11	122.20	26.09
5720.000	50.98	PK	V	39.49	84.45	110.80	26.35
5700.000	38.77	PK	V	39.51	72.26	105.20	32.94
5650.000	32.85	PK	V	39.49	66.32	68.20	1.88
11490.000	48.21	PK	V	20.67	62.86	74.00	11.14
11490.000	35.11	AV	V	20.67	49.76	54.00	4.24
17235.000	45.53	PK	V	26.76	66.27	68.20	1.93
Middle Channel: 5785 MHz							
5785.000	76.81	PK	H	39.44	110.23	N/A	N/A
5785.000	66.42	AV	H	39.44	99.84	N/A	N/A
5785.000	88.26	PK	V	39.44	121.68	N/A	N/A
5785.000	78.34	AV	V	39.44	111.76	N/A	N/A
11570.000	48.24	PK	V	20.83	63.05	74.00	10.95
11570.000	35.12	AV	V	20.83	49.93	54.00	4.07
17355.000	45.12	PK	V	27.74	66.84	68.20	1.36
High Channel: 5825 MHz							
5825.000	75.82	PK	H	39.46	109.26	N/A	N/A
5825.000	65.37	AV	H	39.46	98.81	N/A	N/A
5825.000	87.91	PK	V	39.46	121.35	N/A	N/A
5825.000	77.98	AV	V	39.46	111.42	N/A	N/A
5850.000	53.52	PK	V	39.49	86.99	122.20	35.21
5855.000	48.64	PK	V	39.51	82.13	110.80	28.67
5875.000	37.08	PK	V	39.60	70.66	105.20	34.54
5925.000	32.82	PK	V	39.68	66.48	68.20	1.72
11650.000	48.40	PK	V	21.07	63.45	74.00	10.55
11650.000	35.20	AV	V	21.07	50.25	54.00	3.75
17475.000	41.27	PK	V	28.61	63.86	68.20	4.34

802.11a Chain 1:

Low Channel: 5745MHz

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
5745.000	75.11	PK	H	39.46	108.55	N/A	N/A
5745.000	65.29	AV	H	39.46	98.73	N/A	N/A
5745.000	86.95	PK	V	39.46	120.39	N/A	N/A
5745.000	76.92	AV	V	39.46	110.36	N/A	N/A
5725.000	59.51	PK	V	39.48	92.97	122.20	29.23
5720.000	43.67	PK	V	39.49	77.14	110.80	33.66
5700.000	38.57	PK	V	39.51	72.06	105.20	33.14
5650.000	32.51	PK	V	39.49	65.98	68.20	2.22
11490.000	44.56	PK	V	20.67	59.21	74.00	14.79
11490.000	31.28	AV	V	20.67	45.93	54.00	8.07
17235.000	43.26	PK	V	26.76	64.00	68.20	4.20
Middle Channel: 5785 MHz							
5785.000	74.42	PK	H	39.44	107.84	N/A	N/A
5785.000	64.16	AV	H	39.44	97.58	N/A	N/A
5785.000	86.68	PK	V	39.44	120.10	N/A	N/A
5785.000	76.34	AV	V	39.44	109.76	N/A	N/A
11570.000	43.62	PK	V	20.83	58.43	74.00	15.57
11570.000	30.31	AV	V	20.83	45.12	54.00	8.88
17355.000	44.87	PK	V	27.74	66.59	68.20	1.61
High Channel: 5825 MHz							
5825.000	74.15	PK	H	39.46	107.59	N/A	N/A
5825.000	64.28	AV	H	39.46	97.72	N/A	N/A
5825.000	86.43	PK	V	39.46	119.87	N/A	N/A
5825.000	76.44	AV	V	39.46	109.88	N/A	N/A
5850.000	44.41	PK	V	39.49	77.88	122.20	44.32
5855.000	40.60	PK	V	39.51	74.09	110.80	36.71
5875.000	35.07	PK	V	39.60	68.65	105.20	36.55
5925.000	32.69	PK	V	39.68	66.35	68.20	1.85
11650.000	43.95	PK	V	21.07	59.00	74.00	15.00
11650.000	30.48	AV	V	21.07	45.53	54.00	8.47
17475.000	43.71	PK	V	28.61	66.30	68.20	1.90

802.11n ht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.000	76.19	PK	H	39.46	109.63	N/A	N/A
5745.000	64.58	AV	H	39.46	98.02	N/A	N/A
5745.000	86.06	PK	V	39.46	119.50	N/A	N/A
5745.000	74.61	AV	V	39.46	108.05	N/A	N/A
5725.000	56.54	PK	V	39.48	90.00	122.20	32.20
5720.000	44.96	PK	V	39.49	78.43	110.80	32.37
5700.000	34.07	PK	V	39.51	67.56	105.20	37.64
5650.000	32.41	PK	V	39.49	65.88	68.20	2.32
11490.000	48.18	PK	V	20.67	62.83	74.00	11.17
11490.000	35.09	AV	V	20.67	49.74	54.00	4.26
17235.000	45.18	PK	V	26.76	65.92	68.20	2.28
Middle Channel: 5785 MHz							
5785.000	75.75	PK	H	39.44	109.17	N/A	N/A
5785.000	63.46	AV	H	39.44	96.88	N/A	N/A
5785.000	85.35	PK	V	39.44	118.77	N/A	N/A
5785.000	73.21	AV	V	39.44	106.63	N/A	N/A
11570.000	45.75	PK	V	20.83	60.56	74.00	13.44
11570.000	32.38	AV	V	20.83	47.19	54.00	6.81
17355.000	44.77	PK	V	27.74	66.49	68.20	1.71
High Channel: 5825 MHz							
5825.000	76.10	PK	H	39.46	109.54	N/A	N/A
5825.000	64.38	AV	H	39.46	97.82	N/A	N/A
5825.000	86.07	PK	V	39.46	119.51	N/A	N/A
5825.000	74.22	AV	V	39.46	107.66	N/A	N/A
5850.000	45.39	PK	V	39.49	78.86	122.20	43.34
5855.000	40.69	PK	V	39.51	74.18	110.80	36.62
5875.000	34.07	PK	V	39.60	67.65	105.20	37.55
5925.000	32.69	PK	V	39.68	66.35	68.20	1.85
11650.000	46.74	PK	V	21.07	61.79	74.00	12.21
11650.000	33.37	AV	V	21.07	48.42	54.00	5.58
17475.000	43.68	PK	V	28.61	66.27	68.20	1.93

802.11ac vht20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.000	76.81	PK	H	39.46	110.25	N/A	N/A
5745.000	64.26	AV	H	39.46	97.70	N/A	N/A
5745.000	88.17	PK	V	39.46	121.61	N/A	N/A
5745.000	76.39	AV	V	39.46	109.83	N/A	N/A
5725.000	59.69	PK	V	39.48	93.15	122.20	29.05
5720.000	47.44	PK	V	39.49	80.91	110.80	29.89
5700.000	37.37	PK	V	39.51	70.86	105.20	34.34
5650.000	32.85	PK	V	39.49	66.32	68.20	1.88
11490.000	48.21	PK	V	20.67	62.86	74.00	11.14
11490.000	35.11	AV	V	20.67	49.76	54.00	4.24
17235.000	44.46	PK	V	26.76	65.20	68.20	3.00
Middle Channel: 5785 MHz							
5785.000	75.78	PK	H	39.44	109.20	N/A	N/A
5785.000	63.21	AV	H	39.44	96.63	N/A	N/A
5785.000	87.89	PK	V	39.44	121.31	N/A	N/A
5785.000	75.38	AV	V	39.44	108.80	N/A	N/A
11570.000	48.60	PK	V	20.83	63.41	74.00	10.59
11570.000	35.30	AV	V	20.83	50.11	54.00	3.89
17355.000	43.88	PK	V	27.74	65.60	68.20	2.60
High Channel: 5825 MHz							
5825.000	75.24	PK	H	39.46	108.68	N/A	N/A
5825.000	63.46	AV	H	39.46	96.90	N/A	N/A
5825.000	87.53	PK	V	39.46	120.97	N/A	N/A
5825.000	76.90	AV	V	39.46	110.34	N/A	N/A
5850.000	49.04	PK	V	39.49	82.51	122.20	39.69
5855.000	41.23	PK	V	39.51	74.72	110.80	36.08
5875.000	35.46	PK	V	39.60	69.04	105.20	36.16
5925.000	32.29	PK	V	39.68	65.95	68.20	2.25
11650.000	49.21	PK	V	21.07	64.26	74.00	9.74
11650.000	36.11	AV	V	21.07	51.16	54.00	2.84
17475.000	43.75	PK	V	28.61	66.34	68.20	1.86

802.11ax he20(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.000	76.18	PK	H	39.46	109.62	N/A	N/A
5745.000	64.34	AV	H	39.46	97.78	N/A	N/A
5745.000	88.58	PK	V	39.46	122.02	N/A	N/A
5745.000	76.23	AV	V	39.46	109.67	N/A	N/A
5725.000	59.24	PK	V	39.48	92.70	122.20	29.50
5720.000	56.05	PK	V	39.49	89.52	110.80	21.28
5700.000	36.66	PK	V	39.51	70.15	105.20	35.05
5650.000	31.96	PK	V	39.49	65.43	68.20	2.77
11490.000	48.55	PK	V	20.67	63.20	74.00	10.80
11490.000	35.28	AV	V	20.67	49.93	54.00	4.07
17235.000	44.43	PK	V	26.76	65.17	68.20	3.03
Middle Channel: 5785 MHz							
5785.000	76.40	PK	H	39.44	109.82	N/A	N/A
5785.000	64.28	AV	H	39.44	97.70	N/A	N/A
5785.000	87.60	PK	V	39.44	121.02	N/A	N/A
5785.000	75.23	AV	V	39.44	108.65	N/A	N/A
11570.000	47.21	PK	V	20.83	62.02	74.00	11.98
11570.000	34.11	AV	V	20.83	48.92	54.00	5.08
17355.000	43.24	PK	V	27.74	64.96	68.20	3.24
High Channel: 5825 MHz							
5825.000	75.39	PK	H	39.46	108.83	N/A	N/A
5825.000	63.12	AV	H	39.46	96.56	N/A	N/A
5825.000	85.09	PK	V	39.46	118.53	N/A	N/A
5825.000	73.90	AV	V	39.46	107.34	N/A	N/A
5850.000	49.96	PK	V	39.49	83.43	122.20	38.77
5855.000	38.55	PK	V	39.51	72.04	110.80	38.76
5875.000	34.52	PK	V	39.60	68.10	105.20	37.10
5925.000	32.69	PK	V	39.68	66.35	68.20	1.85
11650.000	46.96	PK	V	21.07	62.01	74.00	11.99
11650.000	33.48	AV	V	21.07	48.53	54.00	5.47
17475.000	43.86	PK	V	28.61	66.45	68.20	1.75

802.11n ht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.000	71.63	PK	H	39.45	105.06	N/A	N/A
5755.000	59.28	AV	H	39.45	92.71	N/A	N/A
5755.000	84.68	PK	V	39.45	118.11	N/A	N/A
5755.000	72.46	AV	V	39.45	105.89	N/A	N/A
5725.000	51.12	PK	V	39.48	84.58	122.20	37.62
5720.000	48.22	PK	V	39.49	81.69	110.80	29.11
5700.000	37.05	PK	V	39.51	70.54	105.20	34.66
5650.000	33.07	PK	V	39.49	66.54	68.20	1.66
11510.000	44.36	PK	V	20.67	59.01	74.00	14.99
11510.000	31.18	AV	V	20.67	45.83	54.00	8.17
17265.000	42.11	PK	V	26.94	63.03	68.20	5.17
High Channel: 5795 MHz							
5795.000	70.34	PK	H	39.43	103.75	N/A	N/A
5795.000	58.47	AV	H	39.43	91.88	N/A	N/A
5795.000	84.99	PK	V	39.43	118.40	N/A	N/A
5795.000	72.88	AV	V	39.43	106.29	N/A	N/A
5850.000	39.95	PK	V	39.49	73.42	122.20	48.78
5855.000	39.58	PK	V	39.51	73.07	110.80	37.73
5875.000	35.11	PK	V	39.60	68.69	105.20	36.51
5925.000	33.34	PK	V	39.68	67.00	68.20	1.20
11590.000	45.19	PK	V	20.88	60.05	74.00	13.95
11590.000	32.10	AV	V	20.88	46.96	54.00	7.04
17385.000	42.48	PK	V	28.07	64.53	68.20	3.67

802.11ac vht40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.000	72.46	PK	H	39.45	105.89	N/A	N/A
5755.000	61.39	AV	H	39.45	94.82	N/A	N/A
5755.000	83.54	PK	V	39.45	116.97	N/A	N/A
5755.000	72.85	AV	V	39.45	106.28	N/A	N/A
5725.000	54.34	PK	V	39.48	87.80	122.20	34.40
5720.000	51.22	PK	V	39.49	84.69	110.80	26.11
5700.000	40.13	PK	V	39.51	73.62	105.20	31.58
5650.000	32.78	PK	V	39.49	66.25	68.20	1.95
11510.000	45.18	PK	V	20.67	59.83	74.00	14.17
11510.000	32.09	AV	V	20.67	46.74	54.00	7.26
17265.000	43.16	PK	V	26.94	64.08	68.20	4.12
High Channel: 5795 MHz							
5795.000	71.36	PK	H	39.43	104.77	N/A	N/A
5795.000	61.47	AV	H	39.43	94.88	N/A	N/A
5795.000	82.94	PK	V	39.43	116.35	N/A	N/A
5795.000	72.07	AV	V	39.43	105.48	N/A	N/A
5850.000	38.68	PK	V	39.49	72.15	122.20	50.05
5855.000	38.88	PK	V	39.51	72.37	110.80	38.43
5875.000	35.13	PK	V	39.60	68.71	105.20	36.49
5925.000	32.84	PK	V	39.68	66.50	68.20	1.70
11590.000	45.59	PK	V	20.88	60.45	74.00	13.55
11590.000	32.30	AV	V	20.88	47.16	54.00	6.84
17385.000	42.19	PK	V	28.07	64.24	68.20	3.96

802.11ax he40(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.000	72.85	PK	H	39.45	106.28	N/A	N/A
5755.000	60.23	AV	H	39.45	93.66	N/A	N/A
5755.000	84.54	PK	V	39.45	117.97	N/A	N/A
5755.000	72.48	AV	V	39.45	105.91	N/A	N/A
5725.000	51.26	PK	V	39.48	84.72	122.20	37.48
5720.000	48.53	PK	V	39.49	82.00	110.80	28.80
5700.000	37.45	PK	V	39.51	70.94	105.20	34.26
5650.000	33.11	PK	V	39.49	66.58	68.20	1.62
11510.000	46.63	PK	V	20.67	61.28	74.00	12.72
11510.000	33.32	AV	V	20.67	47.97	54.00	6.03
17265.000	43.92	PK	V	26.94	64.84	68.20	3.36
High Channel: 5795 MHz							
5795.000	74.29	PK	H	39.43	107.70	N/A	N/A
5795.000	62.34	AV	H	39.43	95.75	N/A	N/A
5795.000	85.37	PK	V	39.43	118.78	N/A	N/A
5795.000	73.40	AV	V	39.43	106.81	N/A	N/A
5850.000	39.14	PK	V	39.49	72.61	122.20	49.59
5855.000	37.89	PK	V	39.51	71.38	110.80	39.42
5875.000	36.67	PK	V	39.60	70.25	105.20	34.95
5925.000	32.81	PK	V	39.68	66.47	68.20	1.73
11590.000	45.67	PK	V	20.88	60.53	74.00	13.47
11590.000	32.34	AV	V	20.88	47.20	54.00	6.80
17385.000	43.24	PK	V	28.07	65.29	68.20	2.91

802.11ac vht80(2TX Non-beamforming mode was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5775 MHz							
5775.000	65.46	PK	H	39.44	98.88	N/A	N/A
5775.000	53.11	AV	H	39.44	86.53	N/A	N/A
5775.000	77.86	PK	V	39.44	111.28	N/A	N/A
5775.000	65.03	AV	V	39.44	98.45	N/A	N/A
5725.000	38.18	PK	V	39.48	71.64	122.20	50.56
5720.000	37.49	PK	V	39.49	70.96	110.80	39.84
5700.000	36.26	PK	V	39.51	69.75	105.20	35.45
5650.000	33.45	PK	V	39.49	66.92	68.20	1.28
5850.000	36.13	PK	V	39.49	69.60	122.20	52.60
5855.000	36.32	PK	V	39.51	69.81	110.80	40.99
5875.000	35.19	PK	V	39.60	68.77	105.20	36.43
5925.000	33.27	PK	V	39.68	66.93	68.20	1.27
11550.000	34.67	PK	V	20.78	49.43	74.00	24.57
11550.000	22.34	AV	V	20.78	37.10	54.00	16.90
17325.000	34.61	PK	V	27.41	56.00	68.20	12.20

802.11ax he80(2TX Non-beamforming mode was the worst):

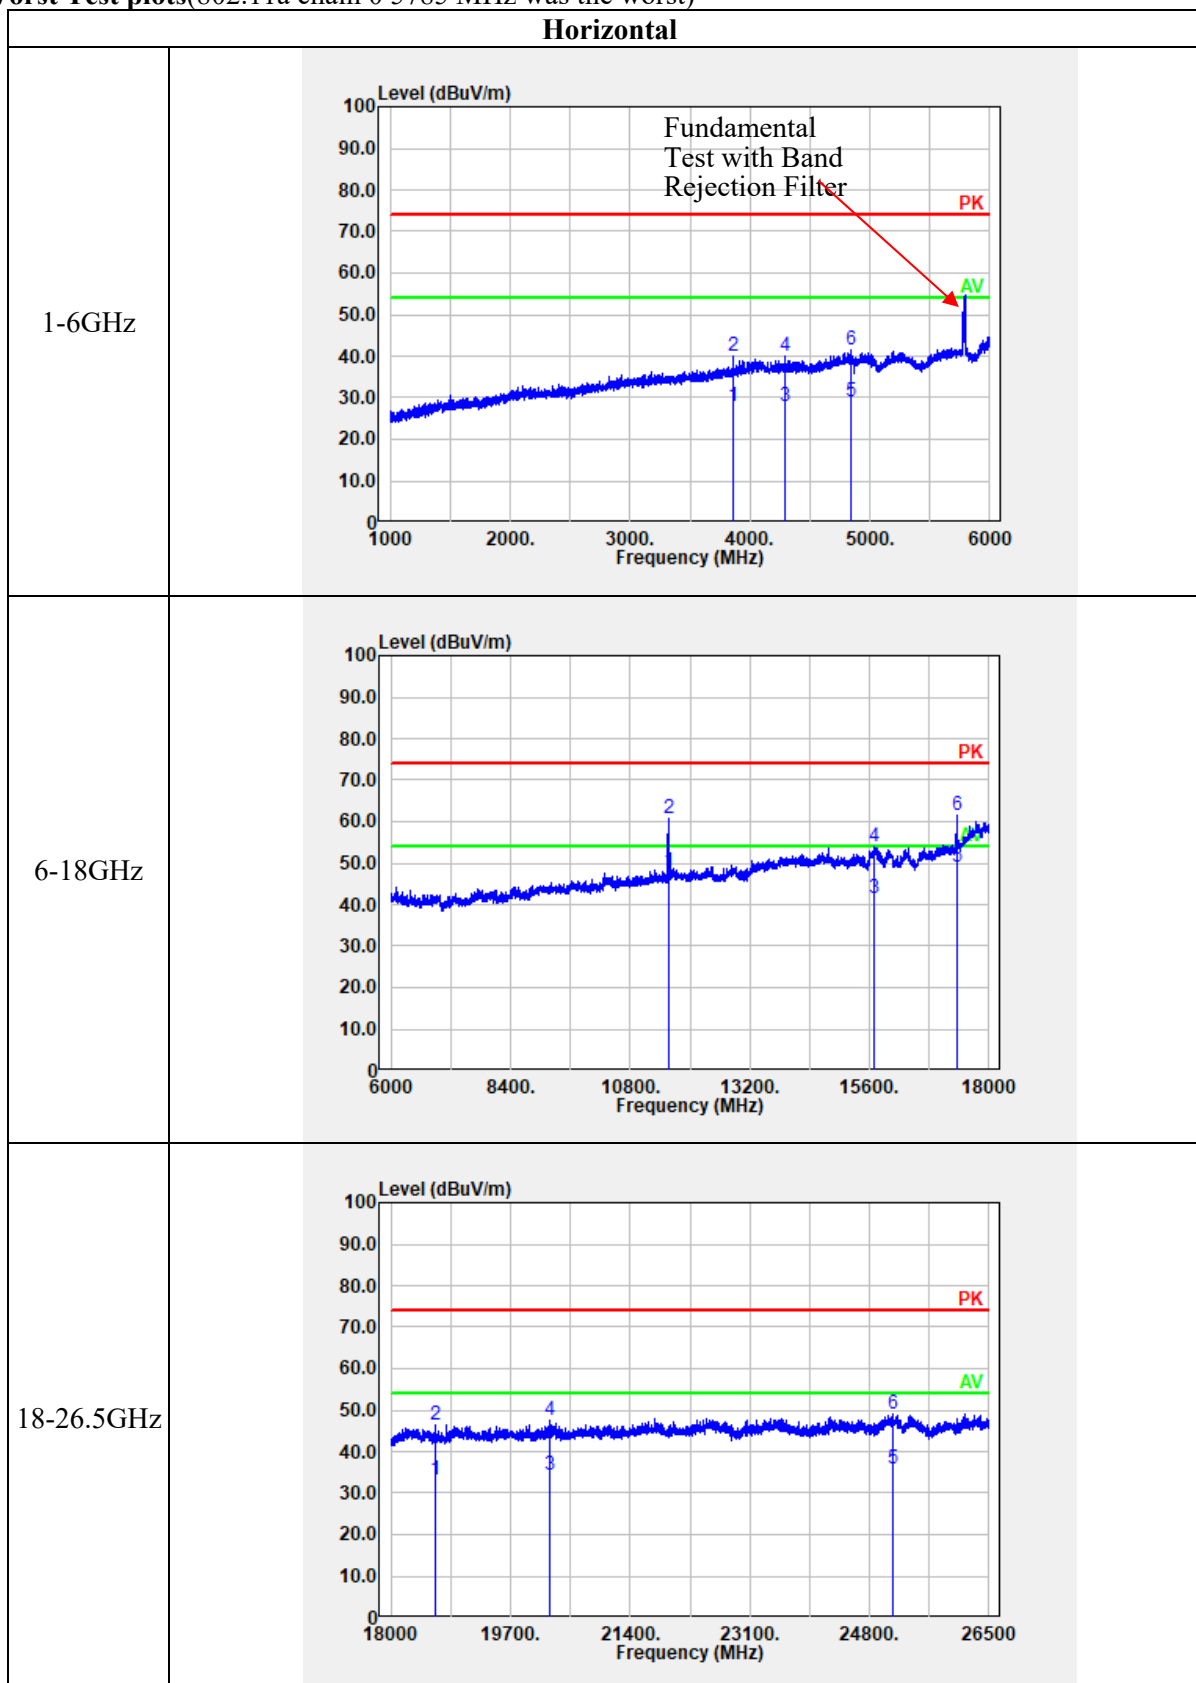
Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5775 MHz							
5775.000	66.28	PK	H	39.44	99.70	N/A	N/A
5775.000	54.17	AV	H	39.44	87.59	N/A	N/A
5775.000	78.79	PK	V	39.44	112.21	N/A	N/A
5775.000	66.36	AV	V	39.44	99.78	N/A	N/A
5725.000	38.66	PK	V	39.48	72.12	122.20	50.08
5720.000	38.22	PK	V	39.49	71.69	110.80	39.11
5700.000	36.07	PK	V	39.51	69.56	105.20	35.64
5650.000	33.12	PK	V	39.49	66.59	68.20	1.61
5850.000	36.61	PK	V	39.49	70.08	122.20	52.12
5855.000	36.49	PK	V	39.51	69.98	110.80	40.82
5875.000	34.33	PK	V	39.60	67.91	105.20	37.29
5925.000	33.27	PK	V	39.68	66.93	68.20	1.27
11550.000	35.30	PK	V	20.78	50.06	74.00	23.94
11550.000	23.15	AV	V	20.78	37.91	54.00	16.09
17325.000	35.58	PK	V	27.41	56.97	68.20	11.23

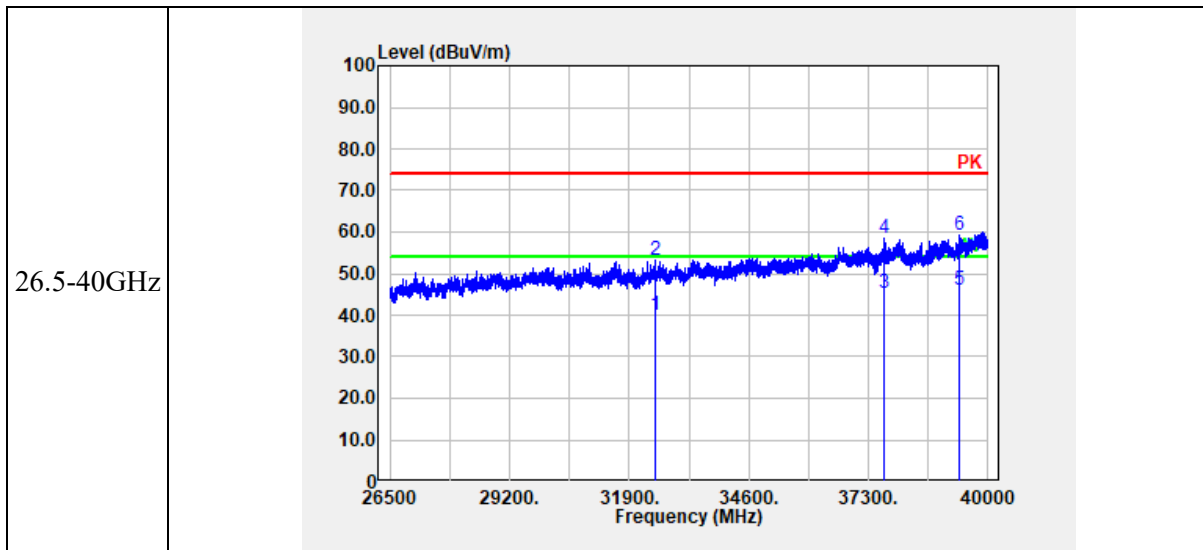
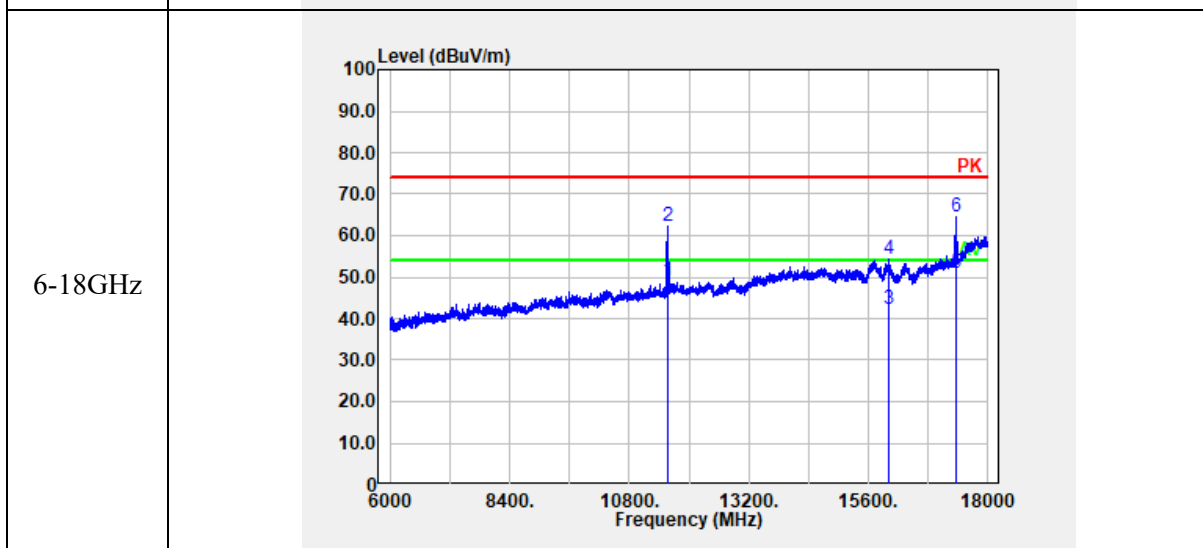
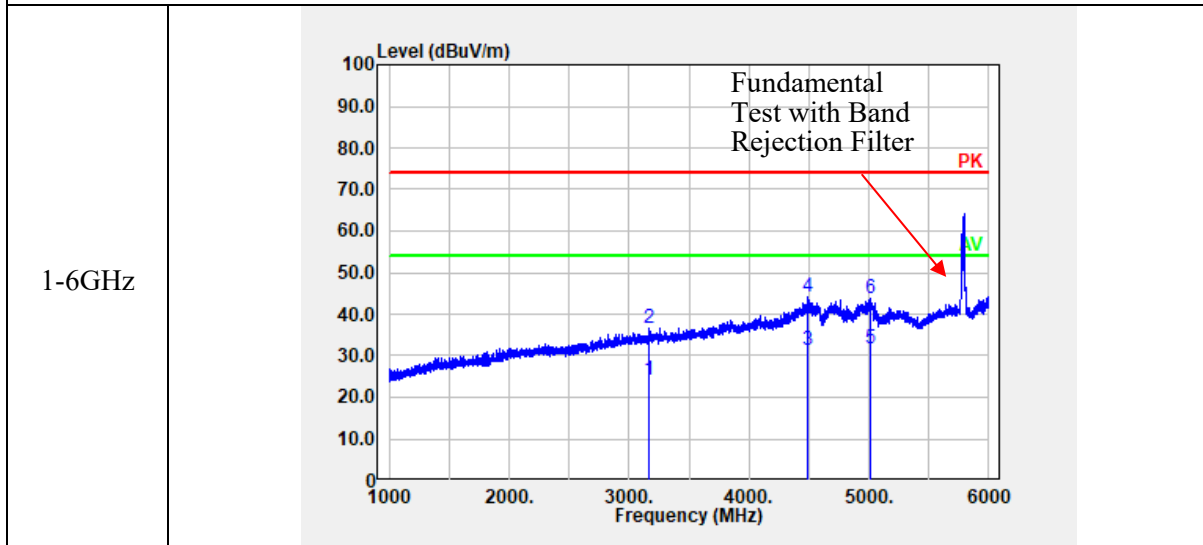
Note:

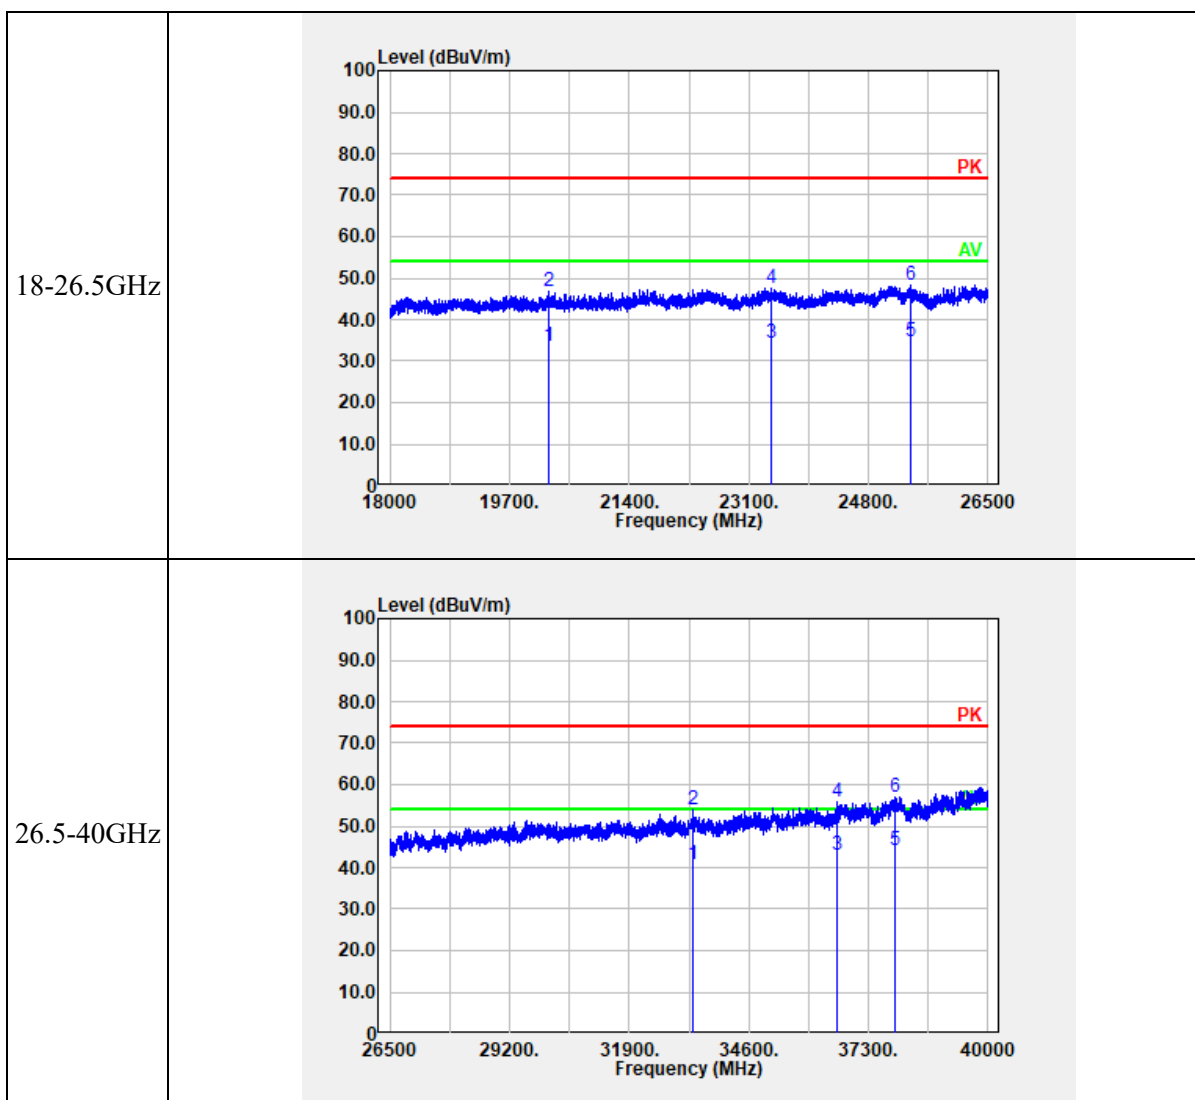
Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]}) \text{ dB} = 6.02 \text{ dB}$

Worst Test plots(802.11a chain 0 5785 MHz was the worst)



**Vertical**



4.3 Emission Bandwidth:

Serial Number:	21EC	Test Date:	2023/03/10~2023/03/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.6	Relative Humidity: (%)	37~39	ATM Pressure: (kPa)	101.7-101.8
----------------------	------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250 MHz:**

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	27.52	17.60
	5200	37.73	18.08
	5240	25.36	17.44
802.11n ht20	5180	21.92	18.08
	5200	22.00	18.24
	5240	21.92	18.08
802.11n ht40	5190	39.84	36.48
	5230	39.84	36.48
802.11ac vht20	5180	22.00	18.32
	5200	22.16	18.40
	5240	22.08	18.32
802.11ac vht40	5190	39.84	36.64
	5230	39.68	36.64
802.11ac vht80	5210	82.24	75.84
802.11ax he20	5180	21.68	19.28
	5200	21.68	19.28
	5240	21.68	19.20
802.11ax he40	5190	39.68	37.60
	5230	39.68	37.76
802.11ax he80	5210	81.92	77.44
Note: Test only was performed at Chain 0. The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.			

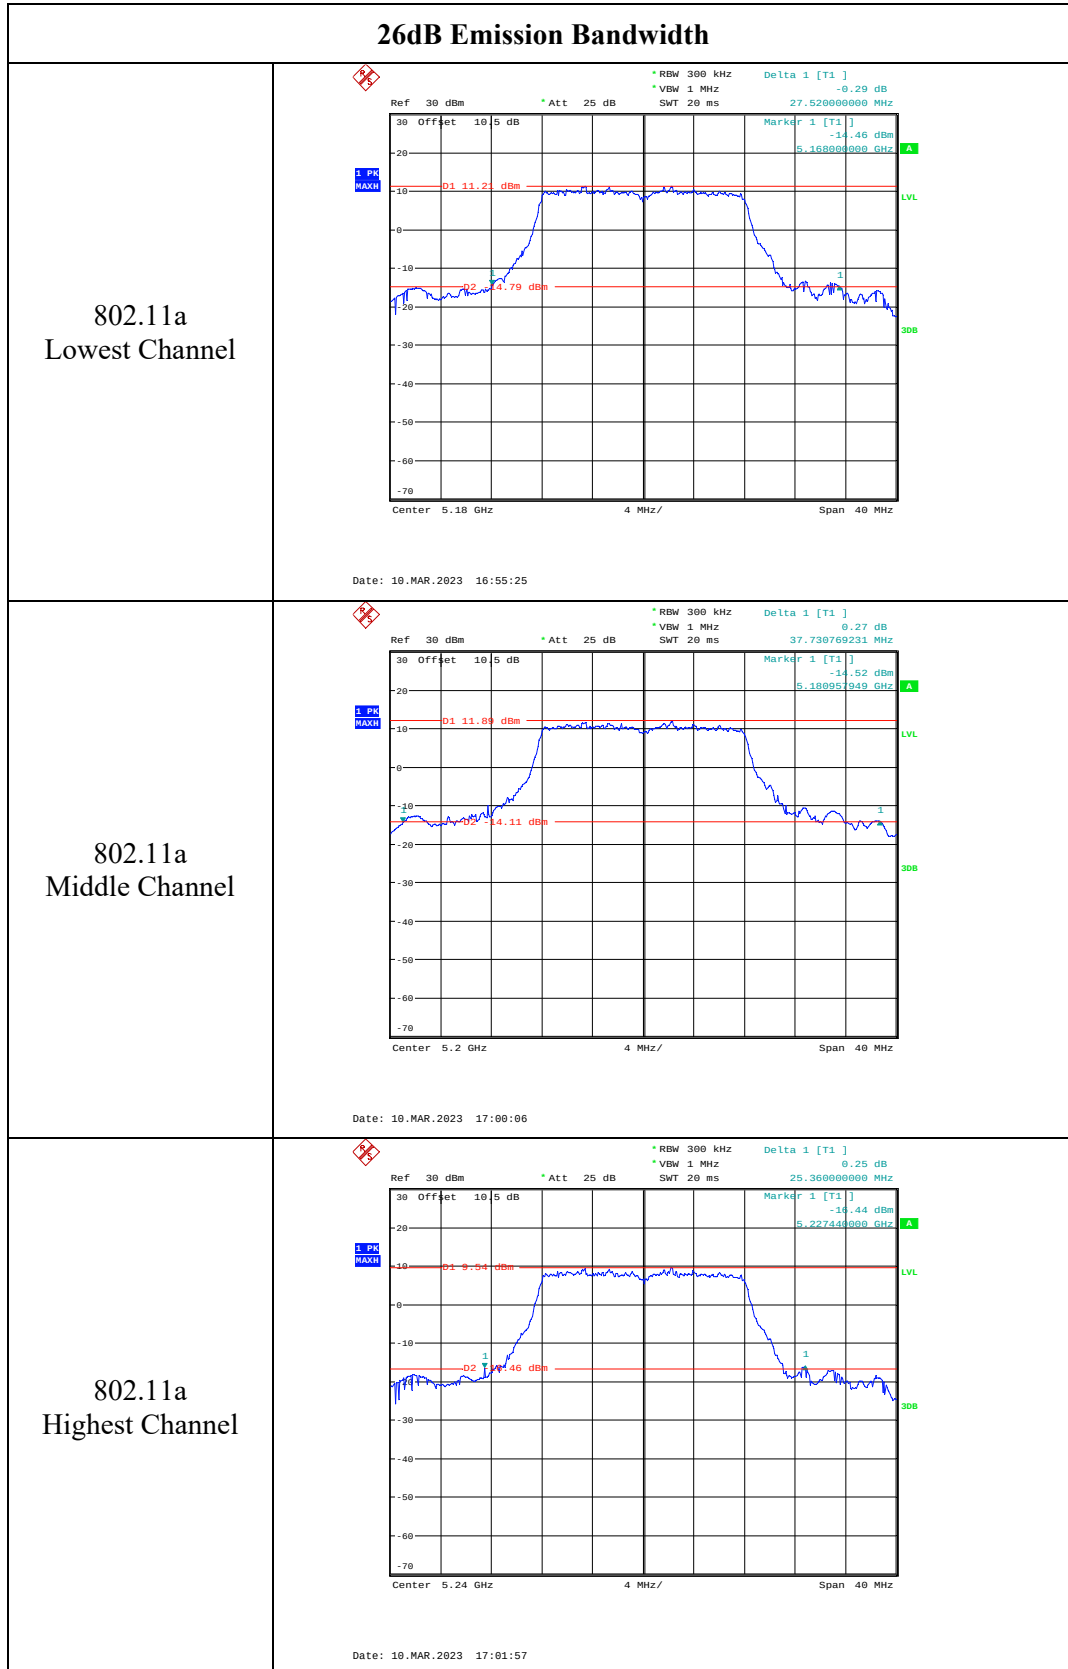
5250-5350 MHz and Cross Band 5150-5250 MHz&5250-5350 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260	21.68	17.28
	5280	26.96	17.44
	5320	21.60	17.20
802.11n ht20	5260	21.84	18.08
	5280	21.92	18.08
	5320	21.92	18.08
802.11n ht40	5270	40.00	36.64
	5310	39.84	36.64
802.11ac vht20	5260	22.08	18.24
	5280	22.16	18.32
	5320	22.16	18.32
802.11ac vht40	5270	39.93	36.48
	5310	39.68	36.48
802.11ac vht80	5290	82.24	76.16
802.11ax he20	5260	21.76	19.20
	5280	21.76	19.28
	5320	21.60	19.20
802.11ax he40	5270	39.68	37.60
	5310	39.84	37.76
802.11ax he80	5290	81.92	77.44
802.11ac vht160	5250	163.84	155.52
802.11ax he160	5250	162.56	156.80
Note: Test only was performed at Chain 0.			

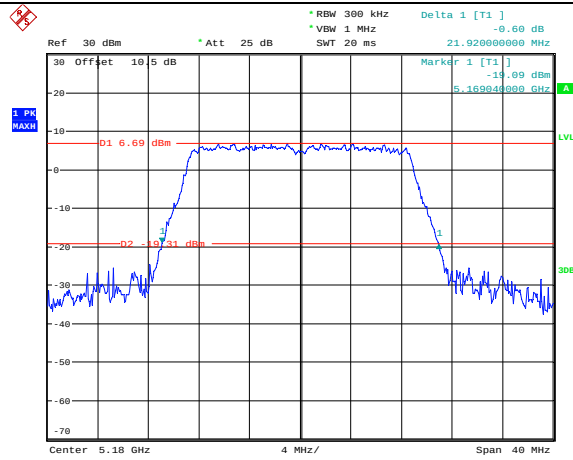
5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.40	19.20
	5785	16.40	19.12
	5825	16.40	19.52
802.11n ht20	5745	17.68	18.32
	5785	17.68	18.32
	5825	17.68	18.24
802.11n ht40	5755	36.16	36.48
	5795	36.32	36.48
802.11ac vht20	5745	17.68	18.48
	5785	17.68	18.56
	5825	17.68	18.56
802.11ac vht40	5755	36.32	36.64
	5795	36.32	36.64
802.11ac vht80	5775	76.48	76.16
802.11ax he20	5745	18.96	19.28
	5785	18.96	19.36
	5825	18.96	19.28
802.11ax he40	5755	37.92	37.76
	5795	37.60	37.92
802.11ax he80	5775	77.44	77.12
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz Test only was performed at Chain 0. The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.			

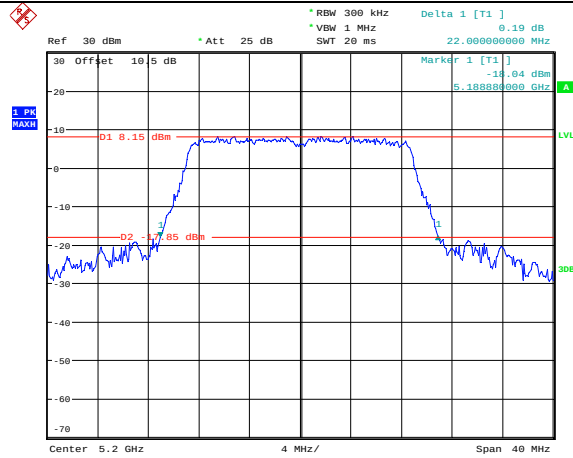
5150-5250MHz:



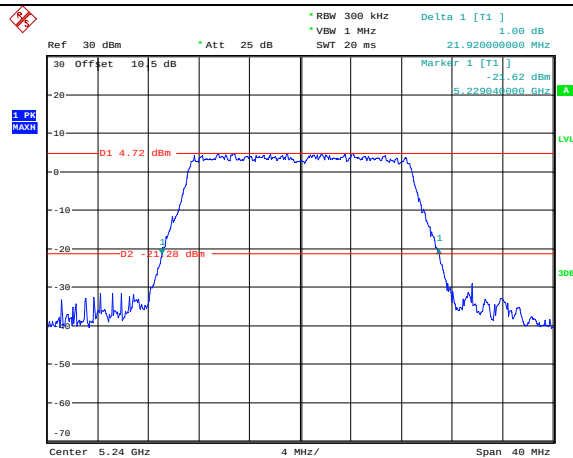
26dB Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 11.MAR.2023 14:36:27

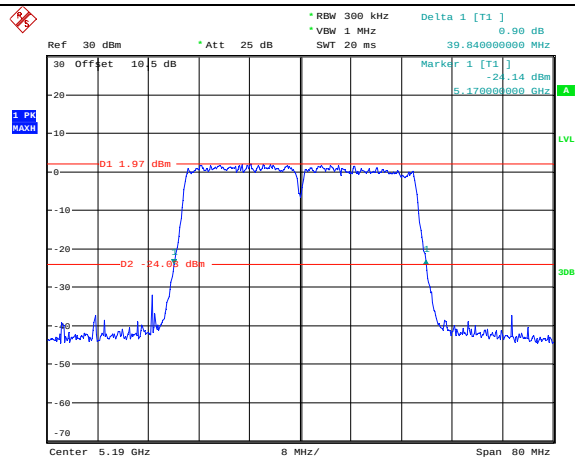
802.11n ht20
Middle Channel

Date: 11.MAR.2023 14:41:27

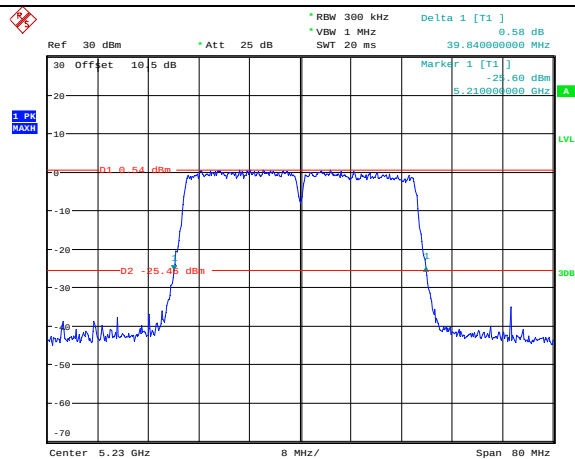
802.11n ht20
Highest Channel

Date: 11.MAR.2023 14:38:51

26dB Emission Bandwidth

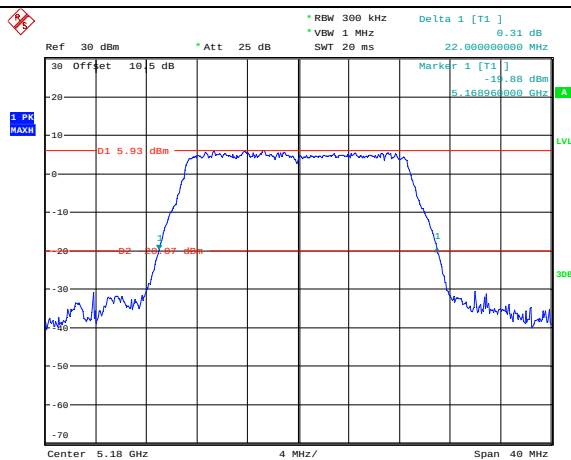
802.11n ht40
Lowest Channel

Date: 11.MAR.2023 14:54:52

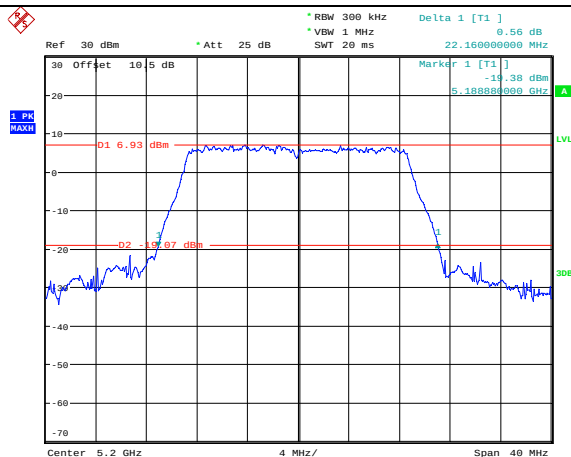
802.11n ht40
Highest Channel

Date: 11.MAR.2023 14:54:04

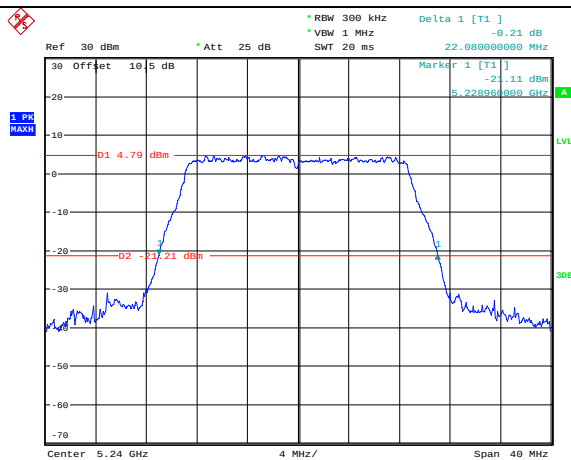
26dB Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.MAR.2023 14:46:17

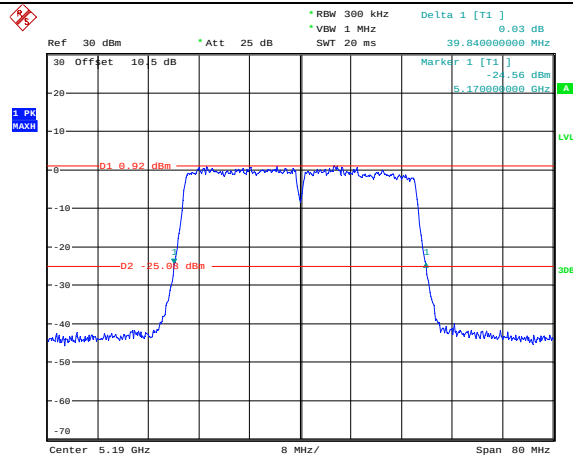
802.11ac vht20
Middle Channel

Date: 11.MAR.2023 14:45:09

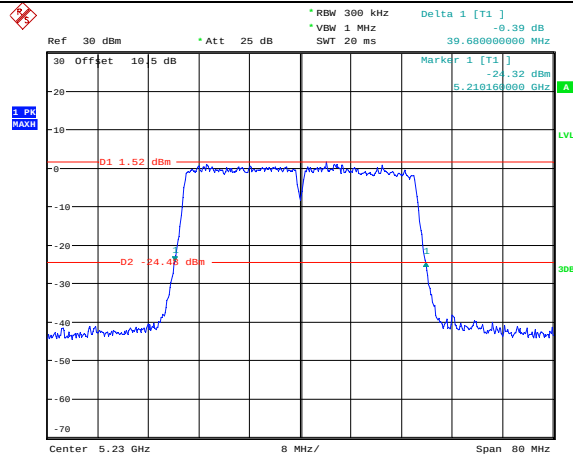
802.11ac vht20
Highest Channel

Date: 11.MAR.2023 14:48:01

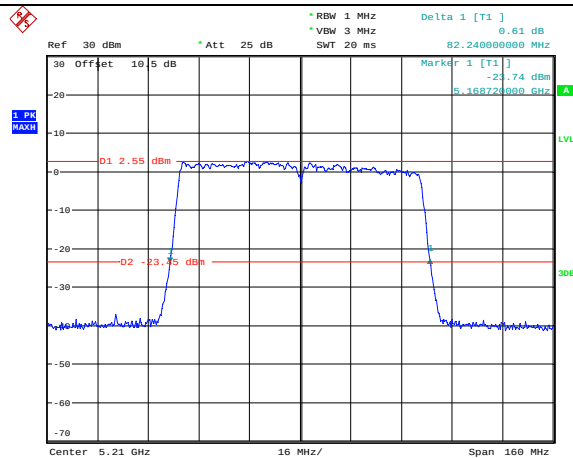
26dB Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.MAR.2023 14:51:06

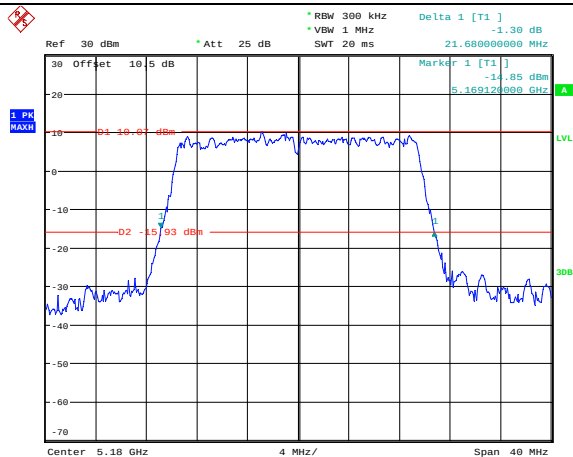
802.11ac vht40
Highest Channel

Date: 11.MAR.2023 14:52:10

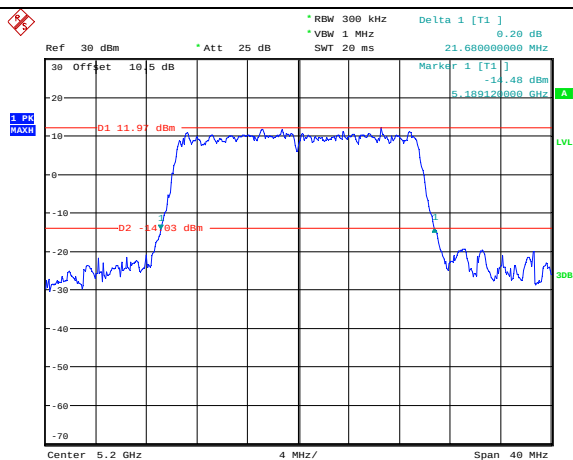
802.11ac vht80
Middle Channel

Date: 11.MAR.2023 14:57:35

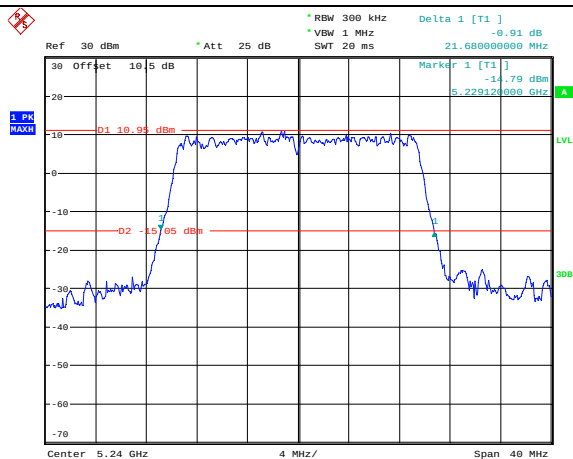
26dB Emission Bandwidth

802.11ax he20
Lowest Channel

Date: 11.MAR.2023 18:27:33

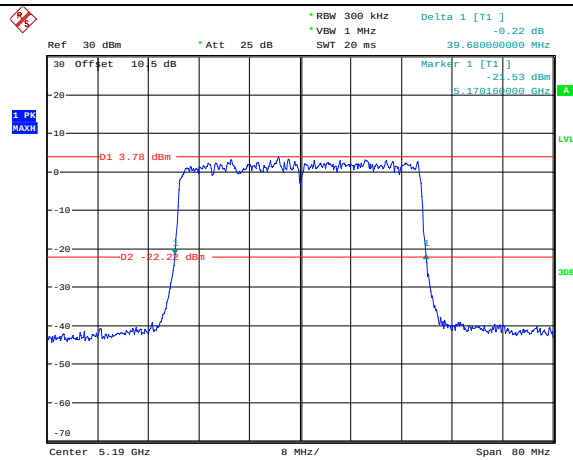
802.11ax he20
Middle Channel

Date: 11.MAR.2023 18:28:26

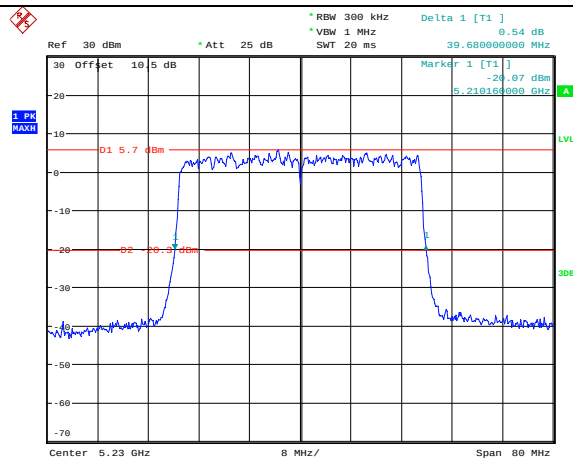
802.11ax he20
Highest Channel

Date: 11.MAR.2023 18:30:21

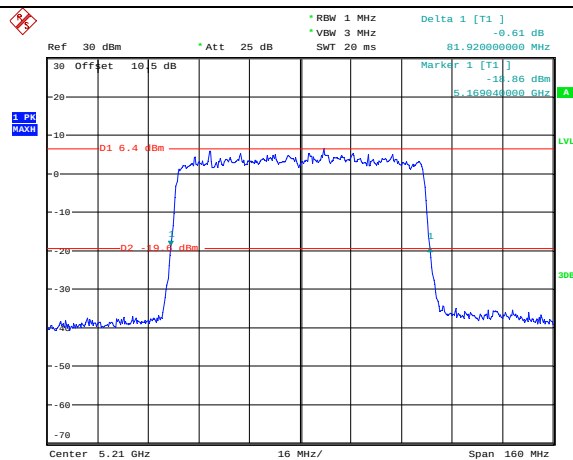
26dB Emission Bandwidth

802.11ax he40
Lowest Channel

Date: 11.MAR.2023 18:31:23

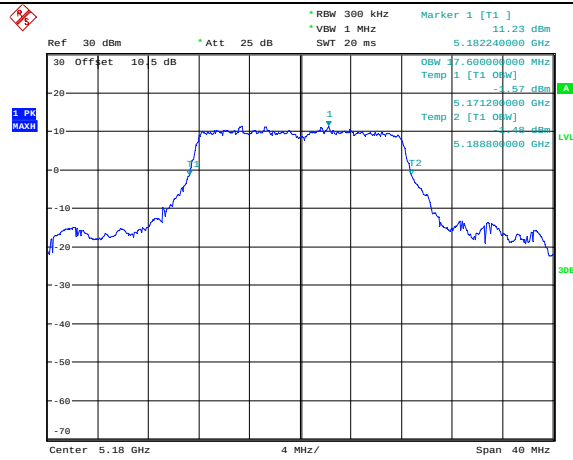
802.11ax he40
Highest Channel

Date: 11.MAR.2023 18:32:43

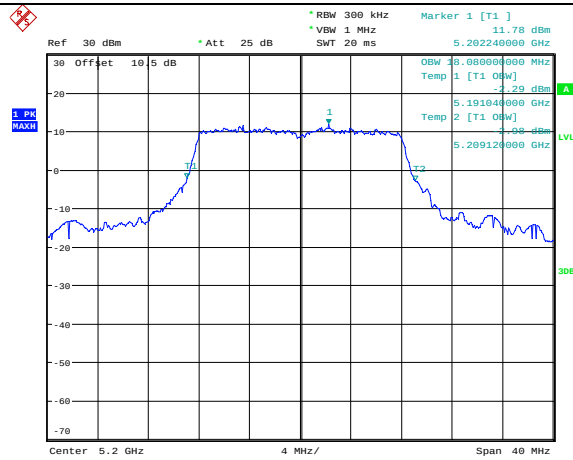
802.11ax he80
Middle Channel

Date: 11.MAR.2023 18:34:00

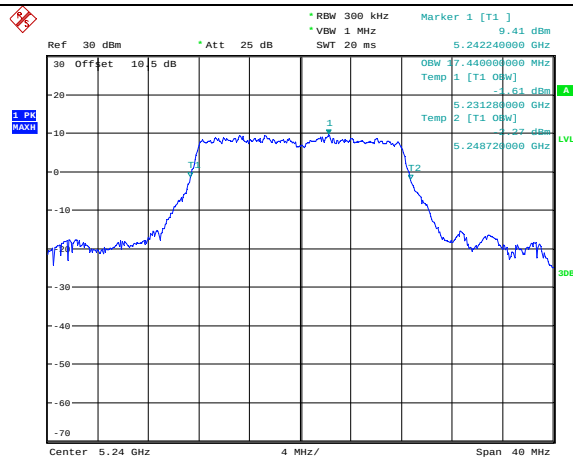
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 10.MAR.2023 16:54:02

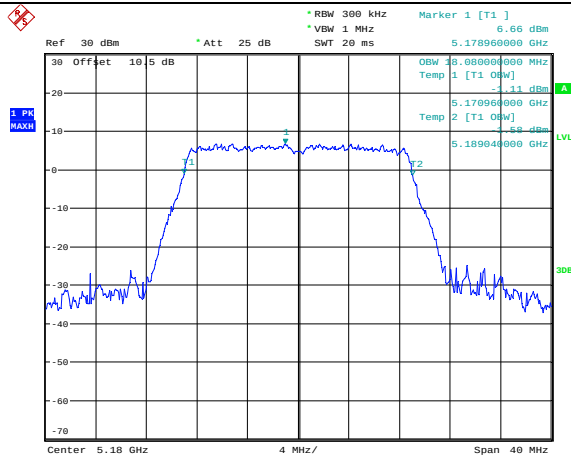
802.11a
Middle Channel

Date: 10.MAR.2023 16:57:25

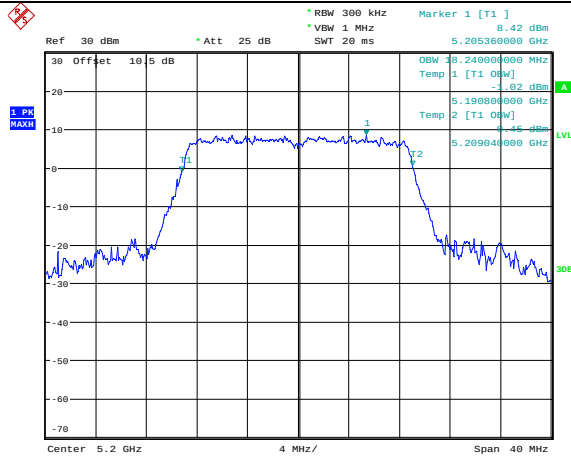
802.11a
Highest Channel

Date: 10.MAR.2023 17:02:42

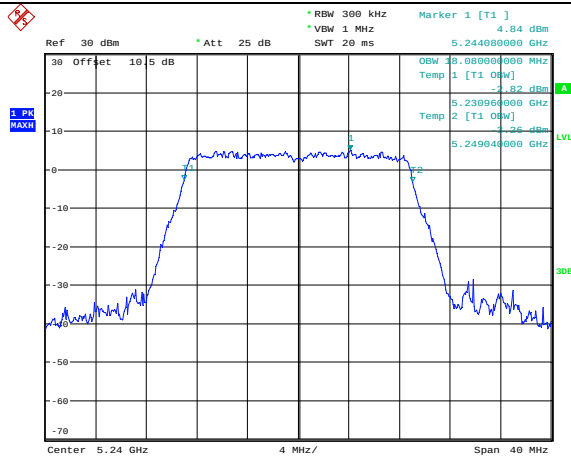
99% Emission Bandwidth

802.11n ht20
Lowest Channel

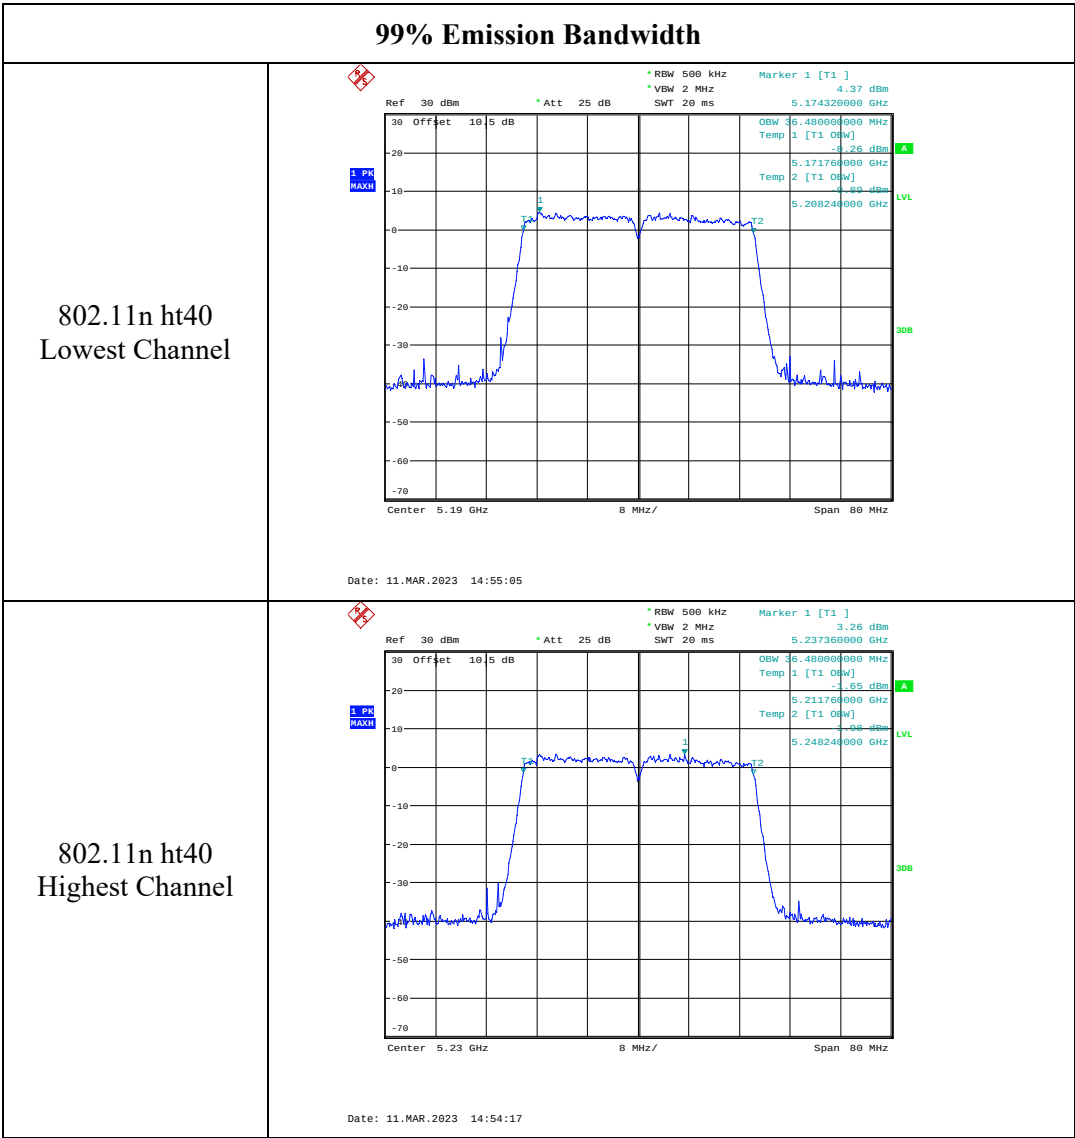
Date: 11.MAR.2023 14:35:23

802.11n ht20
Middle Channel

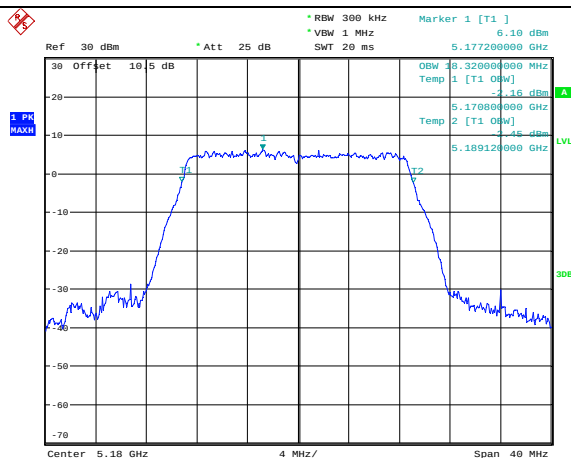
Date: 11.MAR.2023 14:42:15

802.11n ht20
Highest Channel

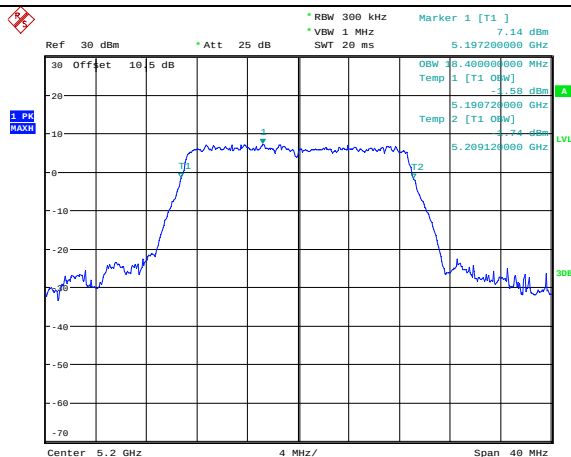
Date: 11.MAR.2023 14:37:48



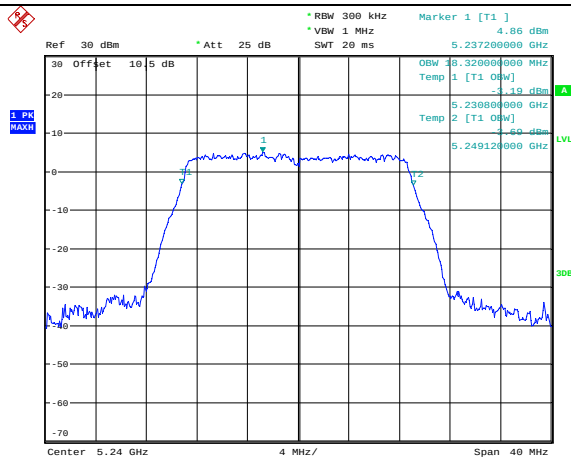
99% Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.MAR.2023 14:47:10

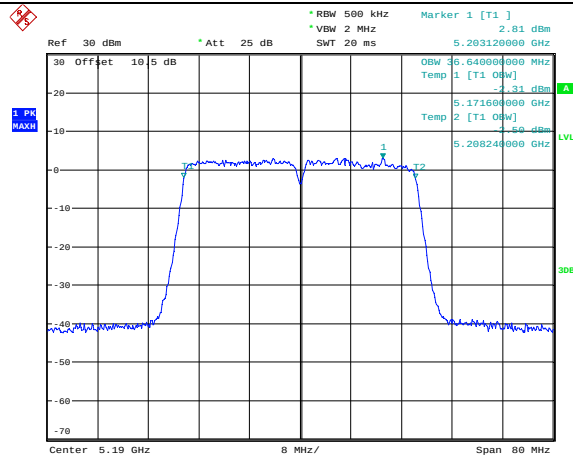
802.11ac vht20
Middle Channel

Date: 11.MAR.2023 14:44:18

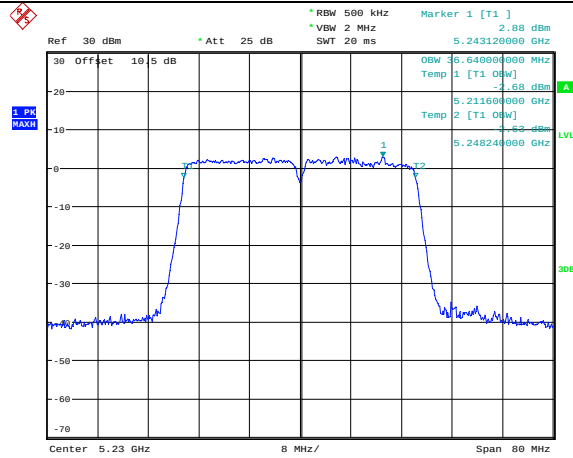
802.11ac vht20
Highest Channel

Date: 11.MAR.2023 14:48:17

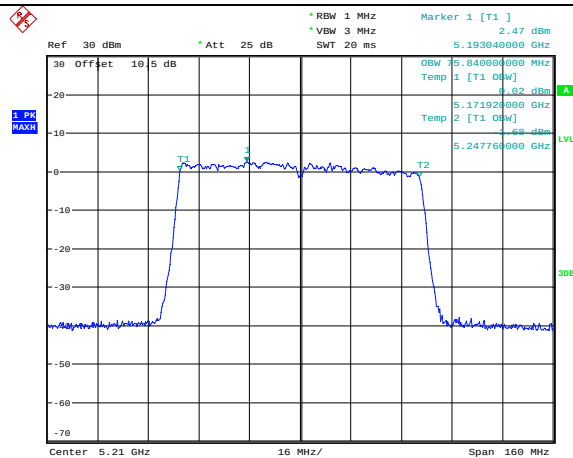
99% Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.MAR.2023 14:50:25

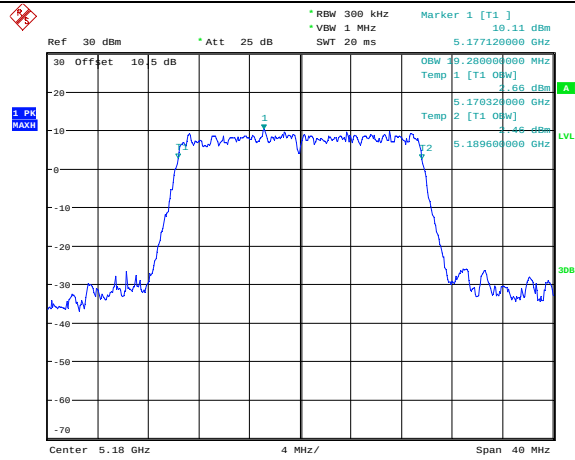
802.11ac vht40
Highest Channel

Date: 11.MAR.2023 14:52:49

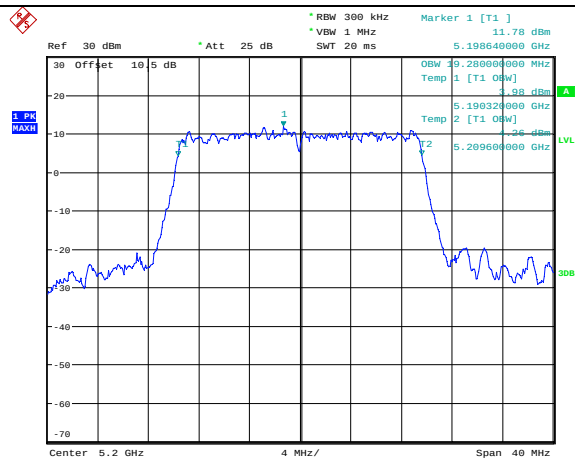
802.11ac vht80
Middle Channel

Date: 11.MAR.2023 14:57:48

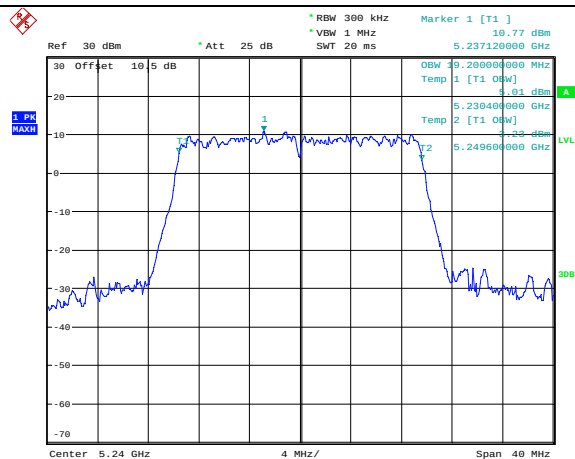
99% Emission Bandwidth

802.11ax he20
Lowest Channel

Date: 11.MAR.2023 18:27:46

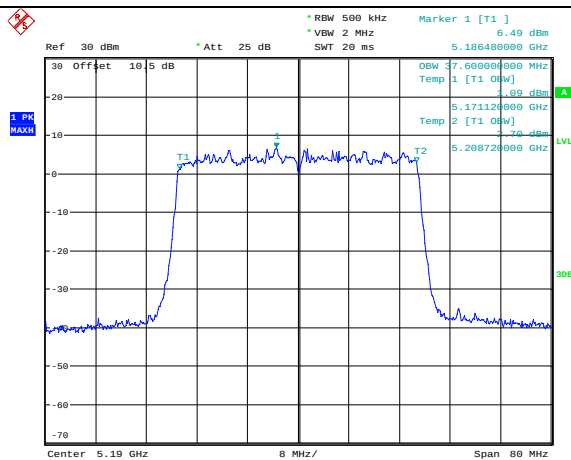
802.11ax he20
Middle Channel

Date: 11.MAR.2023 18:28:48

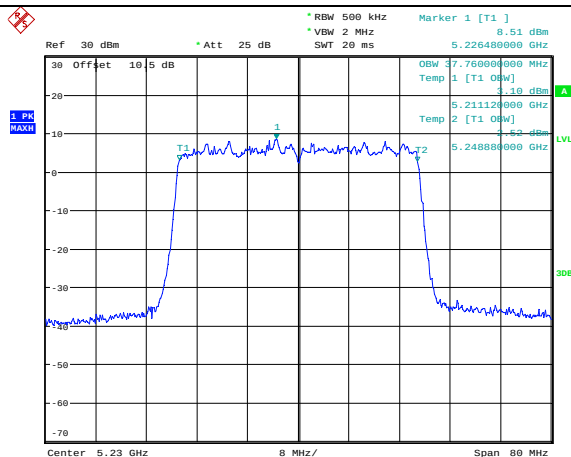
802.11ax he20
Highest Channel

Date: 11.MAR.2023 18:29:41

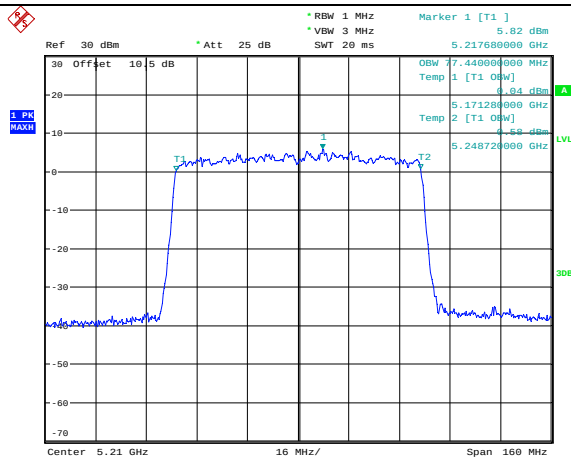
99% Emission Bandwidth

802.11ax he40
Lowest Channel

Date: 11.MAR.2023 18:31:36

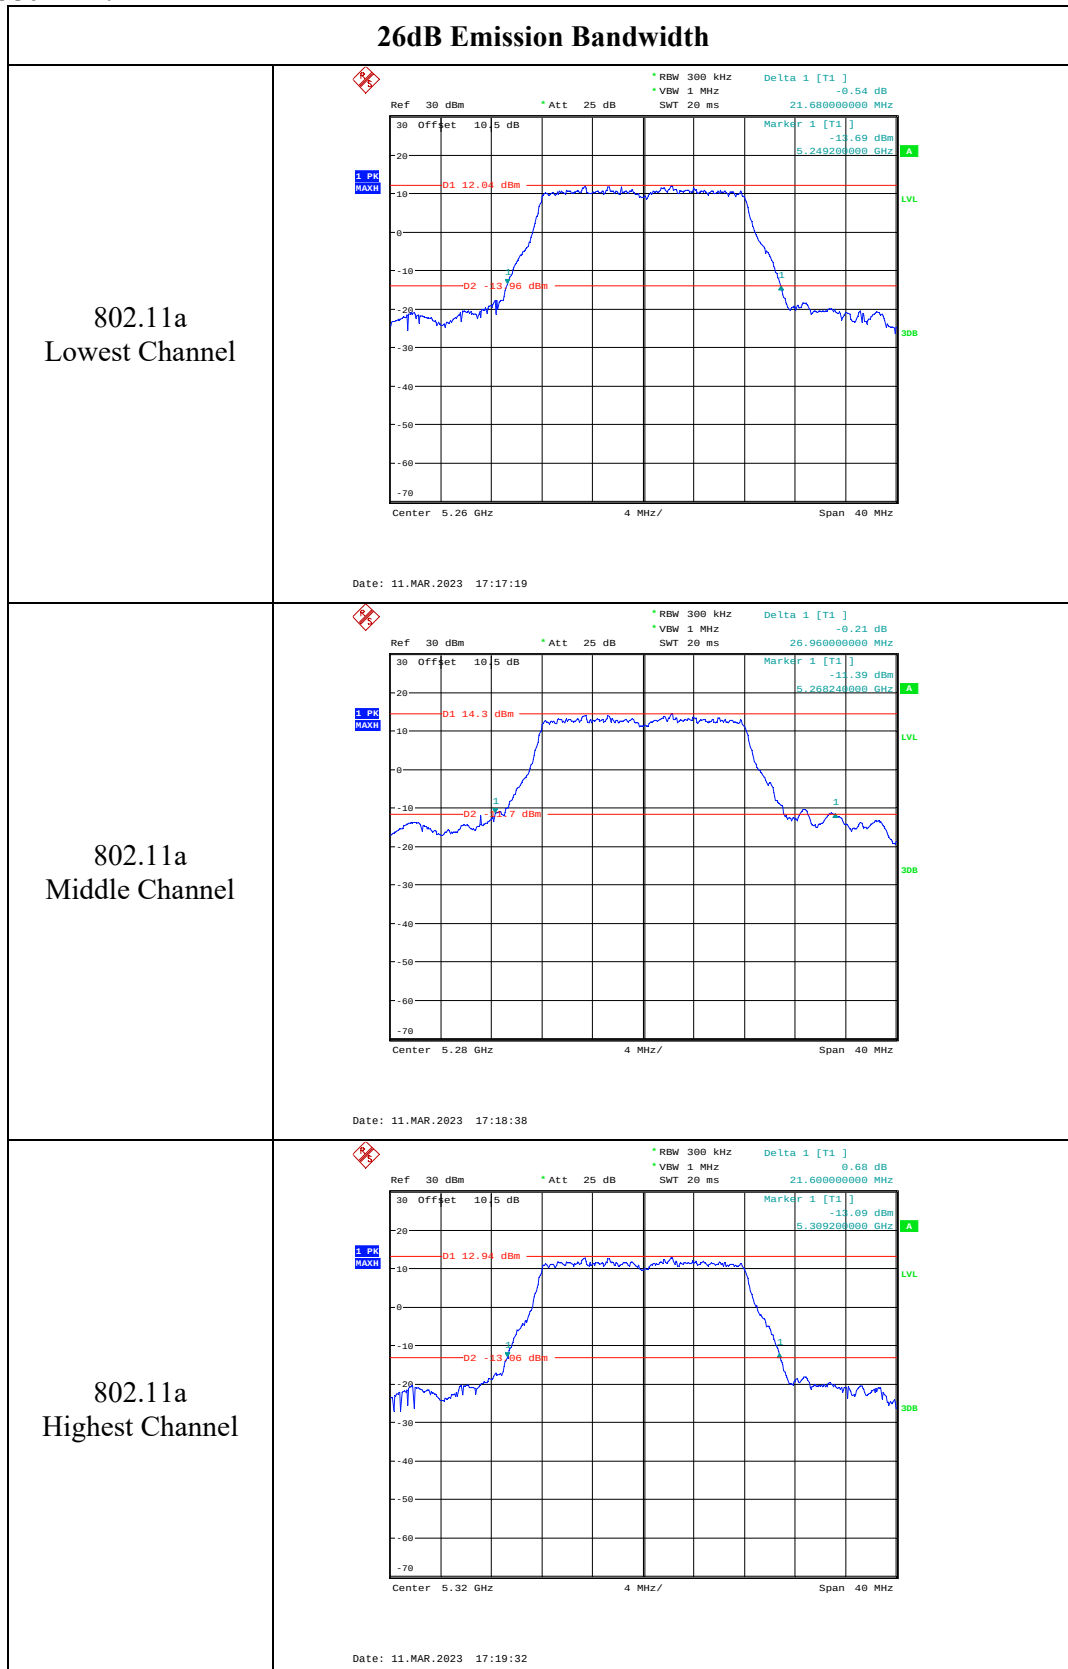
802.11ax he40
Highest Channel

Date: 11.MAR.2023 18:32:24

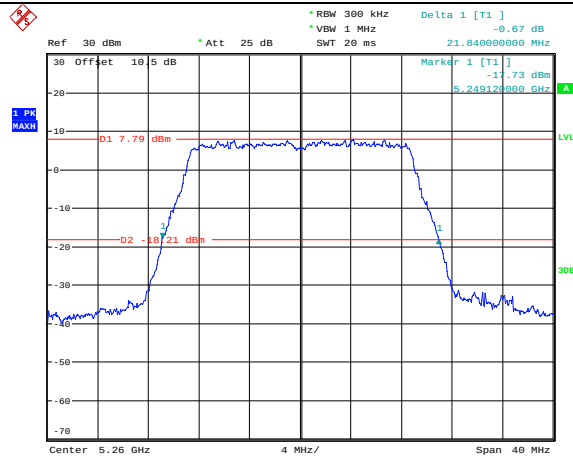
802.11ax he80
Middle Channel

Date: 11.MAR.2023 18:33:41

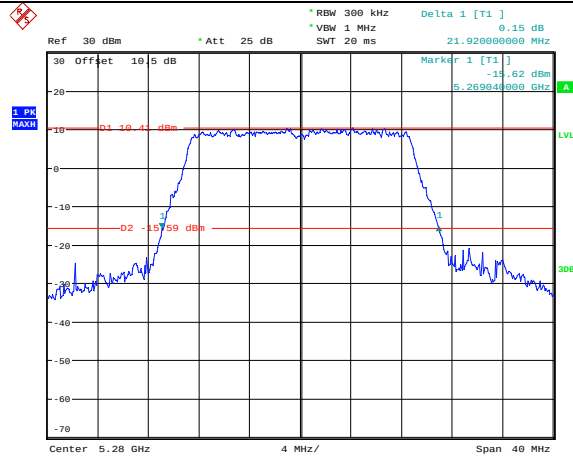
5250-5350MHz:



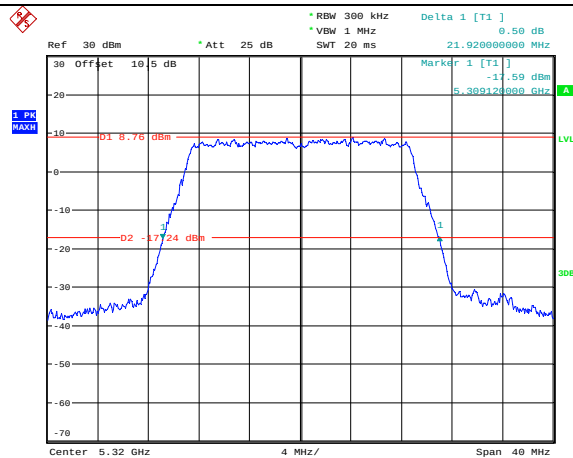
26dB Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 11.MAR.2023 17:22:03

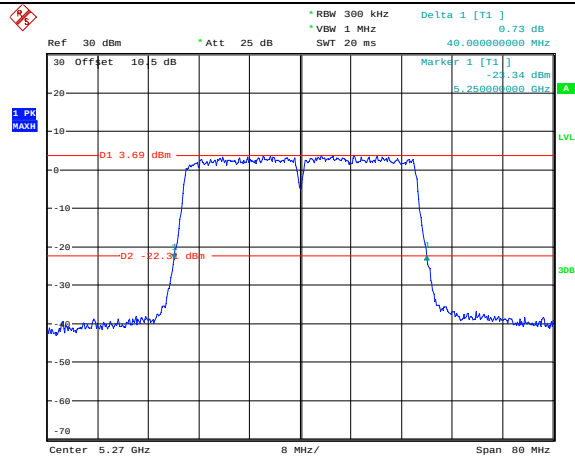
802.11n ht20
Middle Channel

Date: 11.MAR.2023 17:23:40

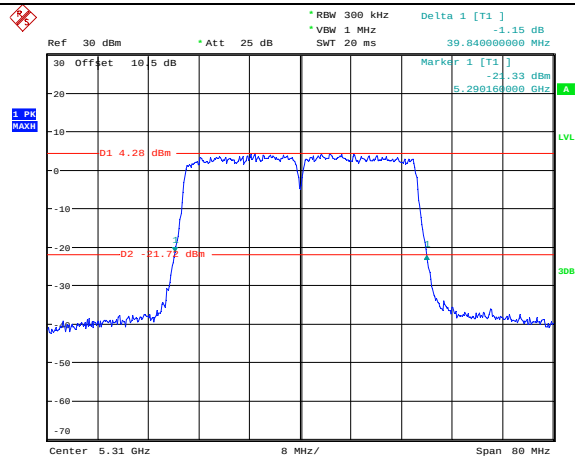
802.11n ht20
Highest Channel

Date: 11.MAR.2023 17:21:13

26dB Emission Bandwidth

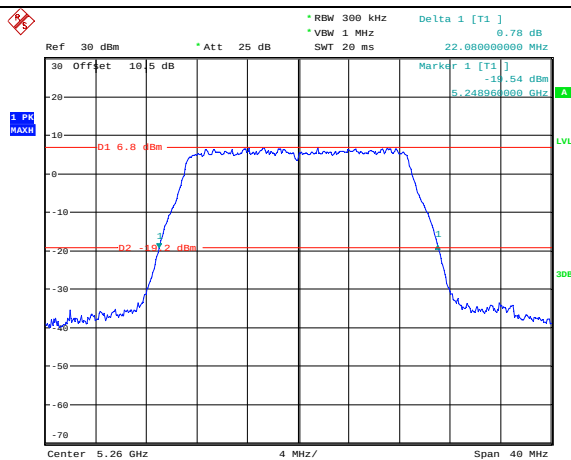
802.11n ht40
Lowest Channel

Date: 11.MAR.2023 17:38:08

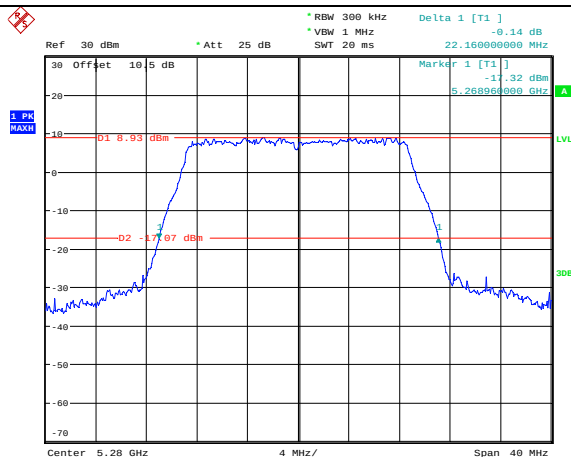
802.11n ht40
Highest Channel

Date: 11.MAR.2023 17:37:31

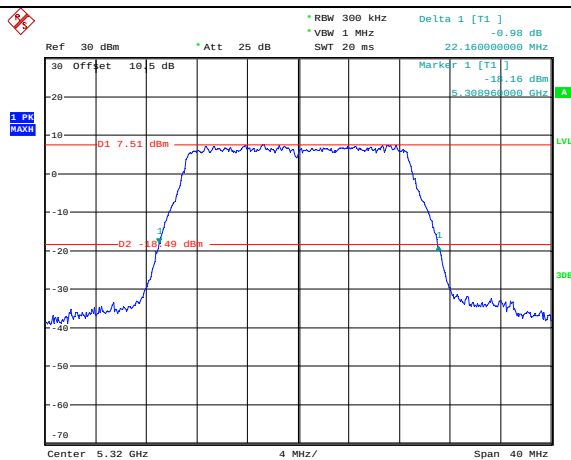
26dB Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.MAR.2023 17:26:18

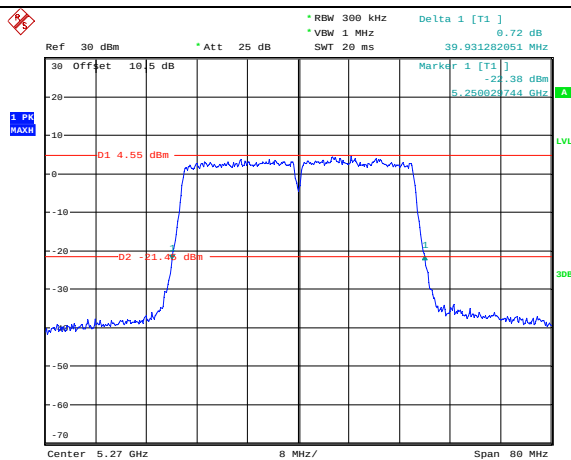
802.11ac vht20
Middle Channel

Date: 11.MAR.2023 17:25:35

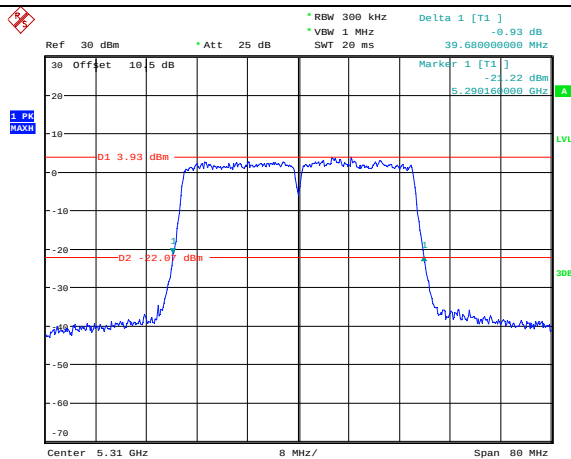
802.11ac vht20
Highest Channel

Date: 11.MAR.2023 17:28:17

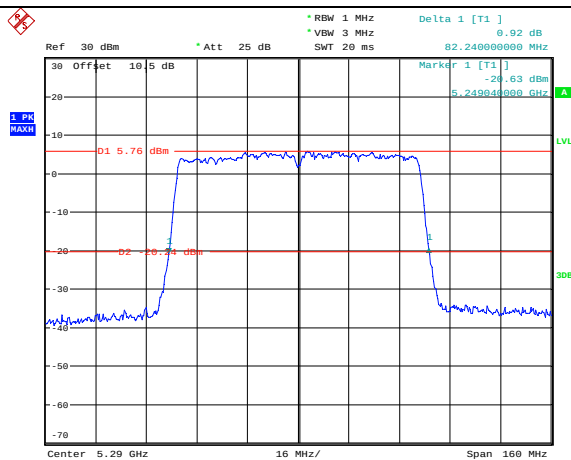
26dB Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.MAR.2023 17:33:37

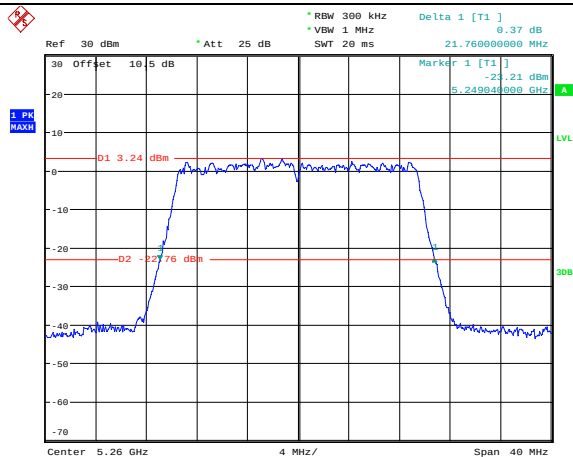
802.11ac vht40
Highest Channel

Date: 11.MAR.2023 17:35:23

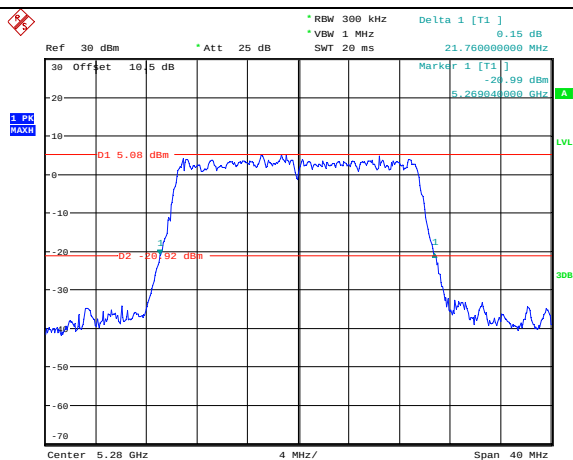
802.11ac vht80
Middle Channel

Date: 11.MAR.2023 17:40:47

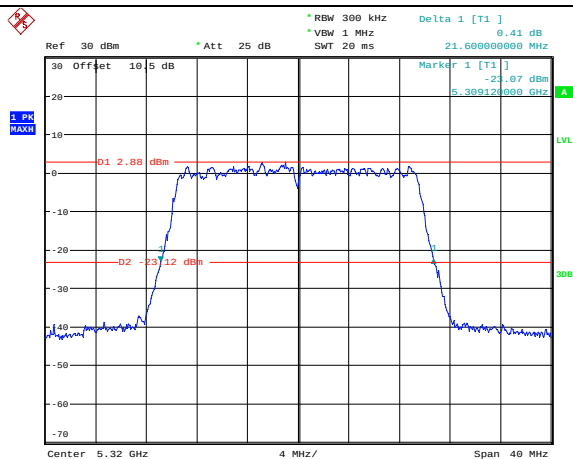
26dB Emission Bandwidth

802.11ax he20
Lowest Channel

Date: 14.MAR.2023 09:58:08

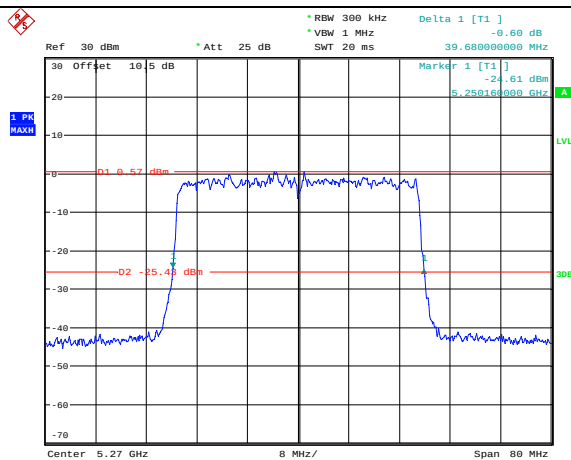
802.11ax he20
Middle Channel

Date: 14.MAR.2023 10:00:19

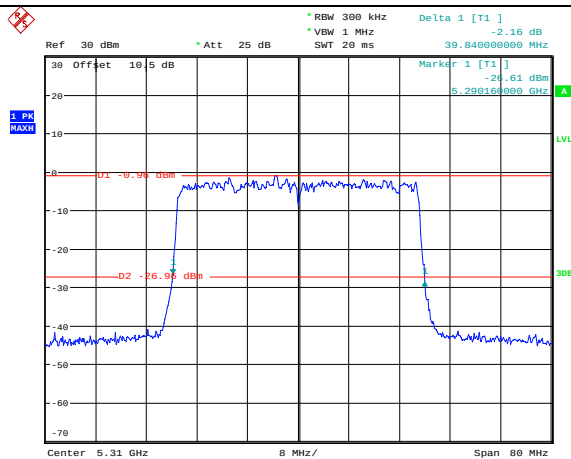
802.11ax he20
Highest Channel

Date: 14.MAR.2023 09:59:15

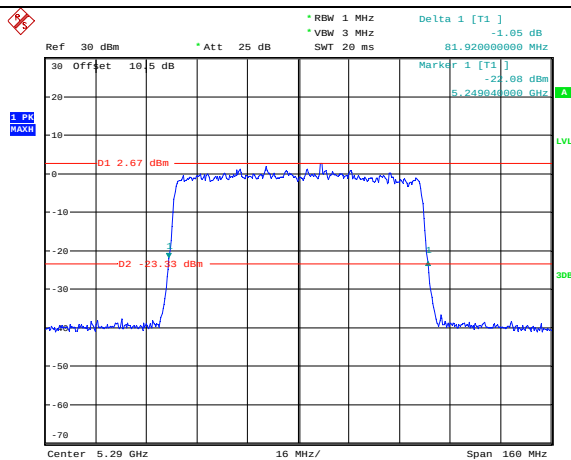
26dB Emission Bandwidth

802.11ax he40
Lowest Channel

Date: 14.MAR.2023 10:03:18

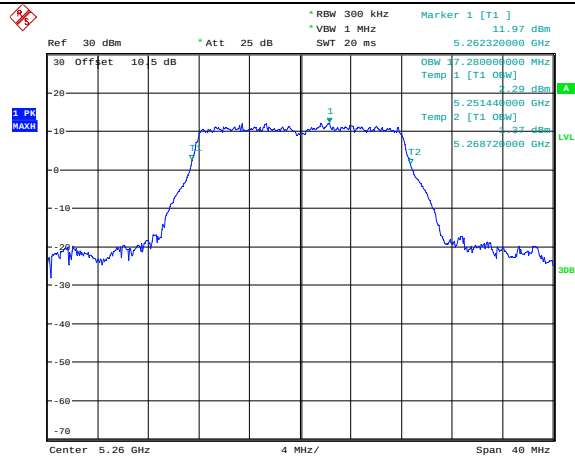
802.11ax he40
Highest Channel

Date: 14.MAR.2023 10:04:26

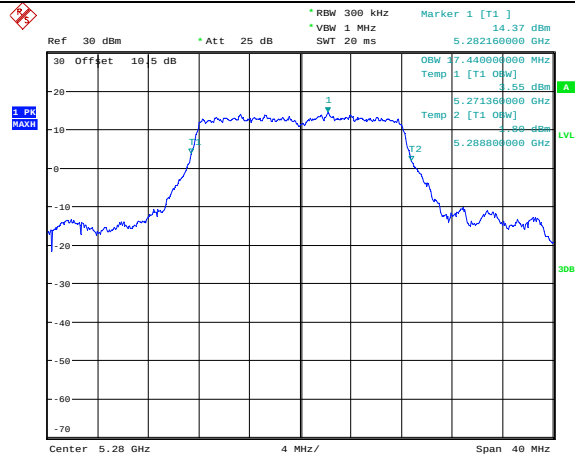
802.11ax he80
Middle Channel

Date: 14.MAR.2023 10:07:44

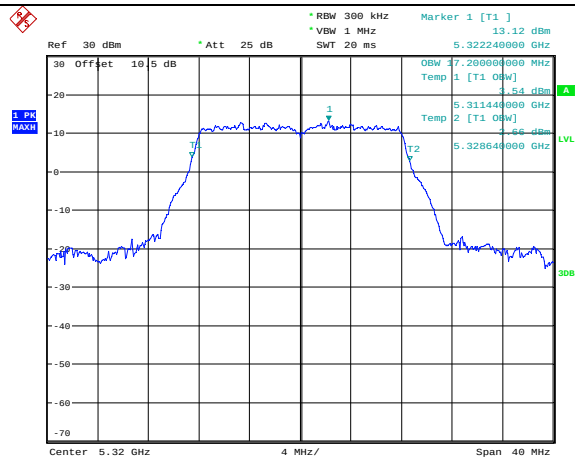
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 11.MAR.2023 17:17:34

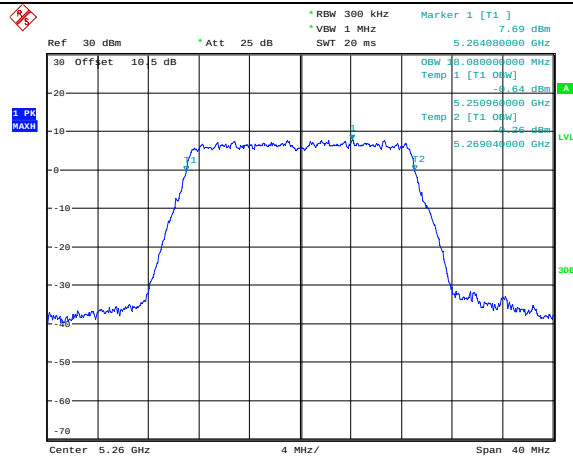
802.11a
Middle Channel

Date: 11.MAR.2023 17:18:56

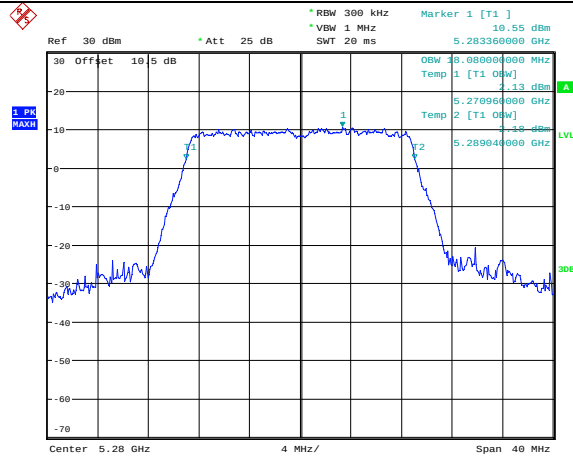
802.11a
Highest Channel

Date: 11.MAR.2023 17:19:50

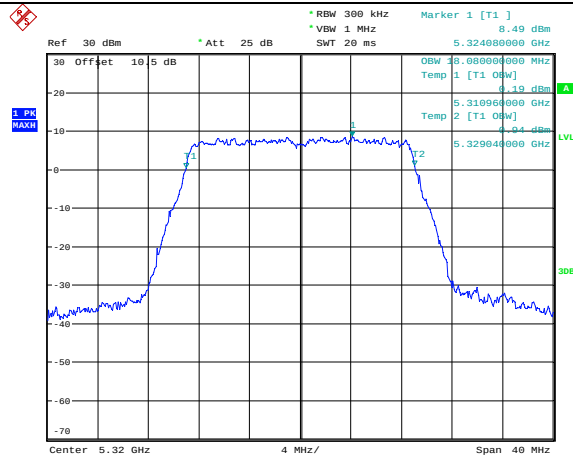
99% Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 11.MAR.2023 17:22:18

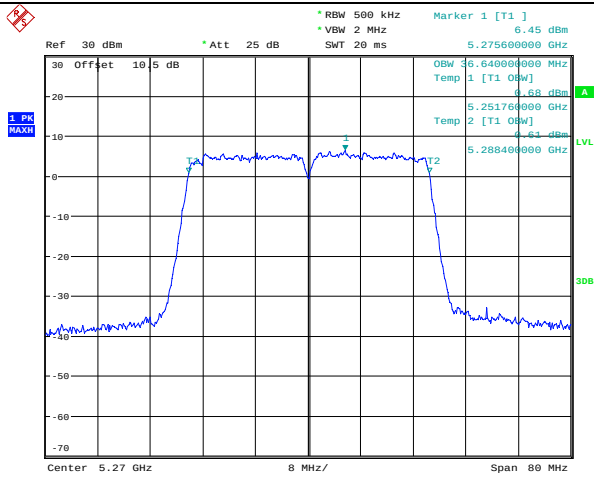
802.11n ht20
Middle Channel

Date: 11.MAR.2023 17:23:18

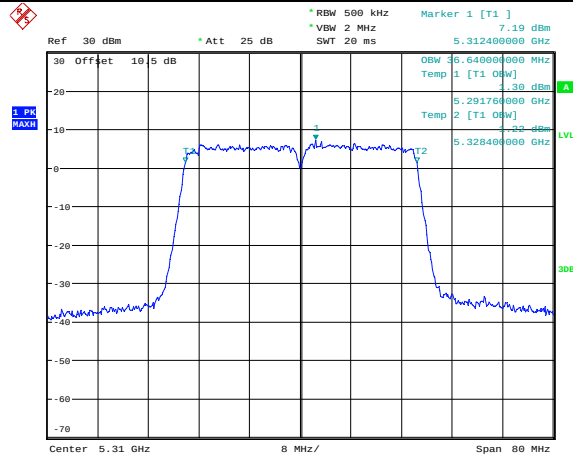
802.11n ht20
Highest Channel

Date: 11.MAR.2023 17:21:27

99% Emission Bandwidth

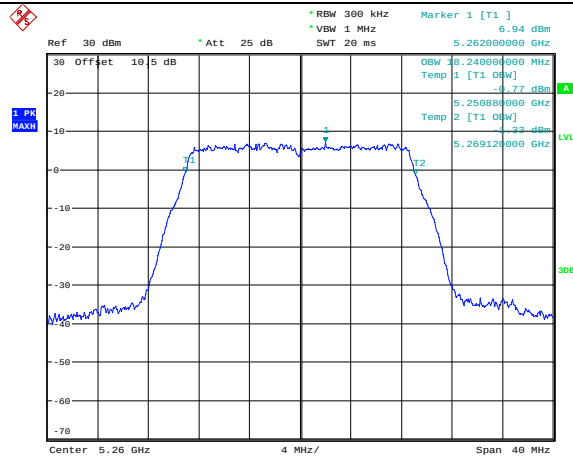
802.11n ht40
Lowest Channel

Date: 11.MAR.2023 17:38:38

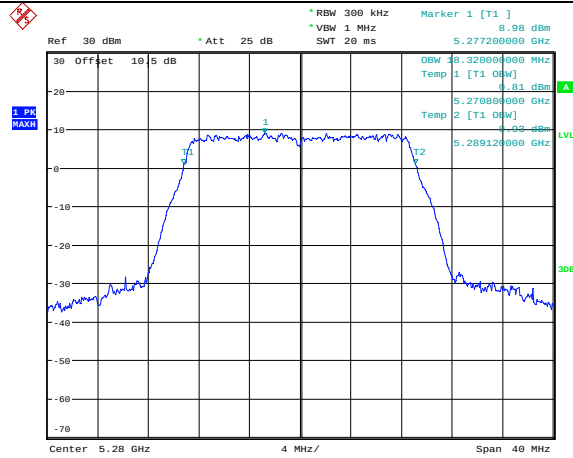
802.11n ht40
Highest Channel

Date: 11.MAR.2023 17:36:53

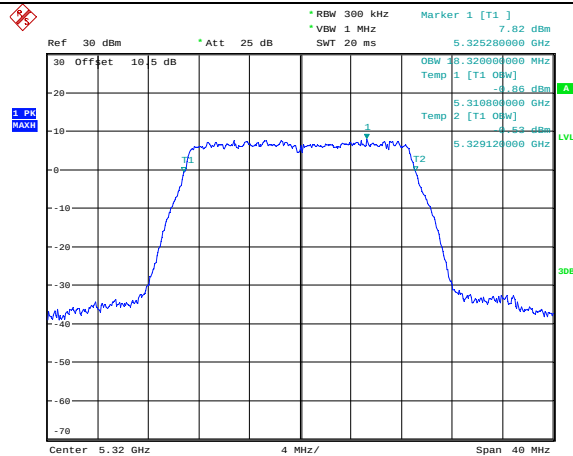
99% Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.MAR.2023 17:26:59

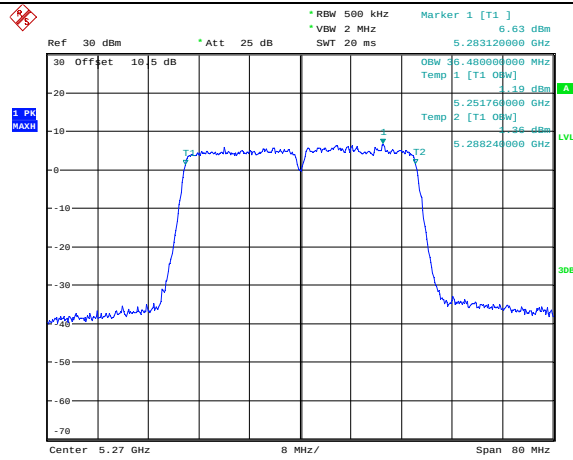
802.11ac vht20
Middle Channel

Date: 11.MAR.2023 17:25:11

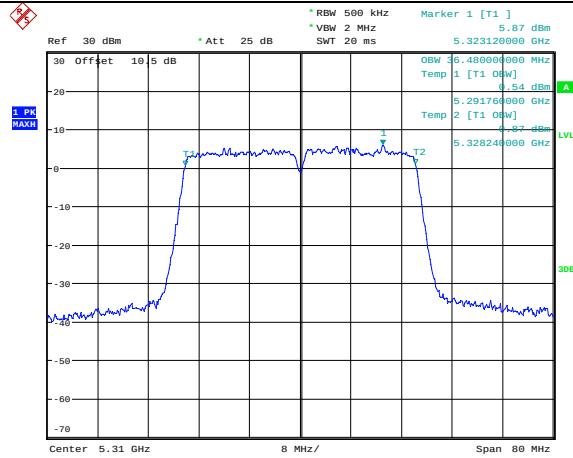
802.11ac vht20
Highest Channel

Date: 11.MAR.2023 17:27:54

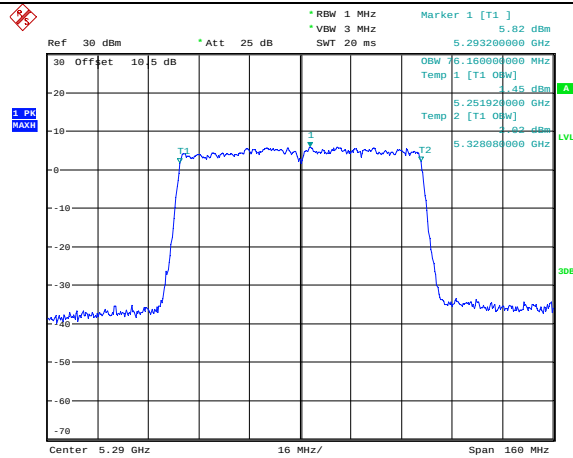
99% Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.MAR.2023 17:29:54



802.11ac vht40
Highest Channel

Date: 11.MAR.2023 17:35:37


802.11ac vht80
Middle Channel

Date: 11.MAR.2023 17:41:02

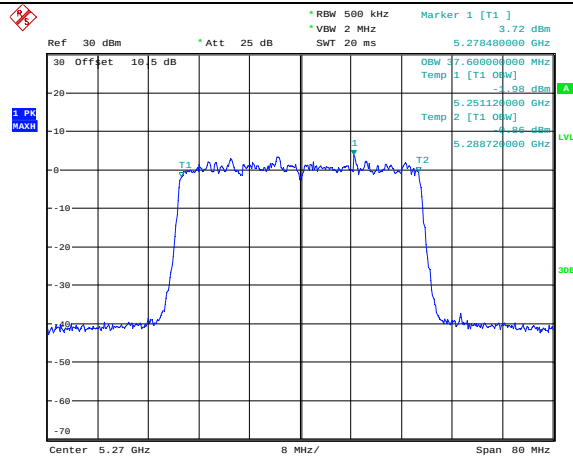
802.11ax he20
Lowest Channel

802.11ax he20
Middle Channel

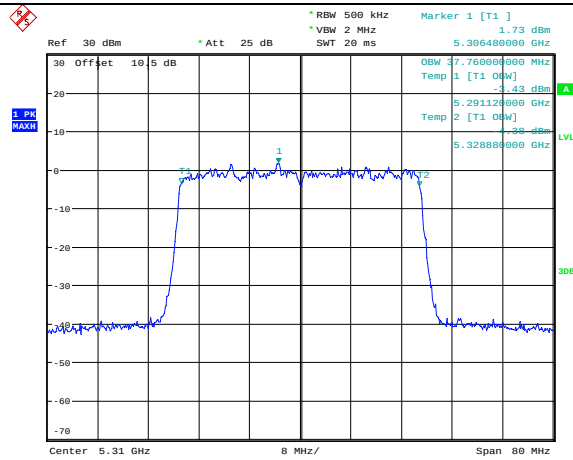
802.11ax he20
Highest Channel



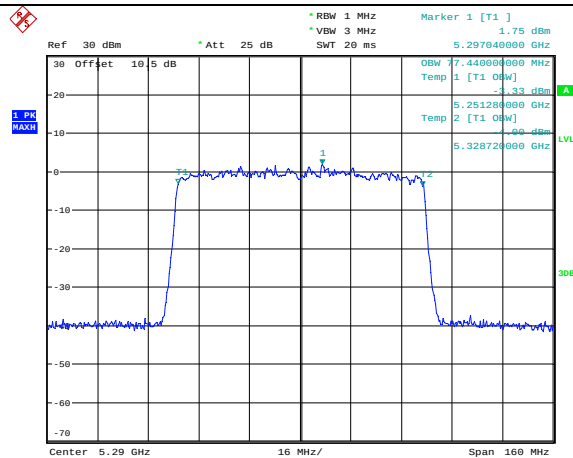
99% Emission Bandwidth

802.11ax he40
Lowest Channel

Date: 14.MAR.2023 10:02:10

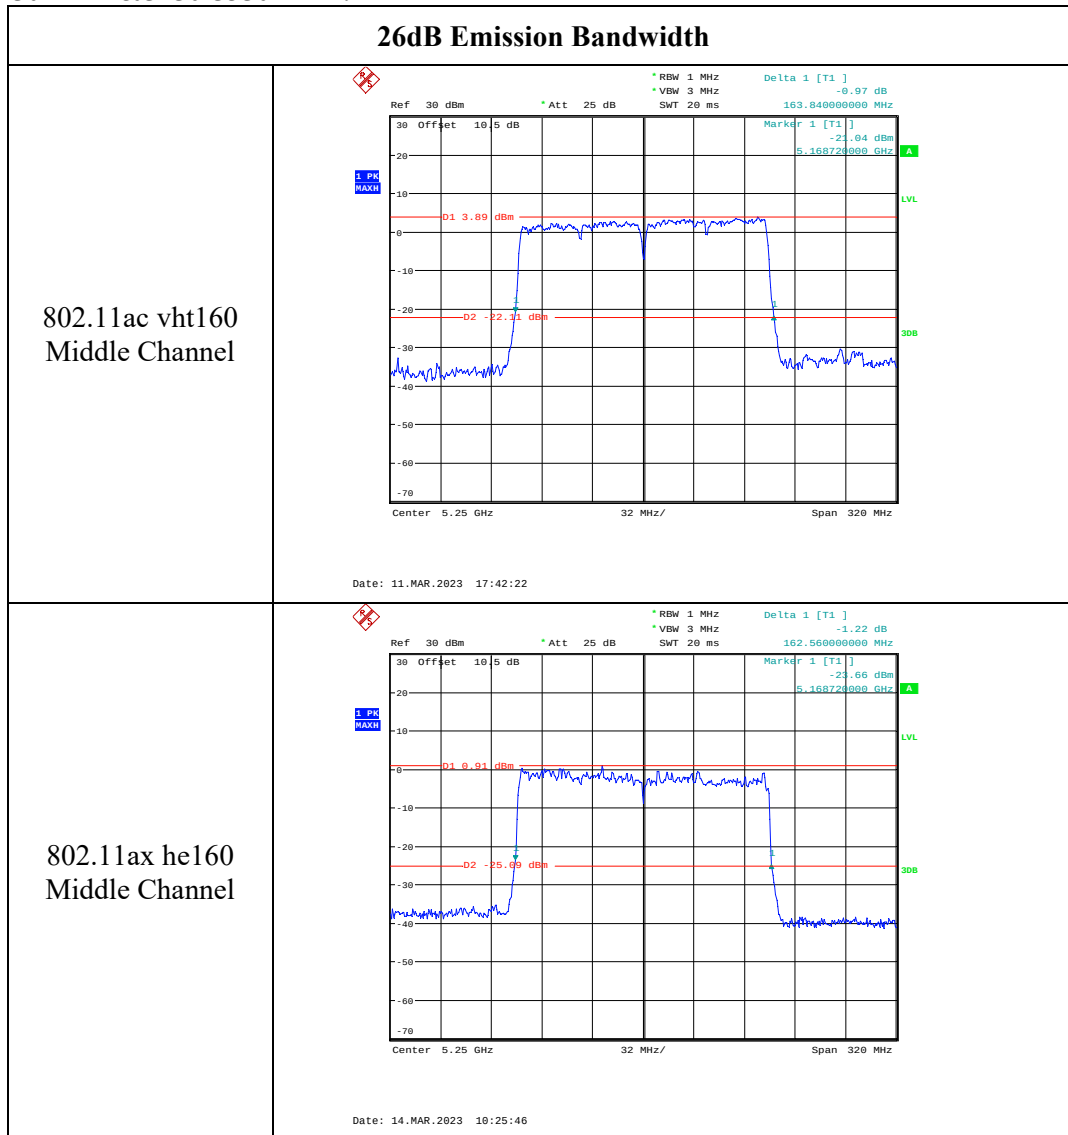
802.11ax he40
Highest Channel

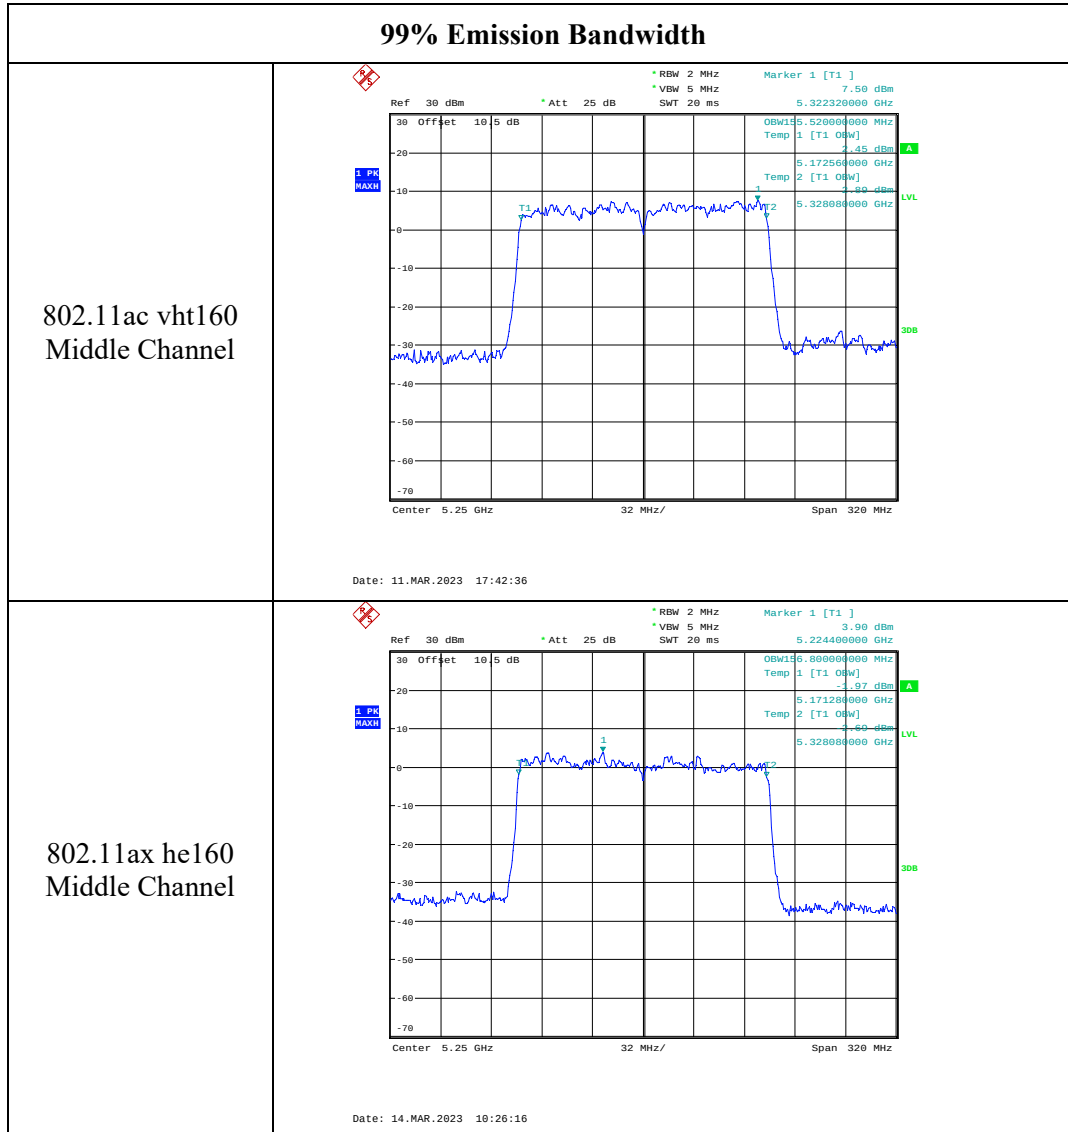
Date: 14.MAR.2023 10:05:44

802.11ax he80
Middle Channel

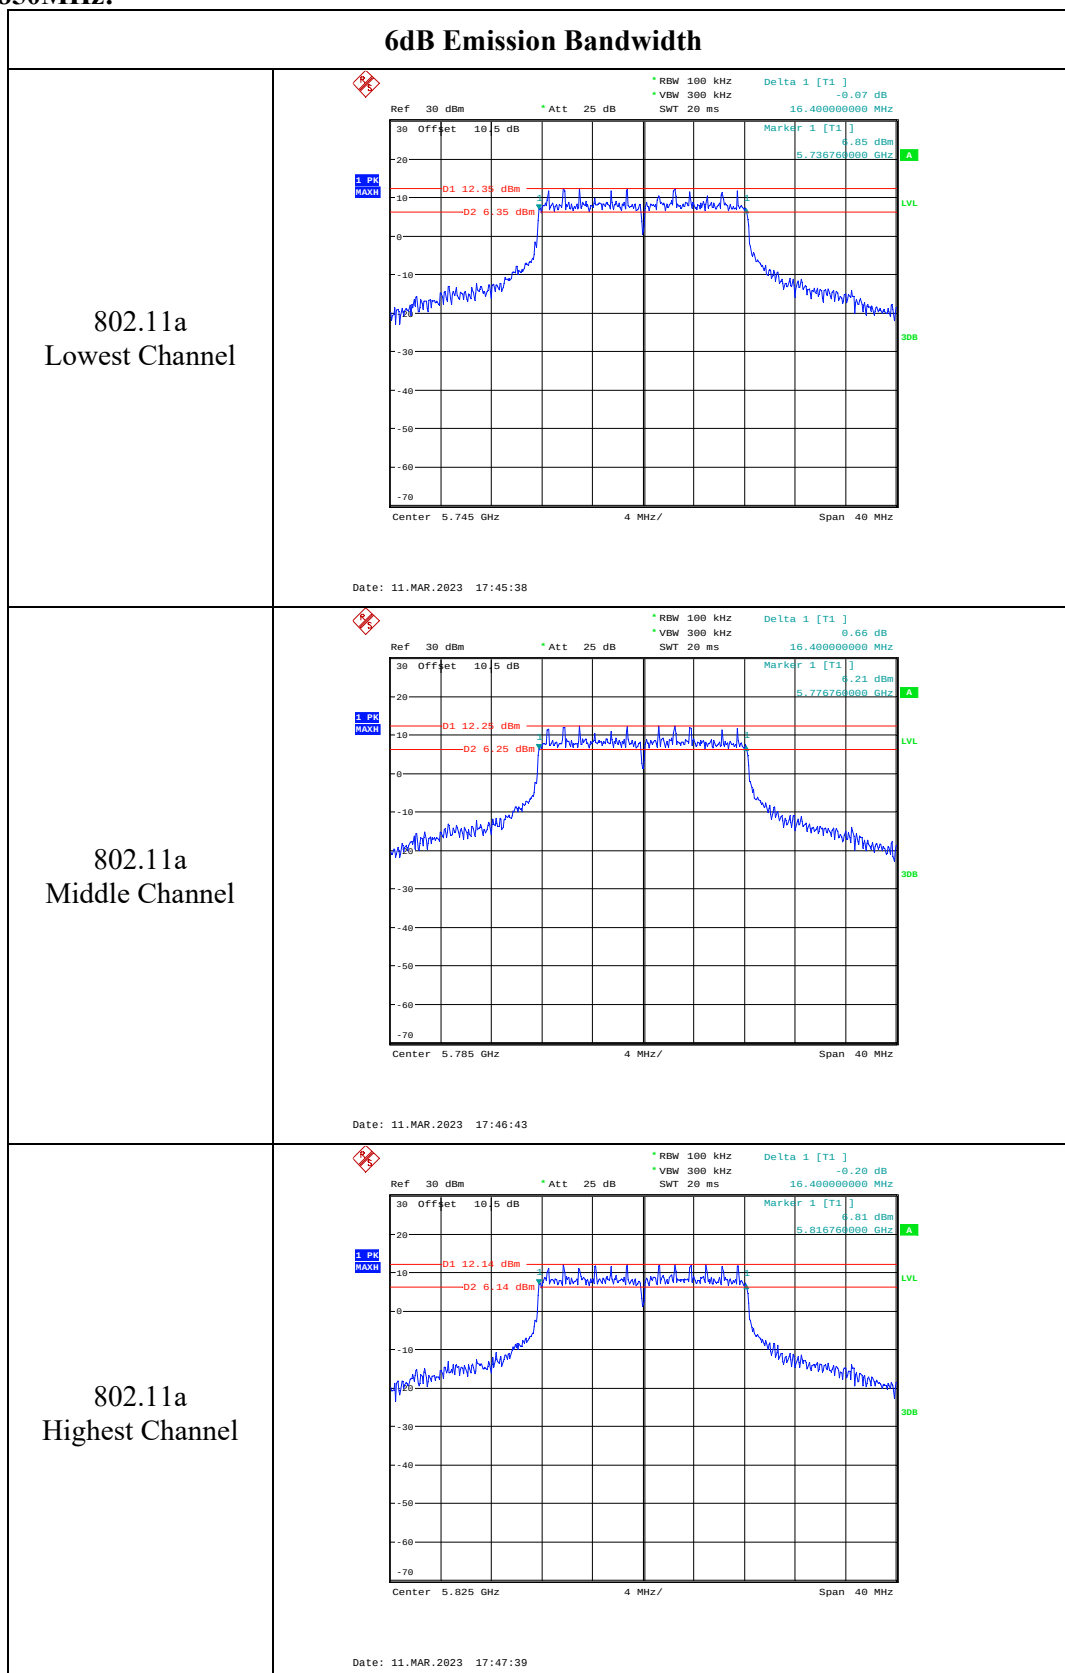
Date: 14.MAR.2023 10:07:08

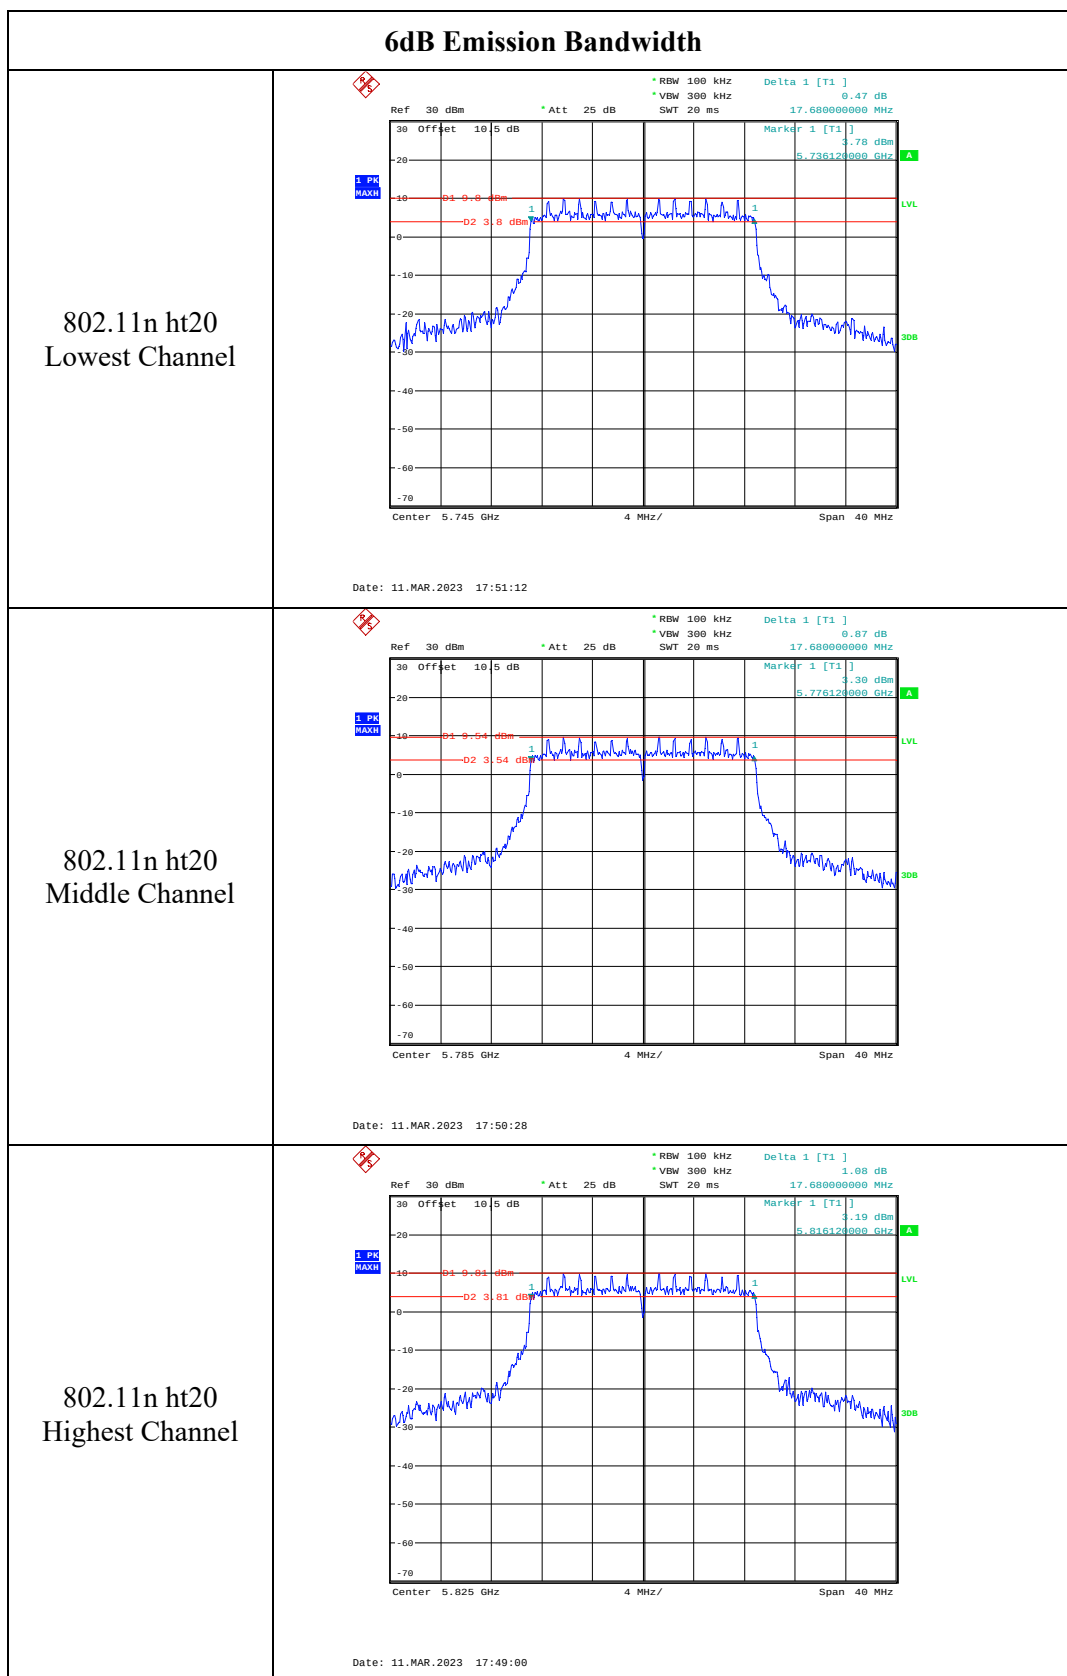
5150-5250 MHz & 5250-5350 MHz:

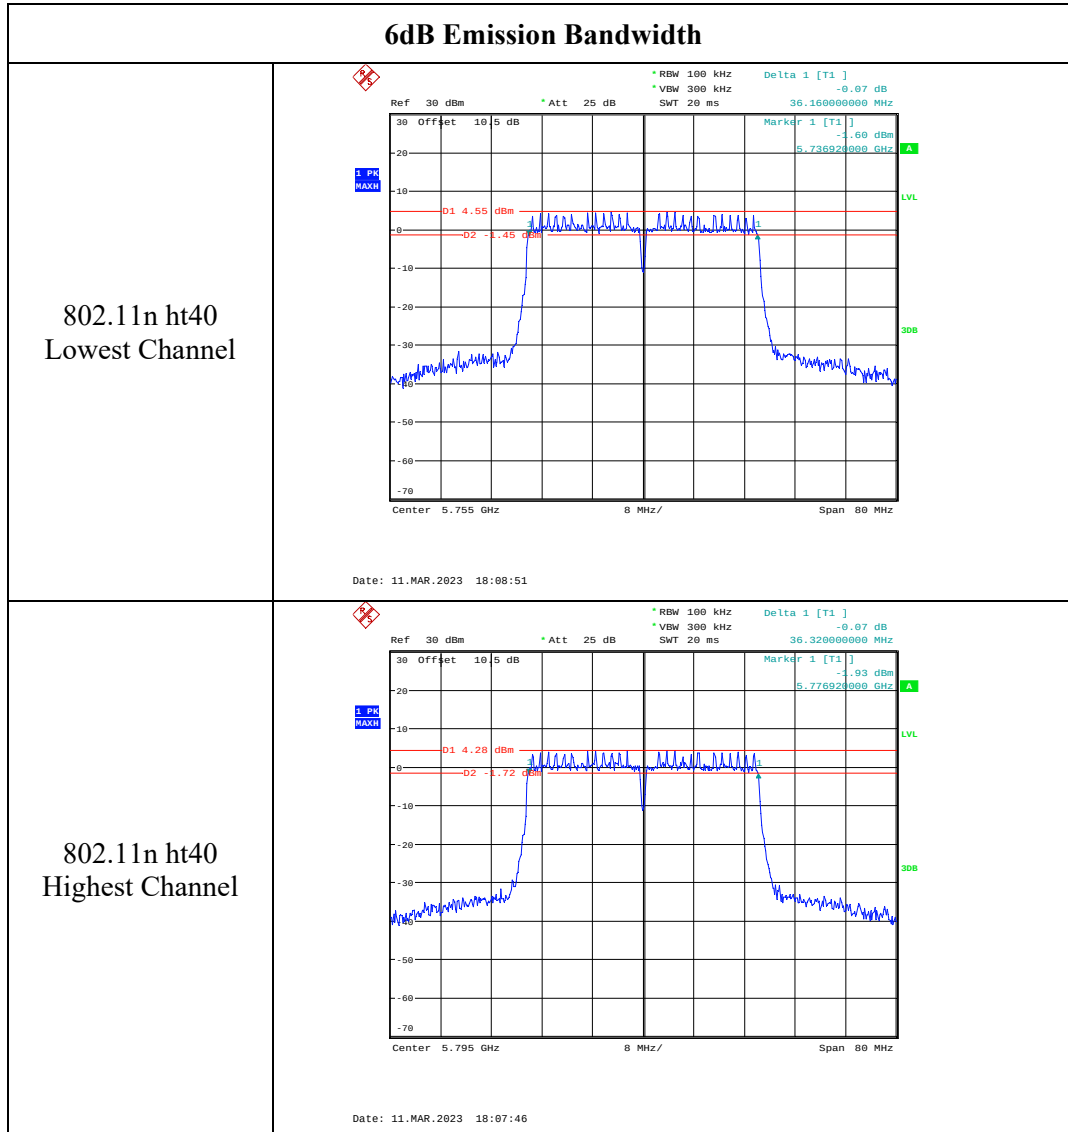


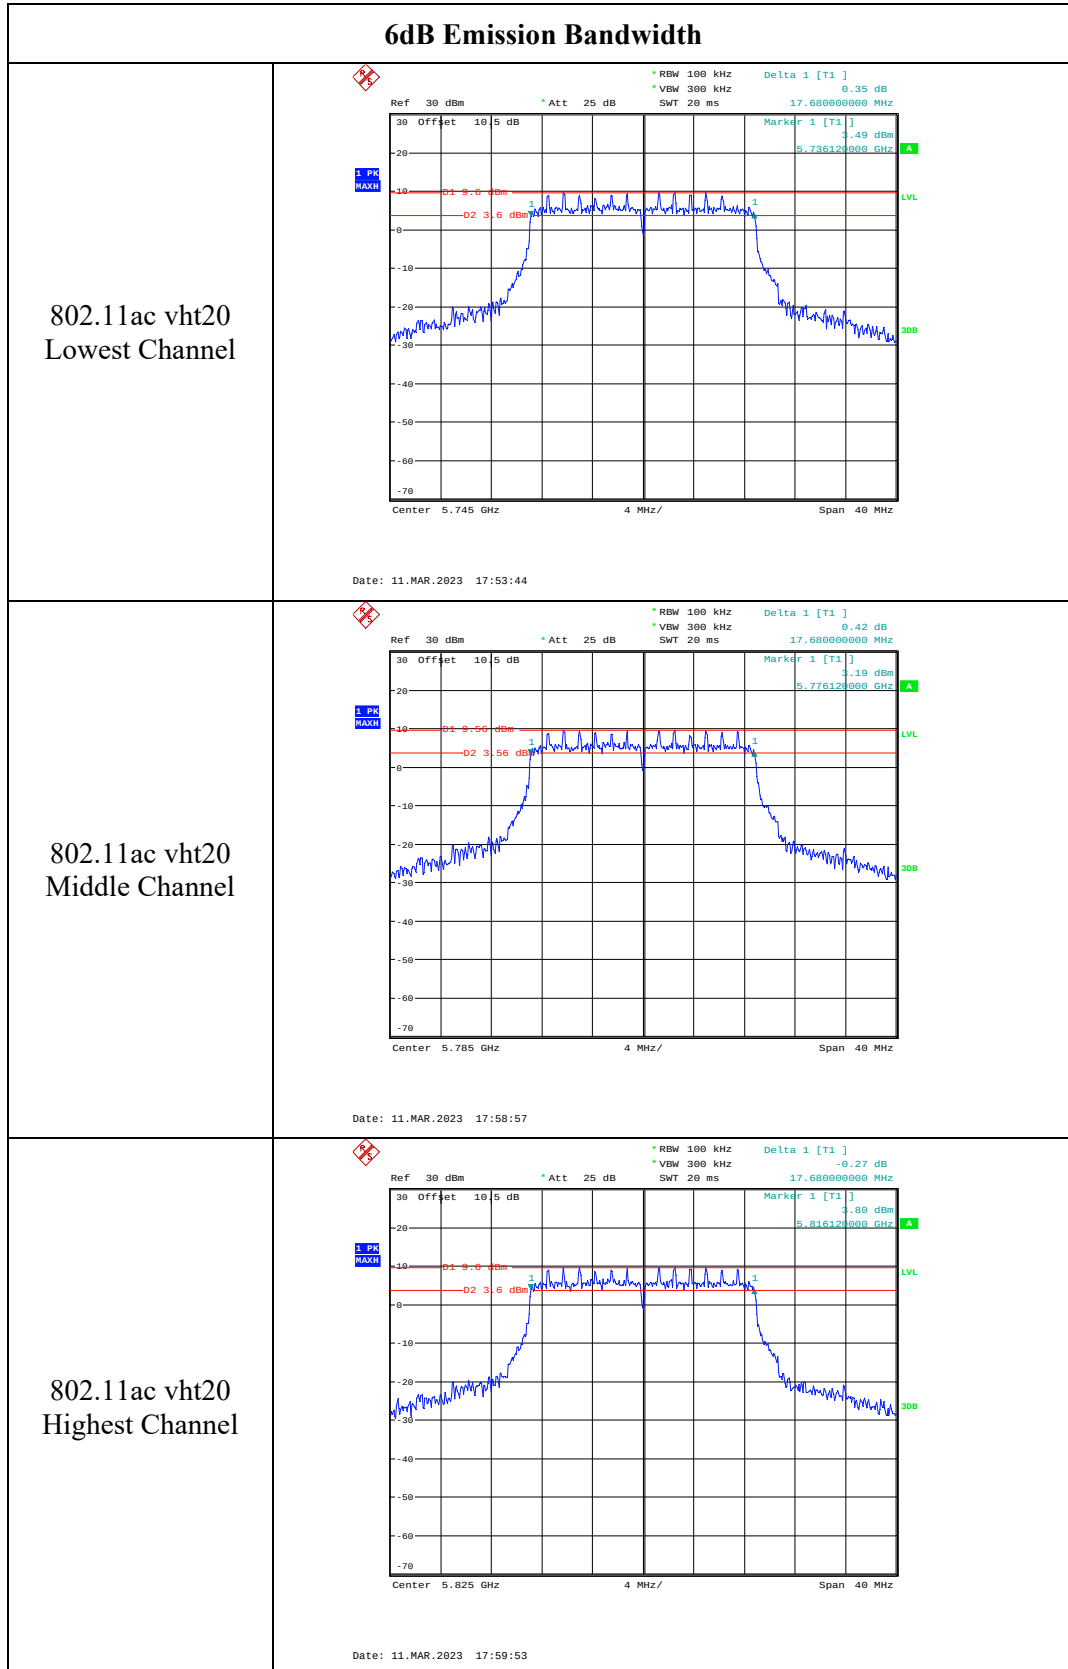


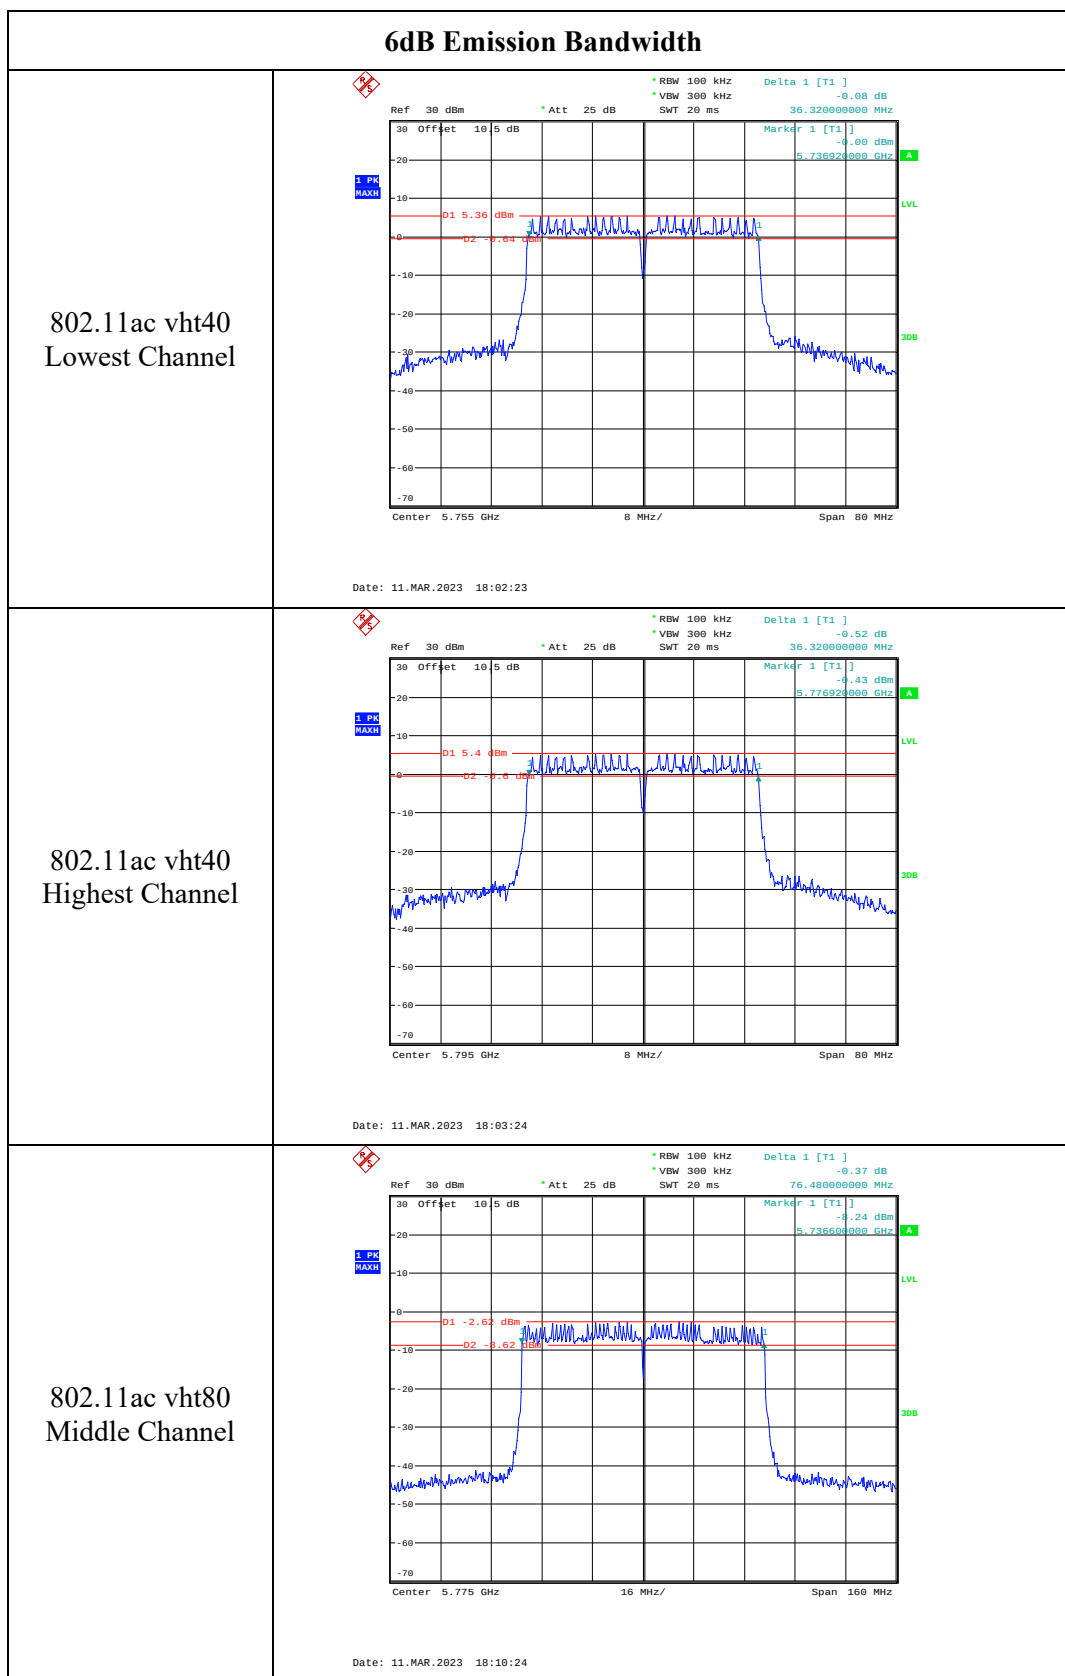
5725-5850MHz:

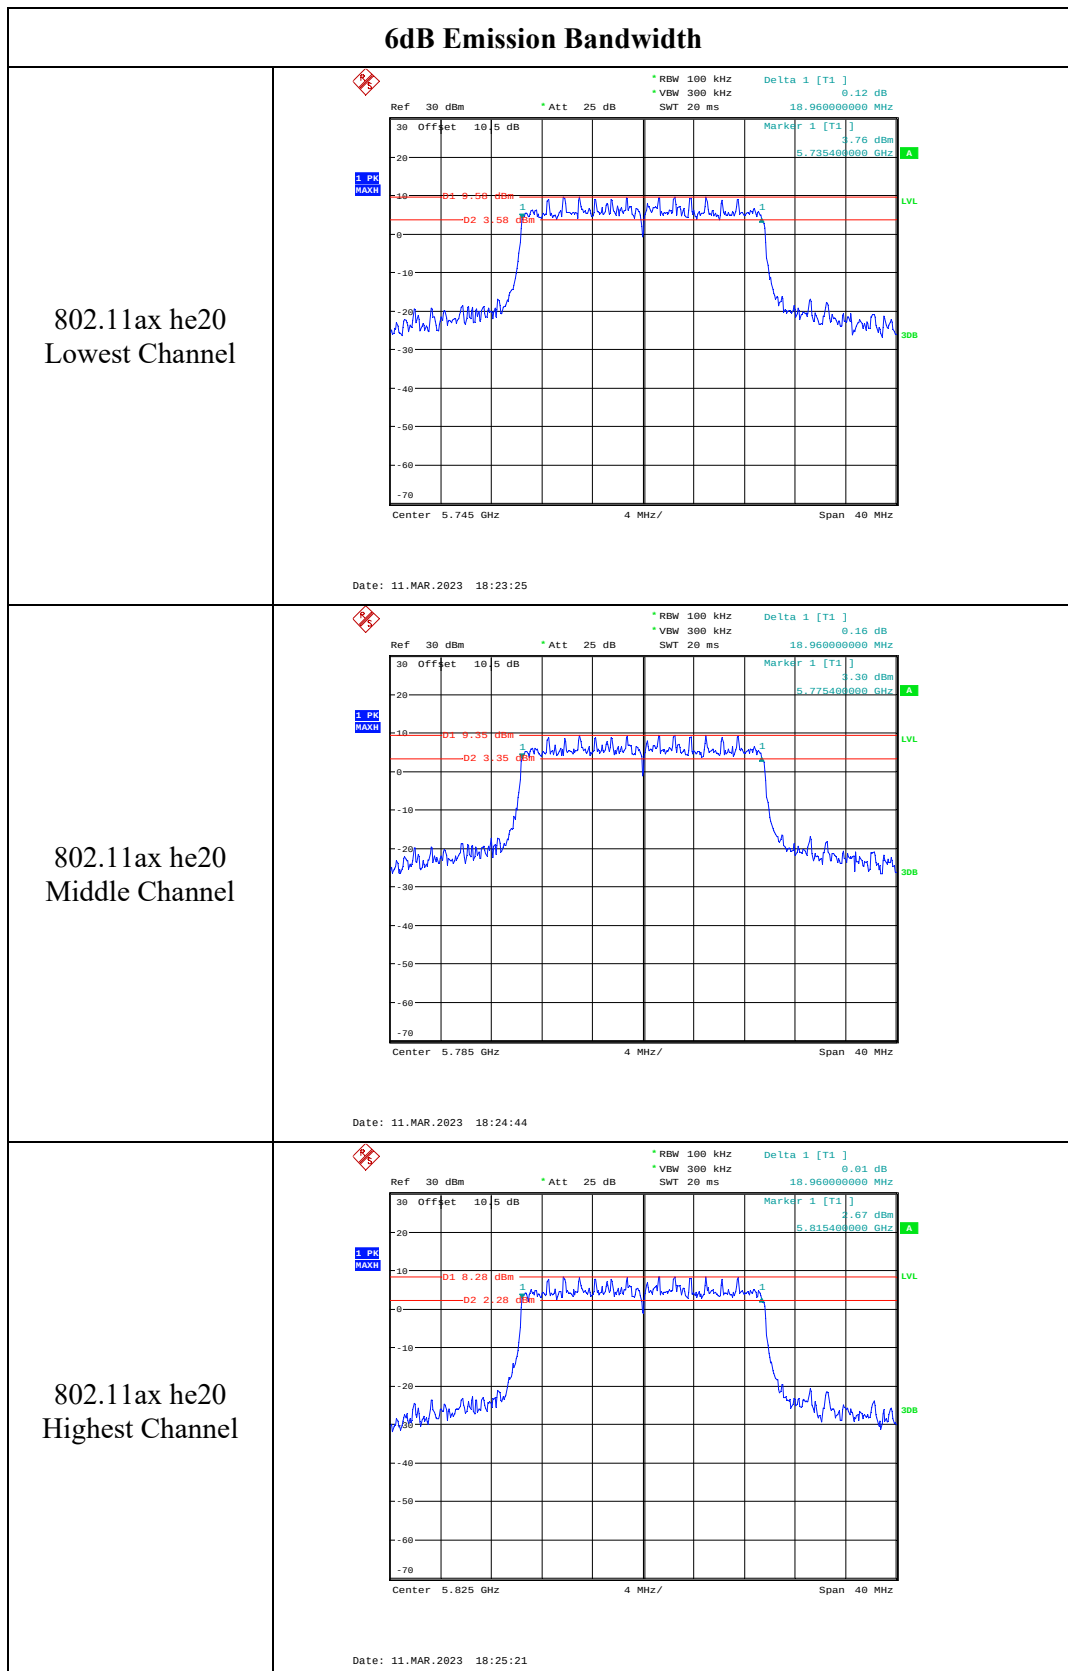


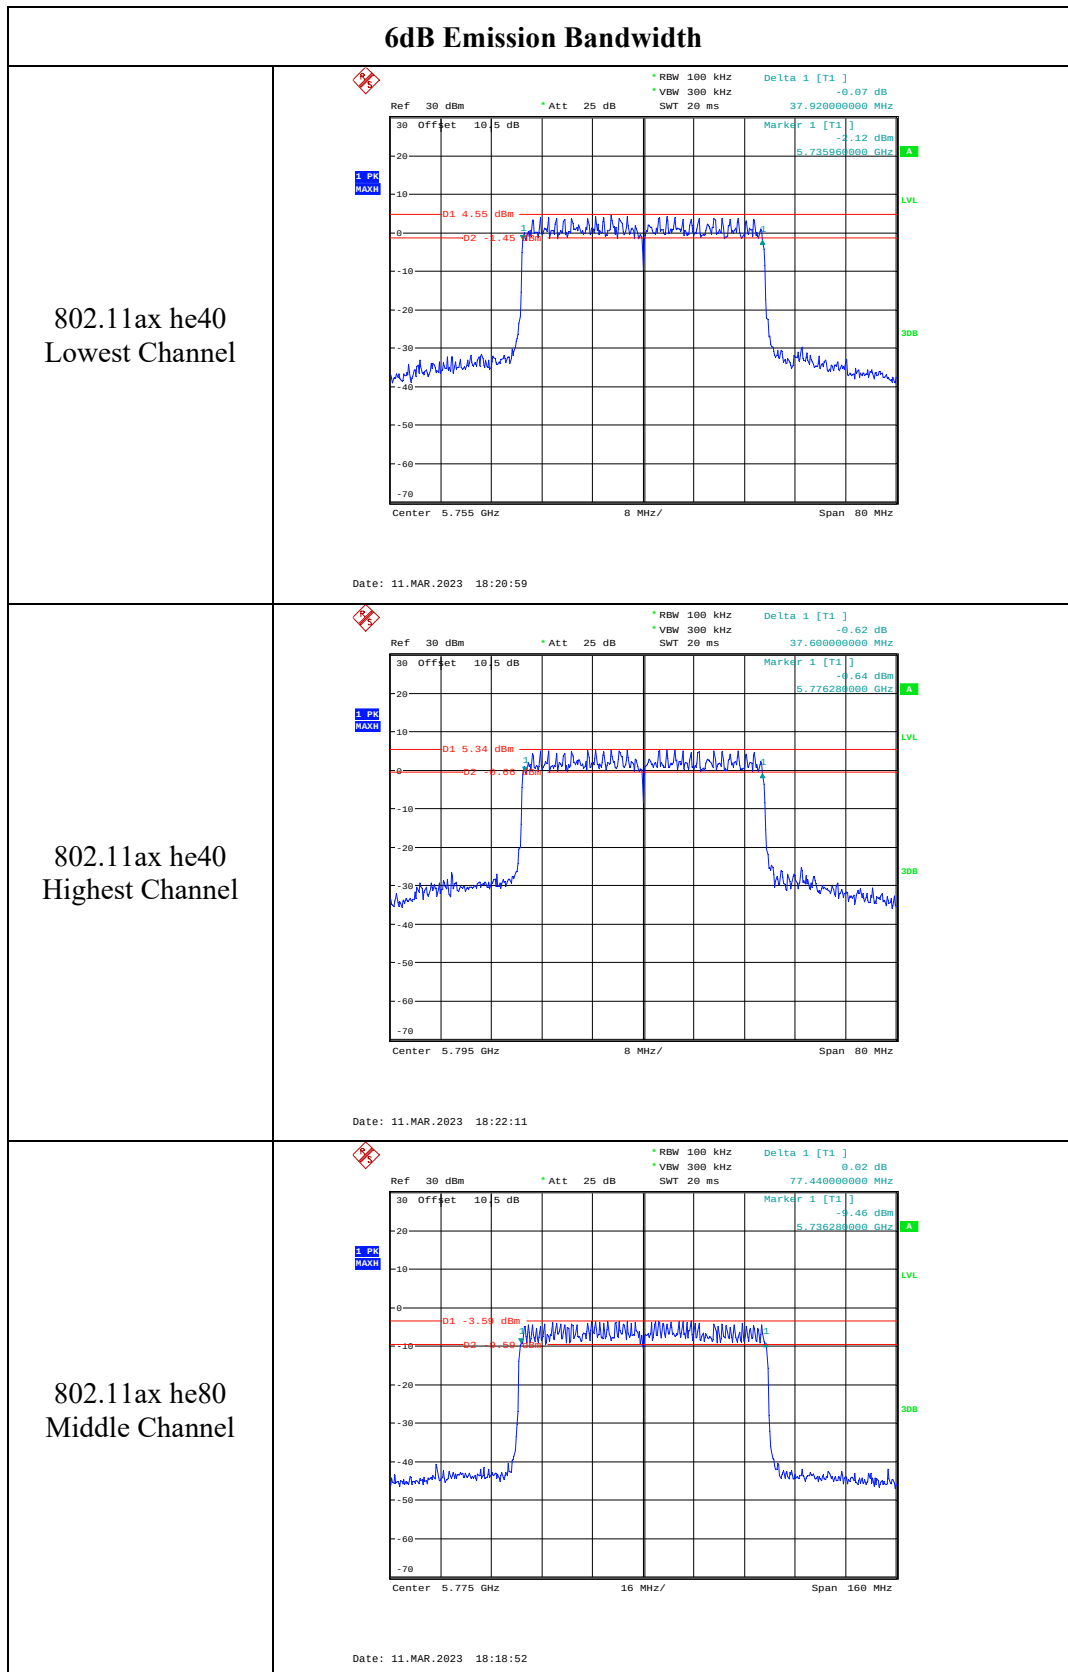




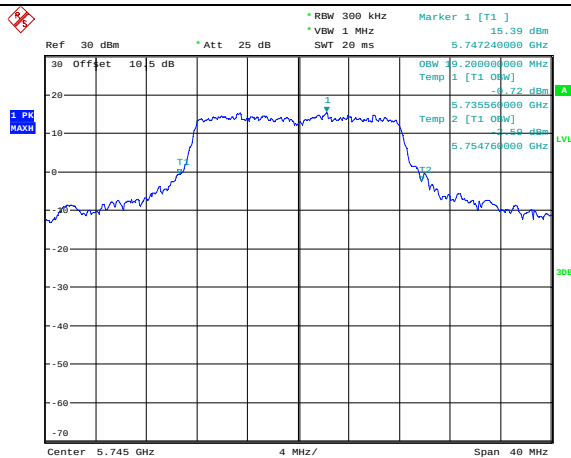




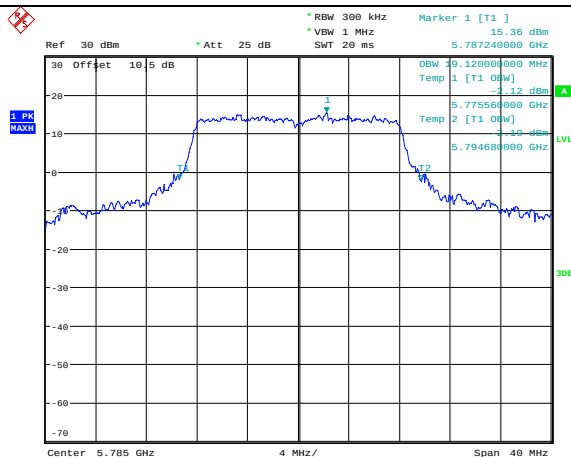




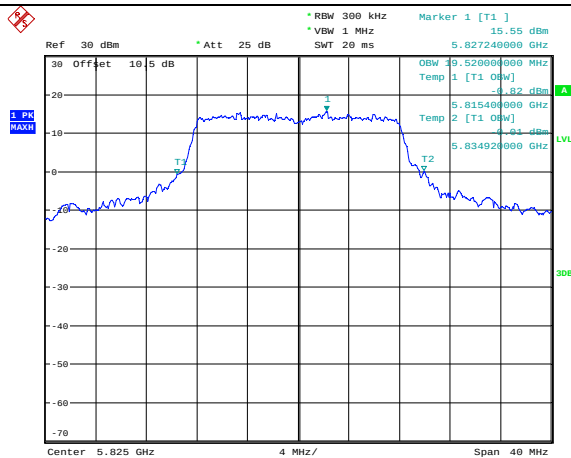
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 11.MAR.2023 17:45:56

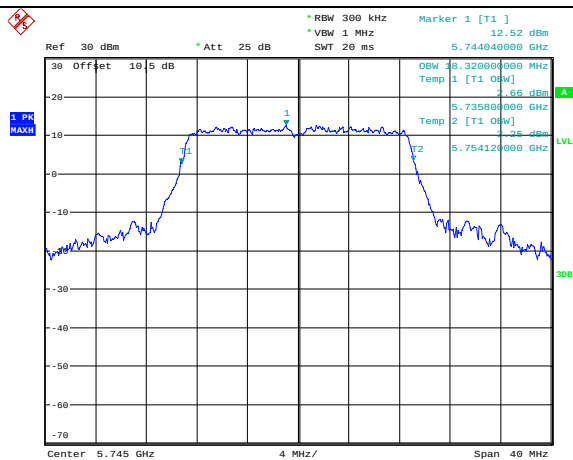
802.11a
Middle Channel

Date: 11.MAR.2023 17:47:00

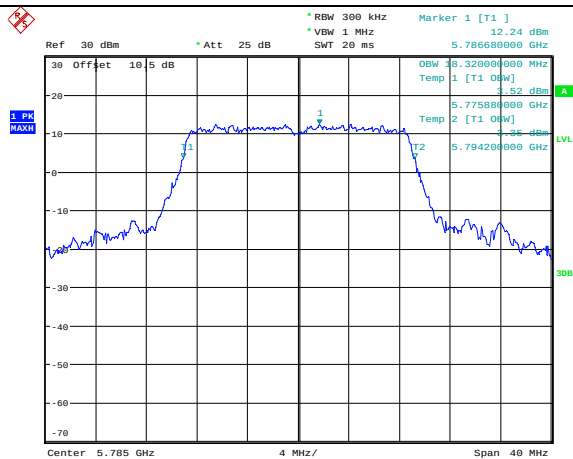
802.11a
Highest Channel

Date: 11.MAR.2023 17:47:56

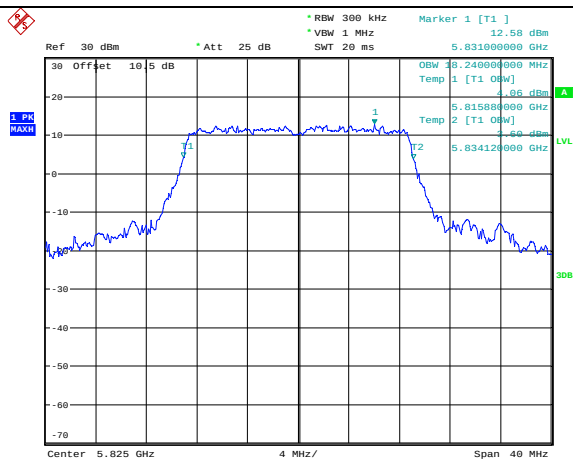
99% Emission Bandwidth

802.11n ht20
Lowest Channel

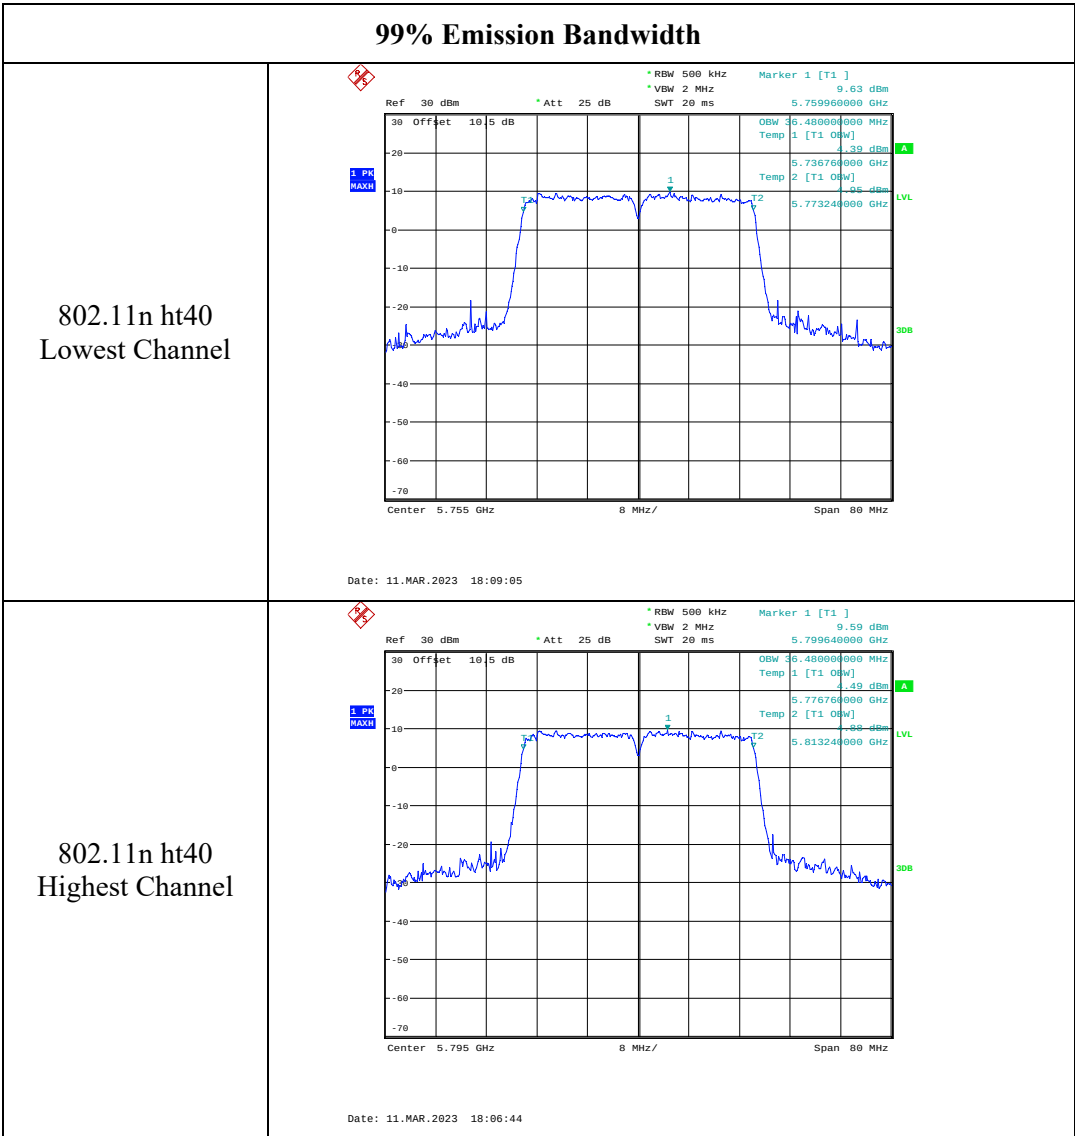
Date: 11.MAR.2023 17:51:30

802.11n ht20
Middle Channel

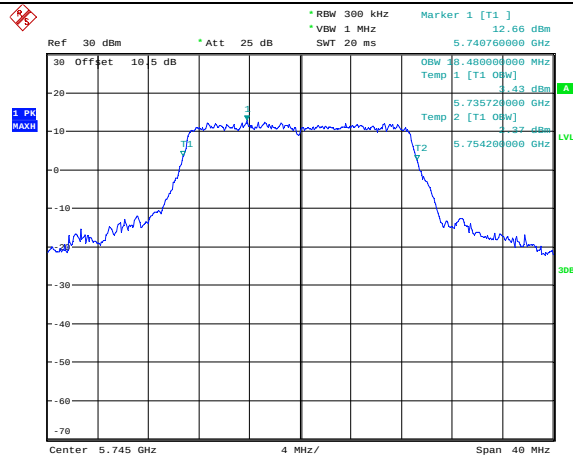
Date: 11.MAR.2023 17:50:07

802.11n ht20
Highest Channel

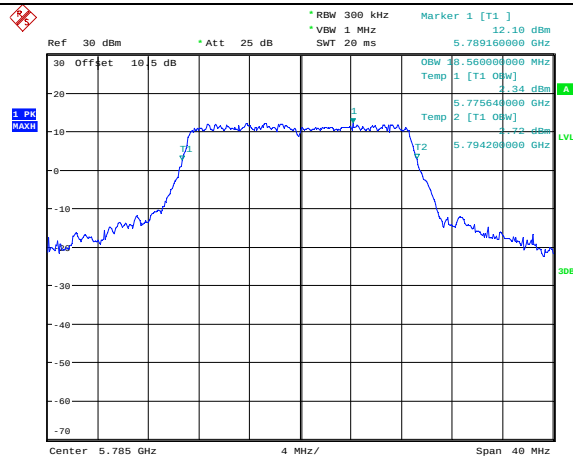
Date: 11.MAR.2023 17:49:18



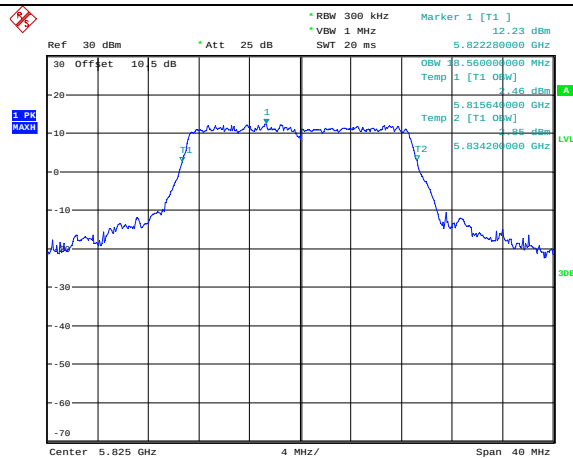
99% Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.MAR.2023 17:52:40

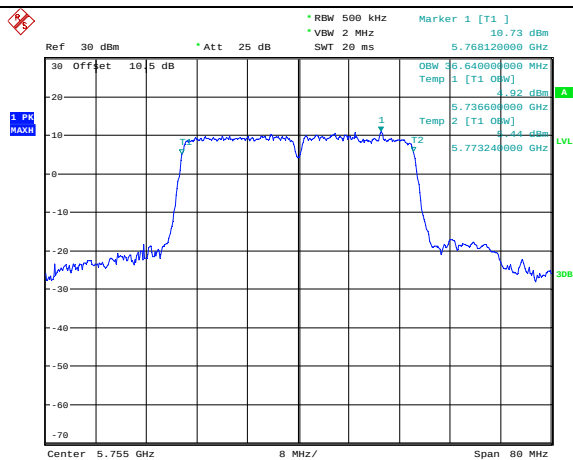
802.11ac vht20
Middle Channel

Date: 11.MAR.2023 17:59:12

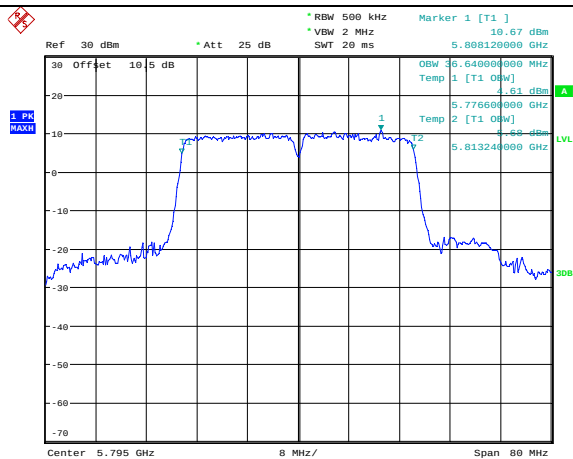
802.11ac vht20
Highest Channel

Date: 11.MAR.2023 18:00:08

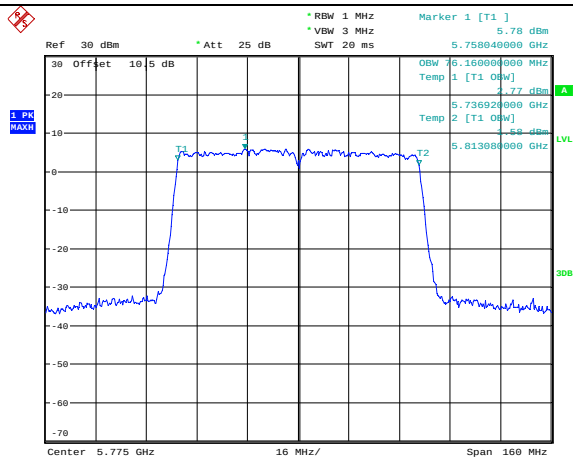
99% Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.MAR.2023 18:01:27

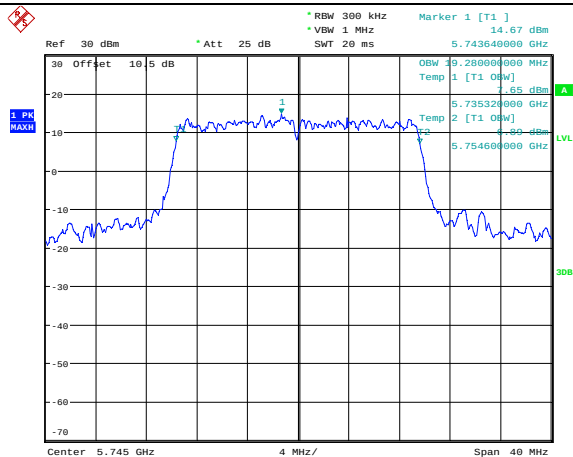
802.11ac vht40
Highest Channel

Date: 11.MAR.2023 18:04:17

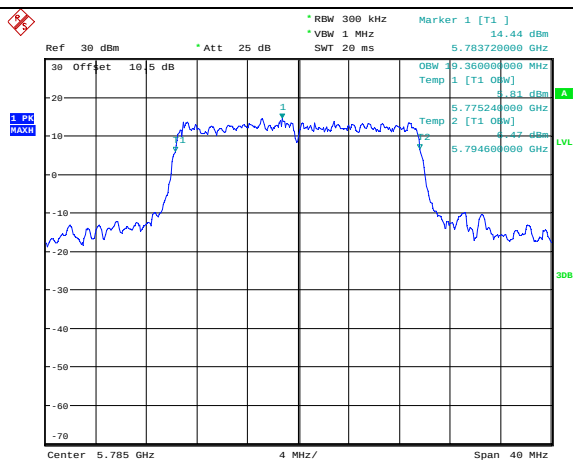
802.11ac vht80
Middle Channel

Date: 11.MAR.2023 18:10:39

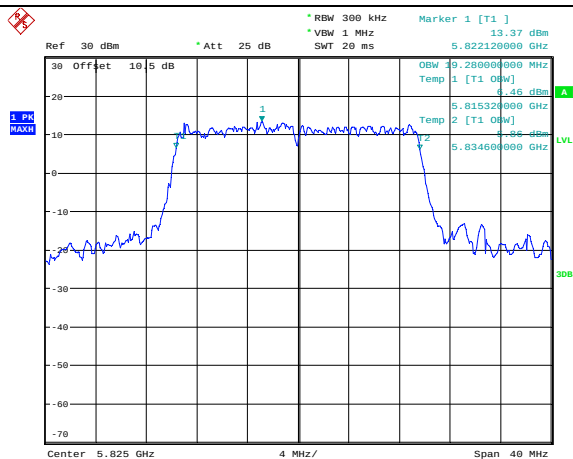
99% Emission Bandwidth

802.11ax he20
Lowest Channel

Date: 11.MAR.2023 18:23:38

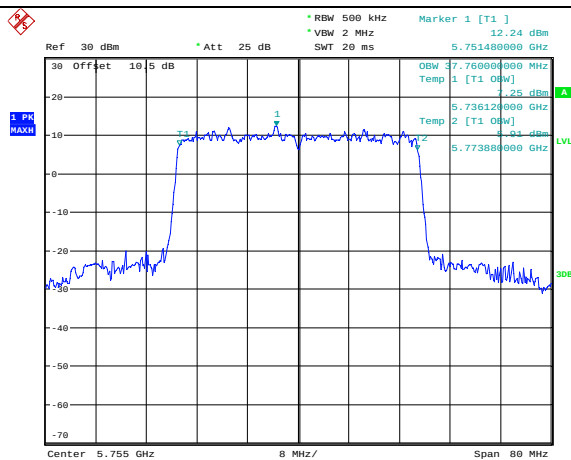
802.11ax he20
Middle Channel

Date: 11.MAR.2023 18:24:25

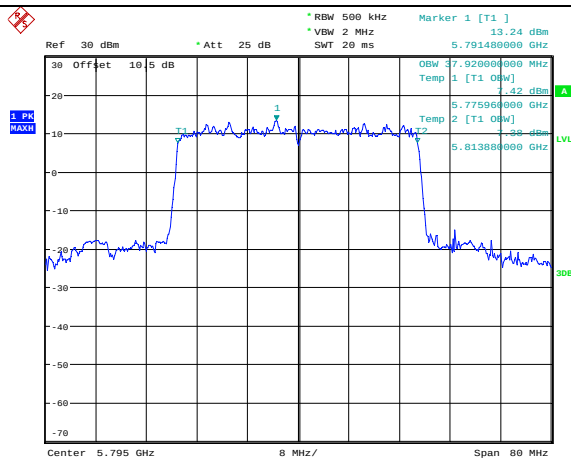
802.11ax he20
Highest Channel

Date: 11.MAR.2023 18:25:34

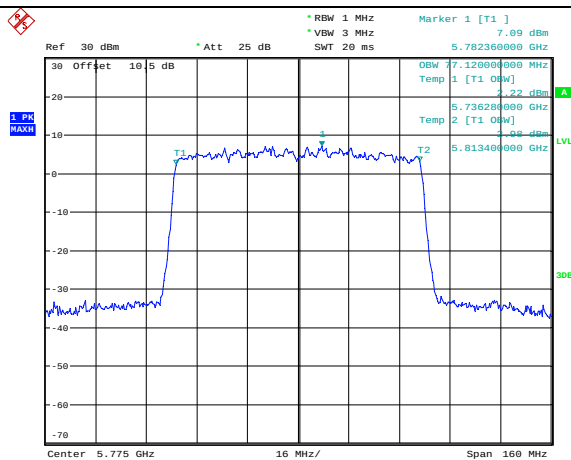
99% Emission Bandwidth

802.11ax he40
Lowest Channel

Date: 11.MAR.2023 18:20:38

802.11ax he40
Highest Channel

Date: 11.MAR.2023 18:22:36

802.11ax he80
Middle Channel

Date: 11.MAR.2023 18:19:05

4.4 Maximum Conducted Output Power:

Serial Number:	21EC	Test Date:	2023/2/22-2023/3/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2-25.9	Relative Humidity: (%)	43-55	ATM Pressure: (kPa)	101.7-102.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250 MHz:**

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5180	19.68	17.84	/	30
	5200	20.23	20.03	/	30
	5240	18.86	17.52	/	30
802.11n ht20	5180	16.12	16.98	19.58	27.07
	5200	17.85	18.81	21.37	27.07
	5240	14.92	16.58	18.84	27.07
802.11n ht40	5190	13.94	15.04	17.54	27.07
	5230	13.16	14.86	17.10	27.07
802.11ac vht20	5180	15.56	16.54	19.09	27.07
	5200	16.91	18.06	20.53	27.07
	5240	15.12	16.75	19.02	27.07
802.11ac vht40	5190	13.12	14.35	16.79	27.07
	5230	13.61	15.33	17.56	27.07
802.11ac vht80	5210	12.08	13.31	15.75	27.07
802.11ax he20	5180	16.15	16.98	19.60	27.07
	5200	17.31	18.26	20.82	27.07
	5240	15.23	16.94	19.18	27.07
802.11ax he40	5190	12.54	13.45	16.03	27.07
	5230	13.26	14.76	17.08	27.07
802.11ax he80	5210	10.81	12.47	14.73	27.07

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

For Non-beamforming mode:

Directional gain = 5.93dBi

For Beamforming mode:

Directional gain = 5.93+3 = 8.93 dBi

The worst limit Beamforming mode was used in the table.

5250-5350 MHz and Cross Band 5150-5250 MHz&5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5260	21.68	17.64	/	24
	5280	23.21	19.21	/	24
	5320	21.79	17.65	/	24
802.11n ht20	5260	16.32	15.18	18.80	20.98
	5280	17.85	16.81	20.37	20.98
	5320	17.89	16.51	20.26	20.98
802.11n ht40	5270	15.99	15.09	18.57	20.98
	5310	16.16	14.46	18.40	20.98
802.11ac vht20	5260	13.56	12.44	16.05	20.98
	5280	13.91	12.06	16.09	20.98
	5320	13.82	11.75	15.92	20.98
802.11ac vht40	5270	13.52	12.67	16.13	20.98
	5310	13.67	11.33	15.67	20.98
802.11ac vht80	5290	12.28	10.48	14.48	20.98
802.11ax he20	5260	13.15	12.38	15.79	20.98
	5280	13.61	12.26	16.00	20.98
	5320	13.39	11.94	15.74	20.98
802.11ax he40	5270	13.69	12.37	16.09	20.98
	5310	13.26	11.68	15.55	20.98
802.11ax he80	5290	12.89	11.54	15.28	20.98
802.11ac vht160	5250	12.74	10.67	14.84	20.98
802.11ax he160	5250	12.61	11.59	15.14	20.98

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

For Non-beamforming mode:

Directional gain = 6.02dBi

For Beamforming mode:

Directional gain = 6.02+3 = 9.02 dBi

The worst limit Beamforming mode was used in the table.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5745	23.12	19.54	/	30
	5785	23.37	19.58	/	30
	5825	23.22	19.45	/	30
802.11n ht20	5745	22.45	19.68	24.29	27.66
	5785	22.29	19.76	24.22	27.66
	5825	21.98	19.84	24.05	27.66
802.11n ht40	5755	17.94	16.87	20.45	27.66
	5795	18.16	17.05	20.65	27.66
802.11ac vht20	5745	22.45	20.19	24.48	27.66
	5785	22.67	20.56	24.75	27.66
	5825	22.18	20.33	24.36	27.66
802.11ac vht40	5755	20.26	19.35	22.84	27.66
	5795	20.43	19.85	23.16	27.66
802.11ac vht80	5775	12.64	11.39	15.07	27.66
802.11ax he20	5745	22.31	19.95	24.30	27.66
	5785	22.51	20.77	24.74	27.66
	5825	21.87	20.97	24.45	27.66
802.11ax he40	5755	20.34	18.76	22.63	27.66
	5795	20.11	19.84	22.99	27.66
802.11ax he80	5775	12.88	12.45	15.68	27.66

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{\text{ANT}} \leq 4$;

So:

For Non-beamforming mode:

Directional gain = 5.34dBi

For Beamforming mode:

Directional gain = $5.34 + 3 = 8.34$ dBi

The worst limit Beamforming mode was used in the table.

4.5 Maximum power spectral density:

Serial Number:	21EC	Test Date:	2023/03/14-2023/03/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.4~23.6	Relative Humidity: (%)	37~38	ATM Pressure: (kPa)	101.2~101.7
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250 MHz:**

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5180	6.76	5.75	0.17	6.93	17.00
	5200	7.12	7.98	0.17	8.15	17.00
	5240	5.38	4.95	0.17	5.55	17.00
802.11n ht20	5180	2.90	4.42	0.35	7.09	11.07
	5200	4.34	6.44	0.35	8.88	11.07
	5240	1.00	3.92	0.35	6.06	11.07
802.11n ht40	5190	-2.16	-0.27	0.72	2.62	11.07
	5230	-3.41	-0.57	0.72	1.97	11.07
802.11ac vht20	5180	4.48	4.19	/	7.35	11.07
	5200	6.36	5.50	/	8.96	11.07
	5240	5.54	4.24	/	7.95	11.07
802.11ac vht40	5190	-0.40	-0.99	0.16	2.49	11.07
	5230	1.10	-0.09	0.16	3.72	11.07
802.11ac vht80	5210	-4.26	-4.81	0.36	-1.16	11.07
802.11ax he20	5180	4.56	4.24	0.11	7.52	11.07
	5200	6.30	5.38	0.11	8.98	11.07
	5240	5.43	4.10	0.11	7.94	11.07
802.11ax he40	5190	-1.69	-2.14	0.20	1.30	11.07
	5230	0.13	-0.75	0.20	2.92	11.07
802.11ax he80	5210	-5.38	-5.99	0.34	-2.32	11.07

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 5.93 + 10 \cdot \log(2/1) = 8.93 \text{ dBi}$ for Non-beamforming mode

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 5.93 + 3 + 10 \cdot \log(2/1) = 11.93 \text{ dBi}$ for Beamforming mode

The worst limit Beamforming mode was used in the table.

Duty cycle ≥98%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 **Alternative** was used.

Duty cycle <98%, duty cycle variations are less than ±2%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 **Alternative** was used.

Duty cycle <98%, duty cycle variations exceed ±2%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 was used.

The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.

5250-5350 MHz and Cross Band 5150-5250 MHz&5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5260	8.37	4.39	0.17	8.54	11.00
	5280	10.39	6.52	0.17	10.56	11.00
	5320	8.95	4.21	0.17	9.12	11.00
802.11n ht20	5260	1.98	0.69	0.35	4.74	4.98
	5280	2.05	0.59	0.35	4.74	4.98
	5320	2.06	0.04	0.35	4.53	4.98
802.11n ht40	5270	0.22	-1.09	0.72	3.34	4.98
	5310	0.68	-1.52	0.72	3.45	4.98
802.11ac vht20	5260	2	0.75	/	4.43	4.98
	5280	2	0.62	/	4.37	4.98
	5320	2.07	0.08	/	4.20	4.98
802.11ac vht40	5270	0.71	-0.75	0.16	3.21	4.98
	5310	0.22	-2.04	0.16	2.41	4.98
802.11ac vht80	5290	-3.53	-5.08	0.36	-0.87	4.98
802.11ax he20	5260	1.96	0.72	0.11	4.50	4.98
	5280	2	0.52	0.11	4.44	4.98
	5320	2.01	0.04	0.11	4.26	4.98
802.11ax he40	5270	0.5	-0.84	0.20	3.09	4.98
	5310	0.13	-2.04	0.20	2.39	4.98
802.11ax he80	5290	-3.2	-4.91	0.34	-0.62	4.98
802.11ac vht160	5250	-5.41	-7.22	0.62	-2.59	4.98
802.11ax he160	5250	-6.16	-7.95	0.65	-3.30	4.98

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 6.02 + 10 \cdot \log(2/1) = 9.02 \text{ dBi}$ for Non-beamforming mode

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 6.02 + 3 + 10 \cdot \log(2/1) = 12.02 \text{ dBi}$ for Beamforming mode

The worst limit Beamforming mode was used in the table.

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 **Alternative** was used.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 **Alternative** was used.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 was used.

The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5745	10.98	5.94	0.17	11.15	30.00
	5785	10.77	6.04	0.17	10.94	30.00
	5825	10.25	6.26	0.17	10.42	30.00
802.11n ht20	5745	8.25	5.66	0.35	10.51	24.66
	5785	8.1	5.86	0.35	10.48	24.66
	5825	7.64	6.04	0.35	10.27	24.66
802.11n ht40	5755	2.94	1.67	0.72	6.08	24.66
	5795	2.67	1.82	0.72	6.00	24.66
802.11ac vht20	5745	8.83	5.83	/	10.59	24.66
	5785	8.37	6.05	/	10.37	24.66
	5825	7.92	5.25	/	9.80	24.66
802.11ac vht40	5755	4.43	3.43	0.16	7.13	24.66
	5795	4.09	3.55	0.16	7.00	24.66
802.11ac vht80	5775	-3.68	-4.58	0.36	-0.74	24.66
802.11ax he20	5745	8.72	5.83	0.11	10.63	24.66
	5785	8.5	6.01	0.11	10.55	24.66
	5825	6.76	5.17	0.11	9.16	24.66
802.11ax he40	5755	3.29	2.07	0.20	5.93	24.66
	5795	4	3.7	0.20	7.06	24.66
802.11ax he80	5775	-4.51	-5.01	0.34	-1.40	24.66

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 5.34 + 10 \cdot \log(2/1) = 8.34 \text{ dBi}$ for Non-beamforming mode

Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 5.34 + 3 + 10 \cdot \log(2/1) = 11.34 \text{ dBi}$ for Beamforming mode

The worst limit Beamforming mode was used in the table.

If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / \text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement

Duty cycle ≥98%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 **Alternative** was used.

Duty cycle <98%, duty cycle variations are less than ±2%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 **Alternative** was used.

Duty cycle <98%, duty cycle variations exceed ±2%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 was used.

The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.

Maximum power spectral density

The screenshot displays a spectrum analyzer interface. At the top, a red square icon with a white 'X' is in the upper left corner. The top status bar shows the following information:

- Center: 5.18 GHz
- Span: 40 MHz
- Ref: 20 dBm
- Att: 25 dB
- * RBW: 1 MHz
- * VBW: 3 MHz
- * SMT: 5 s
- Marker 1 [1]: 6.76 dBm
- 5.177200000 GHz

The main display area shows a spectrum plot with a blue trace. The vertical axis (Y-axis) is labeled 'dBm' and ranges from -80 to 20. The horizontal axis (X-axis) is labeled 'Offset' and ranges from -20 to 20. The plot shows a signal centered at 0 offset, with a peak level of approximately 10 dBm. The signal has a bandwidth of 4 MHz, as indicated by the 'Span' value. The plot is divided into a grid with major lines every 10 dB on the Y-axis and every 10 MHz on the X-axis.

Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SmT 5 s Marker 1 [T1] 7.12 dBm 5.197371429 GHz

20 Offset 10 5 dB

10 0 -10 -20 -30 -40 -50 -60 -70 -80

Center 5.2 GHz 4 MHz/ Span 40 MHz

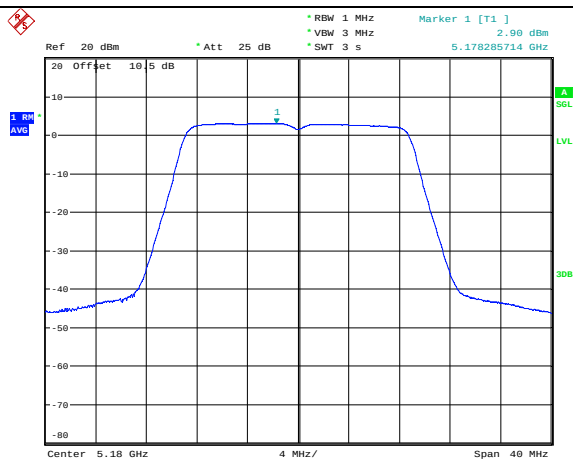
The screenshot displays a spectrum analyzer interface. At the top, a red 'X' icon is in the upper left corner. The top status bar shows the following parameters:

- Ref: 20 dBm
- * Att: 25 dB
- * RBW: 1 MHz
- * VBW: 3 MHz
- * SM/T: 5 s
- Marker 1 [T1]: 5.38 dBm
- 5.237600000 GHz

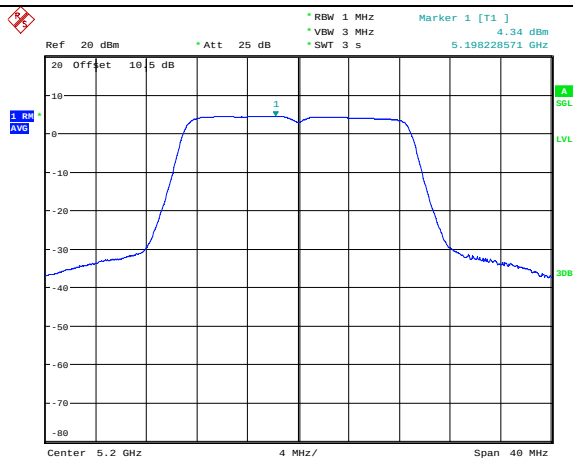
The main display area shows a spectrum plot with a blue trace. The horizontal axis represents frequency, with labels at 20, Off, set, 10, 5, dB, 4 MHz/ (span), and Span 40 MHz. The vertical axis represents power, with labels from -80 to 10 in increments of 10. A blue trace shows a signal centered at 5.24 GHz, with a peak level of approximately 0 dBm. A marker labeled '1' is placed on the trace at approximately 5.2376 GHz. The trace shows a flat top and steep sides, indicating a narrowband signal.

Date: 14.MAR.2023 15:38:50

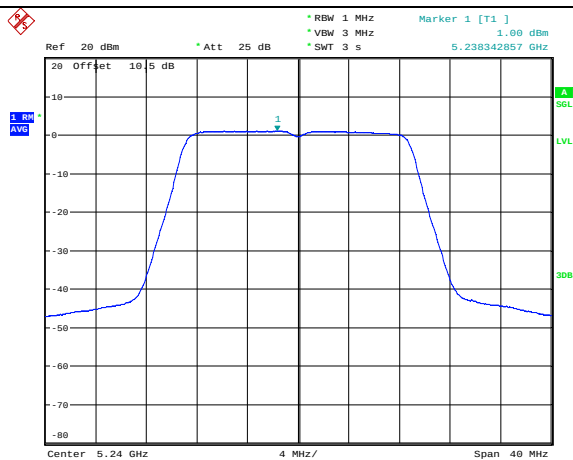
Maximum power spectral density

802.11n ht20
Lowest Channel

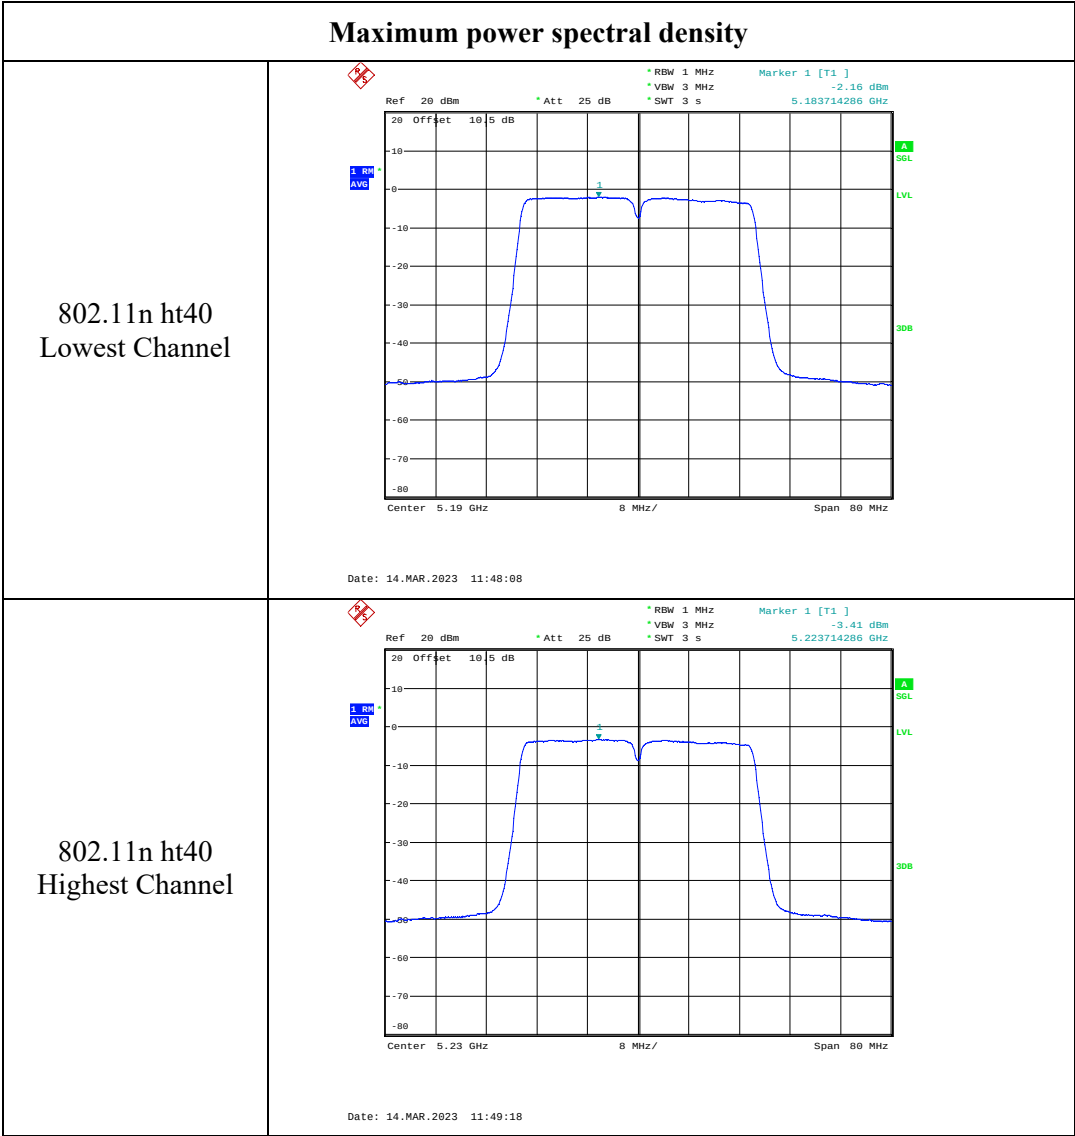
Date: 14.MAR.2023 11:42:08

802.11n ht20
Middle Channel

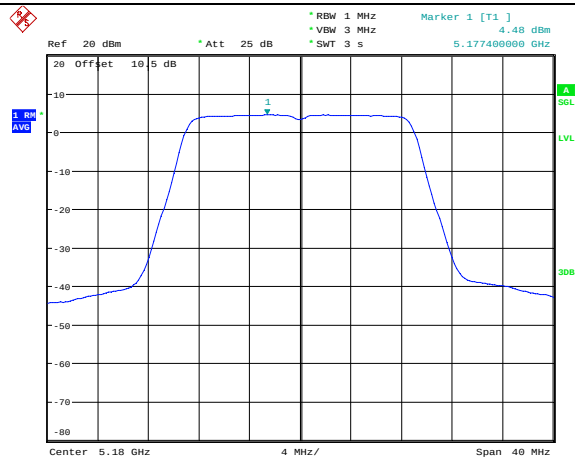
Date: 14.MAR.2023 11:43:44

802.11n ht20
Highest Channel

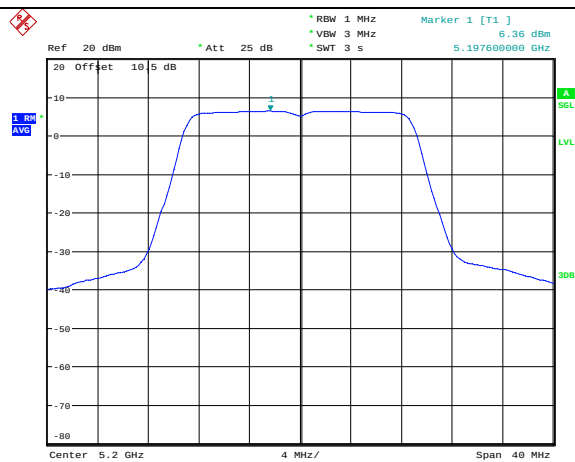
Date: 14.MAR.2023 11:42:54



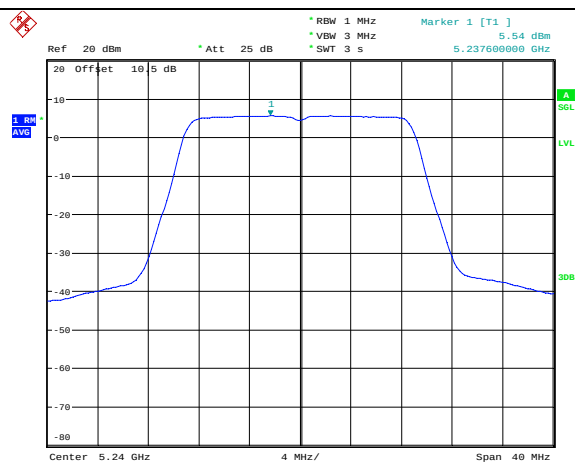
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 14.MAR.2023 13:33:59

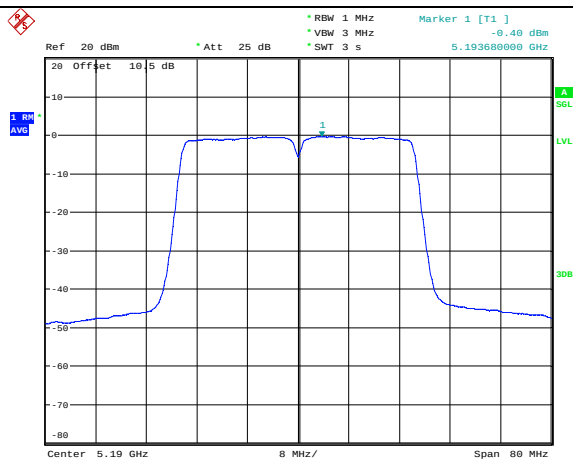
802.11ac vht20
Middle Channel

Date: 14.MAR.2023 14:26:31

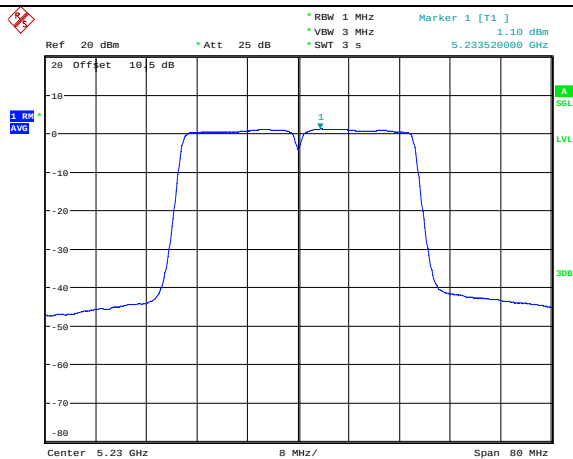
802.11ac vht20
Highest Channel

Date: 14.MAR.2023 13:37:39

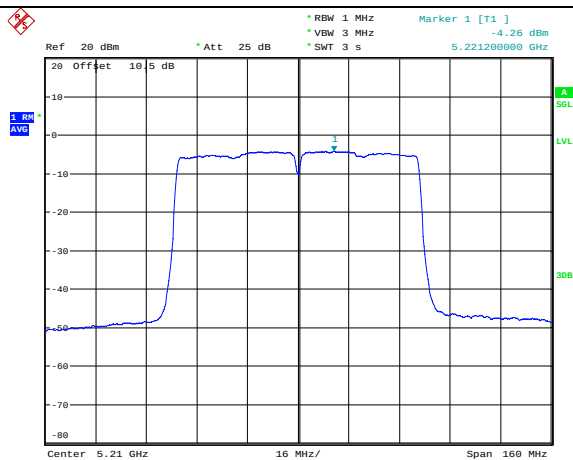
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 14.MAR.2023 13:27:43

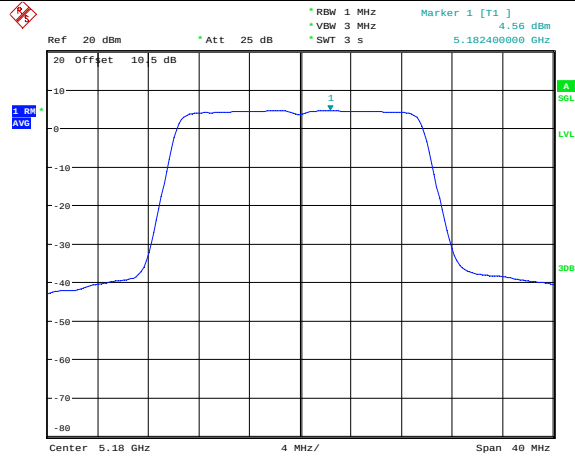
802.11ac vht40
Highest Channel

Date: 14.MAR.2023 13:23:39

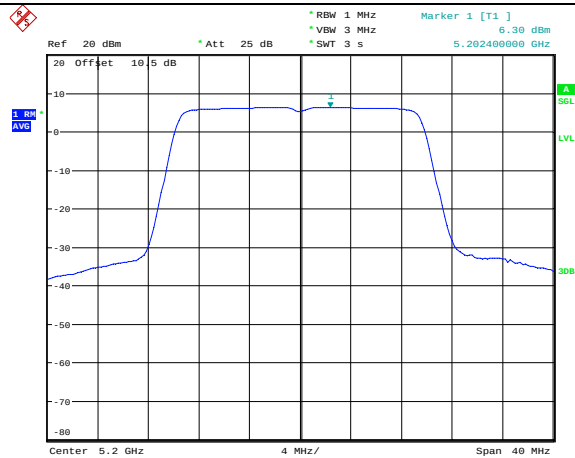
802.11ac vht80
Middle Channel

Date: 14.MAR.2023 14:33:01

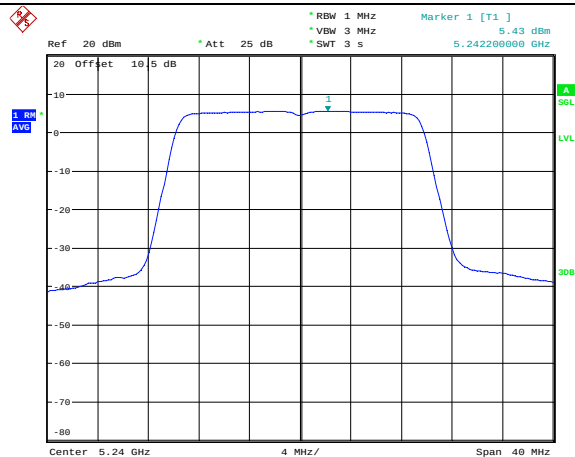
Maximum power spectral density

802.11ax he20
Lowest Channel

Date: 14.MAR.2023 14:50:22

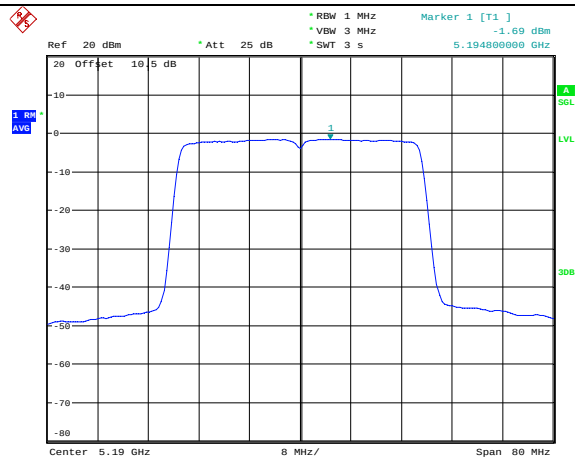
802.11ax he20
Middle Channel

Date: 14.MAR.2023 14:51:39

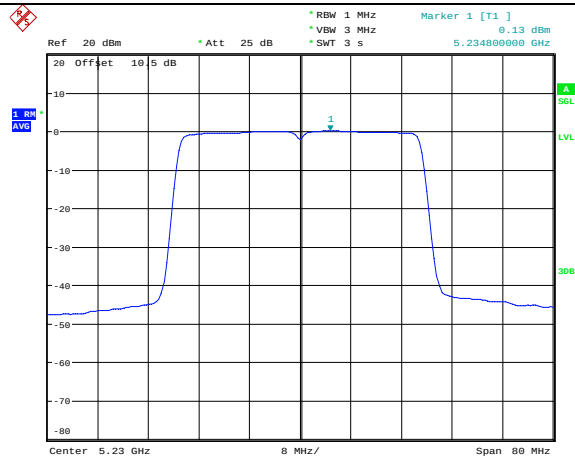
802.11ax he20
Highest Channel

Date: 14.MAR.2023 14:52:53

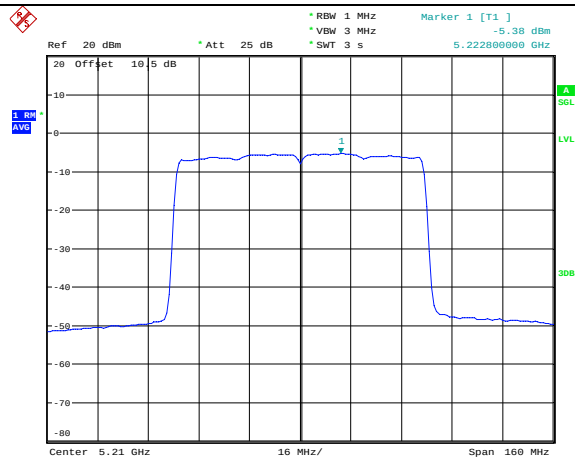
Maximum power spectral density

802.11ax he40
Lowest Channel

Date: 14.MAR.2023 14:59:17

802.11ax he40
Highest Channel

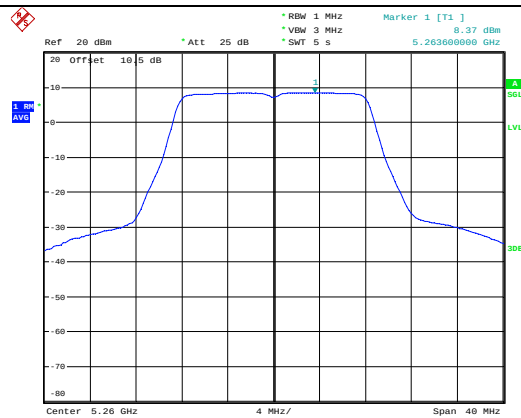
Date: 14.MAR.2023 15:00:51

802.11ax he80
Middle Channel

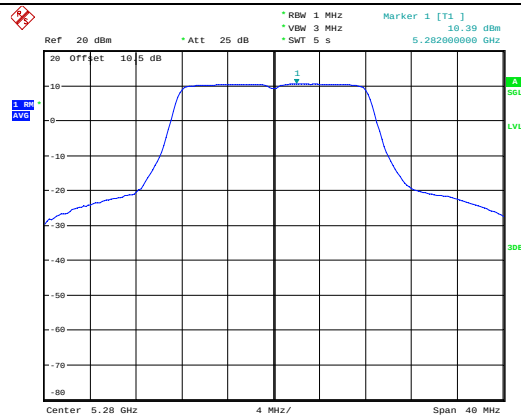
Date: 14.MAR.2023 15:02:24

5250-5350MHz:

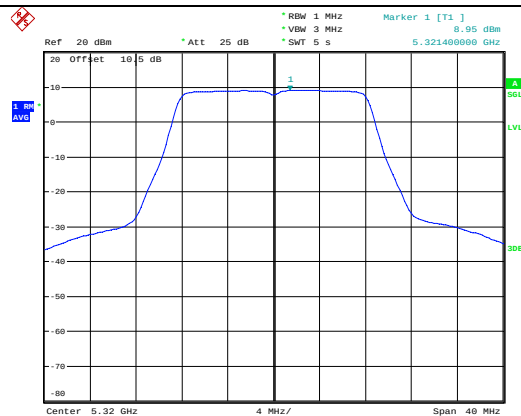
Maximum power spectral density

802.11a
Lowest Channel

Date: 14.MAR.2023 16:41:14

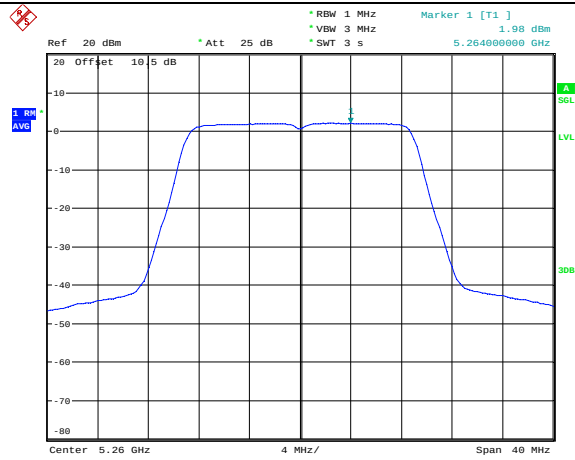
802.11a
Middle Channel

Date: 14.MAR.2023 16:45:57

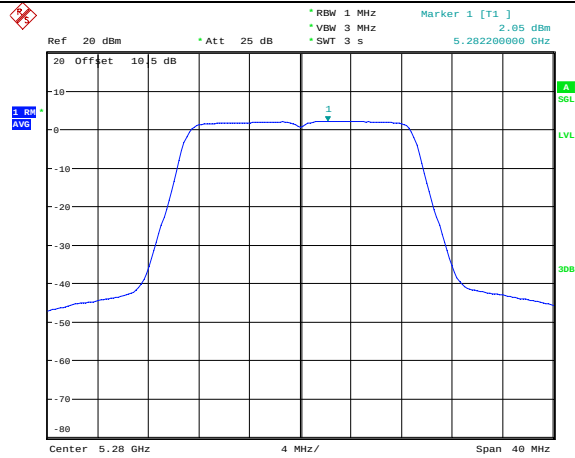
802.11a
Highest Channel

Date: 14.MAR.2023 16:47:29

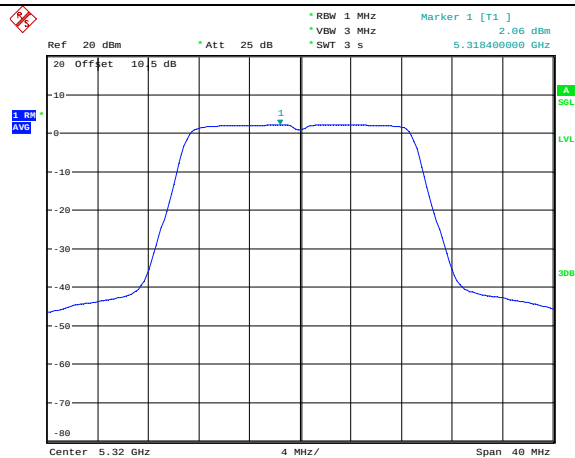
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 14.MAR.2023 16:53:18

802.11n ht20
Middle Channel

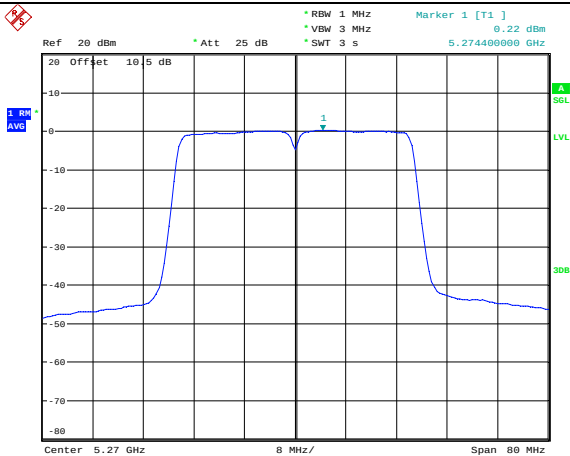
Date: 14.MAR.2023 16:56:41

802.11n ht20
Highest Channel

Date: 14.MAR.2023 17:00:08

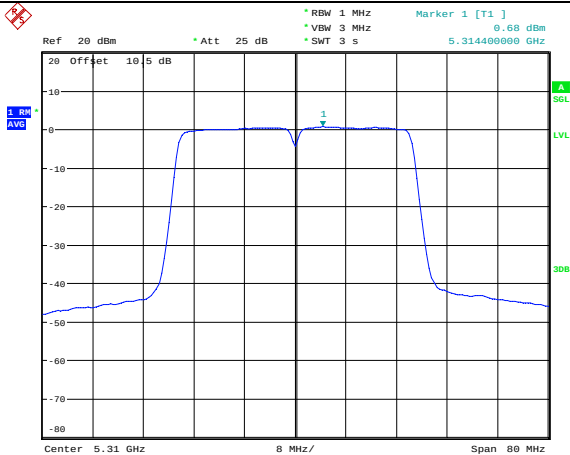
Maximum power spectral density

802.11n ht40
Lowest Channel



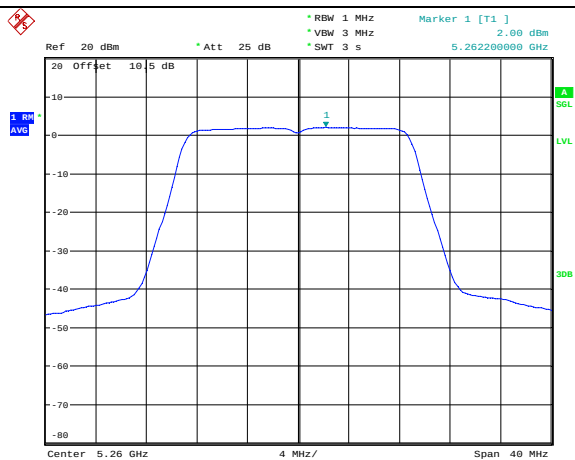
Date: 14.MAR.2023 17:04:44

802.11n ht40
Highest Channel

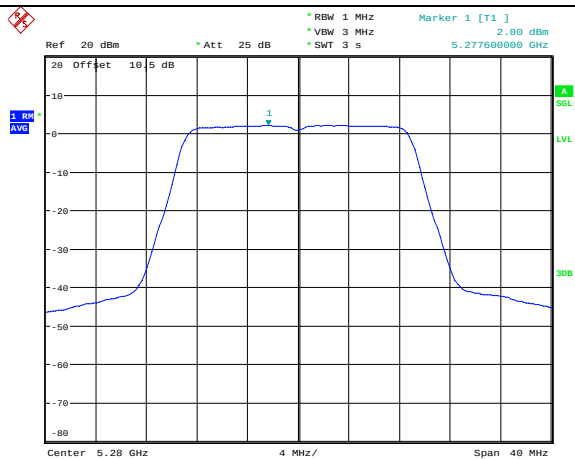


Date: 14.MAR.2023 17:06:00

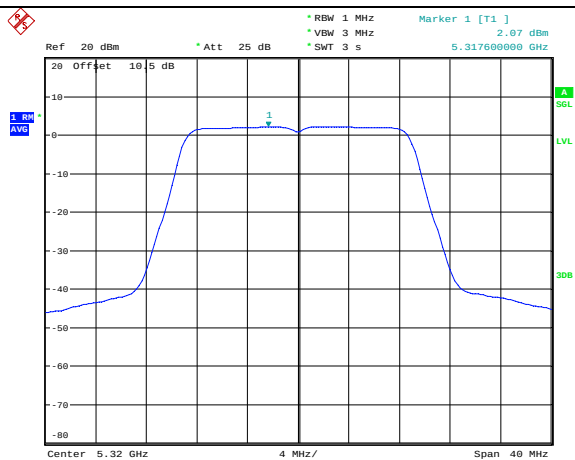
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 14.MAR.2023 17:11:11

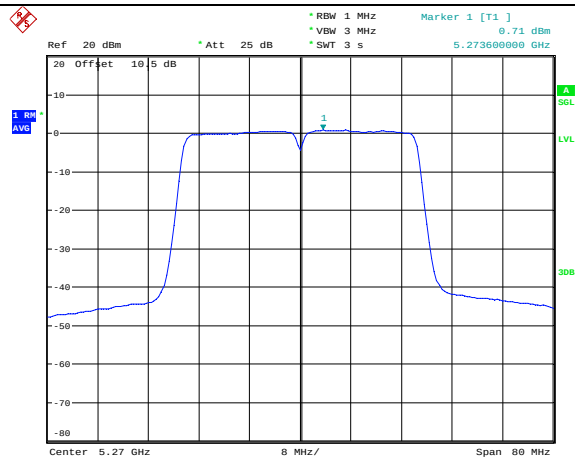
802.11ac vht20
Middle Channel

Date: 14.MAR.2023 17:18:29

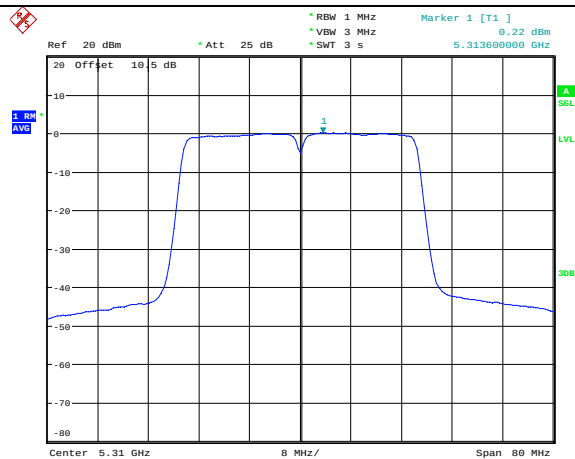
802.11ac vht20
Highest Channel

Date: 14.MAR.2023 17:24:46

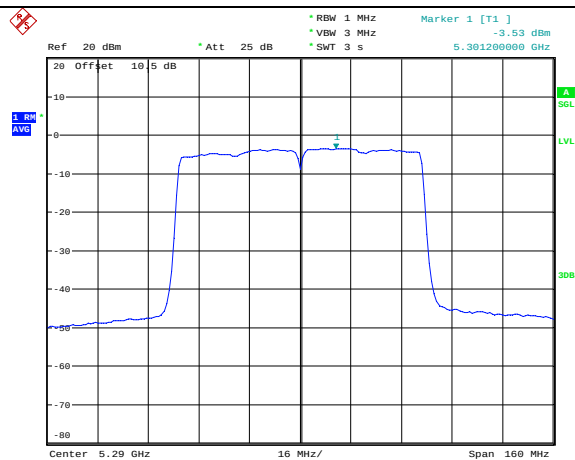
Maximum power spectral density

802.11ac vht40
Lowest Channel

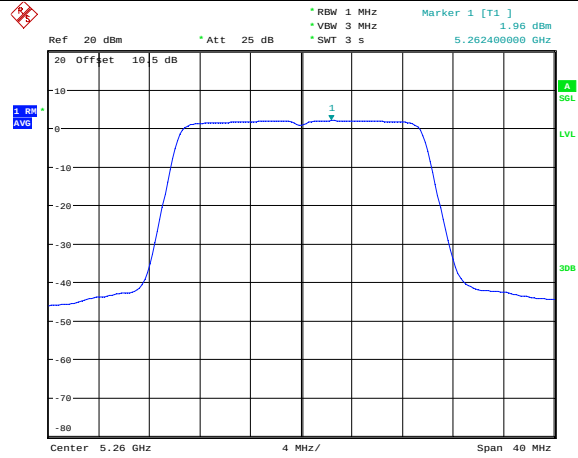
Date: 14.MAR.2023 17:26:42

802.11ac vht40
Highest Channel

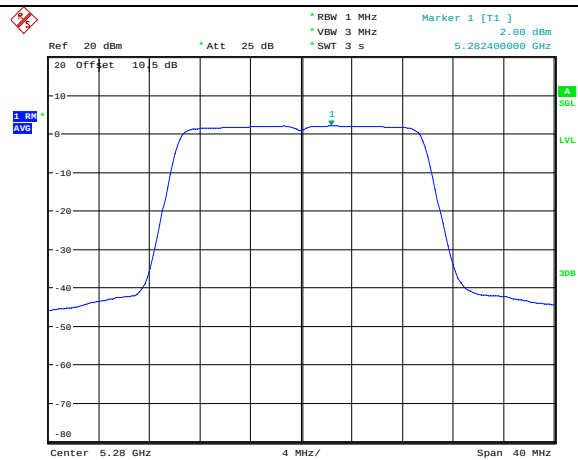
Date: 14.MAR.2023 17:27:47

802.11ac vht80
Middle Channel

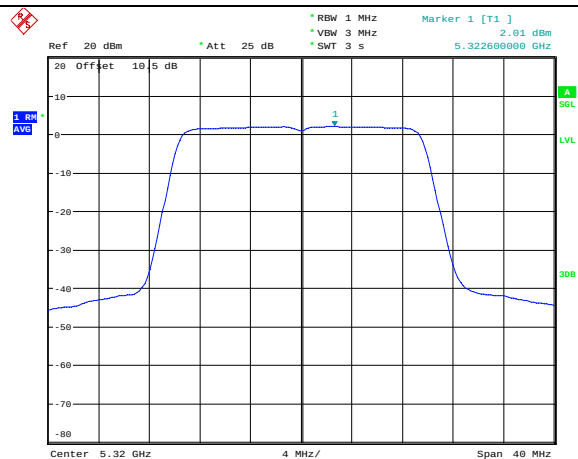
Date: 14.MAR.2023 17:30:20

Maximum power spectral density802.11ax he20
Lowest Channel

Date: 14.MAR.2023 17:41:11

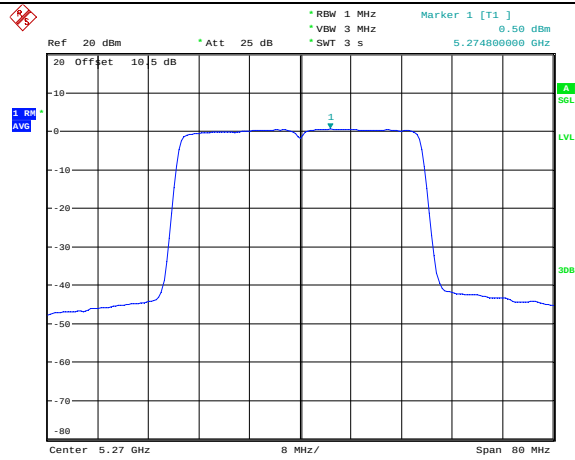
802.11ax he20
Middle Channel

Date: 14.MAR.2023 17:43:18

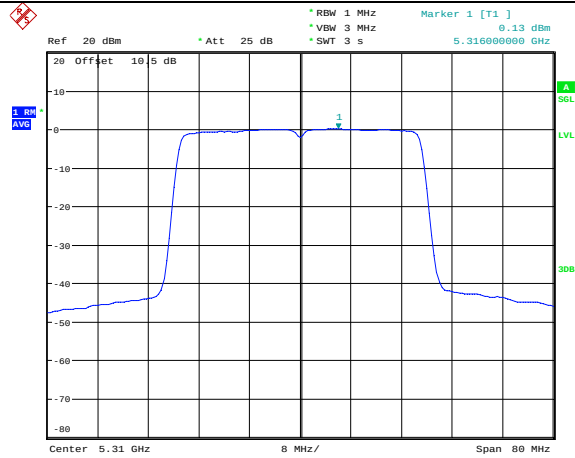
802.11ax he20
Highest Channel

Date: 14.MAR.2023 17:50:11

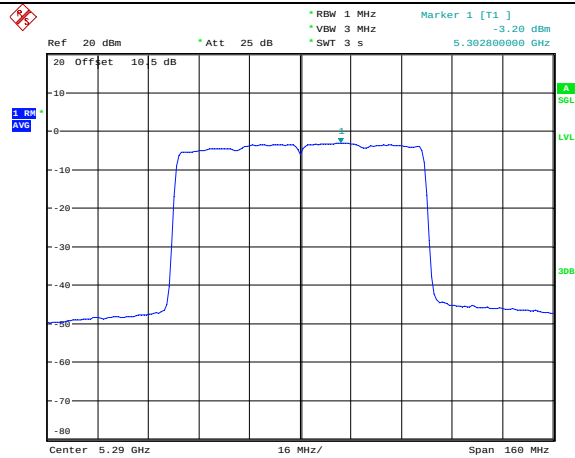
Maximum power spectral density

802.11ax he40
Lowest Channel

Date: 14.MAR.2023 17:52:07

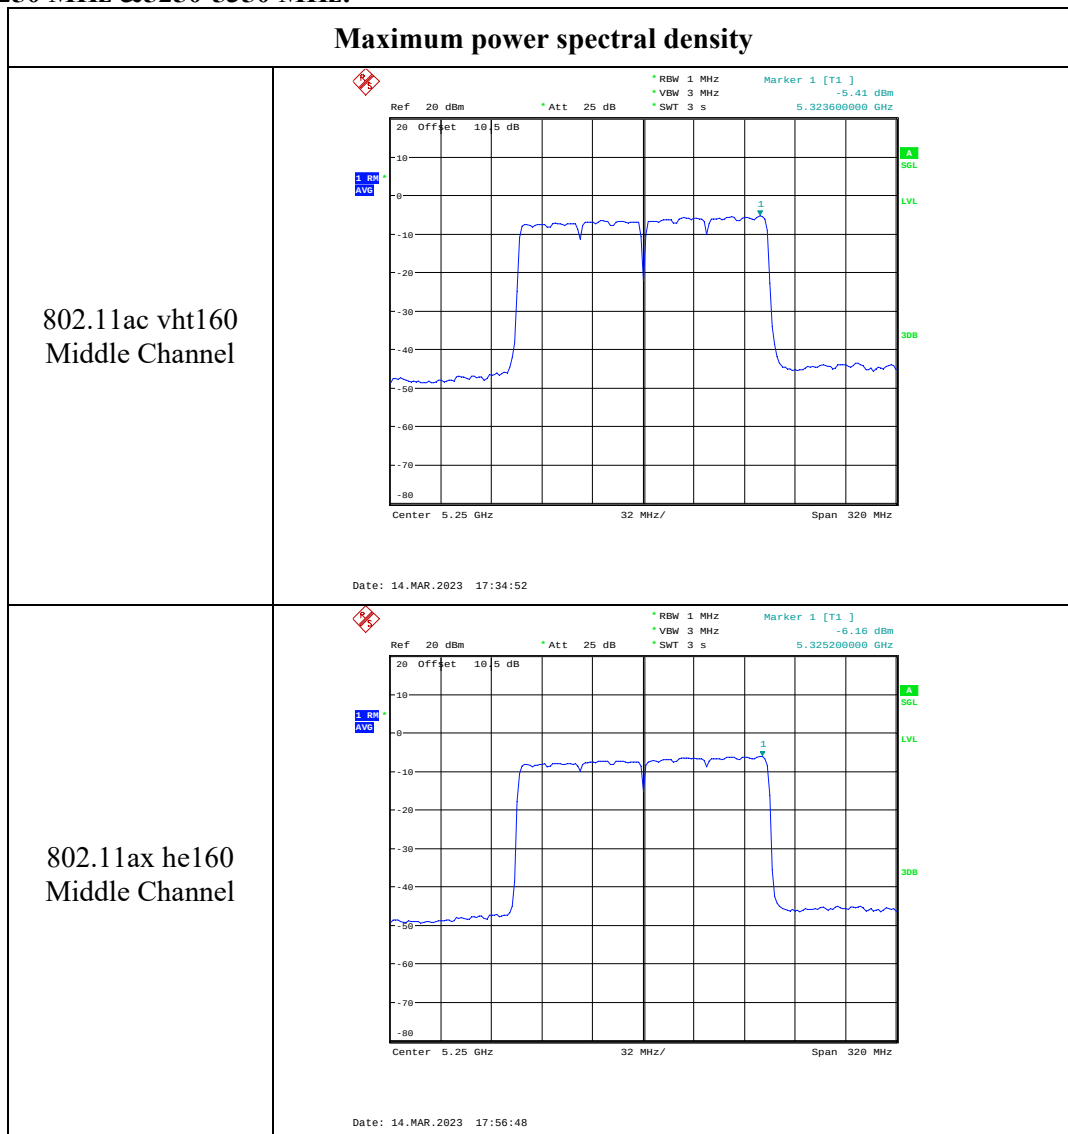
802.11ax he40
Highest Channel

Date: 14.MAR.2023 17:53:16

802.11ax he80
Middle Channel

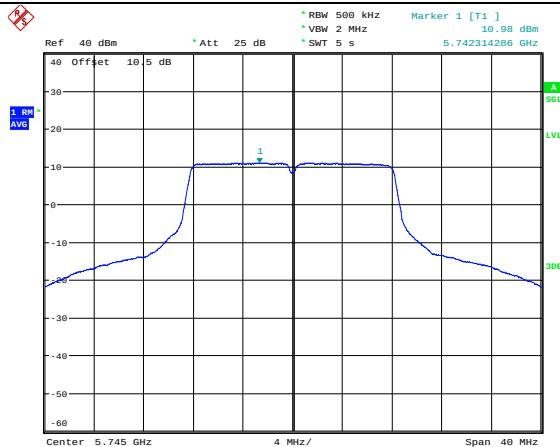
Date: 14.MAR.2023 17:55:15

5150-5250 MHz & 5250-5350 MHz:

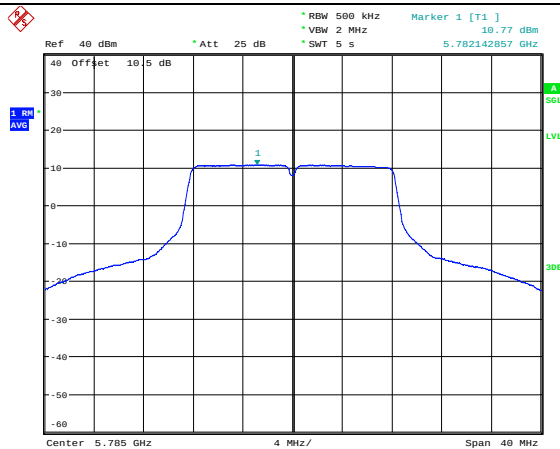


5725-5850MHz

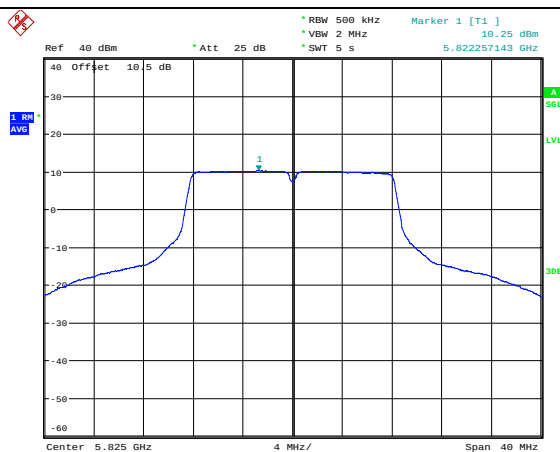
Maximum power spectral density

802.11a
Lowest Channel

Date: 16.MAR.2023 17:48:13

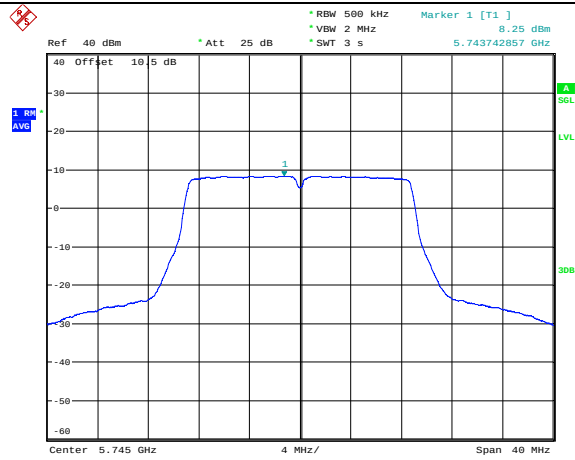
802.11a
Middle Channel

Date: 16.MAR.2023 17:49:08

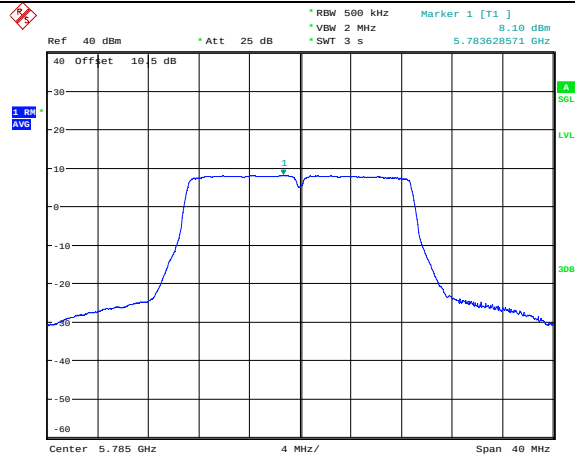
802.11a
Highest Channel

Date: 16.MAR.2023 17:49:55

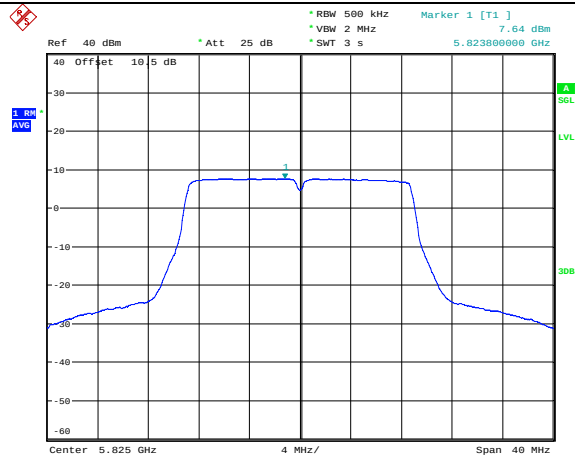
Maximum power spectral density

802.11n ht20
Lowest Channel

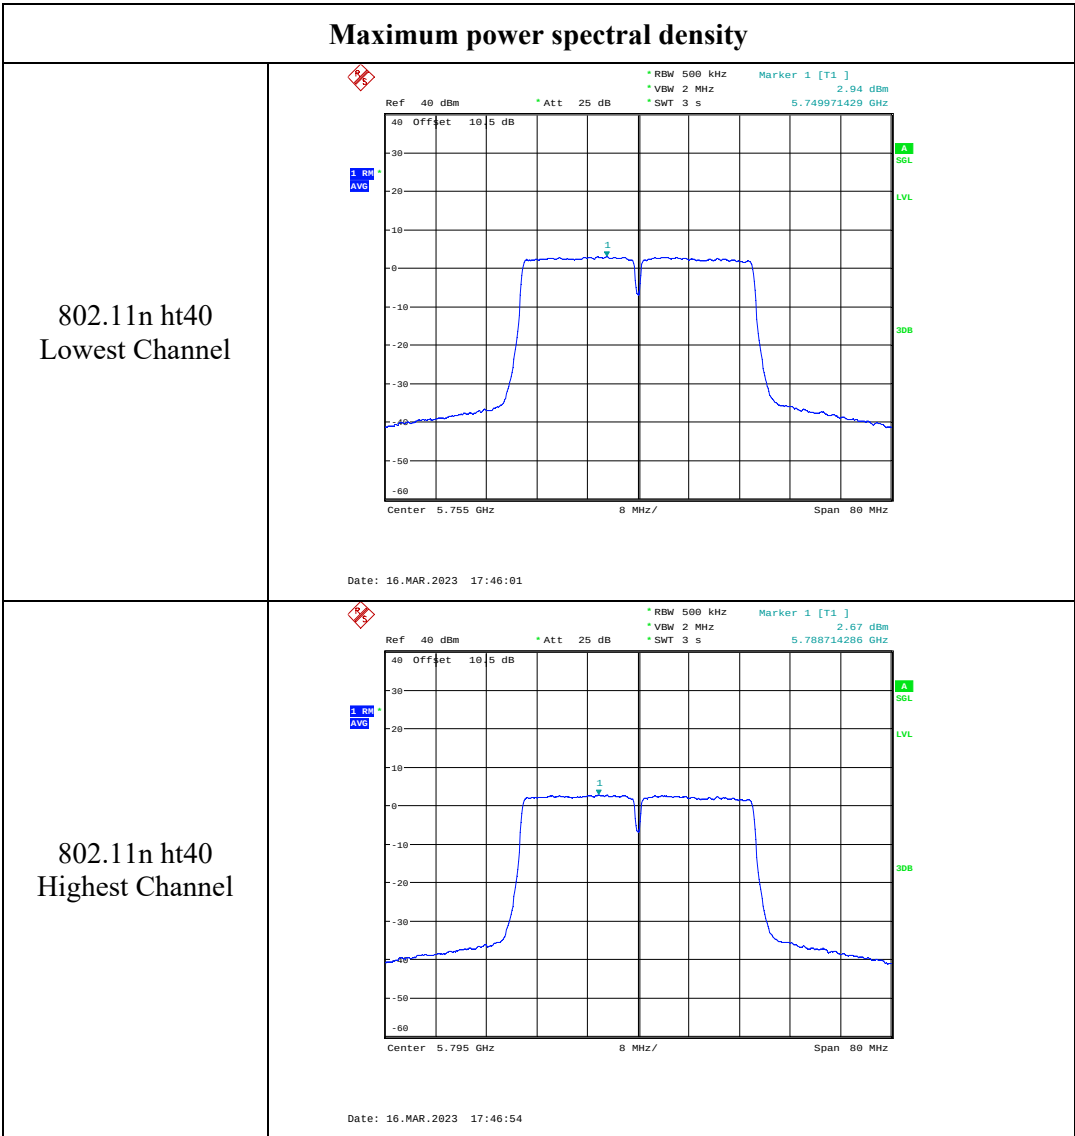
Date: 16.MAR.2023 17:44:47

802.11n ht20
Middle Channel

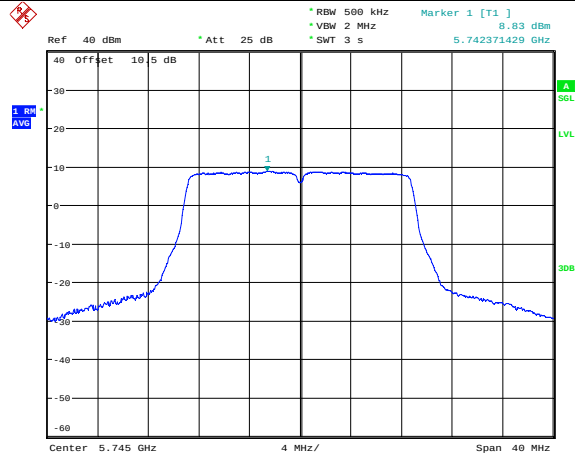
Date: 16.MAR.2023 17:44:02

802.11n ht20
Highest Channel

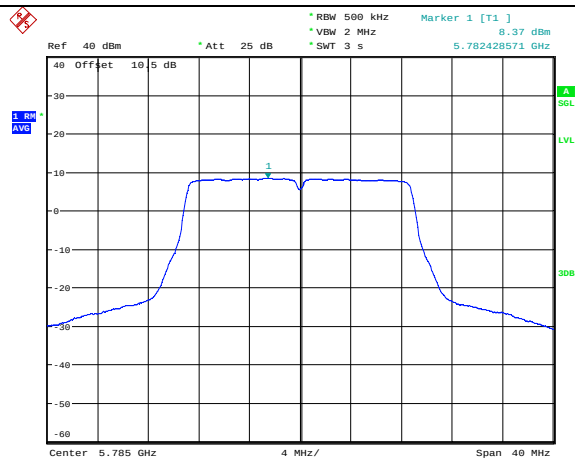
Date: 16.MAR.2023 17:43:19



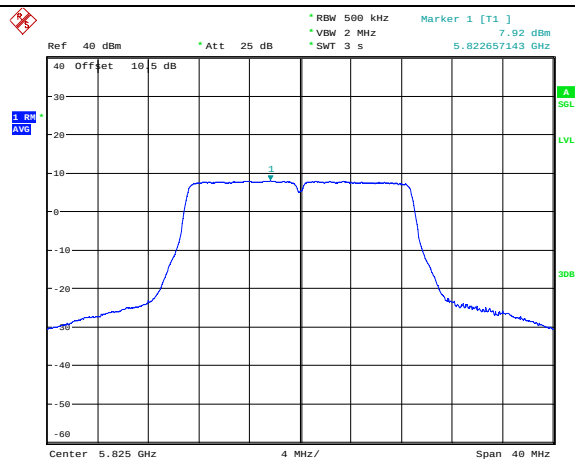
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 16.MAR.2023 17:40:53

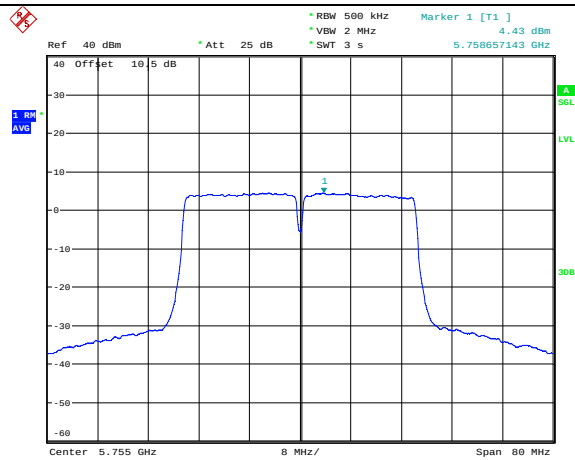
802.11ac vht20
Middle Channel

Date: 16.MAR.2023 17:41:47

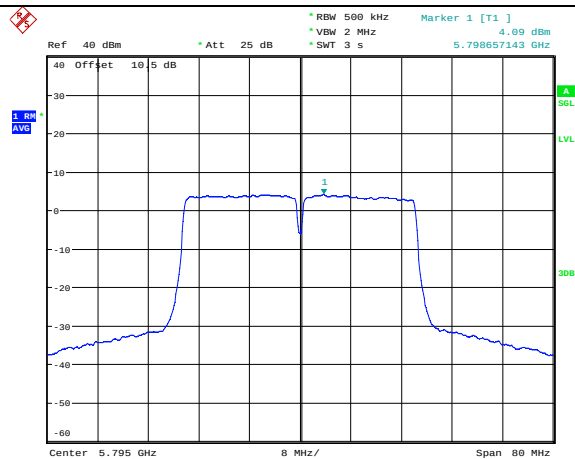
802.11ac vht20
Highest Channel

Date: 16.MAR.2023 17:42:30

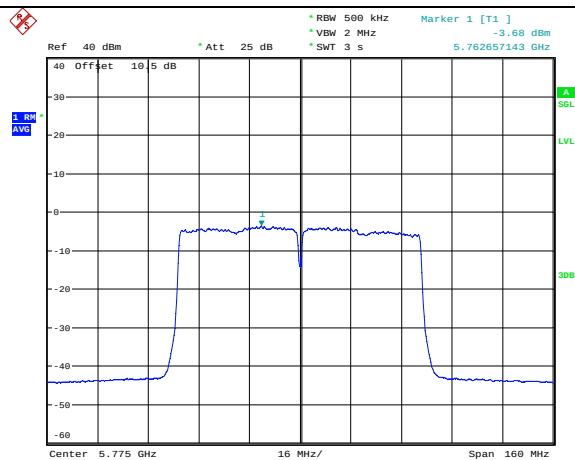
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 16.MAR.2023 17:32:11

802.11ac vht40
Highest Channel

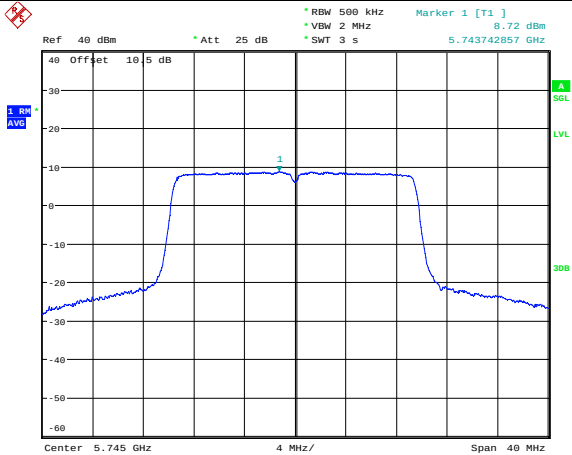
Date: 16.MAR.2023 17:33:33

802.11ac vht80
Middle Channel

Date: 16.MAR.2023 17:36:20

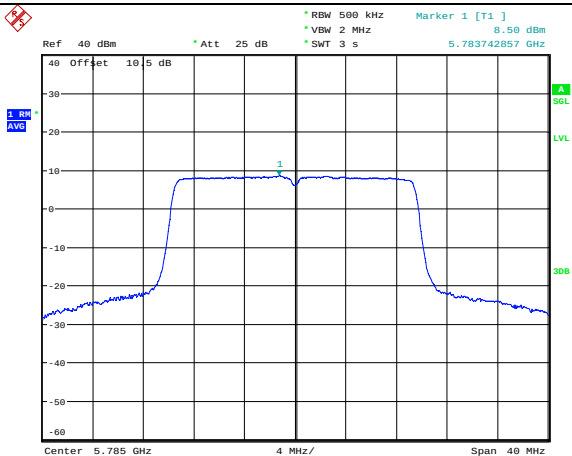
Maximum power spectral density

802.11ax he20
Lowest Channel



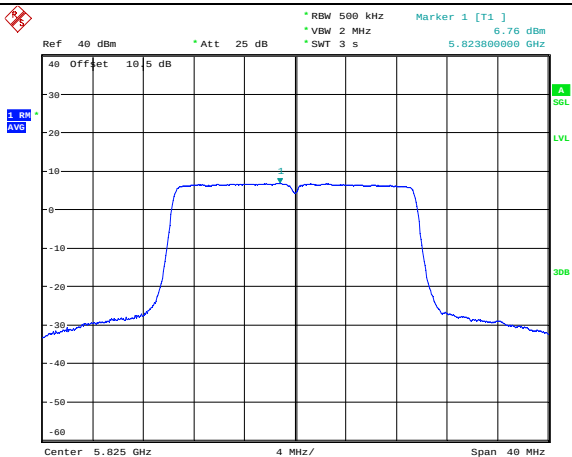
Date: 16.MAR.2023 17:52:22

802.11ax he20
Middle Channel



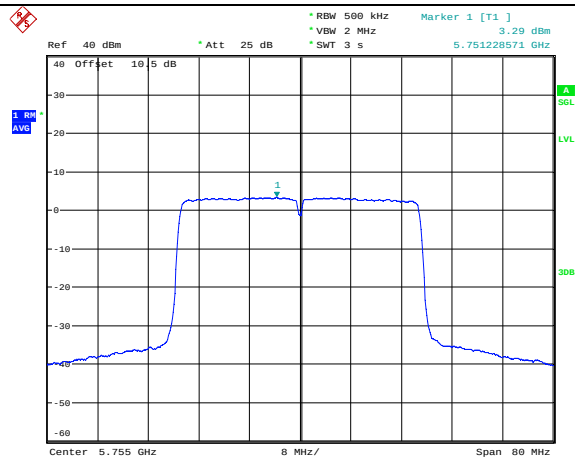
Date: 16.MAR.2023 17:53:06

802.11ax he20
Highest Channel

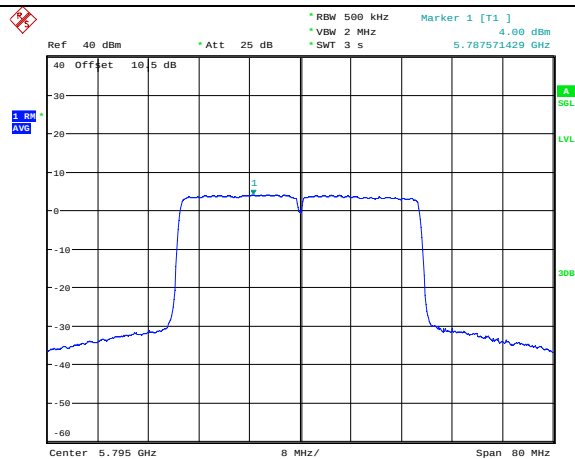


Date: 16.MAR.2023 17:54:02

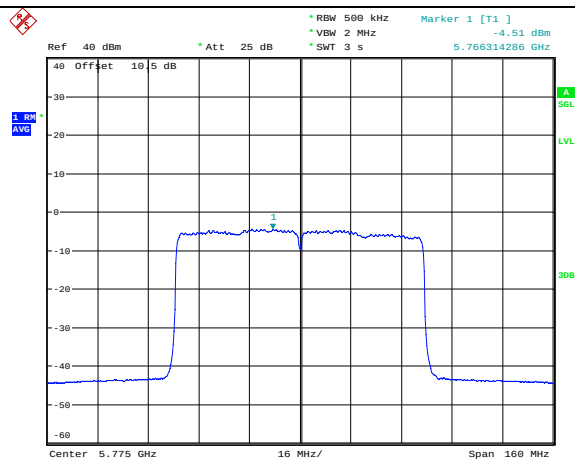
Maximum power spectral density

802.11ax he40
Lowest Channel

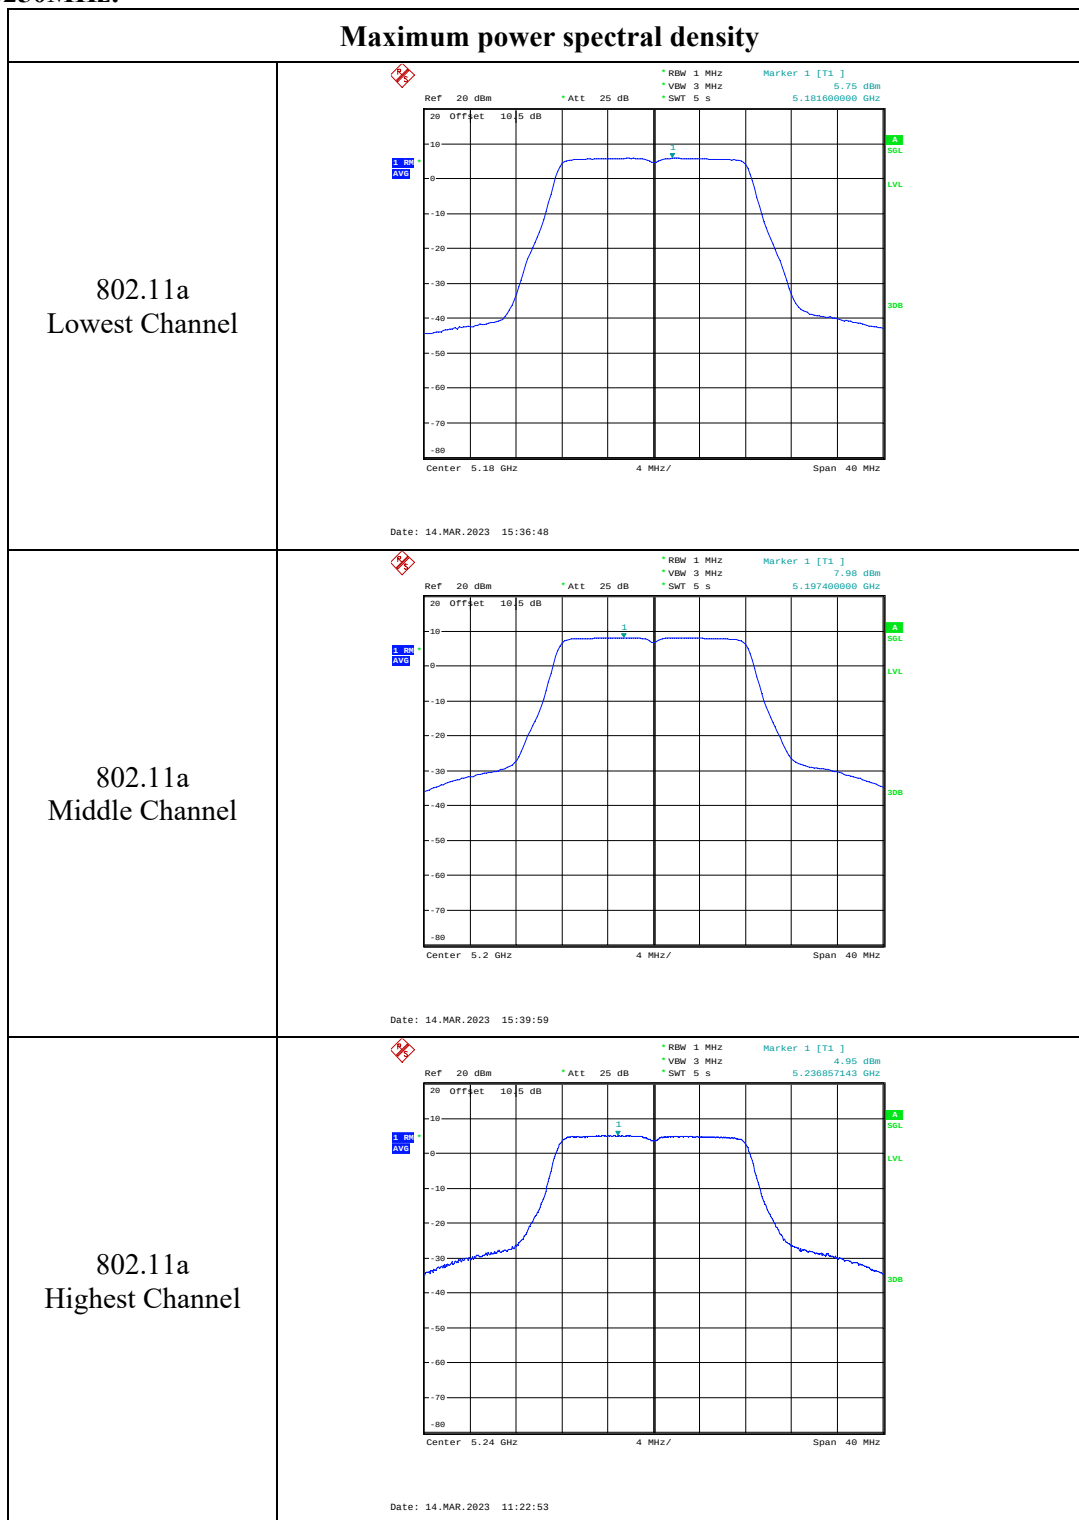
Date: 16.MAR.2023 17:55:19

802.11ax he40
Highest Channel

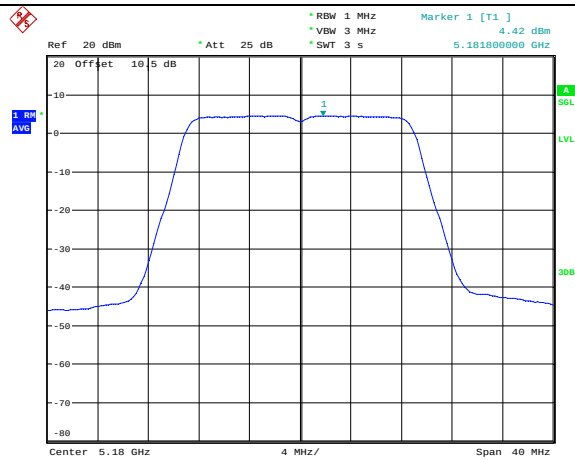
Date: 16.MAR.2023 17:59:17

802.11ax he80
Middle Channel

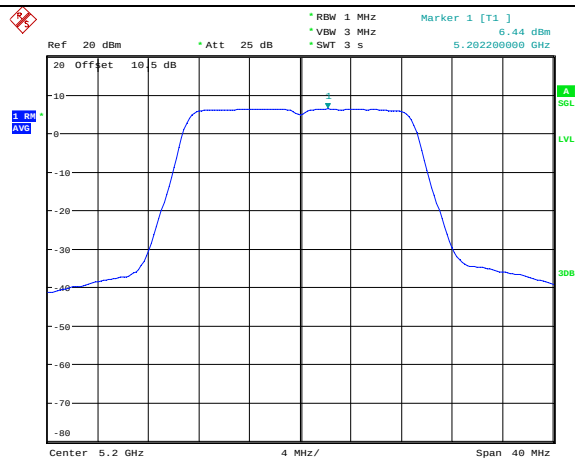
Date: 16.MAR.2023 18:00:50

Chain 1:
5150-5250MHz:

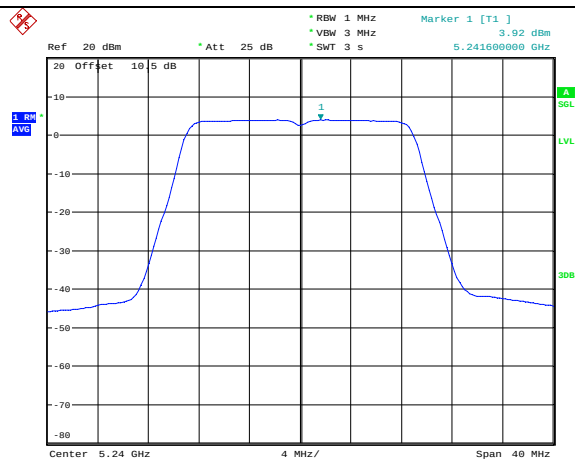
Maximum power spectral density

802.11n ht20
Lowest Channel

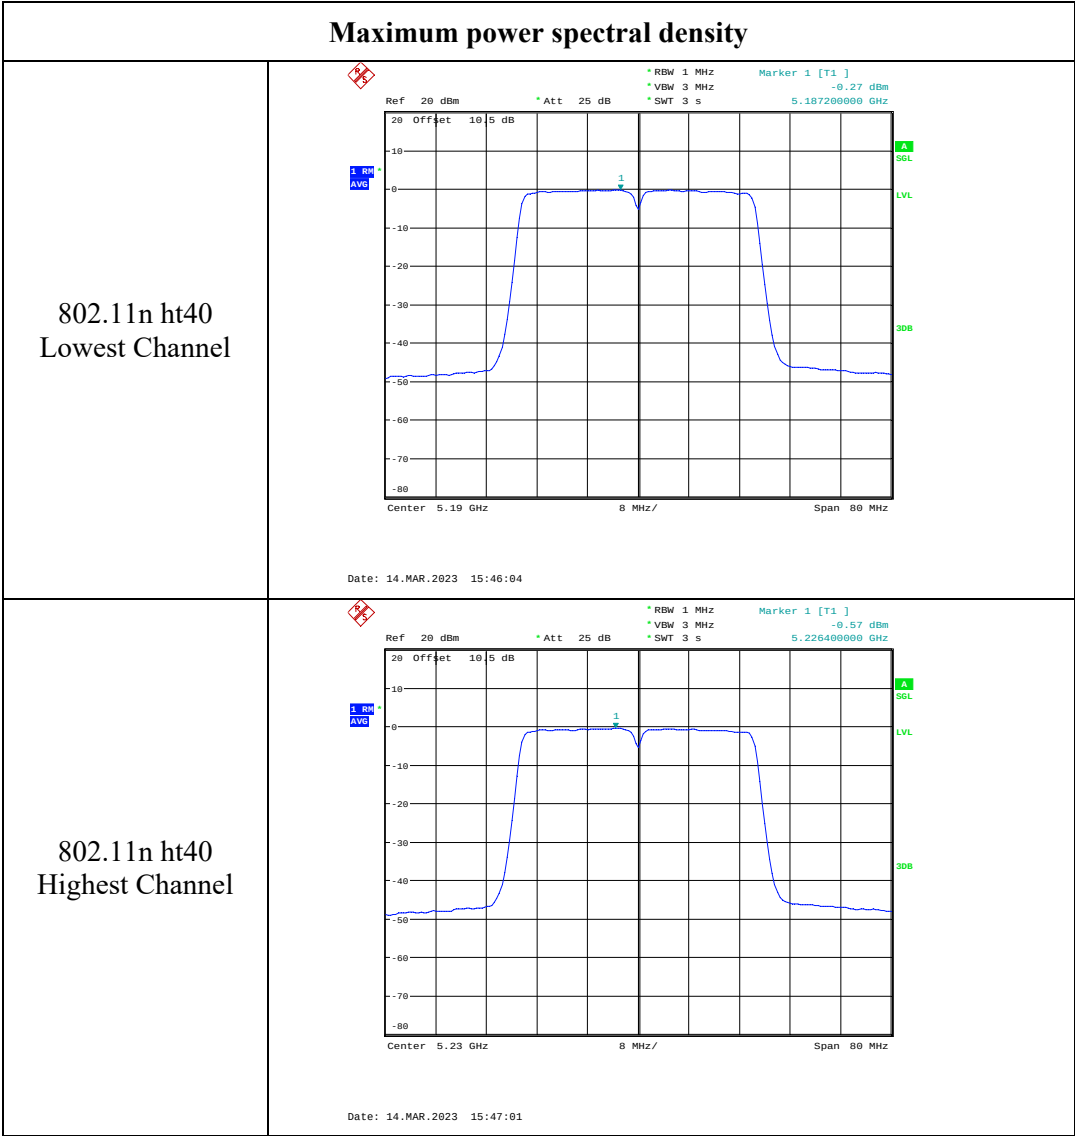
Date: 14.MAR.2023 15:42:57

802.11n ht20
Middle Channel

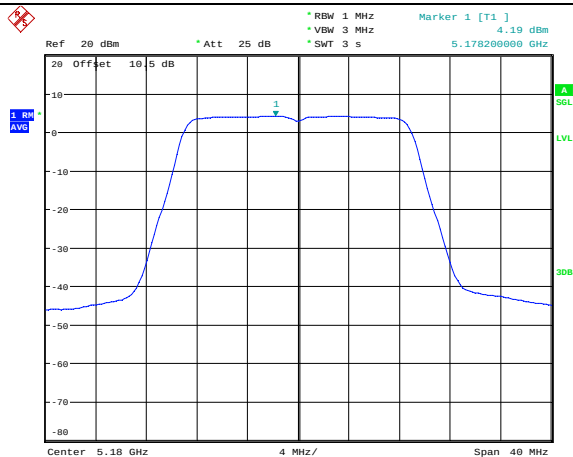
Date: 14.MAR.2023 15:41:57

802.11n ht20
Highest Channel

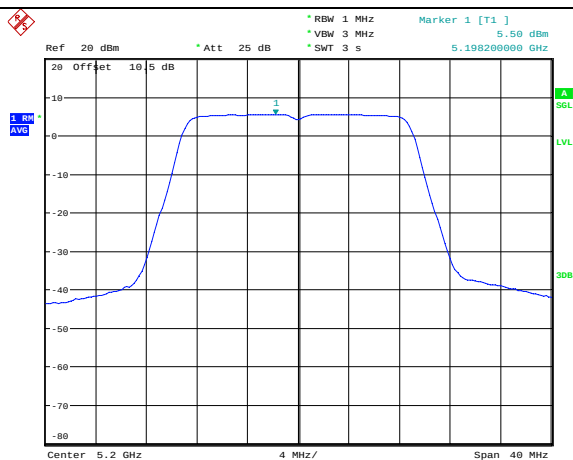
Date: 14.MAR.2023 15:44:00



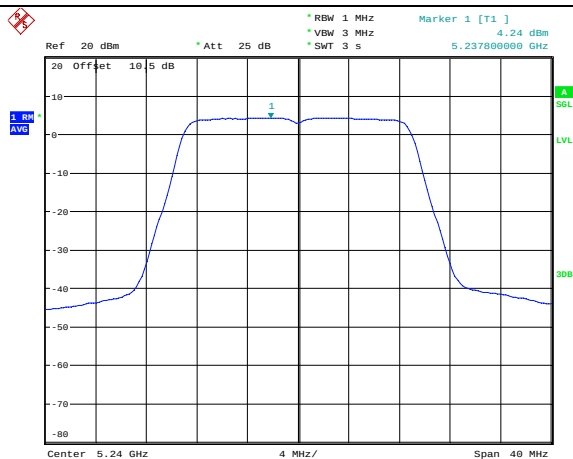
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 14.MAR.2023 15:26:34

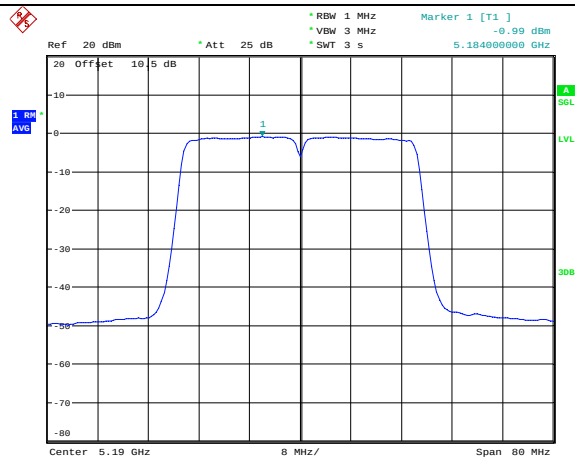
802.11ac vht20
Middle Channel

Date: 14.MAR.2023 15:25:35

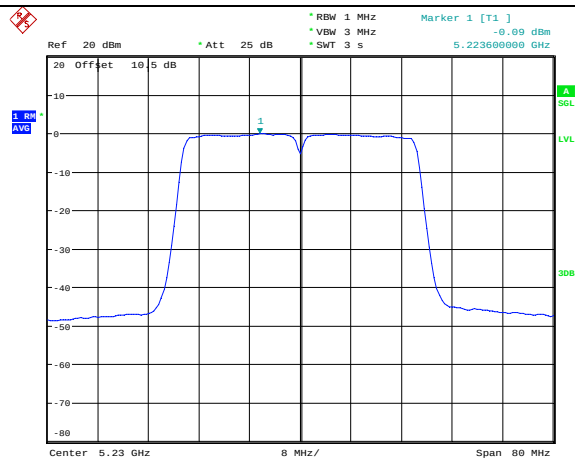
802.11ac vht20
Highest Channel

Date: 14.MAR.2023 15:24:44

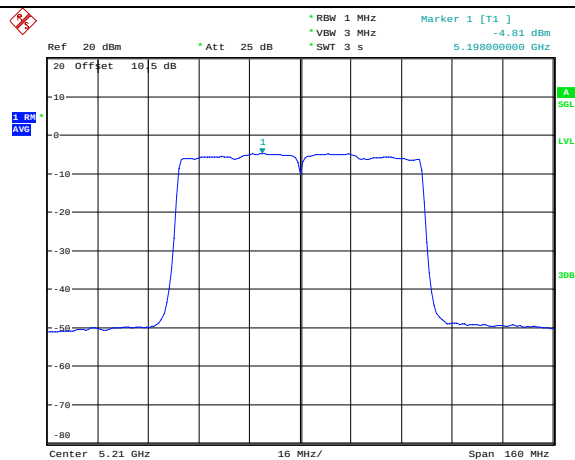
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 14.MAR.2023 15:27:52

802.11ac vht40
Highest Channel

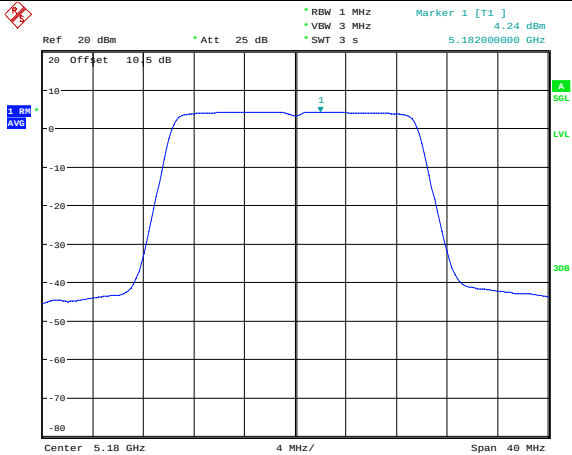
Date: 14.MAR.2023 15:28:44

802.11ac vht80
Middle Channel

Date: 14.MAR.2023 15:30:29

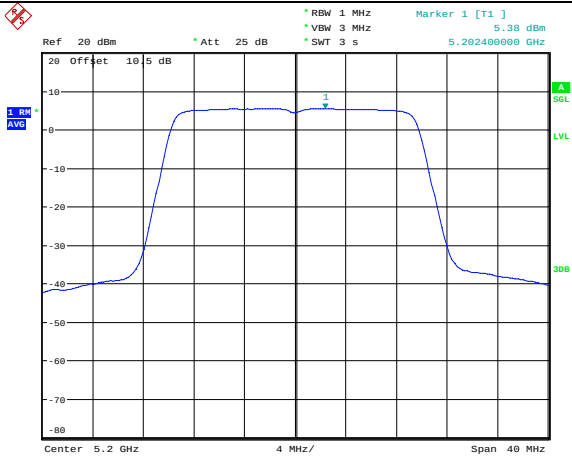
Maximum power spectral density

802.11ax he20
Lowest Channel



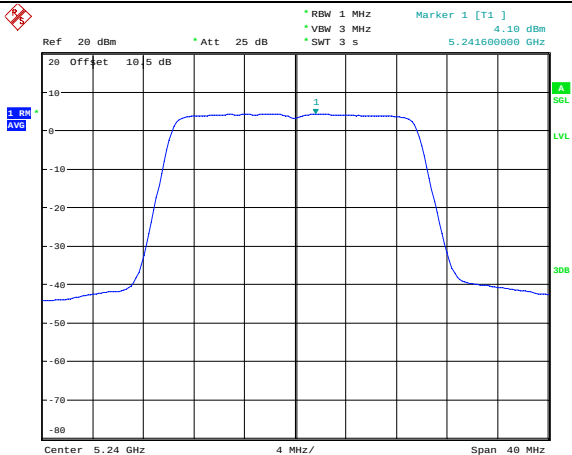
Date: 14.MAR.2023 15:16:18

802.11ax he20
Middle Channel



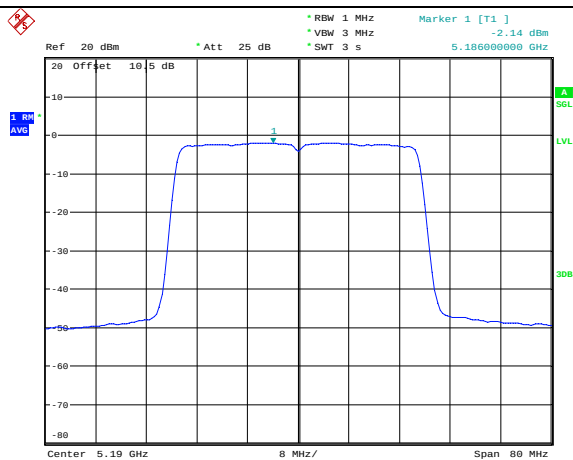
Date: 14.MAR.2023 15:20:39

802.11ax he20
Highest Channel

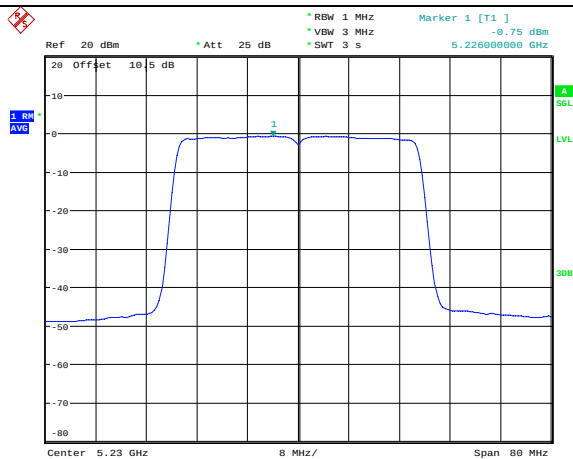


Date: 14.MAR.2023 15:22:23

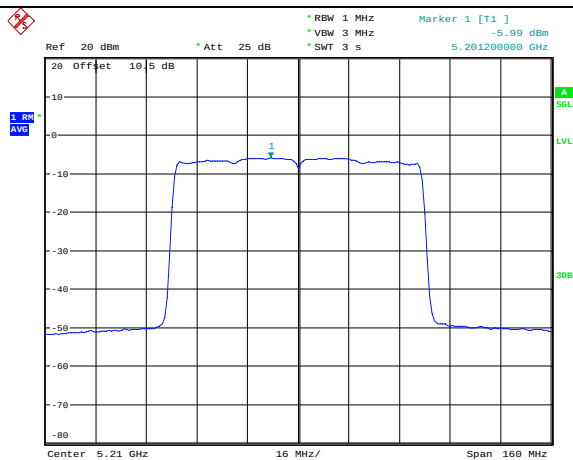
Maximum power spectral density

802.11ax he40
Lowest Channel

Date: 14.MAR.2023 15:13:31

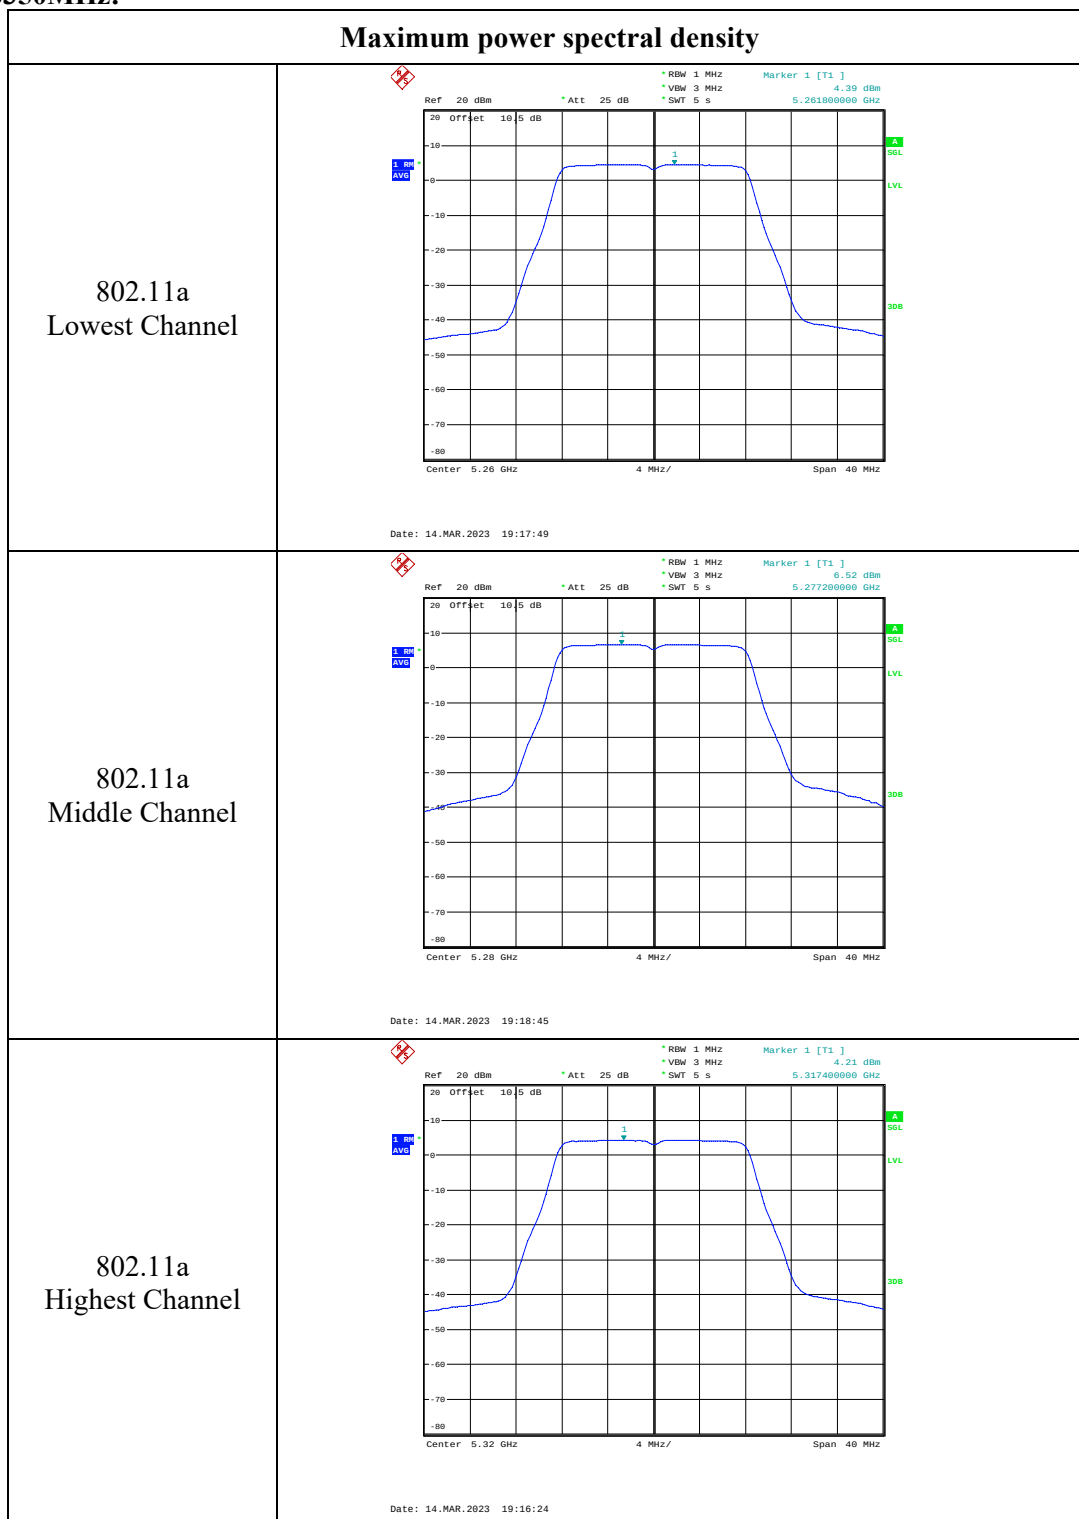
802.11ax he40
Highest Channel

Date: 14.MAR.2023 15:14:33

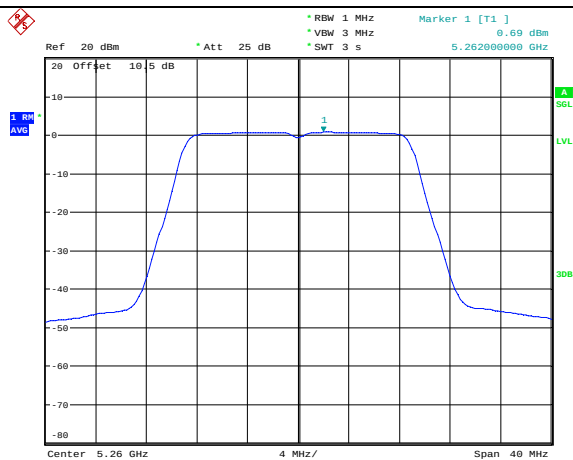
802.11ax he80
Middle Channel

Date: 14.MAR.2023 15:08:58

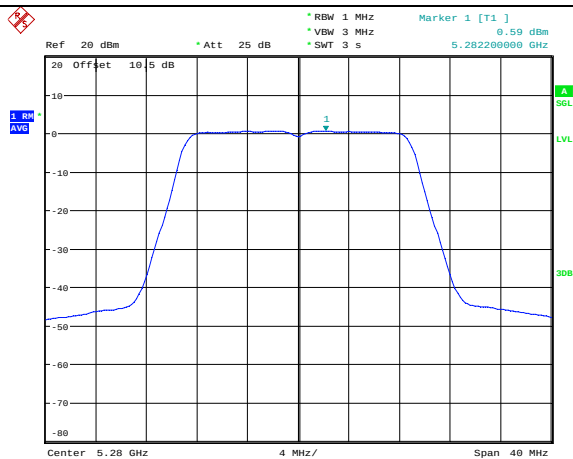
5250-5350MHz:



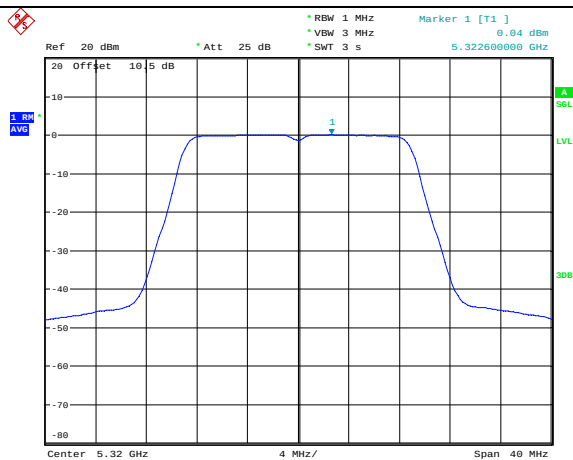
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 14.MAR.2023 19:12:12

802.11n ht20
Middle Channel

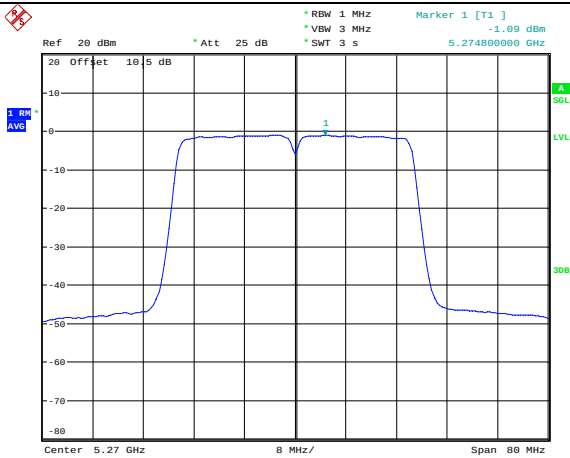
Date: 14.MAR.2023 19:13:07

802.11n ht20
Highest Channel

Date: 14.MAR.2023 19:14:06

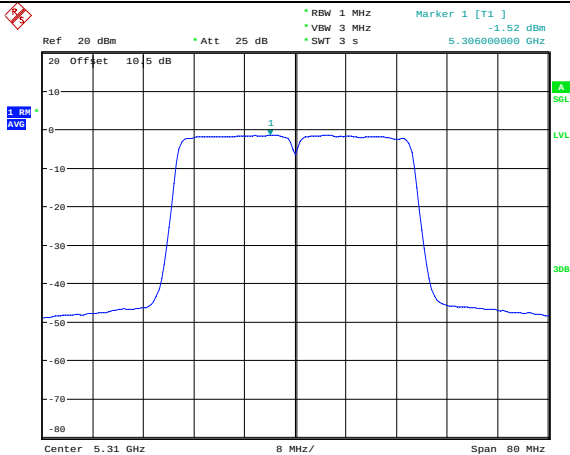
Maximum power spectral density

802.11n ht40
Lowest Channel



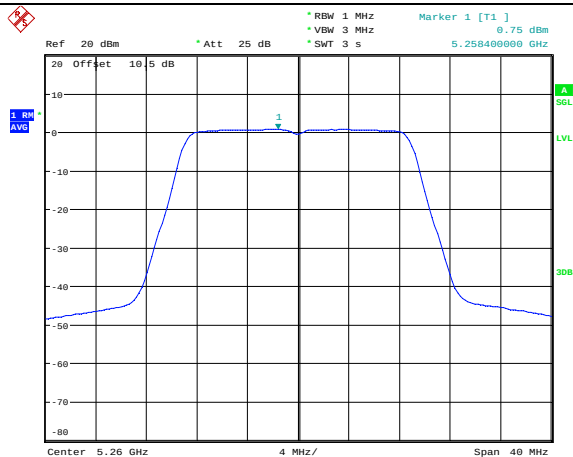
Date: 14.MAR.2023 19:08:38

802.11n ht40
Highest Channel

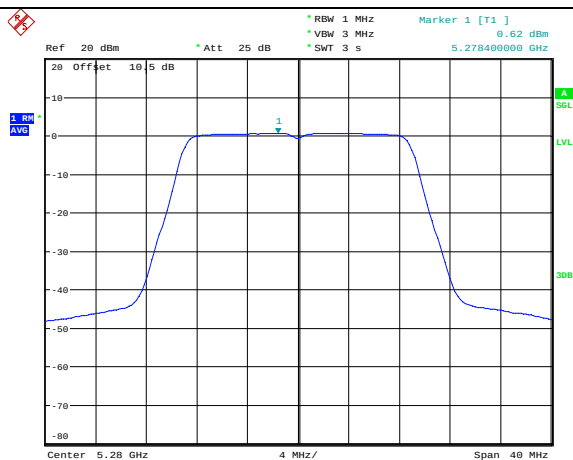


Date: 14.MAR.2023 19:10:36

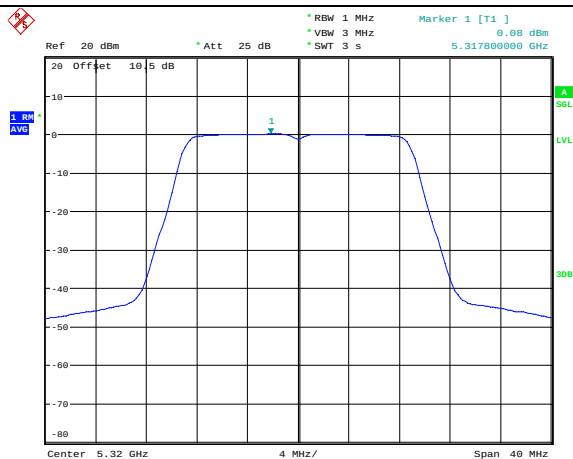
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 14.MAR.2023 18:14:48

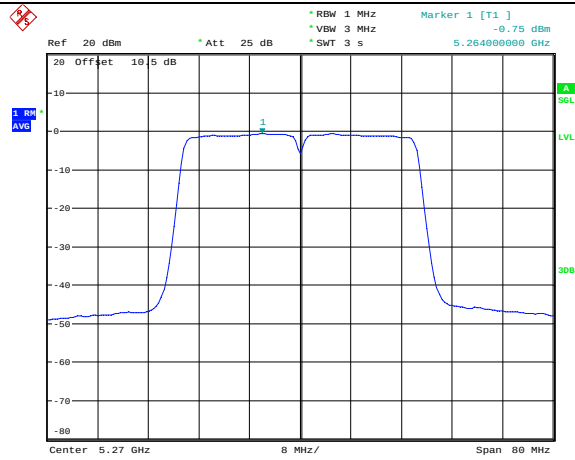
802.11ac vht20
Middle Channel

Date: 14.MAR.2023 18:12:48

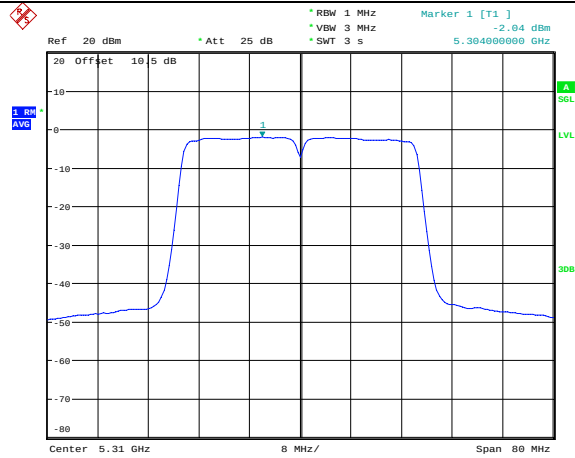
802.11ac vht20
Highest Channel

Date: 14.MAR.2023 18:11:41

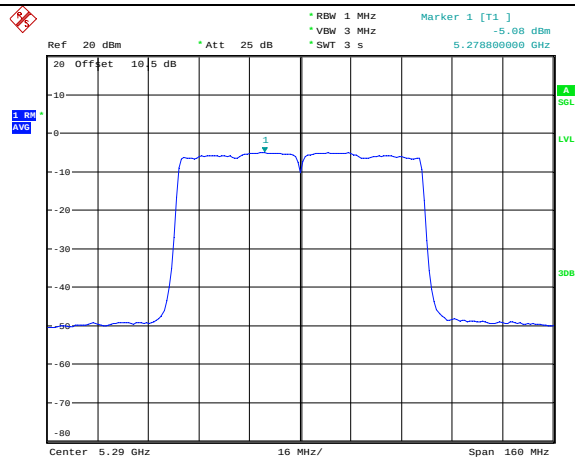
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 14.MAR.2023 18:17:44

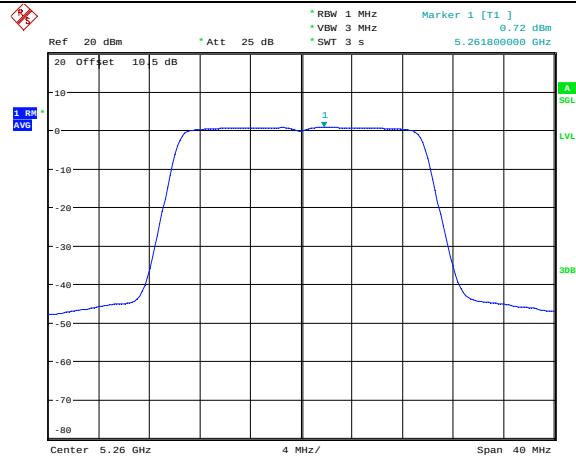
802.11ac vht40
Highest Channel

Date: 14.MAR.2023 18:18:44

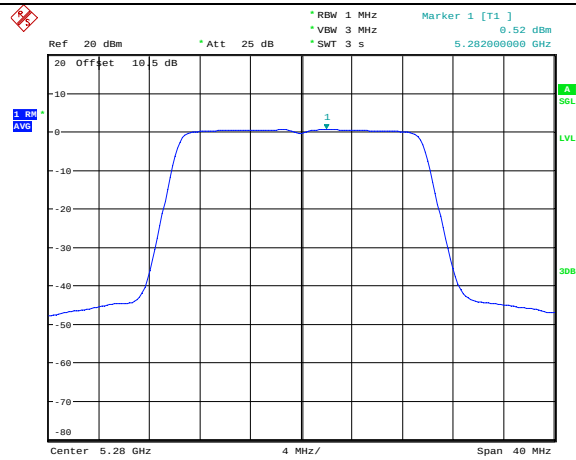
802.11ac vht80
Middle Channel

Date: 14.MAR.2023 19:04:50

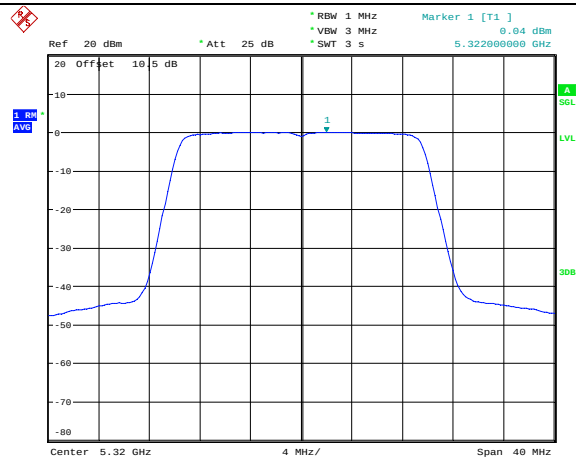
Maximum power spectral density

802.11ax he20
Lowest Channel

Date: 14.MAR.2023 18:08:20

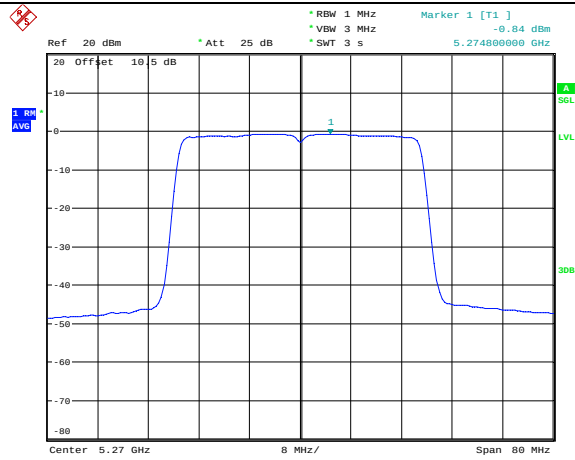
802.11ax he20
Middle Channel

Date: 14.MAR.2023 18:09:24

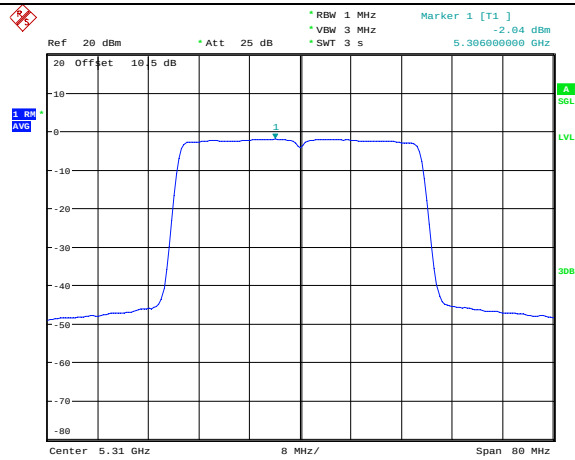
802.11ax he20
Highest Channel

Date: 14.MAR.2023 18:10:21

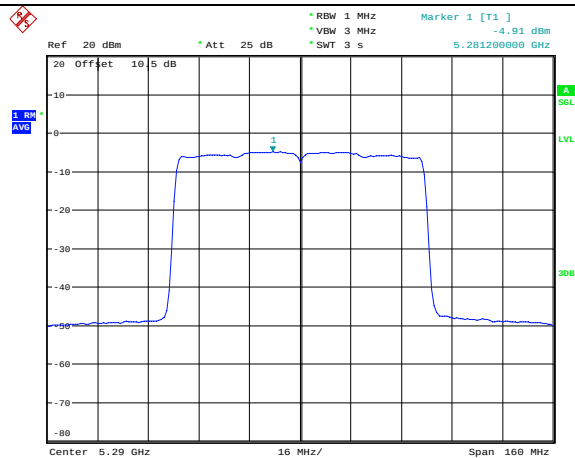
Maximum power spectral density

802.11ax he40
Lowest Channel

Date: 14.MAR.2023 18:04:51

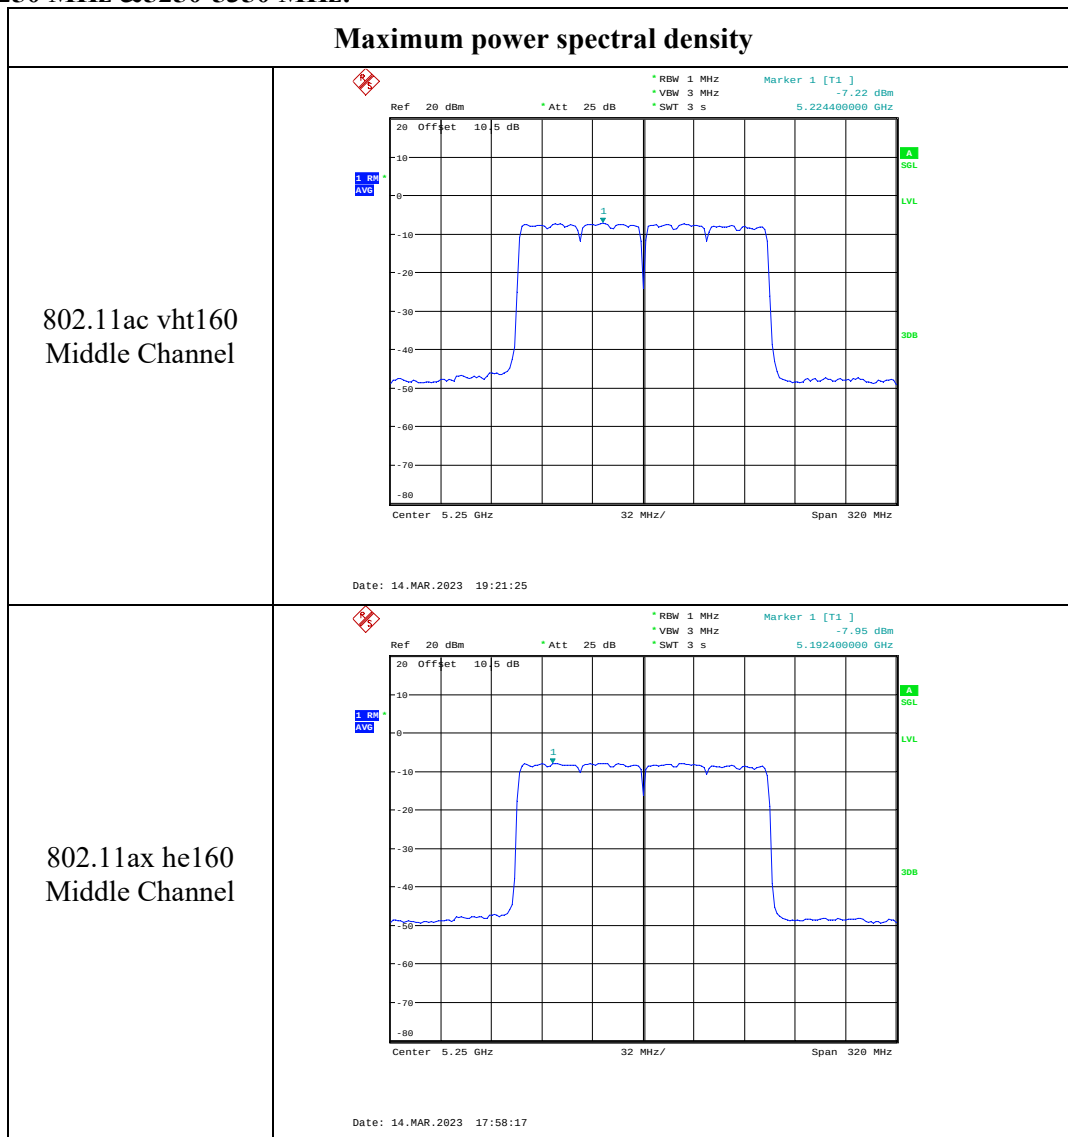
802.11ax he40
Highest Channel

Date: 14.MAR.2023 18:06:23

802.11ax he80
Middle Channel

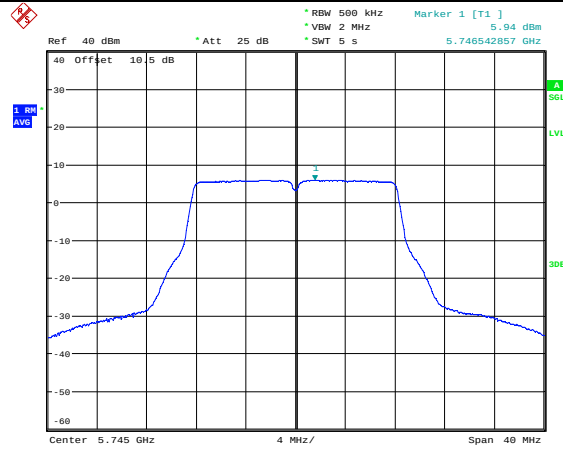
Date: 14.MAR.2023 18:02:01

5150-5250 MHz & 5250-5350 MHz:

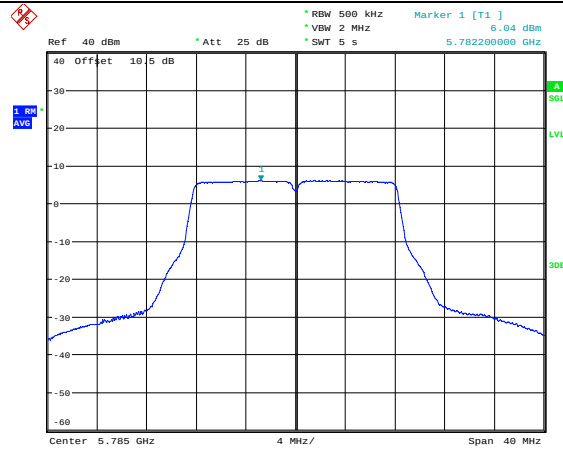


5725-5850MHz

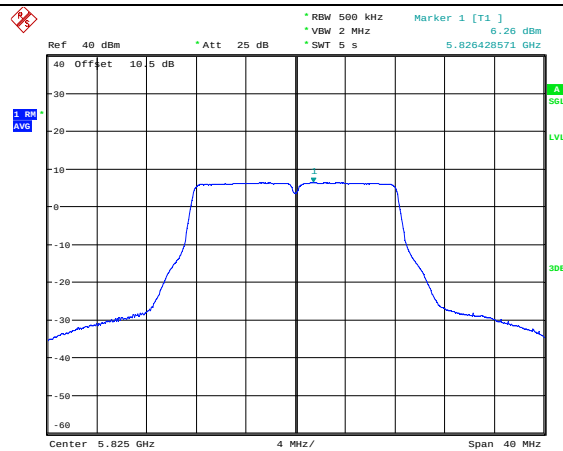
Maximum power spectral density

802.11a
Lowest Channel

Date: 16.MAR.2023 18:26:25

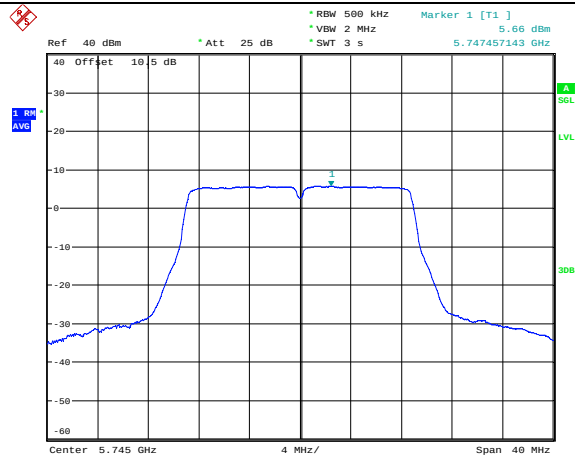
802.11a
Middle Channel

Date: 16.MAR.2023 18:25:38

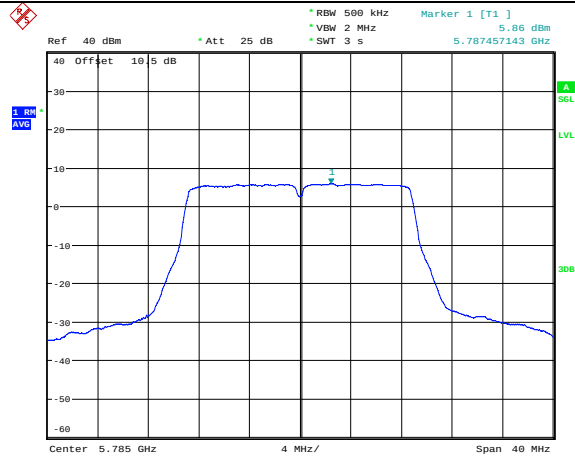
802.11a
Highest Channel

Date: 16.MAR.2023 18:24:49

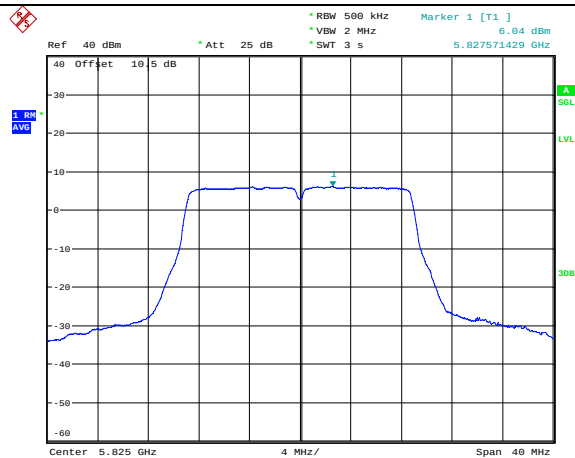
Maximum power spectral density

802.11n ht20
Lowest Channel

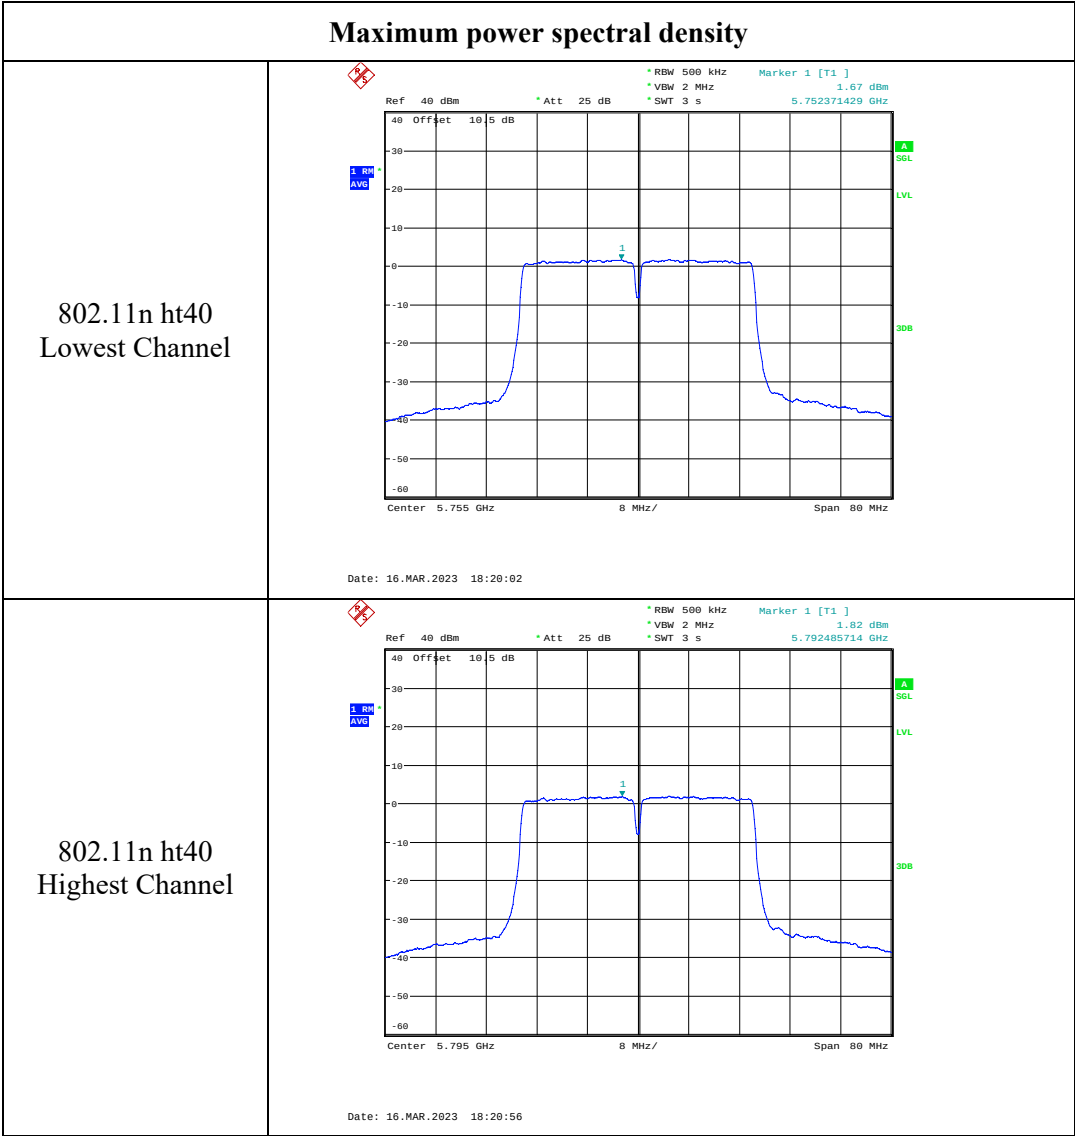
Date: 16.MAR.2023 18:22:09

802.11n ht20
Middle Channel

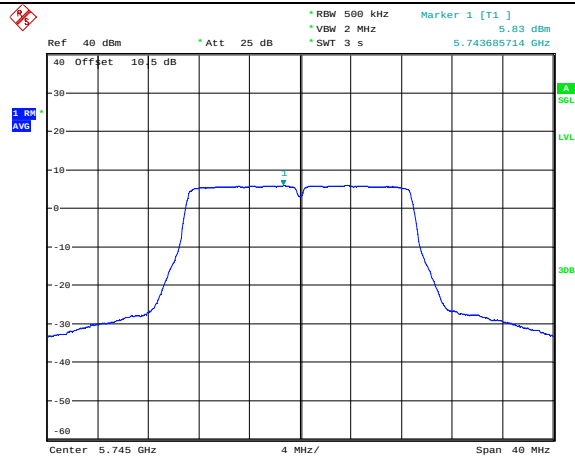
Date: 16.MAR.2023 18:22:57

802.11n ht20
Highest Channel

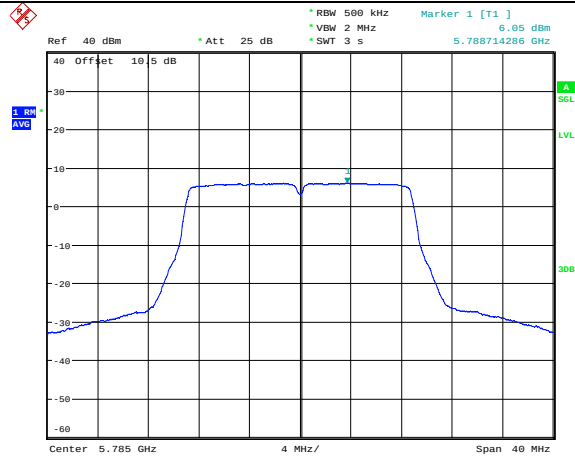
Date: 16.MAR.2023 18:23:44



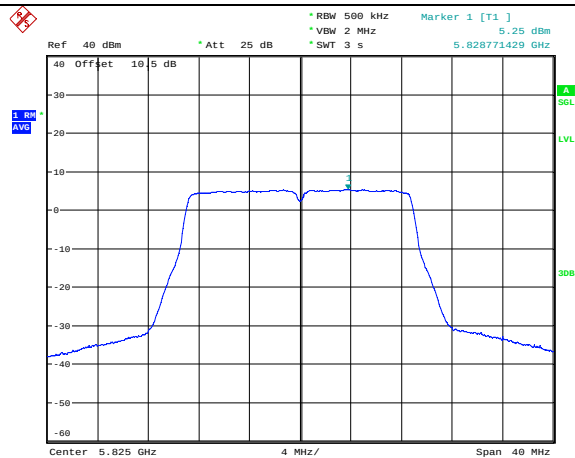
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 16.MAR.2023 18:10:47

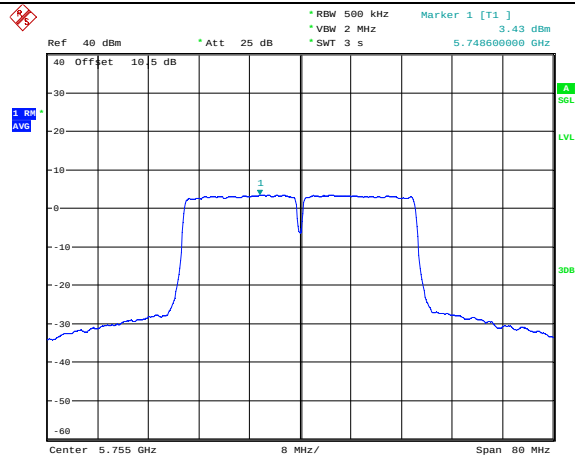
802.11ac vht20
Middle Channel

Date: 16.MAR.2023 18:09:59

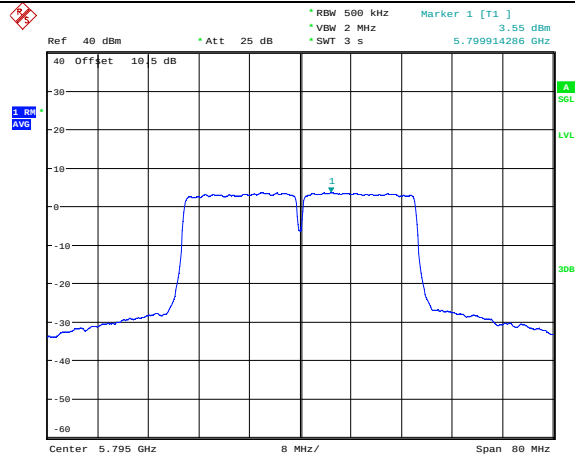
802.11ac vht20
Highest Channel

Date: 16.MAR.2023 18:09:00

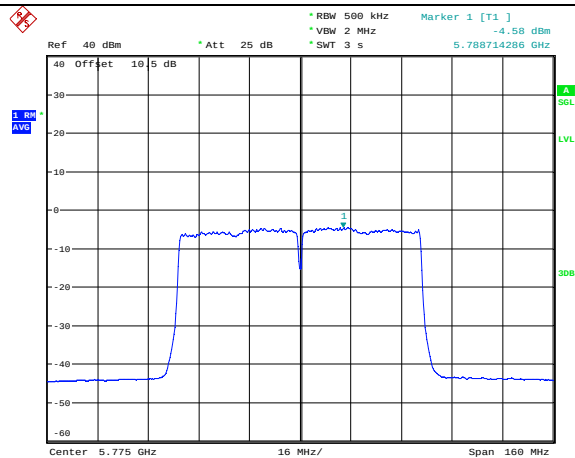
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 16.MAR.2023 18:12:17

802.11ac vht40
Highest Channel

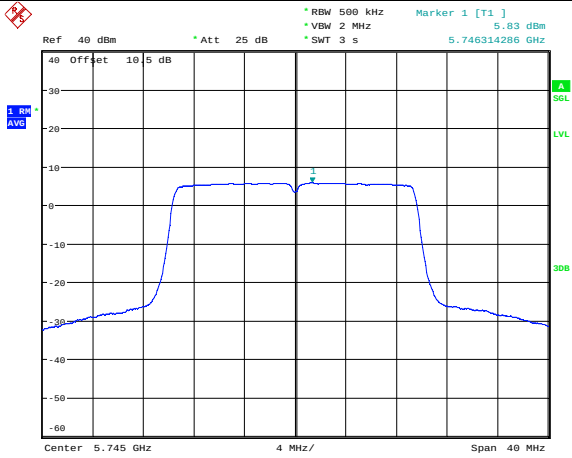
Date: 16.MAR.2023 18:13:08

802.11ac vht80
Middle Channel

Date: 16.MAR.2023 18:14:44

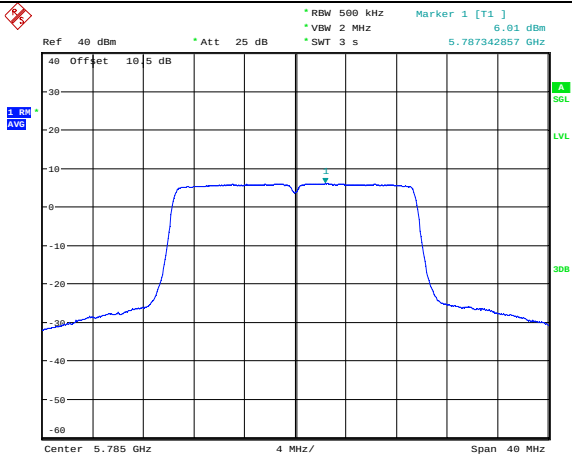
Maximum power spectral density

802.11ax he20
Lowest Channel



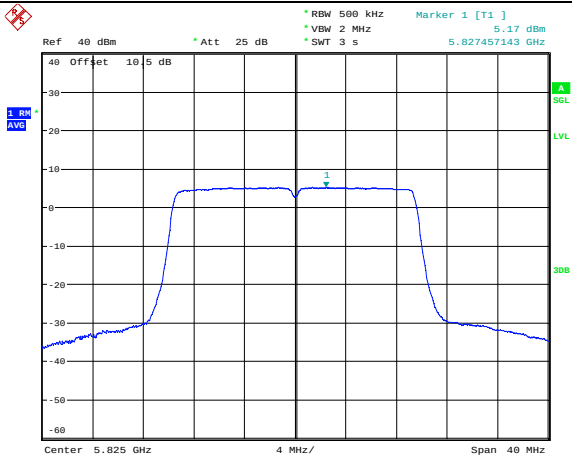
Date: 16.MAR.2023 18:05:37

802.11ax he20
Middle Channel



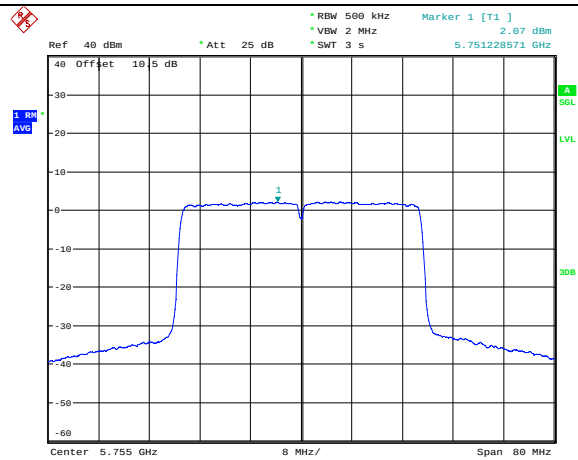
Date: 16.MAR.2023 18:06:25

802.11ax he20
Highest Channel

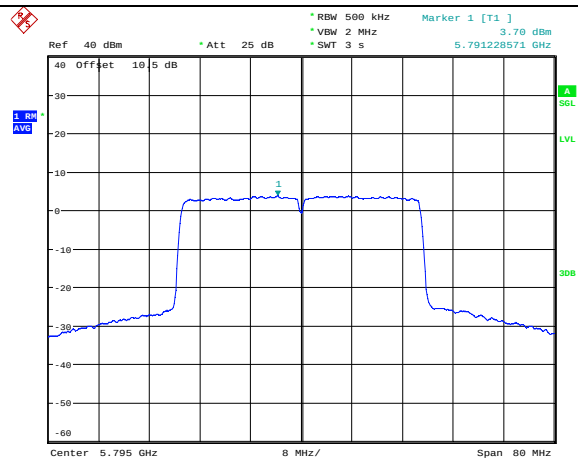


Date: 16.MAR.2023 18:07:34

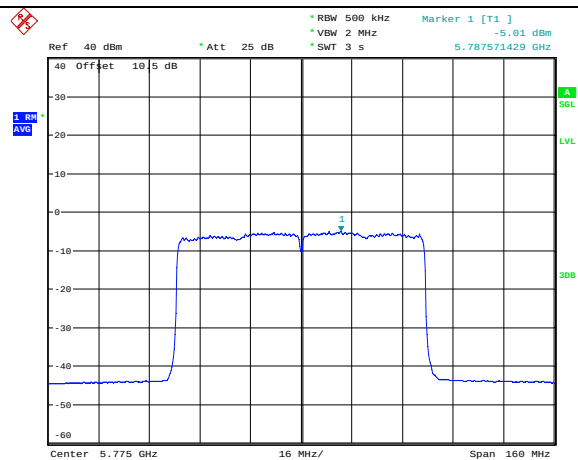
Maximum power spectral density

802.11ax he40
Lowest Channel

Date: 16.MAR.2023 18:03:15

802.11ax he40
Highest Channel

Date: 16.MAR.2023 18:04:17

802.11ax he80
Middle Channel

Date: 16.MAR.2023 18:01:49

4.6 Duty Cycle:

Serial Number:	21EC	Test Date:	2023/03/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	23.4	Relative Humidity: (%)	36.0	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

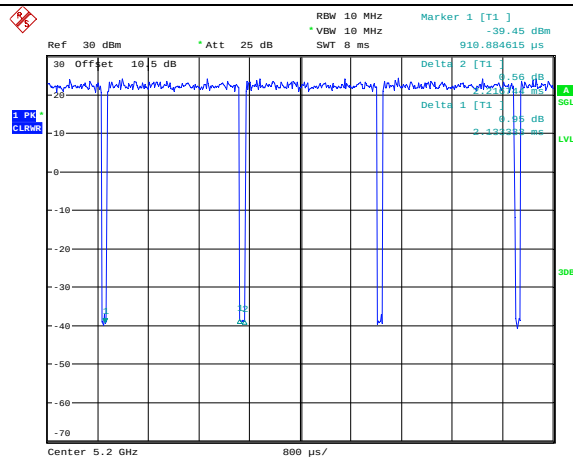
Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty Cycle Factor (dB)
802.11a	2.133	2.217	96.21	469	0.17
802.11n ht20	1.014	1.098	92.35	986	0.35
802.11n ht40	0.508	0.599	84.81	1969	0.72
802.11ac vht20	1.021	1.027	99.42	/	/
802.11ac vht40	0.521	0.540	96.48	1919	0.16
802.11ac vht80	0.266	0.289	92.04	3759	0.36
802.11ax he20	0.808	0.828	97.58	1238	0.11
802.11ax he40	0.458	0.480	95.42	2183	0.20
802.11ax he80	0.255	0.276	92.39	3922	0.34
802.11ac vht160	0.157	0.181	86.74	6369	0.62
802.11ax he160	0.167	0.194	86.08	5988	0.65

Note: Test only was performed at chain 0.

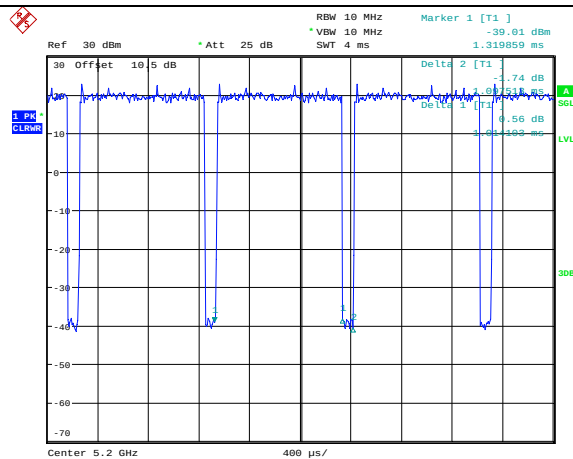
Duty Cycle

802.11a



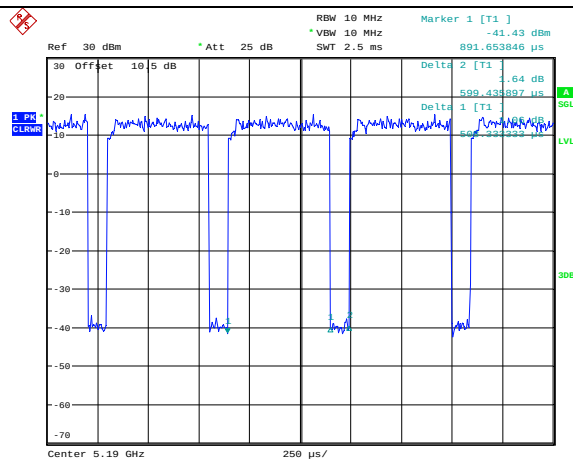
Date: 11.MAR.2023 15:15:13

802.11n ht20



Date: 11.MAR.2023 15:09:54

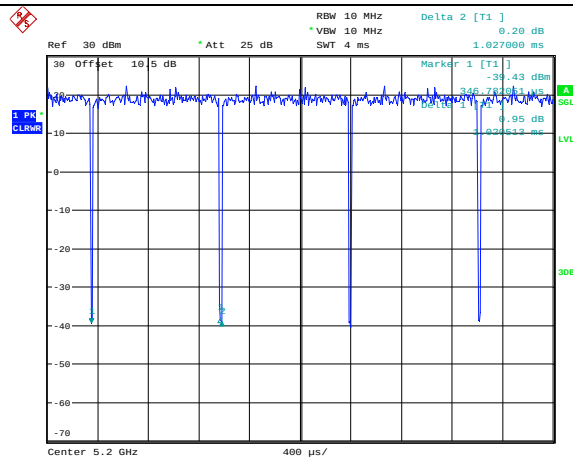
802.11n ht40



Date: 11.MAR.2023 15:03:01

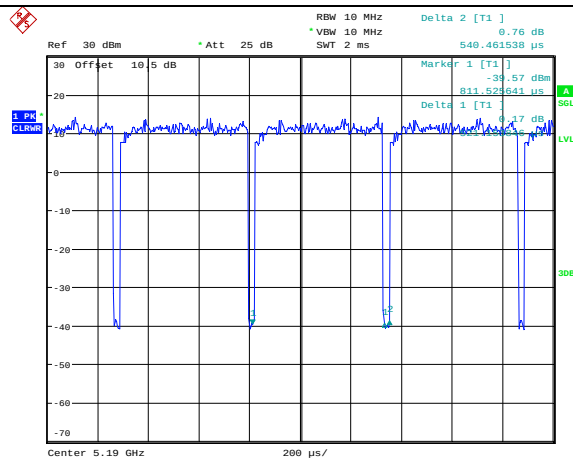
Duty Cycle

802.11ac vht20



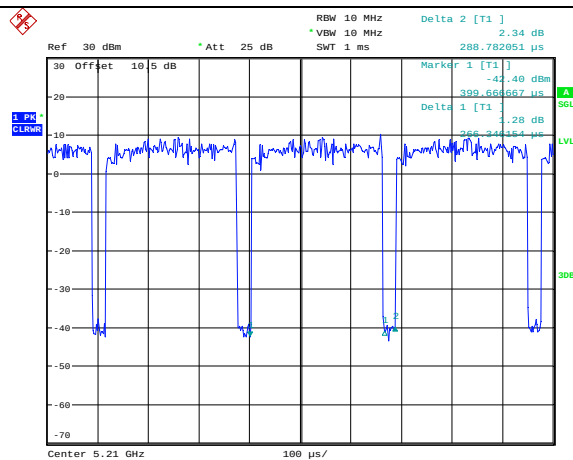
Date: 11.MAR.2023 15:11:17

802.11ac vht40



Date: 11.MAR.2023 15:04:53

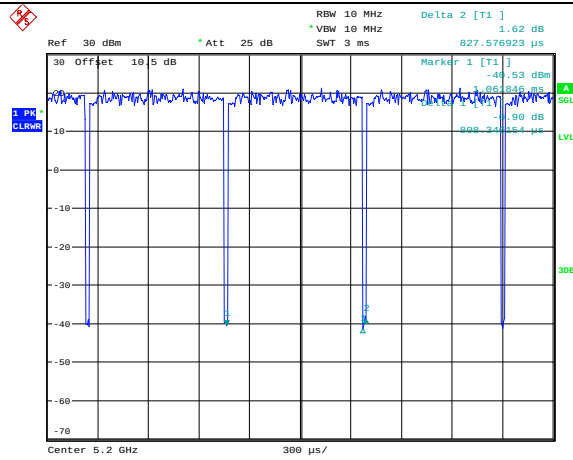
802.11ac vht80



Date: 11.MAR.2023 15:00:36

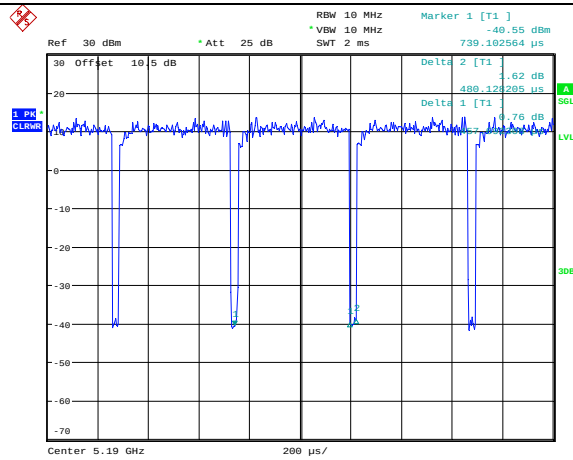
Duty Cycle

802.11ax he20



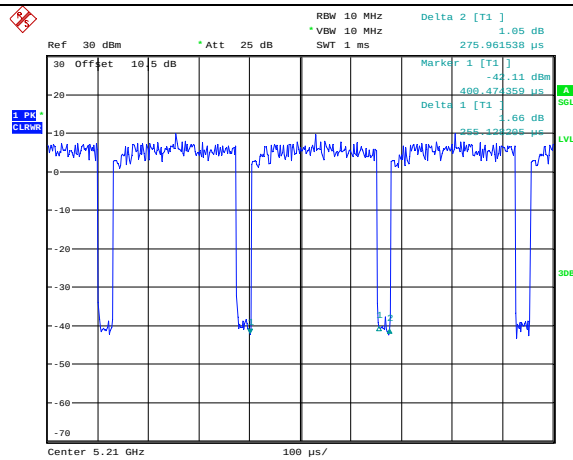
Date: 11.MAR.2023 15:18:27

802.11ax he40

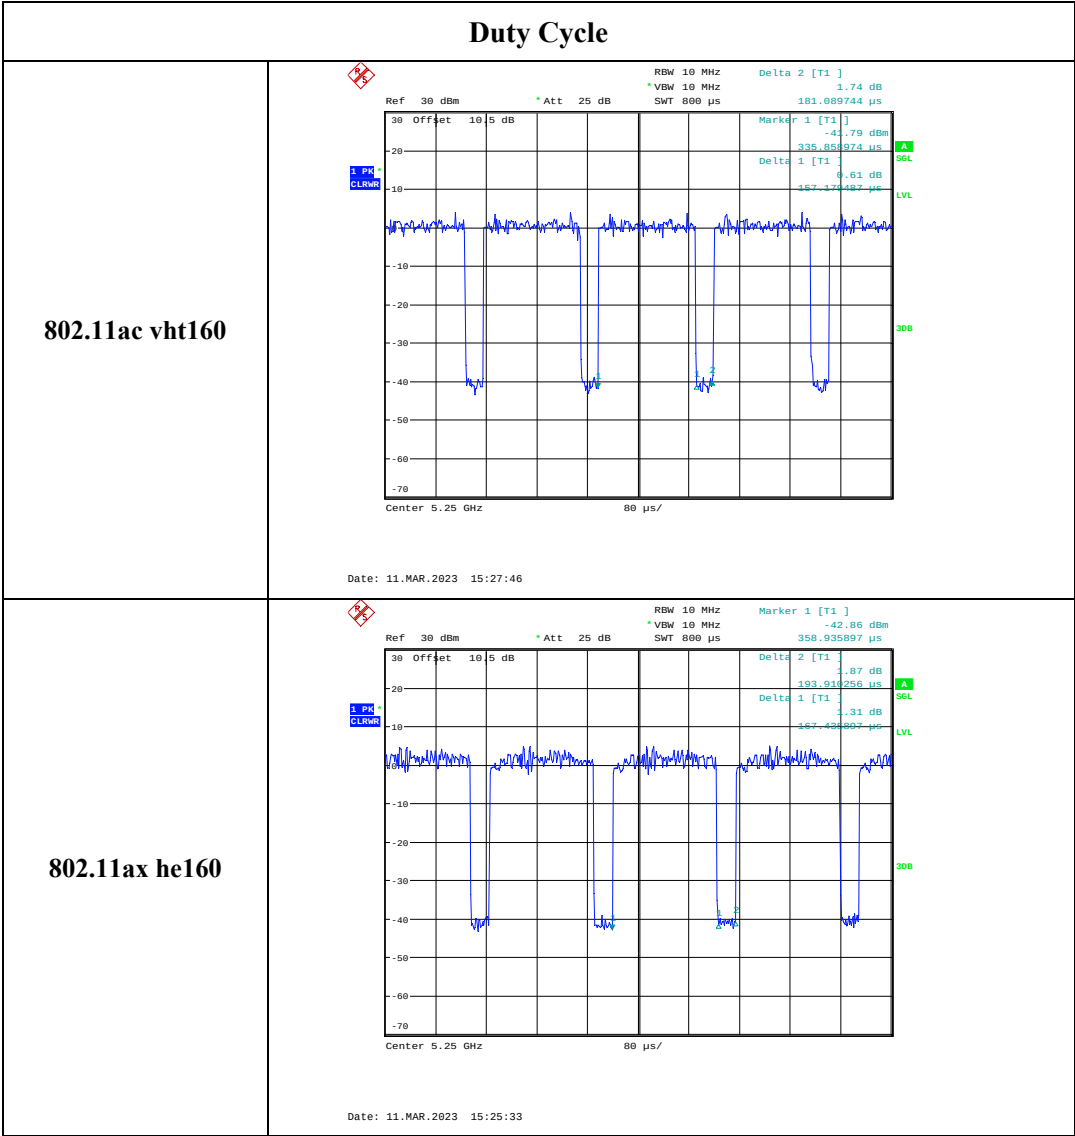


Date: 11.MAR.2023 15:20:20

802.11 ax he80



Date: 11.MAR.2023 15:22:37



5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to §1.1307(b)(3)(i)

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

5.2 Measurement Result

Operation Modes	Frequency (MHz)	Distance (mm)	P _{th}		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (P) (dBm)	ERP (P) (mW)	Exemption
			(mW)	(dBm)					
WLAN 2.4G	2412-2462	200	3060	34.86	25	7.84	30.69	1172.20	Compliant
WLAN 5G	5150-5250	200	3060	34.86	22	8.93	28.78	755.09	Compliant
	5250-5350	200	3060	34.86	24	6.02	27.87	612.35	Compliant
	5725-5850	200	3060	34.86	25	8.34	31.19	1315.22	Compliant

Note:

Antenna gain includes beamforming gain for WLAN 2.4G and 5150-5250MHz/5725-5850MHz(the maximum power at 802.11a mode for 5250-5350MHz band was used for RF exposure evaluation). The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

WLAN 2.4G and 5G can transmit simultaneously.

$$\sum_{i=1}^a \left(\frac{P_i}{P_{th-i}} \right) + \sum_{j=1}^b \left(\frac{ERP_j}{ERP_{th-j}} \right) + \sum_{k=1}^c \left(\frac{Evaluated_k}{Exposure Limit_k} \right)$$

$$= P_{2.4G}/P_{th-2.4G} + P_{5G}/P_{th-5G}$$

$$= 1172.20/3060 + 1315.22/3060$$

$$= 0.81$$

Result: The device compliant the Exemption at 20cm distances.

===== END OF REPORT =====