FCC PART 15.231 EMI MEASUREMENT AND TEST REPORT For

HONG KONG SAINTMART INDUSTRIES CO., LTD.

RM B 4/F KIU FU COMM BLDG 300-306 LOCKHART RD WANCHAI HK

FCC ID: V9JSM0105

Apr. 24, 2008

		. 21, 2000	
This Report Concerns:		Equipment Type:	
Original Report		Reminder Alarm (Toddler	
		Alert)	
Test Engineer:	Eric Li	Brich	
Report No.:	F08041629	A	
Receive EUT			
Date/Test Date:	Apr.18,2008 / Apr.18-24,2007		
Reviewed By:	Christina Christine Sharehar BST Tashralam Co. Ltd.		
		Shenzhen BS1 Technology Co.,Lta.	
Prepared By:	BST	3F,Weames Technology Building, No. 10 Kefa Road,Science Park,	
	THE STATE OF THE S	Nanshan District, Shenzhen, Guangdong, China	
		Tel: 0755-26747751 ~ 3	

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd. This report must not be used by the client to claim product certification,approval,or endorsement by NVLAP, NIST or any agency of the US Government.

Fax: 0755-26747751 ~ 3 ext.826

TABLE OF CONTENTS

1.	GEN	ERAL INFORMATION	.3
	1.1.	Report information	.3
	1.2.	Measurement Uncertainty	
2.	PRO	DUCT DESCRIPTION	
	2.1.	EUT Description	
	2.2.	Block Diagram of EUT Configuration	
	2.3.	Support Equipment List	
	2.4.	Test Conditions	.4
3.	FCC	ID LABEL	.5
4.	TEST	Γ RESULTS SUMMARY	.6
		fications	
5.		Γ EQUIPMENT USED	
6.		IATION EMISSIONS	
	6.1.	Test Equipment	
	6.2.	Test Procedure	
	6.3.	Radiated Test Setup	
	6.4.	Radiated Emission Limit	.8
	6.5.	Radiated Emission Test Result	.9
7.	20B I	BANDWIDTH1	10
	7.1.	Test Equipment	10
	7.2.	Test Procedure	10
	7.3.	FCC 15.231(c) 20B Bandwidth Limit	10
	7.4.	Test Result	10
8.	DWE	ELL TIME1	11
	8.1.	Test Equipment	11
	8.2.	Test Procedure	11
	8.3.	Deactivation Requirement	11
	8.4.	Test Result	11

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.
- 1.1.2.The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of Shenzhen Academy of Metrology & Quality Inspection. (FCC Registered Test Site Number: 274801) on Longzhu Road, Nanshan Shenzhen, Guangdong, China

The Test Site is constructed and calibrated to meet the FCC requirements.

1.2. Measurement Uncertainty

Available upon request.

BT FCC ID REPORT : F08041629A Page 3/11

2. PRODUCT DESCRIPTION

2.1. EUT Description

Description : Reminder Alarm (Toddler Alert)

Applicant : HONG KONG SAINTMART INDUSTRIES CO. LTD.

RM B 4/F KIU FU COMM BLDG 300-306

LOCKHART RD WANCHAI HK

Model Number : SM0105

Additional Information

Frequency : 433.92MHz

Power Supply : DC3V (Supplied by battery)

Maximum : N/A

Range

Transmitter : The transmitter has a built in antenna and solder on the

Antenna PCB Current N/A

Consumption

2.2. Block Diagram of EUT Configuration

EUT

2.3. Support Equipment List

2.4. Test Conditions

Temperature: 23~25

Relative Humidity: 55~63 %

3. FCC ID LABEL

FCC ID: V9JSM0105

Label Location on EUT

EUT Bottom View/ FCC ID Label Location



BT FCC ID REPORT : F08041629A Page 5/11

4. TEST RESULTS SUMMARY

FCC 15 Subpart C,Paragraph 15.231

Test Standards	Test Items	Test Results
§15.231 (b)	Radiated Emission	Pass
§15.231 (c)	20dB Band Width Testing	Pass
§15.231 (e)	Dwell Time	Pass

Remark: "N/A" means "Not applicable."

Modifications

No modification was made.

BT FCC ID REPORT : F08041629A Page 6/11

5. TEST EQUIPMENT USED

Equipment/Facilities	Manufacturer	Model #	Serial no.	Date of Cal.	Cal. Interval
Cable	Resenberger	N/A	NO.1	Mar 10 , 2008	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 10 , 2008	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 10 , 2008	1 Year
LISN	Rohde & Schwarz	ESH3-Z5	100305	Mar 10 , 2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10, 2008	1 Year
EMI Test Receiver	Rohde & Schwarz	ESP13	100180	Oct.18,2007	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	Sep.10,2007	1 Year
3m Semi-Anechoic Chamber	Albatross Projects	9m×6m×6m	N/A	Feb.20,2008	1 Year
Signal Generator	FLUKE	PM5418 + Y/C	LO747012	Feb.20,2008	1 Year
Signal Generator	FLUKE	PM5418TX	LO738007	Feb.20,2008	1 Year
Loop Antenna	SCHWARZBECK	FMZB1516	113	Jan.30,2008	1 Year
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	Sep.22,2007	1 Year
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-564	Sep.22,2007	1 Year
Ultra Broadband Antenna	Rohde & Schwarz	HL-562	100110	June.15,2007	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct.11,2007	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct.11,2007	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
Power Meter	Rohde & Schwarz	NRVD	100041	Feb.20,2008	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Feb.20,2008	1 Year
Coaxial Cable with N-connectors	SCHWARZBECK	AK9515H	95549	Sep.22,2007	1 Year
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb.20,2008	1 Year
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb.20,2008	1 Year
Absorbing clamp	Rohde & Schwarz	MDS-21	N/A	Oct.29,2007	1 Year

BT FCC ID REPORT : F08041629A Page 7/11

6. RADIATION EMISSIONS


6.1. Test Equipment

Please refer to section 4 this report.

6.2. Test Procedure

The emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits. through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit_o

6.3. Radiated Test Setup

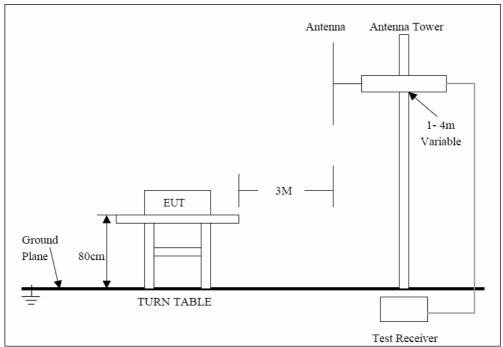

Setup below 3mMHz,refer to 7.3;For the accrual test configuration, pleas refer to the related items-photos of Testing.

6.4. Radiated Emission Limit

According to §15.231(e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Funda- mental fre- quency (MHz)	Field strength of fun- damental (microvolts/ meter)	Field strength of spu- rious emission (microvolts/meter)	
40.66– 40.70.	1,000	100	
70-130	500	50	
130-174	500 to 1,500 1	50 to 150 ¹	
174-260	1,500	150	
260-470	1,500 to 5,000 1	150 to 500 ¹	
Above 470	5,000	500	

Linear interpolations for frequency ranges 130 - 174 MHz and 260 - 470 MHz.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

BT FCC ID REPORT : F08041629A Page 8/11

6.5. Radiated Emission Test Result

Temperature: 25 Humidity: 56%RH

Test Result: PASS

Frequency (MHz)	Antenna	Emission Level	FCC 15 Subpart C Limit
	Polarization	(PK)(dBuV/m)	(AV)(dBuV/m)
433.92	V	52.68	72.8
433.92	Н	53.41	72.8
867.64	V	42.78	52.8
867.64	Н	40.36	52.8
1301.76	V	38.66	52.8
1301.76	Н	36.31	52.8
1735.68	V	32.66	52.8
1735.68	Н	33.22	52.8
2169.60	V		52.8
2169.60	Н		52.8
2603.52	V		52.8
2603.52	Н		52.8
3037.44	V		52.8
3037.44	Н		52.8
3471.36	V		52.8
3471.36	Н		52.8
3905.28	V		52.8
3905.28	Н		52.8
4339.2	V		52.8
4339.2	Н		52.8

Note:

----means the emission is too low,more than 20dB from the limit.

BT FCC ID REPORT : F08041629A Page 9/11

7. 20B BANDWIDTH

7.1. Test Equipment

Please refer to Section 4 this report.

7.2. Test Procedure

- 1. The EUT was tested according C63.4-2003. The radiated test was performed at FCC Registration laboratory.
- 2. With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

7.3. FCC 15.231(c) 20B Bandwidth Limit


Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

7.4. Test Result

Temperature: 25 Humidity: 56%RH

 $Limit = Frequency \times 0.25\% = 433.9220 \times 0.25\% = 1084.805 \ kHz$

Test data: 54.3KHz Test Result: PASS

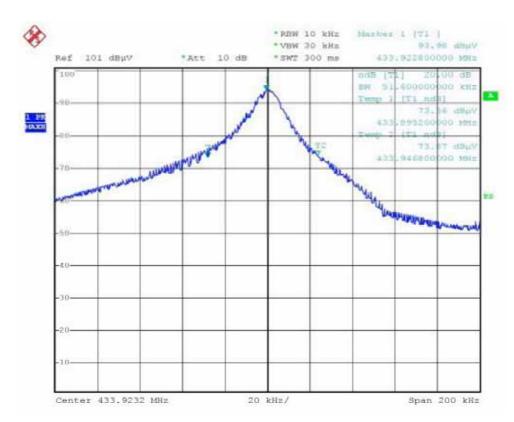

BT FCC ID REPORT : F08041629A Page 10/11

8. DWELL TIME

8.1. Test Equipment

Please refer to Section 4 this report.

8.2. Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

8.3. Deactivation Requirement


Per 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

8.4. Test Result

Temperature: 25 Humidity: 56%RH

THE DURATION OF TRANSMITTER IS ABOUT238 ms, THE SILENT PERIOD BETWEEN TRANSMISSIONS IS ABOUT 10.7s.

Test Result: PASS

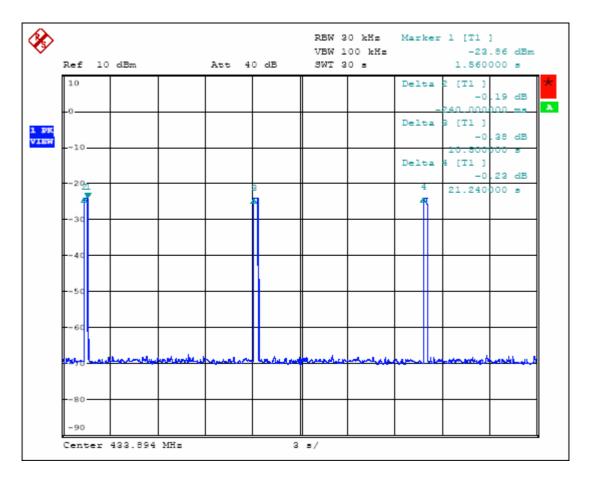

BT FCC ID REPORT : F08041629A Page 11/11