



Test report issued under the responsibility of:
EMITECH MONTPELLIER laboratory
MRA US-EU Designation Number: FR0006
Canadian CAB Identifier: FR0003

RADIO TEST REPORT

FCC 47 CFR part 15.247
RSS-247, issue 2, February 2017

Company : **UPONOR Inc.**
Address..... : 5925 148th Street West
APPLE VALLEY 55124
MINNESOTA - USA

Test item description. : **Wireless actuators for temperature control in home application for heating/cooling system**
Trade Mark. : UPONOR
Manufacturer..... : WATTS ELECTRONICS FRANCE
Model/Type reference..... : P08208 / A3801208 (R-208 NA)
FCC ID..... : V9MSM4NA1
IC..... : 7664A-SM4NA1
Ratings..... : 120Vac/60Hz

Testing Laboratory : **EMITECH MONTPELLIER laboratory**
Address..... : 145 rue de Massacan
34740 VENDARGUES
FRANCE

Report Reference No. : **RR-EVE-21D571-6A**
Test procedure. : FCC IC Certification
Diffusion..... : Mr DORE
Applicant's name. : WATTS ELECTRONICS FRANCE
Date of issue..... : April 7, 2022
Total number of pages..... : 110
Revision..... : 0
Modified page(s)..... : Creation
Compiled by..... : Alexis TOUZET
Approved by (+ signature)..... : Olivier HEYER (Laboratory Manager)

*Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of
the whole manufactured products of the tested sample.*

REPORT INDEX:

1. GENERAL INFORMATIONS	3
2. REFERENCE DOCUMENT(S)	4
3. EQUIPMENT TECHNICAL DESCRIPTION	5
3.1. TEST CONDITIONS	5
3.2. EUT MARKING PLATE	5
3.3. EUT GENERAL VIEW	6
3.4. EUT INTERNAL VIEW – X265	7
3.5. EUT INTERNAL VIEW – R208	8
3.6. EUT MECHANICAL AND ELECTRICAL DESIGN	9
3.7. EUT INPUT/OUTPUT PORTS	9
3.8. EUT RADIO SPECIFICATIONS	10
4. OPINION(S) AND INTERPRETATION(S)	10
5. RESULT SUMMARY	11
6. MEASUREMENT UNCERTAINTY	14
7. RF EXPOSURE	15
8. TEST CONDITIONS AND RESULTS	15
8.1. CONDUCTED LIMITS	15
8.2. 6dB BANDWIDTH	18
8.3. OCCUPIED BANDWIDTH	28
8.4. MAXIMUM EFFECTIVE ISOTROPIC RADIATED POWER	38
8.5. BAND-EDGE COMPLIANCE	48
8.6. POWER SPECTRAL DENSITY	59
8.7. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz	70
8.8. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz	80
8.9. FREQUENCY ERROR	107

REVISION HISTORY:

Revision	Date	Modified pages	Modifications
0	April 7, 2022	/	Creation

1. GENERAL INFORMATION

This document submits the results of Radio tests performed on the equipment **Wireless actuators for temperature control in domestic applications for heating / cooling system A3801208 – P08208 / R-208 NA** (denominated hereafter E.U.T.: equipment under test) according to document(s) listed in §2 of this test report.

TESTING PROCEDURE AND TESTING LOCATION:					
Testing Location : EMITECH MONTPELLIER laboratory Address. : 145 rue de Massacan 34740 VENDARGUES FRANCE Test procedure. : FCC IC Certification Tested by : Alexis TOUZET & Morgan PATEY Test supervisor : None Date of receipt of test item : N/A Date (s) of performance of tests : From July 05 th to August 04 th of 2021					
APPLICANT'S GENERAL INFORMATION:					
Company name : WATTS ELECTRONICS FRANCE for UPONOR Inc. Company address. : 5925 148th Street West APPLE VALLEY 55124 MINNESOTA - USA Person(s) present during the tests. : Mr DESGRANGES Responsible. : Mr DORE					
GENERAL REMARKS:					
The information in <i>italics</i> is declared by the manufacturer and is under his responsibility The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report the decimal separator is point.					
POSSIBLE TEST CASE VERDICTS:					
Test case does not apply to the test object.: N/A Test case not performed.....: N/P Test object does meet the requirement.....: P (Pass) Test object does not meet the requirement.: F (Fail)					
DEFINITIONS AND ABBREVIATIONS:					
E.U.T.	Equipment under test	AE	Ancillary equipment	Pk	Peak detector
RBW	Resolution bandwidth	VBW	Video bandwidth	QP	Quasi-peak detector
OATS	Open area test site	FAR	Full anechoic room	Av	Average detector
VP	Vertical Polarization	HP	Horizontal Polarization	RMS	Root Mean Square
RF	Radio frequency	NTR	Nothing to report	N/C	Not communicated

2. REFERENCE DOCUMENT(S)

NORMATIVE REFERENCES:

The following referenced documents are necessary for the application of the present test report.

FCC 47 CRF part 15: April, 2020

Code of federal regulations. Title 47- Telecommunication Chapter 1- Federal Communication Commission. Part 15- Radio frequency devices Subpart B- Unintentional Radiators. Limits and methods of measurement of radio disturbance. Characteristic of information technology equipment.

FCC 47 CRF part 15.247

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850MHz. (frequency hopping and digitally modulated)

RSS-247, issue 2, February 2017

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence Exempt Local Area Network (LE-LAN) Devices

RSS/CNR-Gen, Issue 5, March 2019

Exigences générales et information relatives à la certification du matériel de radiocommunication

ANSI C 63.10:2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

ANSI C 63.4:2014

American National Standard for Methods of measurement of Radio-Noise from low-voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Although the product standard uses obsolete technical standards, the latest versions of standards achievable by the laboratory will be used for testing.

INFORMATIVE REFERENCES:

The following referenced documents are not necessary for the application of the present test report but they assist the user with regard to a particular subject area.

3. EQUIPMENT TECHNICAL DESCRIPTION

3.1. Test Conditions

Test item description. : Wireless actuators for temperature control in domestic applications for heating / cooling system

Model/Type reference..... : P08208 / A3801208 (R-208 NA)

FCC ID..... : V9MSM4NA1

IC. : 7664A-SM4NA1

Trade Mark. : UPONOR

Serial number (S/N)..... : Not communicated

Part number (P/N). : Not communicated

Software version..... : 414

Firmware version. : Not communicated

Type of sample. : Pre-serial

Function(s)..... : R-208 NA is the antenna part of the BASE part (X-265 – A380265A – P08205) which drives actuators for temperature control in domestic applications for heating / cooling system

Manufacturer name. : WATTS ELECTRONICS FRANCE


Address. : ZA des Tourettes
BP 10
43800 ROSIERES
FRANCE

General product information:
N/A

3.2. EUT Marking plate

During tests, the EUT did not have its marking plate.


3.3.EUT General view

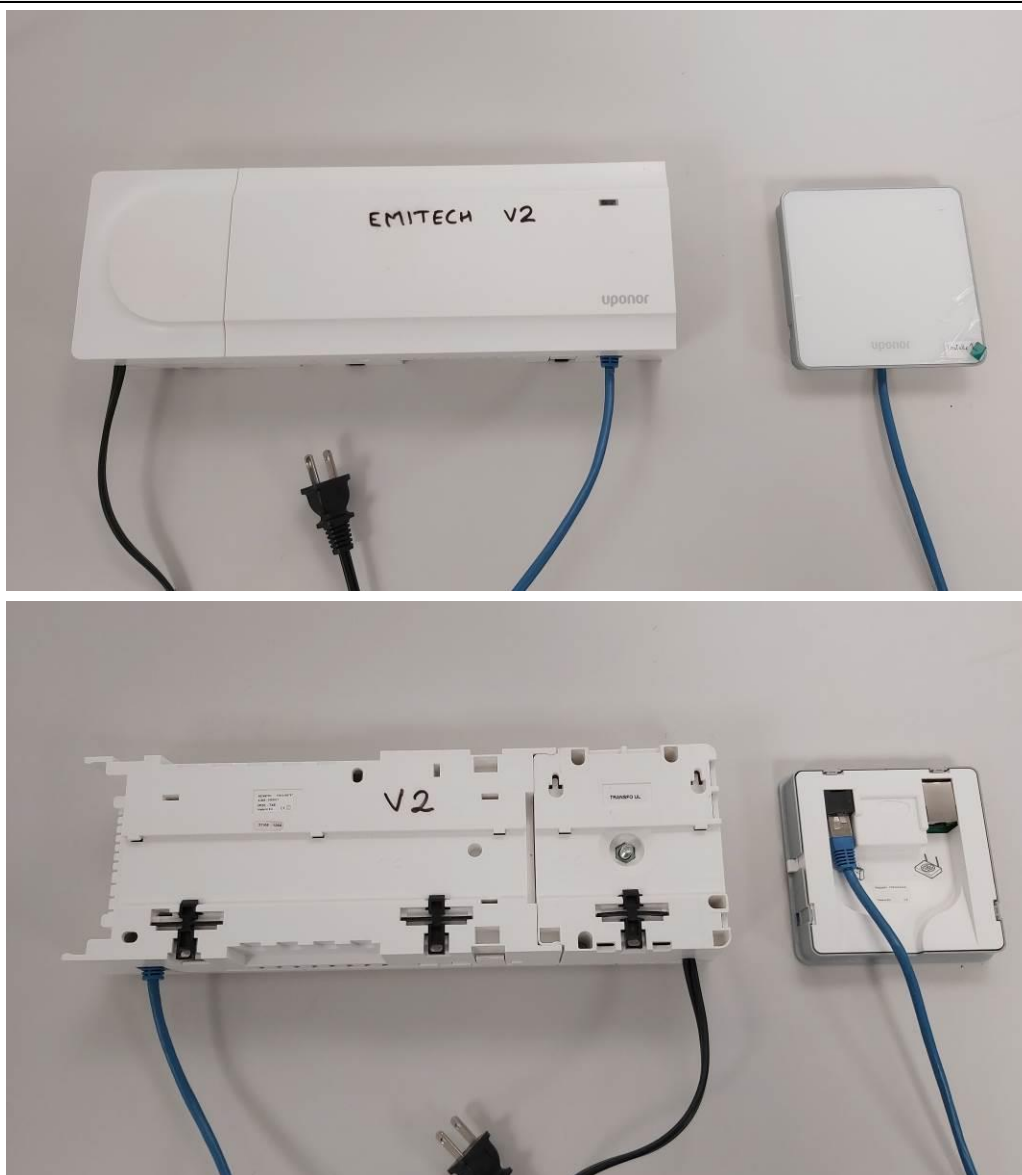

3.4.EUT Internal view (X-265 – A380265A – P08205)



3.5.EUT Internal view (R-208 NA)

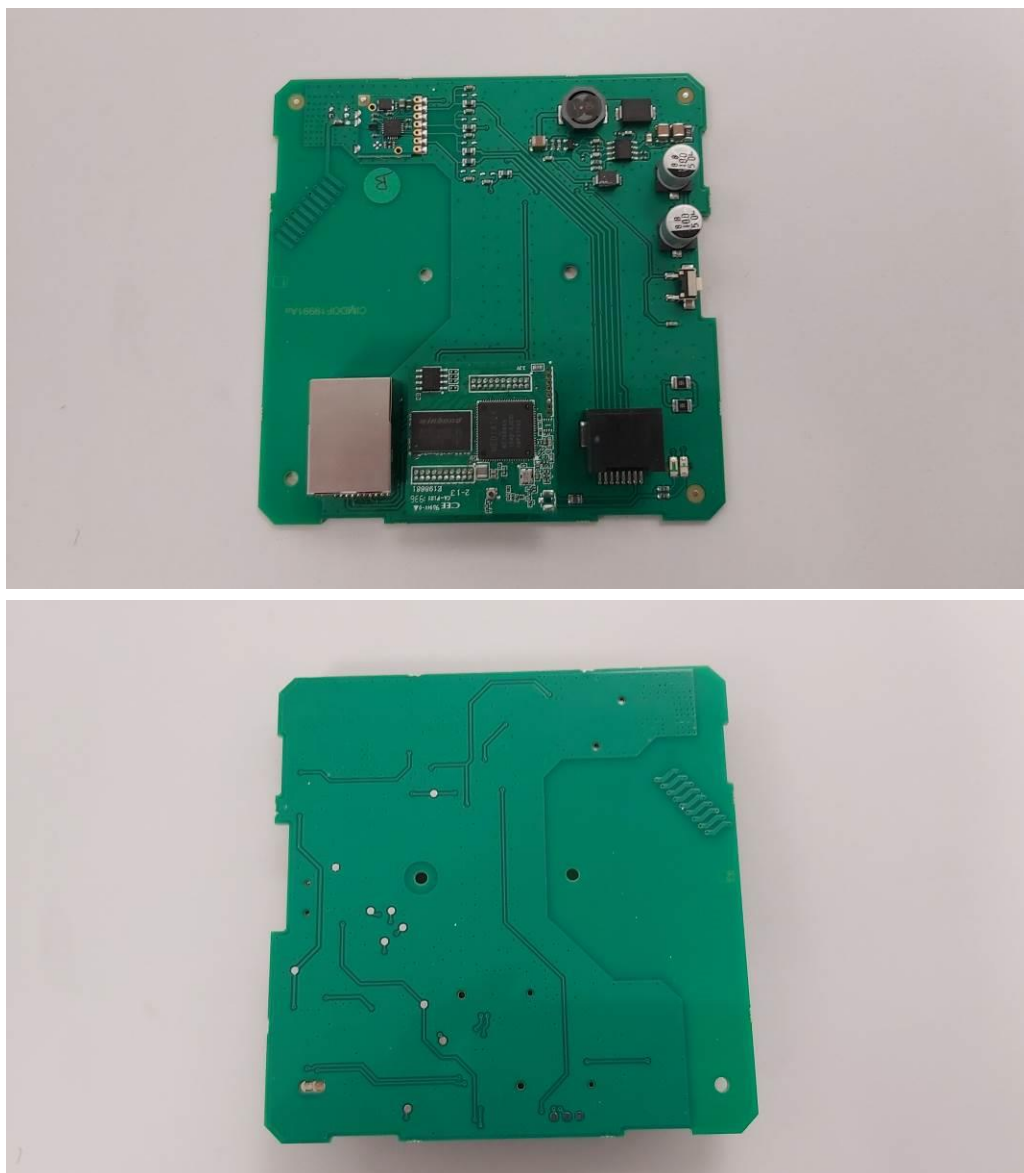


3.6. EUT Mechanical and Electrical Design

Power supply. : 120Vac/60Hz
Power supply range..... : Not communicated
Power type..... : Single phase without earth
Power (W)..... : 60
Nominal current (A). : 0.5
Dimensions (L x W x H) (m). : X-265 – A380265A – P08205: 0.11x0.055x0.34
R-208 NA : 0.11x0.11x0.021
Weight (kg). : 2
Temperature range (°C). : 0° to +45°C
Ground bounding strap..... : No

Comments:

N/A

3.7. EUT Input/Output ports

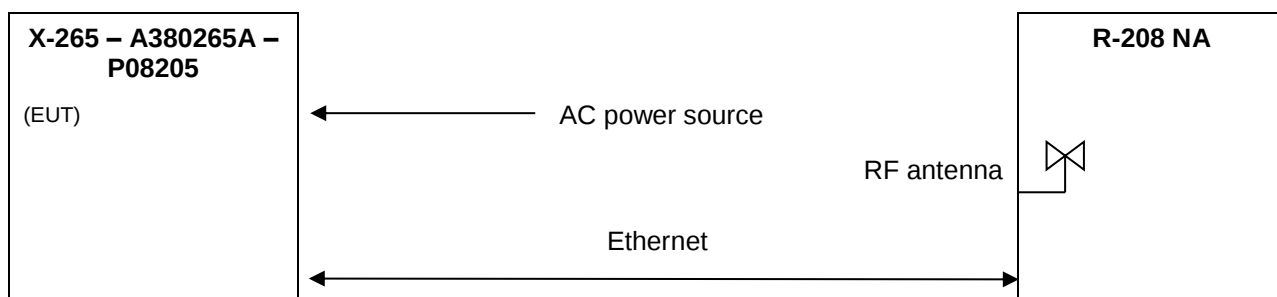

PORT	NAME	TYPE	LENGHT	CABLE TYPE	COMMENTS
0	Main frame	N/E	N/A	Plastic	N/A
1	AC power source	AC/DC	<3m	2P	120Vac/60Hz
2	RF antenna	RF	N/A	N/A	2400MHz
4	Ethernet	DC & I/O	<3m	RJ45	Power Over Ethernet

AC/DC : AC/DC Converter port AC.....: Alternative current port DC.....: Discontinuous current port
I/O: Input or Output port TP: Telecommunication port RF: Radio frequency port
N/E: Non Electrical port

3.8. EUT Radio Specifications

a) GENERAL INFORMATIONS	
According to manufacturer's declarations :	
EUT type.....	Transceiver
Technology	SRD and WiFi
Environmental profile.....	Data transmissions
Temperature range.....	0°C to +45°C
Antenna type	Internal
Antenna Gain.....	Not communicated
Comments:	
N/A	
b) TRANSMITTER PARAMETERS (Tx)	
Frequency bands.....	Wi-Fi : 2400 MHz to 2483.5 MHz
RF Power.....	Not communicated
Number of channels / Separation.....	11
Modulation type	802.11b and 802.11g
Duty cycle	Not communicated
Tested frequency.....	2412 MHz (Low channel (Ch #1)) 2437 MHz (Mid channel (Ch #6)) 2462 MHz (High channel (Ch #11)) 2467 MHz (Canada High channel (Ch #12)) exclusively used for Canada
c) RECEIVER PARAMETERS (Rx)	
Frequency bands.....	Wi-Fi : 2400 MHz to 2483.5 MHz
Bandwidth.....	20 MHz

4. OPINION(S) AND INTERPRETATION(S)

TEST(S) PERFORMED	DEVIATION(S) TO TEST METHOD(S)
FCC part 15.247 subclause d) and RSS-247	N/A
FCC part 15.247 and RSS-247	N/A
FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen	N/A
FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen	N/A
FCC part 15 Radio part 15.215 and RSS Gen	N/A
ANSI C63.4: 2014	N/A
ANSI C63.10: 2013	N/A

Comments: N/A

5. RESULT SUMMARY

TEST DESIGNATION	SEVERITY	VERDICT	BASIC STANDARDS / COMMENTS
SUBPART A - GENERAL			
Labeling requirements		N/P	15.19 / See certification documents
Information to user		N/P	15.21 / See certification documents
Home-built devices		N/A	15.23
Kits		N/A	15.25
Special Accessories		N/A	15.27
Inspection by the Commission		N/A	15.29
Measurement standards		PASS	15.31
Test procedure for CPU boards and computer power supplies		N/A	15.32
Frequency range of radiated measurements		PASS	15.33
Measurement detector functions and bandwidths		PASS	15.35
Transition provisions for compliance with the rules		N/P	15.37 / See certification documents
SUBPART B – UNINTENTIONAL RADIATORS			
Equipment authorization			15.101
- Verification		N/P	
- Declaration of Conformity		N/P	
CPU boards and power supplies used in personal computers		N/A	15.102
Exempted device		N/A	15.103
Information to the user		N/P	15.105 / See certification documents
Conducted limits	Class B	N/A	15.107 /
Radiated emission limits	Class B	PASS	15.109
Antenna power conduction limits for receivers		N/A	15.111
Power line carrier systems		N/A	15.113
TV interface devices, including cable system terminal devices		N/A	15.115
TV broadcast receivers		N/A	15.117
Cable ready consumer electronics equipment		N/A	15.118
Program blocking technology requirements for TV receivers		N/A	15.120
Scanning receivers and frequency converters used with scanning receivers		N/A	15.121

TEST DESIGNATION	SEVERITY	VERDICT	BASIC STANDARDS / COMMENTS
Labeling of digital cable ready products		N/A	15.123
SUBPART C –INTENTIONAL RADIATORS			
Equipment authorization requirement		PASS	15.201 / Transmitter part is subject to Certification procedure
Certified operating frequency range		N/A	15.202
Antenna requirement		PASS	15.203 / Antenna gain limitation to 6dBi
External radio frequency power amplifiers and antenna modifications		N/A	15.204
Restricted bands of operation		PASS	15.204
Conducted limits	Class B	PASS	15.207
Radiated emission limits; general requirements	Class B	PASS	15.209
Tunnel radio systems		N/A	15.211
Modular transmitters		N/A	15.212
Cable locating equipment		N/A	15.213
Cordless telephones		N/A	15.214
Additional provisions to the general radiated emission limits		PASS	15.215
Operation within the band 902-928MHz, 2400-2483.5MHz and 5725-5850MHz			15.247
- Frequency hopping and digitally modulated		-	a)
- Frequency hopping system		N/A	a) (1)
- Digital modulation system		PASS	a) (2)
- Maximum peak conducted output power		-	b)
- For hopping system in the 2400-2483.5 MHz and 5725-5850 MHz bands		N/A	b) (1)
- For hopping system in the 902-928MHz band		N/A	b) (2)
- For system using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands		PASS	b) (3)
- Operation with directional antenna gains > 6 dBi		N/A	c)
- Out-of-band emissions		PASS	d)
- Power spectral density conducted		PASS	e)
- Hybrid system		N/A	f)
- Frequency hopping additional requirements		N/A	g)
- Frequency hopping intelligence		N/A	h)
- RF exposure compliance		PASS	i)

Sample subject to the test complies for tests done with the requirements of the reference document(s) listed in §2 of this test report and, where applicable, with deviation(s) specified in this document.

To declare, or not, the compliance with the specifications, it was not explicitly taken into account of uncertainty associated with the results with the exception of emission tests based on CISPR standards.

TEST(S) PERFORMED	MODIFICATION(S)
FCC part 15.247 subclause d) and RSS-247	N/A
FCC part 15.247 and RSS-247	N/A
FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen	N/A
FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen	N/A
FCC part 15 Radio part 15.215 and RSS Gen	N/A
ANSI C63.4: 2014	N/A
ANSI C63.10: 2013	N/A

6. MEASUREMENT UNCERTAINTY

PARAMETER	MAXIMAL EMITECH UNCERTAINTY	MINIMAL STANDARD UNCERTAINTY
Radio frequency	$\pm 1 \times 10^{-7}$	$\pm 1 \times 10^{-7}$
RF power, conducted		
RF power	$\pm 0.8\text{dB}$	$\pm 1 \text{ dB}$
Power spectral density	$\pm 2.3\text{dB}$	$\pm 3 \text{ dB}$
Occupied bandwidth		
RF power	$\pm 3.8 \%$	$\pm 5 \%$
Conducted emission (spurious)		
$f \leq 1 \text{ GHz}$	$\pm 0.8 \text{ dB}$	
1 GHz - 12.75 GHz	$\pm 1.6 \text{ dB}$	$\pm 3 \text{ dB}$
Radiated emission (ERP / EIRP)		
$f \leq 62.5 \text{ MHz}$	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
62.5 MHz - 1 GHz	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
1 GHz - 18 GHz	$\pm 5.2 \text{ dB}$	$\pm 6 \text{ dB}$
18 GHz – 26 GHz	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
26 GHz – 40 GHz	$\pm 5.4 \text{ dB}$	$\pm 6 \text{ dB}$
EIRP and power spectral density with diode	$\pm 5.2 \text{ dB}$	$\pm 6 \text{ dB}$
Radiated emission (magnetic field)		
9kHz – 30MHz	$\pm 3 \text{ dB}$	$\pm 6 \text{ dB}$
Supply voltages	$\pm 3 \%$	$\pm 3 \%$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5 \%$	$\pm 5 \%$
Time / Duty cycle	$\pm 4.4 \%$	$\pm 5 \%$
Radiated emission (electric field for FCC standard)		
9kHz – 30MHz	$\pm 2.7 \text{ dB}$	/
30MHz – 1GHz	$\pm 5.0 \text{ dB}$	/
1GHz – 18GHz	$\pm 5.6 \text{ dB}$	/
18GHz – 26GHz	$\pm 5.7 \text{ dB}$	/
26GHz – 40GHz	$\pm 5.7 \text{ dB}$	/

For the calculation of expanded uncertainty, the confidence interval is 95 % (k=2).

7. RF EXPOSURE

Maximum EIRP = 23dBm (199.52 mW) at 2467MHz

In accordance with KDB 447498 D01 General RF Exposure Guidance v06:

$PSD = EIRP / (4 \cdot \pi \cdot R^2) = 199.52 / (4 \cdot \pi \cdot (20 \text{ cm})^2) = 0.039694 \text{ mW/cm}^2$

Limit = 1 mW/cm²

8. TEST CONDITIONS AND RESULTS

8.1. Conducted limits

Reference standard:	FCC part 15.107, 15.207 RSS-Gen
Test method:	ANSI C63.4: 2014
General test setup: EUT is set on an insulating support at 40cm from the ground reference plane. All power was connected to the system through Artificial Mains Network (AMN). The AMN is placed at 80cm from the boundary of the EUT and bonded to a ground reference plane.	

TESTED CABLE	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
120Vac/60Hz power supply / All channels	150kHz-30MHz	15.207	EMI5059	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	30 to 60 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		


TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR 4000L	15322		
Cable	EMITECH	Current absorber sheath	9491	23/06/2020	23/08/2022
Cable	C&C	N-3m	14333	18/03/2021	18/05/2023
LISN	PMM	L2-16	1209	08/06/2020	08/08/2022
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FPL1003	16027	14/08/2020	14/10/2021
Software	Nexio	BAT EMC	0000		
Surges Suppressor	Hewlett Packard	11947A	0238	20/12/2019	20/02/2023
Thermohygrometer	Testo	608-H2	12268	07/05/2020	07/07/2022
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

CONDUCTED EMISSION (MEASUREMENT) - TABULATED RESULTS							
120VAC/60Hz POWER SUPPLY / ALL CHANNELS						EMI5059	
Terminal	Test Frequency (MHz)	Meter Reading dB (μV)	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level dB (μV)	Limit dB (μV)	Margin (dB)
/	/	/	/	/	/	/	/
Supplementary information: No spurious emissions were detected.							

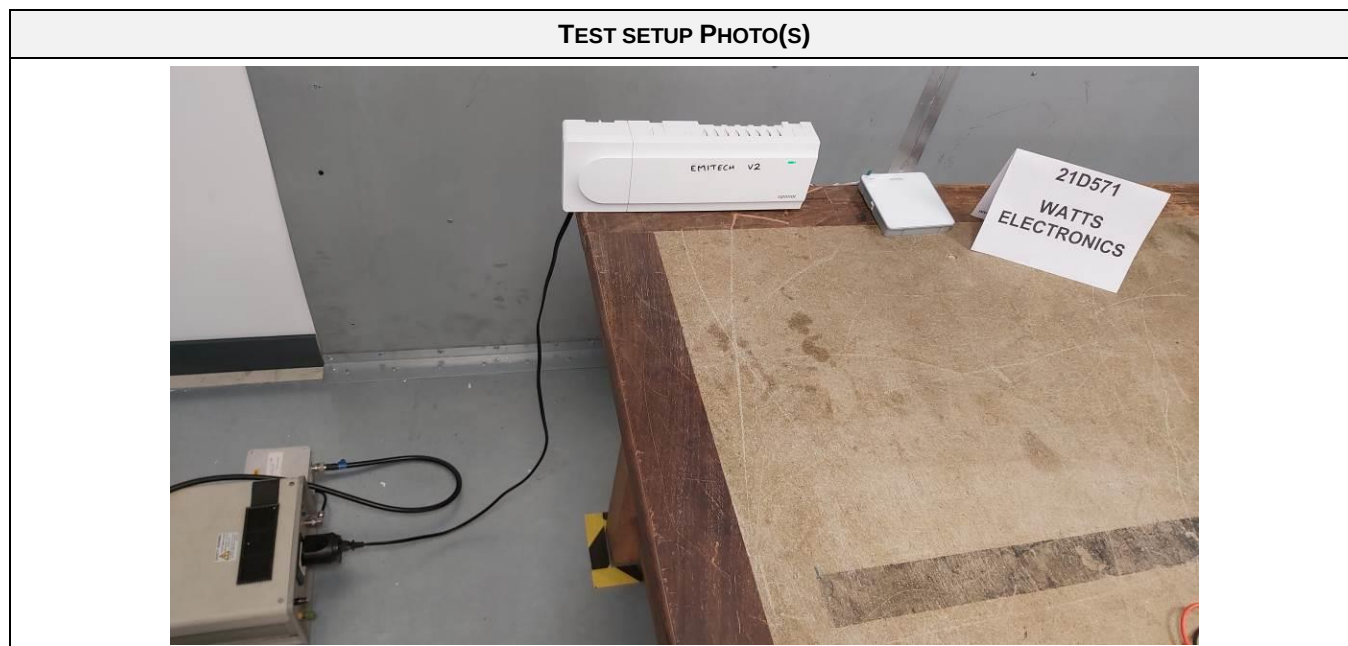

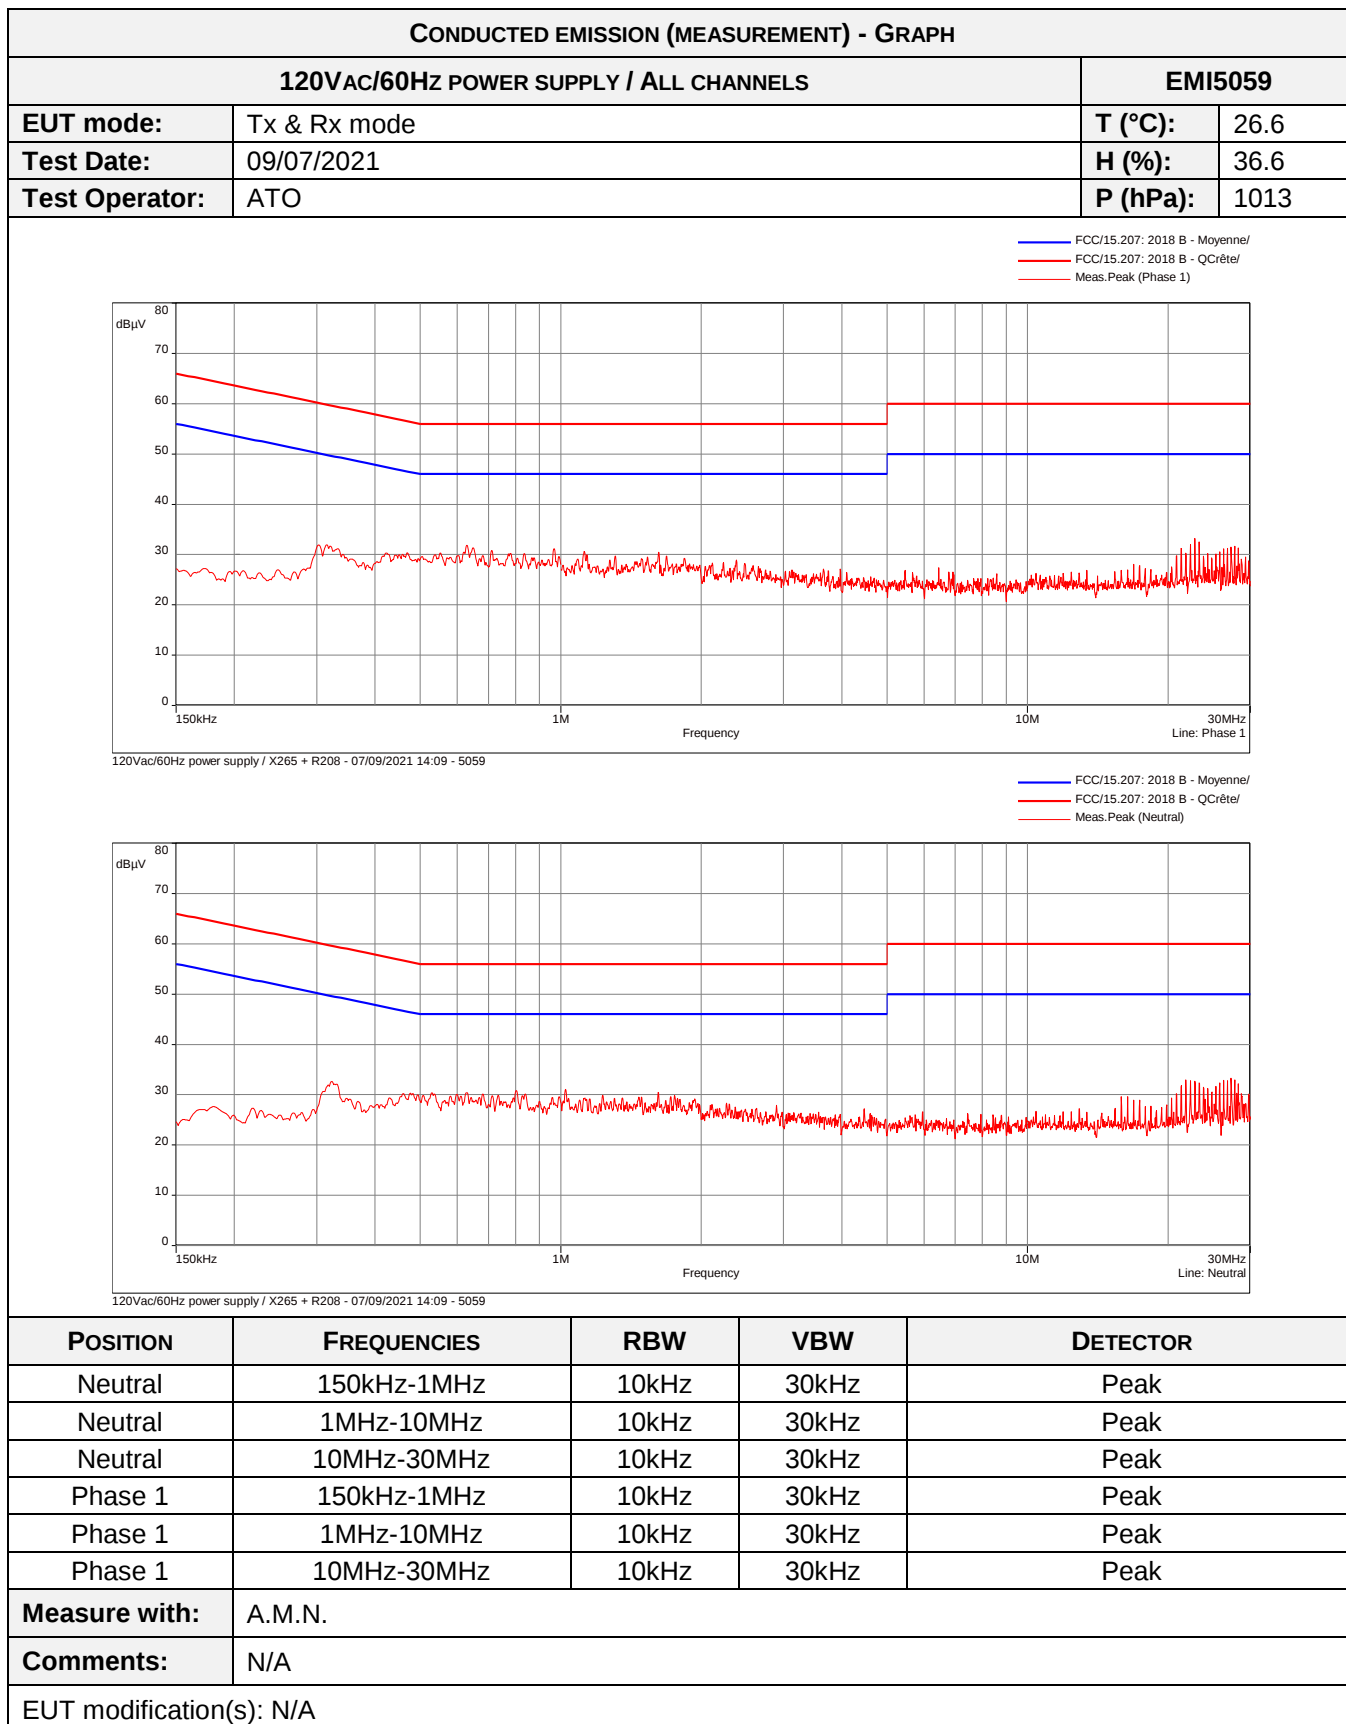

No spurious emissions were detected.

8.2.6dB bandwidth

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10 : 2013
Test description: Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. EUT is connected to the measuring receiver via 50Ω attenuator(s). Tests are done in max-hold mode in order to capture all channels.	


TEST CASE AND CONDITIONS	SEVERITY	RESULT TAB.	VERDICT
Low channel (Ch #1) / 802.11b	>500kHz	EMI8049	PASS
Mid channel (Ch #6) / 802.11b	>500kHz	EMI8050	PASS
High channel (Ch #11) / 802.11b	>500kHz	EMI8051	PASS
Canada High channel (Ch #12) / 802.11b	>500kHz	EMI8052	PASS
Low channel (Ch #1) / 802.11g	>500kHz	EMI8053	PASS
Mid channel (Ch #6) / 802.11g	>500kHz	EMI8054	PASS
High channel (Ch #11) / 802.11g	>500kHz	EMI8055	PASS
Canada High channel (Ch #12) / 802.11g	>500kHz	EMI8056	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	22.6 °C
Relative Humidity	20 to 75 %	58.3 %
Atmospheric pressure	N/A	1004 hPa
Test method deviation: N/A		
Supplementary information:		


TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR 4000L	15322		
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023


Blank cells = Permanent validity

TEST SETUP PHOTO(S)

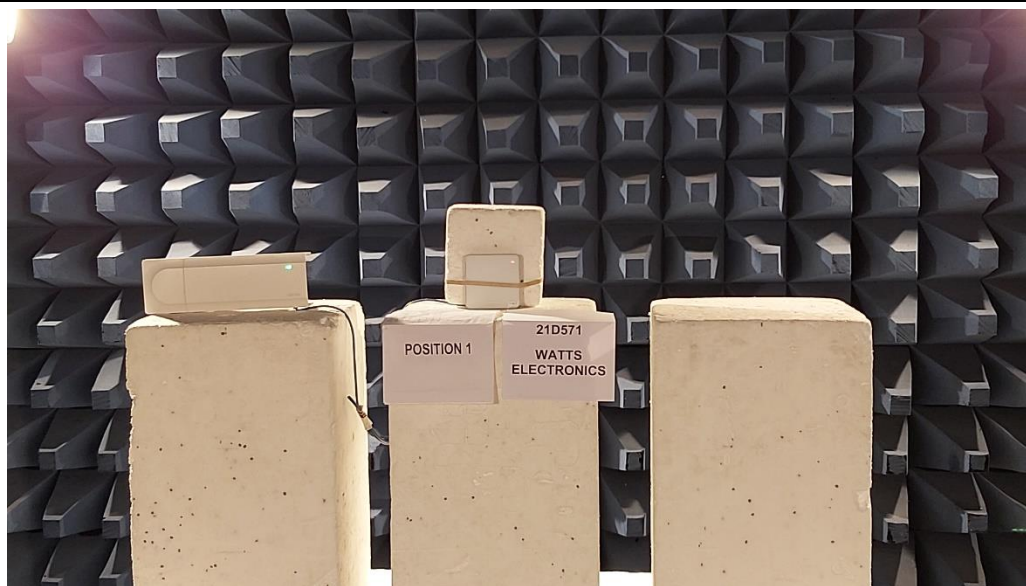


TEST SETUP PHOTO(S)

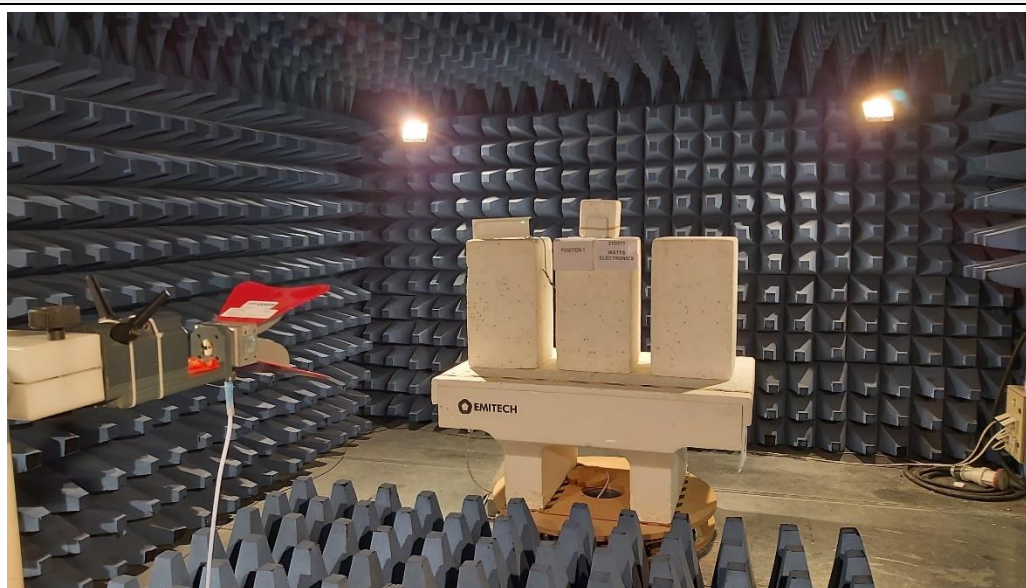


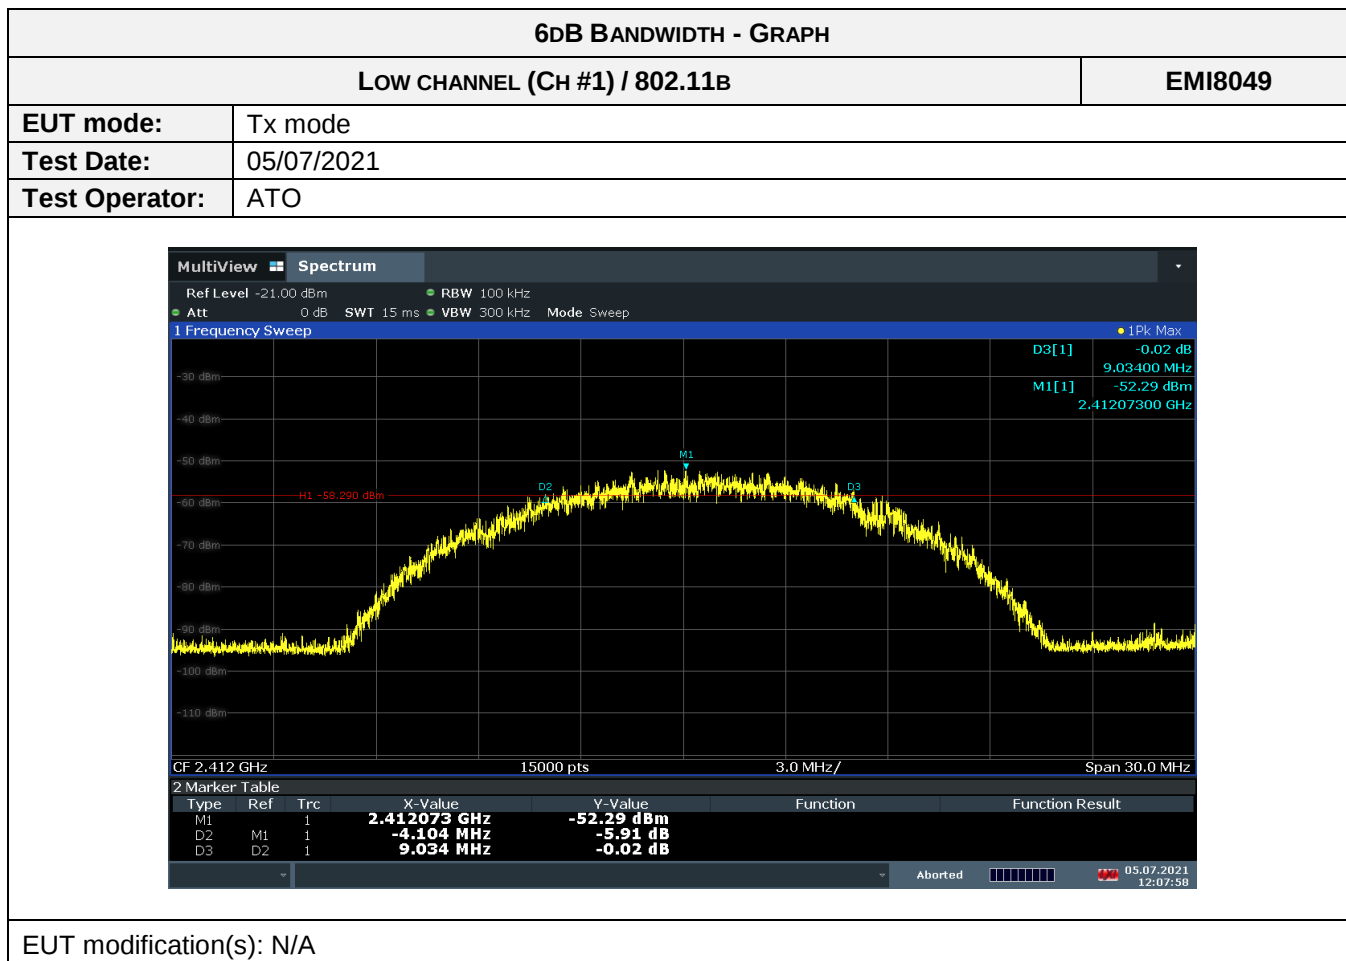


6dB BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL (CH #1) / 802.11B			
Frequency	RBW	6 dB Bandwidth	Limit
2412 MHz	100kHz	9.034 MHz	>500kHz

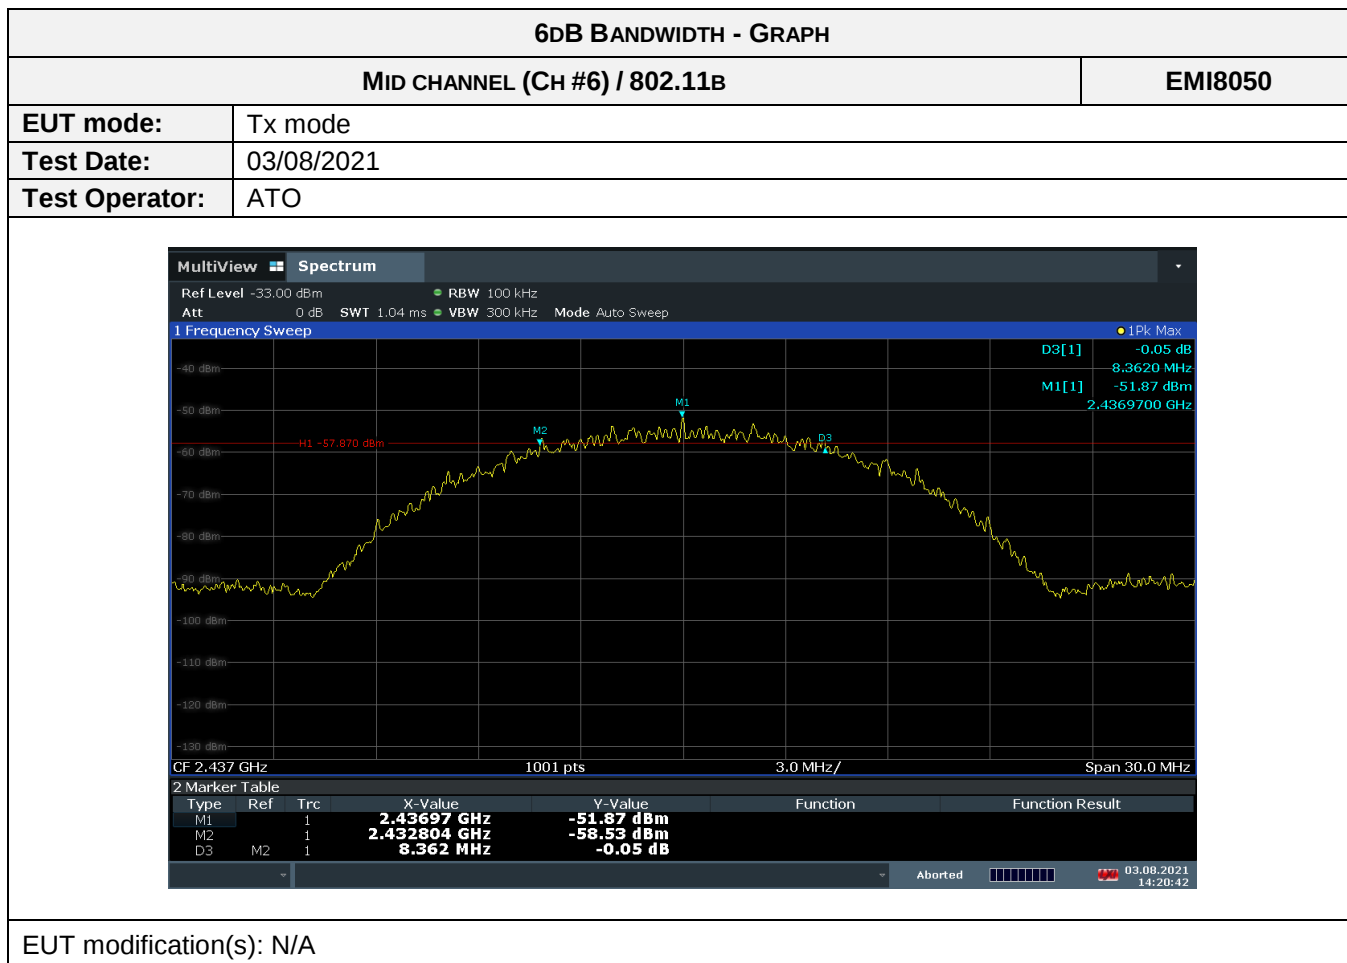


6dB BANDWIDTH - TABULATED RESULTS			
MID CHANNEL (CH #6) / 802.11B			
Frequency	RBW	6 dB Bandwidth	Limit
2437 MHz	100kHz	8.362 MHz	>500kHz

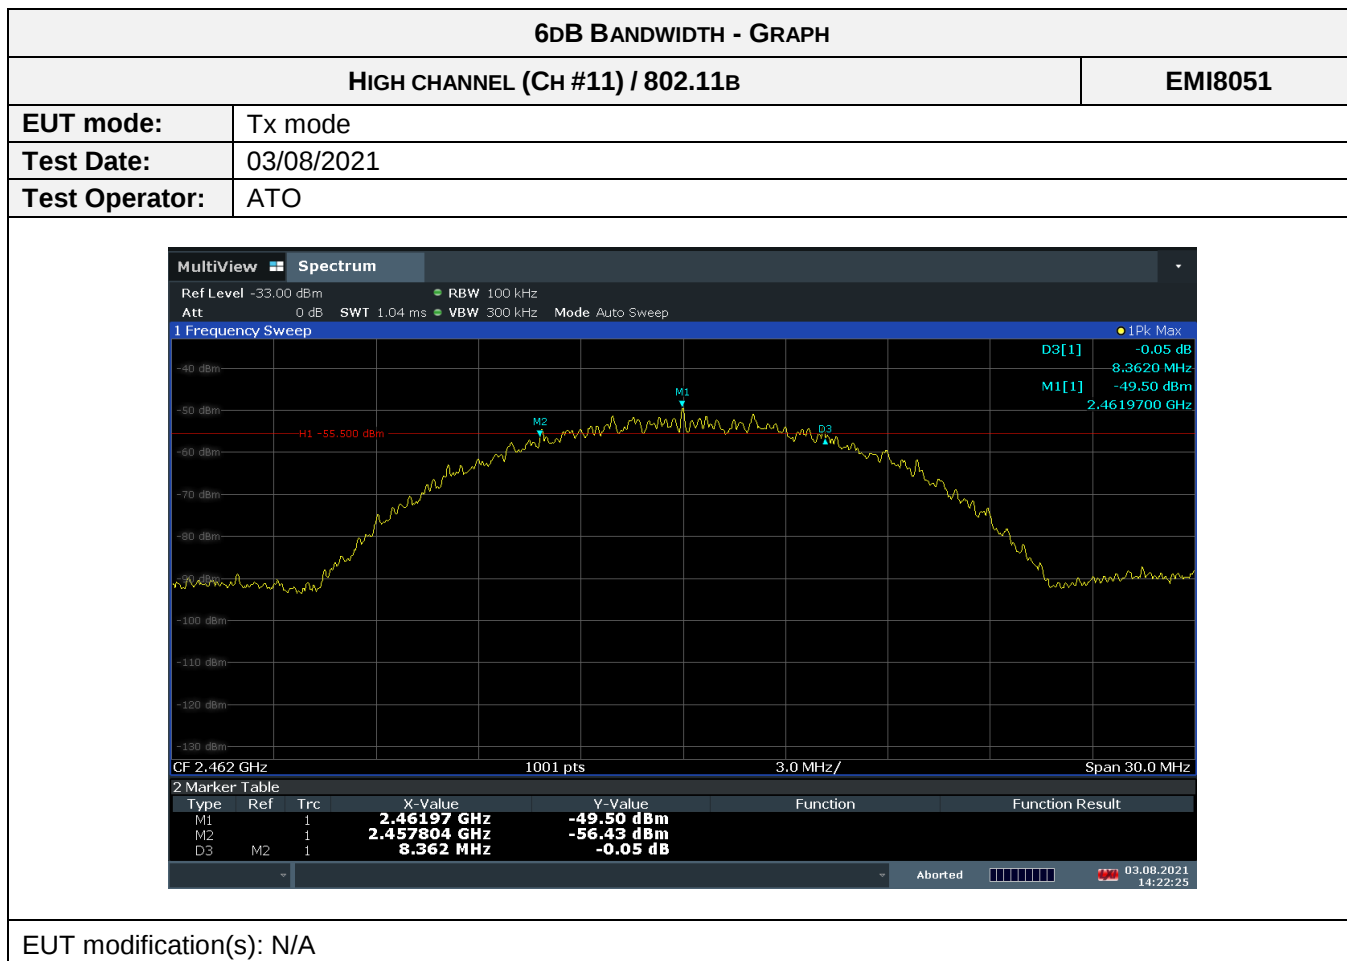

6dB BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL (CH #11) / 802.11B			
Frequency	RBW	6 dB Bandwidth	Limit
2462 MHz	100kHz	8.362 MHz	>500kHz

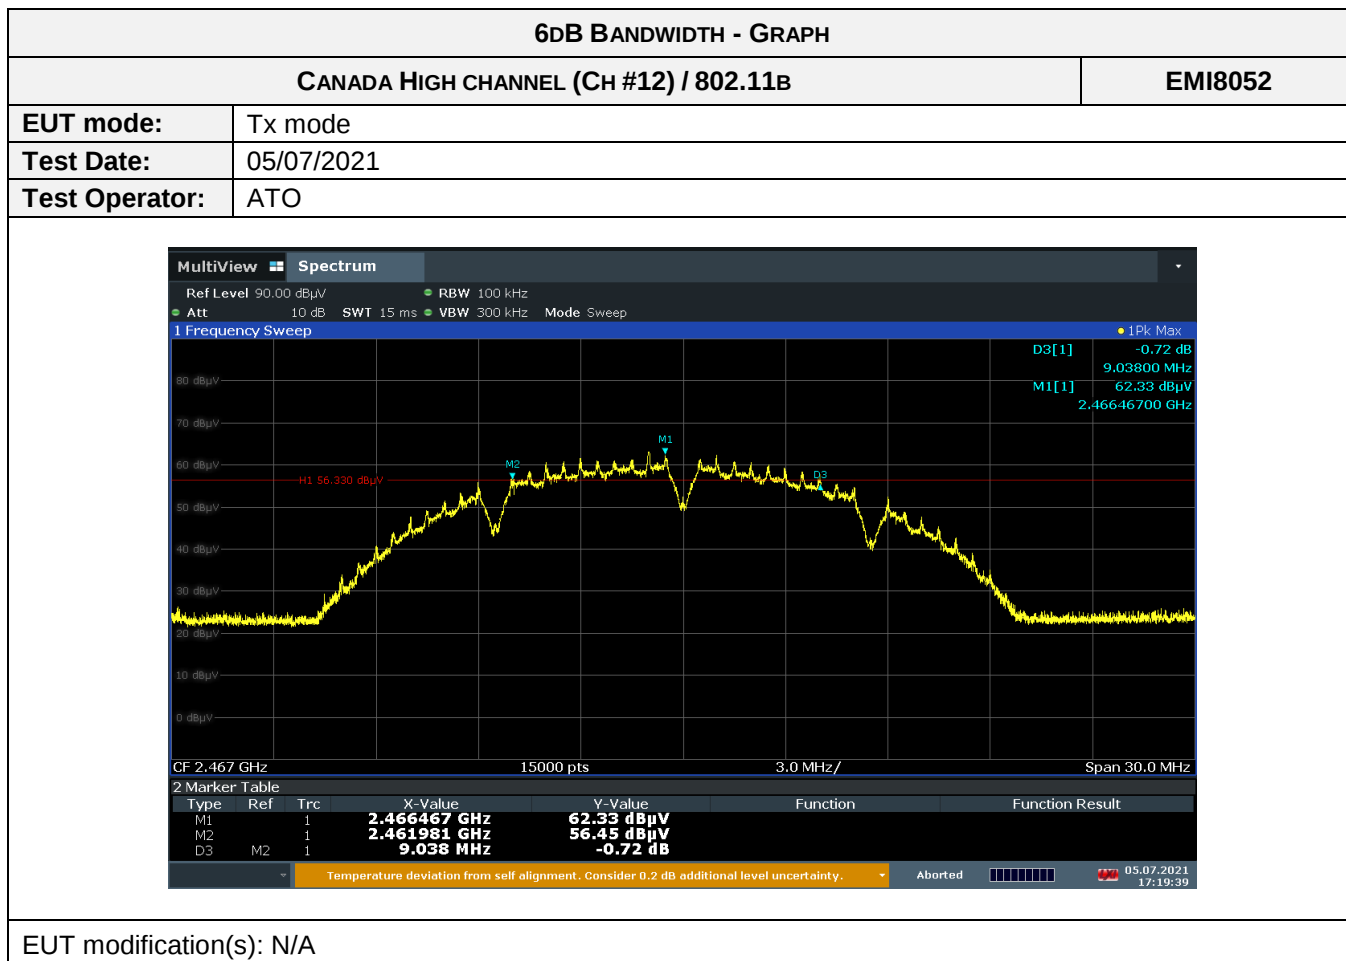


6dB BANDWIDTH - TABULATED RESULTS			
CANADA HIGH CHANNEL (Ch #12) / 802.11B			
Frequency	RBW	6 dB Bandwidth	Limit
2467 MHz	100kHz	9.038 MHz	>500kHz

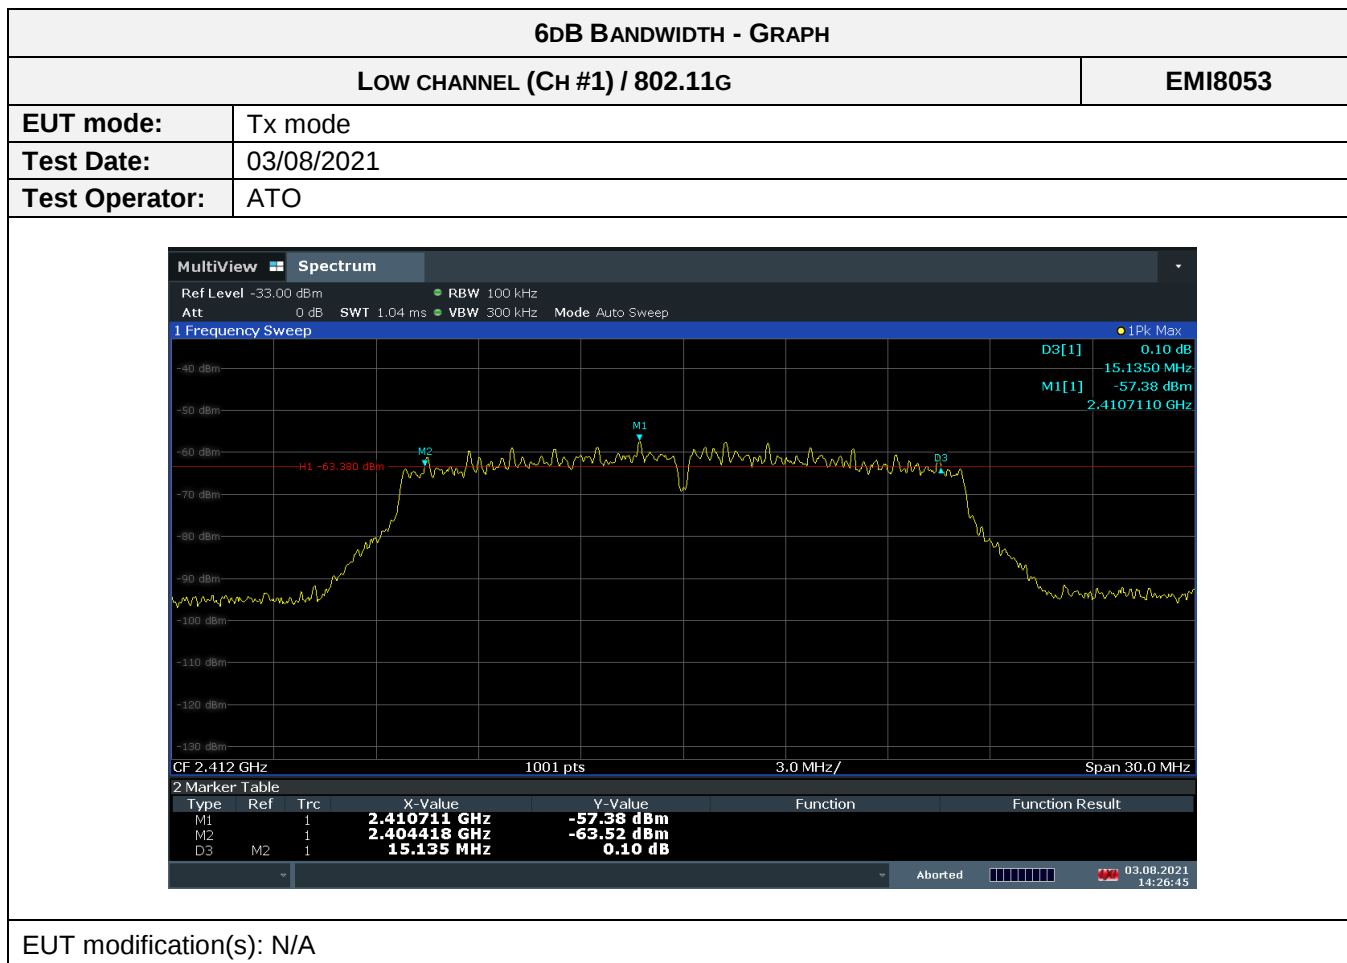

6dB BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL (CH #1) / 802.11G			
Frequency	RBW	6 dB Bandwidth	Limit
2412 MHz	100kHz	15.135 MHz	>500kHz

EUT modification(s): N/A

6dB BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL (CH #11) / 802.11G			
Frequency	RBW	6 dB Bandwidth	Limit
2462 MHz	100kHz	15.704 MHz	>500kHz

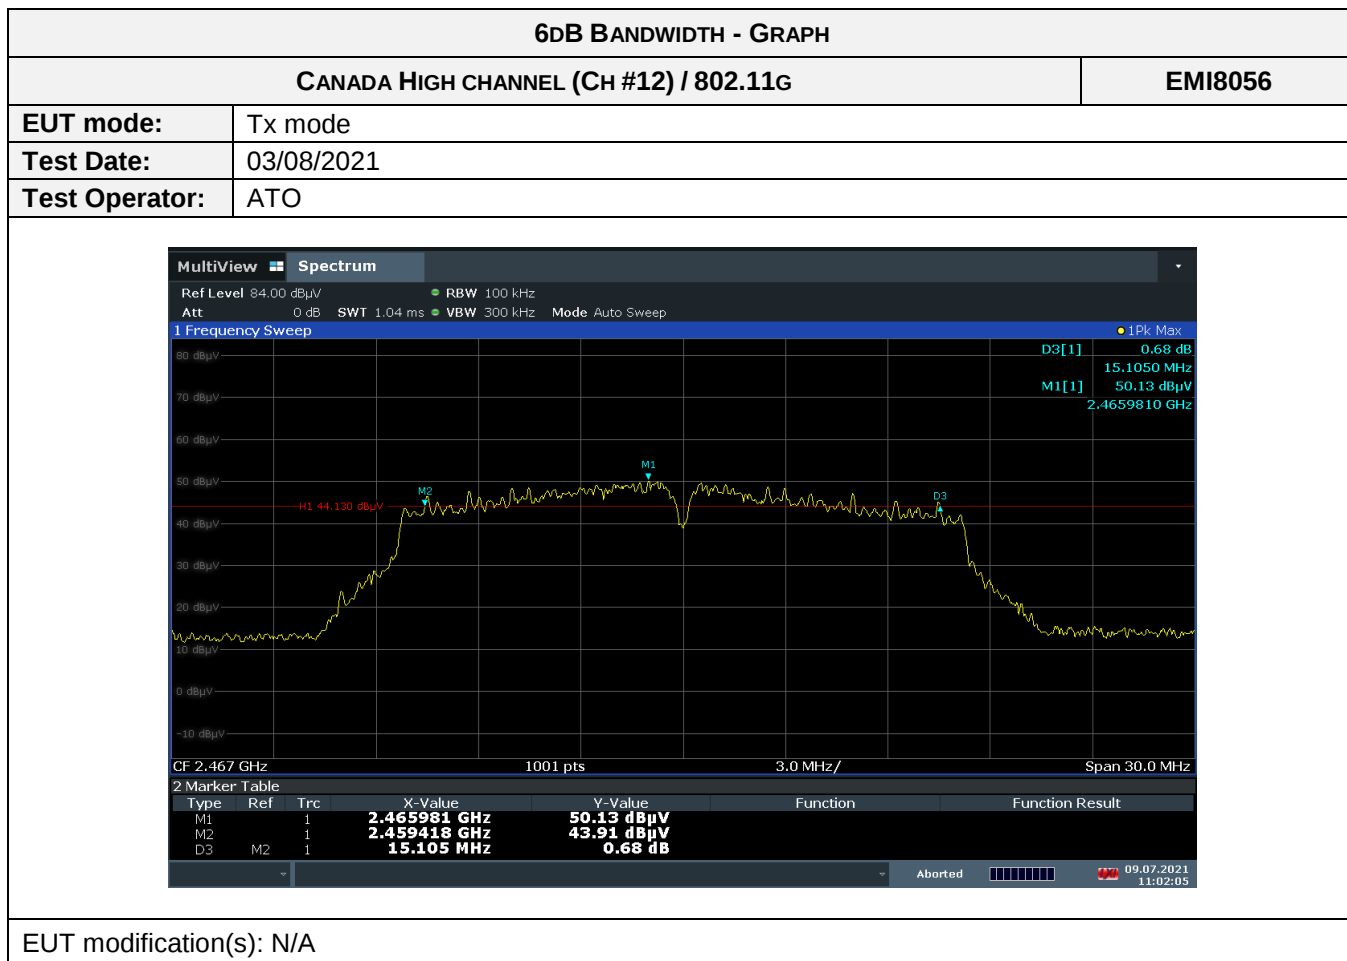

6dB BANDWIDTH - TABULATED RESULTS			
CANADA HIGH CHANNEL (CH #12) / 802.11G			
Frequency	RBW	6 dB Bandwidth	Limit
2467 MHz	100kHz	15.105 MHz	>500kHz

8.3. 99% Occupied bandwidth

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10 : 2013
Test description: The occupied bandwidth (OBW) is the Frequency Range in which 99 % of the total mean power of a given emission falls. The residual part of the total power being denoted as β , which, in cases of symmetrical spectra, splits up into $\beta/2$ on each side of the spectrum. Unless otherwise specified, $\beta/2$ is taken as 0,5 %. The maximum occupied bandwidth includes all associated side bands above the appropriate emissions level and the frequency error or drift under extreme test conditions.	

TEST CASE AND CONDITIONS	SEVERITY	RESULT TAB.	VERDICT
Low channel (Ch #1) / 802.11b	Within 2400MHz to 2483.5MHz	EMI8057	PASS
Mid channel (Ch #6) / 802.11b	Within 2400MHz to 2483.5MHz	EMI8058	PASS
High channel (Ch #11) / 802.11b	Within 2400MHz to 2483.5MHz	EMI8059	PASS
Canada High channel (Ch #12) / 802.11b	Within 2400MHz to 2483.5MHz	EMI8060	PASS
Low channel (Ch #1) / 802.11g	Within 2400MHz to 2483.5MHz	EMI8061	PASS
Mid channel (Ch #6) / 802.11g	Within 2400MHz to 2483.5MHz	EMI8062	PASS
High channel (Ch #11) / 802.11g	Within 2400MHz to 2483.5MHz	EMI8063	PASS
Canada High channel (Ch #12) / 802.11g	Within 2400MHz to 2483.5MHz	EMI8064	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	22.6 °C
Relative Humidity	20 to 75 %	58.3 %
Atmospheric pressure	N/A	1004 hPa
Test method deviation: N/A		
Supplementary information:		


TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR 4000L	15322		
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023


Blank cells = Permanent validity

TEST SETUP PHOTO(S)




TEST SETUP PHOTO(S)

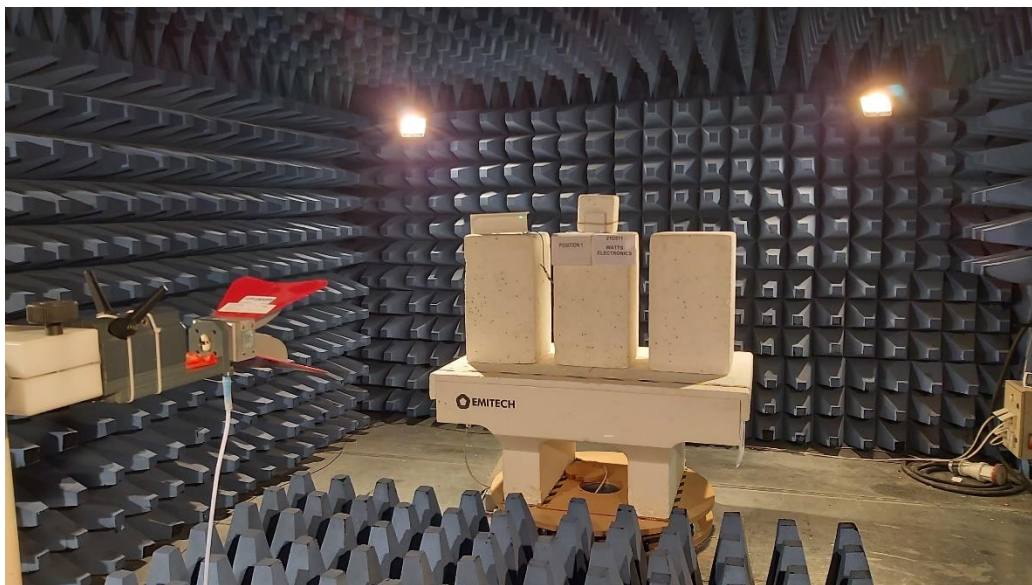


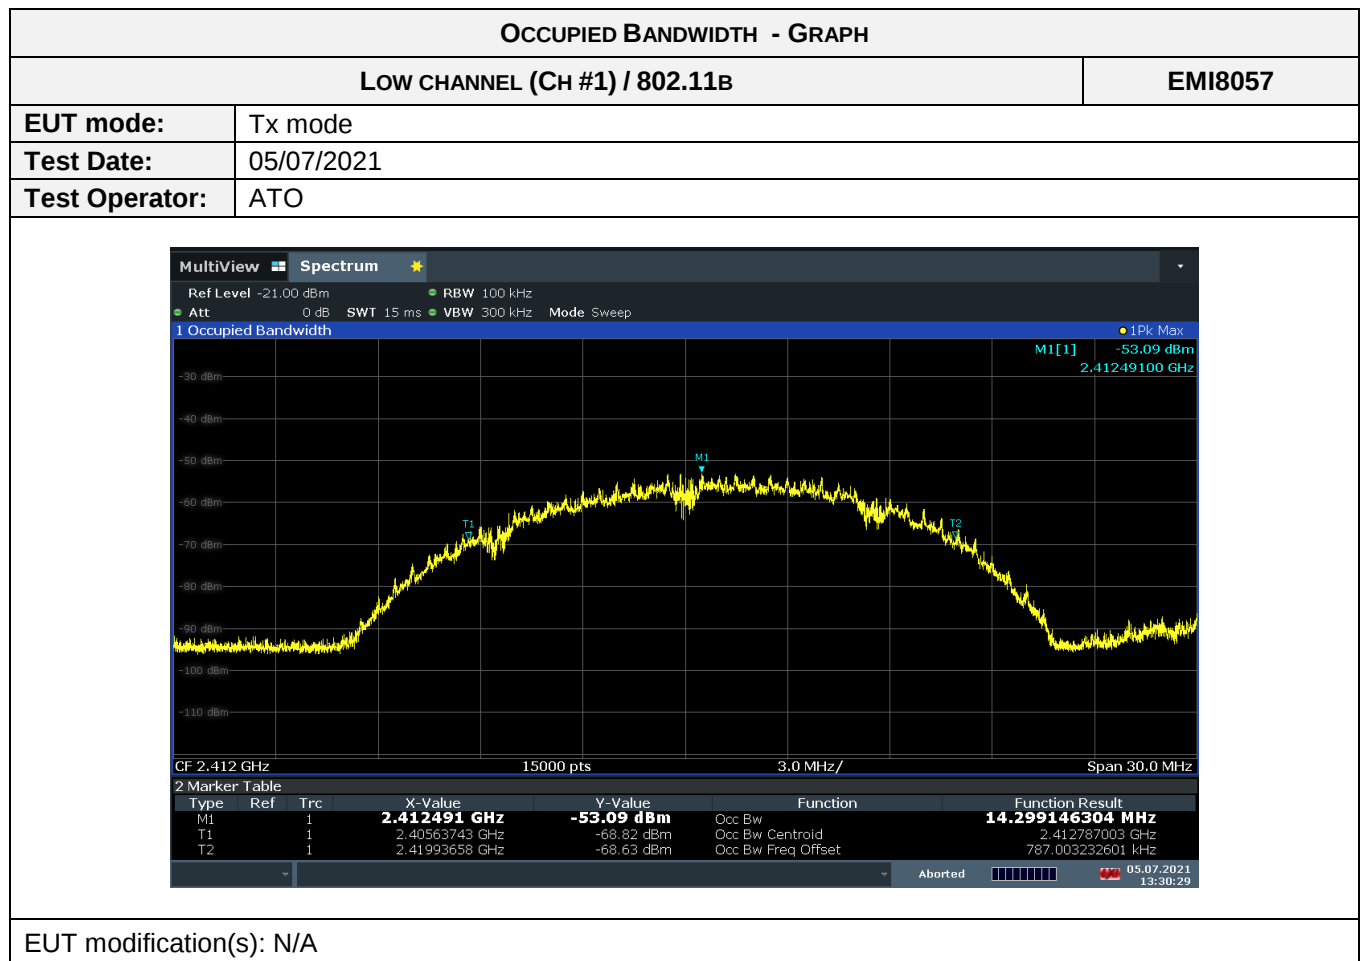


OCCUPIED BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL (CH #1) / 802.11B			
f_{Low}	f_{High}	OBW 99%	Limit
2405.637 MHz	2419.936 MHz	14.299 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

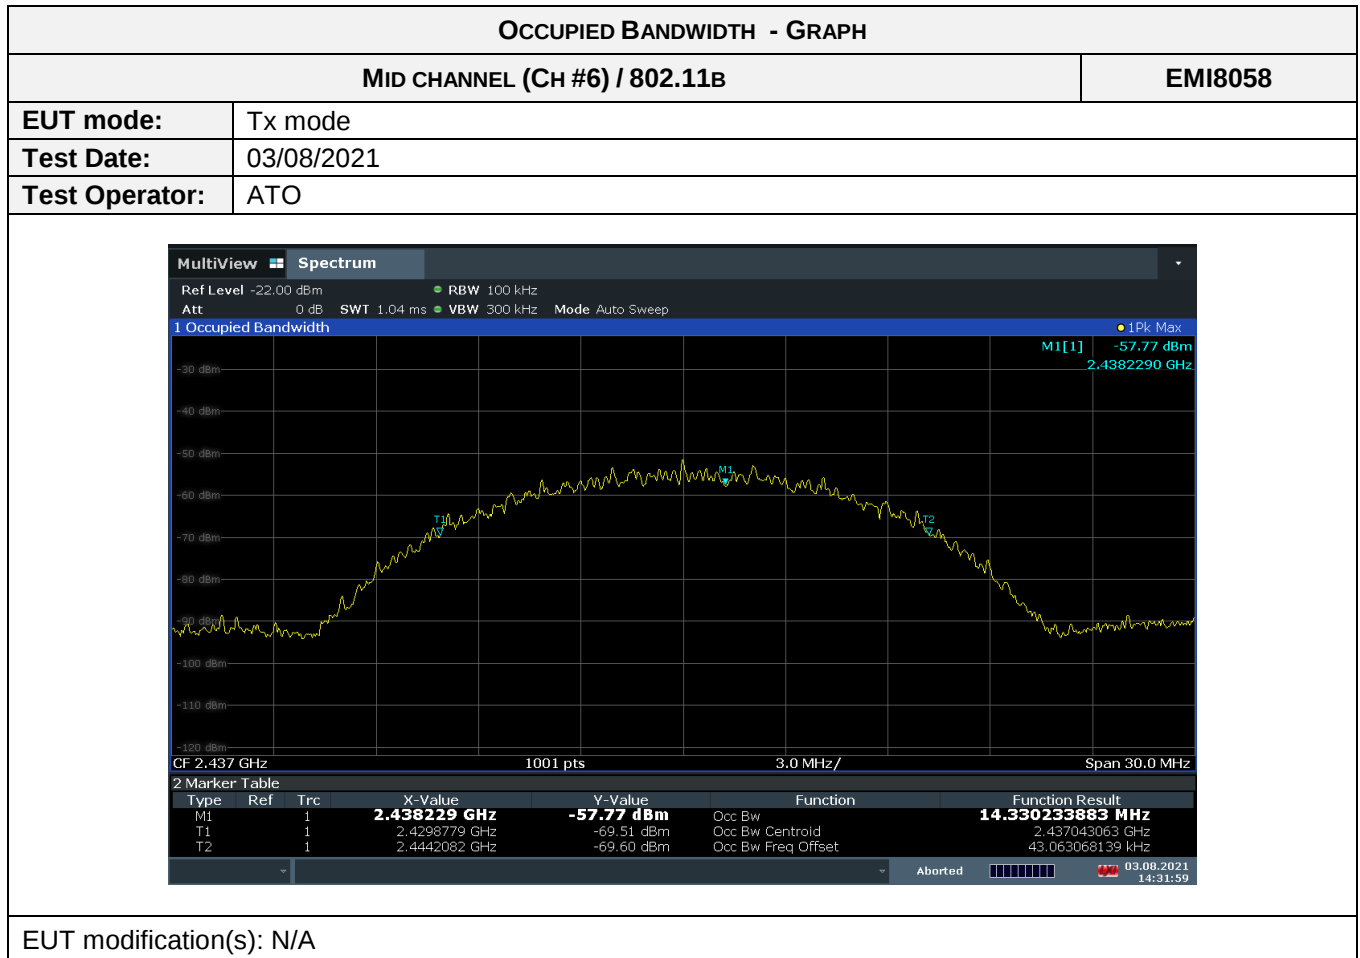


OCCUPIED BANDWIDTH - TABULATED RESULTS			
MID CHANNEL (CH #6) / 802.11B			
f _{Low}	f _{High}	OBW 99%	Limit
2429.877 MHz	2444.208 MHz	14.330 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

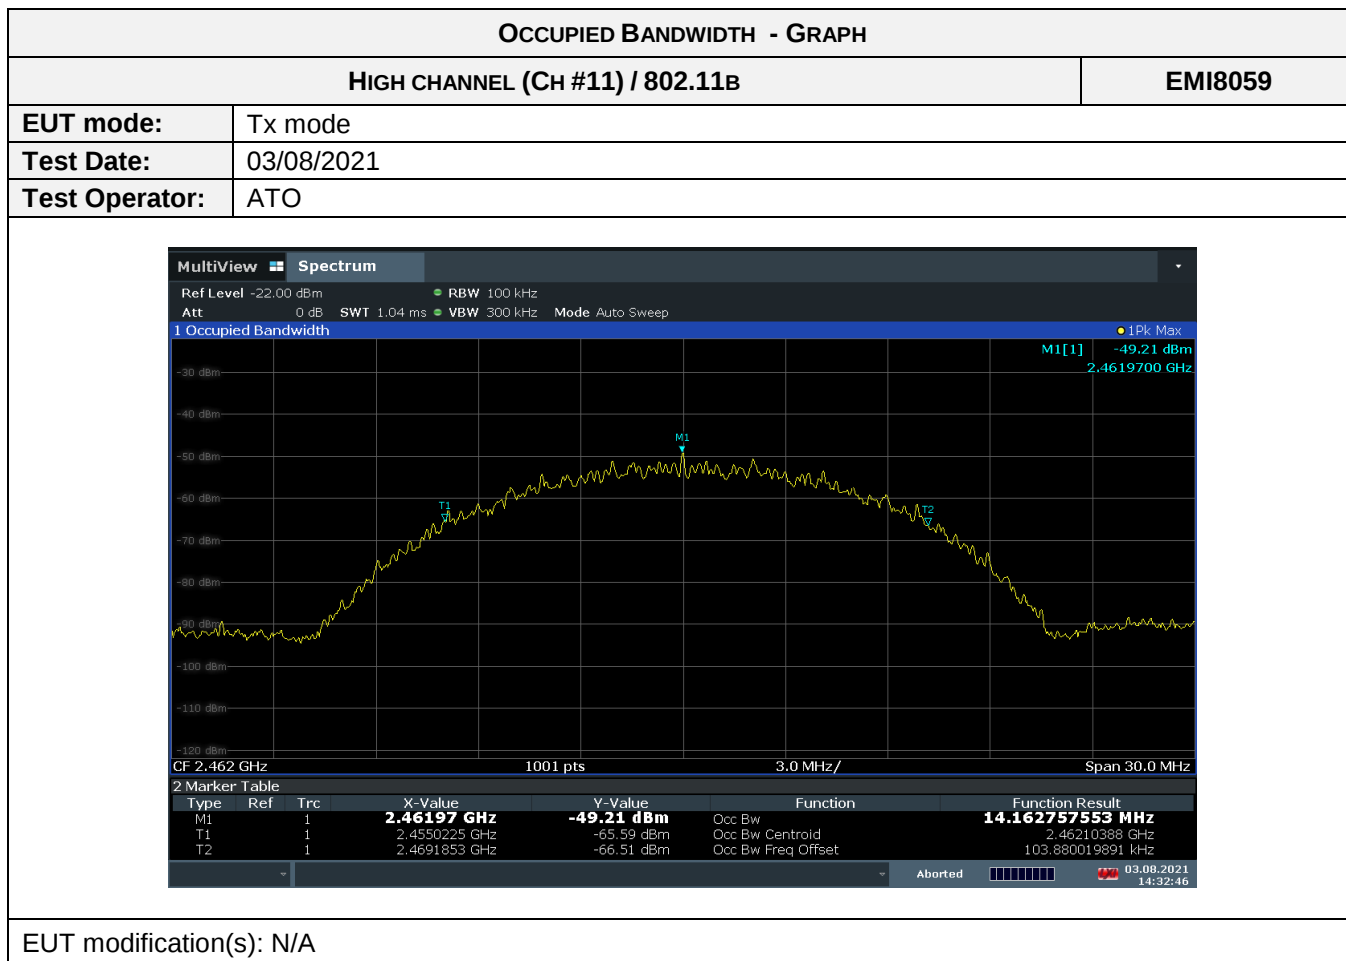


OCCUPIED BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL (CH #11) / 802.11B			
f_{Low}	f_{High}	OBW 99%	Limit
2455.022 MHz	2469.185 MHz	14.162 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

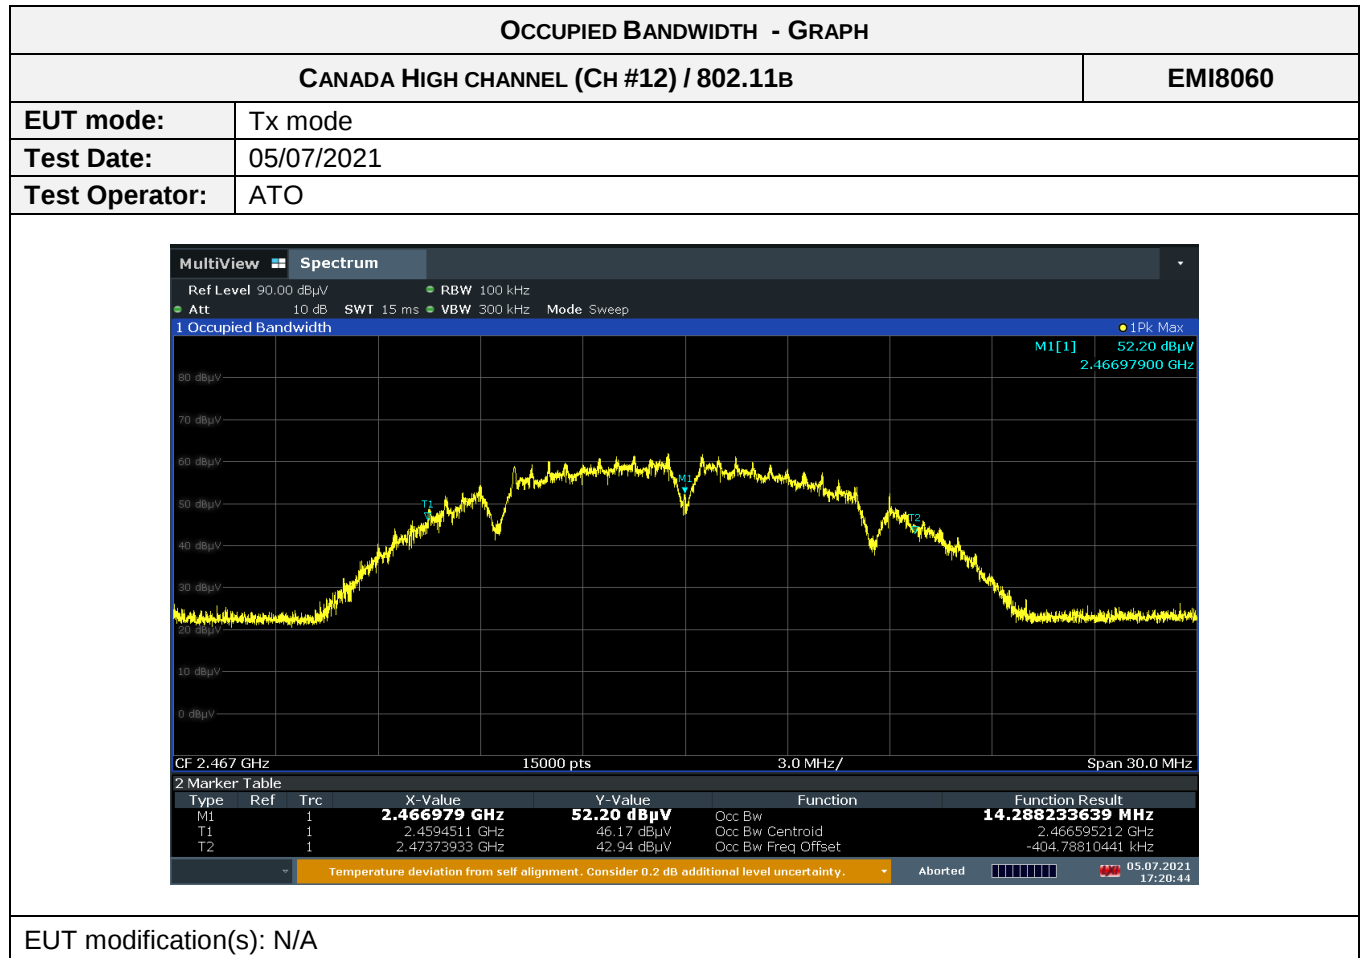

OCCUPIED BANDWIDTH - TABULATED RESULTS			
CANADA HIGH CHANNEL (CH #12) / 802.11B			
f_{Low}	f_{High}	OBW 99%	Limit
2459.451 MHz	2473.739 MHz	14.288 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

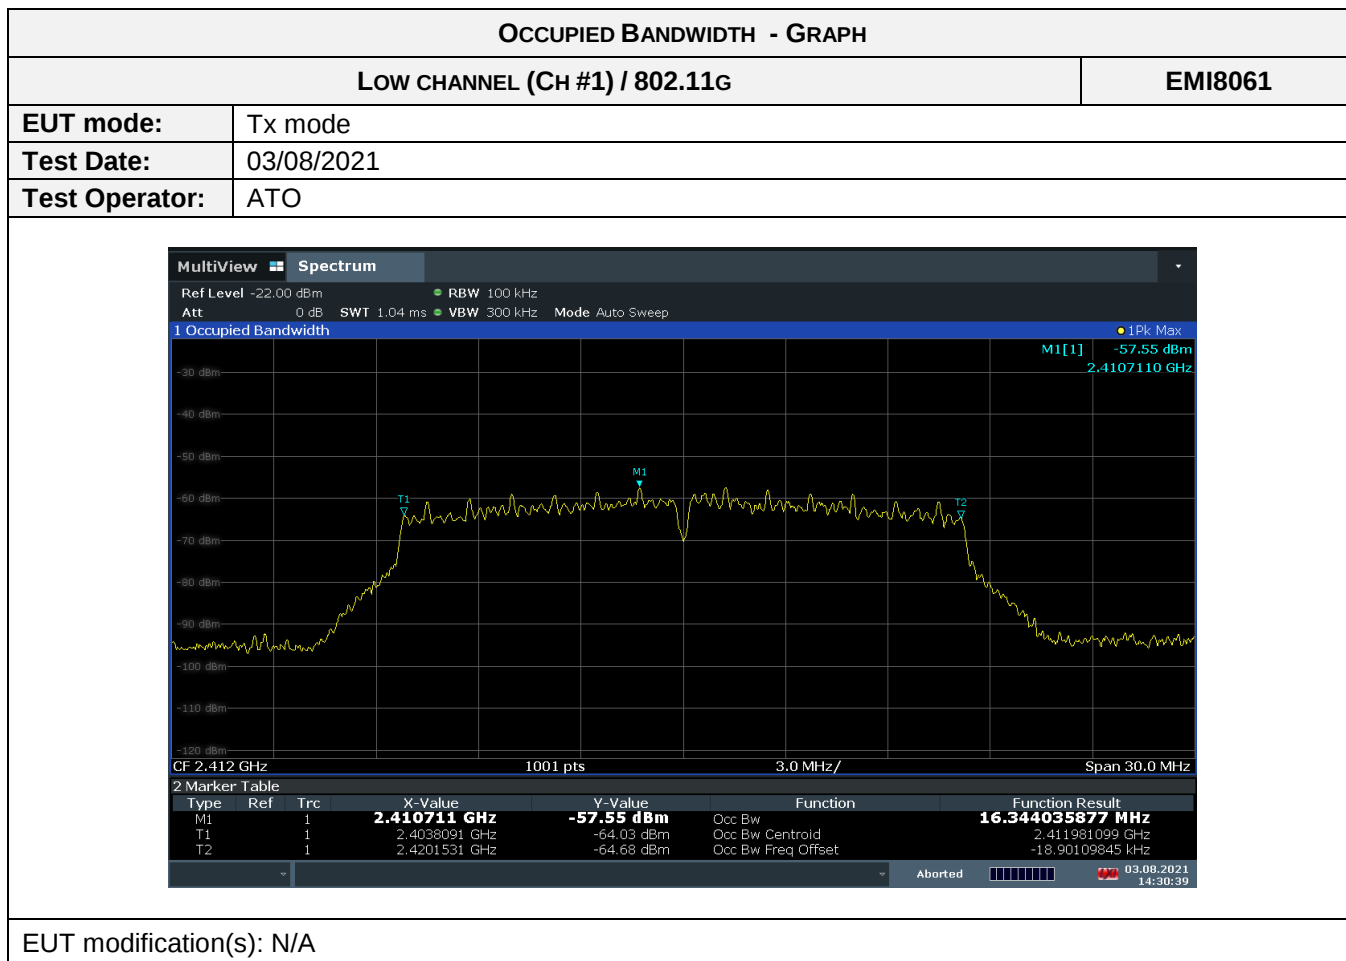


OCCUPIED BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL (CH #1) / 802.11G			
f_{Low}	f_{High}	OBW 99%	Limit
2403.809 MHz	2420.153 MHz	16.354 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

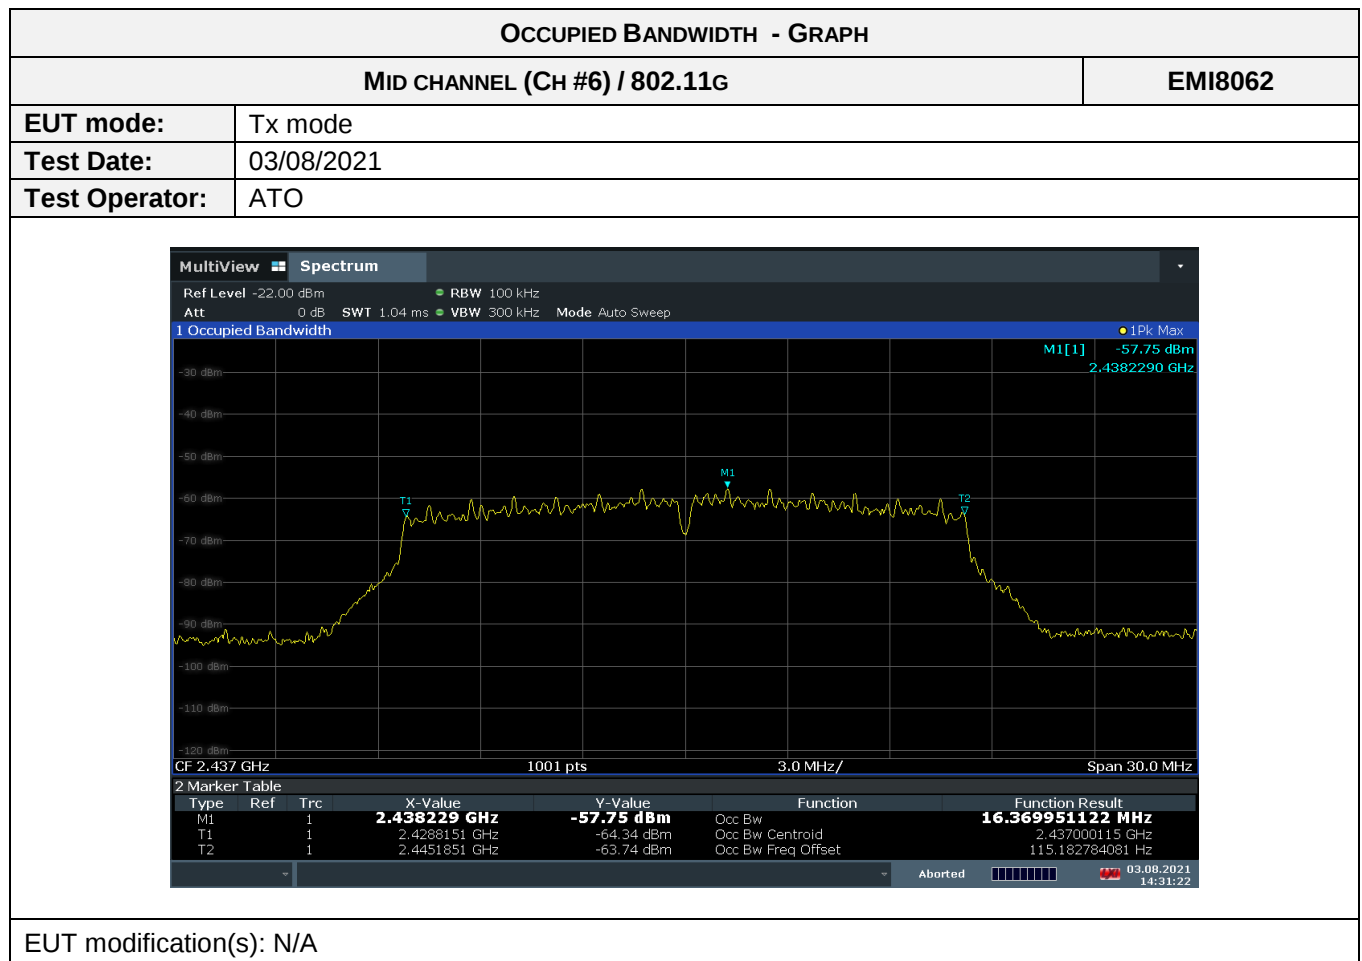

OCCUPIED BANDWIDTH - TABULATED RESULTS			
MID CHANNEL (CH #6) / 802.11G			
f_{Low}	f_{High}	OBW 99%	Limit
2428.815 MHz	2445.185 MHz	16.369 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

EUT modification(s): N/A

OCCUPIED BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL (CH #11) / 802.11G			
f _{Low}	f _{High}	OBW 99%	Limit
2453.846 MHz	2470.175 MHz	16.329 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

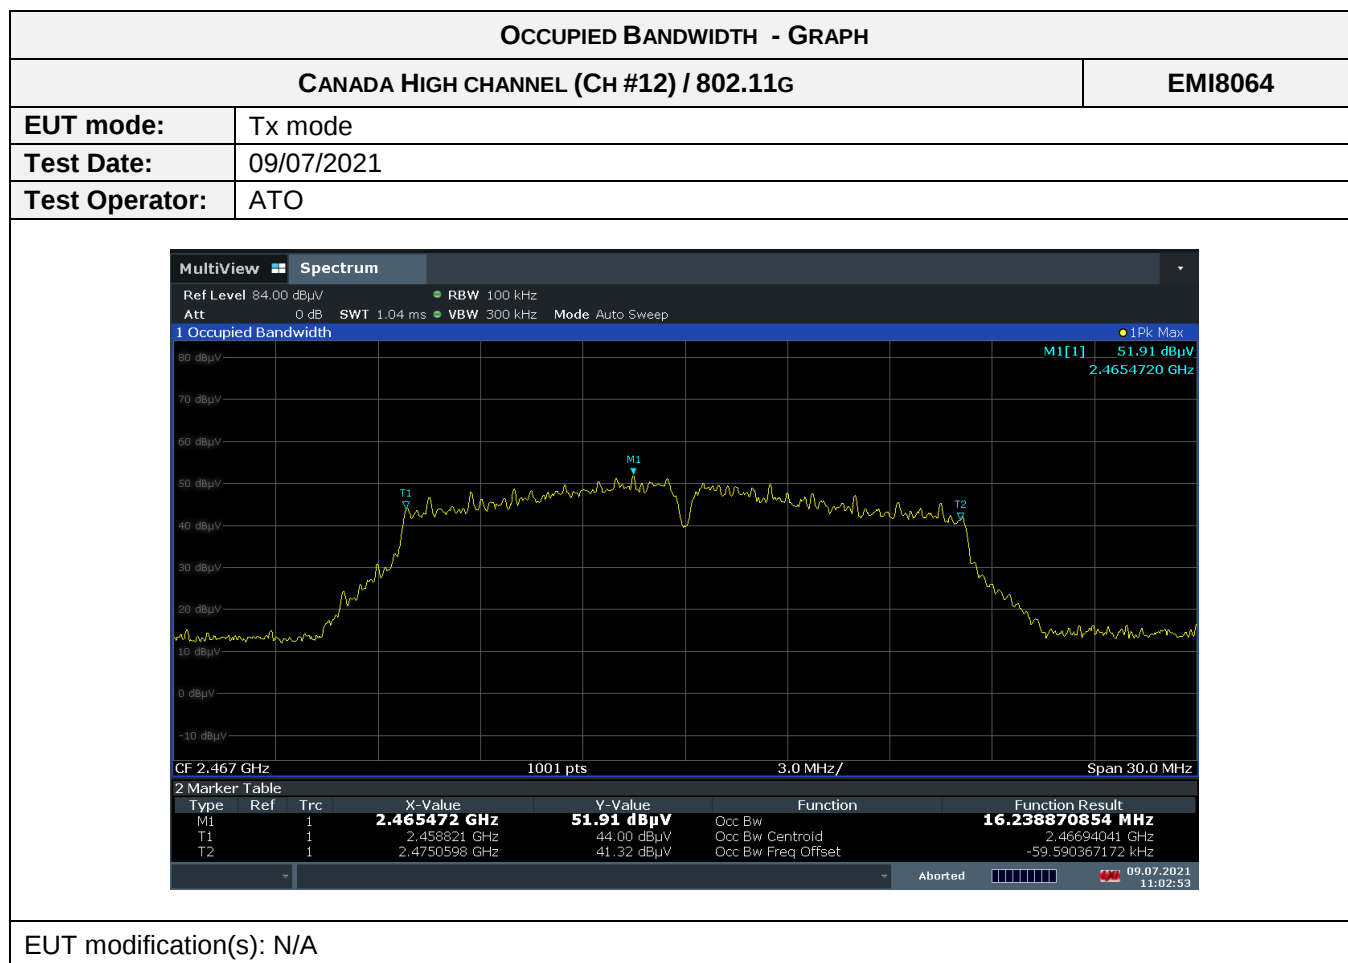

OCCUPIED BANDWIDTH - TABULATED RESULTS			
CANADA HIGH CHANNEL (CH #12) / 802.11G			
f _{Low}	f _{High}	OBW 99%	Limit
2458.821 MHz	2475.059 MHz	16.238 MHz	Flow > 2400MHz Fhigh < 2483.5 MHz

8.4. Maximum effective isotropic radiated power

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: EUT is set on an insulating support at 150cm above the ground reference plane. Measurement are done on a normalized test site by the substitution method. The test antenna is oriented in the two polarizations (vertical and horizontal), and the product is rotated at 360° in the horizontal plane (See photo(s) for initial position of the EUT(0°)). If applicable the test antenna was raised and lowered through the specified range of height until a maximum signal level is detected. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded. Then EUT is set inside the climatic enclosure. Measurements are repeated in extreme test conditions with the carrier level correlated with the maximum carrier level measured in normal conditions. EUT is powered by a stabilized power supply.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
RF Output Power / Low channel (Ch #1) / 802.11b	2.362GHz-2.462GHz	1W (30dBm)	EMI4523	PASS
RF Output Power / Mid channel (Ch #6) / 802.11b	2.387GHz-2.487GHz	1W (30dBm)	EMI5042	PASS
RF Output Power / High channel (Ch #11) / 802.11b	2.412GHz-2.512GHz	1W (30dBm)	EMI5043	PASS
RF Output Power / Canada High channel (Ch #12) / 802.11b	2.417GHz-2.517GHz	1W (30dBm)	EMI4549	PASS
RF Output Power / Low channel (Ch #1) / 802.11g	2.362GHz-2.462GHz	1W (30dBm)	EMI5044	PASS
RF Output Power / Mid channel (Ch #6) / 802.11g	2.387GHz-2.487GHz	1W (30dBm)	EMI5092	PASS
RF Output Power / High channel (Ch #11) / 802.11g	2.412GHz-2.512GHz	1W (30dBm)	EMI5093	PASS
RF Output Power / Canada High channel (Ch #12) / 802.11g	2.417GHz-2.517GHz	1W (30dBm)	EMI5045	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR 4000L	15322		
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Attenuator	EMITECH	SUB.V2-H	14495	13/01/2021	13/03/2022
Attenuator	EMITECH	SUB.V2-V	14496	13/01/2021	13/03/2022
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021

CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023


Blank cells = Permanent validity

TEST SETUP PHOTO(S)

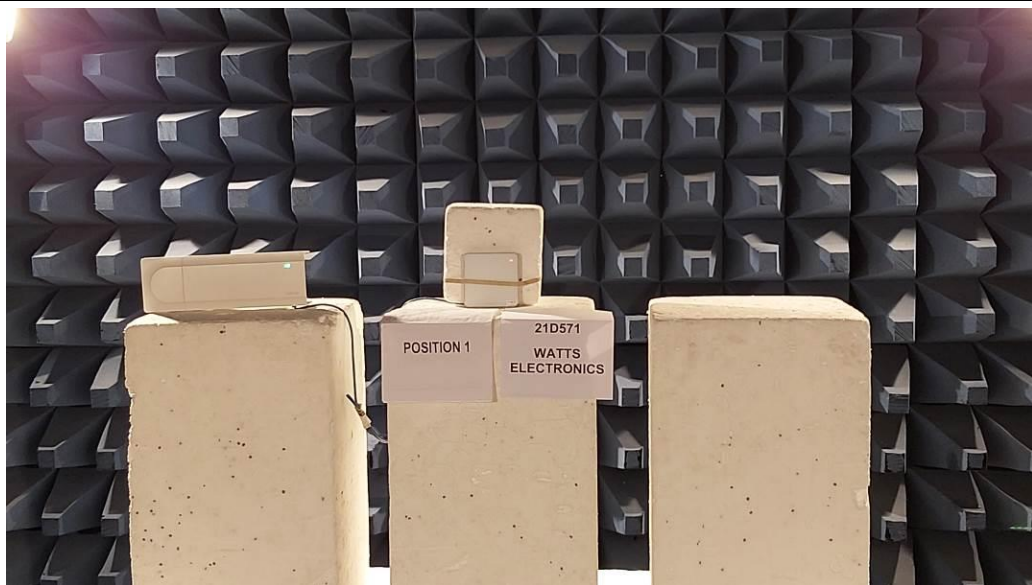


TEST SETUP PHOTO(S)




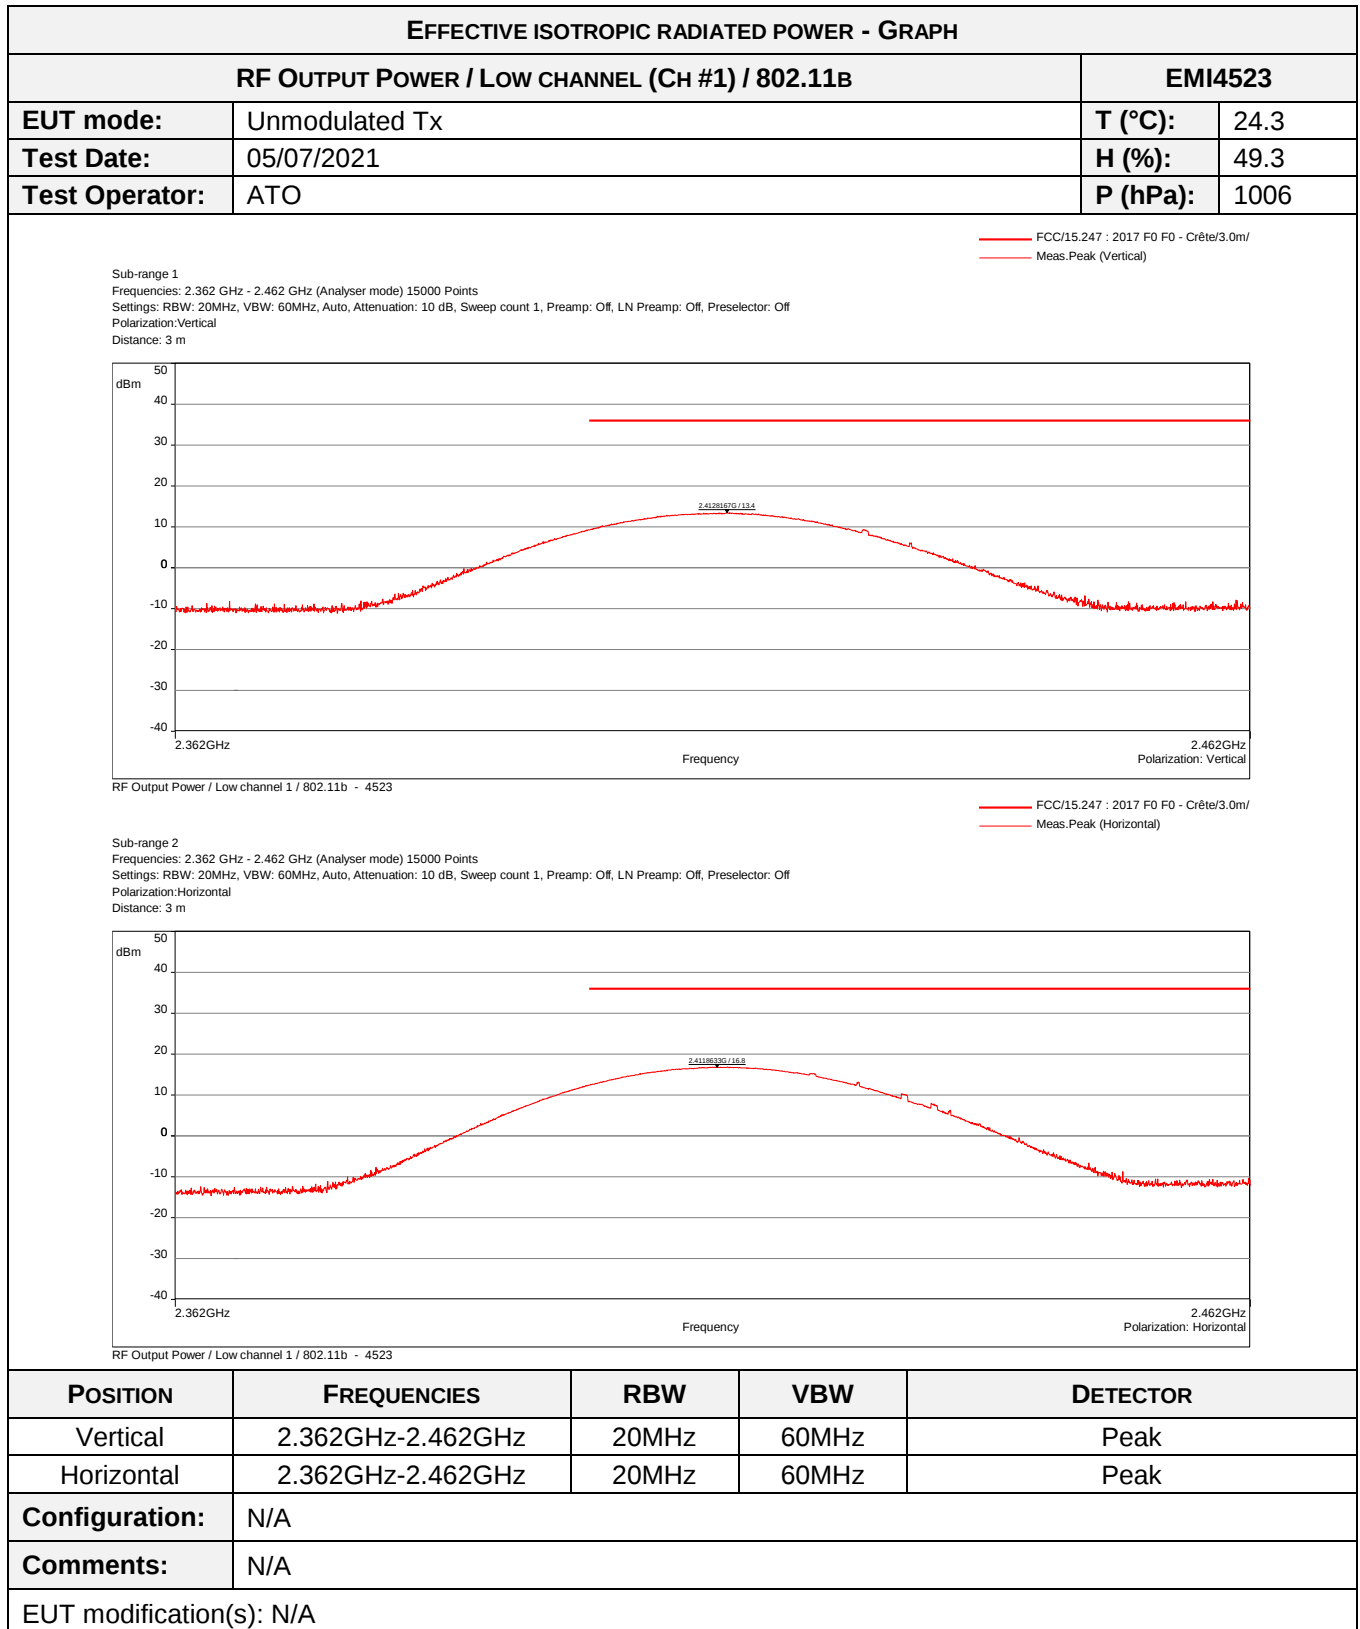


EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / LOW CHANNEL (Ch #1) / 802.11b			EMI4523
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2412.81	Vertical	13.4	36
2411.86	Horizontal	16.8	36

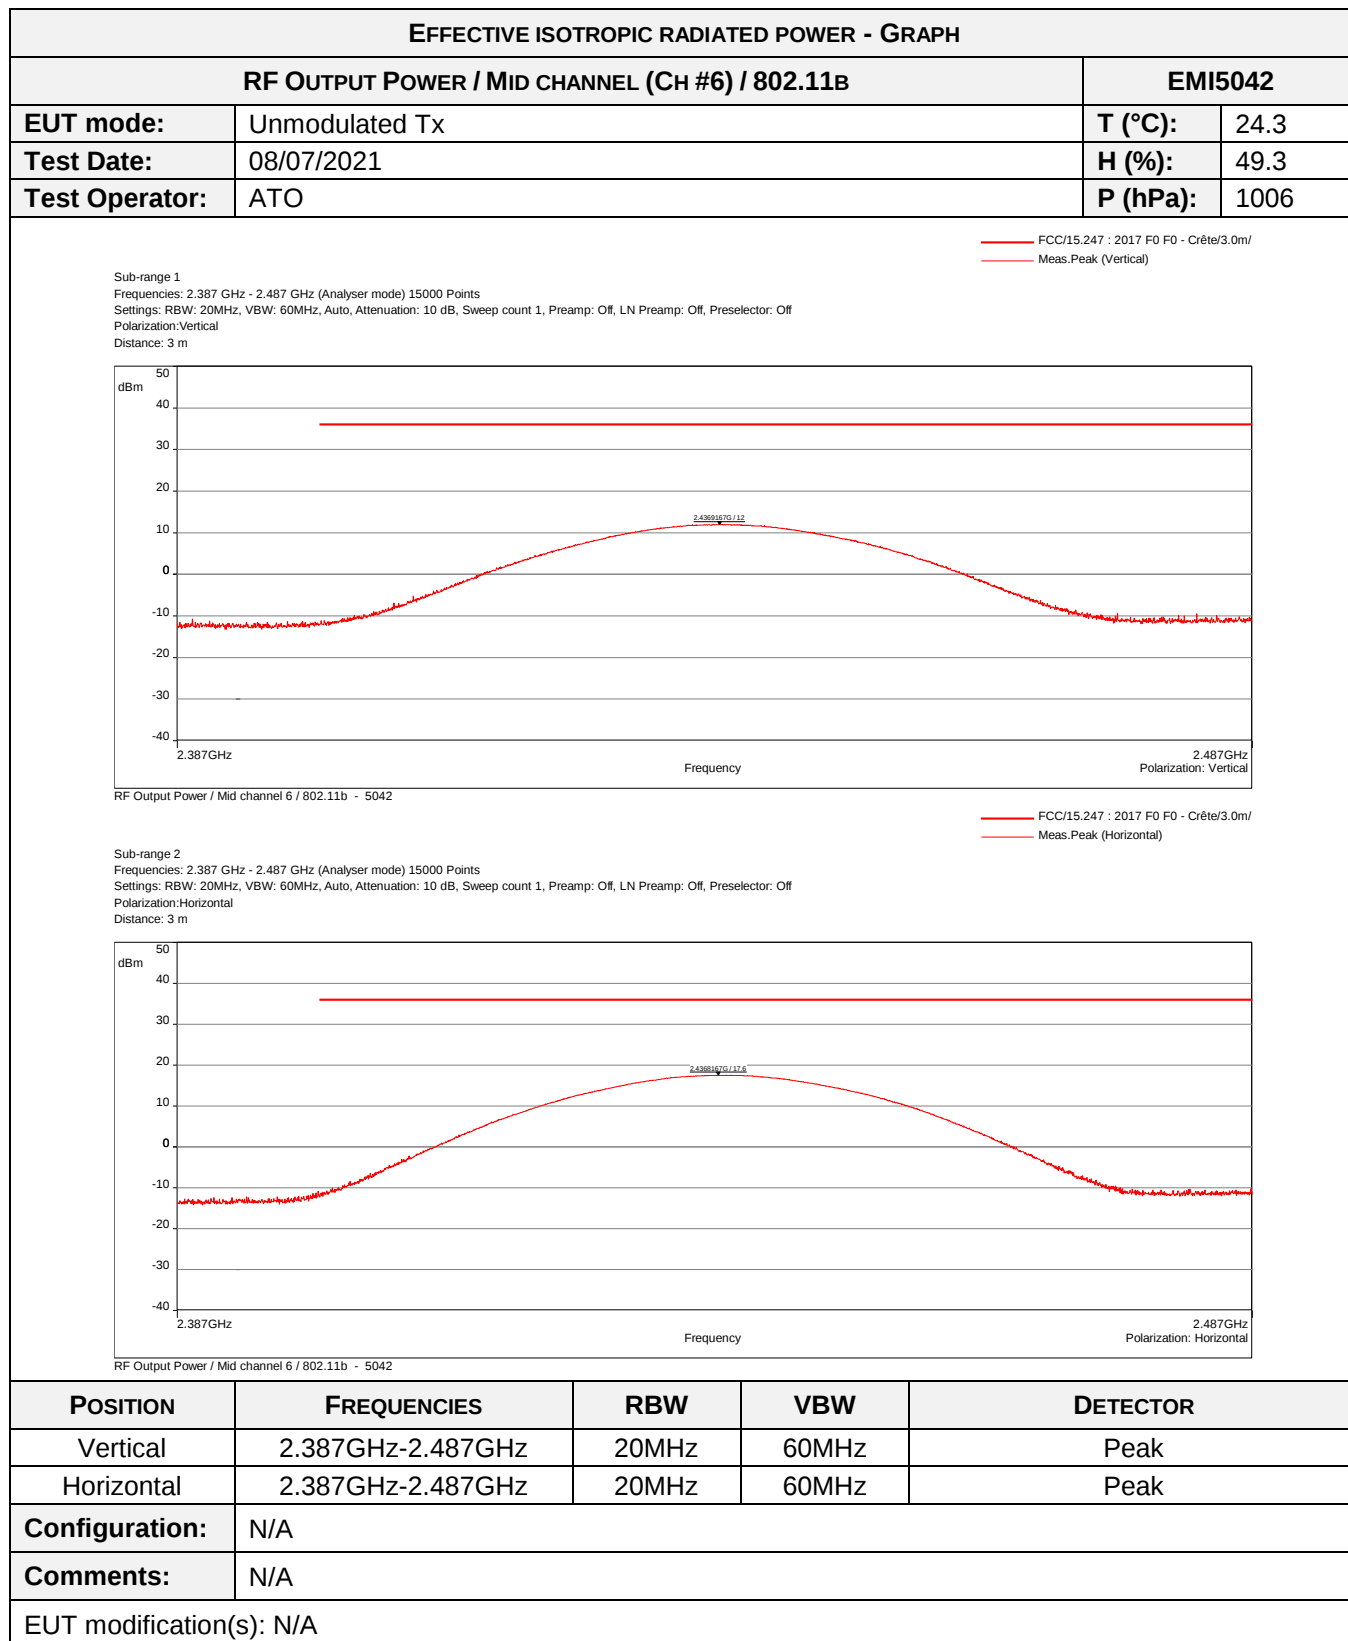


EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / MID CHANNEL (CH #6) / 802.11B			EMI5042
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2436.91	Vertical	12.0	36
2436.81	Horizontal	17.6	36

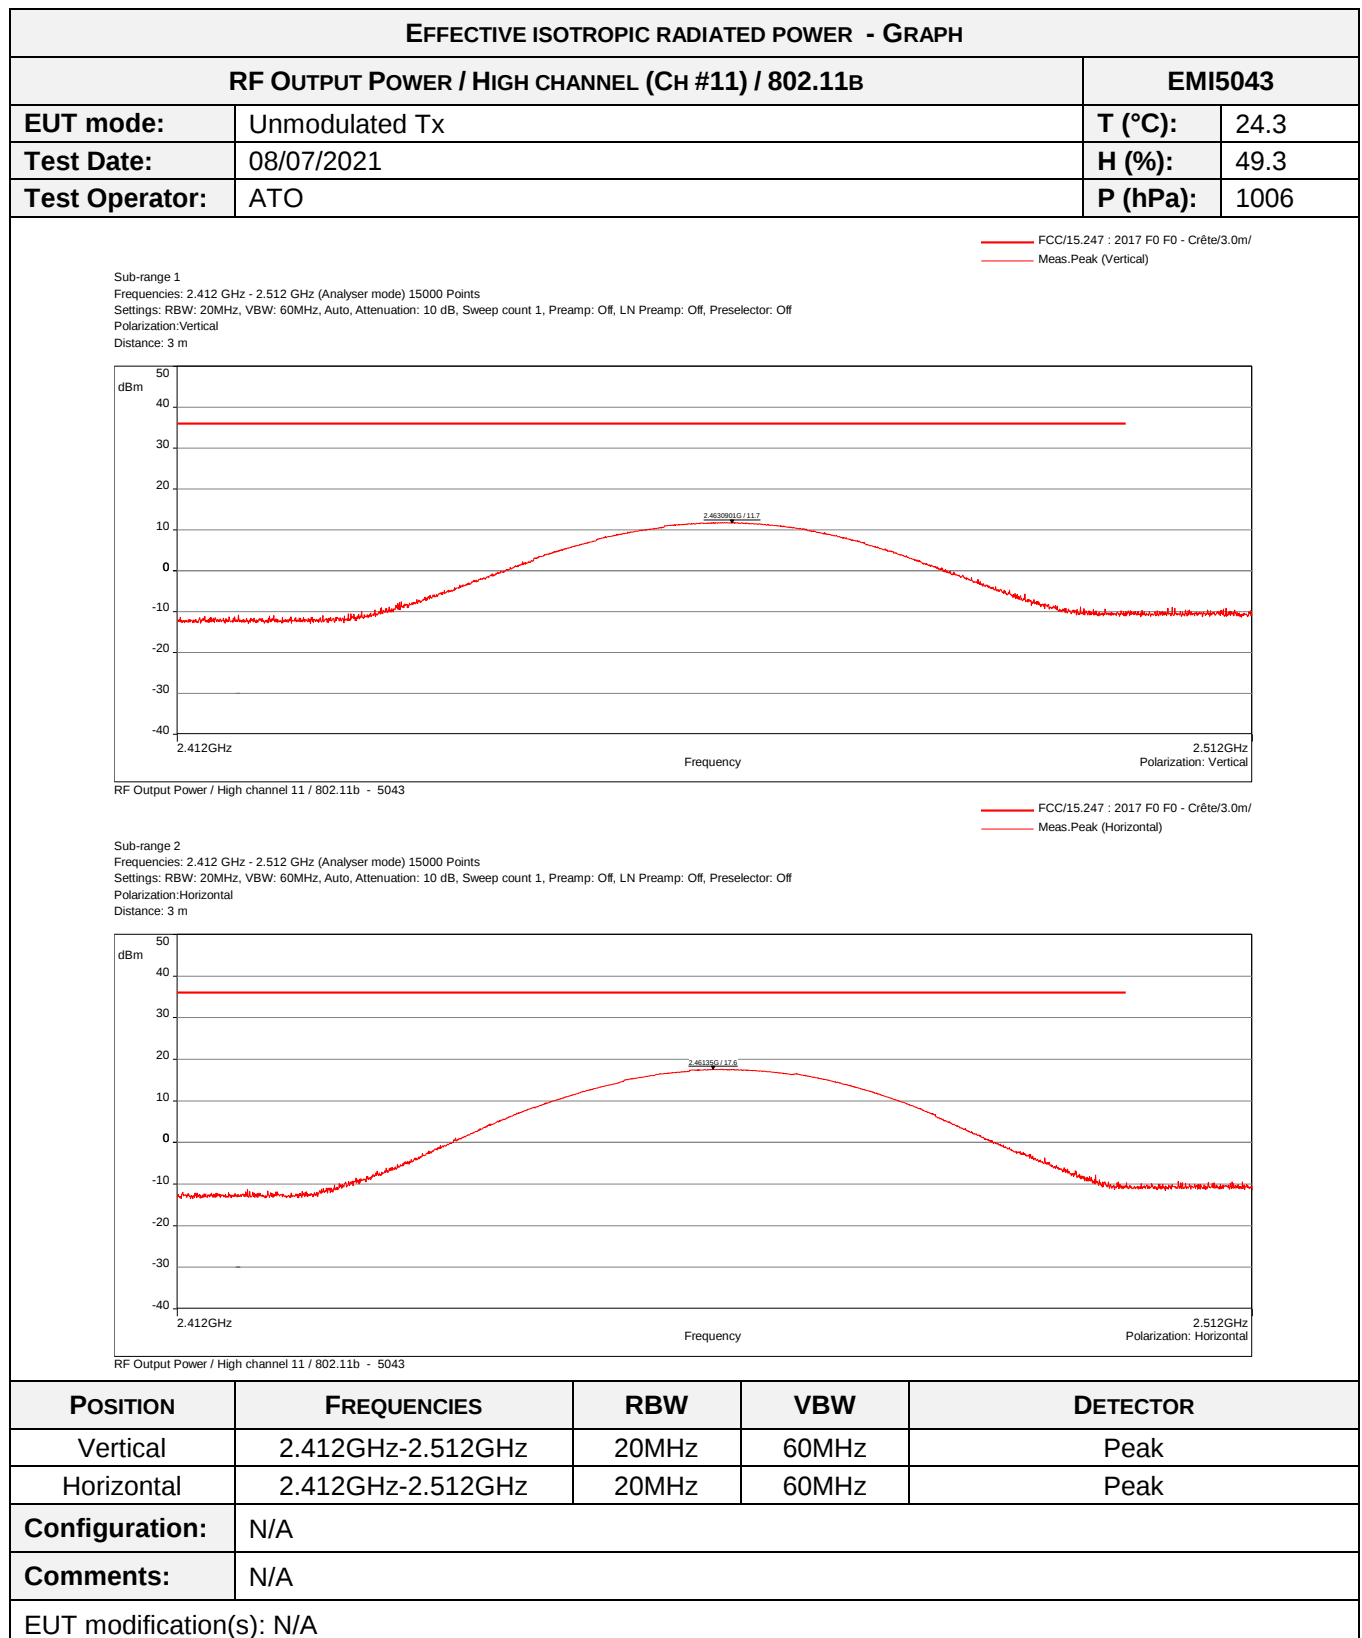


EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / HIGH CHANNEL (CH #11) / 802.11b			EMI5043
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2463.09	Vertical	11.7	36
2461.35	Horizontal	17.6	36

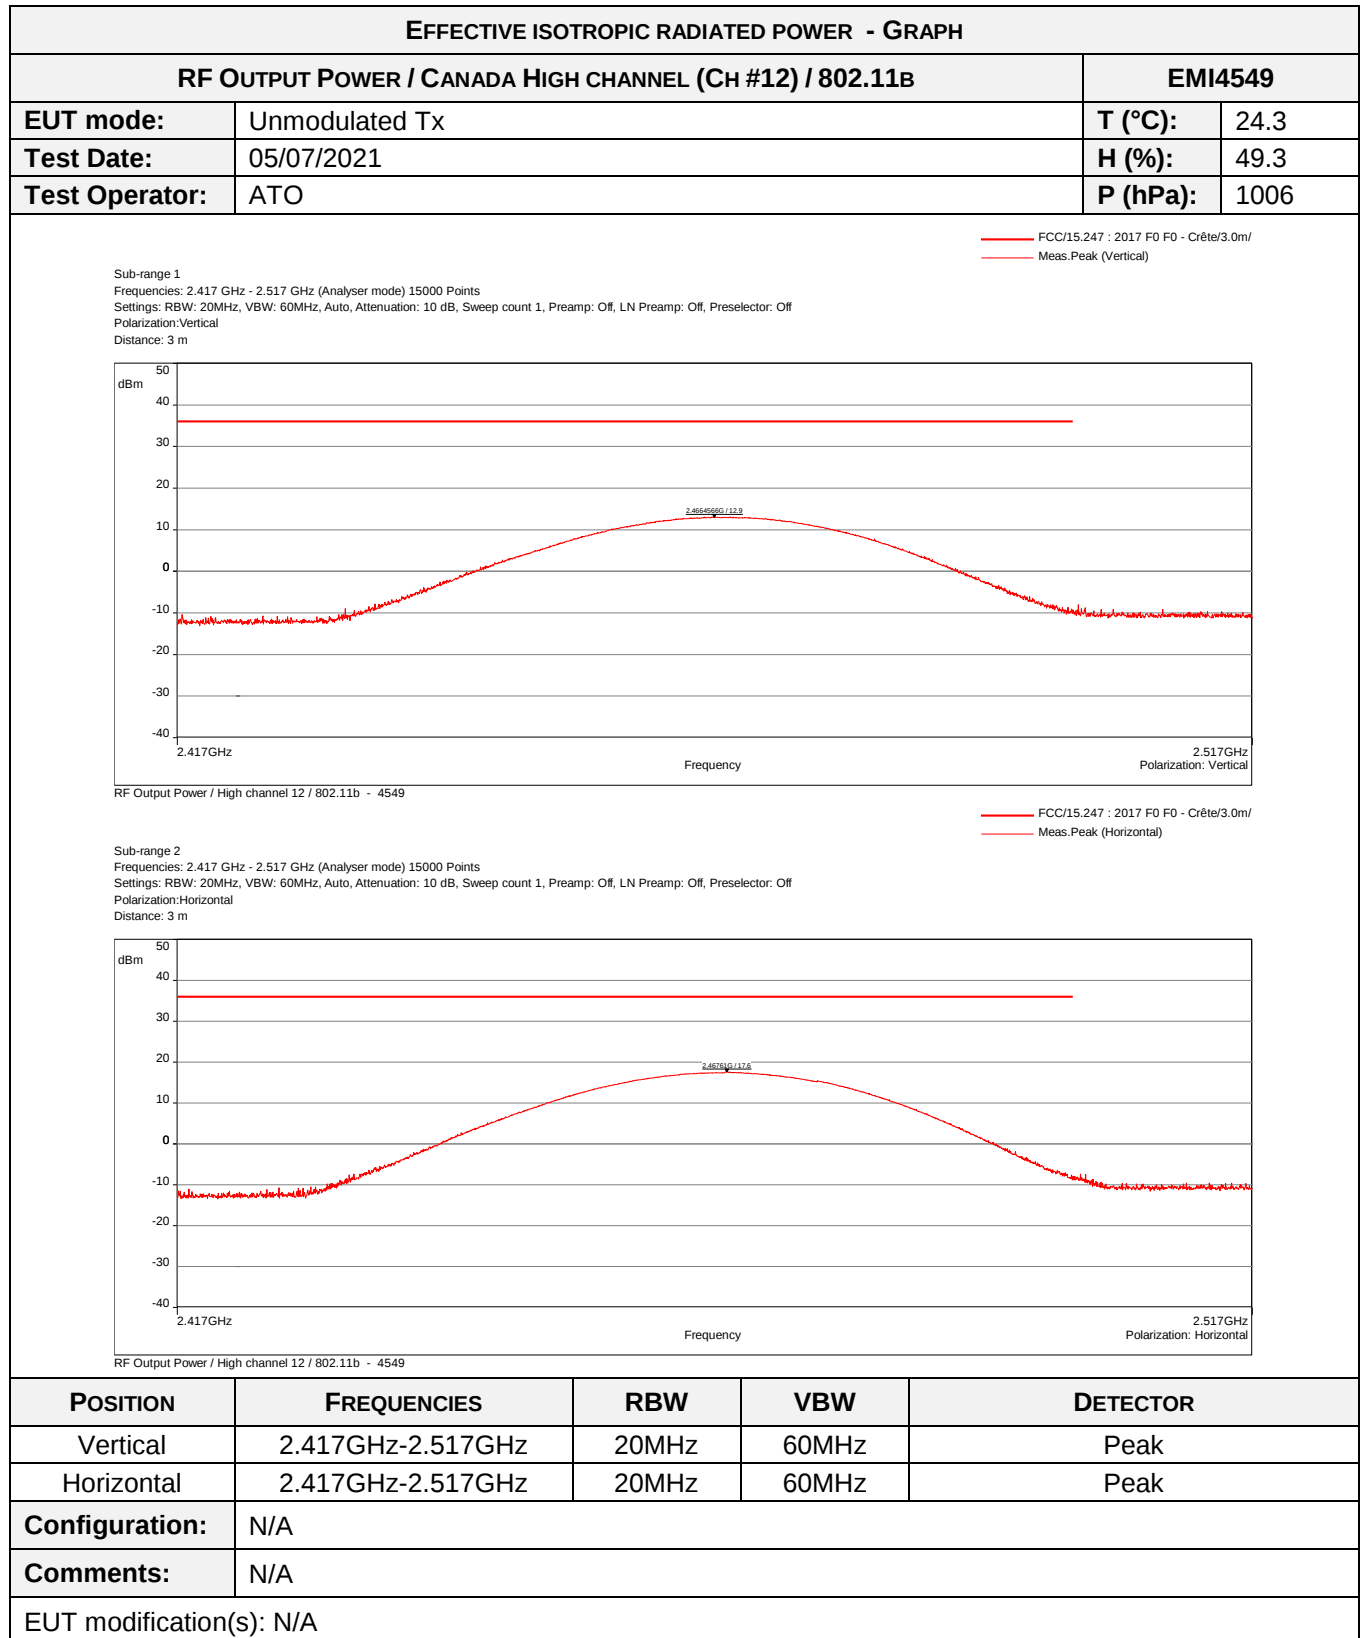


EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / CANADA HIGH CHANNEL (CH #12) / 802.11B			EMI4549
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2466.45	Vertical	12.9	36
2467.61	Horizontal	17.6	36

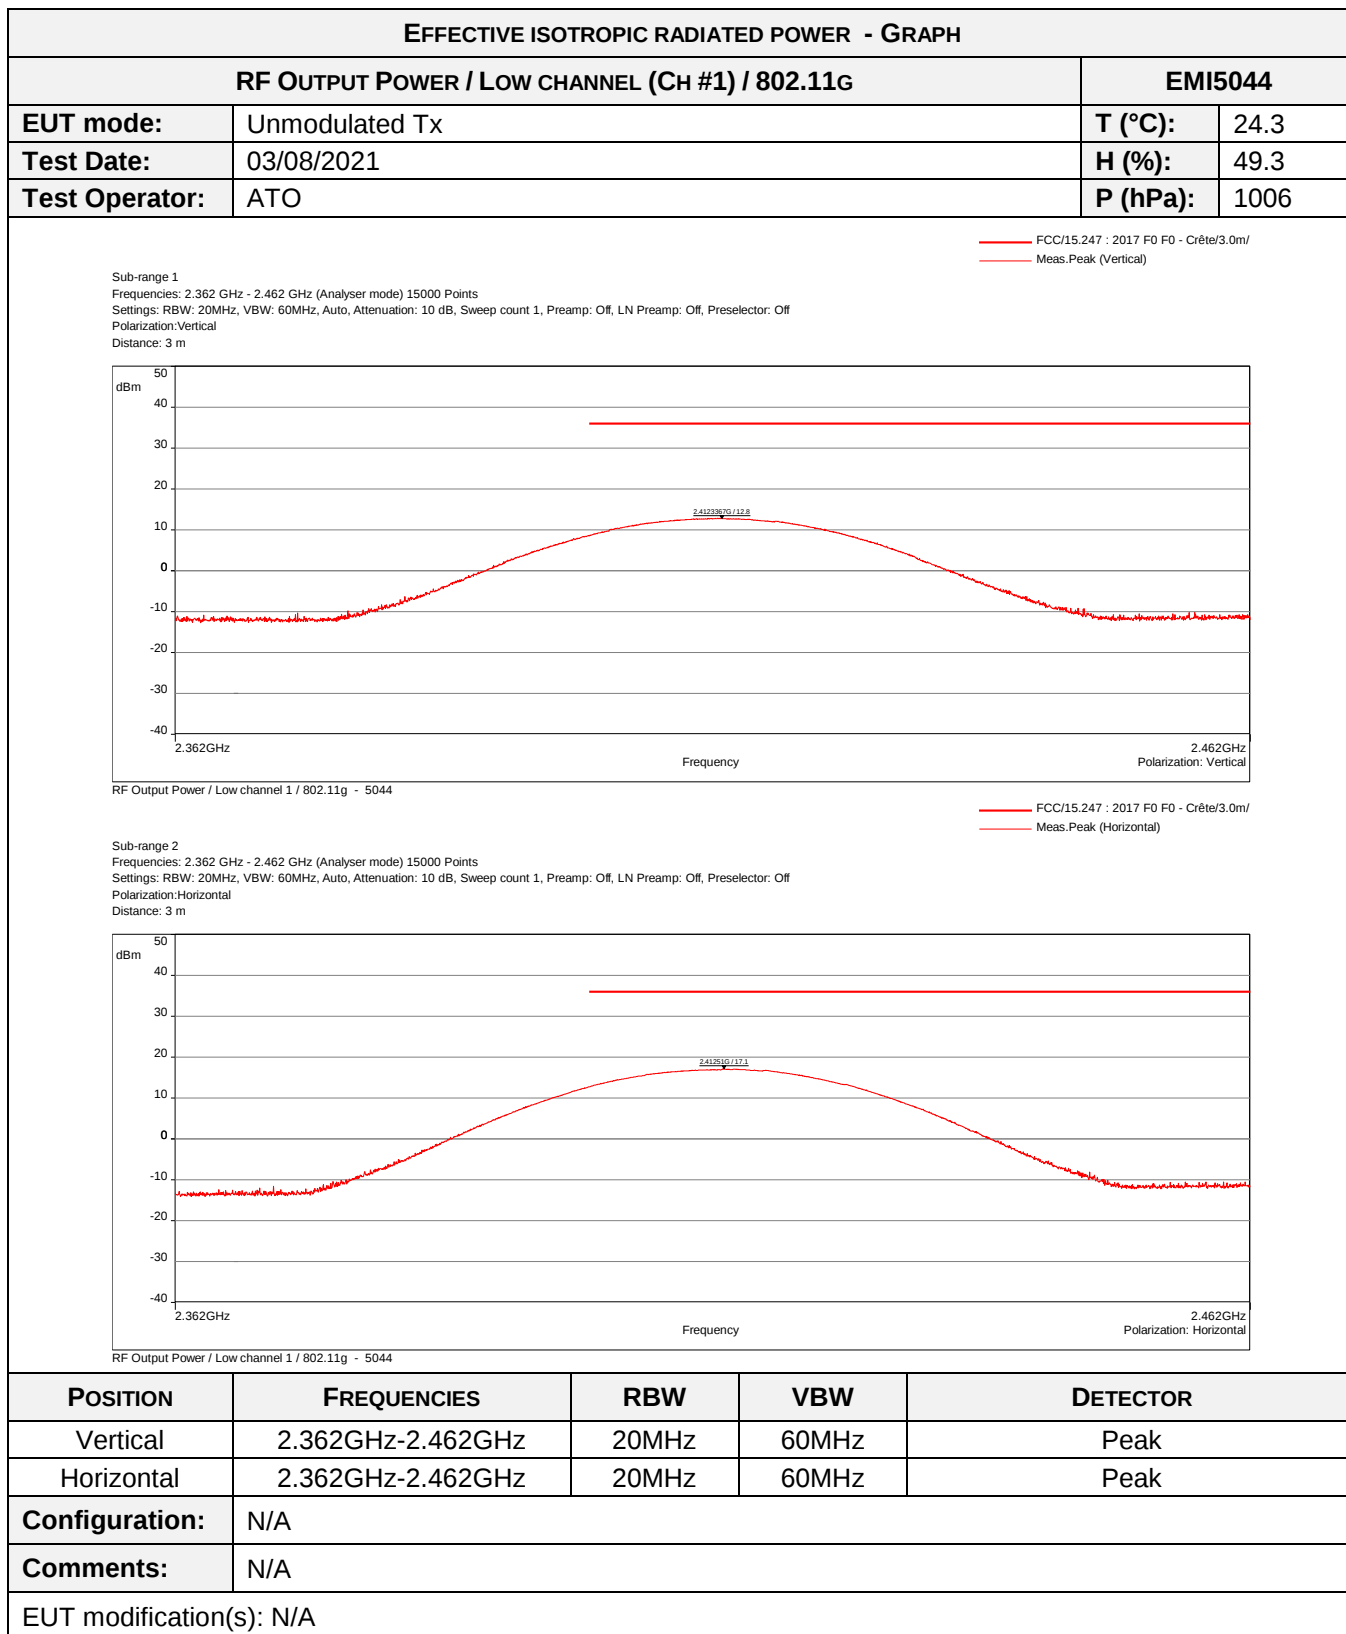


EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / LOW CHANNEL (Ch #1) / 802.11G			EMI5044
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2412.33	Vertical	12.8	36
2412.51	Horizontal	17.1	36

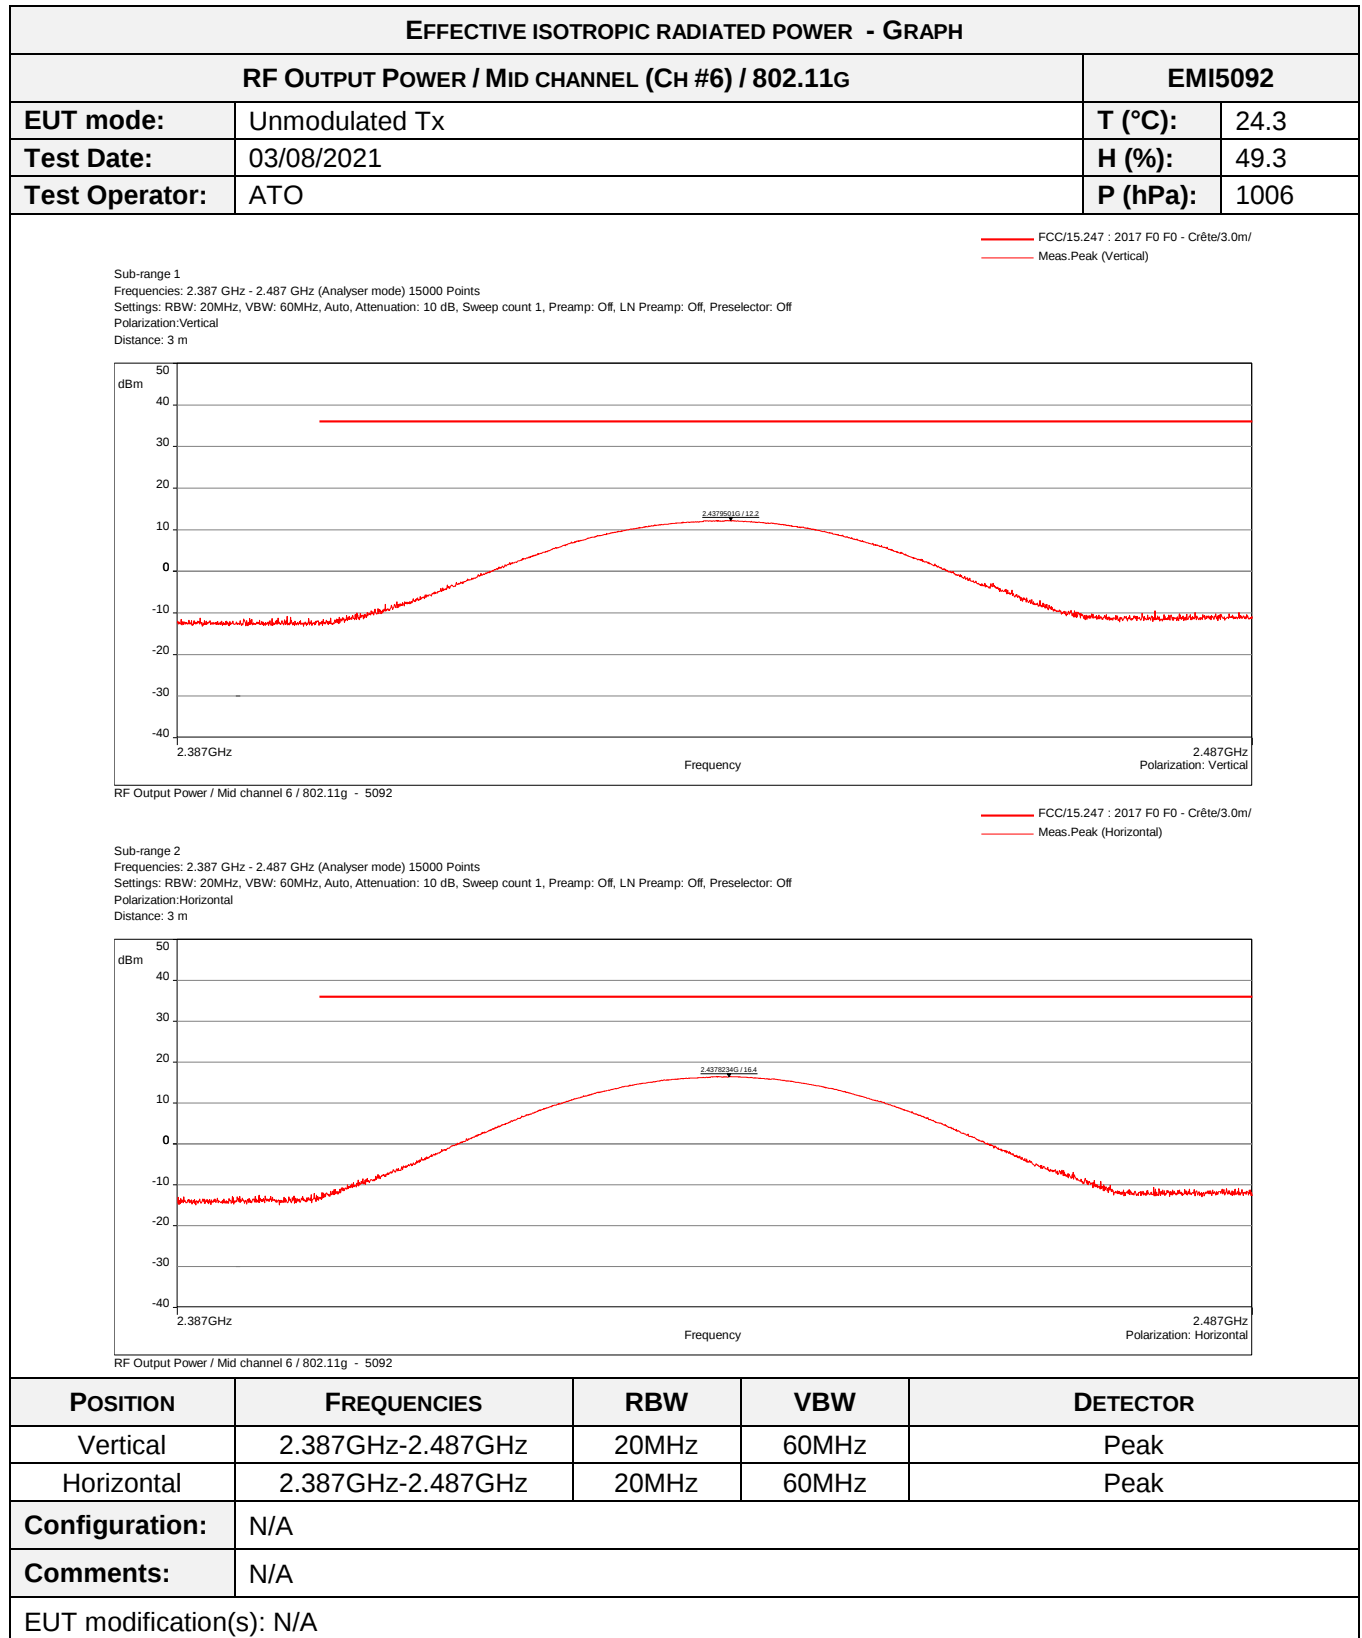

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / MID CHANNEL (CH #6) / 802.11G			EMI5092
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2437.95	Vertical	12.2	36
2437.82	Horizontal	16.4	36

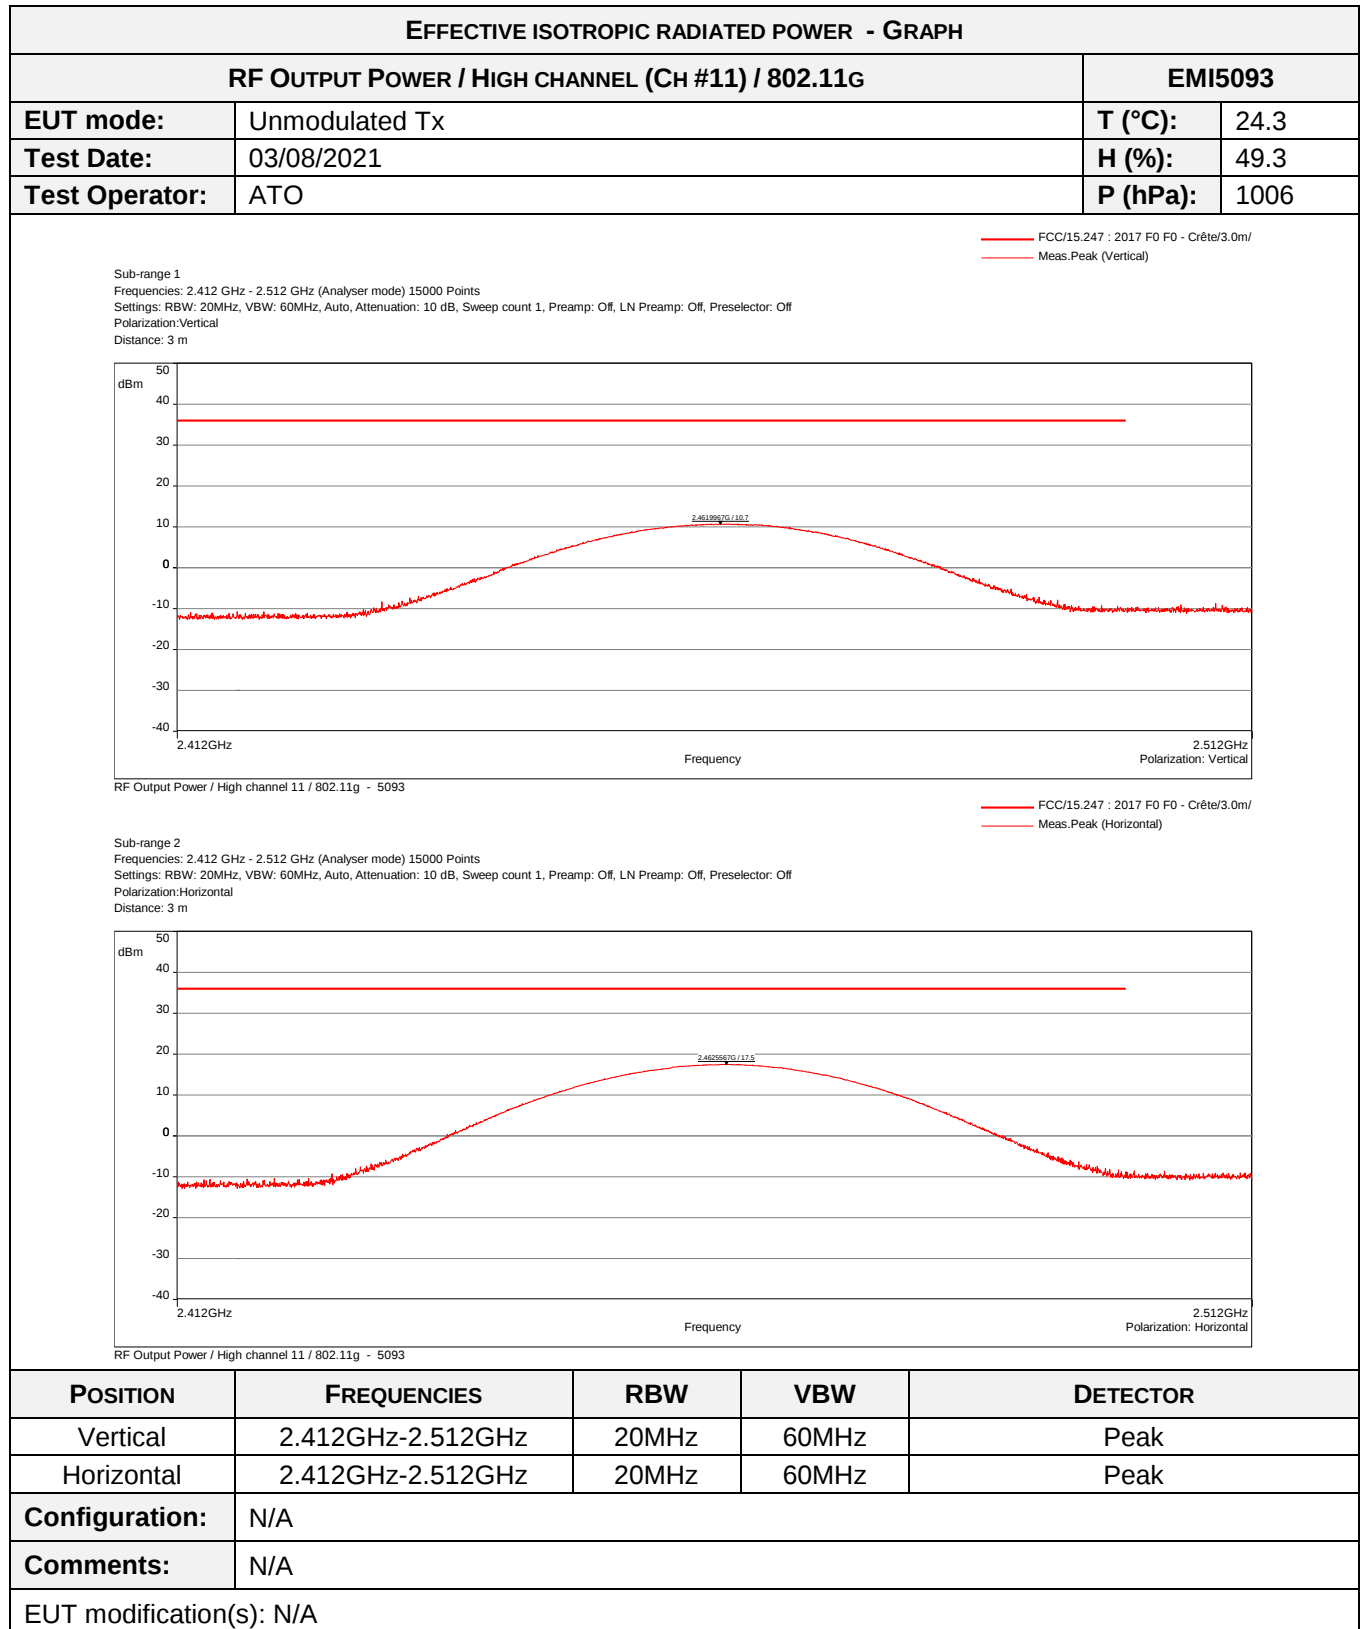

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / HIGH CHANNEL (CH #11) / 802.11G			EMI5093
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2461.99	Vertical	10.7	36
2462.55	Horizontal	17.5	36

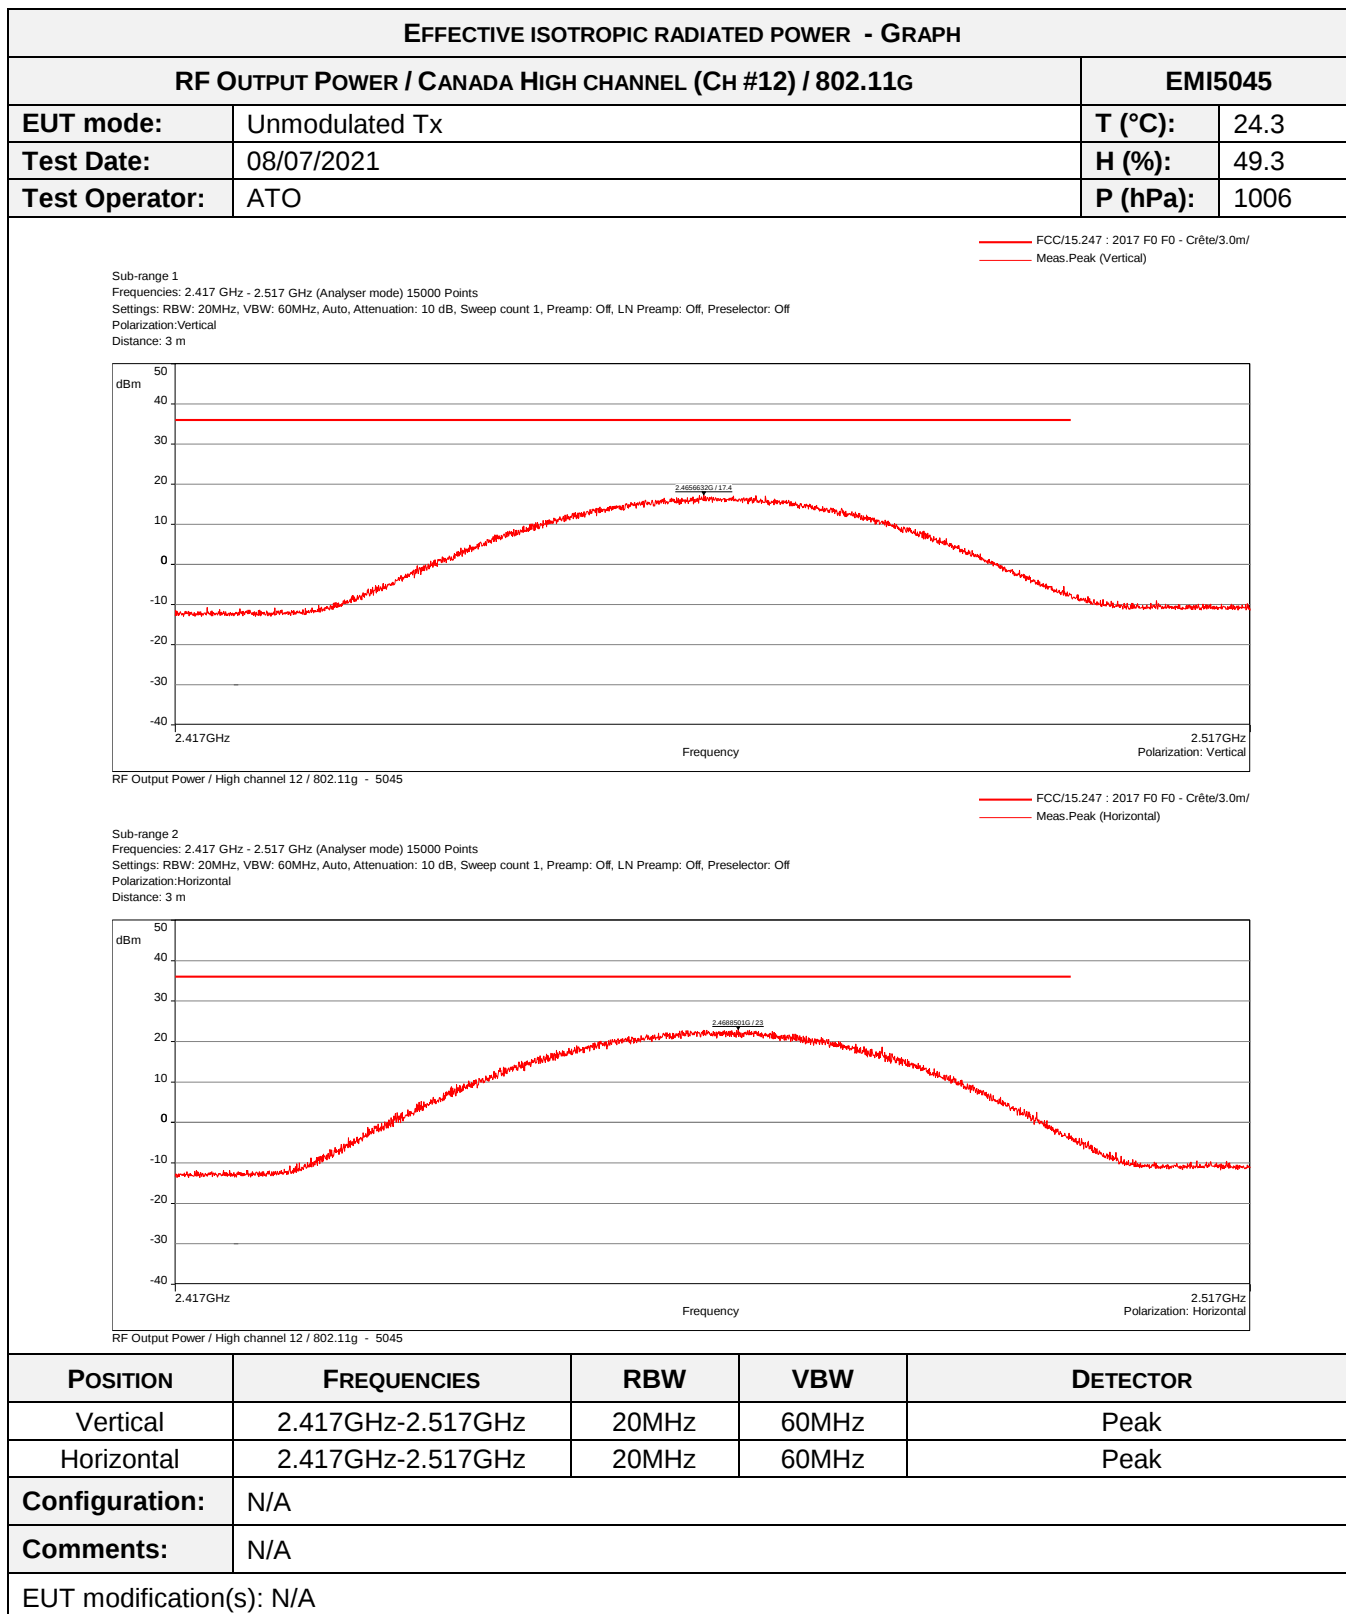

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
RF OUTPUT POWER / CANADA HIGH CHANNEL (CH #12) / 802.11G			EMI5045
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2465.66	Vertical	17.4	36
2468.85	Horizontal	23.0	36

8.5. Band-edge compliance

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 subclause d) and RSS-247
Test description: d) In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. EUT is connected to the measuring receiver via 50Ω attenuator(s). Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Radiated measurement / Band Edge / Low channel / 802.11b	2.38GHz-2.5GHz	>20dBc	EMI4526	PASS
Radiated measurement / Band Edge / Low channel / 802.11g	2.38GHz-2.5GHz	>20dBc	EMI5099	PASS
Radiated measurement / Band Edge / Mid channel (Ch #6) / 802.11b	2.38GHz-2.5GHz	>20dBc	EMI5103	PASS
Radiated measurement / Band Edge / Mid channel (Ch #6) / 802.11g	2.38GHz-2.5GHz	>20dBc	EMI5101	PASS
Radiated measurement / Band Edge / High channel (Ch #11) / 802.11b	2.38GHz-2.5GHz	>20dBc	EMI5105	PASS
Radiated measurement / Band Edge / High channel (Ch #11) / 802.11g	2.38GHz-2.5GHz	>20dBc	EMI5107	PASS
Radiated measurement / Band Edge / Canada High channel (Ch #12) / 802.11b	2.38GHz-2.5GHz	>20dBc	EMI4553	PASS
Radiated measurement / Band Edge / Canada High channel (Ch #12) / 802.11g	2.38GHz-2.5GHz	>20dBc	EMI5047	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR 4000L	15322		
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022

CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021


BAT-EMC software version: V3.18.0.26


Blank cells = Permanent validity


TEST SETUP PHOTO(S)





TEST SETUP PHOTO(S)

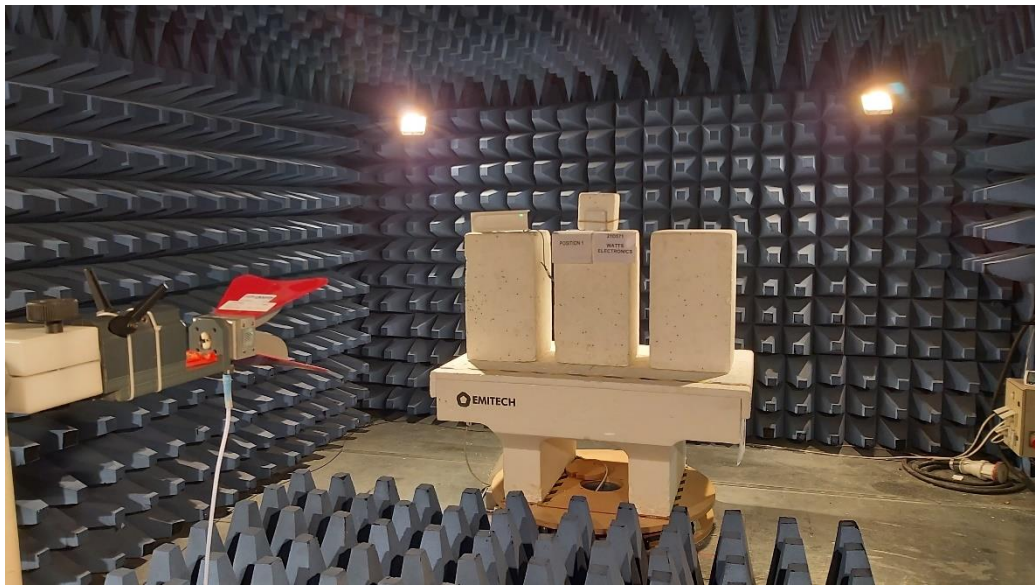


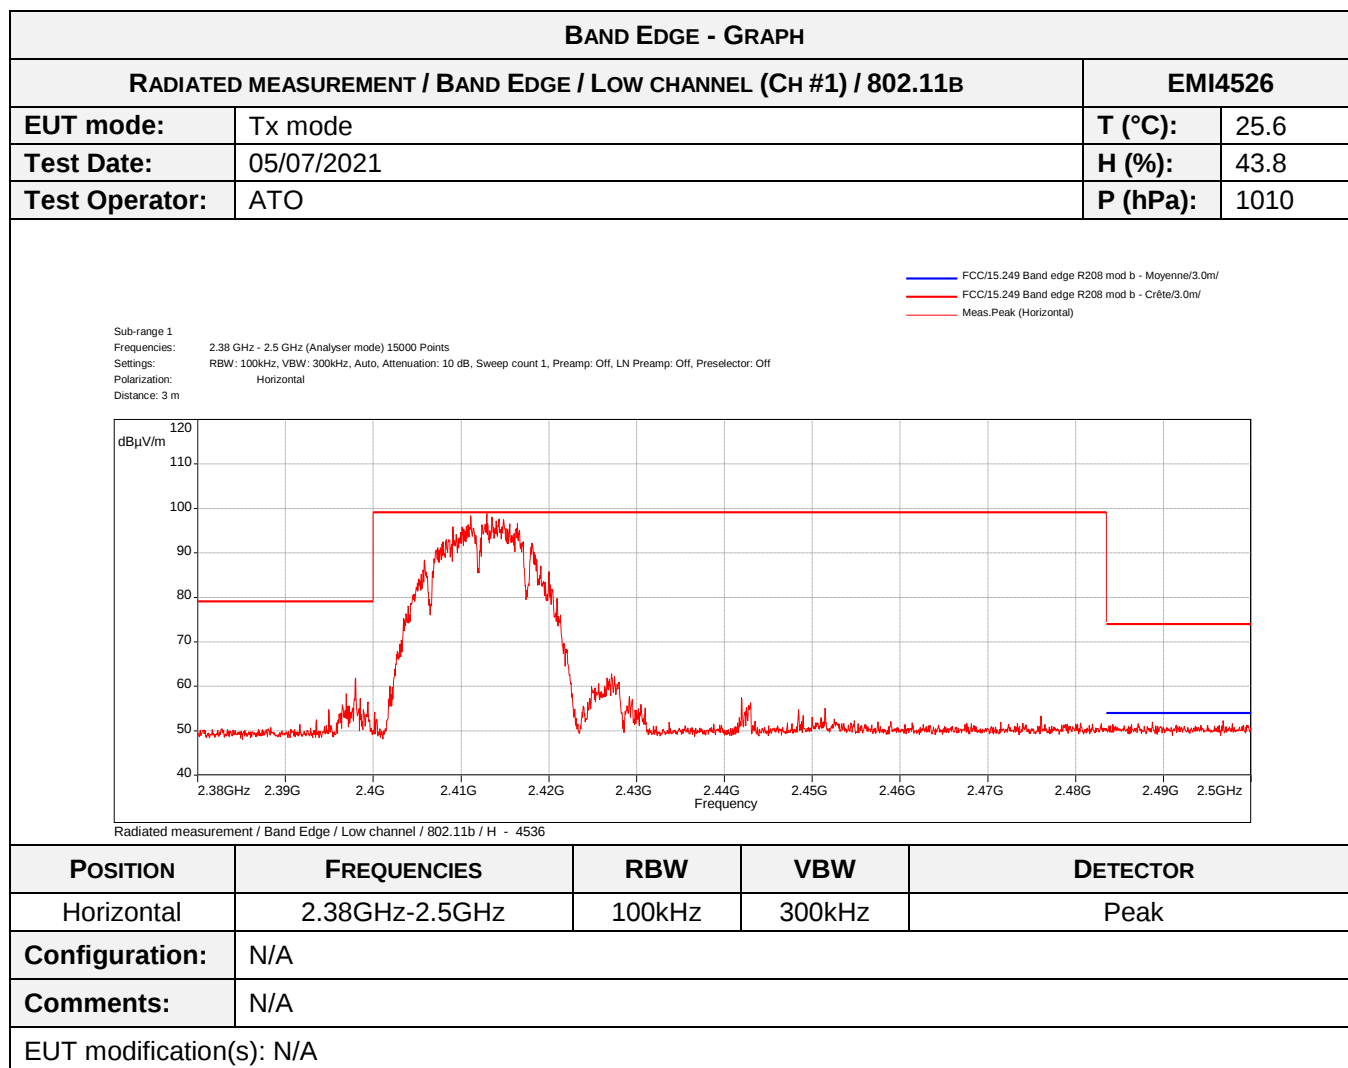


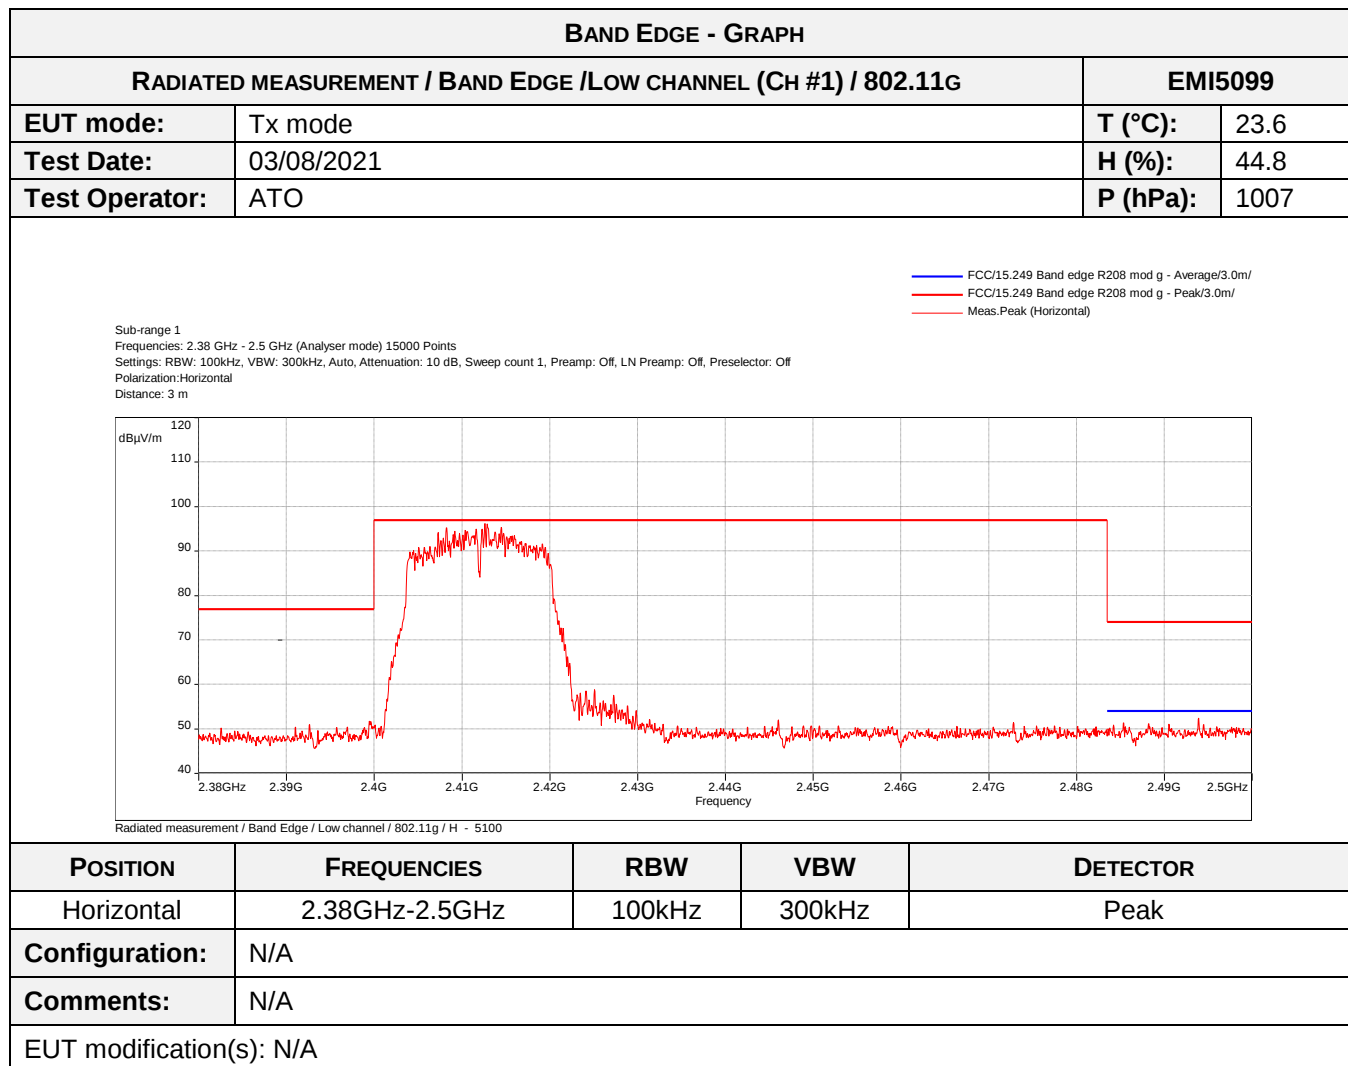


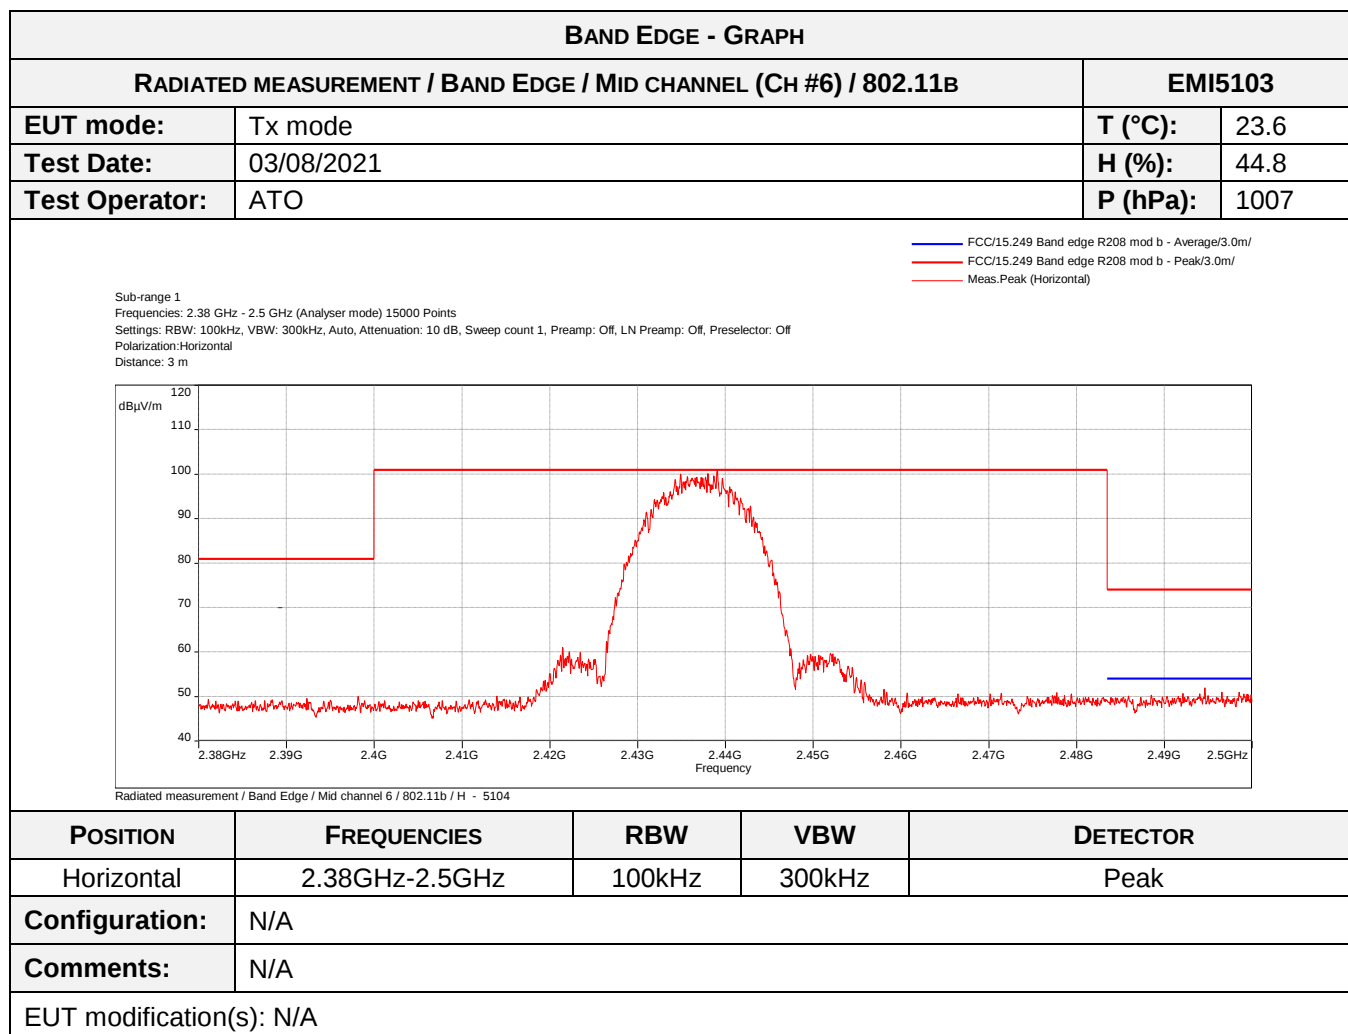


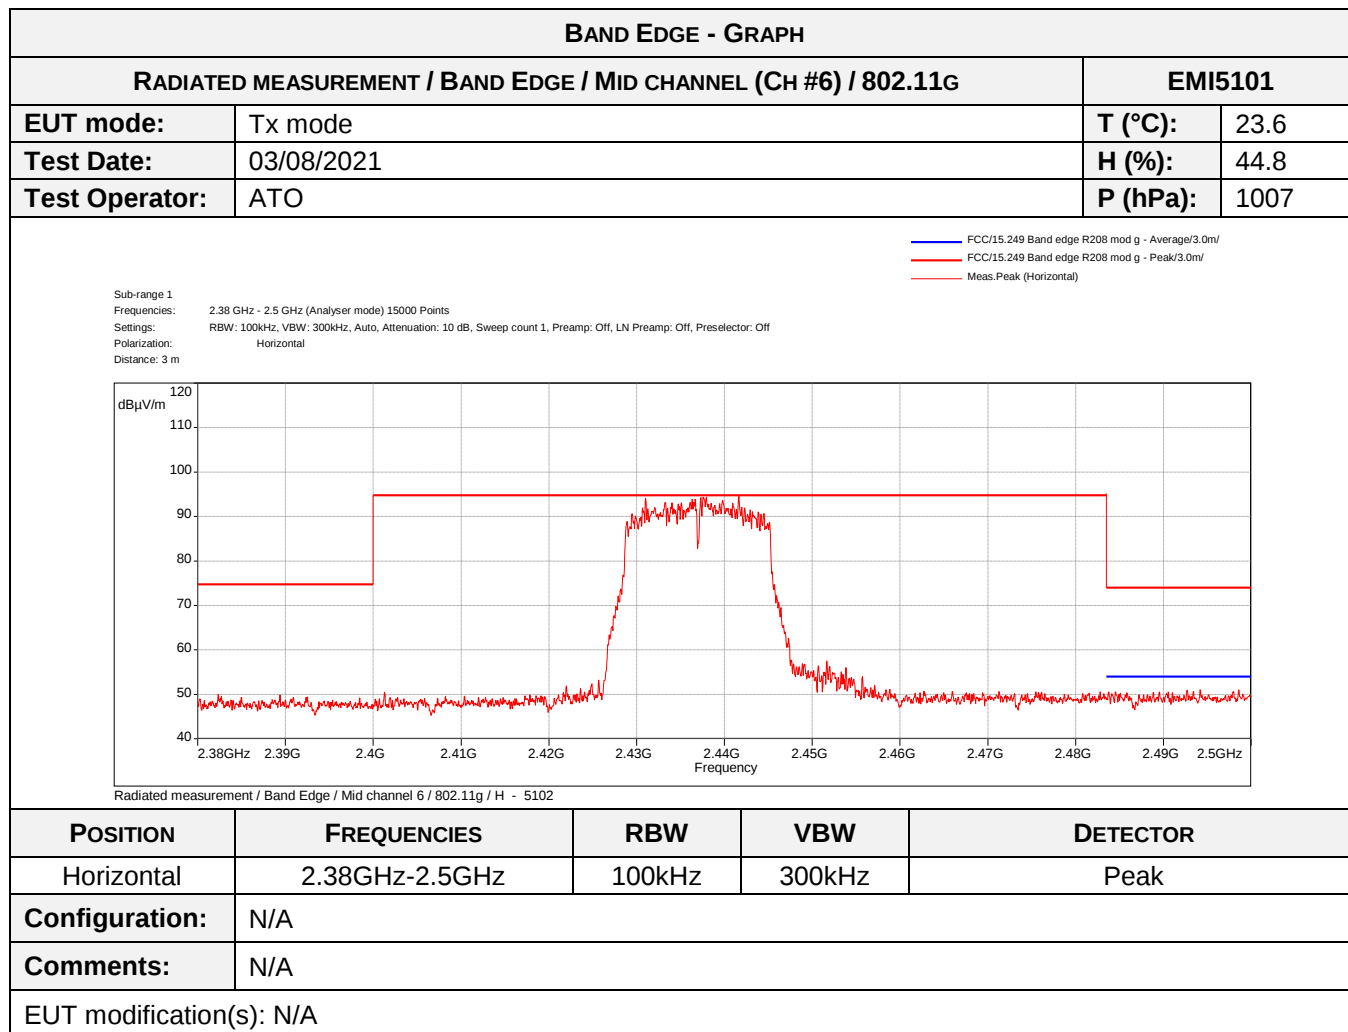

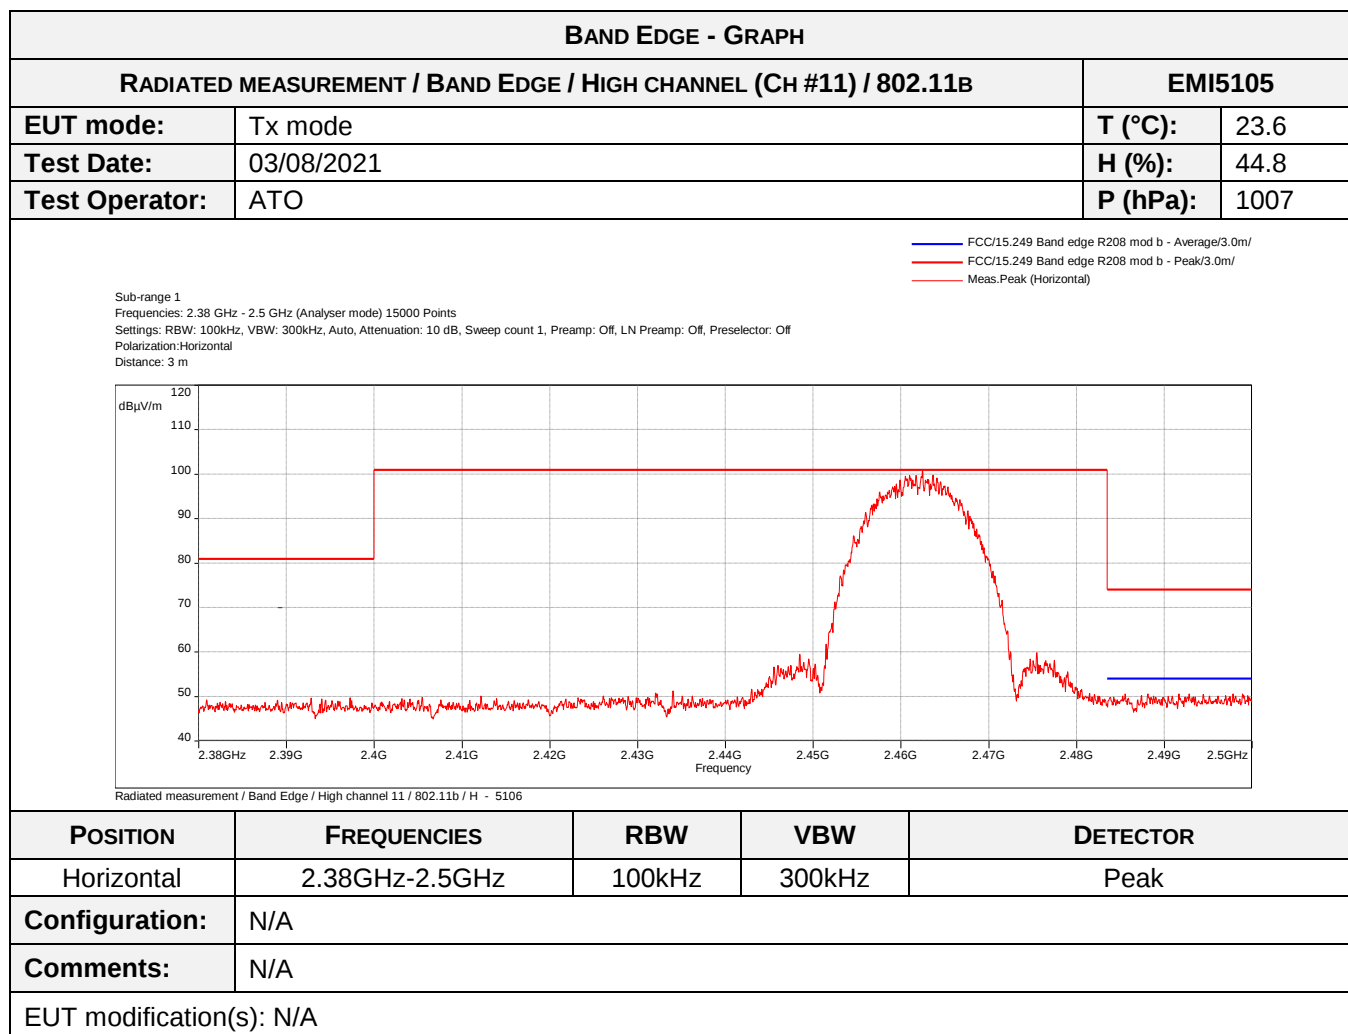

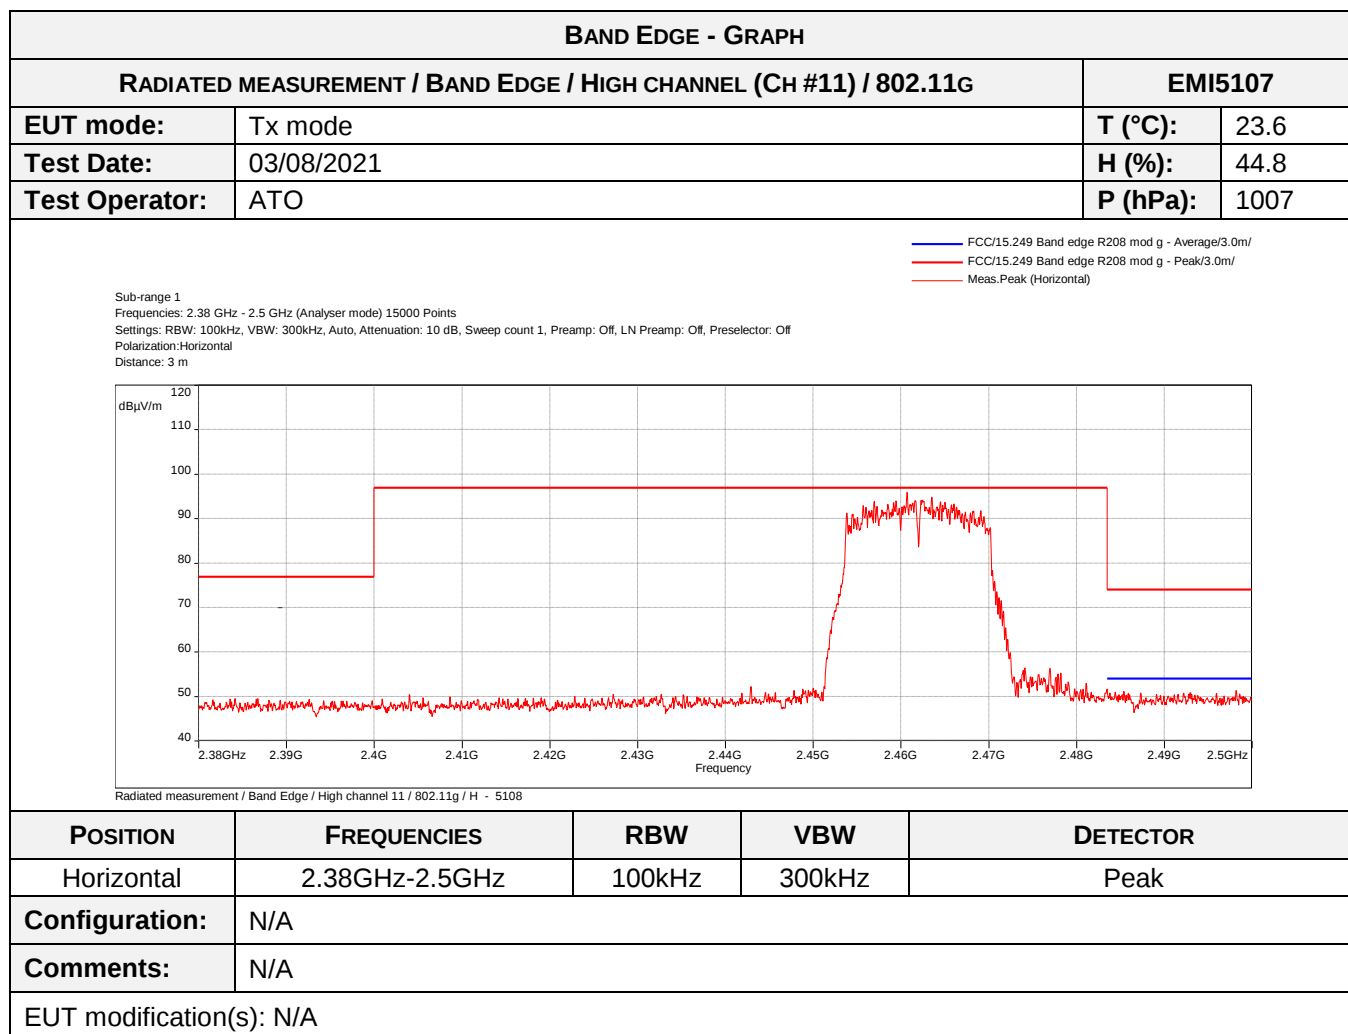

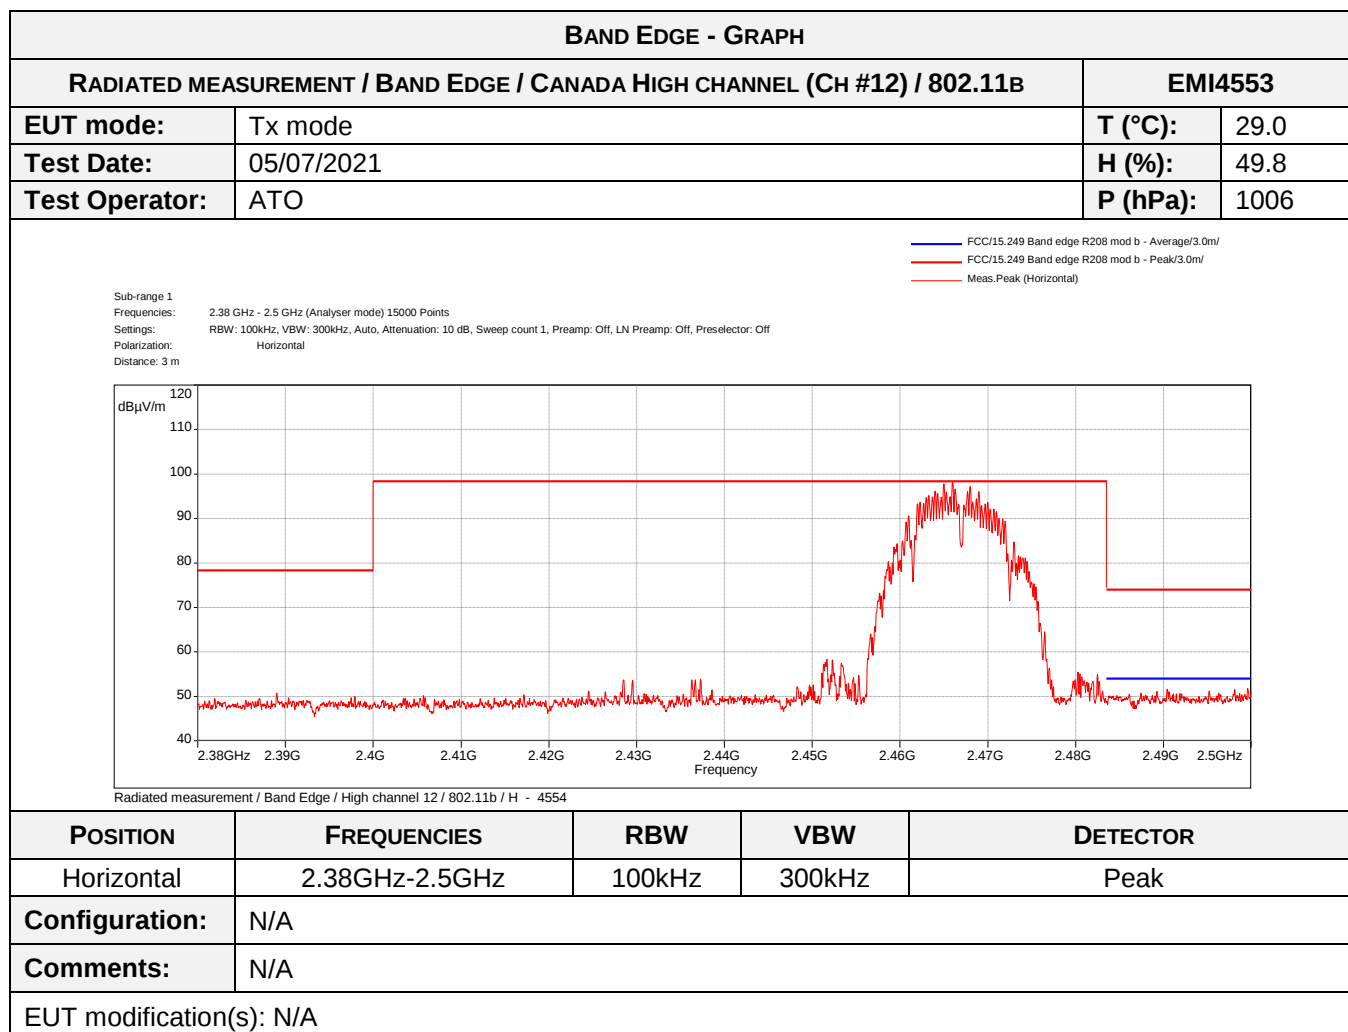

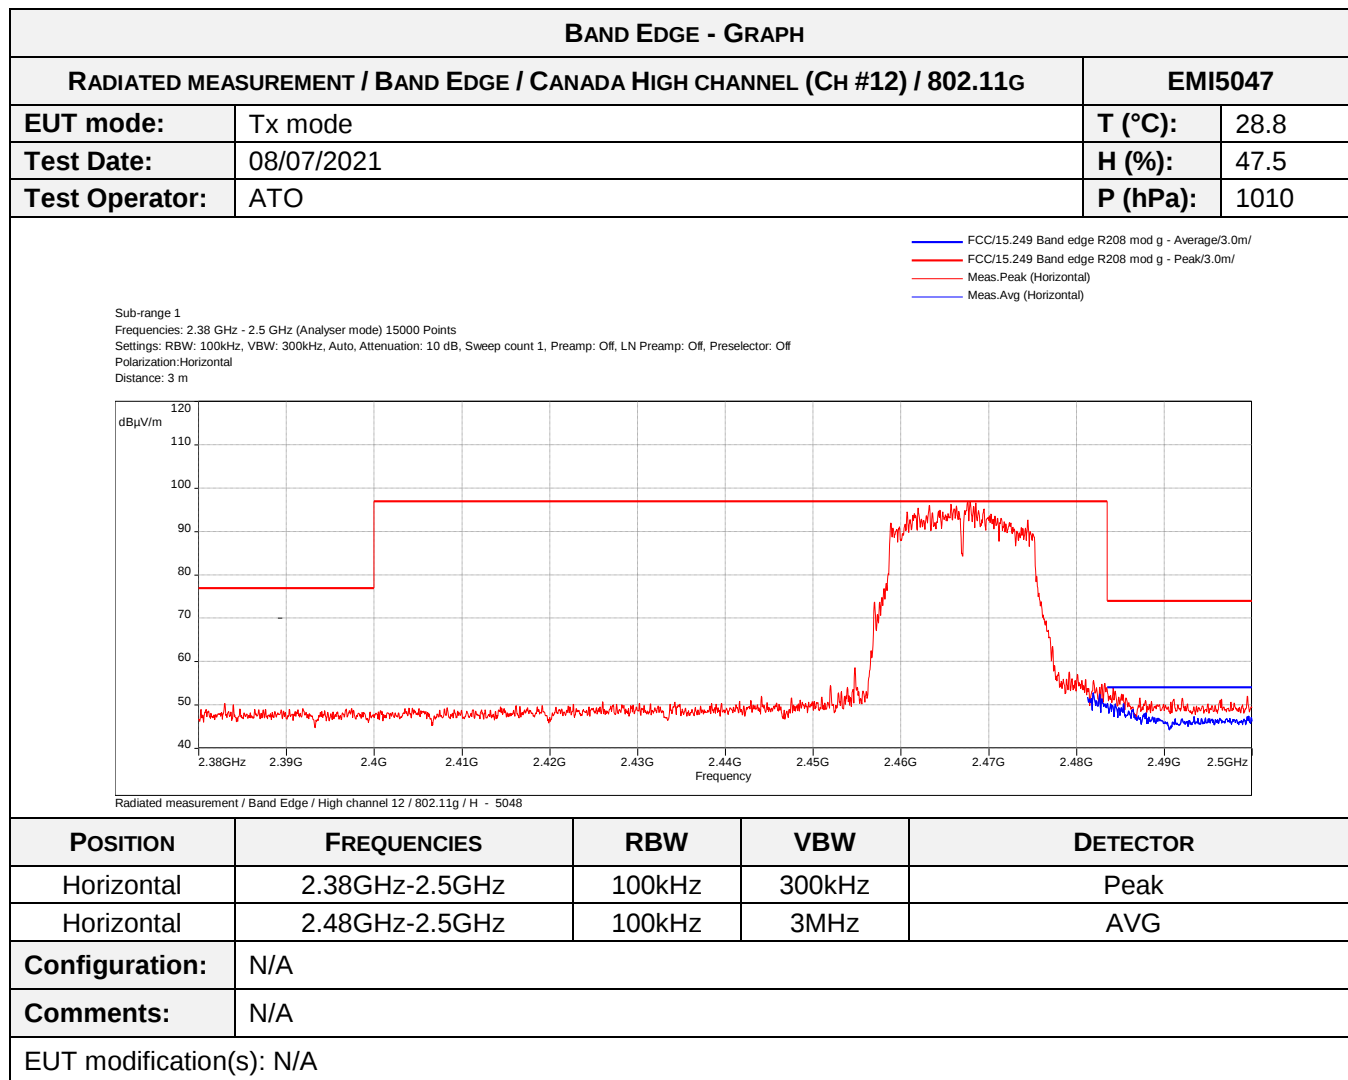

8.6. Power spectral density

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density. EUT is connected to the measuring receiver via 50Ω attenuator(s). Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
PSD / Low channel (Ch #1) / 802.11b	2.402GHz-2.422GHz	8dBm/3kHz	EMI4535	PASS
PSD / Low channel (Ch #1) / 802.11g	2.402GHz-2.422GHz	8dBm/3kHz	EMI5094	PASS
PSD / Mid channel (Ch #6) / 802.11b	2.427GHz-2.447GHz	8dBm/3kHz	EMI5096	PASS
PSD / Mid channel (Ch #6) / 802.11g	2.427GHz-2.447GHz	8dBm/3kHz	EMI5095	PASS
PSD / High channel (Ch #11) / 802.11b	2.452GHz-2.472GHz	8dBm/3kHz	EMI5097	PASS
PSD / High channel (Ch #11) / 802.11g	2.452GHz-2.472GHz	8dBm/3kHz	EMI5098	PASS
PSD / Canada High channel (Ch #12) / 802.11b	2.457GHz-2.477GHz	8dBm/3kHz	EMI4552	PASS
PSD / Canada High channel (Ch #12) / 802.11g	2.457GHz-2.477GHz	8dBm/3kHz	EMI5046	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(s)
Relative Humidity	20 to 75 %	See Graph(s)
Atmospheric pressure	N/A	See Graph(s)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR 4000L	15322		
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Attenuator	EMITECH	SUB.V2-H	14495	13/01/2021	13/03/2022
Attenuator	EMITECH	SUB.V2-V	14496	13/01/2021	13/03/2022
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023


BAT-EMC software version: V3.18.0.26


Blank cells = Permanent validity

TEST SETUP PHOTO(S)




TEST SETUP PHOTO(S)

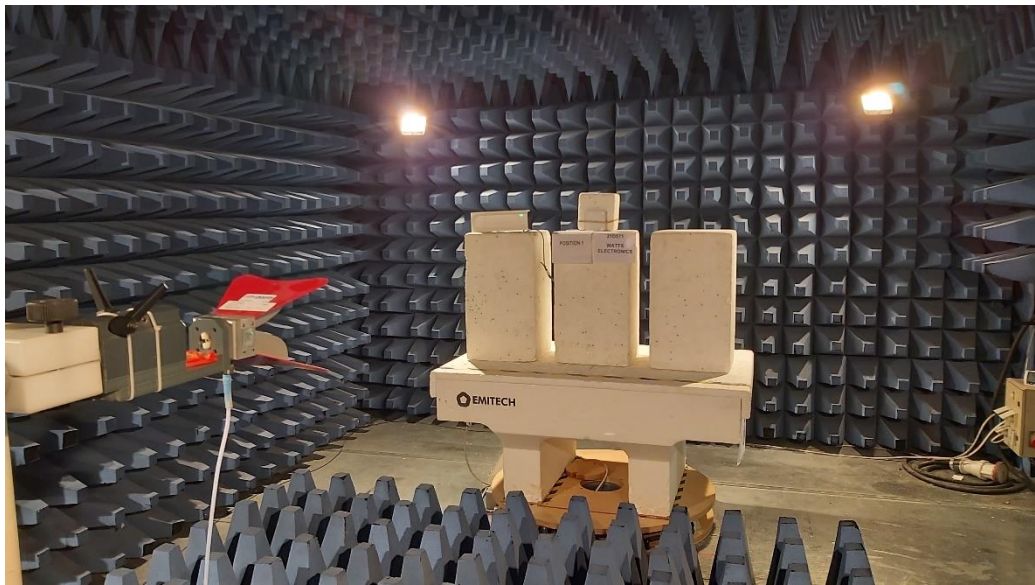


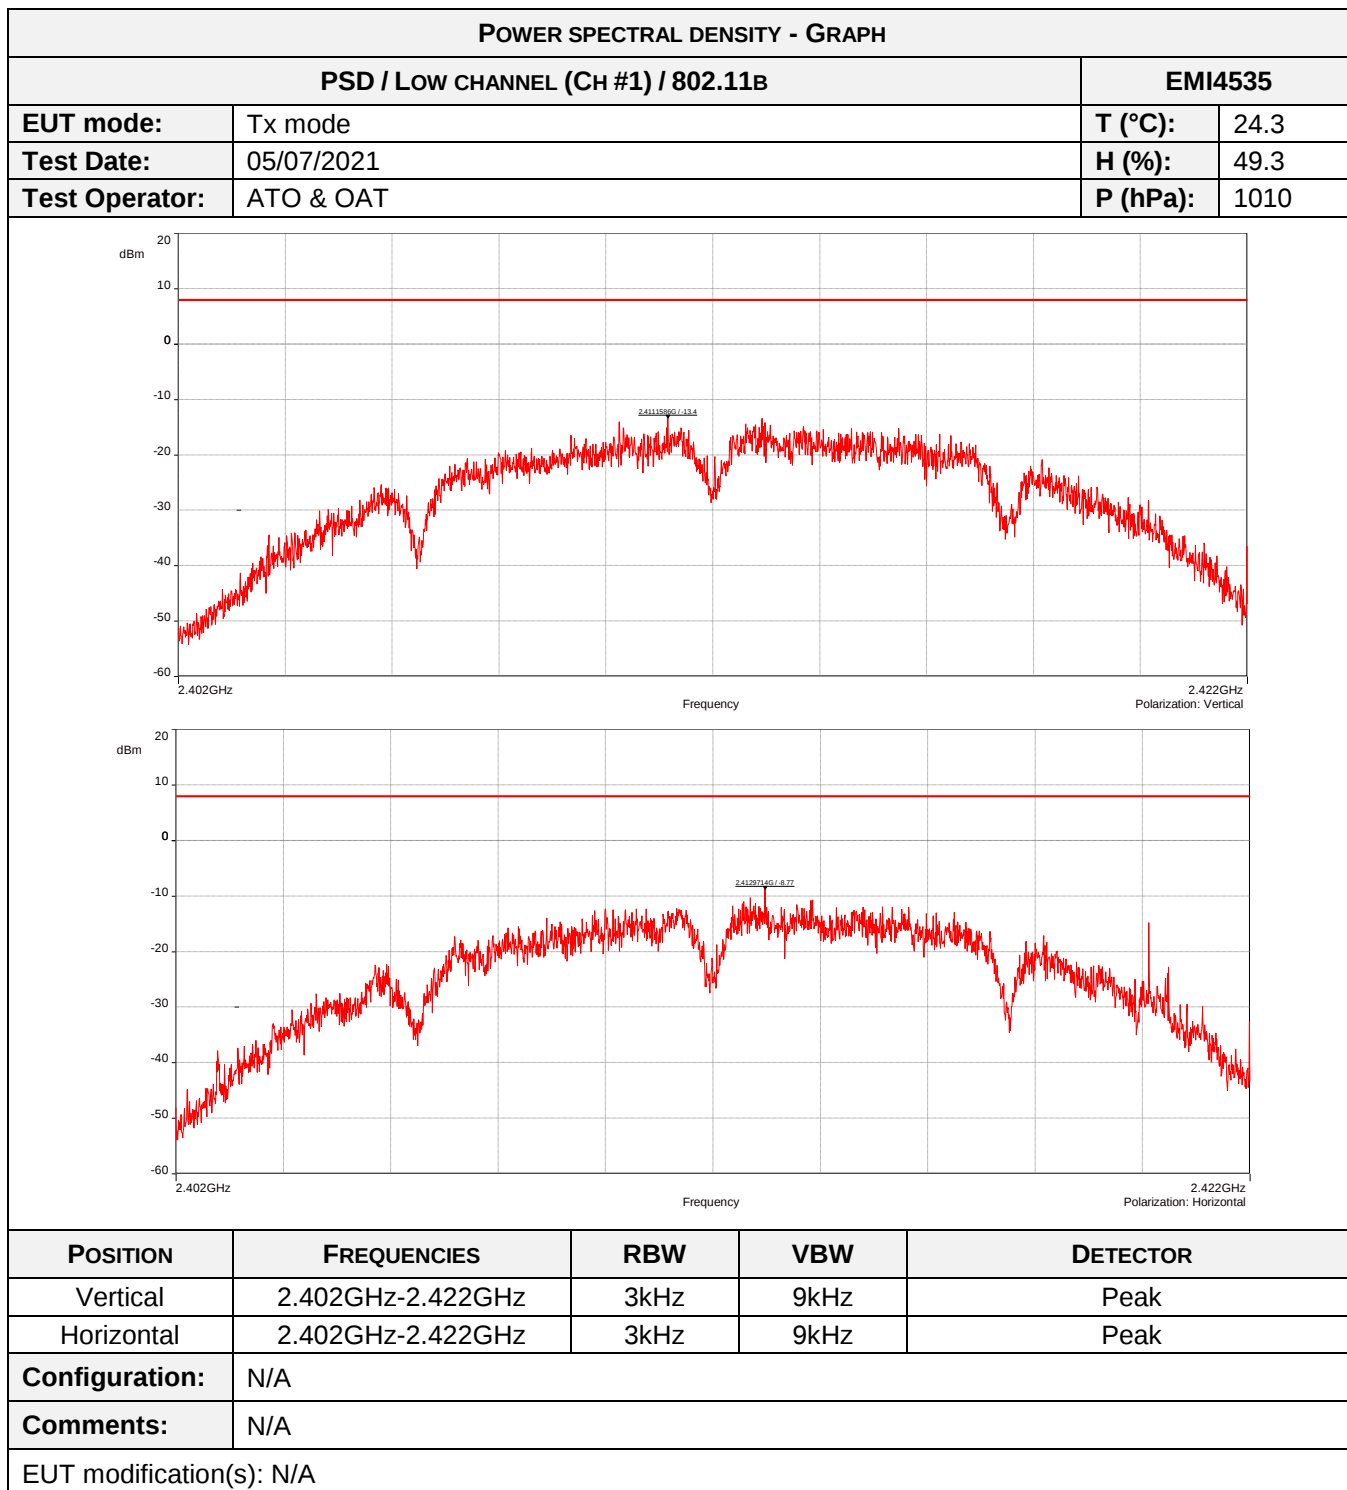


POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / Low CHANNEL (CH #1) / 802.11B			EMI4535
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2411.15	Vertical	-13.4	8
2412.97	Horizontal	-8.77	8

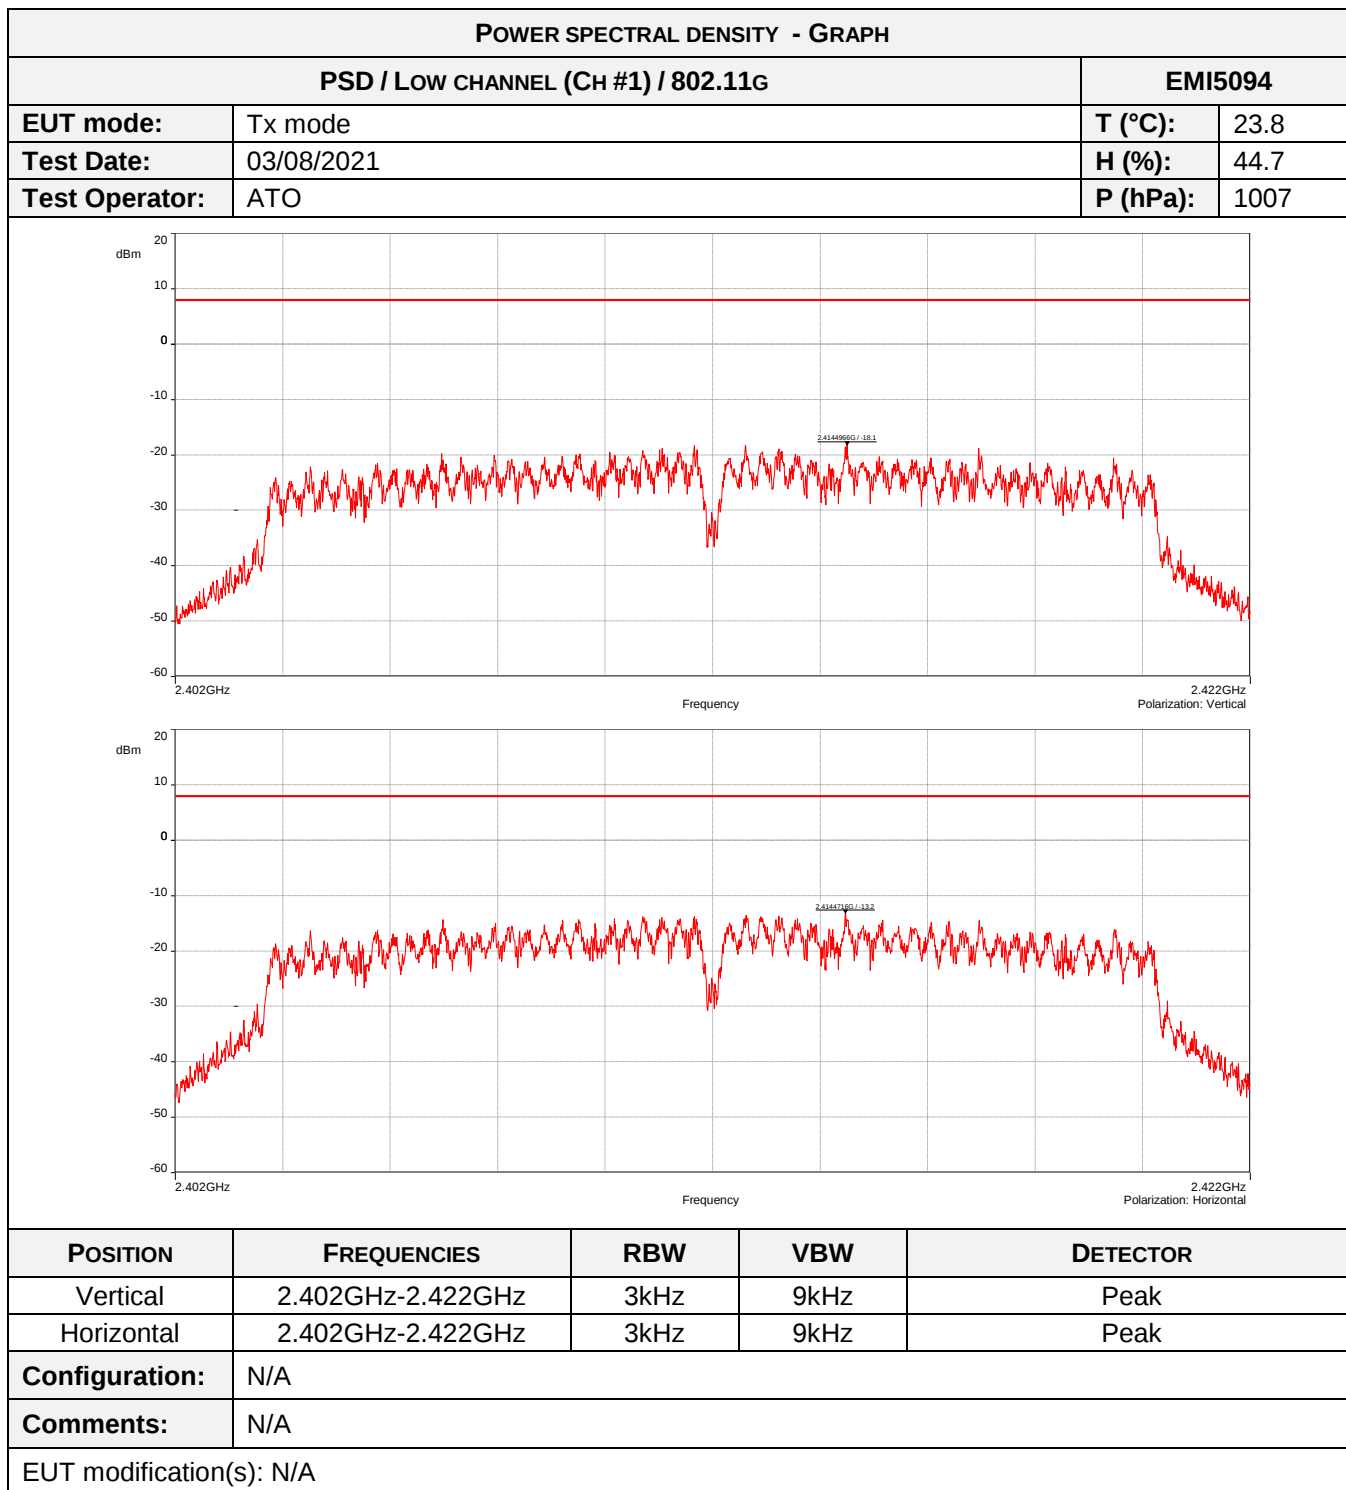


POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / Low CHANNEL (CH #1) / 802.11G			EMI5094
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2414.49	Vertical	-18.1	8
2414.47	Horizontal	-13.2	8

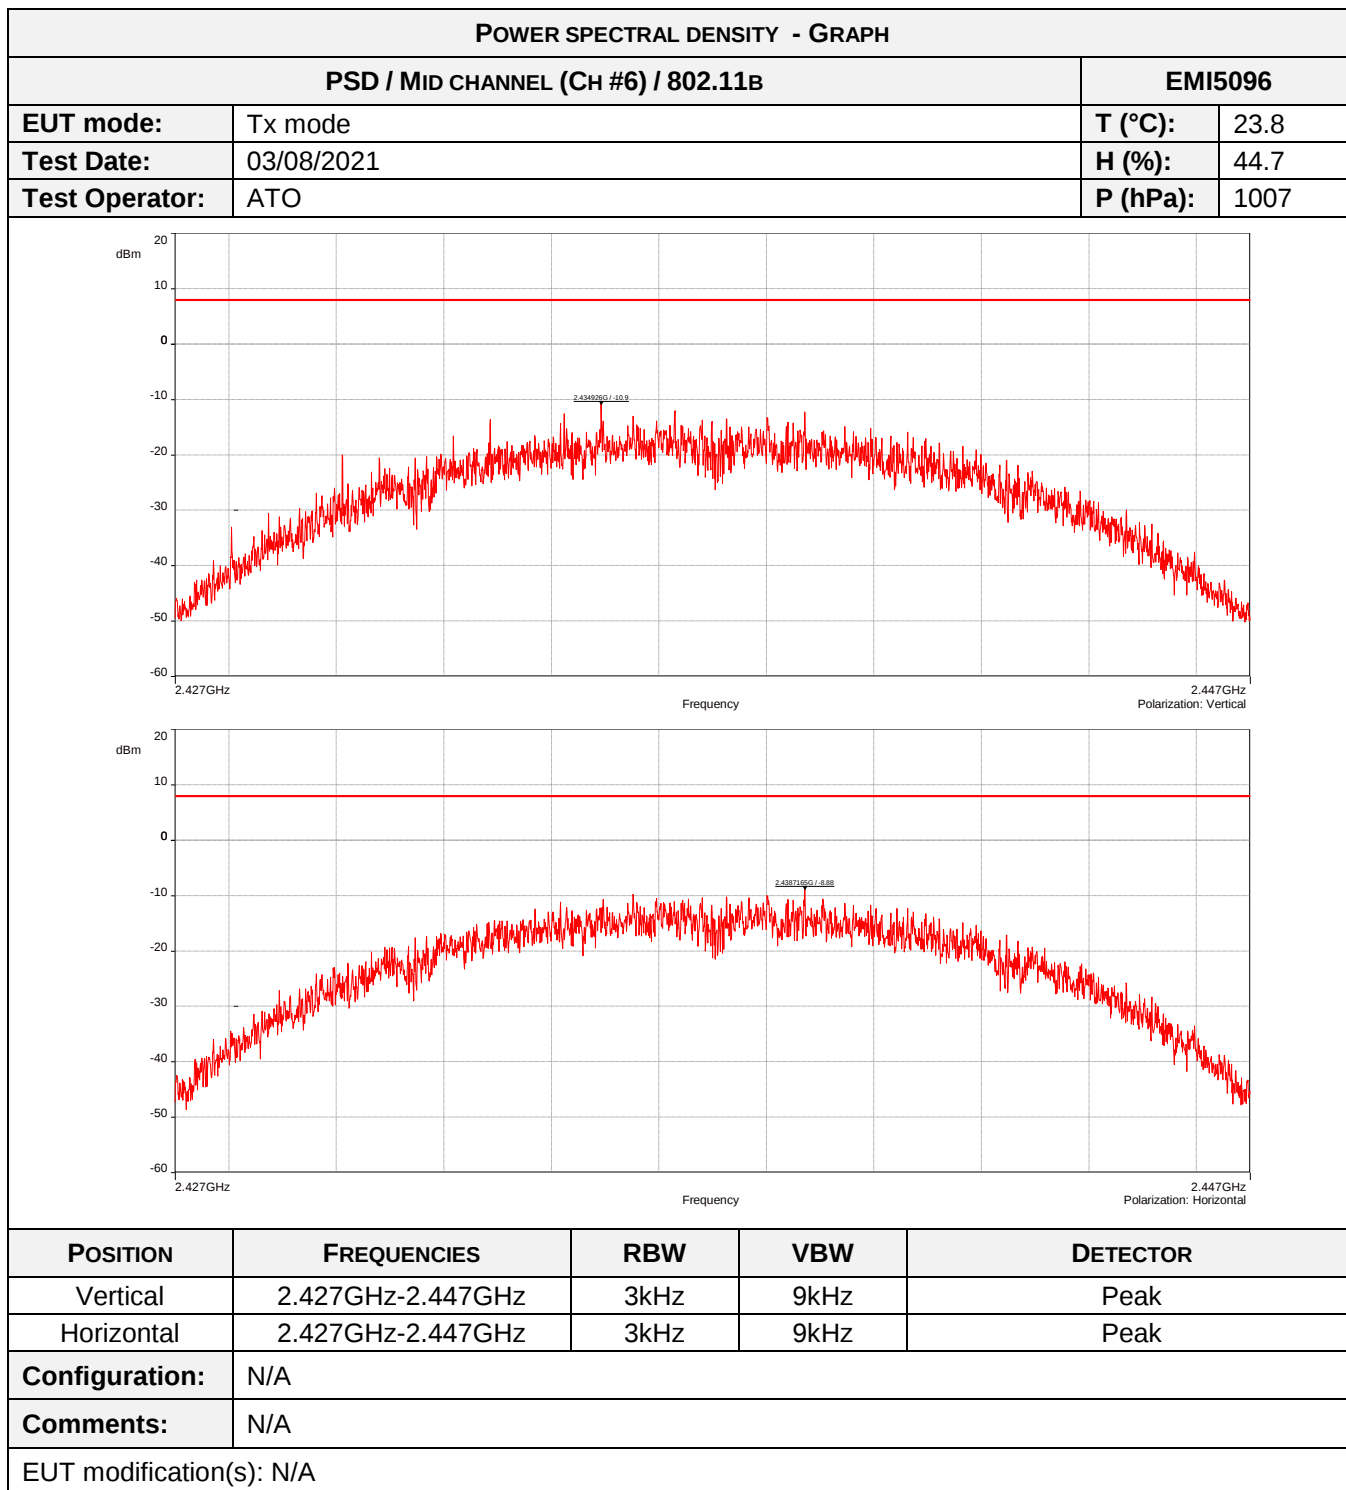


POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / MID CHANNEL (CH #6) / 802.11B			EMI5096
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2434.92	Vertical	-10.9	8
2438.71	Horizontal	-8.88	8

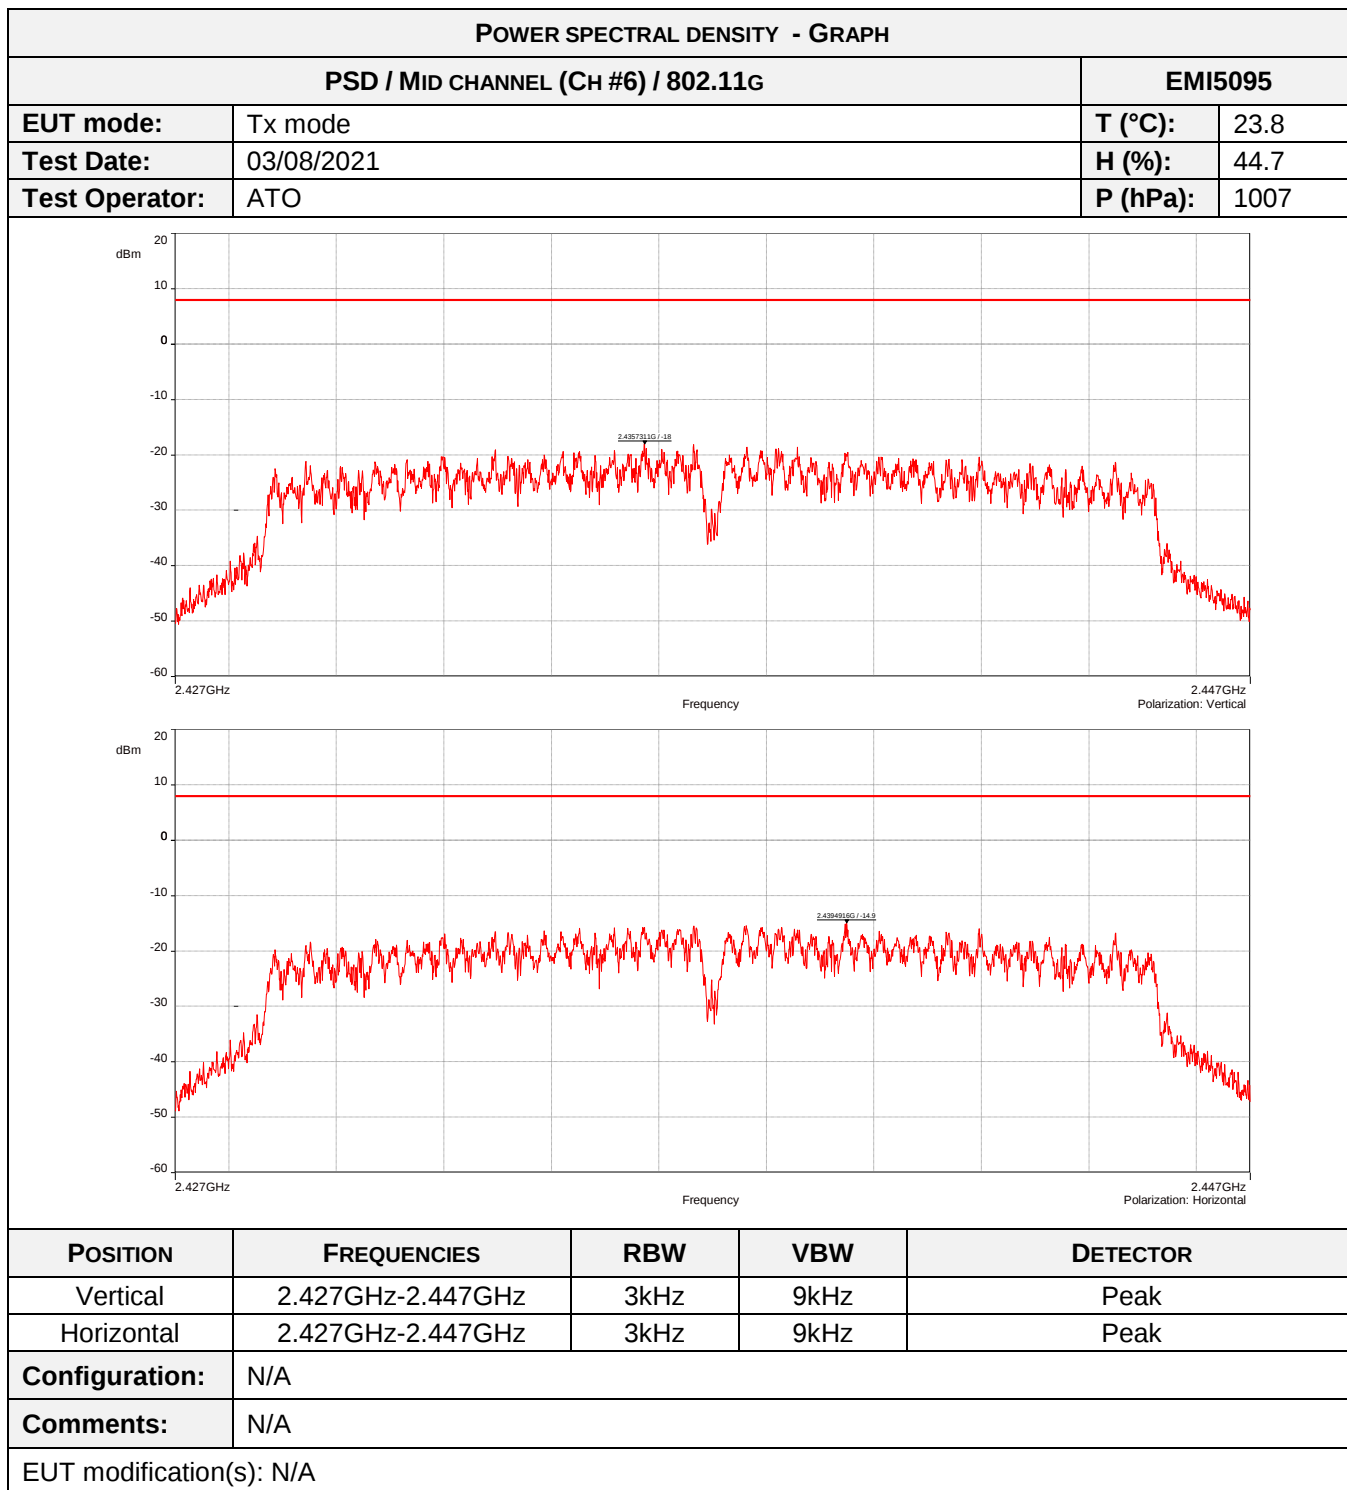


POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / MID CHANNEL (CH #6) / 802.11G			EMI5095
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2435.73	Vertical	-18.0	8
2439.49	Horizontal	-14.9	8

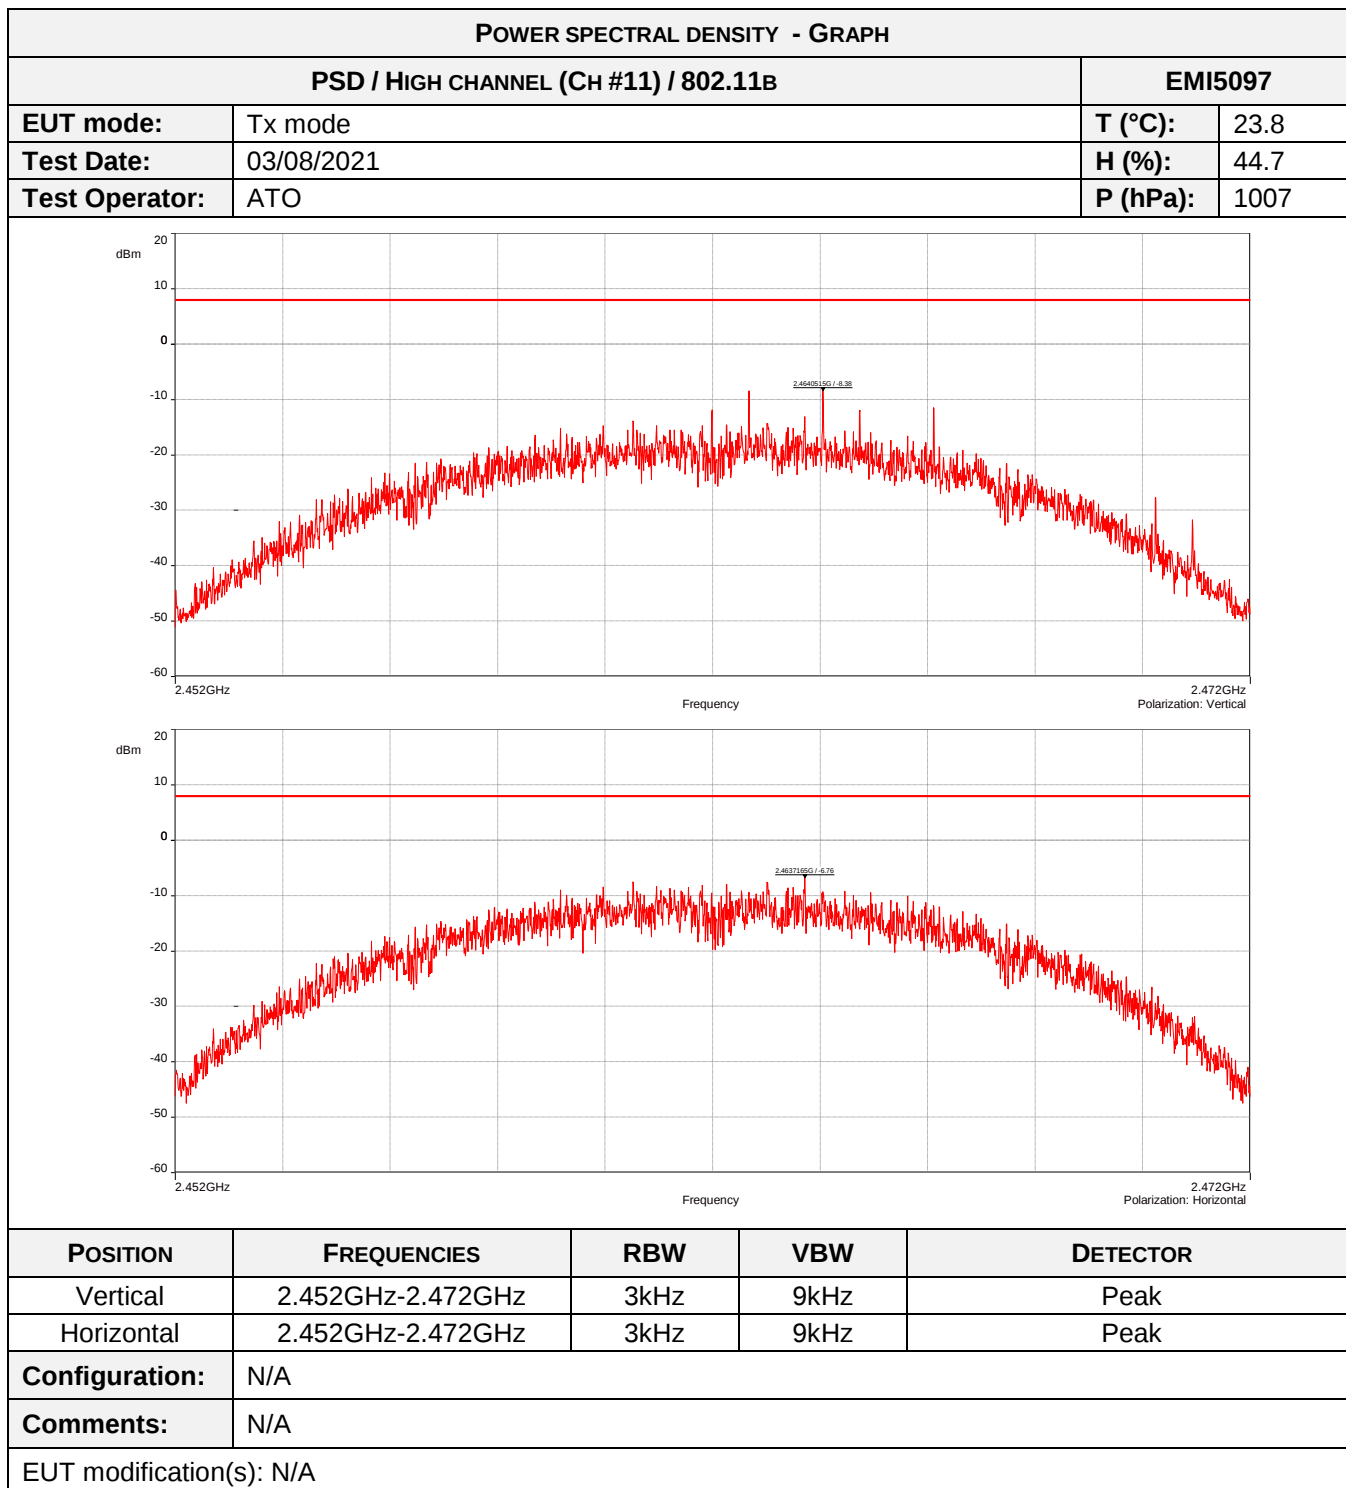


POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / HIGH CHANNEL (CH #11) / 802.11B			EMI5097
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2464.05	Vertical	-8.38	8
2463.71	Horizontal	-6.76	8

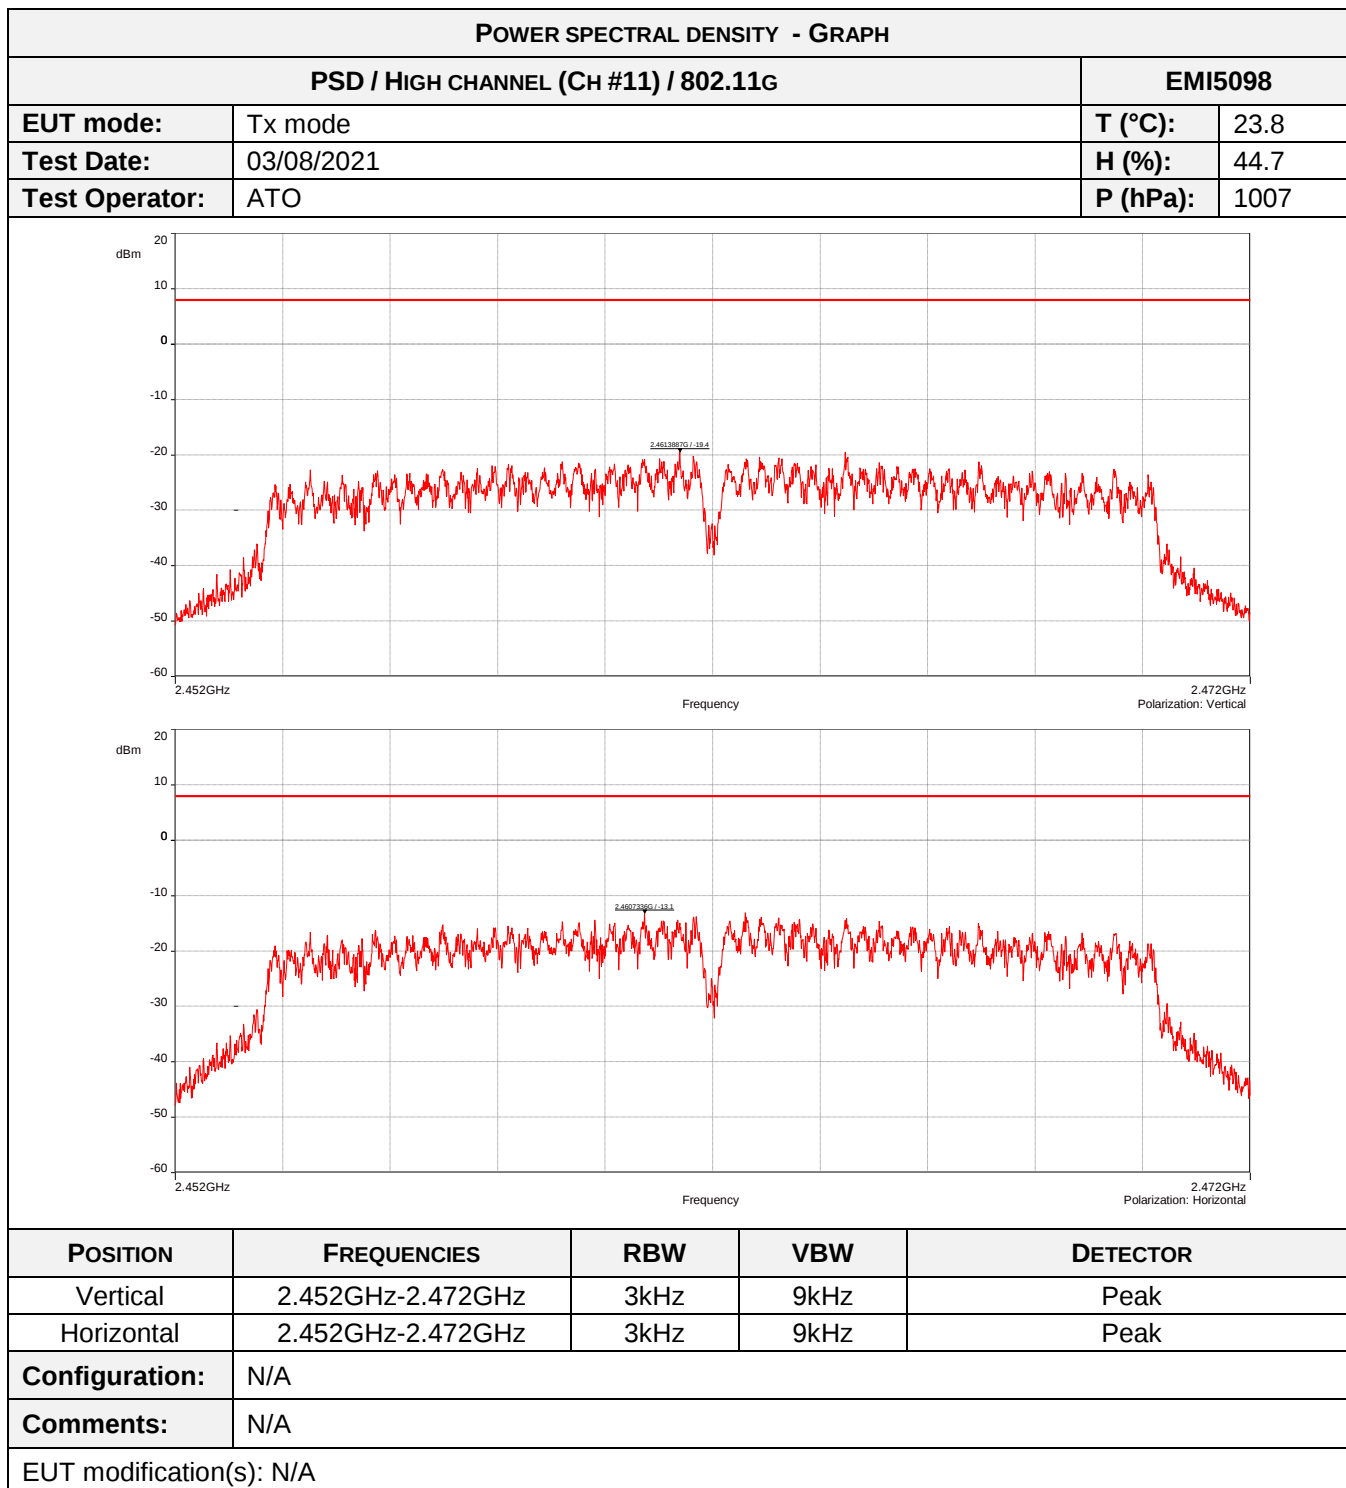

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / HIGH CHANNEL (CH #11) / 802.11G			EMI5098
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2461.38	Vertical	-19.4	8
2460.73	Horizontal	-13.1	8

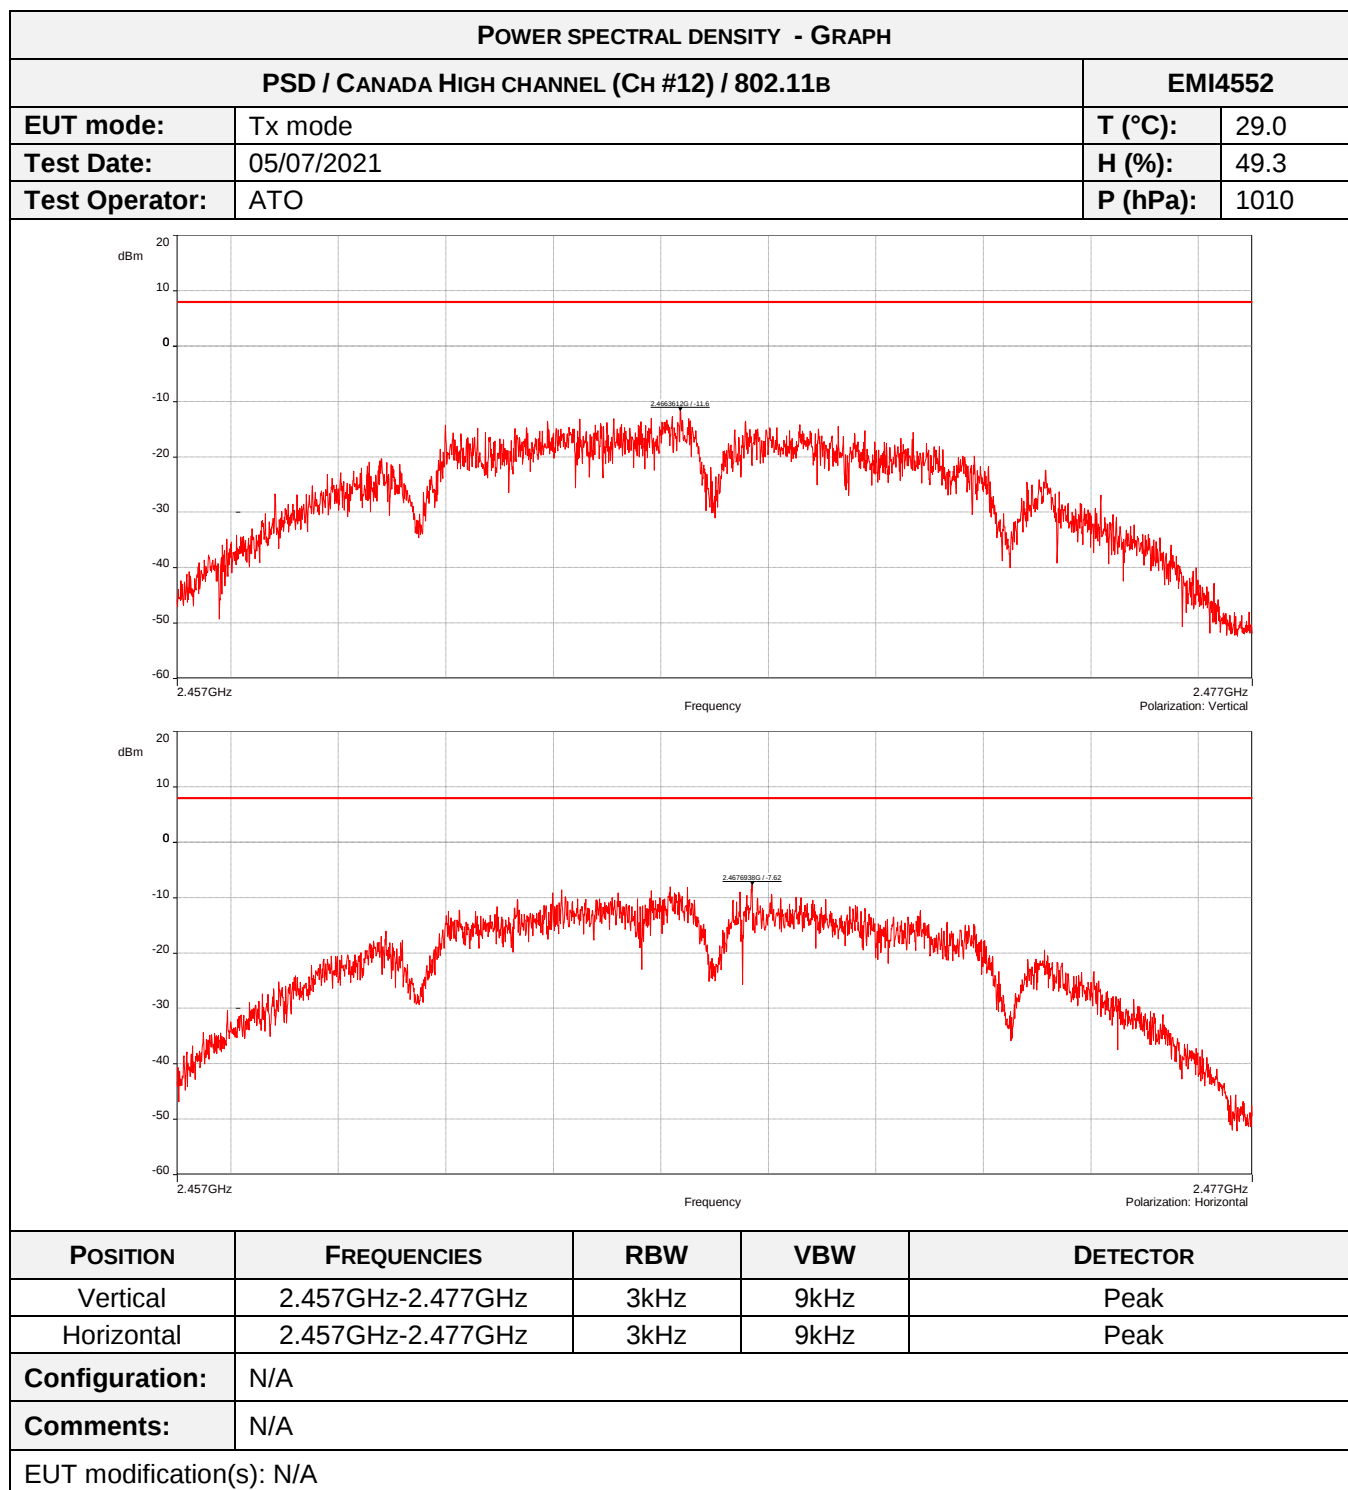

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / CANADA HIGH CHANNEL (CH #12) / 802.11B			EMI4552
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2466.36	Vertical	-11.6	8
2467.69	Horizontal	-7.62	8

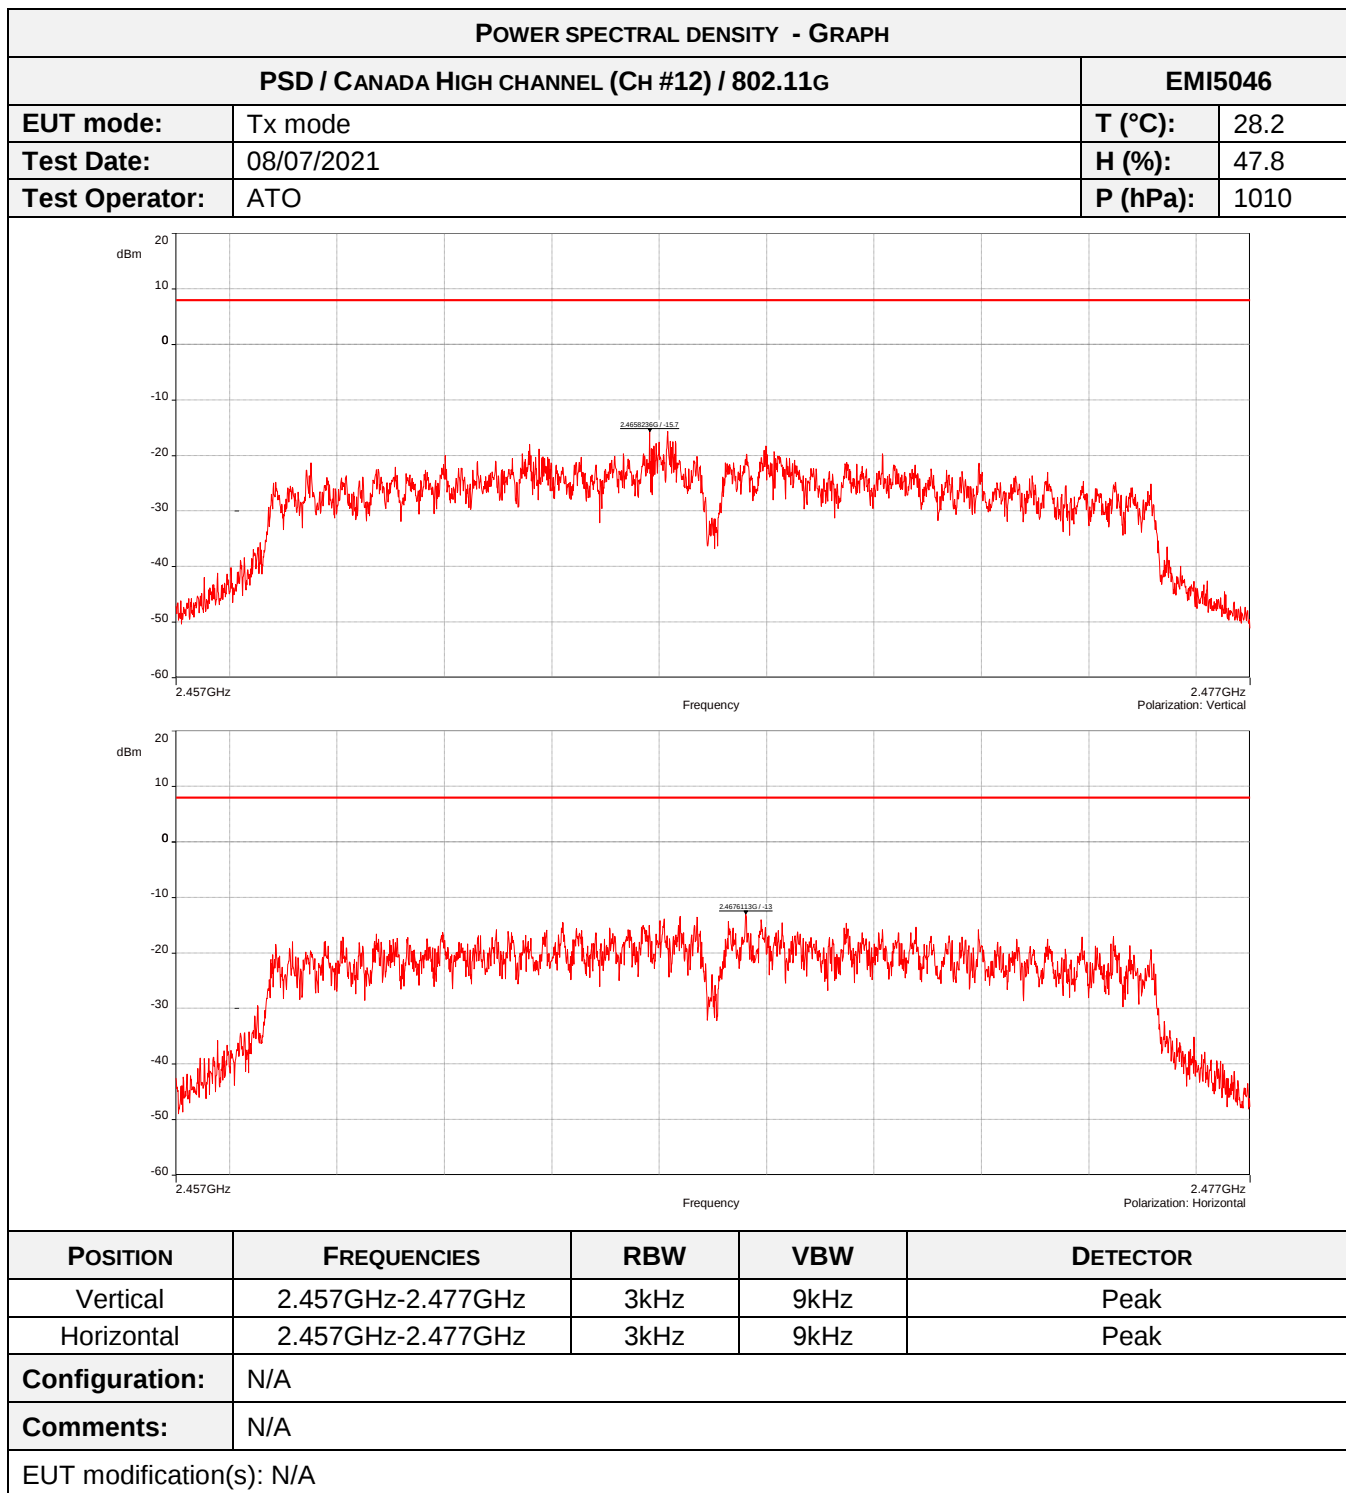

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / CANADA HIGH CHANNEL (CH #12) / 802.11G			EMI5046
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2465.82	Vertical	-15.7	8
2467.61	Horizontal	-13.0	8

8.7. Transmitter radiated spurious emissions at frequencies <30MHz

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen
General test setup: Spurious domain emission limits are limits on emissions at frequencies other than those of the carrier and sidebands associated with normal test modulation. EUT is set on an insulating support at 80cm above the ground reference plane. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter in a anechoic chamber. The EUT was rotated 360° in order to maximize radiated levels. Test antenna was oriented in 3 axes (0°, 45° and 90°). Final measurements (quasi-peak) were then performed in a 10-meter Open Area Test Site that complies to CISPR 16 in the same measurement conditions. All frequencies were investigated, where applicable.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Radiated measurement / 0° / 802.11b / All channels	9kHz-30MHz	15.209	EMI5027	PASS
Radiated measurement / 45° / 802.11b / All channels	9kHz-30MHz	15.209	EMI5028	PASS
Radiated measurement / 90° / 802.11b / All channels	9kHz-30MHz	15.209	EMI5029	PASS
Radiated measurement / 0° / 802.11g / All channels	9kHz-30MHz	15.209	EMI5030	PASS
Radiated measurement / 45° / 802.11g / All channels	9kHz-30MHz	15.209	EMI5031	PASS
Radiated measurement / 90° / 802.11g / All channels	9kHz-30MHz	15.209	EMI5032	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: Limit indicated on measurement curves is calculated with 40 dB/decade extrapolation factor and 51.5 dB conversion factor		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	KIKUSUI	PCR4000L	3074	25/07/2019	25/09/2021
Antenna	Rohde & Schwarz	HFH2-Z2	5825	24/04/2020	24/06/2022
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES < 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT / 0° / 802.11B / ALL CHANNELS				EMI5027	
Frequency MHz	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level (dBμA/m)	Limit (dBμA/m)	Margin (dB)
4.416	Peak	-32.58	-1.72	18.04	-19.76
4.622	Peak	-32.59	0.01	18.04	-18.03
Supplementary information: N/A					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES < 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT / 45° / 802.11B / ALL CHANNELS				EMI5028	
Frequency MHz	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level (dBμA/m)	Limit (dBμA/m)	Margin (dB)
0.514	Peak	-32.45	0.17	21.89	-21.73
1.537	Peak	-32.41	-10.44	12.37	-22.81
4.417	Peak	-32.58	-0.67	18.04	-18.71
4.622	Peak	-32.59	1.97	18.04	-16.07
Supplementary information: N/A					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES < 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT / 90° / 802.11B / ALL CHANNELS				EMI5029	
Frequency MHz	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level (dBμA/m)	Limit (dBμA/m)	Margin (dB)
0.514	Peak	-32.45	2.68	21.88	-19.20
1.128	Peak	-32.42	-8.05	15.06	-23.11
1.539	Peak	-32.41	-10.65	12.36	-23.01
4.622	Peak	-32.59	-4.04	18.04	-22.08
Supplementary information: N/A					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES < 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT / 0° / 802.11G / ALL CHANNELS				EMI5030	
Frequency MHz	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level (dBμA/m)	Limit (dBμA/m)	Margin (dB)
4.419	Peak	-32.58	-2.12	18.04	-20.16
4.625	Peak	-32.59	0.03	18.04	-18.01
Supplementary information: N/A					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES < 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT / 45° / 802.11G / ALL CHANNELS				EMI5031	
Frequency MHz	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level (dBμA/m)	Limit (dBμA/m)	Margin (dB)
0.514	Peak	-32.45	0.30	21.89	-21.59
1.539	Peak	-32.41	-9.90	12.36	-22.25
4.419	Peak	-32.58	-0.99	18.04	-19.03
4.622	Peak	-32.59	1.74	18.04	-16.30
Supplementary information: N/A					


TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES < 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT / 90° / 802.11G / ALL CHANNELS				EMI5032	
Frequency MHz	Detector (Pk/QP/Av)	Gain/Loss Factor (dB)	Level (dBμA/m)	Limit (dBμA/m)	Margin (dB)
0.513	Peak	-32.45	2.32	21.89	-19.58
0.719	Peak	-32.44	-3.66	18.97	-22.63
1.539	Peak	-32.41	-10.69	12.36	-23.05
4.625	Peak	-32.59	-3.72	18.04	-21.76
Supplementary information: N/A					


TEST SETUP PHOTO(S)





TEST SETUP PHOTO(S)




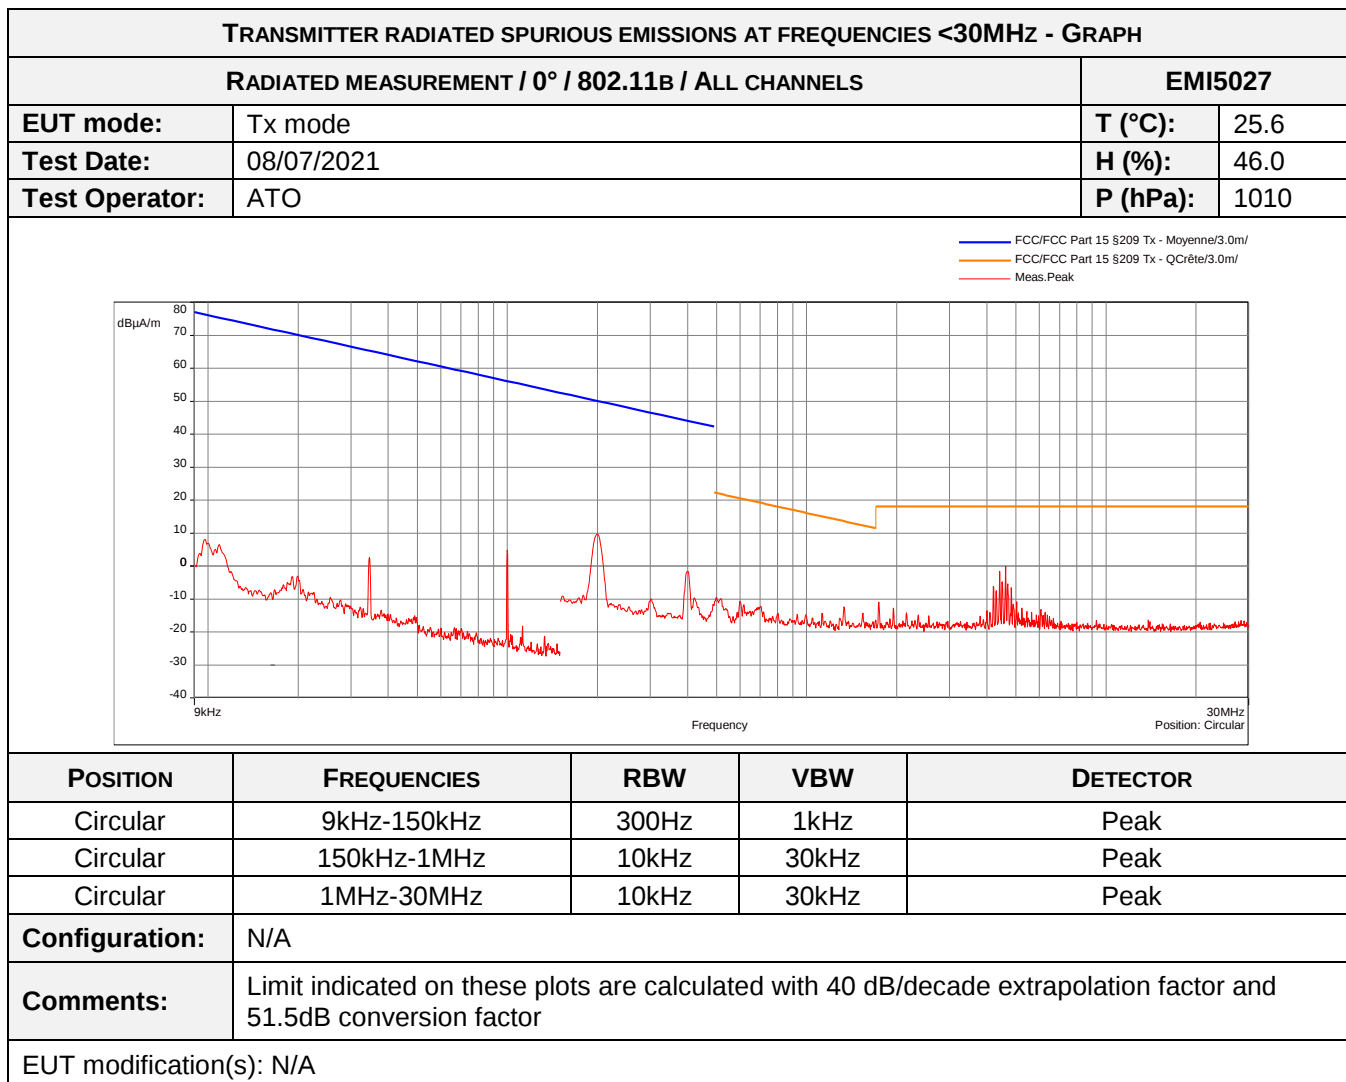

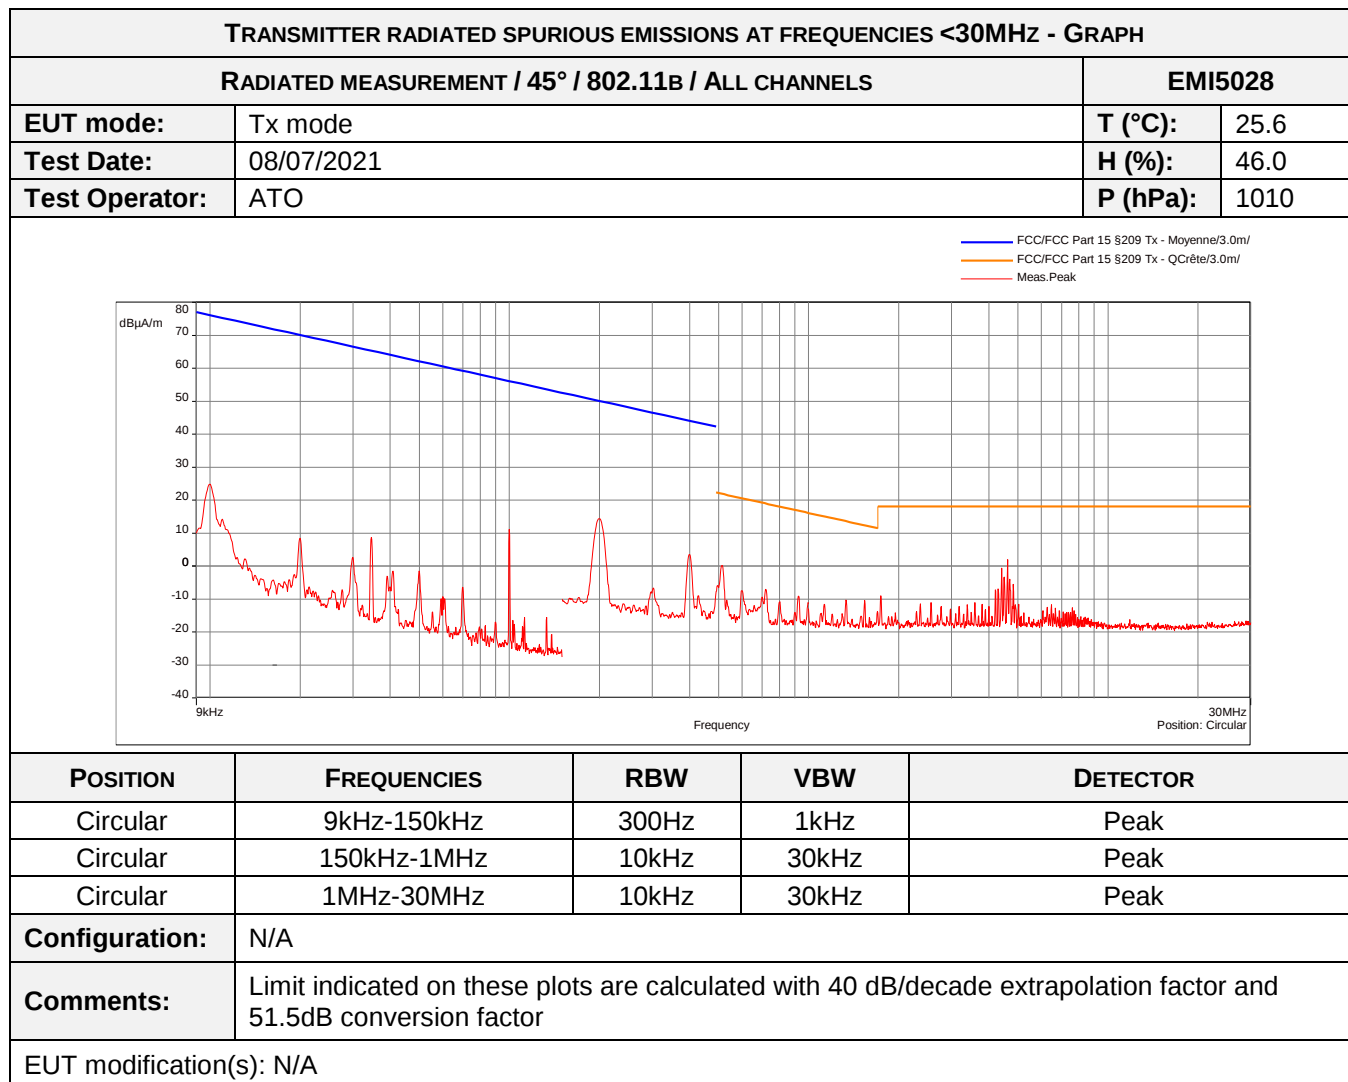

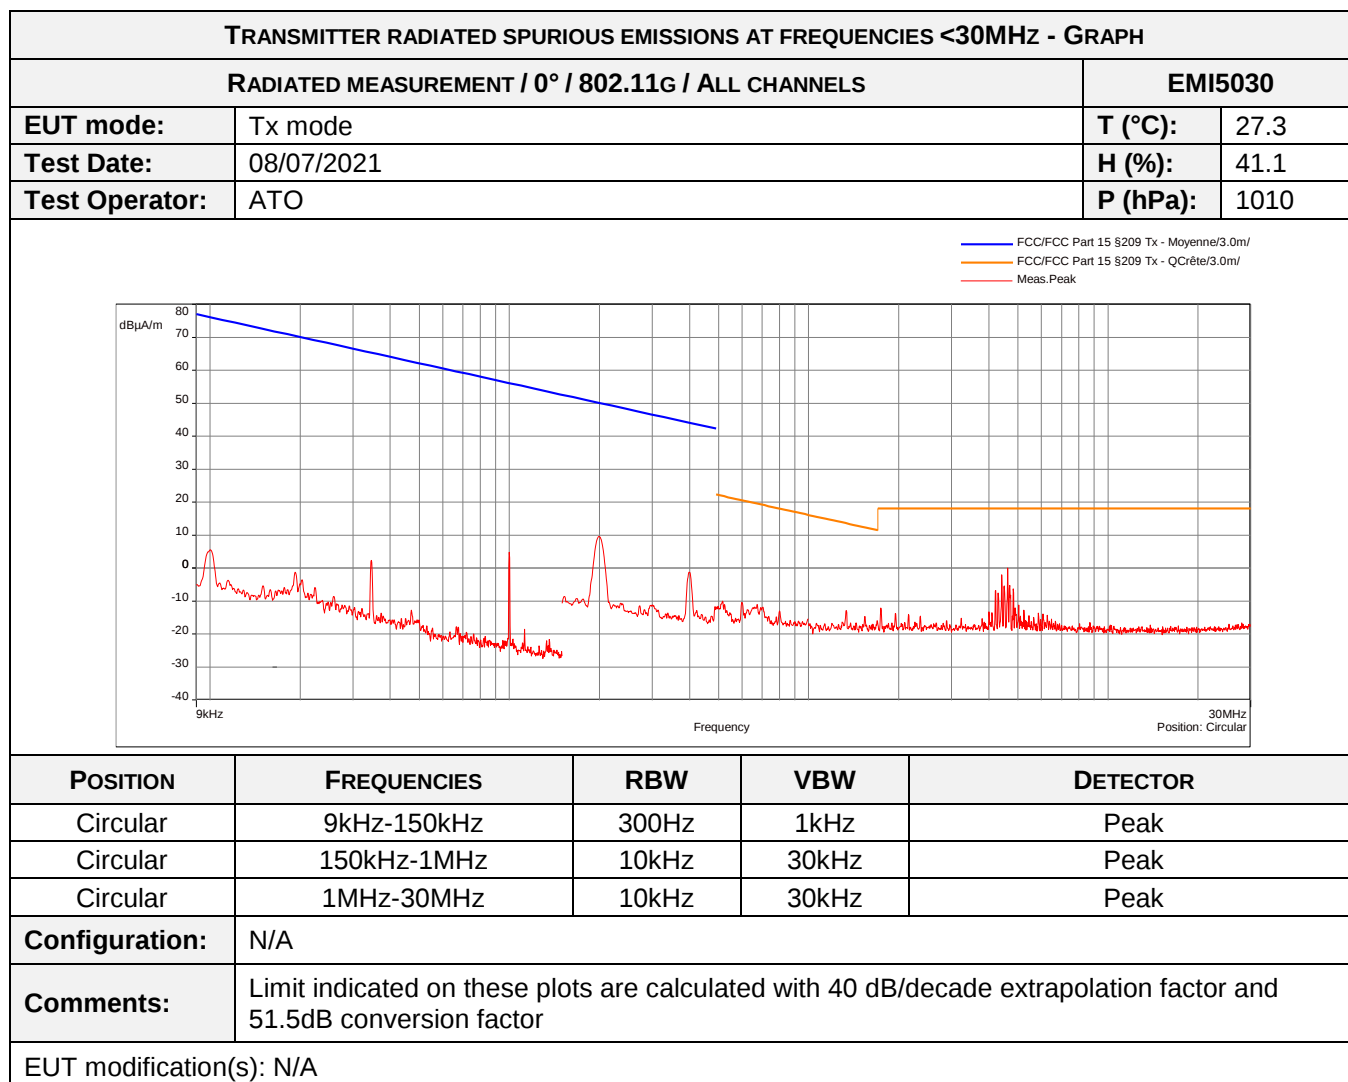

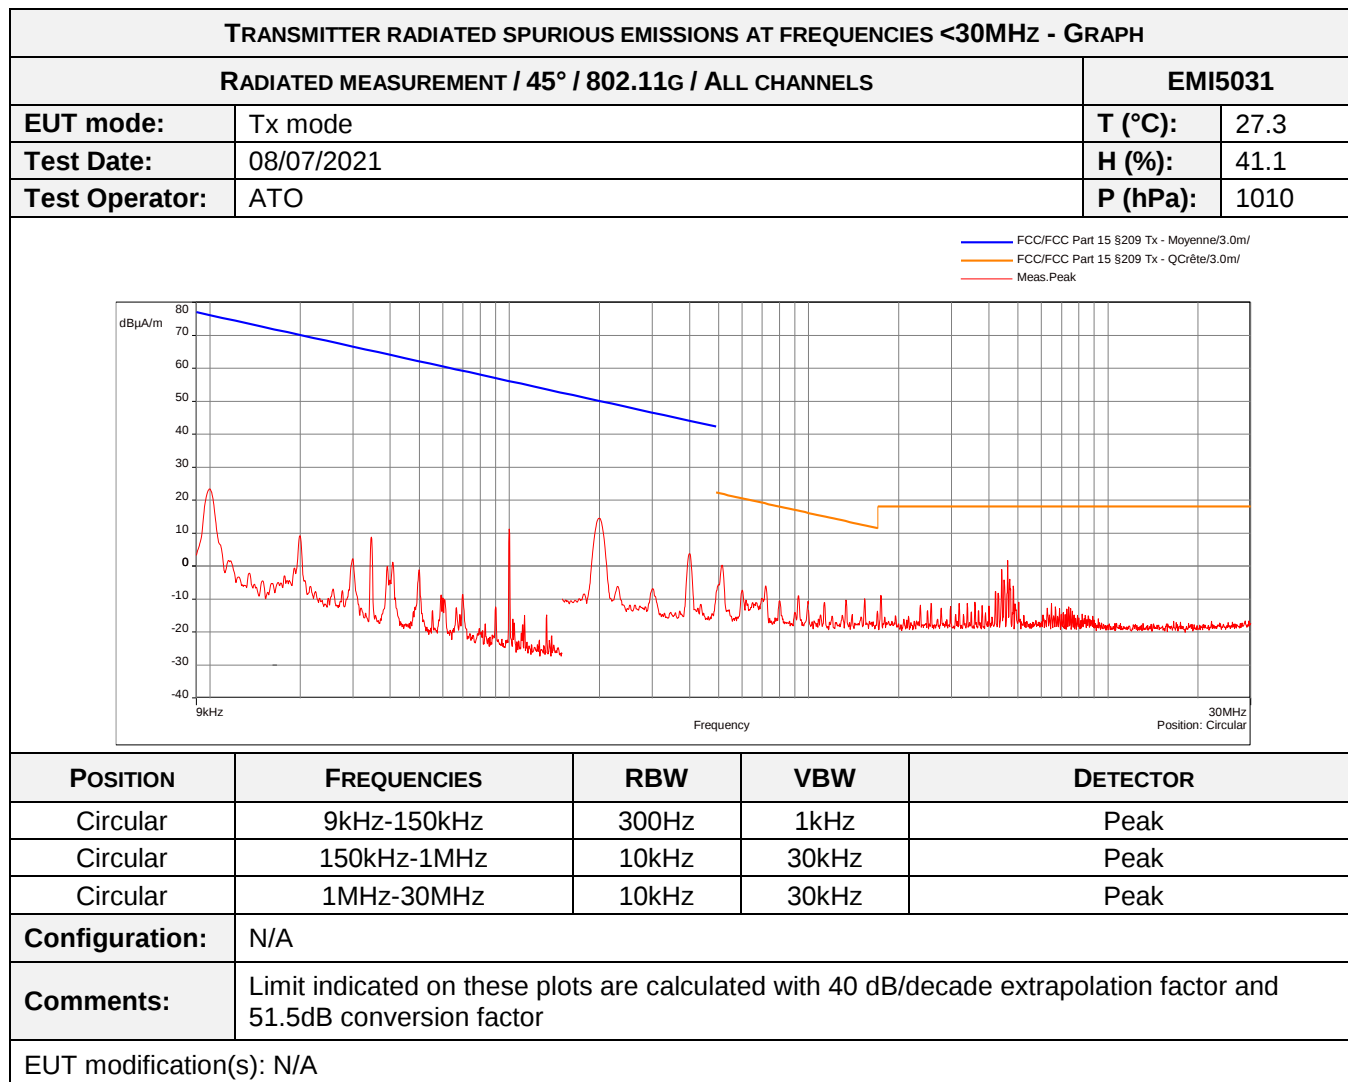

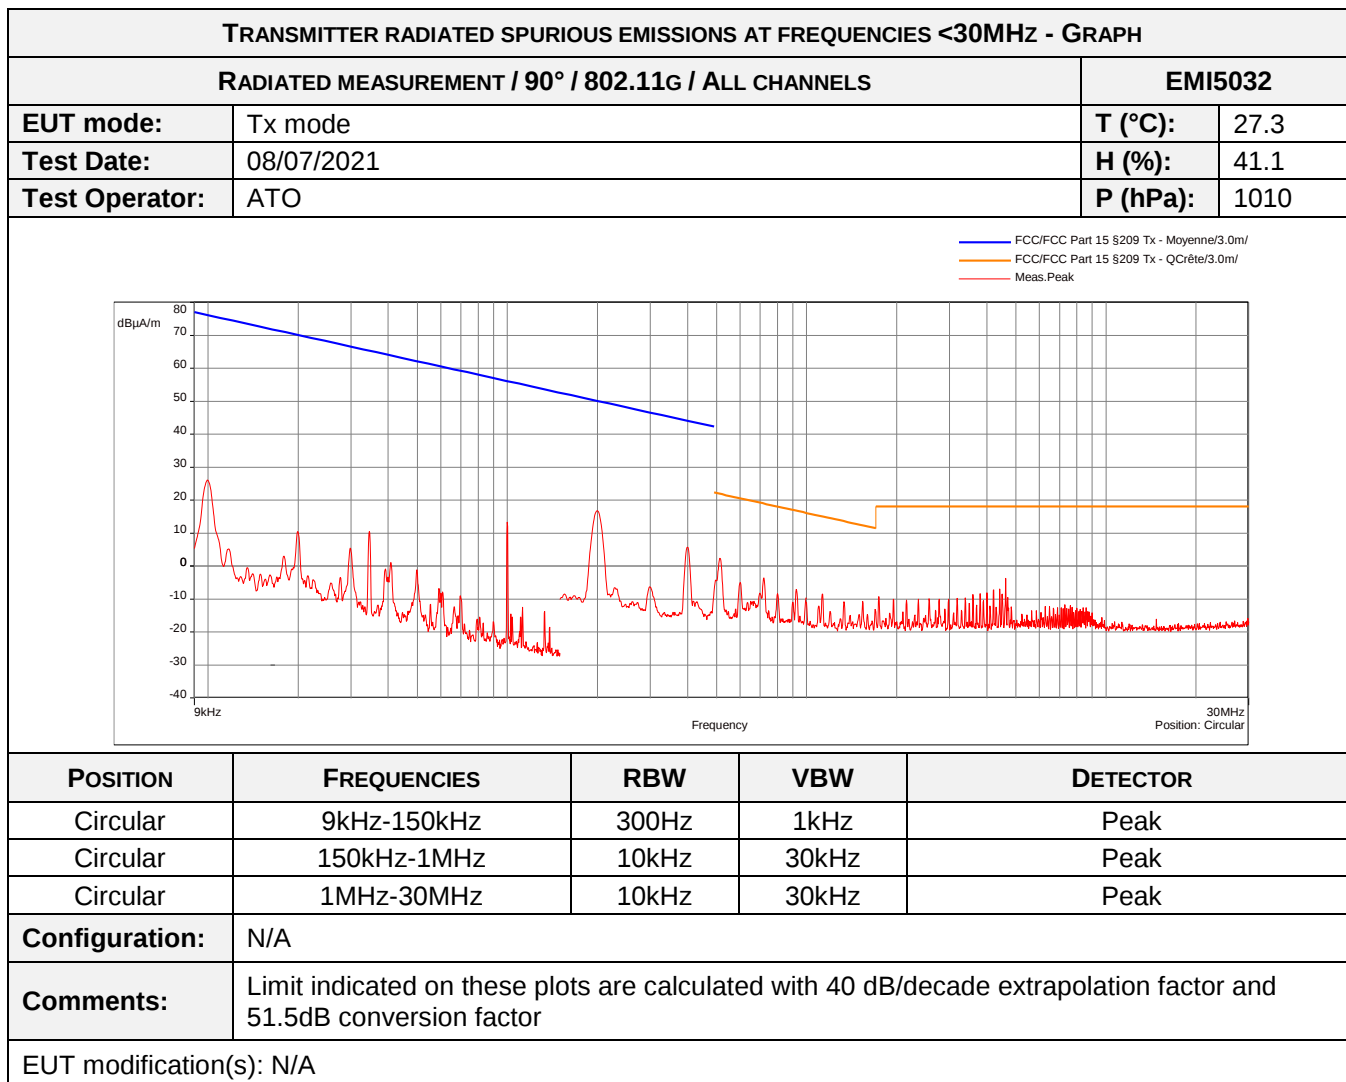

8.8. Transmitter radiated spurious emissions at frequencies >30MHz

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen
Test description: EUT is set on an insulating support at 80(f<1GHz), 150cm(f>1GHz)cm above the ground reference plane. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak or average) were then performed in a semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° about its azimuth and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated, where applicable. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

Radiated measurement / All channels / 802.11b	30MHz-1GHz	15.209	EMI5068	PASS
Radiated measurement / All channels / 802.11g	30MHz-1GHz	15.209	EMI5069	PASS
Radiated measurement 1GHz to 18GHz / 802.11b / Low channel (Ch #1)	1GHz-18GHz	15.209	EMI4525	PASS
Radiated measurement 1GHz to 18GHz / 802.11g / Low channel (Ch #1)	1GHz-18GHz	15.209	EMI5109	PASS
Radiated measurement 1GHz to 18GHz / 802.11b / Mid channel (Ch #6)	1GHz-18GHz	15.209	EMI5111	PASS
Radiated measurement 1GHz to 18GHz / 802.11g / Mid channel (Ch #6)	1GHz-18GHz	15.209	EMI5110	PASS
Radiated measurement 1GHz to 18GHz / 802.11b / High channel (Ch #11)	1GHz-18GHz	15.209	EMI5112	PASS
Radiated measurement 1GHz to 18GHz / 802.11g / High channel (Ch #11)	1GHz-18GHz	15.209	EMI5113	PASS
Radiated measurement 1GHz to 18GHz / 802.11b / Canada High channel (Ch #12)	1GHz-18GHz	15.209	EMI4541	PASS
Radiated measurement 1GHz to 18GHz / 802.11g / Canada High channel (Ch #12)	1GHz-18GHz	15.209	EMI5050	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11b / Low channel (Ch #1)	18GHz-26.5GHz	15.209	EMI5123	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11g / Low channel (Ch #1)	18GHz-26.5GHz	15.209	EMI5127	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11b / Mid channel (Ch #6)	18GHz-26.5GHz	15.209	EMI5124	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11g / Mid channel (Ch #6)	18GHz-26.5GHz	15.209	EMI5128	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11b / High channel (Ch #11)	18GHz-26.5GHz	15.209	EMI5125	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11g / High channel (Ch #11)	18GHz-26.5GHz	15.209	EMI5129	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11b / Canada High channel (Ch #12)	18GHz-26.5GHz	15.209	EMI5126	PASS
Radiated measurement 18GHz to 26.5GHz / 802.11g / Canada High channel (Ch #12)	18GHz-26.5GHz	15.209	EMI5130	PASS

Radiated measurement / Rx mode / All channels / 802.11b	30MHz-1GHz	15.109 Class B	EMI5132	PASS
Radiated measurement / Rx mode / All channels / 802.11g	30MHz-1GHz	15.109 Class B	EMI5133	PASS
Radiated measurement 1GHz to 18GHz / 802.11b / All channels / Rx mode	1GHz-18GHz	15.109 Class B	EMI5121	PASS
Radiated measurement 1GHz to 18GHz / 802.11g / All channels / Rx mode	1GHz-18GHz	15.109 Class B	EMI5051	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	GW Instek	APS-1102	17754	02/03/2021	02/05/2022
AC power source	KIKUSUI	PCR4000L	3074	25/07/2019	25/09/2021
Antenna	Rohde & Schwarz	HFH2-Z2	5825	24/04/2020	24/06/2022
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Antenna	Electro Metrics	BIA-30HF	1107	13/06/2018	13/08/2021
Antenna	Rohde & Schwarz	HL223	1137	13/06/2018	13/08/2021
Antenna	Rohde & Schwarz	HL223	3126	13/06/2018	13/08/2021
Cable	MegaPhase	F135N1N28	16666	25/10/2019	25/12/2021
Cable	MegaPhase	F135N1N28	16667	25/10/2019	25/12/2021
Cable	MegaPhase	F135N1N28	16668	25/10/2019	25/12/2021
Cable	/	N-1m	3625	27/01/2021	27/03/2023
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-6,5m	14380	25/07/2019	25/09/2021
Cable	MegaPhase	N-8m	15813	14/01/2021	14/03/2023
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Cable	MegaPhase	TM18-N1N1-118	12841	14/08/2020	14/10/2022
Filter	Micro-Tronics	HPM18865	12843	09/06/2018	09/08/2021
Filter	Wainwright Instruments	WTRCTV5-700-1000-20-60	12838	27/06/2018	27/08/2021
Preamplifier	IMPULSE	CA118-546ACN	9169	13/01/2021	13/03/2022
Receiver	Rohde & Schwarz	ESW26	17791	14/04/2021	14/06/2022
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Shielded enclosure	COMTEST	SAC 3m	14494	02/10/2019	02/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	09/06/2021	09/08/2023
Thermohygrometer	Testo	608-H2	12269	07/05/2020	07/07/2022
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES > 30MHz - TABULATED RESULTS					
Frequency MHz	Detector (Pk/QP/Av)	Antenna polarization	Level (dBμV/m)	Limit Avg (dBμV/m)	Margin (dB)
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: except following tabulated results, No spurious emissions were detected.					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES > 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT 1GHz TO 18GHz / 802.11b / MID CHANNEL (CH #6)				EMI5111	
Frequency MHz	Detector (Pk/QP/Av)	Antenna polarization	Level (dBμV/m)	Limit Avg (dBμV/m)	Margin (dB)
4873.124	Peak	Vertical	48.90	54	-5.10
7309.287	Peak	Vertical	49.32	54	-4.68
4873.124	Peak	Horizontal	50.79	54	-3.21
Supplementary information: N/A					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES > 30MHz - TABULATED RESULTS					
RADIATED MEASUREMENT 1GHz TO 18GHz / 802.11b / HIGH CHANNEL (CH #11)				EMI5112	
Frequency MHz	Detector (Pk/QP/Av)	Antenna polarization	Level (dBμV/m)	Limit Avg (dBμV/m)	Margin (dB)
4923.128	Peak	Vertical	49.81	54	-4.19
4923.128	Peak	Horizontal	49.11	54	-4.89
Supplementary information: N/A					




TEST SETUP PHOTO(S) - RADIATED MEASUREMENT / 30MHz TO 200MHz



TEST SETUP PHOTO(S) - RADIATED MEASUREMENT / 200MHz TO 1GHz





TEST SETUP PHOTO(S) - RADIATED MEASUREMENT / 1GHZ TO 18GHZ

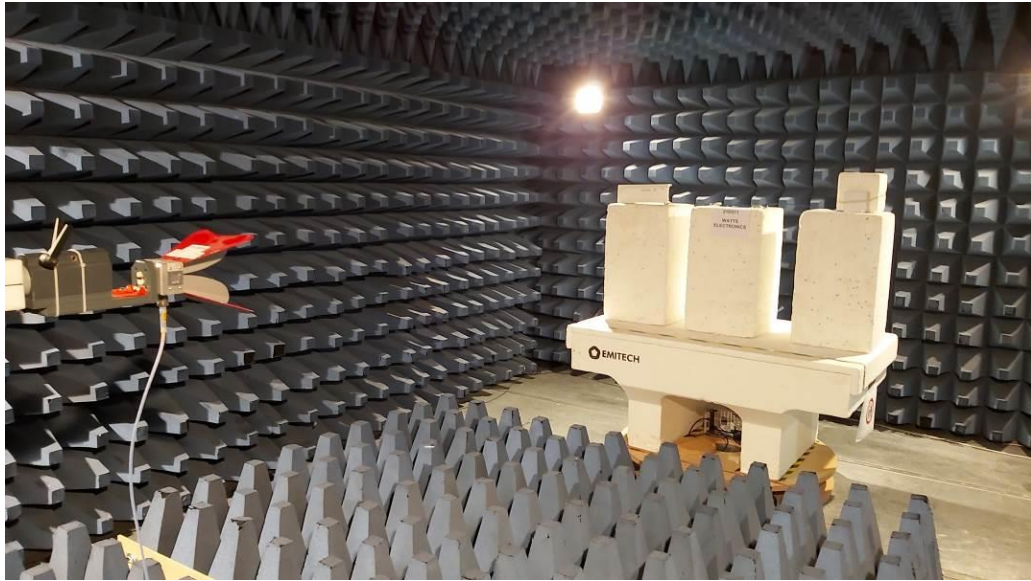



TEST SETUP PHOTO(S) - RADIATED MEASUREMENT / 18GHZ TO 26.5GHZ




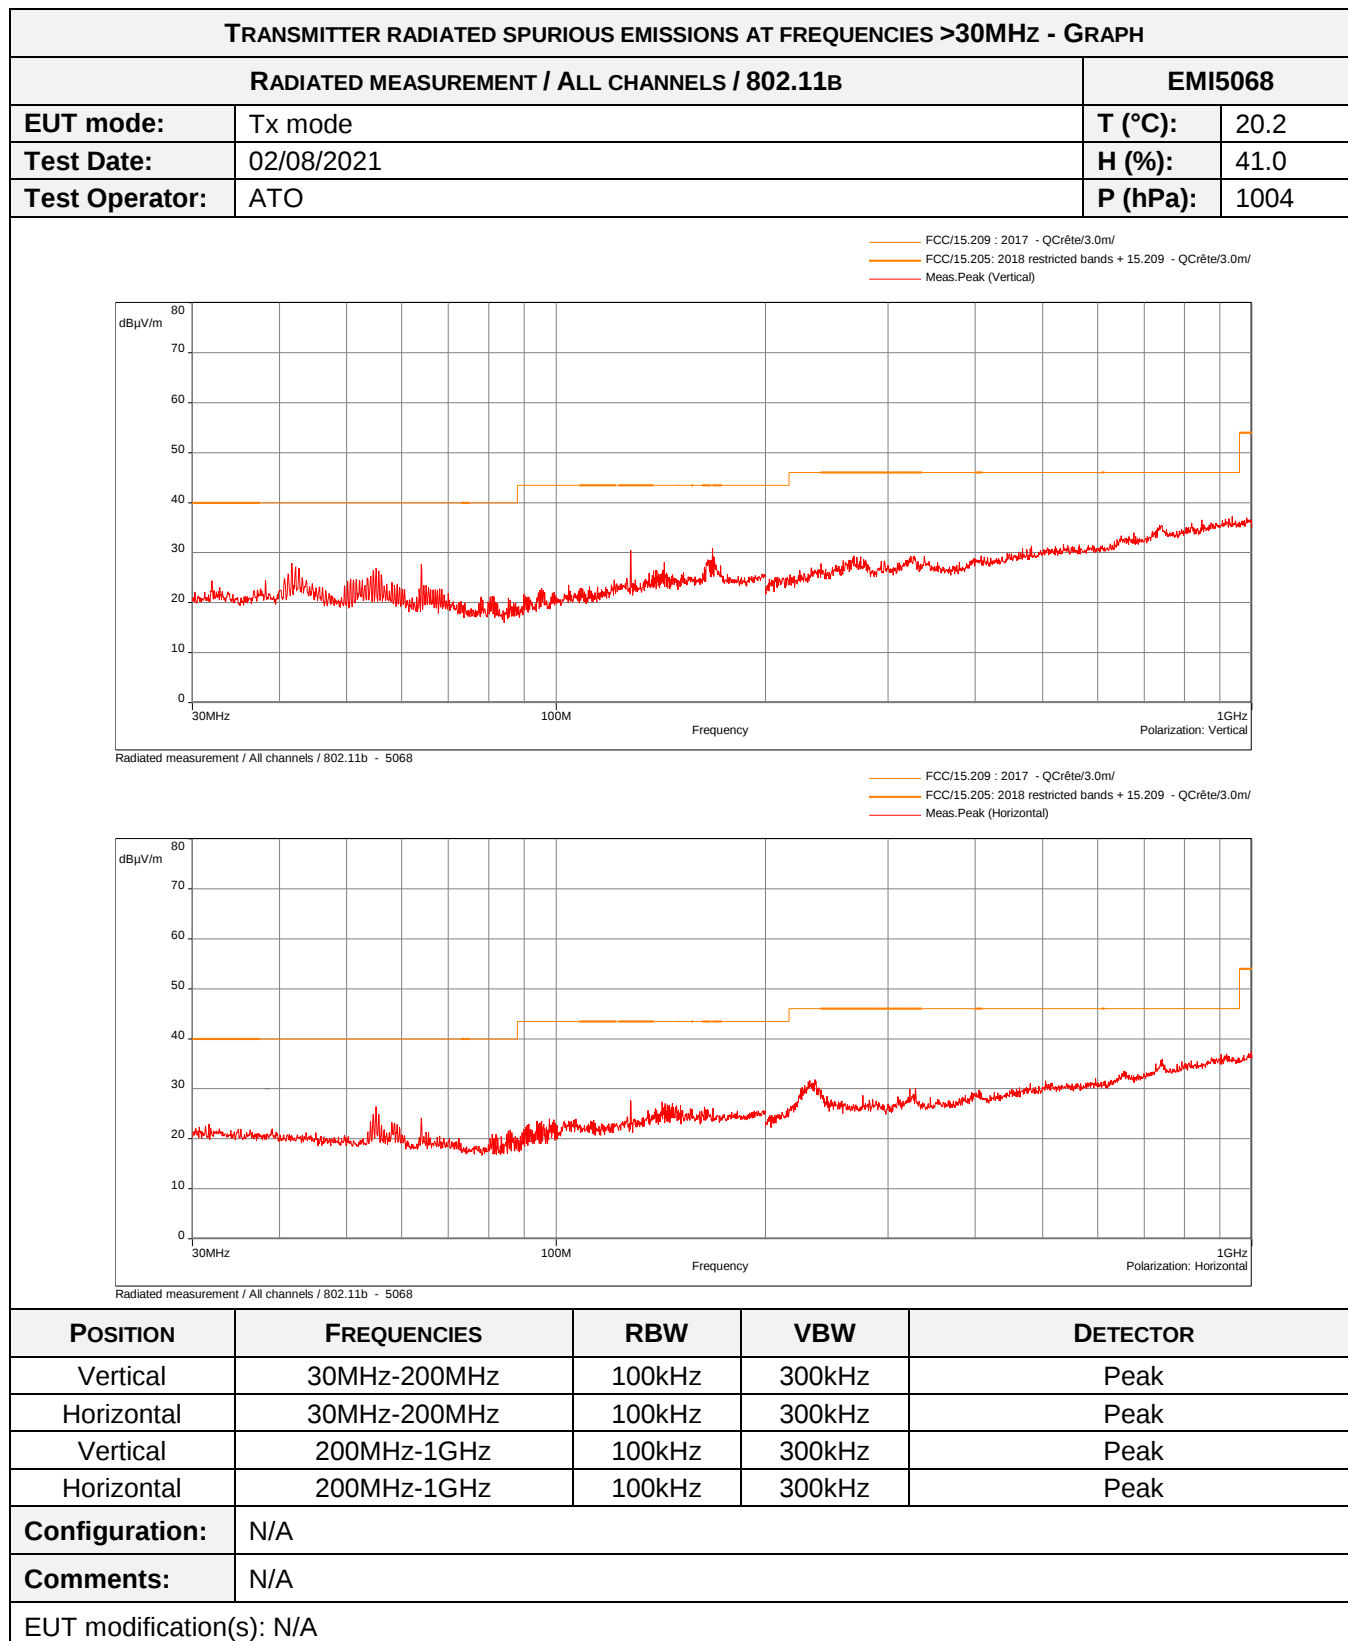


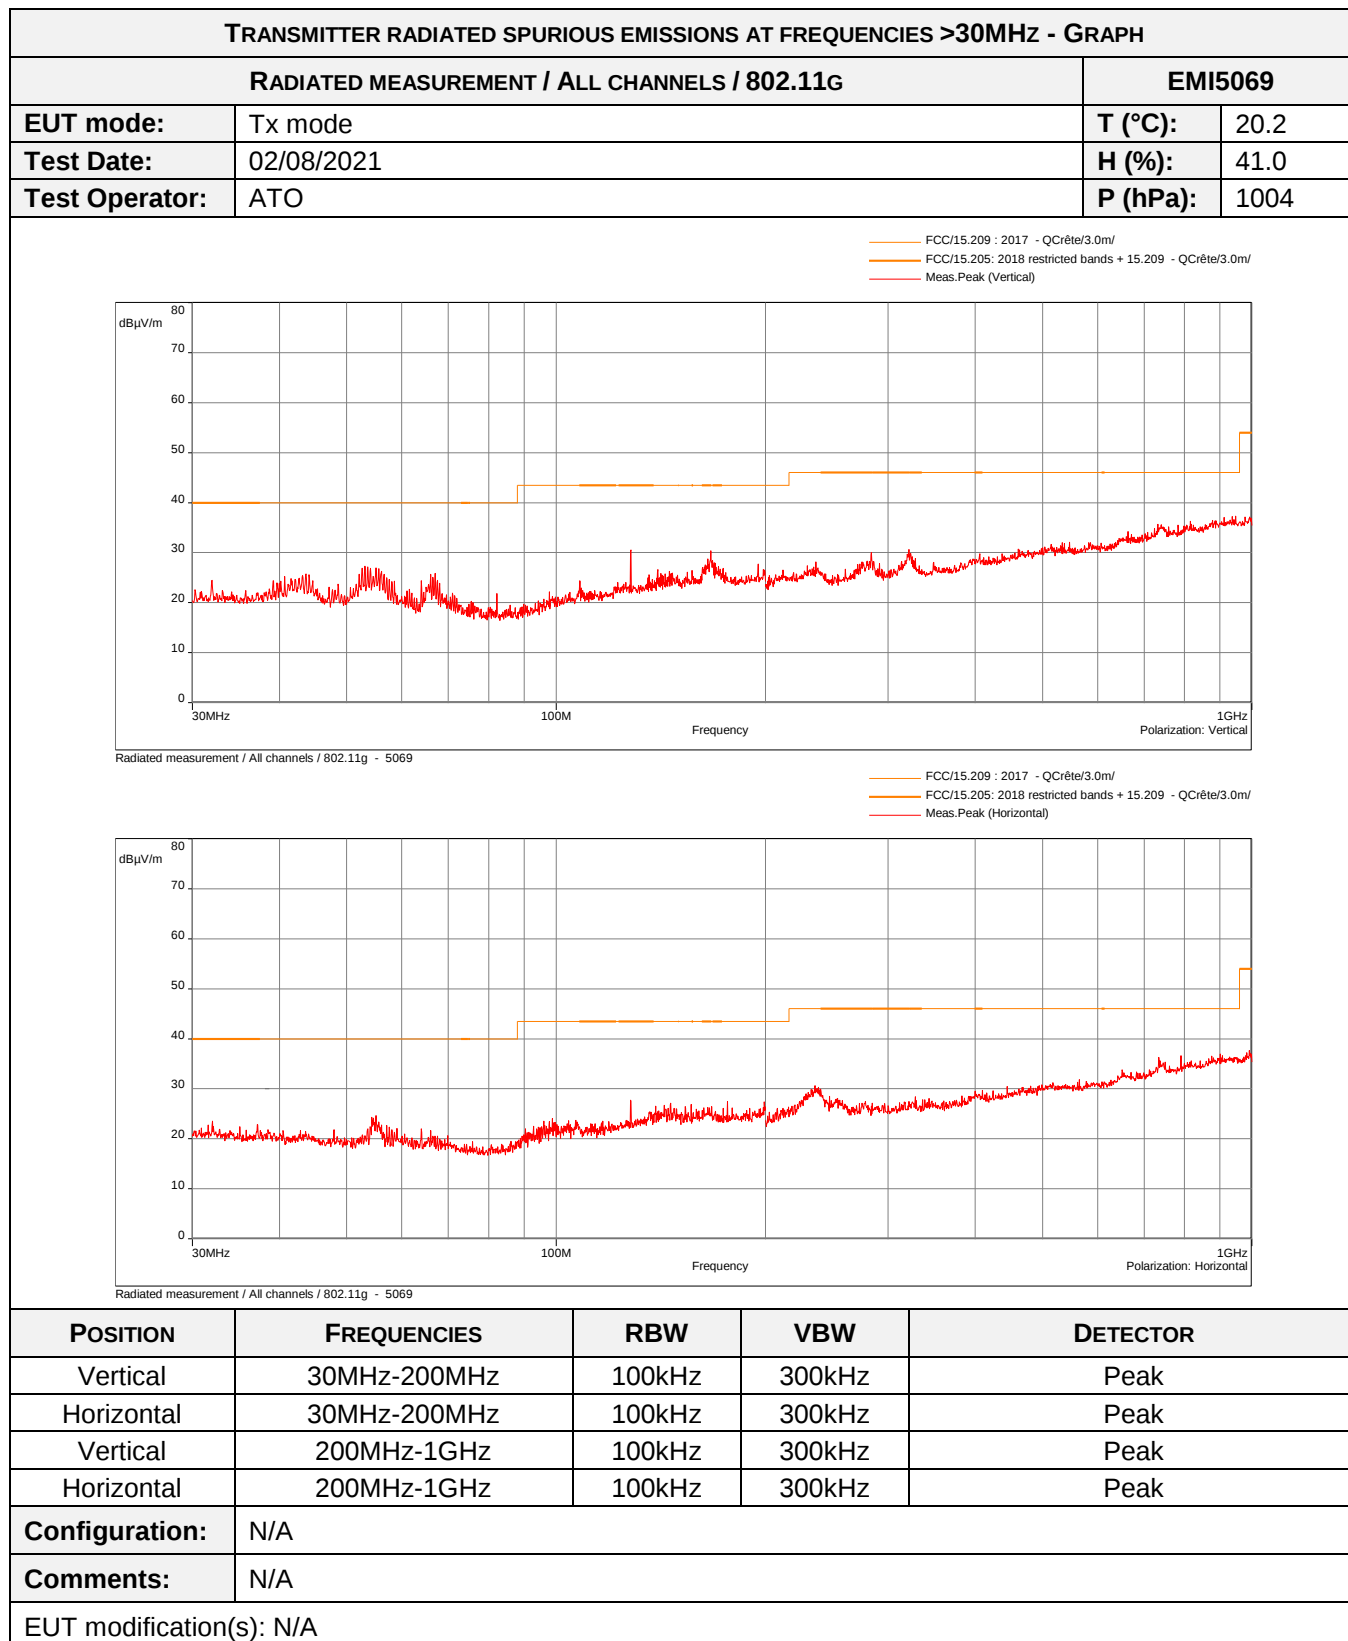


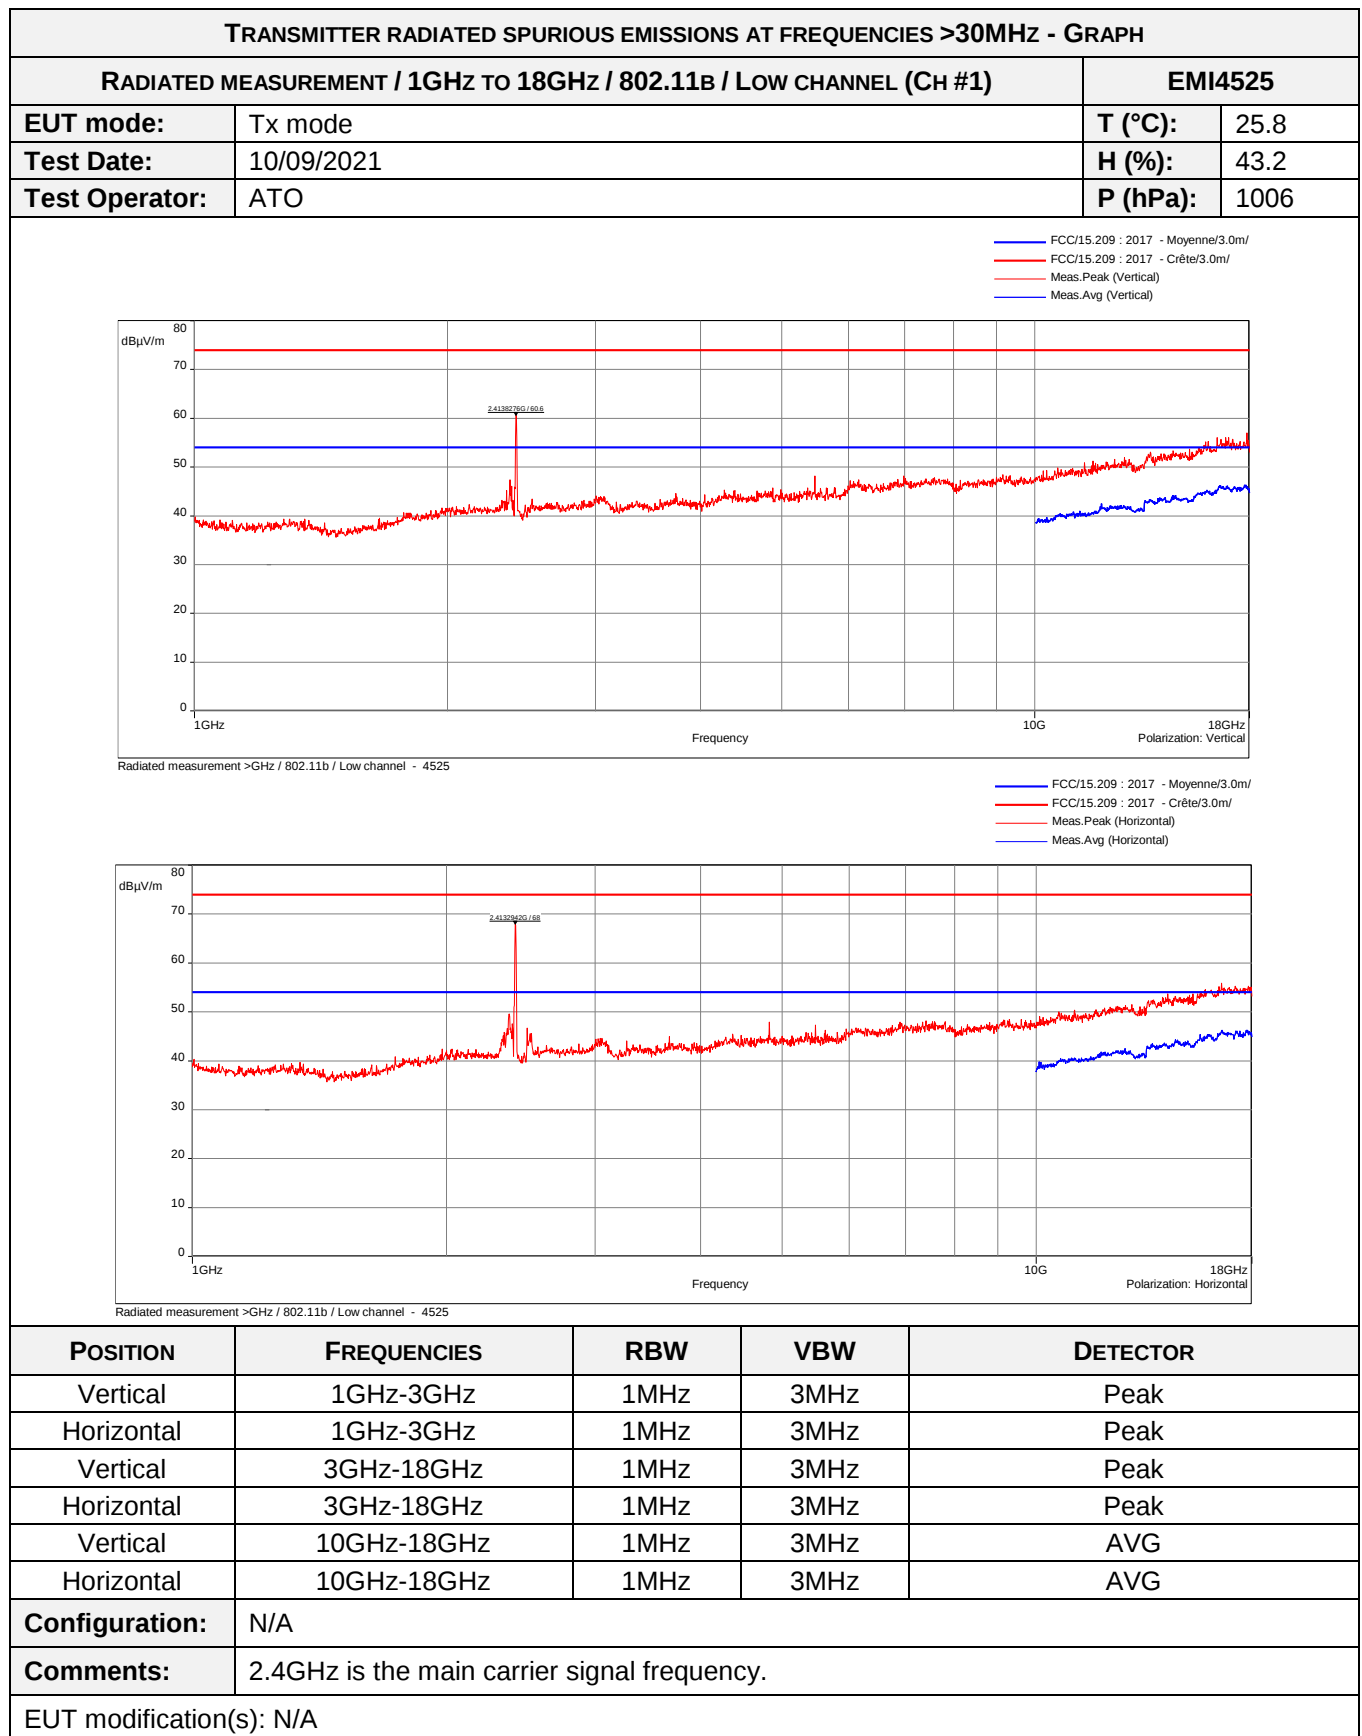


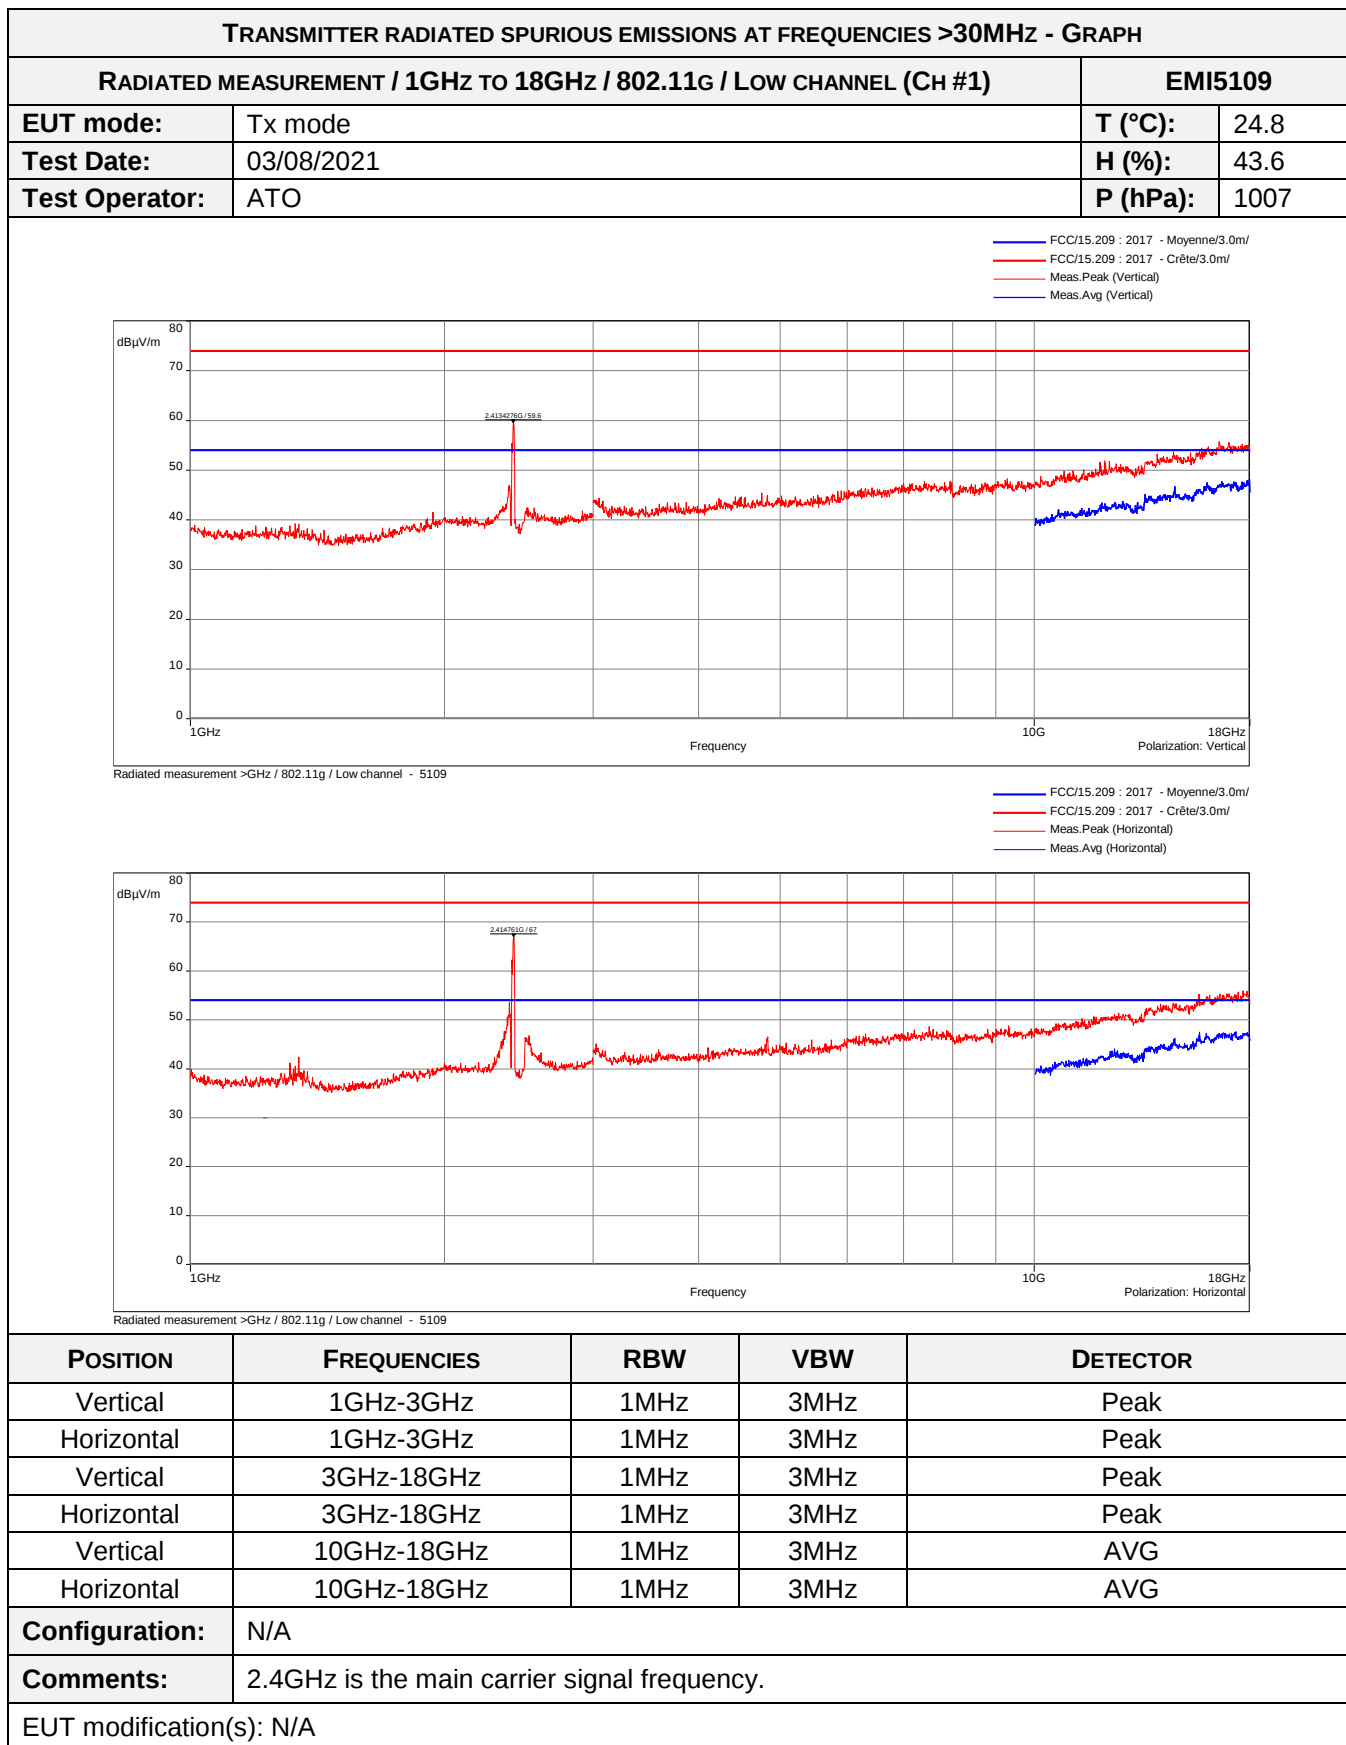


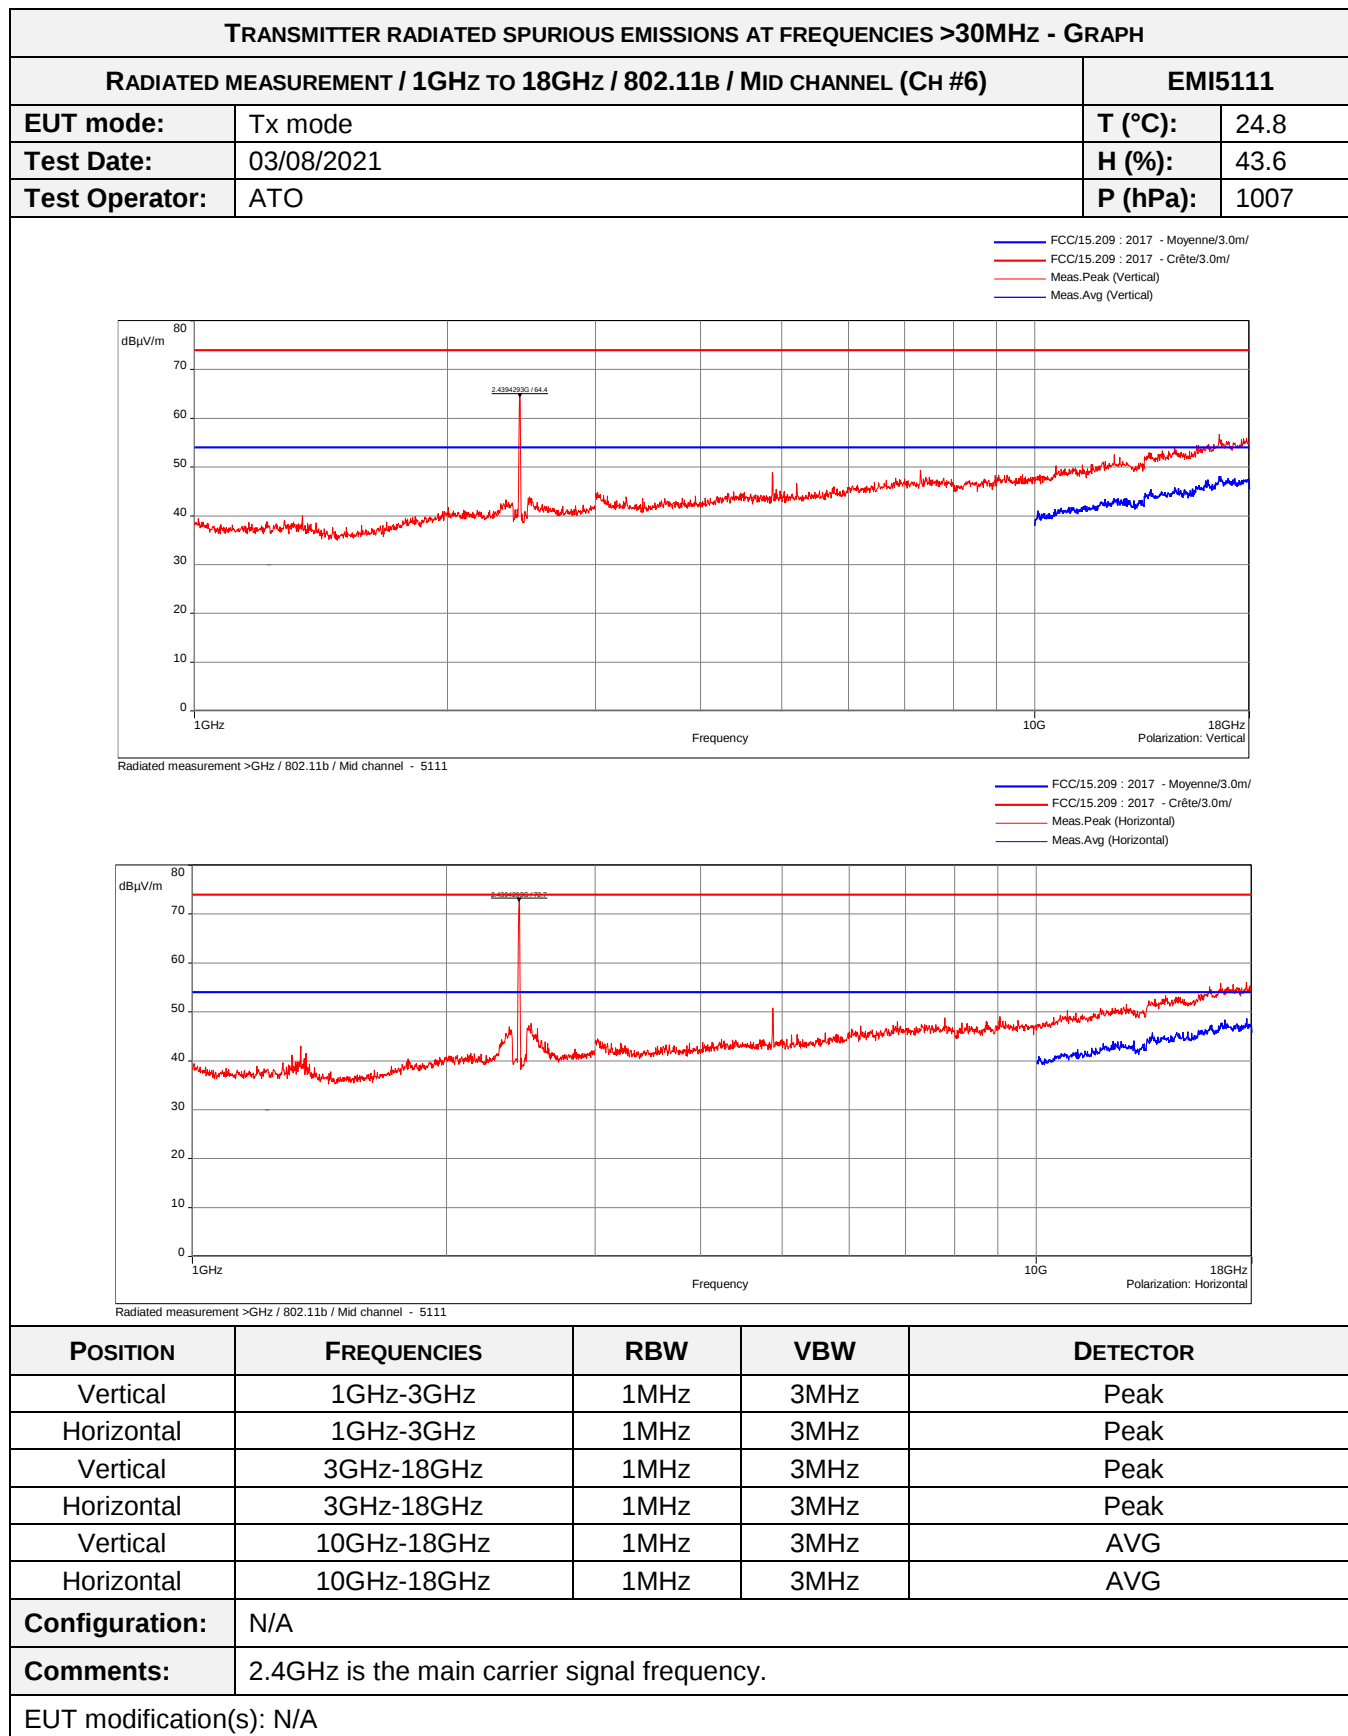


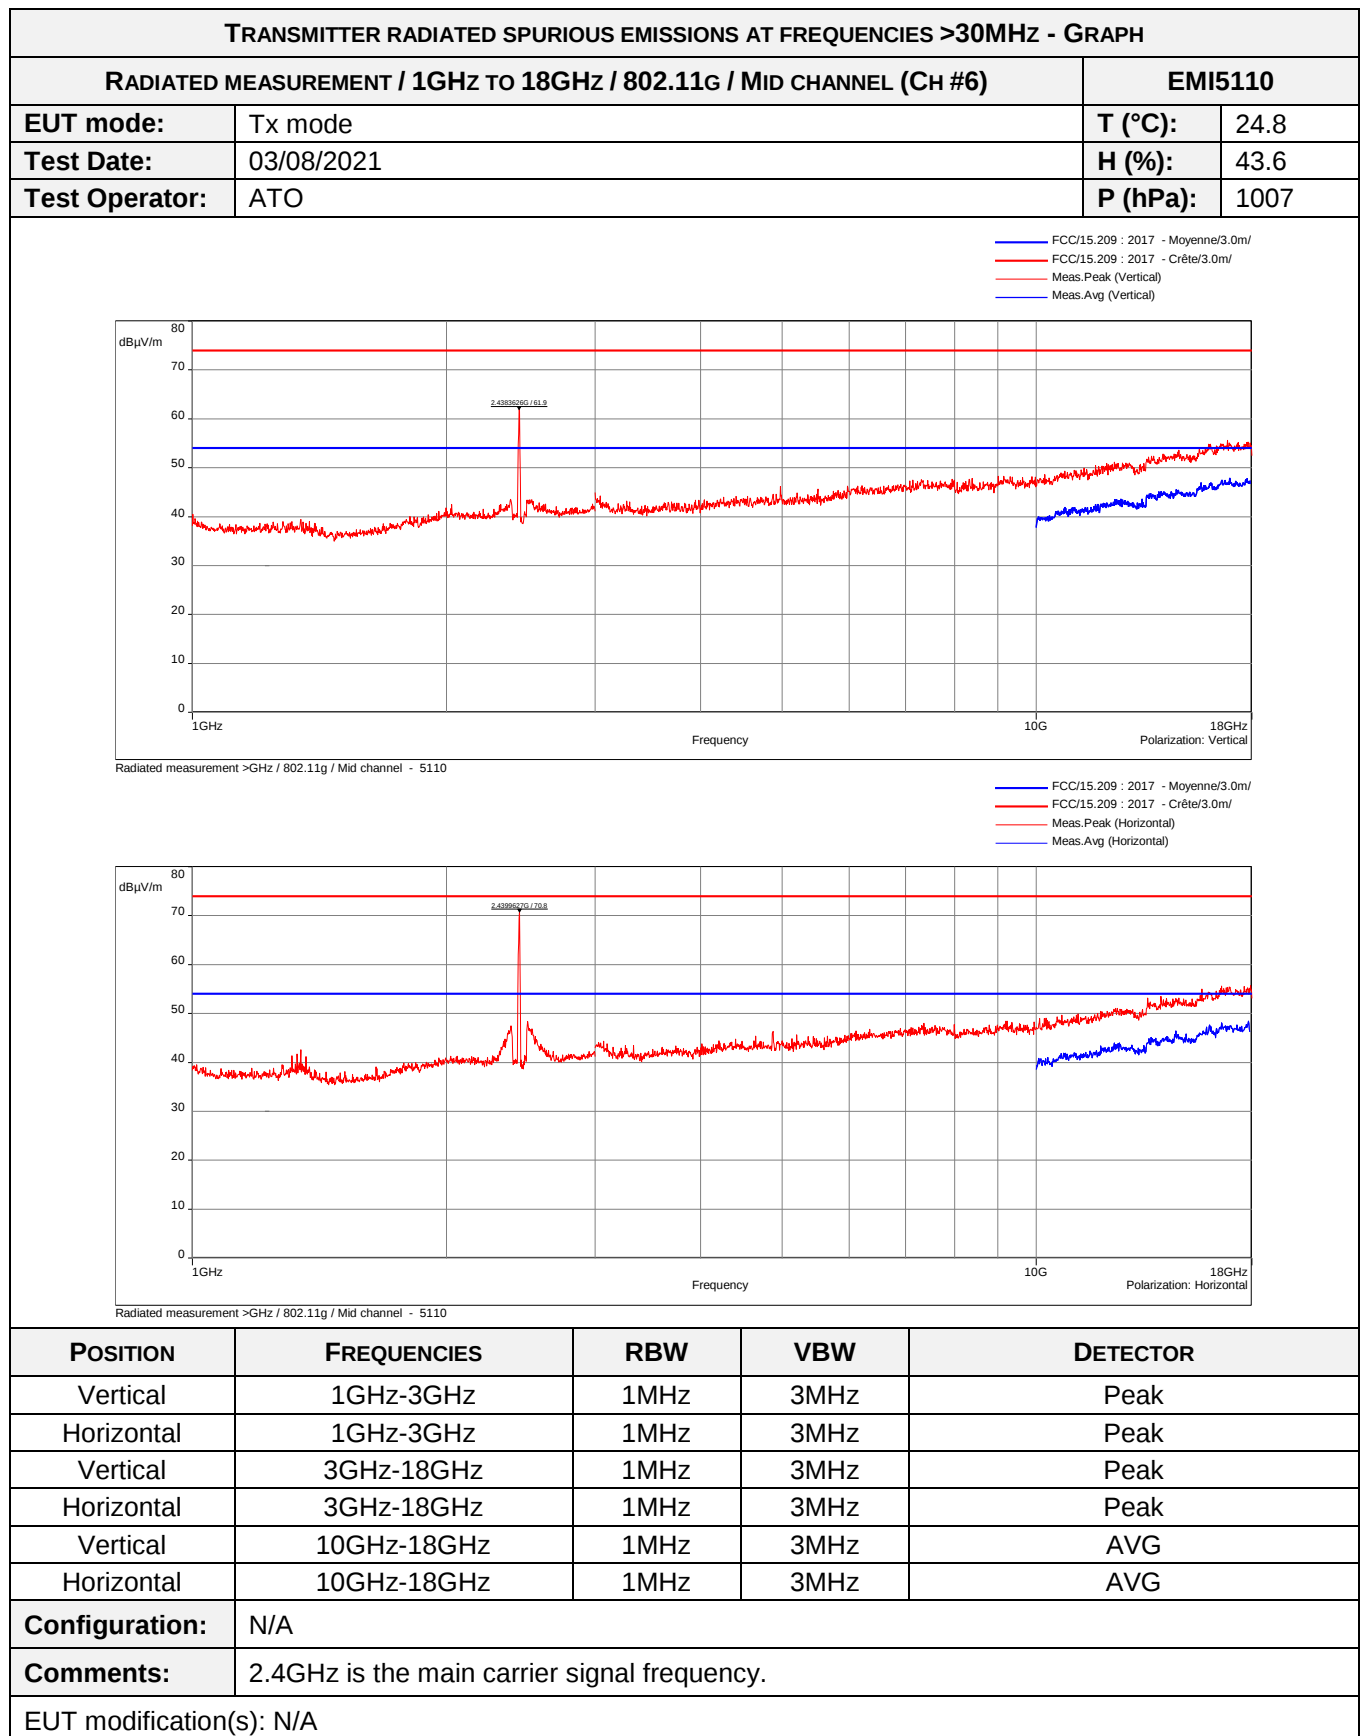


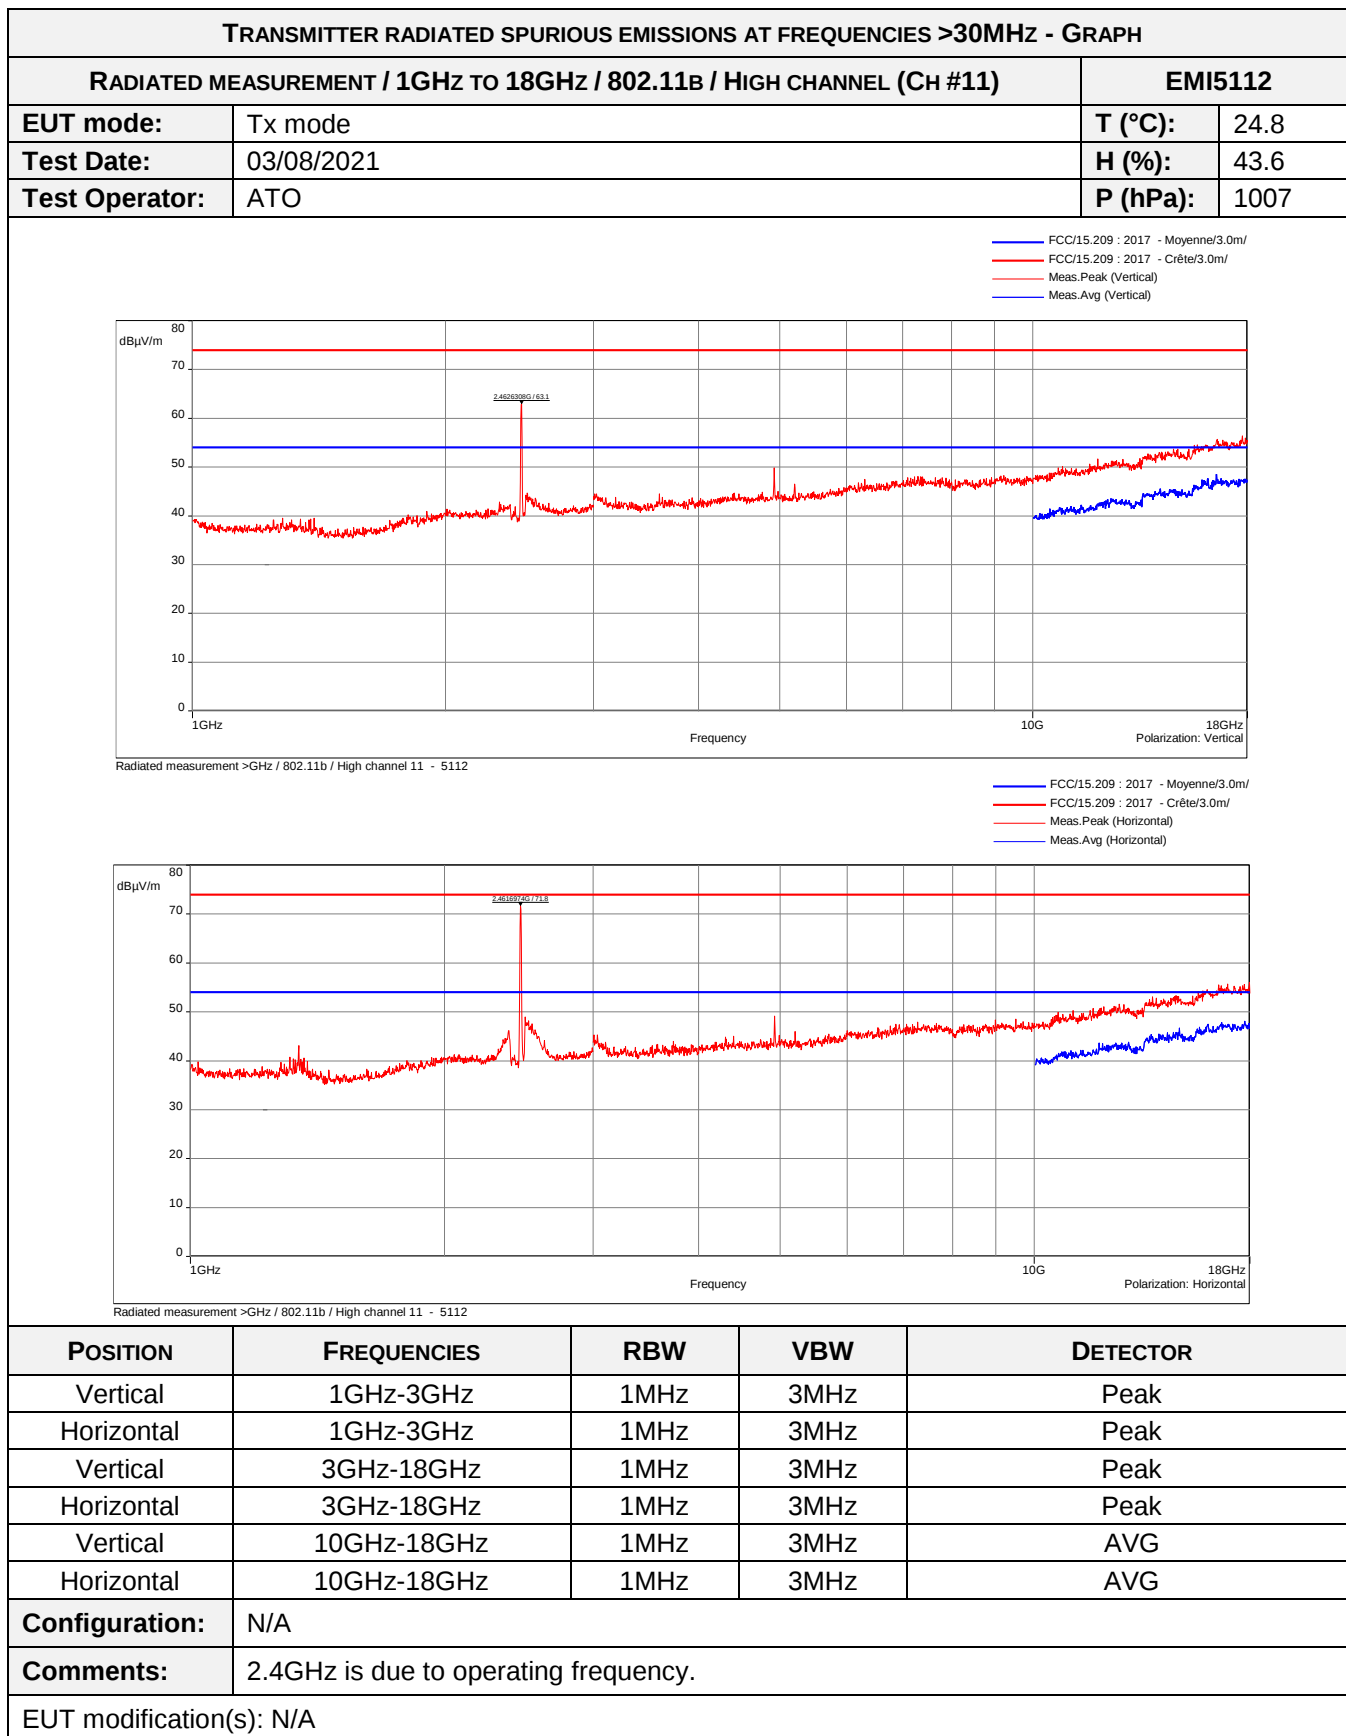


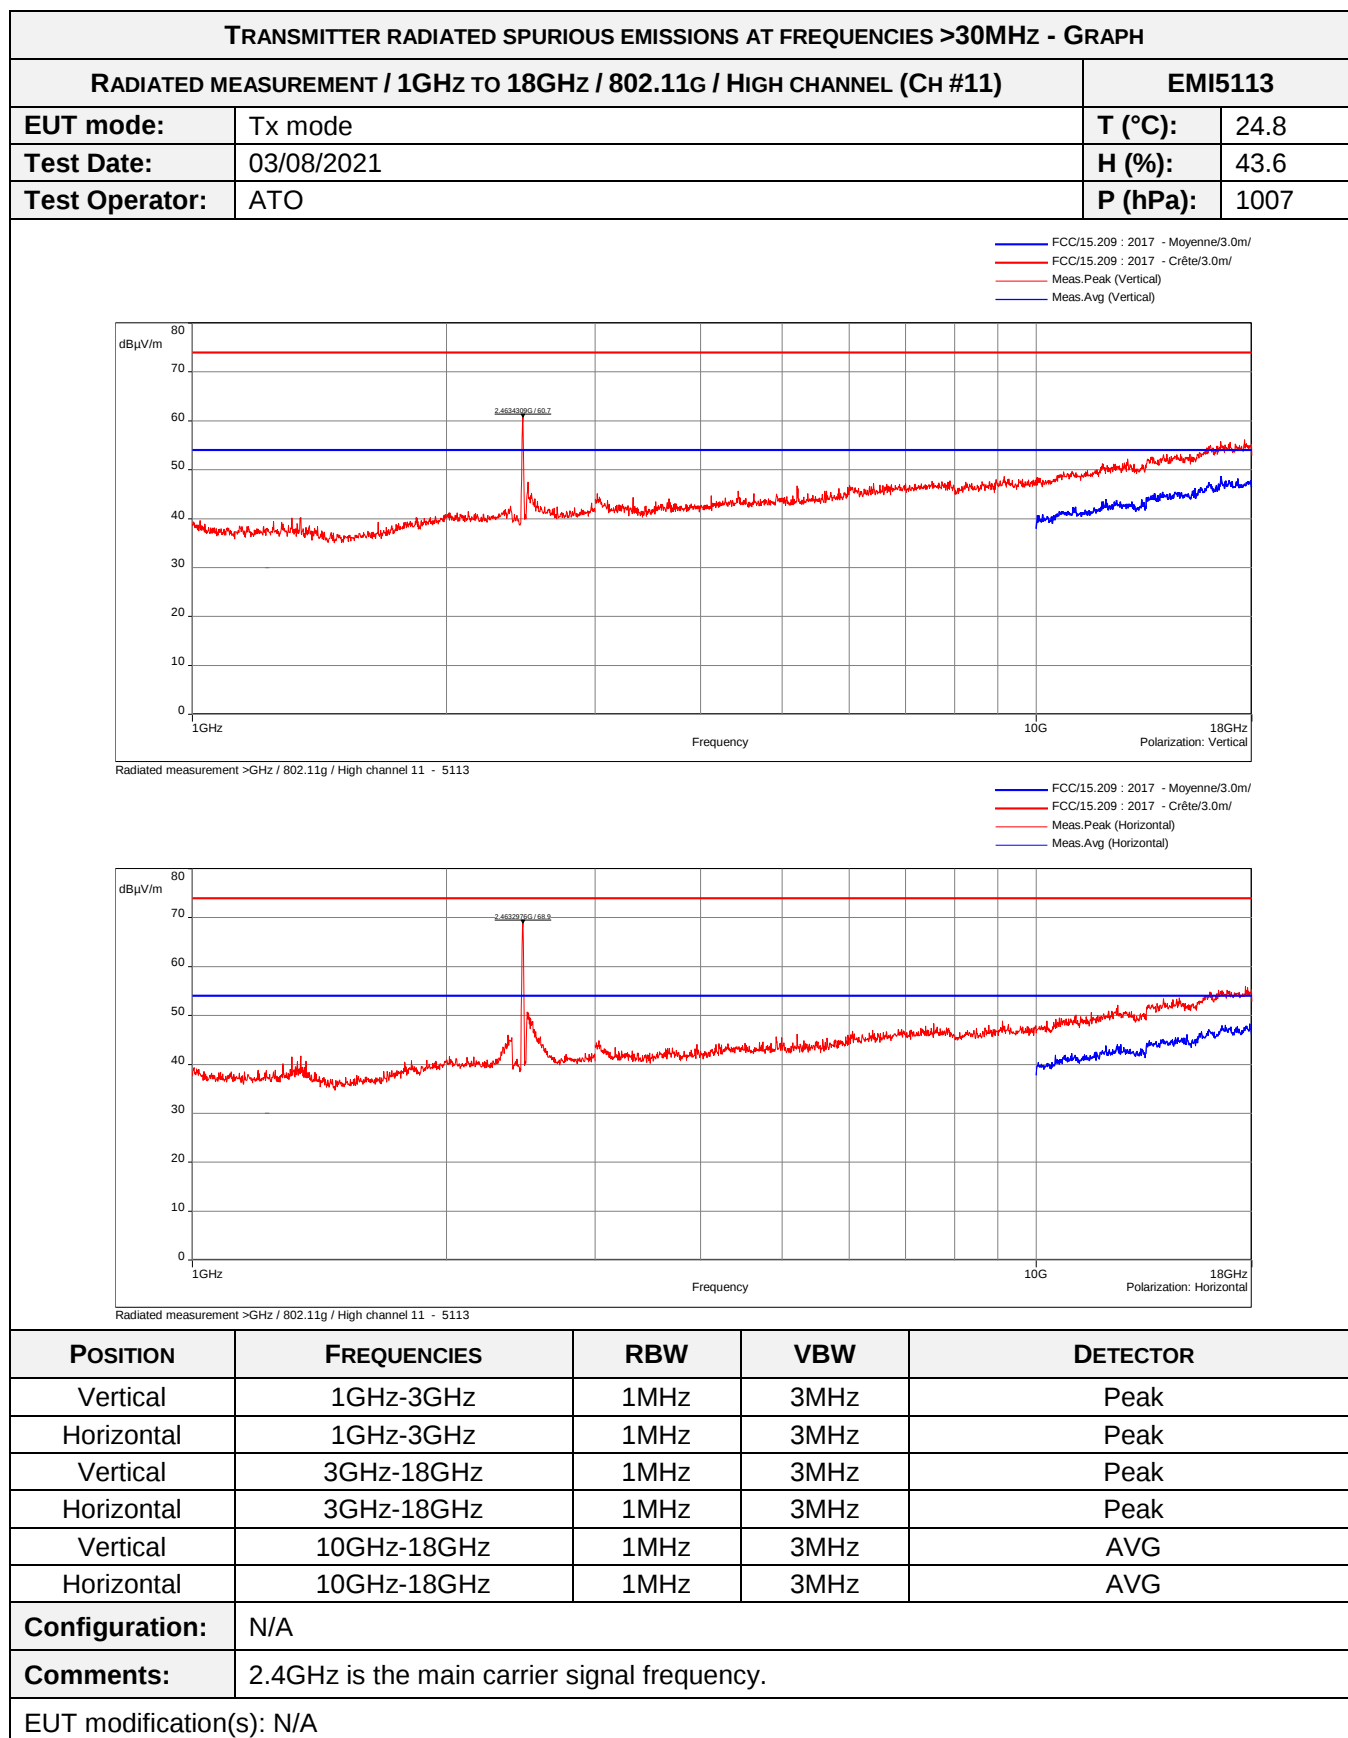


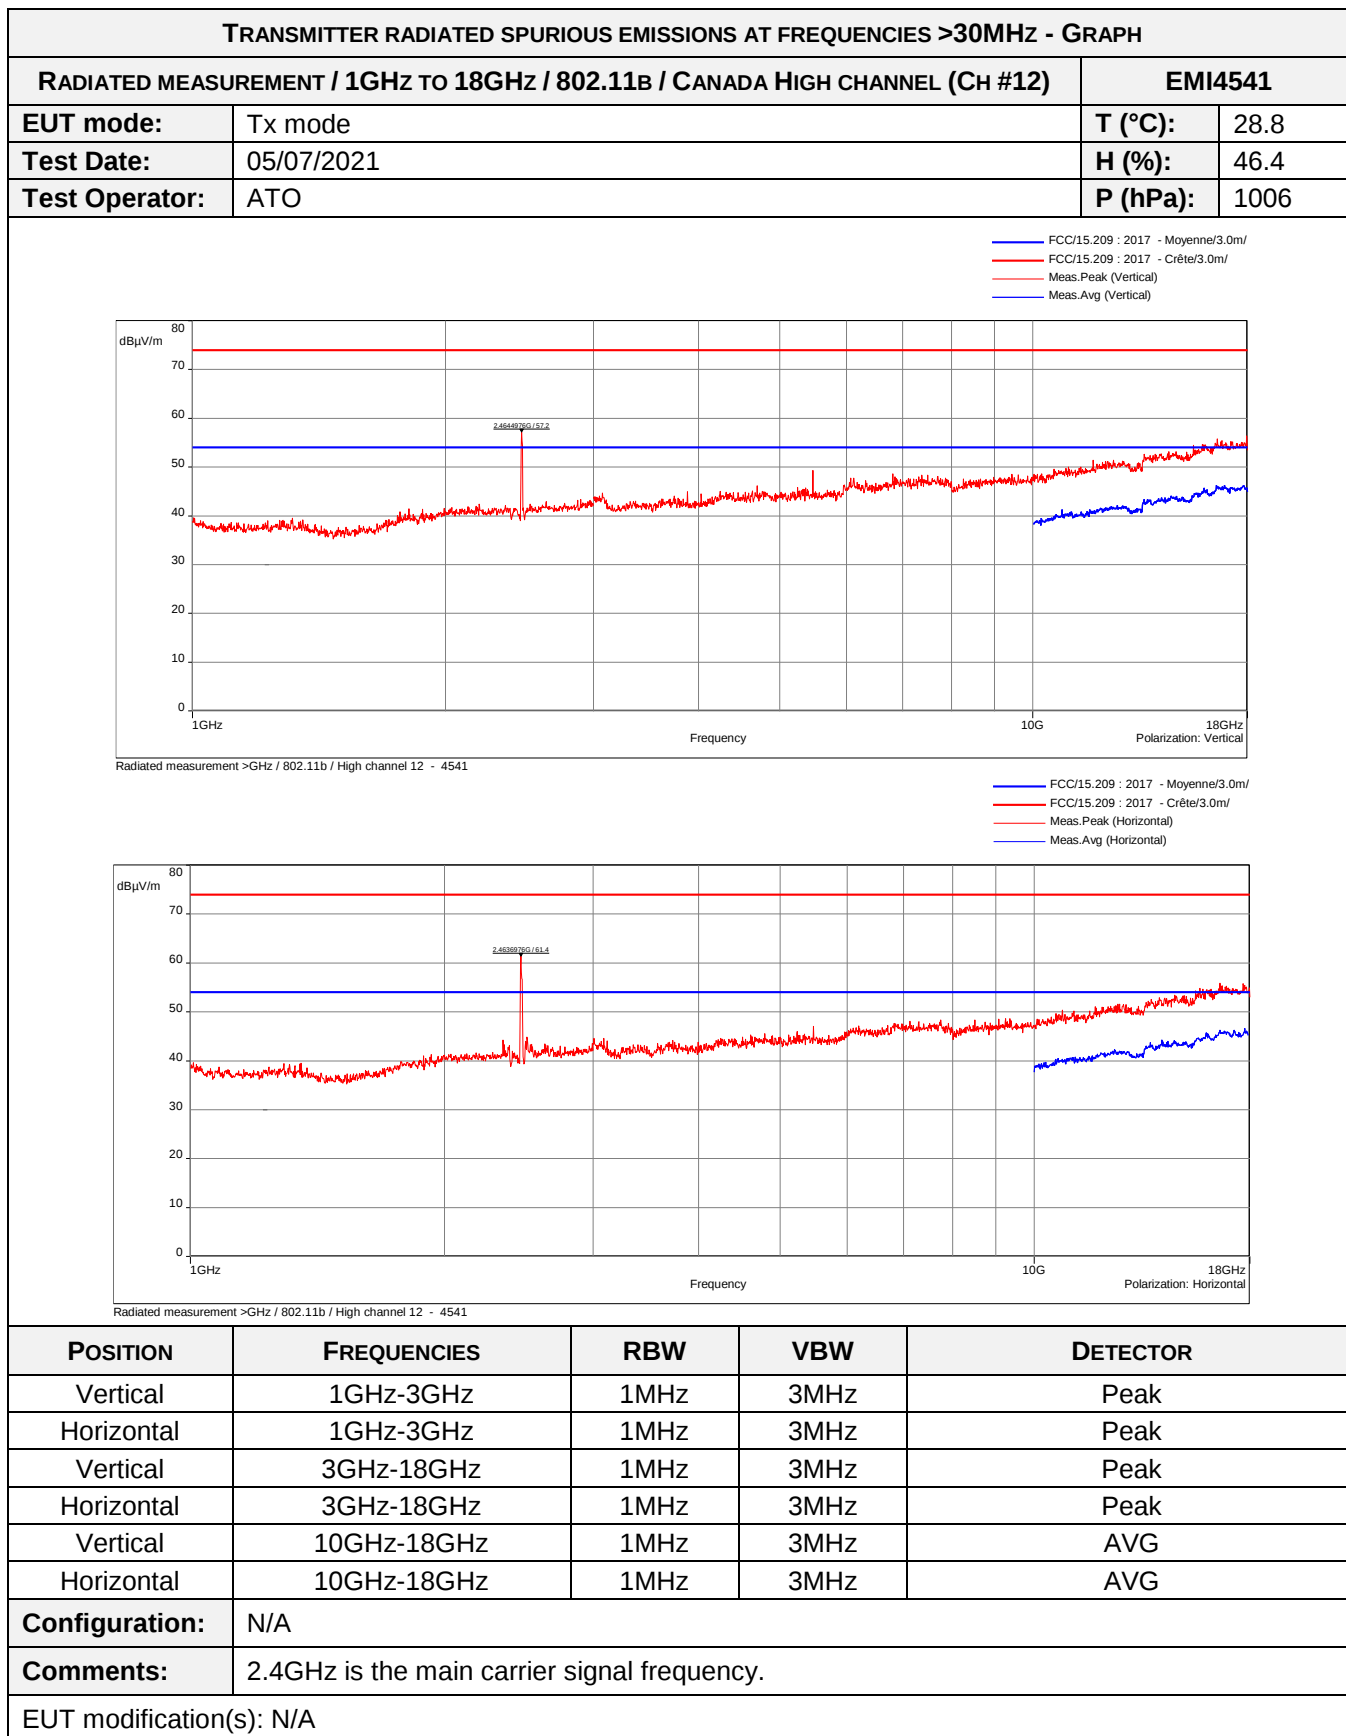


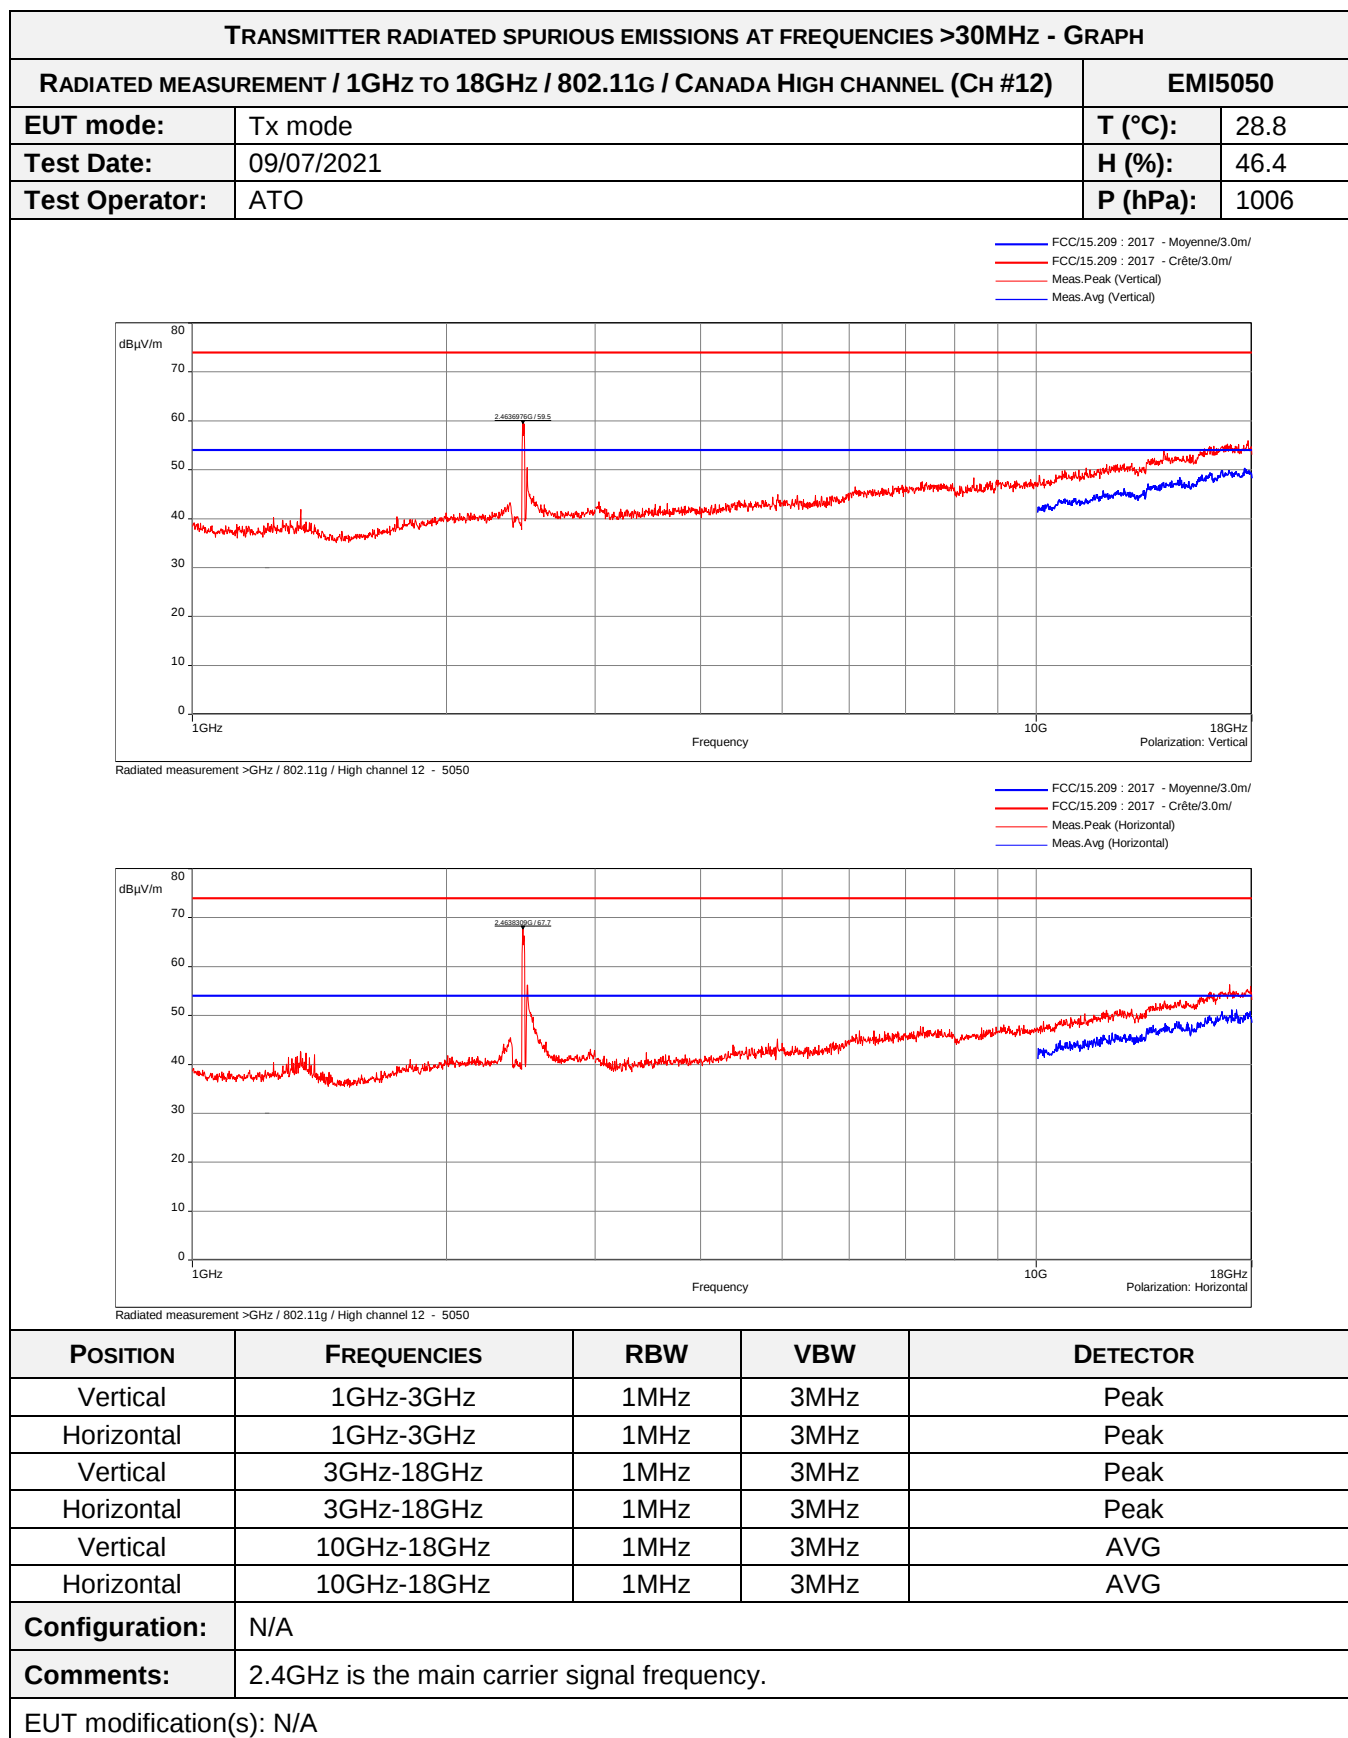


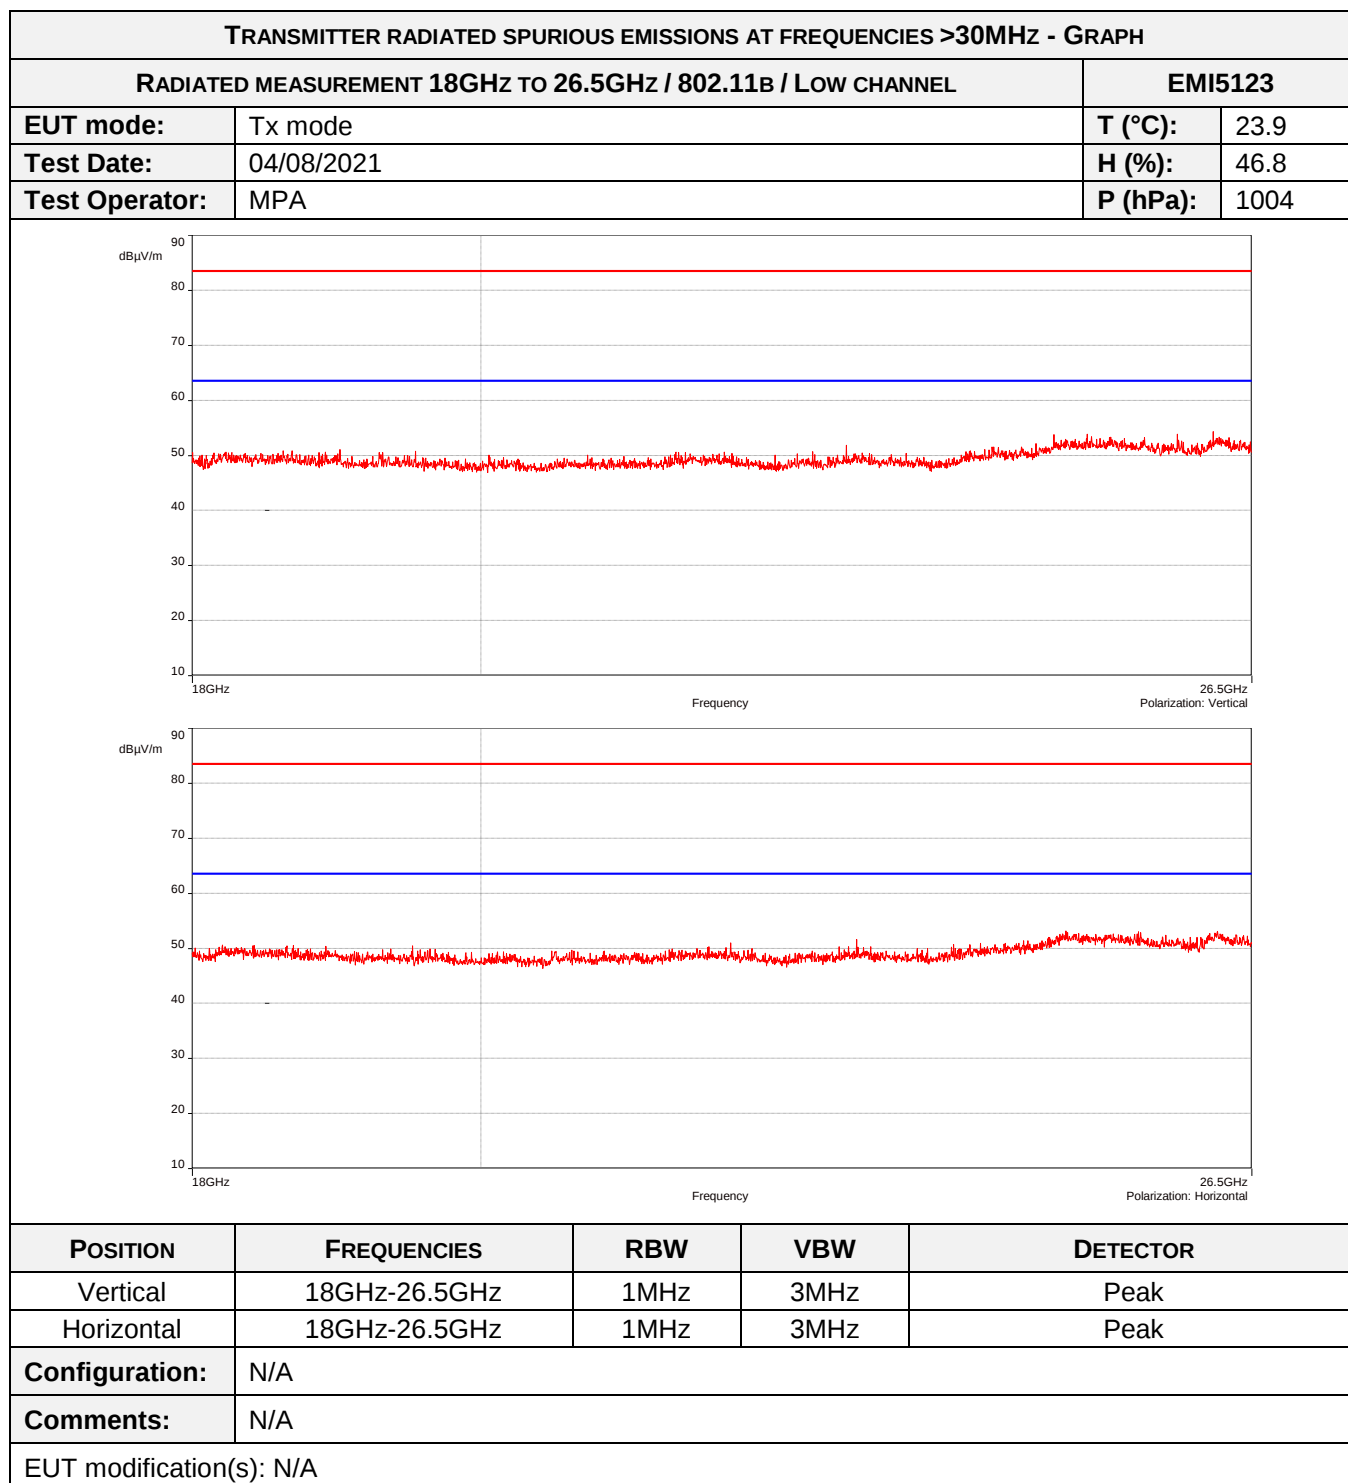

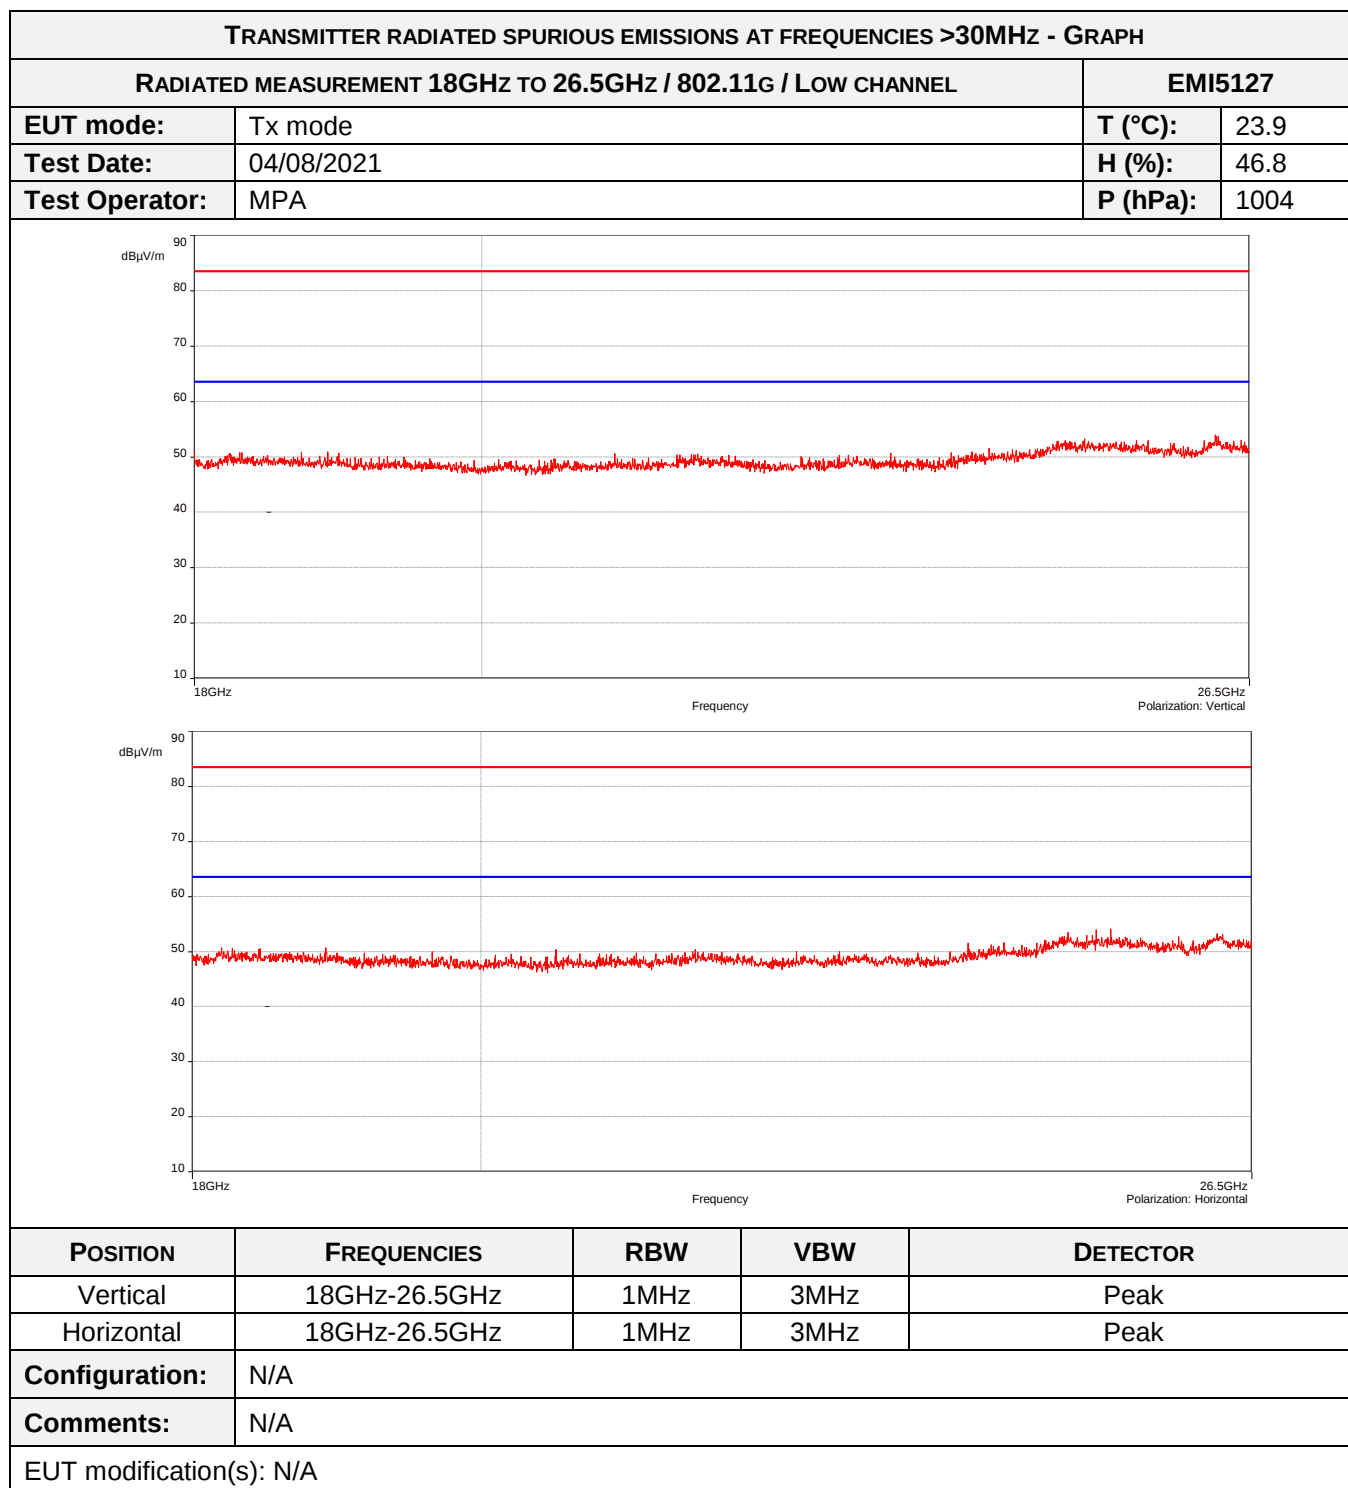


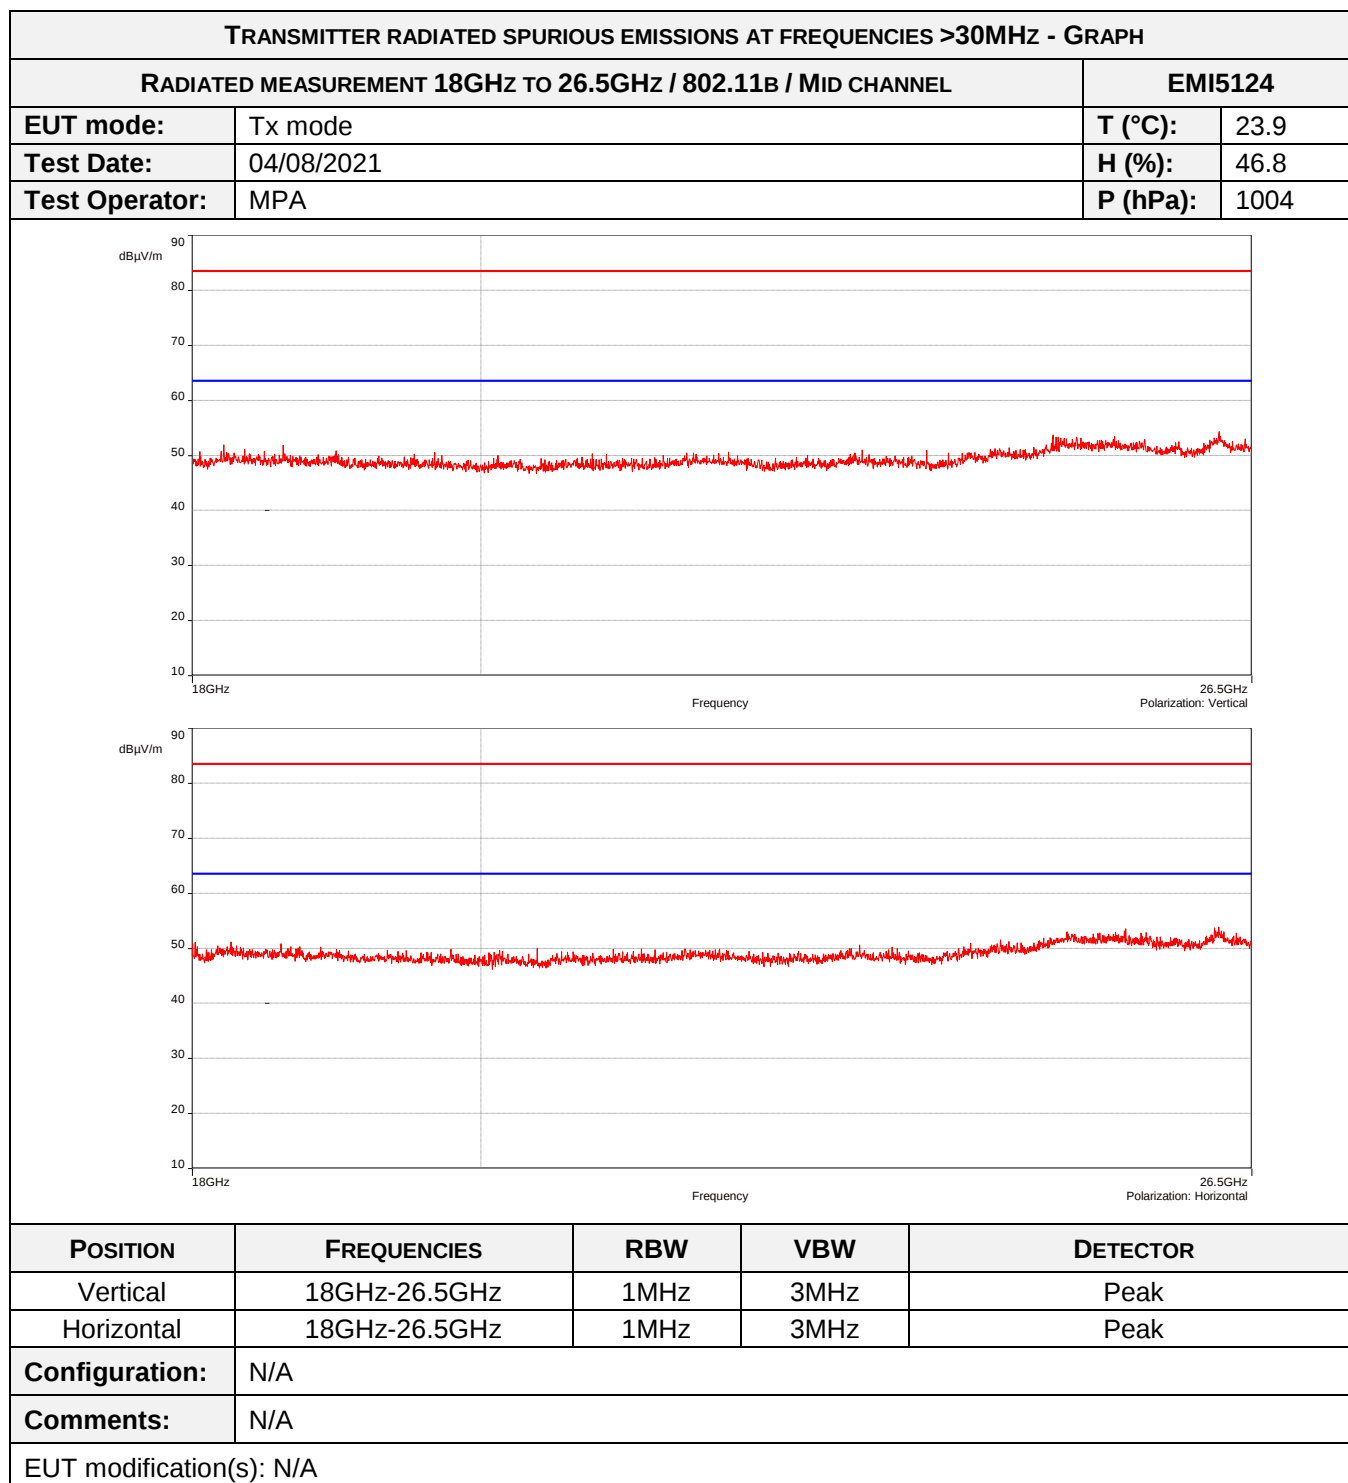

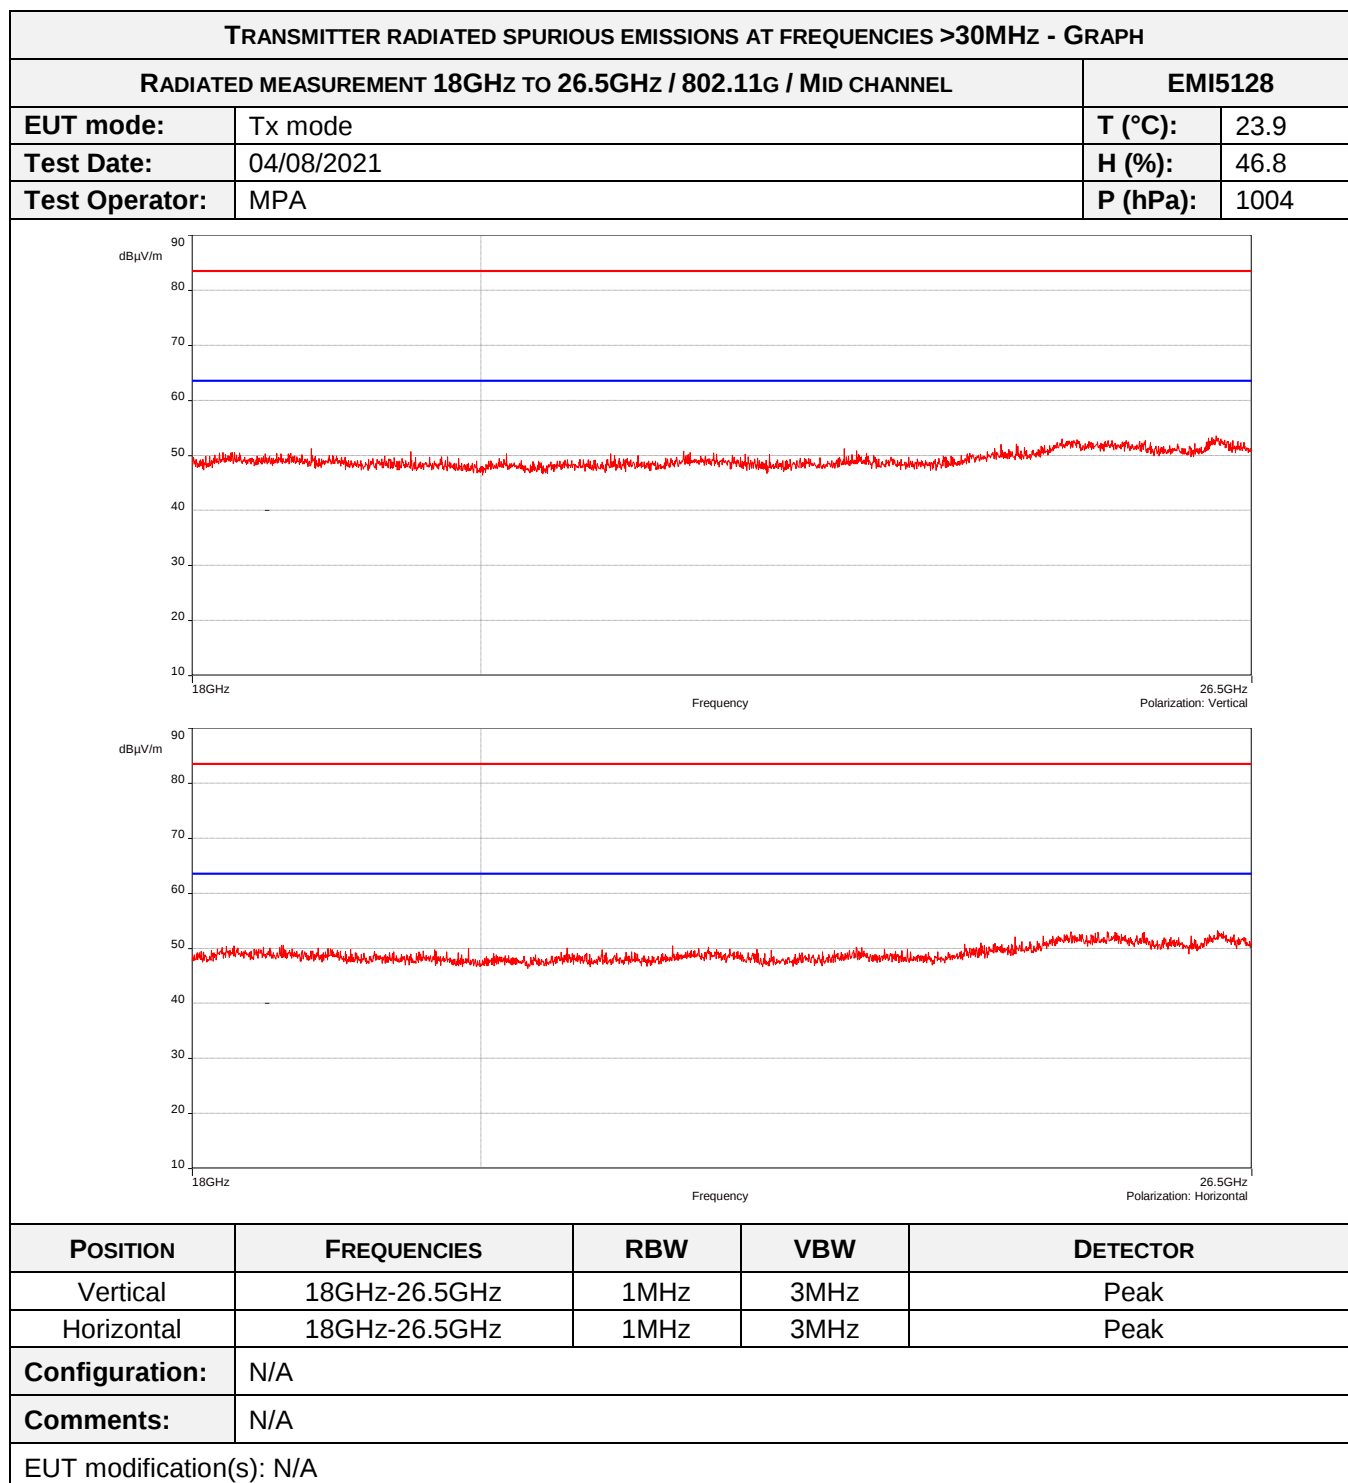


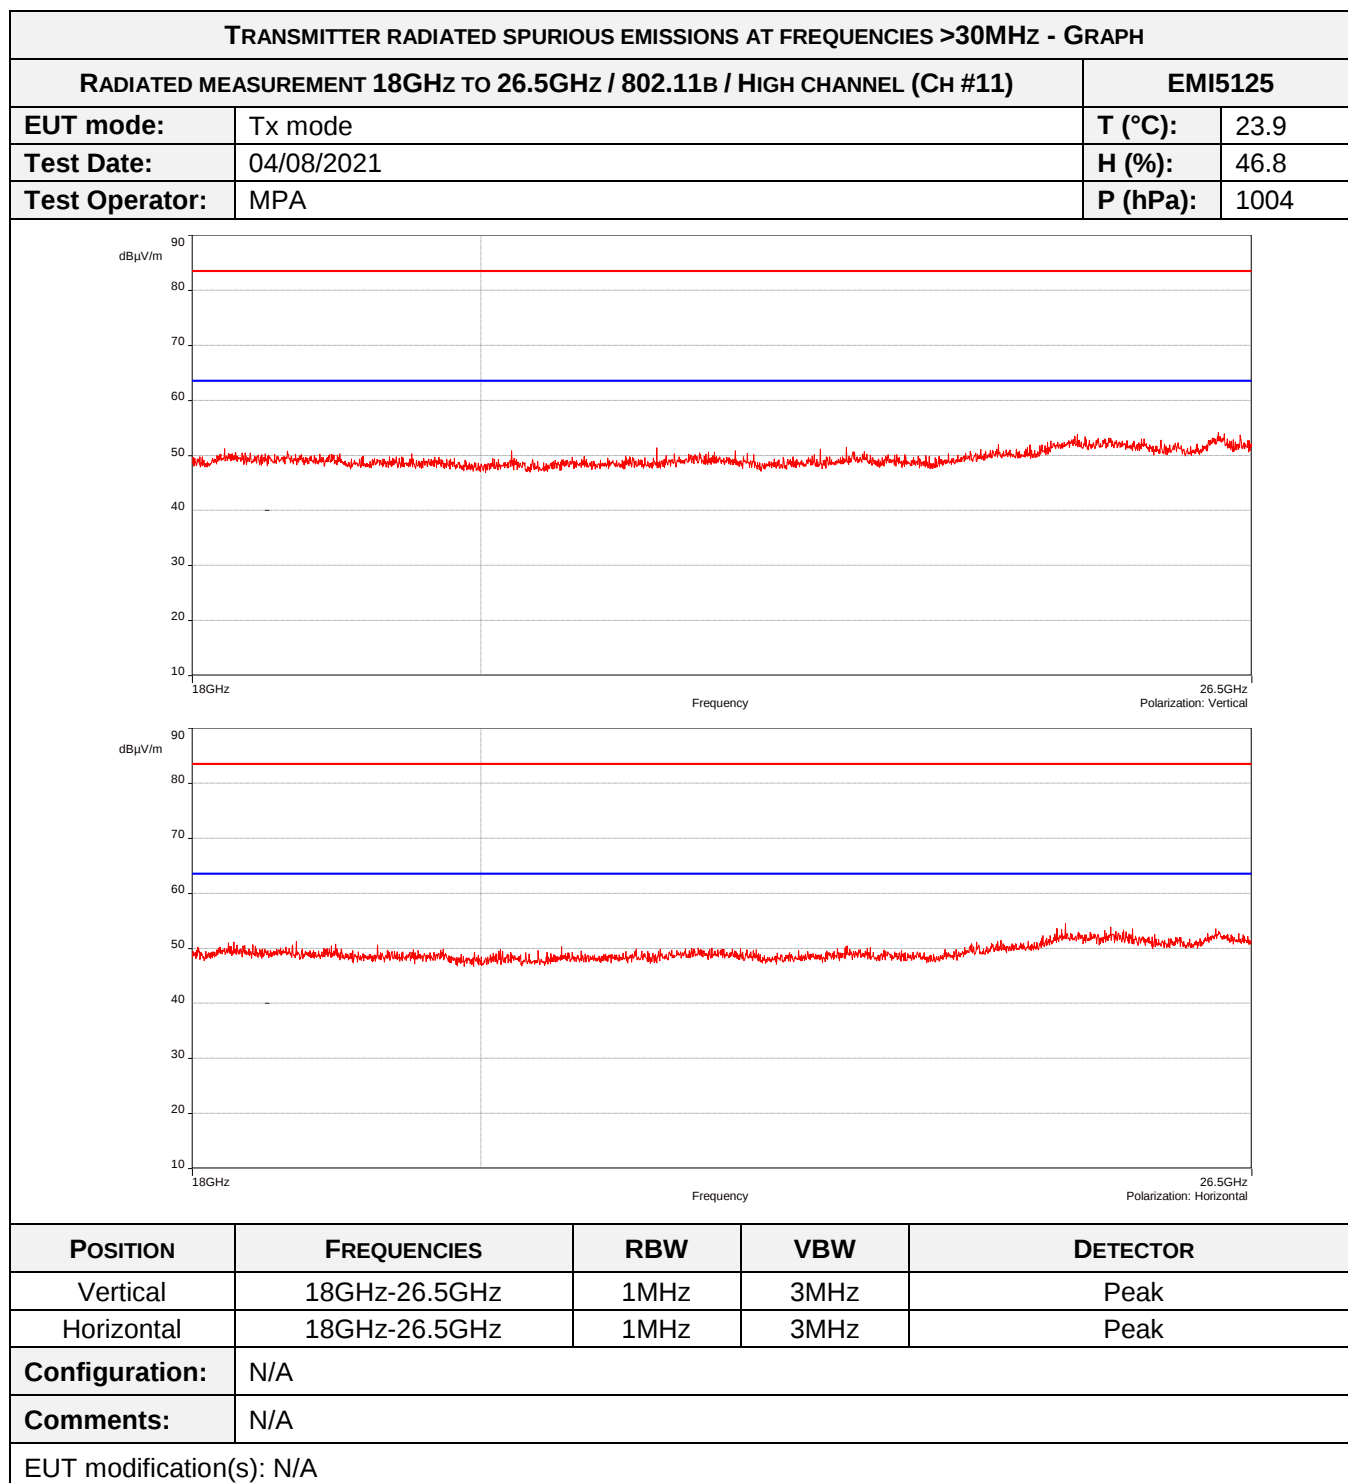



TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - GRAPH				
RADIATED MEASUREMENT 18GHz TO 26.5GHz / 802.11G / HIGH CHANNEL (CH #11)			EMI5129	
EUT mode:	Tx mode		T (°C):	23.9
Test Date:	04/08/2021		H (%):	46.8
Test Operator:	MPA		P (hPa):	1004
</				

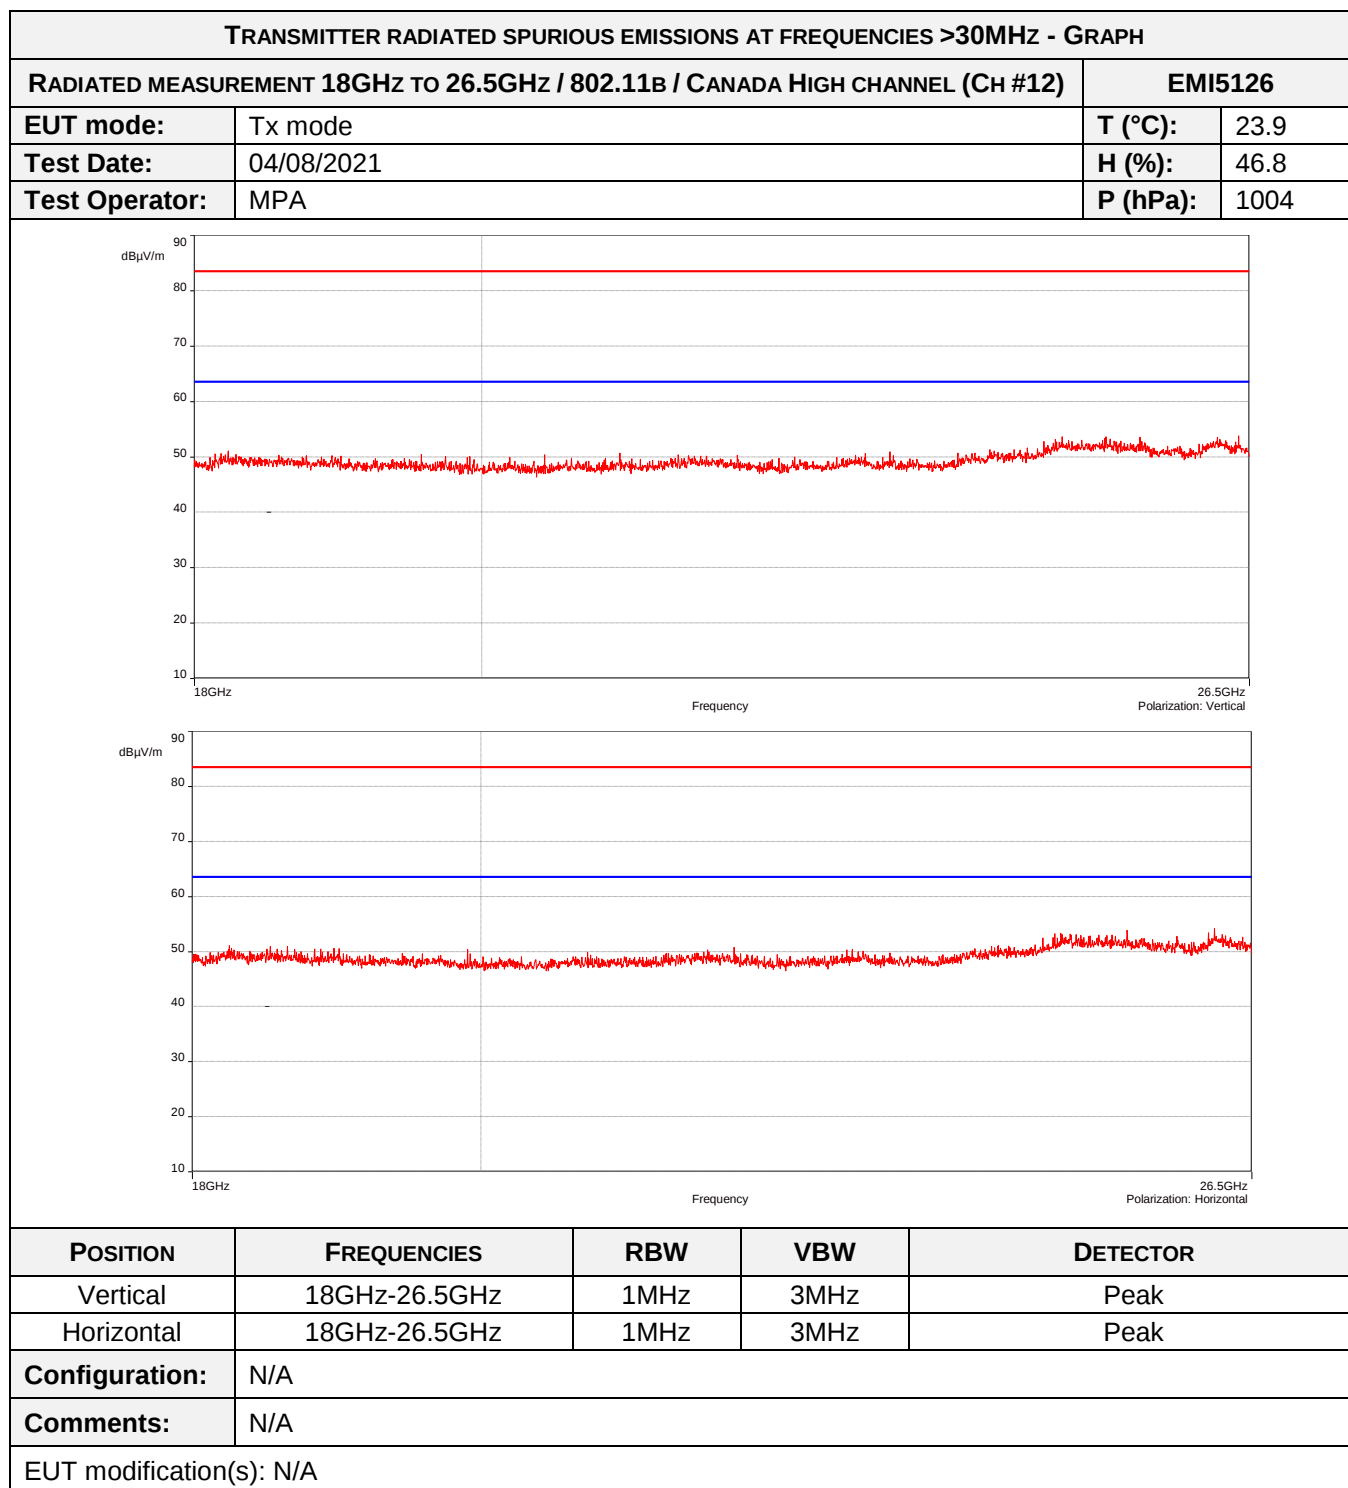


TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - GRAPH				
RADIATED MEASUREMENT 18GHz TO 26.5GHz / 802.11G / CANADA HIGH CHANNEL (CH #12)			EMI5130	
EUT mode:	Tx mode		T (°C):	23.9
Test Date:	04/08/2021		H (%):	46.8
Test Operator:	MPA		P (hPa):	1004

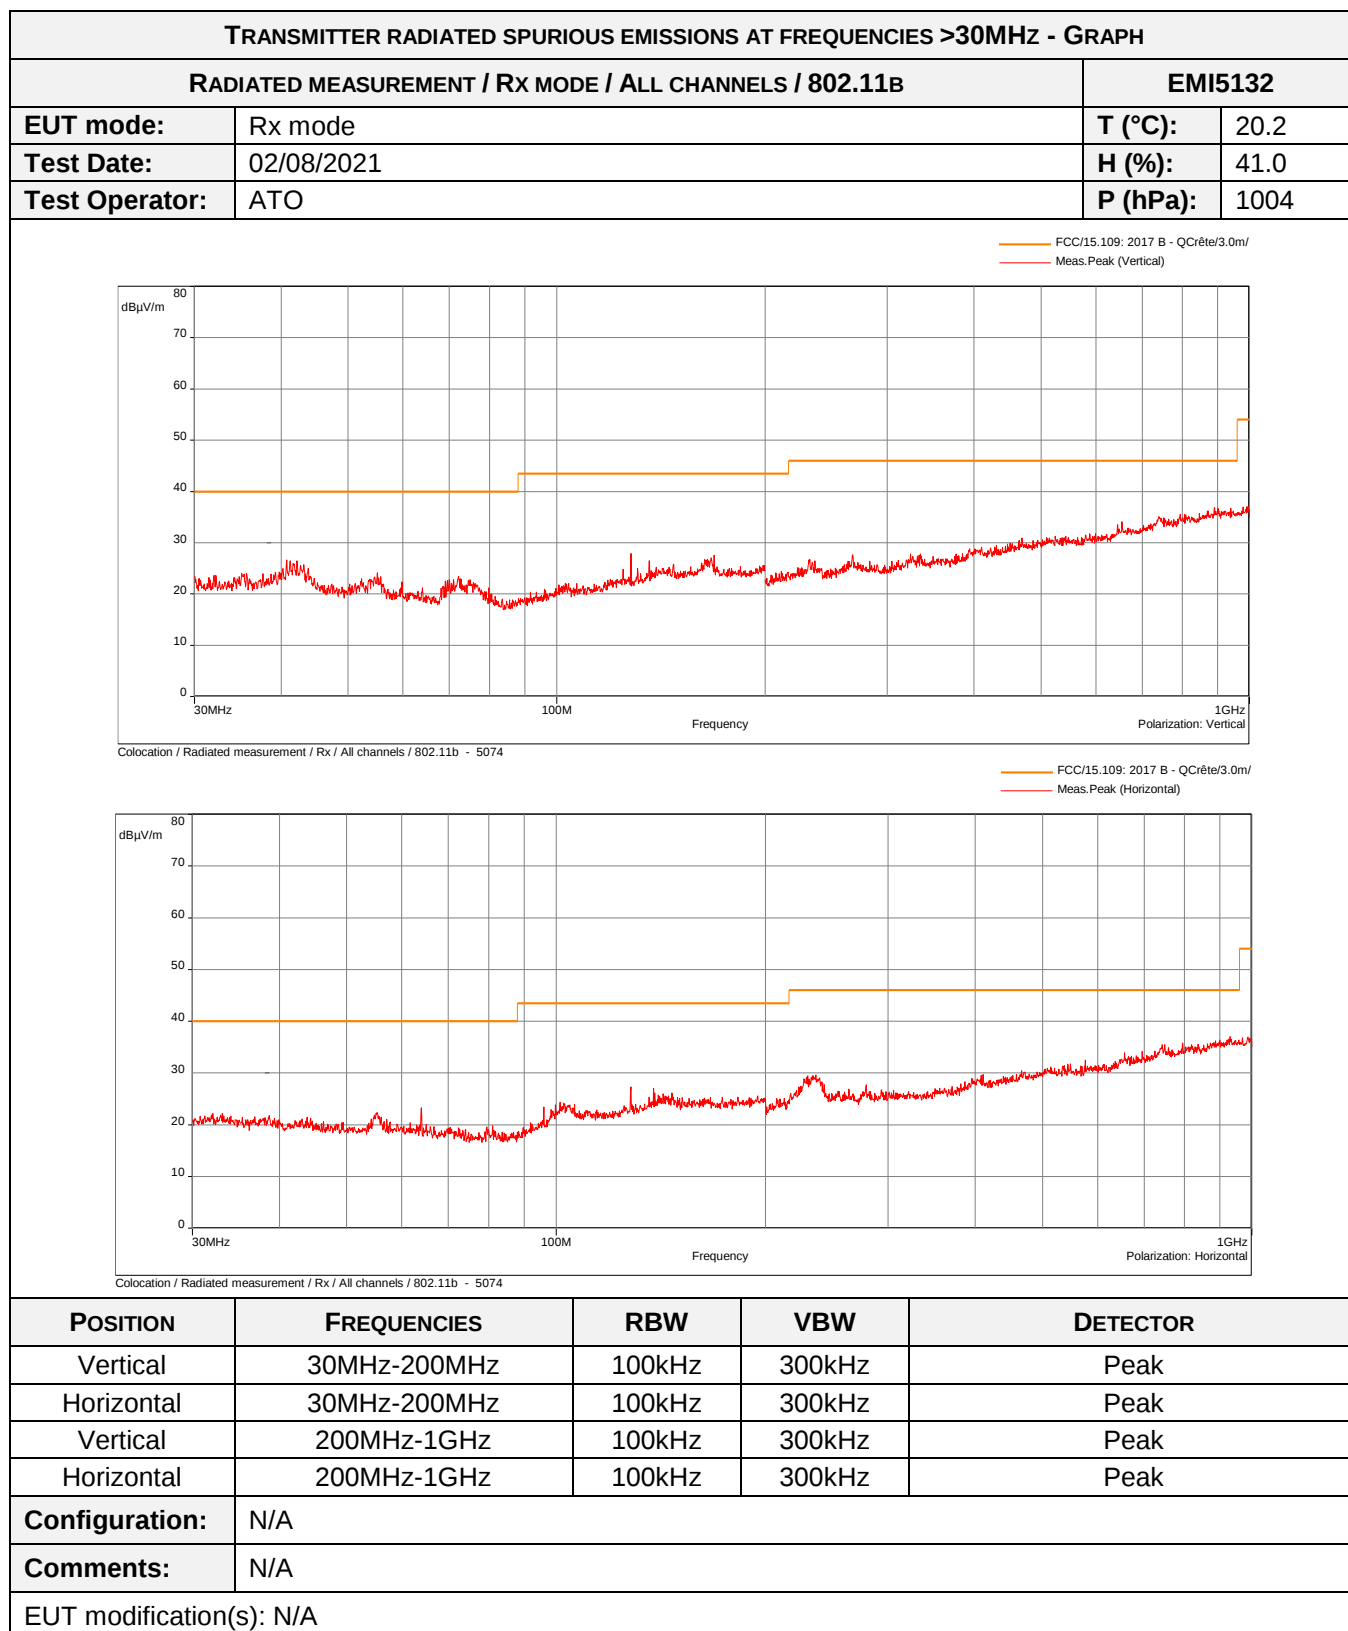

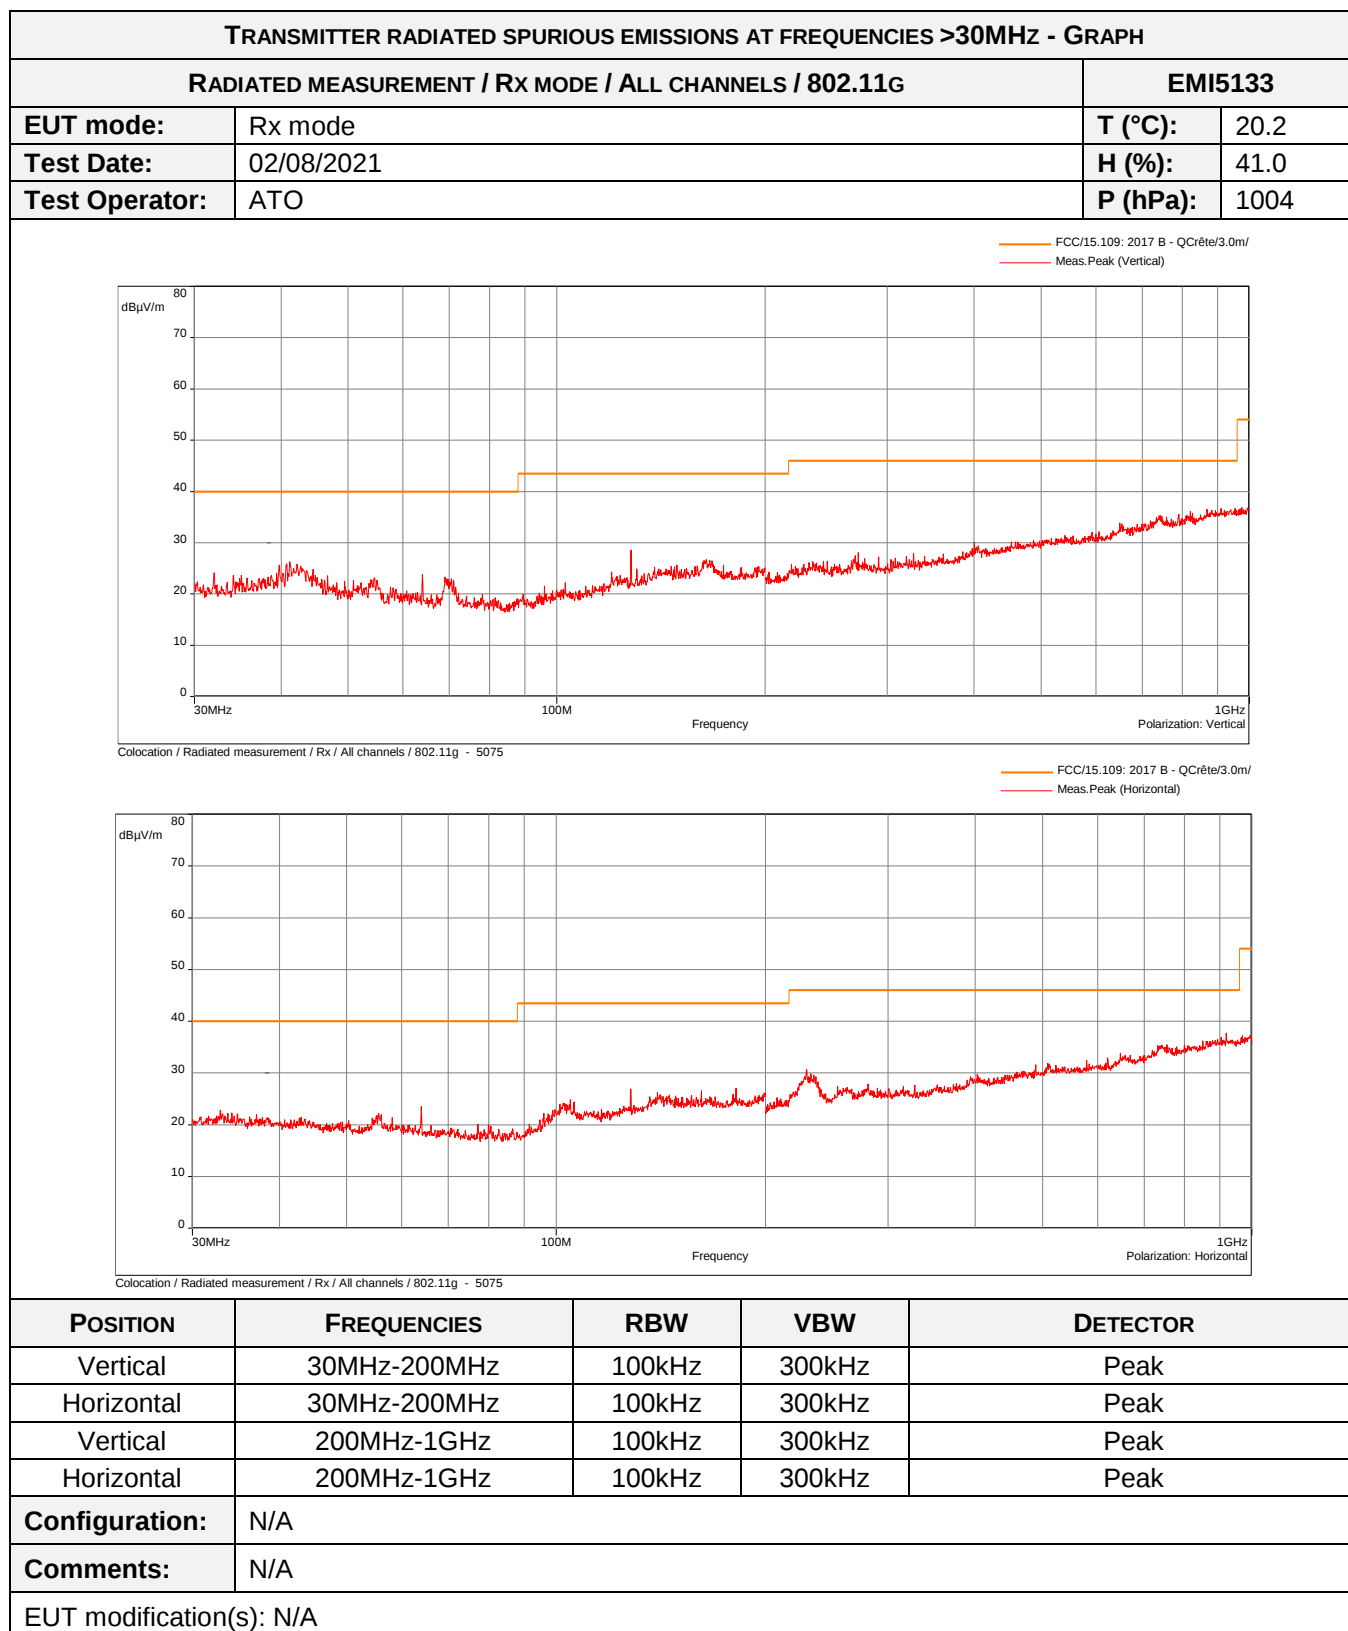

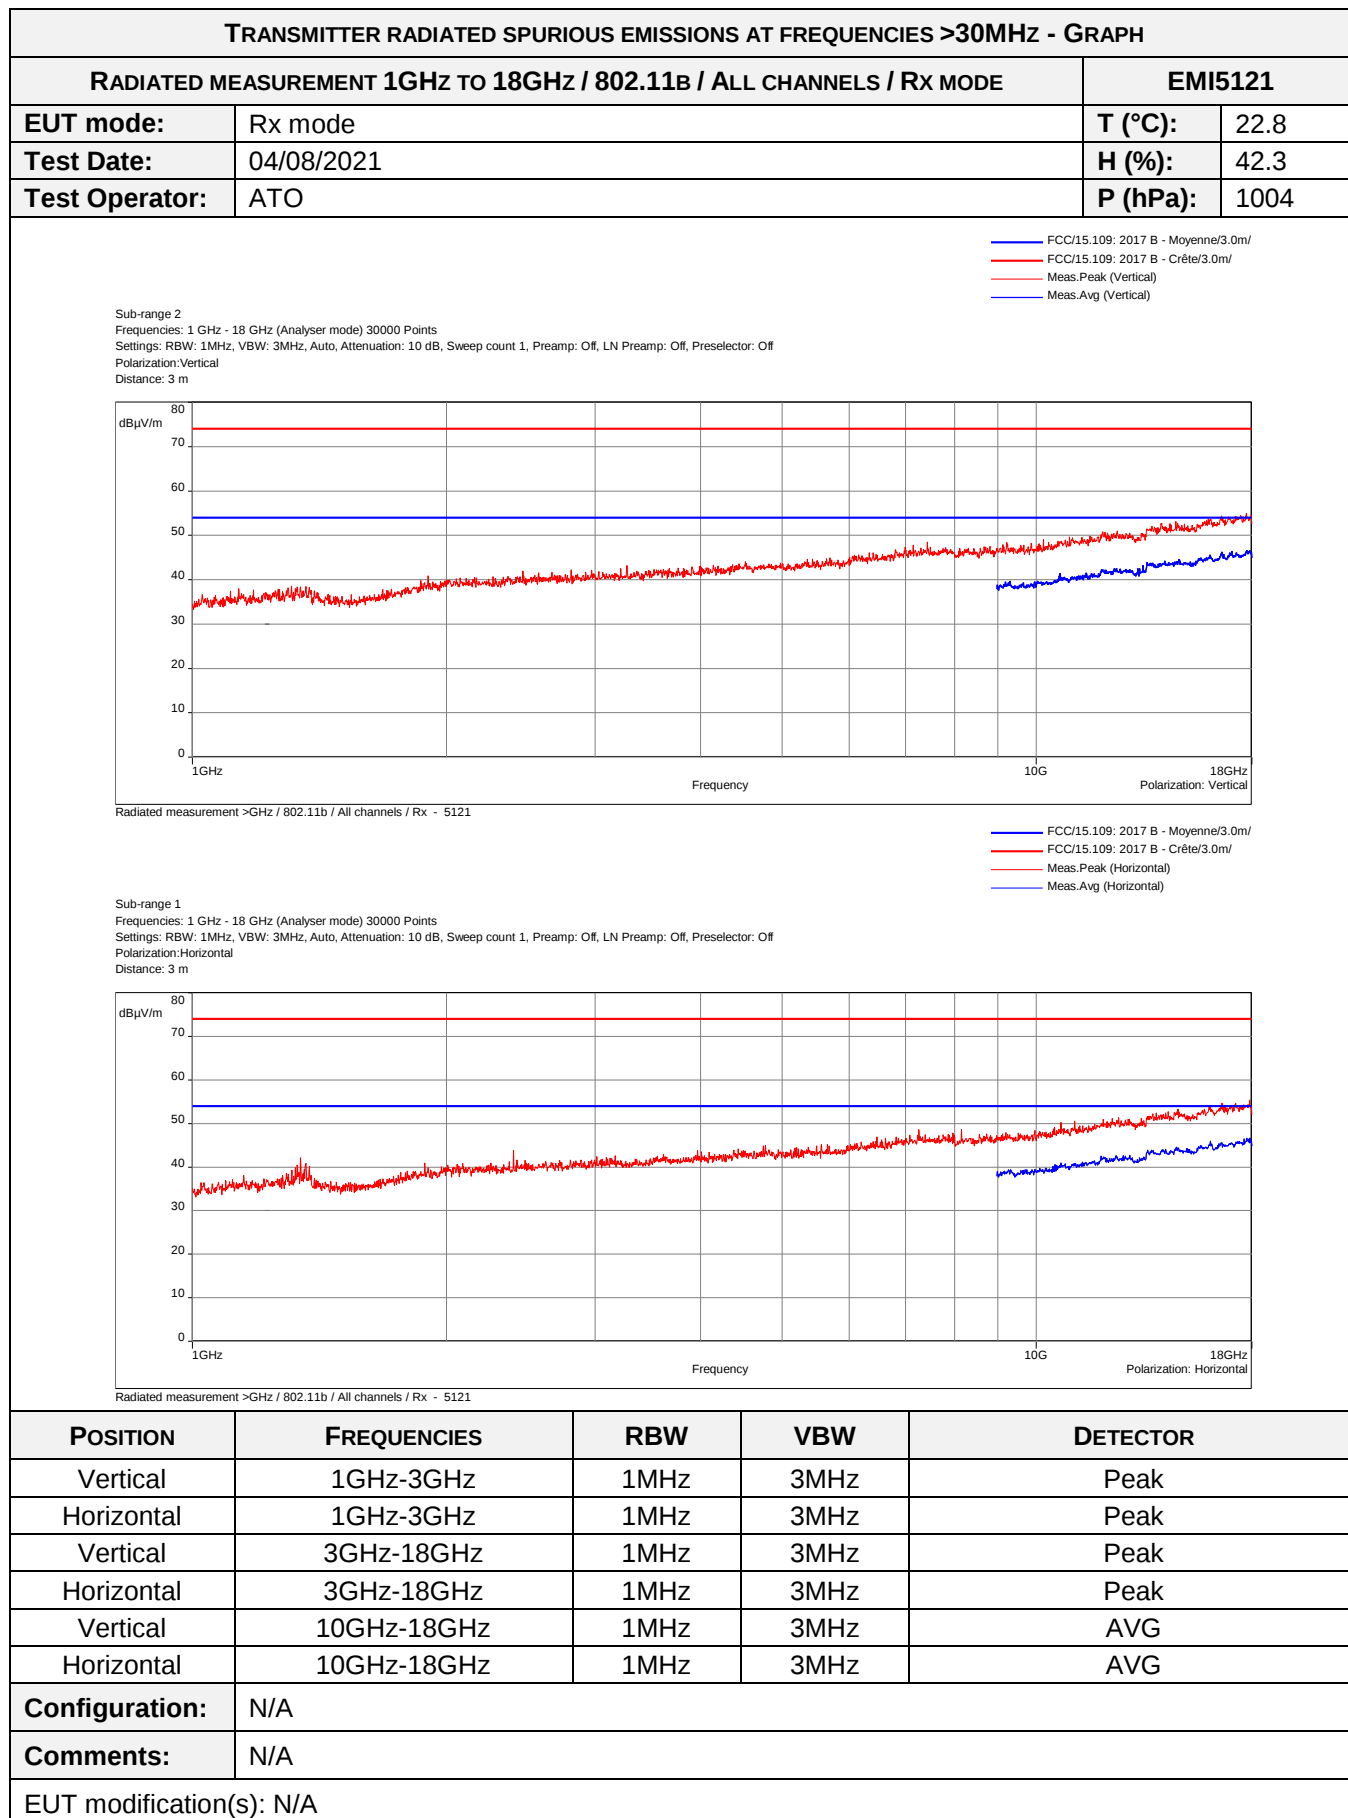

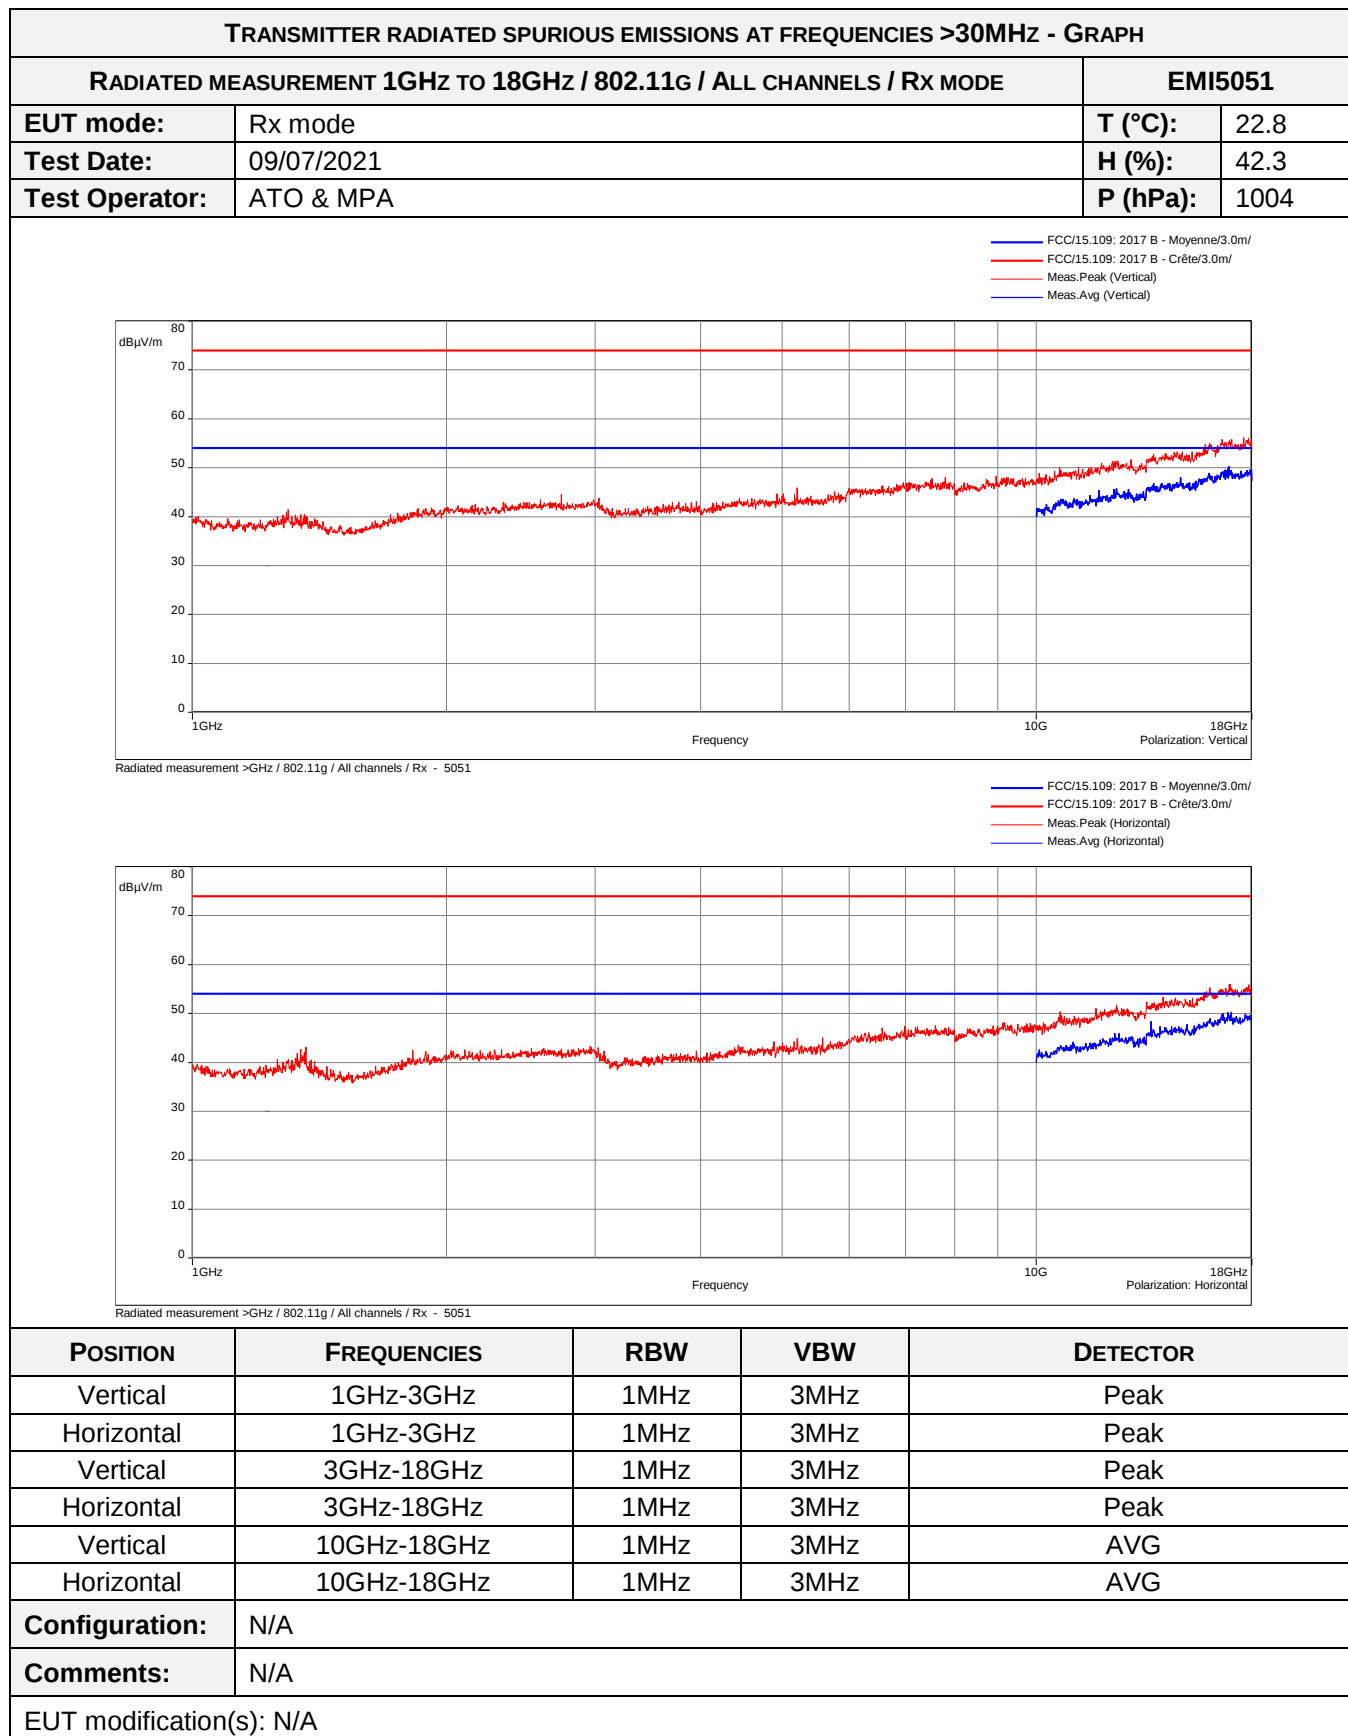

8.9. Frequency error

Reference standard:	FCC part 15 Radio part 15.215 and RSS Gen
Test method:	FCC part 15 Radio part 15.215 and RSS Gen
Test description: Frequency error is the difference between the measured unmodulated carrier frequency under extreme conditions and the nominal Centre Frequency as stated by the manufacturer. This measurement procedure only applies if the EUT can generate an unmodulated carrier. EUT is set inside the climatic enclosure. It is connected to the measuring receiver via 50Ω attenuator(s). RBW=200Hz	

TEST CASE	EUT MODE	SEVERITY	RESULT TAB.	VERDICT
Low channel (Ch #1) / 802.11b	Tx mode	Within 2408.35MHz To 2475.15MHz	EMI6786	PASS
Mid channel (Ch #6) / 802.11b	Tx mode		EMI6787	PASS
High channel (Ch #11) / 802.11b	Tx mode		EMI6788	PASS
Canada High channel (Ch #12) / 802.11b	Tx mode		EMI6789	PASS
Low channel (Ch #1) / 802.11g	Tx mode		EMI6790	PASS
Mid channel (Ch #6) / 802.11g	Tx mode		EMI6791	PASS
High channel (Ch #11) / 802.11g	Tx mode		EMI6792	PASS
Canada High channel (Ch #12) / 802.11g	Tx mode		EMI6793	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	21.7
Relative Humidity	20 to 75 %	66.4
Atmospheric pressure	N/A	1004
Test method deviation: N/A		
Supplementary information: EUT power supply is replaced by a stabilized power supply. Limit indicated is 80% of the permitted band.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	GW Instek	APS-1102	17754	02/03/2021	02/05/2022
Antenna	EMITECH	3.5 cm	4653		
Cable	C&C	N-3m	14331	18/03/2021	18/05/2023
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Cable	Radiall	SMA-1m	16564	29/07/2019	29/09/2021
Climatic enclosure	CLIMATS	EXCAL 7714-HA	14261	07/04/2021	07/06/2022
Spectrum analyzer	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023
Thermohygrometer	Testo	608-H2	7611	09/06/2021	09/08/2023
Thermometer contactless	GHM Greisinger	GMH 3710	12968	06/10/2020	06/12/2021

Blank cells = Permanent validity

TEST SETUP PHOTO(S)



EFFECTIVE RADIATED POWER - TABULATED RESULTS

LOW CHANNEL (CH #1) / 802.11B			EMI6786	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2412.00116	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2412.00567	
Extremes Temperature conditions	45	120Vac/60Hz	2412.02274	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2412.00761	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2412.00886	

EFFECTIVE RADIATED POWER - TABULATED RESULTS

MID CHANNEL (CH #6) / 802.11B			EMI6787	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2437.00166	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2437.00575	
Extremes Temperature conditions	45	120Vac/60Hz	2437.02291	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2437.00721	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2437.00788	

EFFECTIVE RADIATED POWER - TABULATED RESULTS				
HIGH CHANNEL (CH #11) / 802.11B			EMI6788	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2462.00212	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2462.00588	
Extremes Temperature conditions	45	120Vac/60Hz	2462.02008	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2462.00714	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2462.00757	

EFFECTIVE RADIATED POWER - TABULATED RESULTS				
CANADA HIGH CHANNEL (CH #12) / 802.11B			EMI6789	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2467.00240	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2467.00612	
Extremes Temperature conditions	45	120Vac/60Hz	2467.01890	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2467.00755	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2467.00712	

EFFECTIVE RADIATED POWER - TABULATED RESULTS				
LOW CHANNEL (CH #1) / 802.11G			EMI6790	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2411.99805	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2412.00170	
Extremes Temperature conditions	45	120Vac/60Hz	2411.99940	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2411.99169	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2411.99180	

EFFECTIVE RADIATED POWER - TABULATED RESULTS				
MID CHANNEL (CH #6) / 802.11G			EMI6791	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2436.99310	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2437.00100	
Extremes Temperature conditions	45	120Vac/60Hz	2436.99890	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2436.99195	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2436.99190	

EFFECTIVE RADIATED POWER - TABULATED RESULTS				
HIGH CHANNEL (CH #11) / 802.11G			EMI6792	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2461.99280	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2462.00000	
Extremes Temperature conditions	45	120Vac/60Hz	2461.99880	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2461.99247	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2466.99430	

EFFECTIVE RADIATED POWER - TABULATED RESULTS				
CANADA HIGH CHANNEL (CH #12) / 802.11G			EMI6793	
Test Case	Temperature (°C)	Power supply	Frequency (MHz)	Limit
Normal conditions	25	120Vac/60Hz	2466.99280	Within 2408.35MHz To 2475.15MHz
Extremes Temperature conditions	0	120Vac/60Hz	2466.99840	
Extremes Temperature conditions	45	120Vac/60Hz	2466.99810	
Extremes Power supply conditions -15%	25	102Vac/60Hz	2466.99327	
Extremes Power supply conditions +15%	25	138Vac/60Hz	2466.9943	

End of test report