



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM170600570902
Page: 1 of 30

TEST REPORT

Application No.:

SZEM1706005709CR(SGS SZ No.:T51710230033EM)

Applicant:

Toy State International Ltd.

Address of Applicant:

Unit 905, 9/F, West Wing, Tsim Sha Tsui Centre, 66 Mody Road, TST East,
Kowloon, Hong Kong

Manufacturer:

Toy State International Ltd.

Address of Manufacturer:

Unit 905, 9/FL, West Wing, Tsimshatsui Centre, 66 Mody Road, TST East,
Kowloon, Hong Kong

Equipment Under Test (EUT):

EUT Name: Psycho Gyro™-Blue, Green

Model No.: 90251, 90252 *

* Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

Assortment No.: 90250

FCC ID: V9Q-90250R24

Standards: 47 CFR Part 15, Subpart C 15.249

Date of Receipt: 2017-06-07

Date of Test: 2017-06-08 to 2017-06-14

Date of Issue: 2017-06-21

Test Result :	Pass*
----------------------	-------

* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-06-21		Original

Authorized for issue by:			
		 _____ Leo Li /Project Engineer	
		 _____ Eric Fu /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass

Declaration of EUT Family Grouping:

Model No.: 90251, 90252

Only the model 90251 was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for all the above models, with only difference on colour, appearance and model No.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS	6
4.3 MEASUREMENT UNCERTAINTY	6
4.4 TEST LOCATION.....	7
4.5 TEST FACILITY.....	7
4.6 DEVIATION FROM STANDARDS	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5 EQUIPMENT LIST	8
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	10
6.1 ANTENNA REQUIREMENT	10
6.1.1 <i>Test Requirement:</i>	10
6.1.2 <i>Conclusion</i>	10
7 RADIO SPECTRUM MATTER TEST RESULTS.....	11
7.1 20dB BANDWIDTH.....	11
7.1.1 <i>E.U.T. Operation</i>	11
7.1.2 <i>Measurement Procedure and Data</i>	11
7.2 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A)).....	13
7.2.1 <i>E.U.T. Operation</i>	13
7.2.2 <i>Measurement Procedure and Data</i>	13
7.3 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY.....	20
7.3.1 <i>E.U.T. Operation</i>	21
7.3.2 <i>Measurement Procedure and Data</i>	21
7.4 RADIATED EMISSIONS	26
7.4.1 <i>E.U.T. Operation</i>	26
7.4.2 <i>Measurement Procedure and Data</i>	26
8 PHOTOGRAPHS.....	29
8.1 RADIATED EMISSIONS TEST SETUP.....	29
8.2 EUT CONSTRUCTIONAL DETAILS.....	30

4 General Information

4.1 Details of E.U.T.

EUT Name:	Psycho Gyro™-Blue, Green
Model No.:	90251
Frequency Range:	2410MHz-2475MHz
Modulation Type:	GFSK
Number of Channels:	66
Channel Spacing:	1MHz
Antenna Type:	Wire
Antenna Gain:	0dBi
Power supply:	4.5V DC (1.5Vx2"AAA" Size Batteries) for remote controller Lithium Ion Battery: 9.7V 700mAh rechargeable battery Battery: Charge by DC 9.6V for Car Adapter Model:SEC0960750CE Input:AC100-240V~50/60Hz 300mA Output:9.6V 750mA
Test voltage	AC 120V/60Hz
Cable:	DC cable:180cm unshielded

Channel list:

1 CH	2.410GHz	25 CH	2.434GHz	49 CH	2.458GHz
2 CH	2.411GHz	26 CH	2.435GHz	50 CH	2.459GHz
3 CH	2.412GHz	27 CH	2.436GHz	51 CH	2.460GHz
4 CH	2.413GHz	28 CH	2.437GHz	52 CH	2.461GHz
5 CH	2.414GHz	29 CH	2.438GHz	53 CH	2.462GHz
6 CH	2.415GHz	30 CH	2.439GHz	54 CH	2.463GHz
7 CH	2.416GHz	31 CH	2.440GHz	55 CH	2.464GHz
8 CH	2.417GHz	32 CH	2.441GHz	56 CH	2.465GHz
9 CH	2.418GHz	33 CH	2.442GHz	57 CH	2.466GHz
10 CH	2.419GHz	34 CH	2.443GHz	58 CH	2.467GHz
11 CH	2.420GHz	35 CH	2.444GHz	59 CH	2.468GHz
12 CH	2.421GHz	36 CH	2.445GHz	60 CH	2.469GHz
13 CH	2.422GHz	37 CH	2.446GHz	61 CH	2.470GHz
14 CH	2.423GHz	38 CH	2.447GHz	62 CH	2.471GHz
15 CH	2.424GHz	39 CH	2.448GHz	63 CH	2.472GHz
16 CH	2.425GHz	40 CH	2.449GHz	64 CH	2.473GHz
17 CH	2.426GHz	41 CH	2.450GHz	65 CH	2.474GHz
18 CH	2.427GHz	42 CH	2.451GHz	66 CH	2.475GHz
19 CH	2.428GHz	43 CH	2.452GHz		
20 CH	2.429GHz	44 CH	2.453GHz		
21 CH	2.430GHz	45 CH	2.454GHz		
22 CH	2.431GHz	46CH	2.455GHz		
23 CH	2.432GHz	47CH	2.456GHz		
24 CH	2.433GHz	48CH	2.457GHz		

4.2 Description of Support Units

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10-8
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
9	Temperature test	1 °C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

RF connected test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2017-04-14	2018-04-13
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-05-10	2018-05-10
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-02	2017-03-05	2020-03-05
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2017-04-14	2018-04-13

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-10	2018-05-10
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2017-06-05	2018-06-04
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2014-11-01	2017-11-01
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-13
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
Band filter	N/A	N/A	N/A	N/A	N/A

General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-18

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:


47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

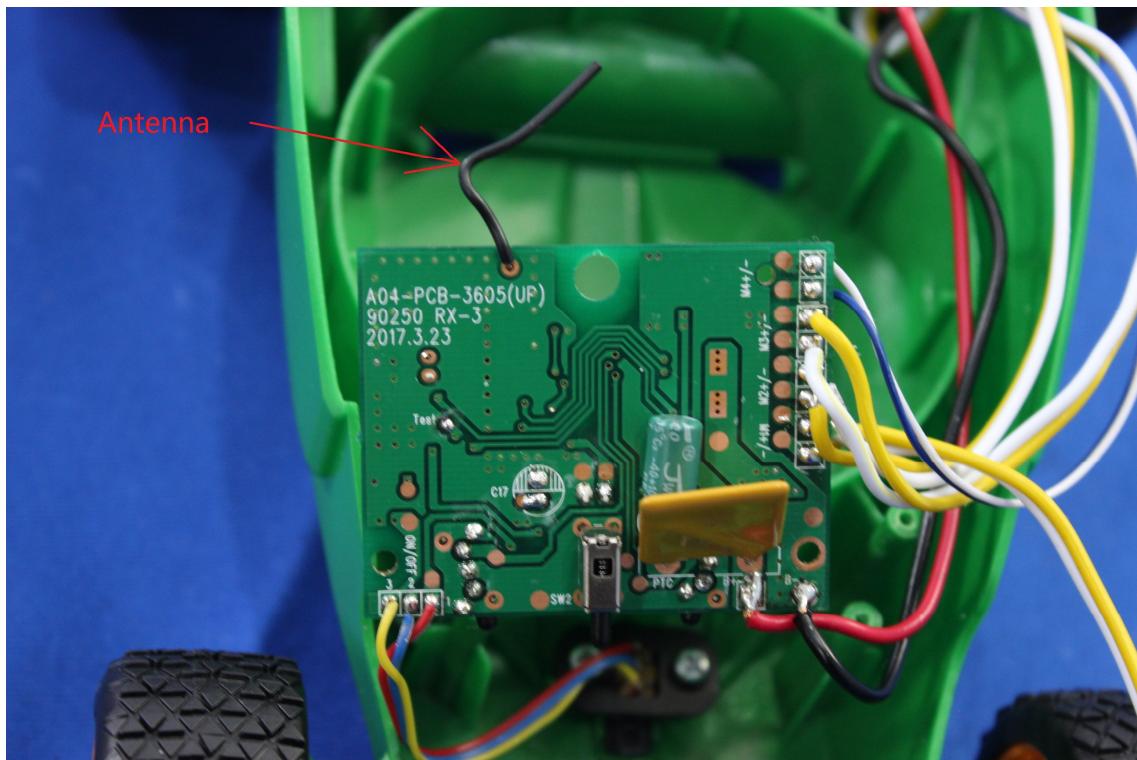

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

7 Radio Spectrum Matter Test Results

7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2013) Section 6.9
Limit: N/A


7.1.1 E.U.T. Operation



Operating Environment:

Temperature: 25 °C Humidity: 55 % RH Atmospheric Pressure: 1010 mbar
Test mode b:TX mode_Keep the EUT in transmitting with modulation mode.

7.1.2 Measurement Procedure and Data

EUT	Test Channel	-20dB Bandwidth[MHz]	Limit[MHz]	Verdict
Car	2410	5.340	---	PASS
	2440	4.840	---	PASS
	2475	4.660	---	PASS

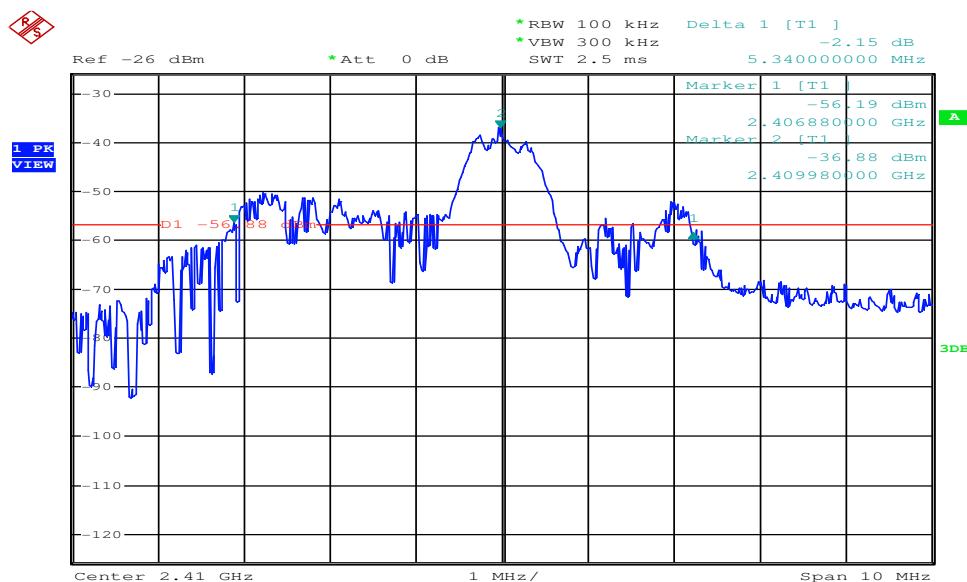

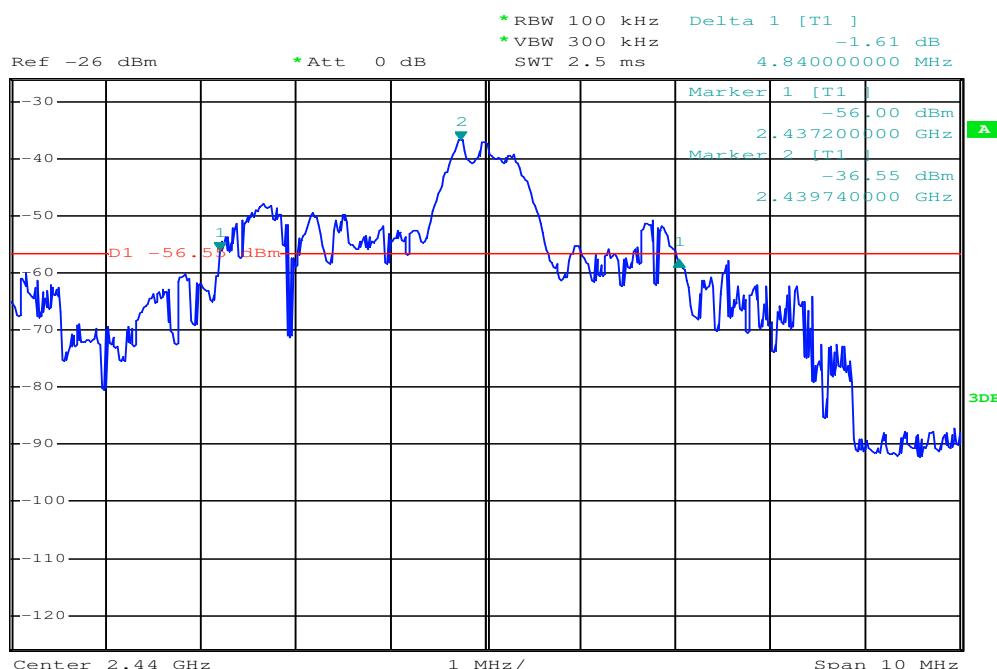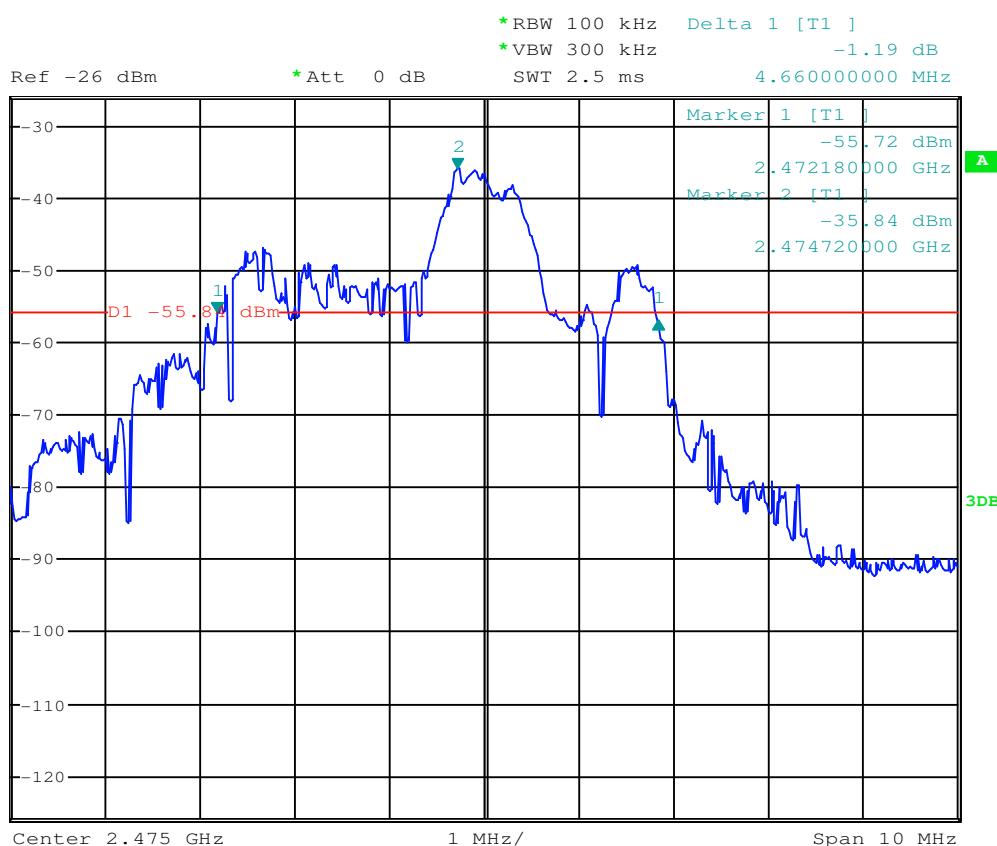1 PK
VIEW

A
3DB
1 PK
VIEW

A
3DB

7.2 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)

Test Method: ANSI C63.10 (2013) Section 6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in transmitting with modulation mode.

7.2.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Mode:b; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

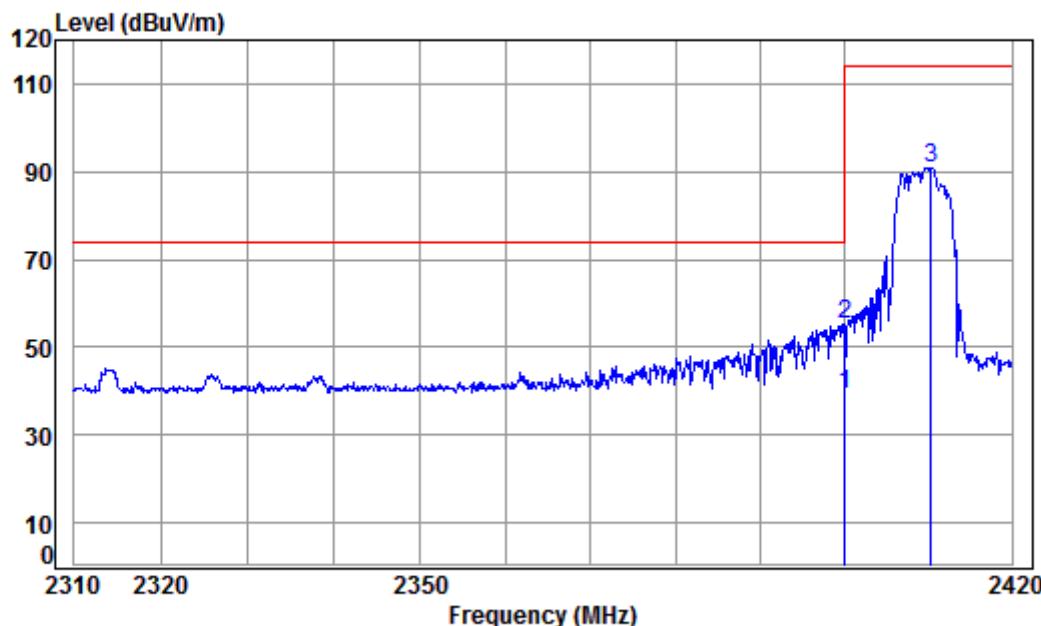


Condition: 3m HORIZONTAL

Job No: : 05709CR

Mode: : 2410 Band edge
: car

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2400.000	5.35	29.11	37.96	42.67	39.17	54.00	-14.83 Average
2 pk	2400.000	5.35	29.11	37.96	58.93	55.43	74.00	-18.57 Peak
3	2410.338	5.35	29.14	37.96	94.21	90.74	114.00	-23.26 peak

Mode:b; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

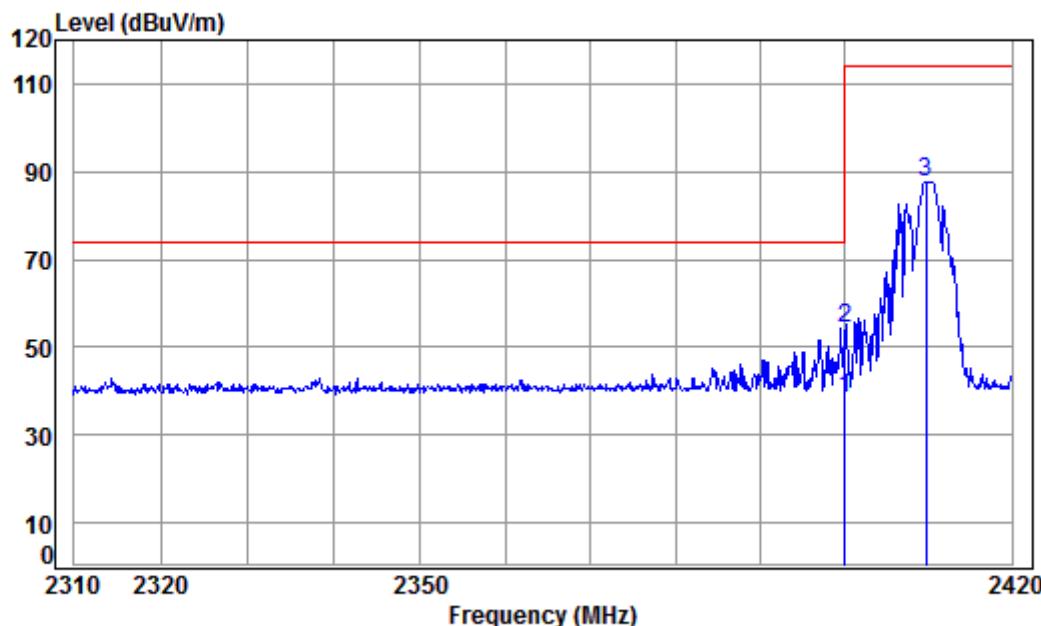


Condition: 3m VERTICAL

Job No: : 05709CR

Mode: : 2410 Band edge
: car

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2400.000	5.34	29.11	37.96	41.68	38.17	54.00	-15.83	Average
2	pk	2400.000	5.34	29.11	37.96	57.94	54.43	74.00	-19.57	Peak
3		2409.665	5.35	29.14	37.96	91.29	87.82	114.00	-26.18	Peak

Mode:b; Polarization:Horizontal; Modulation Type:GFSK; Channel:middle

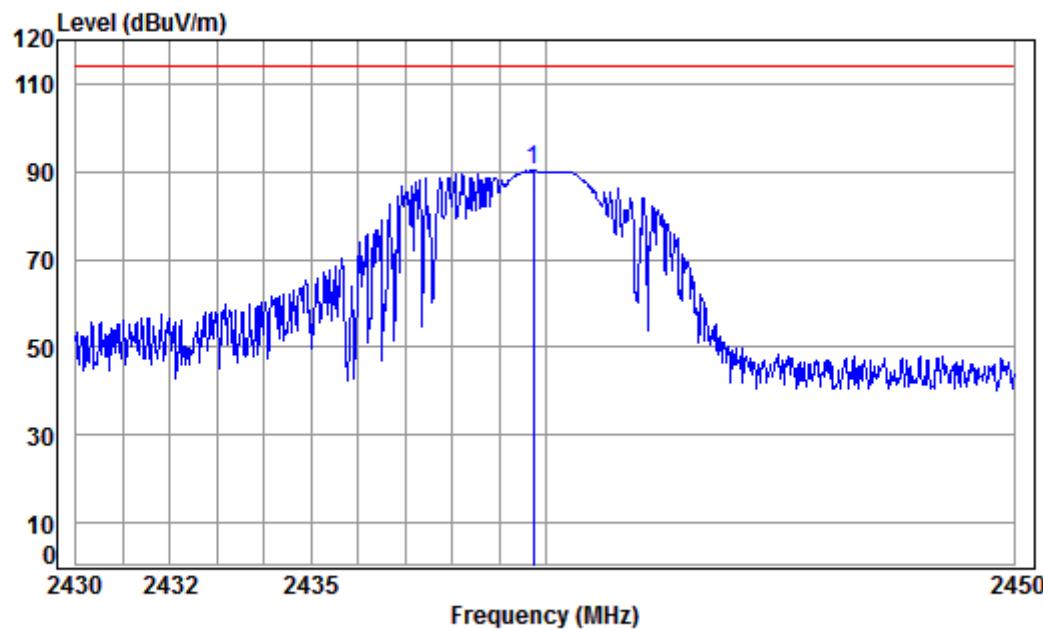


Condition: 3m HORIZONTAL

Job No: : 05709CR

Mode: : 2440 Band edge
: car

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2439.740	5.38	29.23	37.96	93.49	90.14	114.00	-23.86 Peak

Mode:b; Polarization:Vertical; Modulation Type:GFSK; Channel:middle

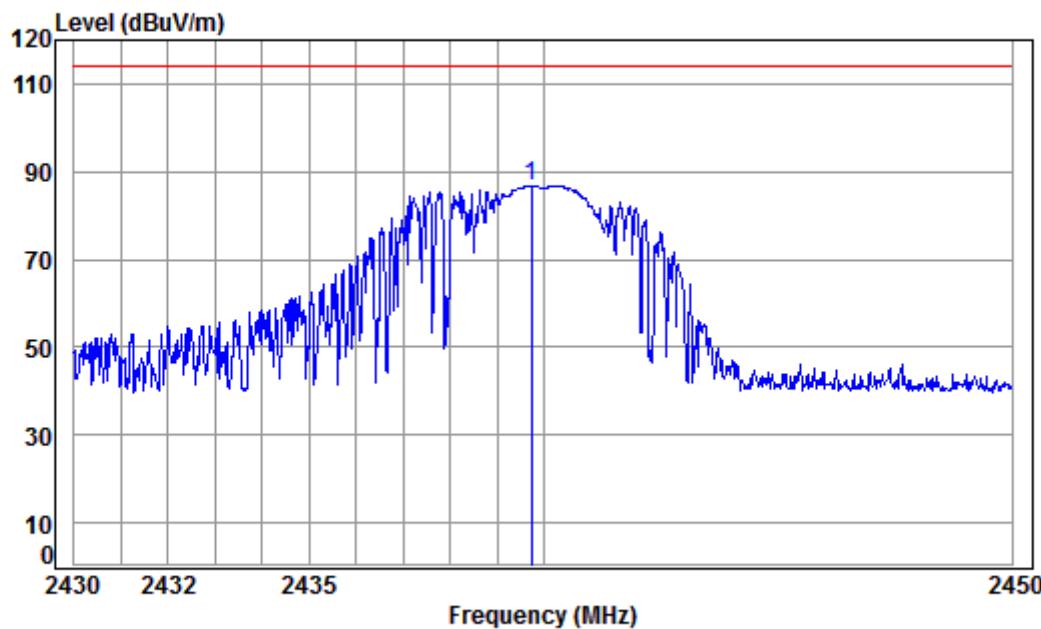

Condition: 3m VERTICAL

Job No: : 05709CR


Mode: : 2440 Band edge
: car

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
-----	----	------	----	------	--------	--------	----

1 pp	2439.740	5.38	29.23	37.96	90.01	86.66	114.00	-27.34	Peak
------	----------	------	-------	-------	-------	-------	--------	--------	------

Mode:b; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

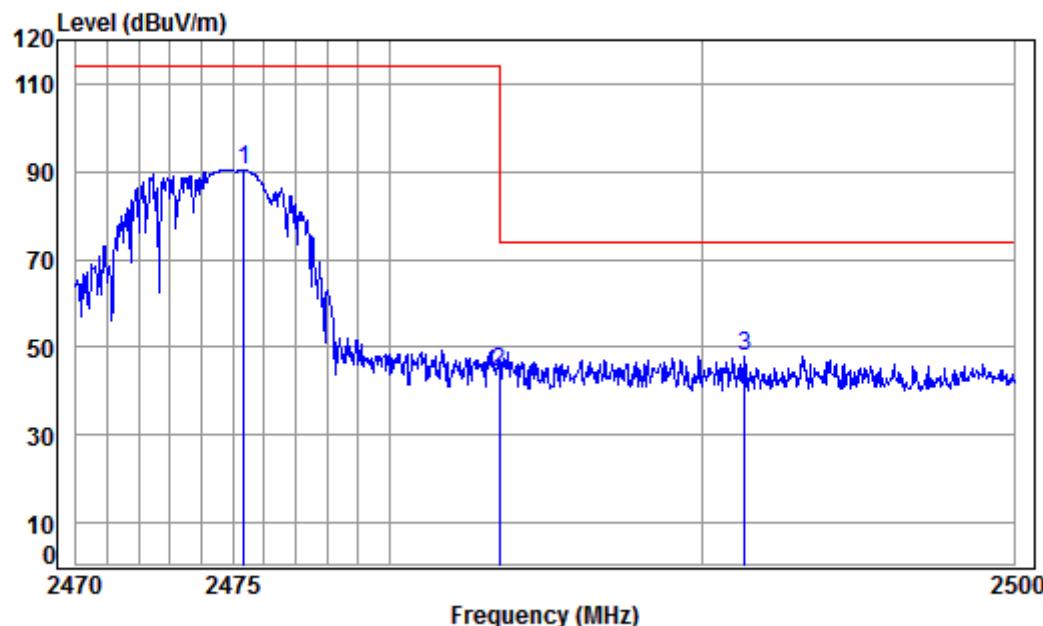


Condition: 3m HORIZONTAL

Job No: : 05709CR

Mode: : 2475 Band edge
: car

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2475.344	5.40	29.33	37.95	93.47	90.25	114.00	-23.75	peak
2		2483.500	5.41	29.35	37.95	47.58	44.39	74.00	-29.61	peak
3		2491.353	5.41	29.38	37.95	51.27	48.11	74.00	-25.89	peak

Mode:b; Polarization:Vertical; Modulation Type:GFSK; Channel:High

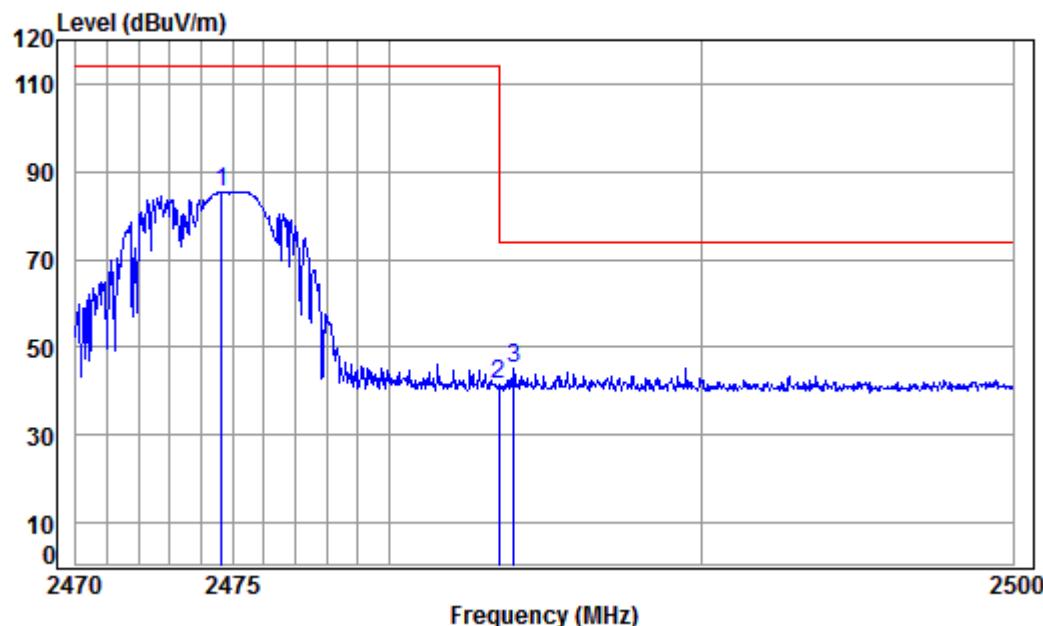

Condition: 3m VERTICAL

Job No: : 05709CR

Mode: : 2475 Band edge
: car

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2474.656	5.40	29.33	37.95	88.60	85.38	114.00	-28.62	peak
2		2483.500	5.41	29.35	37.95	44.66	41.47	74.00	-32.53	peak
3		2483.965	5.41	29.35	37.95	48.46	45.27	74.00	-28.73	peak

7.3 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar
Test mode b:TX mode_Keep the EUT in transmitting with modulation mode.

7.3.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Mode:b; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

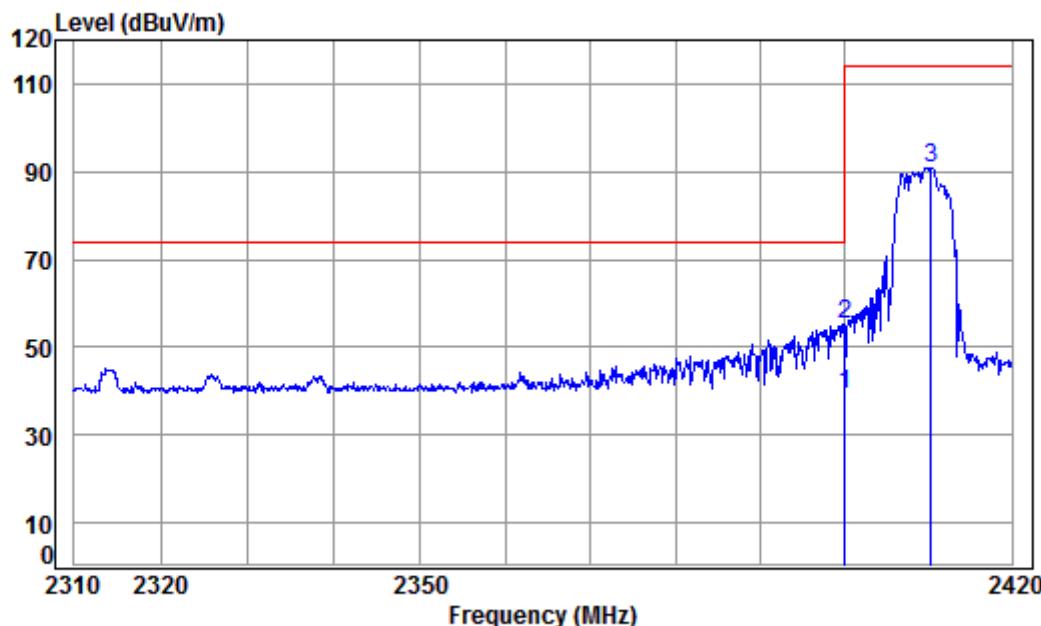


Condition: 3m HORIZONTAL

Job No: : 05709CR

Mode: : 2410 Band edge
: car

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Over Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2400.000	5.35	29.11	37.96	42.67	39.17	54.00	-14.83 Average
2 pk	2400.000	5.35	29.11	37.96	58.93	55.43	74.00	-18.57 Peak
3	2410.338	5.35	29.14	37.96	94.21	90.74	114.00	-23.26 peak

Mode:b; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

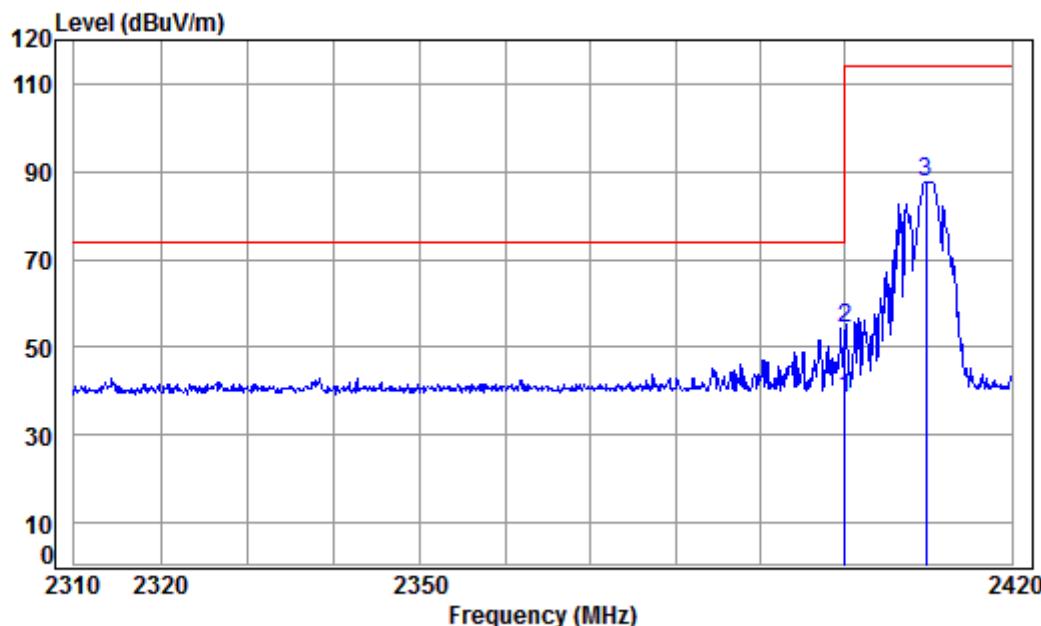


Condition: 3m VERTICAL

Job No: : 05709CR

Mode: : 2410 Band edge
: car

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2400.000	5.34	29.11	37.96	41.68	38.17	54.00	-15.83	Average
2	pk	2400.000	5.34	29.11	37.96	57.94	54.43	74.00	-19.57	Peak
3		2409.665	5.35	29.14	37.96	91.29	87.82	114.00	-26.18	Peak

Mode:b; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

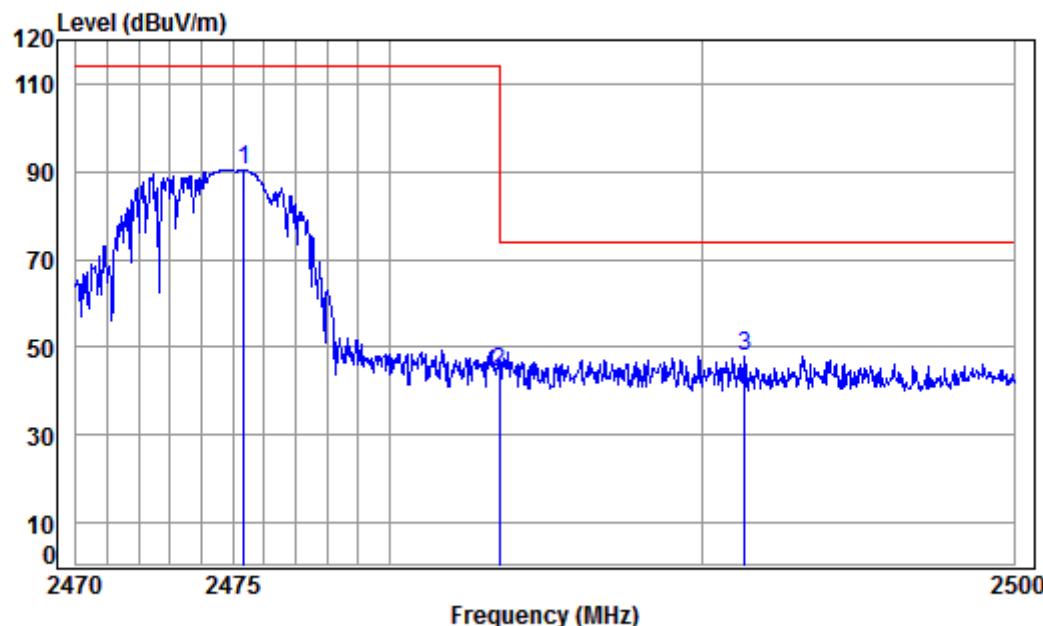


Condition: 3m HORIZONTAL

Job No: : 05709CR

Mode: : 2475 Band edge
: car

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2475.344	5.40	29.33	37.95	93.47	90.25	114.00	-23.75	peak
2		2483.500	5.41	29.35	37.95	47.58	44.39	74.00	-29.61	peak
3		2491.353	5.41	29.38	37.95	51.27	48.11	74.00	-25.89	peak

Mode:b; Polarization:Vertical; Modulation Type:GFSK; Channel:High

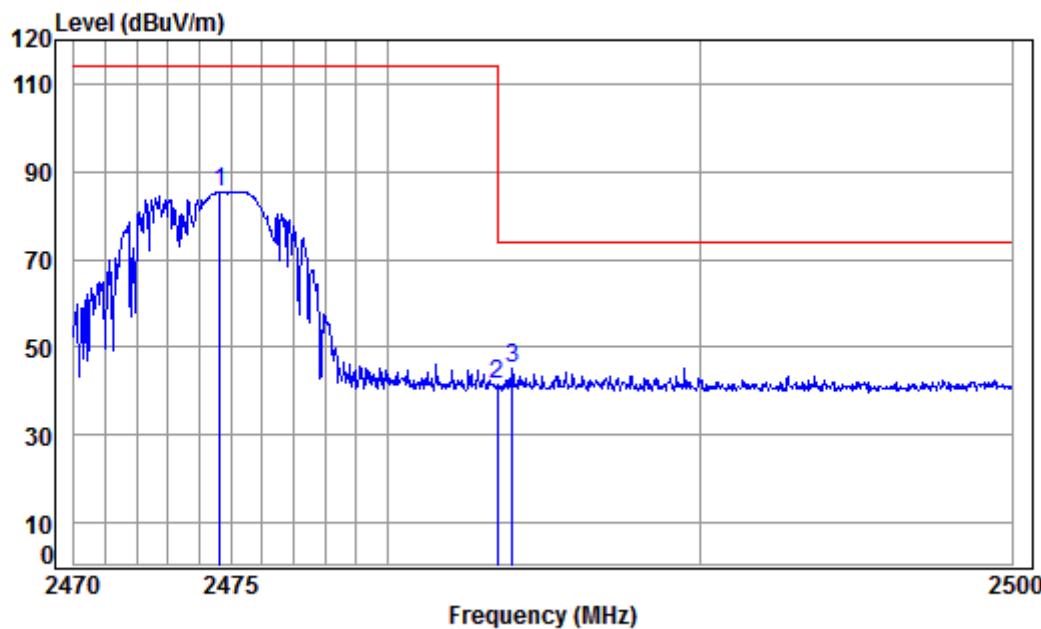

Condition: 3m VERTICAL

Job No: : 05709CR

Mode: : 2475 Band edge
: car

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2474.656	5.40	29.33	37.95	88.60	85.38	114.00	-28.62	peak
2		2483.500	5.41	29.35	37.95	44.66	41.47	74.00	-32.53	peak
3		2483.965	5.41	29.35	37.95	48.46	45.27	74.00	-28.73	peak

7.4 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 55 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode_Keep the EUT in transmitting with modulation mode.

7.4.2 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Mode:b; Polarization:Horizontal

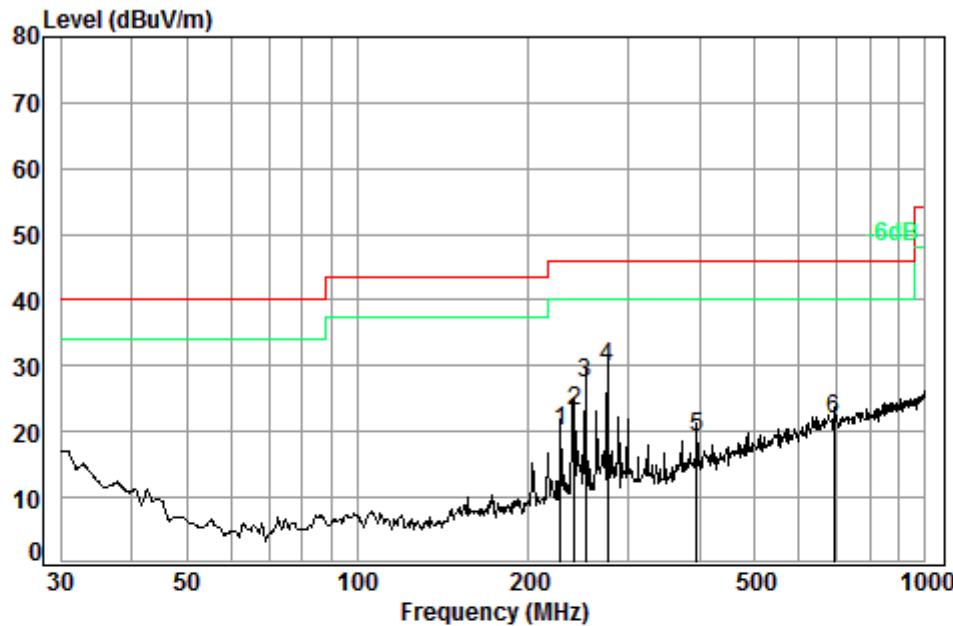


Condition: 3m HORIZONTAL

Job No. : 05709CR

Test mode: b

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Line Limit
					MHz	dB	
1	227.69	1.56	11.59	26.61	33.47	20.01	46.00 -25.99
2	240.83	1.63	12.01	26.56	35.96	23.04	46.00 -22.96
3	252.06	1.68	12.34	26.53	40.01	27.50	46.00 -18.50
4 pp	276.12	1.80	12.85	26.46	41.48	29.67	46.00 -16.33
5	396.24	2.19	16.25	27.11	27.84	19.17	46.00 -26.83
6	689.56	2.88	21.52	27.43	24.82	21.79	46.00 -24.21

Mode:b; Polarization:Vertical

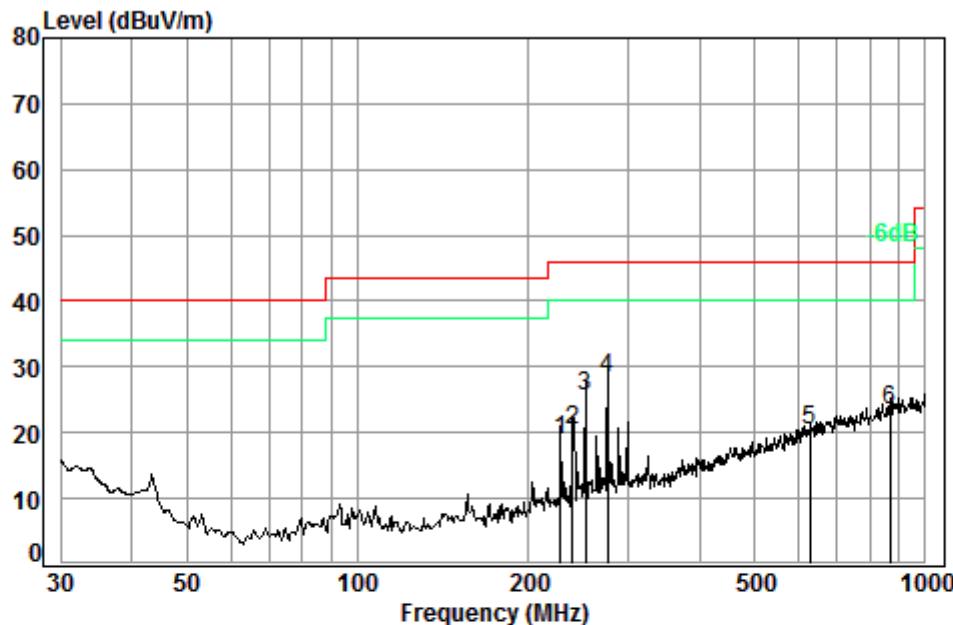

Condition: 3m VERTICAL



Job No. : 05709CR

Test mode: b

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level			Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	227.69	1.56	11.59	26.61	32.31	18.85	46.00	-27.15
2	239.15	1.62	11.95	26.57	33.27	20.27	46.00	-25.73
3	252.06	1.68	12.34	26.53	38.15	25.64	46.00	-20.36
4 pp	276.12	1.80	12.85	26.46	39.98	28.17	46.00	-17.83
5	627.27	2.76	20.51	27.51	24.60	20.36	46.00	-25.64
6	866.09	3.47	22.79	26.96	24.09	23.39	46.00	-22.61

8 Photographs

8.1 Radiated Emissions Test Setup

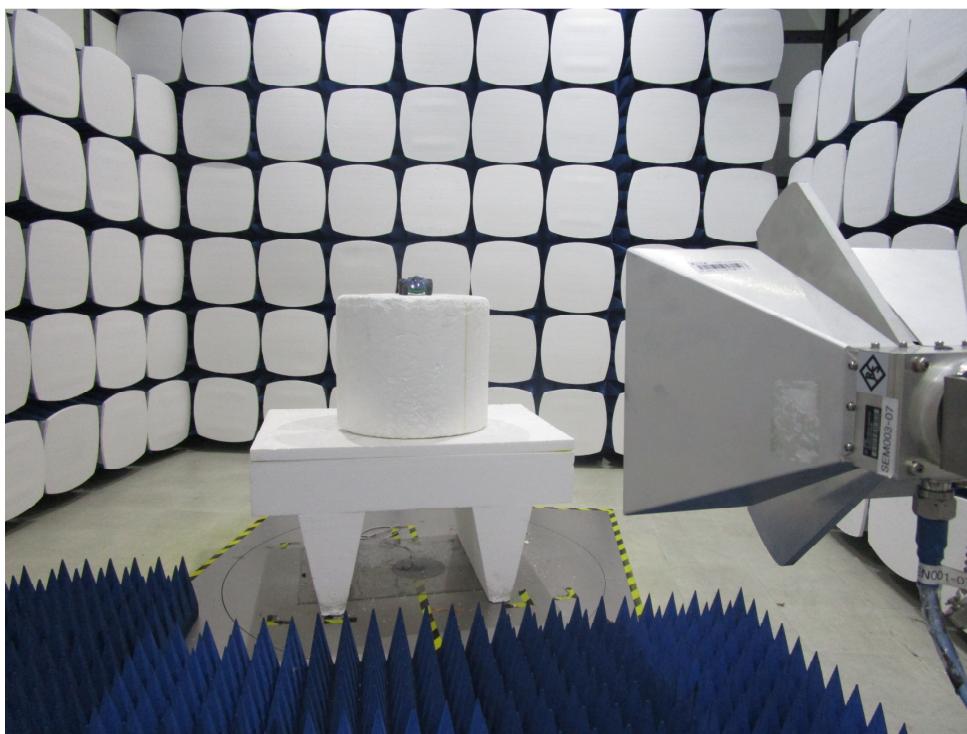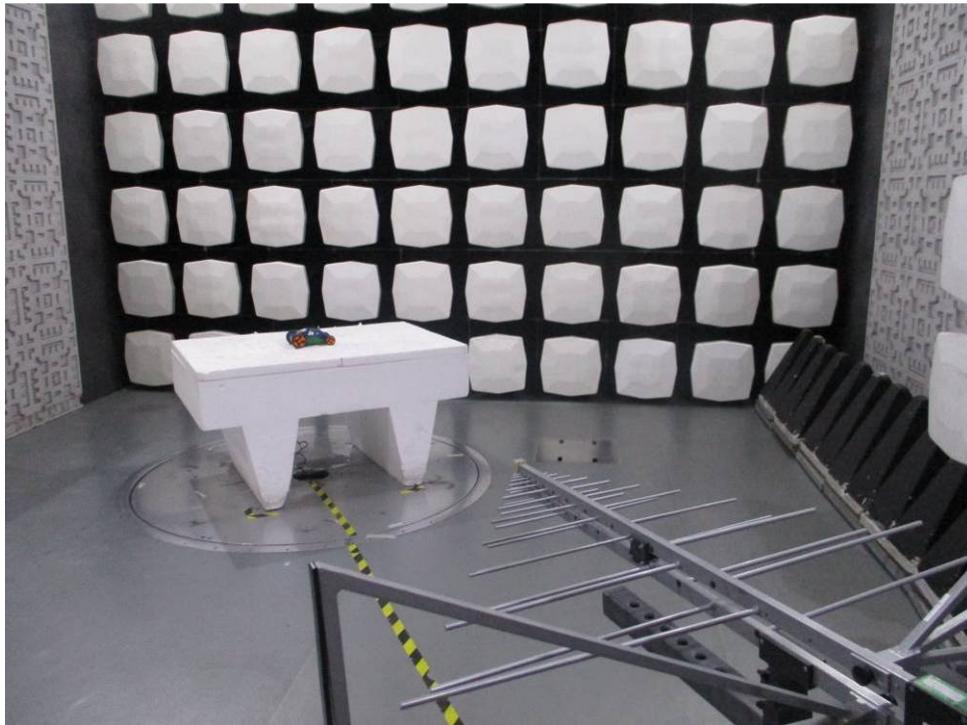

8.2 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1706005709CR.