



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

2.0 Portable Bluetooth Stereo Speaker

Model: BT-138

Trade Name: Artdio , kinyo

Prepared for

**KINYO CO., LTD.
NO.476 MING HU ROAD, HSIN CHU CITY, TAIWAN**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
(aka COMPLIANCE ENGINEERING SERVICE (CHINA))
NO. 5, JINAO INDUSTRIAL PARK, NO. 35 JUKENG ROAD,
DASHUIKENG VILLAGE, GUANLAN TOWN, BAOAN
DISTRICT, SHENZHEN, CHINA**

TEL: 86-755-28055000

FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION.....	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS AND LISTING	8
6. SETUP OF EQUIPMENT UNDER TEST	9
6.1 SETUP CONFIGURATION OF EUT	9
6.2 SUPPORT EQUIPMENT	9
7. FCC PART 15.247 REQUIREMENTS.....	10
7.1 PEAK POWER	10
7.2 PEAK POWER SPECTRAL DENSITY	11
7.3 BAND EDGES MEASUREMENT	14
7.4 FREQUENCY SEPARATION	19
7.5 NUMBER OF HOPPING FREQUENCY.....	22
7.6 SPURIOUS EMISSIONS	24
7.7 POWERLINE CONDUCTED EMISSIONS	46
APPENDIX 1 PHOTOGRPHS OF TEST SETUP.....	48



1. TEST RESULT CERTIFICATION

Applicant: KINYO CO.,LTD.
No 476 Ming Hu Road Hsin Chu City Taiwan

Equipment Under Test: 2.0 Portable Bluetooth Stereo Speaker

Trade Name: Artdio , kinyo

Model: BT-138

Date of Test: July 09-August 12,2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Clinton Kao
Manager
Compliance Certification Service Inc.

Reviewed by:

Vincent Yao
Assistant manager
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	2.0 Portable Bluetooth Stereo Speaker
Trade Name	Artdio , kinyo
Model Number	BT-138
Model Discrepancy	N/A
Power Supply	DC6V Powered by the battery Or DC6V Powered by the adapter Adapter Manufacturer / Model No.: S.T./ SW-060100A AC input:AC100-240V, 50/60Hz DC output: 6.0V/ 1000mA DC Output Cable: Un-shielded, 1.90m
Frequency Range	2402 ~ 2480 MHz
Transmit Power	-3.23 dBm
Modulation Technique	FHSS (GFSK)
Number of Channels	79 Channels
Antenna Specification	PCB Antenna Gain: 3 dBi (max)
Temperature Range	0 ~ +55°C

Note: This submittal(s) (test report) is intended for FCC ID: VF6ARTDIOBT138 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) are chosen for full testing.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 5, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4: 2003 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan

TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA

FCC

Japan

VCCI

Canada

INDUSTRY CANADA

Taiwan

BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsemc.com.tw>



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	PC	M4600C	NS04619689NS1 6052619	DoC	LENOVO	Unshielded 1.50m	Shielded 1.80m
2	KEYBOARD	SK-8815	02284283	DoC	LENOVO	Shielded 1.80m	N/A
3	MOUSE	MO28U0L	23-118901	DoC	LENOVO	Shielded 1.80	N/A
4	LCD MONITOR	T15E52	N/A	DoC	GoLana Technology	Shielded 1.80	Shielded 2.00m
5	MODEM	Modem-1414	9013593	IFXDM1414	ACEEX	Shielded, 1.50m	Unshielded, 2.00m
6	PRINTER	P310B	C41344000NK02 520275	DoC	EPSON	Shielded, 1.50m	Unshielded, 1.80m

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. FCC PART 15.247 REQUIREMENTS

7.1 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
RF Power Meter & Sensor	Anritsu	ML2487A	6K00001491	02/23/2009
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

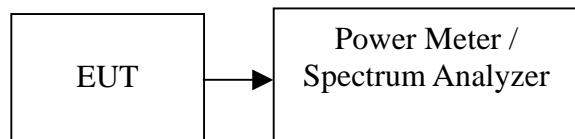

TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-4.87	1.0	-3.87	0.00041	1	PASS
Md	2441	-4.23	1.0	-3.23	0.00048		PASS
Hgh	2480	-4.37	1.0	-3.37	0.00046		PASS



7.2 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS


No non-compliance noted

Test Data


Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-16.98	2.00	-14.98	8.00	PASS
Mid	2441	-16.63	2.00	-14.63		PASS
High	2480	-16.78	2.00	-14.78		PASS

Test Plot

PPSD (CH Low)

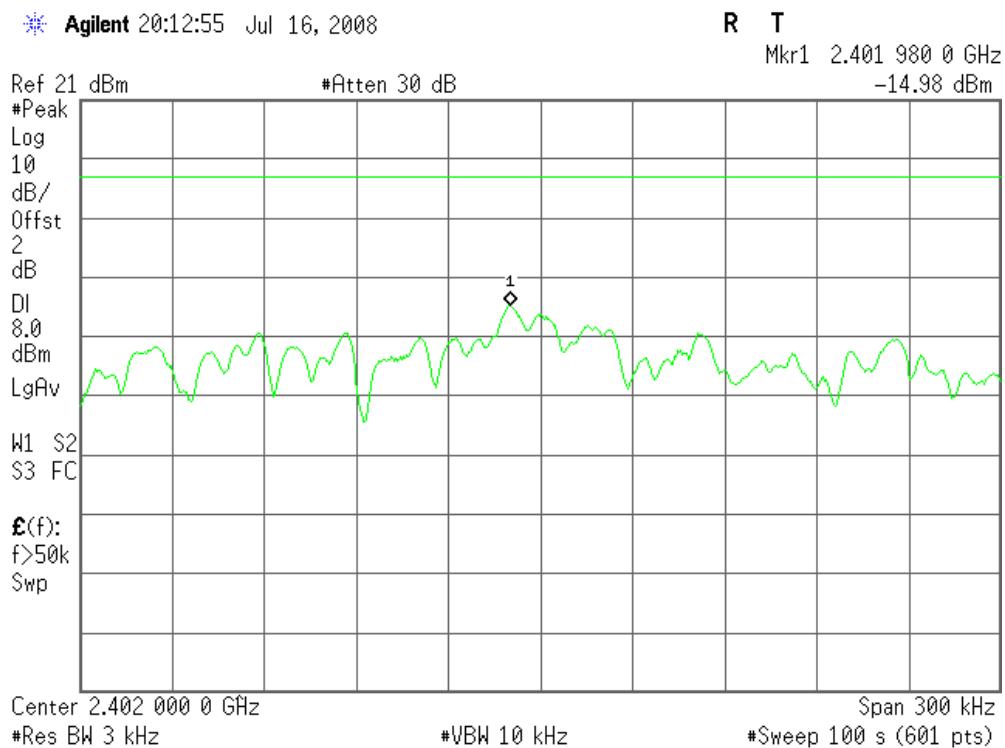

PPSD (CH Mid)

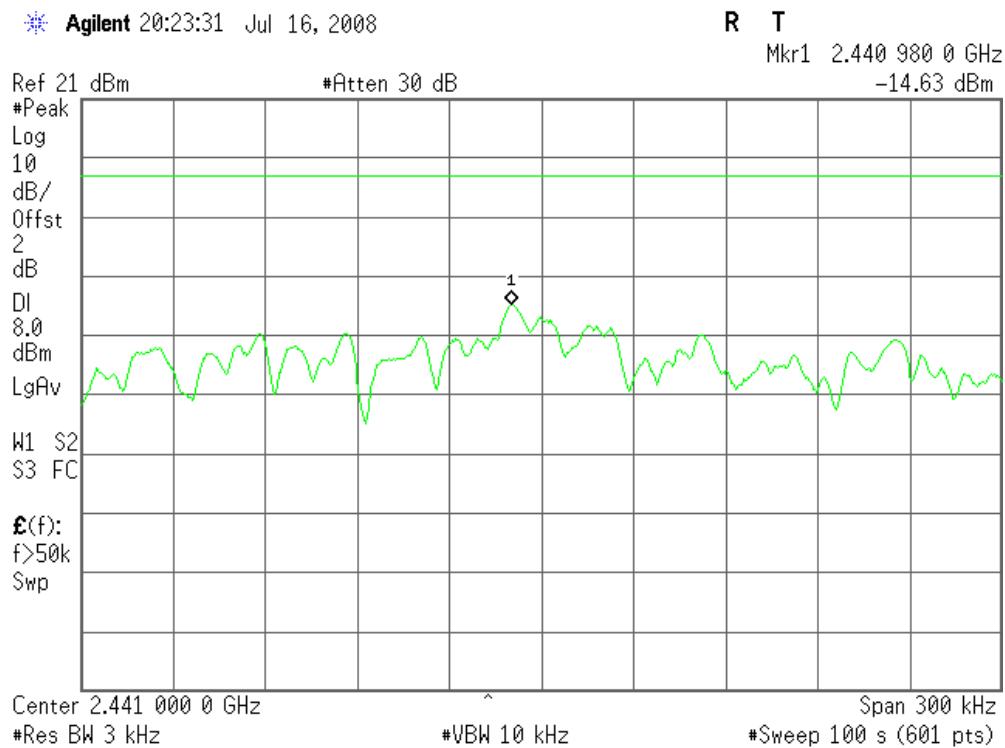


PPSD (CH High)

Agilent 20:24:43 Jul 16, 2008

R T

Mkr1 2.479 980 5 GHz

-14.78 dBm

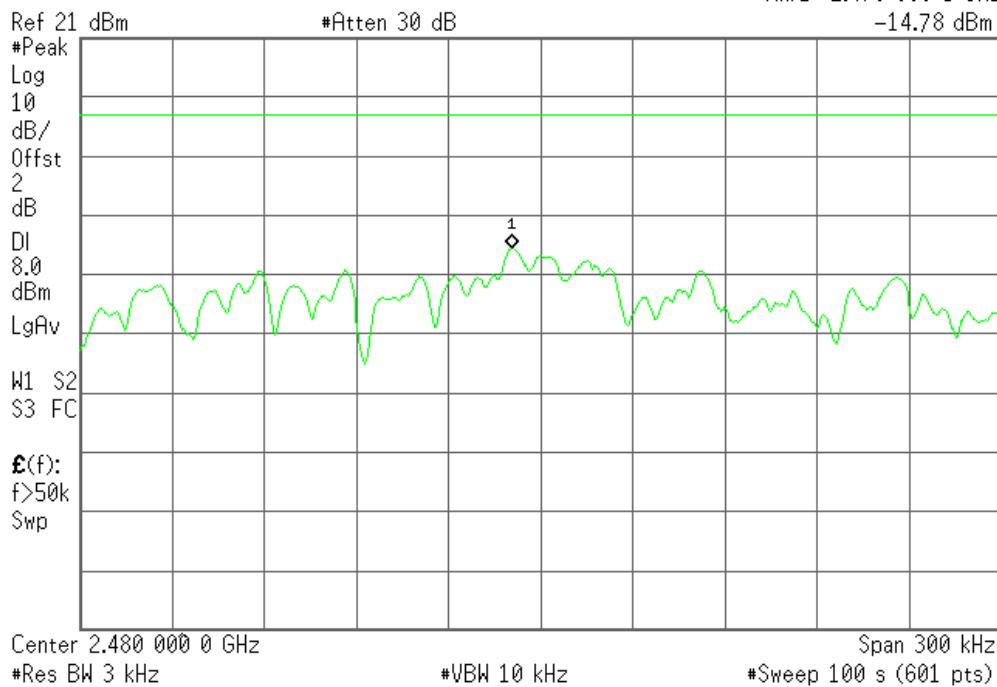

7.3 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Test Configuration

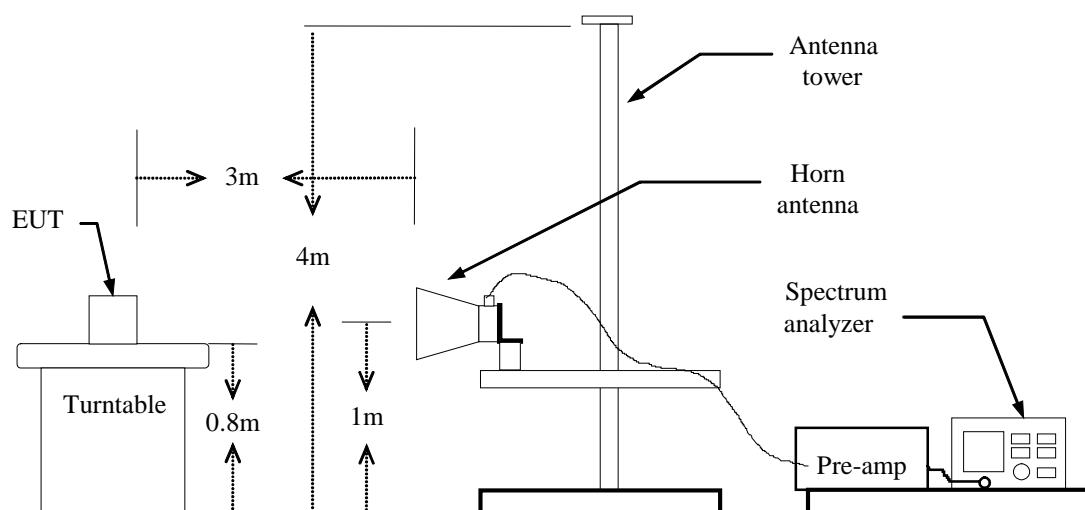

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.

Test Data

Band Edges (CH-Low)


Detector mode: Peak



Polarity: Vertical


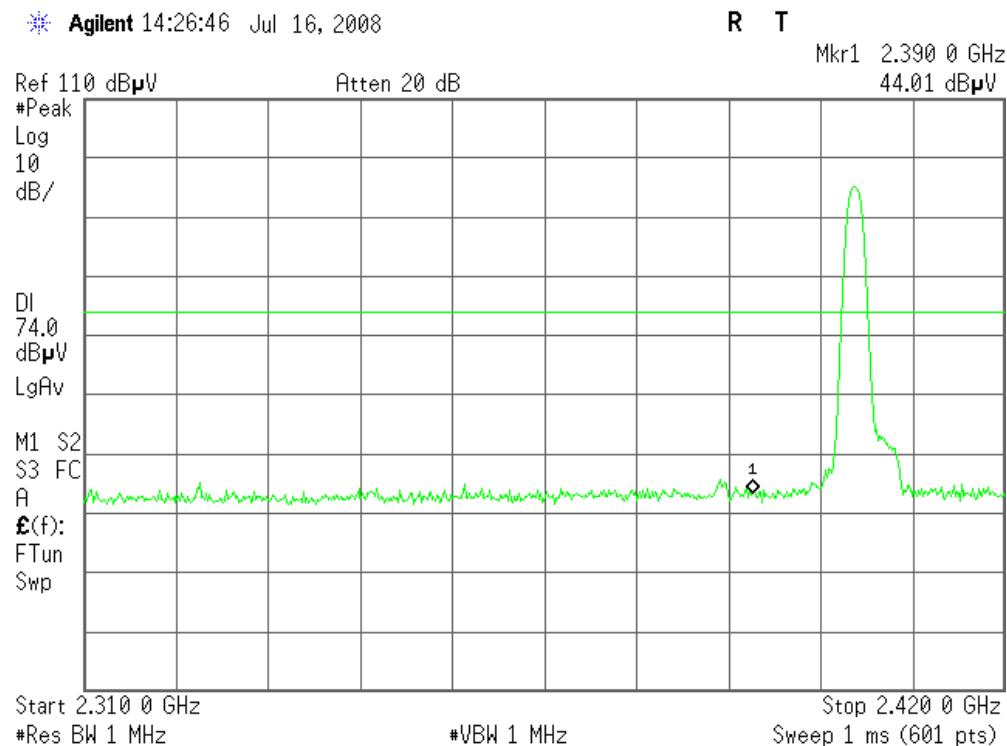


Detector mode: Average

Polarity: Vertical

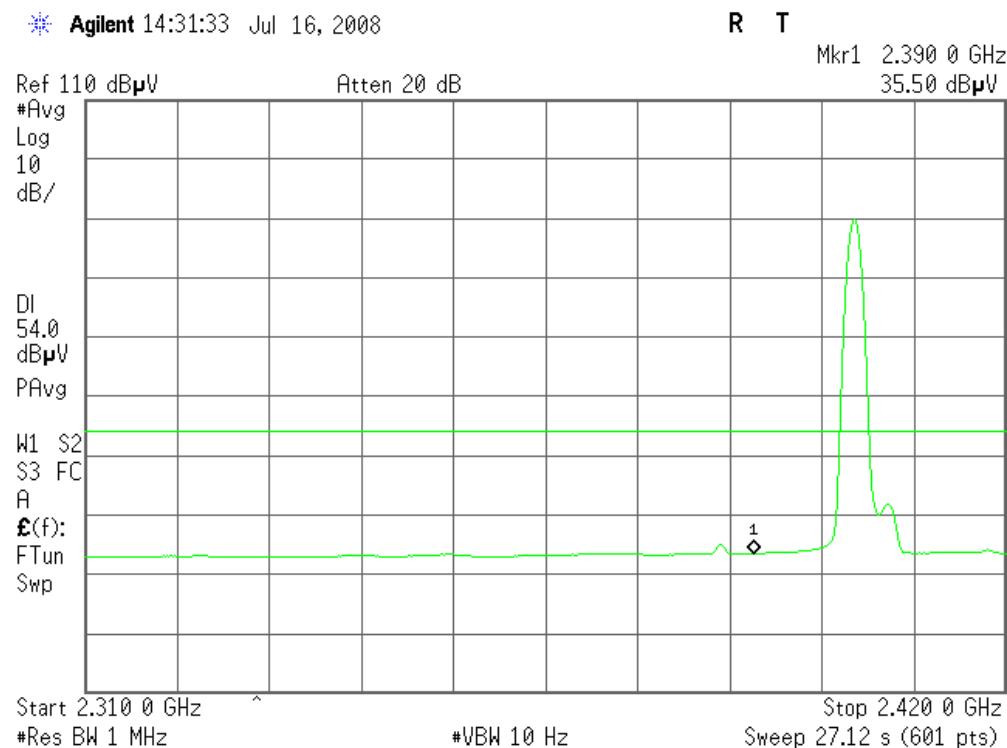


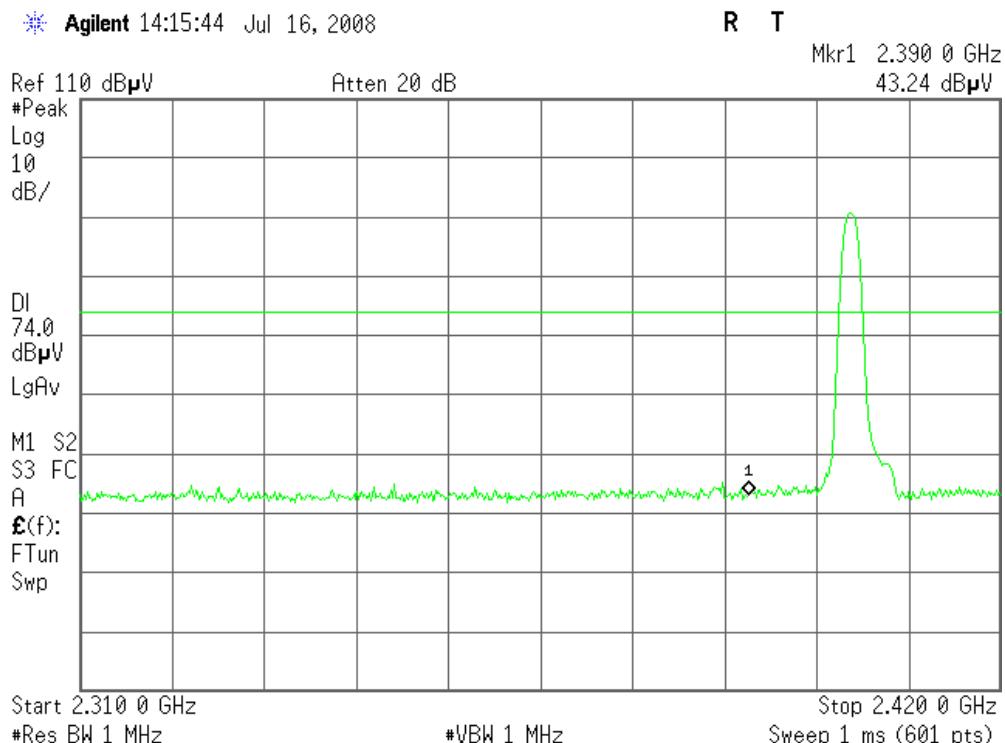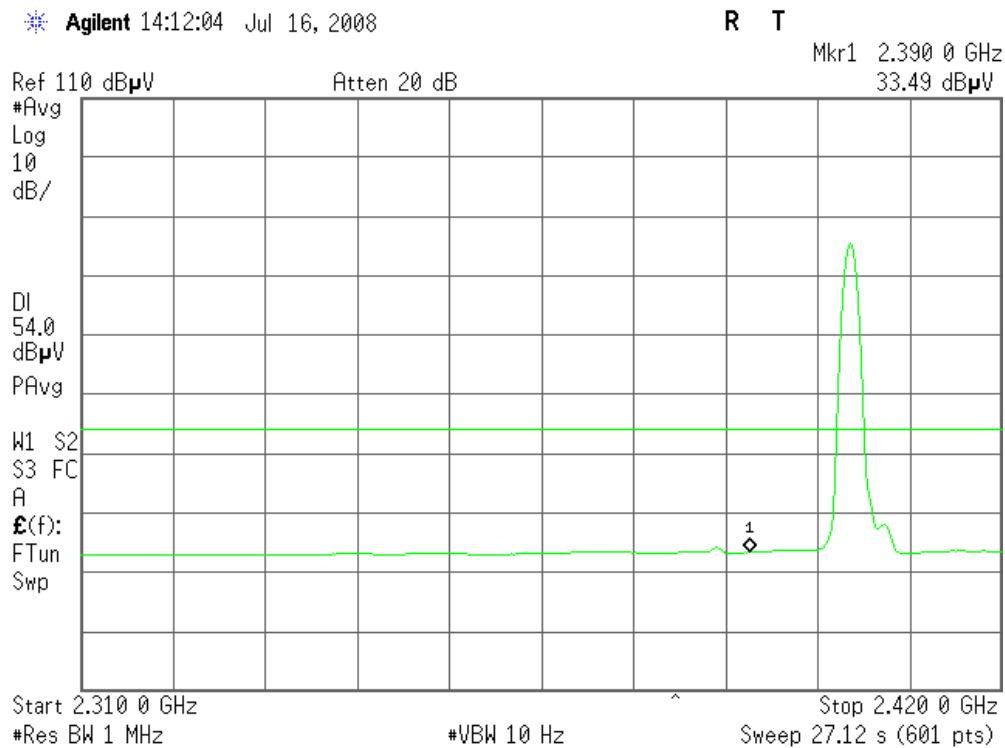Detector mode: Peak**Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

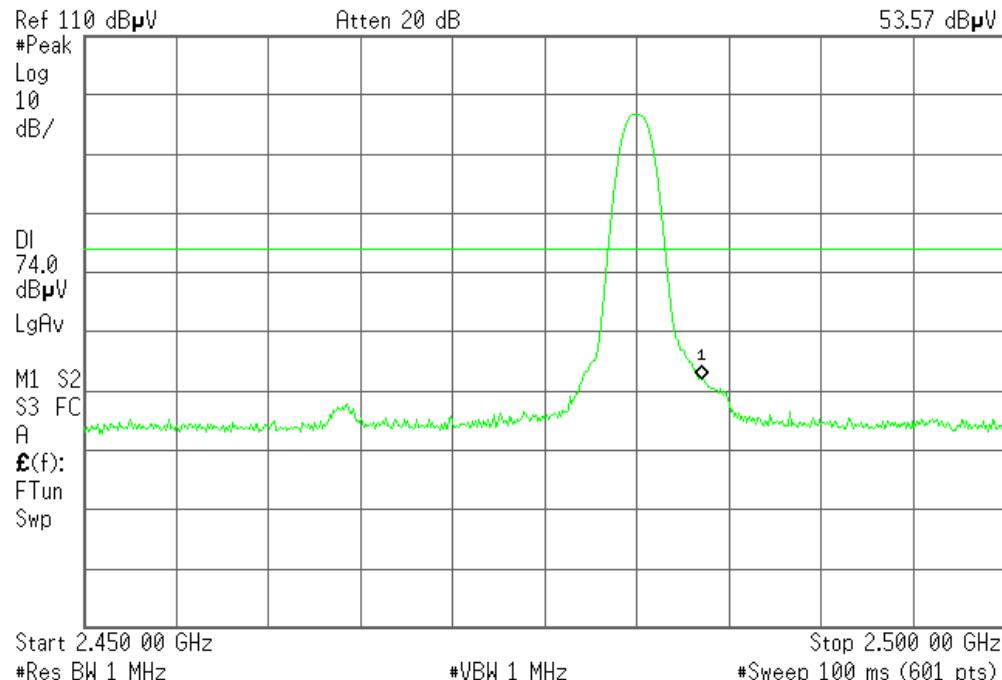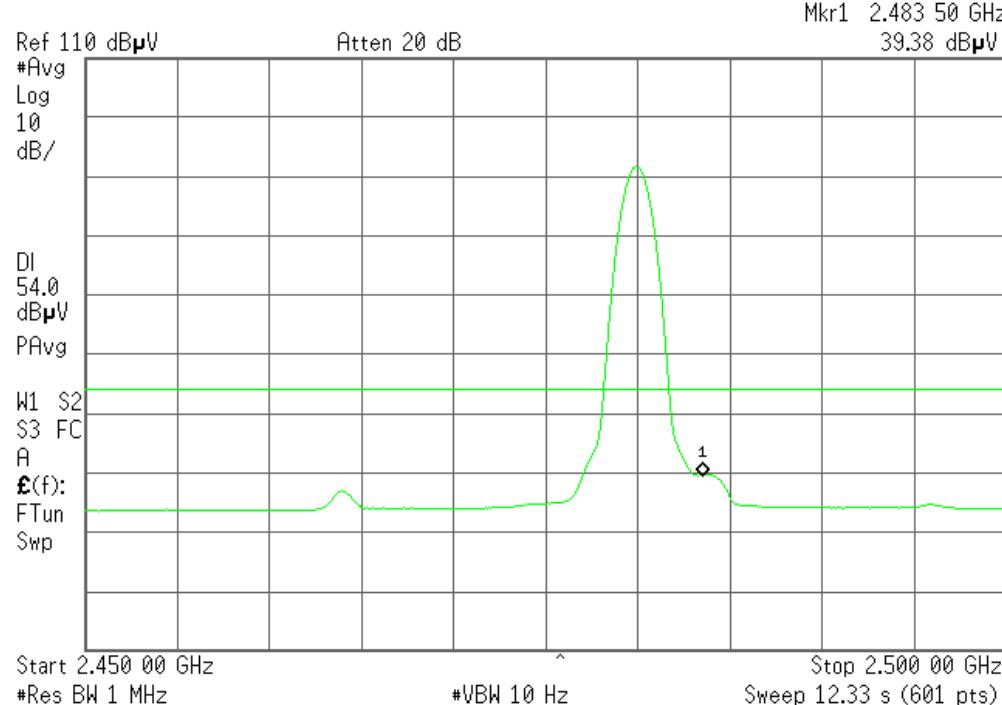
Band Edges (CH-High)**Detector mode: Peak****Polarity: Vertical**2  Agilent 14:22:34 Jul 16, 2008**Detector mode: Average****Polarity: Vertical**3  Agilent 14:24:33 Jul 16, 2008

Detector mode: Peak

* Agilent 14:18:23 Jul 16, 2008

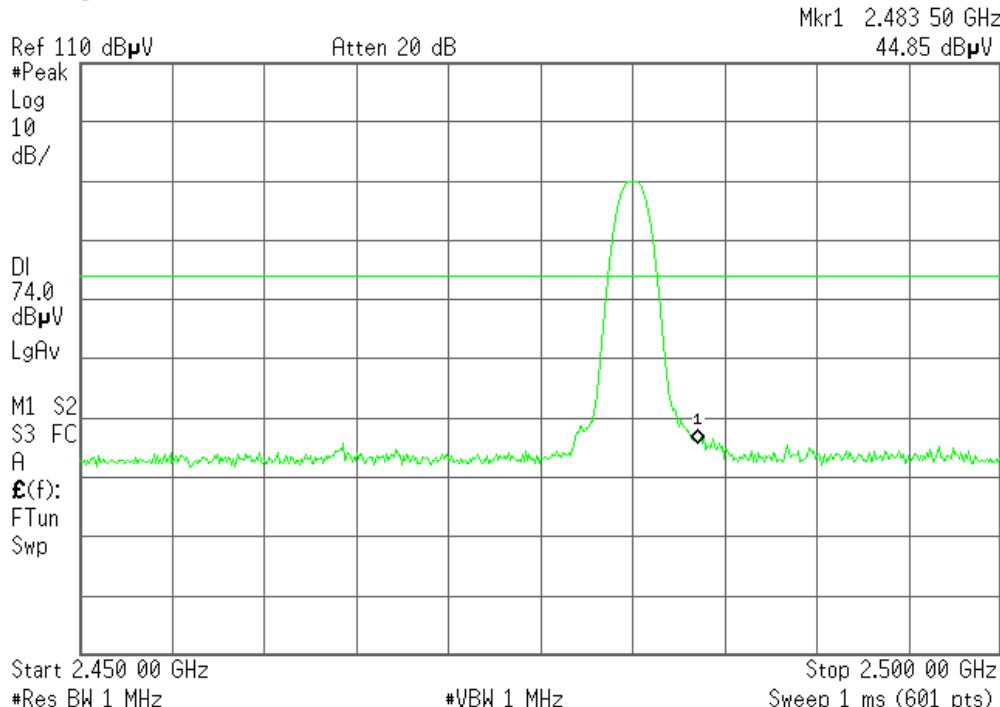**Polarity: Horizontal****Detector mode: Average**

* Agilent 14:21:15 Jul 16, 2008

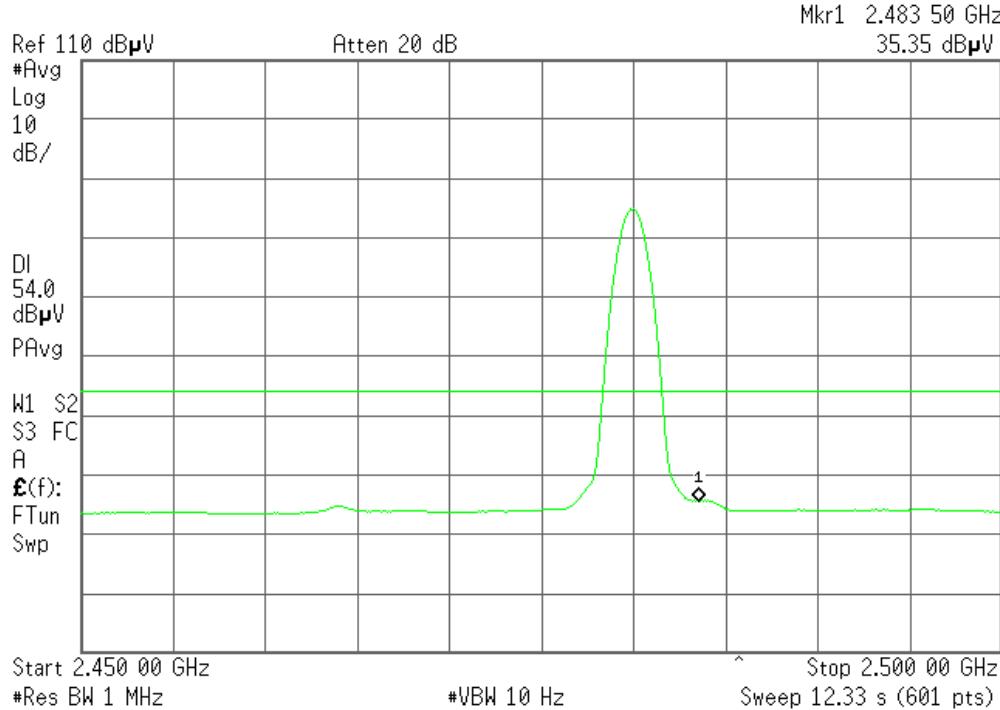

7.4 FREQUENCY SEPARATION

LIMIT


According to § 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW, VBW=30kHz, Adjust Span to 3 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS


No non-compliance noted

Test Data

Channel Separation (MHz)	Limit (kHz)	Result
1.0	841kHz (20dB BW, Max)	Pass


Test Plot

Measurement of Channel Separation

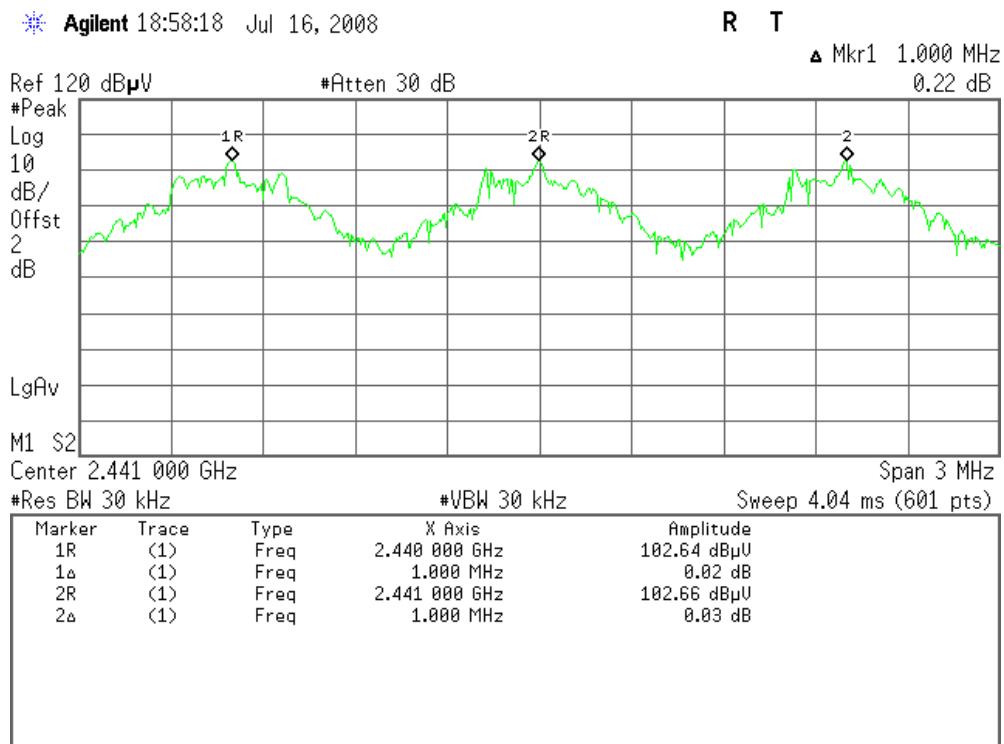


Test Plot

20 dB bandwidth(CH Mid)

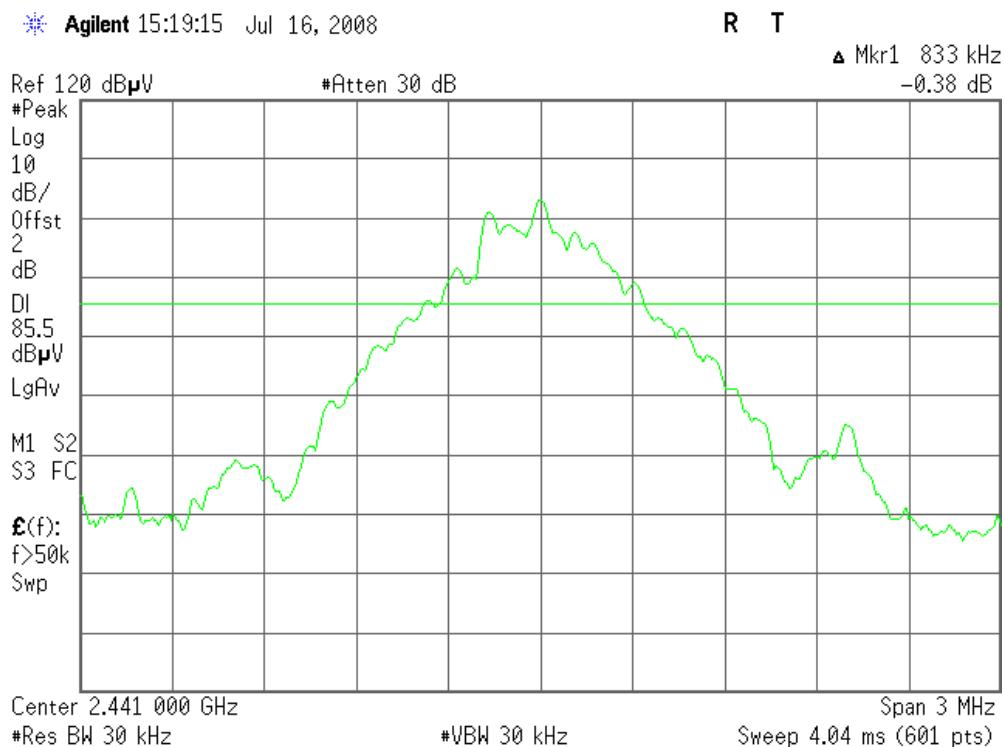


20 dB bandwidth(CH Low)

* Agilent 15:15:36 Jul 16, 2008

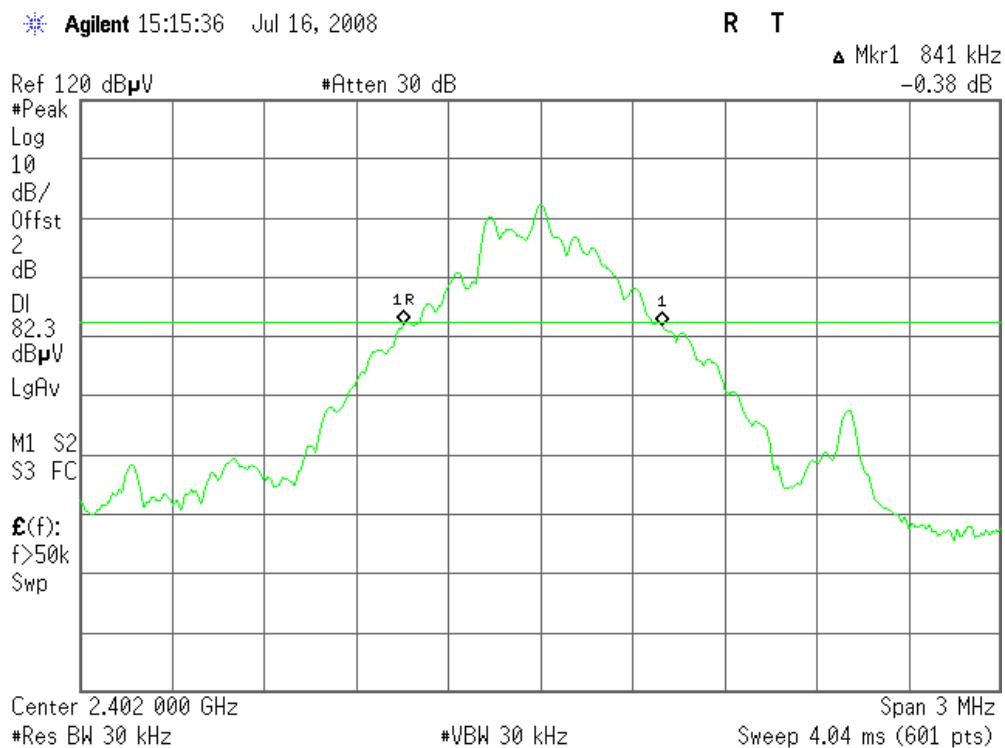**20 dB bandwidth (CH High)**

* Agilent 15:15:41 Jul 16, 2008

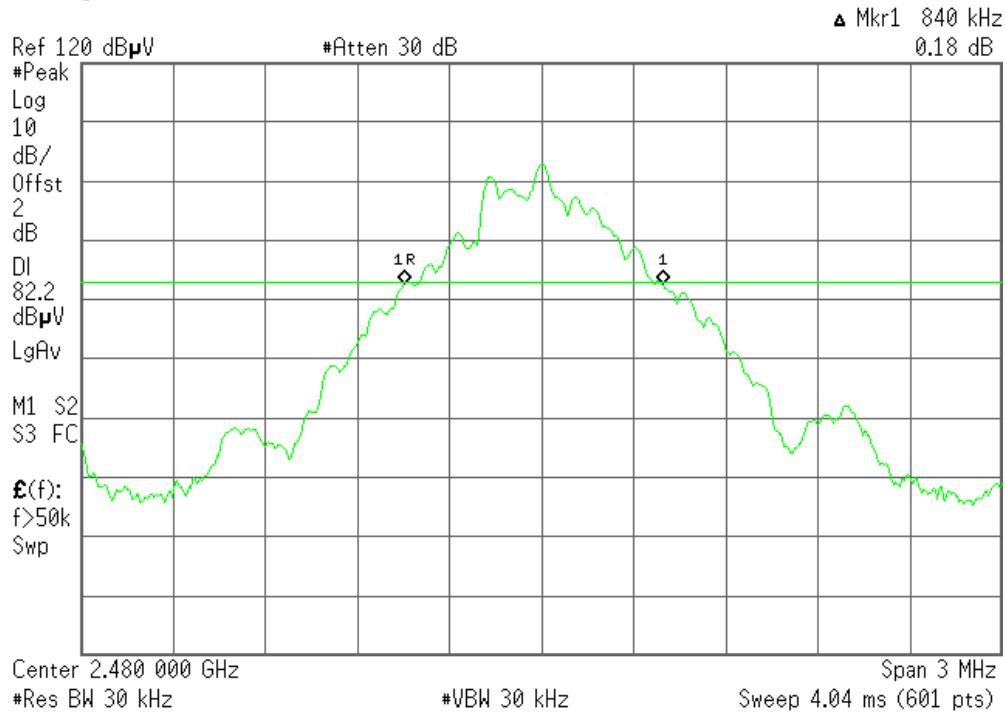



7.5 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=510kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Test Plot


Channel Number

2.4 GHz – 2.441 GHz

* Agilent 17:57:25 Jul 16, 2008

R T

Mkr1 2.402 00 GHz
102.14 dB μ V

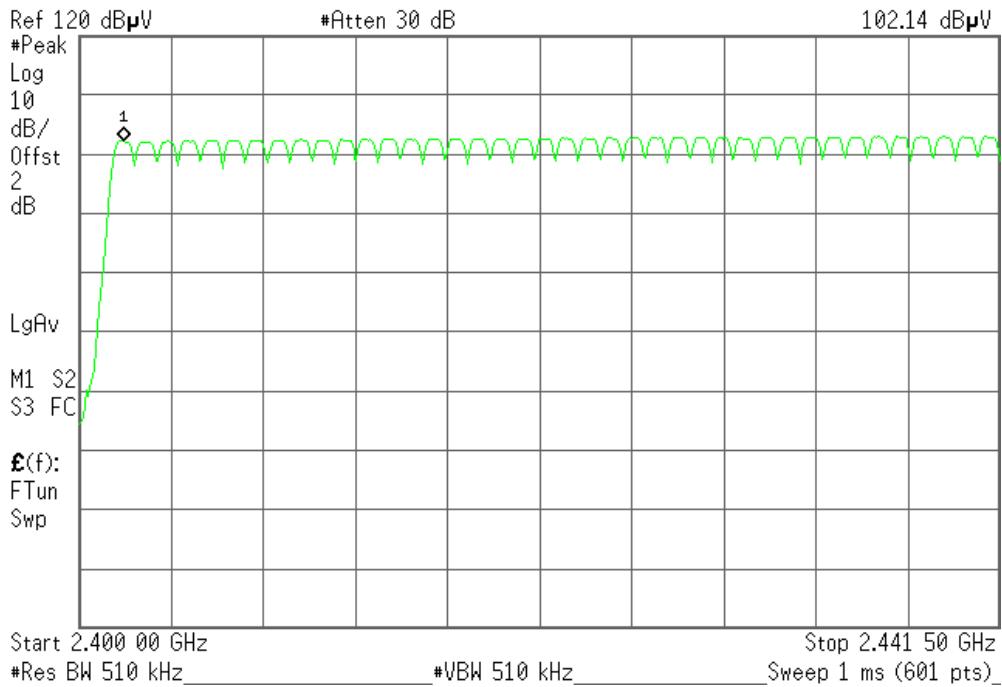


2.441 GHz – 2.4835 GHz

* Agilent 17:56:16 Jul 16, 2008

R T

Mkr1 2.480 00 GHz
102.21 dB μ V

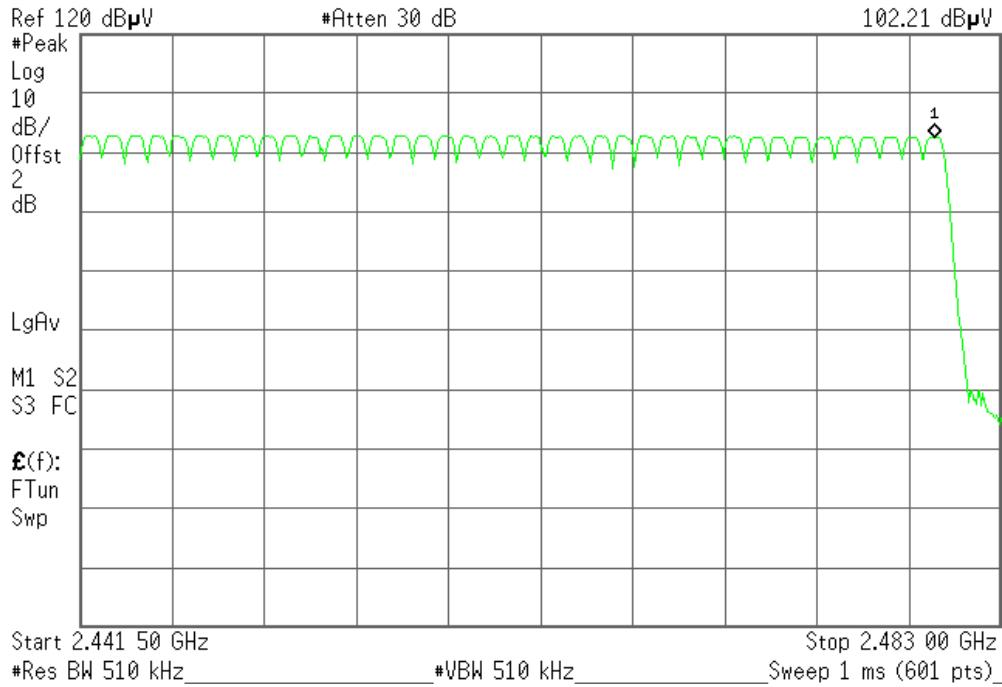

7.6 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

DH 1

CH Low: $0.42 * (1600/2)/79 * 31.6 = 134.4$ (ms)

CH Mid: $0.42 * (1600/2)/79 * 31.6 = 134.4$ (ms)

CH High: $0.43 * (1600/2)/79 * 31.6 = 137.6$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.42	134.4	31.60	400.00	PASS
Mid	0.42	134.4	31.60		PASS
High	0.43	137.6	31.60		PASS

DH 3

CH Low: $1.67 * (1600/4)/79 * 31.6 = 267.2$ (ms)

CH Mid: $1.68 * (1600/4)/79 * 31.6 = 268.8$ (ms)

CH High: $1.67 * (1600/4)/79 * 31.6 = 267.2$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.67	267.2	31.60	400.00	PASS
Mid	1.68	268.8	31.60		PASS
High	1.67	267.2	31.60		PASS



DH 5

CH Low: $2.93 * (1600/6)/79 * 31.6 = 312.5$ (ms)

CH Mid: $2.93 * (1600/6)/79 * 31.6 = 312.5$ (ms)

CH High: $2.92 * (1600/6)/79 * 31.6 = 311.5$ (ms)


CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.93	312.5	31.60	400.00	PASS
Mid	2.93	312.5	31.60		PASS
High	2.92	311.5	31.60		PASS

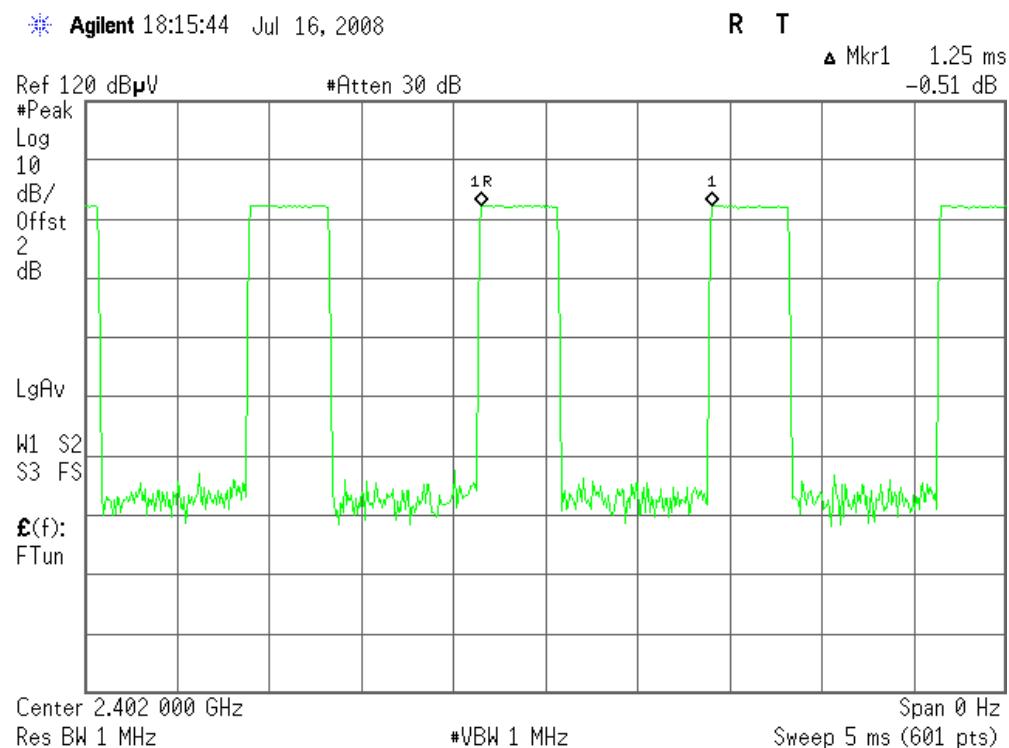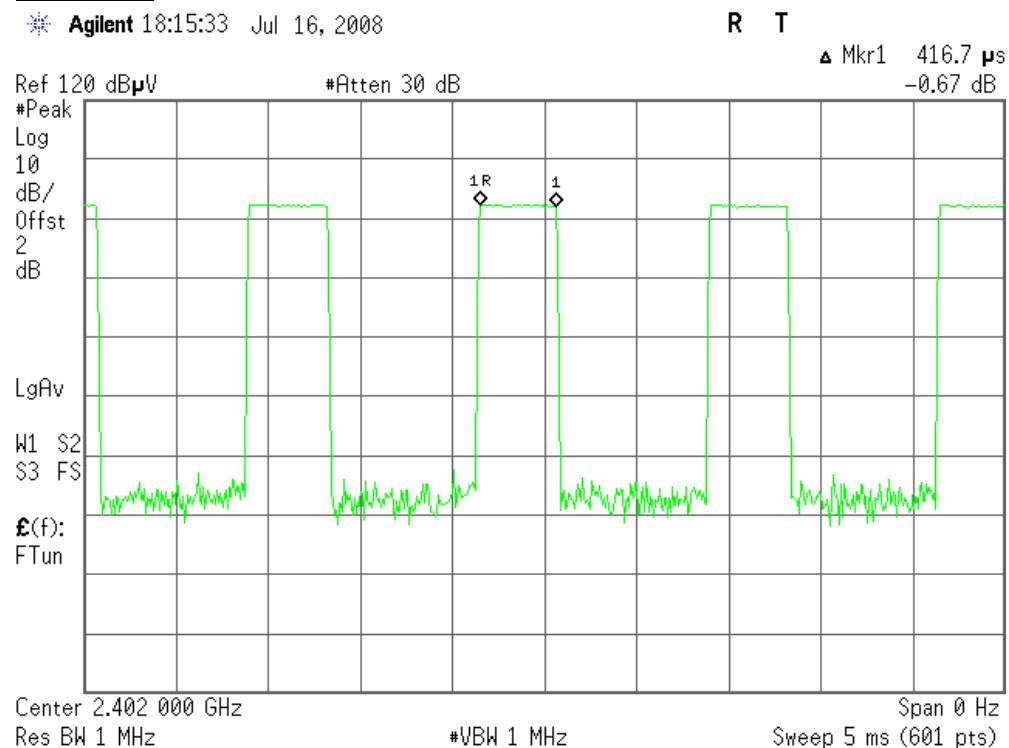Test Plot**DH 1****(CH Low)**

(CH Mid)


* Agilent 21:46:54 Jul 16, 2008

R T

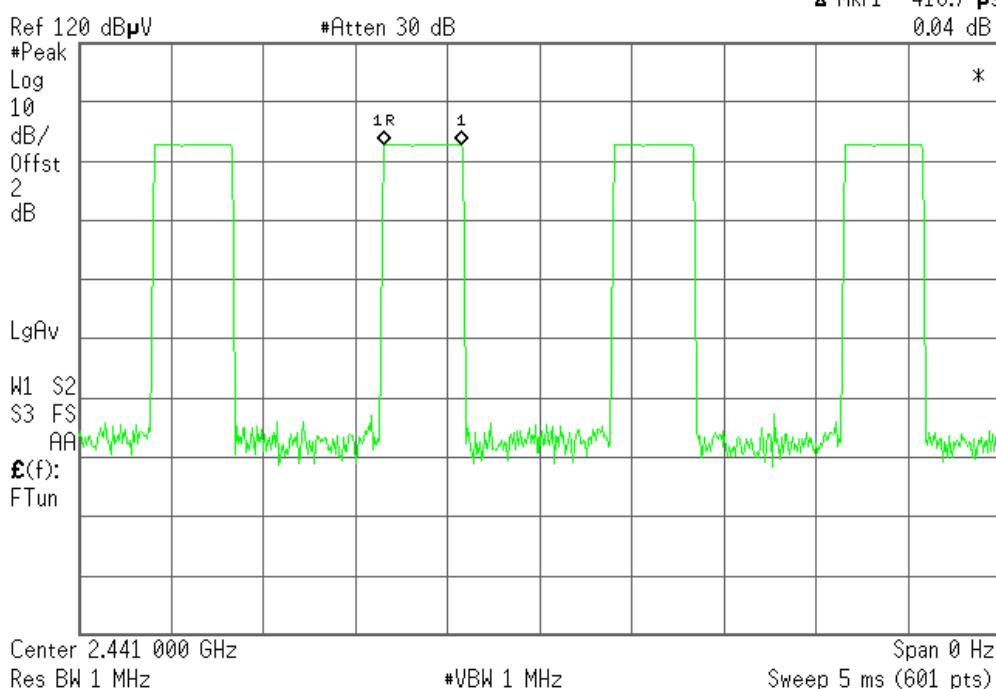△ Mkr1 416.7 μ s
0.04 dB

* Agilent 21:46:26 Jul 16, 2008


R T

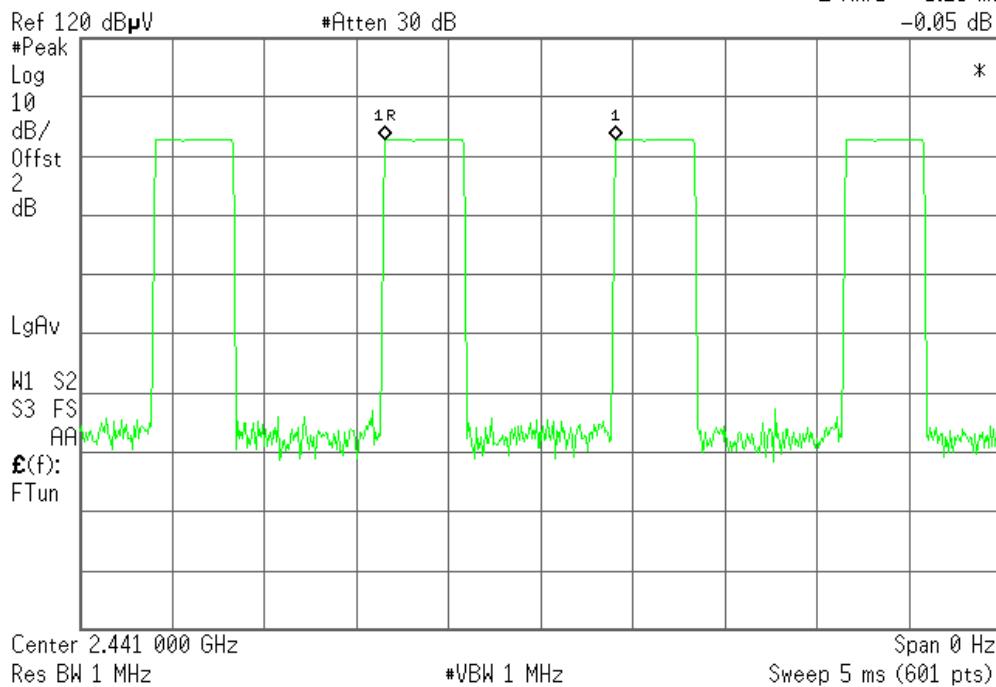△ Mkr1 1.25 ms
-0.05 dB

(CH High)


Agilent 21:52:19 Jul 16, 2008



R T

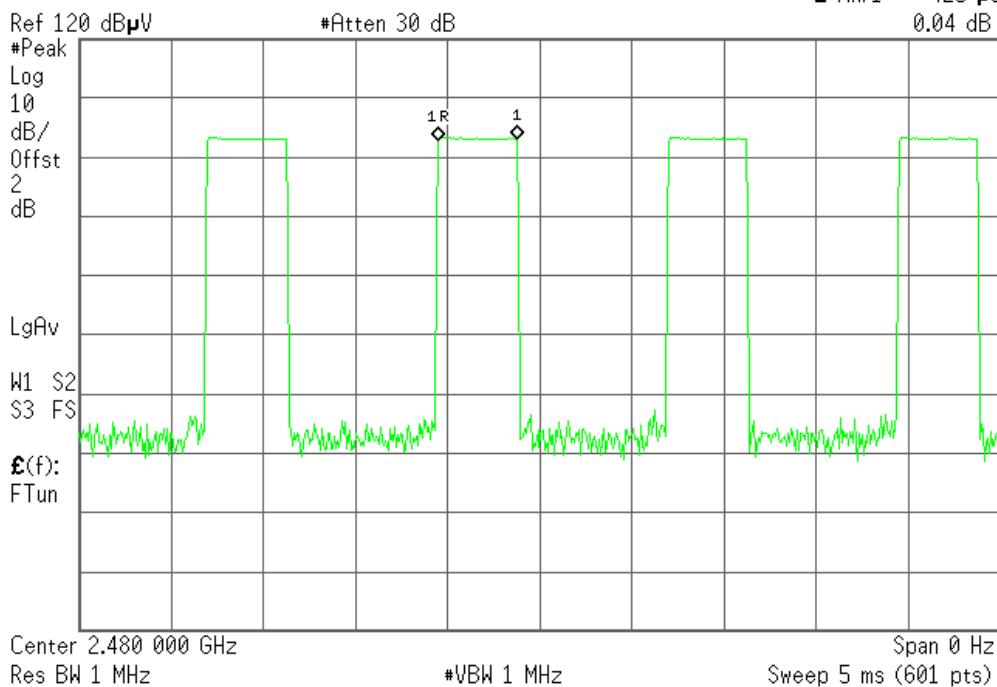△ Mkr1 425 μ s
0.04 dB

Agilent 21:49:42 Jul 16, 2008

R T

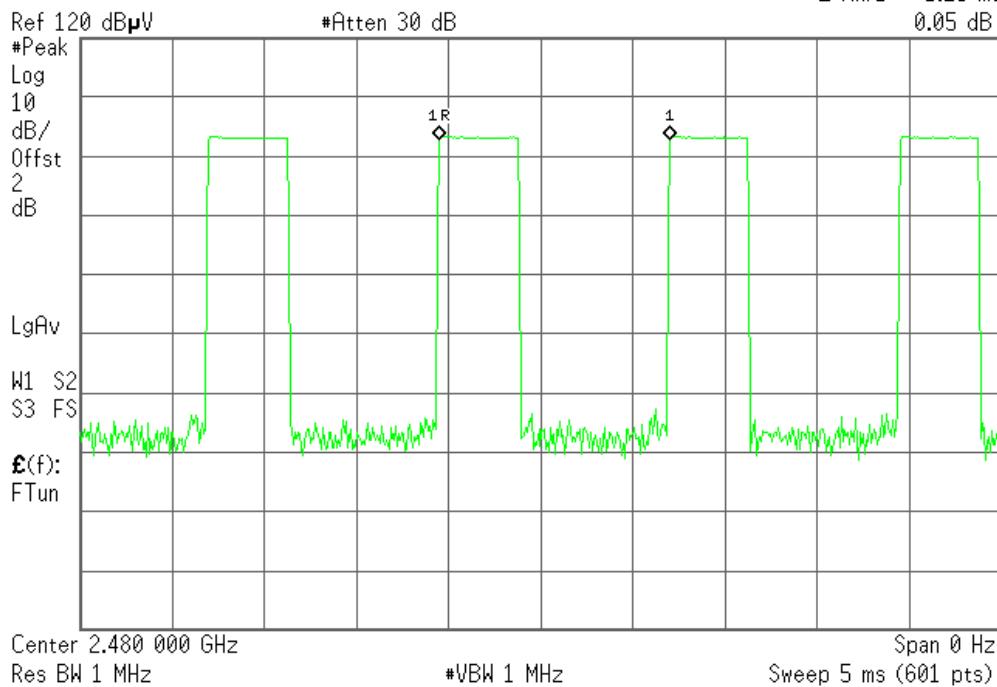
△ Mkr1 1.25 ms
0.05 dB

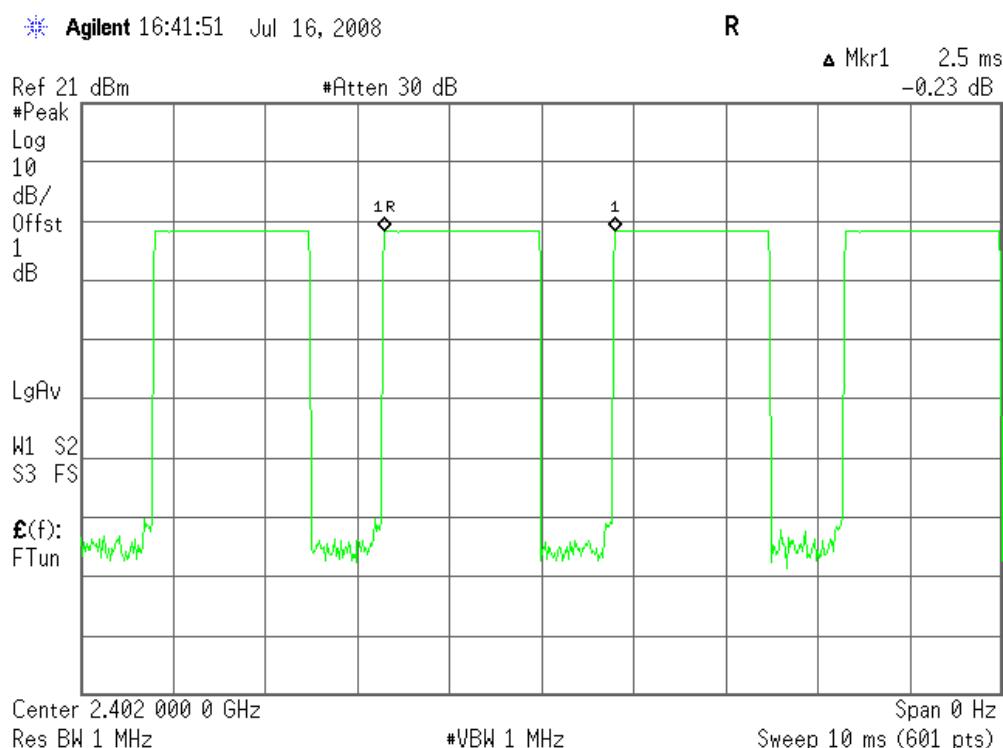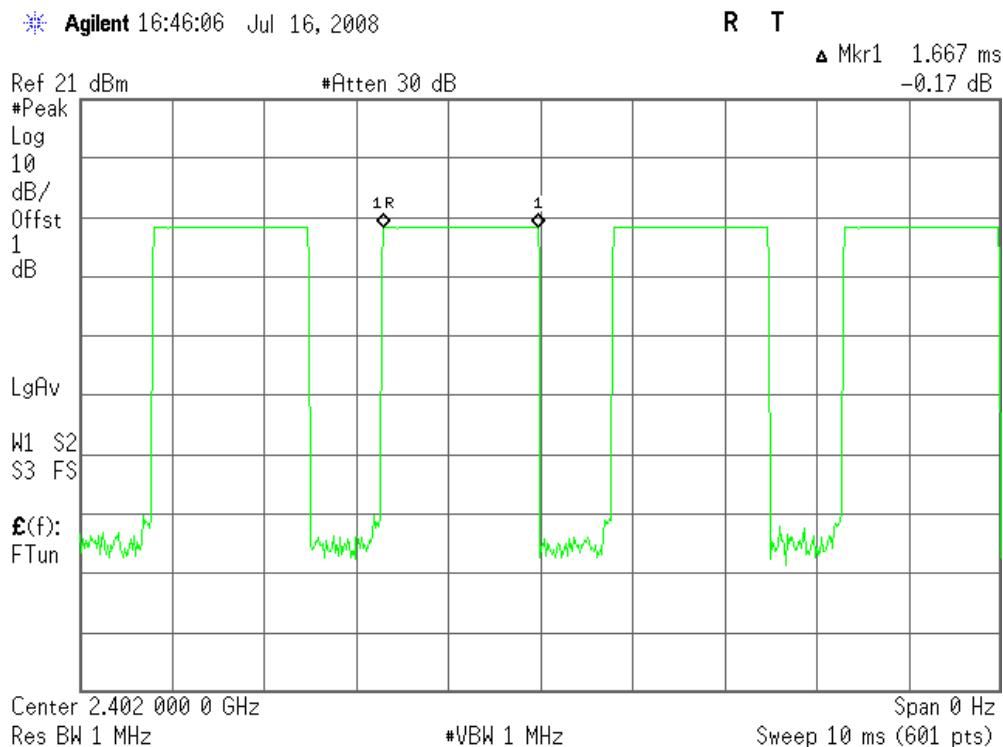DH 3**(CH Low)**

(CH Mid)


Agilent 16:45:58 Jul 16, 2008

R T

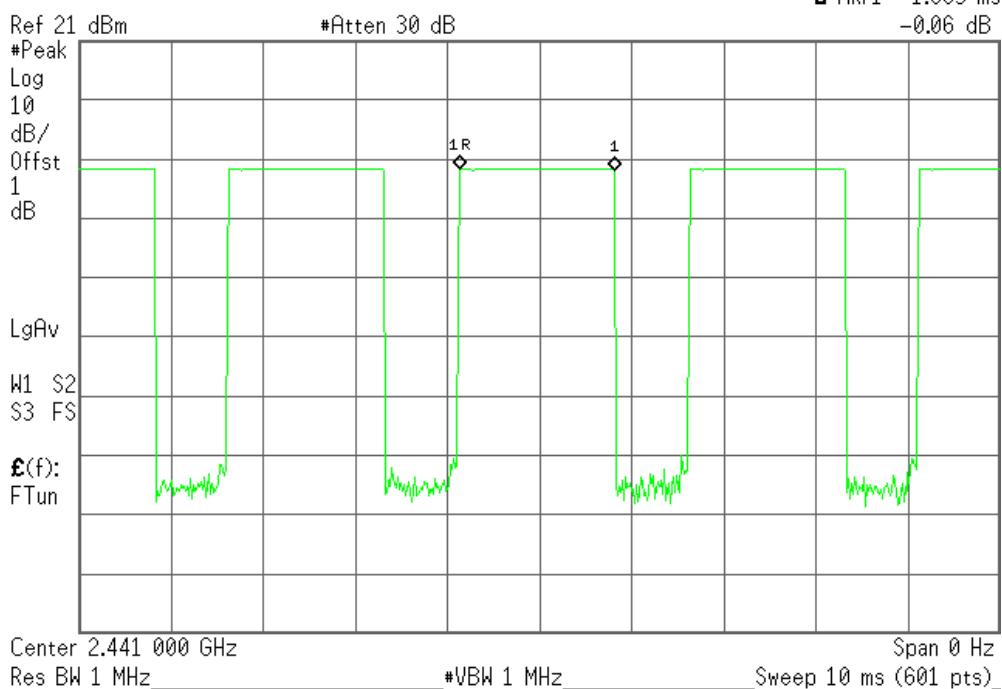△ Mkr1 1.683 ms
-0.06 dB

Agilent 16:46:06 Jul 16, 2008


R

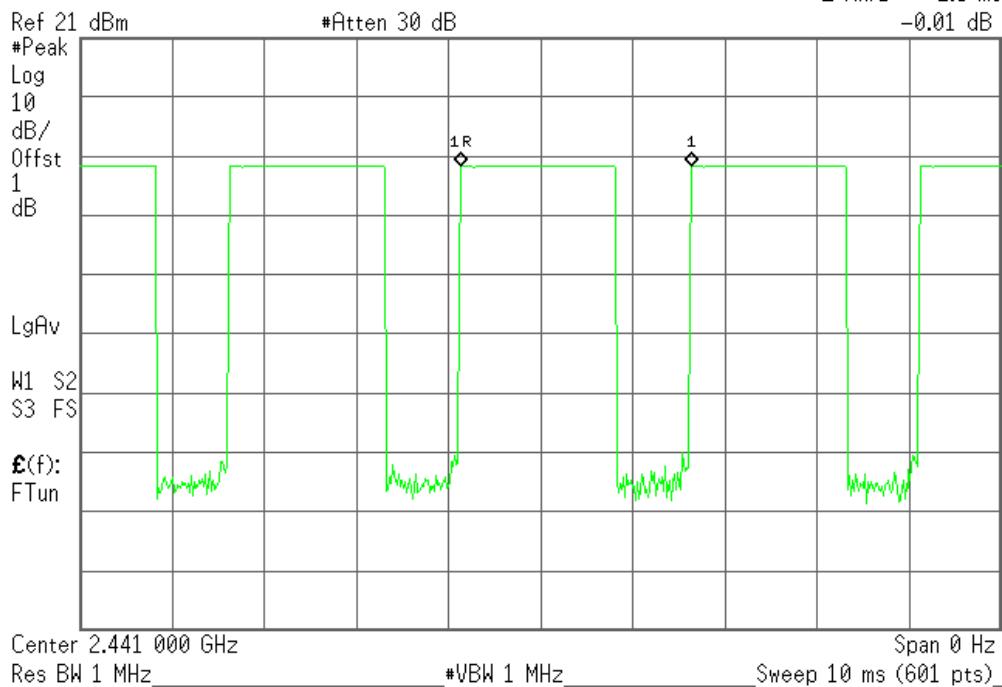△ Mkr1 2.5 ms
-0.01 dB

(CH High)


Agilent 16:56:26 Jul 16, 2008



R

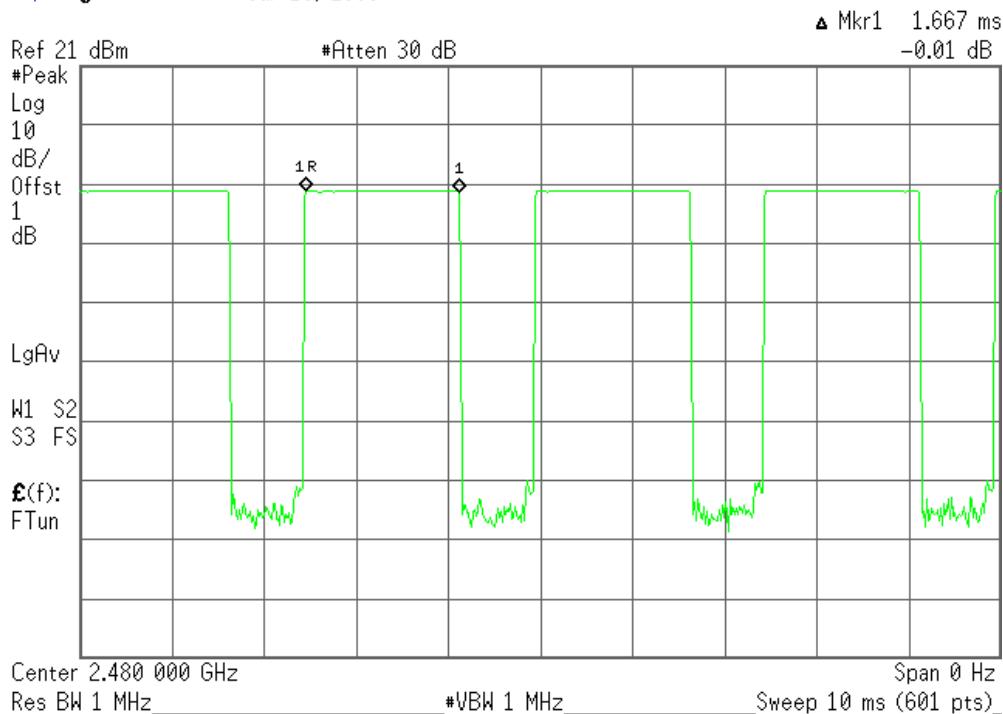

Agilent 16:56:26 Jul 16, 2008

R

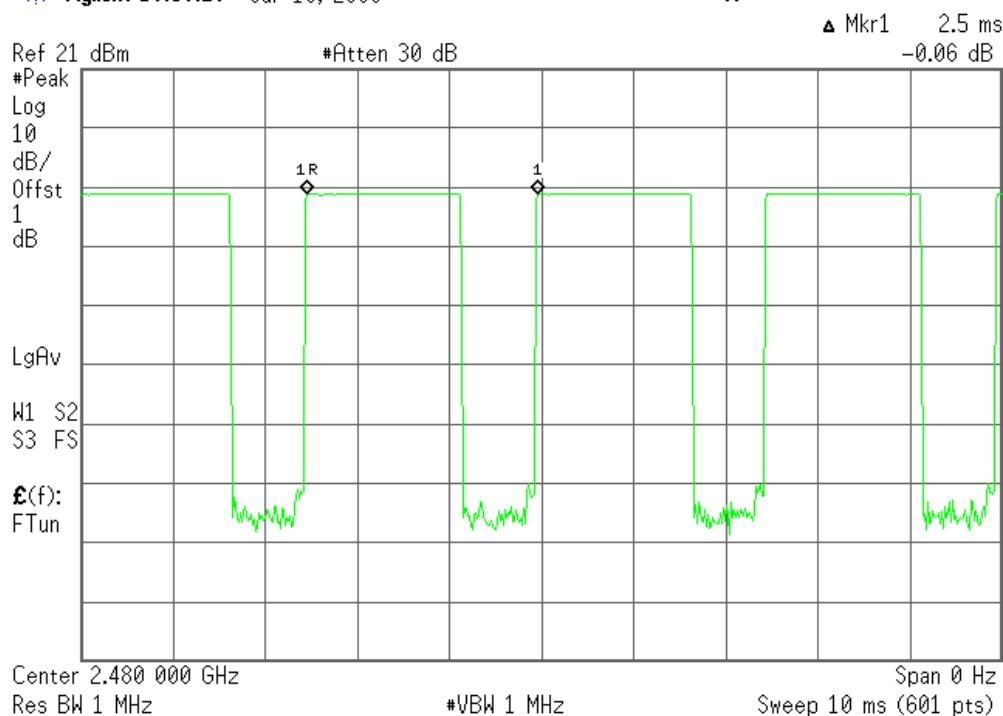


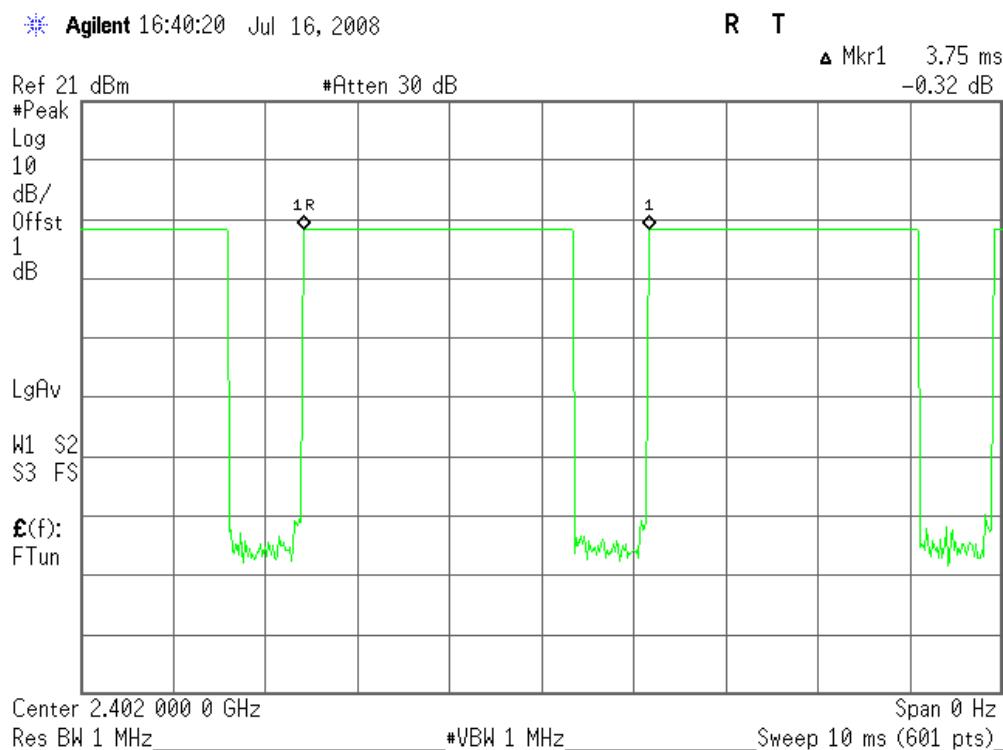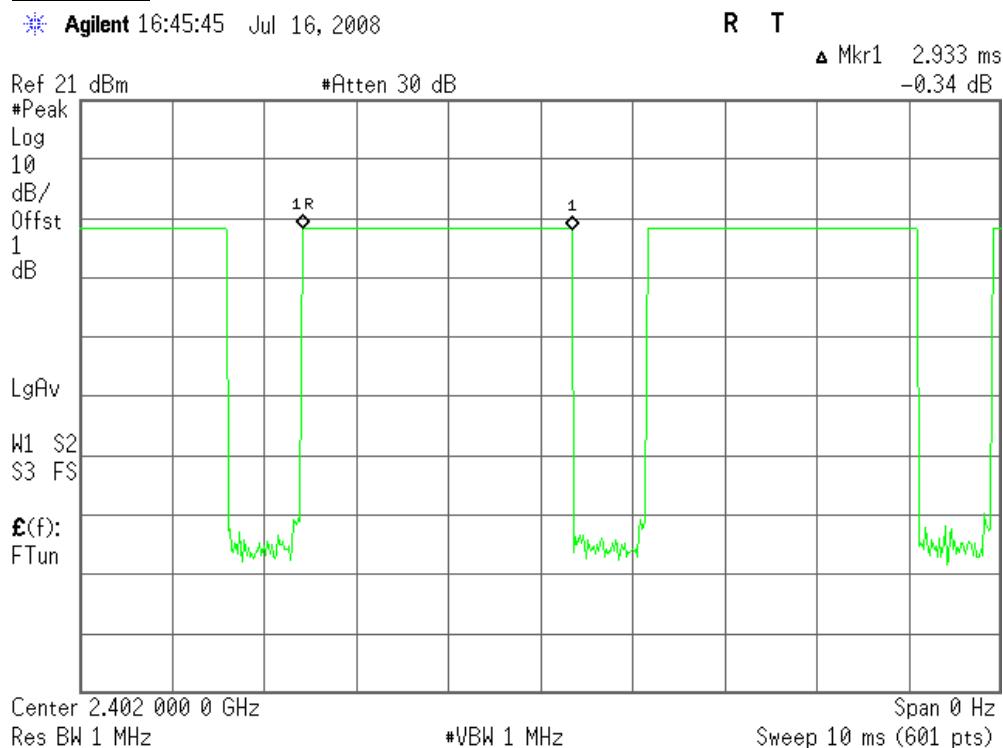DH5**(CH Low)**

(CH Mid)


* Agilent 16:41:14 Jul 16, 2008

R T

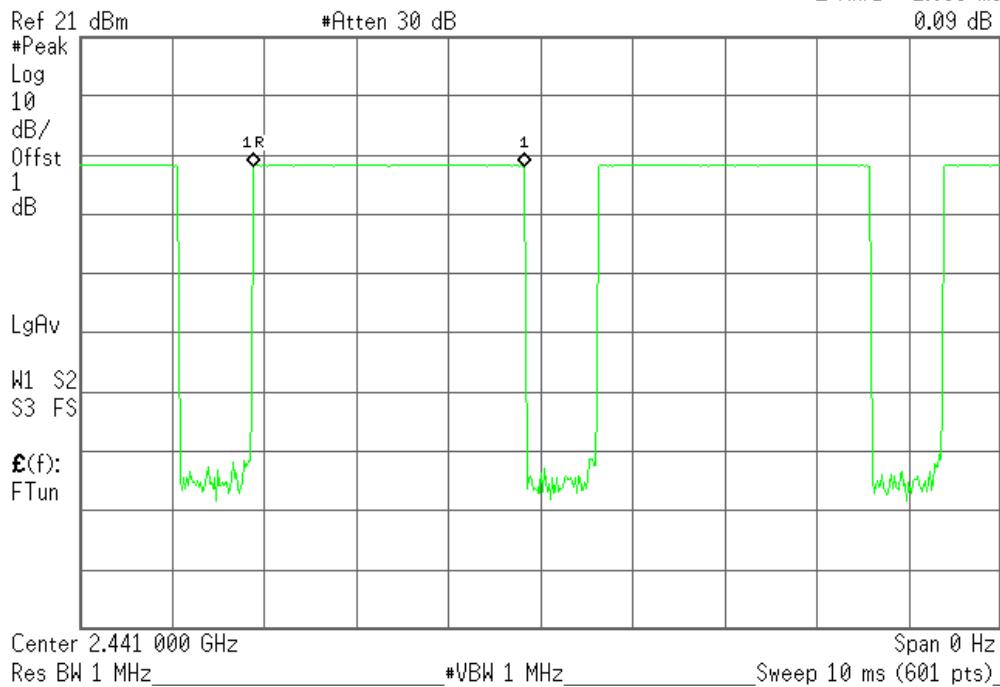△ Mkr1 2.933 ms
0.09 dB

* Agilent 16:42:28 Jul 16, 2008

R

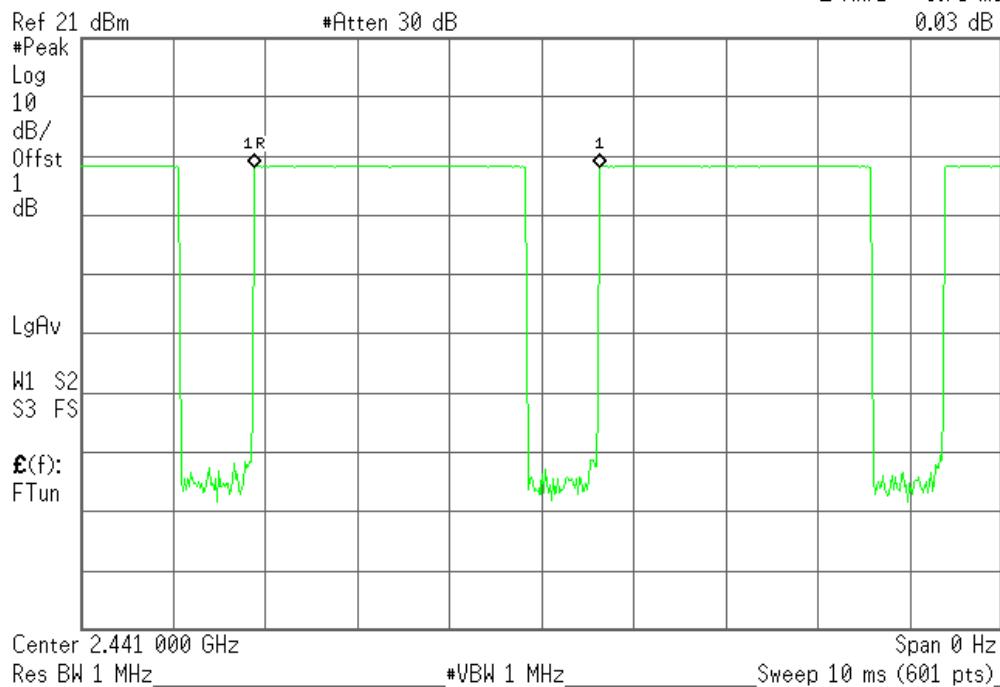△ Mkr1 3.75 ms
0.03 dB


(CH High)

* Agilent 16:52:28 Jul 16, 2008

R T

△ Mkr1 2.917 ms

-0.02 dB

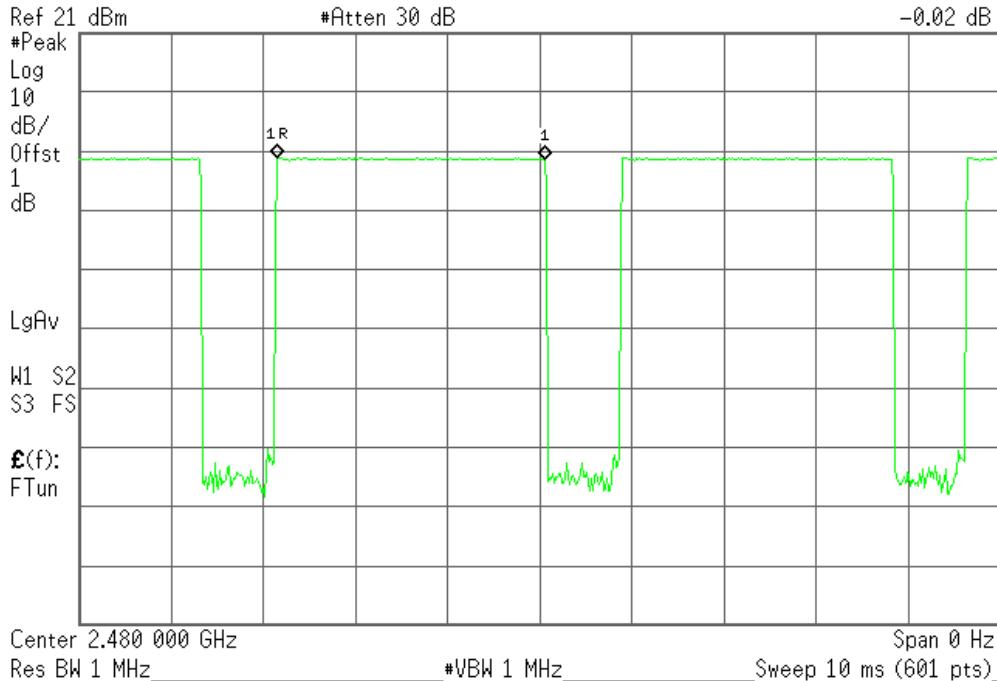


* Agilent 16:52:42 Jul 16, 2008

R

△ Mkr1 3.75 ms

0.07 dB

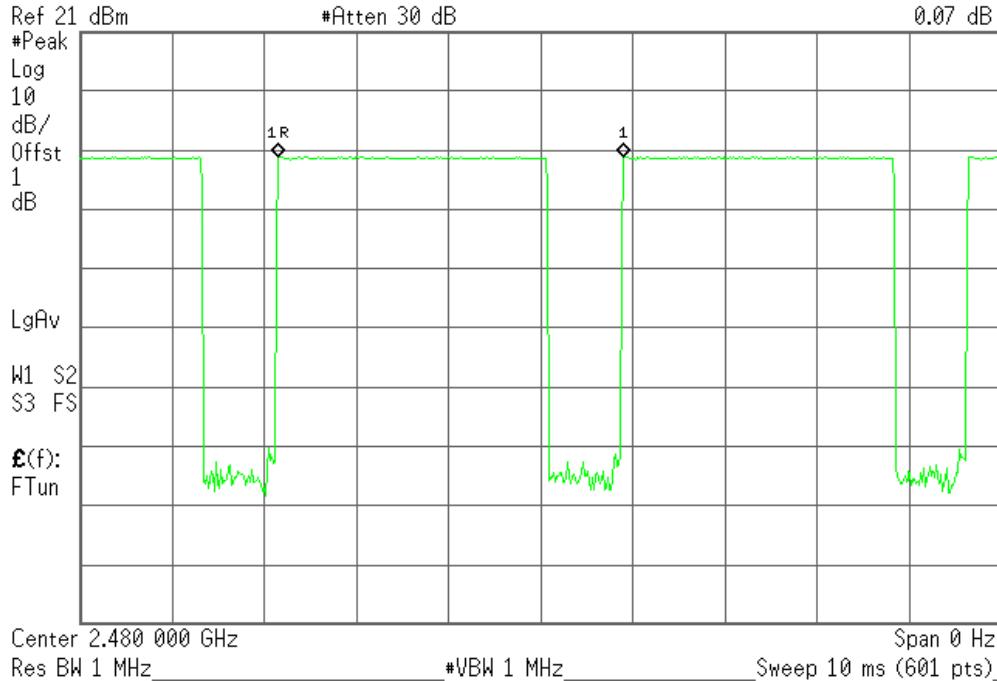

SPURIOUS EMISSIONS

7.7 Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE



Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted

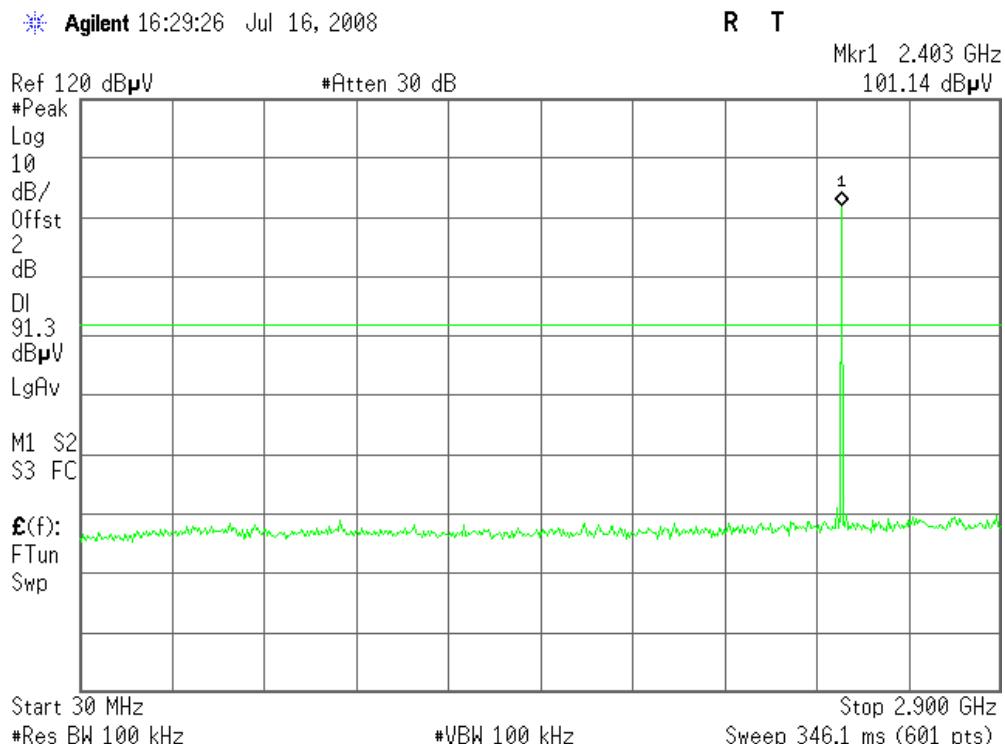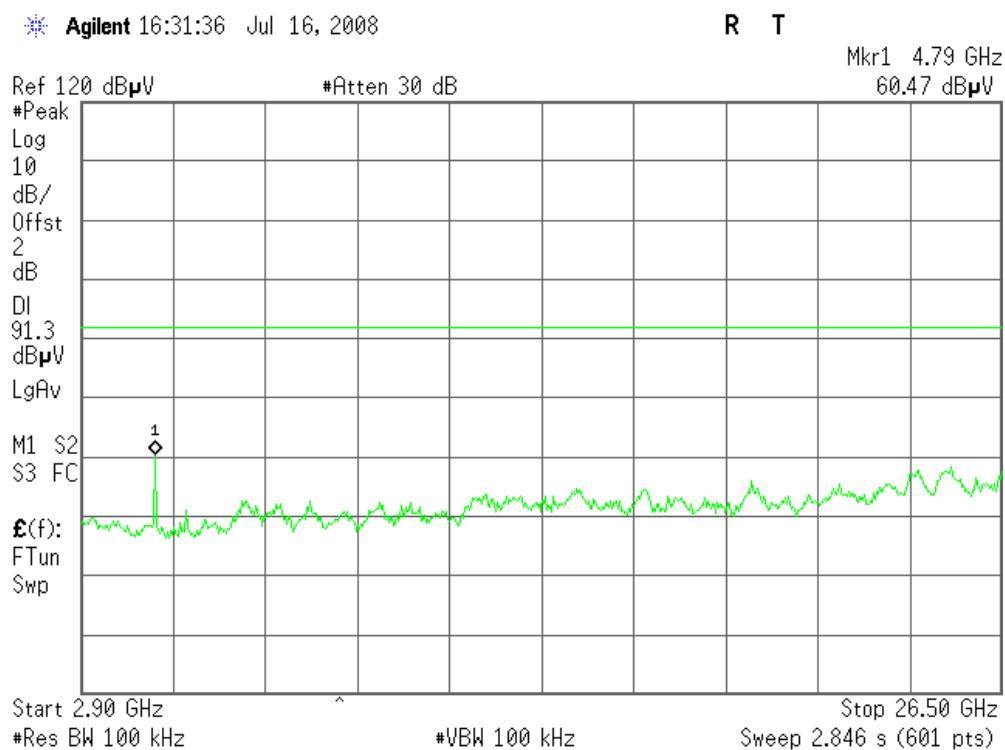
Test Plot**CH Low****30MHz – 2.9GHz****2.9GHz – 26.5GHz**

CH Mid**30MHz – 2.9GHz**

* Agilent 16:34:46 Jul 16, 2008

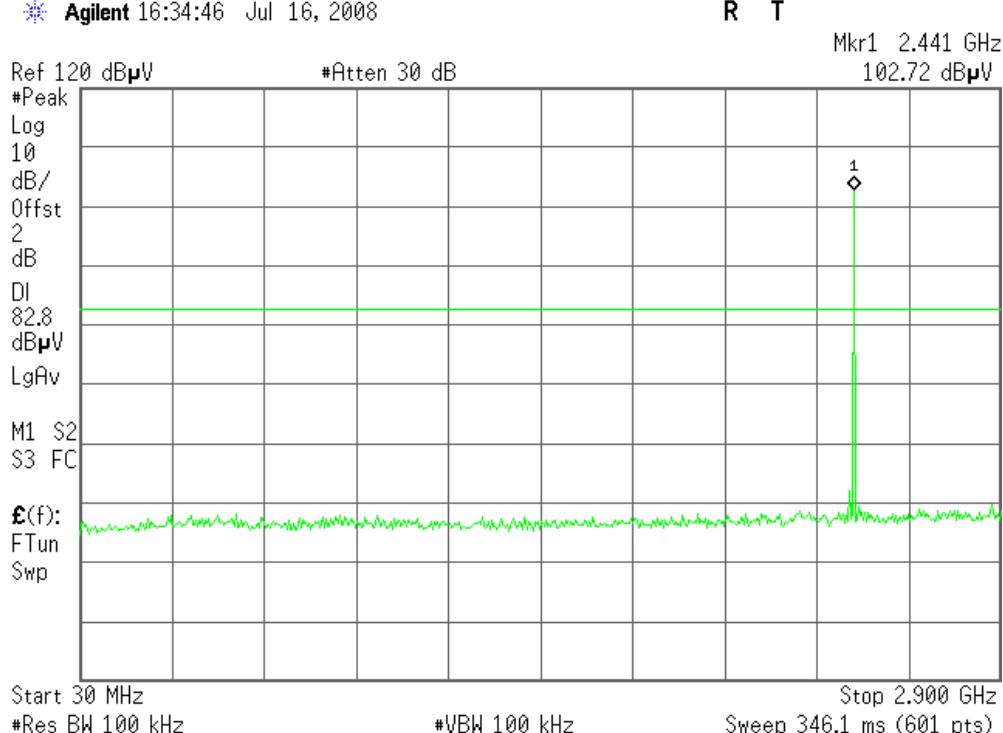**2.9GHz – 26.5GHz**


* Agilent 16:33:26 Jul 16, 2008

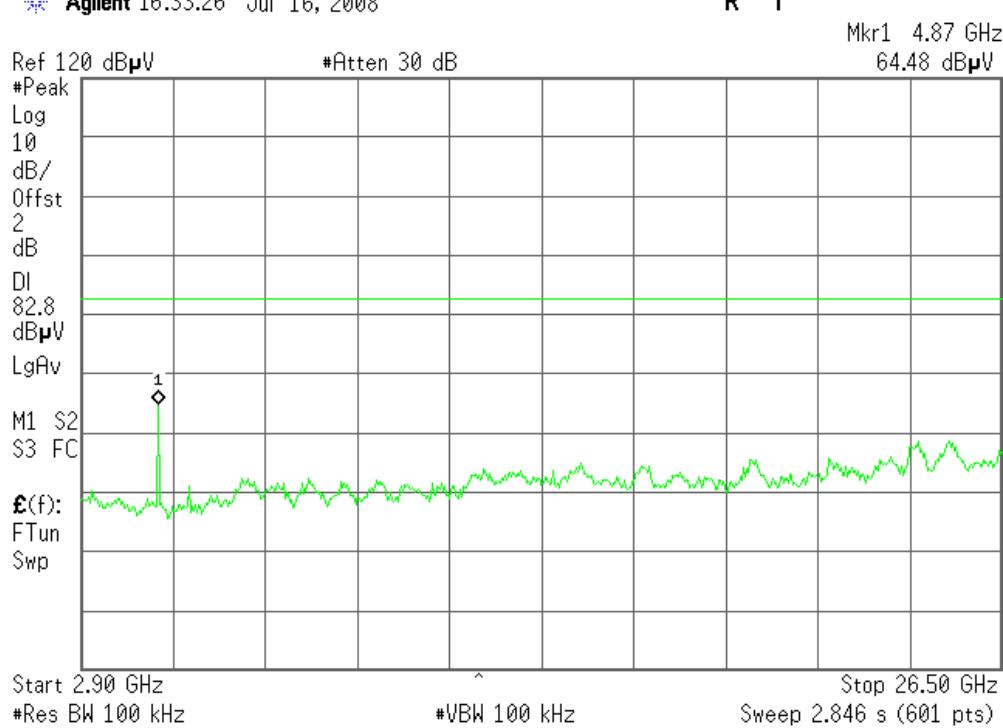

CH High


30MHz – 2.9GHz

* Agilent 16:33:35 Jul 16, 2008

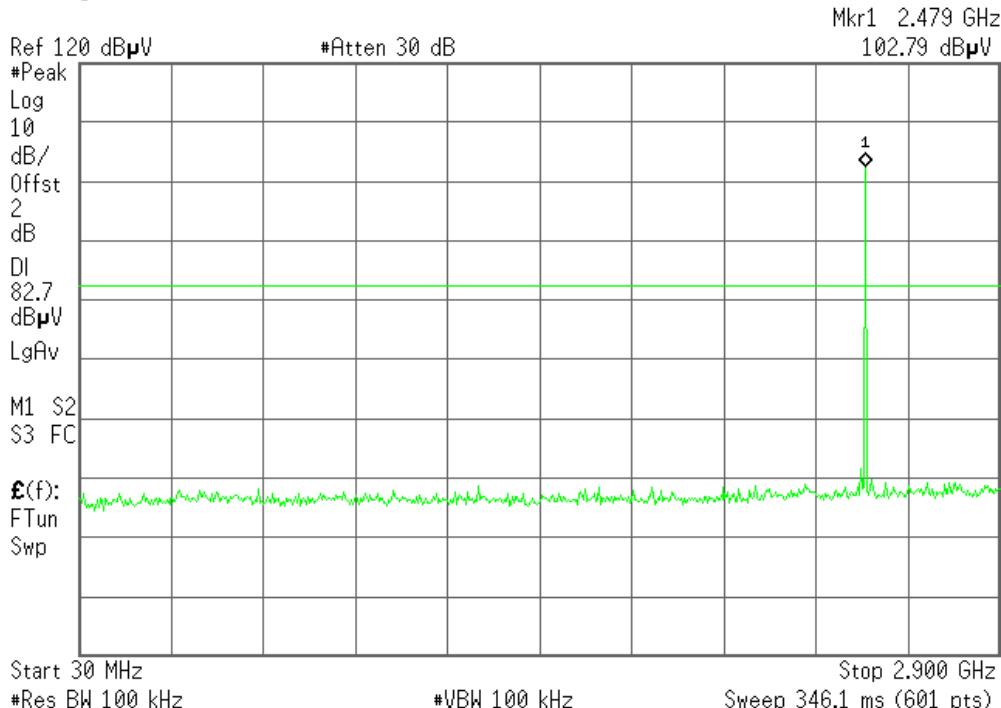

2.9GHz – 26.5GHz

* Agilent 16:35:35 Jul 16, 2008

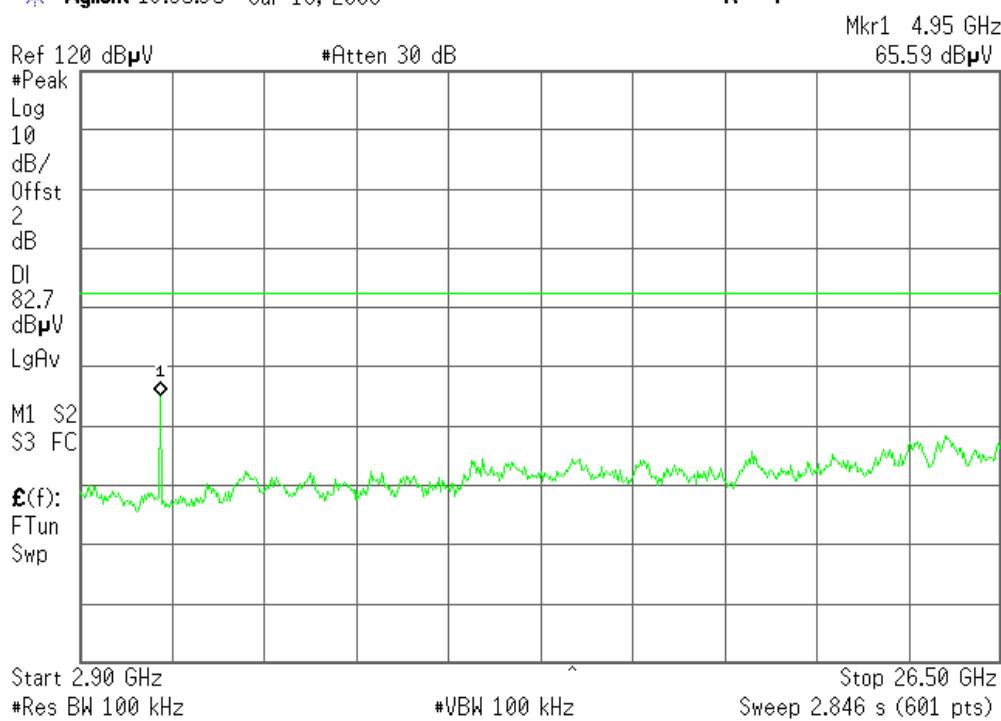



7.7.2 Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED


966 RF CHAMBER 2				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2009
Pre-Amplifier	MITEQ	N/A	AFS42-00102650-42-10P-42	02/14/2009
Bilog Antenna	SCHWAZBECK	CBL6143	5082	06/09/2009
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
RF Comm. Test set	HP	8920B	US36142090	N.C.R
Site NSA	C&C	N/A	N/A	06/09/2009
Horn Antenna	TRC	N/A	N/A	03/04/2009
Signal Generator	Anritsu	MG3694A	#050125	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

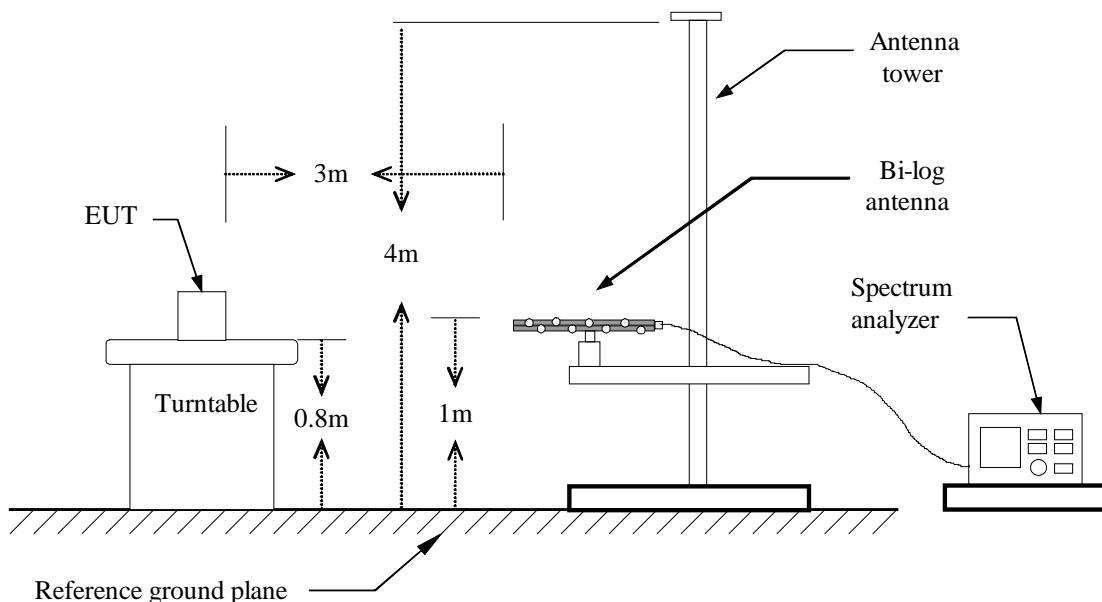

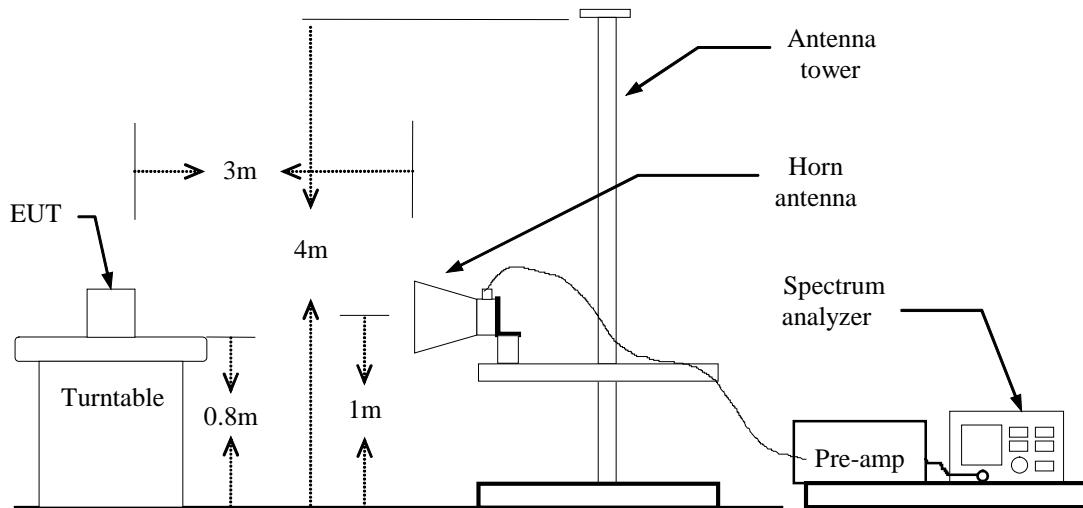Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal

Test Date: August 06,2008

Temperature: 20°C

Tested by: Breeze Jiang

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Safe Margin (dBuV/m)
57.900	V	Peak	44.56	-19.48	25.08	40.00	-14.92
104.700	V	Peak	51.81	-20.17	31.64	43.50	-11.86
220.350	V	Peak	43.47	-17.27	26.20	46.00	-19.80
436.500	V	Peak	37.33	-10.58	26.75	46.00	-19.25
609.166	V	Peak	37.40	-5.80	31.60	46.00	-14.40
881.000	V	Peak	31.25	-2.65	28.60	46.00	-17.40
60.600	H	Peak	41.96	-19.63	22.33	40.00	-17.67
107.400	H	Peak	46.15	-20.06	26.09	43.50	-17.41
276.600	H	Peak	41.53	-15.27	26.26	46.00	-19.74
424.833	H	Peak	39.51	-10.89	28.62	46.00	-17.38
648.833	H	Peak	36.75	-5.26	31.49	46.00	-14.51
858.833	H	Peak	31.91	-2.71	29.20	46.00	-16.80

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** TX(CH Low)**Test Date:** August 06,2008**Temperature:** 20°C**Tested by:** Breeze Jiang**Humidity:** 70 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1350.00	V	49.77	---	-10.24	39.53	---	74.00	54.00	-14.47	Peak
1850.00	V	48.51	---	-6.65	41.86	---	74.00	54.00	-12.14	Peak
2560.00	V	48.50	---	-3.31	45.19	---	74.00	54.00	-8.81	Peak
3650.00	V	44.40	---	-0.18	44.22	---	74.00	54.00	-9.78	Peak
N/A										
1506.67	H	47.11	---	-9.37	37.74	---	74.00	54.00	-16.26	Peak
1890.00	H	46.66	---	-6.33	40.33	---	74.00	54.00	-13.67	Peak
2666.67	H	46.30	---	-3.02	43.28	---	74.00	54.00	-10.72	Peak
3858.33	H	44.60	---	0.35	44.95	---	74.00	54.00	-9.05	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX(CH Mid)**Test Date:** August 06,2008**Temperature:** 20°C**Tested by:** Breeze Jiang**Humidity:** 70 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1413.33	V	47.69	---	-9.90	37.79	---	74.00	54.00	-16.21	Peak
1900.00	V	46.17	---	-6.25	39.92	---	74.00	54.00	-14.08	Peak
2173.33	V	45.67	---	-4.77	40.90	---	74.00	54.00	-13.10	Peak
3925.00	V	45.05	---	1.27	46.32	---	74.00	54.00	-7.68	Peak
N/A										
1196.67	H	52.52	---	-11.09	41.43	---	74.00	54.00	-12.57	Peak
1863.33	H	50.69	---	-6.54	44.15	---	74.00	54.00	-9.85	Peak
2990.00	H	48.89	---	-2.12	46.77	---	74.00	54.00	-7.23	Peak
3558.33	H	44.84	---	-2.43	42.41	---	74.00	54.00	-11.59	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX(CH High)**Test Date:** August 06,2008**Temperature:** 20°C**Tested by:** Breeze Jiang**Humidity:** 70 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1280.00	V	48.70	---	-10.63	38.07	---	74.00	54.00	-15.93	Peak
1950.00	V	46.68	---	-5.86	40.82	---	74.00	54.00	-13.18	Peak
2566.67	V	46.61	---	-3.29	43.32	---	74.00	54.00	-10.68	Peak
3925.00	V	45.05	---	1.27	46.32	---	74.00	54.00	-7.68	Peak
N/A										
1330.00	H	49.91	---	-10.36	39.55	---	74.00	54.00	-14.45	Peak
2080.00	H	48.88	---	-5.14	43.74	---	74.00	54.00	-10.26	Peak
2566.67	H	48.29	---	-3.29	45.00	---	74.00	54.00	-9.00	Peak
4333.33	H	44.10	---	1.97	46.07	---	74.00	54.00	-7.93	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site G				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESCI EMI TEST RECEIV.ESCI	ROHDE&SCHWARZ	1166.5950 03	100088	02/24/2009
LISN	EMCO	3825/2	1371	02/24/2009
LISN	EMCO	3825/2	8901-1459	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Operation Mode: Normal **Test Date:** August 06,2008
Temperature: 22°C **Humidity:** 67% RH
Tested by: Breeze Jiang

FREQ MHz	PEAK dBuV	Q.P. dBuV	AVG dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.205	62.19	56.30	45.98	64.41	54.41	-8.11	-8.43	L1
0.272	60.13	53.69	39.23	62.50	52.50	-8.81	-13.27	L1
0.694	51.41	50.82	35.81	56.00	46.00	-5.18	-10.19	L1
0.846	58.85	47.61	36.77	56.00	46.00	-8.39	-9.23	L1
0.969	54.50	45.50	38.38	56.00	46.00	-10.50	-7.62	L1
1.125	52.15	49.30	21.63	56.00	46.00	-6.70	-24.37	L1
0.250	56.58	57.06	35.96	63.14	53.14	-6.08	-17.18	L2
0.276	61.57	54.58	34.15	62.40	52.40	-7.82	-18.25	L2
0.309	52.30	55.27	32.99	61.45	51.45	-6.18	-18.46	L2
0.780	55.32	48.54	35.28	56.00	46.00	-7.46	-10.72	L2
0.828	58.21	50.53	38.70	56.00	46.00	-5.47	-7.30	L2
0.876	54.31	47.38	33.26	56.00	46.00	-8.62	-12.74	L2

Note:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9KHz.
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

APPENDIX 1

PHOTOGRPHS OF TEST SETUP

Radiated Emission Set up Photos



Conducted Emission Set Up Photos

