


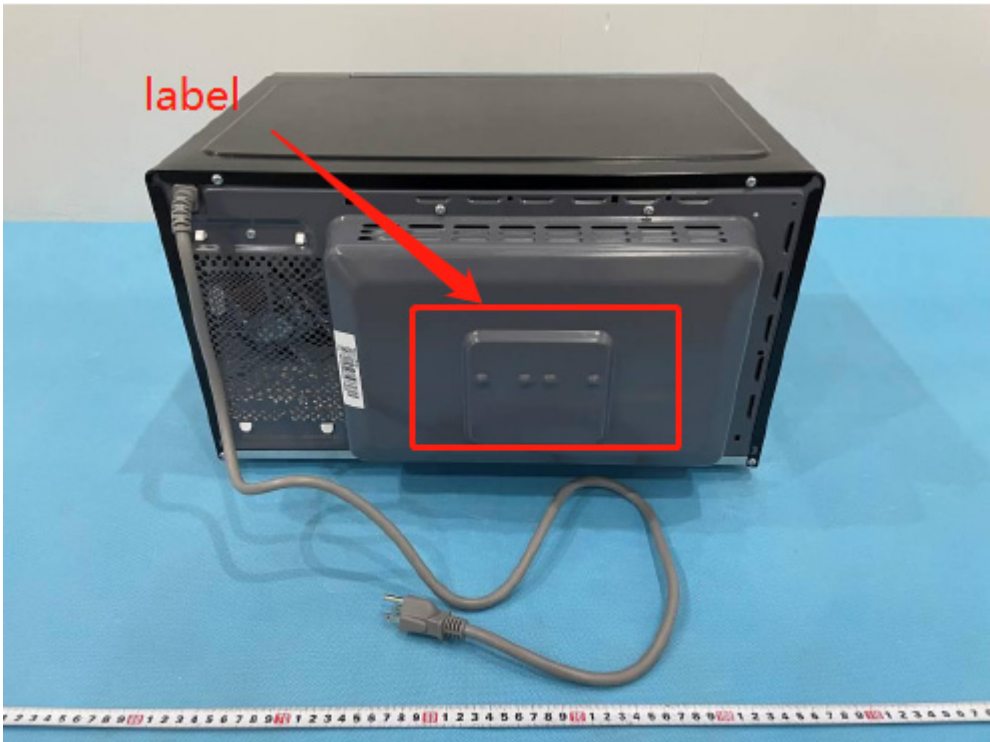


EXHIBITA-FCC ID LABEL AND LOCATION

FCC ID Label

<div><p>MICROWAVE OVEN MODEL: EC0P042BB-S POWER SUPPLY:120VAC 60Hz RATED INPUT(MICROWAVE):1600W RATED OUTPUT(MICROWAVE):1000W WATTS:1000W(Grill) WATTS:1700W(Convection) MICROWAVE OUTPUT FREQUENCY:2450MHz MANUFACTURE DATE:MM.YYYY FCC ID:VG8XC0P04YY HOUSEHOLD USE ONLY (NOT FOR COMMERCIAL USE) THIS DEVICE COMPLIES WITH DHHS RADIATION PERFORMANCE STANDARDS 21 CFR SUBCHAPTER J. MADE IN CHINA Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd. No.6,Yong An Road,Beijiao,Shunde,Foshan, Guangdong, China.</p></div> <div><p>LISTED 54NJ E214180</p></div> <div><p>WARNING:Cancer and Reproductive Harm-www.p65warnings.ca.gov</p></div>	<p>CAUTION•THIS DEVICE IS TO BE SERVICED ONLY BY PROPERLY QUALIFIED SERVICE PERSONNEL. CONSULT THE SERVICE MANUAL FOR PROPER SERVICE PROCEDURES TO ASSURE CONTINUED COMPLIANCE WITH THE FEDERAL PERFORMANCE STANDARD FOR MICROWAVE OVENS AND FOR PRECAUTIONS TO BE TAKEN TO AVOID POSSIBLE EXPOSURE TO EXCESSIVE MICROWAVE ENERGY.</p> <p>WARNING• TO ENSURE CONTINUED PROTECTION AGAINST ELECTRICAL SHOCK HAZARD, CONNECT TO PROPERLY GROUNDED OUTLETS ONLY.DISCONNECT APPLIANCE BEFORE SERVICING. REMOVAL OF OUTERCASE WITH PRODUCT ENERGIZED MAY EXPOSE SERVICEMAN TO HAZARDOUS HIGH VOLTAGE POTENTIALS.</p> <ul style="list-style-type: none">•CERTAIN INTERNAL PARTS ARE INTENTIONALLY NOT GROUNDED AND MAY PRESENT A RISK OF ELECTRIC SHOCK ONLY DURING SERVICING.SERVICE PERSONNEL -DO NOT CONTACT THE FOLLOWING PARTS WHEN THE APPLIANCE IS ENERGIZED: IF PROVIDED FAN MOTOR, TURNTABLE MOTOR, DAMPER MOTOR,L.V.TRANSFORMER (TOUCH CONTROL TYPE) OR TIMER MOTOR ASSEMBLY (MECHANICAL TYPE).•RISK OF ELECTRIC SHOCK. NON-REMOVABLE FASTENERS ARE PROVIDED BECAUSE OF INTERNAL HIGH VOLTAGES. DO NOT REMOVE FASTENERS.•NOT FOR BUILT-IN INSTALLATION.
--	---

FCC ID Label Location Information



The label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the time purchase (Labeling requirements per 2.295)