



## FCC PART 18 TEST REPORT

For

**Jiangxi Midea Guiya Green Lighting Electrical Co., Ltd**

Guixi Industrial District, Guixi, Jiangxi, China

**FCC ID: VGZBR30-15W**

<b>Report Type:</b> Original Report	<b>Product Type:</b> CFL
<b>Test Engineer:</b>	Phase Zhang <i>Phase Zhang</i>
<b>Report Number:</b>	RSZ110921532-00
<b>Report Date:</b>	2011-09-27
<b>Reviewed By:</b>	Suny Sun EMC Engineer <i>Suny Sun</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION .....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S) .....	3
TEST METHODOLOGY.....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
JUSTIFICATION.....	5
EUT EXERCISE SOFTWARE.....	5
SPECIAL ACCESSORIES .....	5
EQUIPMENT MODIFICATIONS.....	5
EXTERNAL I/O CABLE .....	5
CONFIGURATION OF TEST SETUP .....	5
BLOCK DIAGRAM OF TEST SETUP.....	6
<b>FCC §18.307 - AC LINE CONDUCTED EMISSIONS .....</b>	<b>7</b>
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP .....	8
TEST EQUIPMENT LIST AND DETAILS .....	8
TEST PROCEDURE.....	8
TEST RESULTS SUMMARY .....	8
TEST DATA.....	9
<b>FCC §18.305 – FIELD STRENGTH.....</b>	<b>11</b>
MEASUREMENT UNCERTAINTY .....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP .....	12
TEST EQUIPMENT LIST AND DETAILS .....	12
TEST PROCEDURE.....	12
CORRECTED AMPLITUDE CALCULATION .....	12
TEST RESULTS SUMMARY .....	12
TEST DATA.....	13

## **GENERAL INFORMATION**

### **Product Description for Equipment under Test (EUT)**

The *Jiangxi Midea Guiya Green Lighting Electrical Co., Ltd*'s model: *MDESLBR30/15W-E26 (FCC ID: VGZBR30-15W)* (the "EUT") in this report is a *CFL*, which measure approximately: 14.2 cm (L) x 4.8 cm (W) x 9.4 cm (H), rated input voltage: AC 120V/60Hz.

*\* All measurement and test data in this report was gathered from production sample serial number: 1109014 (Assigned by BACL, Shenzhen). The EUT was received on 2011-09-21.*

### **Objective**

The following test report is prepared on behalf of *Jiangxi Midea Guiya Green Lighting Electrical Co., Ltd* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

### **Related Submittal(s)/Grant(s)**

No related submittal(s).

### **Test Methodology**

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## **SYSTEM TEST CONFIGURATION**

### **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).

### **EUT Exercise Software**

N/A

### **Special Accessories**

The special accessories were supplied by Bay Area Compliance Laboratories Corp.


### **Equipment Modifications**

No modifications were made to the unit tested.


### **External I/O Cable**

Cable Description	Length (m)	From Port	To
Unshielded Detachable AC Power Cable	1.0	EUT	LISN

### **Configuration of Test Setup**



### Block Diagram of Test Setup

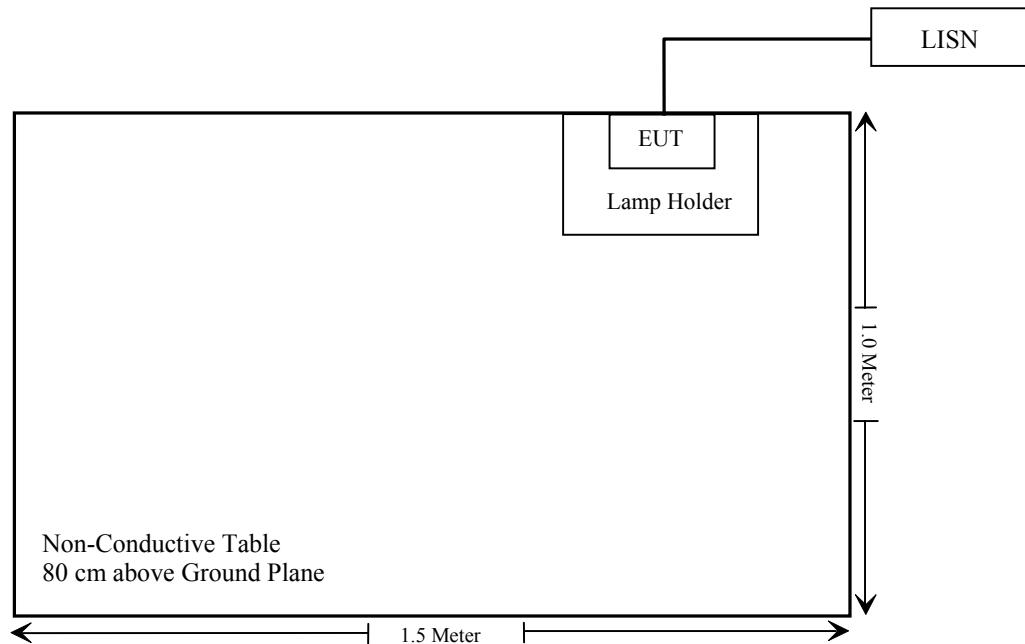


## FCC §18.307 - AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. is 2.4 dB (k=2, 95% level of confidence).

### EUT Setup

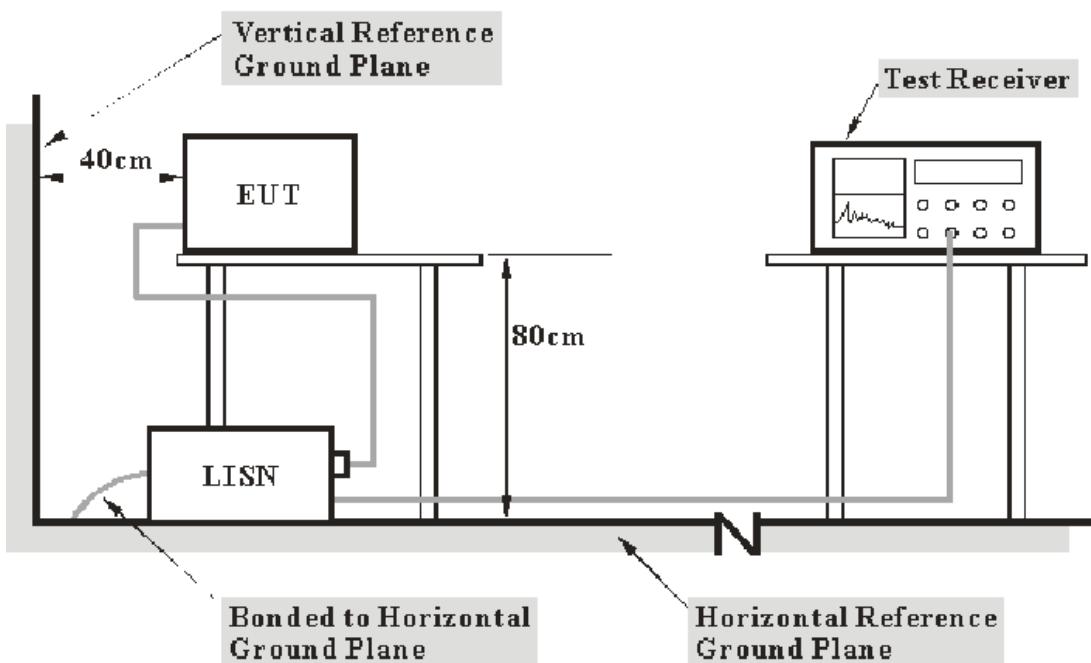

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The EUT was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<b><i>Frequency Range</i></b>	<b><i>IFBW</i></b>
450 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2010-11-24	2011-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2010-11-17	2011-11-16
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2011-07-08	2012-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-Peak detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

**9.63 dB at 1.495 MHz in the Line conducted mode**

Refer to CISPR16-4-2: 2011 and CISPR 16-4-1: 2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

$$\text{or } U_{(Lm)} \leq Margin + U_{cispr}$$

The measurement result of EUT is below the limit level by a margin 9.63 dB and  $U_{(Lm)}(2.4\text{dB}) \leq Margin(9.63 \text{ dB}) + U_{cispr}(3.4\text{dB})$ , so the EUT complies with the limit of the FCC Part 18 Class B.

## Test Data


### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


Testing was performed by Phase Zhang on 2011-09-23.

Test Mode: On

### AC 120V/60 Hz, Line:

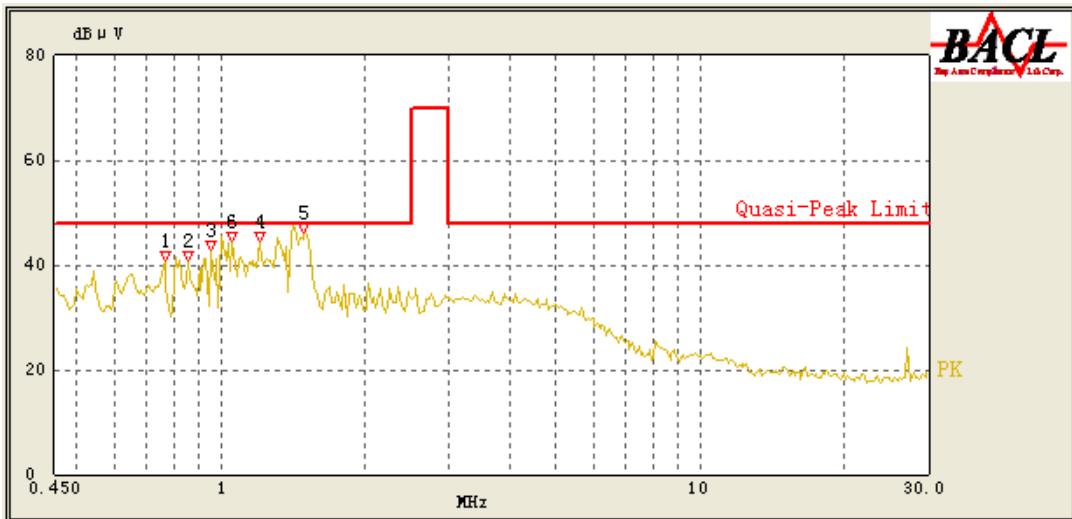

Frequency (MHz)	Correction Factor (dB)	Corrected Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1.495	38.37	10.10	48.00	9.63
1.205	37.41	10.10	48.00	10.59
0.765	34.27	10.10	48.00	13.73
0.855	33.51	10.10	48.00	14.49
1.055	33.39	10.10	48.00	14.61
0.955	28.63	10.10	48.00	19.37

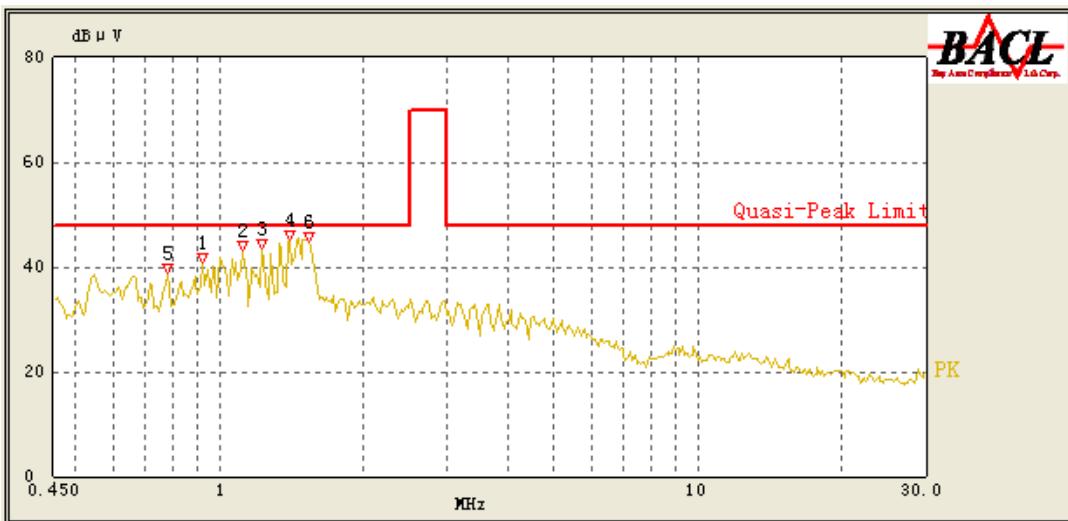**AC 120V/ 60 Hz, Neutral:**

Frequency (MHz)	Correction Factor (dB)	Corrected Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1.545	38.23	10.10	48.00	9.77
1.115	37.17	10.10	48.00	10.83
1.230	36.68	10.10	48.00	11.32
0.780	33.47	10.10	48.00	14.53
0.920	33.11	10.10	48.00	14.89
1.400	32.73	10.10	48.00	15.27

**Note:**

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation  
The corrected factor has been input into the transducer of the test software.
- 3) Margin = Limit – Corrected Amplitude.


## FCC §18.305 – FIELD STRENGTH

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence).

### EUT Setup

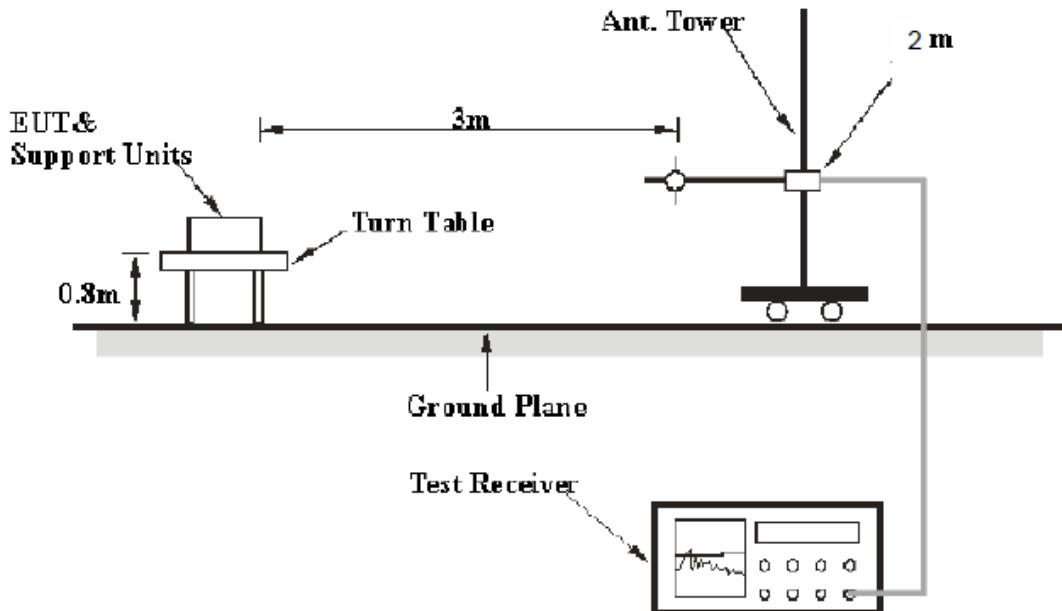

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5.

The EUT was connected to 120 VAC/60 Hz power source.

## EMI Test Receiver Setup and Spectrum Analyzer Setup

The system was investigated from 9 kHz to 30 MHz.

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

<b>Frequency Range</b>	<b>R B/W</b>	<b>Video B/W</b>	<b>IF B/W</b>
9kHz– 150kHz	300 Hz	1 kHz	200Hz
150kHz– 30 MHz	100 kHz	300 kHz	9 kHz

## Test Equipment List and Details

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
ETS-LINDGREN	Passive Loop Antenna	6512	00029604	2010-11-30	2011-11-29
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2010-11-17	2011-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

## Test Procedure

For the radiated emissions test, the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 9 kHz to 30 MHz.

## Corrected Amplitude Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss}$$

## Test Results Summary

According to the data in the following table, with the worst margin reading is below:

**8.42 dB at 0.0098 MHz** in the **Vertical** polarization mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$\begin{aligned} L_m + U(L_m) &\leq L_{\text{lim}} + U_{\text{cispr}} \\ \text{or } U(L_m) &\leq \text{Margin} + U_{\text{cispr}} \end{aligned}$$

The measurement result of EUT is below the limit level by a margin 8.42 dB and  $U_{(L_m)}(4\text{dB}) \leq \text{Margin}(8.42 \text{ dB}) + U_{\text{cispr}}(6.3\text{dB})$ , so the EUT complies with the limit of the FCC Part 18 Class B.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Phase Zhang on 2011-09-24.

Test Mode: On

Frequency (MHz)	Reading (dB $\mu$ A/m)	Detector (PK/QP/Ave.)	Direction (Degree)	Height (m)	Antenna Factor (dB S/m)	Cable Loss (dB)	Corrected Amplitude		Limit (dB $\mu$ V/m)	Margin (dB)
							dB $\mu$ A/m	dB $\mu$ V/m		
0.0098	-32.12	QP	48.00	2.00	35.6	0.1	3.58	55.08	63.5	8.42
0.0890	-19.66	QP	196.00	2.00	16.0	0.1	-3.56	47.94	63.5	15.56
0.0325	-33.81	QP	17.00	2.00	26.7	0.1	-7.01	44.49	63.5	19.01
2.6675	-20.96	QP	247.00	2.00	-11.0	0.1	-31.86	19.64	63.5	43.86
8.0020	-20.73	QP	140.00	2.00	-18.8	0.1	-39.43	12.07	63.5	51.43
13.5160	-20.68	QP	118.00	2.00	-19.6	0.1	-40.18	11.32	63.5	52.18

Note:

- 1) dB $\mu$ V/m = dB $\mu$ A/m + 51.5
- 2) Corrected Amplitude = Meter Reading + Correction Factor
- 3) Correction Factor = Antenna Factor + Cable Loss
- 4) Margin = Limit - Corrected Amplitude

\*\*\*\*END OF REPORT\*\*\*\*