



Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2467		
	MHz		
Polarization:	Horizontal		
Remark:			

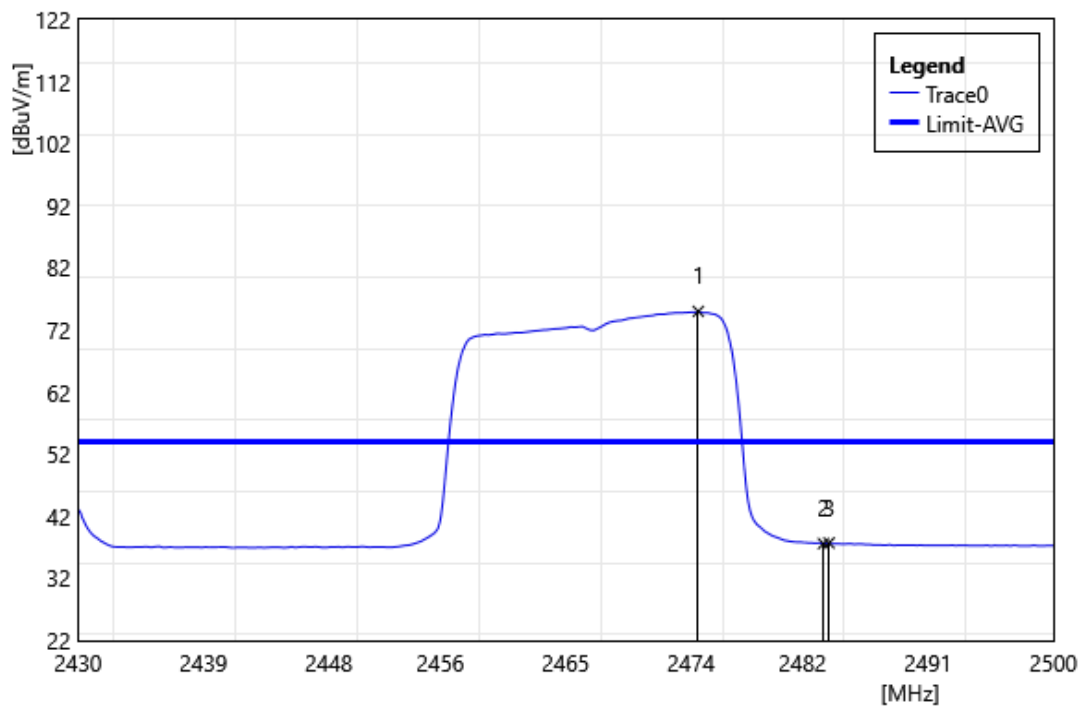


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2474.52	84.84	-9.83	75.01	45.01	30.00	AVG
2	2483.50	47.42	-9.80	37.62	45.01	-7.39	AVG
3	2483.90	47.50	-9.79	37.71	54.00	-16.29	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2467		
	MHz		
Polarization:	Vertical		
Remark:			

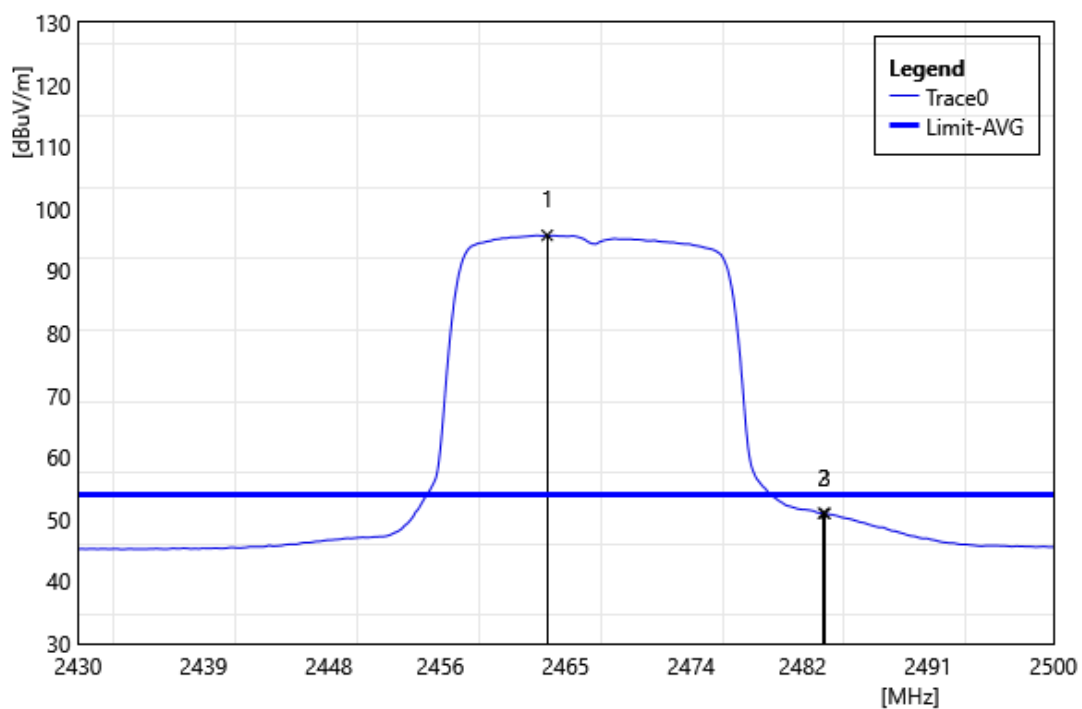


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2463.67	105.62	-9.88	95.74	65.74	30.00	AVG
2	2483.50	60.80	-9.80	51.00	65.74	-14.75	AVG
3	2483.62	60.75	-9.80	50.95	54.00	-3.05	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2472		
	MHz		
Polarization:	Horizontal		
Remark:			

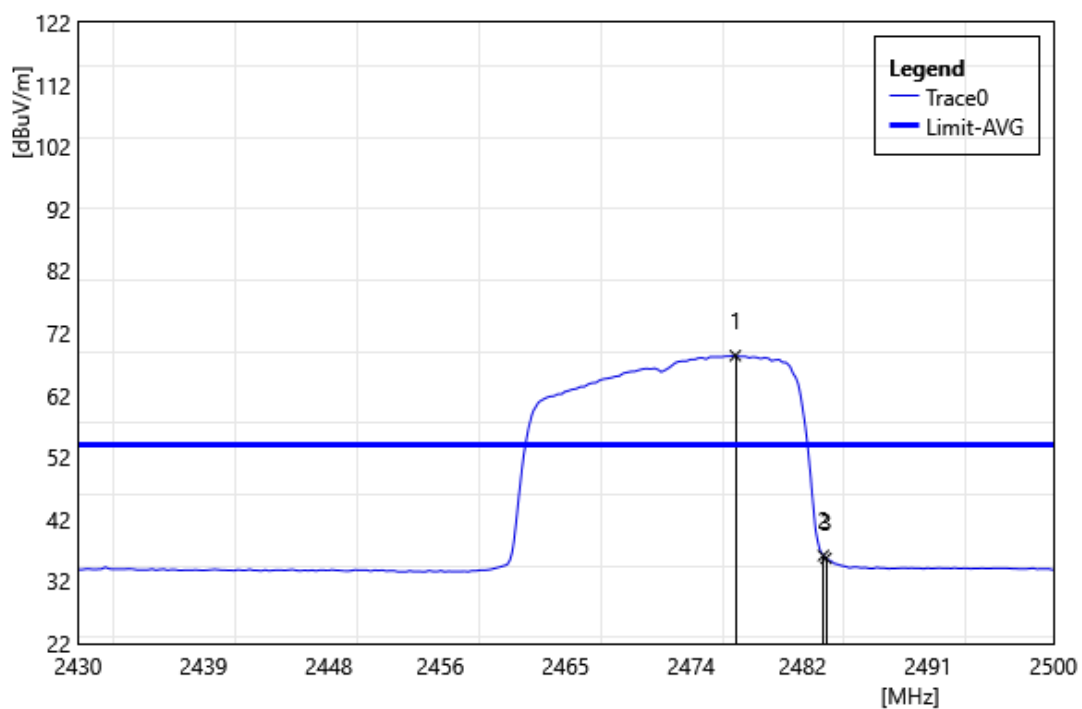


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2477.18	78.18	-9.82	68.36	38.36	30.00	AVG
2	2483.50	45.96	-9.80	36.16	38.36	-2.19	AVG
3	2483.69	45.52	-9.80	35.72	54.00	-18.28	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2472		
	MHz		
Polarization:	Vertical		
Remark:			

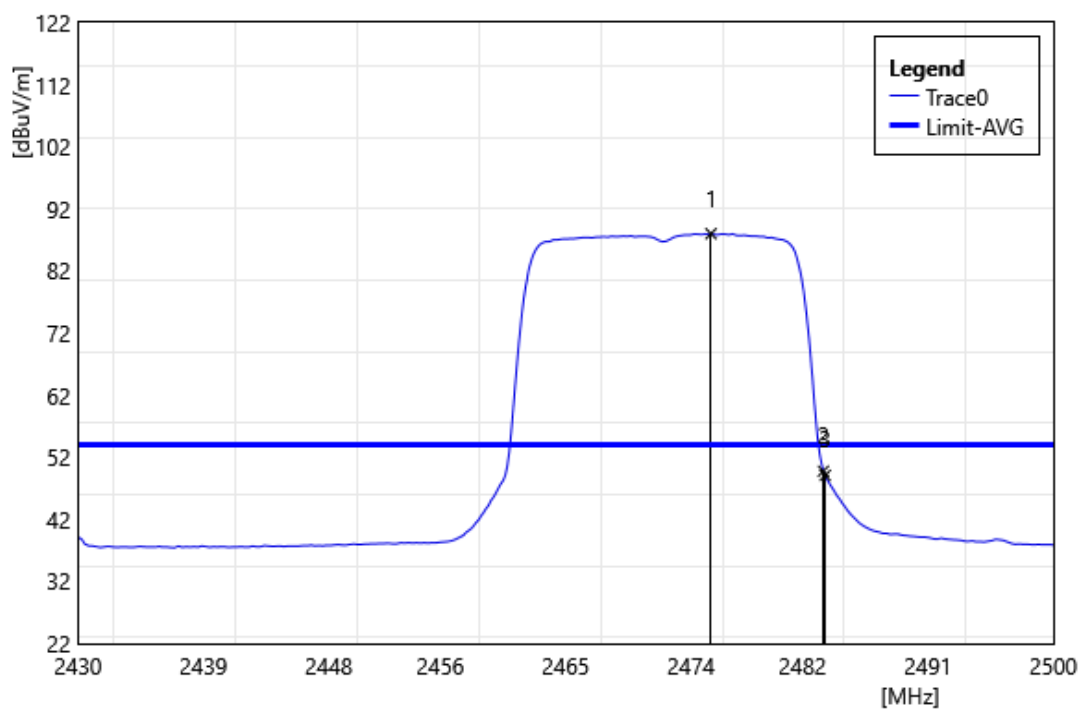


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2475.43	97.84	-9.84	88.00	58.00	30.00	AVG
2	2483.50	59.56	-9.80	49.76	58.00	-8.25	AVG
3	2483.62	58.89	-9.80	49.09	54.00	-4.91	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2422		
	MHz		
Polarization:	Horizontal		
Remark:			

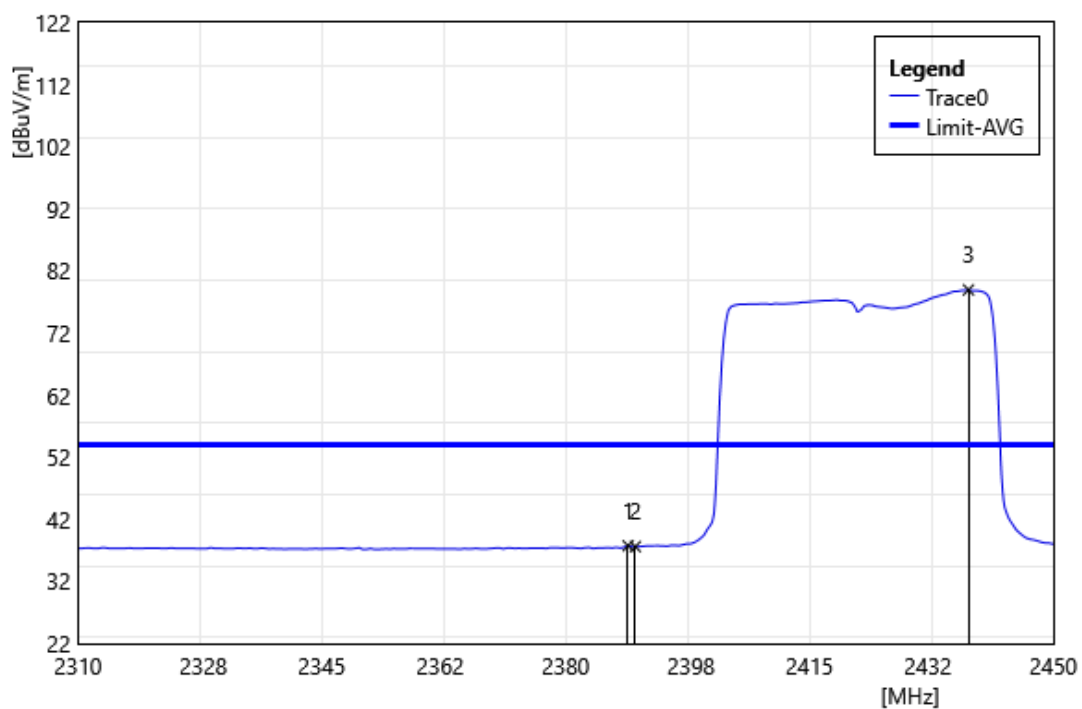


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.96	47.27	-9.53	37.74	54.00	-16.26	AVG
2	2390.00	47.16	-9.54	37.62	48.96	-11.34	AVG
3	2437.82	88.79	-9.83	78.96	48.96	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2422		
	MHz		
Polarization:	Vertical		
Remark:			

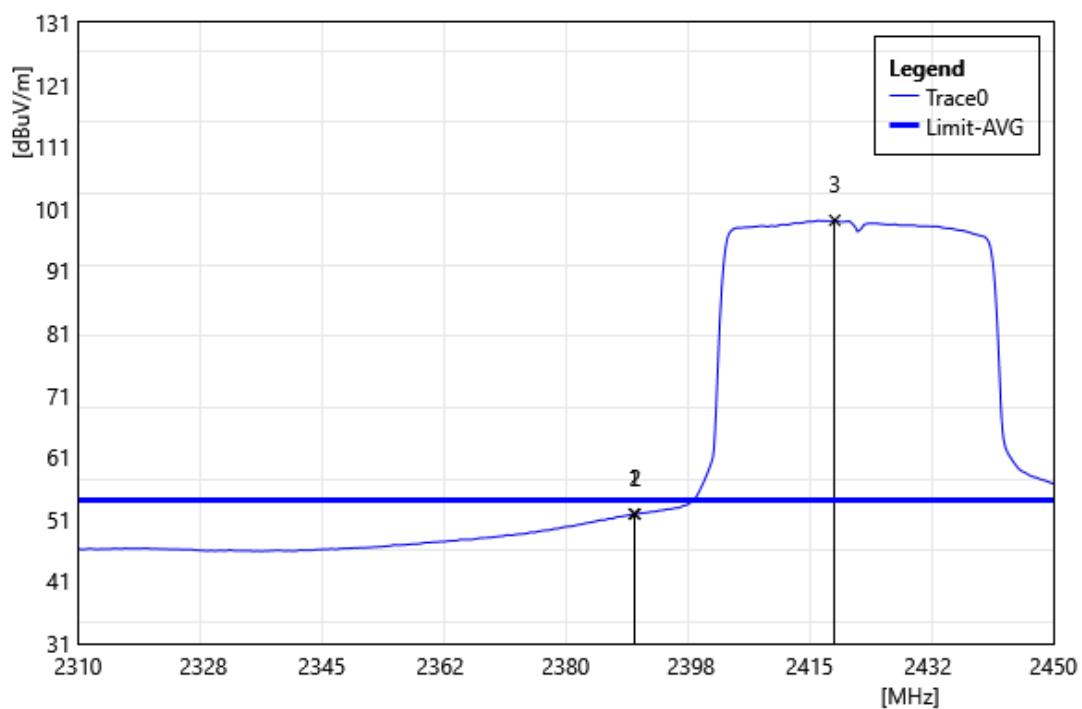


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.80	61.42	-9.54	51.88	54.00	-2.13	AVG
2	2390.00	61.38	-9.54	51.84	54.00	-2.16	AVG
3	2418.64	108.85	-9.69	99.16	54.00	45.16	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2437		
	MHz		
Polarization:	Horizontal		
Remark:			

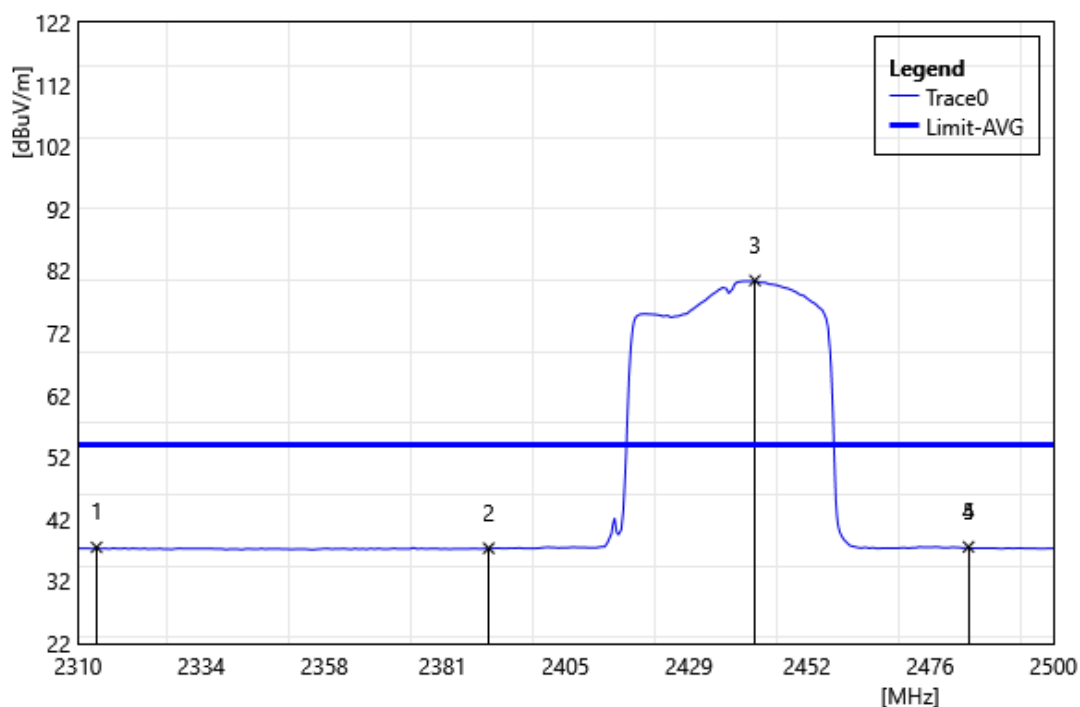


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2313.61	46.84	-9.34	37.50	54.00	-16.50	AVG
2	2390.00	46.89	-9.54	37.35	50.46	-13.11	AVG
3	2441.86	90.33	-9.87	80.46	50.46	30.00	AVG
4	2483.47	47.36	-9.80	37.56	50.46	-12.89	AVG
5	2483.50	47.36	-9.80	37.56	54.00	-16.44	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2437		
	MHz		
Polarization:	Vertical		
Remark:			

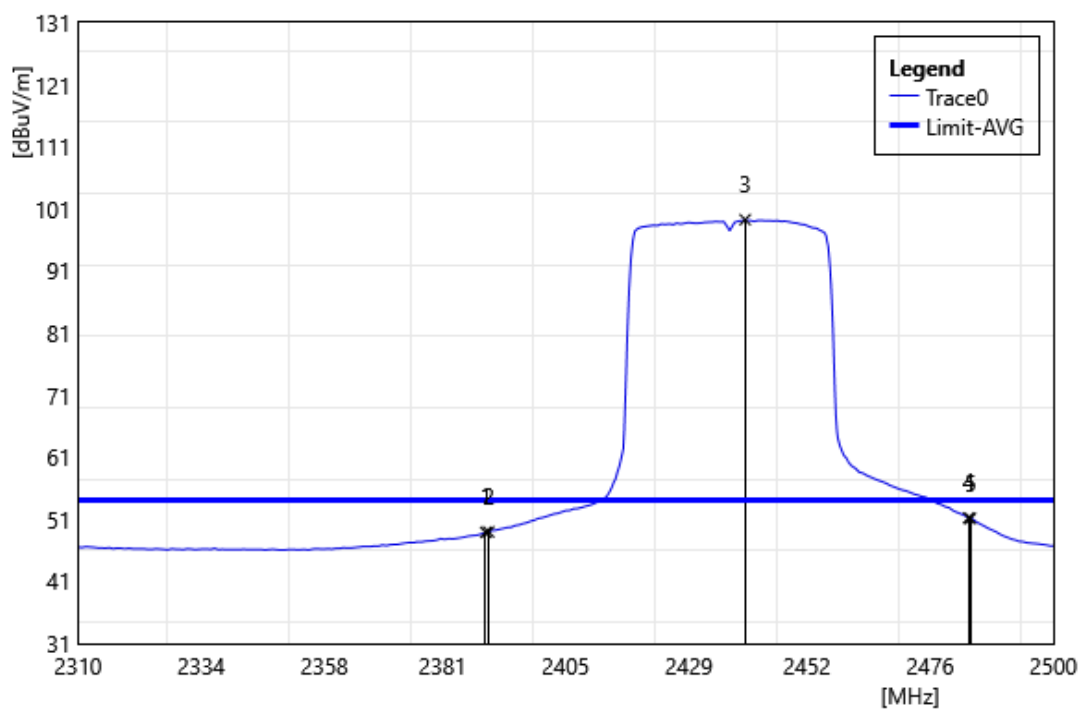


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.42	58.45	-9.54	48.91	54.00	-5.09	AVG
2	2390.00	58.51	-9.54	48.97	69.26	-20.28	AVG
3	2439.96	109.12	-9.86	99.26	69.26	30.00	AVG
4	2483.50	61.03	-9.80	51.23	69.26	-18.03	AVG
5	2483.85	60.94	-9.79	51.15	54.00	-2.85	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2452		
	MHz		
Polarization:	Horizontal		
Remark:			

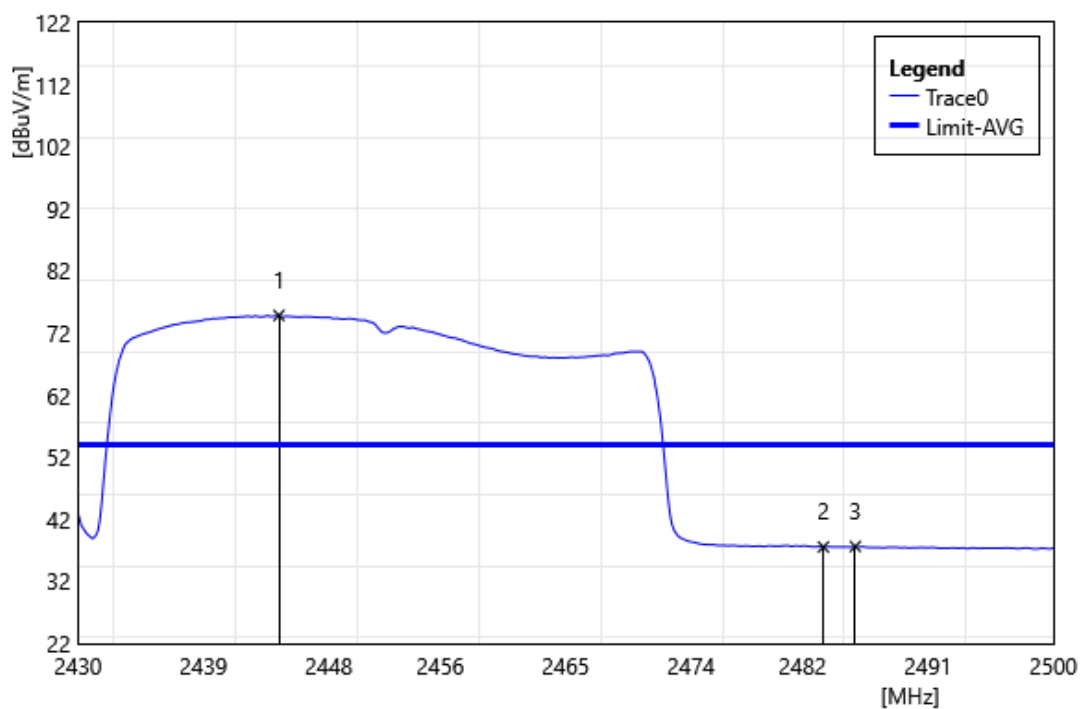


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2444.42	84.72	-9.89	74.83	44.83	30.00	AVG
2	2483.50	47.35	-9.80	37.55	44.83	-7.28	AVG
3	2485.79	47.42	-9.79	37.63	54.00	-16.37	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2452		
	MHz		
Polarization:	Vertical		
Remark:			

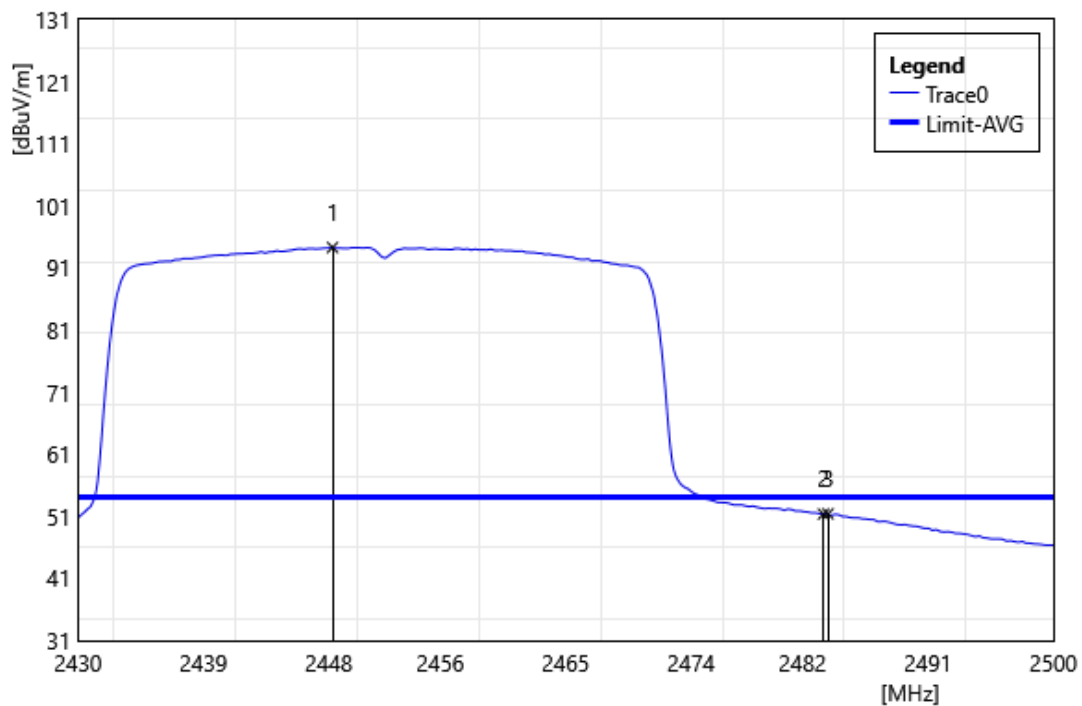


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2448.27	104.23	-9.93	94.30	64.30	30.00	AVG
2	2483.50	61.18	-9.80	51.38	64.30	-12.92	AVG
3	2483.83	61.21	-9.79	51.42	54.00	-2.58	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2457		
	MHz		
Polarization:	Horizontal		
Remark:			

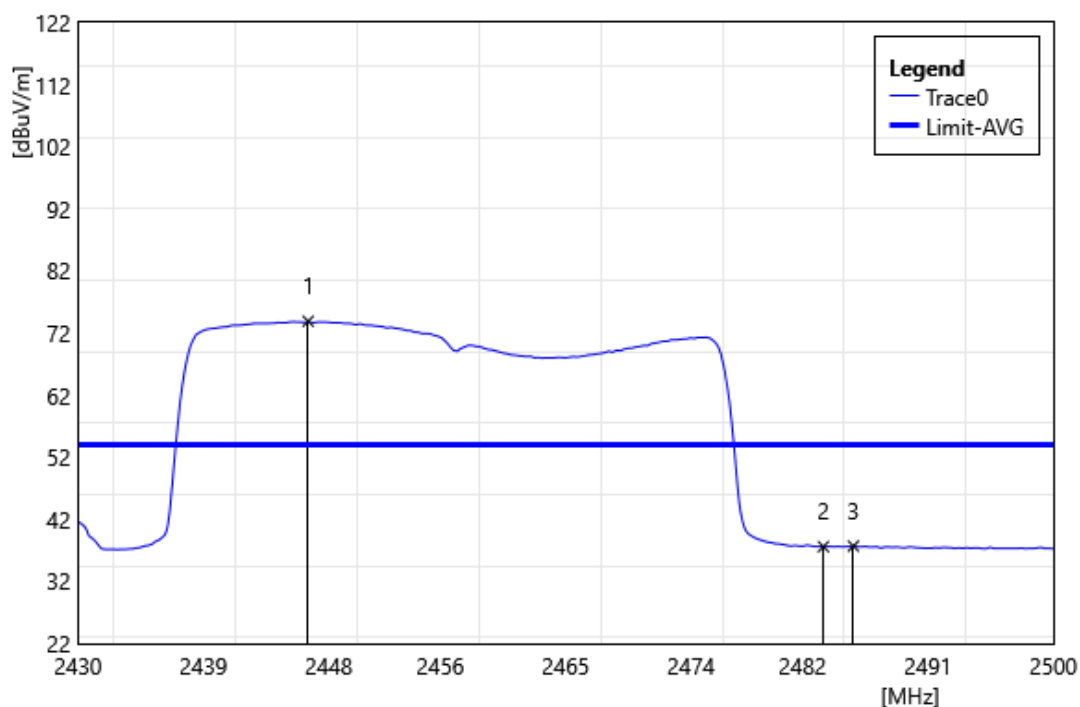


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2446.52	83.83	-9.91	73.92	43.92	30.00	AVG
2	2483.50	47.40	-9.80	37.60	43.92	-6.32	AVG
3	2485.65	47.48	-9.79	37.69	54.00	-16.31	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2457		
	MHz		
Polarization:	Vertical		
Remark:			

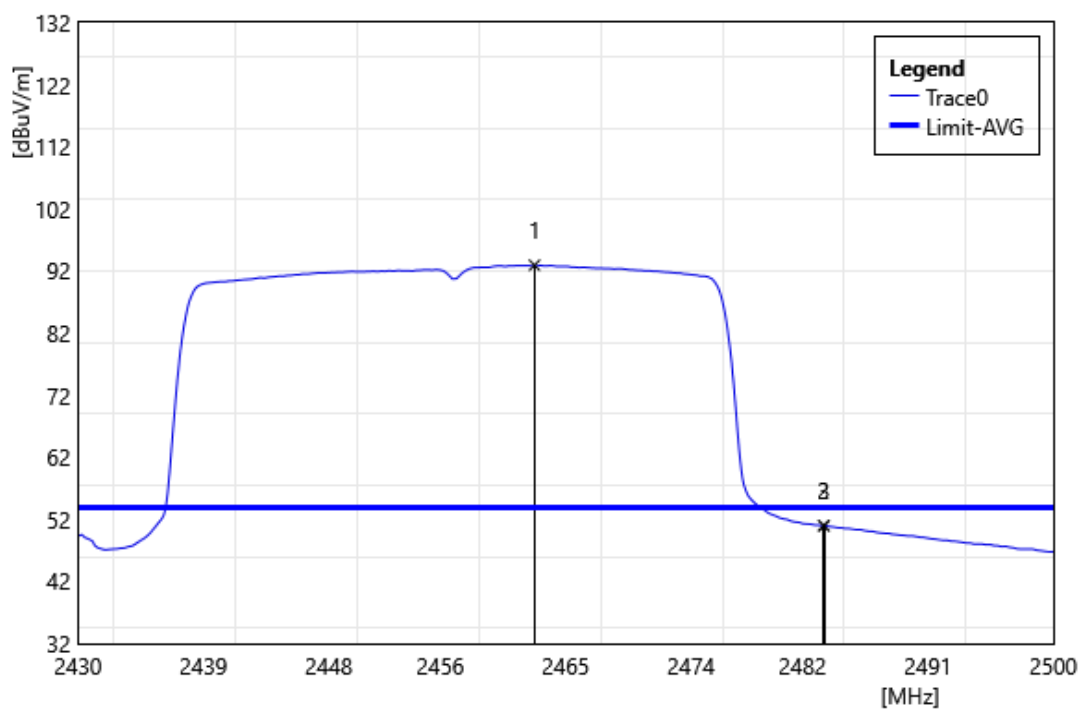


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2462.76	102.82	-9.89	92.94	62.94	30.00	AVG
2	2483.50	60.78	-9.80	50.98	62.94	-11.96	AVG
3	2483.55	60.75	-9.80	50.95	54.00	-3.05	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2462		
	MHz		
Polarization:	Horizontal		
Remark:			

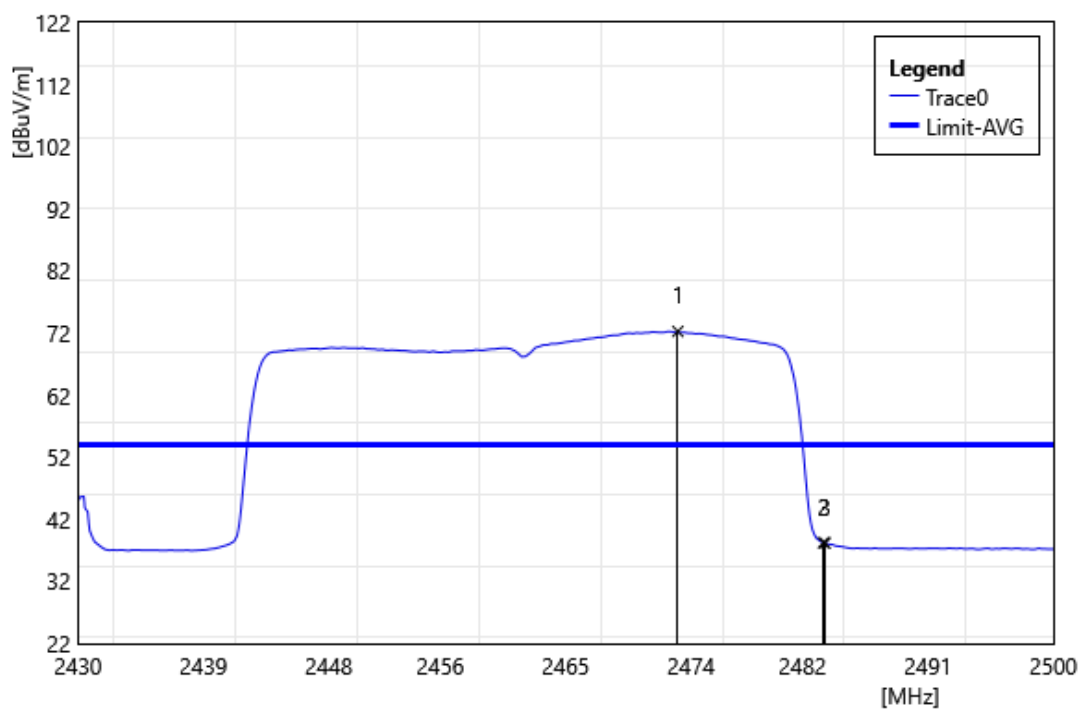

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2473.05	82.10	-9.84	72.27	42.27	30.00	AVG
2	2483.50	48.04	-9.80	38.24	42.27	-4.02	AVG
3	2483.62	47.99	-9.80	38.19	54.00	-15.81	AVG


Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2462		
	MHz		
Polarization:	Vertical		
Remark:			

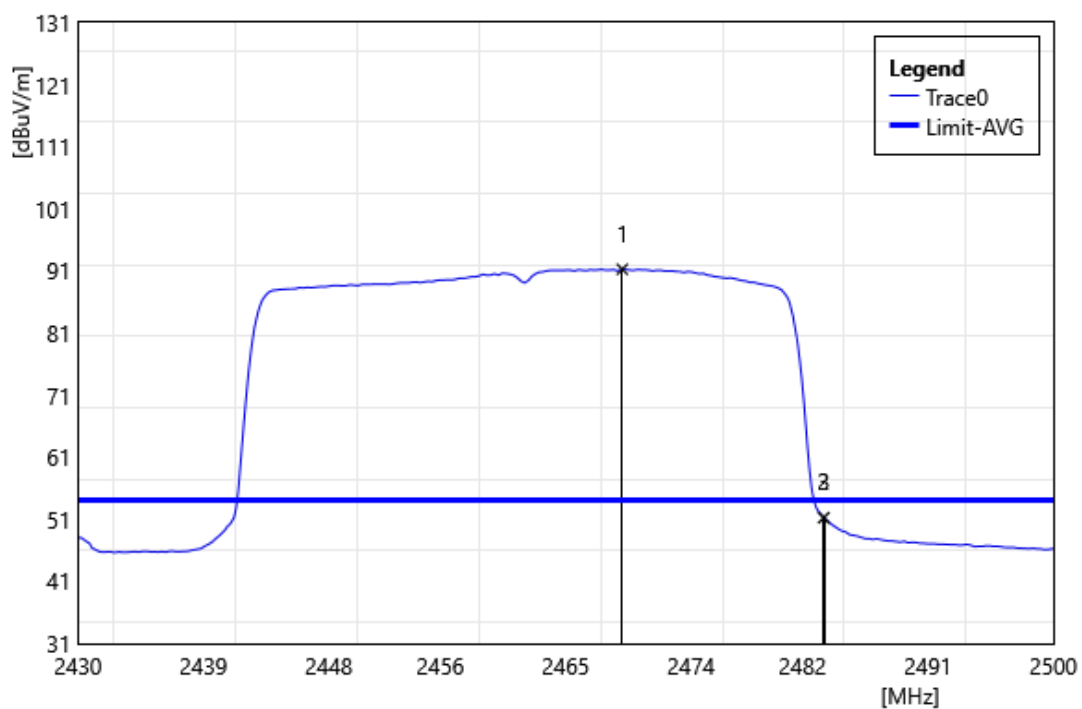

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.06	101.13	-9.86	91.27	61.27	30.00	AVG
2	2483.50	61.07	-9.80	51.27	61.27	-10.00	AVG
3	2483.55	61.06	-9.80	51.26	54.00	-2.74	AVG


MIMO - Peak

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2412 MHz		
Polarization:	Horizontal		
Remark:			

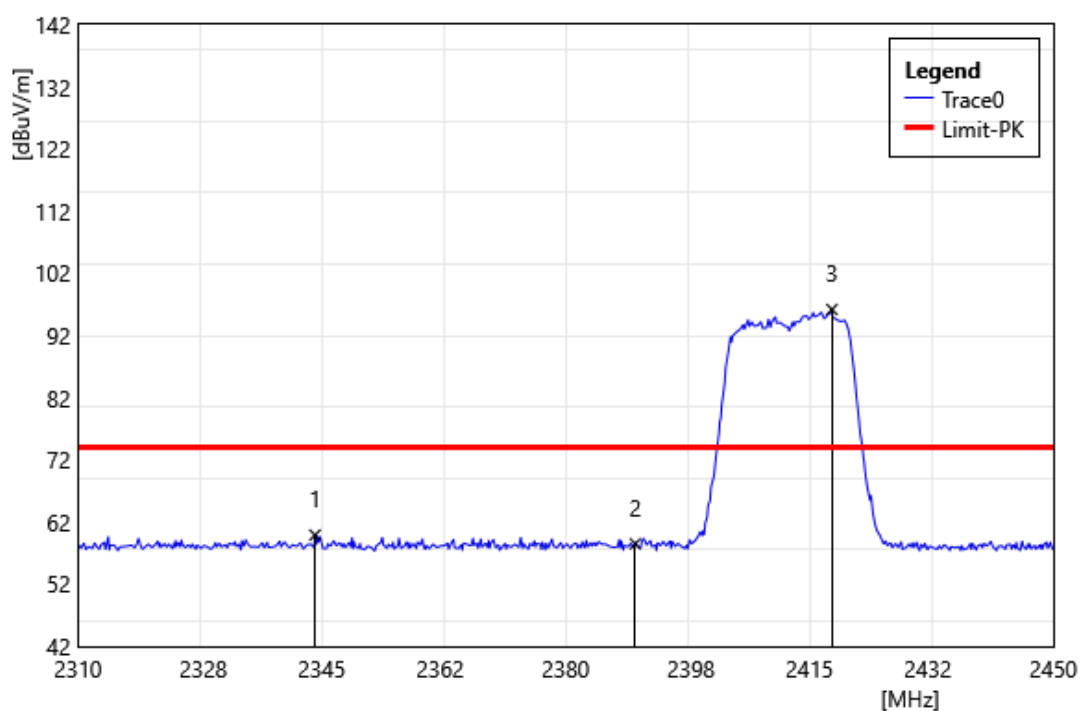


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2344.02	69.39	-9.48	59.91	74.00	-14.09	PEAK
2	2390.00	68.05	-9.54	58.51	76.20	-17.69	PEAK
3	2418.22	105.88	-9.69	96.20	76.20	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2412 MHz		
Polarization:	Vertical		
Remark:			

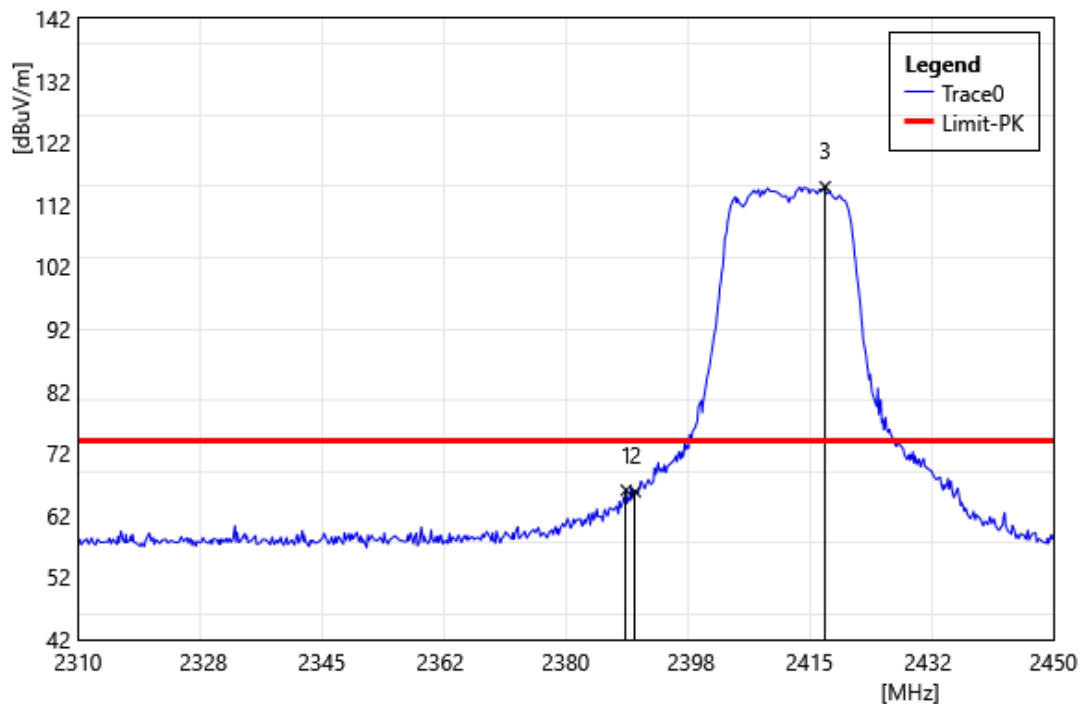


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.68	75.59	-9.53	66.06	74.00	-7.94	PEAK
2	2390.00	75.33	-9.54	65.79	94.92	-29.13	PEAK
3	2417.24	124.59	-9.67	114.92	94.92	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2437 MHz		
Polarization:	Horizontal		
Remark:			

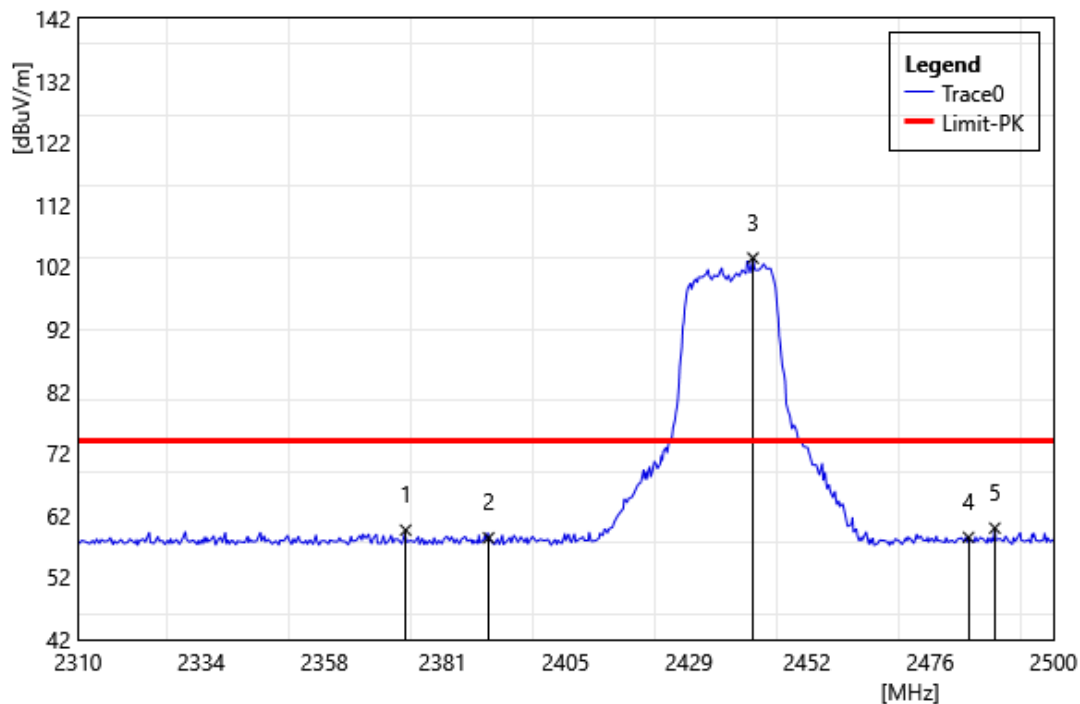


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2373.84	69.14	-9.52	59.62	74.00	-14.38	PEAK
2	2390.00	67.91	-9.54	58.37	83.44	-25.08	PEAK
3	2441.48	113.31	-9.87	103.44	83.44	20.00	PEAK
4	2483.50	68.25	-9.80	58.45	83.44	-24.99	PEAK
5	2488.60	69.72	-9.78	59.94	74.00	-14.06	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2437 MHz		
Polarization:	Vertical		
Remark:			

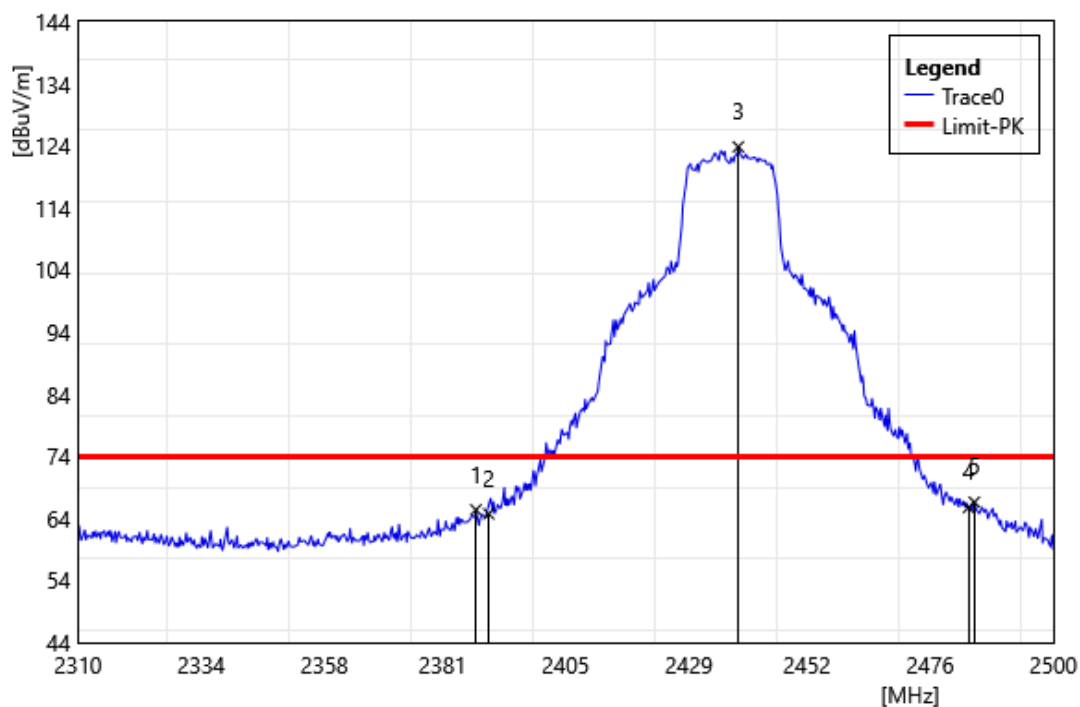


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2387.52	74.91	-9.53	65.38	74.00	-8.62	PEAK
2	2390.00	74.27	-9.54	64.73	103.82	-39.09	PEAK
3	2438.63	133.66	-9.84	123.82	103.82	20.00	PEAK
4	2483.50	75.56	-9.80	65.76	103.82	-38.06	PEAK
5	2484.61	76.39	-9.79	66.60	74.00	-7.40	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2462 MHz		
Polarization:	Horizontal		
Remark:			

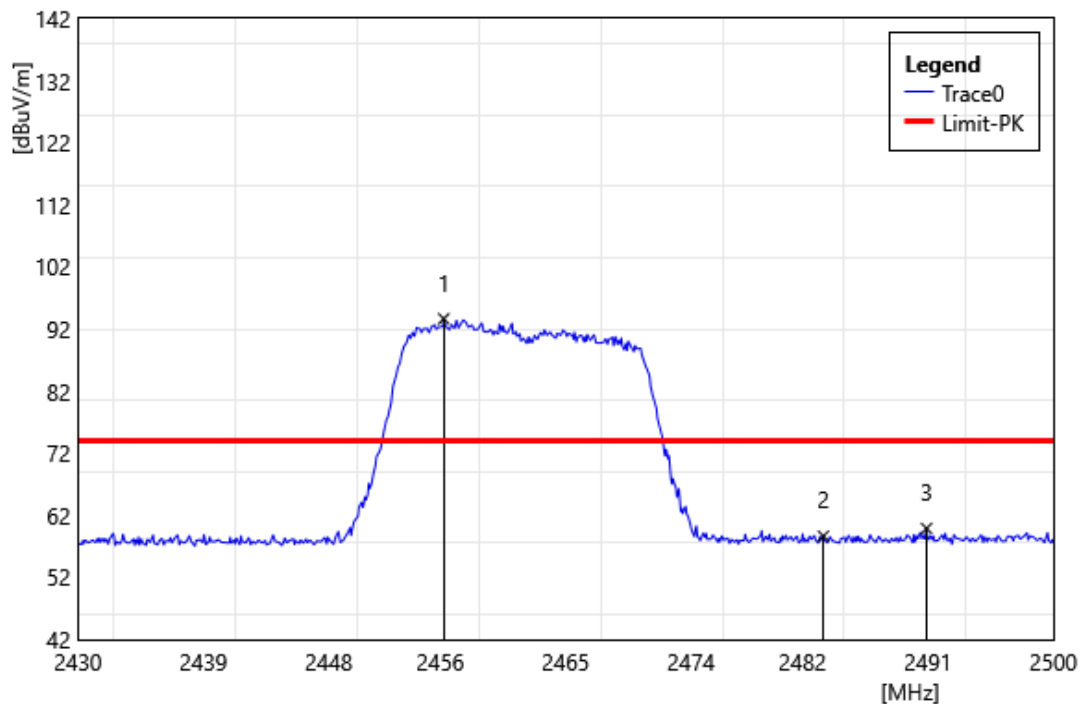


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2456.25	103.57	-9.92	93.65	73.65	20.00	PEAK
2	2483.50	68.44	-9.80	58.64	73.65	-15.01	PEAK
3	2490.90	69.68	-9.77	59.91	74.00	-14.09	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2462 MHz		
Polarization:	Vertical		
Remark:			

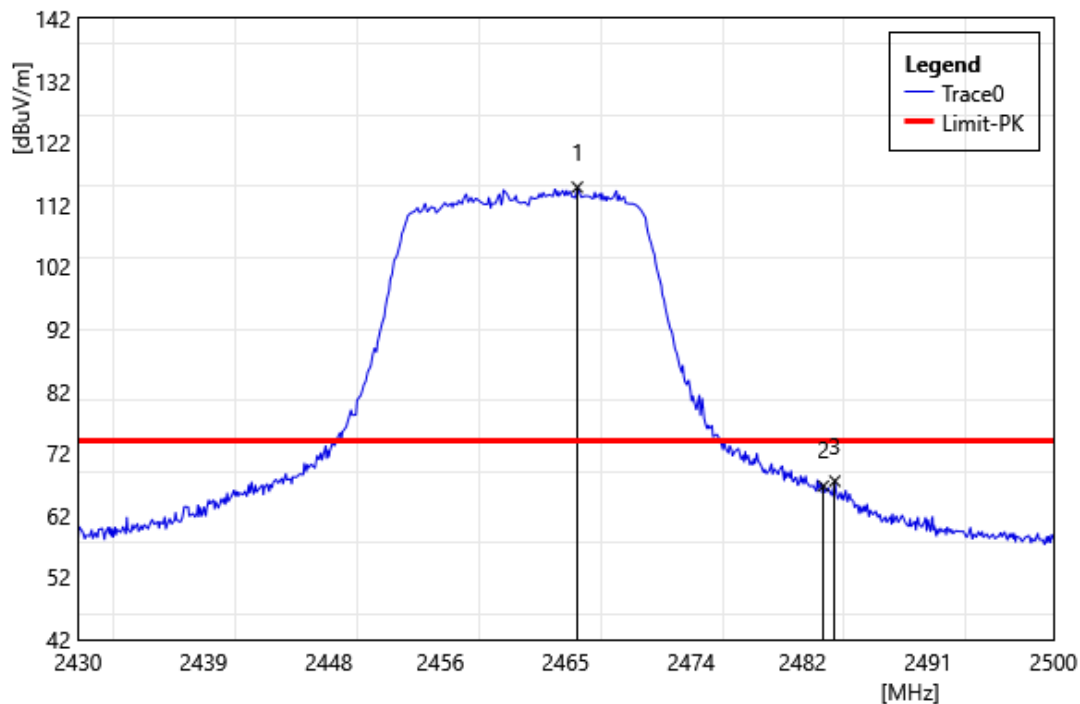


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2465.84	124.73	-9.87	114.86	94.86	20.00	PEAK
2	2483.50	76.51	-9.80	66.71	94.86	-28.14	PEAK
3	2484.32	77.30	-9.79	67.51	74.00	-6.49	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2467 MHz		
Polarization:	Horizontal		
Remark:			

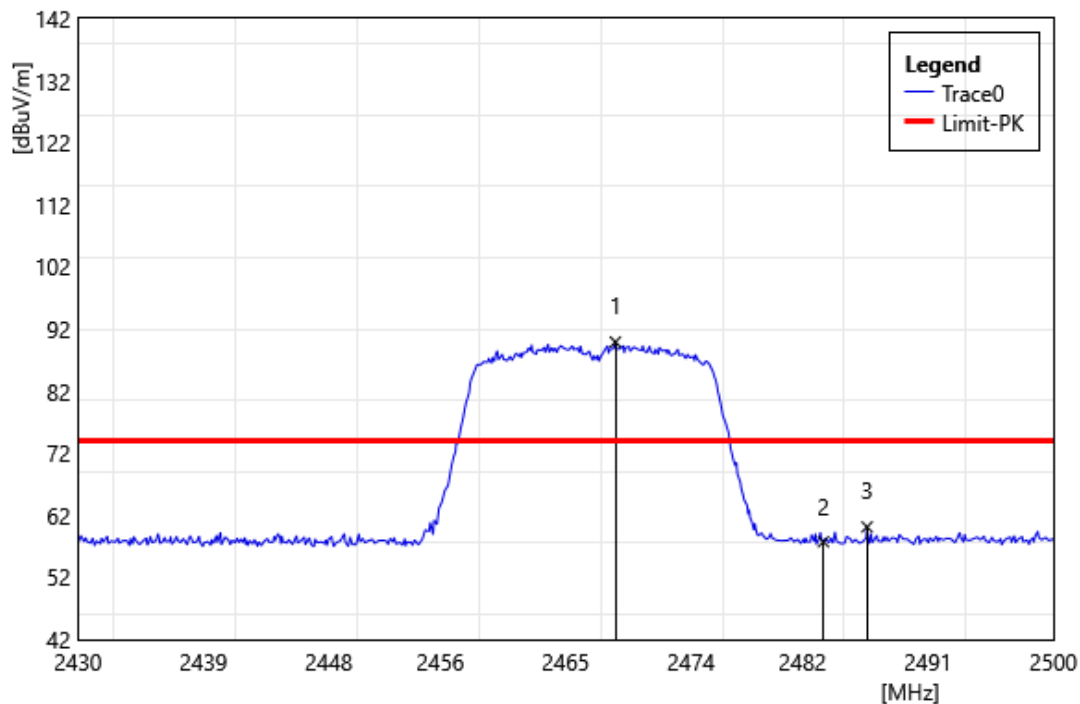


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2468.57	99.79	-9.87	89.92	69.92	20.00	PEAK
2	2483.50	67.55	-9.80	57.75	69.92	-12.18	PEAK
3	2486.63	69.92	-9.78	60.14	74.00	-13.86	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2467 MHz		
Polarization:	Vertical		
Remark:			

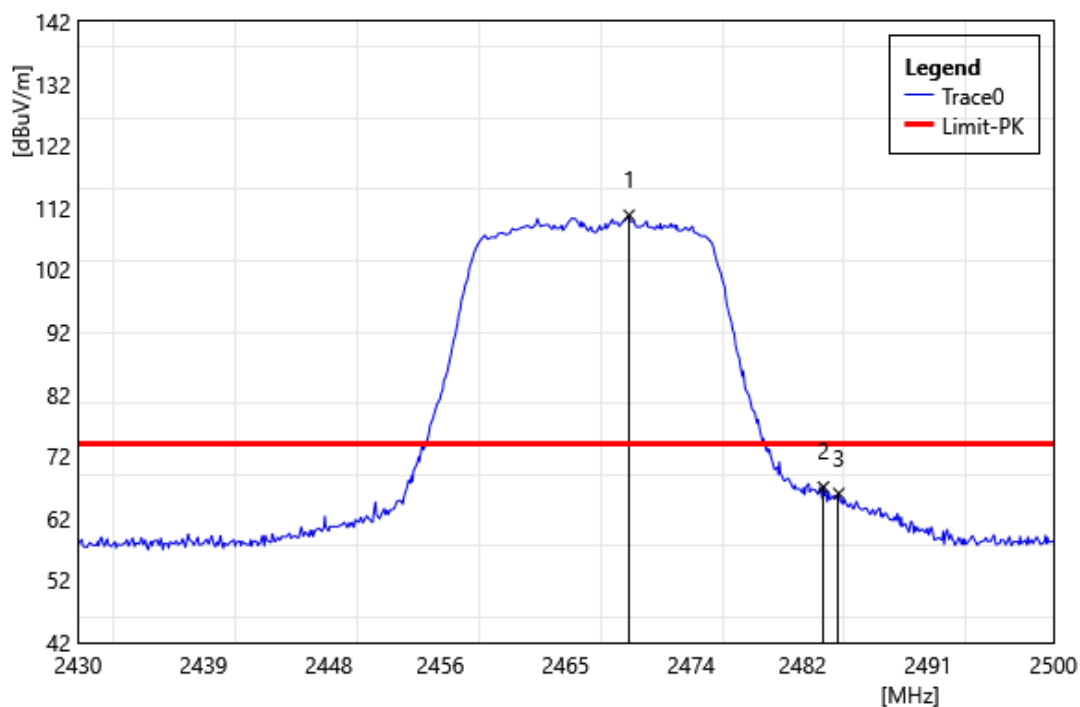


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.55	120.67	-9.86	110.81	90.81	20.00	PEAK
2	2483.50	76.84	-9.80	67.04	90.81	-23.78	PEAK
3	2484.60	75.80	-9.79	66.01	74.00	-7.99	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2472 MHz		
Polarization:	Horizontal		
Remark:			

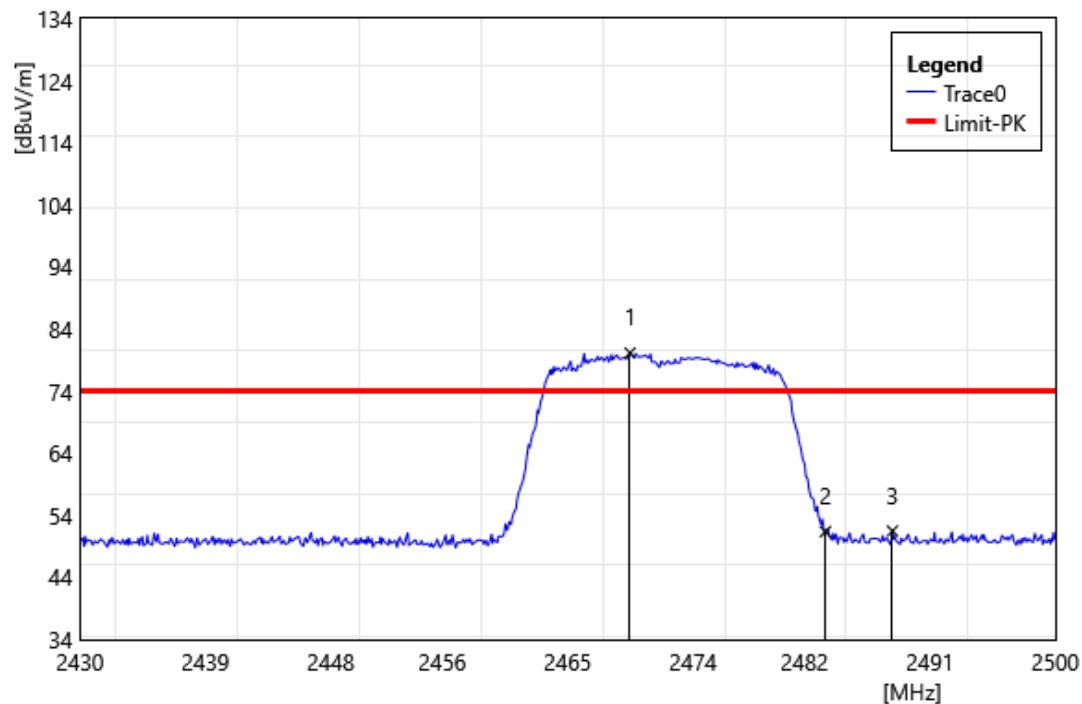


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.48	90.01	-9.86	80.15	60.15	20.00	PEAK
2	2483.50	61.18	-9.80	51.38	60.15	-8.78	PEAK
3	2488.31	61.26	-9.78	51.48	74.00	-22.52	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2472 MHz		
Polarization:	Vertical		
Remark:			

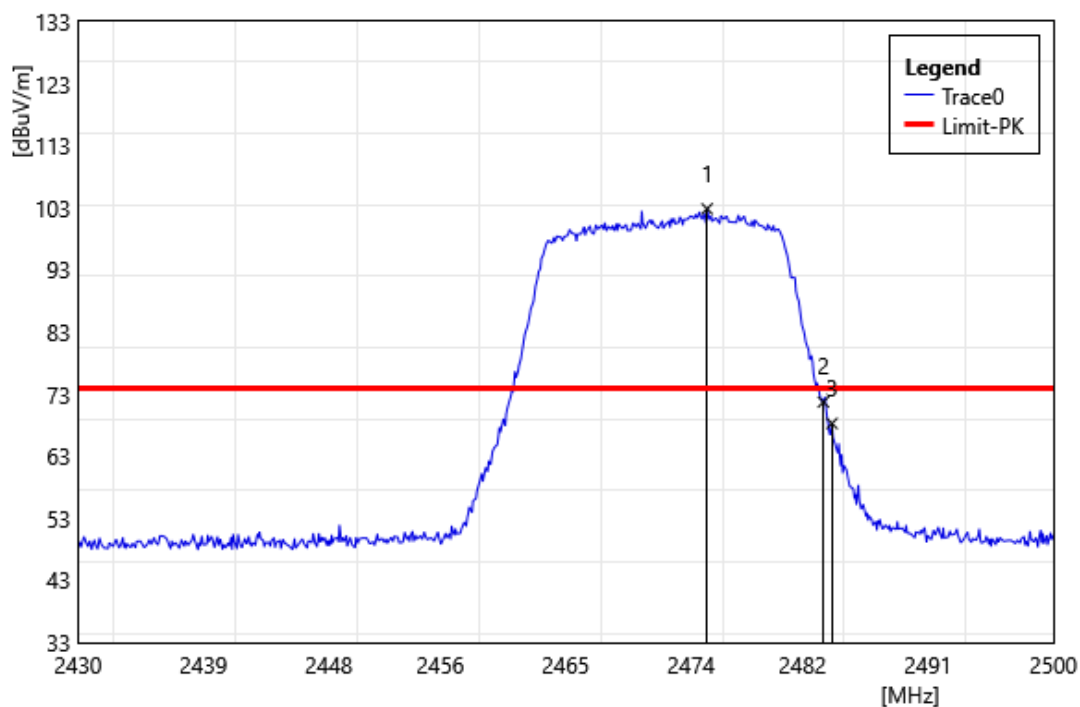


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2475.15	112.69	-9.84	102.85	82.85	20.00	PEAK
2	2483.50	81.53	-9.80	71.73	82.85	-11.12	PEAK
3	2484.11	78.07	-9.79	68.28	74.00	-5.72	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2422 MHz		
Polarization:	Horizontal		
Remark:			

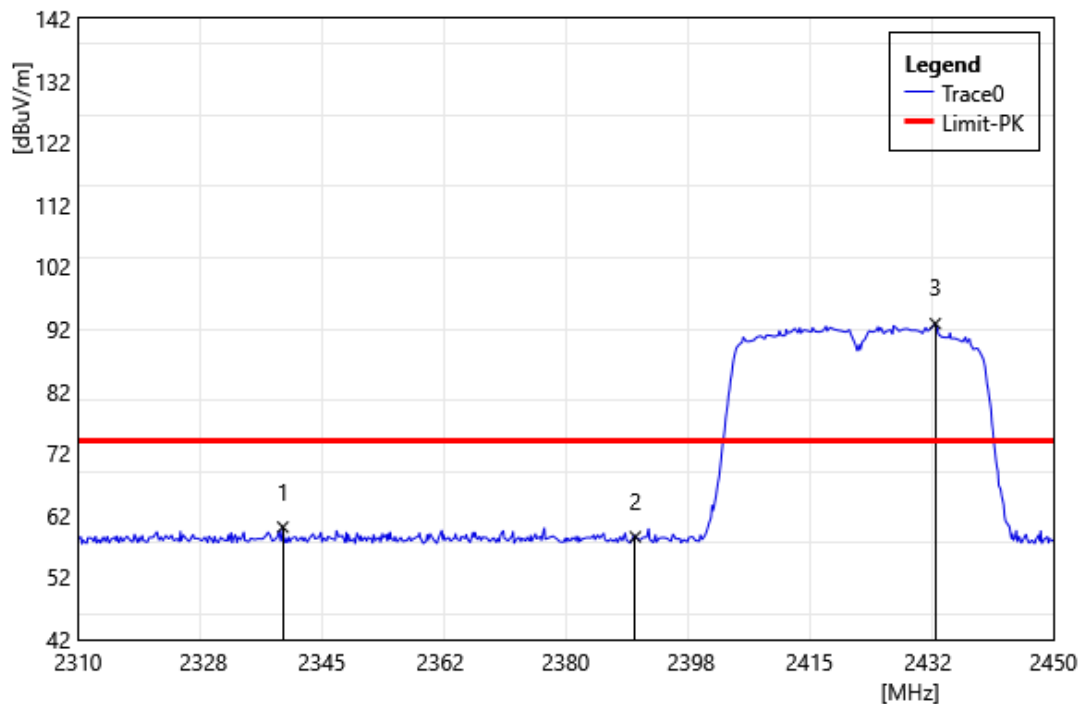


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2339.40	69.58	-9.47	60.11	74.00	-13.89	PEAK
2	2390.00	68.09	-9.54	58.55	72.87	-14.32	PEAK
3	2433.06	102.67	-9.80	92.87	72.87	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2422 MHz		
Polarization:	Vertical		
Remark:			

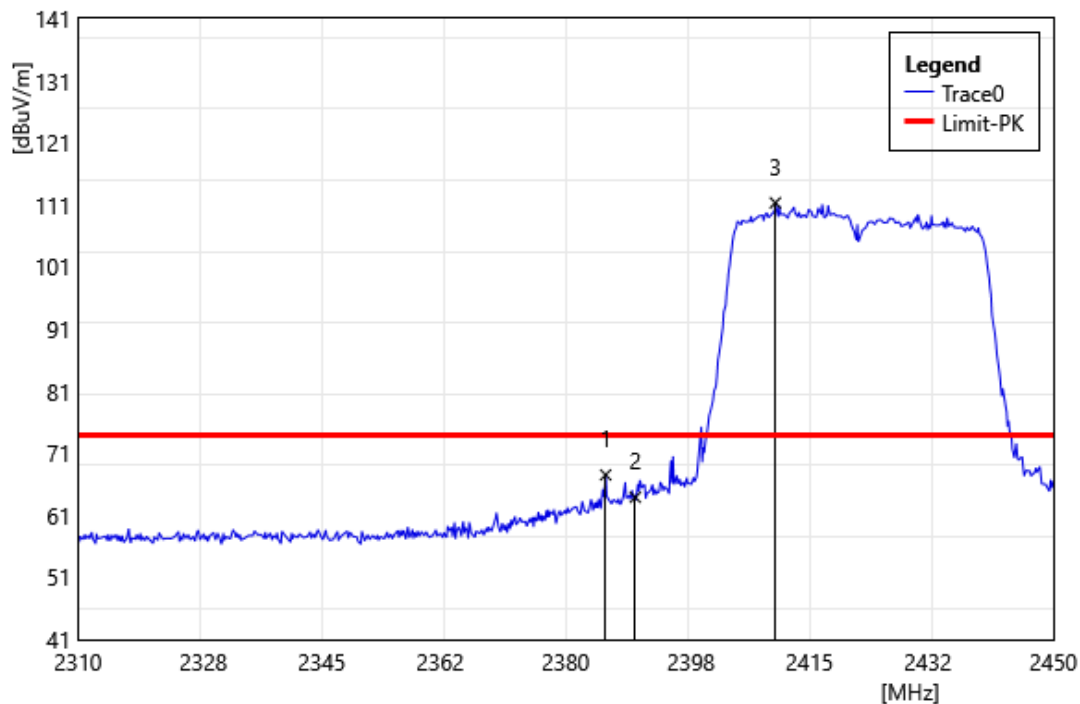


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2385.74	77.04	-9.53	67.51	74.00	-6.49	PEAK
2	2390.00	73.45	-9.54	63.91	91.33	-27.42	PEAK
3	2410.10	120.94	-9.61	111.33	91.33	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2437 MHz		
Polarization:	Horizontal		
Remark:			

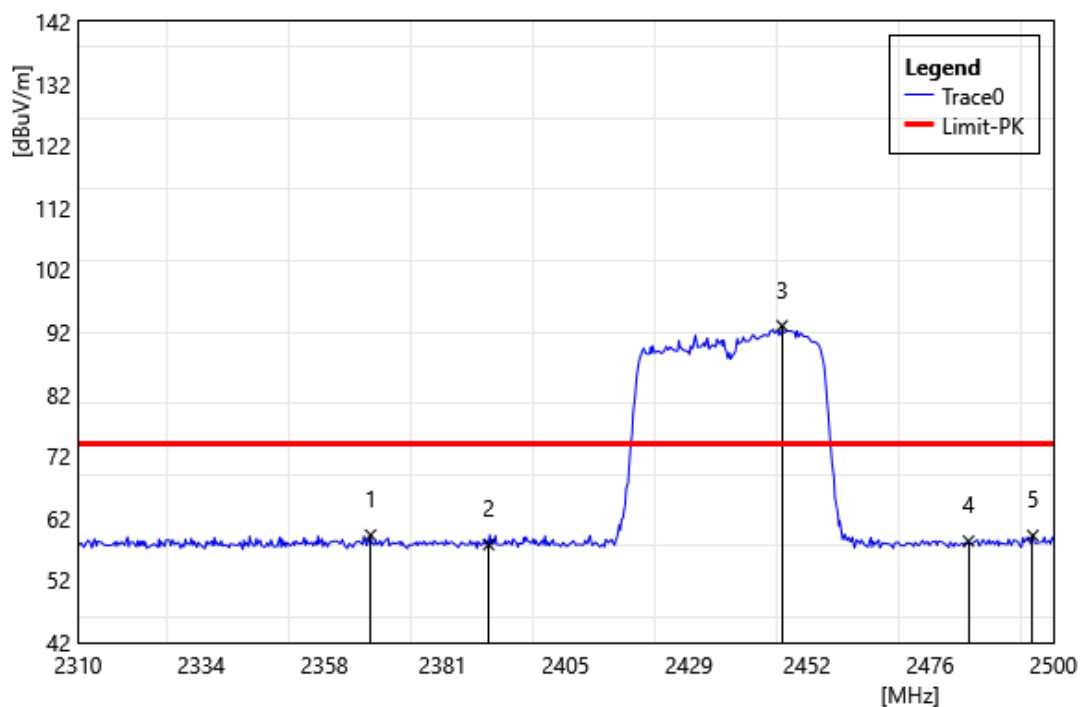


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2367.00	68.84	-9.52	59.32	74.00	-14.68	PEAK
2	2390.00	67.29	-9.54	57.75	73.02	-15.27	PEAK
3	2447.18	102.94	-9.92	93.02	73.02	20.00	PEAK
4	2483.50	68.15	-9.80	58.35	73.02	-14.67	PEAK
5	2496.01	68.98	-9.75	59.24	74.00	-14.77	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2437 MHz		
Polarization:	Vertical		
Remark:			

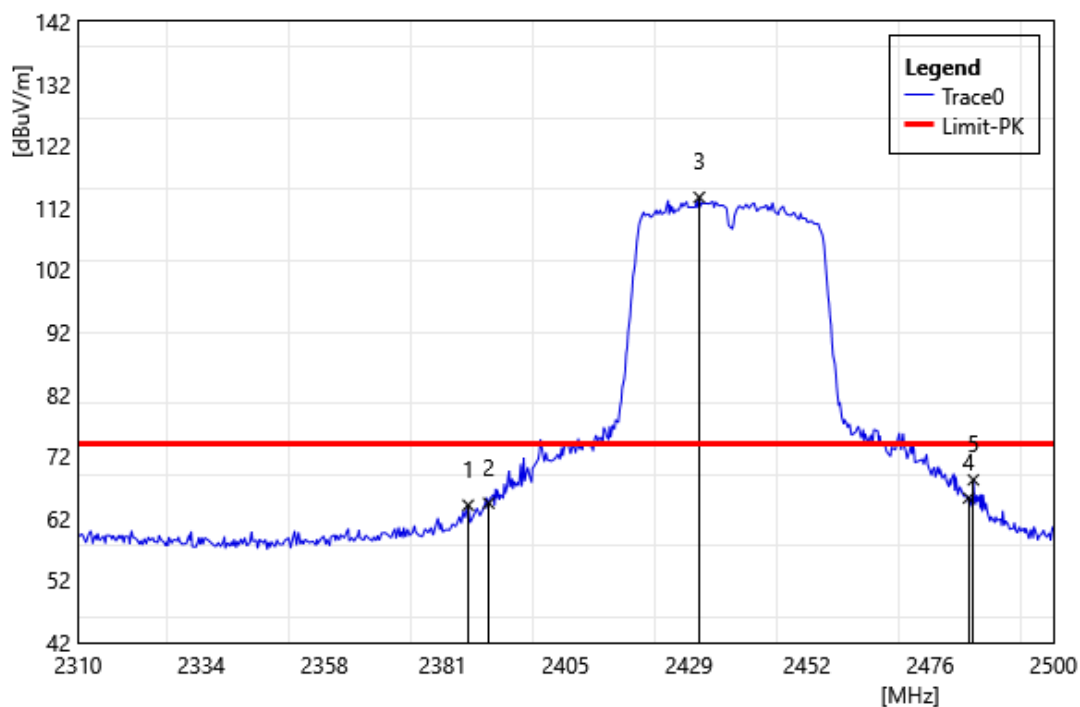


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2386.00	73.64	-9.53	64.11	74.00	-9.89	PEAK
2	2390.00	73.99	-9.54	64.45	93.70	-29.25	PEAK
3	2431.03	123.48	-9.78	113.70	93.70	20.00	PEAK
4	2483.50	75.08	-9.80	65.28	93.70	-28.42	PEAK
5	2484.42	77.99	-9.79	68.20	74.00	-5.80	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2452 MHz		
Polarization:	Horizontal		
Remark:			

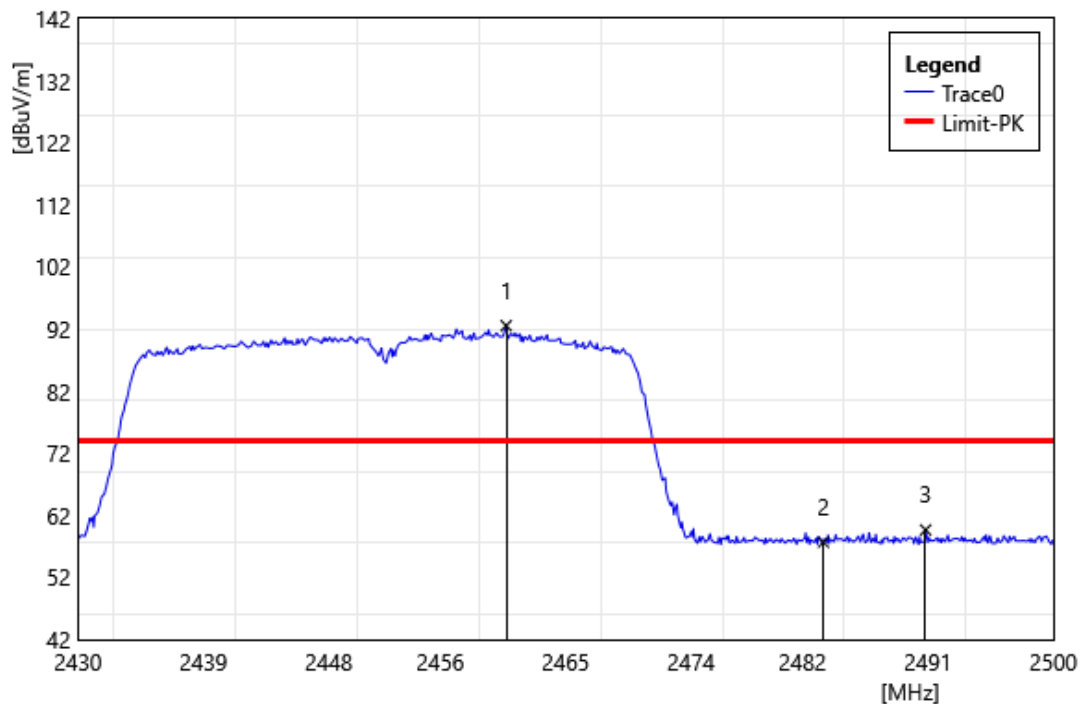


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2460.73	102.44	-9.89	92.55	72.55	20.00	PEAK
2	2483.50	67.48	-9.80	57.68	72.55	-14.87	PEAK
3	2490.83	69.42	-9.77	59.65	74.00	-14.35	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2452 MHz		
Polarization:	Vertical		
Remark:			

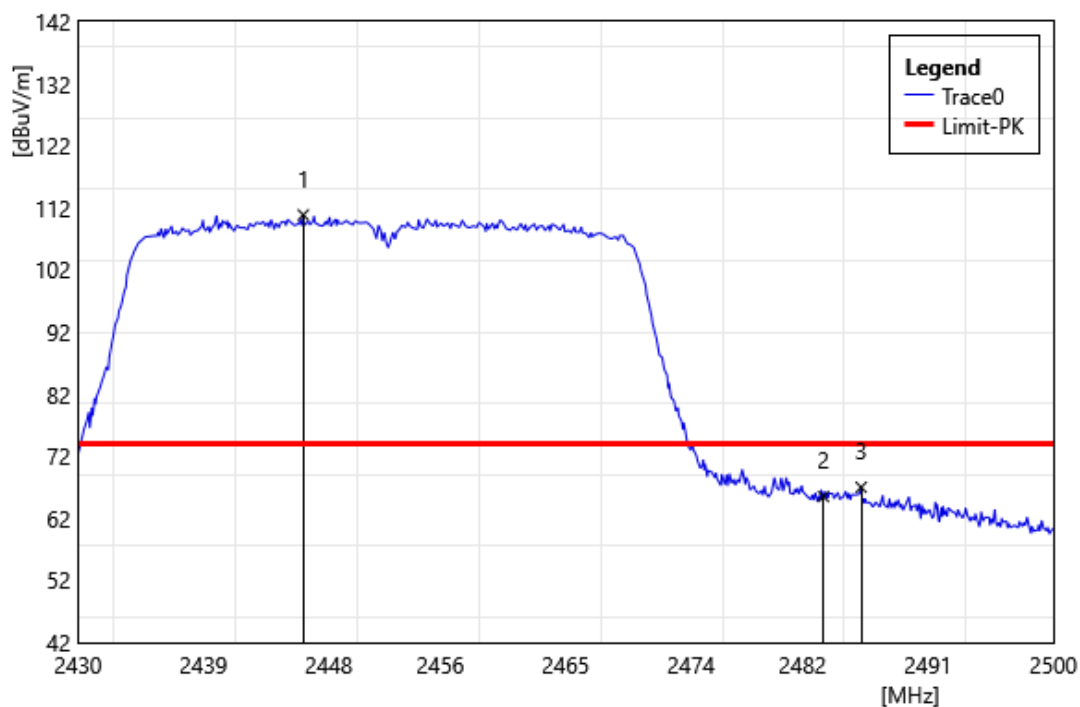


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2446.17	120.77	-9.90	110.87	90.87	20.00	PEAK
2	2483.50	75.32	-9.80	65.52	90.87	-25.35	PEAK
3	2486.21	76.80	-9.79	67.01	74.00	-6.99	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2457 MHz		
Polarization:	Horizontal		
Remark:			

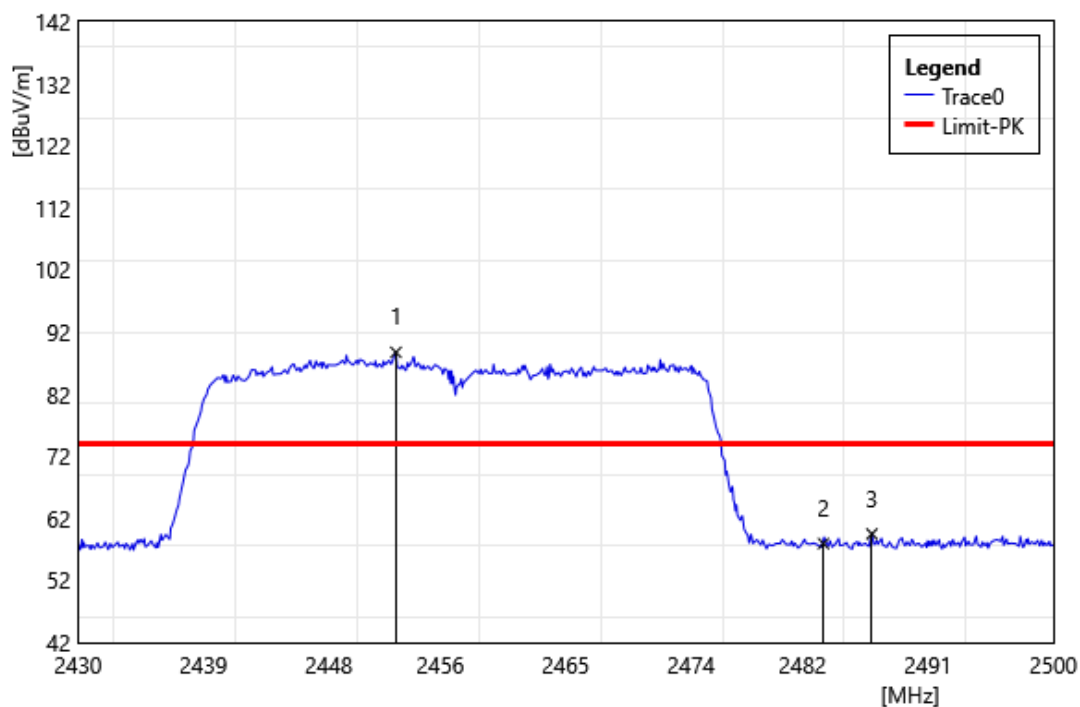


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2452.82	98.67	-9.92	88.75	68.75	20.00	PEAK
2	2483.50	67.73	-9.80	57.93	68.75	-10.82	PEAK
3	2486.98	69.27	-9.78	59.49	74.00	-14.51	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2457 MHz		
Polarization:	Vertical		
Remark:			

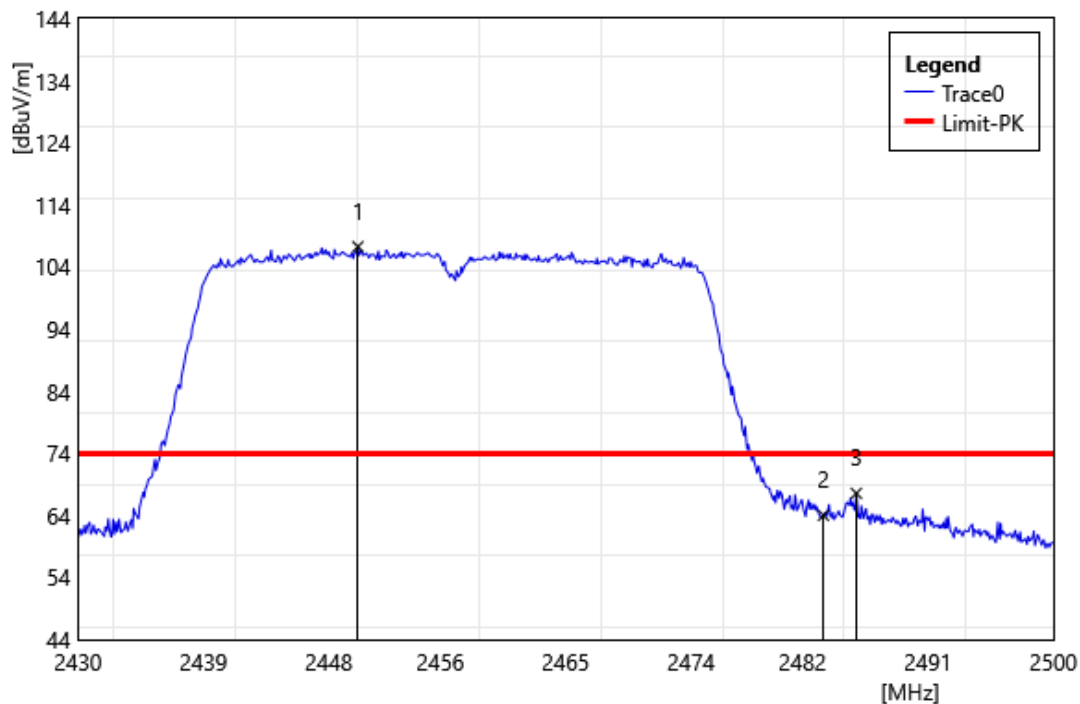


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2450.09	117.18	-9.93	107.26	87.26	20.00	PEAK
2	2483.50	73.81	-9.80	64.01	87.26	-23.25	PEAK
3	2485.86	77.32	-9.79	67.53	74.00	-6.47	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2462 MHz		
Polarization:	Horizontal		
Remark:			

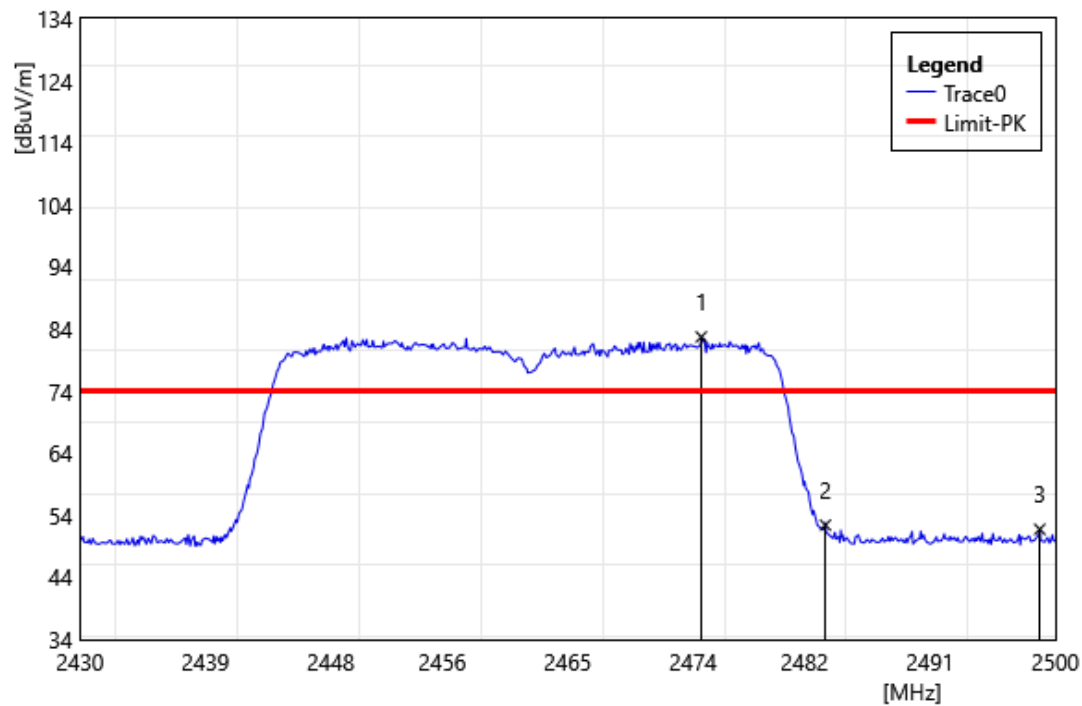


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2474.59	92.56	-9.83	82.73	62.73	20.00	PEAK
2	2483.50	62.22	-9.80	52.42	62.73	-10.32	PEAK
3	2498.88	61.49	-9.73	51.76	74.00	-22.24	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2462 MHz		
Polarization:	Vertical		
Remark:			

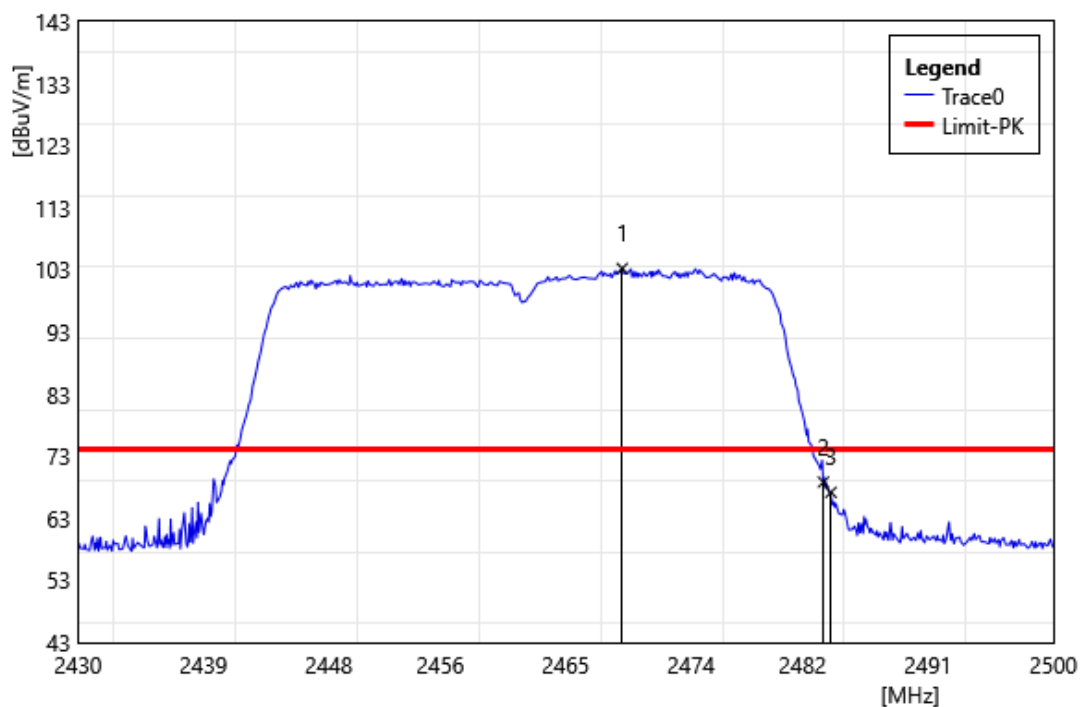


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.06	113.11	-9.86	103.25	83.25	20.00	PEAK
2	2483.50	78.64	-9.80	68.84	83.25	-14.41	PEAK
3	2484.04	76.97	-9.79	67.19	74.00	-6.82	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2412		
	MHz		
Polarization:	Horizontal		
Remark:			

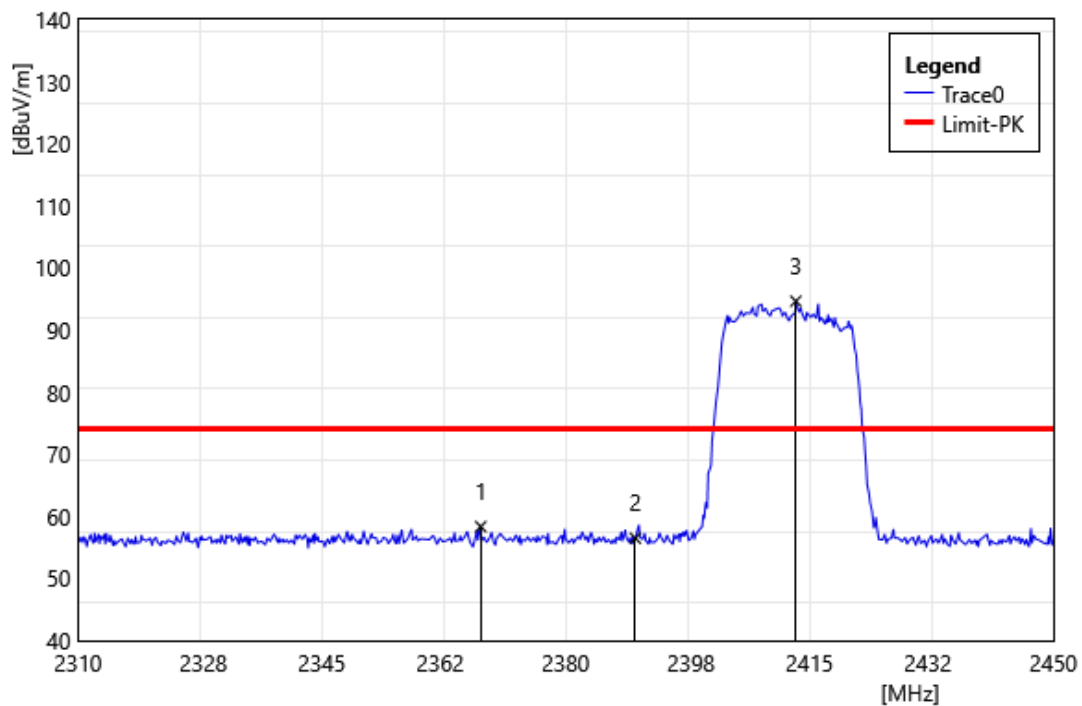


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2367.82	67.86	-9.52	58.34	74.00	-15.66	PEAK
2	2390.00	66.02	-9.54	56.48	74.65	-18.18	PEAK
3	2413.04	104.29	-9.64	94.65	74.65	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2412		
	MHz		
Polarization:	Vertical		
Remark:			

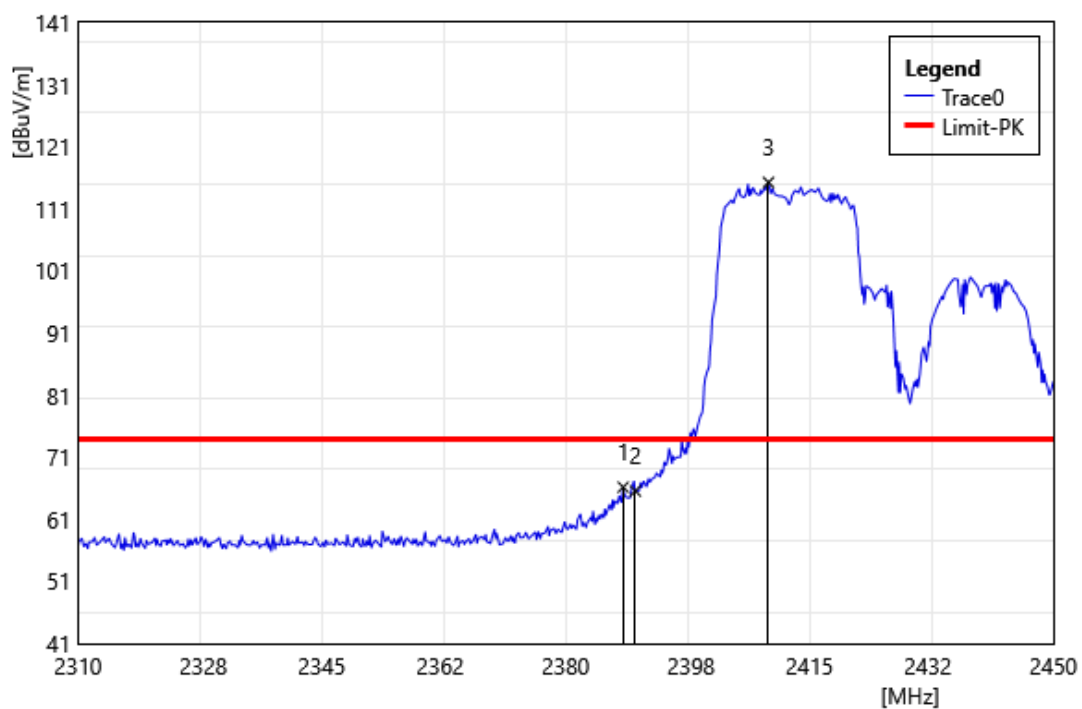


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.26	75.71	-9.53	66.18	74.00	-7.82	PEAK
2	2390.00	75.10	-9.54	65.56	95.26	-29.70	PEAK
3	2409.12	124.87	-9.61	115.26	95.26	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2437		
	MHz		
Polarization:	Horizontal		
Remark:			

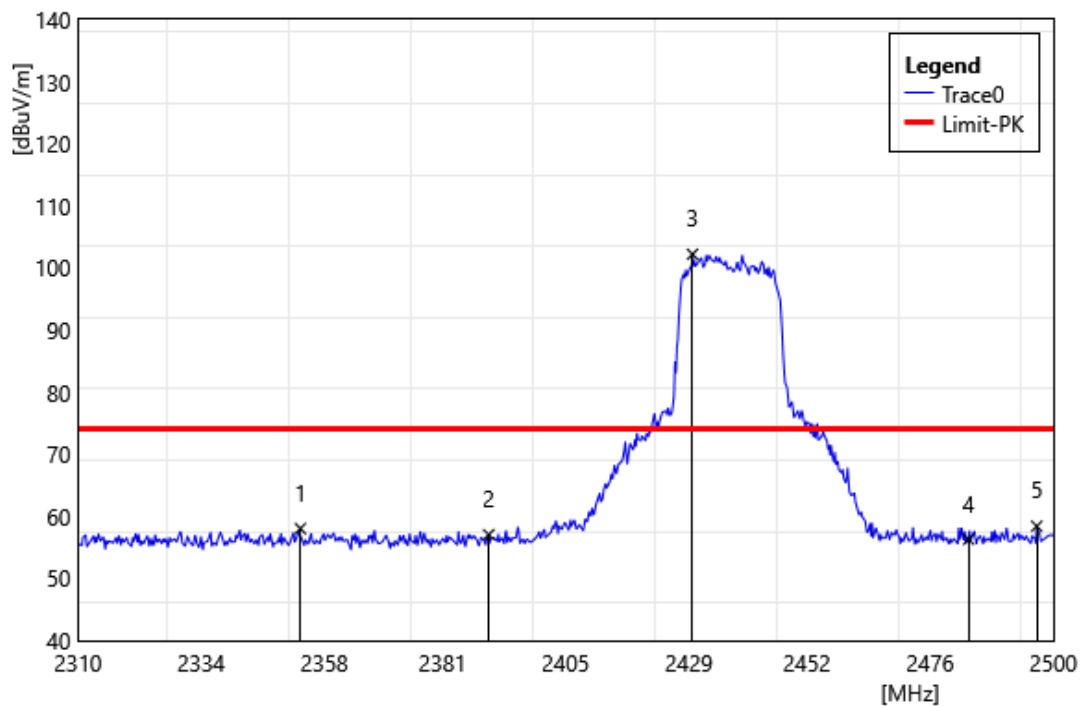


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2353.32	67.55	-9.51	58.04	74.00	-15.96	PEAK
2	2390.00	66.58	-9.54	57.04	82.21	-25.17	PEAK
3	2429.70	111.99	-9.78	102.21	82.21	20.00	PEAK
4	2483.50	66.11	-9.80	56.31	82.21	-25.90	PEAK
5	2496.77	68.16	-9.74	58.43	74.00	-15.58	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2437		
	MHz		
Polarization:	Vertical		
Remark:			

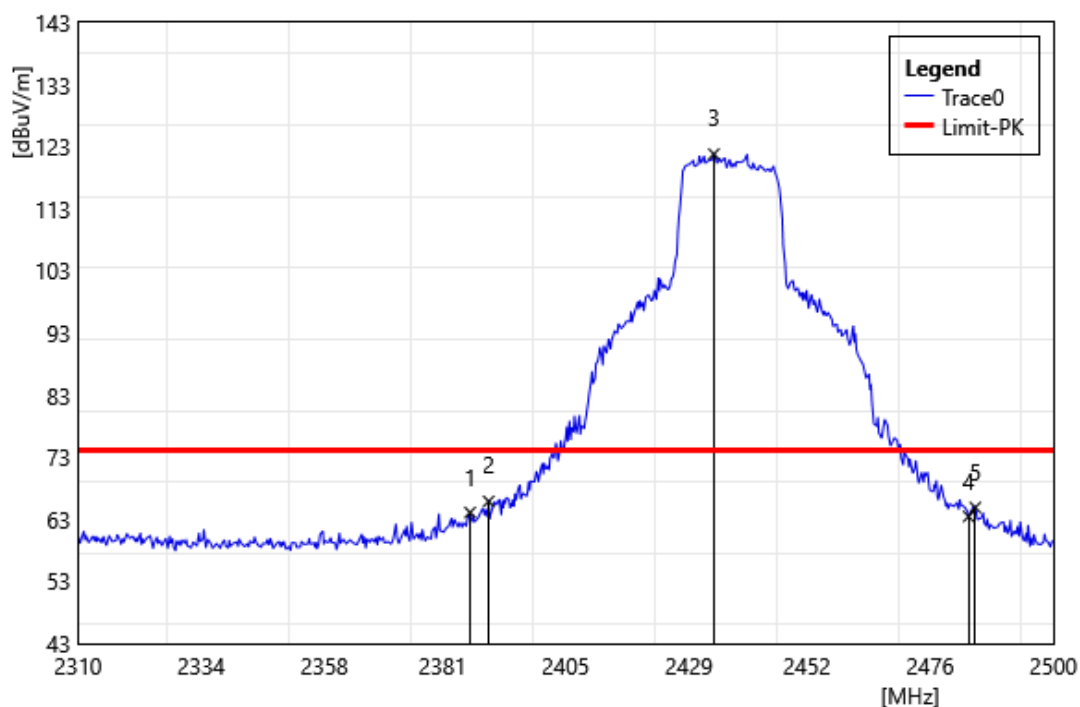


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2386.38	73.63	-9.53	64.10	74.00	-9.90	PEAK
2	2390.00	75.45	-9.54	65.91	101.83	-35.93	PEAK
3	2433.88	131.64	-9.81	121.83	101.83	20.00	PEAK
4	2483.50	73.27	-9.80	63.47	101.83	-38.36	PEAK
5	2484.80	74.71	-9.79	64.92	74.00	-9.08	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2462		
	MHz		
Polarization:	Horizontal		
Remark:			

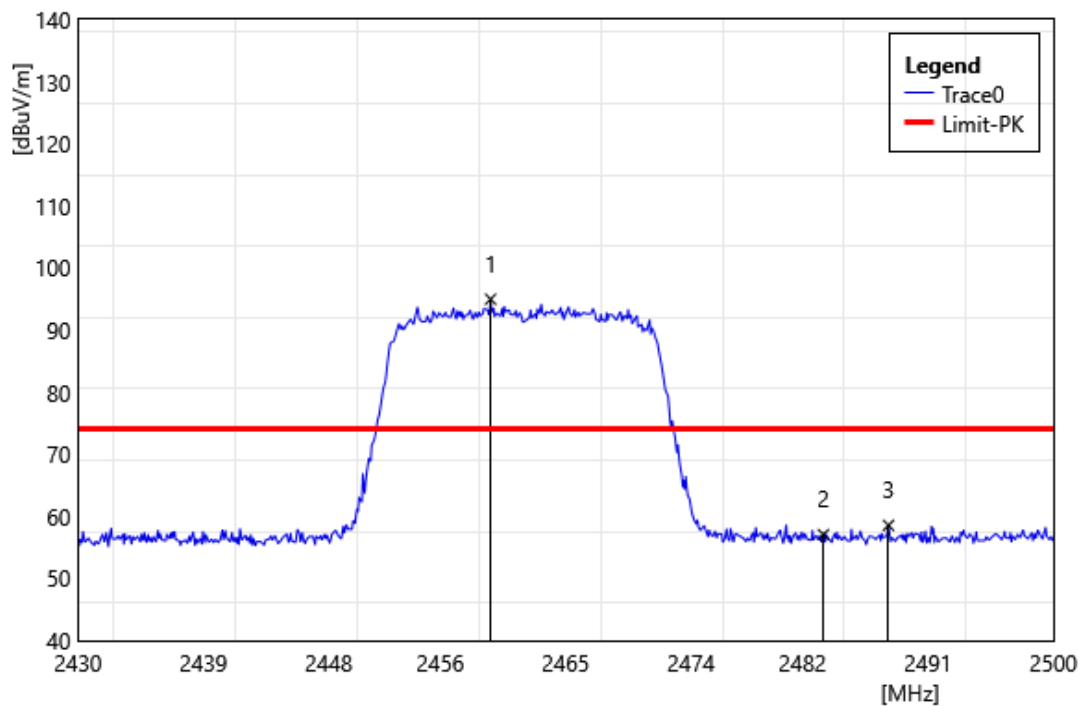


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2459.61	104.86	-9.89	94.97	74.97	20.00	PEAK
2	2483.50	66.87	-9.80	57.07	74.97	-17.90	PEAK
3	2488.17	68.34	-9.78	58.56	74.00	-15.44	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2462		
	MHz		
Polarization:	Vertical		
Remark:			

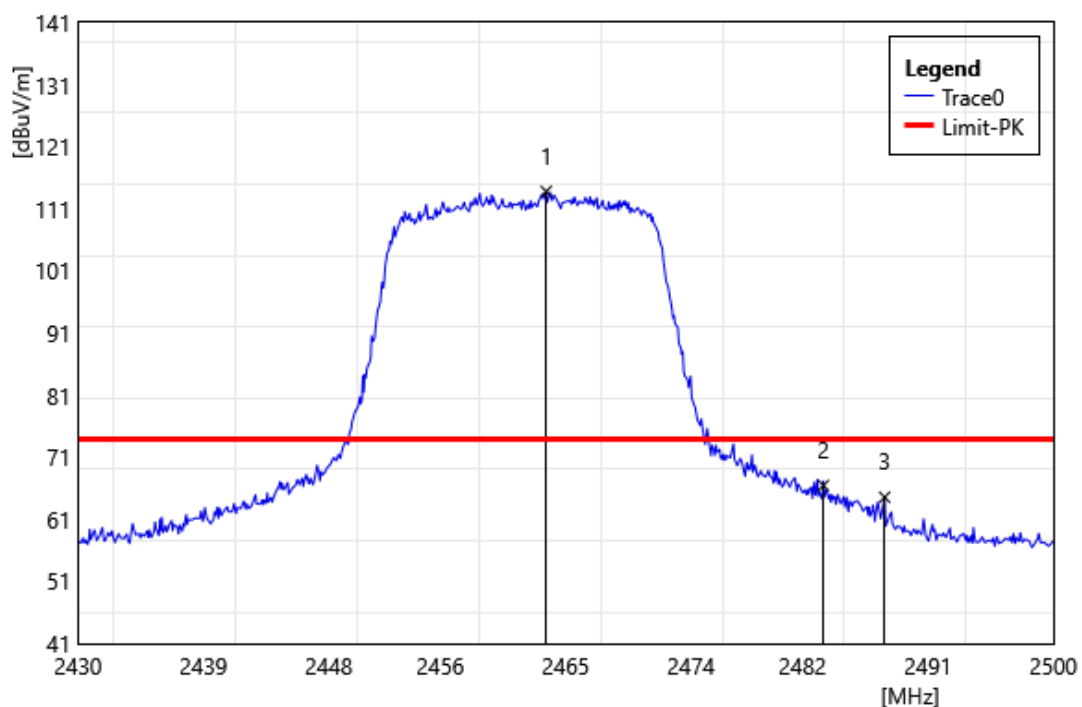


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2463.60	123.70	-9.88	113.82	98.82	20.00	PEAK
2	2483.50	76.26	-9.80	66.46	98.82	-27.36	PEAK
3	2487.89	74.36	-9.78	64.58	74.00	-9.42	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2467		
	MHz		
Polarization:	Horizontal		
Remark:			

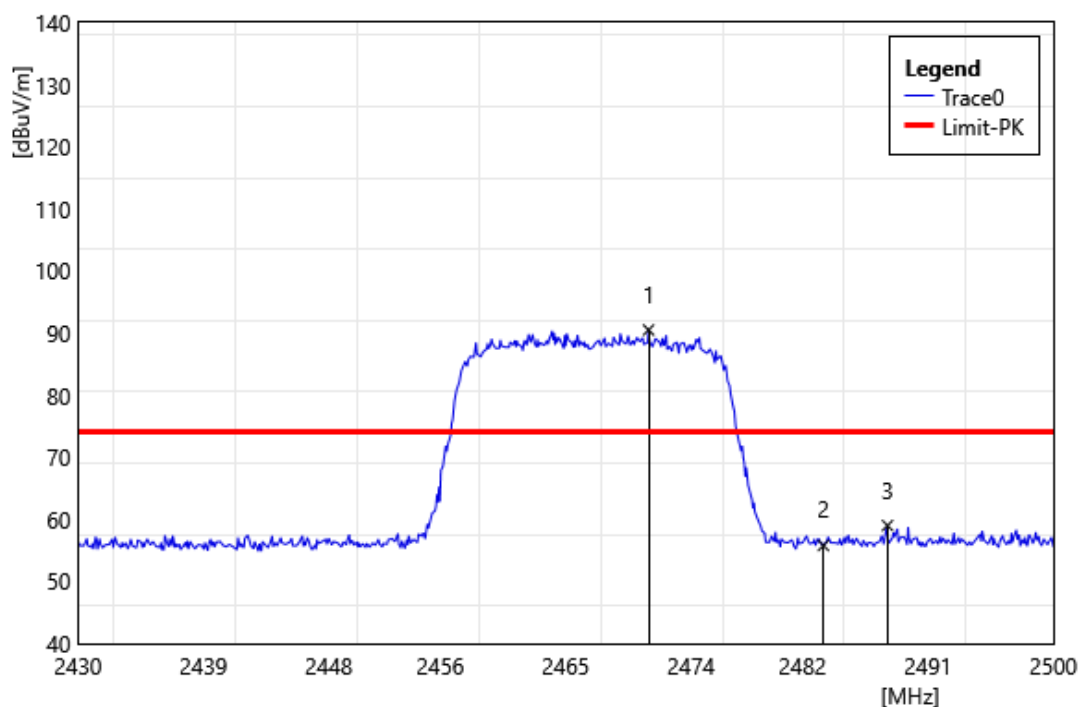


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2470.95	100.35	-9.85	90.50	70.50	20.00	PEAK
2	2483.50	65.58	-9.80	55.78	70.50	-14.72	PEAK
3	2488.10	68.78	-9.78	59.00	74.00	-15.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2467		
	MHz		
Polarization:	Vertical		
Remark:			

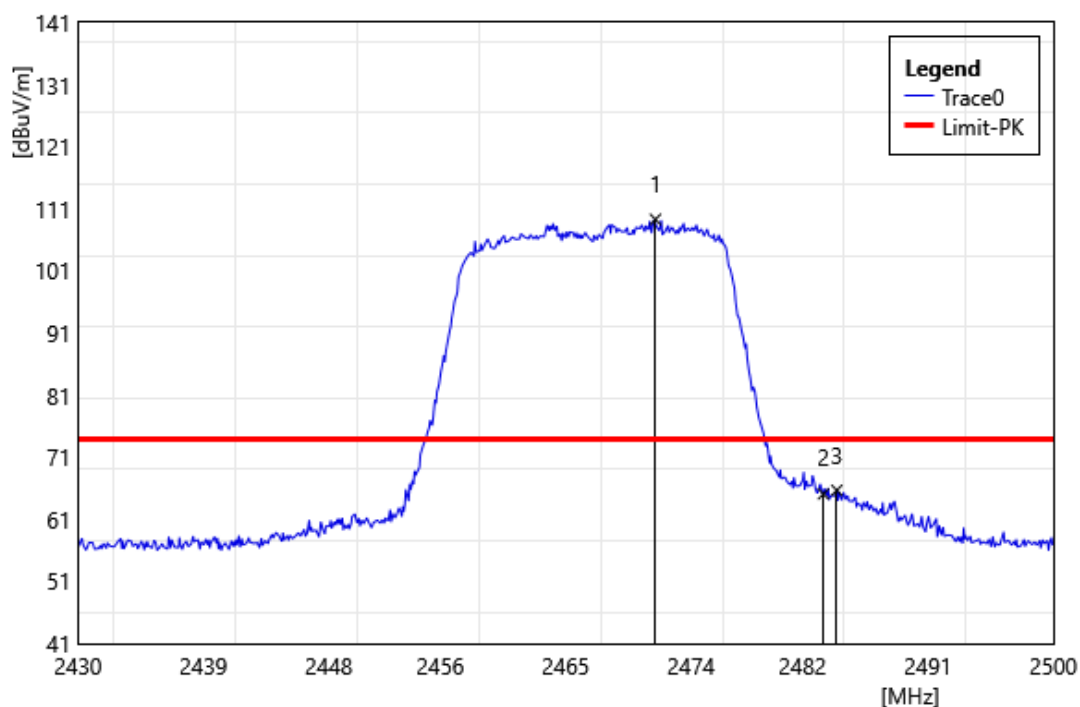


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2471.44	119.16	-9.84	109.32	89.32	20.00	PEAK
2	2483.50	74.90	-9.80	65.10	89.32	-24.22	PEAK
3	2484.46	75.46	-9.79	65.67	74.00	-8.33	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2472		
	MHz		
Polarization:	Horizontal		
Remark:			

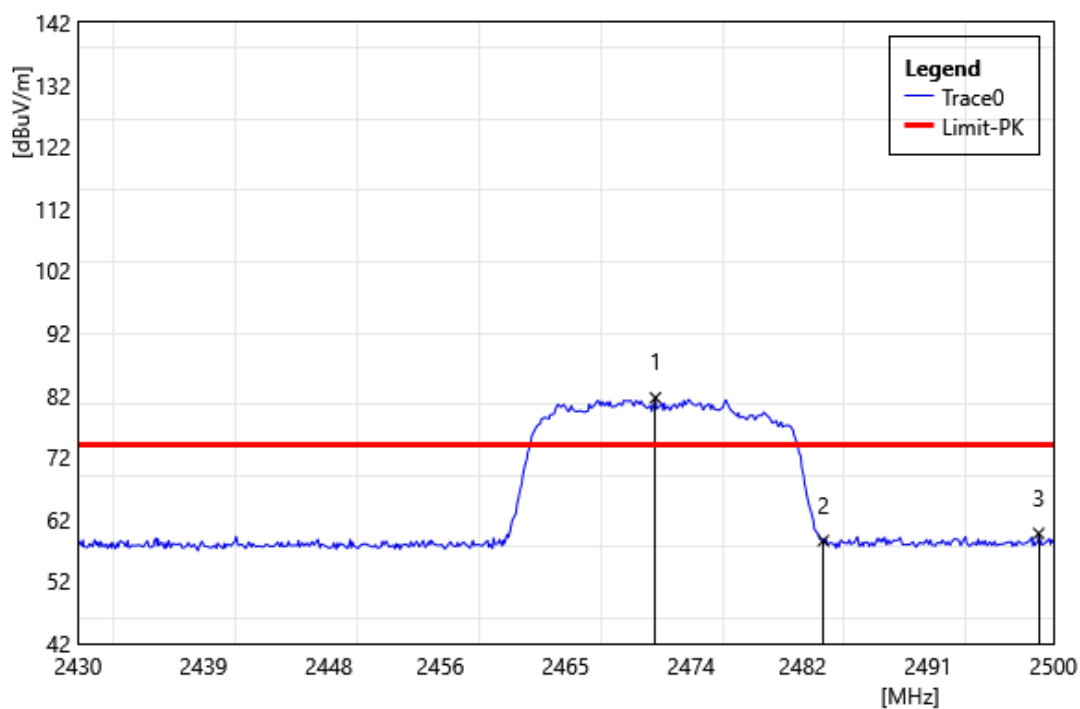


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2471.44	91.42	-9.84	81.58	61.58	20.00	PEAK
2	2483.50	68.37	-9.80	58.57	61.58	-3.01	PEAK
3	2498.95	69.47	-9.73	59.74	74.00	-14.26	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2472		
	MHz		
Polarization:	Vertical		
Remark:			

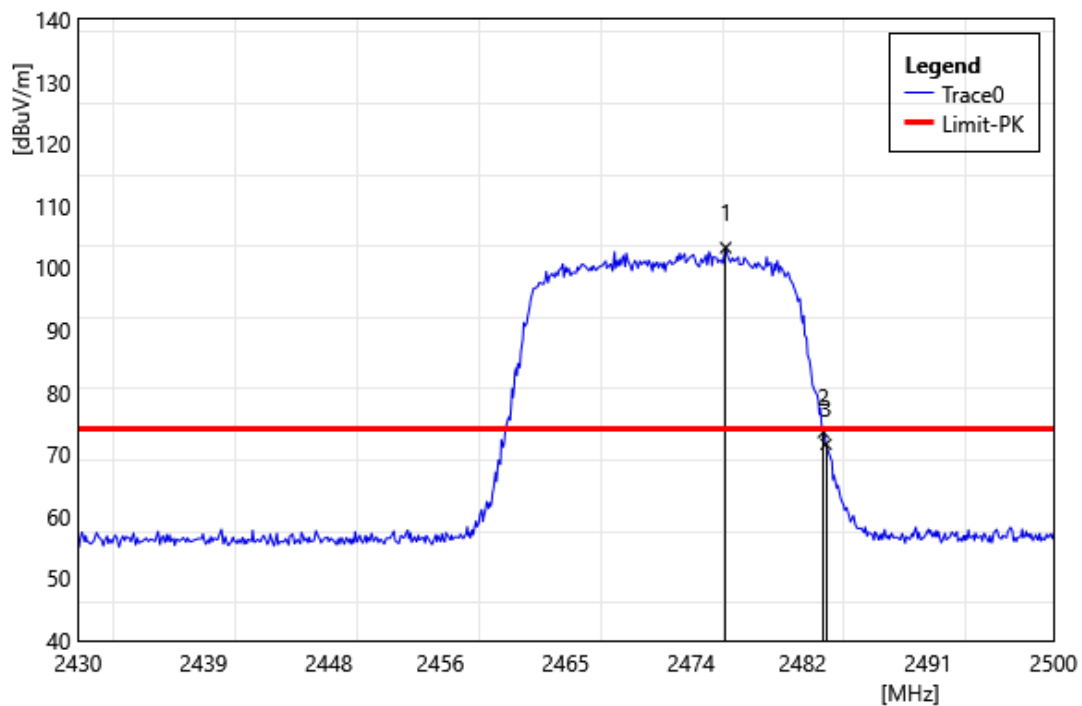


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2476.48	113.10	-9.83	103.27	83.27	20.00	PEAK
2	2483.50	83.32	-9.80	73.52	83.27	-9.75	PEAK
3	2483.69	81.41	-9.80	71.61	74.00	-2.39	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2422		
	MHz		
Polarization:	Horizontal		
Remark:			

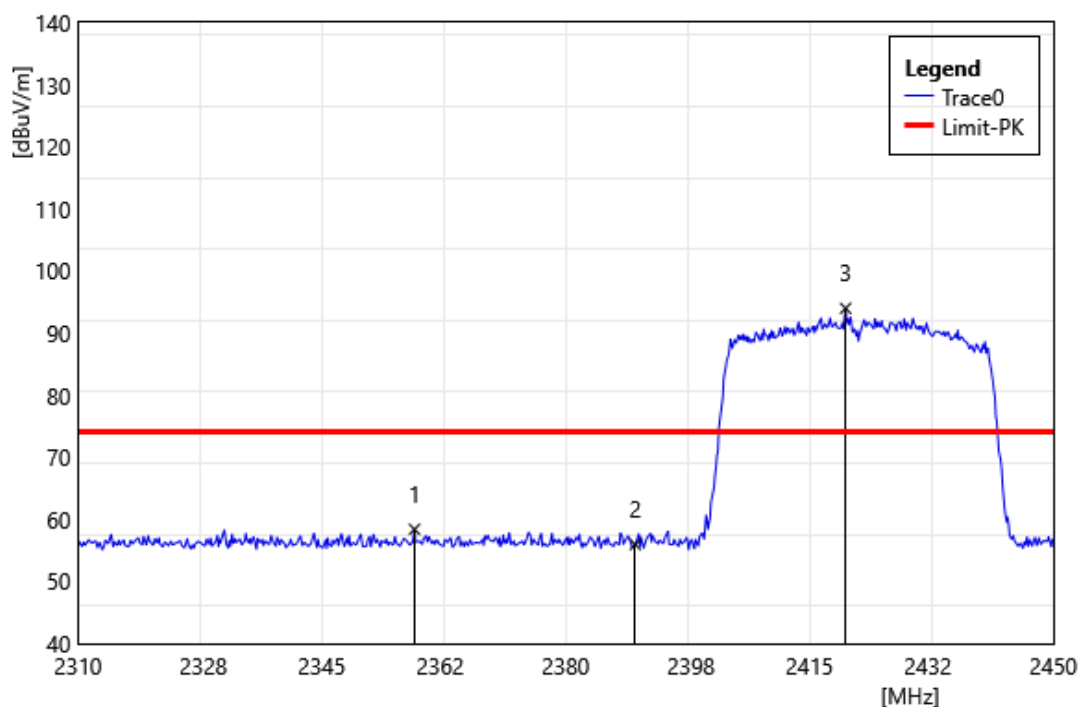


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2358.30	67.90	-9.51	58.40	74.00	-15.61	PEAK
2	2390.00	65.48	-9.54	55.94	73.99	-18.05	PEAK
3	2420.18	103.69	-9.70	93.99	73.99	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2422		
	MHz		
Polarization:	Vertical		
Remark:			

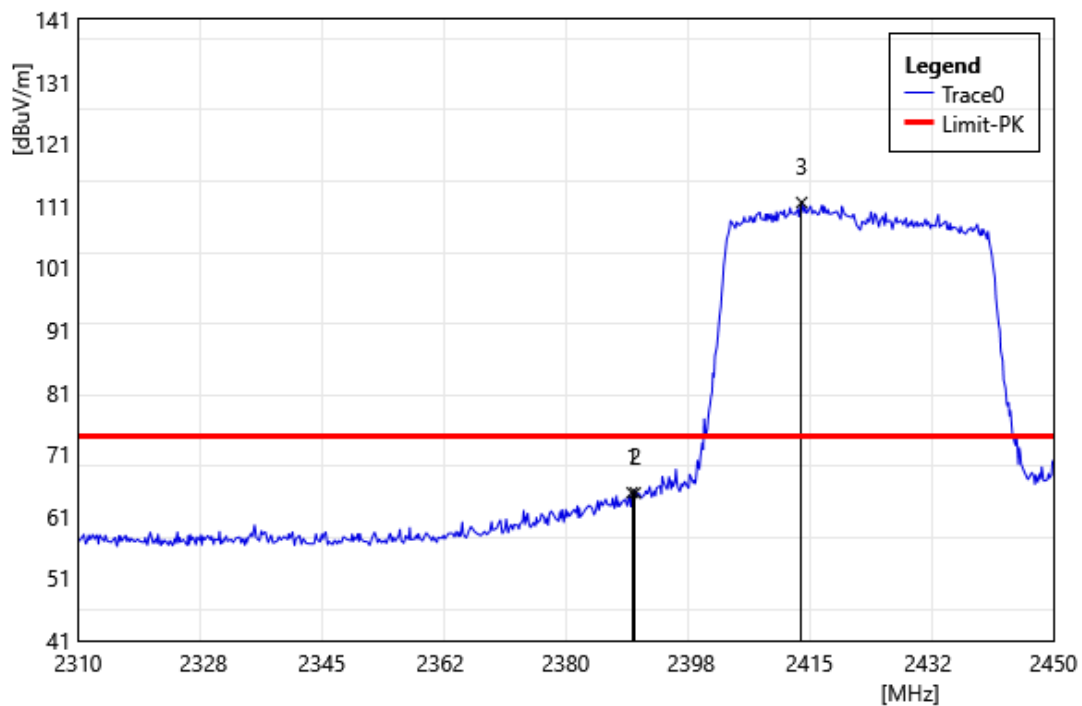


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.52	74.34	-9.54	64.80	74.00	-9.20	PEAK
2	2390.00	74.32	-9.54	64.78	91.54	-26.76	PEAK
3	2413.88	121.19	-9.65	111.54	91.54	20.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2437		
	MHz		
Polarization:	Horizontal		
Remark:			

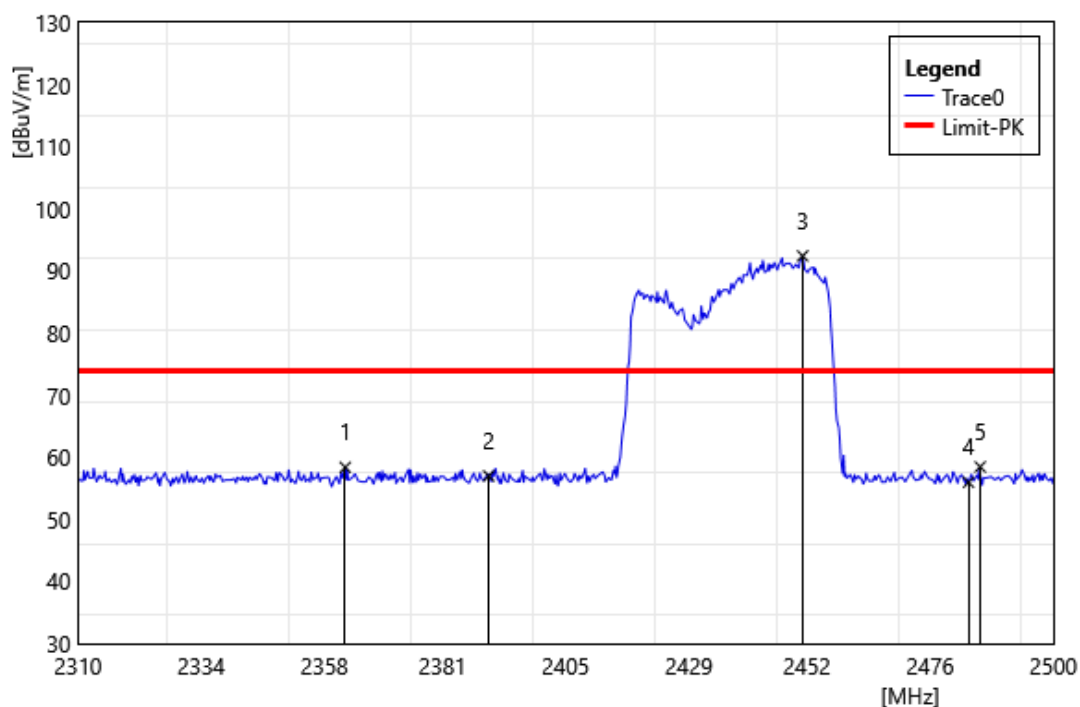


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2362.06	67.91	-9.52	58.39	74.00	-15.61	PEAK
2	2390.00	66.53	-9.54	56.99	72.42	-15.43	PEAK
3	2451.17	102.35	-9.93	92.42	72.42	20.00	PEAK
4	2483.50	65.77	-9.80	55.97	72.42	-16.45	PEAK
5	2485.75	68.24	-9.79	58.45	74.00	-15.55	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2437		
	MHz		
Polarization:	Vertical		
Remark:			

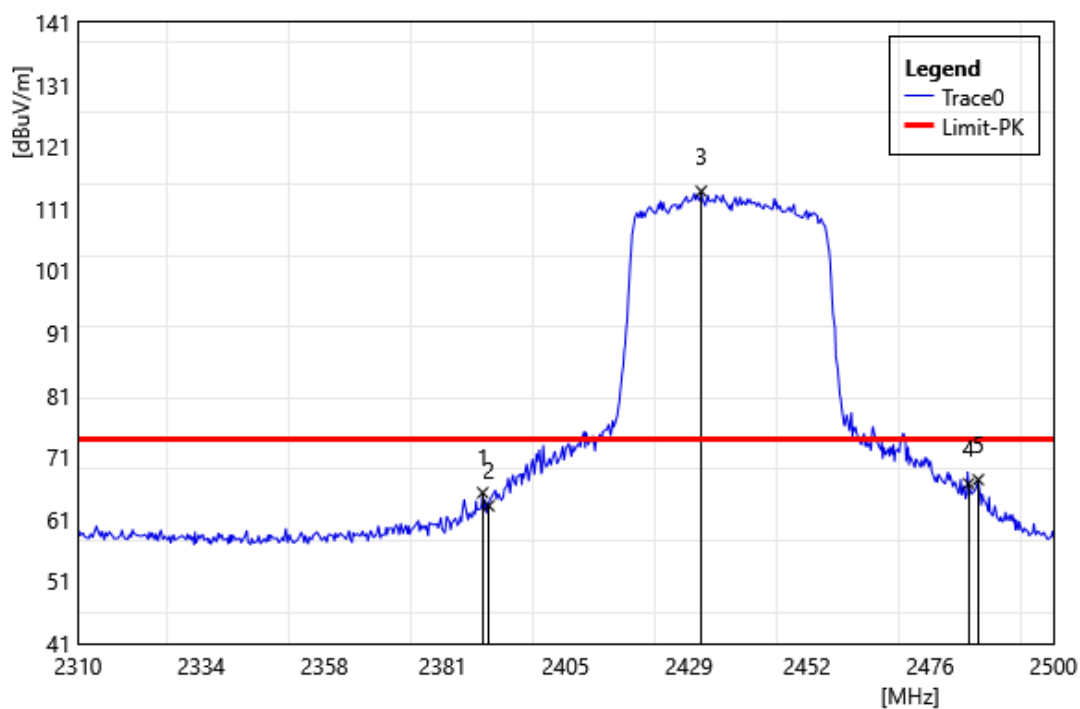


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.85	74.84	-9.53	65.31	74.00	-8.69	PEAK
2	2390.00	72.73	-9.54	63.19	93.83	-30.64	PEAK
3	2431.41	123.61	-9.78	113.83	93.83	20.00	PEAK
4	2483.50	76.53	-9.80	66.73	93.83	-27.11	PEAK
5	2485.37	77.17	-9.79	67.38	74.00	-6.62	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2452		
	MHz		
Polarization:	Horizontal		
Remark:			

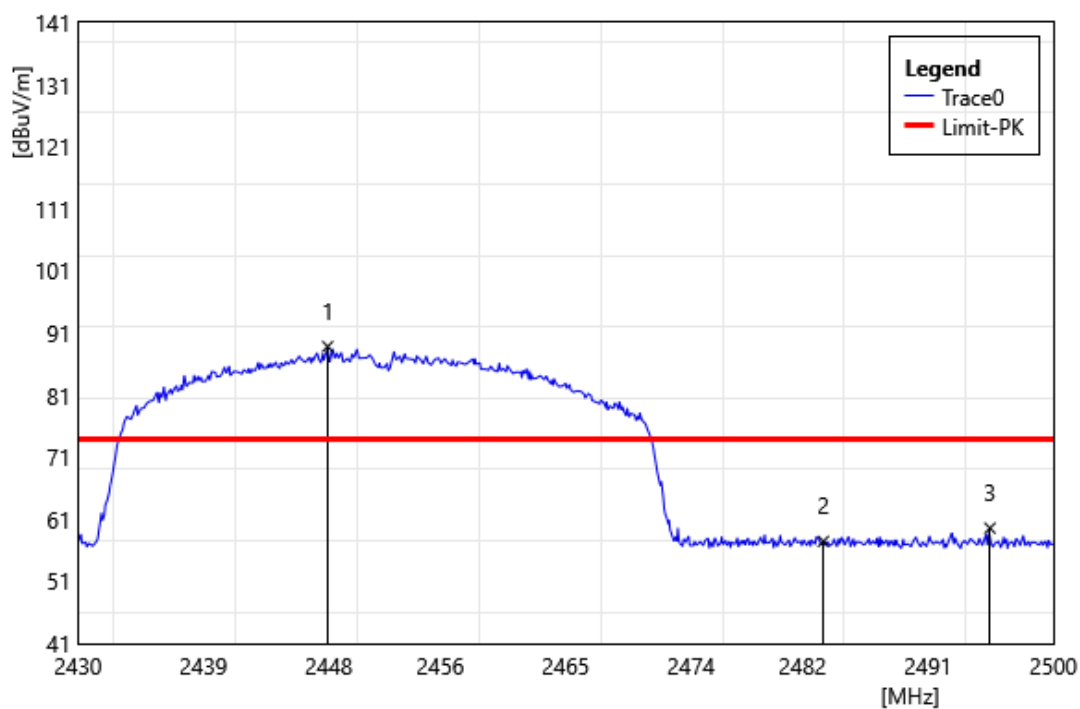


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2447.92	98.75	-9.92	88.83	68.83	20.00	PEAK
2	2483.50	67.25	-9.80	57.45	68.83	-11.37	PEAK
3	2495.45	69.34	-9.75	59.59	74.00	-14.41	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2452		
	MHz		
Polarization:	Vertical		
Remark:			

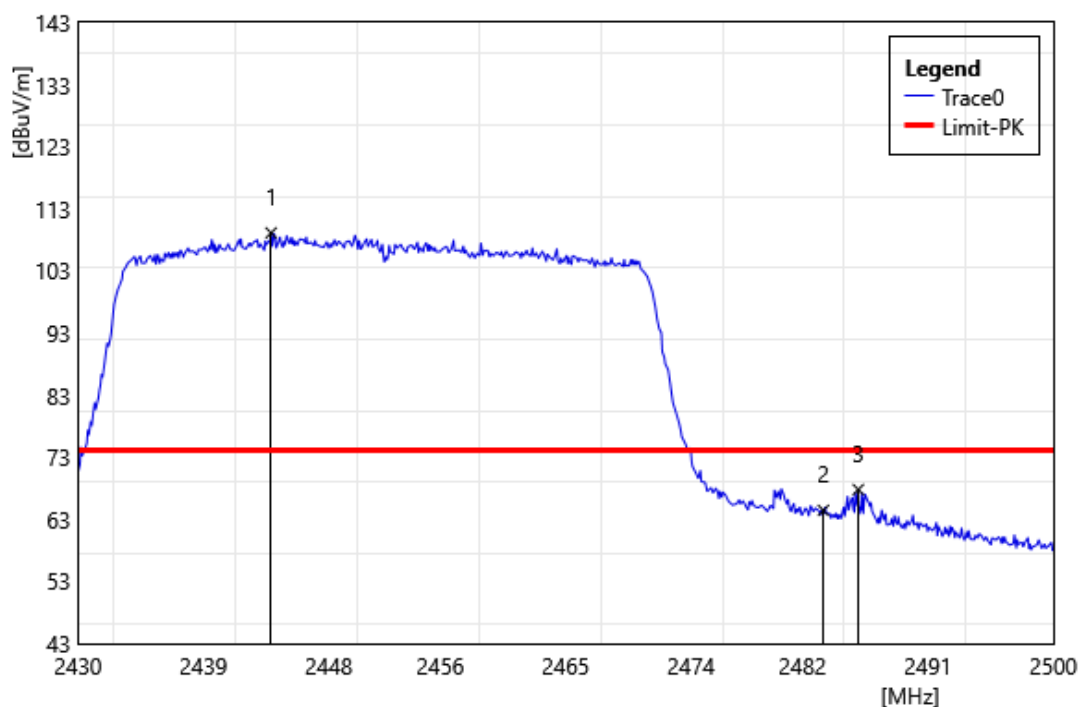


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2443.86	119.02	-9.88	109.14	89.14	20.00	PEAK
2	2483.50	74.26	-9.80	64.46	89.14	-24.69	PEAK
3	2486.00	77.59	-9.79	67.80	74.00	-6.20	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2457		
	MHz		
Polarization:	Horizontal		
Remark:			

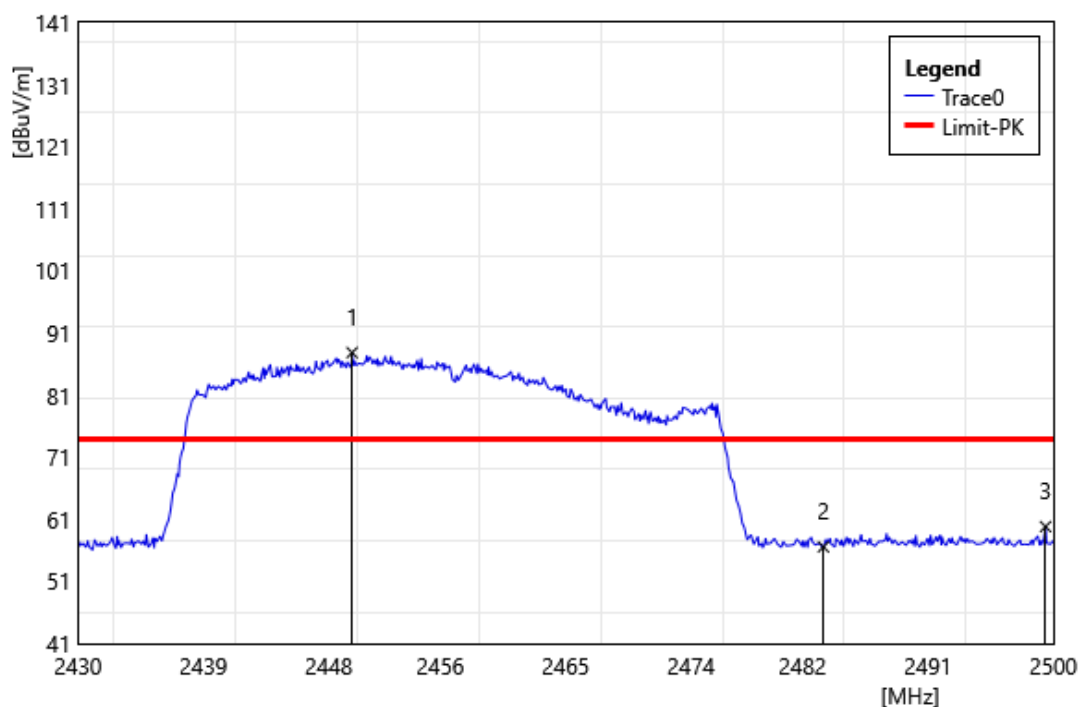


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2449.67	97.79	-9.94	87.85	67.85	20.00	PEAK
2	2483.50	66.37	-9.80	56.57	67.85	-11.28	PEAK
3	2499.44	69.57	-9.73	59.84	74.00	-14.16	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2457		
	MHz		
Polarization:	Vertical		
Remark:			

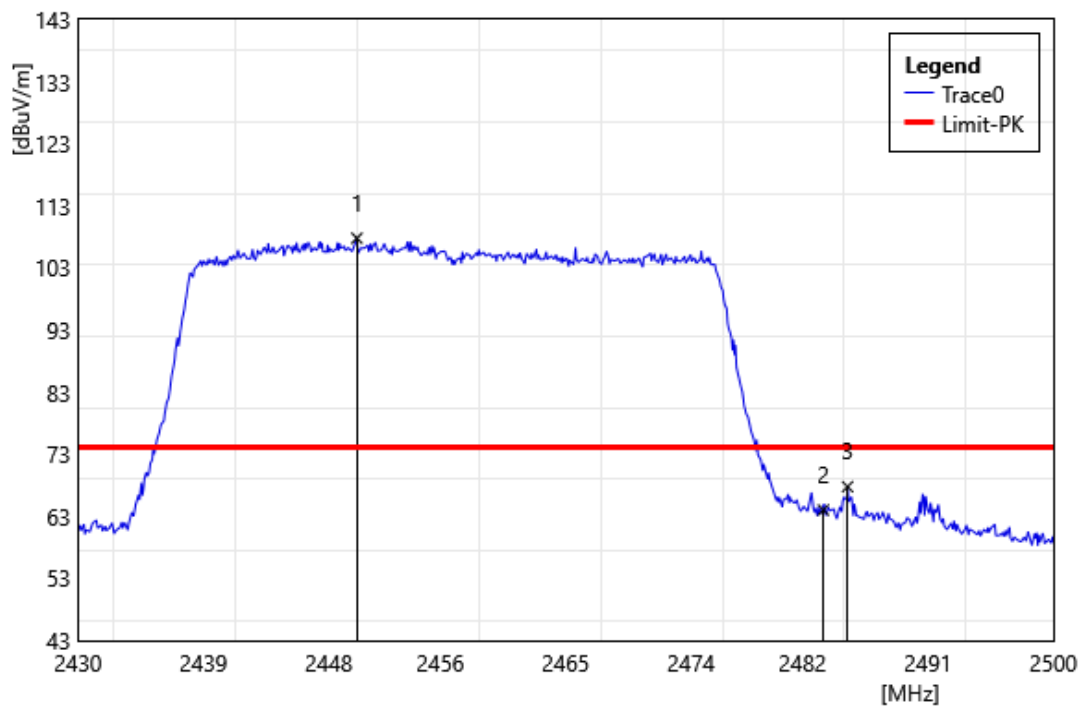


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2450.02	117.72	-9.93	107.79	87.79	20.00	PEAK
2	2483.50	73.82	-9.80	64.02	87.79	-23.77	PEAK
3	2485.23	77.56	-9.79	67.77	74.00	-6.23	PEAK

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2462		
	MHz		
Polarization:	Horizontal		
Remark:			

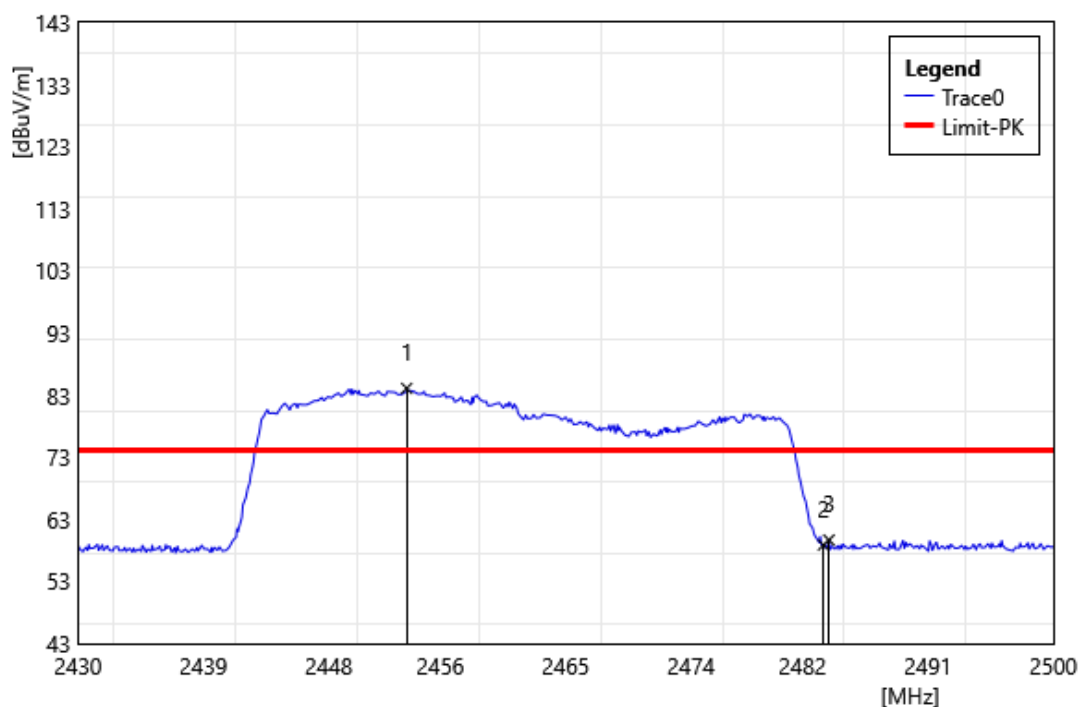

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2453.59	94.02	-9.93	84.10	64.10	20.00	PEAK
2	2483.50	68.68	-9.80	58.88	64.10	-5.22	PEAK
3	2483.90	69.46	-9.79	59.67	74.00	-14.33	PEAK


Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2462		
	MHz		
Polarization:	Vertical		
Remark:			

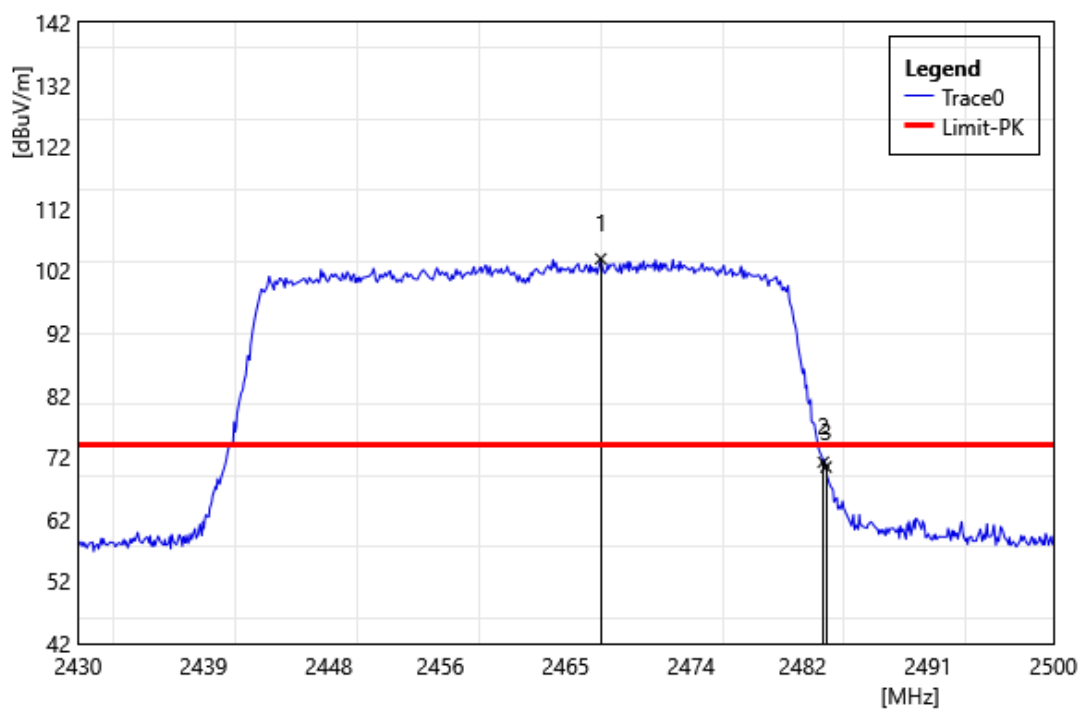

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2467.52	113.82	-9.86	103.96	83.96	20.00	PEAK
2	2483.50	81.01	-9.80	71.21	83.96	-12.76	PEAK
3	2483.69	80.24	-9.80	70.44	74.00	-3.56	PEAK


MIMO - Average

Test Site: 96604-WG Standard: Part 15.247
Test Mode: 802.11n HT20 2412 MHz
Polarization: Horizontal
Remark:

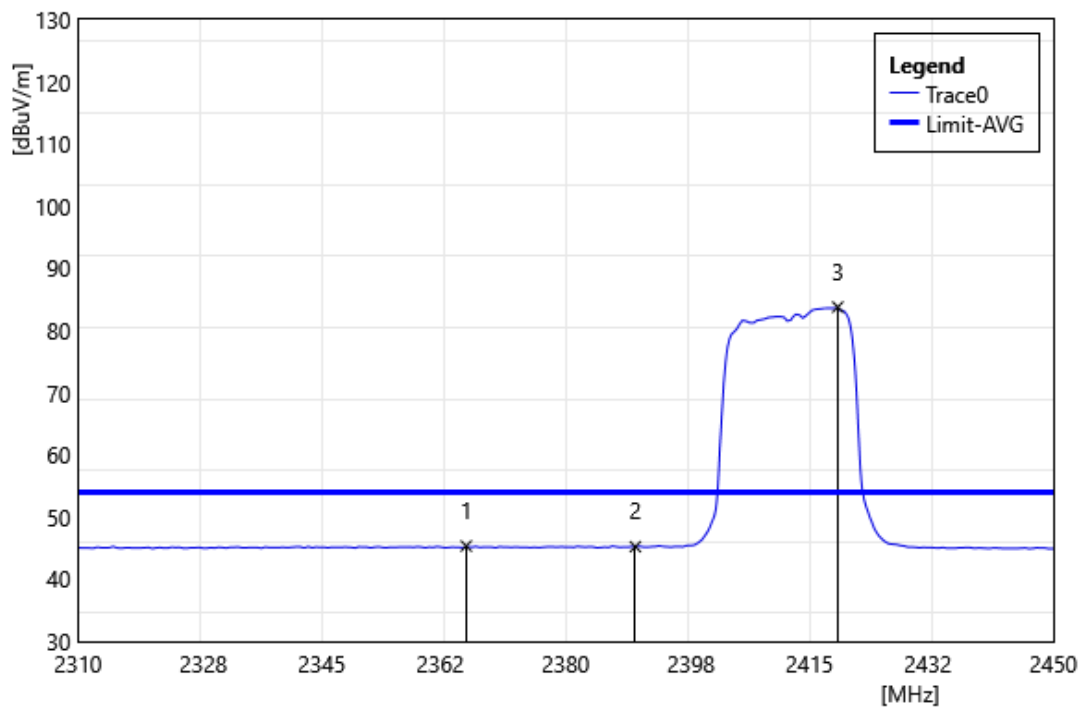


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2365.72	54.86	-9.52	45.35	54.00	-8.66	AVG
2	2390.00	54.78	-9.54	45.24	53.77	-8.54	AVG
3	2419.06	93.46	-9.69	83.77	53.77	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2412 MHz		
Polarization:	Vertical		
Remark:			

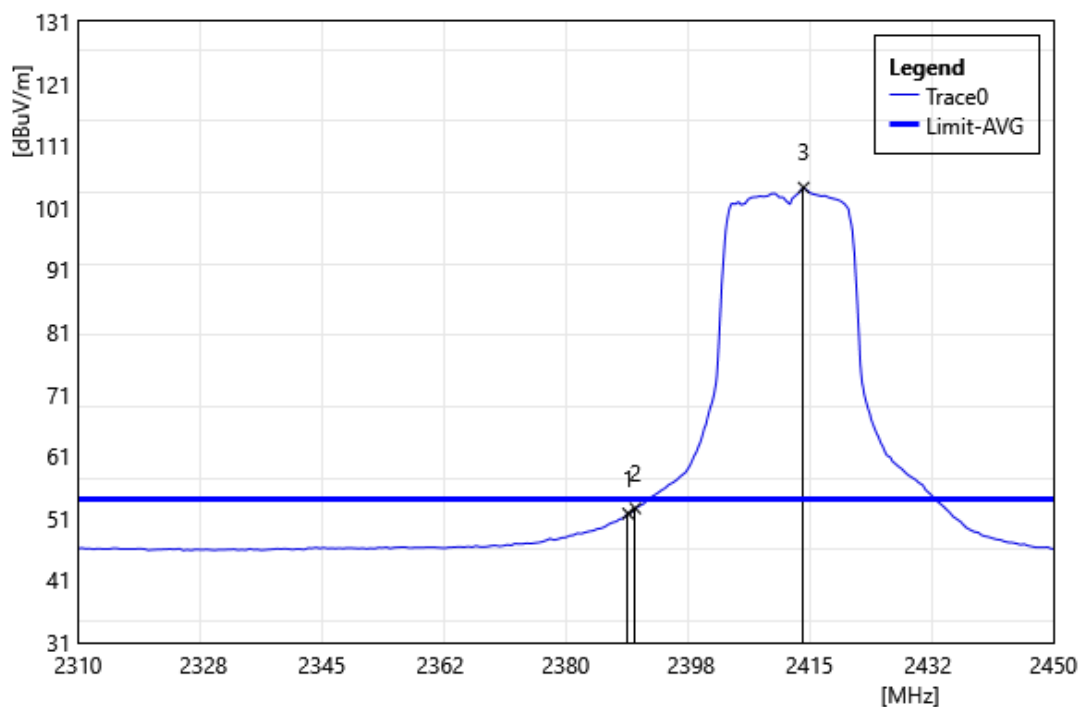


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.96	61.31	-9.53	51.78	54.00	-2.22	AVG
2	2390.00	62.14	-9.54	52.60	74.28	-21.68	AVG
3	2414.16	113.93	-9.65	104.28	74.28	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2437 MHz		
Polarization:	Horizontal		
Remark:			

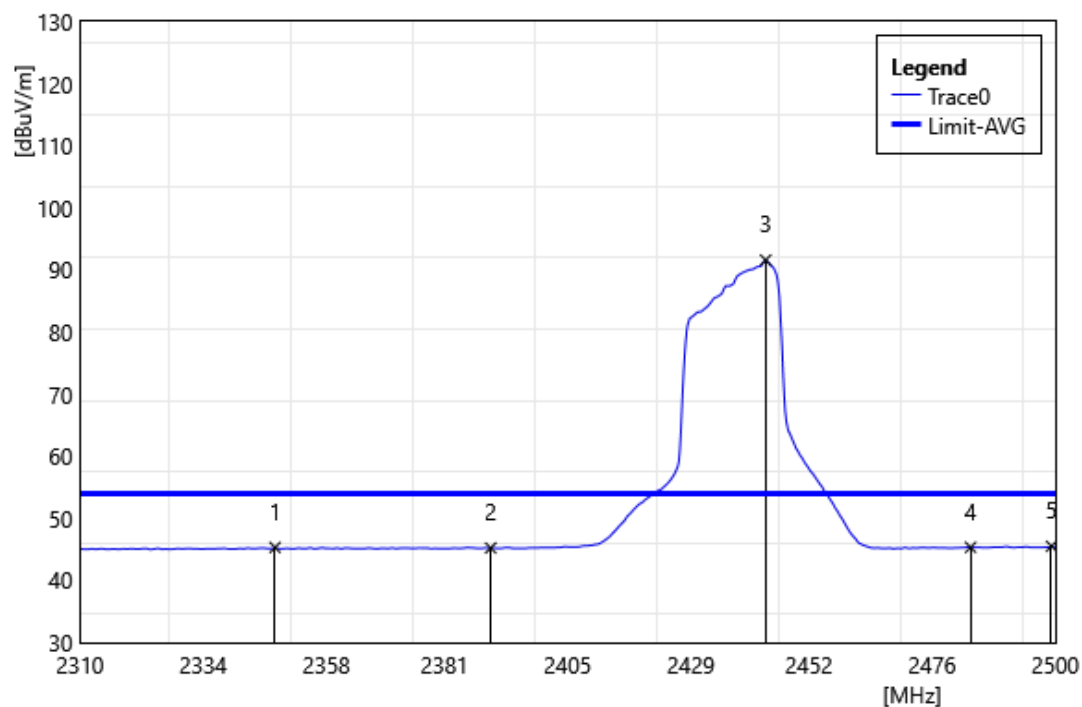


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2348.00	54.82	-9.50	45.32	54.00	-8.68	AVG
2	2390.00	54.76	-9.54	45.22	61.60	-16.38	AVG
3	2443.57	101.48	-9.88	91.60	61.60	30.00	AVG
4	2483.50	55.13	-9.80	45.33	61.60	-16.26	AVG
5	2499.24	55.23	-9.73	45.50	54.00	-8.50	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2437 MHz		
Polarization:	Vertical		
Remark:			

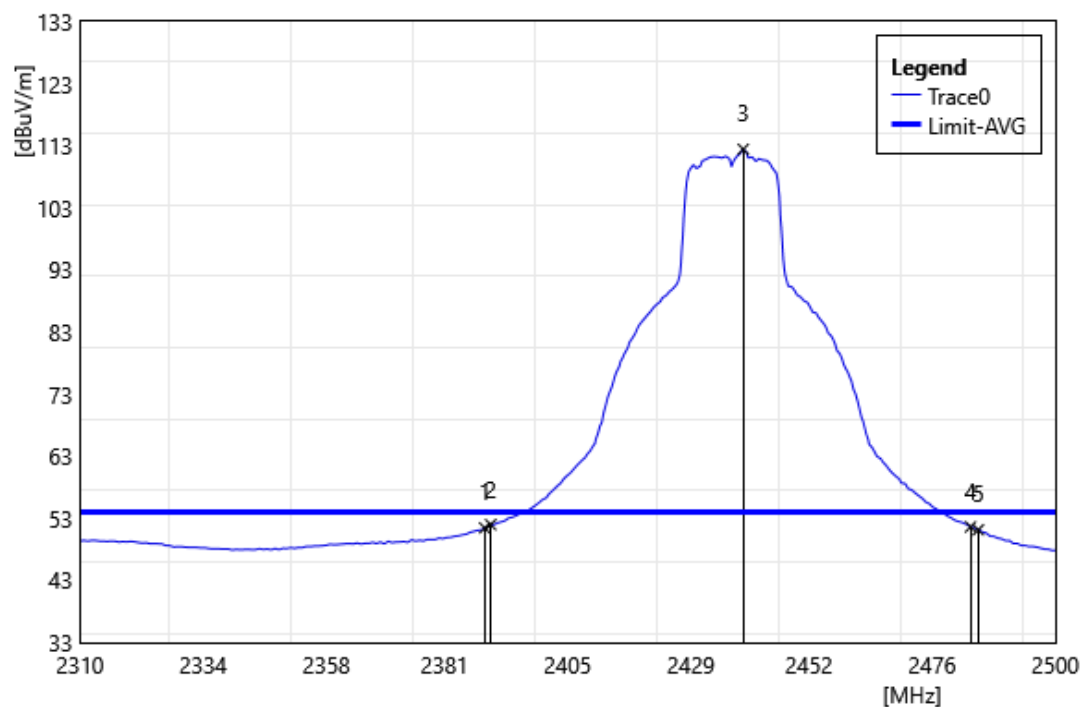


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.85	61.00	-9.53	51.47	54.00	-2.53	AVG
2	2390.00	61.52	-9.54	51.98	82.44	-30.47	AVG
3	2439.20	122.28	-9.84	112.44	82.44	30.00	AVG
4	2483.50	61.42	-9.80	51.62	82.44	-30.82	AVG
5	2484.99	60.94	-9.79	51.15	54.00	-2.85	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2462 MHz		
Polarization:	Horizontal		
Remark:			

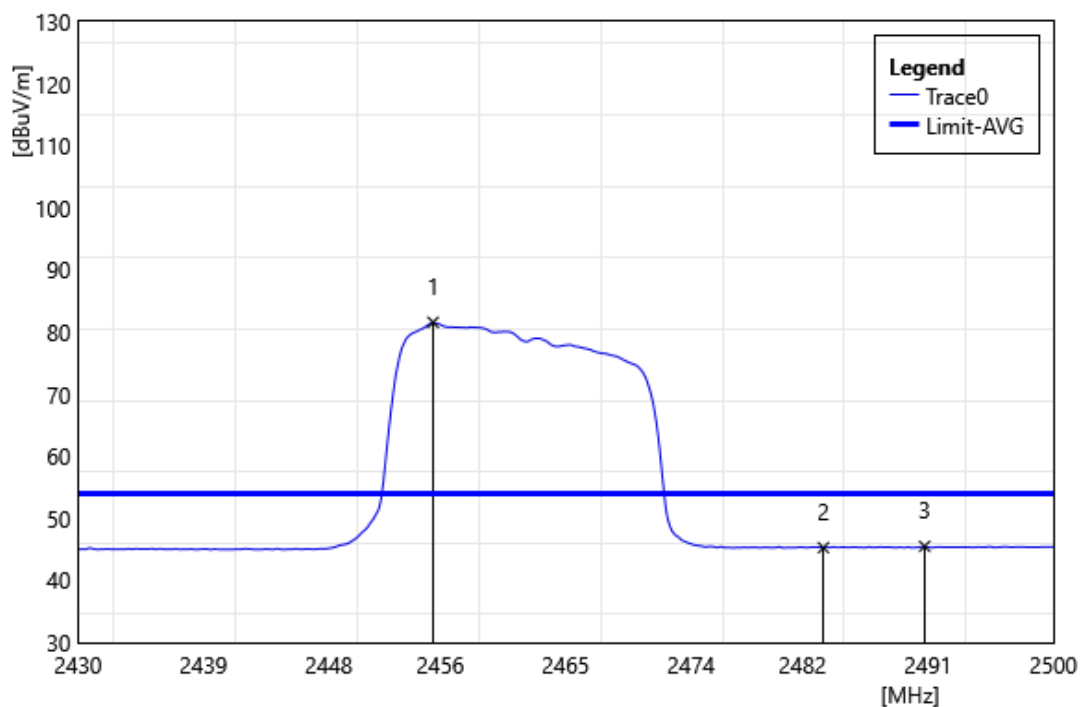


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2455.48	91.49	-9.92	81.57	51.57	30.00	AVG
2	2483.50	55.08	-9.80	45.28	51.57	-6.29	AVG
3	2490.76	55.26	-9.77	45.49	54.00	-8.51	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2462 MHz		
Polarization:	Vertical		
Remark:			

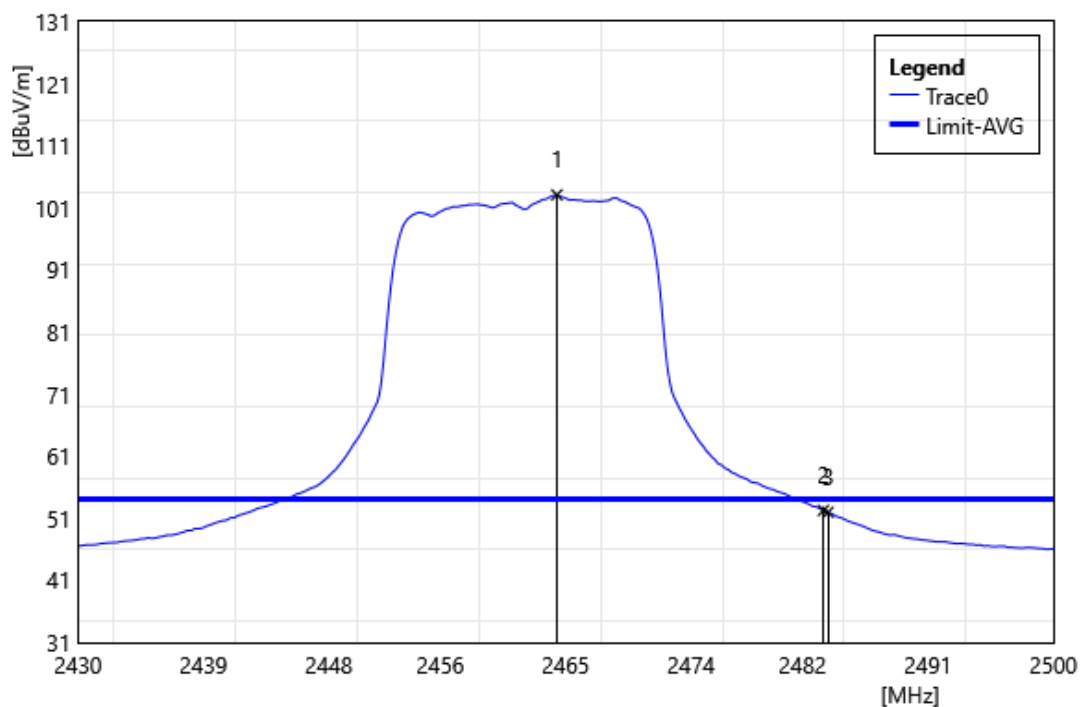


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2464.37	112.97	-9.87	103.10	73.10	30.00	AVG
2	2483.50	62.08	-9.80	52.28	73.10	-20.82	AVG
3	2483.83	61.77	-9.79	51.98	54.00	-2.02	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2467 MHz		
Polarization:	Horizontal		
Remark:			

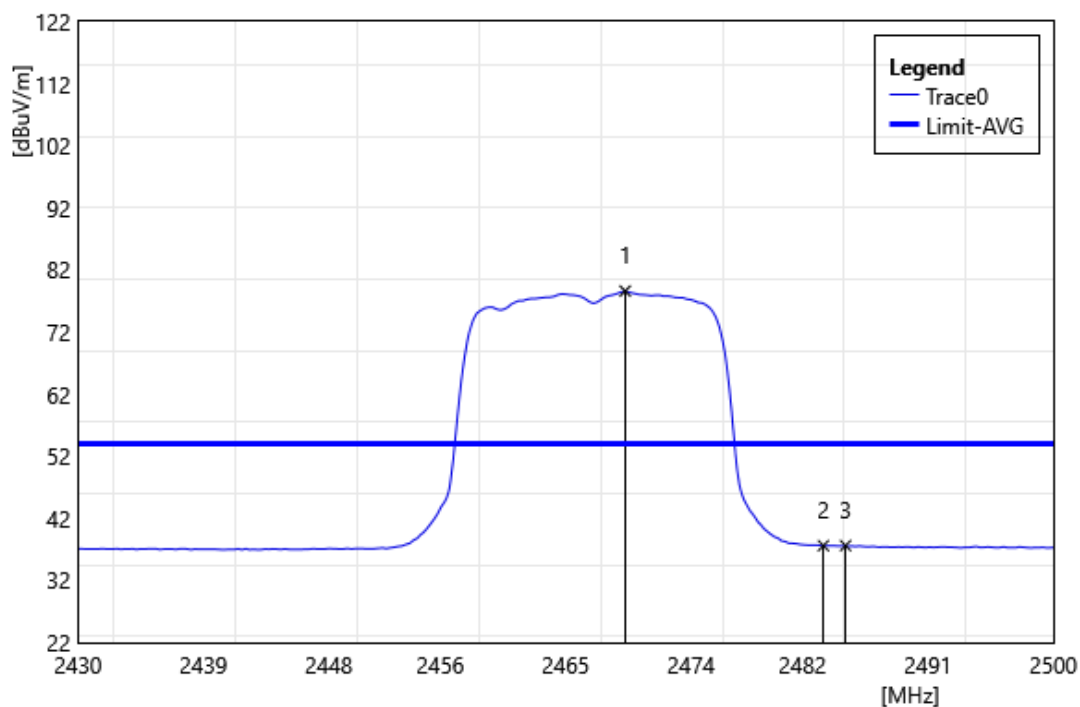


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.27	88.47	-9.86	78.61	48.61	30.00	AVG
2	2483.50	47.39	-9.80	37.59	48.61	-11.02	AVG
3	2485.09	47.40	-9.79	37.61	54.00	-16.39	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2467 MHz		
Polarization:	Vertical		
Remark:			

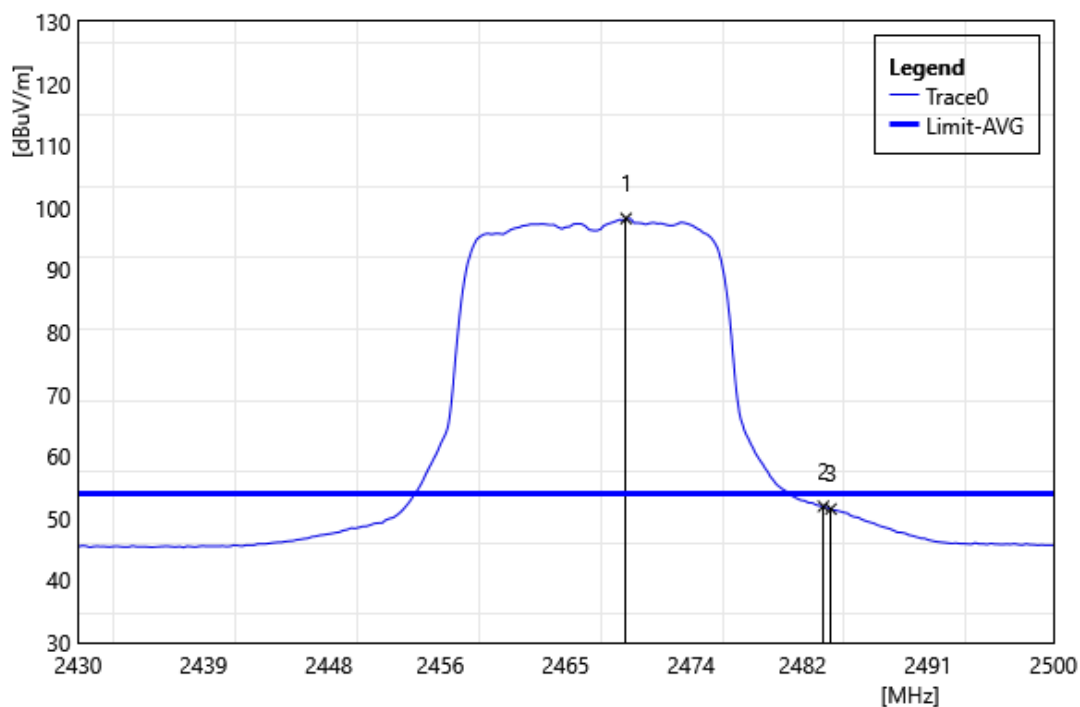


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.34	108.15	-9.86	98.29	68.29	30.00	AVG
2	2483.50	61.74	-9.80	51.94	68.29	-16.35	AVG
3	2484.04	61.30	-9.79	51.52	54.00	-2.49	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2472 MHz		
Polarization:	Horizontal		
Remark:			

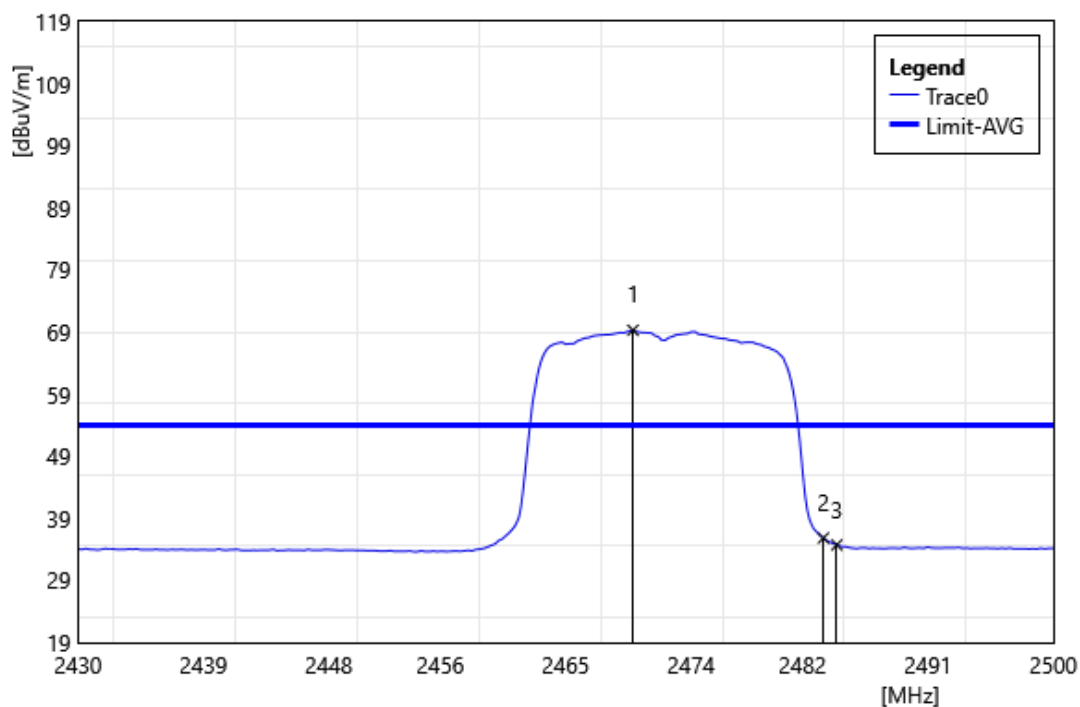


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.83	79.16	-9.86	69.30	39.30	30.00	AVG
2	2483.50	45.64	-9.80	35.84	39.30	-3.46	AVG
3	2484.46	44.50	-9.79	34.71	54.00	-19.29	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT20 2472 MHz		
Polarization:	Vertical		
Remark:			

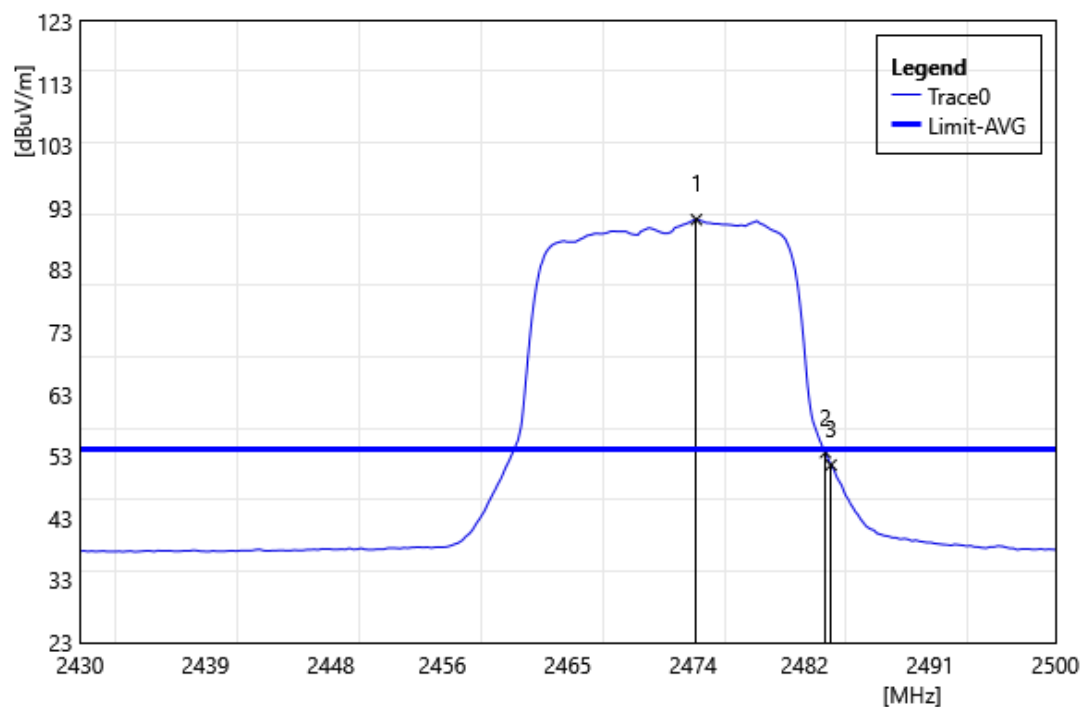


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2474.24	100.95	-9.83	91.12	61.12	30.00	AVG
2	2483.50	63.41	-9.80	53.61	61.12	-7.51	AVG
3	2483.90	61.39	-9.79	51.60	54.00	-2.40	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2422 MHz		
Polarization:	Horizontal		
Remark:			

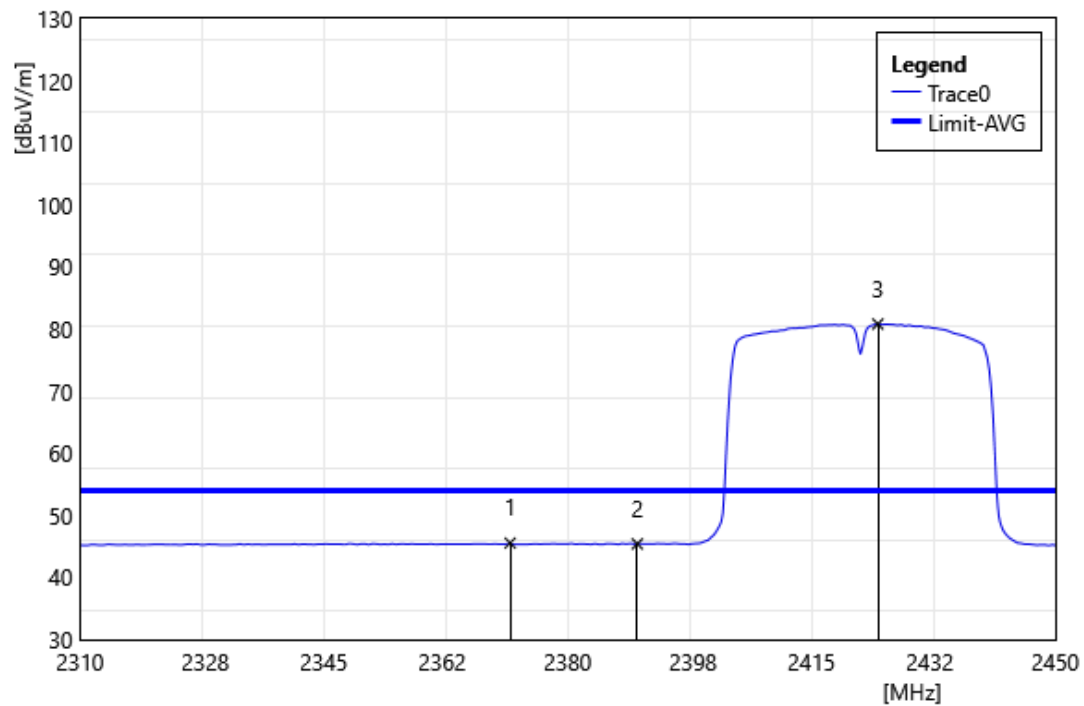


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2371.74	55.06	-9.52	45.54	54.00	-8.46	AVG
2	2390.00	54.94	-9.54	45.40	50.81	-5.41	AVG
3	2424.52	90.54	-9.73	80.81	50.81	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2422 MHz		
Polarization:	Vertical		
Remark:			

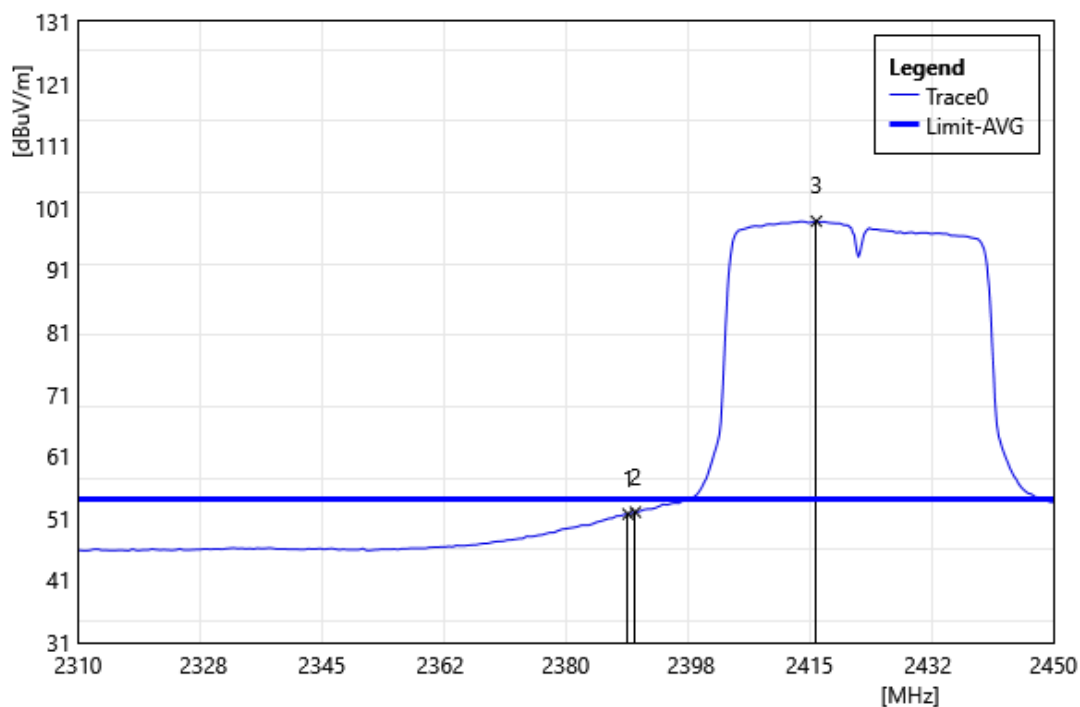


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.96	61.23	-9.53	51.70	54.00	-2.30	AVG
2	2390.00	61.54	-9.54	52.00	68.86	-16.86	AVG
3	2415.98	108.53	-9.67	98.86	68.86	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2437 MHz		
Polarization:	Horizontal		
Remark:			

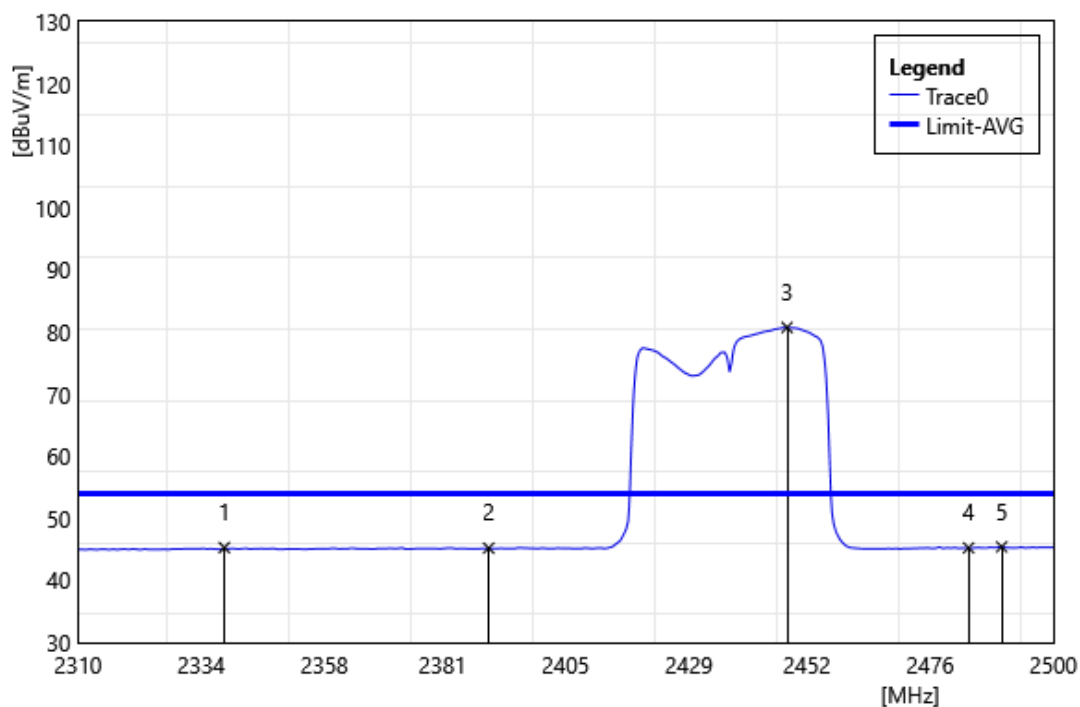


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2338.50	54.74	-9.45	45.29	54.00	-8.71	AVG
2	2390.00	54.75	-9.54	45.21	50.74	-5.54	AVG
3	2448.13	90.66	-9.92	80.74	50.74	30.00	AVG
4	2483.50	55.05	-9.80	45.25	50.74	-5.49	AVG
5	2489.93	55.18	-9.78	45.41	54.00	-8.60	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2437 MHz		
Polarization:	Vertical		
Remark:			

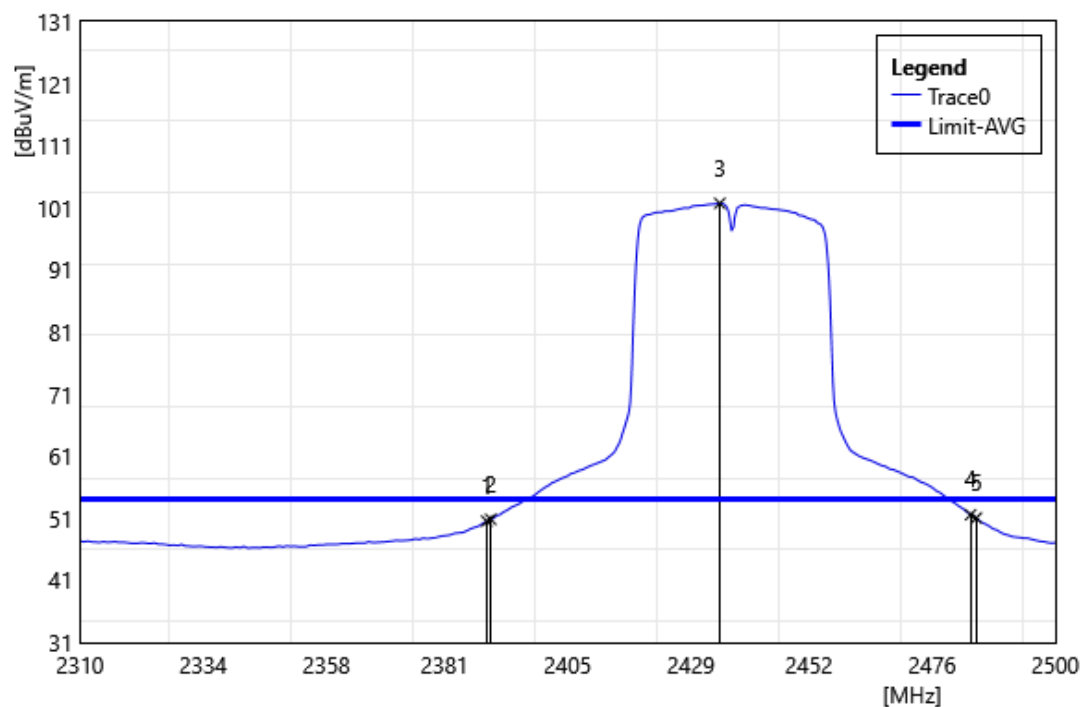


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.23	60.09	-9.53	50.56	54.00	-3.44	AVG
2	2390.00	60.38	-9.54	50.84	71.73	-20.89	AVG
3	2434.64	111.55	-9.82	101.73	71.73	30.00	AVG
4	2483.50	61.39	-9.80	51.59	71.73	-20.14	AVG
5	2484.61	60.86	-9.79	51.07	54.00	-2.94	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2452 MHz		
Polarization:	Horizontal		
Remark:			

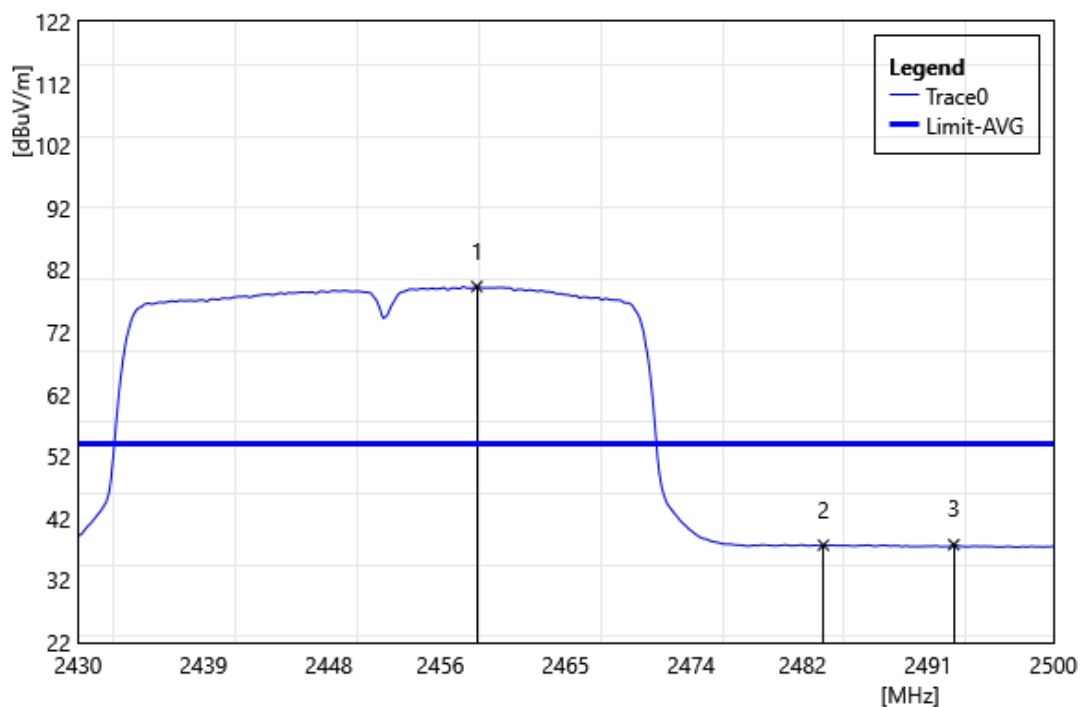


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2458.63	89.23	-9.90	79.33	49.33	30.00	AVG
2	2483.50	47.47	-9.80	37.67	49.33	-11.66	AVG
3	2492.86	47.51	-9.76	37.75	54.00	-16.25	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2452 MHz		
Polarization:	Vertical		
Remark:			

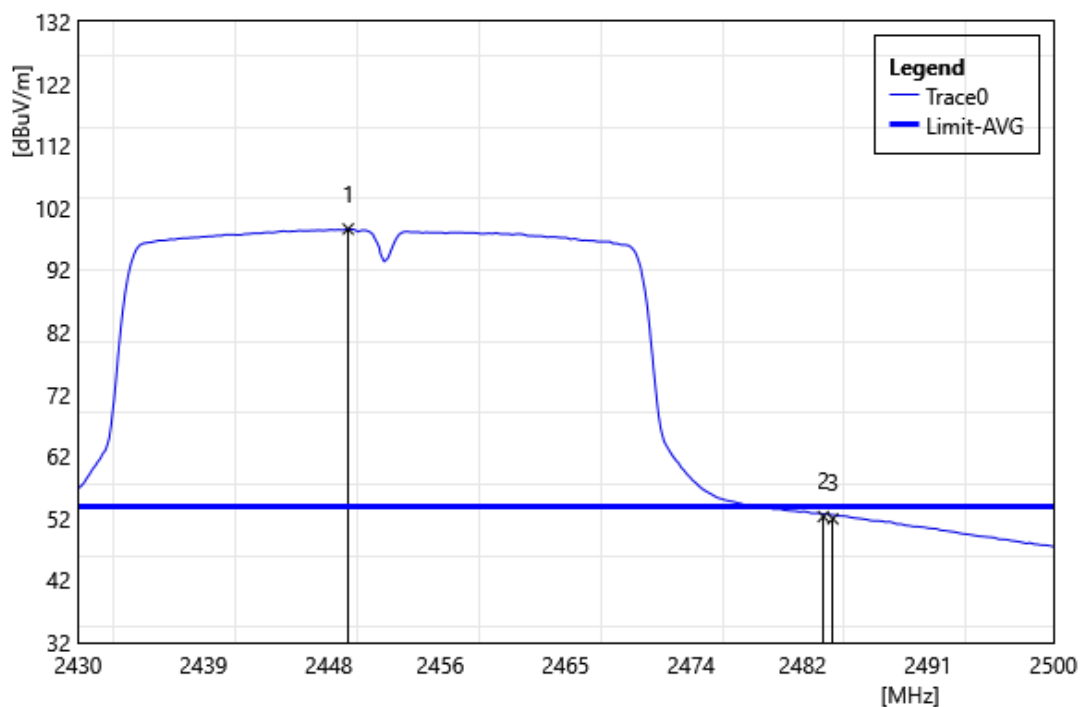


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2449.39	108.54	-9.94	98.60	68.60	30.00	AVG
2	2483.50	62.08	-9.80	52.28	68.60	-16.32	AVG
3	2484.18	61.71	-9.79	51.92	54.00	-2.09	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2457 MHz		
Polarization:	Horizontal		
Remark:			

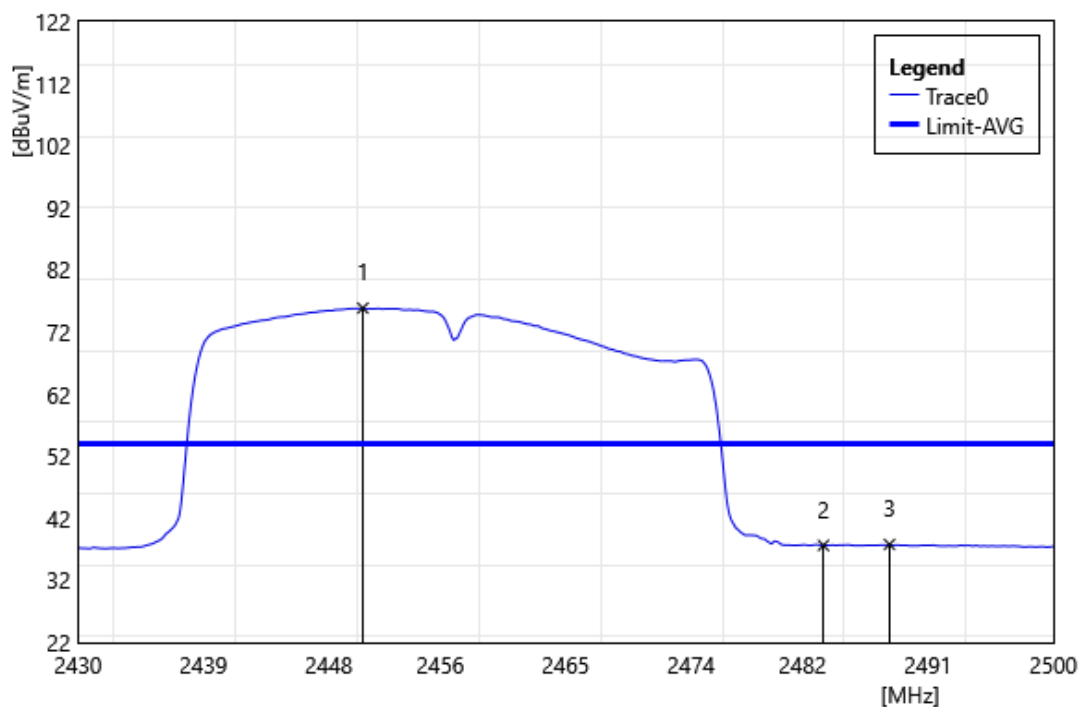


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2450.44	85.80	-9.93	75.87	45.87	30.00	AVG
2	2483.50	47.44	-9.80	37.64	45.87	-8.23	AVG
3	2488.24	47.58	-9.78	37.80	54.00	-16.20	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2457 MHz		
Polarization:	Vertical		
Remark:			

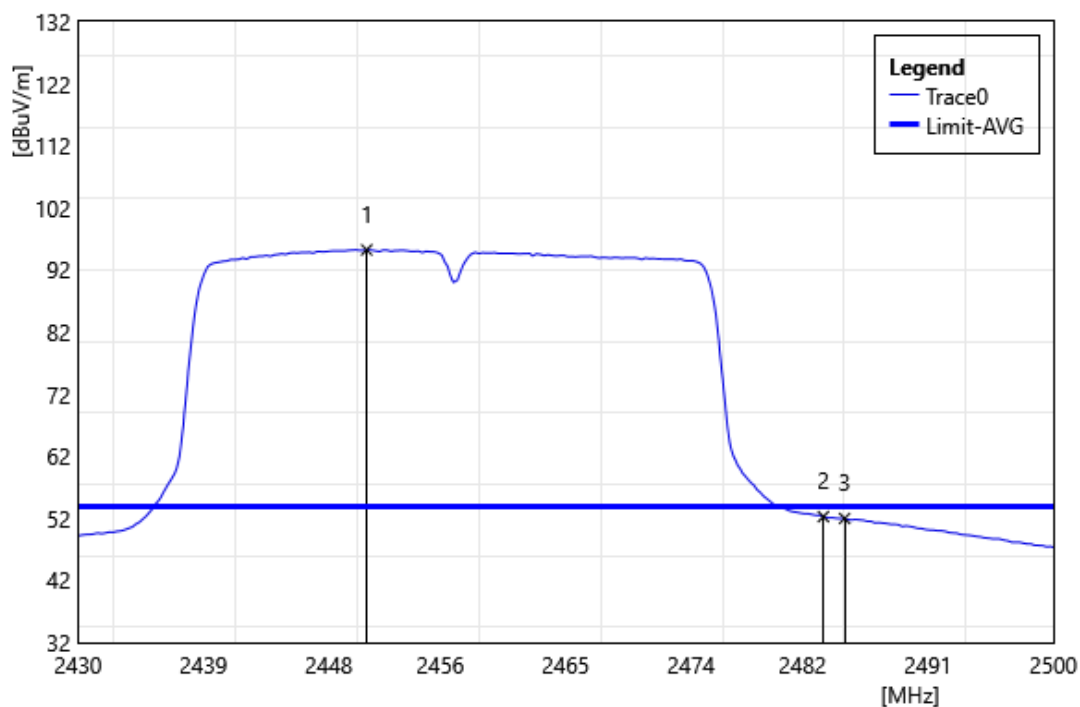


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2450.72	105.17	-9.93	95.24	65.24	30.00	AVG
2	2483.50	62.08	-9.80	52.28	65.24	-12.96	AVG
3	2485.02	61.77	-9.79	51.98	54.00	-2.02	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2462 MHz		
Polarization:	Horizontal		
Remark:			

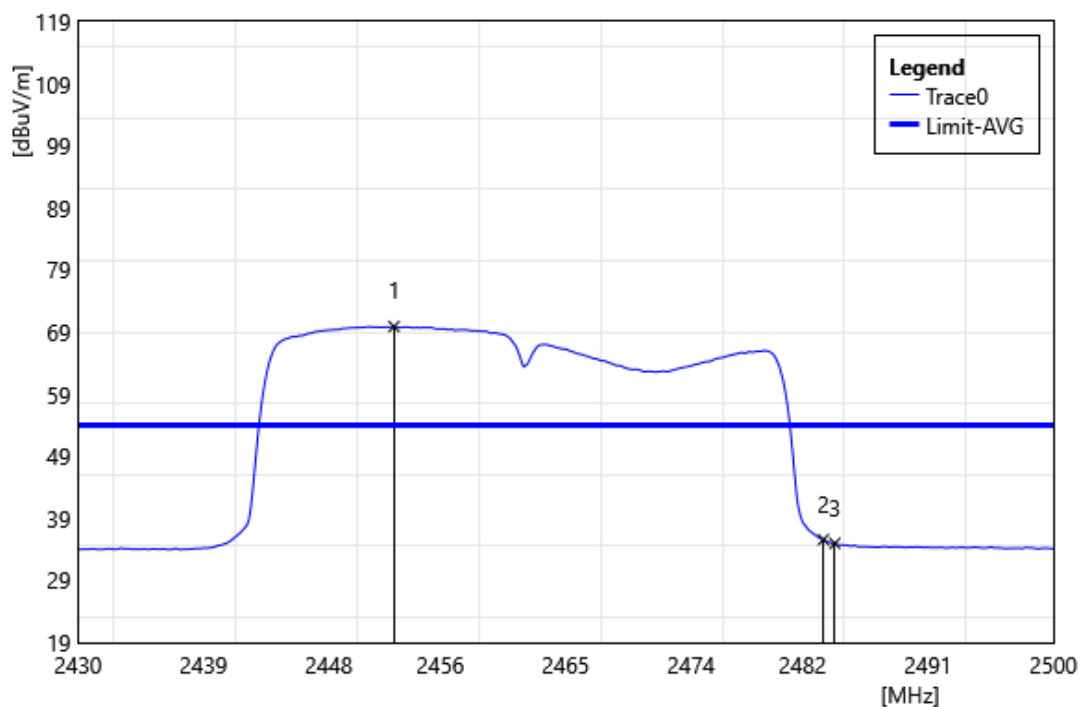


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2452.68	79.81	-9.92	69.89	39.89	30.00	AVG
2	2483.50	45.37	-9.80	35.57	39.89	-4.33	AVG
3	2484.32	44.76	-9.79	34.97	54.00	-19.03	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11n HT40 2462 MHz		
Polarization:	Vertical		
Remark:			

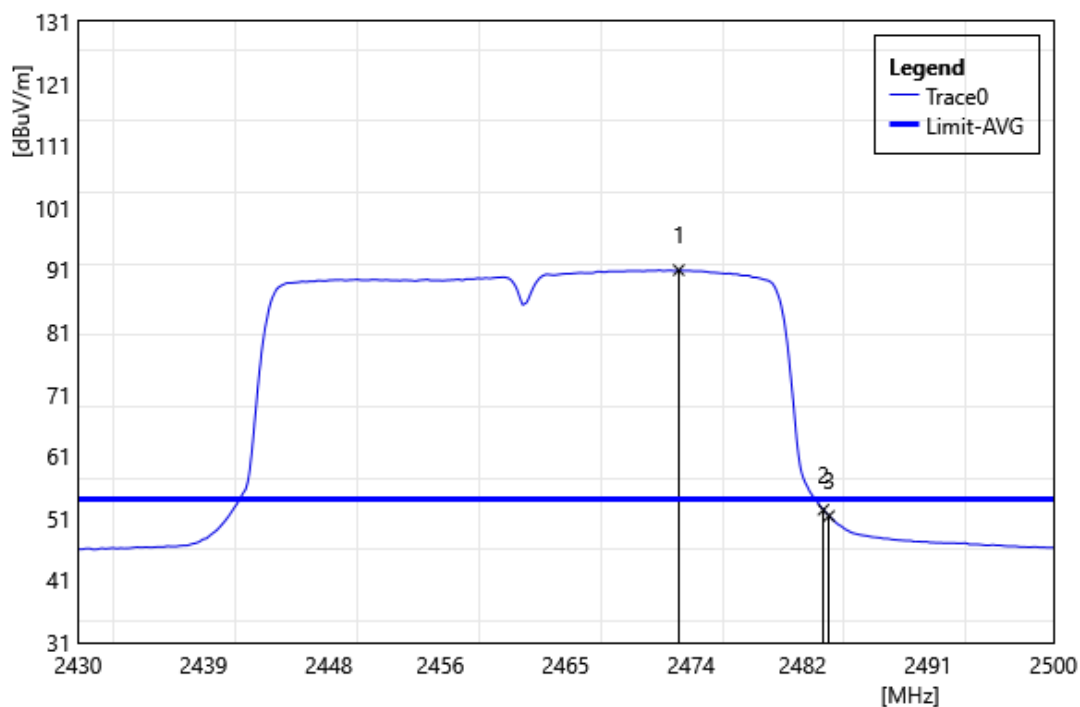


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2473.12	100.83	-9.84	90.99	60.99	30.00	AVG
2	2483.50	62.17	-9.80	52.37	60.99	-8.61	AVG
3	2483.90	61.17	-9.79	51.38	54.00	-2.62	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2412		
	MHz		
Polarization:	Horizontal		
Remark:			

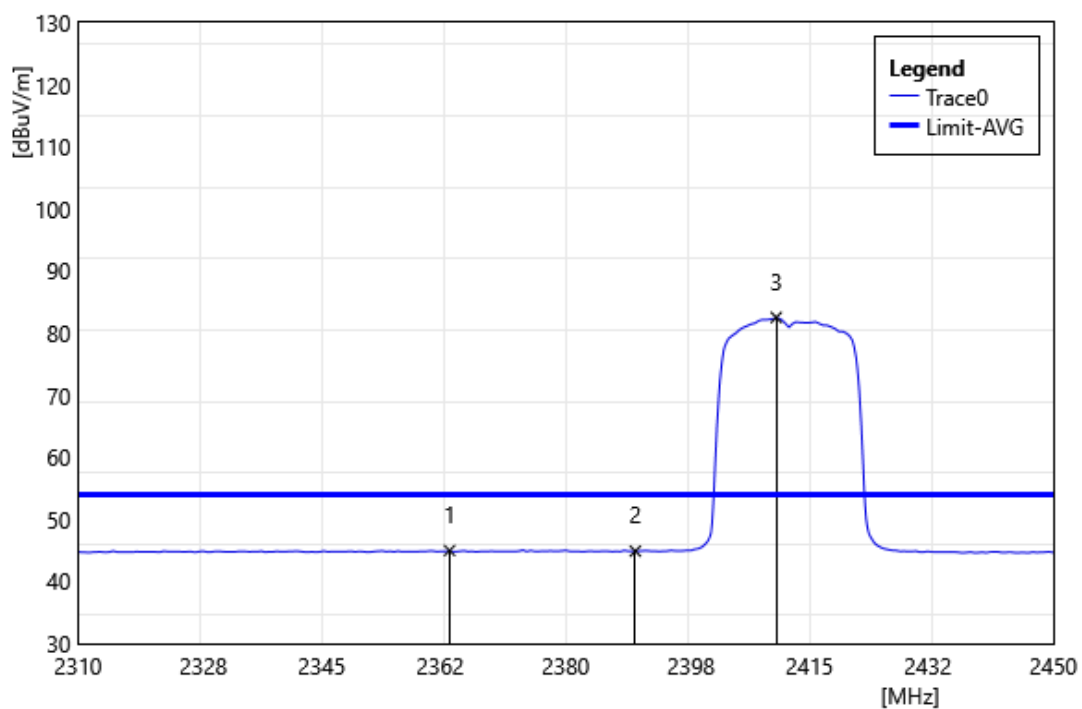


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2363.34	54.50	-9.52	44.98	54.00	-9.02	AVG
2	2390.00	54.42	-9.54	44.88	54.00	-9.12	AVG
3	2410.24	92.13	-9.61	82.52	54.00	28.52	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2412		
	MHz		
Polarization:	Vertical		
Remark:			

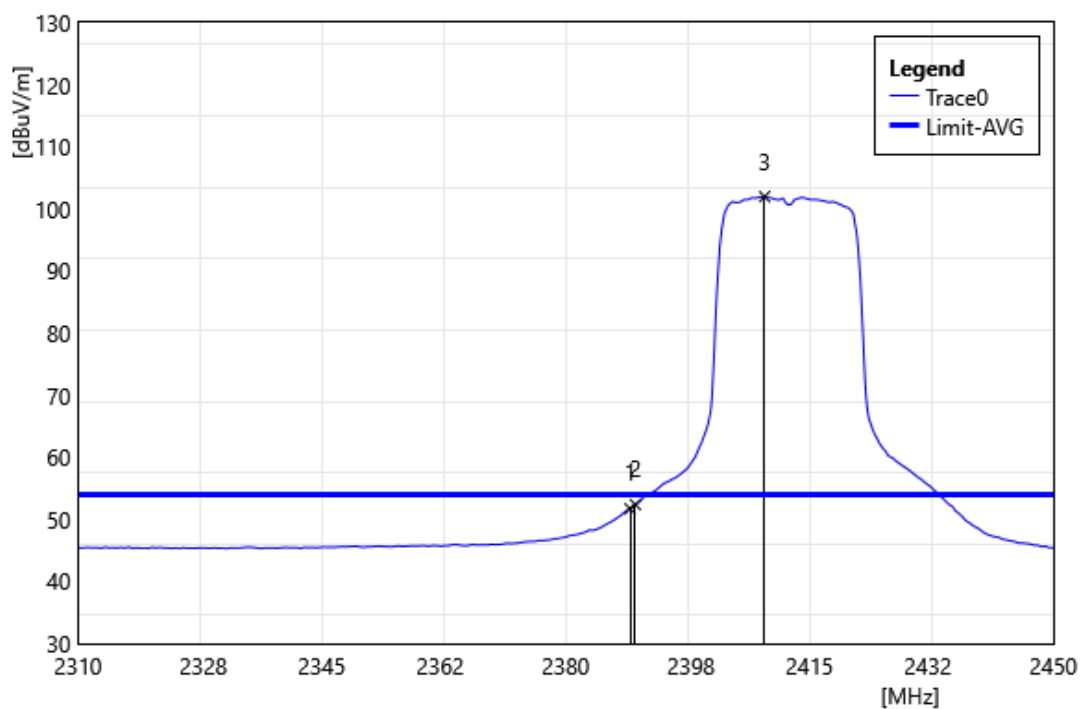


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.24	61.24	-9.53	51.71	54.00	-2.30	AVG
2	2390.00	61.90	-9.54	52.36	71.97	-19.61	AVG
3	2408.56	111.58	-9.61	101.97	71.97	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2437		
	MHz		
Polarization:	Horizontal		
Remark:			

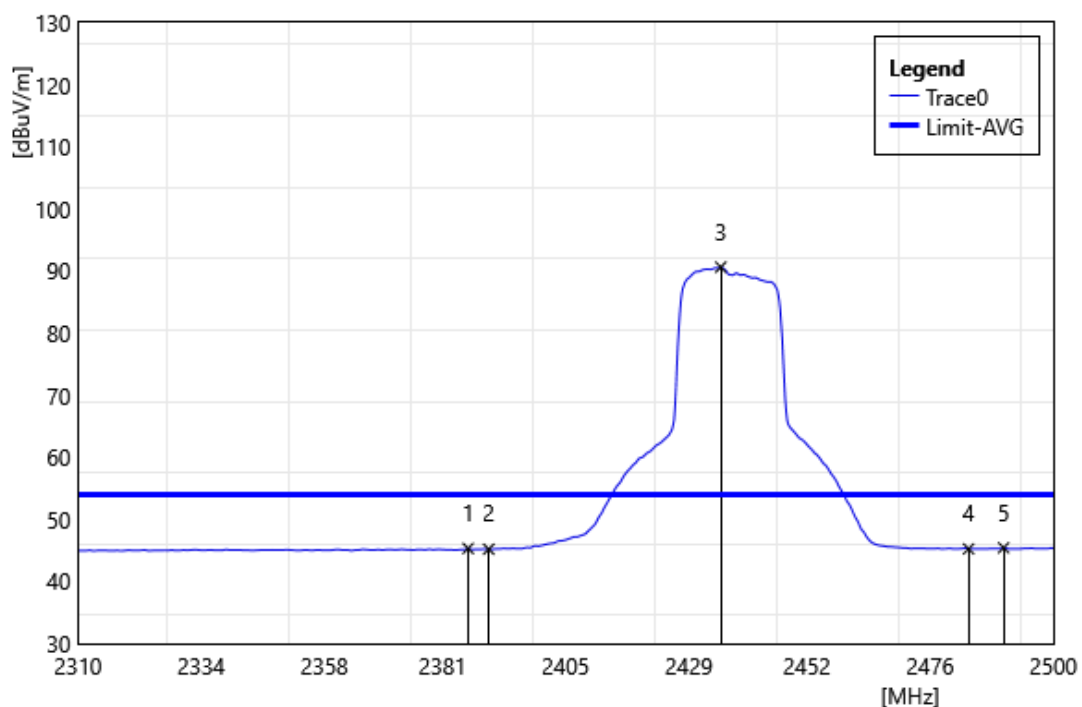


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2386.00	54.85	-9.53	45.32	54.00	-8.68	AVG
2	2390.00	54.74	-9.54	45.20	60.61	-15.42	AVG
3	2435.21	100.43	-9.82	90.61	60.61	30.00	AVG
4	2483.50	55.05	-9.80	45.25	60.61	-15.36	AVG
5	2490.31	55.18	-9.77	45.42	54.00	-8.59	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2437		
	MHz		
Polarization:	Vertical		
Remark:			

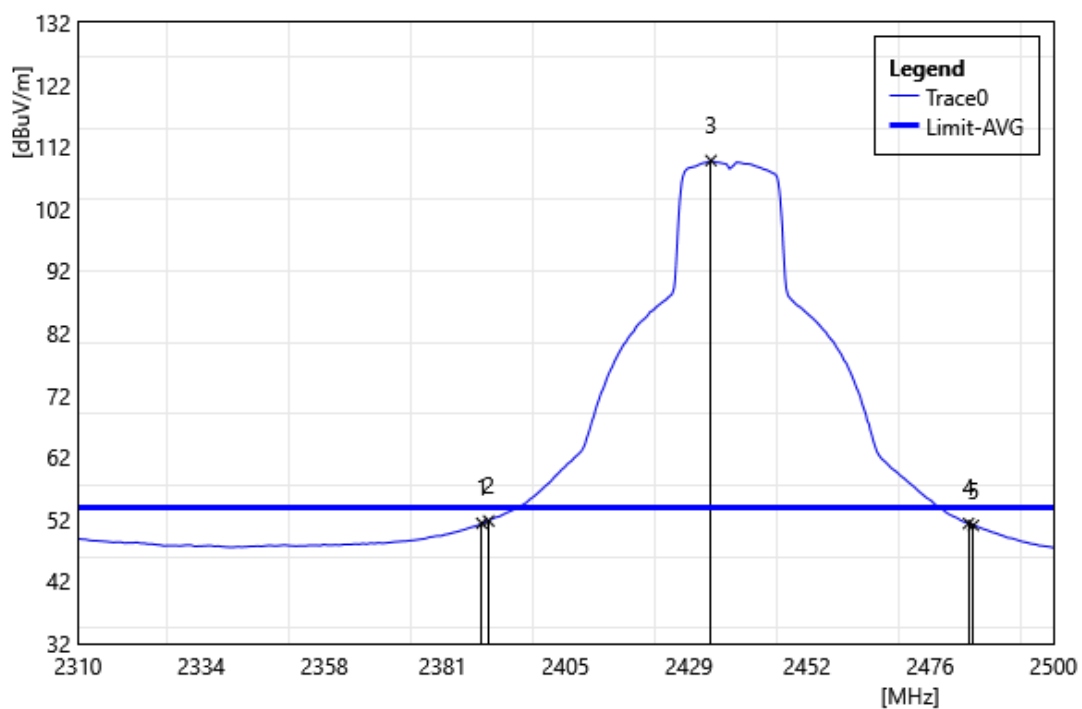


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2388.66	60.89	-9.53	51.36	54.00	-2.64	AVG
2	2390.00	61.29	-9.54	51.75	79.79	-28.04	AVG
3	2433.31	119.60	-9.81	109.79	79.79	30.00	AVG
4	2483.50	61.13	-9.80	51.33	79.79	-28.45	AVG
5	2484.42	60.81	-9.79	51.02	54.00	-2.98	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2462		
	MHz		
Polarization:	Horizontal		
Remark:			

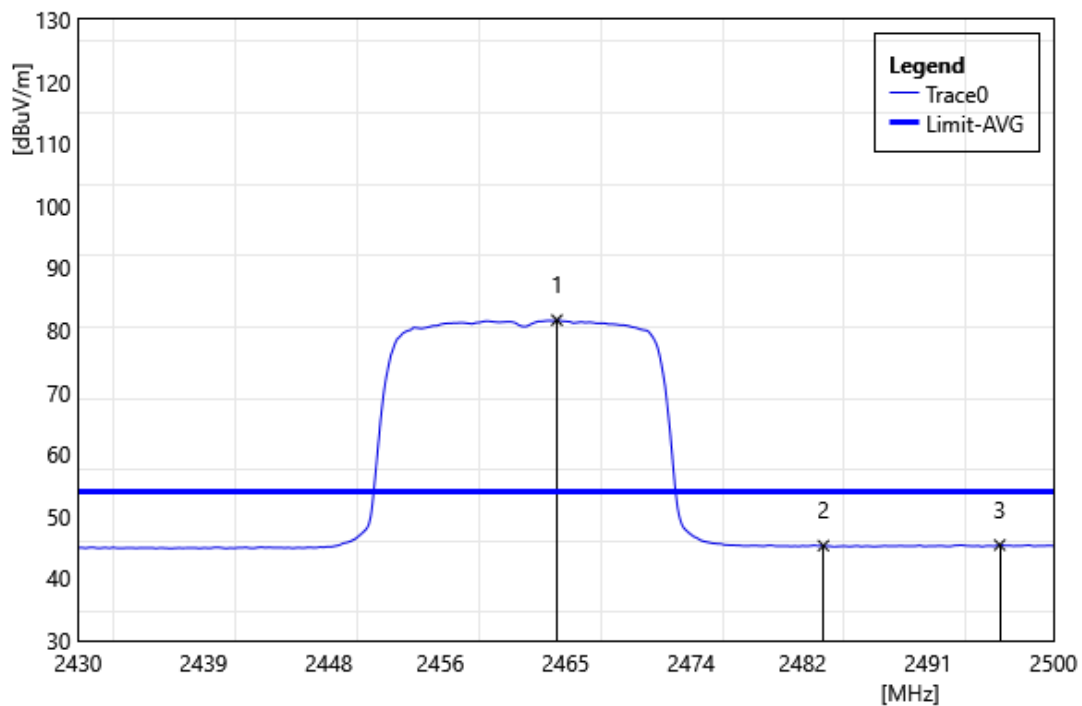


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2464.37	91.48	-9.87	81.61	51.61	30.00	AVG
2	2483.50	55.08	-9.80	45.28	51.61	-6.33	AVG
3	2496.15	55.13	-9.75	45.38	54.00	-8.62	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2462		
	MHz		
Polarization:	Vertical		
Remark:			

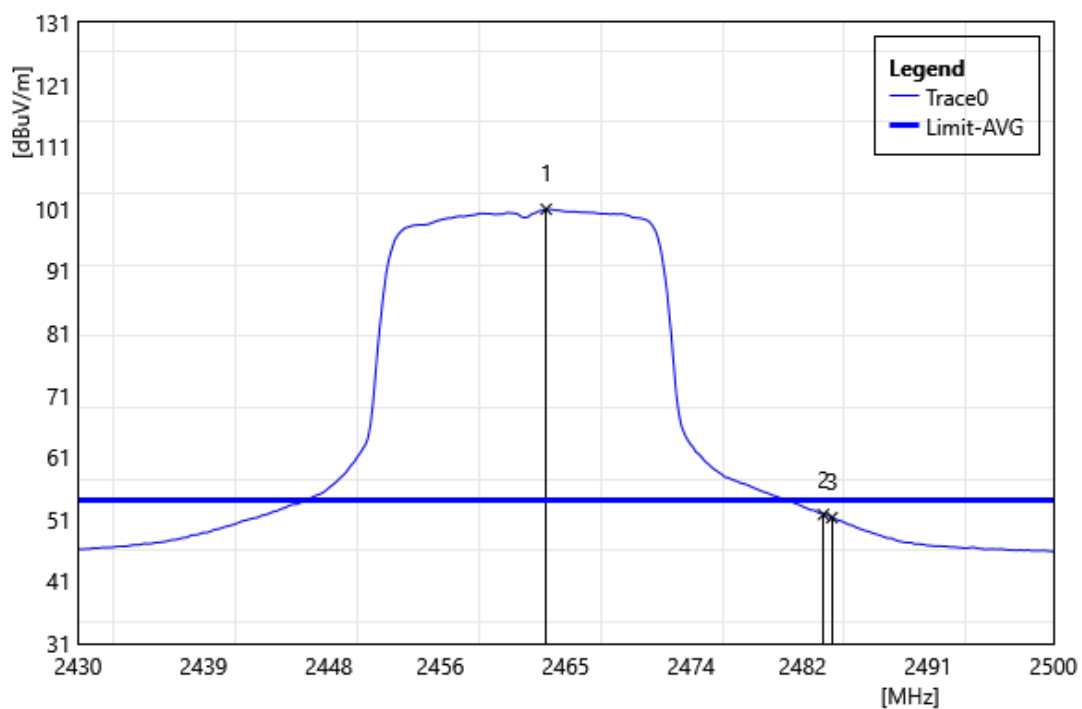


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2463.60	110.82	-9.88	100.94	70.94	30.00	AVG
2	2483.50	61.58	-9.80	51.78	70.94	-19.16	AVG
3	2484.11	61.06	-9.79	51.27	54.00	-2.73	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2467		
	MHz		
Polarization:	Horizontal		
Remark:			

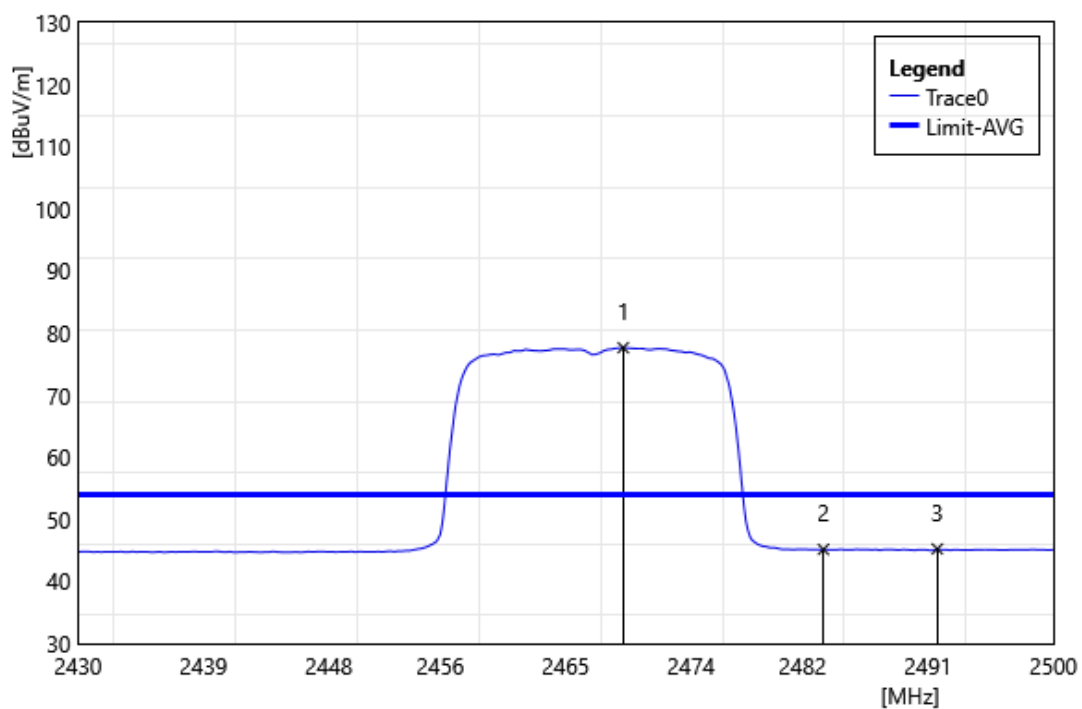


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2469.13	87.51	-9.86	77.65	47.65	30.00	AVG
2	2483.50	54.96	-9.80	45.16	47.65	-2.49	AVG
3	2491.67	55.01	-9.76	45.25	54.00	-8.75	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2467		
	MHz		
Polarization:	Vertical		
Remark:			

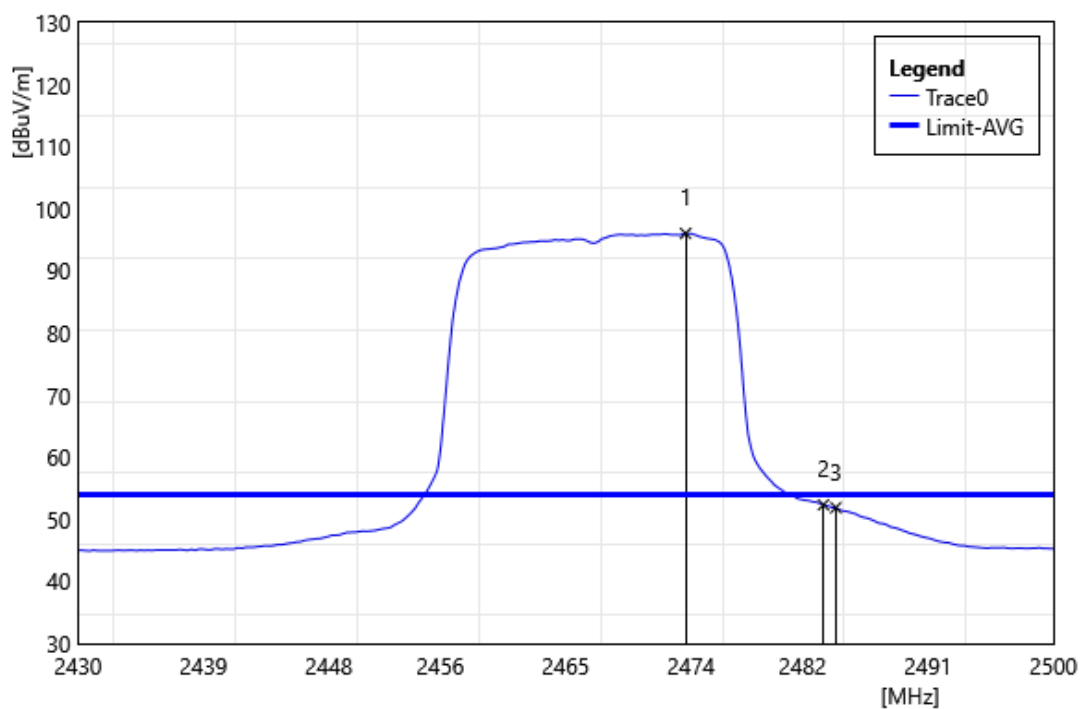


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2473.61	105.89	-9.84	96.05	66.05	30.00	AVG
2	2483.50	62.14	-9.80	52.34	66.05	-13.71	AVG
3	2484.39	61.68	-9.79	51.89	54.00	-2.11	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2472		
	MHz		
Polarization:	Horizontal		
Remark:			

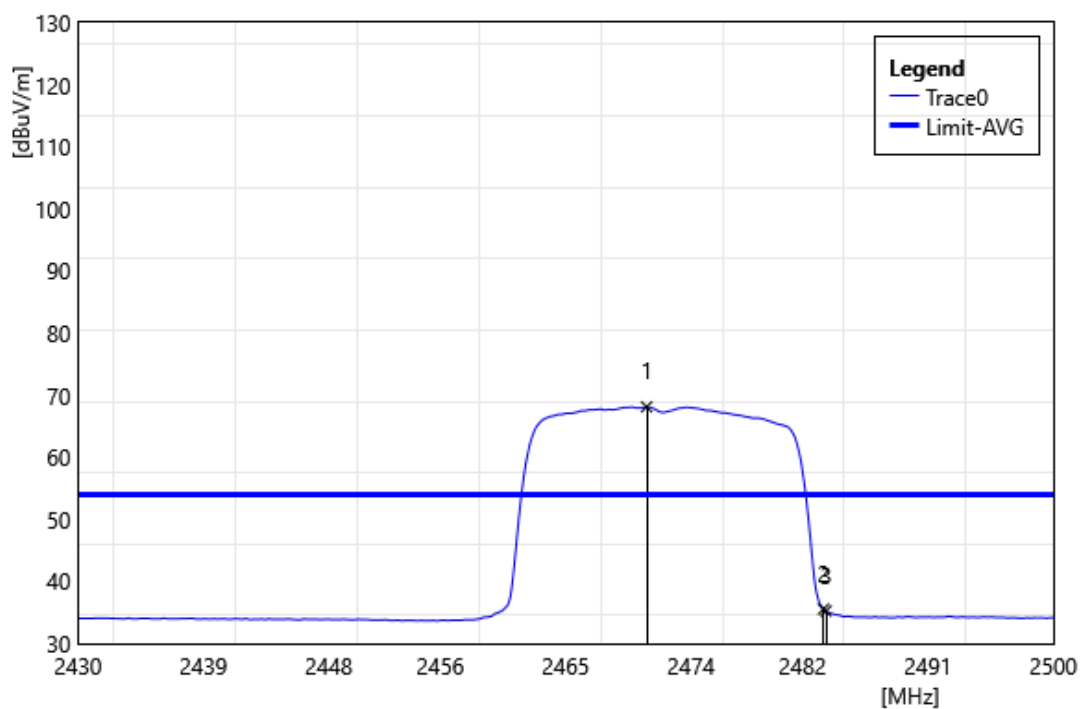


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2470.81	77.96	-9.85	68.11	38.11	30.00	AVG
2	2483.50	45.33	-9.80	35.53	38.11	-2.58	AVG
3	2483.69	45.06	-9.80	35.26	54.00	-18.74	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE20 2472		
	MHz		
Polarization:	Vertical		
Remark:			

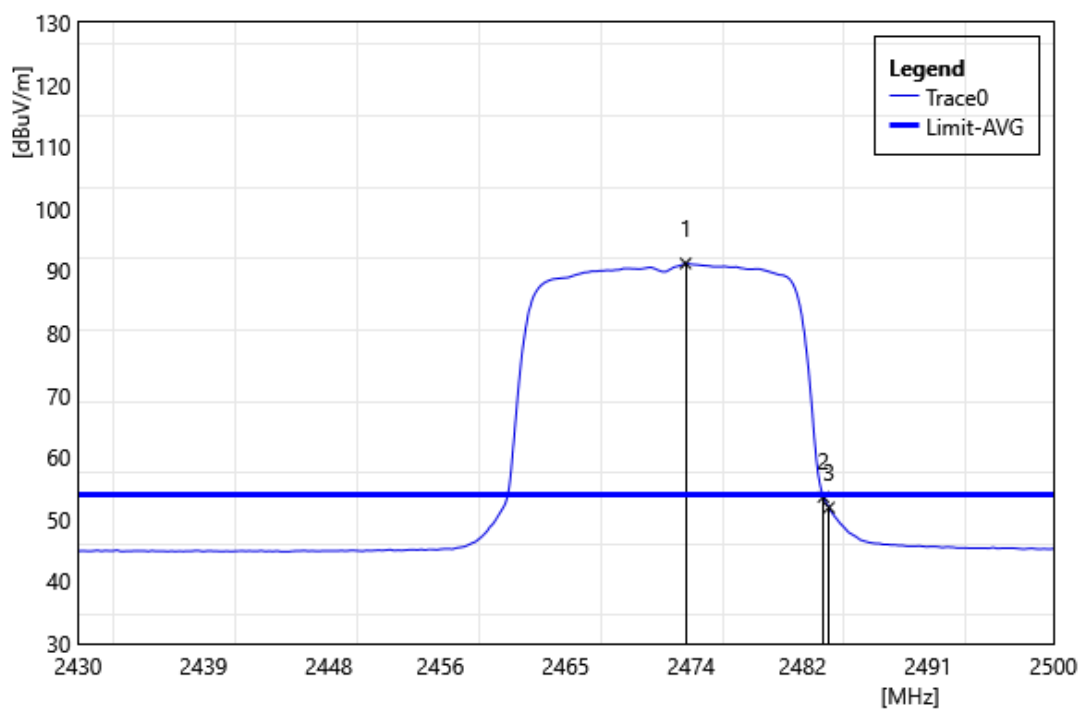


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2473.61	101.06	-9.84	91.22	61.22	30.00	AVG
2	2483.50	63.40	-9.80	53.60	61.22	-7.62	AVG
3	2483.90	61.69	-9.79	51.90	54.00	-2.10	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2422		
	MHz		
Polarization:	Horizontal		
Remark:			

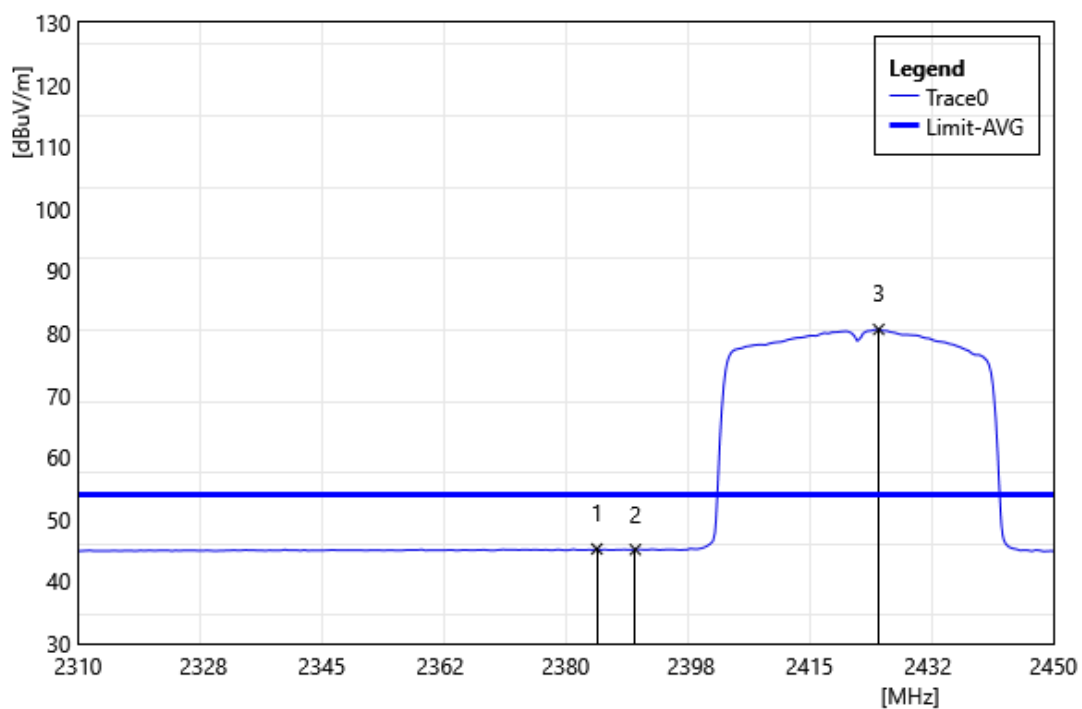


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2384.48	54.76	-9.53	45.23	54.00	-8.77	AVG
2	2390.00	54.67	-9.54	45.13	50.60	-5.46	AVG
3	2424.94	90.33	-9.73	80.60	50.60	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2422		
	MHz		
Polarization:	Vertical		
Remark:			

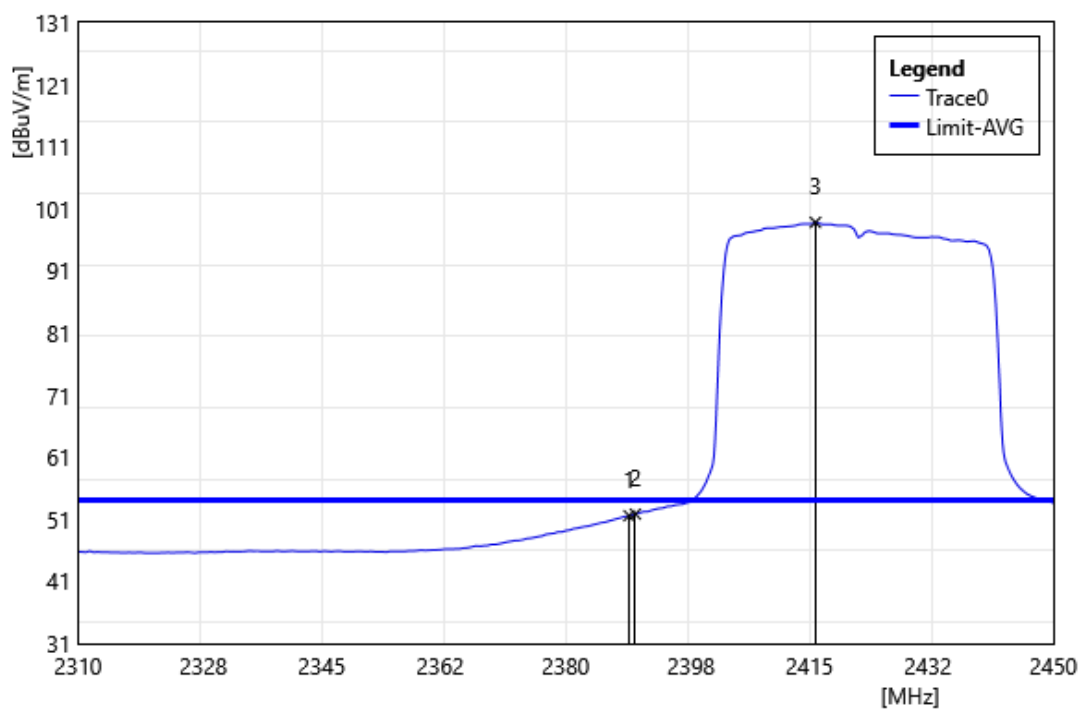


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.10	61.12	-9.53	51.59	54.00	-2.41	AVG
2	2390.00	61.38	-9.54	51.84	68.82	-16.98	AVG
3	2415.84	108.49	-9.67	98.82	68.82	30.00	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2437		
	MHz		
Polarization:	Horizontal		
Remark:			

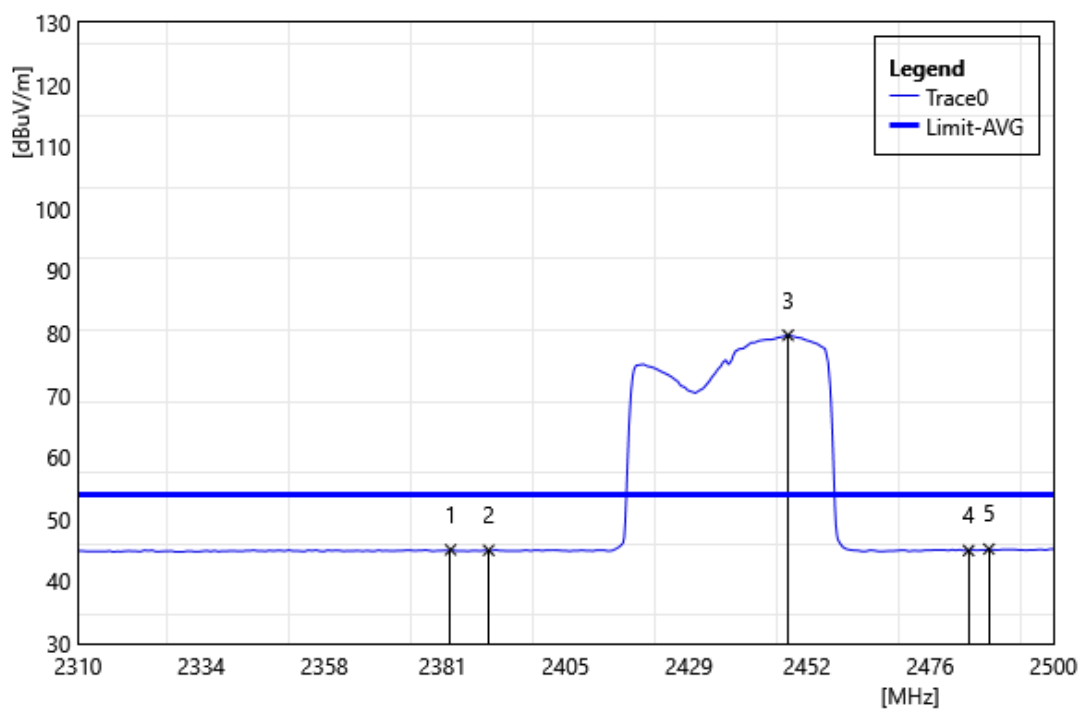


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2382.58	54.63	-9.53	45.10	54.00	-8.90	AVG
2	2390.00	54.56	-9.54	45.02	49.65	-4.64	AVG
3	2448.32	89.58	-9.93	79.65	49.65	30.00	AVG
4	2483.50	54.77	-9.80	44.97	49.65	-4.68	AVG
5	2487.46	55.01	-9.78	45.23	54.00	-8.77	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2437		
	MHz		
Polarization:	Vertical		
Remark:			

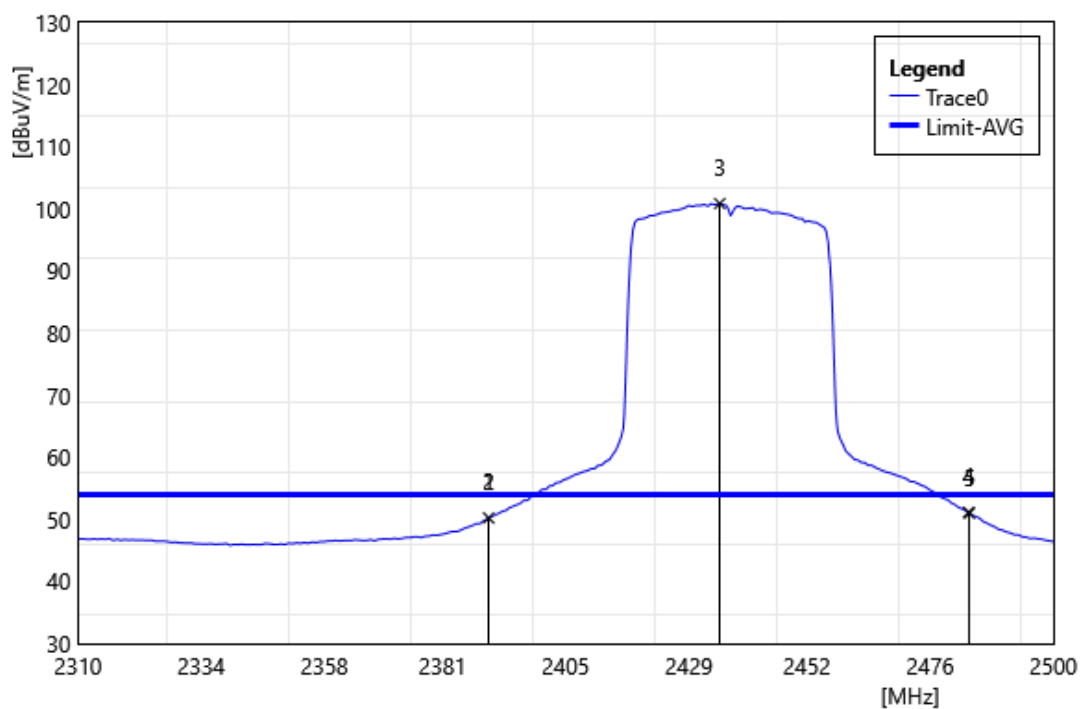


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.99	59.77	-9.54	50.23	54.00	-3.77	AVG
2	2390.00	59.77	-9.54	50.23	70.86	-20.63	AVG
3	2435.02	110.68	-9.82	100.86	70.86	30.00	AVG
4	2483.50	60.91	-9.80	51.11	70.86	-19.75	AVG
5	2483.66	60.82	-9.80	51.02	54.00	-2.98	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2452		
	MHz		
Polarization:	Horizontal		
Remark:			

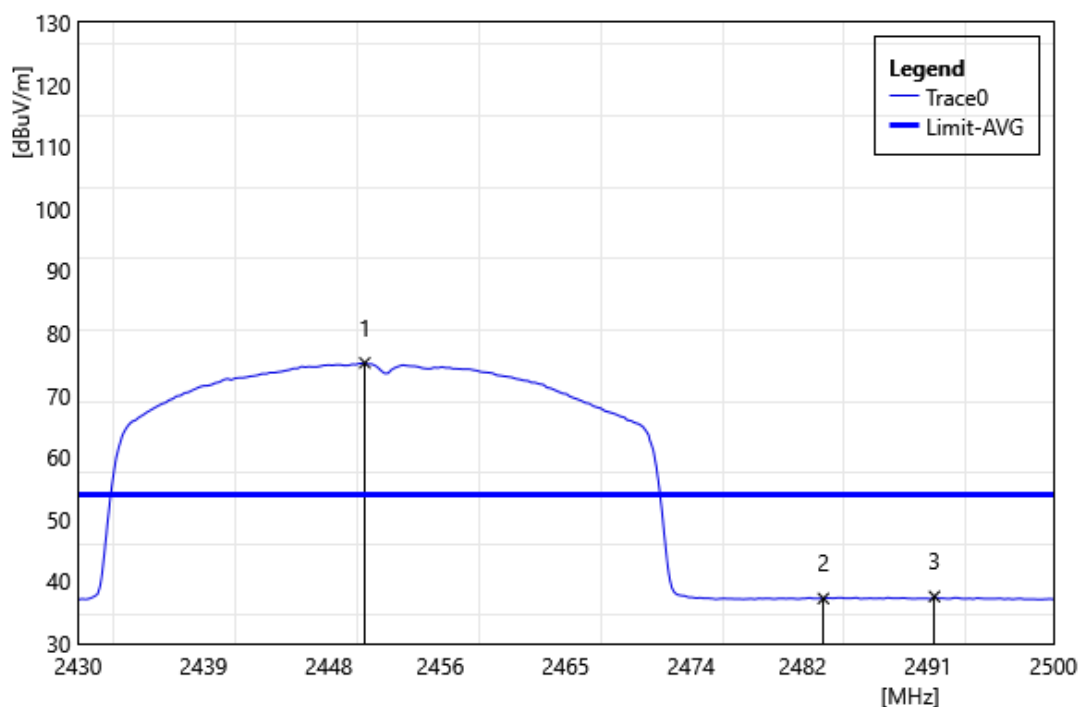


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2450.58	85.13	-9.93	75.20	55.20	20.00	AVG
2	2483.50	47.06	-9.80	37.26	55.20	-17.94	AVG
3	2491.46	47.34	-9.76	37.58	54.00	-16.42	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2452		
	MHz		
Polarization:	Vertical		
Remark:			

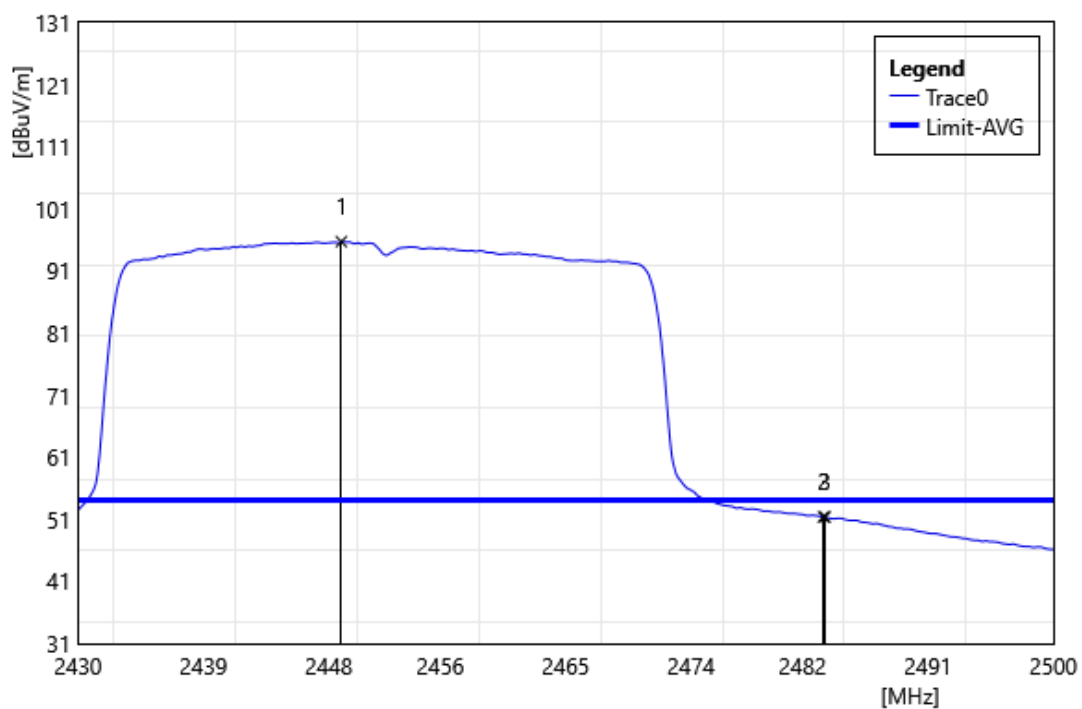


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2448.90	105.66	-9.93	95.73	65.73	30.00	AVG
2	2483.50	61.20	-9.80	51.40	65.73	-14.33	AVG
3	2483.62	61.20	-9.80	51.40	54.00	-2.60	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2457		
	MHz		
Polarization:	Horizontal		
Remark:			

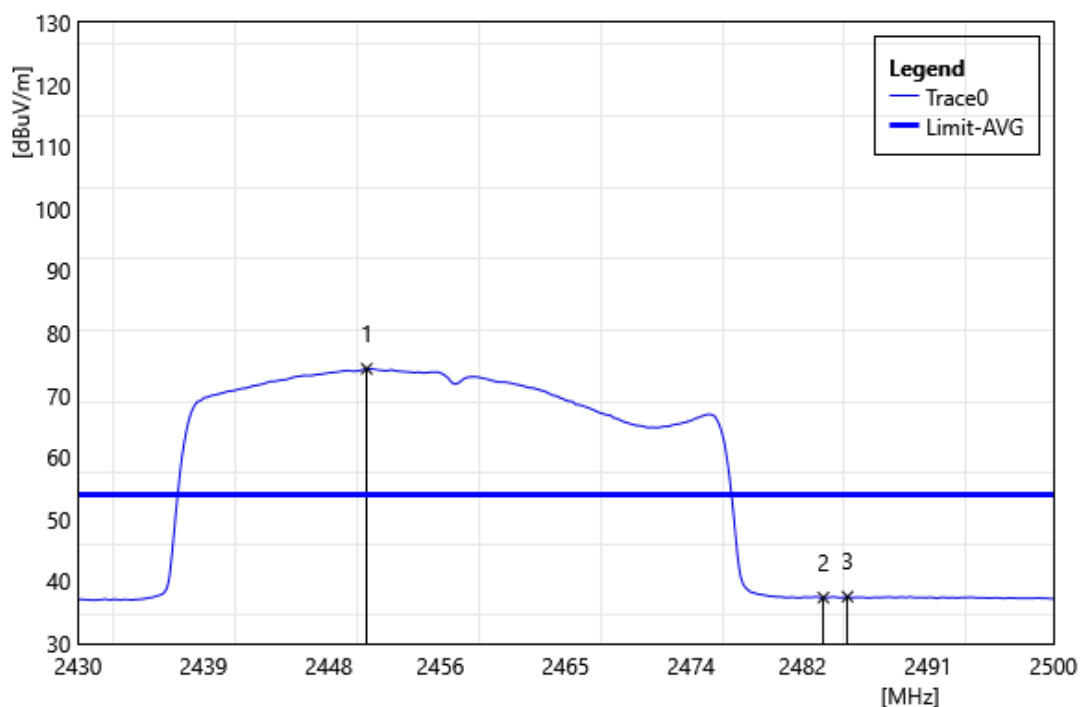


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2450.72	84.19	-9.93	74.26	44.26	30.00	AVG
2	2483.50	47.20	-9.80	37.40	44.26	-6.86	AVG
3	2485.23	47.36	-9.79	37.57	54.00	-16.43	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2457		
	MHz		
Polarization:	Vertical		
Remark:			

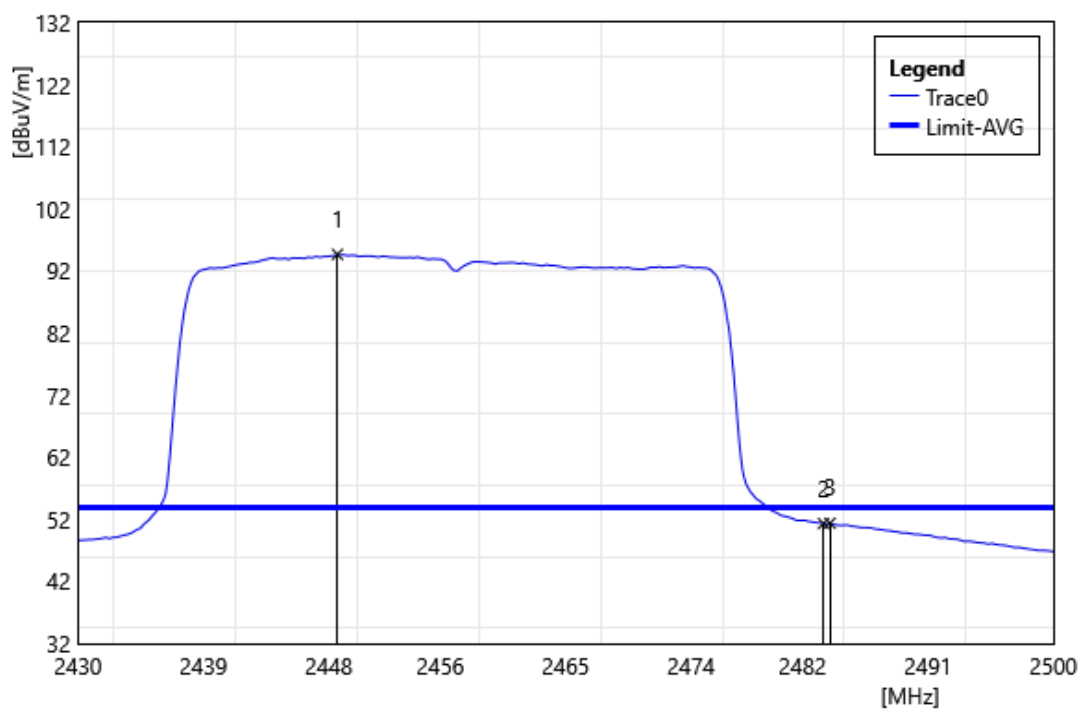


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2448.62	104.59	-9.93	94.66	64.66	30.00	AVG
2	2483.50	61.11	-9.80	51.31	64.66	-13.35	AVG
3	2483.97	61.17	-9.79	51.38	54.00	-13.28	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2462		
	MHz		
Polarization:	Horizontal		
Remark:			

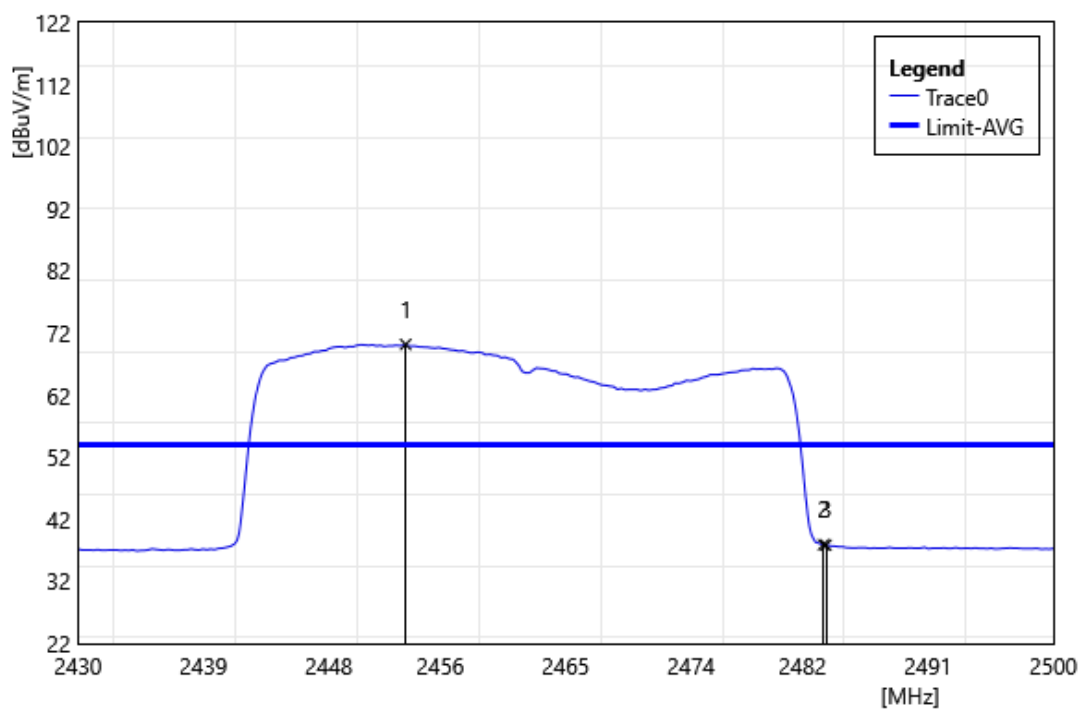

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2453.52	80.09	-9.92	70.17	40.17	30.00	AVG
2	2483.50	47.71	-9.80	37.91	40.17	-2.25	AVG
3	2483.69	47.66	-9.80	37.86	54.00	-16.14	AVG

Test Site:	96604-WG	Standard:	Part 15.247
Test Mode:	802.11ax HE40 2462		
	MHz		
Polarization:	Vertical		
Remark:			

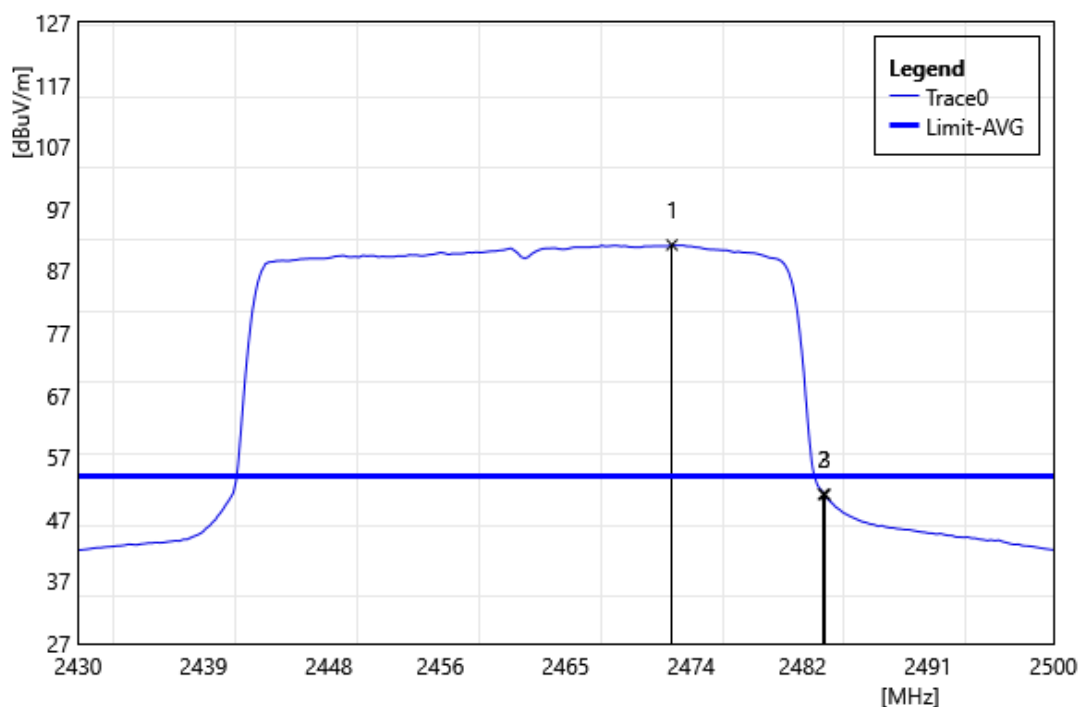

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2472.63	101.02	-9.84	91.18	61.18	30.00	AVG
2	2483.50	60.86	-9.80	51.06	61.18	-10.12	AVG
3	2483.62	60.78	-9.80	50.98	54.00	-3.02	AVG

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Out of Band Conducted Emissions Measurement

Reference level

Reference Appendix B

Out of Band Conducted Emissions

Reference Appendix B

Conducted Band Edge

Reference Appendix B

---END---