


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 297 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

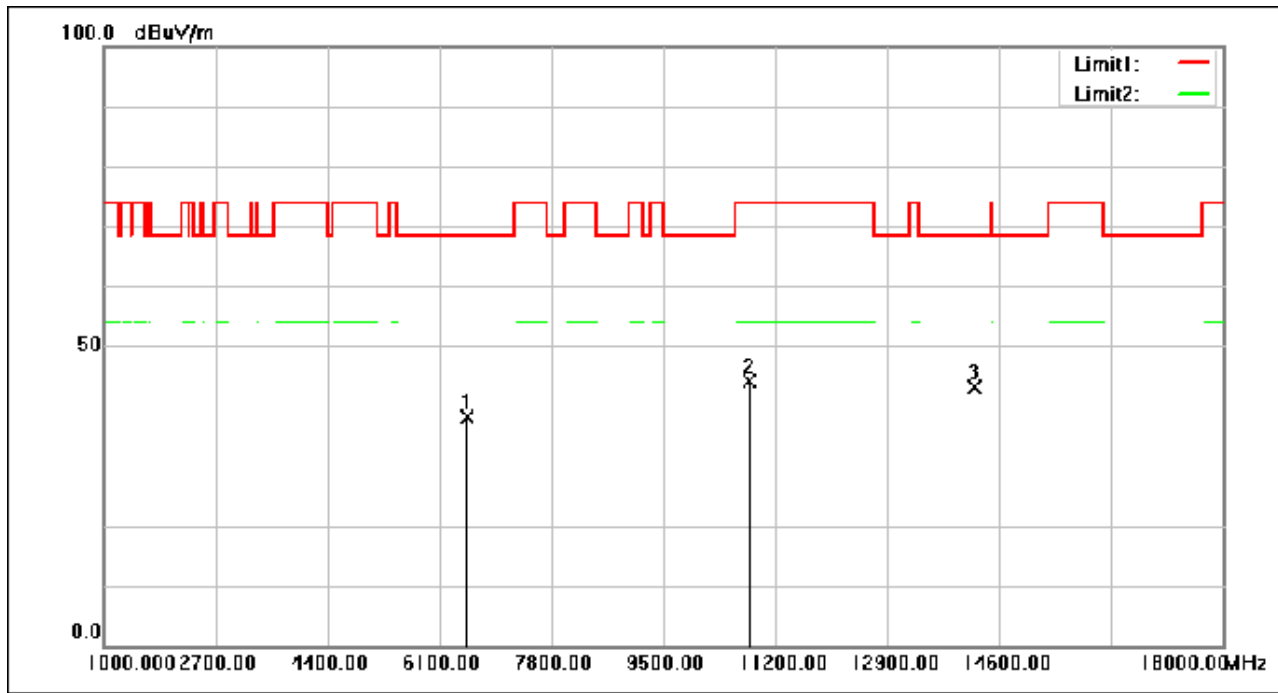

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6535.880	49.13	-10.93	38.20	68.30	-30.10	peak
2	10825.320	50.39	-6.36	44.03	74.00	-29.97	peak
3	14230.080	49.68	-6.46	43.22	68.30	-25.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 298 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

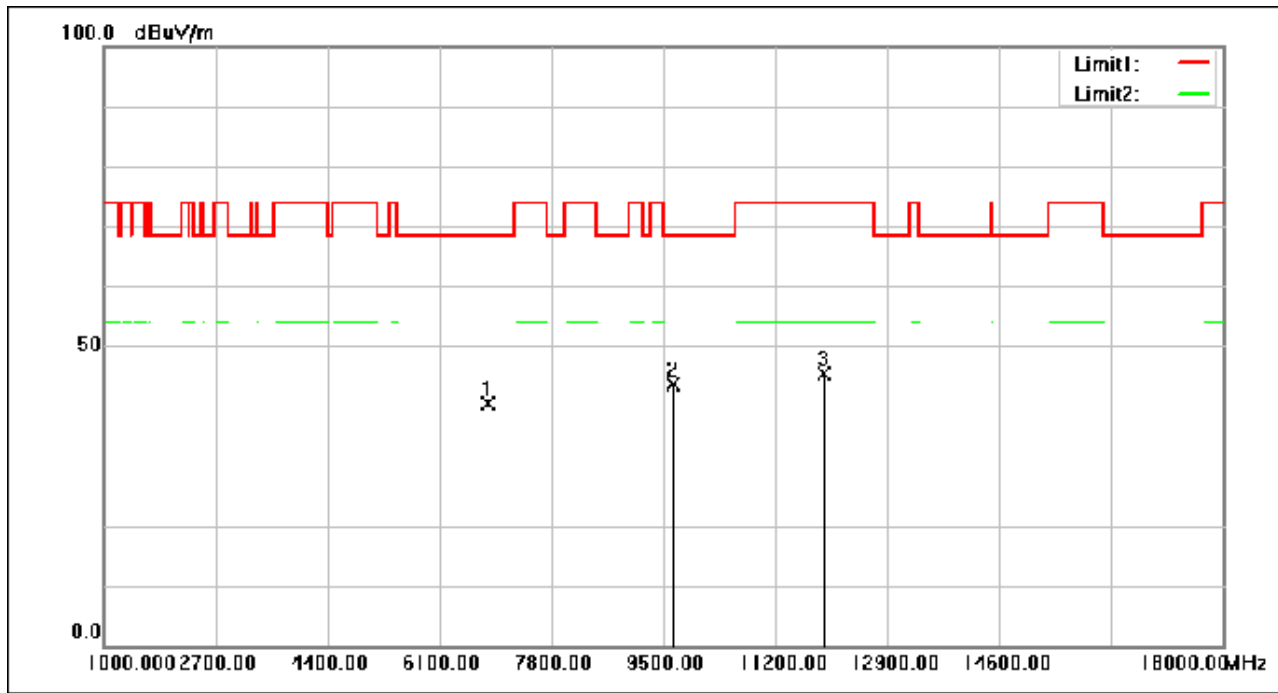

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6844.600	50.32	-10.06	40.26	68.30	-28.04	peak
2	9653.680	50.26	-6.63	43.63	68.30	-24.67	peak
3	11941.880	51.73	-6.39	45.34	74.00	-28.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 299 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

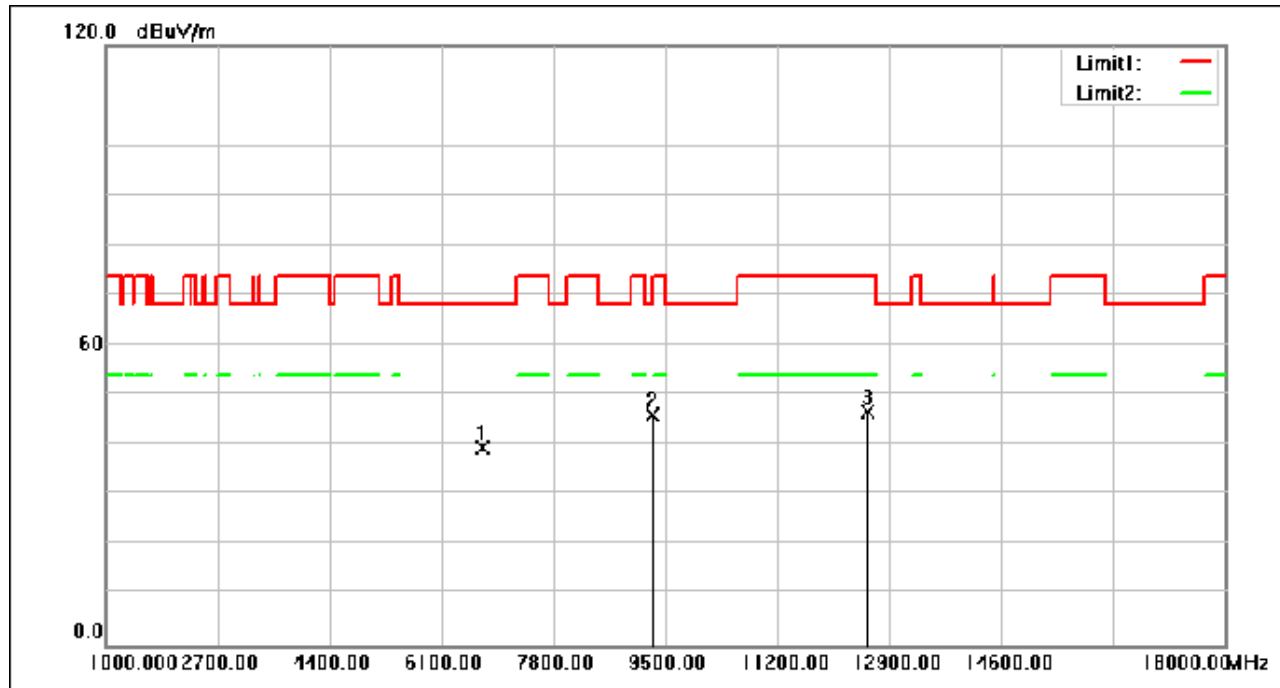

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6737.500	49.72	-10.13	39.59	68.30	-28.71	peak
2	9321.500	53.22	-7.19	46.03	74.00	-27.97	peak
3	12584.650	52.52	-5.89	46.63	74.00	-27.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 300 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

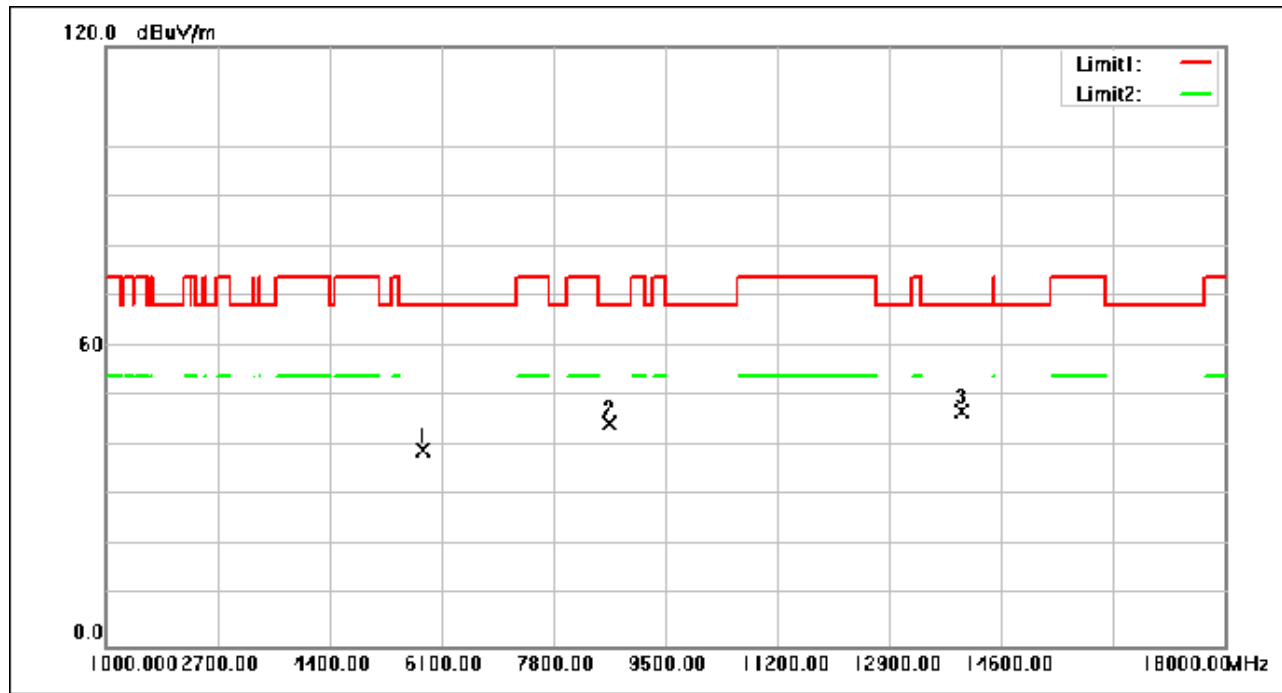

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5824.600	53.22	-14.14	39.08	68.30	-29.22	peak
2	8664.450	53.06	-8.45	44.61	68.30	-23.69	peak
3	14007.550	53.39	-6.33	47.06	68.30	-21.24	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 301 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

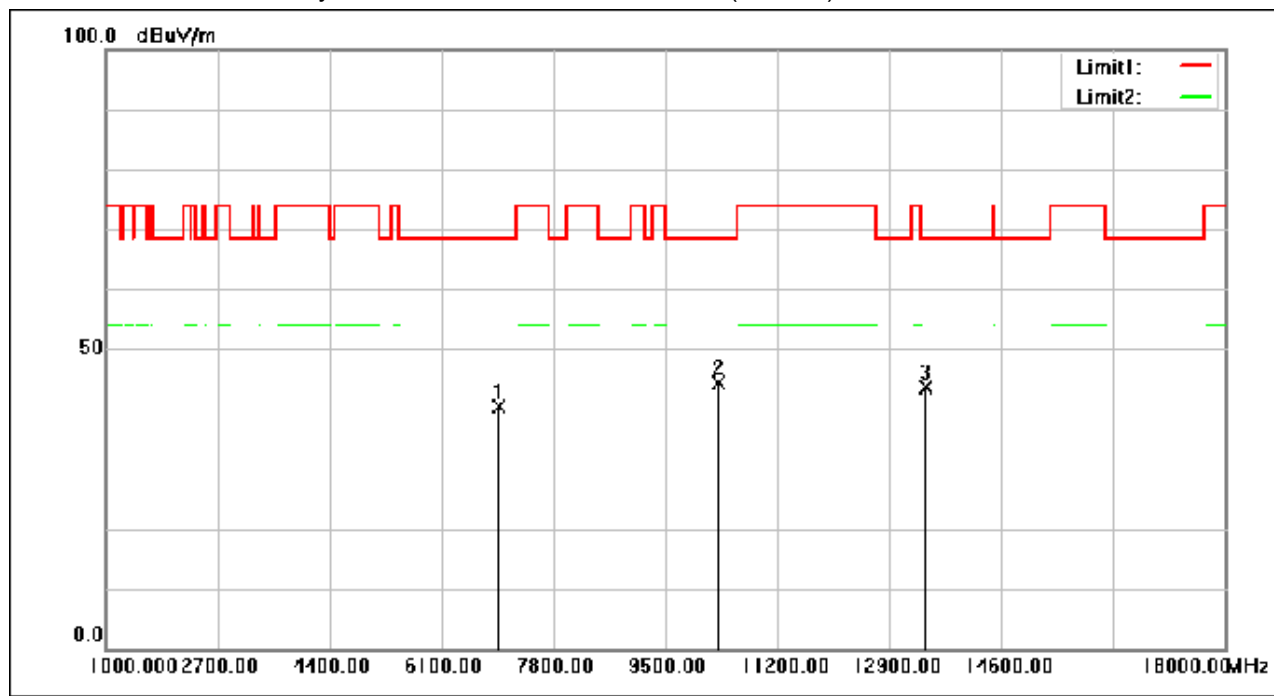

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6981.280	50.24	-9.98	40.26	68.30	-28.04	peak
2	10306.480	50.87	-6.37	44.50	68.30	-23.80	peak
3	13461.680	49.40	-5.71	43.69	68.30	-24.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 302 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

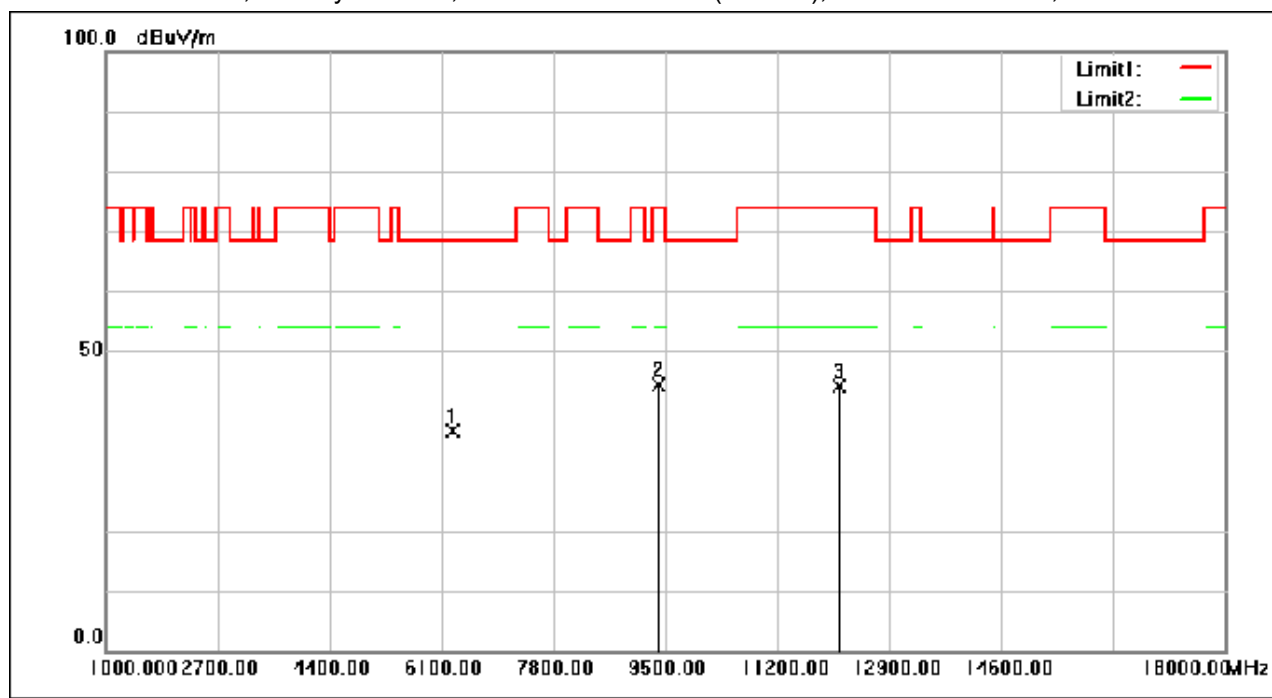

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6272.040	48.58	-12.01	36.57	68.30	-31.73	peak
2	9408.200	51.32	-7.05	44.27	74.00	-29.73	peak
3	12138.400	50.30	-6.27	44.03	74.00	-29.97	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 303 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

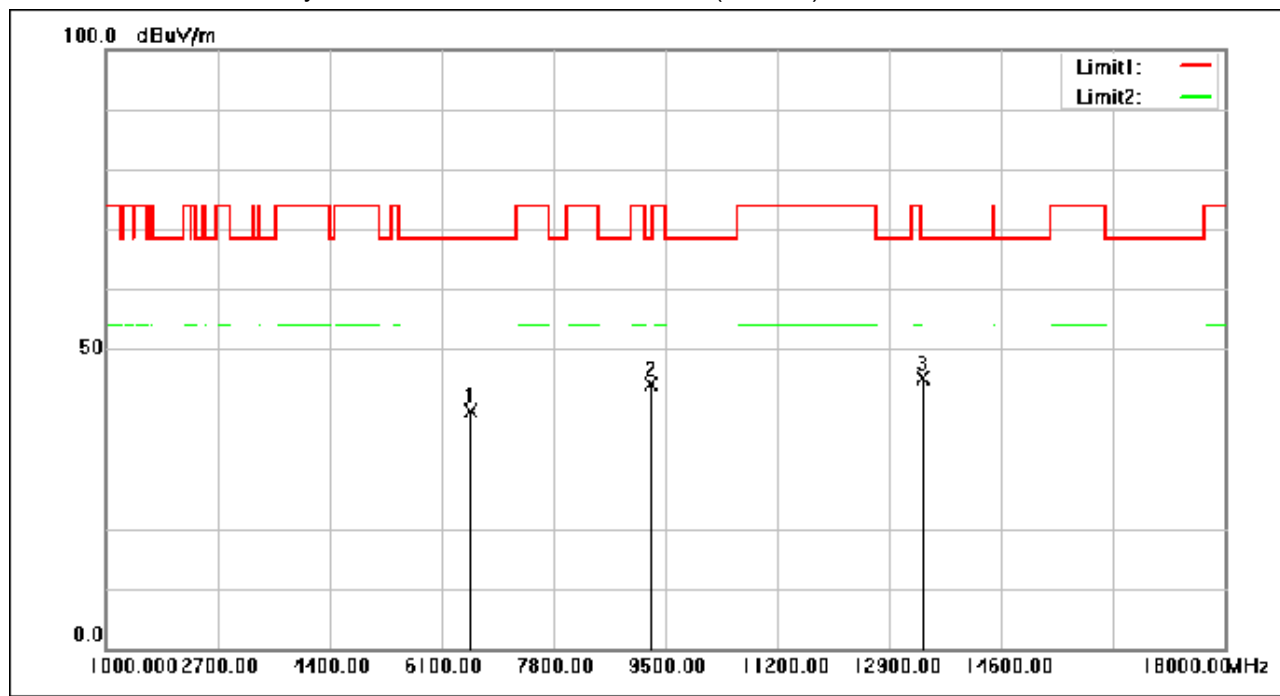

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6554.920	50.52	-10.85	39.67	68.30	-28.63	peak
2	9292.600	51.30	-7.24	44.06	68.30	-24.24	peak
3	13410.680	50.82	-5.68	45.14	68.30	-23.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 304 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

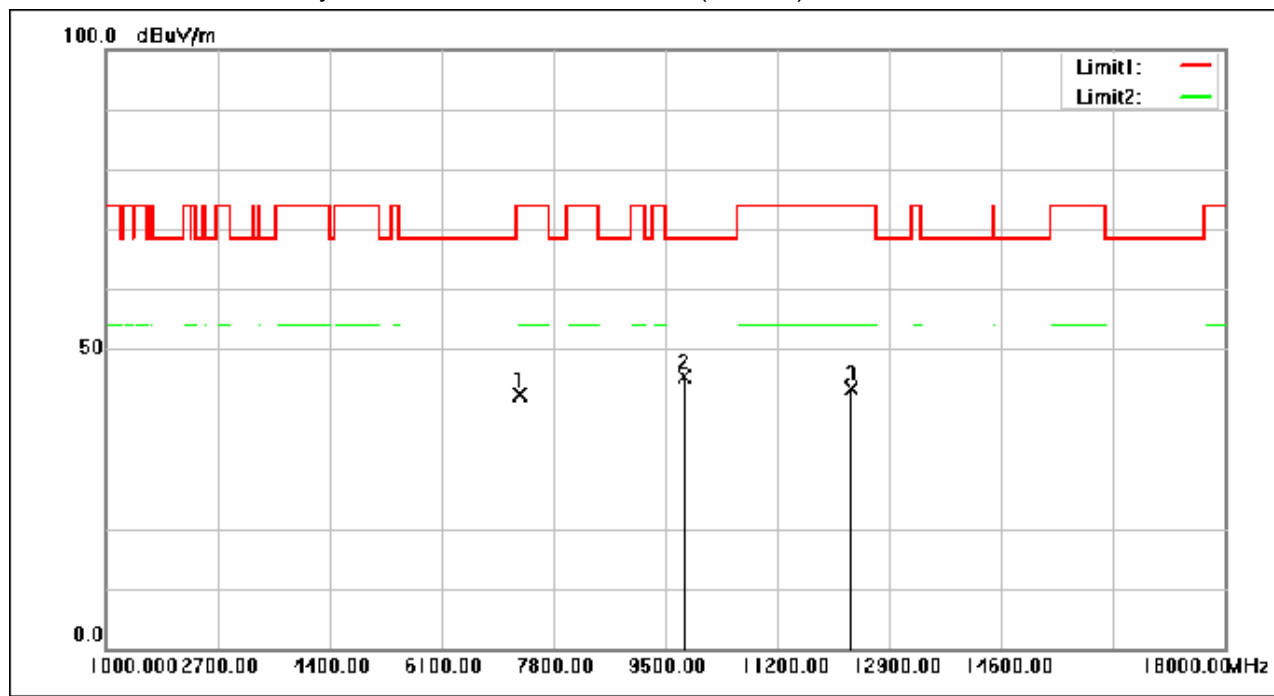

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7301.560	52.08	-9.71	42.37	74.00	-31.63	peak
2	9803.280	51.72	-6.36	45.36	68.30	-22.94	peak
3	12331.520	49.60	-6.10	43.50	74.00	-30.50	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 305 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

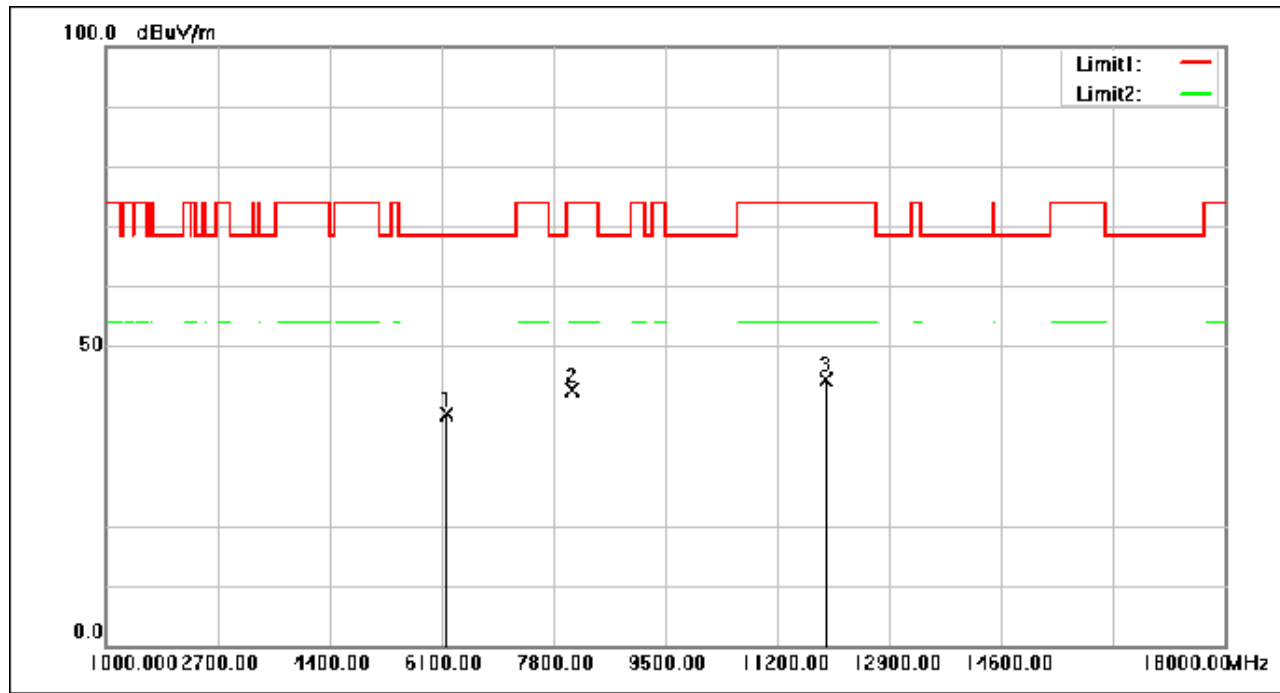

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6185.000	51.01	-12.37	38.64	68.30	-29.66	peak
2	8097.160	51.90	-9.35	42.55	74.00	-31.45	peak
3	11938.480	50.78	-6.39	44.39	74.00	-29.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 306 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

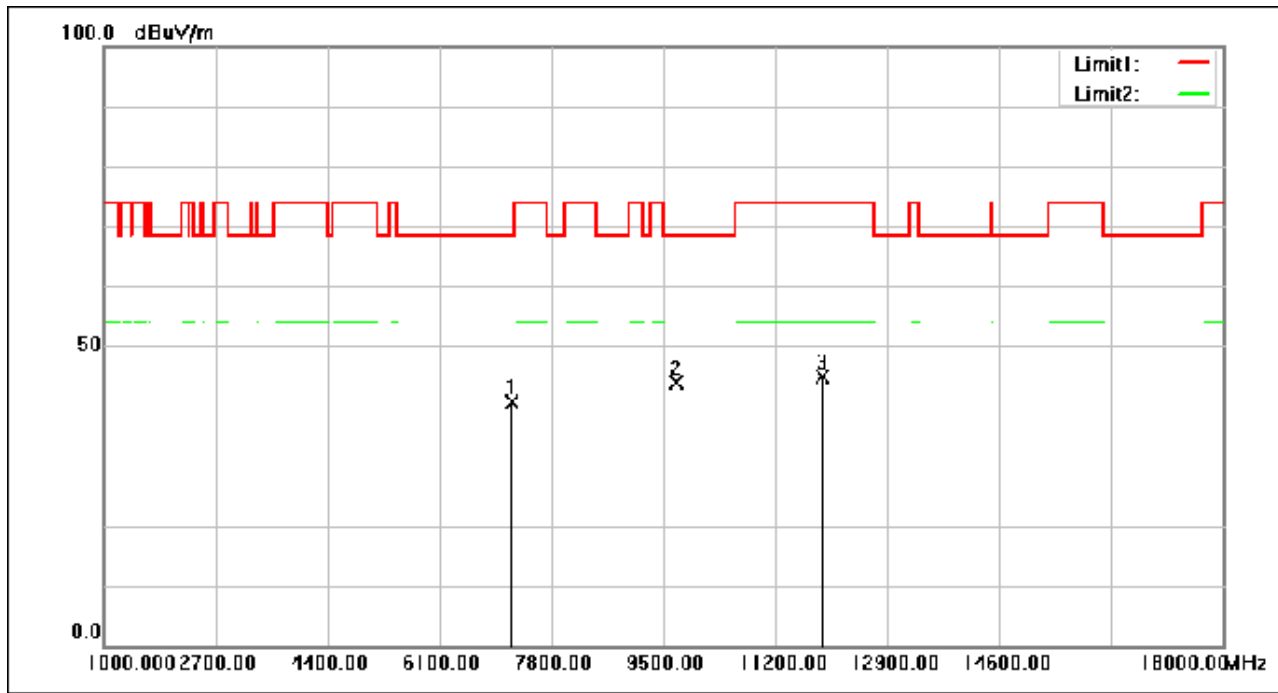

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7221.320	50.41	-9.78	40.63	68.30	-27.67	peak
2	9693.120	50.53	-6.56	43.97	68.30	-24.33	peak
3	11921.480	51.15	-6.39	44.76	74.00	-29.24	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 307 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

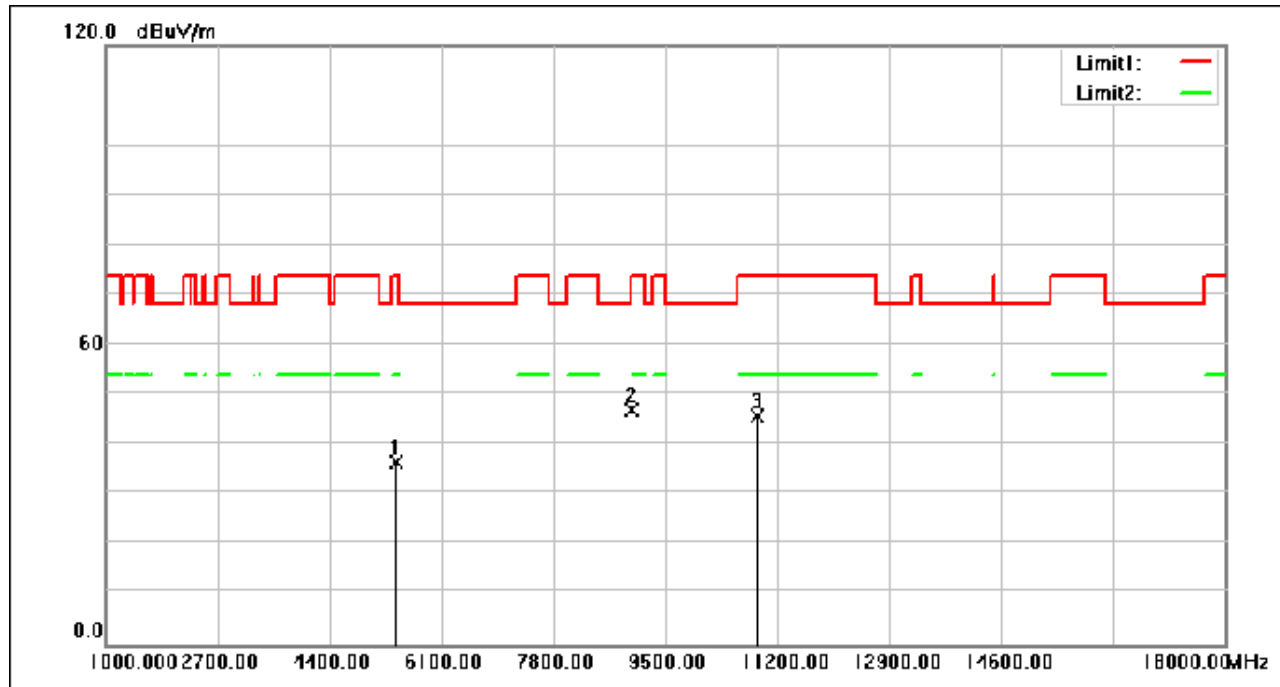

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5403.850	51.74	-15.40	36.34	74.00	-37.66	peak
2	9006.150	54.53	-7.69	46.84	74.00	-27.16	peak
3	10903.350	52.19	-6.36	45.83	74.00	-28.17	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 308 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

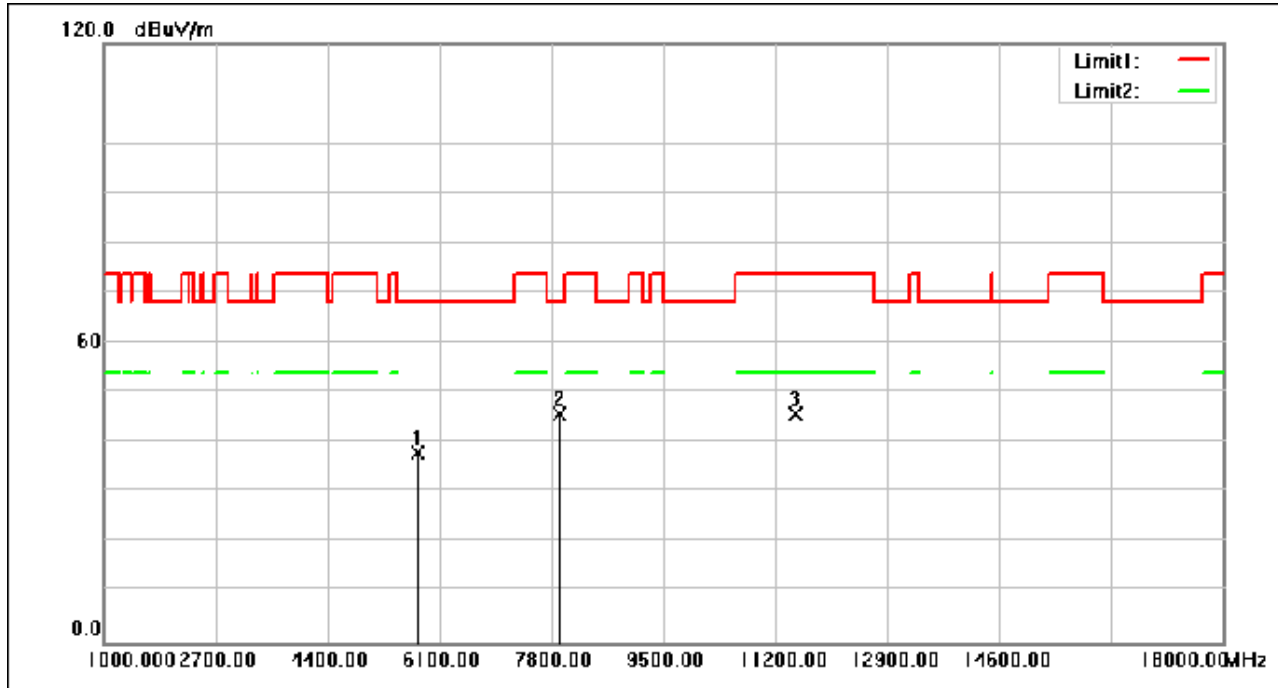

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5778.700	52.24	-14.35	37.89	68.30	-30.41	peak
2	7924.100	55.28	-9.50	45.78	68.30	-22.52	peak
3	11511.100	51.88	-6.07	45.81	74.00	-28.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 309 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

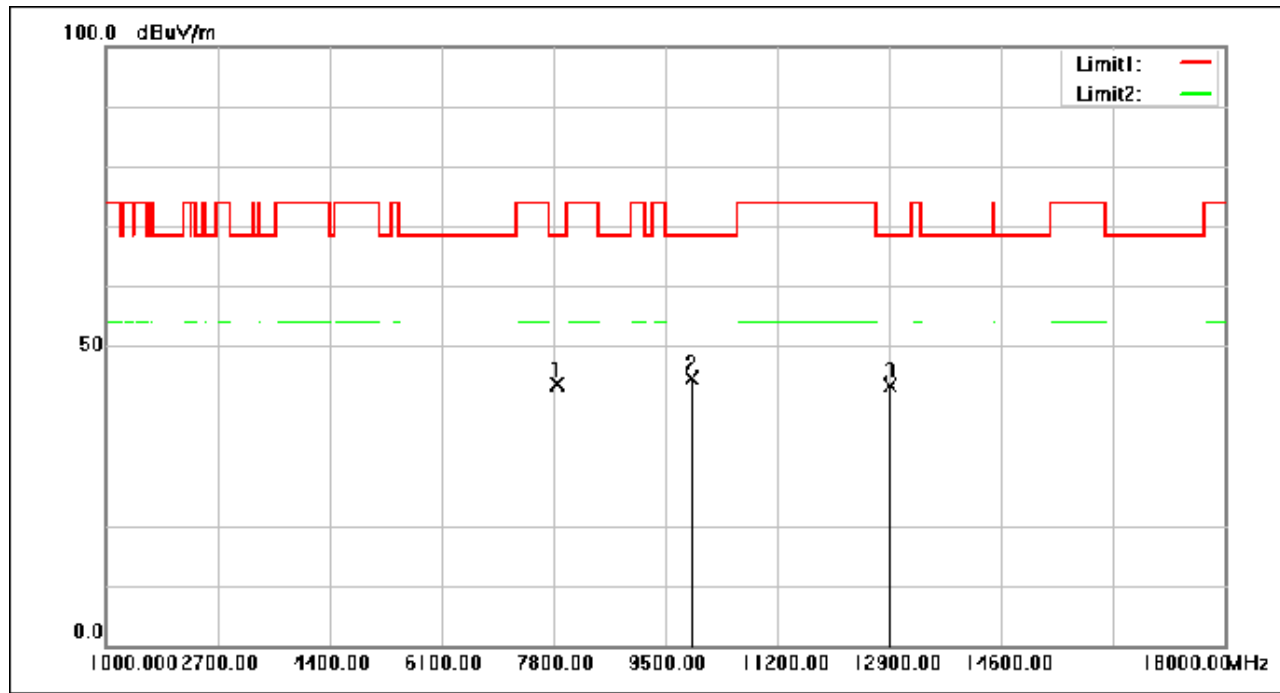

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7866.640	53.12	-9.49	43.63	68.30	-24.67	peak
2	9892.360	50.96	-6.30	44.66	68.30	-23.64	peak
3	12929.920	49.00	-5.60	43.40	68.30	-24.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 310 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

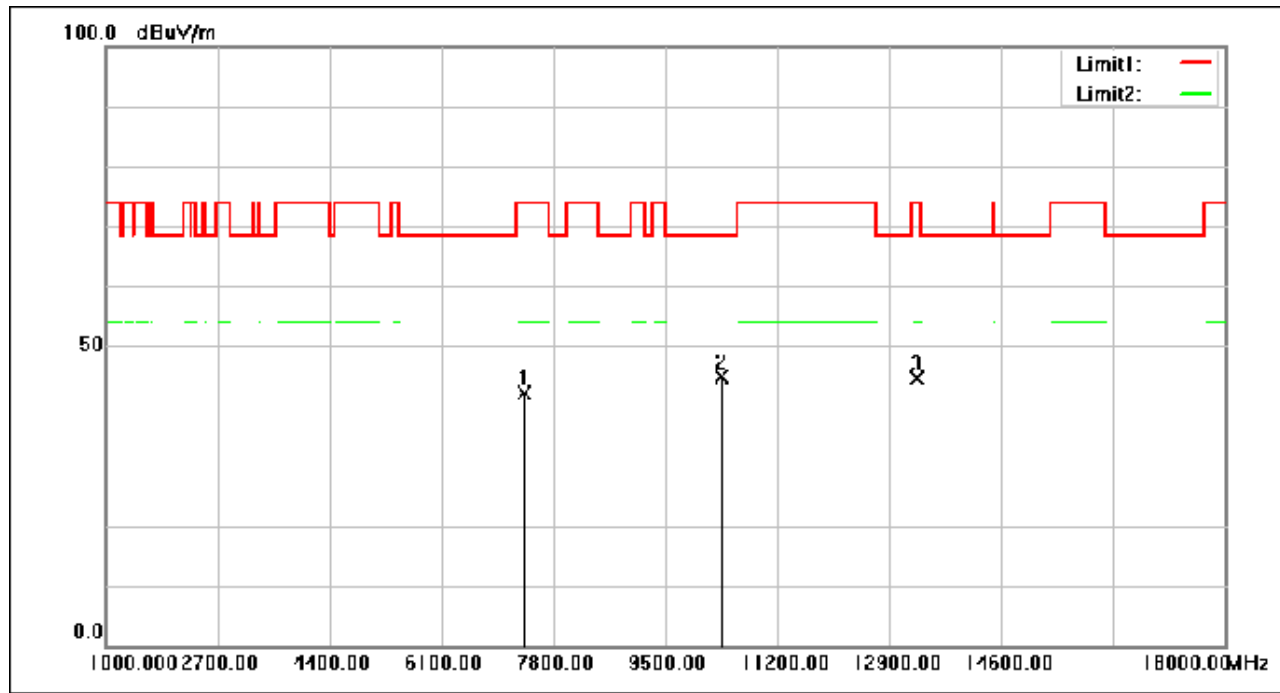

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7368.880	51.88	-9.66	42.22	74.00	-31.78	peak
2	10366.320	51.27	-6.37	44.90	68.30	-23.40	peak
3	13329.760	50.36	-5.64	44.72	74.00	-29.28	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 311 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

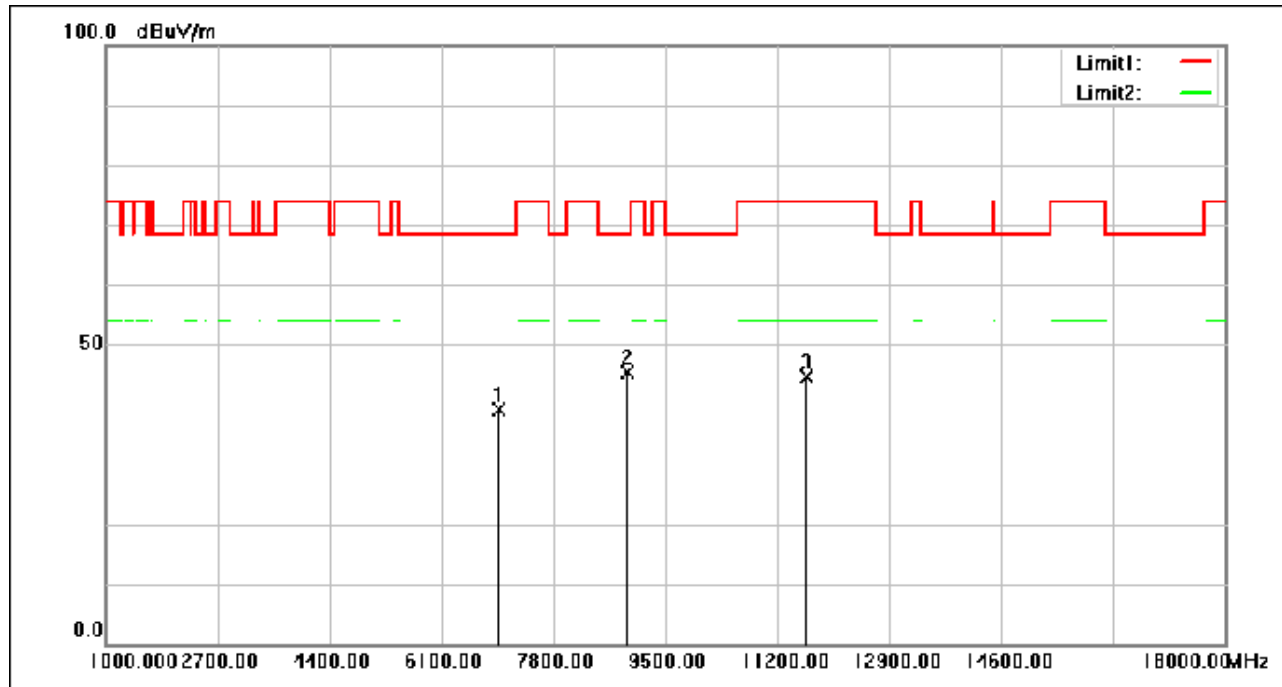

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6977.200	49.12	-9.98	39.14	68.30	-29.16	peak
2	8929.480	53.38	-7.88	45.50	68.30	-22.80	peak
3	11652.880	50.88	-6.18	44.70	74.00	-29.30	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 312 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

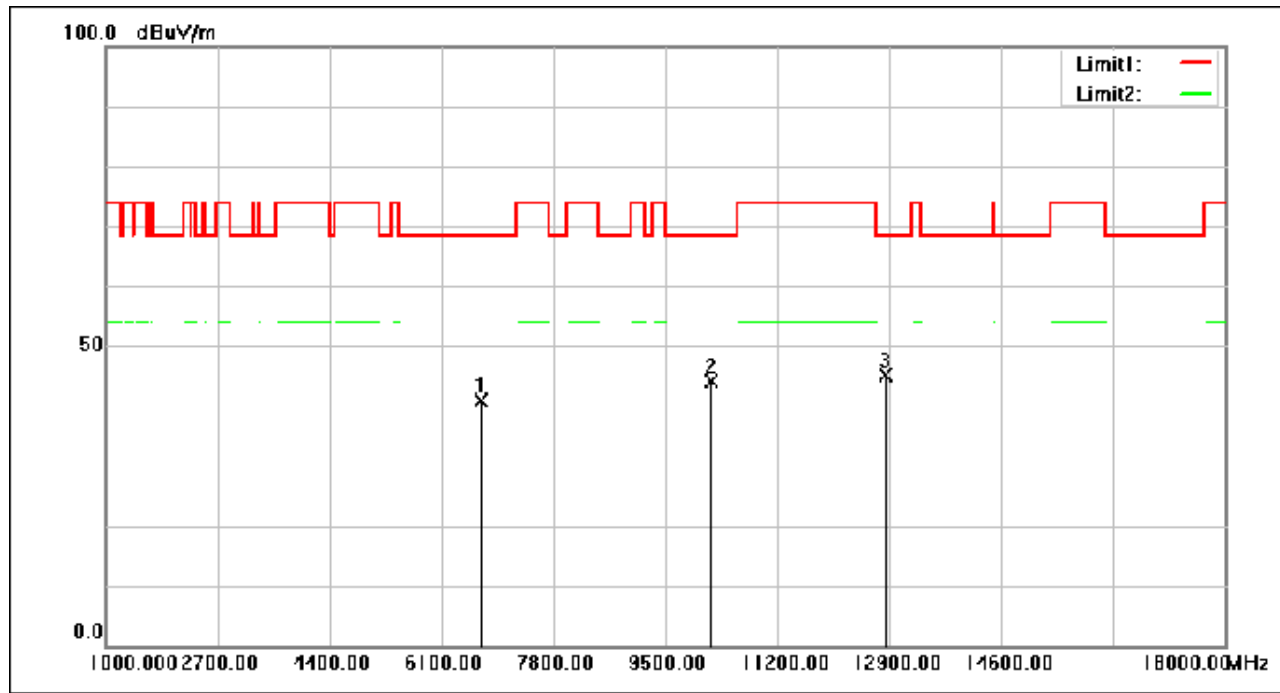

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6700.440	51.22	-10.25	40.97	68.30	-27.33	peak
2	10201.080	50.41	-6.35	44.06	68.30	-24.24	peak
3	12863.280	50.85	-5.66	45.19	68.30	-23.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 313 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

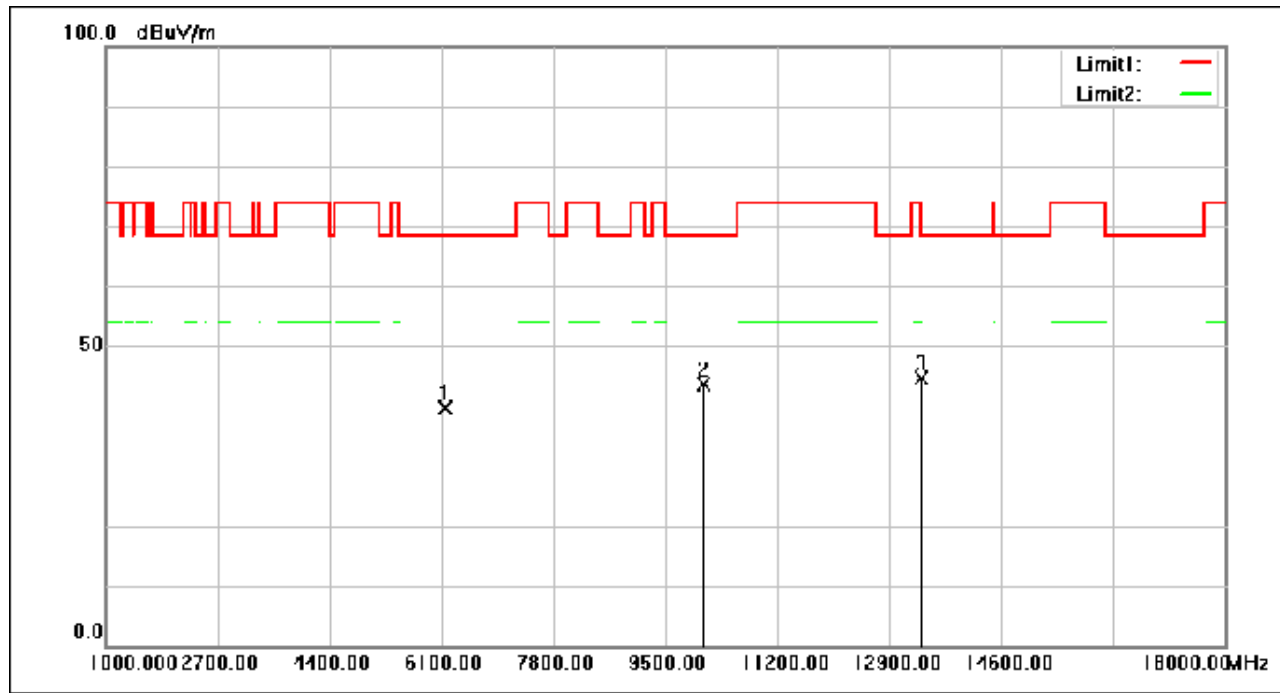

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6159.160	52.02	-12.48	39.54	68.30	-28.76	peak
2	10083.440	50.00	-6.34	43.66	68.30	-24.64	peak
3	13409.320	50.26	-5.68	44.58	68.30	-23.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 314 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

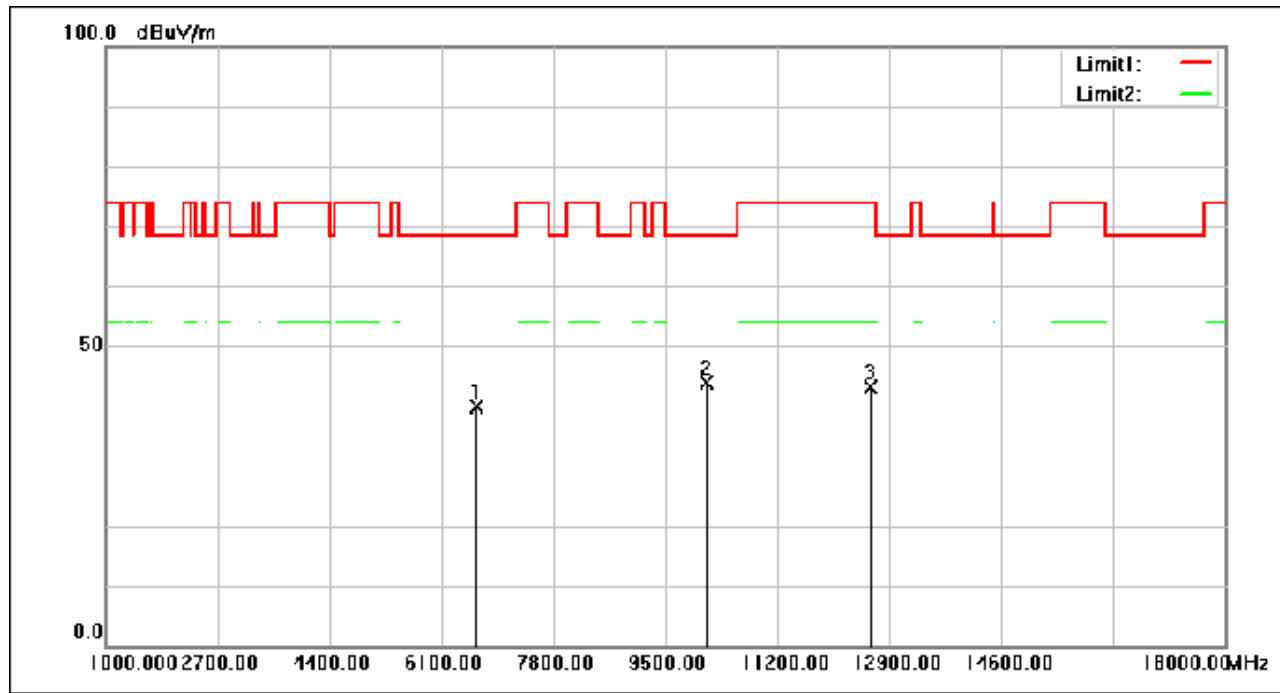

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6634.480	50.51	-10.52	39.99	68.30	-28.31	peak
2	10129.680	50.26	-6.34	43.92	68.30	-24.38	peak
3	12621.200	48.91	-5.87	43.04	74.00	-30.96	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 315 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

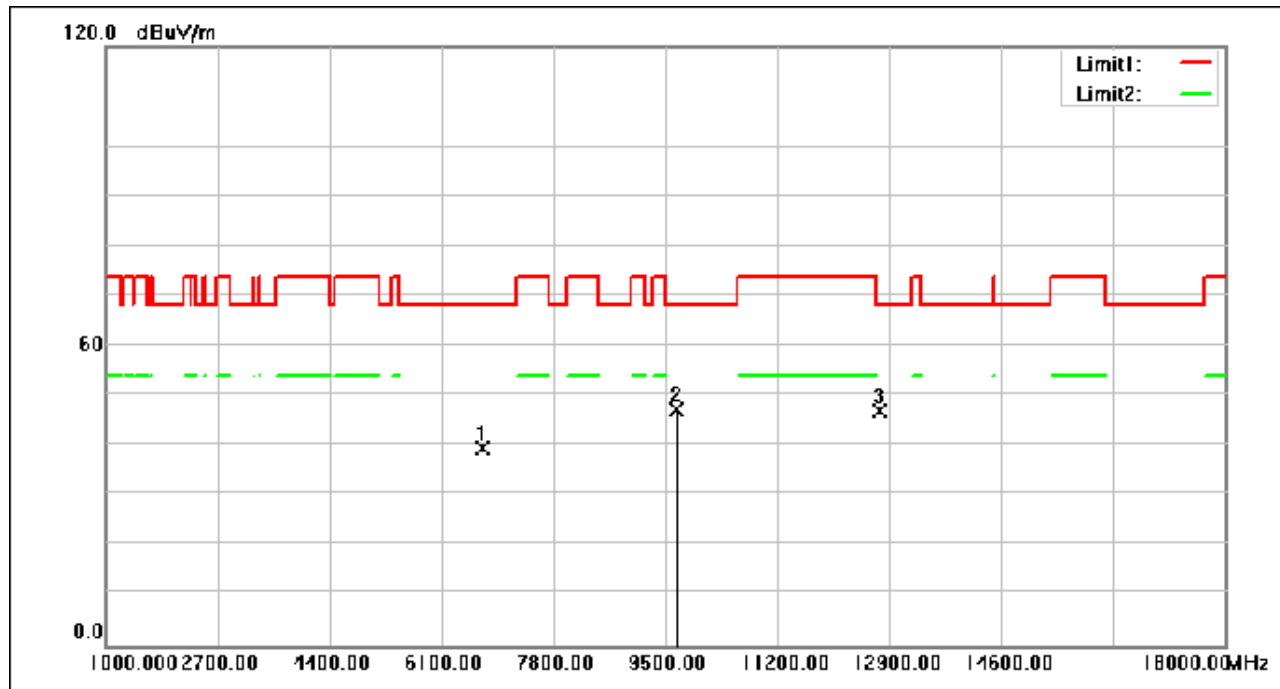

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6741.750	49.48	-10.13	39.35	68.30	-28.95	peak
2	9674.250	53.71	-6.59	47.12	68.30	-21.18	peak
3	12760.600	52.75	-5.75	47.00	68.30	-21.30	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 316 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

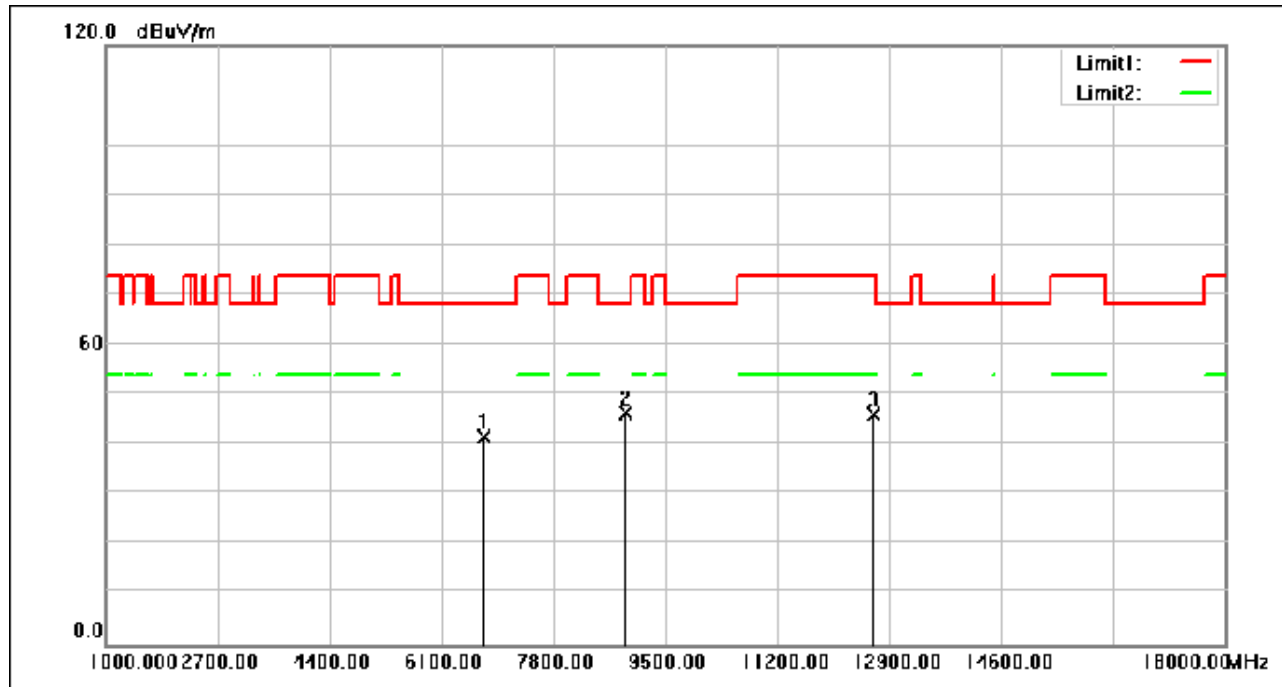

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6758.750	51.65	-10.12	41.53	68.30	-26.77	peak
2	8916.900	54.32	-7.91	46.41	68.30	-21.89	peak
3	12677.300	51.86	-5.81	46.05	74.00	-27.95	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 317 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

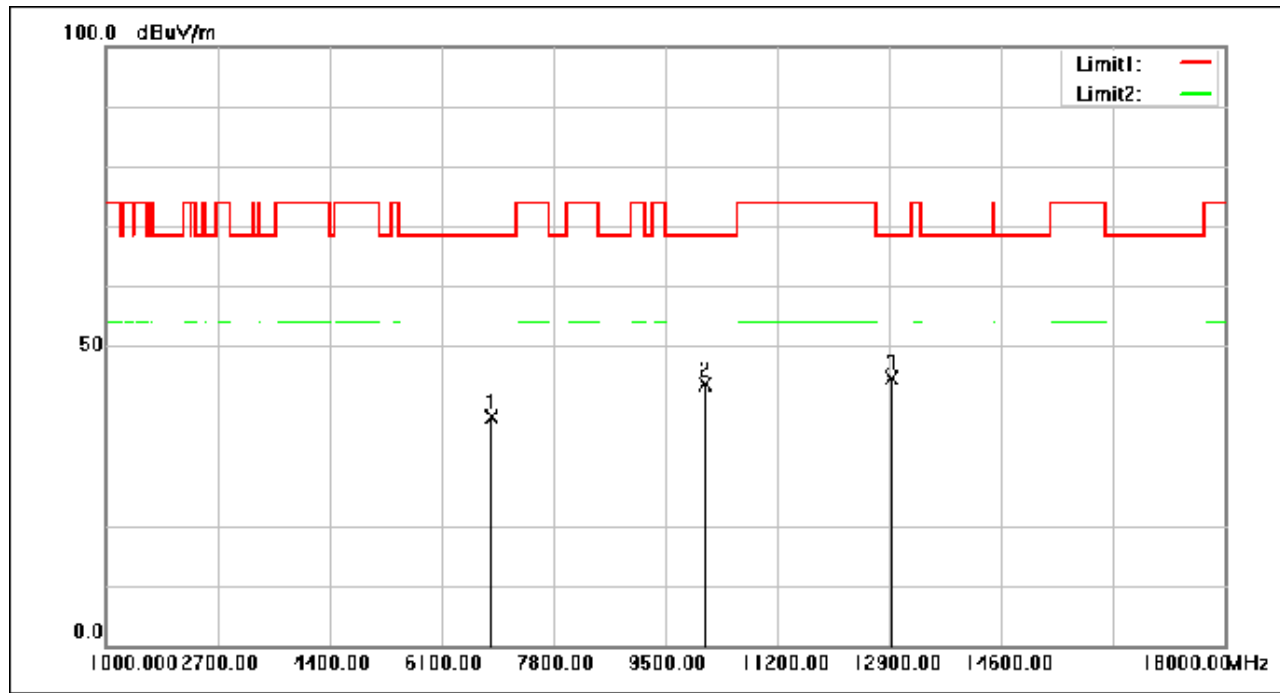

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6879.960	48.28	-10.04	38.24	68.30	-30.06	peak
2	10097.720	49.87	-6.34	43.53	68.30	-24.77	peak
3	12940.120	50.26	-5.59	44.67	68.30	-23.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 318 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

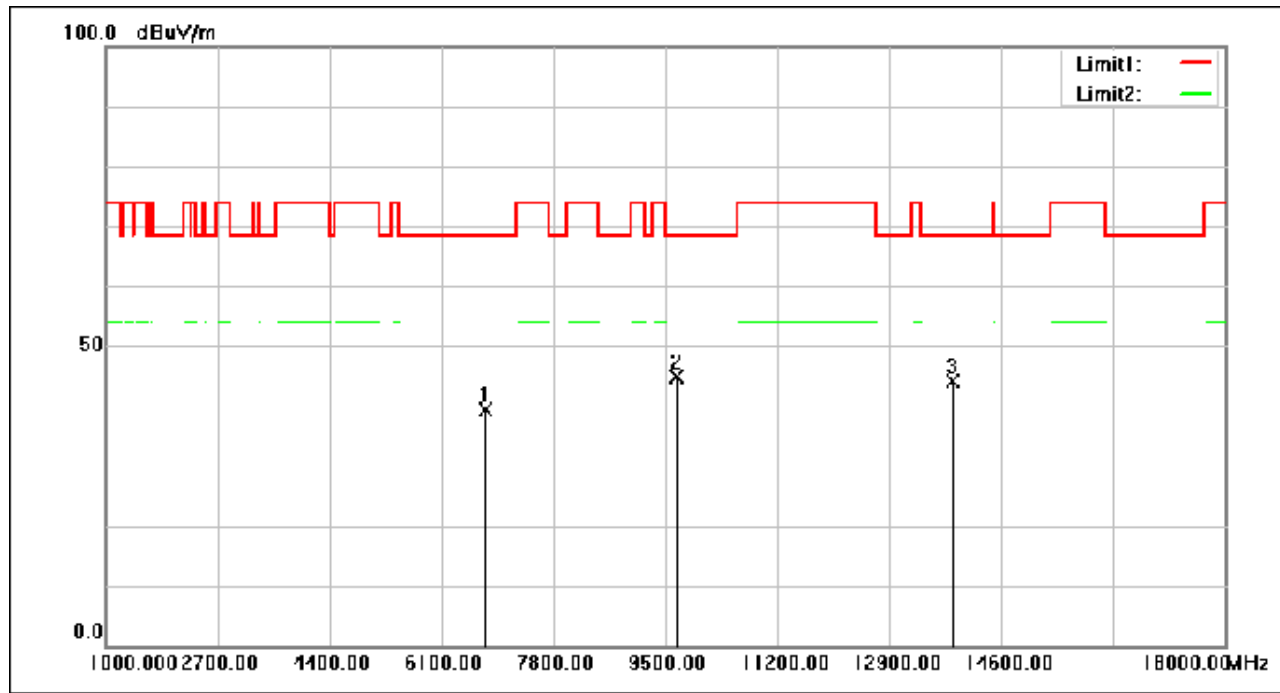

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6777.280	49.59	-10.11	39.48	68.30	-28.82	peak
2	9674.760	51.37	-6.59	44.78	68.30	-23.52	peak
3	13869.000	50.26	-6.17	44.09	68.30	-24.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 319 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

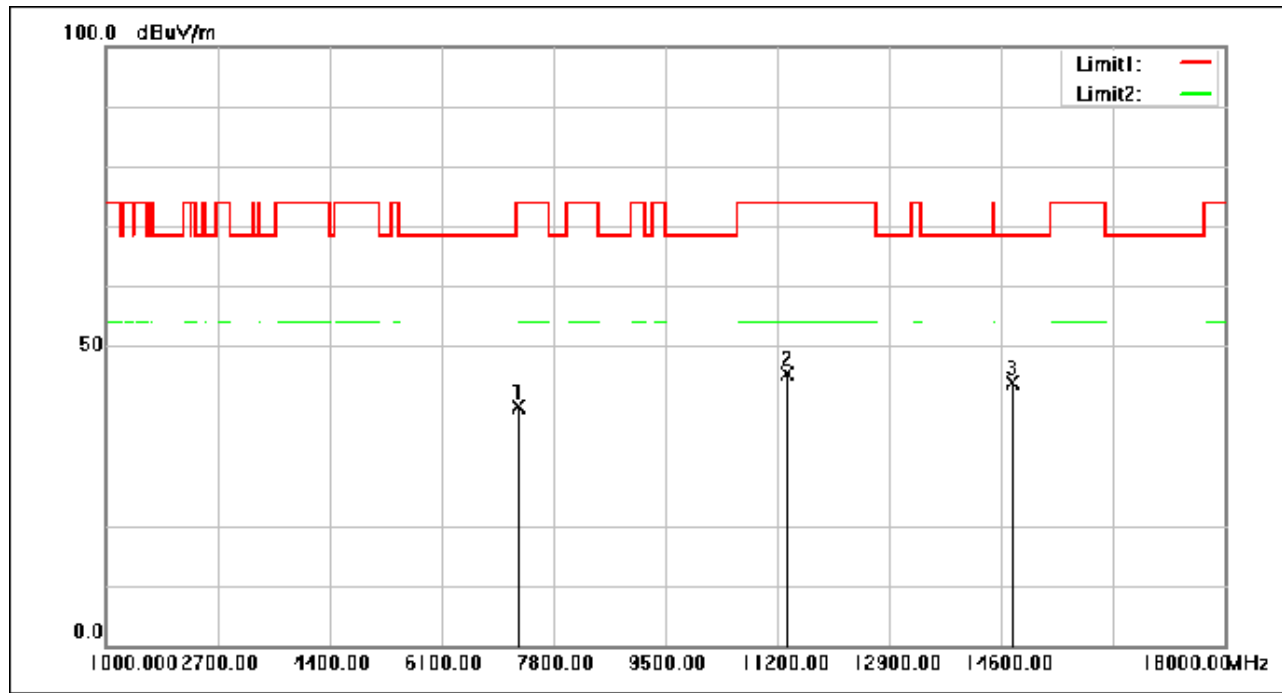

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7287.280	49.51	-9.72	39.79	74.00	-34.21	peak
2	11367.960	51.61	-6.14	45.47	74.00	-28.53	peak
3	14781.560	49.99	-6.01	43.98	68.30	-24.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 320 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU52_Right); Bandwidth: 20MHz; Channel: High

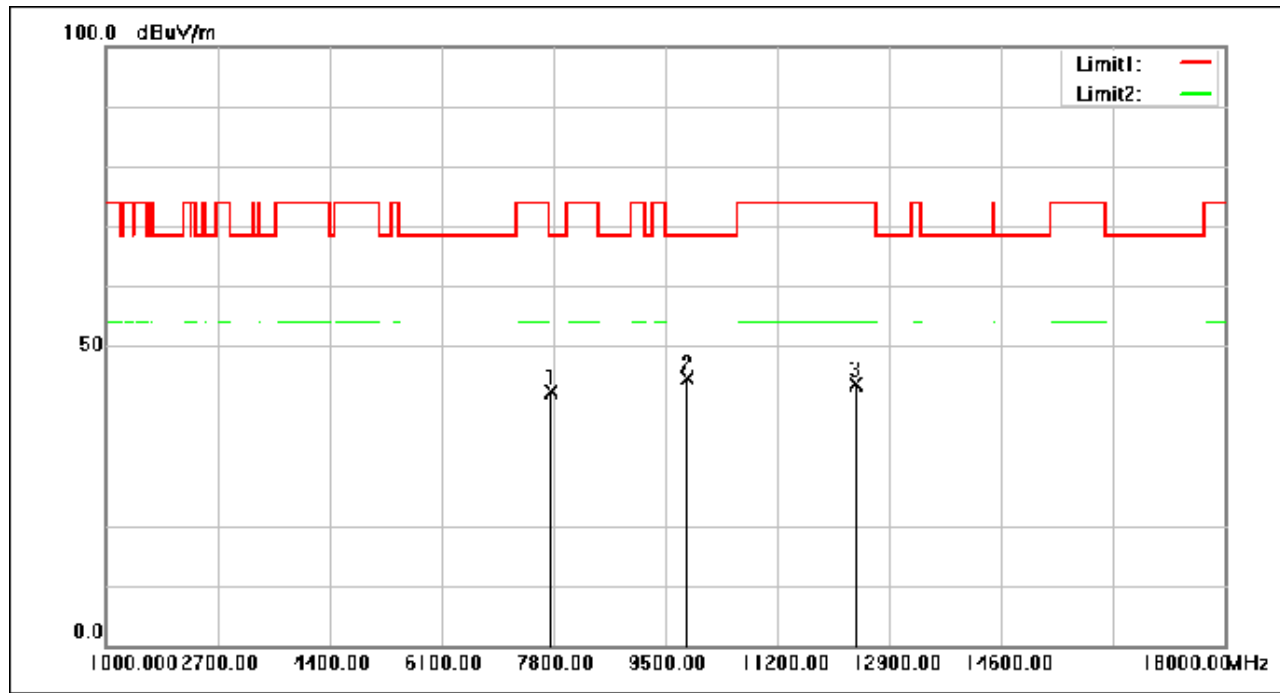

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7771.440	51.95	-9.48	42.47	68.30	-25.83	peak
2	9828.440	51.02	-6.32	44.70	68.30	-23.60	peak
3	12402.240	49.78	-6.05	43.73	74.00	-30.27	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 321 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

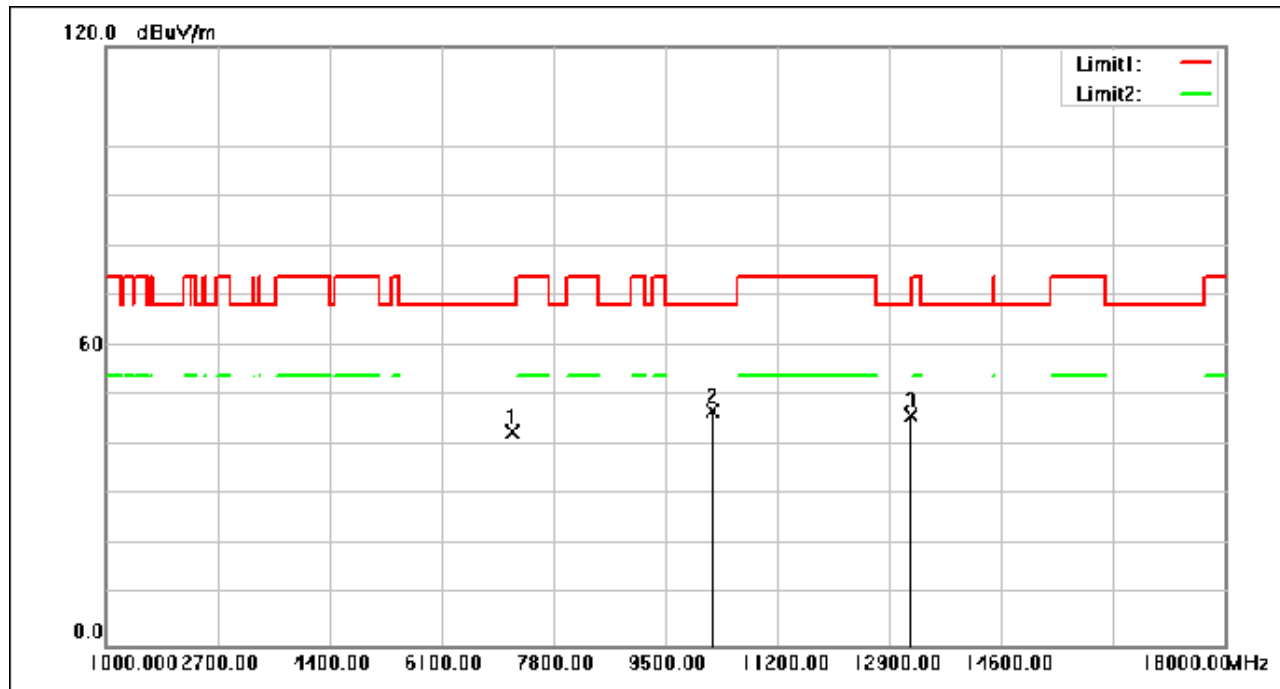

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7177.800	52.44	-9.81	42.63	68.30	-25.67	peak
2	10225.050	53.37	-6.36	47.01	68.30	-21.29	peak
3	13226.400	51.77	-5.58	46.19	68.30	-22.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 322 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

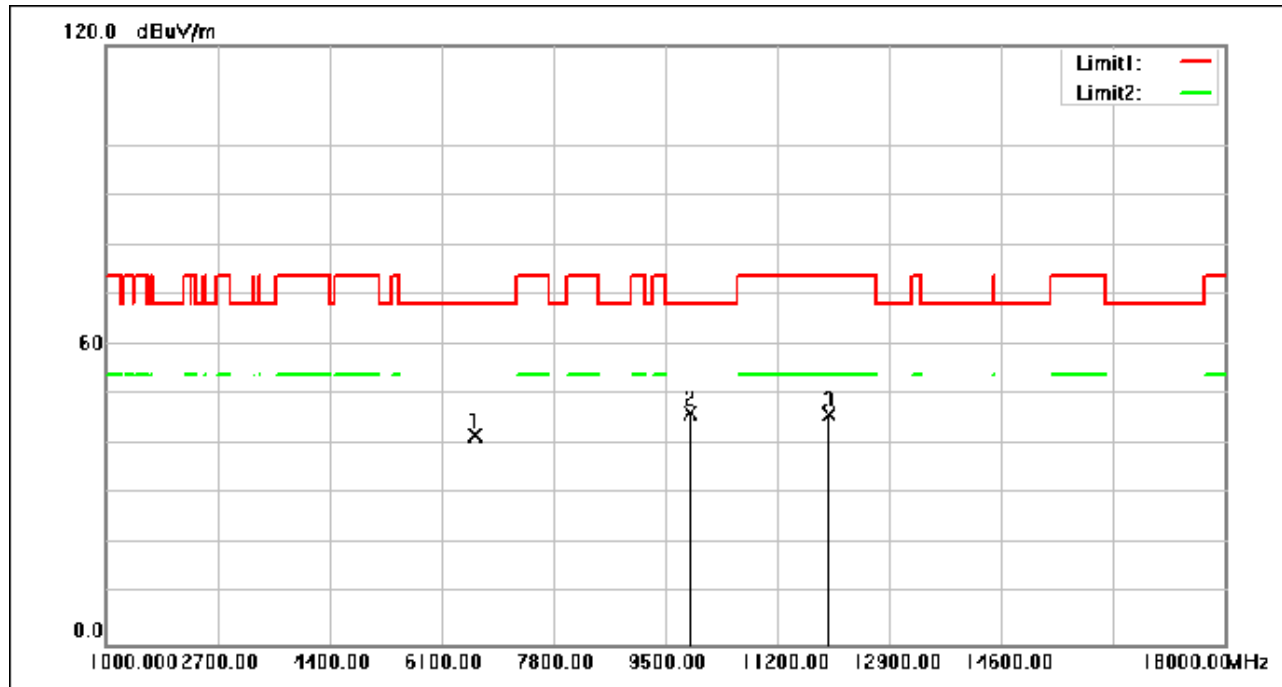

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6610.850	52.32	-10.62	41.70	68.30	-26.60	peak
2	9881.650	52.60	-6.29	46.31	68.30	-21.99	peak
3	11986.250	52.39	-6.39	46.00	74.00	-28.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 323 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

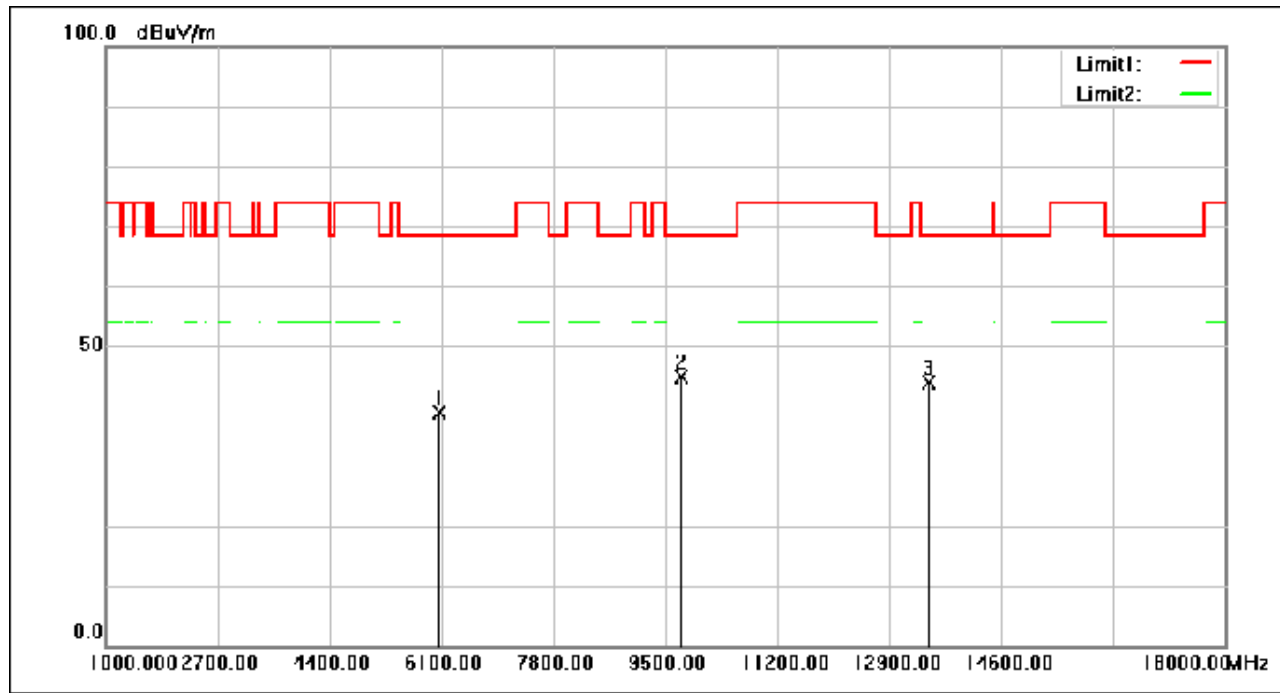

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6082.320	51.66	-12.78	38.88	68.30	-29.42	peak
2	9746.840	51.29	-6.46	44.83	68.30	-23.47	peak
3	13504.520	49.56	-5.74	43.82	68.30	-24.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 324 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

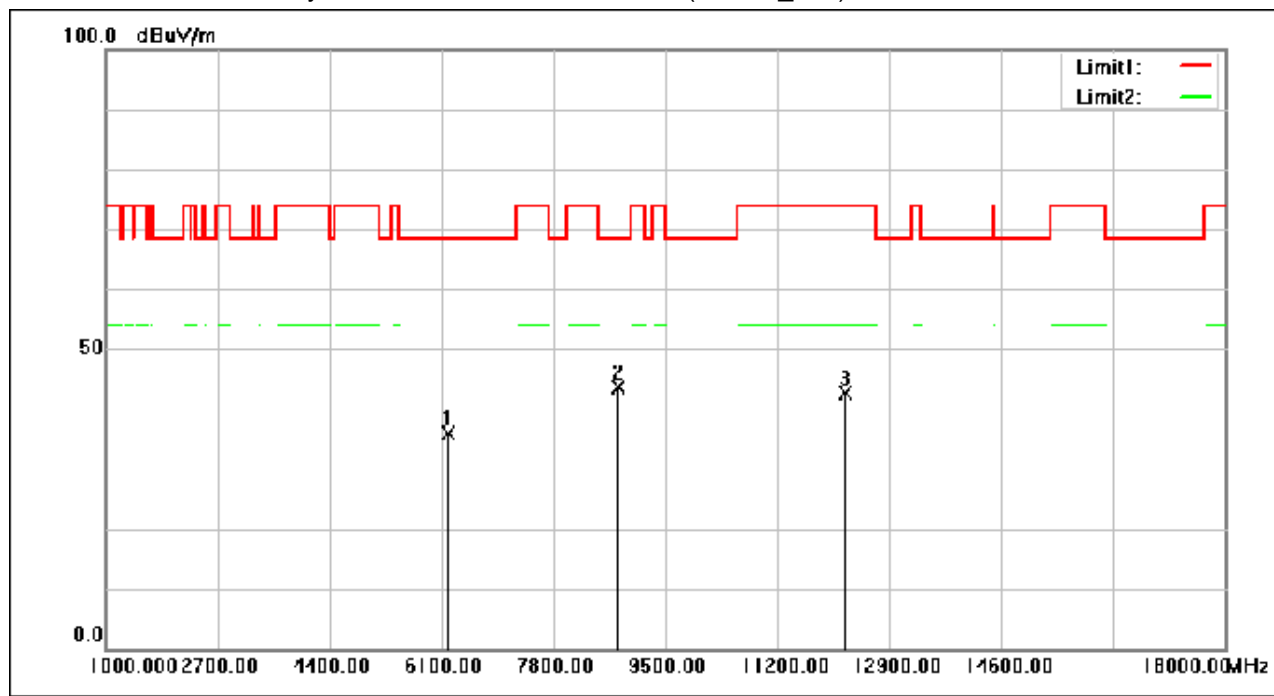

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6204.720	48.29	-12.29	36.00	68.30	-32.30	peak
2	8799.600	51.78	-8.16	43.62	68.30	-24.68	peak
3	12251.280	48.79	-6.17	42.62	74.00	-31.38	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 325 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

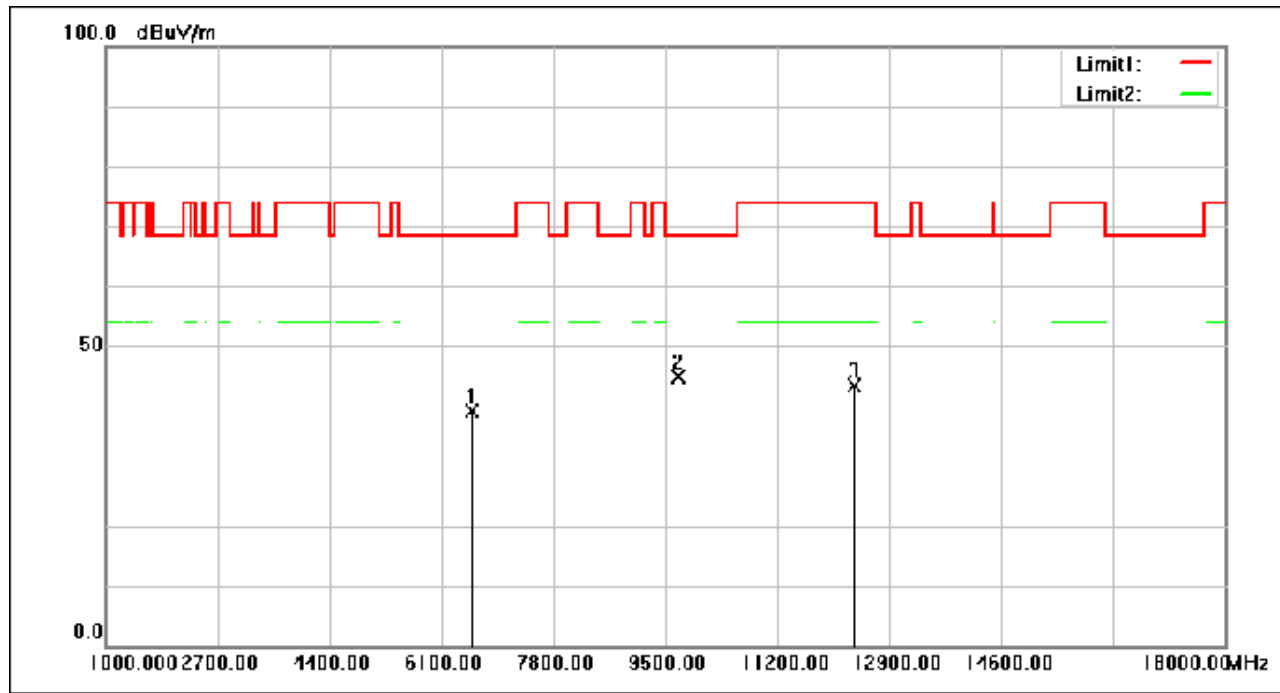

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6562.400	50.00	-10.82	39.18	68.30	-29.12	peak
2	9697.880	51.35	-6.55	44.80	68.30	-23.50	peak
3	12379.800	49.44	-6.06	43.38	74.00	-30.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 326 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

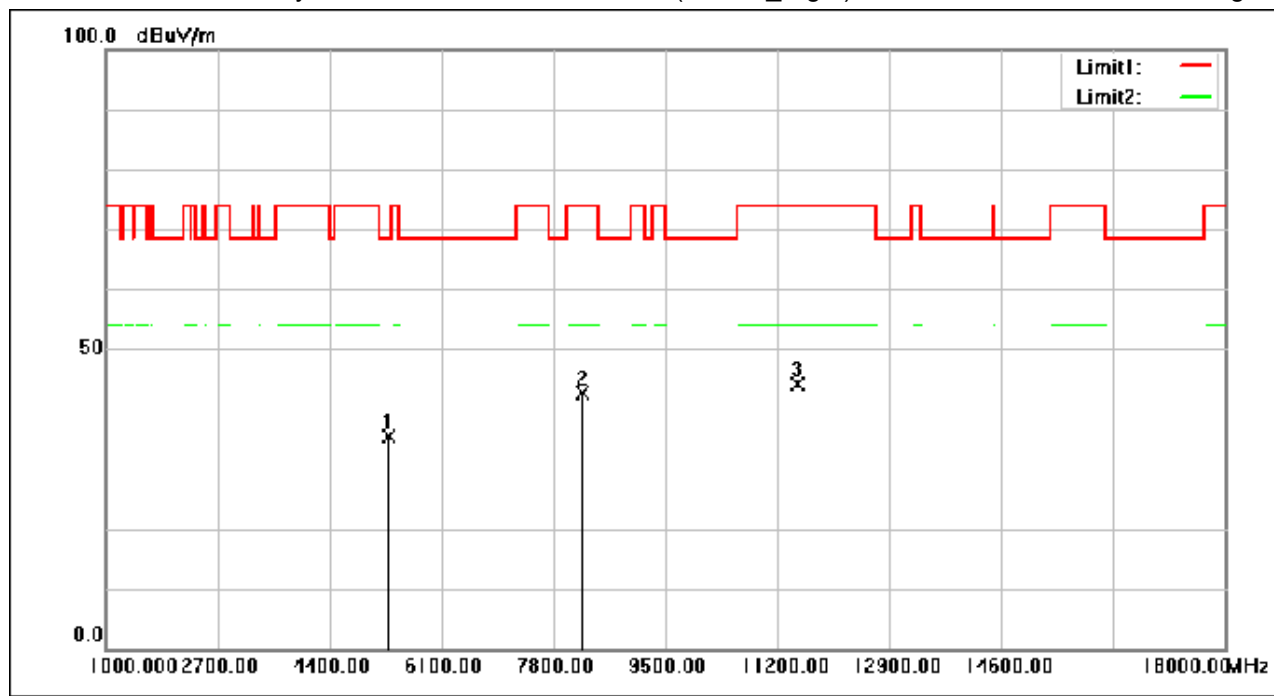

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5311.880	50.92	-15.45	35.47	68.30	-32.83	peak
2	8254.920	51.66	-9.13	42.53	74.00	-31.47	peak
3	11519.600	50.18	-6.07	44.11	74.00	-29.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 327 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

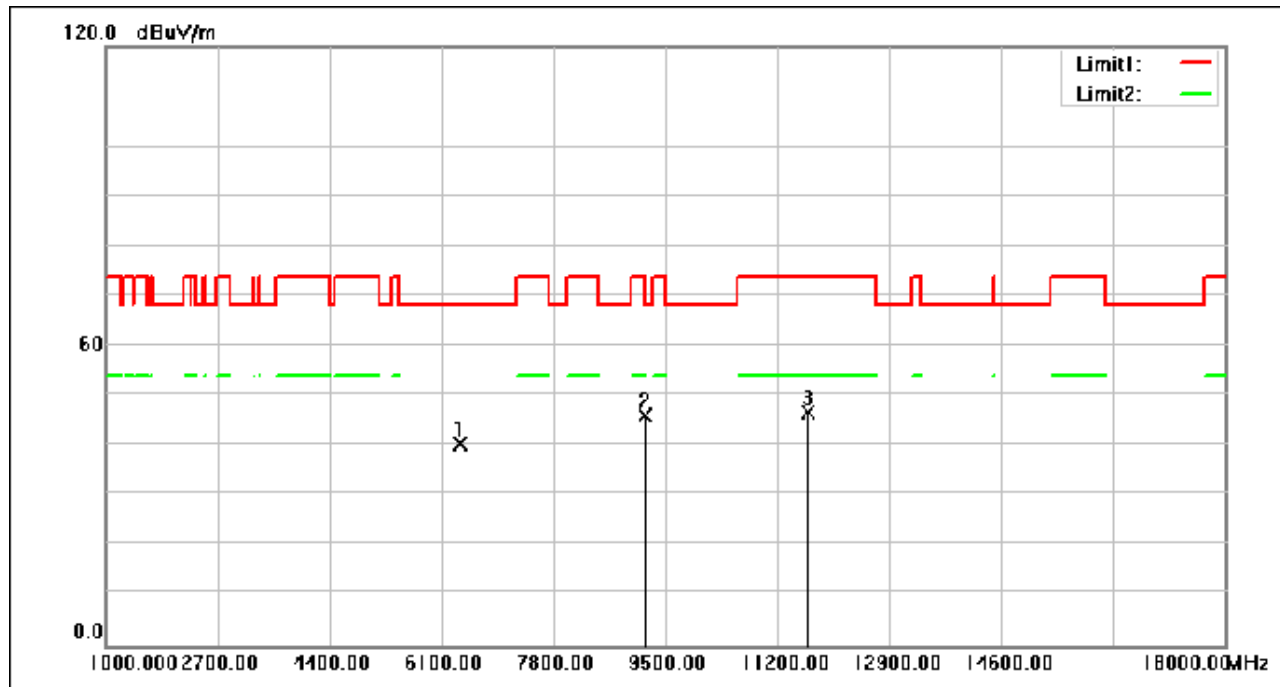

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6399.200	51.91	-11.49	40.42	68.30	-27.88	peak
2	9205.050	53.47	-7.37	46.10	68.30	-22.20	peak
3	11666.650	52.73	-6.19	46.54	74.00	-27.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 328 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

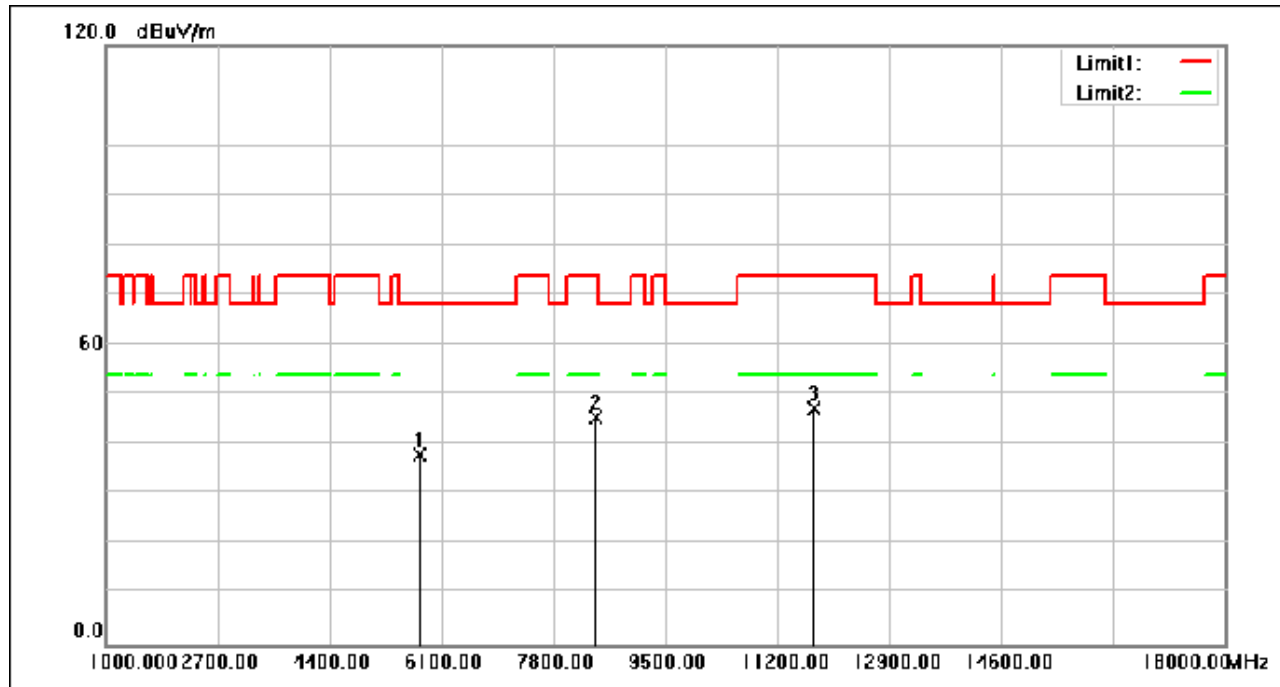

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5777.000	52.39	-14.35	38.04	68.30	-30.26	peak
2	8450.250	54.22	-8.87	45.35	74.00	-28.65	peak
3	11772.050	53.62	-6.27	47.35	74.00	-26.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 329 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

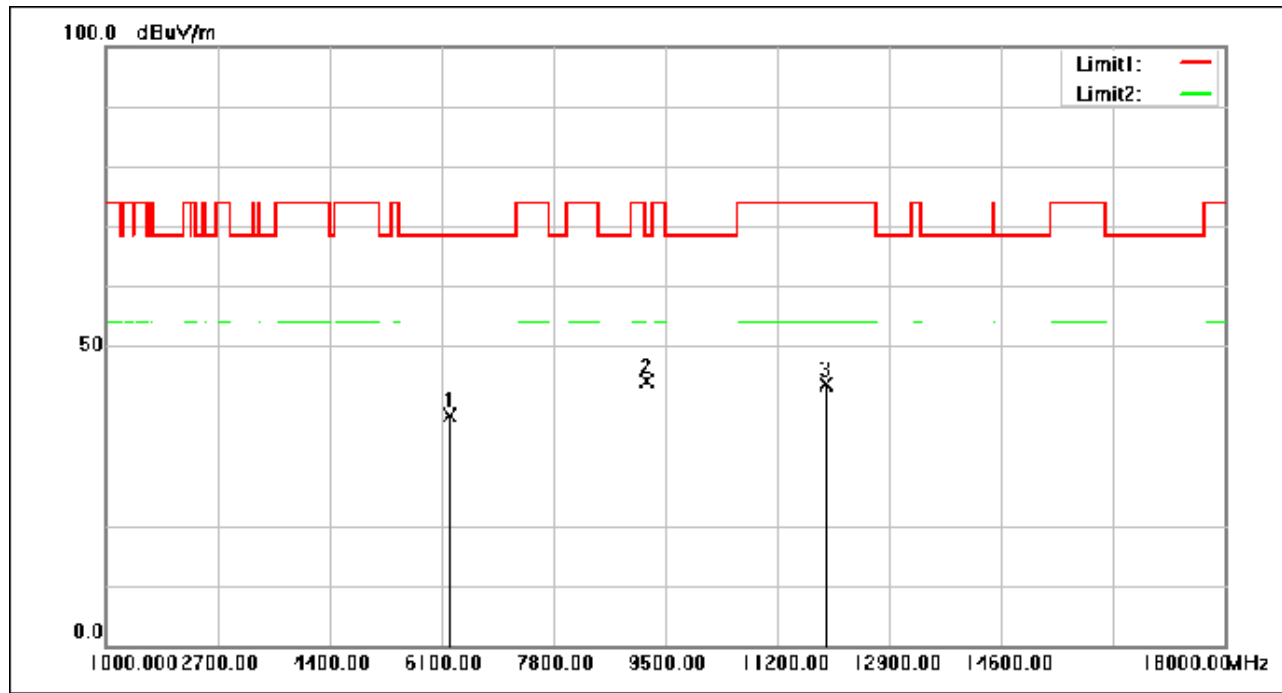

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6234.640	50.65	-12.17	38.48	68.30	-29.82	peak
2	9211.000	51.42	-7.36	44.06	68.30	-24.24	peak
3	11935.080	50.07	-6.39	43.68	74.00	-30.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 330 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

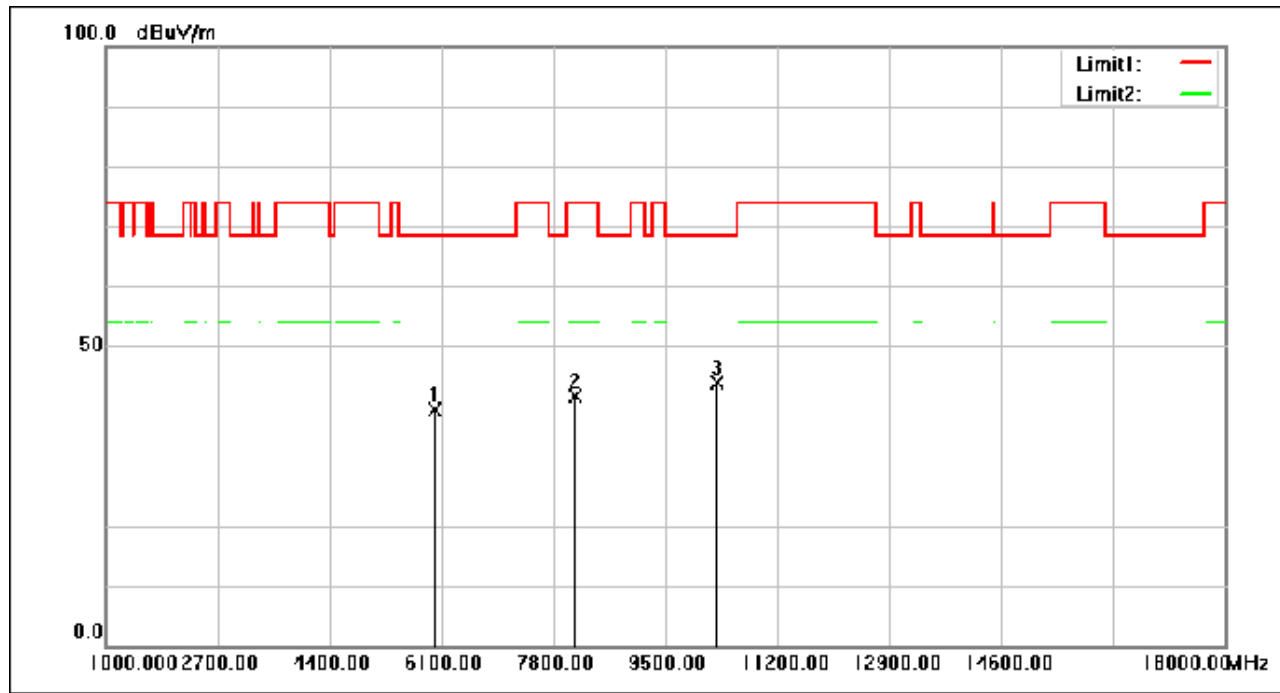

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6006.840	52.51	-13.05	39.46	68.30	-28.84	peak
2	8131.160	50.82	-9.30	41.52	74.00	-32.48	peak
3	10291.520	50.18	-6.36	43.82	68.30	-24.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 331 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

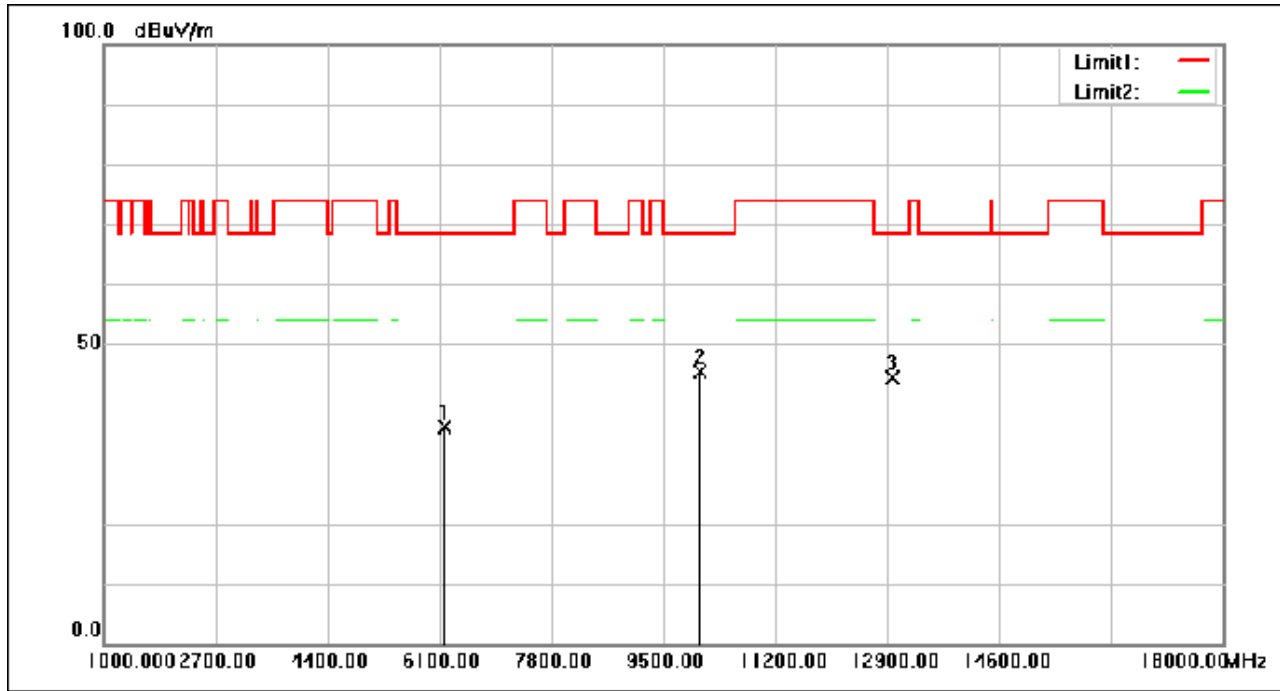

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6201.320	48.31	-12.30	36.01	68.30	-32.29	peak
2	10074.600	51.71	-6.34	45.37	68.30	-22.93	peak
3	12995.880	49.85	-5.54	44.31	68.30	-23.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 332 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

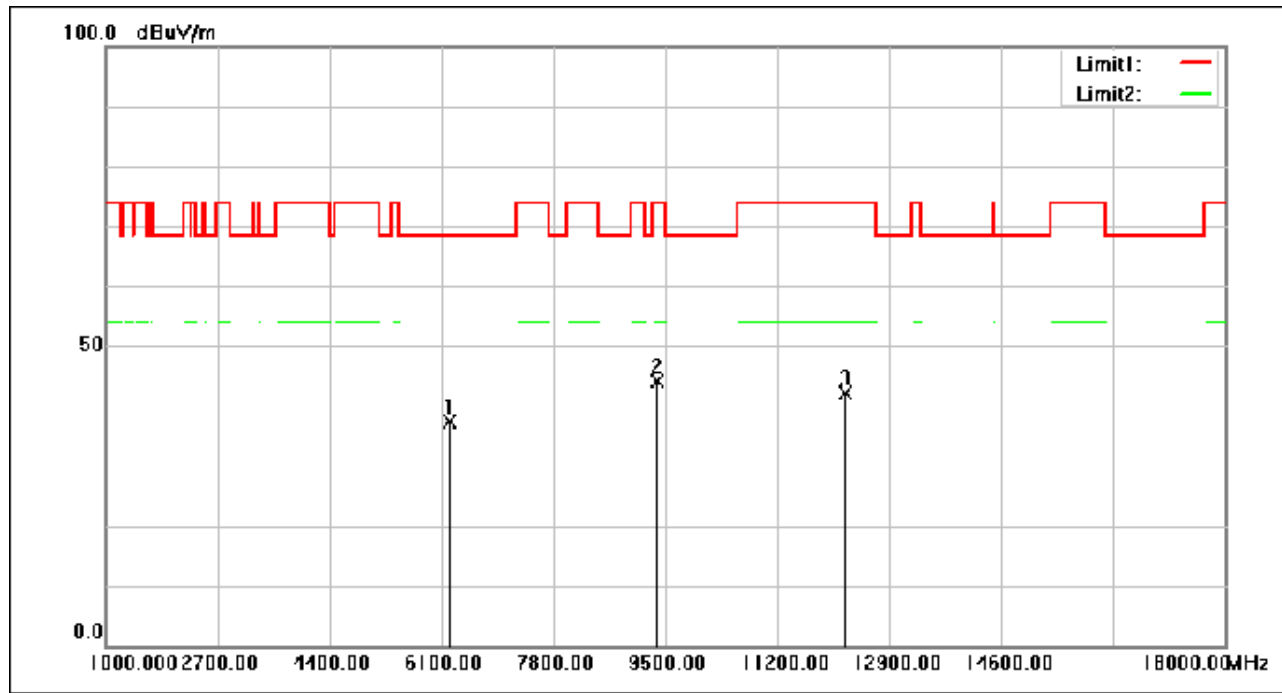

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6232.600	49.46	-12.18	37.28	68.30	-31.02	peak
2	9395.280	51.13	-7.07	44.06	74.00	-29.94	peak
3	12242.440	48.38	-6.18	42.20	74.00	-31.80	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 333 of 929

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

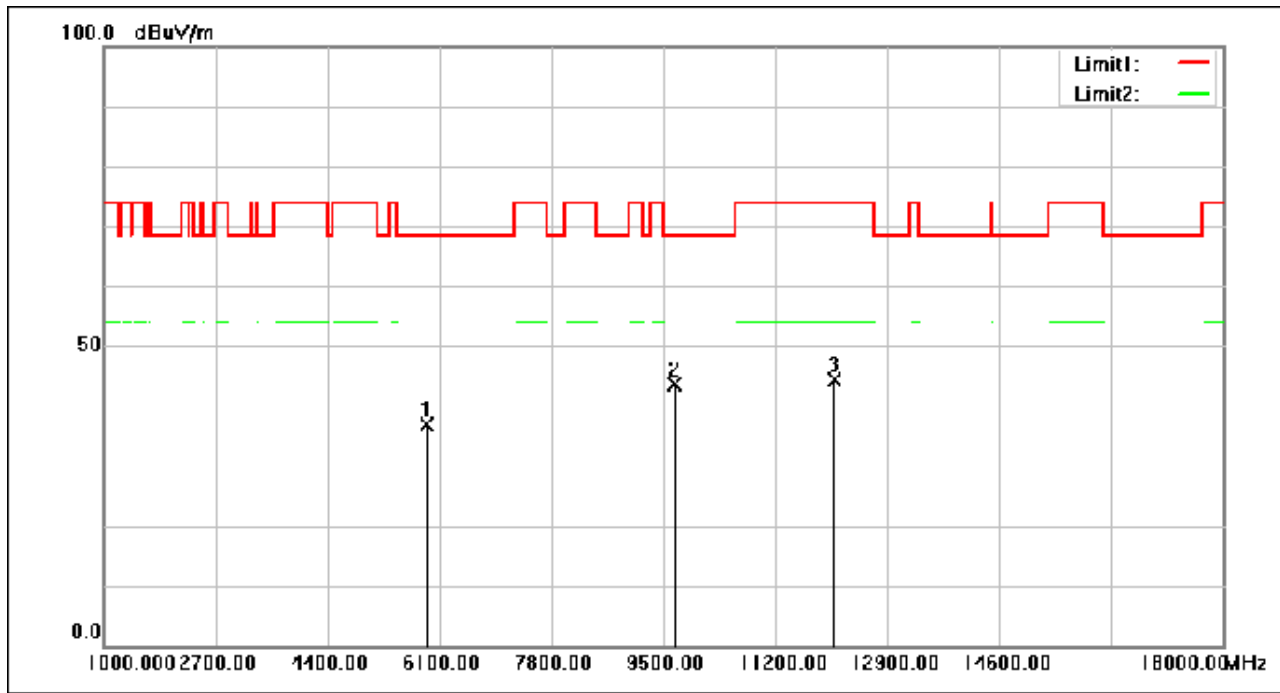

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5926.600	50.53	-13.55	36.98	68.30	-31.32	peak
2	9676.120	50.30	-6.59	43.71	68.30	-24.59	peak
3	12110.520	50.77	-6.30	44.47	74.00	-29.53	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 334 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

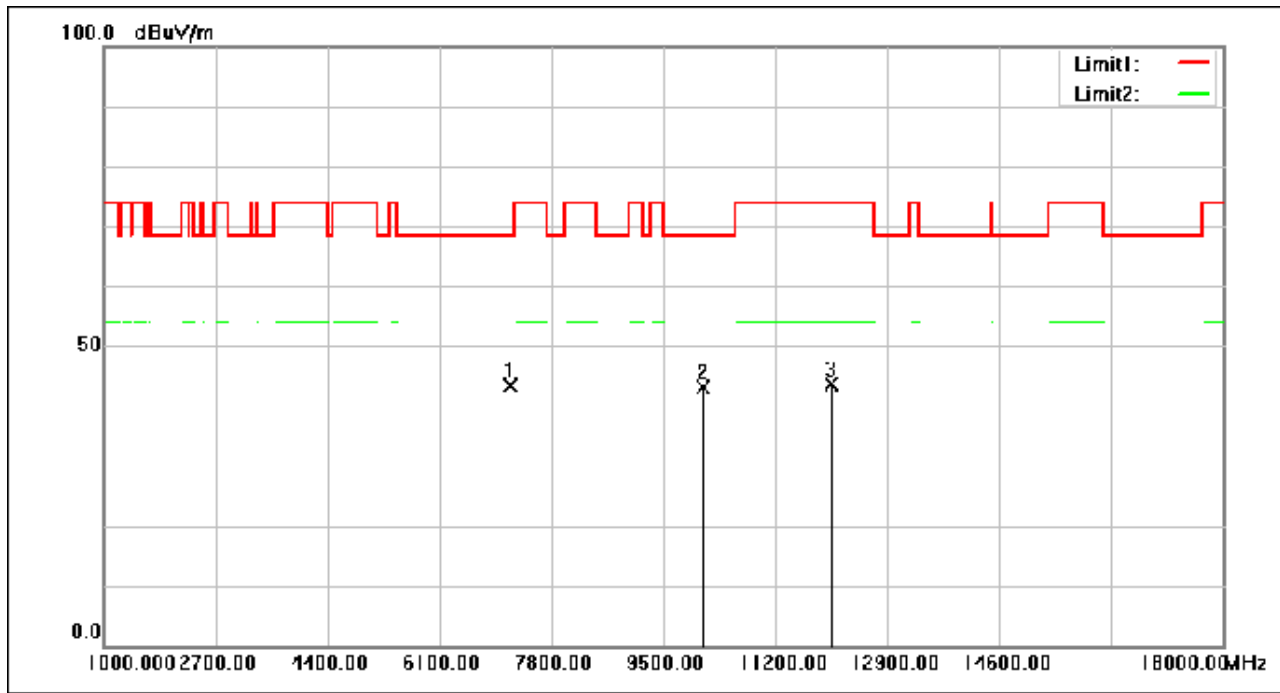

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7174.400	53.10	-9.82	43.28	68.30	-25.02	peak
2	10106.560	49.46	-6.34	43.12	68.30	-25.18	peak
3	12054.080	50.01	-6.34	43.67	74.00	-30.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 335 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

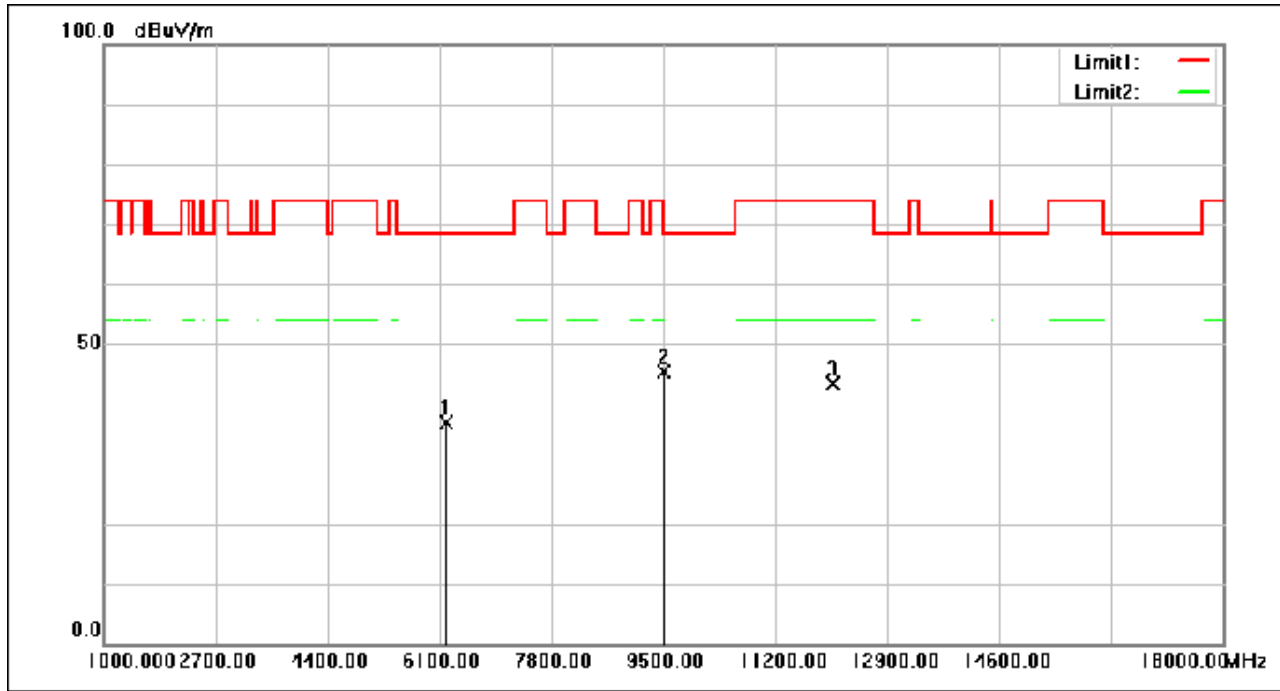

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6217.640	49.23	-12.24	36.99	68.30	-31.31	peak
2	9528.560	52.27	-6.86	45.41	68.30	-22.89	peak
3	12073.120	49.67	-6.33	43.34	74.00	-30.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 336 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

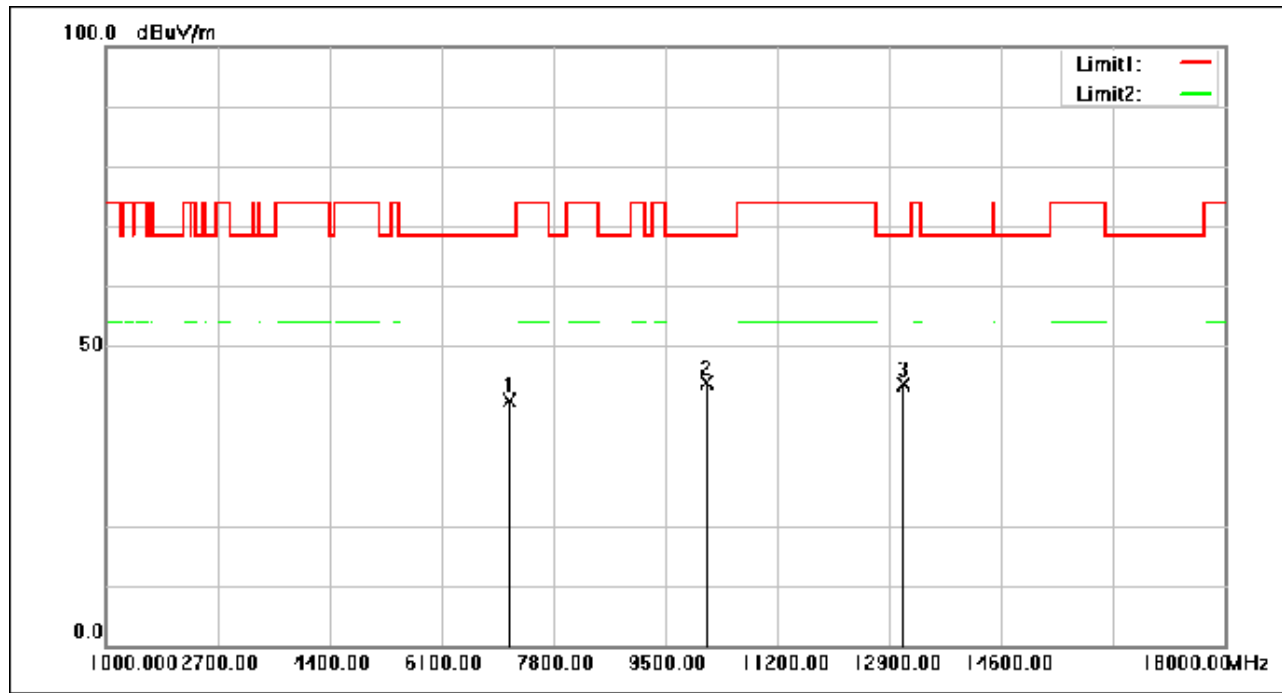

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7143.120	50.72	-9.84	40.88	68.30	-27.42	peak
2	10145.320	50.31	-6.35	43.96	68.30	-24.34	peak
3	13122.360	49.03	-5.52	43.51	68.30	-24.79	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 337 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

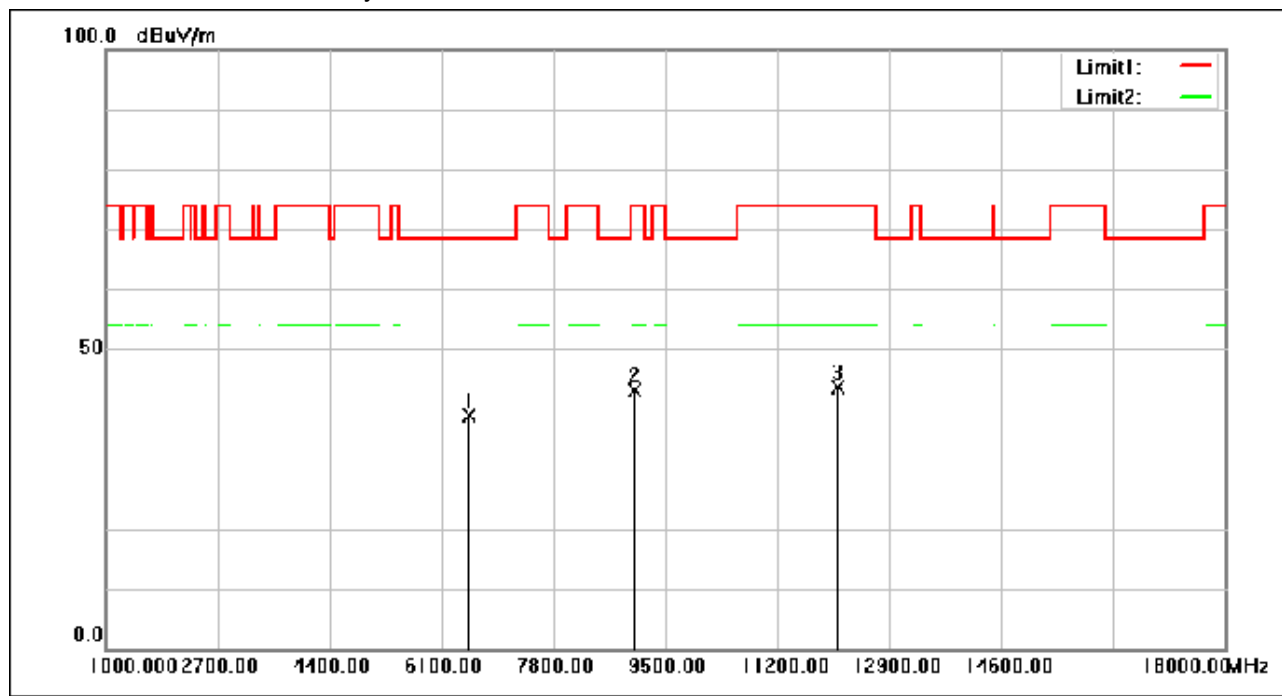

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6533.840	49.78	-10.94	38.84	68.30	-29.46	peak
2	9053.240	50.64	-7.61	43.03	74.00	-30.97	peak
3	12132.280	49.90	-6.27	43.63	74.00	-30.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 338 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

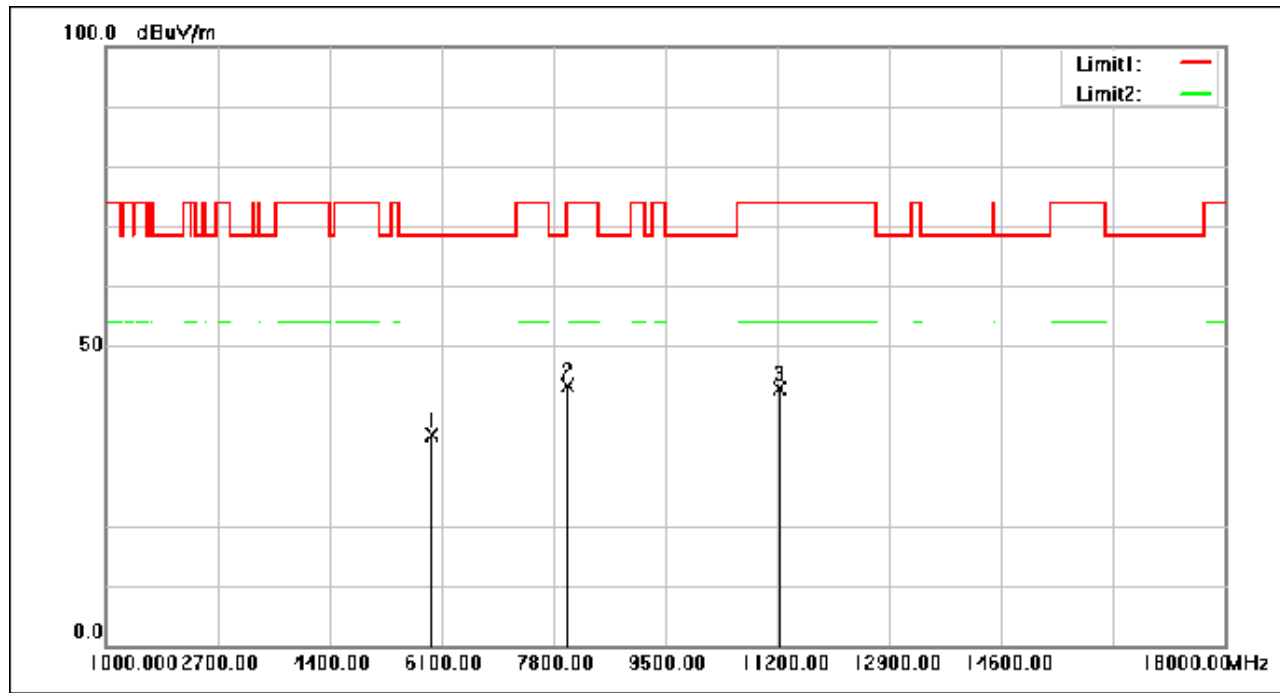

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5947.680	48.44	-13.41	35.03	68.30	-33.27	peak
2	8029.840	52.88	-9.46	43.42	74.00	-30.58	peak
3	11236.720	49.21	-6.22	42.99	74.00	-31.01	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 339 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

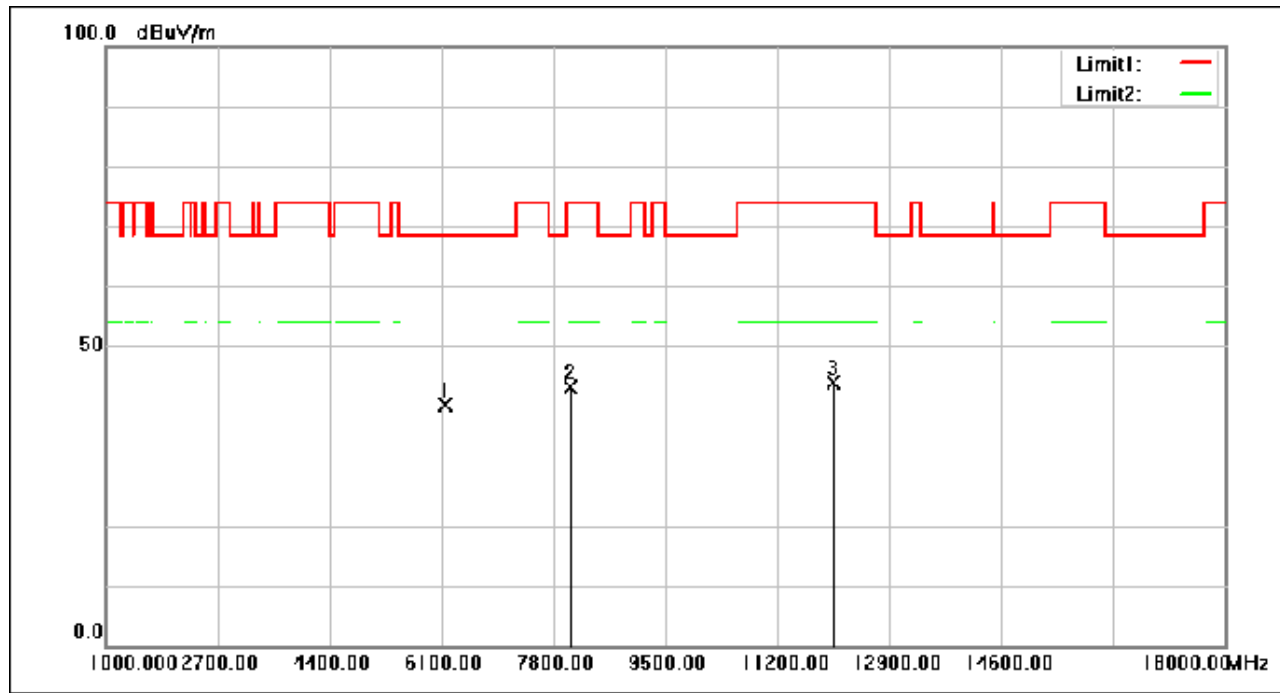

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6159.840	52.71	-12.48	40.23	68.30	-28.07	peak
2	8065.880	52.43	-9.40	43.03	74.00	-30.97	peak
3	12066.320	50.32	-6.33	43.99	74.00	-30.01	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 340 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

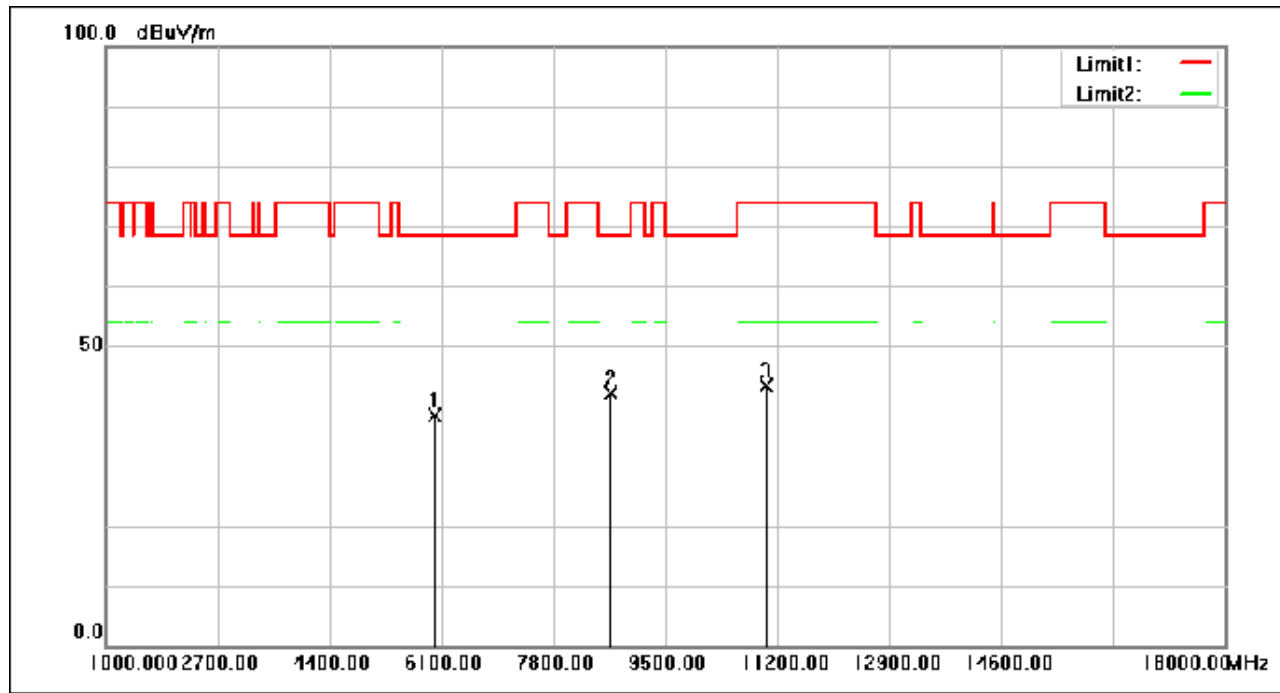

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6014.320	51.38	-13.03	38.35	68.30	-29.95	peak
2	8669.720	50.44	-8.43	42.01	68.30	-26.29	peak
3	11037.480	49.79	-6.34	43.45	74.00	-30.55	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 341 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

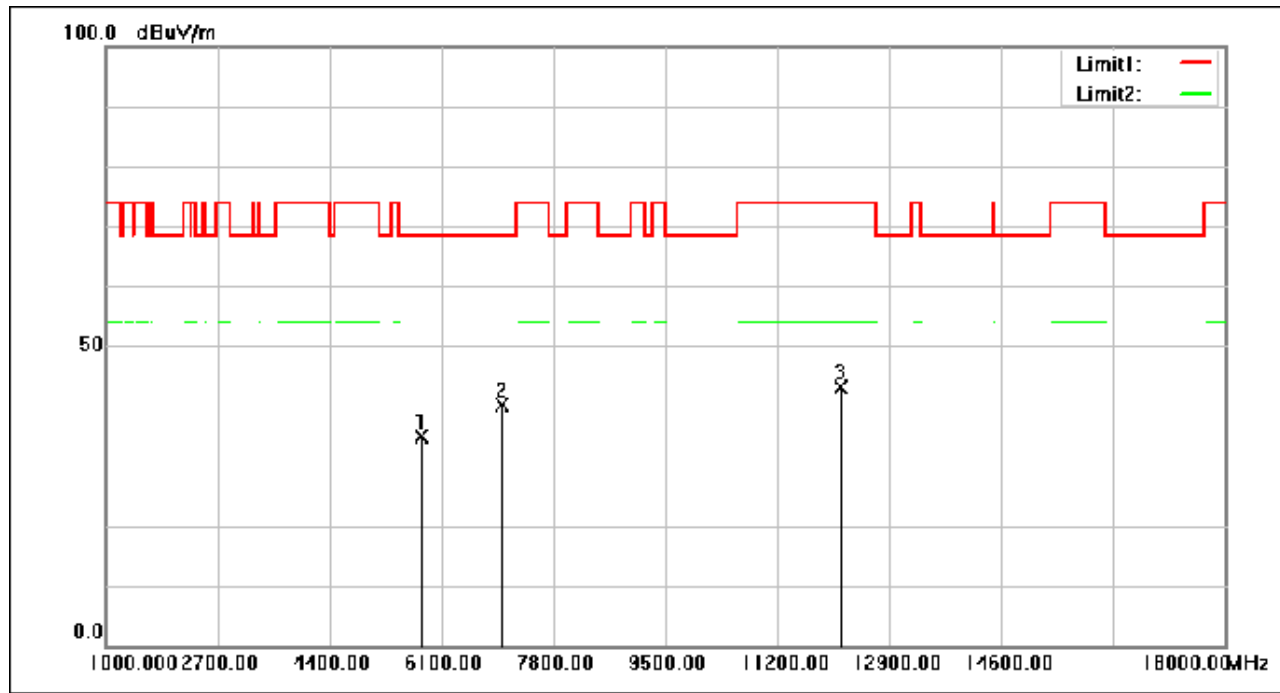

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5802.840	49.20	-14.24	34.96	68.30	-33.34	peak
2	7026.840	50.13	-9.94	40.19	68.30	-28.11	peak
3	12179.200	49.39	-6.23	43.16	74.00	-30.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 342 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

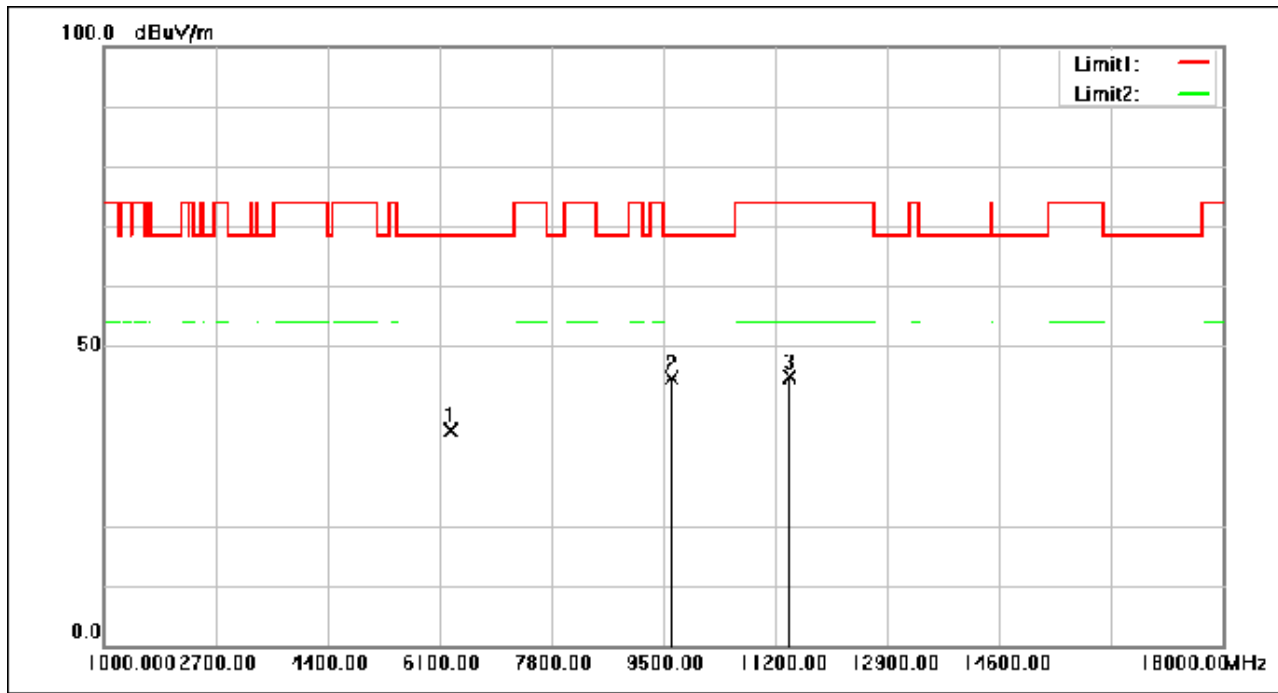

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6277.480	47.78	-11.99	35.79	68.30	-32.51	peak
2	9619.000	51.31	-6.69	44.62	68.30	-23.68	peak
3	11426.440	51.06	-6.10	44.96	74.00	-29.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 343 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

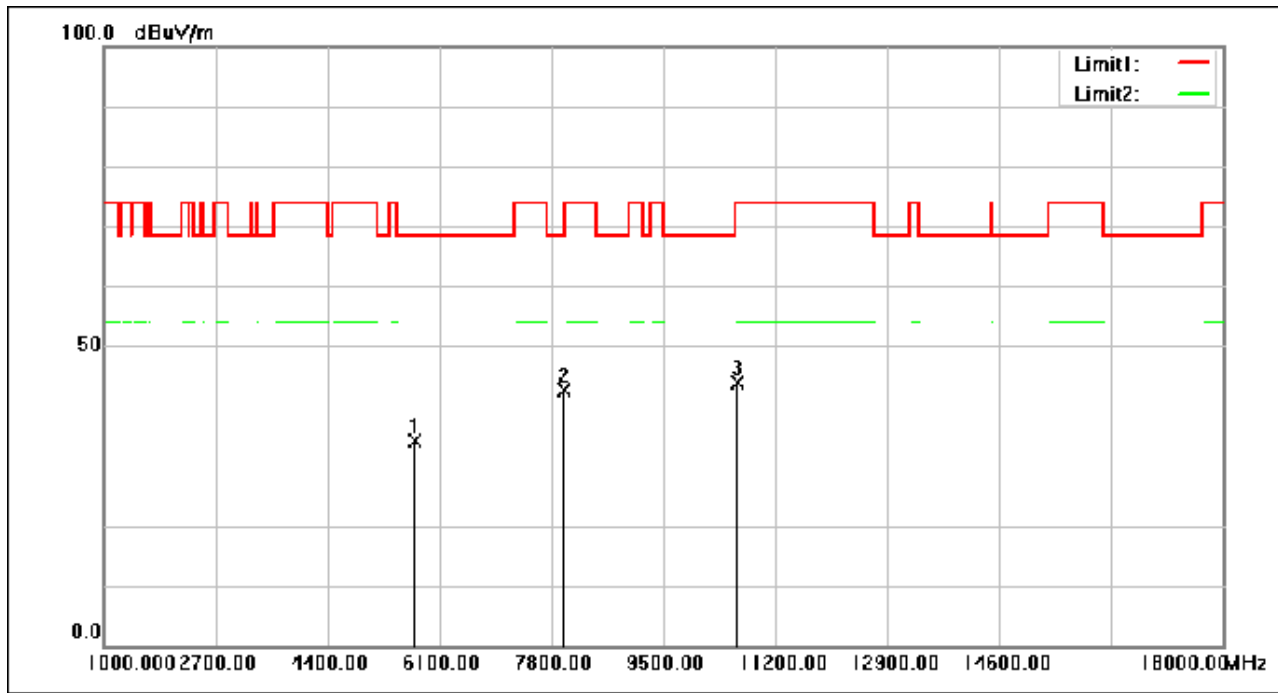

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5726.680	48.77	-14.58	34.19	68.30	-34.11	peak
2	7995.160	52.22	-9.50	42.72	68.30	-25.58	peak
3	10632.200	50.24	-6.38	43.86	74.00	-30.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 344 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

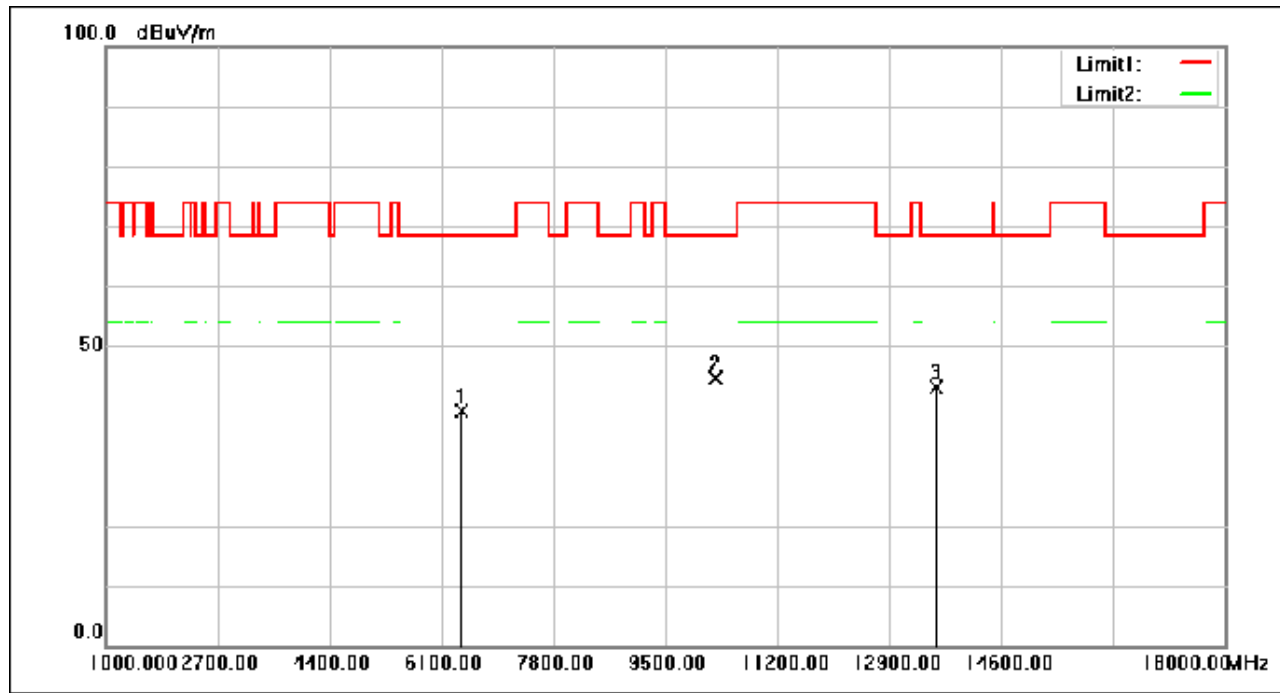

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6408.040	50.54	-11.45	39.09	68.30	-29.21	peak
2	10265.000	51.00	-6.36	44.64	68.30	-23.66	peak
3	13620.120	49.02	-5.88	43.14	68.30	-25.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 345 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

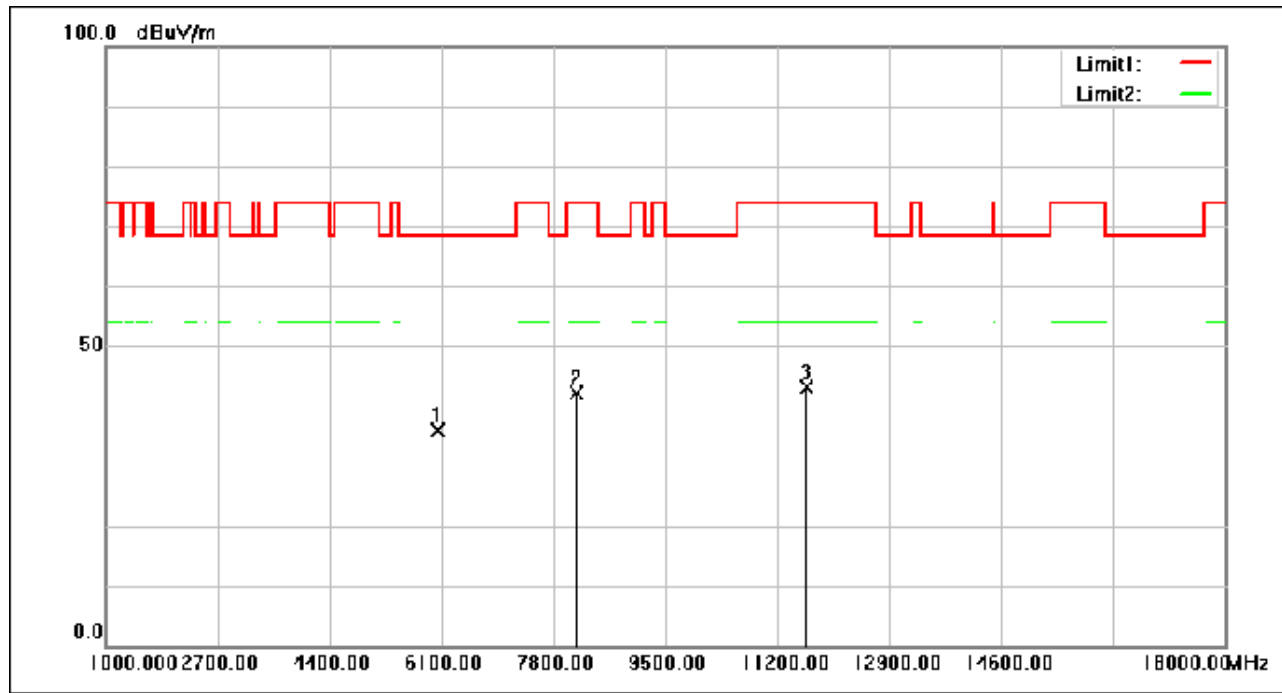

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6061.920	48.84	-12.85	35.99	68.30	-32.31	peak
2	8158.360	51.32	-9.27	42.05	74.00	-31.95	peak
3	11642.680	49.25	-6.18	43.07	74.00	-30.93	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 346 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

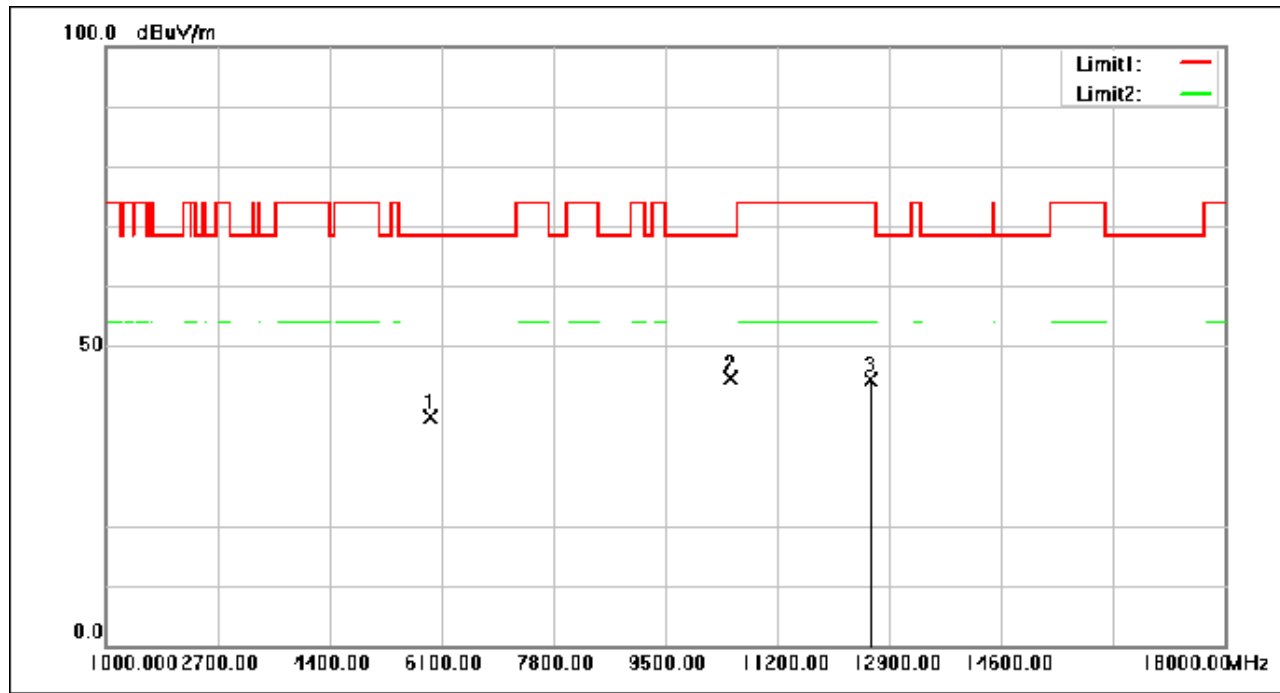

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5937.480	51.62	-13.48	38.14	68.30	-30.16	peak
2	10498.920	51.09	-6.39	44.70	68.30	-23.60	peak
3	12615.760	50.20	-5.87	44.33	74.00	-29.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 347 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

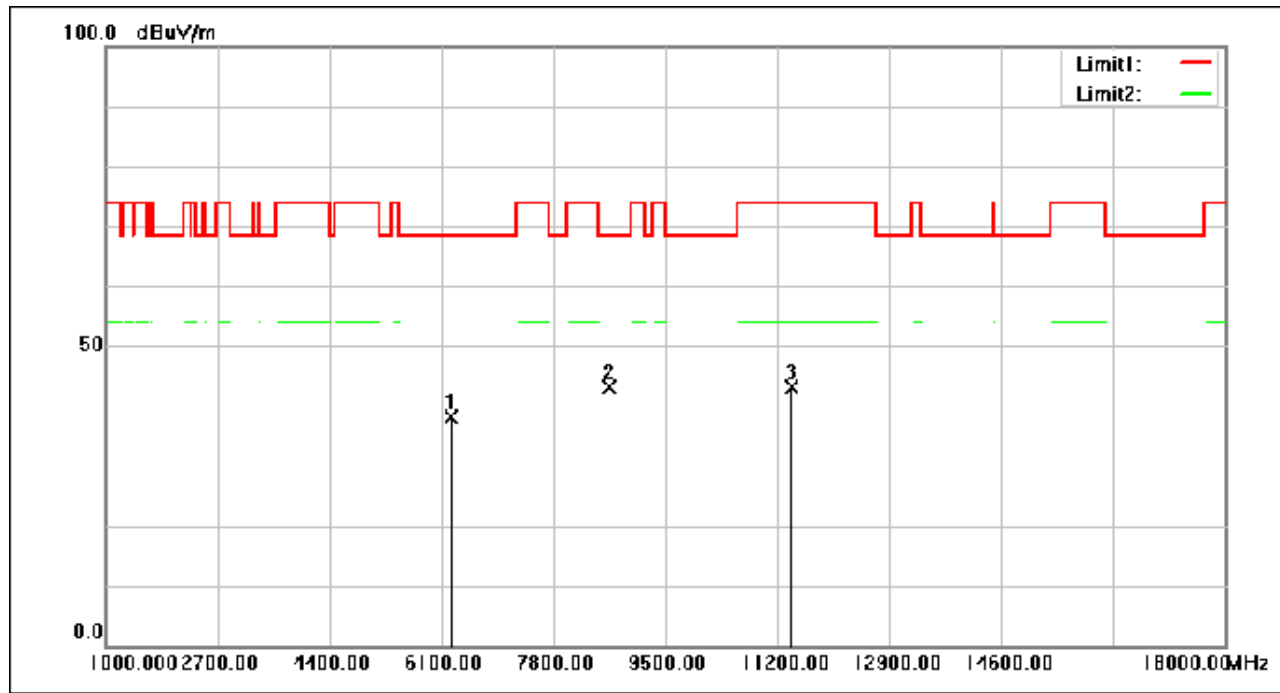

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6263.200	50.16	-12.05	38.11	68.30	-30.19	peak
2	8663.600	51.63	-8.45	43.18	68.30	-25.12	peak
3	11428.480	49.35	-6.11	43.24	74.00	-30.76	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 348 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

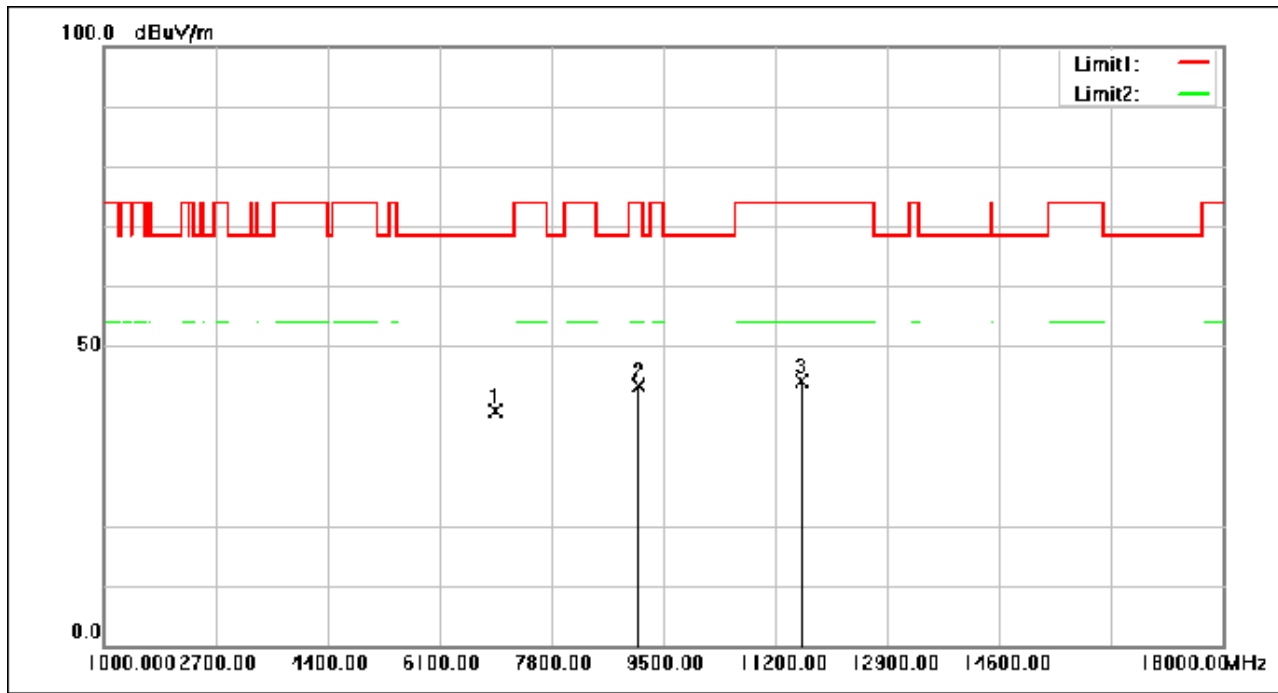

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6950.000	49.01	-10.00	39.01	68.30	-29.29	peak
2	9138.920	50.89	-7.48	43.41	74.00	-30.59	peak
3	11595.760	50.25	-6.14	44.11	74.00	-29.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 349 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

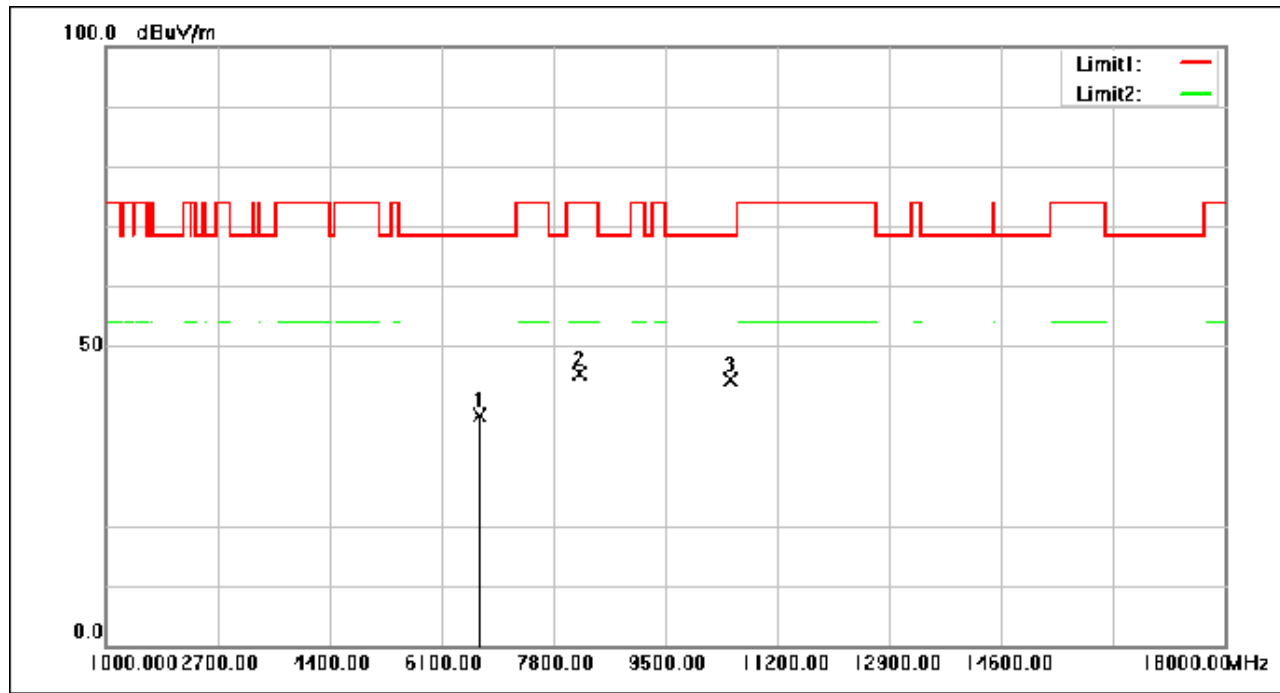

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6691.600	48.58	-10.29	38.29	68.30	-30.01	peak
2	8191.680	54.52	-9.22	45.30	74.00	-28.70	peak
3	10501.640	50.66	-6.39	44.27	68.30	-24.03	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 350 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

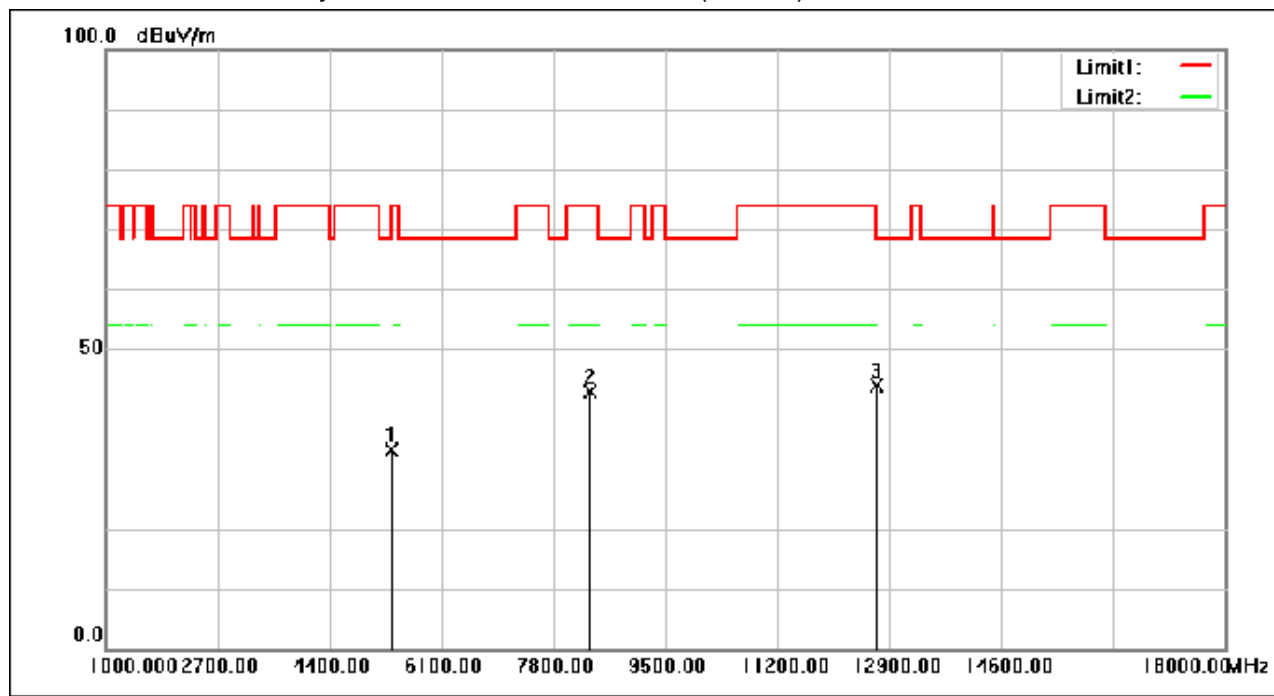

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5339.760	48.67	-15.48	33.19	68.30	-35.11	peak
2	8373.240	51.85	-8.97	42.88	74.00	-31.12	peak
3	12721.840	49.63	-5.78	43.85	68.30	-24.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 351 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

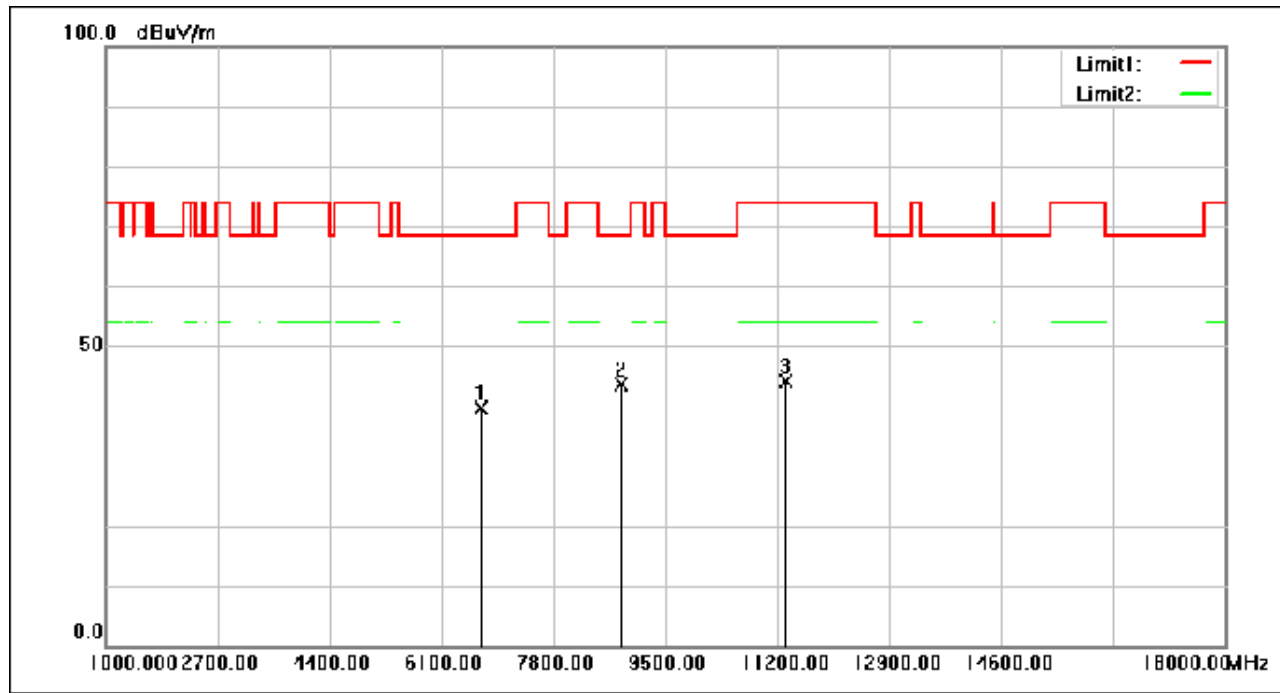

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6696.360	49.96	-10.27	39.69	68.30	-28.61	peak
2	8837.000	51.74	-8.08	43.66	68.30	-24.64	peak
3	11319.000	50.24	-6.16	44.08	74.00	-29.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 352 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

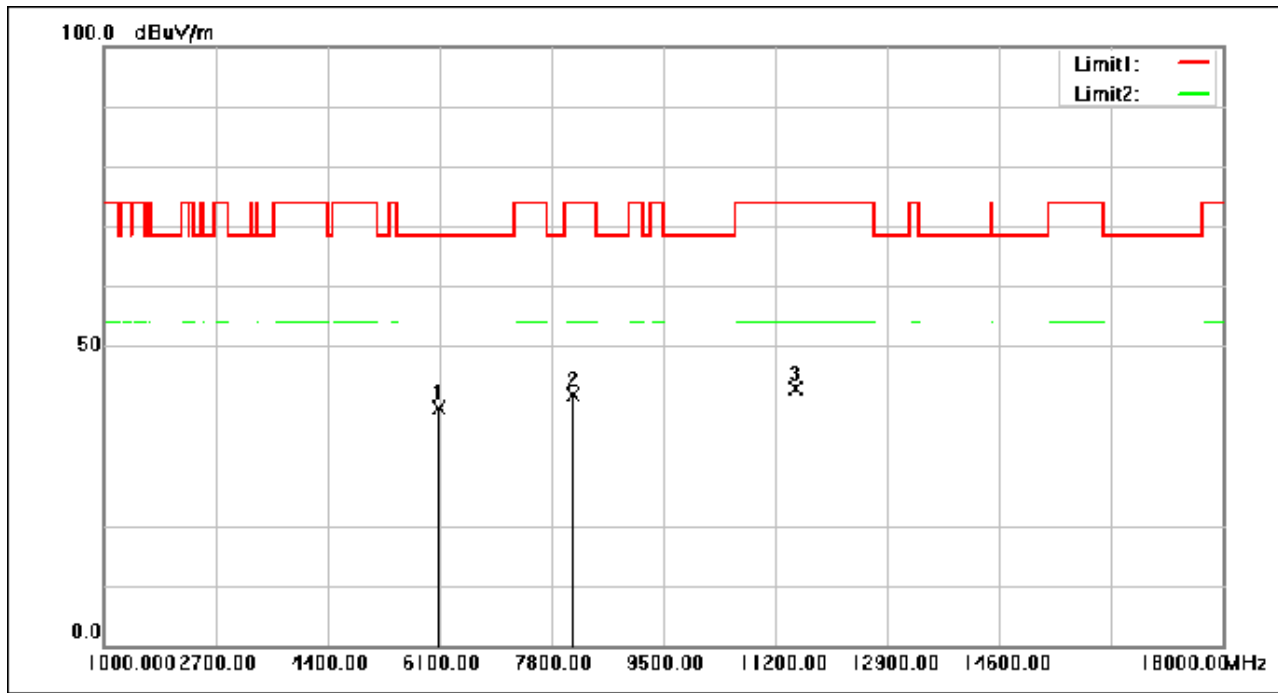

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6084.360	52.32	-12.77	39.55	68.30	-28.75	peak
2	8131.160	51.27	-9.30	41.97	74.00	-32.03	peak
3	11506.000	48.90	-6.06	42.84	74.00	-31.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 353 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

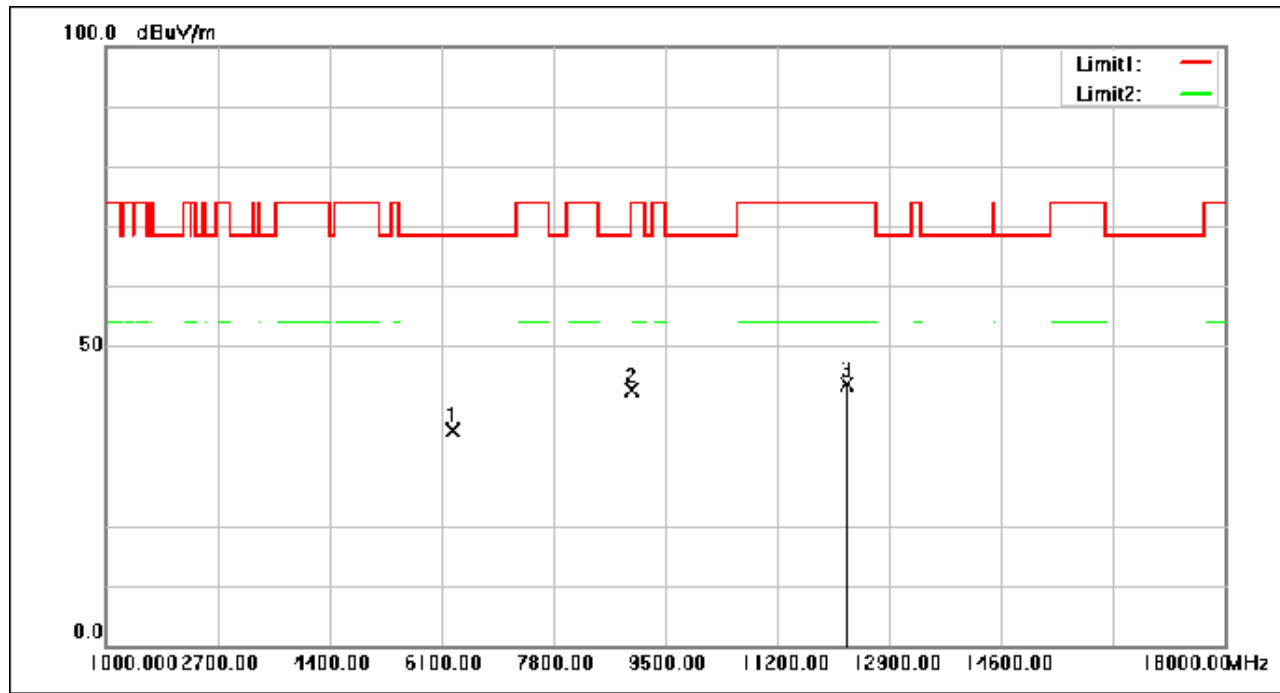

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6278.160	47.88	-11.99	35.89	68.30	-32.41	peak
2	8999.520	50.32	-7.70	42.62	68.30	-25.68	peak
3	12260.120	49.91	-6.17	43.74	74.00	-30.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 354 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

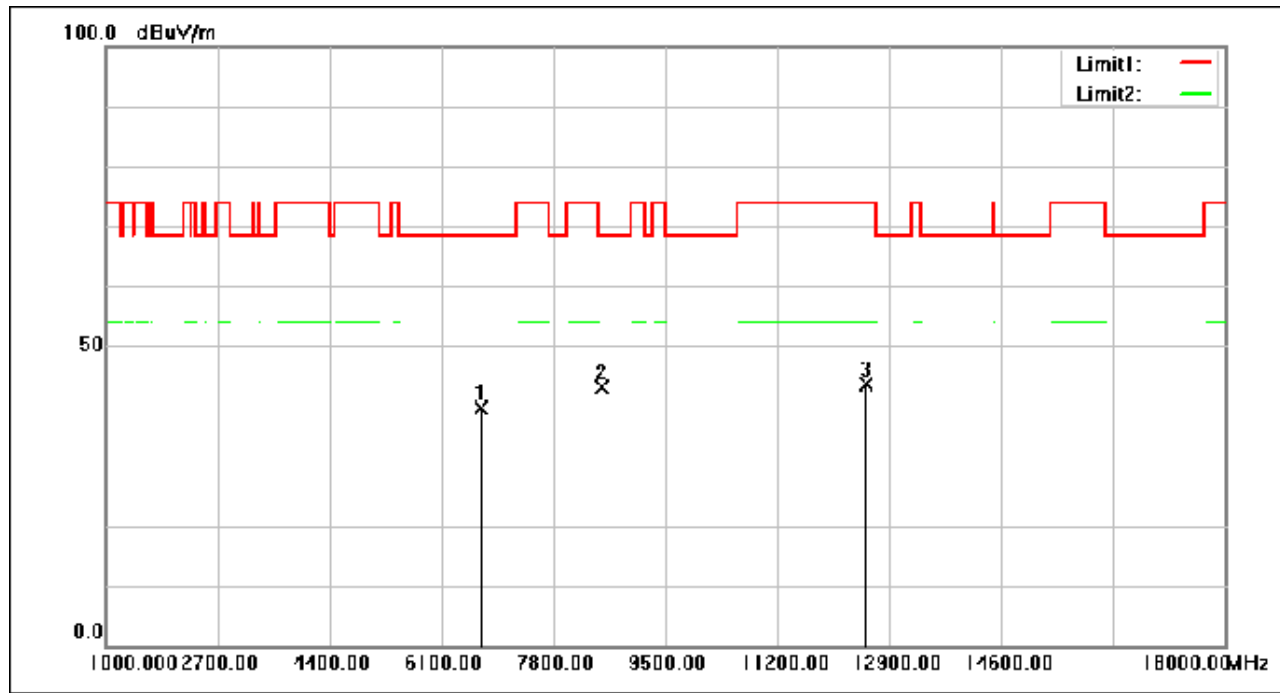

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6703.840	49.90	-10.24	39.66	68.30	-28.64	peak
2	8542.560	51.97	-8.72	43.25	68.30	-25.05	peak
3	12553.880	49.62	-5.92	43.70	74.00	-30.30	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 355 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

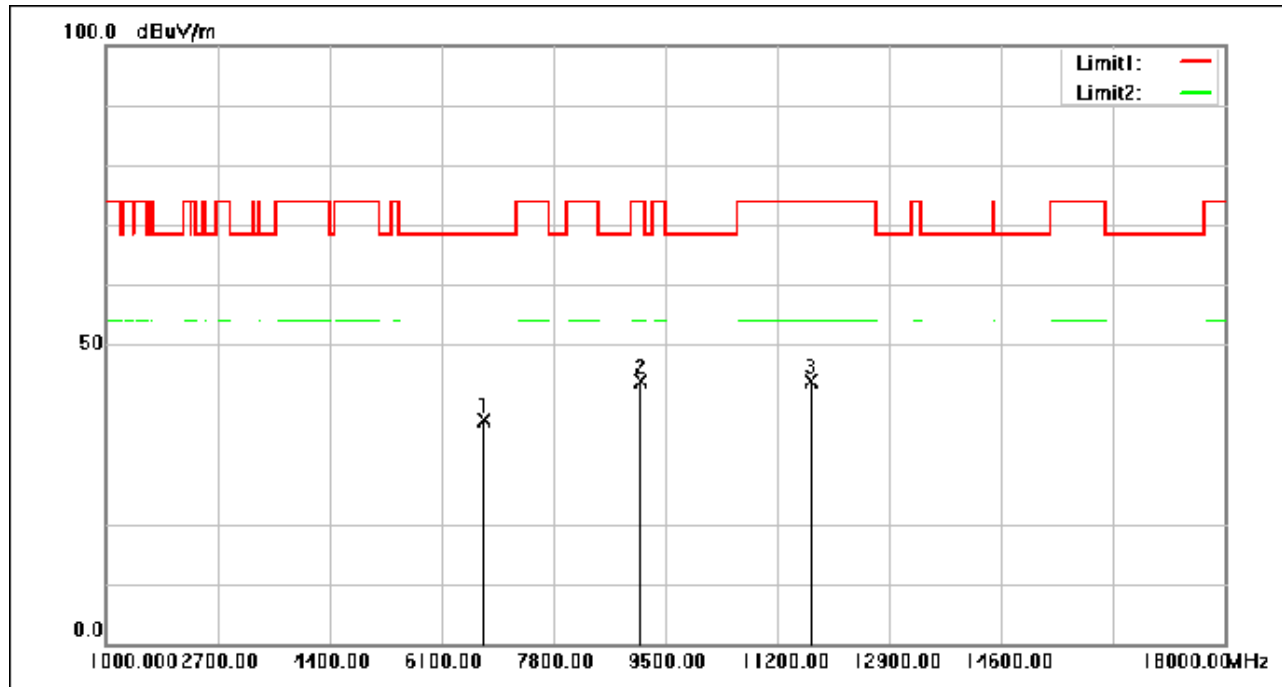

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6761.640	47.50	-10.12	37.38	68.30	-30.92	peak
2	9138.920	51.35	-7.48	43.87	74.00	-30.13	peak
3	11722.240	50.05	-6.23	43.82	74.00	-30.18	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 356 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

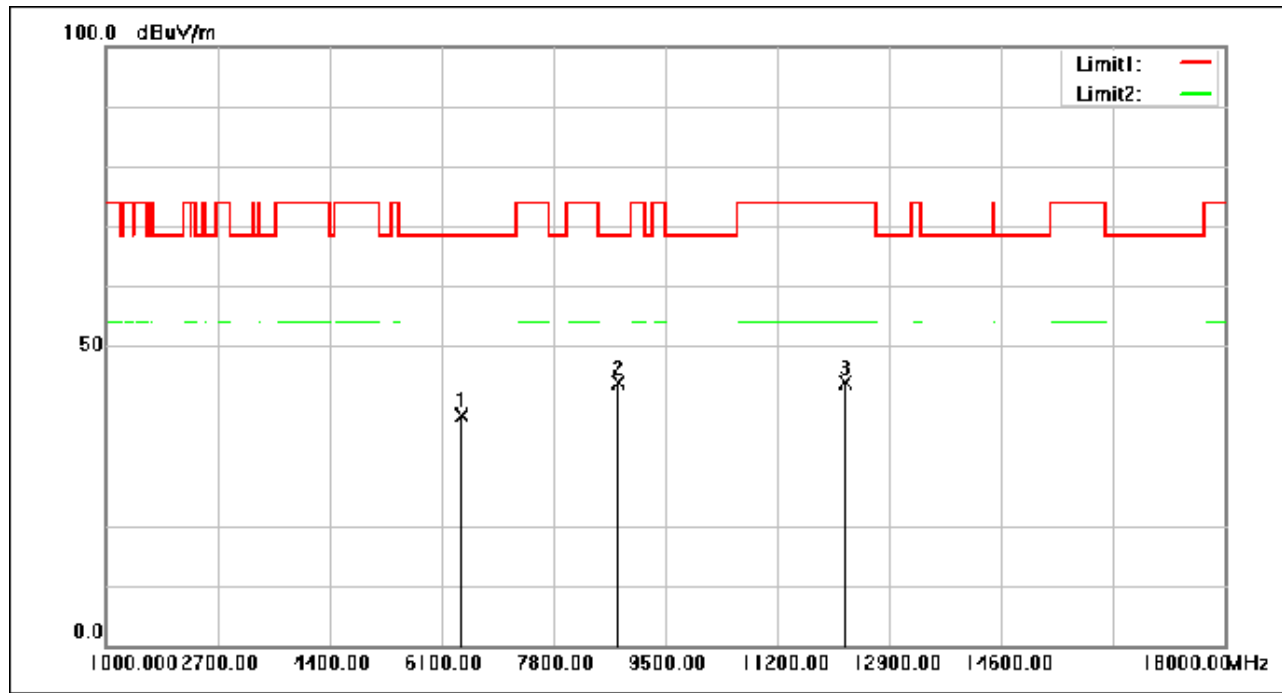

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6406.680	49.87	-11.46	38.41	68.30	-29.89	peak
2	8800.960	52.02	-8.16	43.86	68.30	-24.44	peak
3	12245.840	49.99	-6.18	43.81	74.00	-30.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 357 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

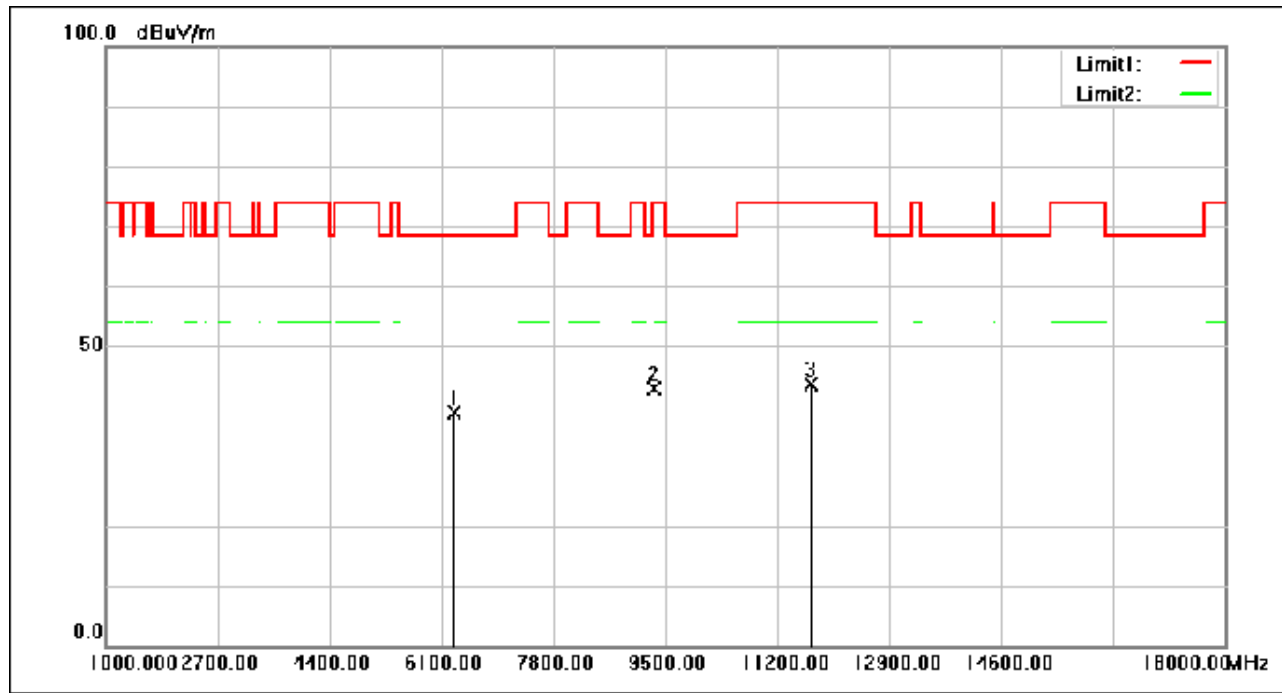

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6301.960	50.69	-11.89	38.80	68.30	-29.50	peak
2	9344.280	50.07	-7.15	42.92	74.00	-31.08	peak
3	11719.520	49.75	-6.23	43.52	74.00	-30.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 358 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

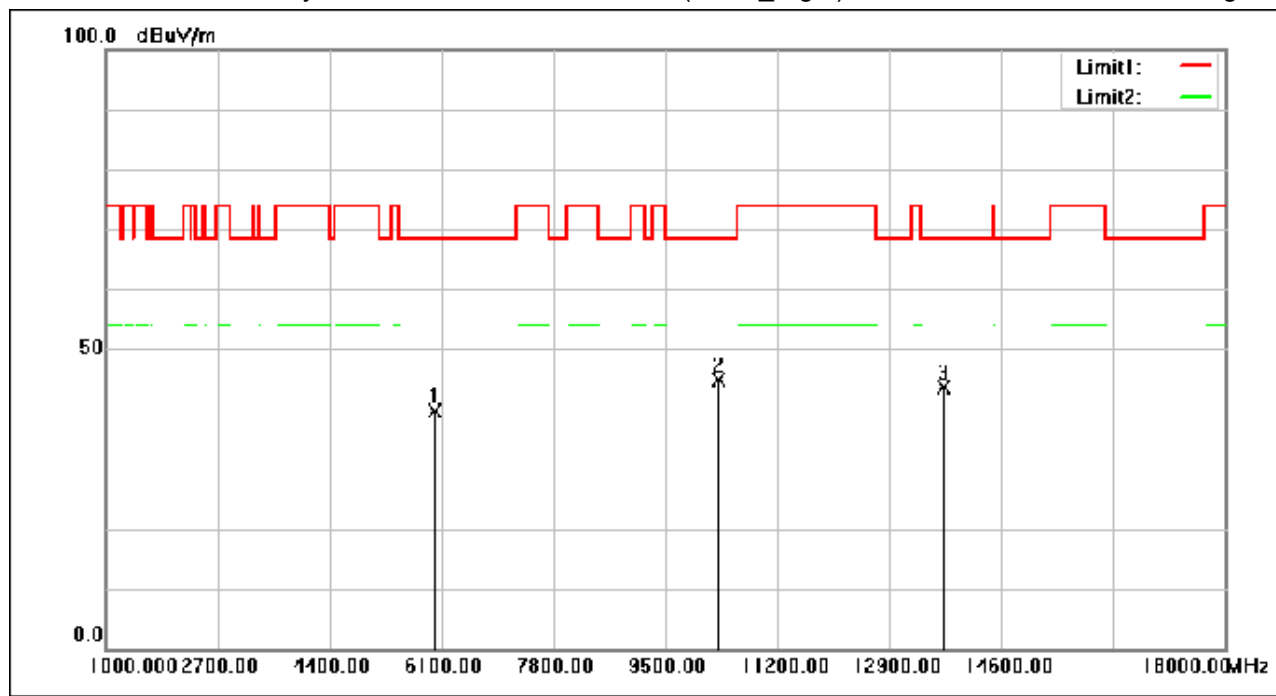

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6006.840	52.75	-13.05	39.70	68.30	-28.60	peak
2	10302.400	51.23	-6.37	44.86	68.30	-23.44	peak
3	13735.040	49.67	-6.02	43.65	68.30	-24.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 359 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

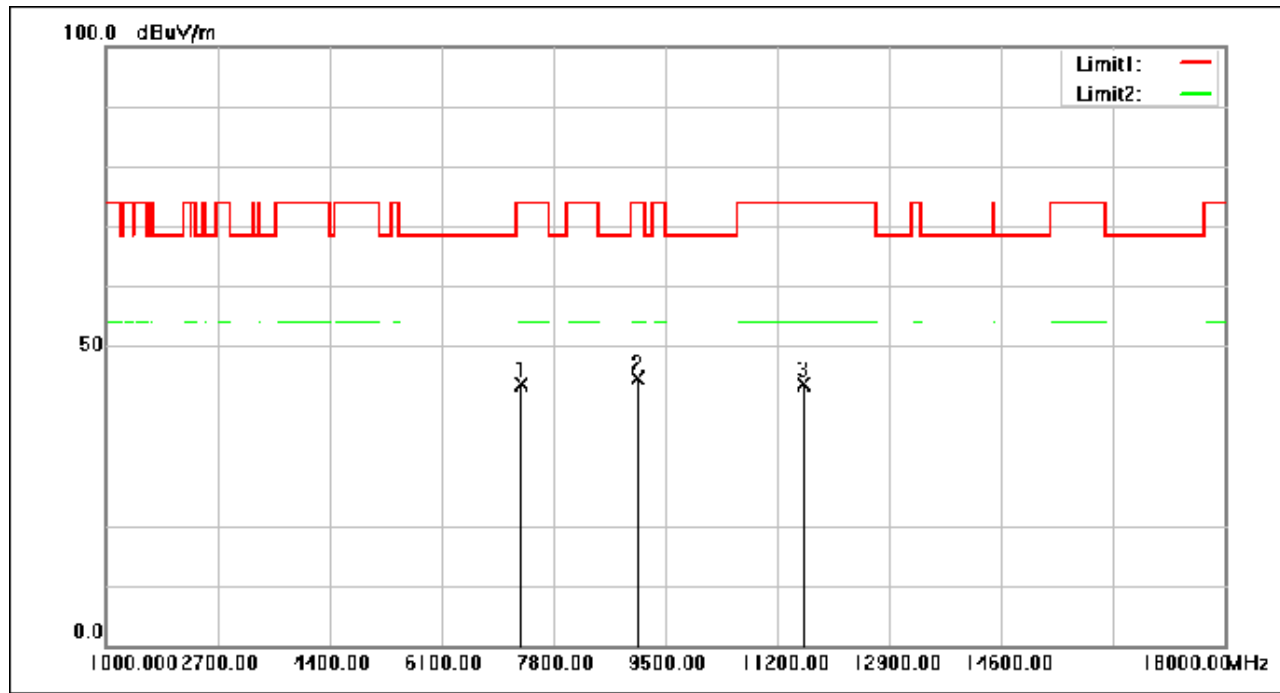

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7316.520	53.42	-9.70	43.72	74.00	-30.28	peak
2	9089.960	52.07	-7.56	44.51	74.00	-29.49	peak
3	11593.040	49.75	-6.14	43.61	74.00	-30.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 360 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

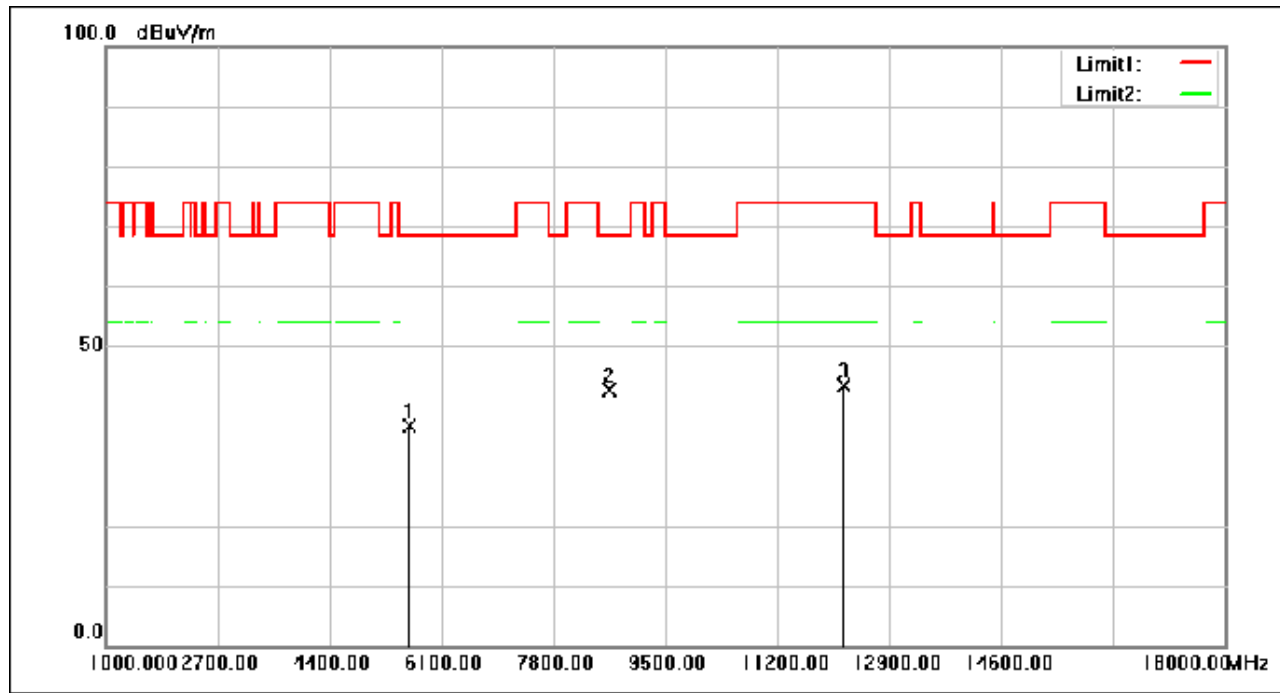

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5617.880	51.59	-14.98	36.61	68.30	-31.69	peak
2	8663.600	51.01	-8.45	42.56	68.30	-25.74	peak
3	12207.760	49.71	-6.21	43.50	74.00	-30.50	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 361 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

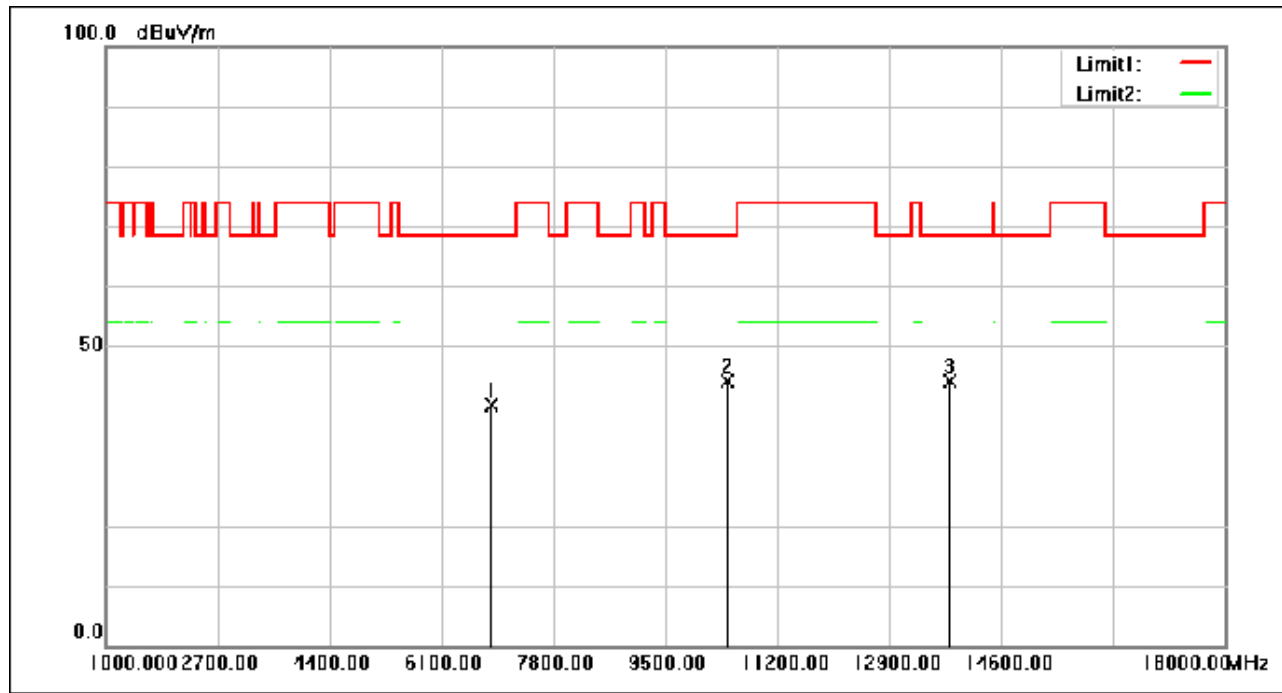

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6865.680	50.30	-10.05	40.25	68.30	-28.05	peak
2	10435.000	50.39	-6.38	44.01	68.30	-24.29	peak
3	13823.440	50.28	-6.12	44.16	68.30	-24.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 362 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

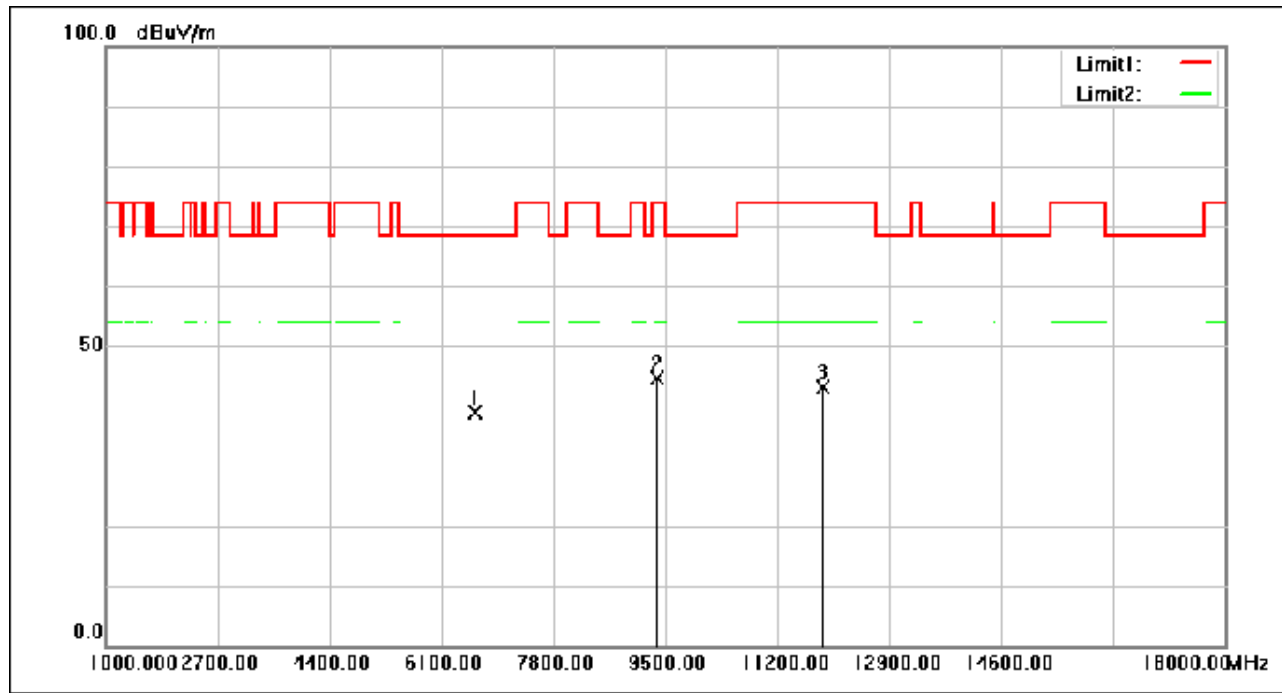

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6619.520	49.48	-10.58	38.90	68.30	-29.40	peak
2	9383.720	51.61	-7.09	44.52	74.00	-29.48	peak
3	11899.720	49.60	-6.38	43.22	74.00	-30.78	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 363 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

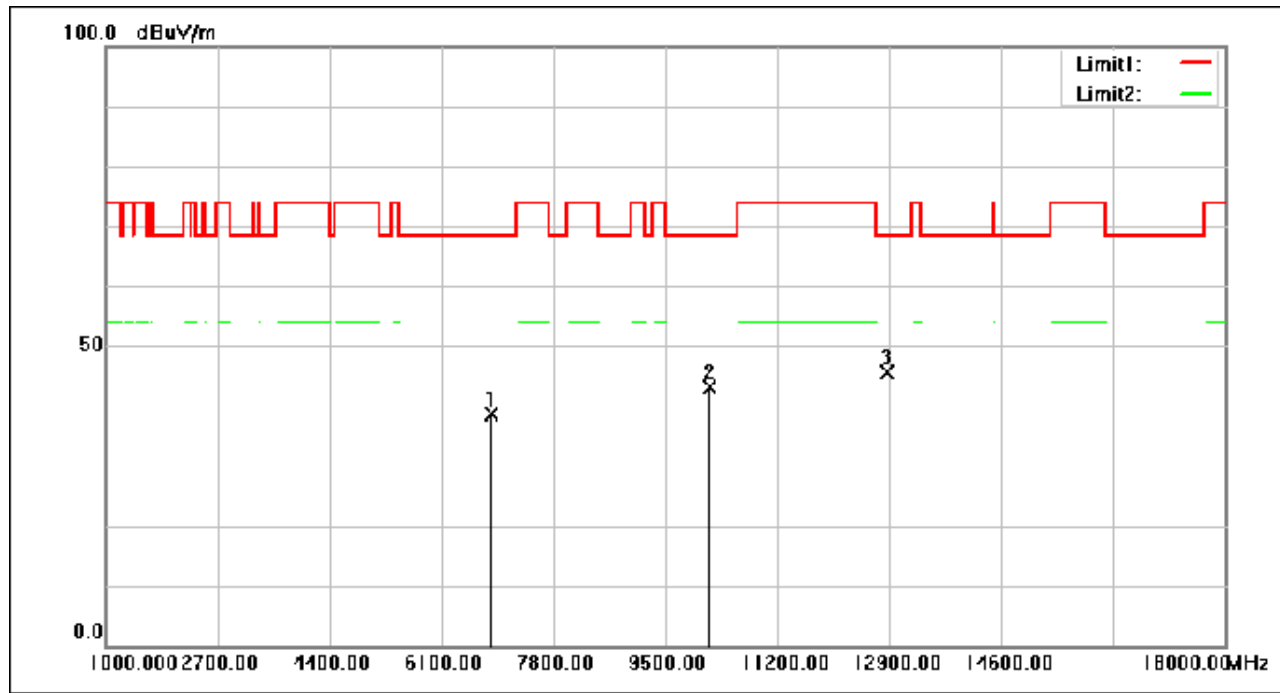

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6865.000	48.78	-10.05	38.73	68.30	-29.57	peak
2	10173.200	49.55	-6.35	43.20	68.30	-25.10	peak
3	12880.280	51.27	-5.64	45.63	68.30	-22.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 364 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

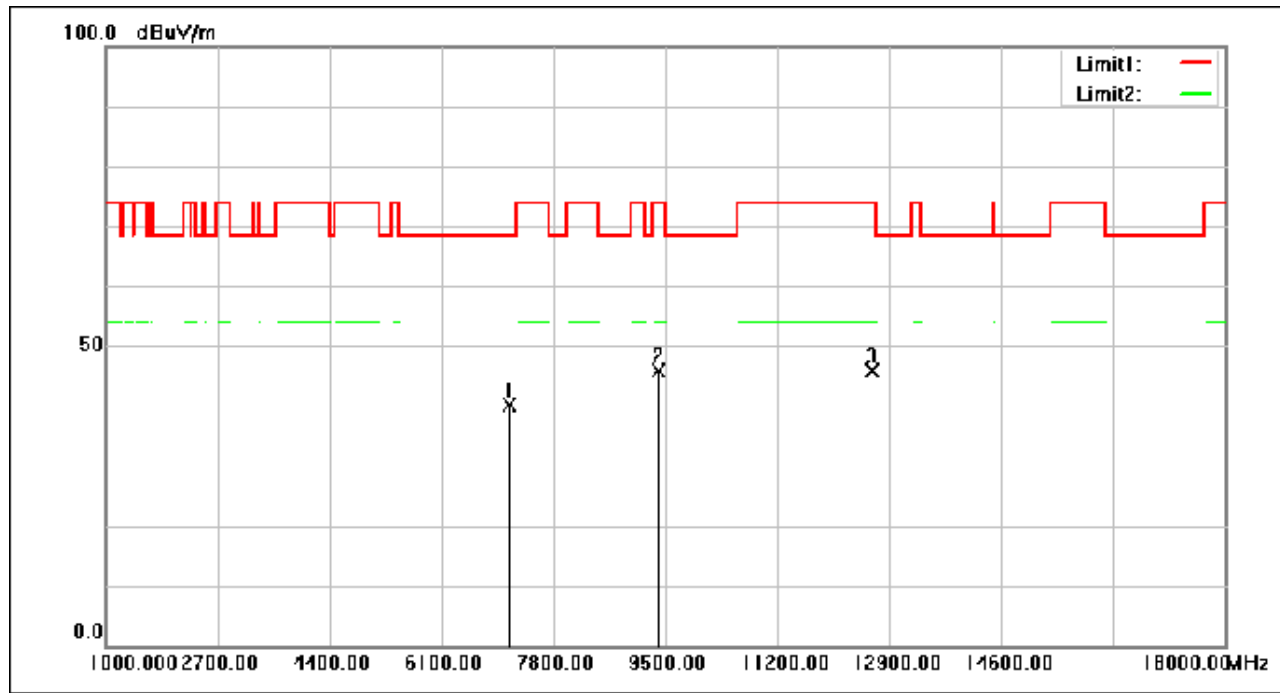

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7147.200	49.95	-9.84	40.11	68.30	-28.19	peak
2	9413.640	52.97	-7.05	45.92	74.00	-28.08	peak
3	12645.680	51.72	-5.84	45.88	74.00	-28.12	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 365 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

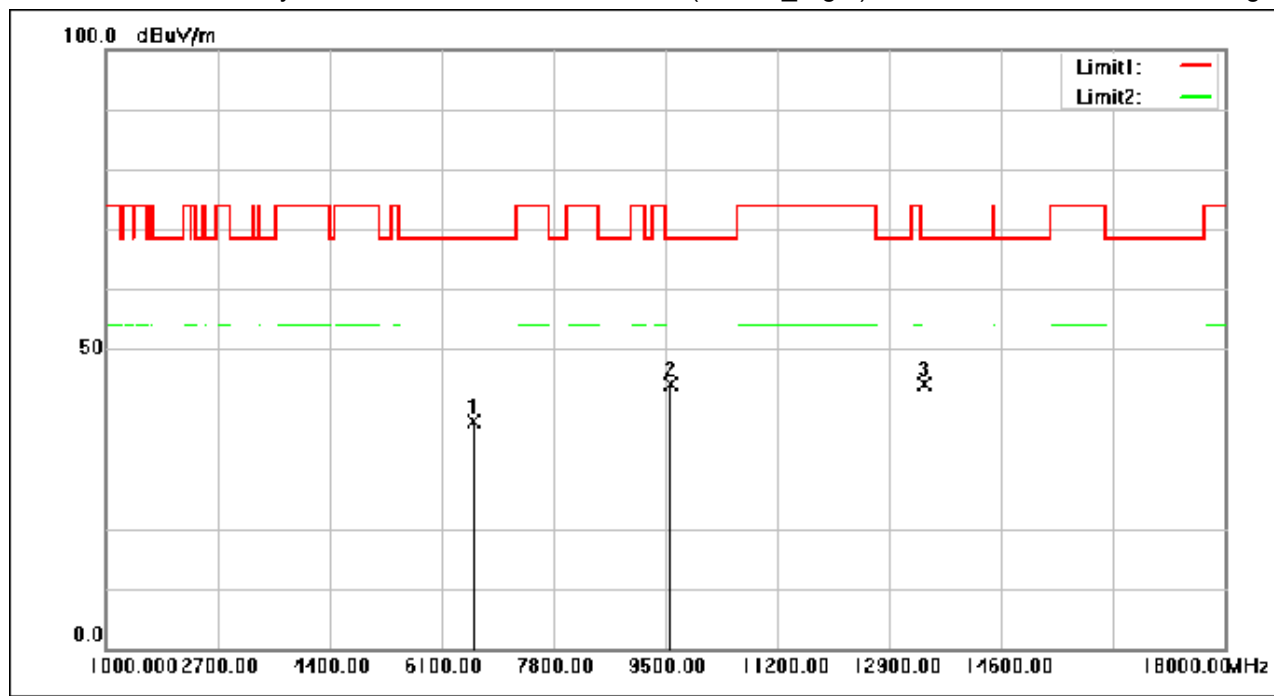

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6605.240	48.52	-10.64	37.88	68.30	-30.42	peak
2	9595.880	50.97	-6.73	44.24	68.30	-24.06	peak
3	13429.720	49.72	-5.70	44.02	68.30	-24.28	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 366 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

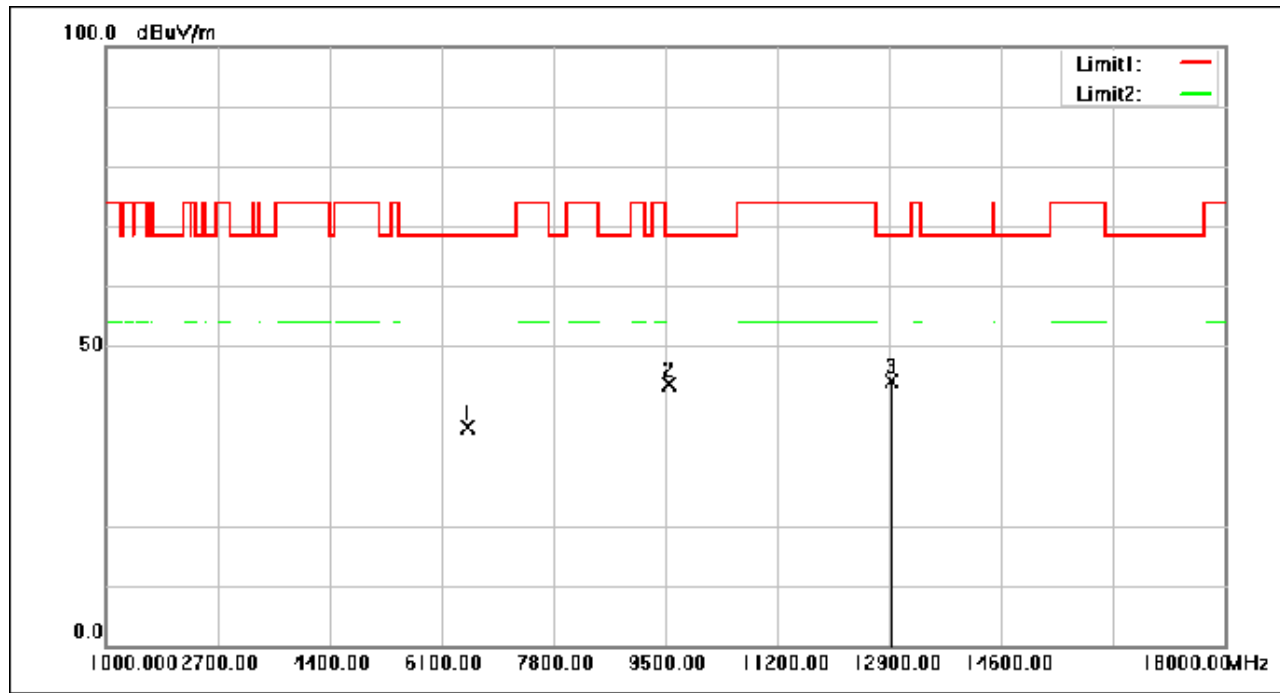

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6494.400	47.59	-11.10	36.49	68.30	-31.81	peak
2	9561.200	50.37	-6.79	43.58	68.30	-24.72	peak
3	12946.920	49.72	-5.59	44.13	68.30	-24.17	peak

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 367 of 929

7.10 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (4) For transmitters operating in the 5.725-5.85 GHz band:
 (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 50.5 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 368 of 929

		modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

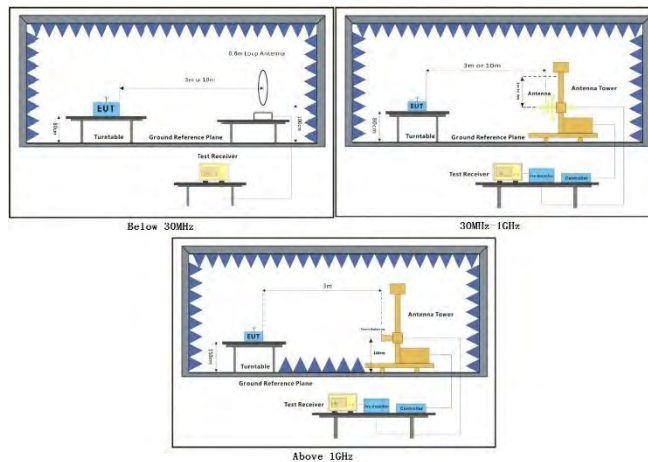

7.10.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 370 of 929

Dipole Antenna

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

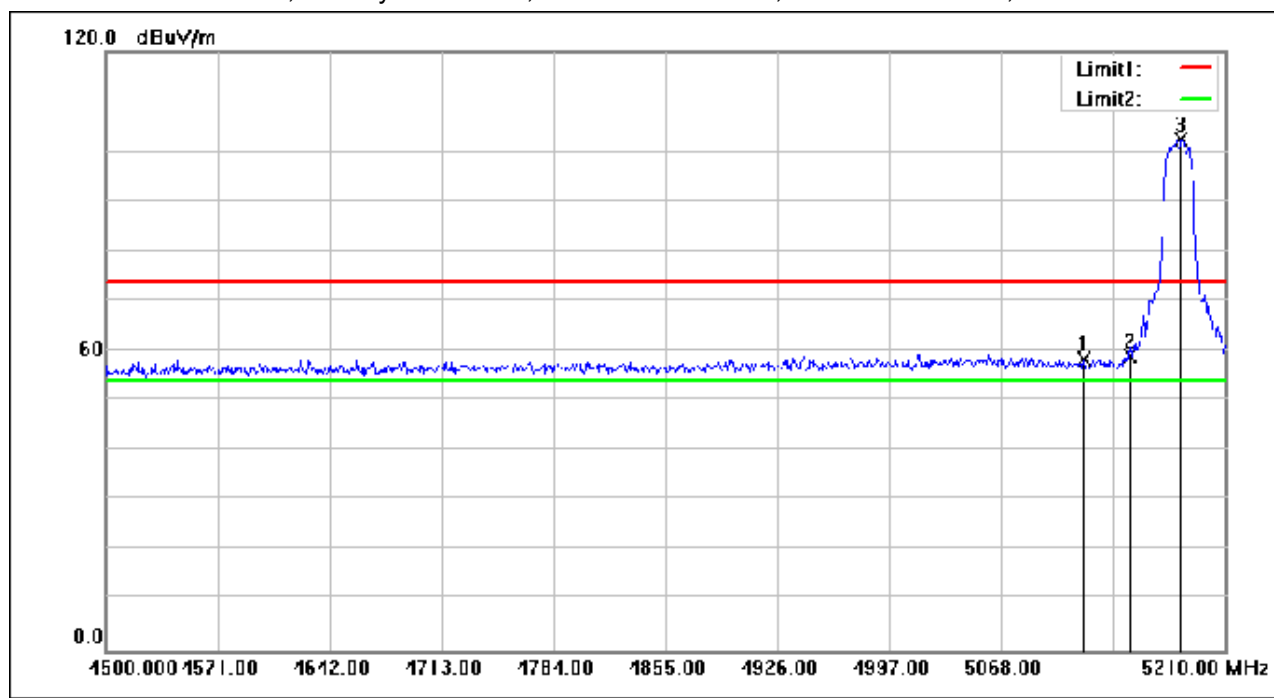

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.540	73.92	-15.56	58.36	74.00	-15.64	peak
2	5150.000	74.37	-15.49	58.88	74.00	-15.12	peak
3	5182.310	117.79	-15.46	102.33	74.00	28.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 371 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

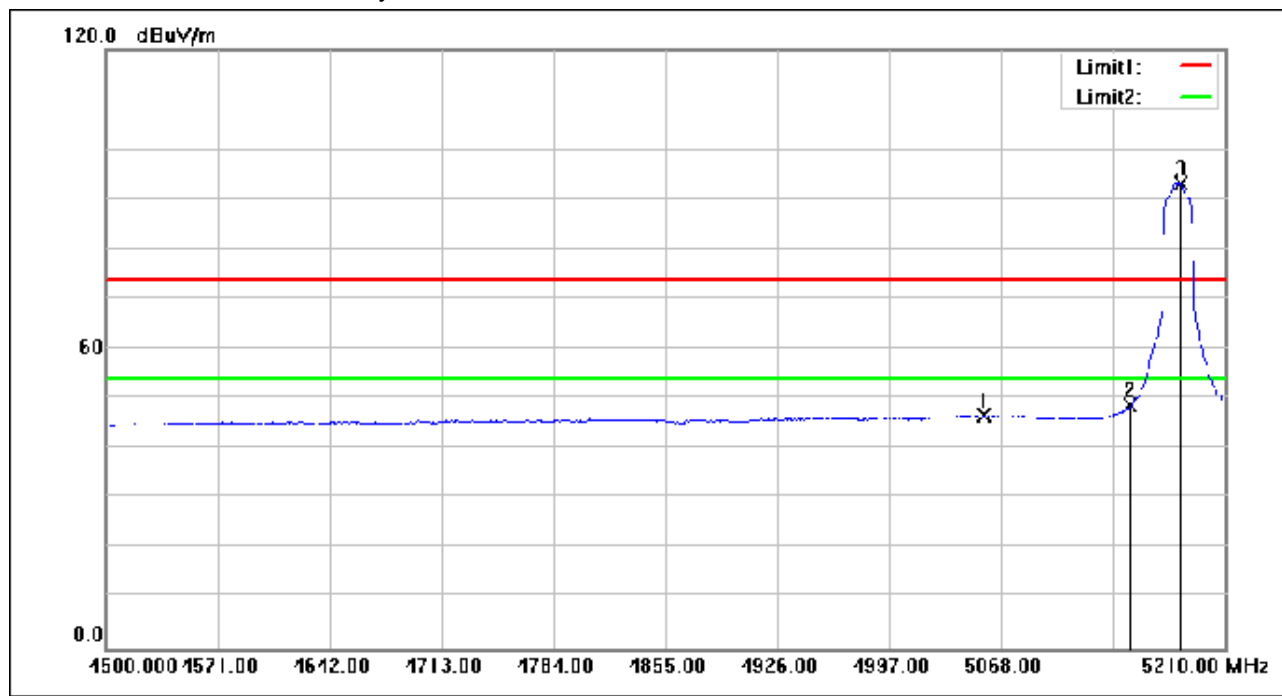

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5057.350	62.41	-15.70	46.71	54.00	-7.29	AVG
2	5150.000	64.35	-15.49	48.86	54.00	-5.14	AVG
3	5181.600	108.74	-15.46	93.28	54.00	39.28	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 372 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

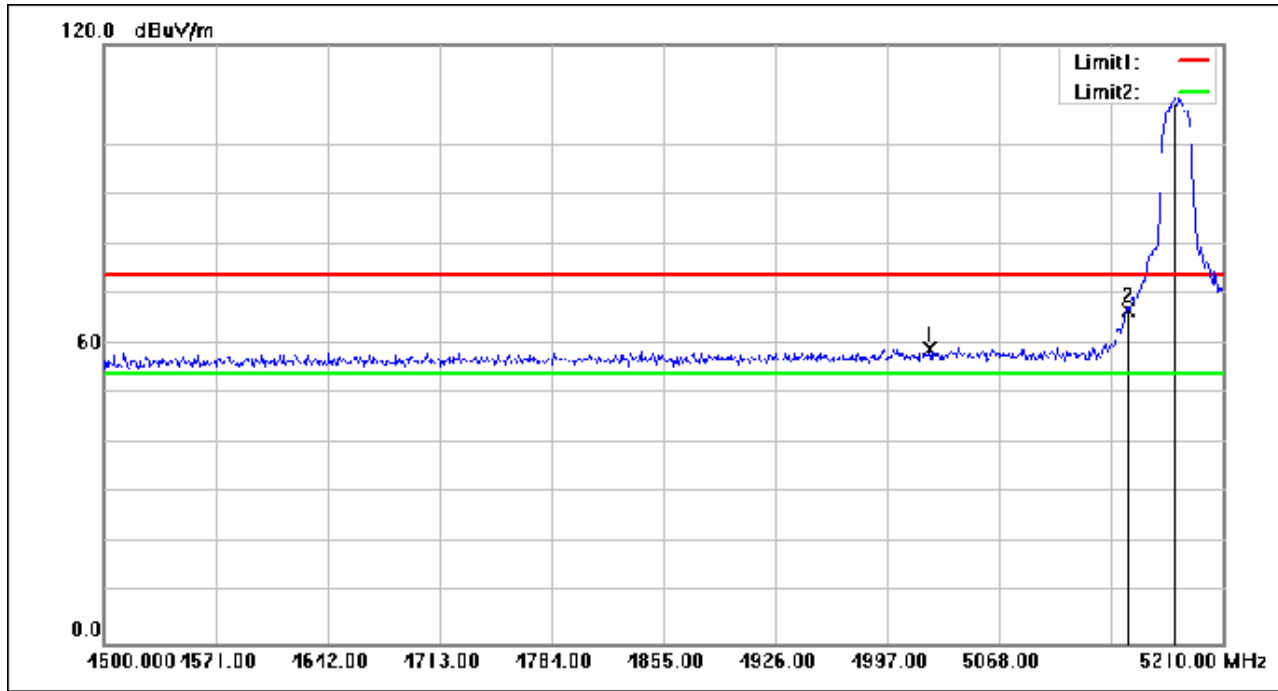

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.980	74.82	-15.79	59.03	74.00	-14.97	peak
2	5150.000	82.35	-15.49	66.86	74.00	-7.14	peak
3	5178.760	124.67	-15.46	109.21	74.00	35.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 373 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

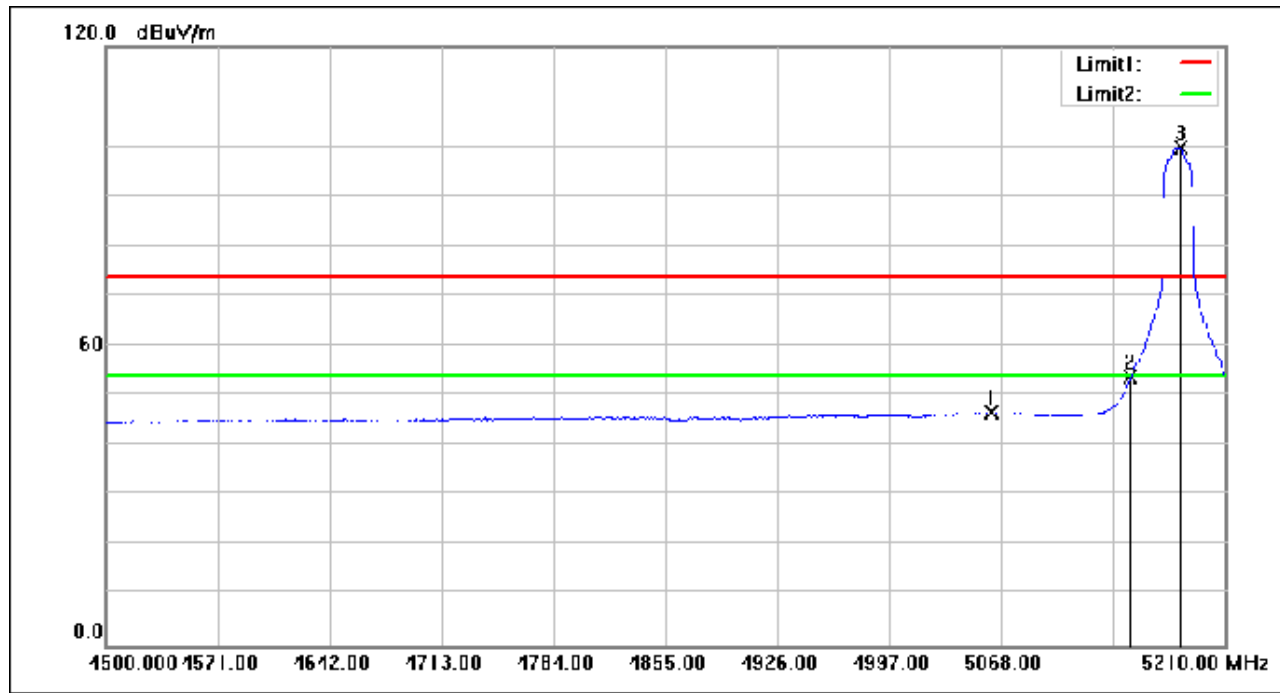

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.610	62.27	-15.69	46.58	54.00	-7.42	AVG
2	5150.000	69.35	-15.49	53.86	54.00	-0.14	AVG
3	5181.600	115.28	-15.46	99.82	54.00	45.82	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 374 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

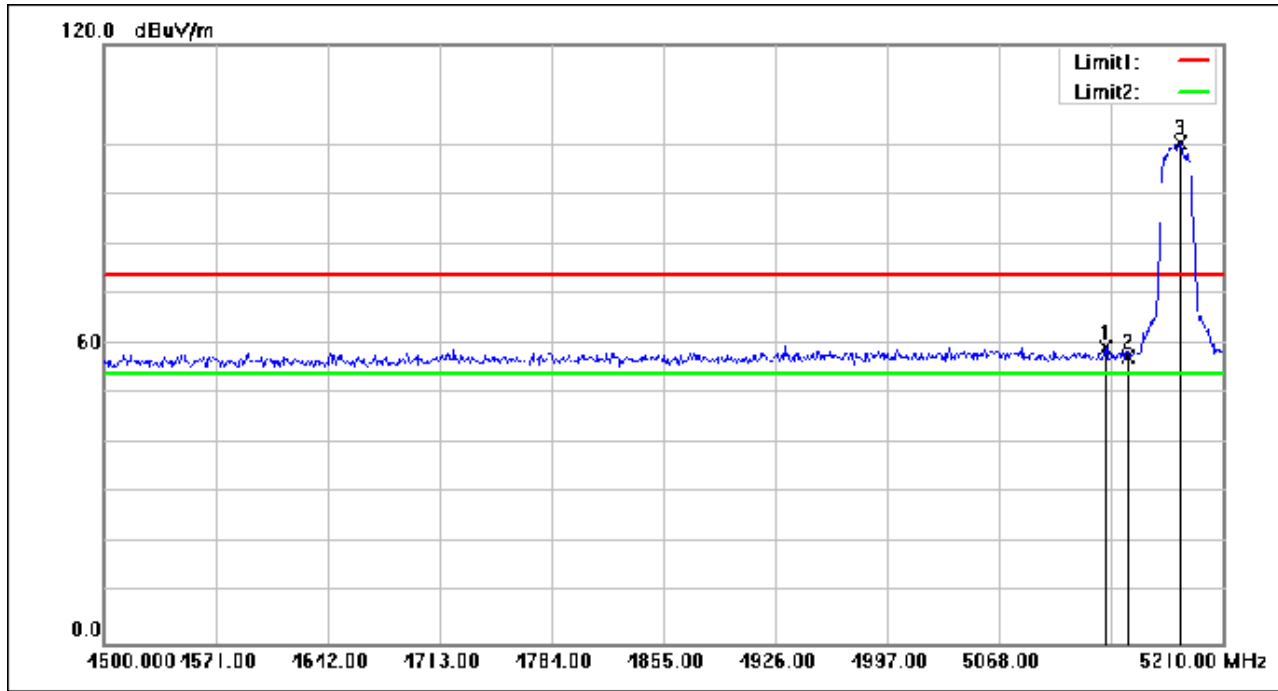

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5135.450	74.88	-15.52	59.36	74.00	-14.64	peak
2	5150.000	72.91	-15.49	57.42	74.00	-16.58	peak
3	5183.020	115.71	-15.45	100.26	74.00	26.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 375 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

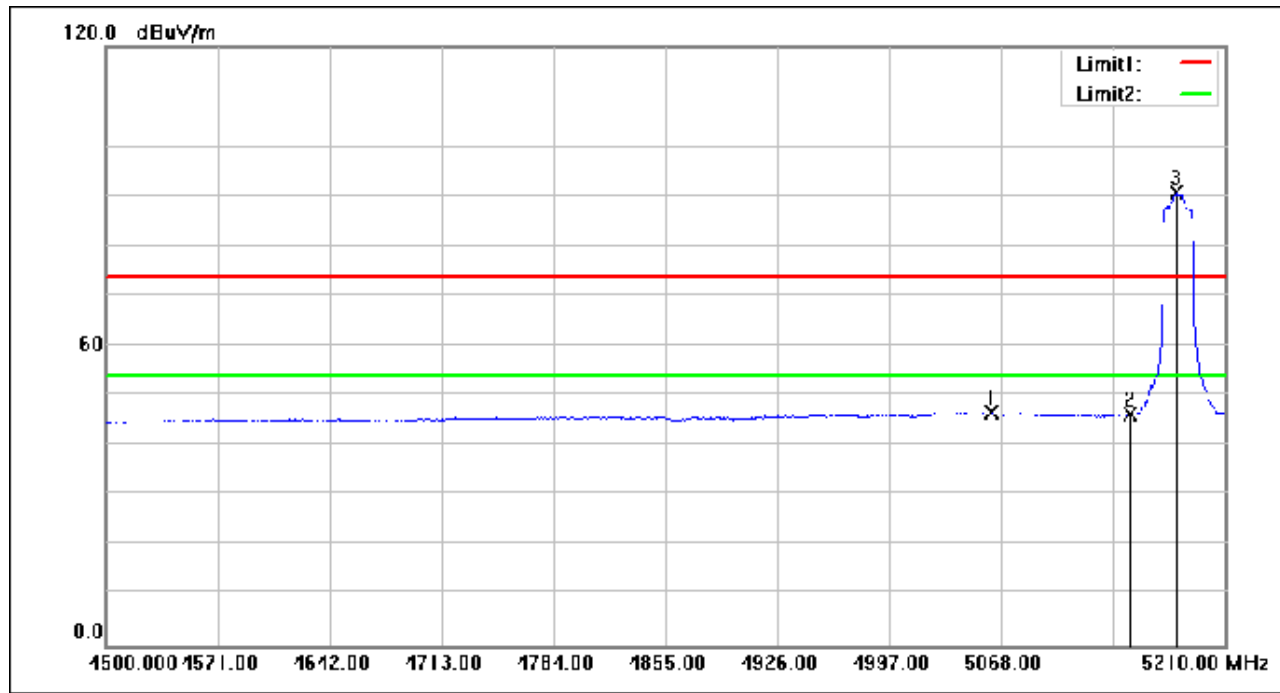

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.610	62.40	-15.69	46.71	54.00	-7.29	AVG
2	5150.000	61.94	-15.49	46.45	54.00	-7.55	AVG
3	5178.760	106.30	-15.46	90.84	54.00	36.84	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 376 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

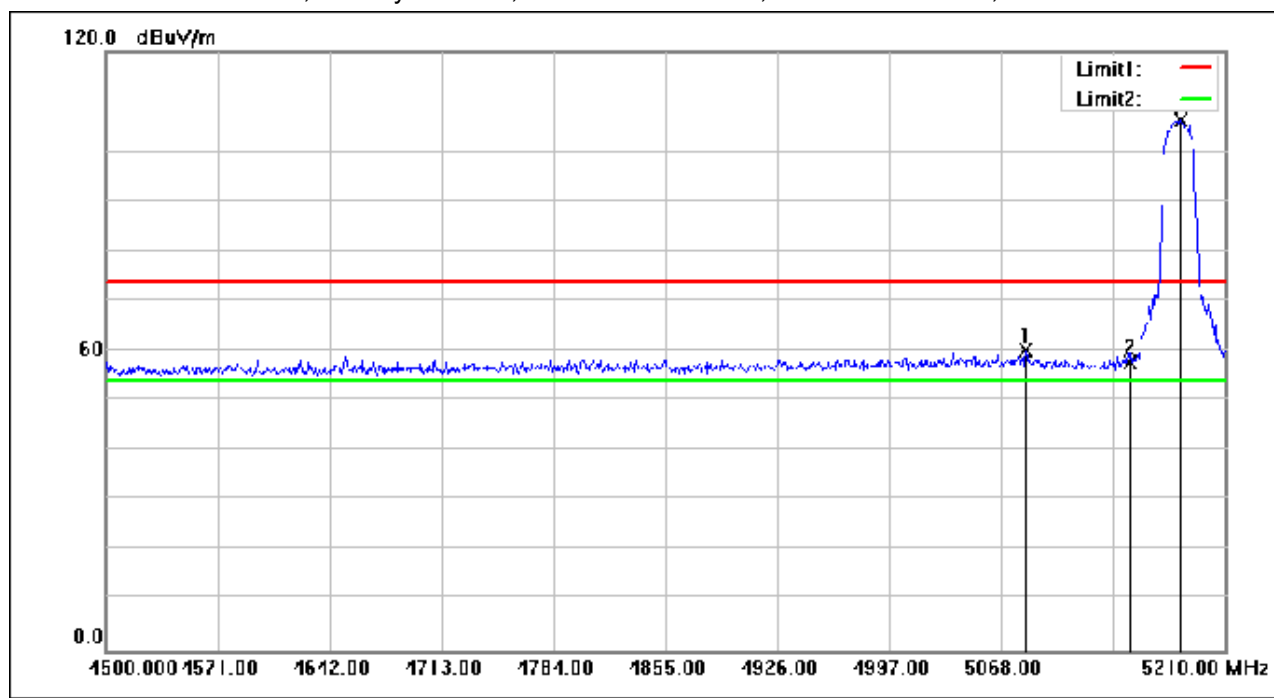

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.620	75.68	-15.64	60.04	74.00	-13.96	peak
2	5150.000	73.19	-15.49	57.70	74.00	-16.30	peak
3	5181.600	121.86	-15.46	106.40	74.00	32.40	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 377 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

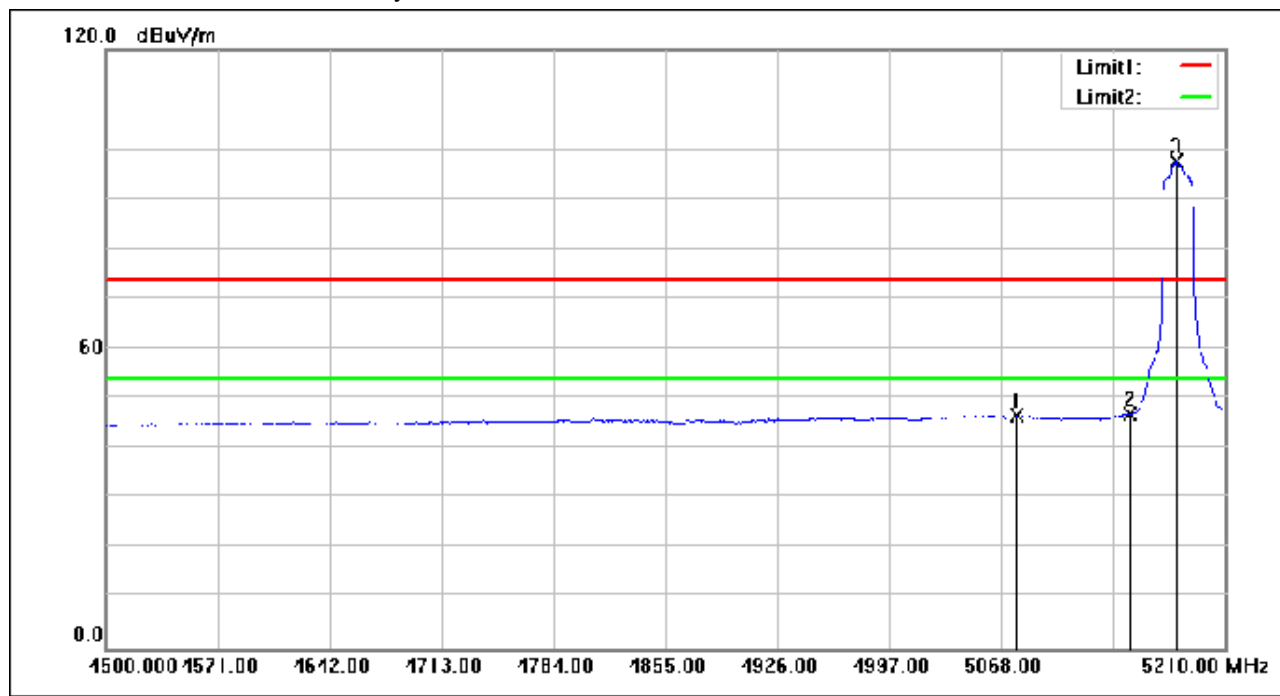

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.940	62.28	-15.66	46.62	54.00	-7.38	AVG
2	5150.000	62.42	-15.49	46.93	54.00	-7.07	AVG
3	5178.760	113.13	-15.46	97.67	54.00	43.67	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 378 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

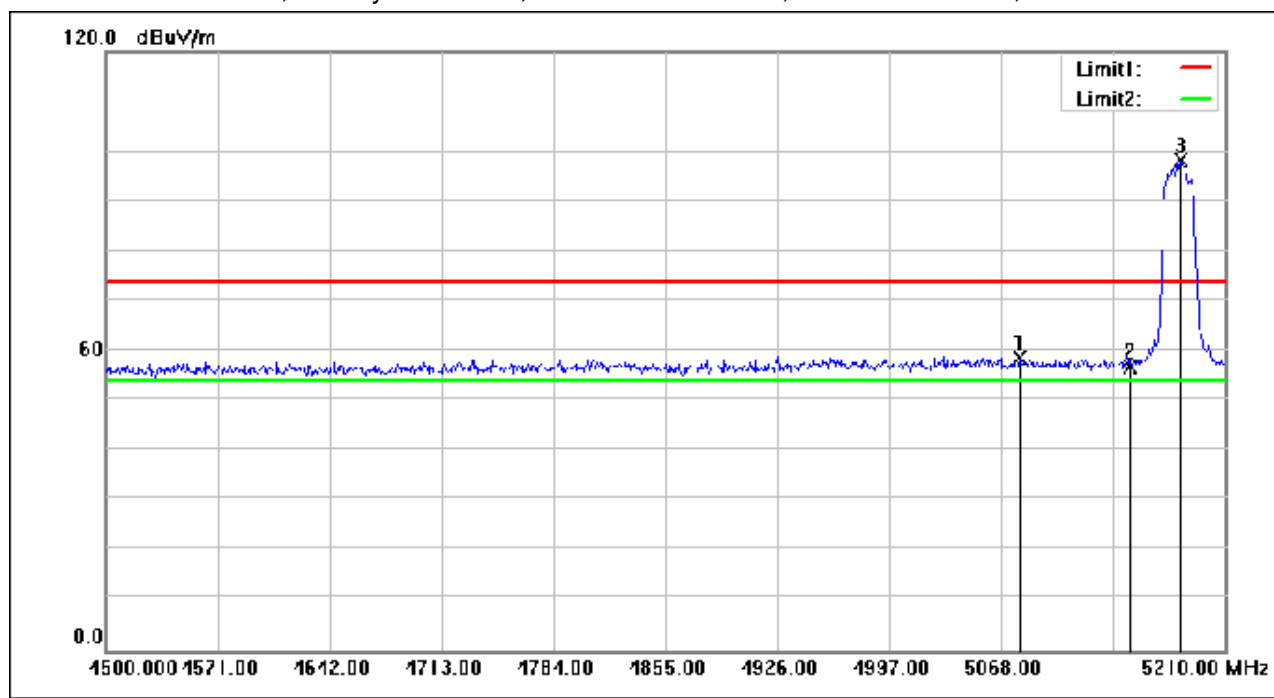

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5079.360	74.21	-15.65	58.56	74.00	-15.44	peak
2	5150.000	72.37	-15.49	56.88	74.00	-17.12	peak
3	5181.600	113.77	-15.46	98.31	74.00	24.31	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 379 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

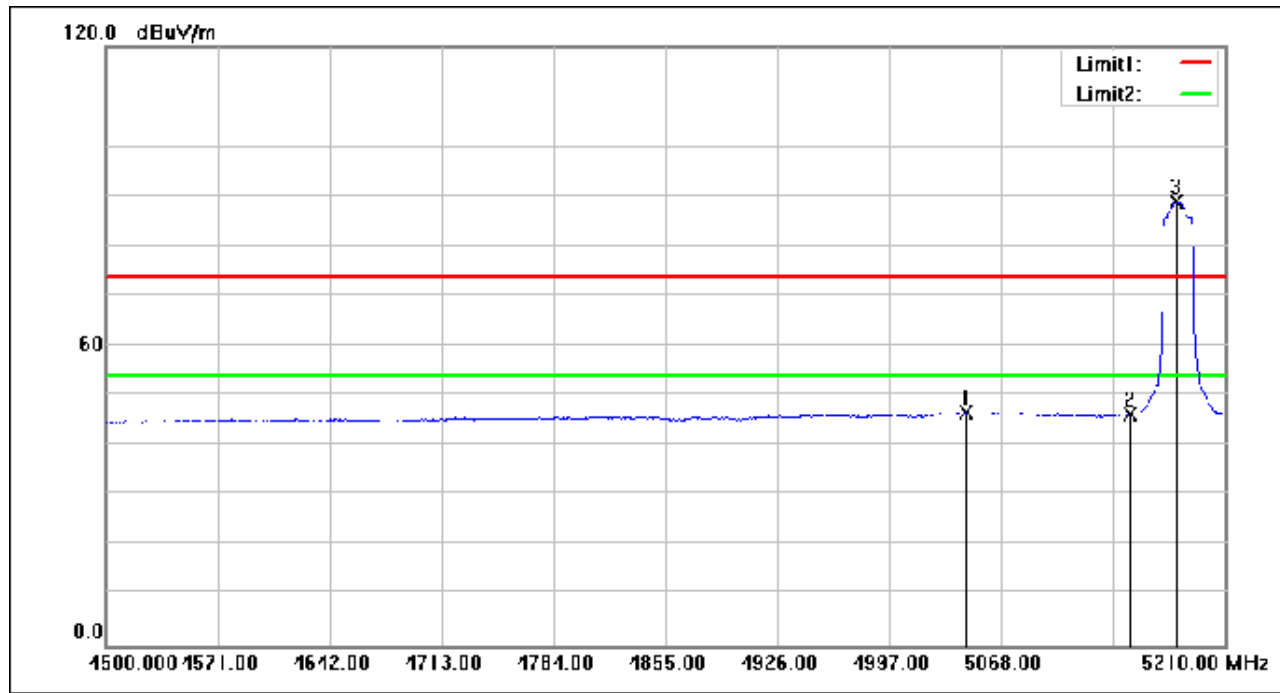

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.280	62.30	-15.73	46.57	54.00	-7.43	AVG
2	5150.000	61.93	-15.49	46.44	54.00	-7.56	AVG
3	5178.760	104.44	-15.46	88.98	54.00	34.98	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 380 of 929

Test Mode: 01; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

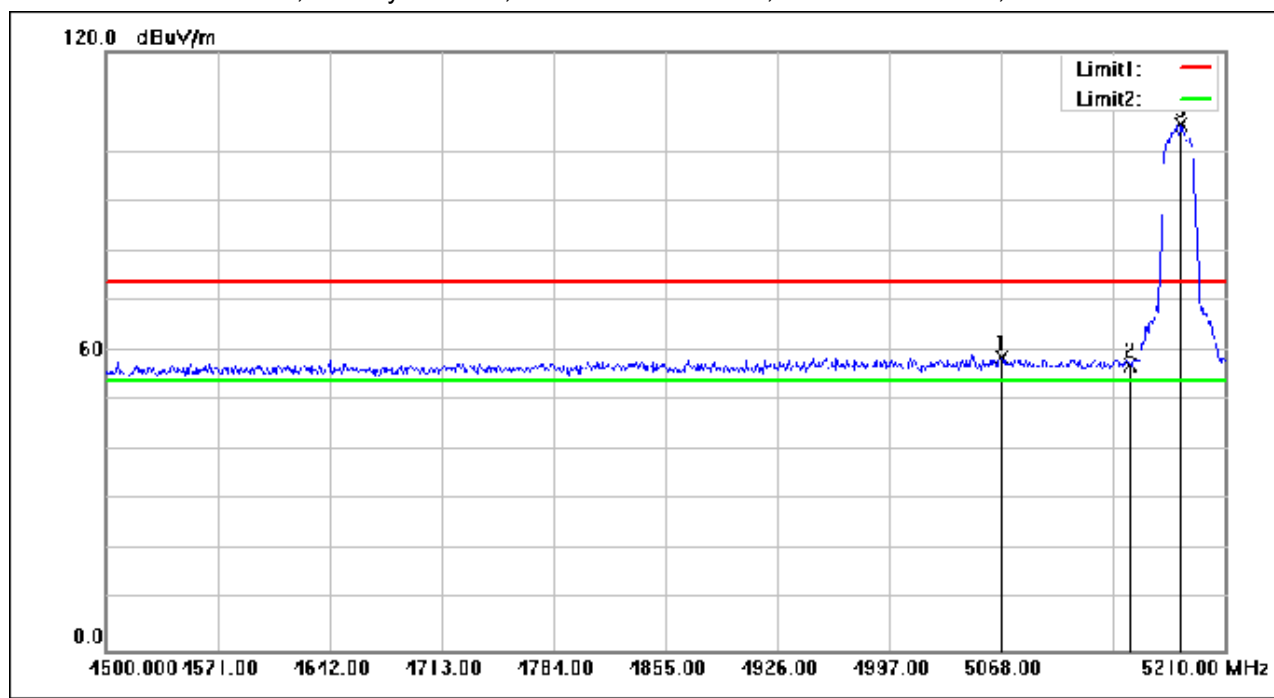

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5068.000	74.44	-15.68	58.76	74.00	-15.24	peak
2	5150.000	72.76	-15.49	57.27	74.00	-16.73	peak
3	5182.310	120.89	-15.46	105.43	74.00	31.43	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 381 of 929

Test Mode: 01; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

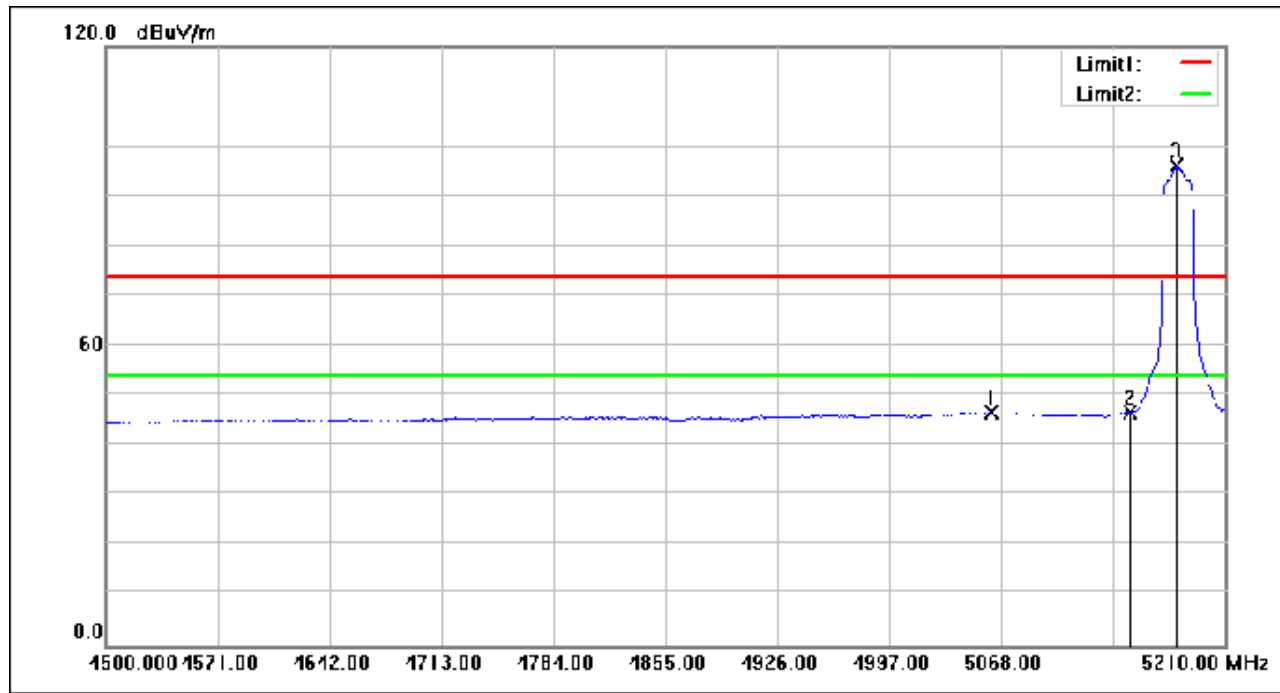

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.610	62.35	-15.69	46.66	54.00	-7.34	AVG
2	5150.000	62.24	-15.49	46.75	54.00	-7.25	AVG
3	5178.760	111.50	-15.46	96.04	54.00	42.04	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 382 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

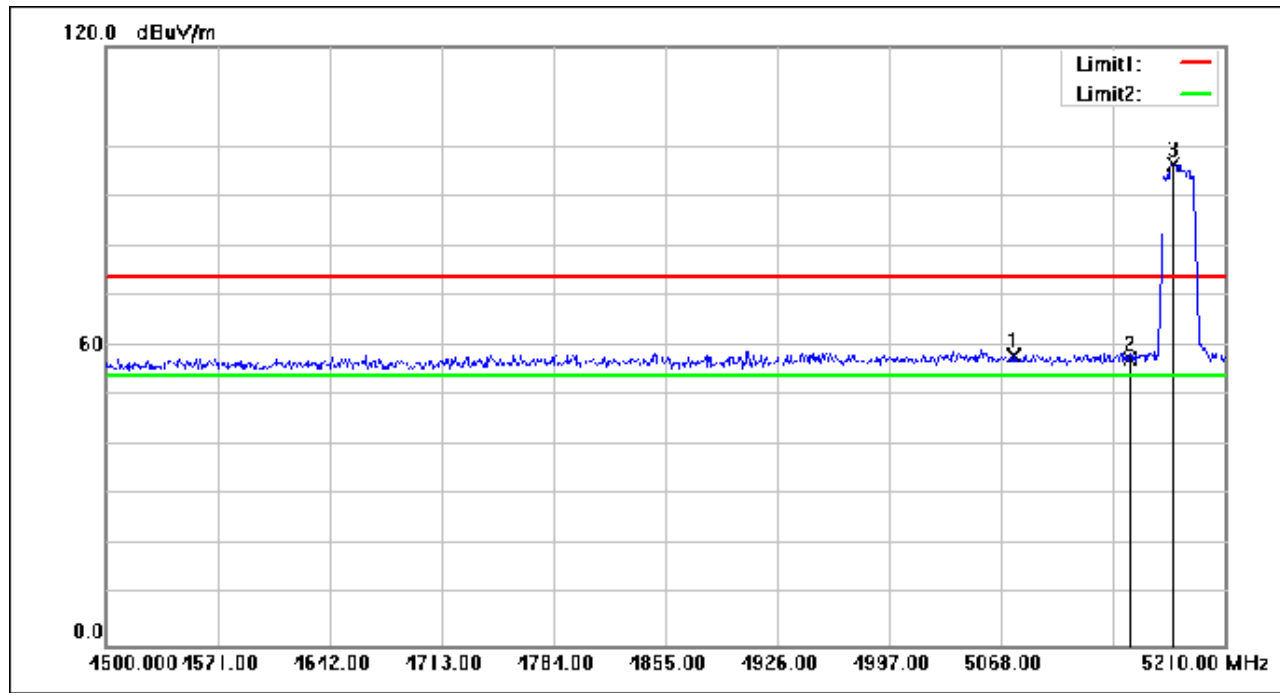

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5075.810	73.72	-15.66	58.06	74.00	-15.94	peak
2	5150.000	73.01	-15.49	57.52	74.00	-16.48	peak
3	5177.340	111.85	-15.46	96.39	74.00	22.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 383 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

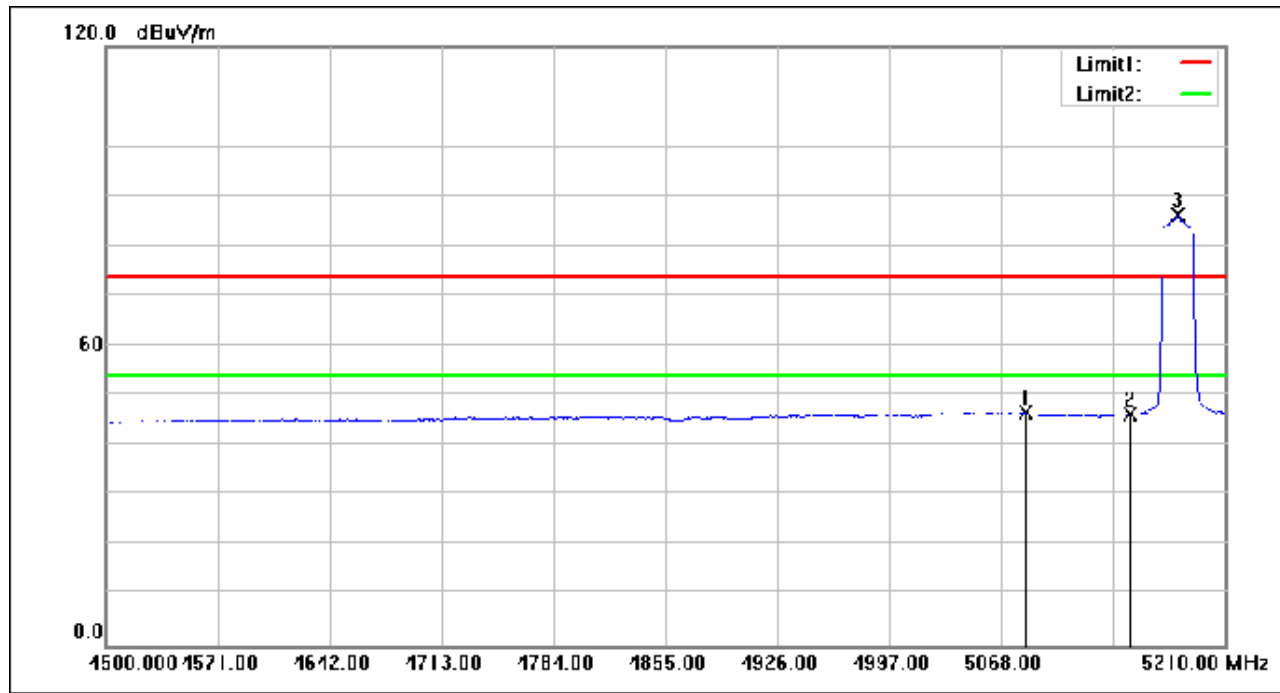

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.620	62.27	-15.64	46.63	54.00	-7.37	AVG
2	5150.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5180.180	101.69	-15.46	86.23	54.00	32.23	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 384 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

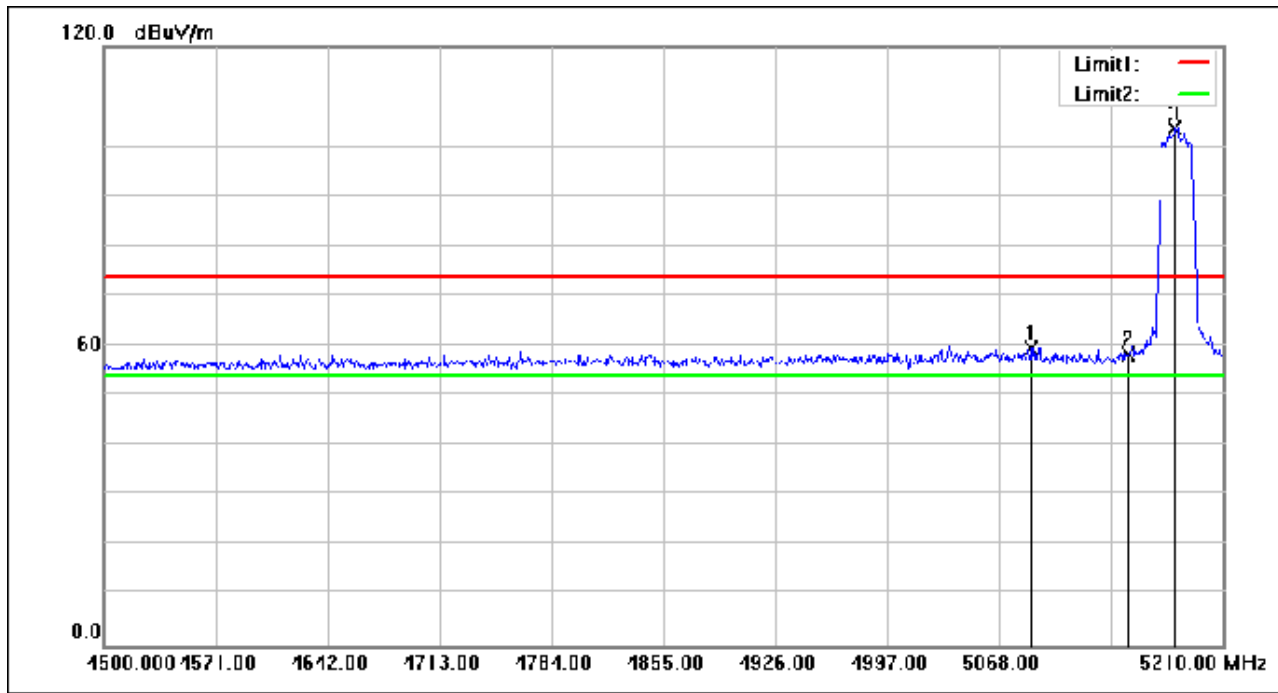

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.590	75.32	-15.63	59.69	74.00	-14.31	peak
2	5150.000	73.82	-15.49	58.33	74.00	-15.67	peak
3	5179.470	119.12	-15.46	103.66	74.00	29.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 385 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

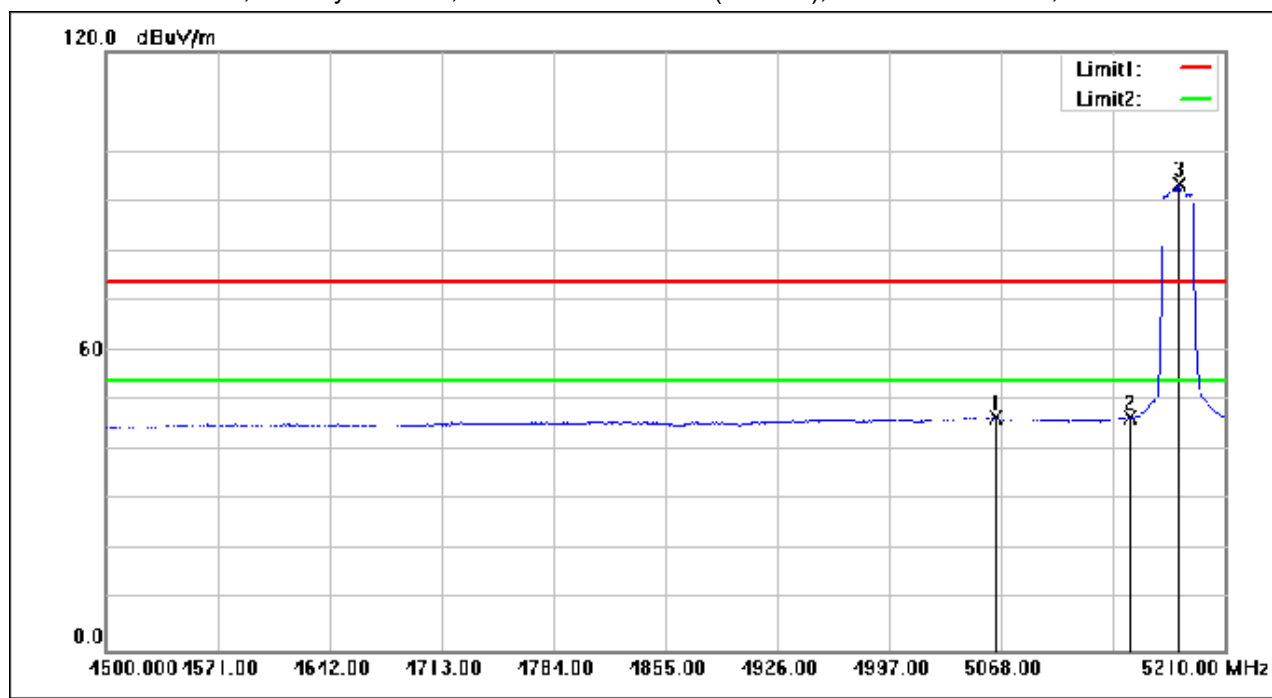

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5064.450	62.24	-15.68	46.56	54.00	-7.44	AVG
2	5150.000	62.17	-15.49	46.68	54.00	-7.32	AVG
3	5180.890	108.84	-15.46	93.38	54.00	39.38	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 386 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

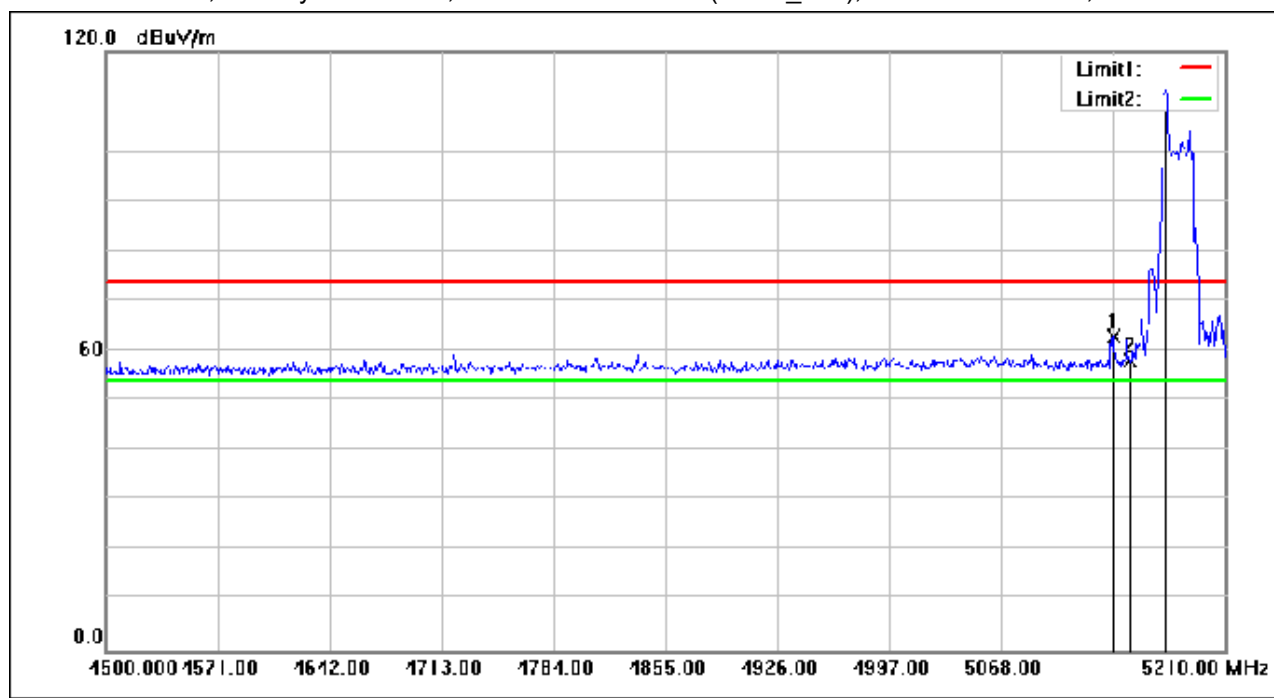

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.000	78.30	-15.51	62.79	74.00	-11.21	peak
2	5150.000	73.56	-15.49	58.07	74.00	-15.93	peak
3	5172.370	127.94	-15.47	112.47	74.00	38.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 387 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

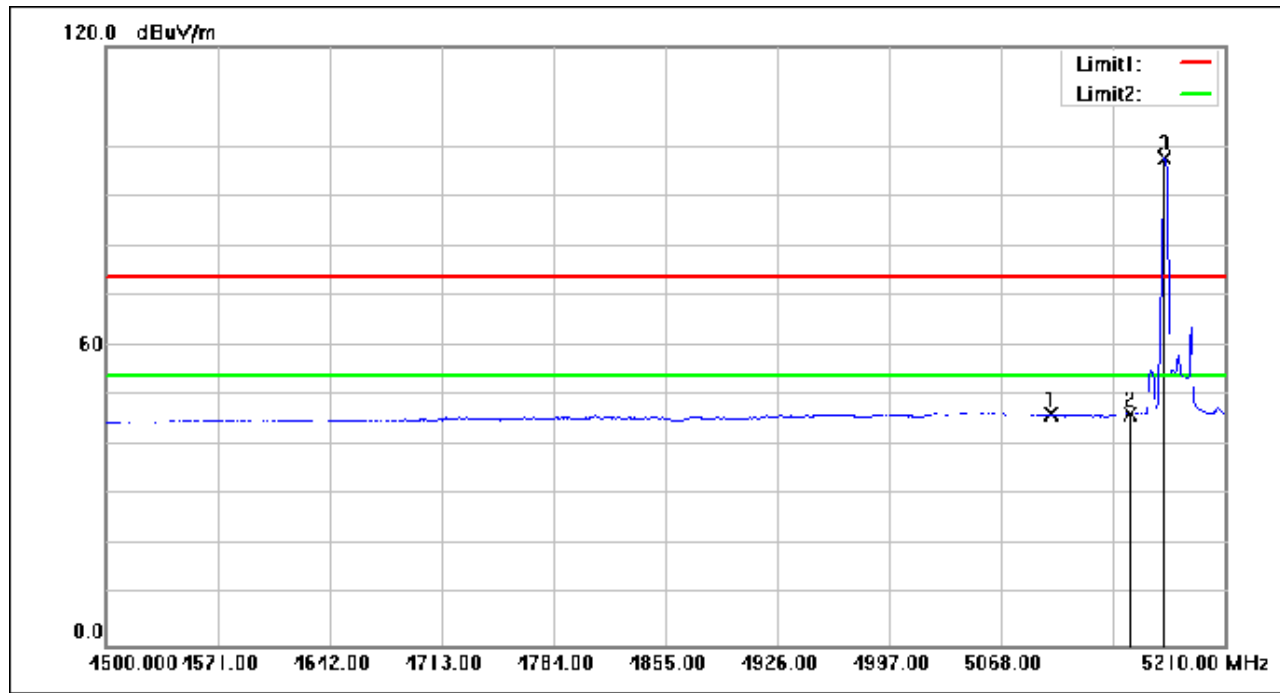

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5099.240	61.83	-15.61	46.22	54.00	-7.78	AVG
2	5150.000	61.82	-15.49	46.33	54.00	-7.67	AVG
3	5171.660	112.99	-15.47	97.52	54.00	43.52	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 388 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

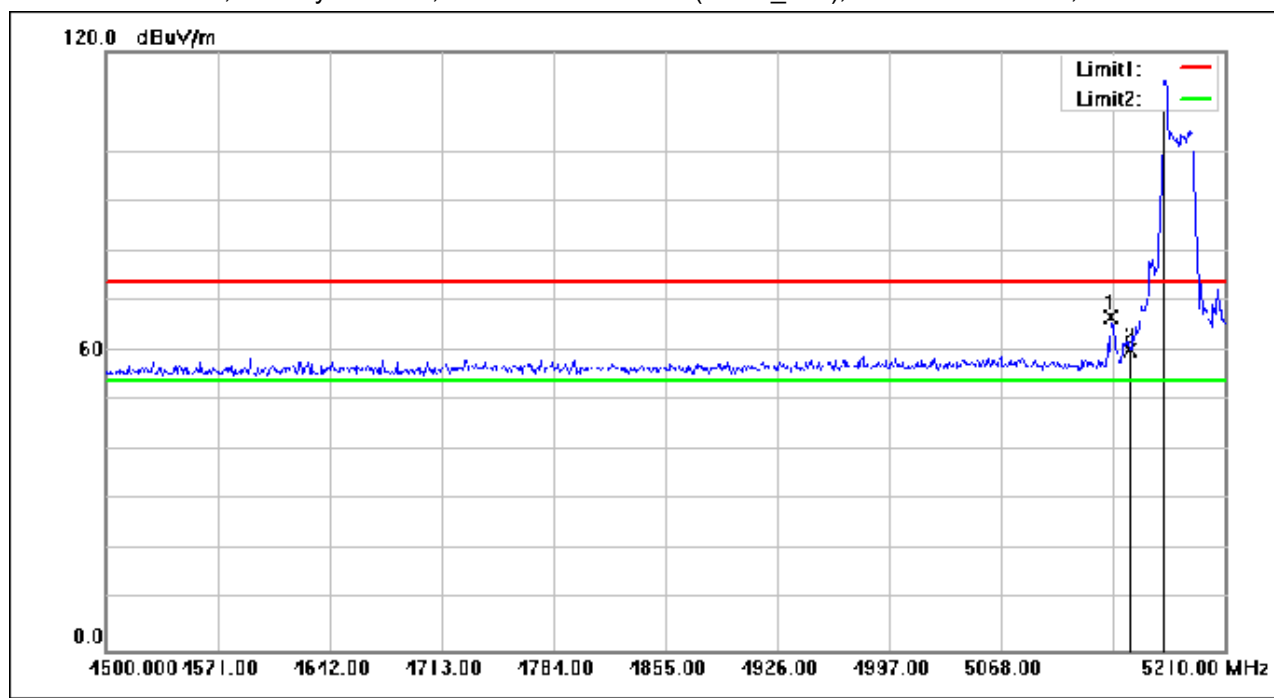

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.580	82.18	-15.52	66.66	74.00	-7.34	peak
2	5150.000	75.53	-15.49	60.04	74.00	-13.96	peak
3	5171.660	129.74	-15.47	114.27	74.00	40.27	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 389 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

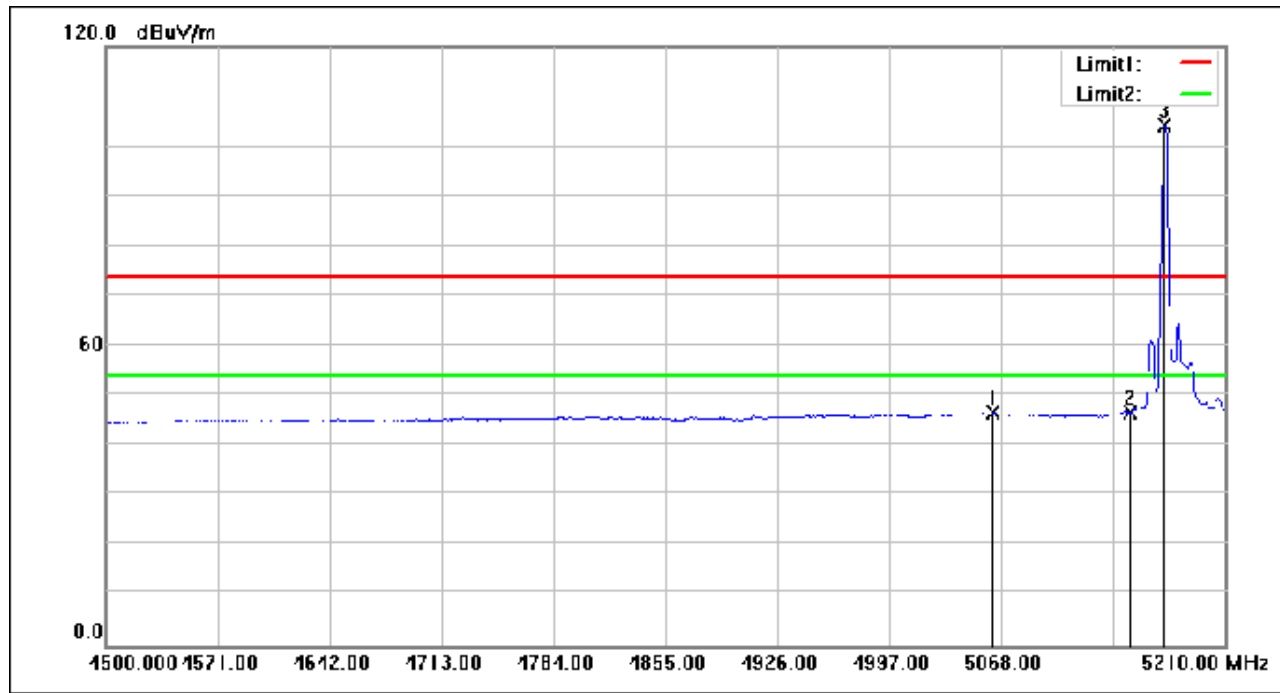

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5062.320	62.25	-15.69	46.56	74.00	-27.44	peak
2	5150.000	62.28	-15.49	46.79	74.00	-27.21	peak
3	5171.660	119.85	-15.47	104.38	74.00	30.38	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 390 of 929

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz; Channel: Low

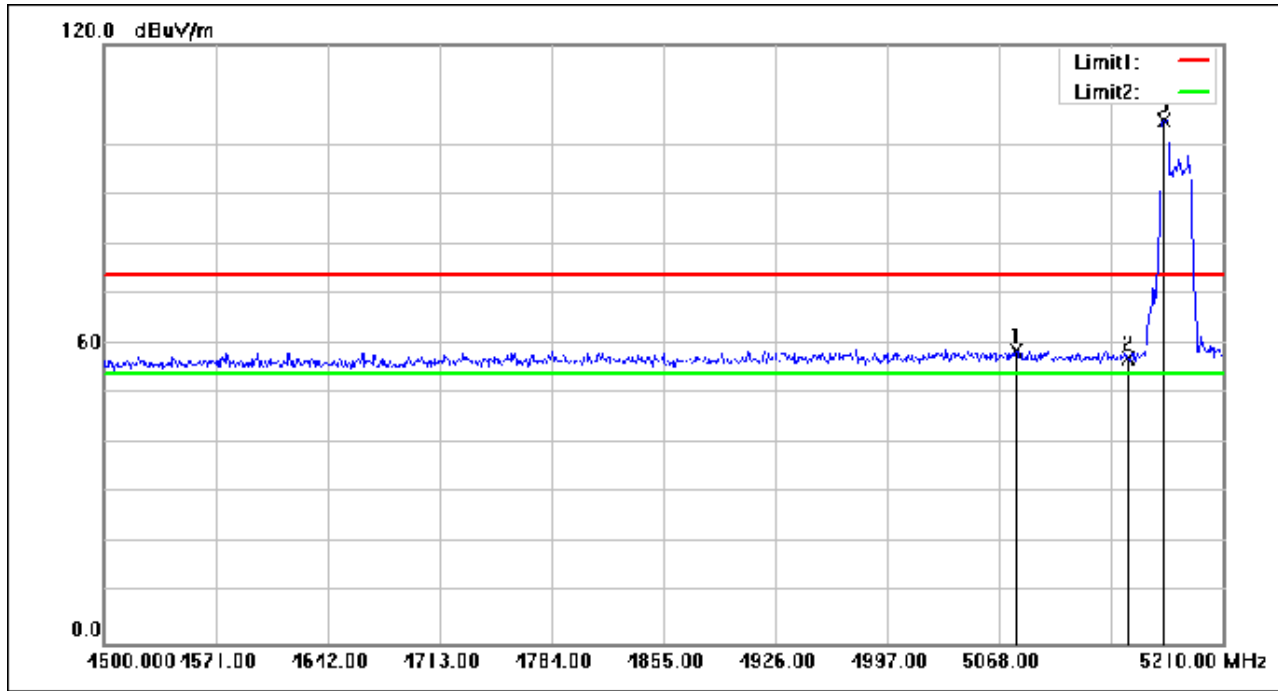

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.650	74.22	-15.66	58.56	74.00	-15.44	peak
2	5150.000	72.75	-15.49	57.26	74.00	-16.74	peak
3	5172.370	120.40	-15.47	104.93	74.00	30.93	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 391 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

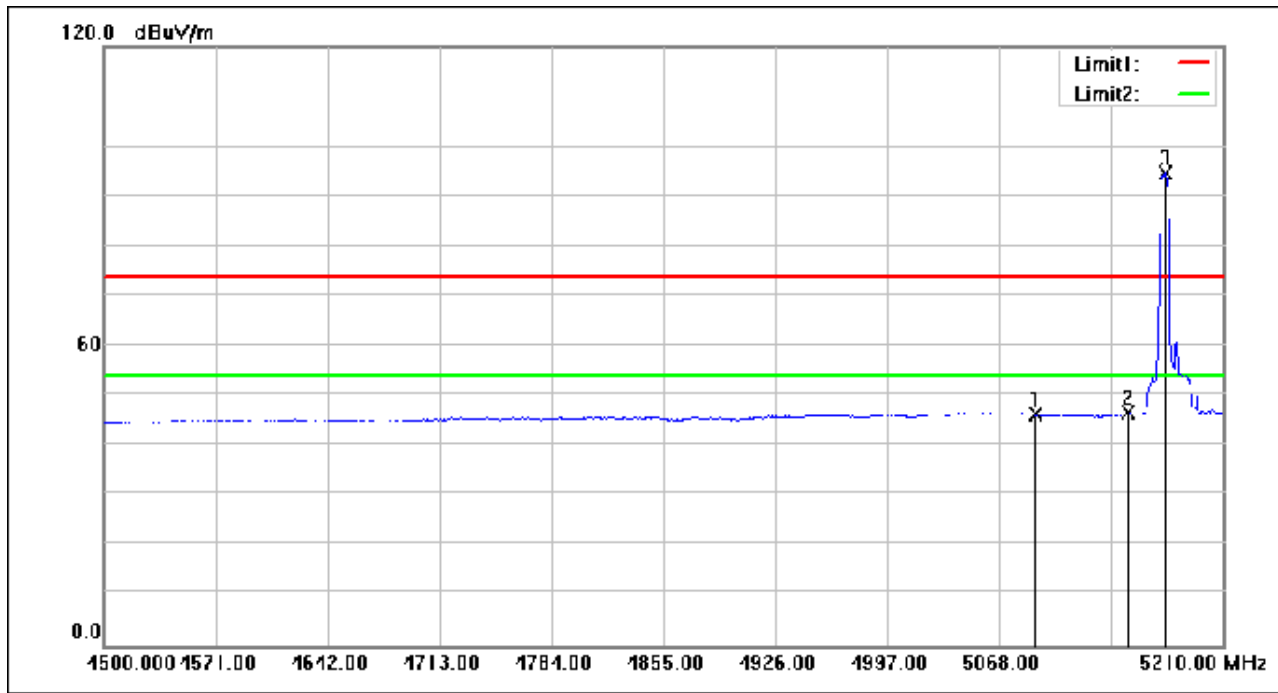

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5090.720	61.96	-15.62	46.34	54.00	-7.66	AVG
2	5150.000	62.10	-15.49	46.61	54.00	-7.39	AVG
3	5173.080	110.07	-15.46	94.61	54.00	40.61	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 392 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

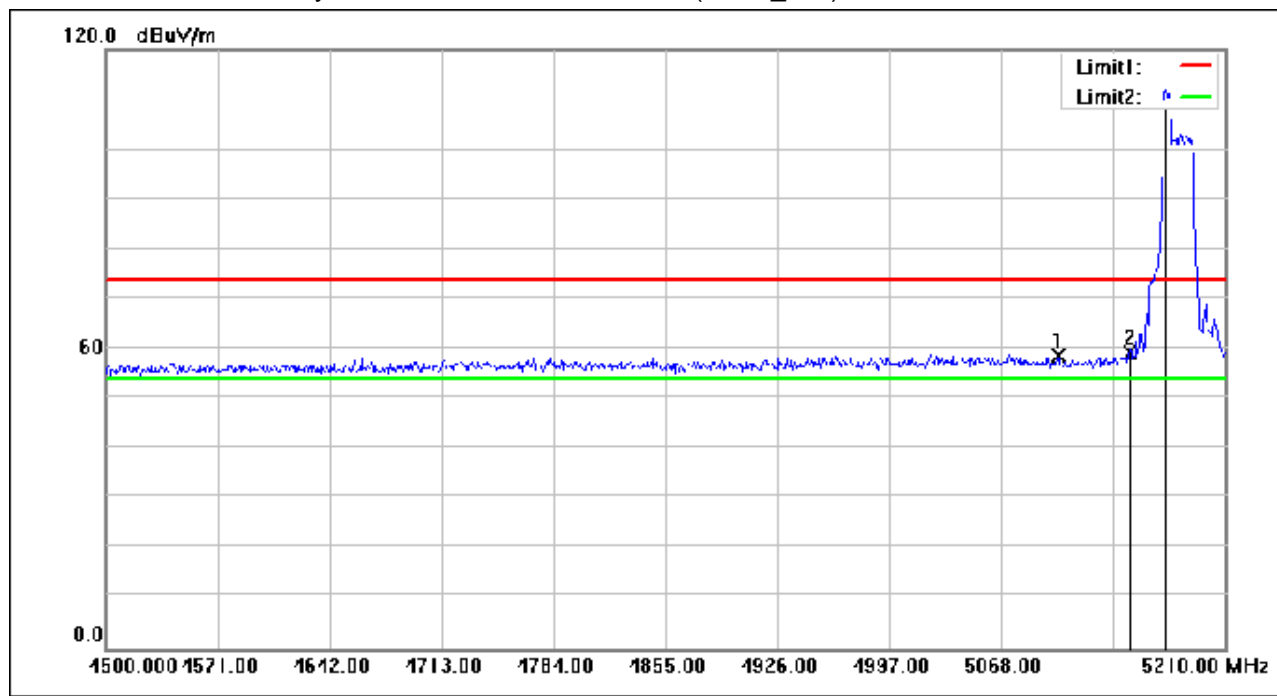

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5104.210	74.22	-15.59	58.63	74.00	-15.37	peak
2	5150.000	74.80	-15.49	59.31	74.00	-14.69	peak
3	5172.370	127.46	-15.47	111.99	74.00	37.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 393 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

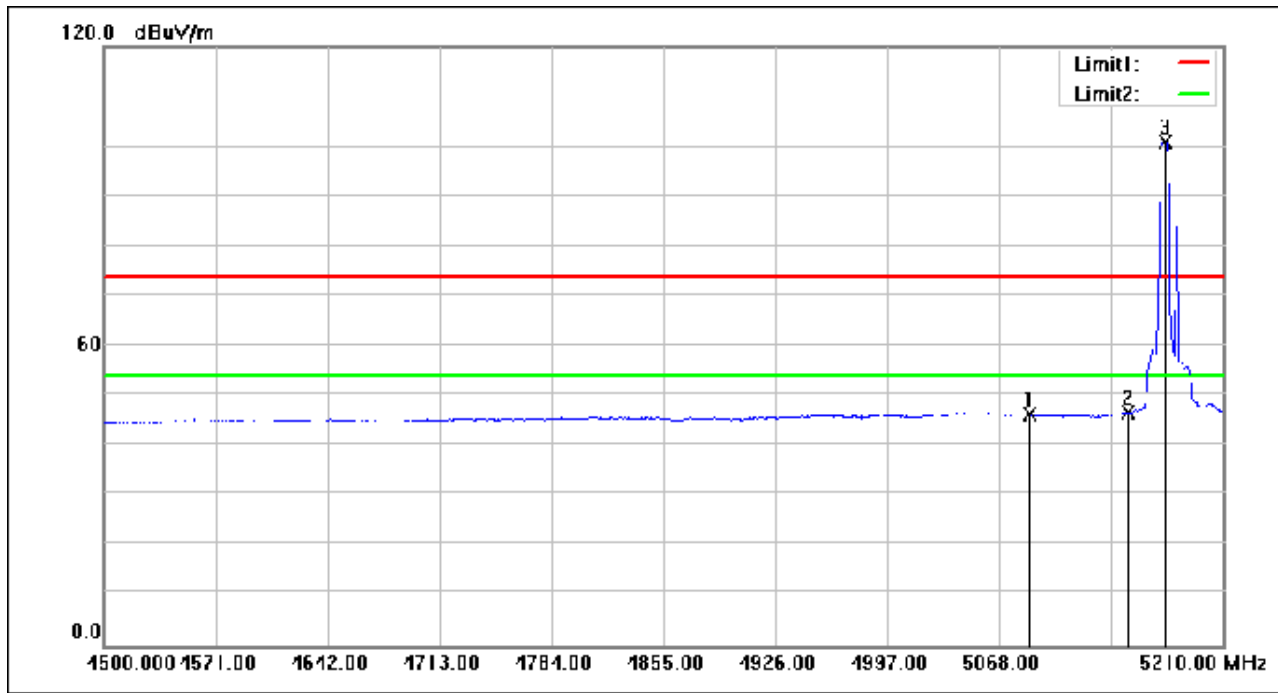

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.170	61.94	-15.63	46.31	54.00	-7.69	AVG
2	5150.000	62.15	-15.49	46.66	54.00	-7.34	AVG
3	5173.790	116.51	-15.46	101.05	54.00	47.05	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 394 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

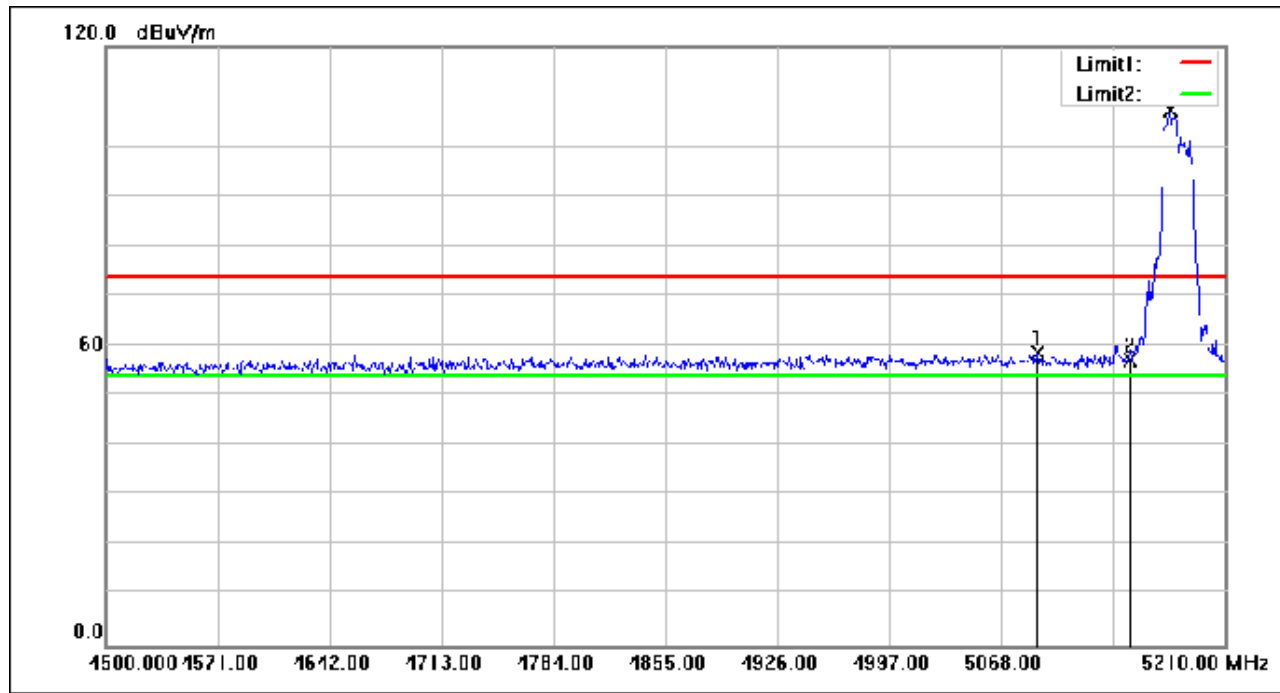

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5090.720	74.16	-15.62	58.54	74.00	-15.46	peak
2	5150.000	72.75	-15.49	57.26	74.00	-16.74	peak
3	5175.210	122.61	-15.46	107.15	74.00	33.15	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 395 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

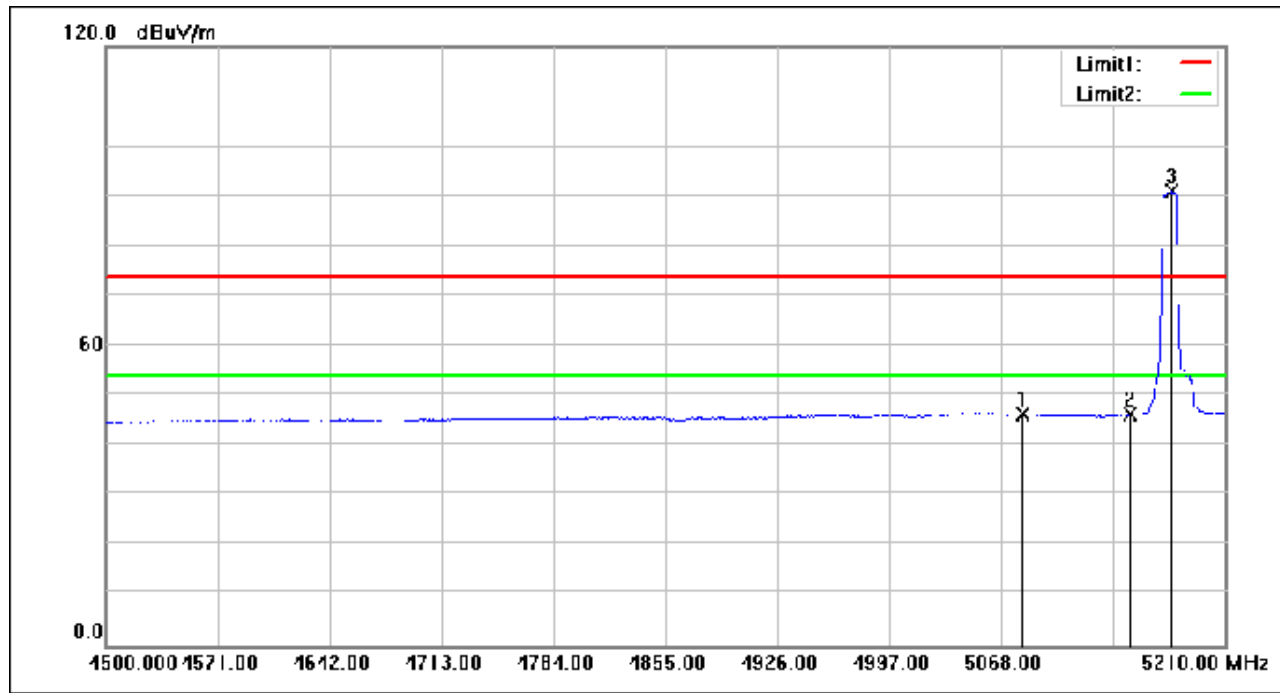

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5081.490	62.11	-15.64	46.47	54.00	-7.53	AVG
2	5150.000	61.72	-15.49	46.23	54.00	-7.77	AVG
3	5175.920	106.37	-15.46	90.91	54.00	36.91	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 396 of 929

Test Mode: 01; Polarity: Vertical; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

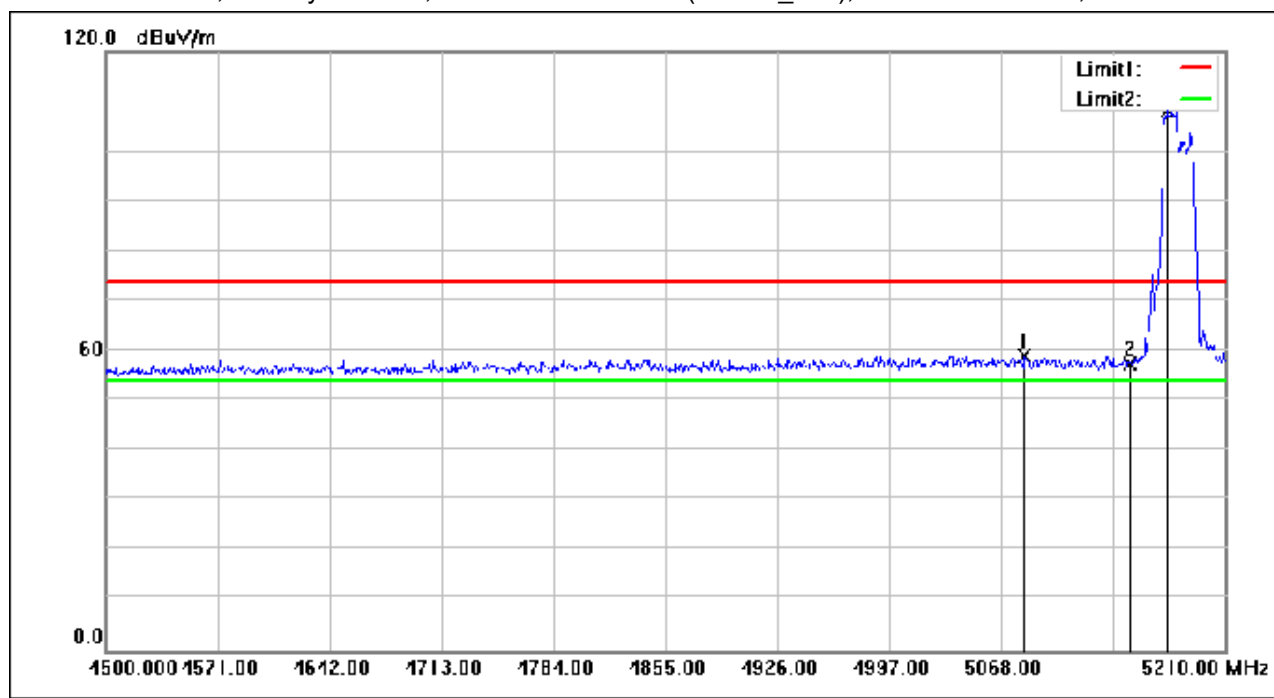

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.910	74.68	-15.64	59.04	74.00	-14.96	peak
2	5150.000	72.80	-15.49	57.31	74.00	-16.69	peak
3	5173.080	123.51	-15.46	108.05	74.00	34.05	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 397 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

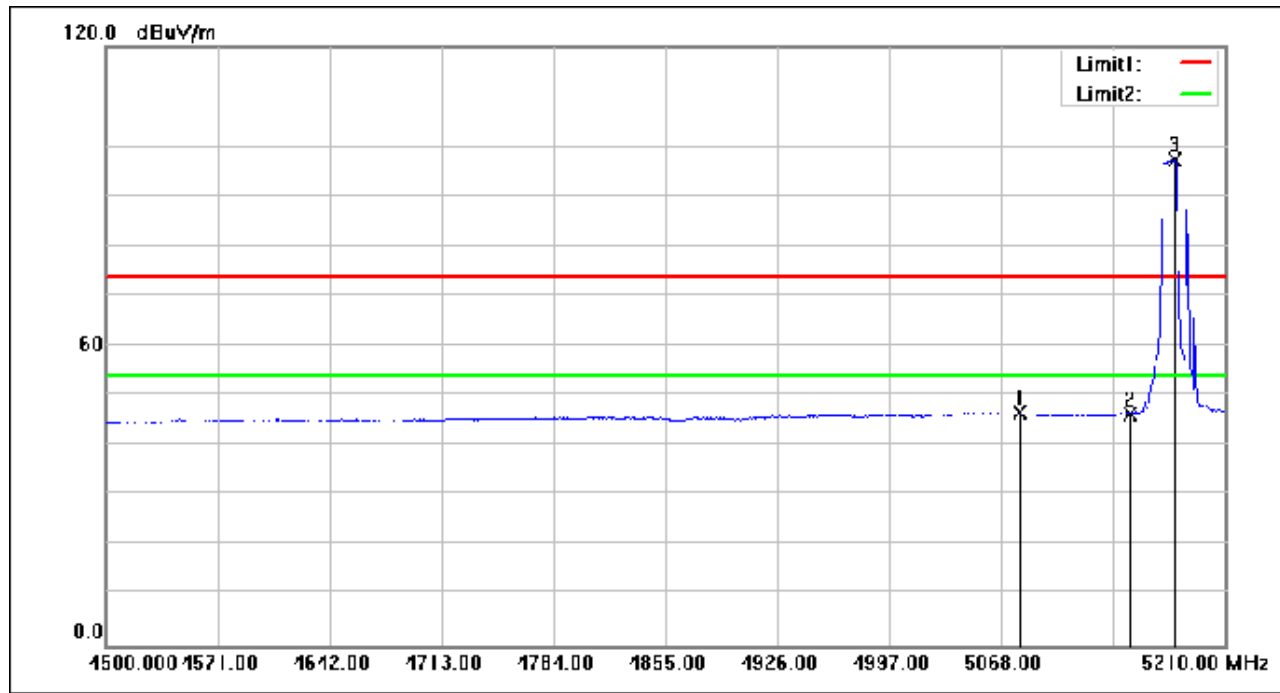

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.070	62.17	-15.64	46.53	54.00	-7.47	AVG
2	5150.000	61.94	-15.49	46.45	54.00	-7.55	AVG
3	5178.050	112.95	-15.46	97.49	54.00	43.49	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 398 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

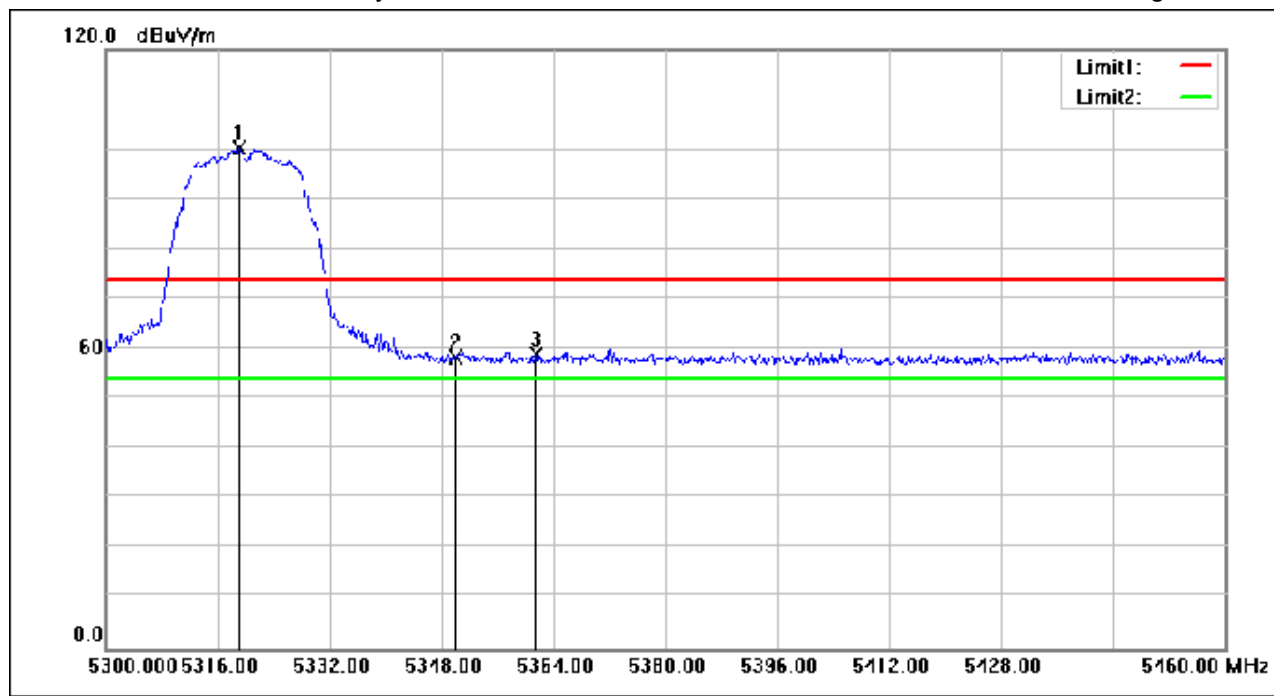

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	115.82	-15.46	100.36	74.00	26.36	peak
2	5350.000	73.83	-15.49	58.34	74.00	-15.66	peak
3	5361.440	74.38	-15.47	58.91	74.00	-15.09	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 399 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

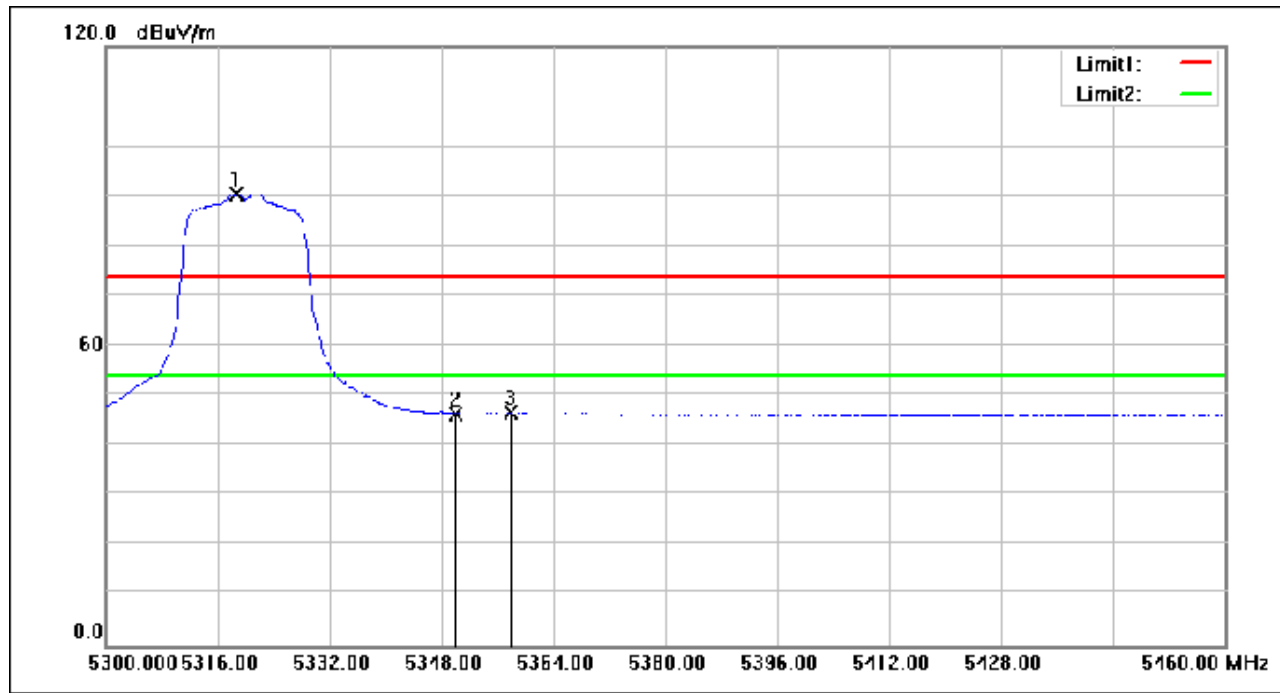

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.560	105.92	-15.46	90.46	54.00	36.46	AVG
2	5350.000	61.95	-15.49	46.46	54.00	-7.54	AVG
3	5357.920	62.12	-15.48	46.64	54.00	-7.36	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 400 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

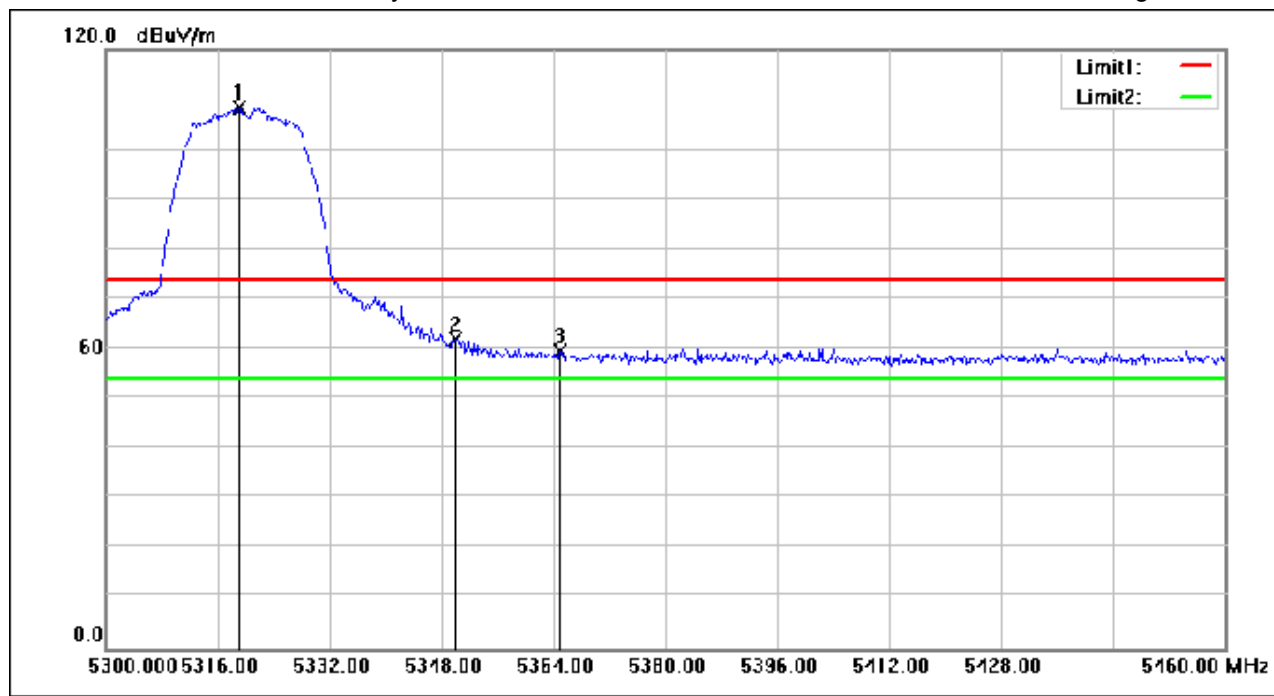

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	124.05	-15.46	108.59	74.00	34.59	peak
2	5350.000	77.39	-15.49	61.90	74.00	-12.10	peak
3	5364.960	75.01	-15.47	59.54	74.00	-14.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 401 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

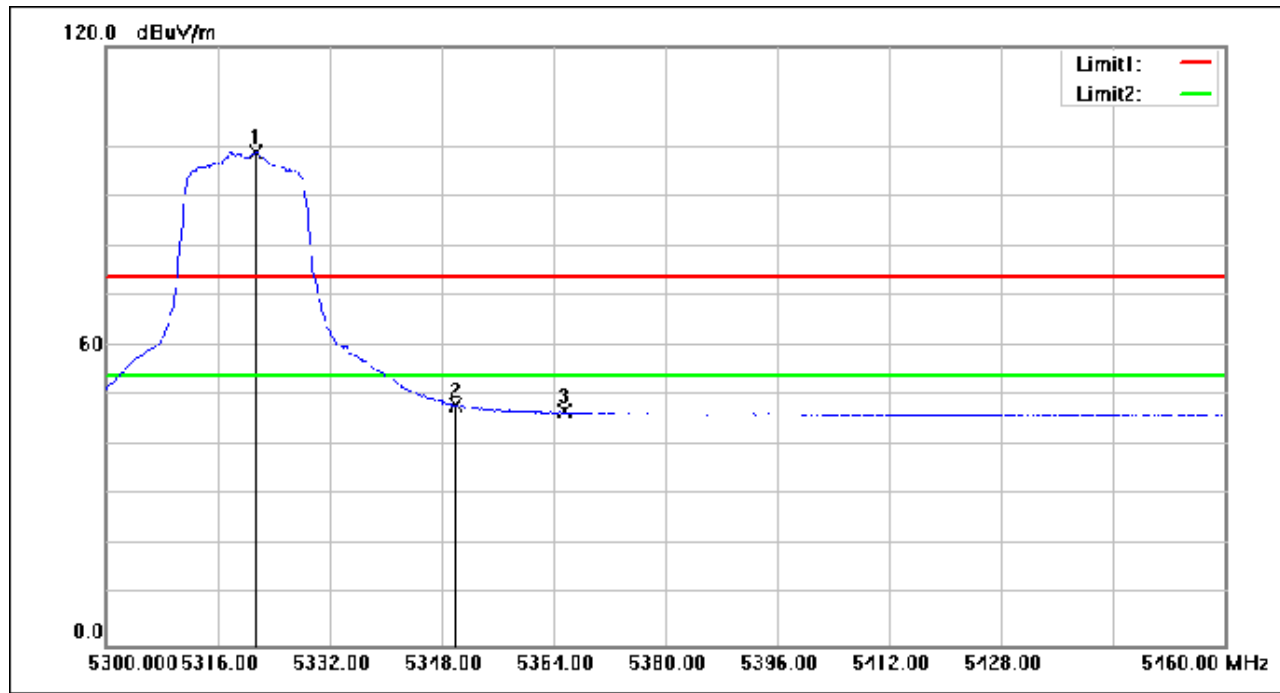

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.440	114.29	-15.46	98.83	54.00	44.83	AVG
2	5350.000	63.50	-15.49	48.01	54.00	-5.99	AVG
3	5365.600	62.38	-15.47	46.91	54.00	-7.09	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 402 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

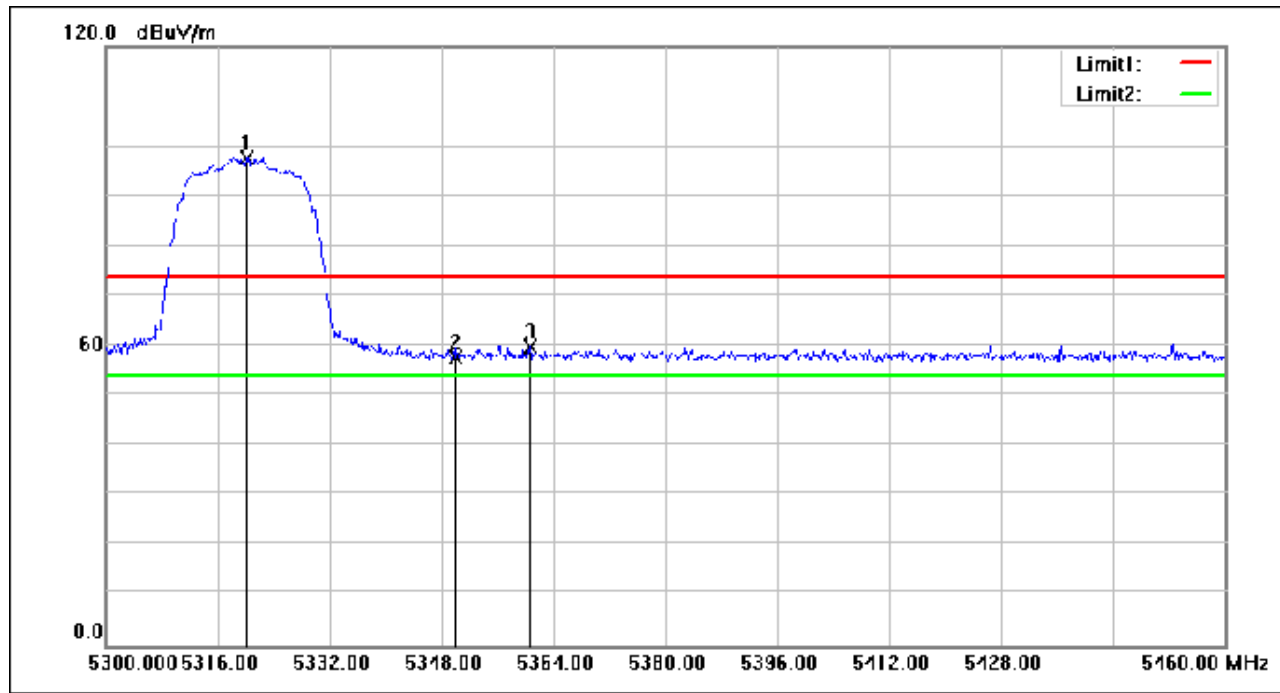

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.160	113.16	-15.46	97.70	74.00	23.70	peak
2	5350.000	73.16	-15.49	57.67	74.00	-16.33	peak
3	5360.640	75.46	-15.47	59.99	74.00	-14.01	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 403 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

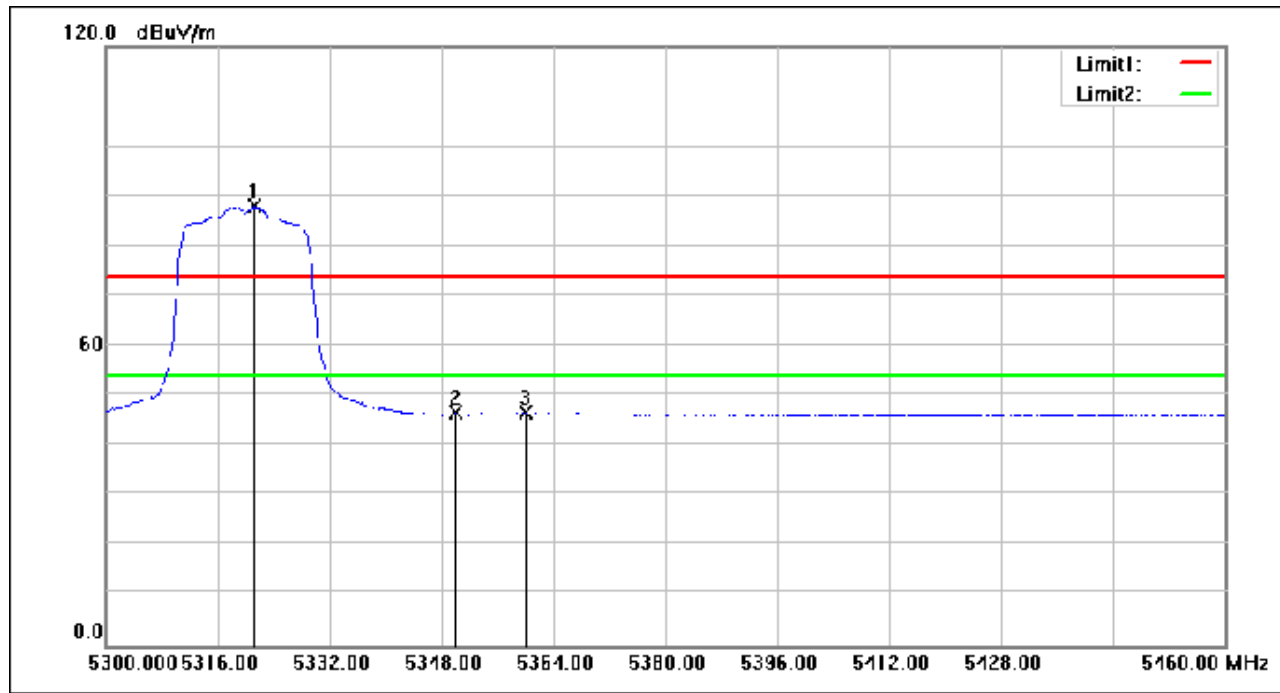

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.120	103.40	-15.46	87.94	54.00	33.94	AVG
2	5350.000	62.05	-15.49	46.56	54.00	-7.44	AVG
3	5360.000	62.03	-15.47	46.56	54.00	-7.44	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 404 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

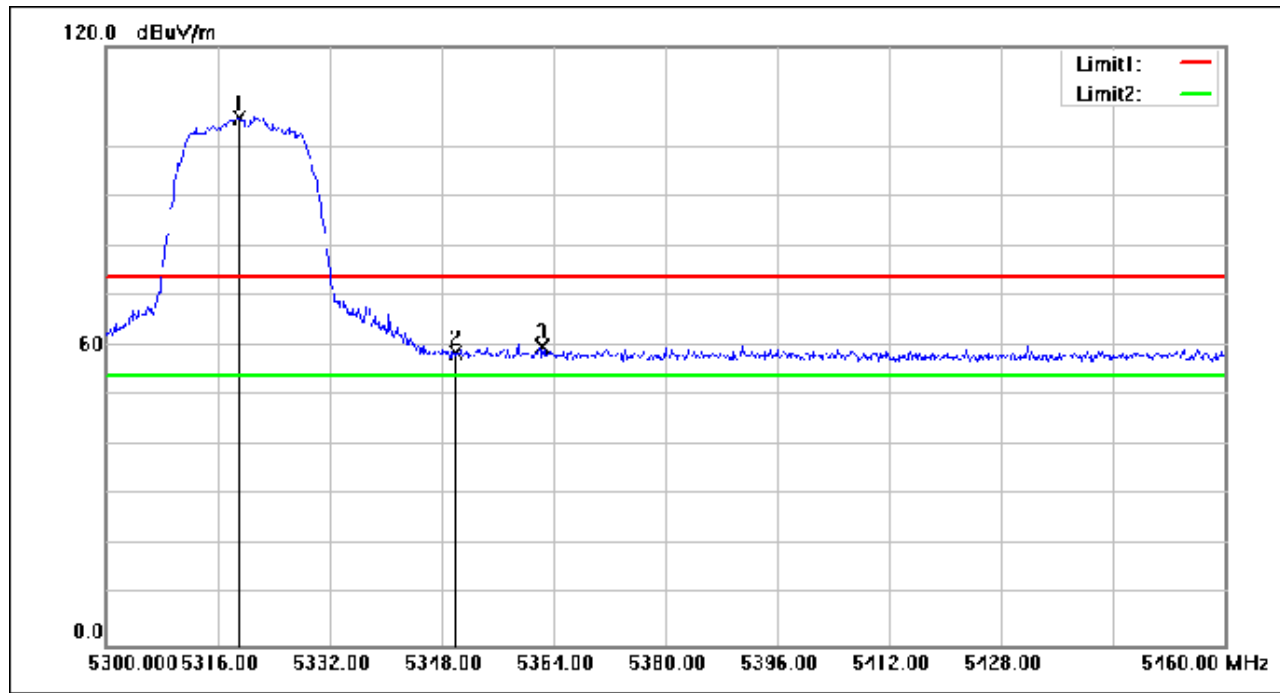

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	121.28	-15.46	105.82	74.00	31.82	peak
2	5350.000	74.15	-15.49	58.66	74.00	-15.34	peak
3	5362.400	75.24	-15.47	59.77	74.00	-14.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 405 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

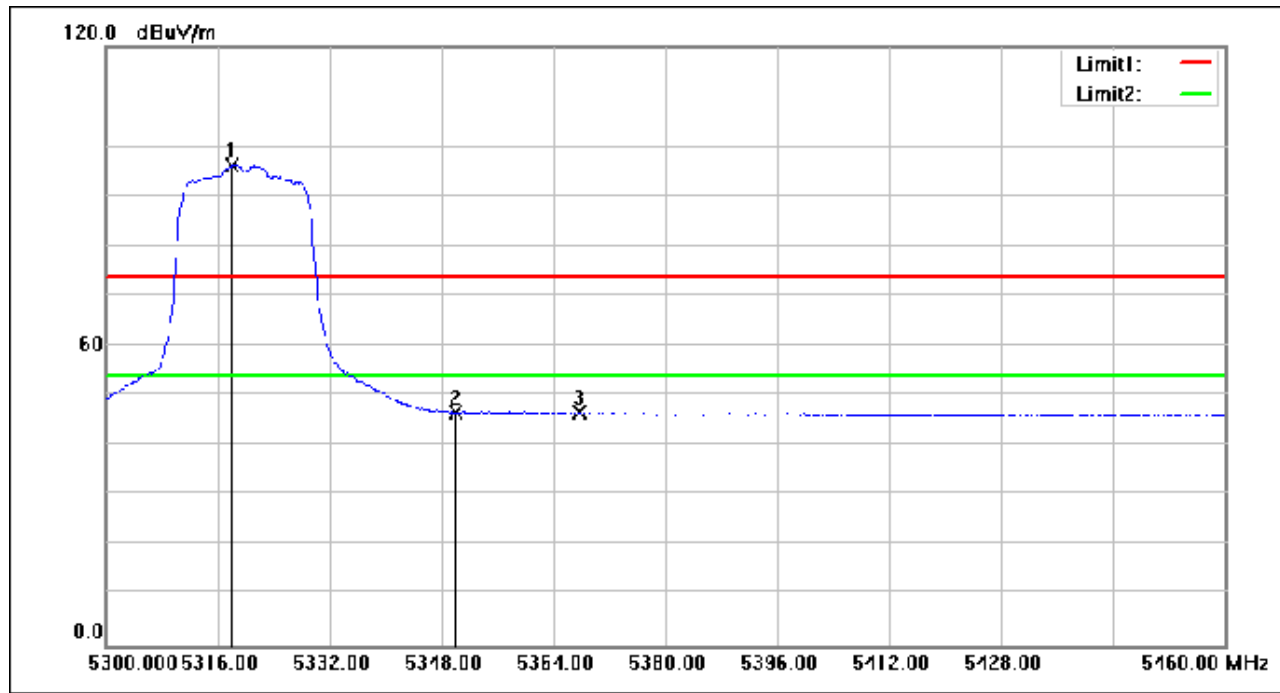

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5317.920	111.66	-15.46	96.20	54.00	42.20	AVG
2	5350.000	62.29	-15.49	46.80	54.00	-7.20	AVG
3	5367.680	62.11	-15.47	46.64	54.00	-7.36	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 406 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

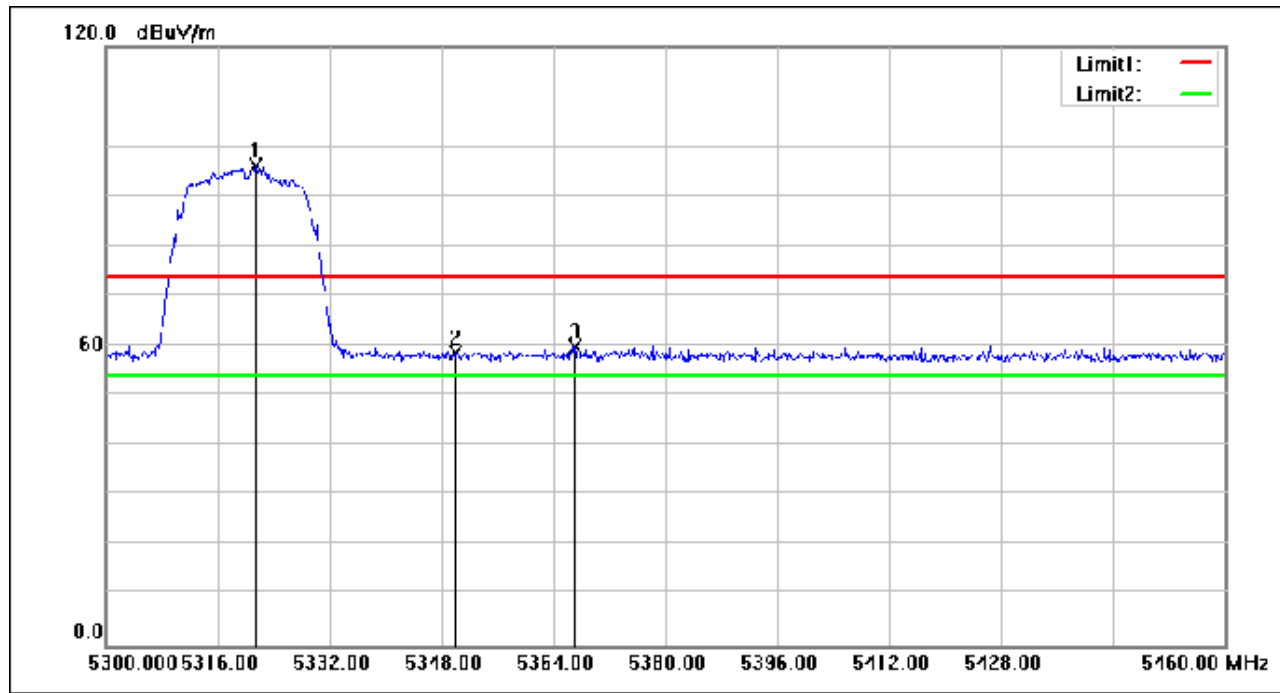

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.440	111.49	-15.46	96.03	74.00	22.03	peak
2	5350.000	74.02	-15.49	58.53	74.00	-15.47	peak
3	5367.040	75.43	-15.47	59.96	74.00	-14.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 407 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

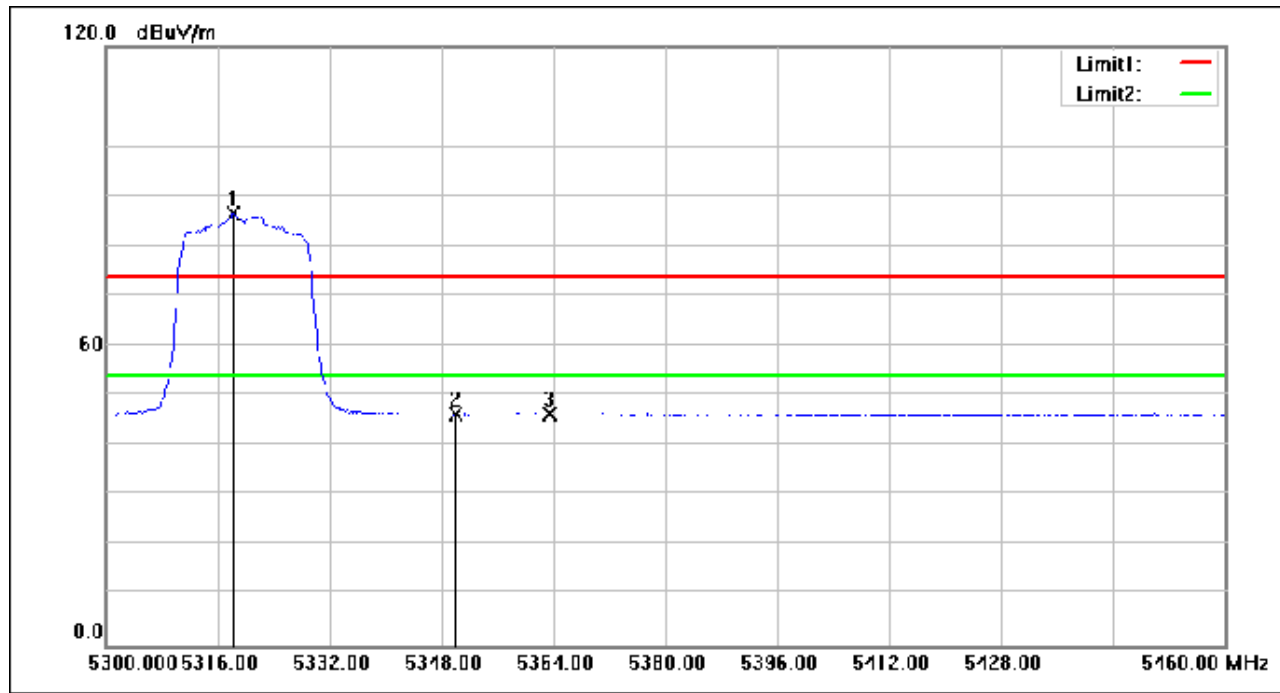

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	101.92	-15.46	86.46	54.00	32.46	AVG
2	5350.000	61.80	-15.49	46.31	54.00	-7.69	AVG
3	5363.520	61.95	-15.47	46.48	54.00	-7.52	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 408 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

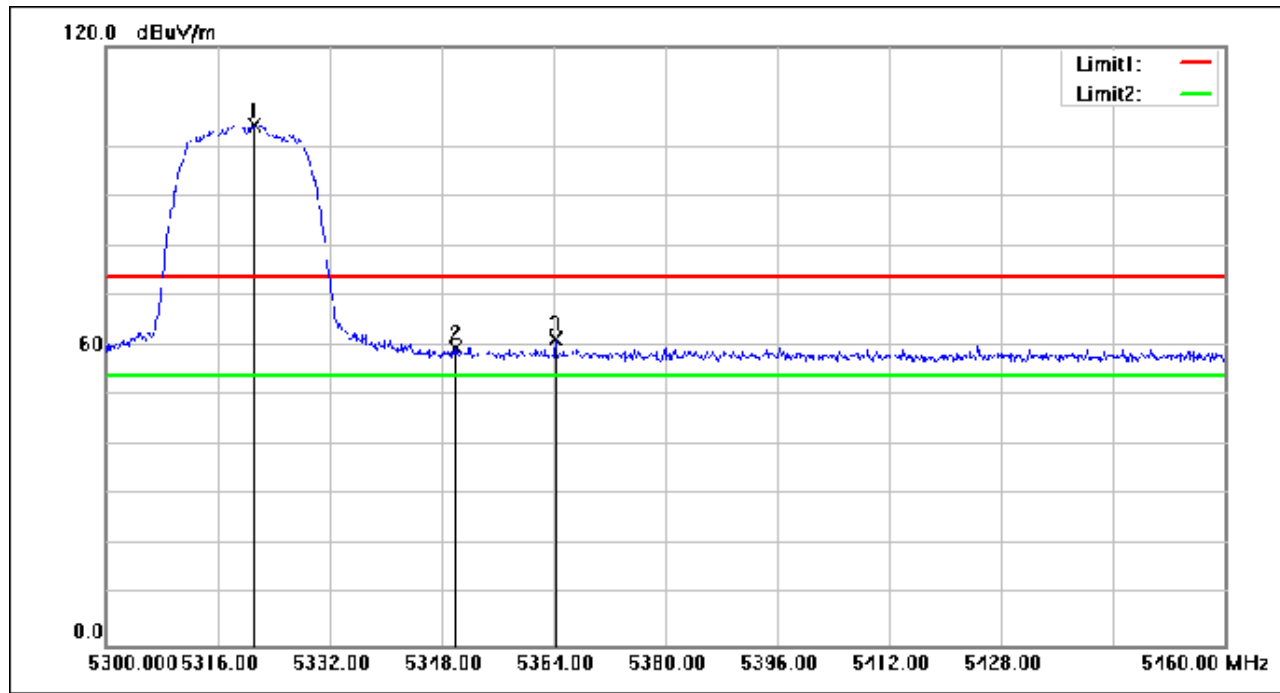

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.280	119.84	-15.46	104.38	74.00	30.38	peak
2	5350.000	74.94	-15.49	59.45	74.00	-14.55	peak
3	5364.320	76.67	-15.47	61.20	74.00	-12.80	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 409 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

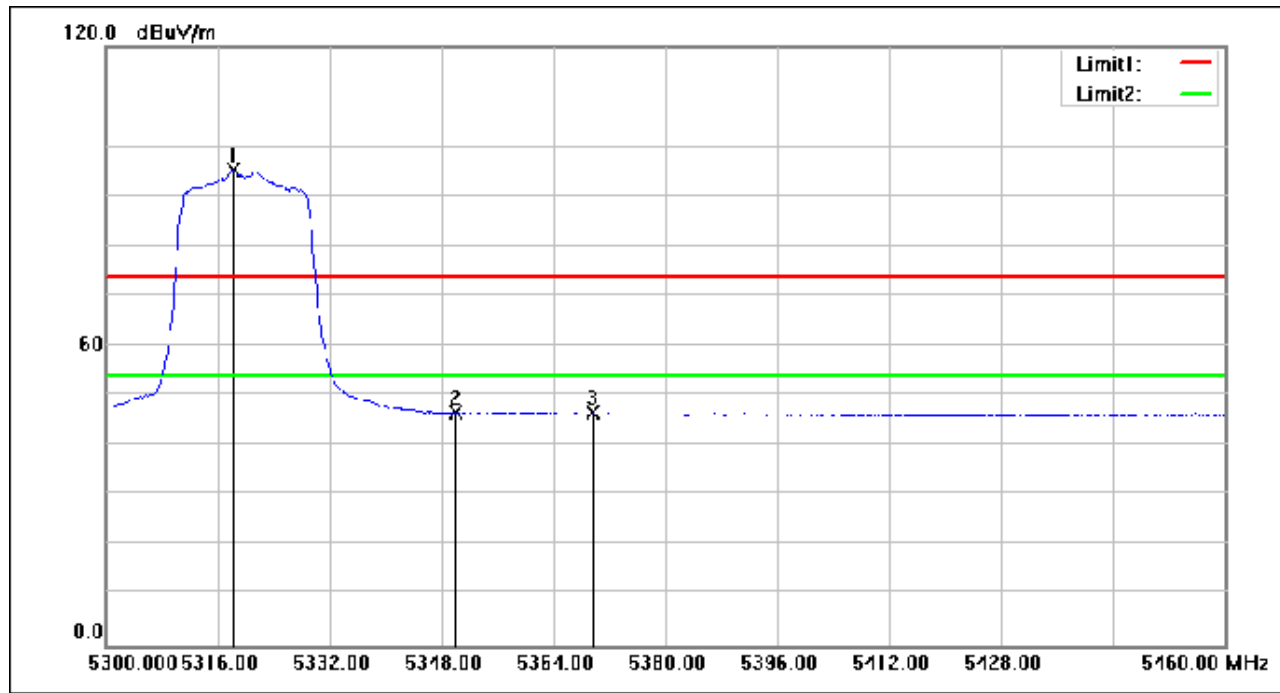

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	110.61	-15.46	95.15	54.00	41.15	AVG
2	5350.000	62.05	-15.49	46.56	54.00	-7.44	AVG
3	5369.600	62.01	-15.45	46.56	54.00	-7.44	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 410 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

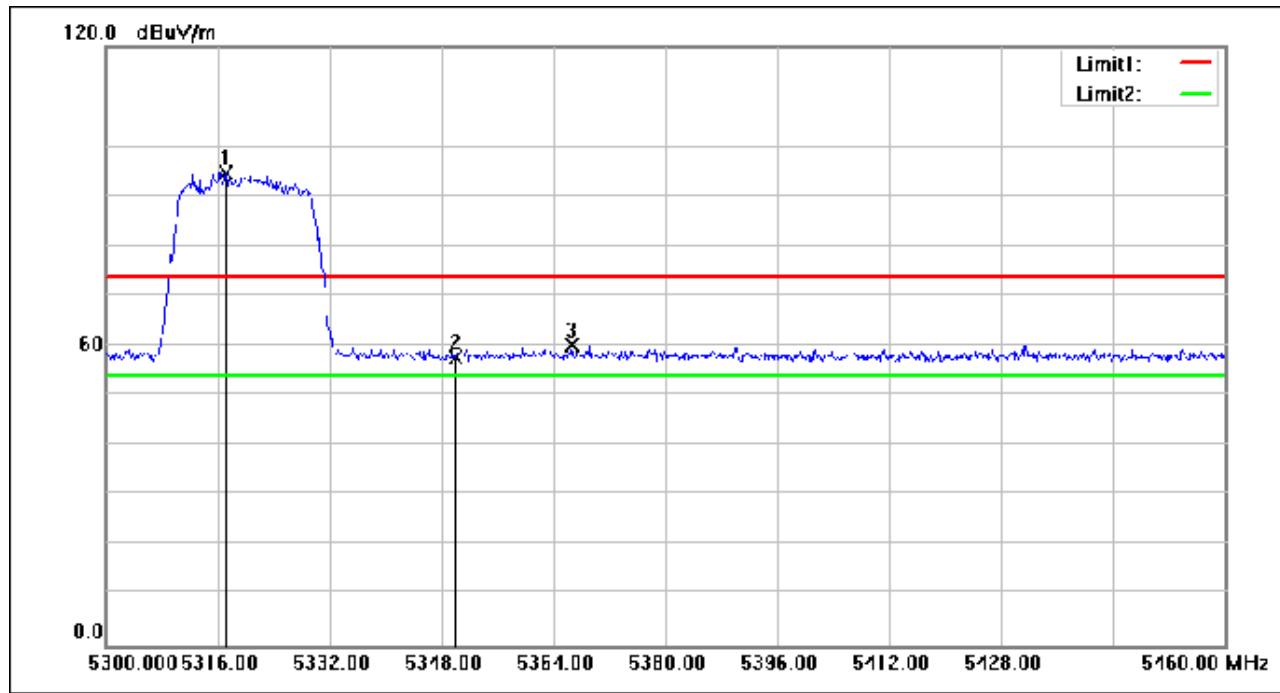

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5317.120	110.11	-15.45	94.66	54.00	40.66	AVG
2	5350.000	73.37	-15.49	57.88	54.00	3.88	AVG
3	5366.560	75.67	-15.47	60.20	54.00	6.20	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 411 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

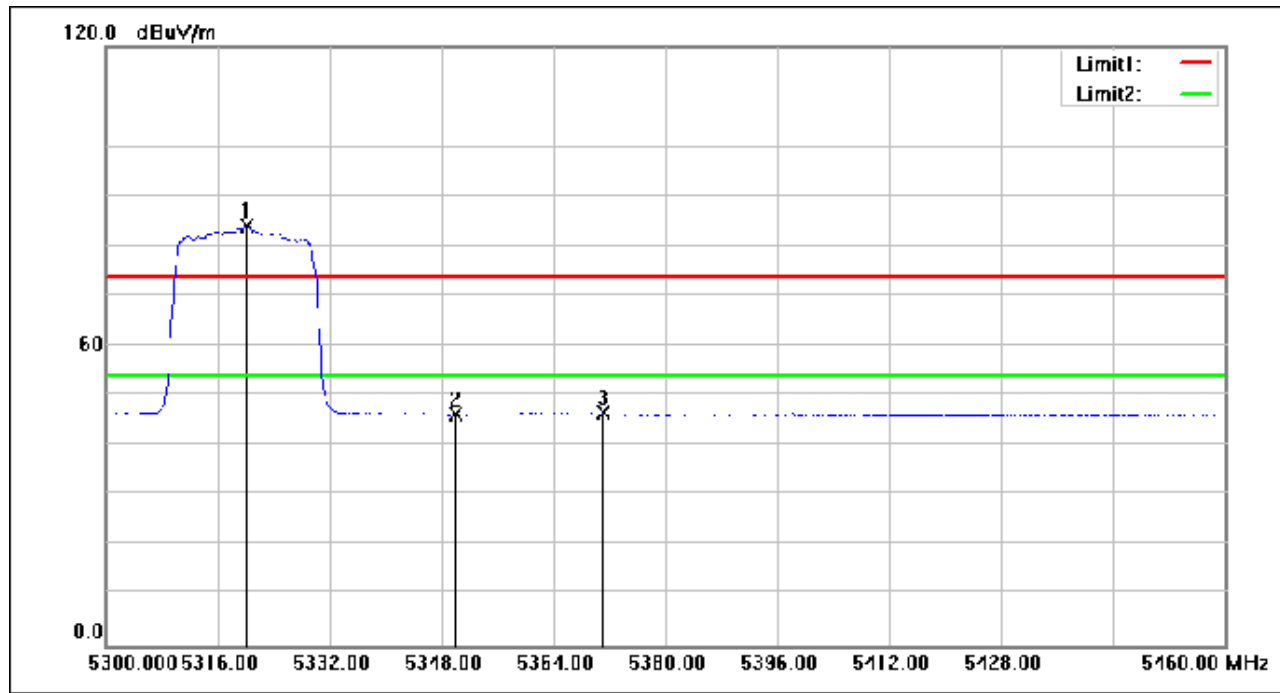

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.160	99.57	-15.46	84.11	54.00	30.11	AVG
2	5350.000	61.76	-15.49	46.27	54.00	-7.73	AVG
3	5371.040	62.07	-15.45	46.62	54.00	-7.38	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 412 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

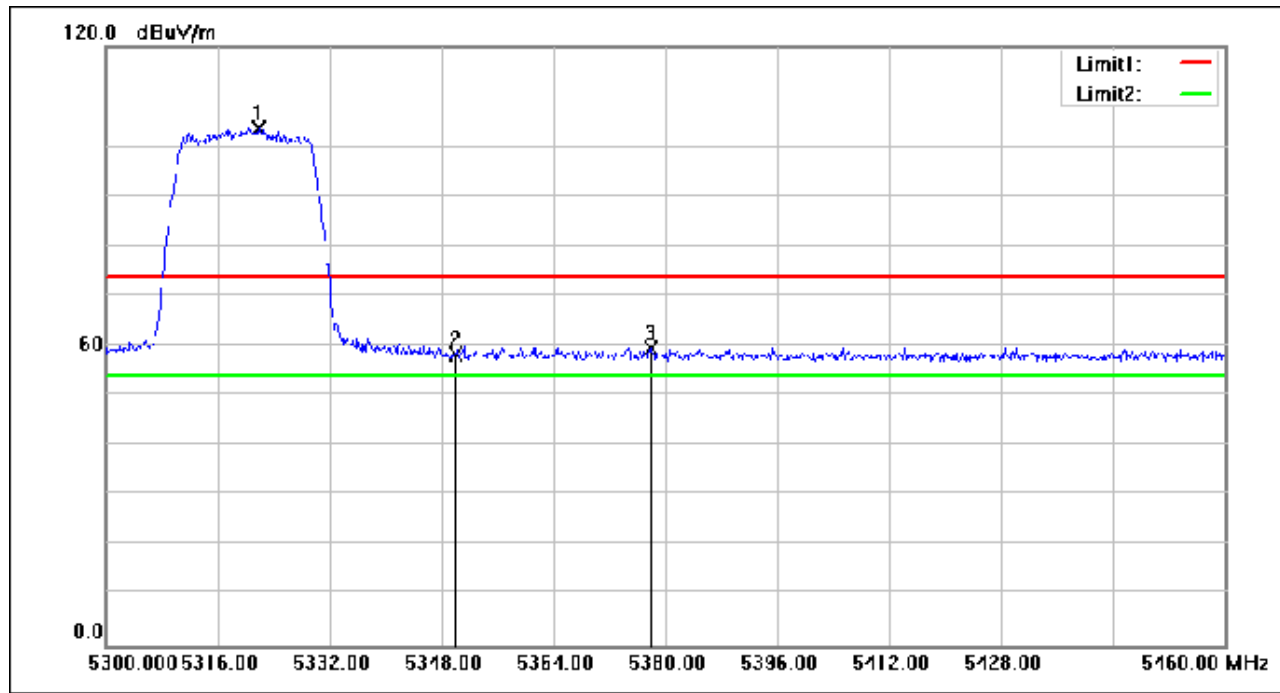

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.760	119.09	-15.46	103.63	74.00	29.63	peak
2	5350.000	73.75	-15.49	58.26	74.00	-15.74	peak
3	5377.920	74.96	-15.45	59.51	74.00	-14.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 413 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

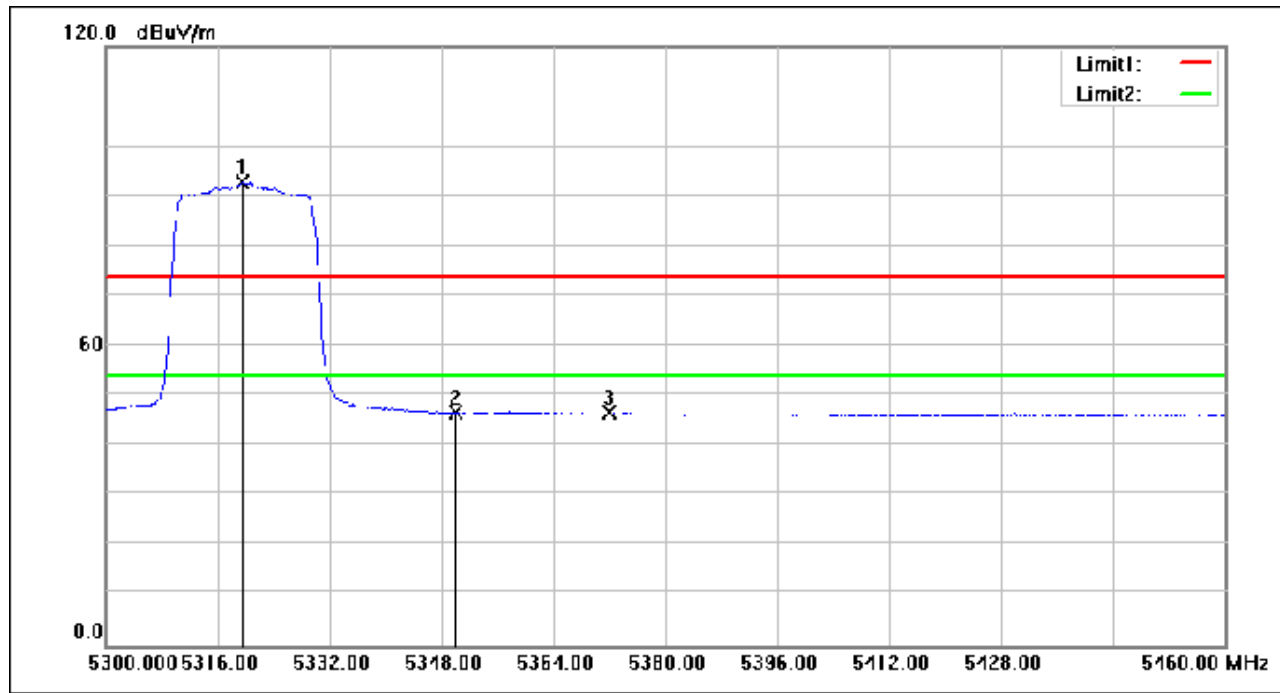

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.520	108.20	-15.46	92.74	54.00	38.74	AVG
2	5350.000	62.04	-15.49	46.55	54.00	-7.45	AVG
3	5372.000	62.05	-15.45	46.60	54.00	-7.40	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 414 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

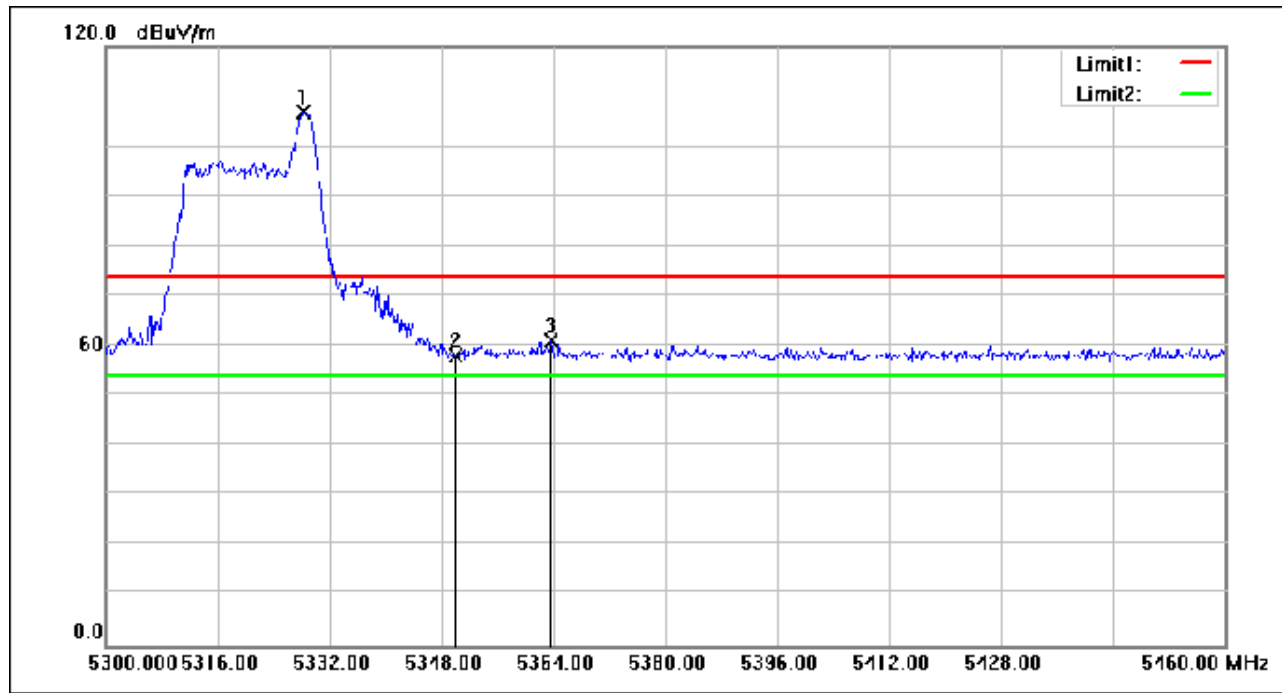

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.320	122.36	-15.47	106.89	74.00	32.89	peak
2	5350.000	73.53	-15.49	58.04	74.00	-15.96	peak
3	5363.680	76.52	-15.47	61.05	74.00	-12.95	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 415 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

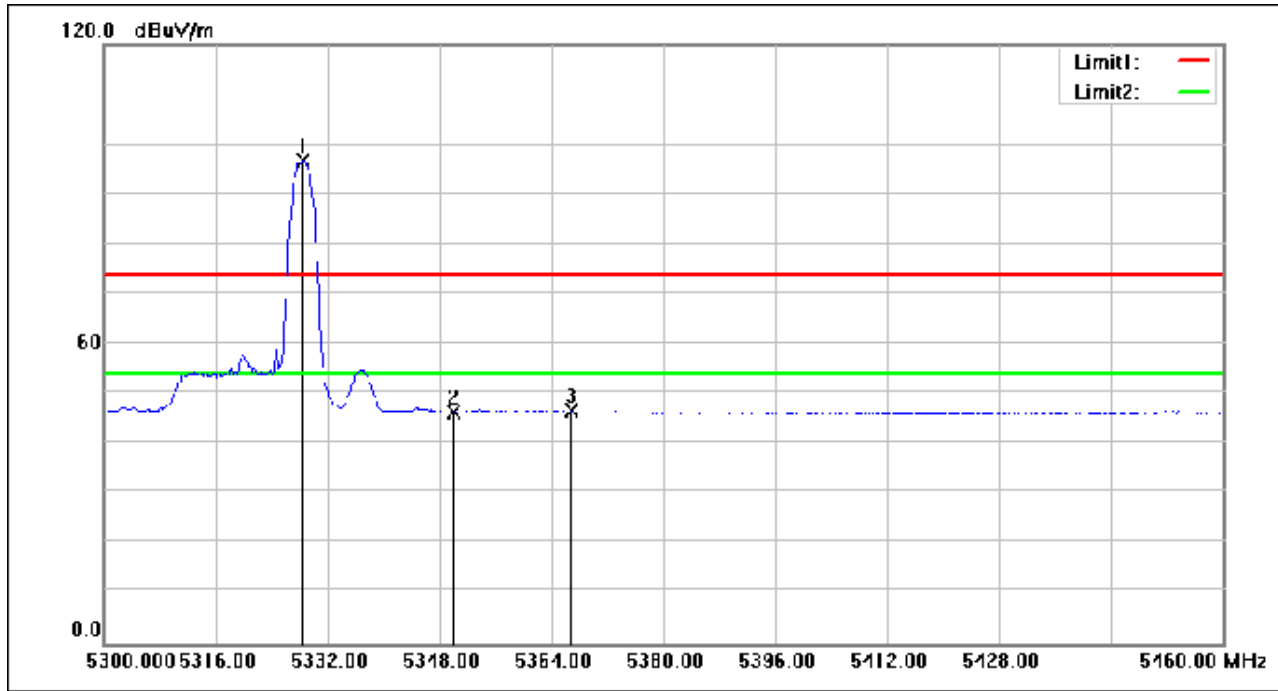

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	112.19	-15.47	96.72	54.00	42.72	AVG
2	5350.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5366.880	62.10	-15.47	46.63	54.00	-7.37	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 416 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

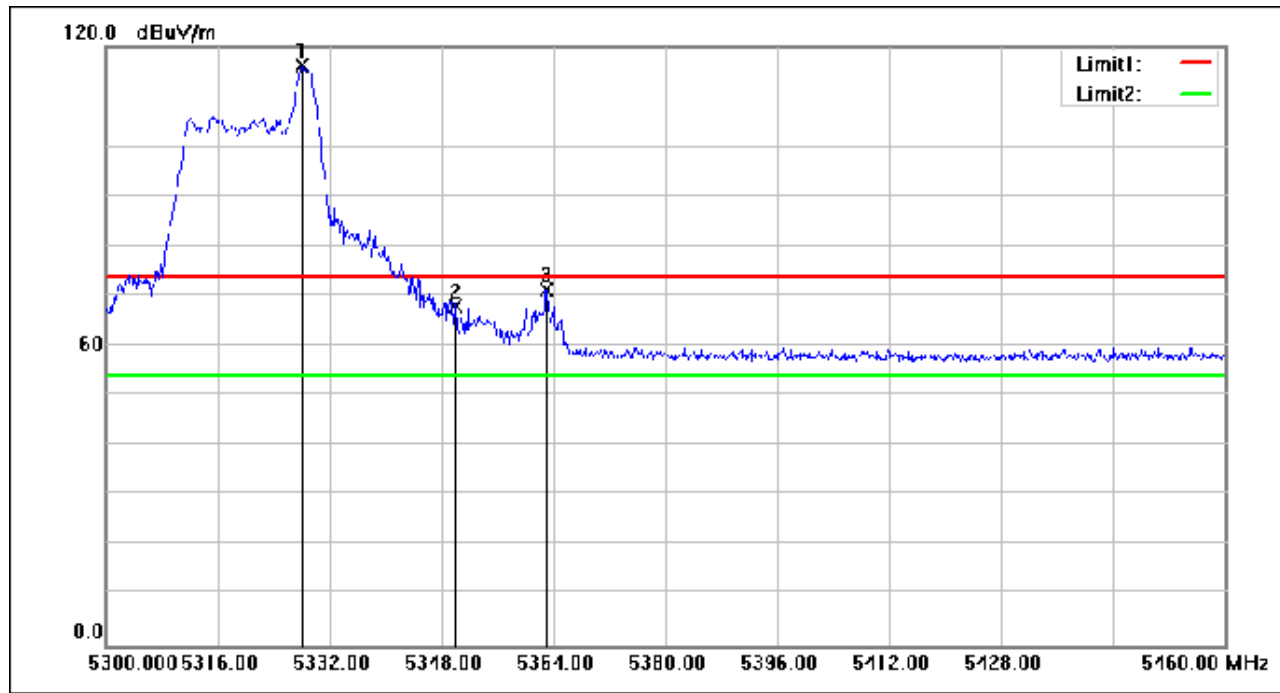

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.000	131.74	-15.47	116.27	74.00	42.27	peak
2	5350.000	83.50	-15.49	68.01	74.00	-5.99	peak
3	5363.040	86.66	-15.47	71.19	74.00	-2.81	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 417 of 929

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ax(RU26_Right); Bandwidth: 20MHz; Channel: High

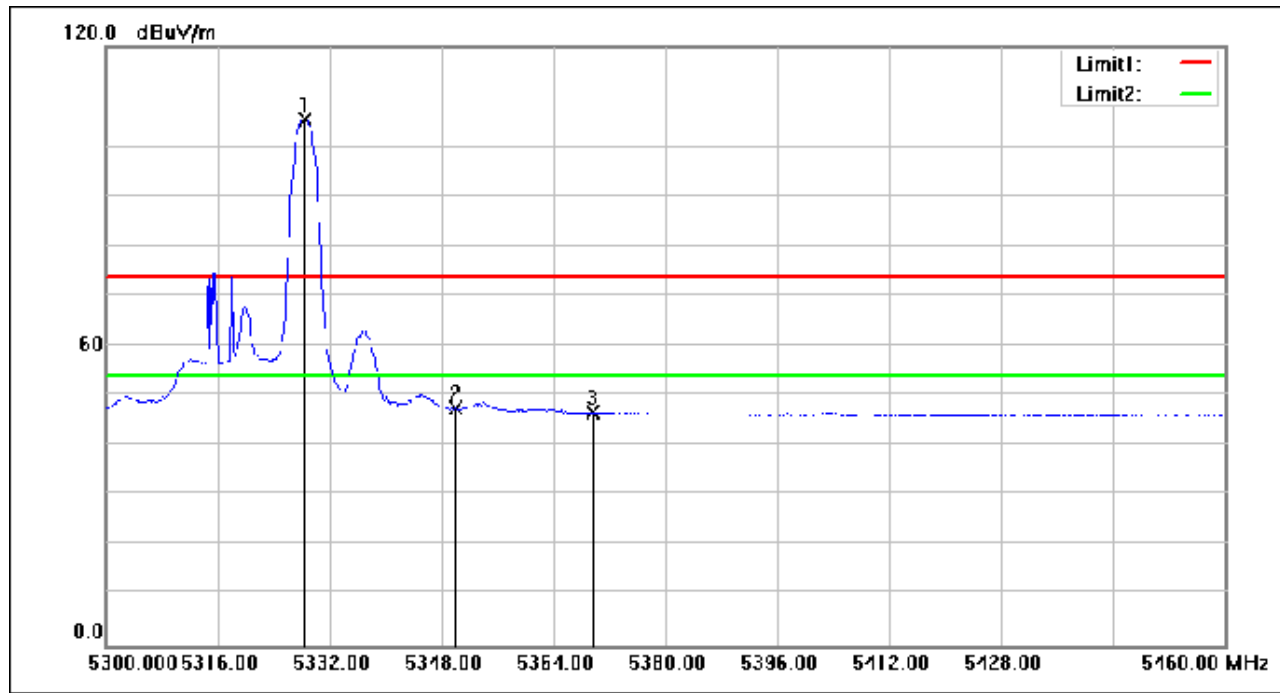

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	121.05	-15.47	105.58	54.00	51.58	AVG
2	5350.000	62.94	-15.49	47.45	54.00	-6.55	AVG
3	5369.600	62.20	-15.45	46.75	54.00	-7.25	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 418 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU52_Right); Bandwidth: 20MHz; Channel: High

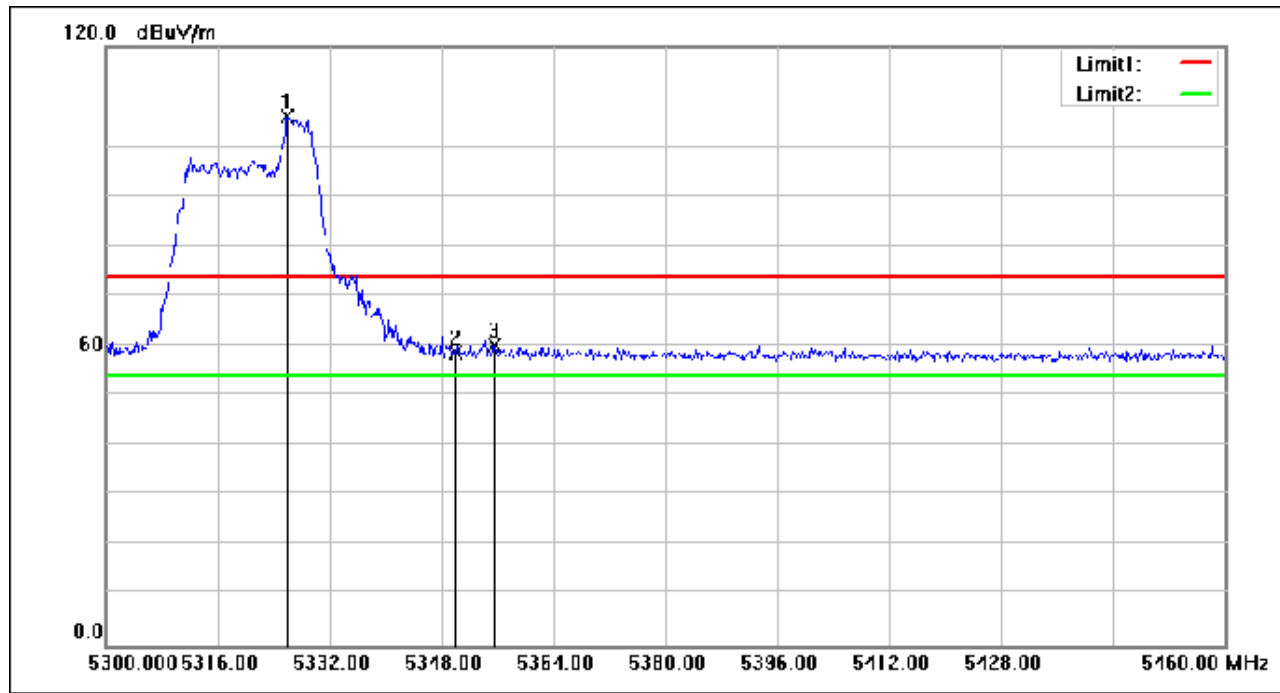

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5325.920	121.48	-15.47	106.01	74.00	32.01	peak
2	5350.000	74.26	-15.49	58.77	74.00	-15.23	peak
3	5355.520	75.55	-15.49	60.06	74.00	-13.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 419 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

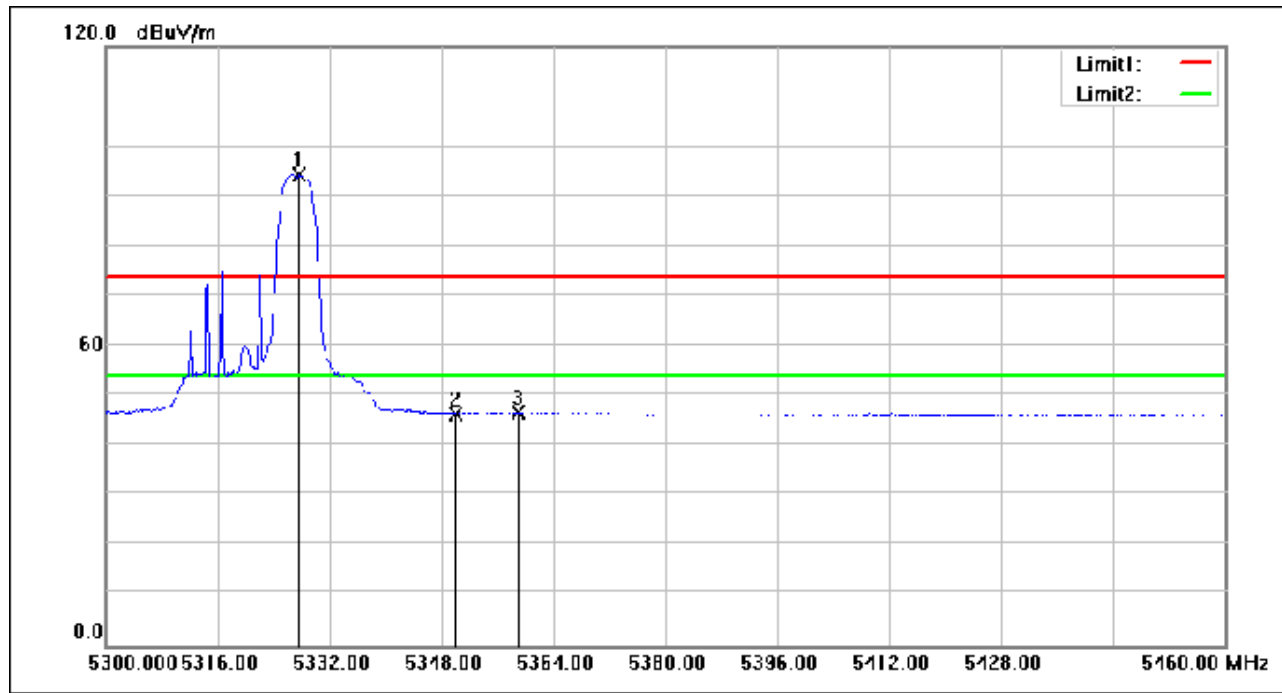

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.680	109.87	-15.47	94.40	54.00	40.40	AVG
2	5350.000	61.97	-15.49	46.48	54.00	-7.52	AVG
3	5358.880	62.11	-15.47	46.64	54.00	-7.36	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 420 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

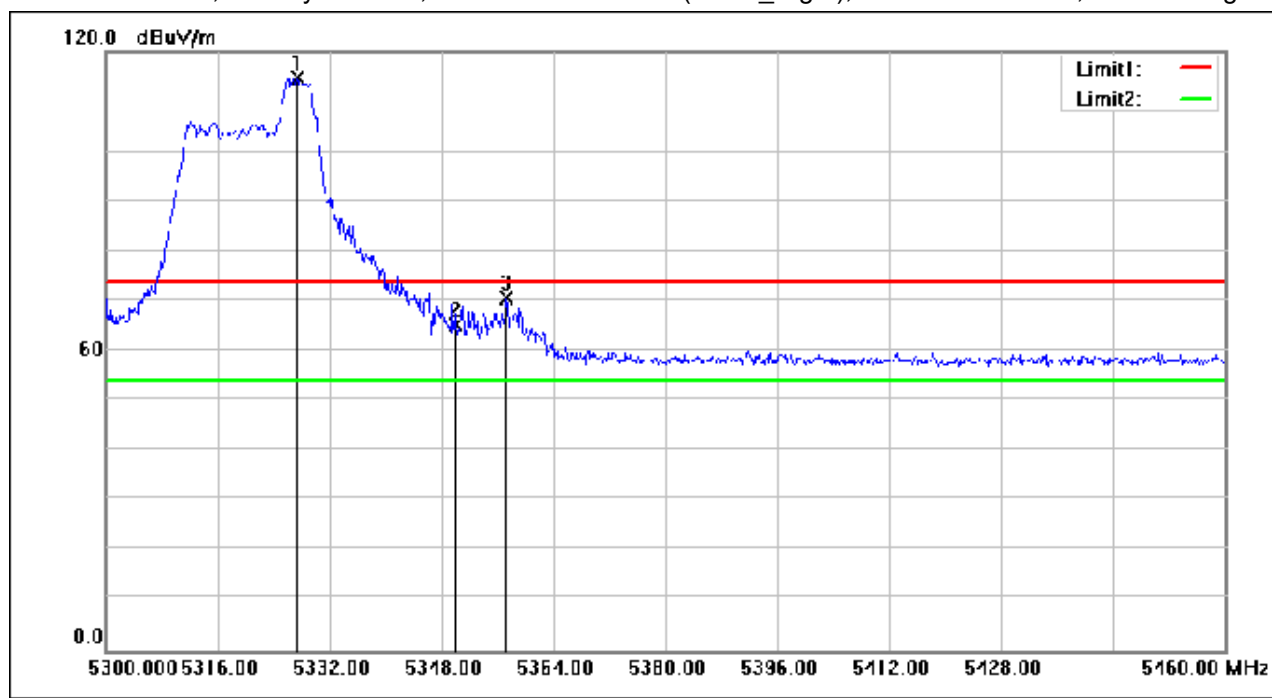

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.360	130.20	-15.46	114.74	74.00	40.74	peak
2	5350.000	80.65	-15.49	65.16	74.00	-8.84	peak
3	5357.280	86.25	-15.48	70.77	74.00	-3.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 421 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

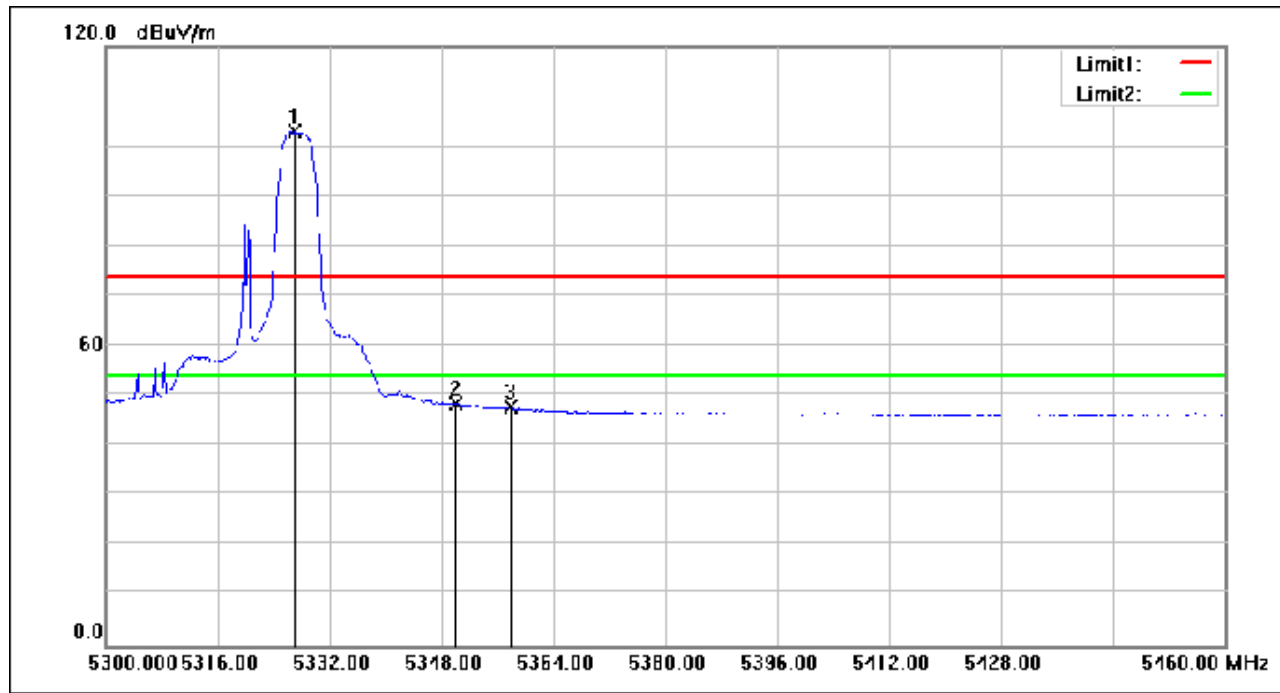

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.040	118.47	-15.47	103.00	54.00	49.00	AVG
2	5350.000	63.83	-15.49	48.34	54.00	-5.66	AVG
3	5357.920	63.19	-15.48	47.71	54.00	-6.29	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 422 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

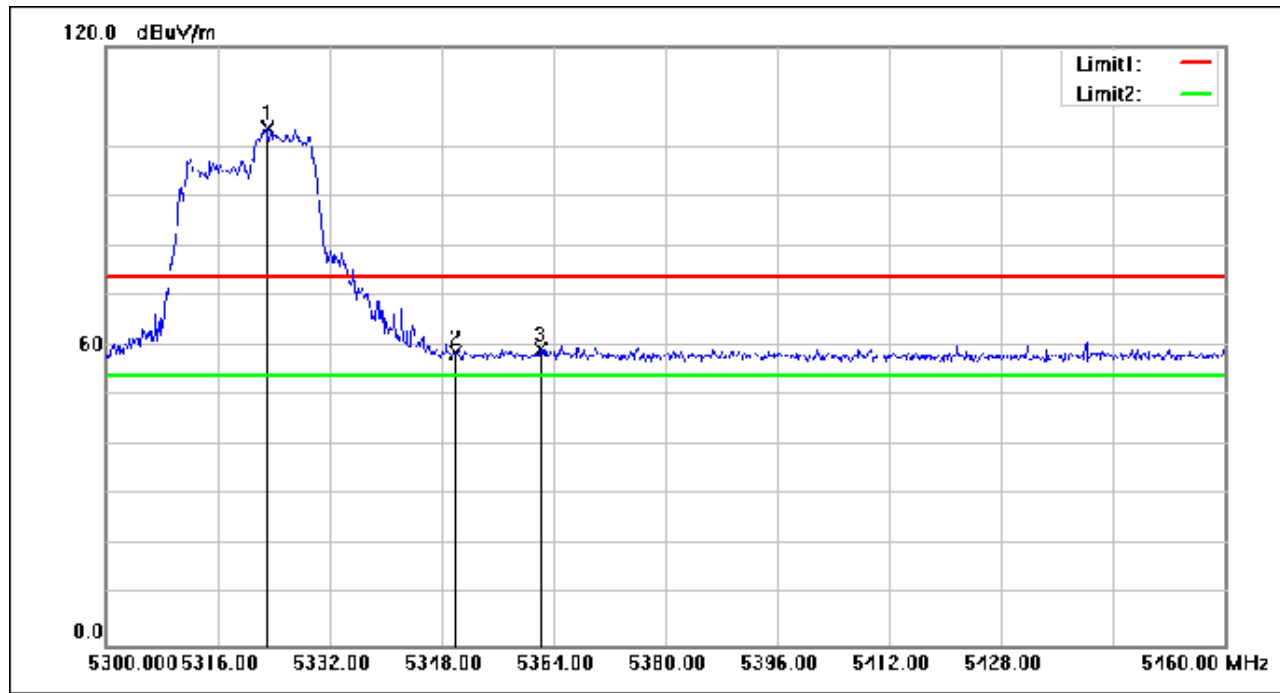

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.040	119.13	-15.47	103.66	74.00	29.66	peak
2	5350.000	74.20	-15.49	58.71	74.00	-15.29	peak
3	5362.080	74.70	-15.47	59.23	74.00	-14.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 423 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

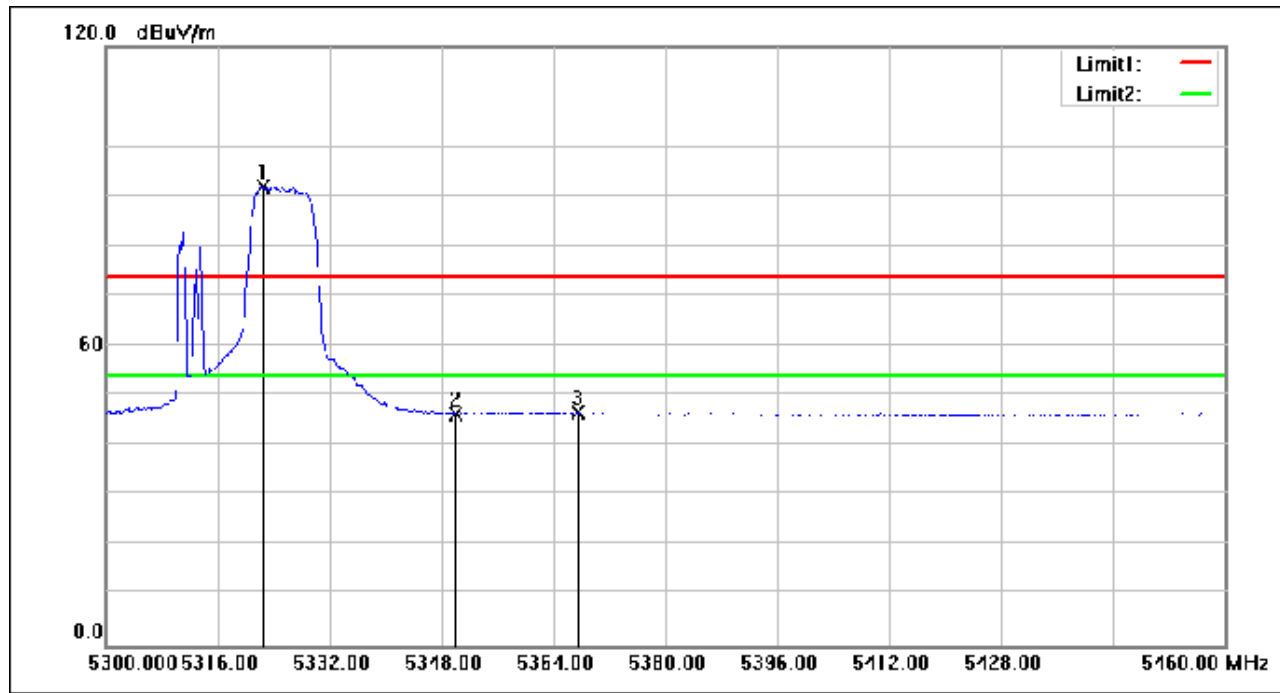

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.400	107.47	-15.46	92.01	54.00	38.01	AVG
2	5350.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5367.520	62.08	-15.47	46.61	54.00	-7.39	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 424 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

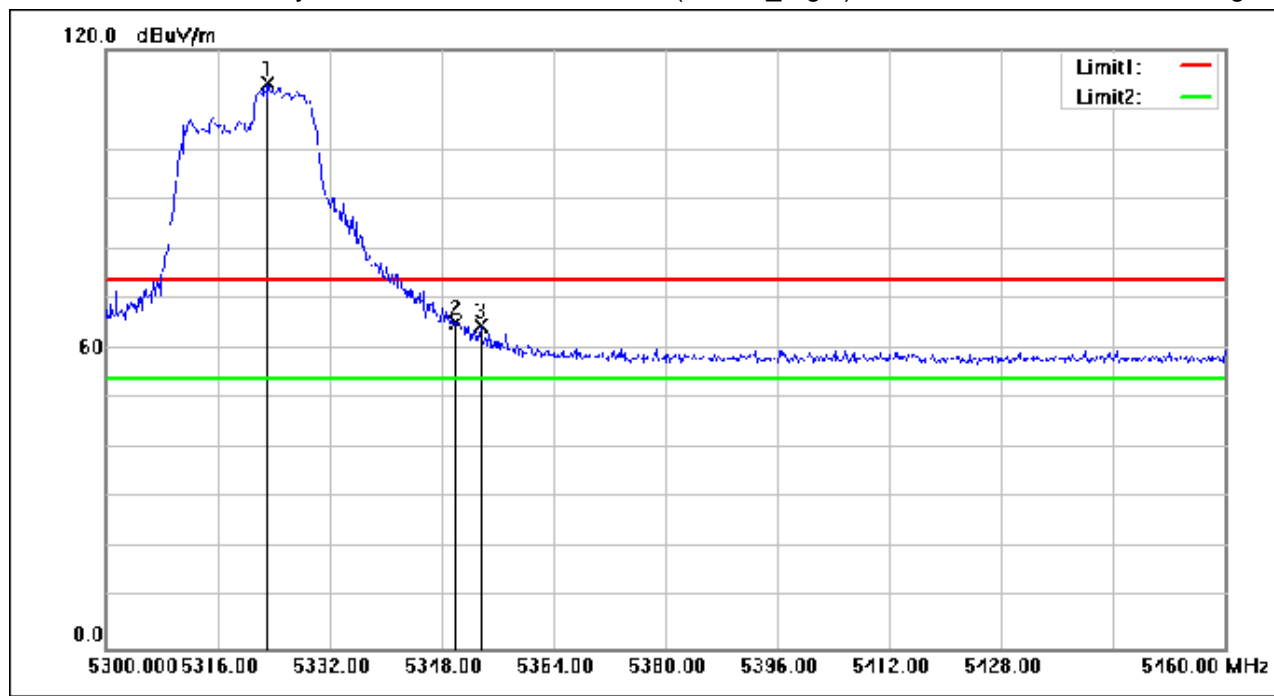

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.200	128.59	-15.47	113.12	74.00	39.12	peak
2	5350.000	80.83	-15.49	65.34	74.00	-8.66	peak
3	5353.600	80.27	-15.49	64.78	74.00	-9.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 425 of 929

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

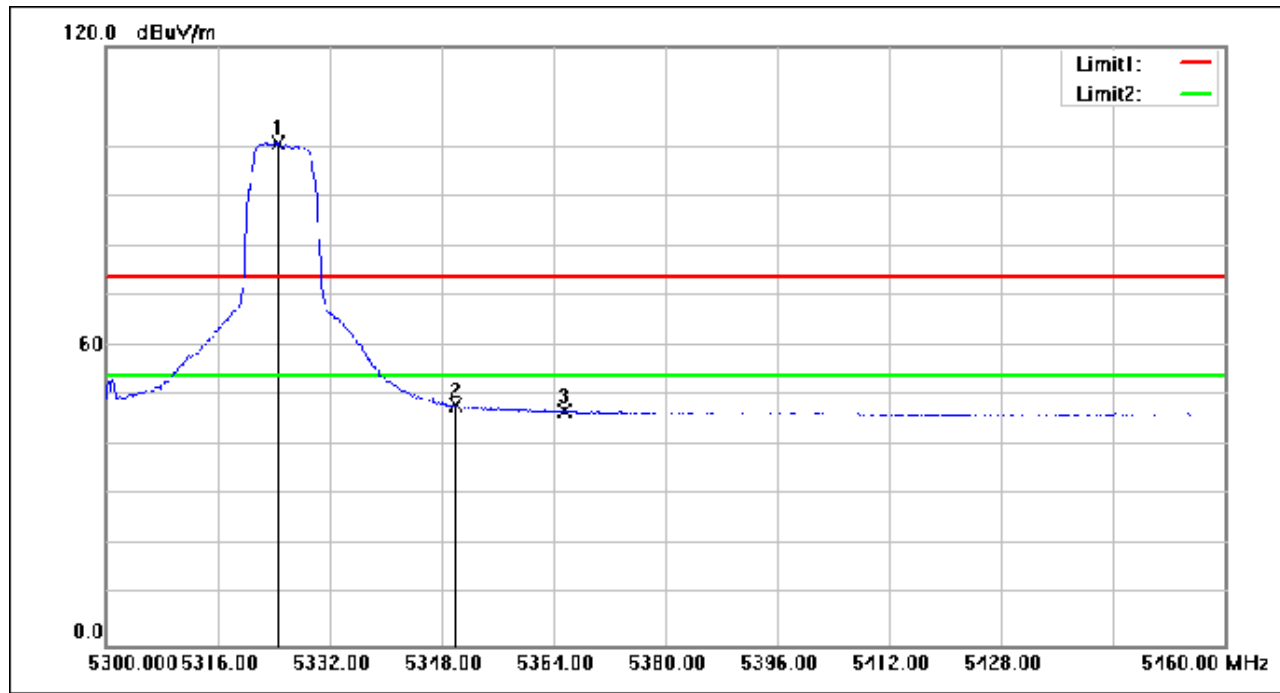

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5324.640	116.19	-15.47	100.72	54.00	46.72	AVG
2	5350.000	63.56	-15.49	48.07	54.00	-5.93	AVG
3	5365.600	62.56	-15.47	47.09	54.00	-6.91	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 426 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

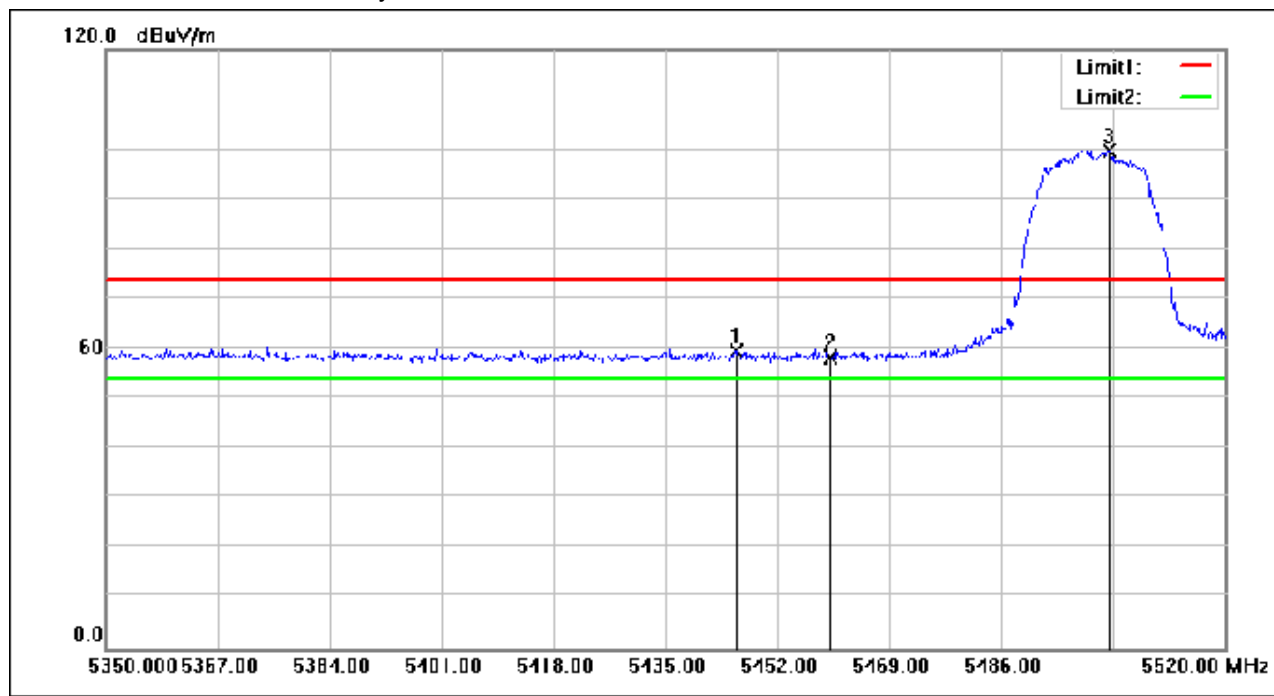

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.710	74.98	-15.32	59.66	74.00	-14.34	peak
2	5460.000	73.72	-15.30	58.42	74.00	-15.58	peak
3	5502.490	115.13	-15.24	99.89	74.00	25.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 427 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

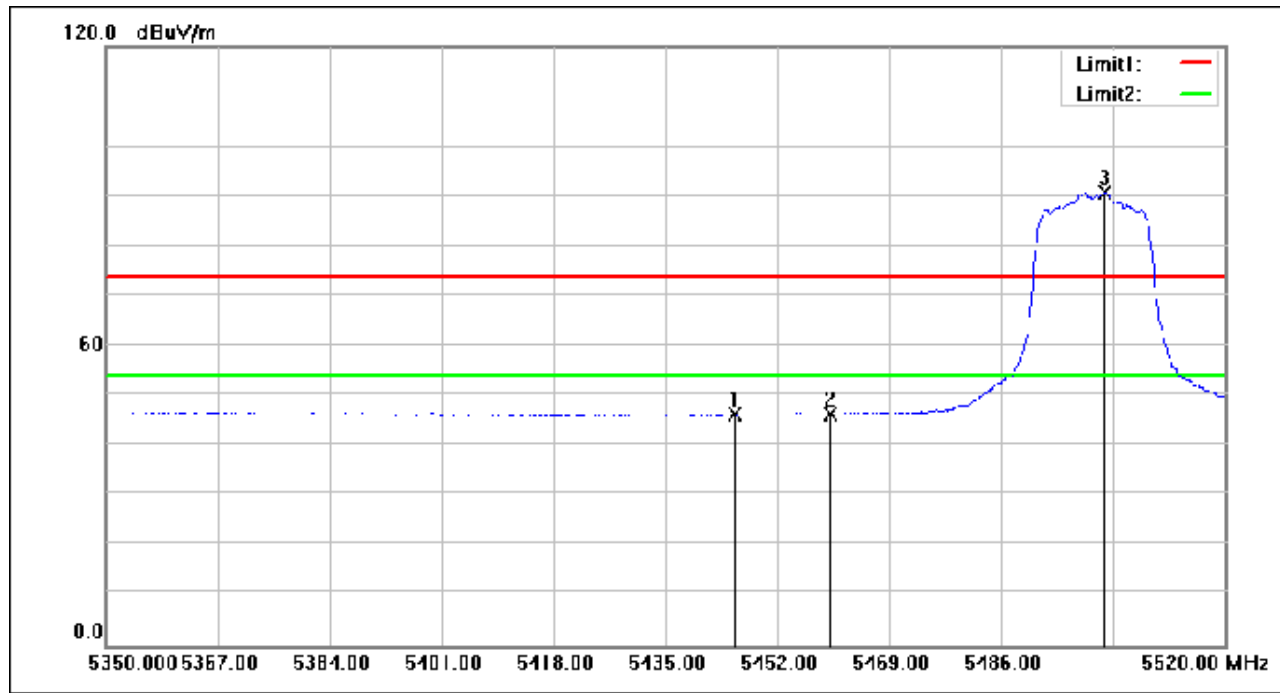

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.540	61.73	-15.32	46.41	54.00	-7.59	AVG
2	5460.000	61.79	-15.30	46.49	54.00	-7.51	AVG
3	5501.640	105.99	-15.25	90.74	54.00	36.74	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 428 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

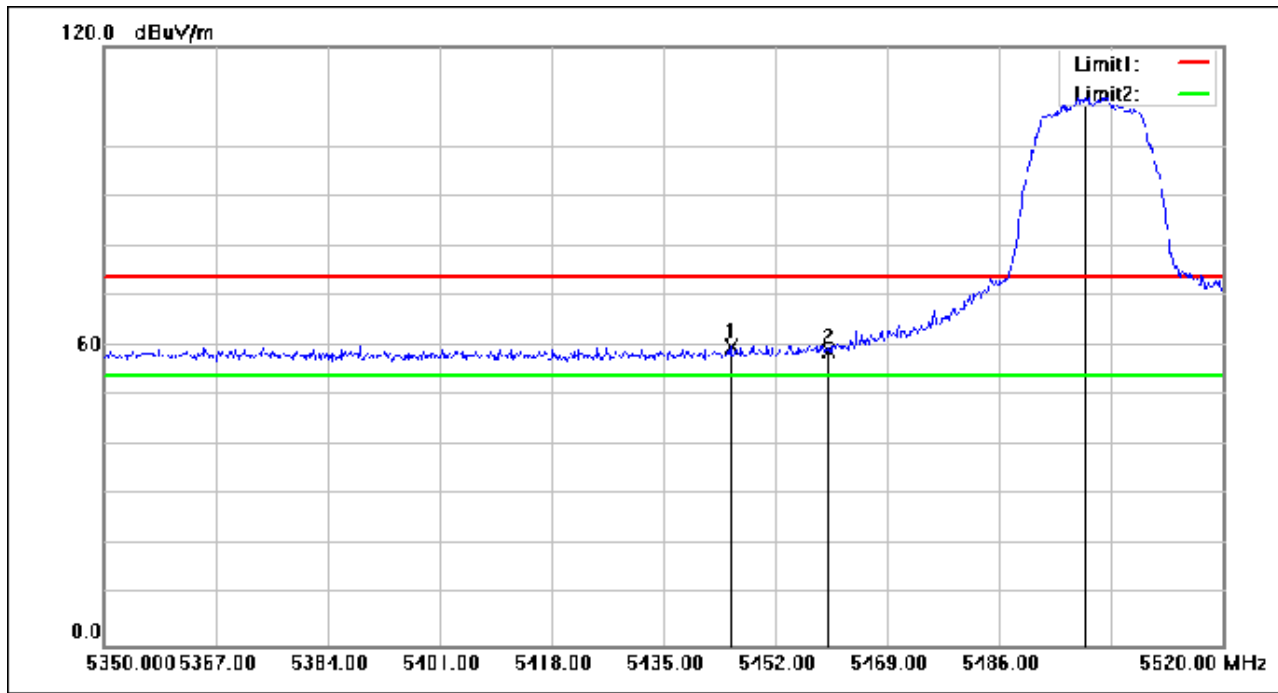

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.200	75.29	-15.32	59.97	74.00	-14.03	peak
2	5460.000	74.35	-15.30	59.05	74.00	-14.95	peak
3	5498.920	125.14	-15.25	109.89	74.00	35.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 429 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

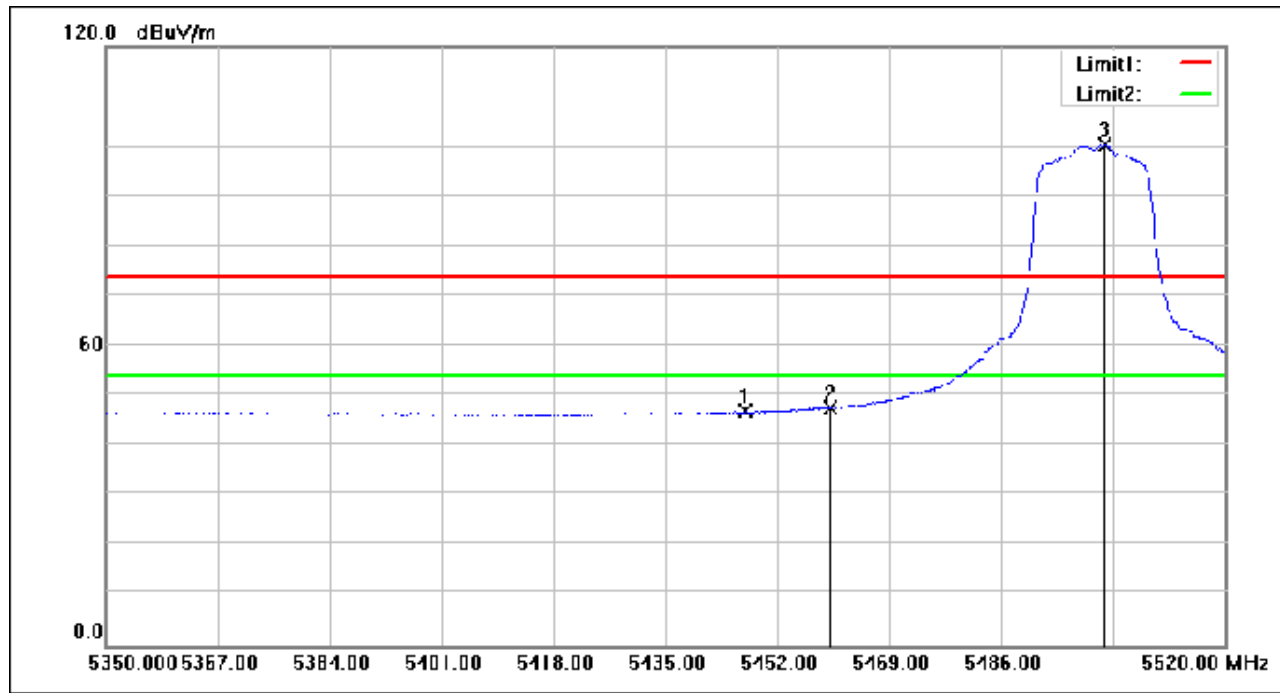

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.070	62.28	-15.32	46.96	54.00	-7.04	AVG
2	5460.000	62.88	-15.30	47.58	54.00	-6.42	AVG
3	5501.810	115.74	-15.25	100.49	54.00	46.49	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 430 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

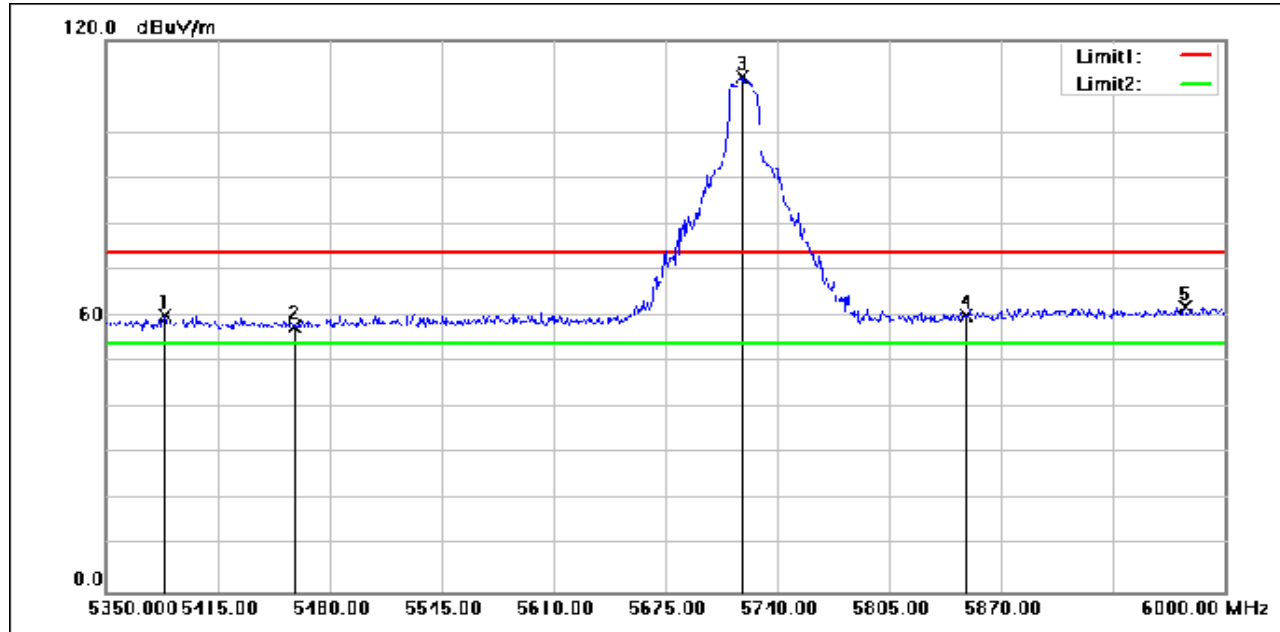

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5384.450	75.52	-15.43	60.09	74.00	-13.91	peak
2	5460.000	73.17	-15.30	57.87	74.00	-16.13	peak
3	5719.200	126.56	-14.61	111.95	74.00	37.95	peak
4	5850.000	74.18	-14.03	60.15	74.00	-13.85	peak
5	5976.600	75.19	-13.23	61.96	74.00	-12.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 431 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

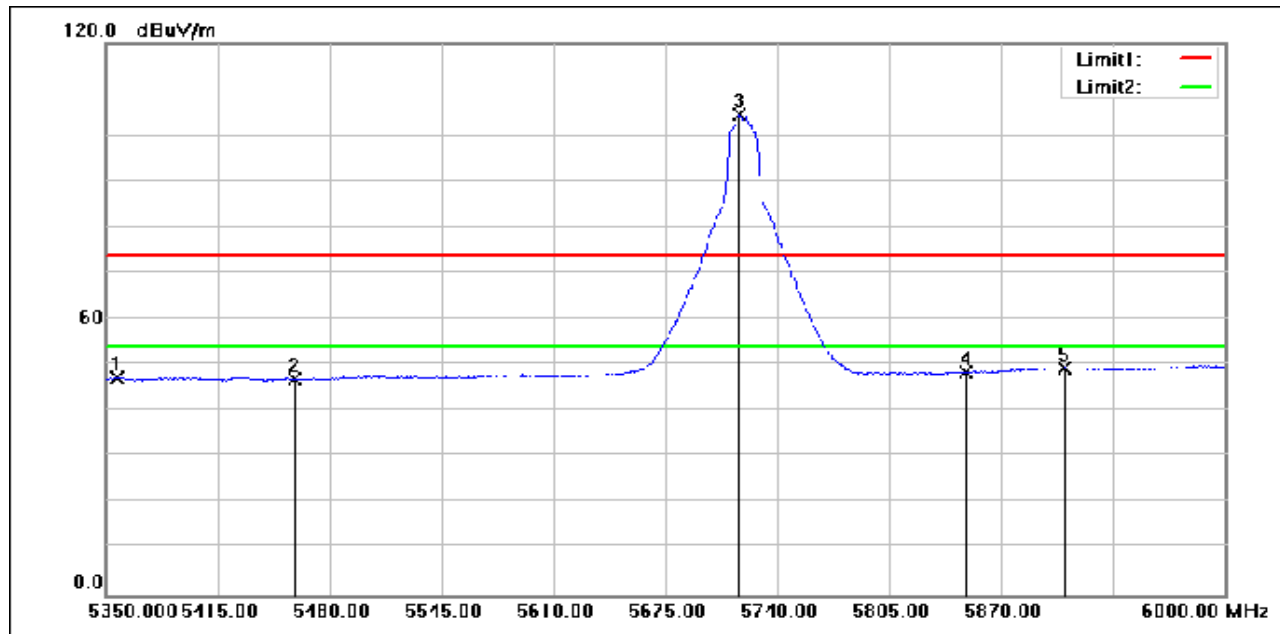

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5356.500	62.87	-15.48	47.39	54.00	-6.61	AVG
2	5460.000	62.26	-15.30	46.96	54.00	-7.04	AVG
3	5717.900	119.02	-14.61	104.41	54.00	50.41	AVG
4	5850.000	62.51	-14.03	48.48	54.00	-5.52	AVG
5	5907.050	63.17	-13.67	49.50	54.00	-4.50	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 432 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

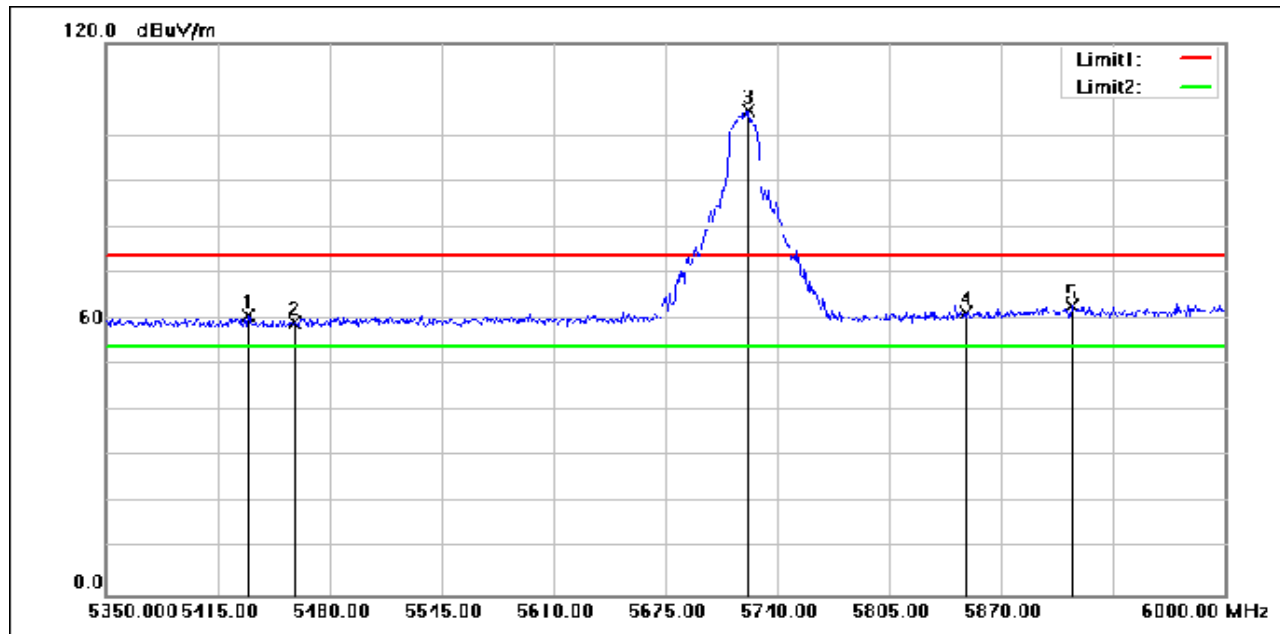

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.550	76.06	-15.34	60.72	74.00	-13.28	peak
2	5460.000	74.43	-15.30	59.13	74.00	-14.87	peak
3	5723.100	119.91	-14.59	105.32	74.00	31.32	peak
4	5850.000	75.39	-14.03	61.36	74.00	-12.64	peak
5	5910.950	76.44	-13.65	62.79	74.00	-11.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 433 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

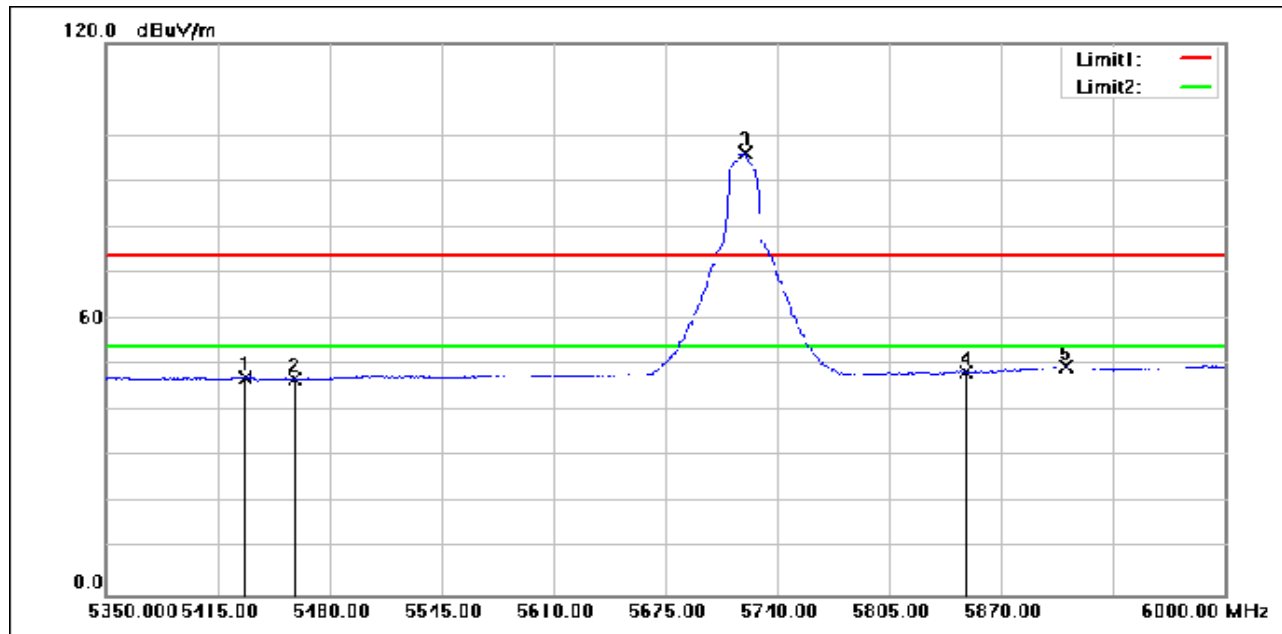

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.250	62.74	-15.34	47.40	54.00	-6.60	AVG
2	5460.000	62.25	-15.30	46.95	54.00	-7.05	AVG
3	5721.150	110.90	-14.60	96.30	54.00	42.30	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5907.700	63.30	-13.67	49.63	54.00	-4.37	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 434 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

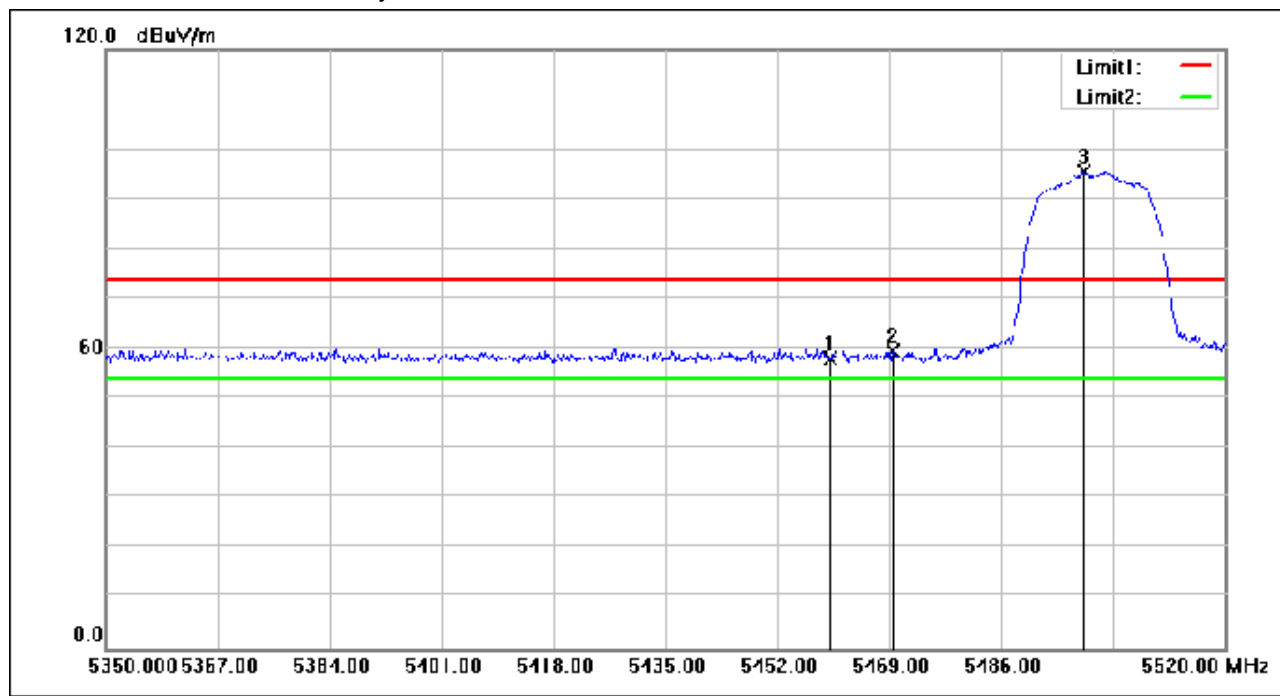

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	73.25	-15.30	57.95	74.00	-16.05	peak
2	5469.510	74.76	-15.28	59.48	74.00	-14.52	peak
3	5498.580	110.66	-15.25	95.41	74.00	21.41	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 435 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

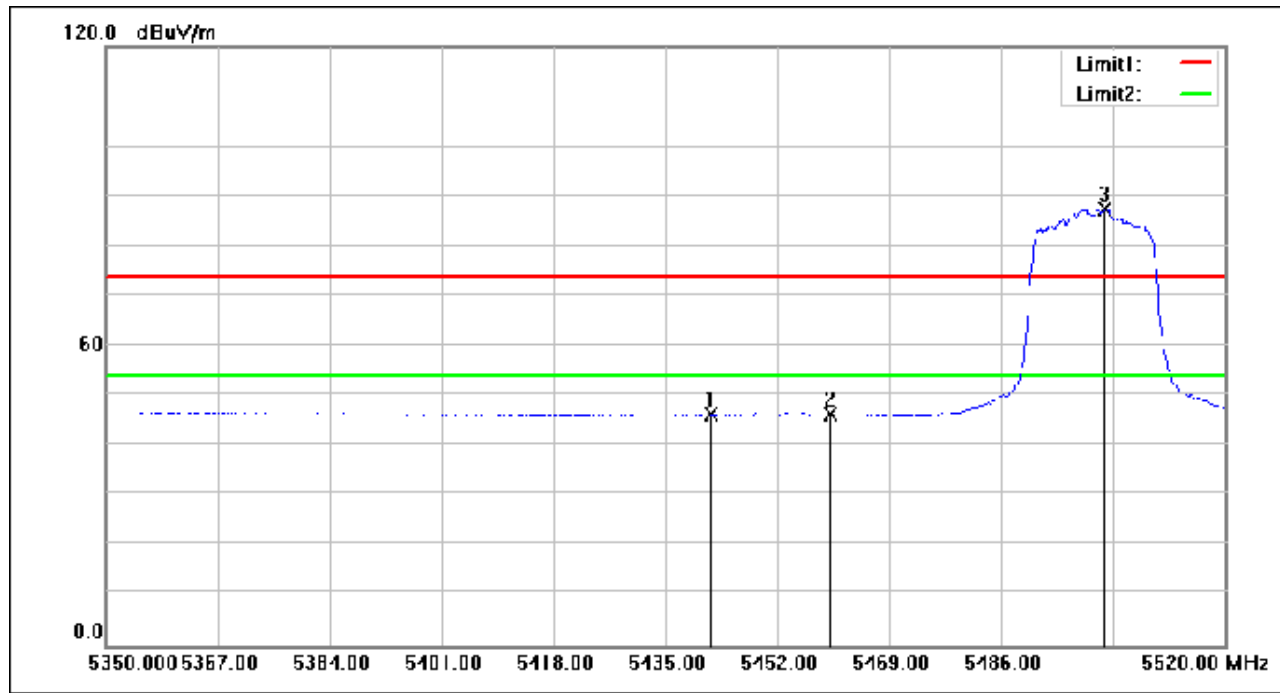

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.970	61.73	-15.32	46.41	54.00	-7.59	AVG
2	5460.000	61.55	-15.30	46.25	54.00	-7.75	AVG
3	5501.810	102.74	-15.25	87.49	54.00	33.49	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 436 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

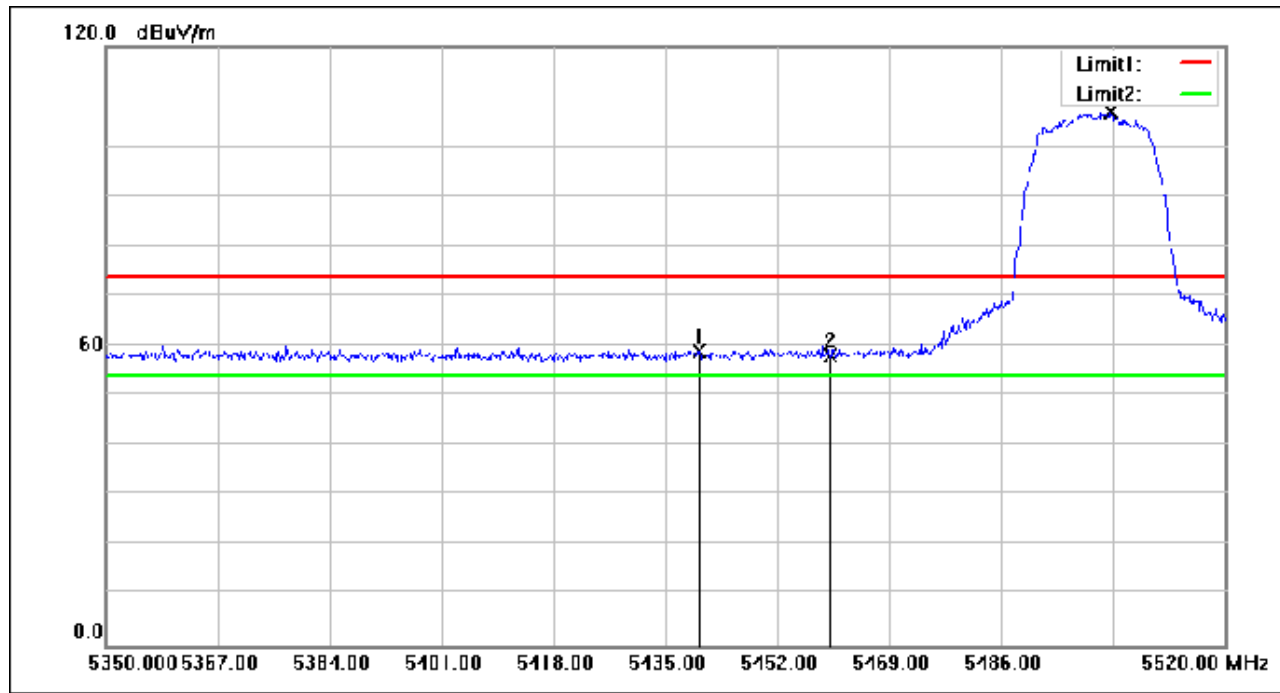

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.100	74.33	-15.33	59.00	74.00	-15.00	peak
2	5460.000	73.46	-15.30	58.16	74.00	-15.84	peak
3	5502.660	122.14	-15.24	106.90	74.00	32.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 437 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

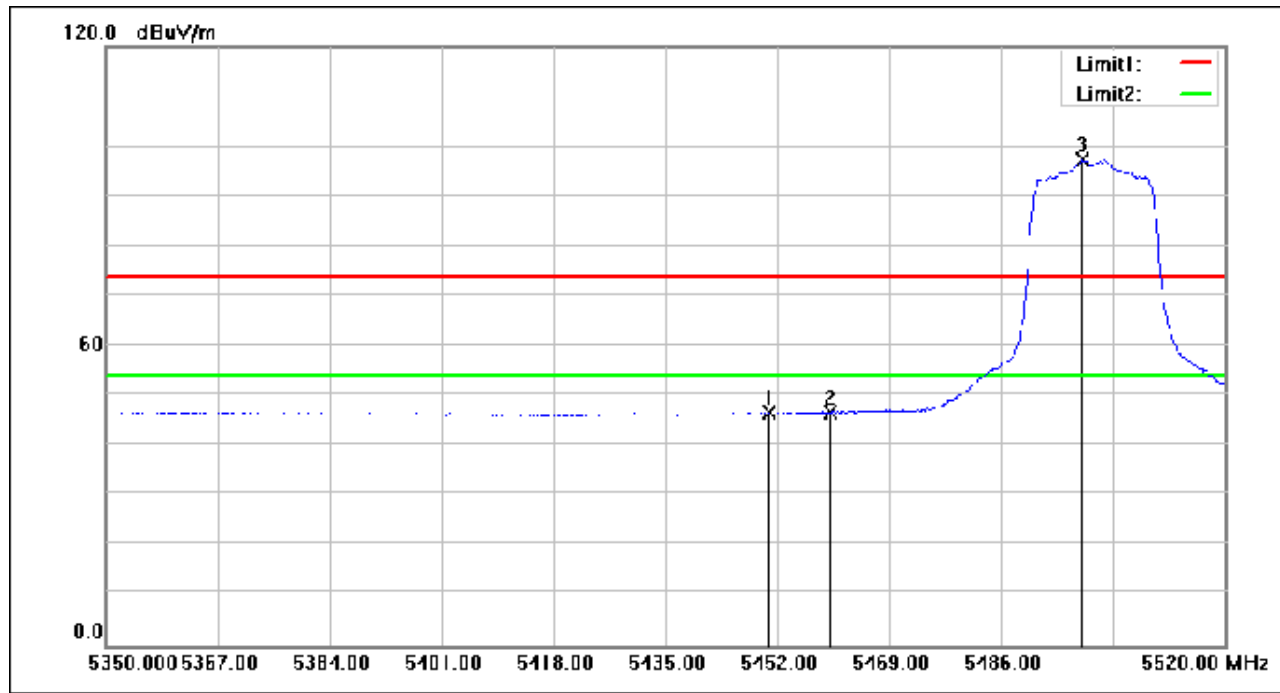

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.810	61.93	-15.31	46.62	54.00	-7.38	AVG
2	5460.000	62.03	-15.30	46.73	54.00	-7.27	AVG
3	5498.410	112.46	-15.25	97.21	54.00	43.21	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 438 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

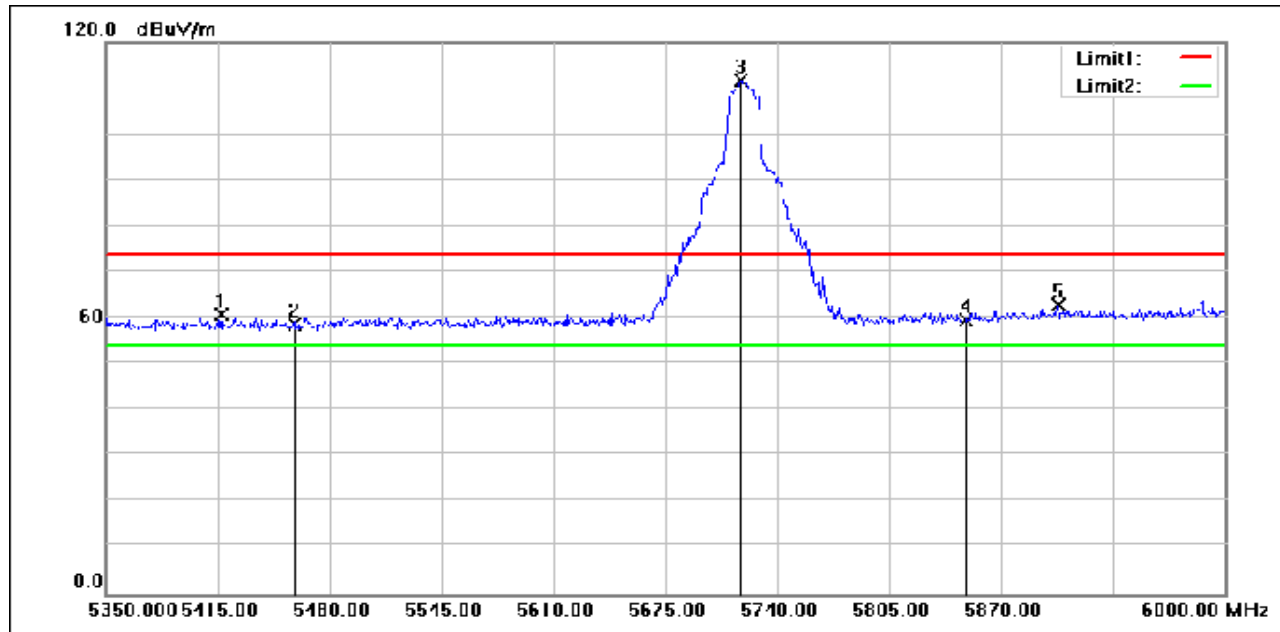

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.950	76.06	-15.37	60.69	74.00	-13.31	peak
2	5460.000	73.89	-15.30	58.59	74.00	-15.41	peak
3	5718.550	126.40	-14.61	111.79	74.00	37.79	peak
4	5850.000	73.53	-14.03	59.50	74.00	-14.50	peak
5	5903.150	76.43	-13.69	62.74	74.00	-11.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 439 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

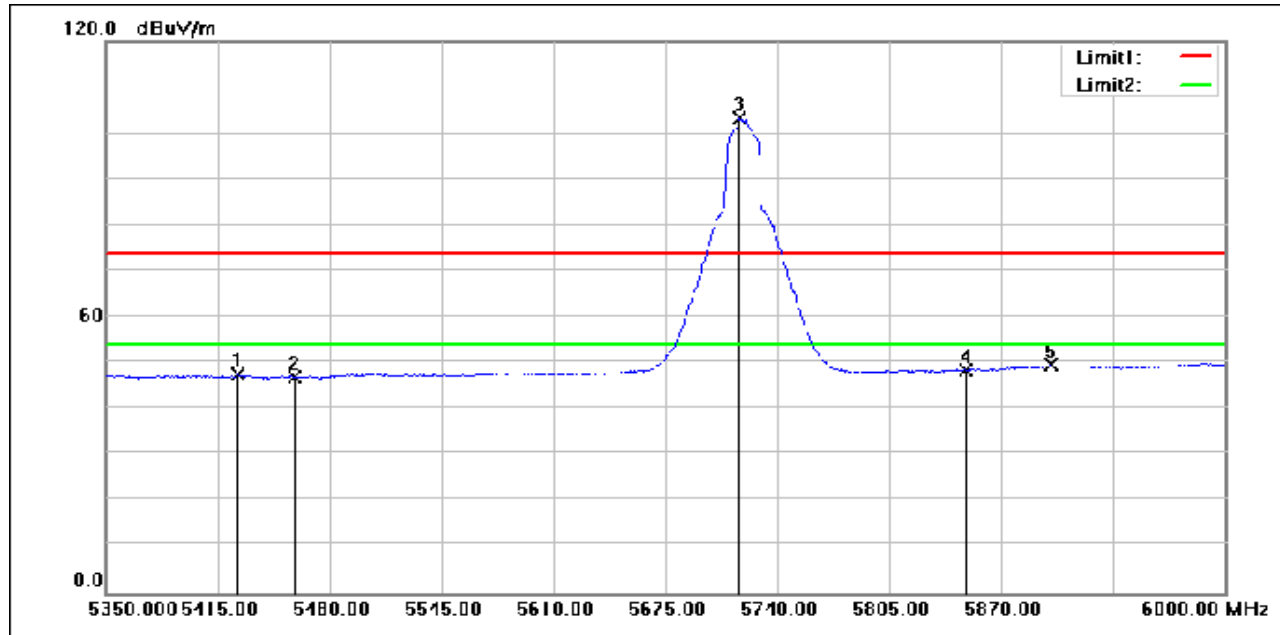

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.700	62.83	-15.36	47.47	54.00	-6.53	AVG
2	5460.000	62.17	-15.30	46.87	54.00	-7.13	AVG
3	5717.900	117.83	-14.61	103.22	54.00	49.22	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5898.600	63.29	-13.72	49.57	54.00	-4.43	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 440 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

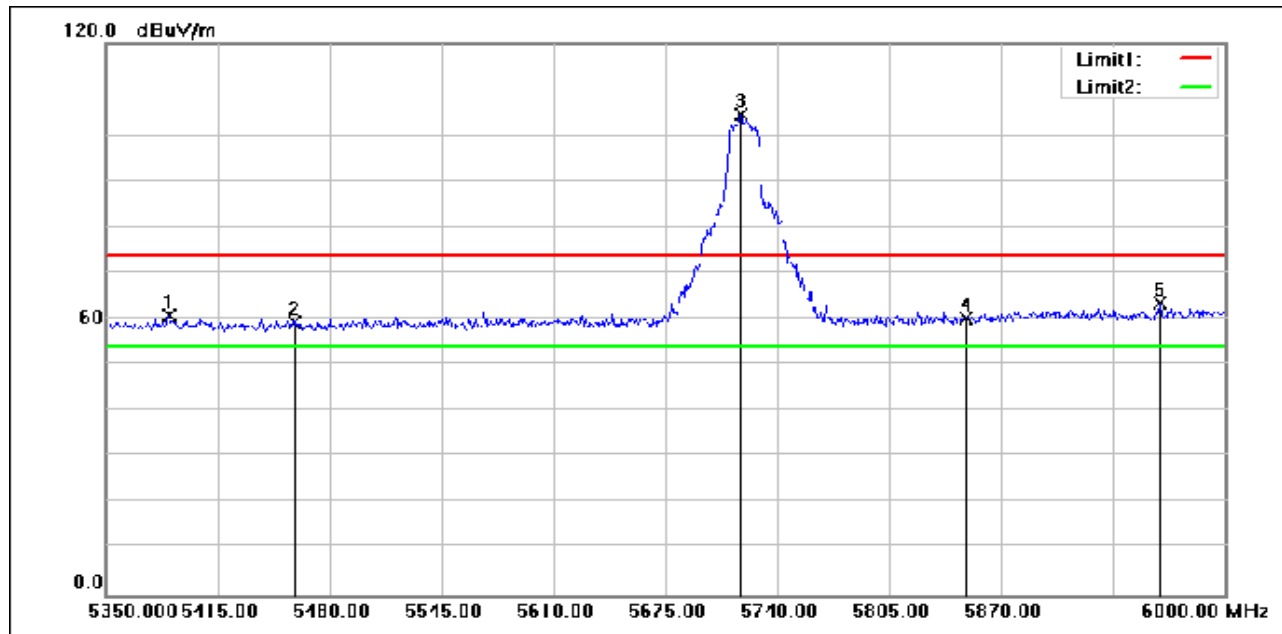

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5386.400	76.22	-15.43	60.79	74.00	-13.21	peak
2	5460.000	74.58	-15.30	59.28	74.00	-14.72	peak
3	5718.550	119.08	-14.61	104.47	74.00	30.47	peak
4	5850.000	74.16	-14.03	60.13	74.00	-13.87	peak
5	5962.300	76.71	-13.32	63.39	74.00	-10.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 441 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

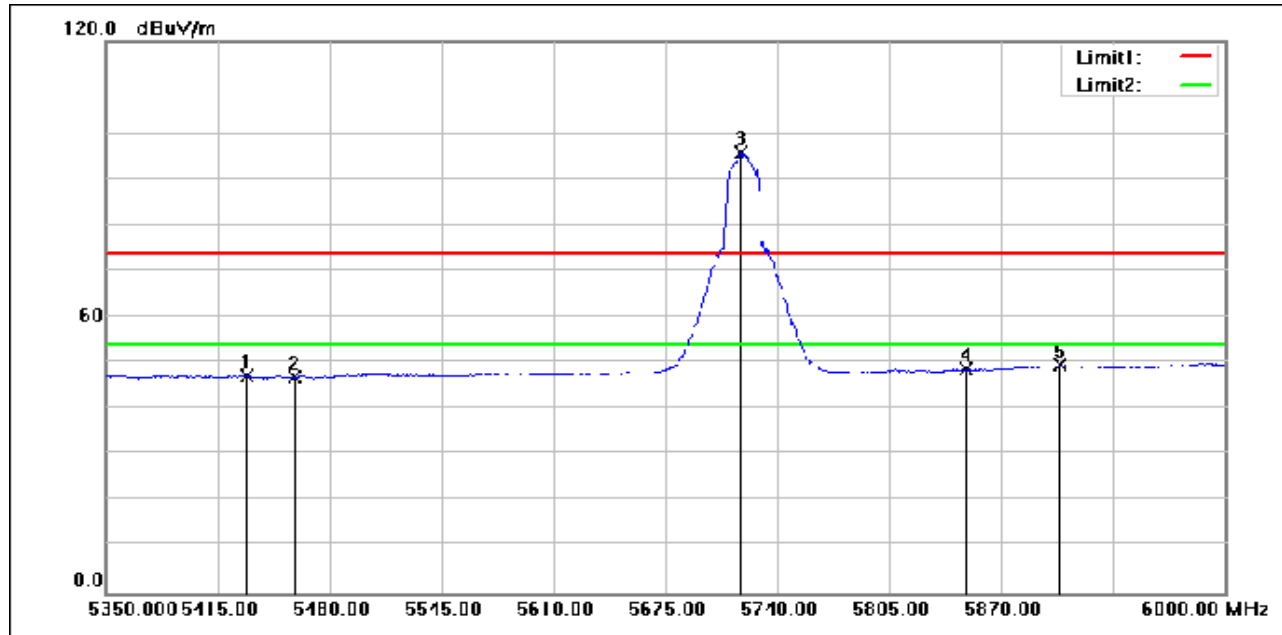

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.900	62.73	-15.34	47.39	54.00	-6.61	AVG
2	5460.000	62.27	-15.30	46.97	54.00	-7.03	AVG
3	5718.550	110.41	-14.61	95.80	54.00	41.80	AVG
4	5850.000	62.73	-14.03	48.70	54.00	-5.30	AVG
5	5903.800	63.35	-13.69	49.66	54.00	-4.34	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 442 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

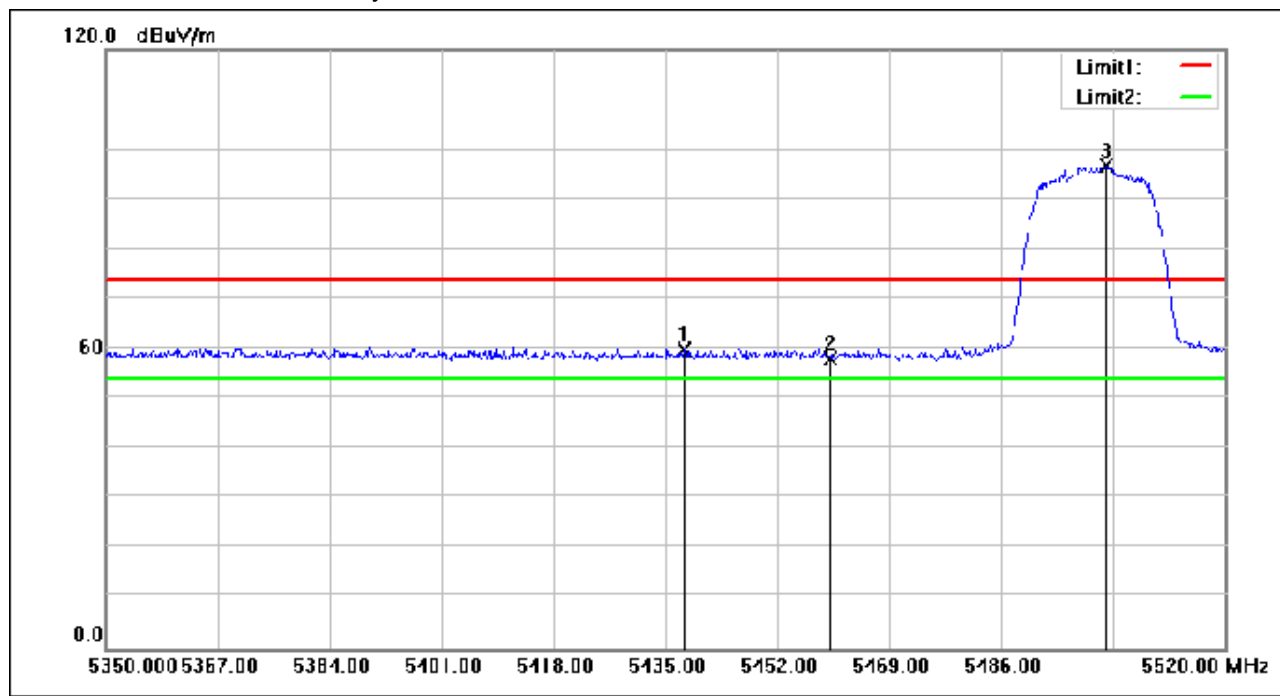

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5437.890	75.20	-15.34	59.86	74.00	-14.14	peak
2	5460.000	73.33	-15.30	58.03	74.00	-15.97	peak
3	5501.980	111.95	-15.25	96.70	74.00	22.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 443 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

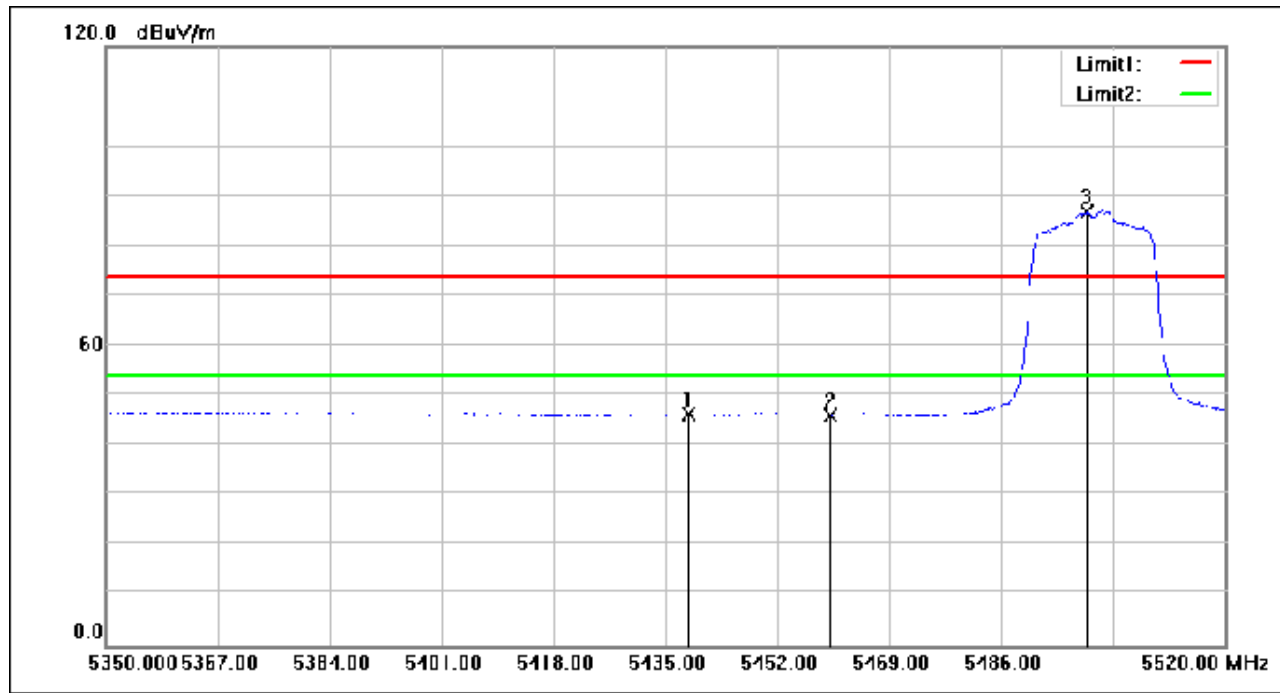

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.570	61.75	-15.34	46.41	54.00	-7.59	AVG
2	5460.000	61.49	-15.30	46.19	54.00	-7.81	AVG
3	5499.090	102.05	-15.25	86.80	54.00	32.80	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 444 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

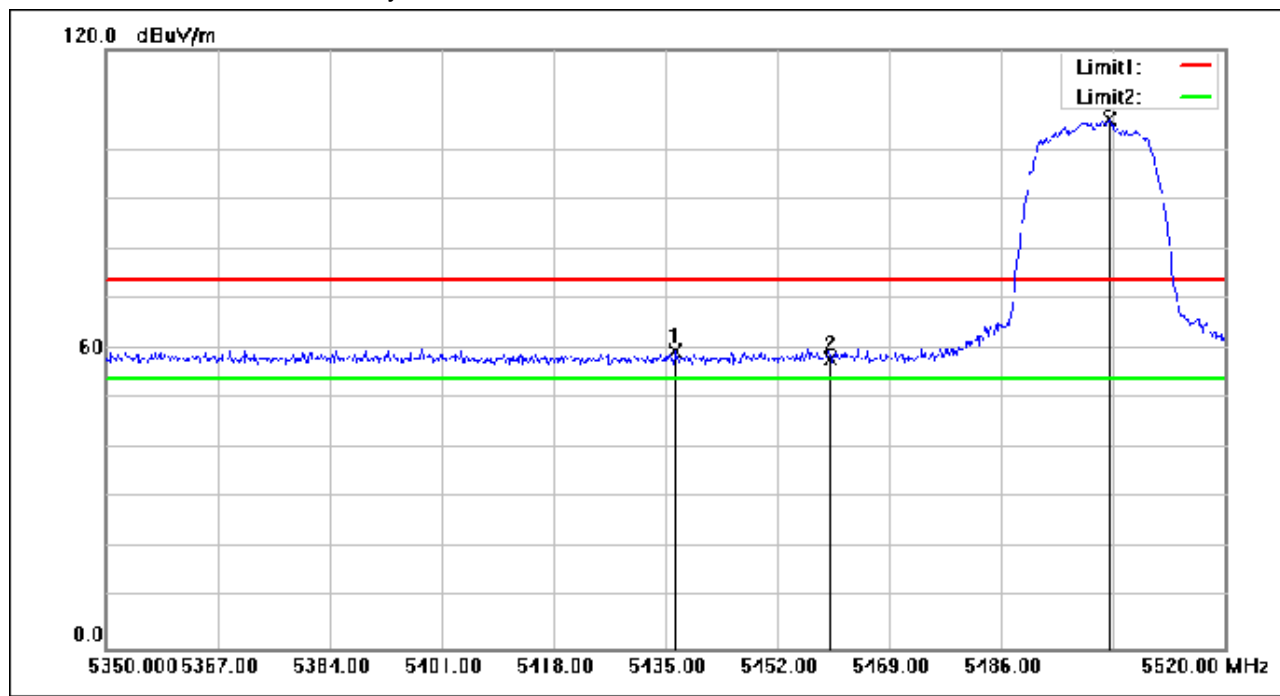

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5436.530	74.85	-15.34	59.51	74.00	-14.49	peak
2	5460.000	73.24	-15.30	57.94	74.00	-16.06	peak
3	5502.320	121.22	-15.24	105.98	74.00	31.98	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 445 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

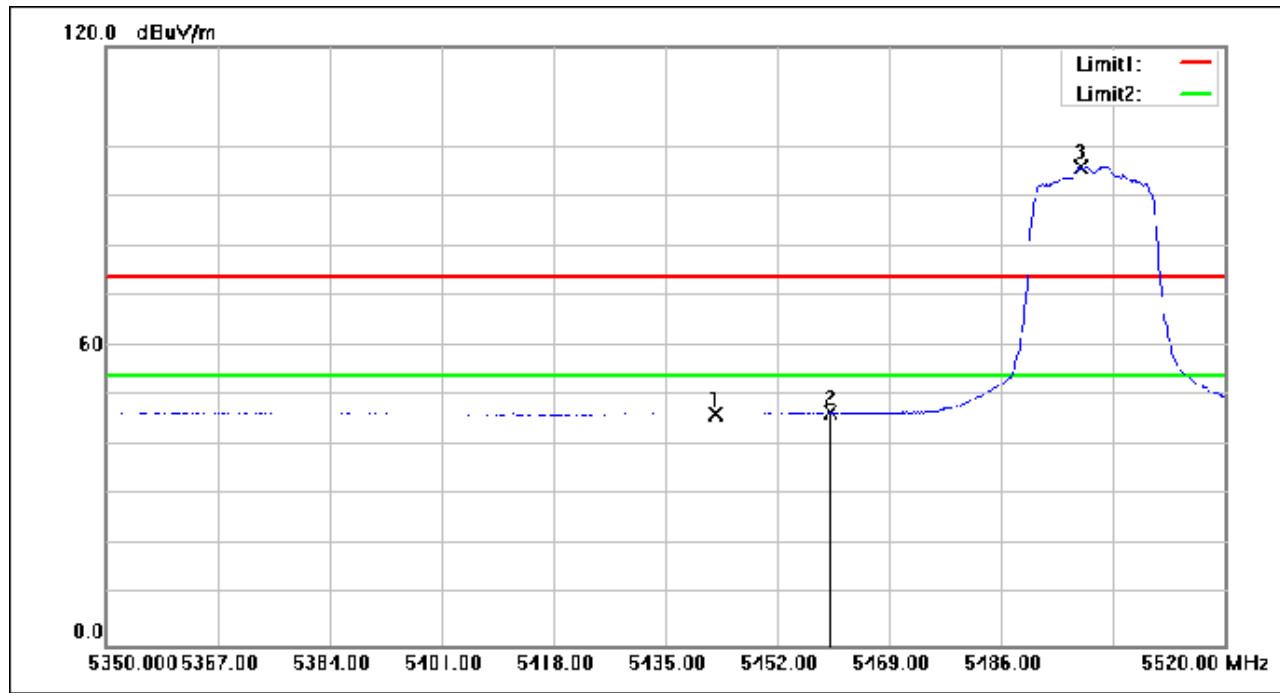

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5442.650	61.80	-15.32	46.48	54.00	-7.52	AVG
2	5460.000	61.81	-15.30	46.51	54.00	-7.49	AVG
3	5498.070	111.17	-15.25	95.92	54.00	41.92	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 446 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: CH144(5720MHz)

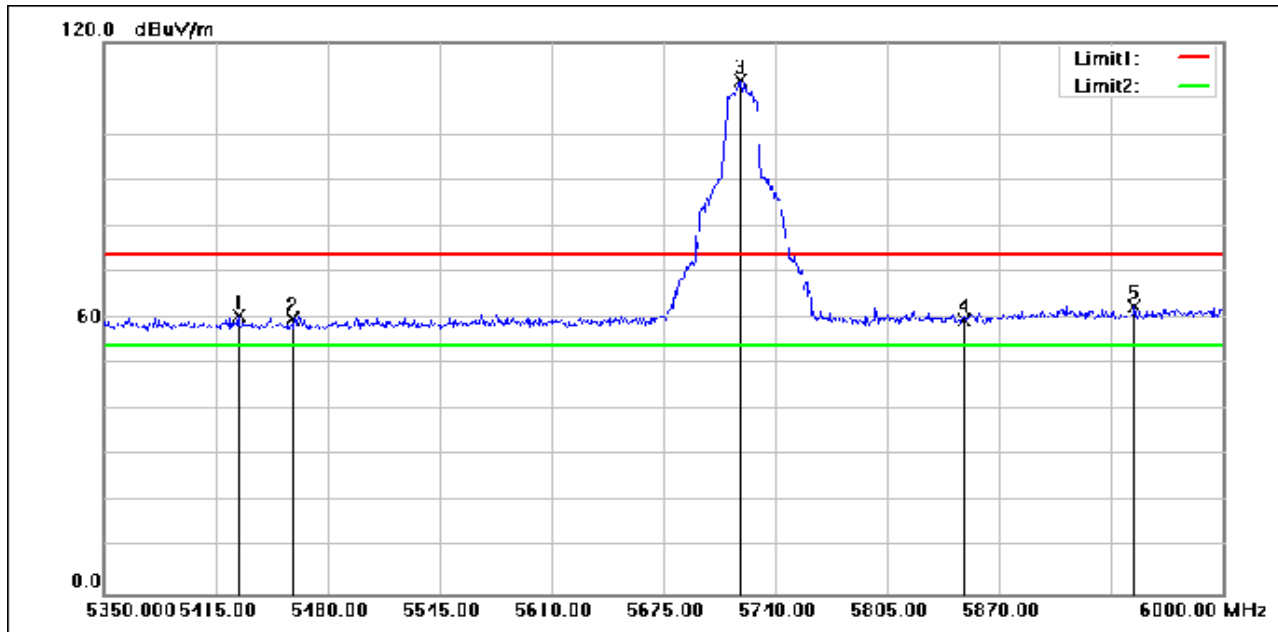

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.000	75.73	-15.36	60.37	74.00	-13.63	peak
2	5460.000	75.14	-15.30	59.84	74.00	-14.16	peak
3	5719.200	126.31	-14.61	111.70	74.00	37.70	peak
4	5850.000	73.59	-14.03	59.56	74.00	-14.44	peak
5	5948.650	75.99	-13.41	62.58	74.00	-11.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 447 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

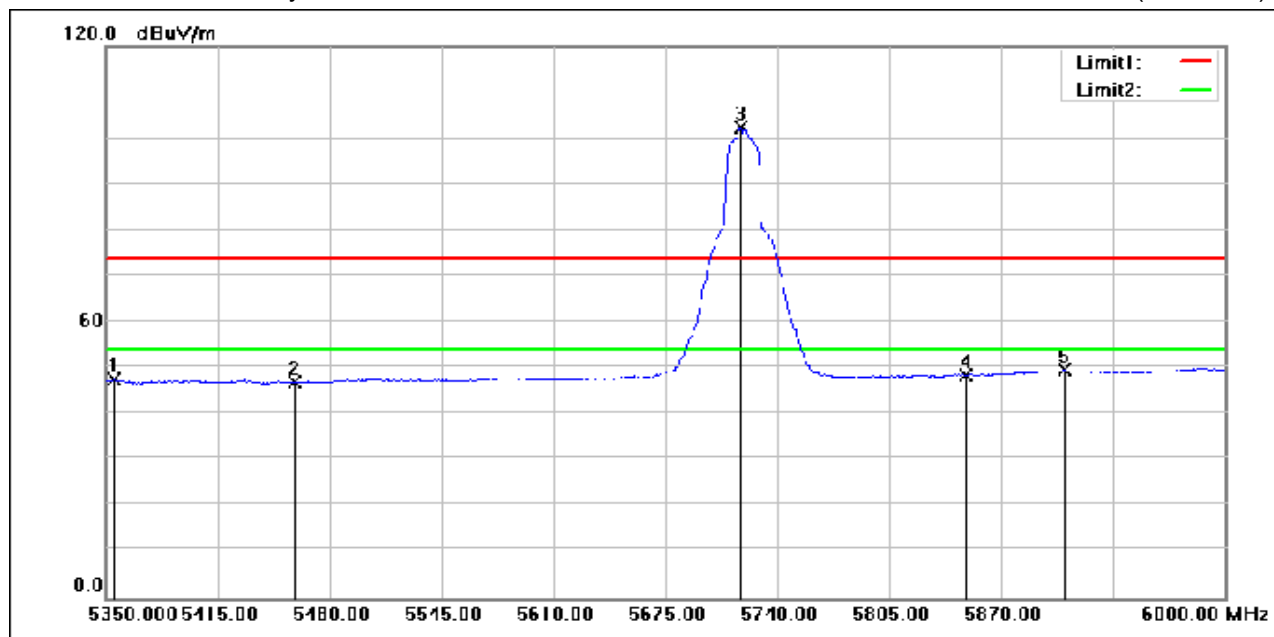

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5354.550	63.08	-15.49	47.59	54.00	-6.41	AVG
2	5460.000	62.16	-15.30	46.86	54.00	-7.14	AVG
3	5718.550	116.93	-14.61	102.32	54.00	48.32	AVG
4	5850.000	62.54	-14.03	48.51	54.00	-5.49	AVG
5	5906.400	63.24	-13.67	49.57	54.00	-4.43	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 448 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

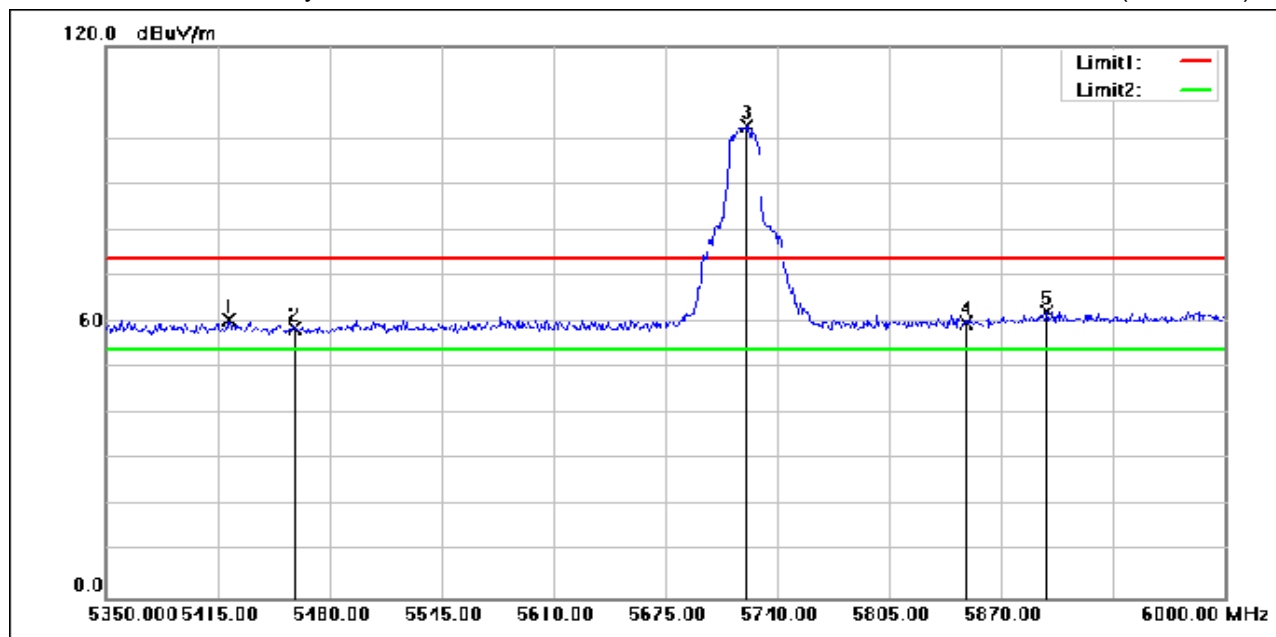

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5421.500	75.82	-15.36	60.46	74.00	-13.54	peak
2	5460.000	73.85	-15.30	58.55	74.00	-15.45	peak
3	5722.450	117.36	-14.59	102.77	74.00	28.77	peak
4	5850.000	73.80	-14.03	59.77	74.00	-14.23	peak
5	5896.650	76.05	-13.74	62.31	74.00	-11.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 449 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

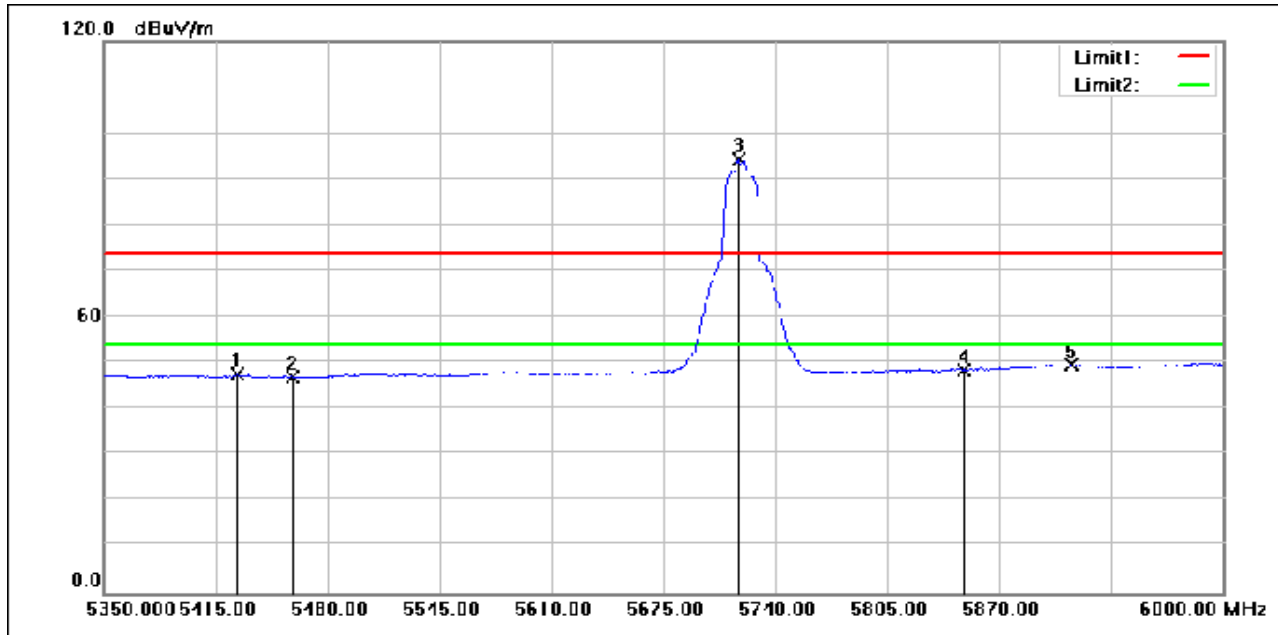

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.350	62.91	-15.36	47.55	54.00	-6.45	AVG
2	5460.000	62.28	-15.30	46.98	54.00	-7.02	AVG
3	5718.550	108.92	-14.61	94.31	54.00	40.31	AVG
4	5850.000	62.62	-14.03	48.59	54.00	-5.41	AVG
5	5912.250	63.19	-13.63	49.56	54.00	-4.44	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 450 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

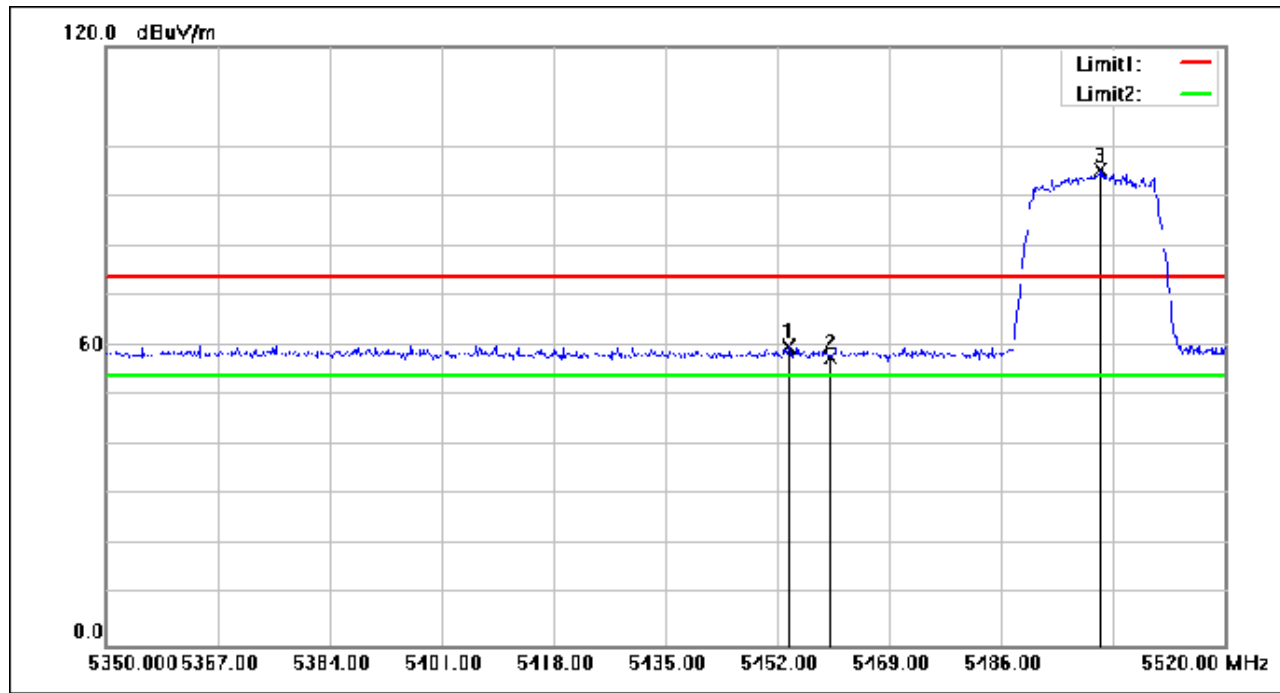

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.700	75.00	-15.30	59.70	74.00	-14.30	peak
2	5460.000	73.09	-15.30	57.79	74.00	-16.21	peak
3	5501.130	110.41	-15.25	95.16	74.00	21.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 451 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

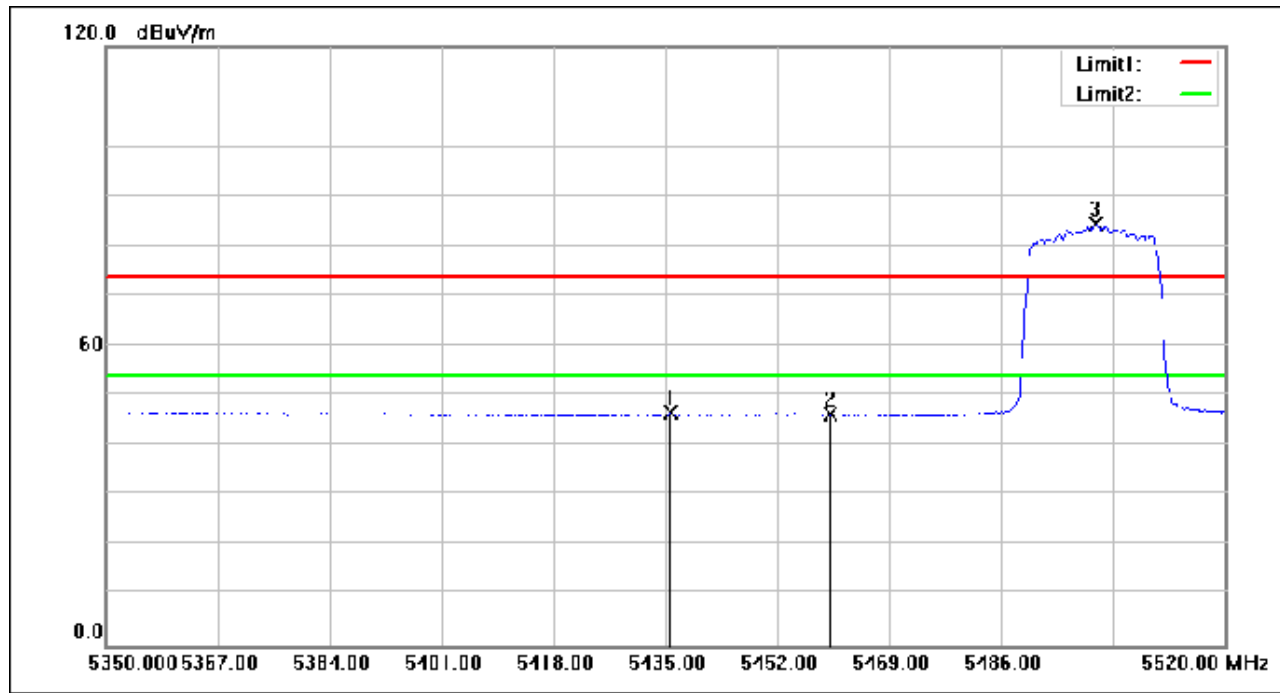

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.850	61.89	-15.34	46.55	54.00	-7.45	AVG
2	5460.000	61.57	-15.30	46.27	54.00	-7.73	AVG
3	5500.280	99.82	-15.25	84.57	54.00	30.57	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 452 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

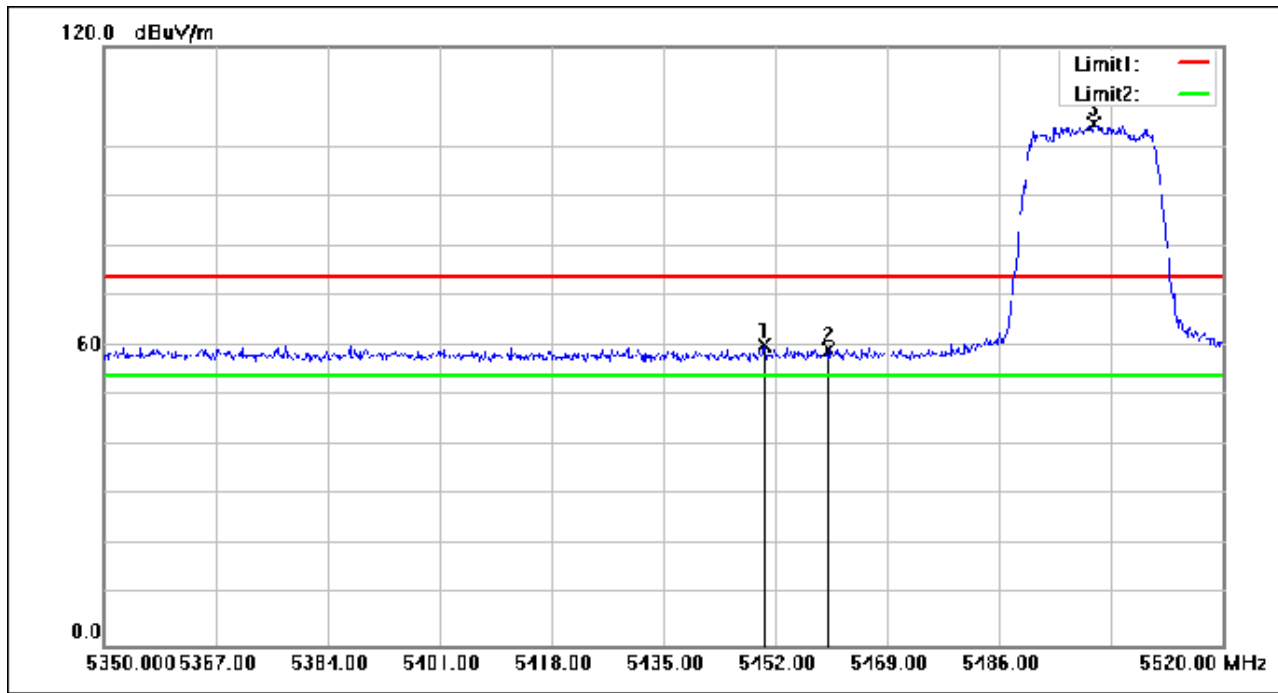

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.300	75.34	-15.32	60.02	74.00	-13.98	peak
2	5460.000	74.47	-15.30	59.17	74.00	-14.83	peak
3	5500.450	119.89	-15.25	104.64	74.00	30.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 453 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

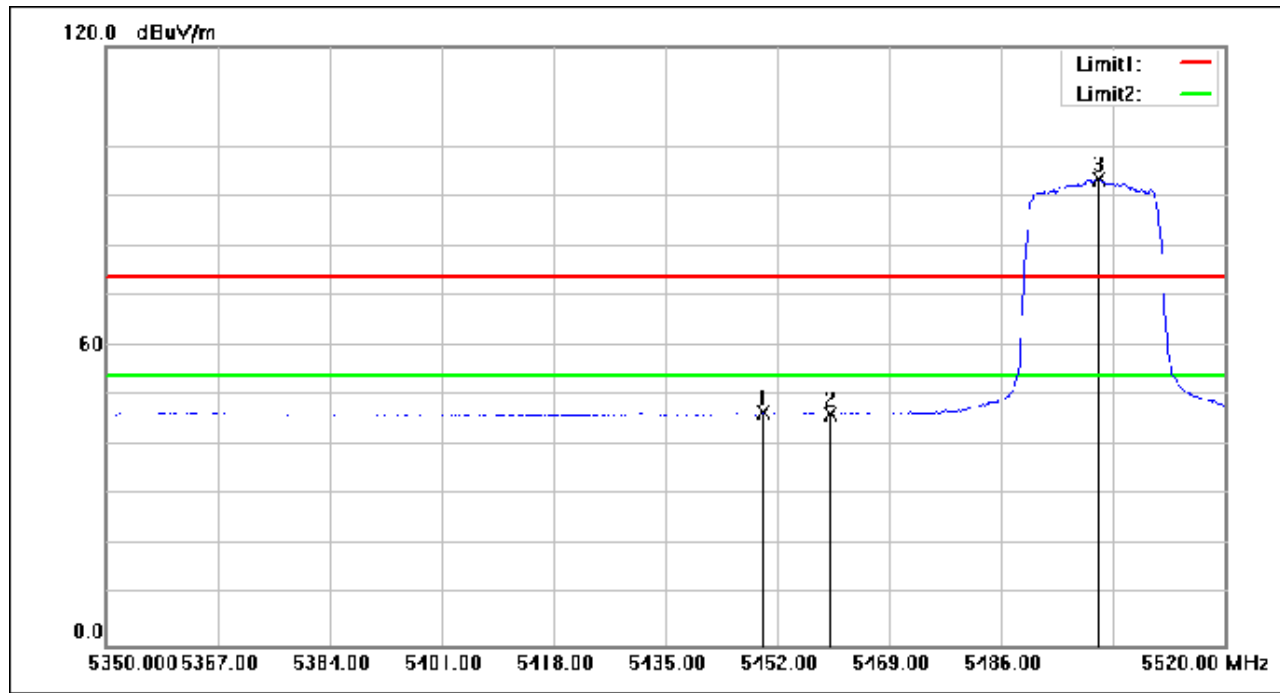

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.790	61.89	-15.32	46.57	54.00	-7.43	AVG
2	5460.000	61.78	-15.30	46.48	54.00	-7.52	AVG
3	5500.790	108.82	-15.25	93.57	54.00	39.57	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 454 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

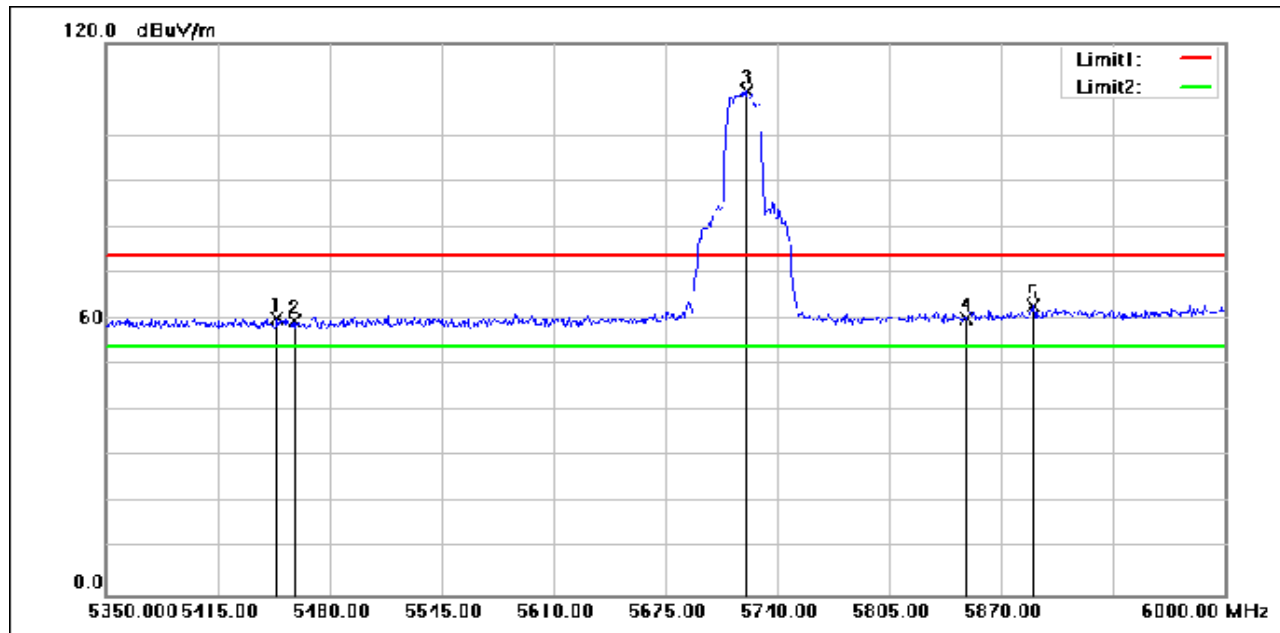

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.450	75.49	-15.32	60.17	74.00	-13.83	peak
2	5460.000	74.75	-15.30	59.45	74.00	-14.55	peak
3	5721.800	124.16	-14.60	109.56	74.00	35.56	peak
4	5850.000	74.27	-14.03	60.24	74.00	-13.76	peak
5	5888.200	76.65	-13.79	62.86	74.00	-11.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 455 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

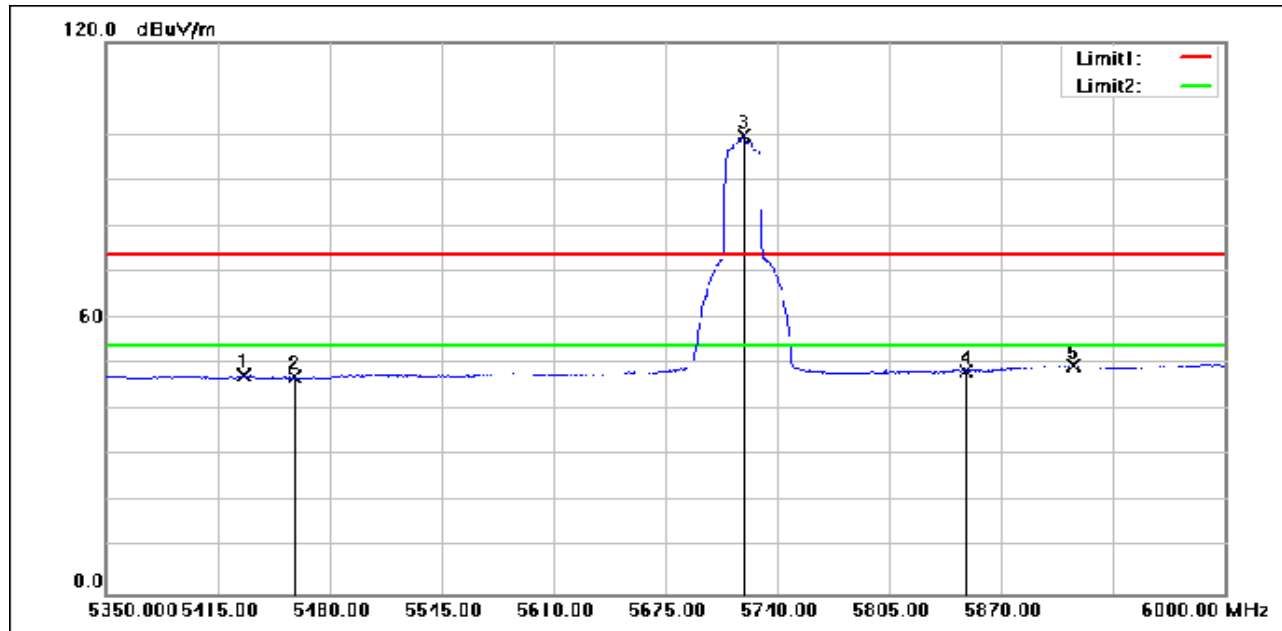

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.77	-15.35	47.42	54.00	-6.58	AVG
2	5460.000	62.41	-15.30	47.11	54.00	-6.89	AVG
3	5720.500	114.23	-14.60	99.63	54.00	45.63	AVG
4	5850.000	62.61	-14.03	48.58	54.00	-5.42	AVG
5	5911.600	63.33	-13.64	49.69	54.00	-4.31	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 456 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(Full RU); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

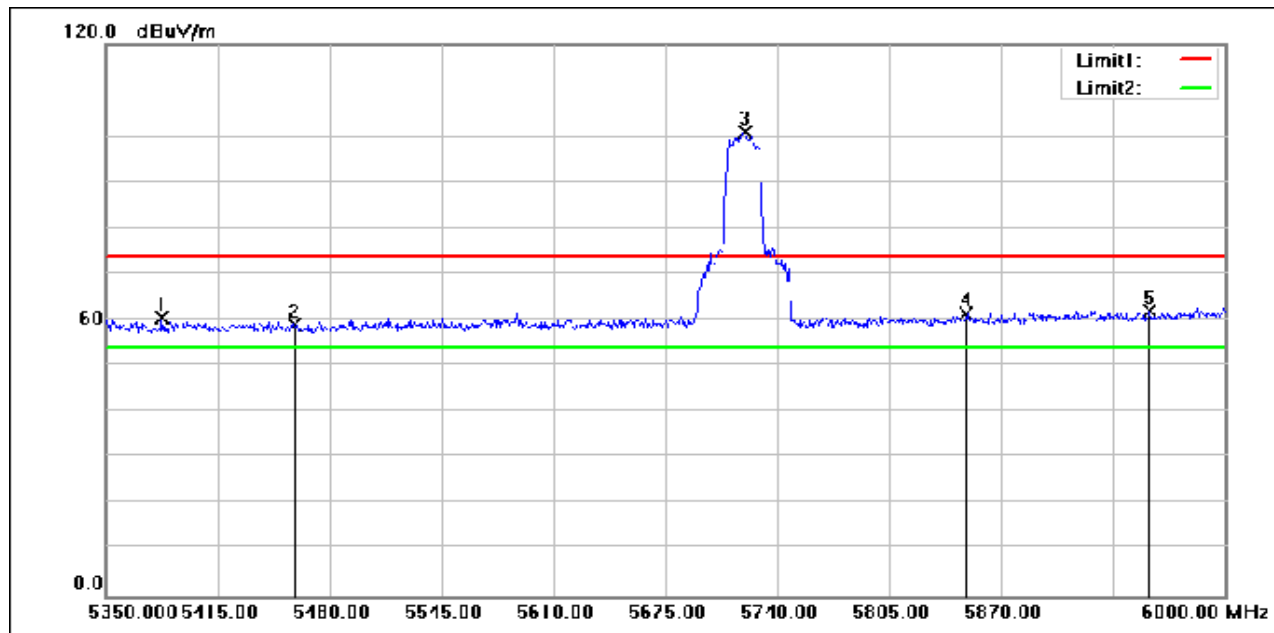

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.500	75.74	-15.43	60.31	74.00	-13.69	peak
2	5460.000	74.13	-15.30	58.83	74.00	-15.17	peak
3	5721.150	115.66	-14.60	101.06	74.00	27.06	peak
4	5850.000	75.27	-14.03	61.24	74.00	-12.76	peak
5	5955.800	75.34	-13.36	61.98	74.00	-12.02	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 457 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

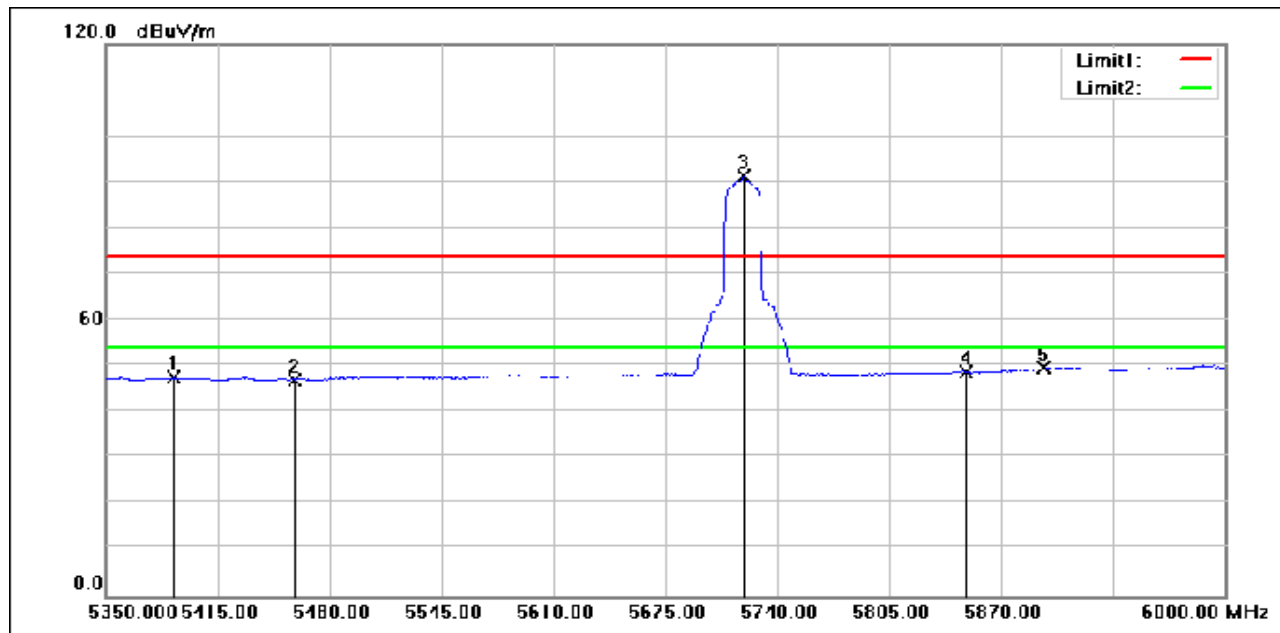

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5389.650	62.90	-15.42	47.48	54.00	-6.52	AVG
2	5460.000	62.40	-15.30	47.10	54.00	-6.90	AVG
3	5720.500	106.08	-14.60	91.48	54.00	37.48	AVG
4	5850.000	62.70	-14.03	48.67	54.00	-5.33	AVG
5	5894.700	63.45	-13.74	49.71	54.00	-4.29	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 458 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

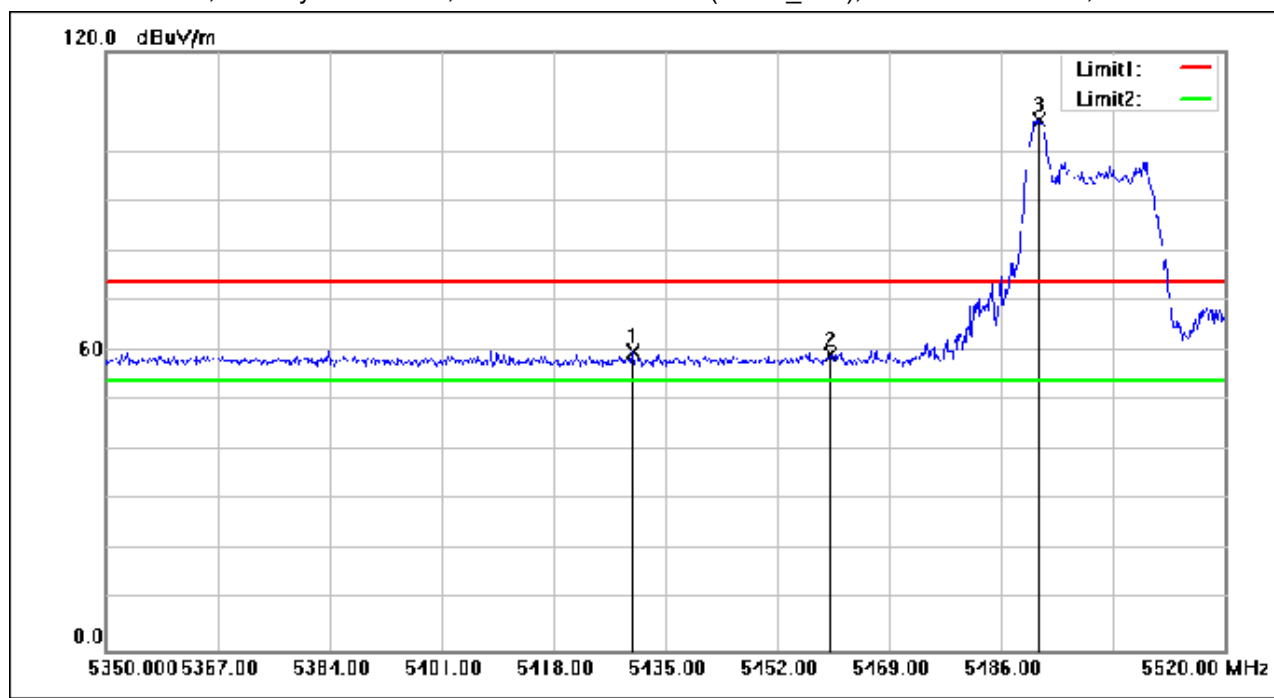

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.070	75.16	-15.35	59.81	74.00	-14.19	peak
2	5460.000	74.55	-15.30	59.25	74.00	-14.75	peak
3	5491.780	121.49	-15.26	106.23	74.00	32.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 459 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

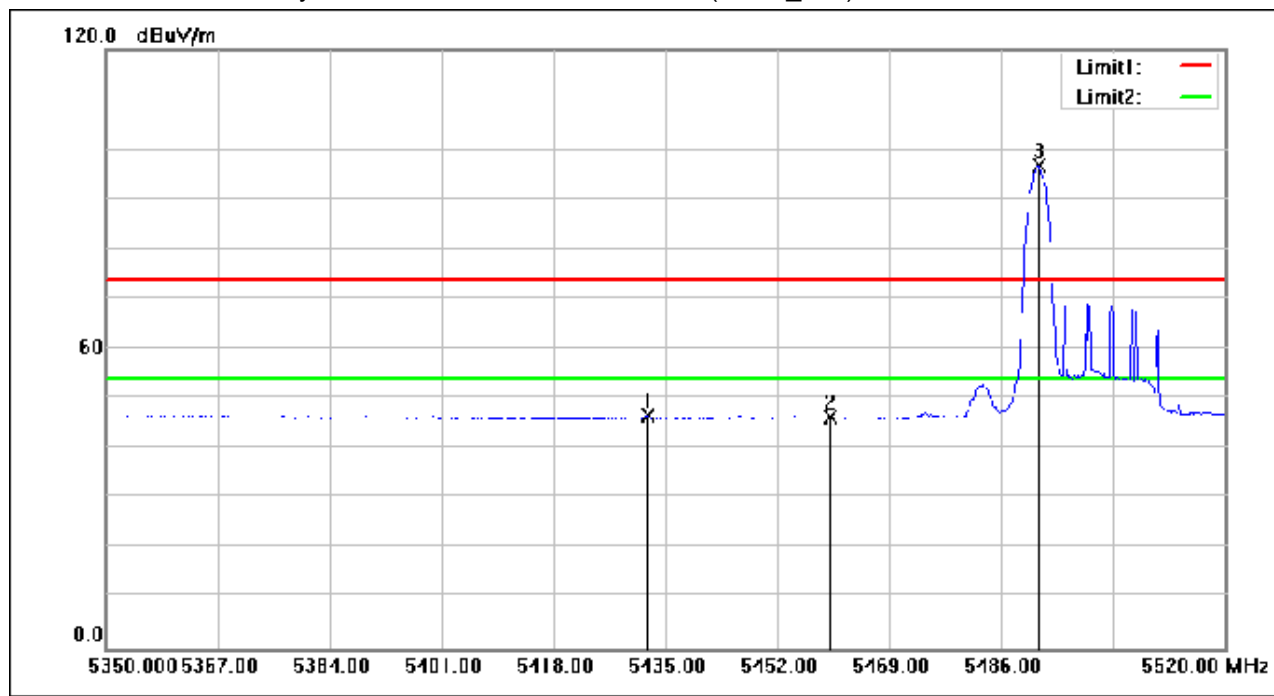

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.280	61.92	-15.34	46.58	54.00	-7.42	AVG
2	5460.000	61.64	-15.30	46.34	54.00	-7.66	AVG
3	5491.780	111.98	-15.26	96.72	54.00	42.72	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 460 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

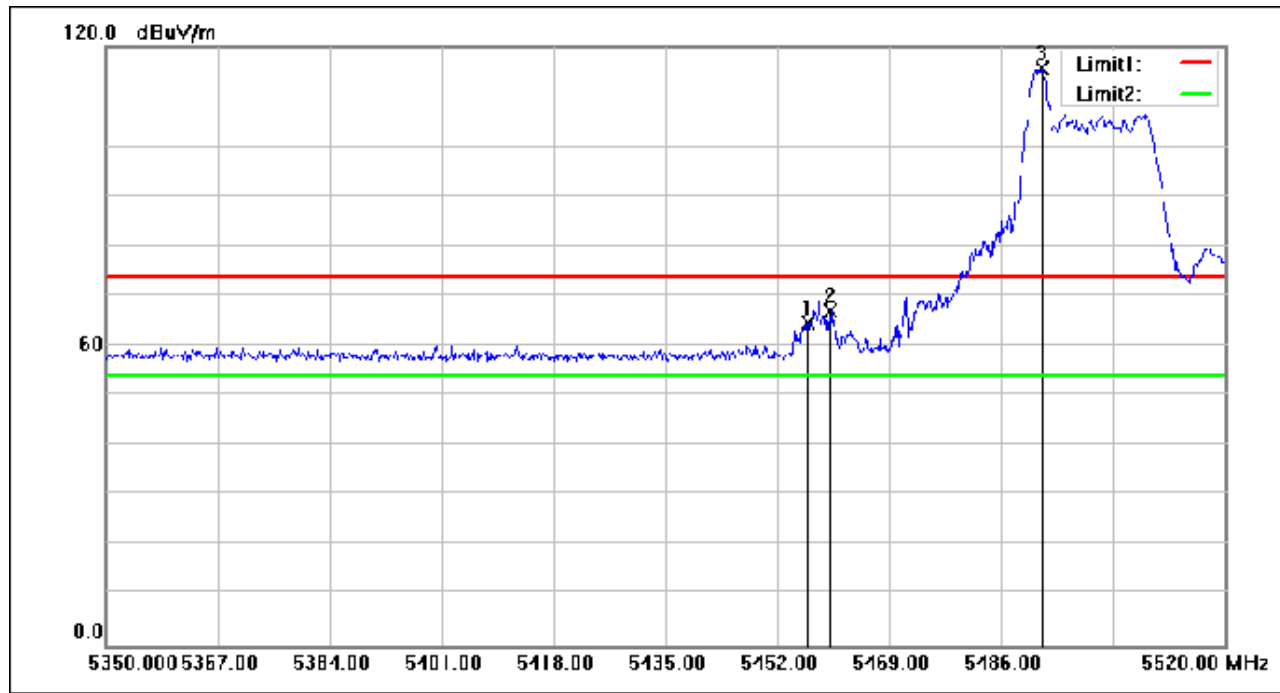

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.590	79.99	-15.30	64.69	74.00	-9.31	peak
2	5460.000	82.44	-15.30	67.14	74.00	-6.86	peak
3	5492.120	130.81	-15.25	115.56	74.00	41.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 461 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

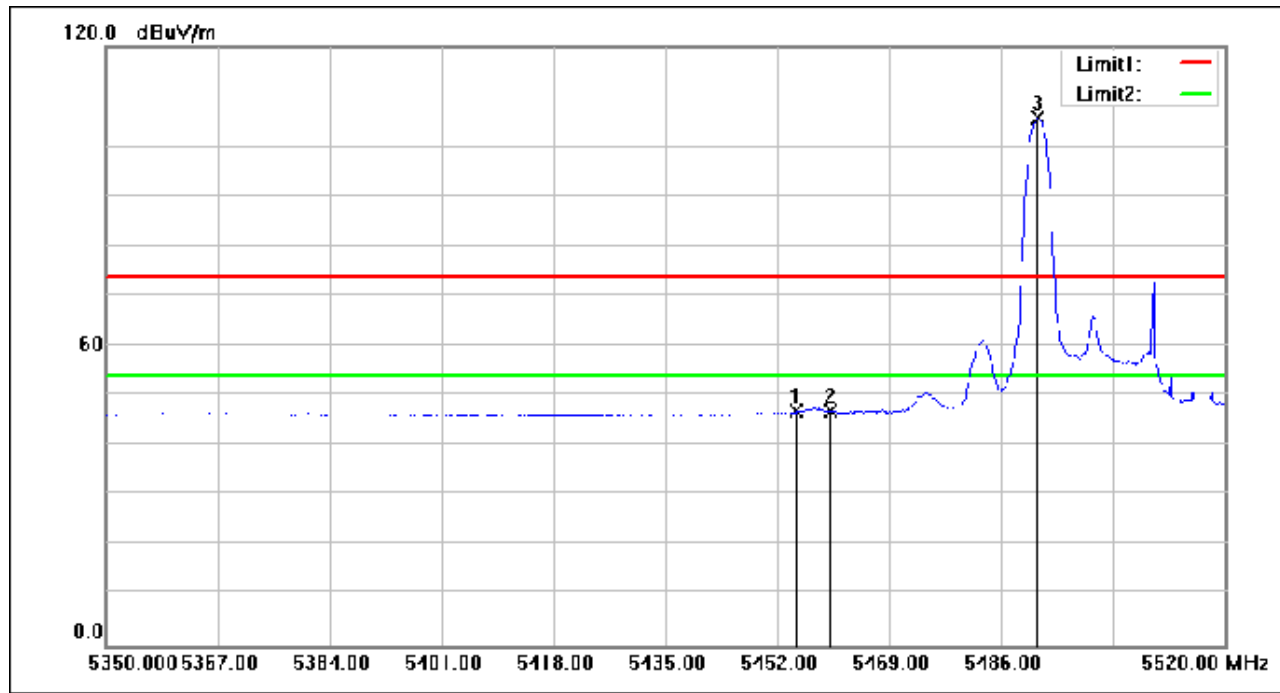

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.720	62.15	-15.30	46.85	54.00	-7.15	AVG
2	5460.000	62.28	-15.30	46.98	54.00	-7.02	AVG
3	5491.440	121.05	-15.26	105.79	54.00	51.79	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 462 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

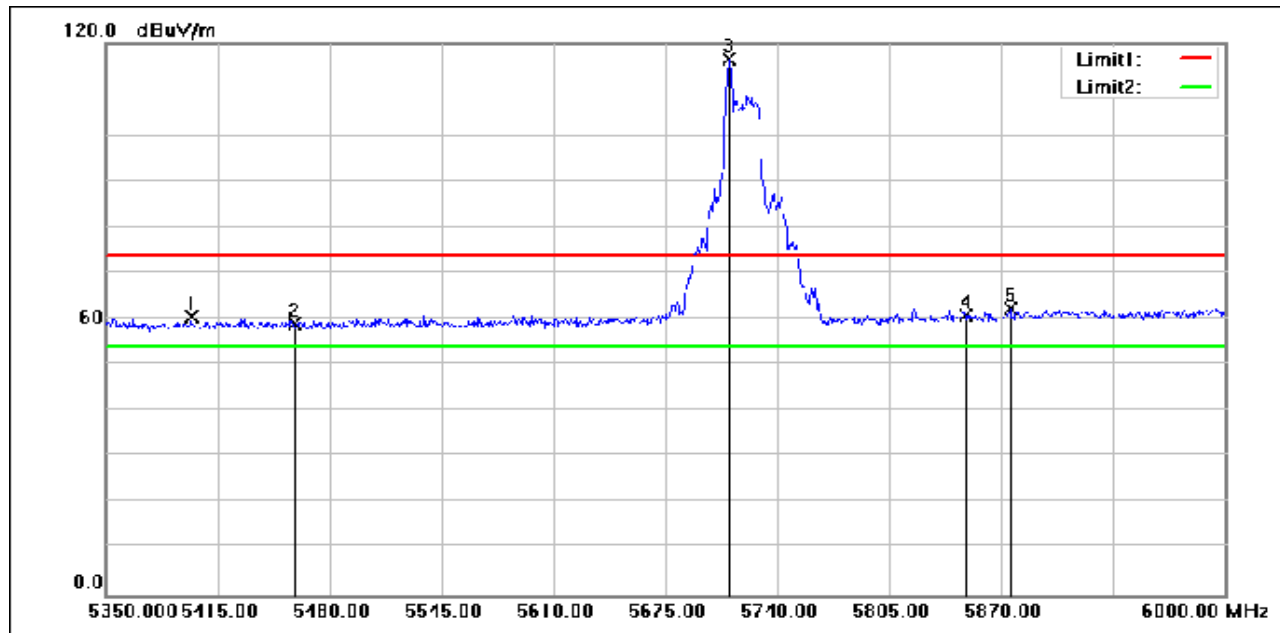

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5399.400	75.79	-15.40	60.39	74.00	-13.61	peak
2	5460.000	74.37	-15.30	59.07	74.00	-14.93	peak
3	5712.050	131.13	-14.63	116.50	74.00	42.50	peak
4	5850.000	74.90	-14.03	60.87	74.00	-13.13	peak
5	5875.200	76.10	-13.87	62.23	74.00	-11.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 463 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

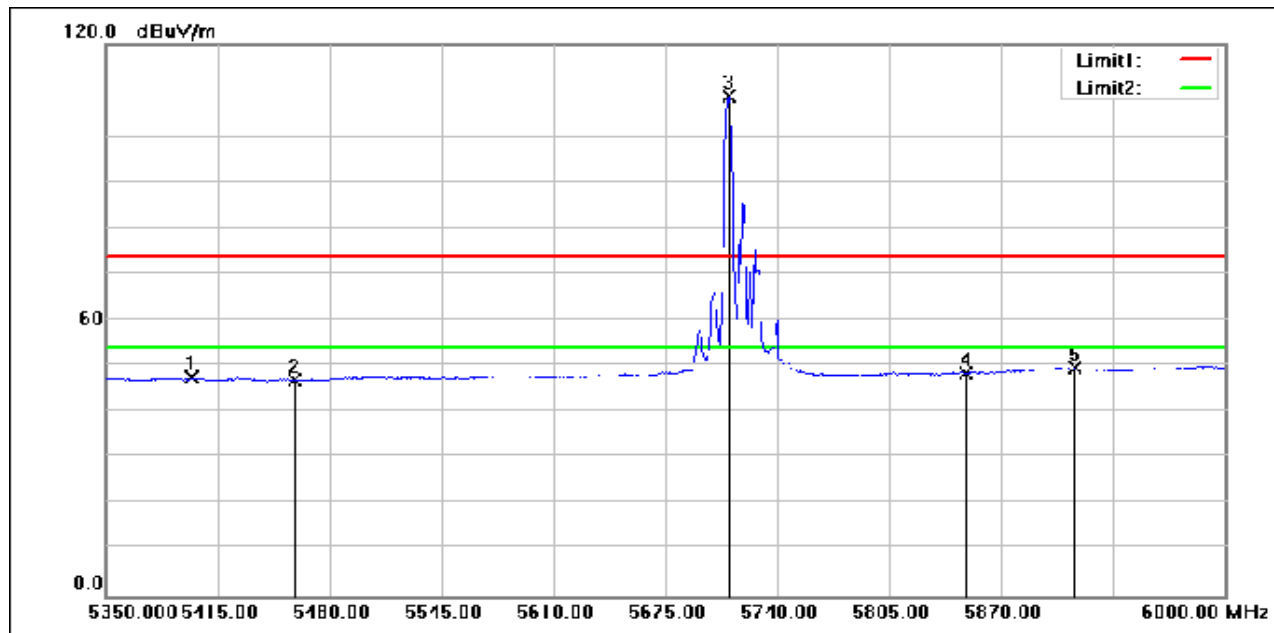

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5400.050	62.88	-15.40	47.48	54.00	-6.52	AVG
2	5460.000	62.38	-15.30	47.08	54.00	-6.92	AVG
3	5712.050	123.26	-14.63	108.63	54.00	54.63	AVG
4	5850.000	62.53	-14.03	48.50	54.00	-5.50	AVG
5	5912.900	63.22	-13.63	49.59	54.00	-4.41	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 464 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

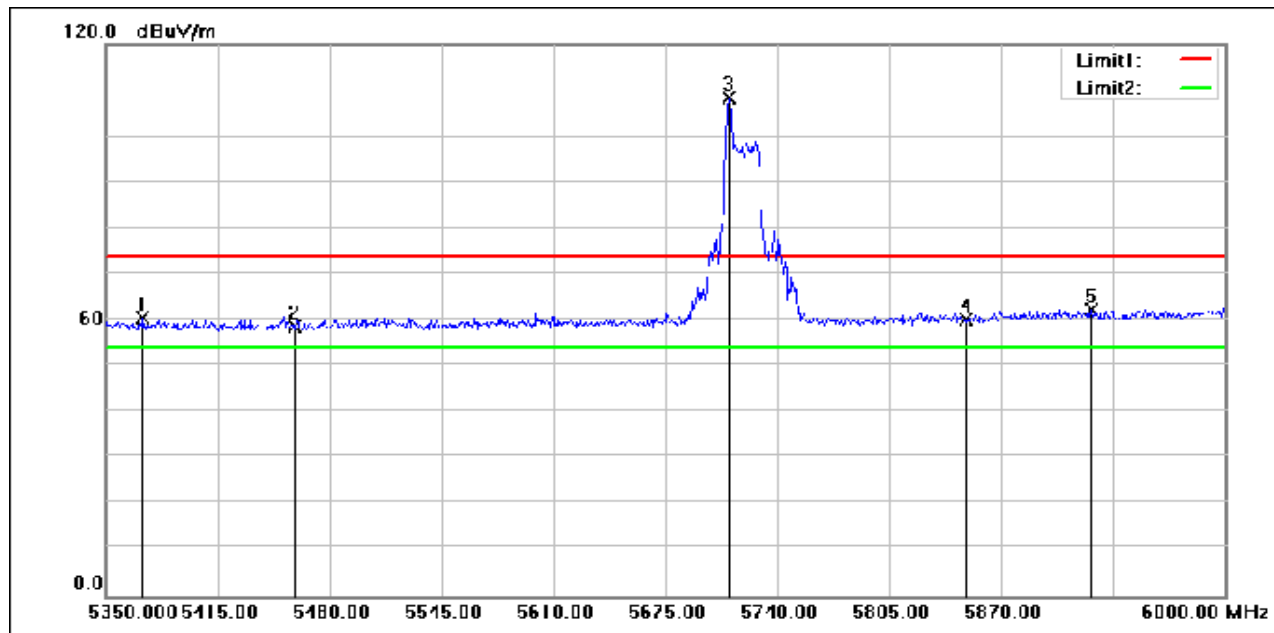

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5371.450	75.91	-15.45	60.46	74.00	-13.54	peak
2	5460.000	73.89	-15.30	58.59	74.00	-15.41	peak
3	5712.050	123.20	-14.63	108.57	74.00	34.57	peak
4	5850.000	74.18	-14.03	60.15	74.00	-13.85	peak
5	5922.000	75.87	-13.57	62.30	74.00	-11.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 465 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

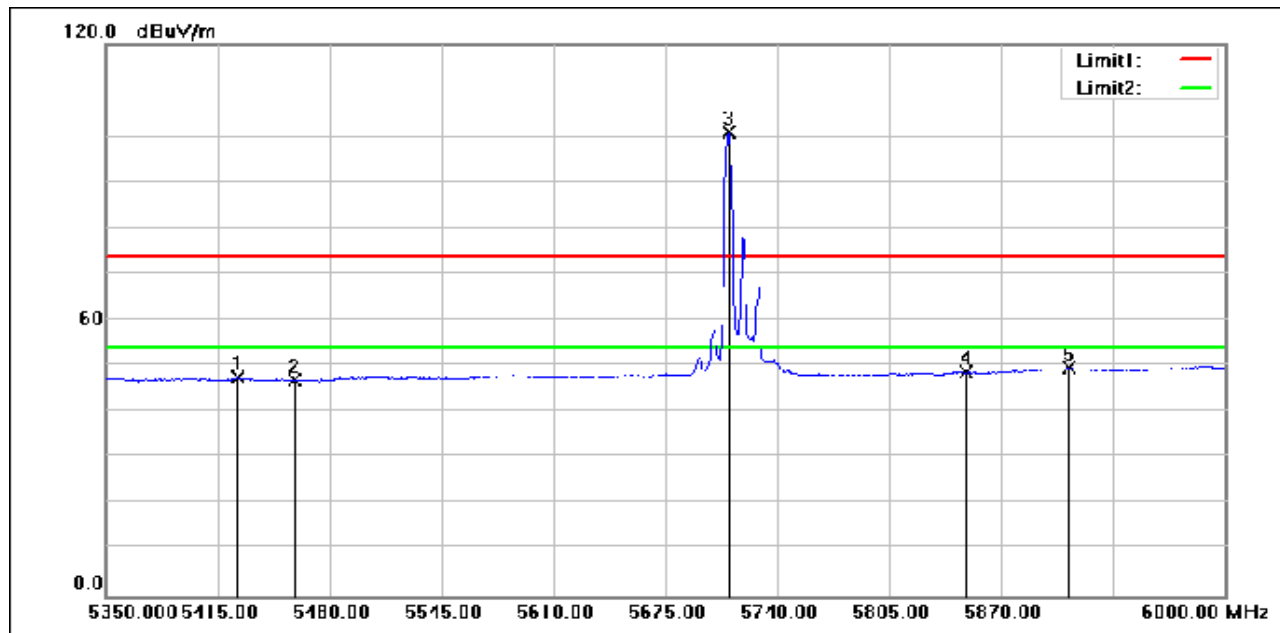

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.700	62.90	-15.36	47.54	54.00	-6.46	AVG
2	5460.000	62.12	-15.30	46.82	54.00	-7.18	AVG
3	5711.400	115.57	-14.63	100.94	54.00	46.94	AVG
4	5850.000	62.68	-14.03	48.65	54.00	-5.35	AVG
5	5909.650	63.24	-13.65	49.59	54.00	-4.41	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 466 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz; Channel: Low

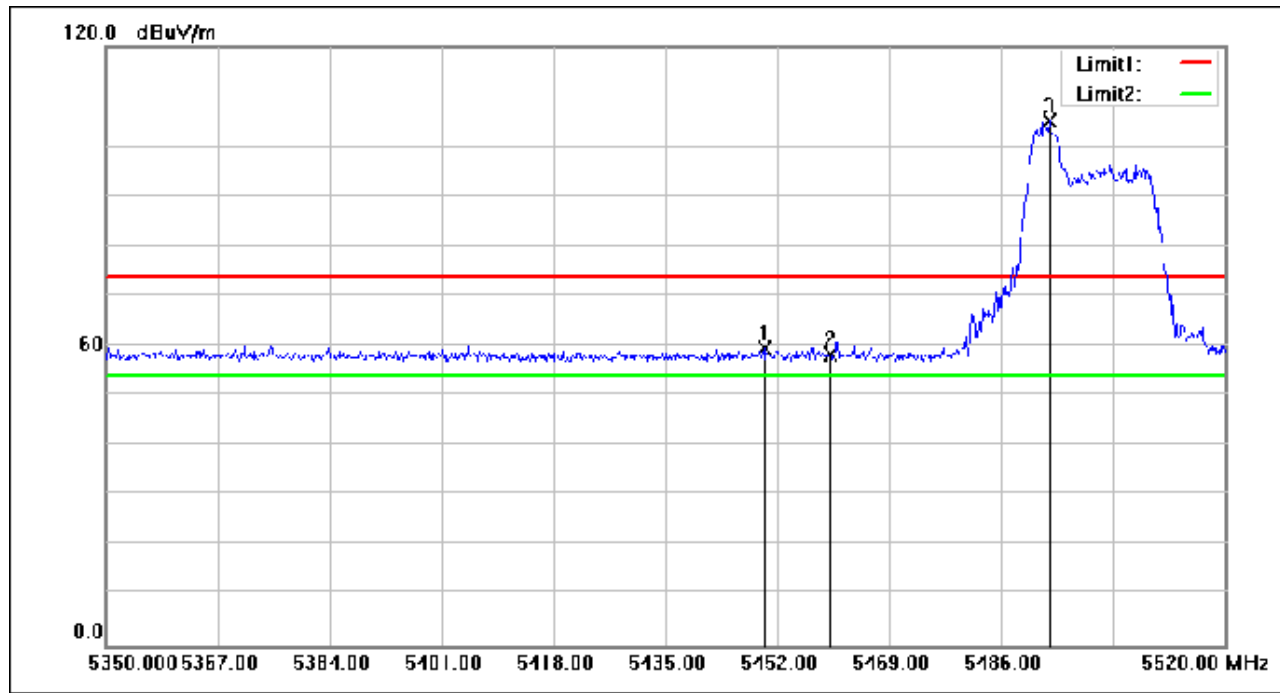

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.960	74.93	-15.32	59.61	74.00	-14.39	peak
2	5460.000	73.71	-15.30	58.41	74.00	-15.59	peak
3	5493.310	120.37	-15.25	105.12	74.00	31.12	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 467 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

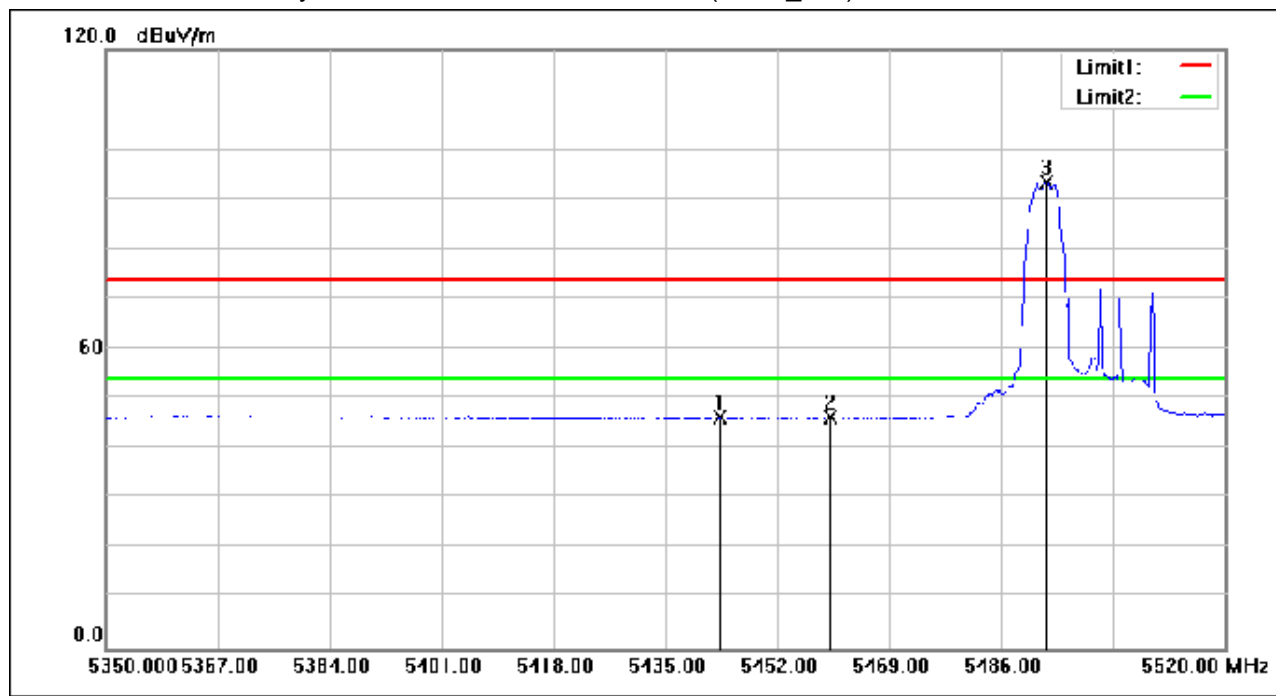

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.330	61.75	-15.32	46.43	54.00	-7.57	AVG
2	5460.000	61.57	-15.30	46.27	54.00	-7.73	AVG
3	5492.800	108.73	-15.25	93.48	54.00	39.48	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 468 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

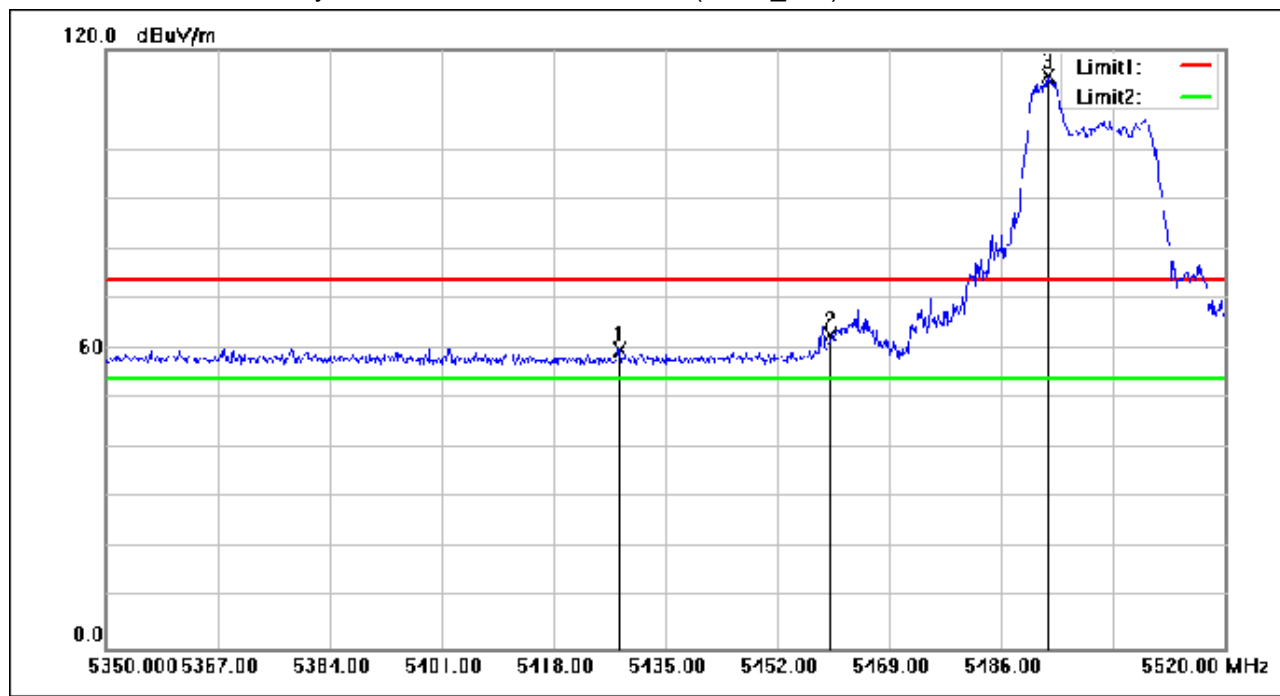

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.030	75.31	-15.35	59.96	74.00	-14.04	peak
2	5460.000	78.14	-15.30	62.84	74.00	-11.16	peak
3	5493.140	130.13	-15.25	114.88	74.00	40.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 469 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

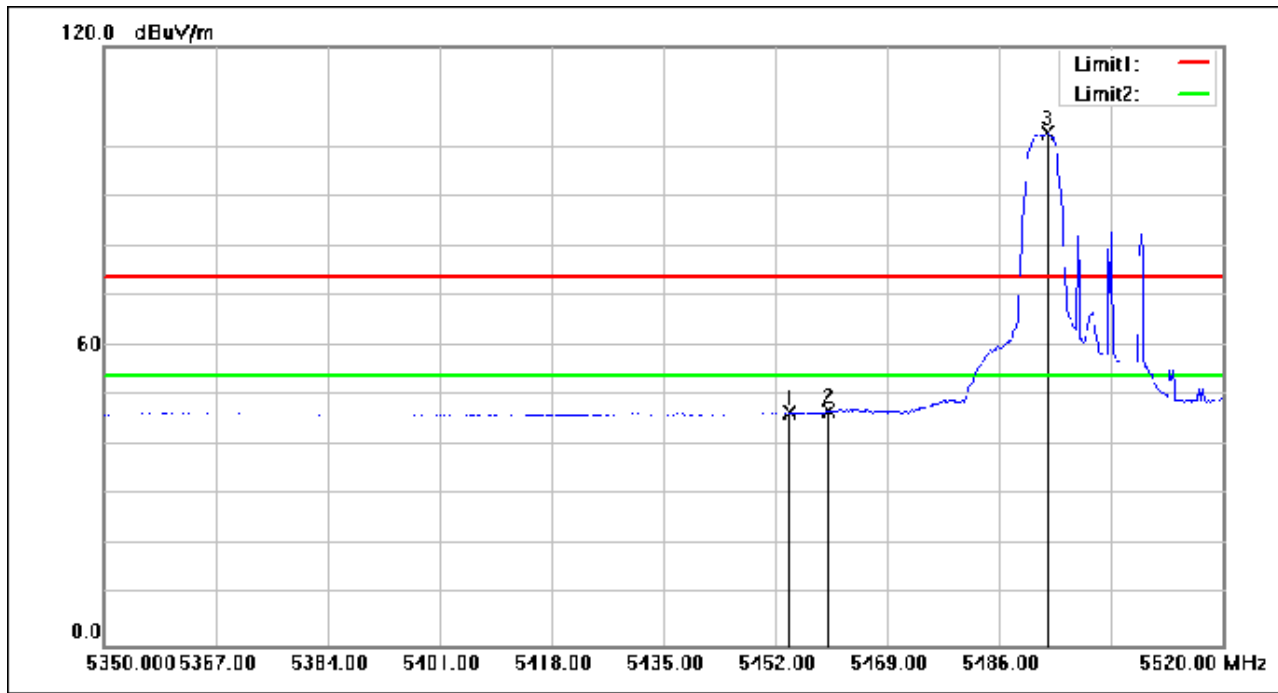

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.210	61.97	-15.30	46.67	54.00	-7.33	AVG
2	5460.000	62.36	-15.30	47.06	54.00	-6.94	AVG
3	5493.310	117.97	-15.25	102.72	54.00	48.72	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 470 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

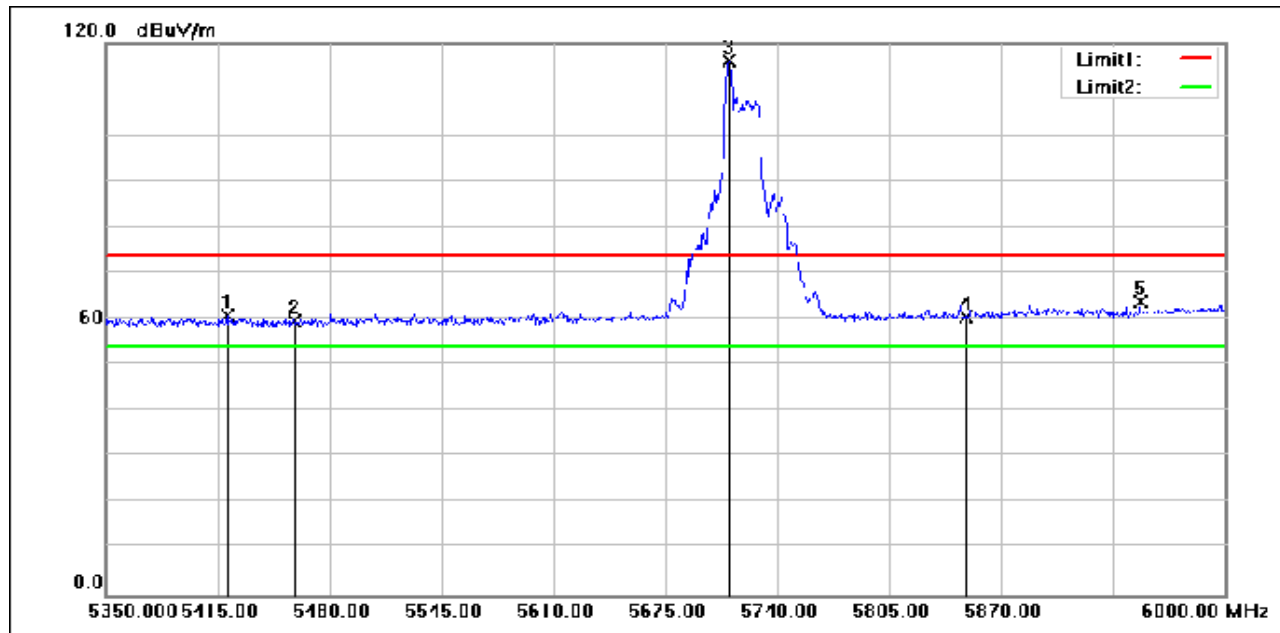

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.200	75.97	-15.36	60.61	74.00	-13.39	peak
2	5460.000	74.73	-15.30	59.43	74.00	-14.57	peak
3	5712.050	130.93	-14.63	116.30	74.00	42.30	peak
4	5850.000	74.55	-14.03	60.52	74.00	-13.48	peak
5	5950.600	77.03	-13.39	63.64	74.00	-10.36	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 471 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

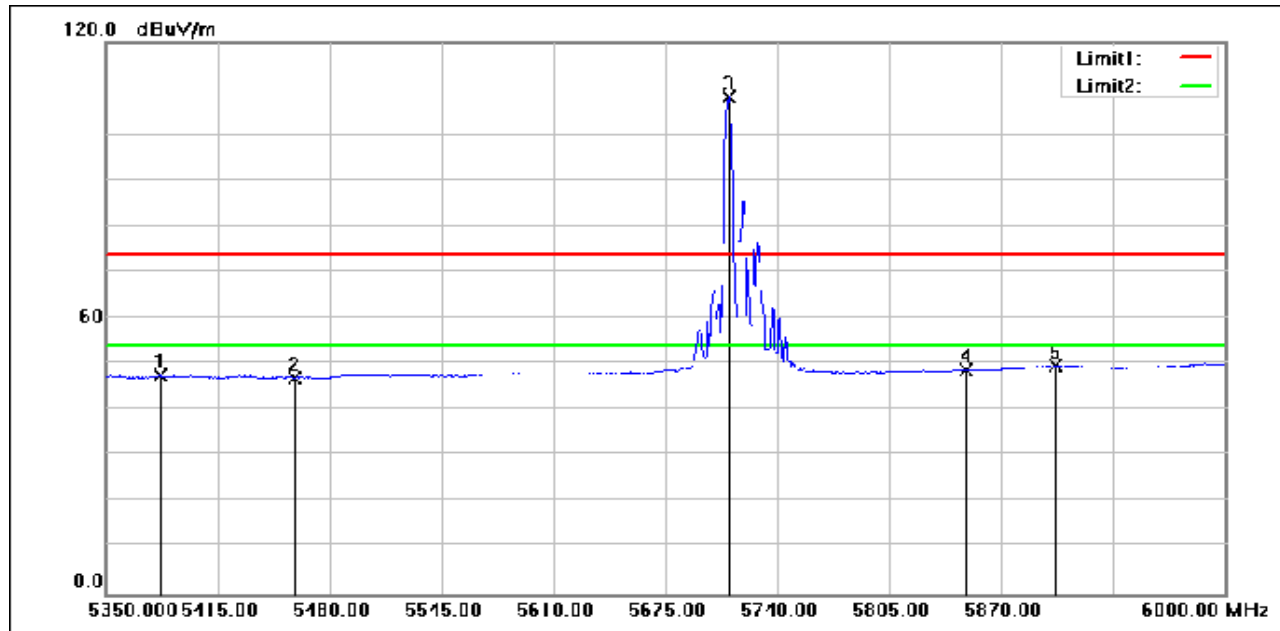

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5381.200	62.98	-15.43	47.55	54.00	-6.45	AVG
2	5460.000	62.34	-15.30	47.04	54.00	-6.96	AVG
3	5711.400	122.90	-14.63	108.27	54.00	54.27	AVG
4	5850.000	62.67	-14.03	48.64	54.00	-5.36	AVG
5	5901.850	63.37	-13.70	49.67	54.00	-4.33	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 472 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

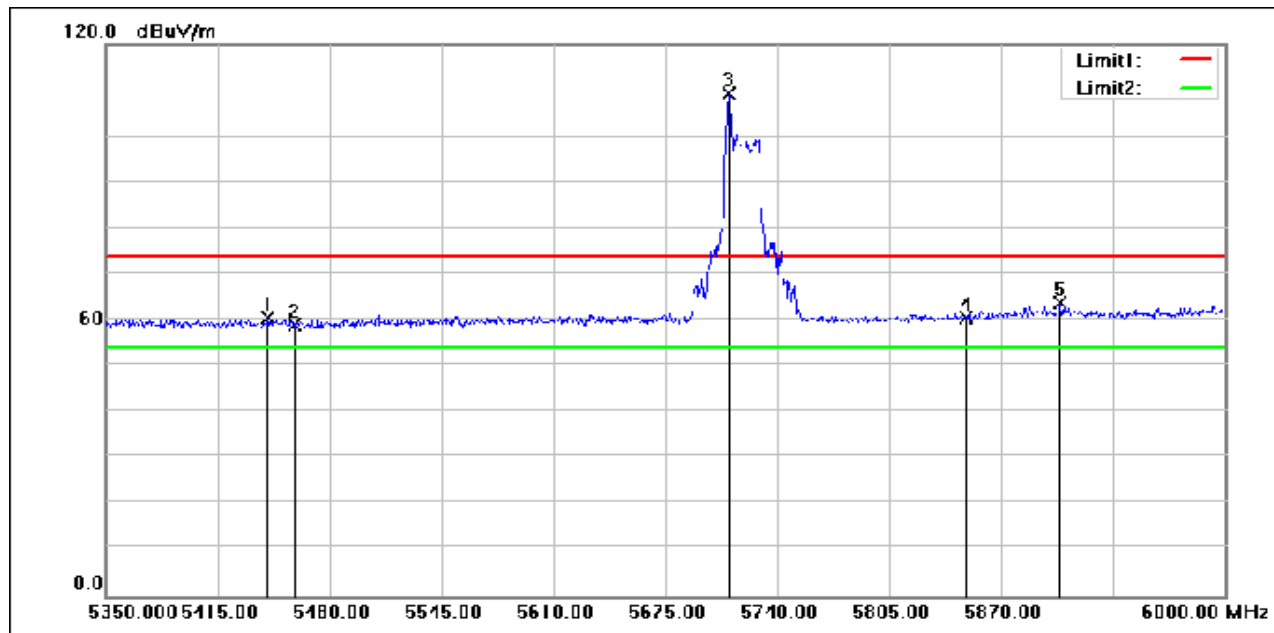

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.250	75.89	-15.32	60.57	74.00	-13.43	peak
2	5460.000	74.28	-15.30	58.98	74.00	-15.02	peak
3	5711.400	123.91	-14.63	109.28	74.00	35.28	peak
4	5850.000	74.41	-14.03	60.38	74.00	-13.62	peak
5	5903.800	77.32	-13.69	63.63	74.00	-10.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 473 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

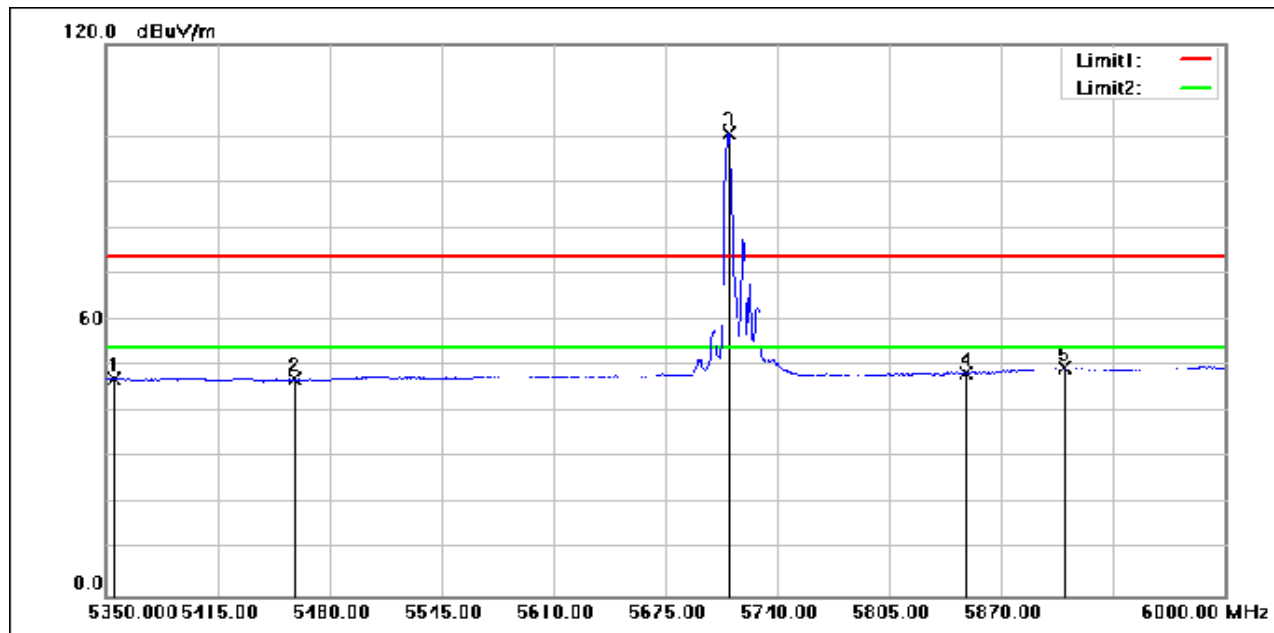

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5354.550	62.89	-15.49	47.40	54.00	-6.60	AVG
2	5460.000	62.41	-15.30	47.11	54.00	-6.89	AVG
3	5711.400	115.31	-14.63	100.68	54.00	46.68	AVG
4	5850.000	62.61	-14.03	48.58	54.00	-5.42	AVG
5	5907.050	63.26	-13.67	49.59	54.00	-4.41	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 474 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

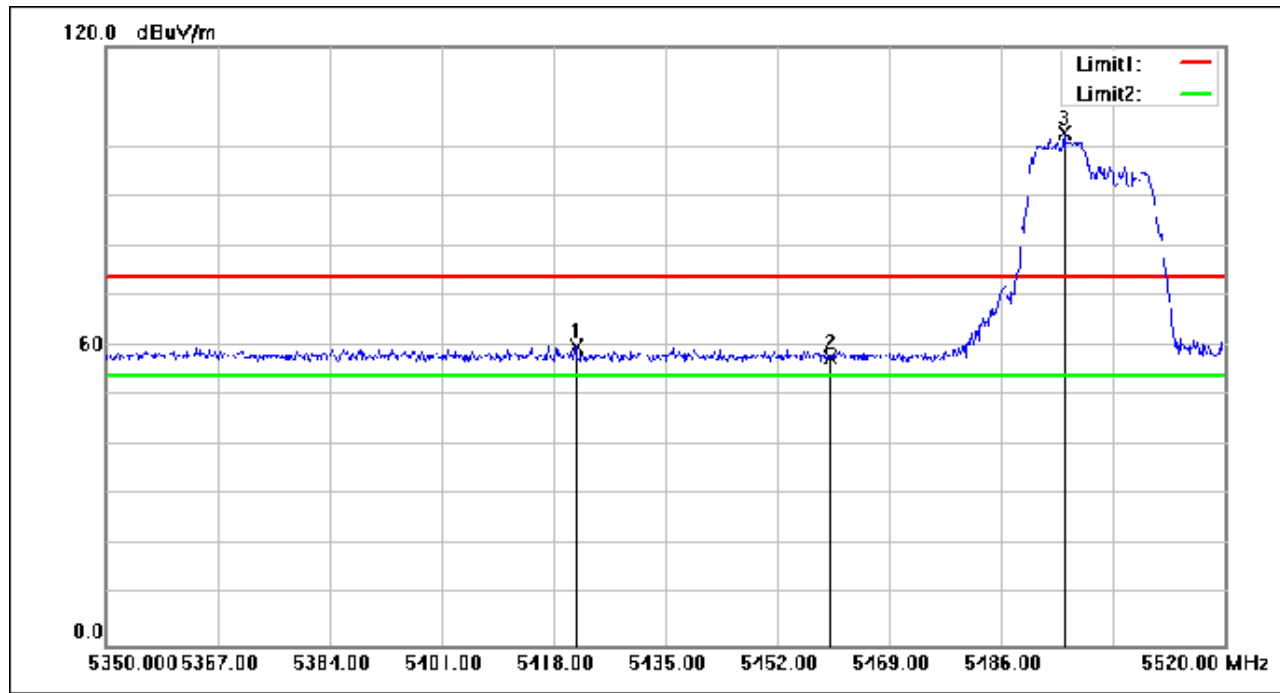

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5421.400	75.10	-15.36	59.74	74.00	-14.26	peak
2	5460.000	73.13	-15.30	57.83	74.00	-16.17	peak
3	5495.520	118.12	-15.25	102.87	74.00	28.87	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 475 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

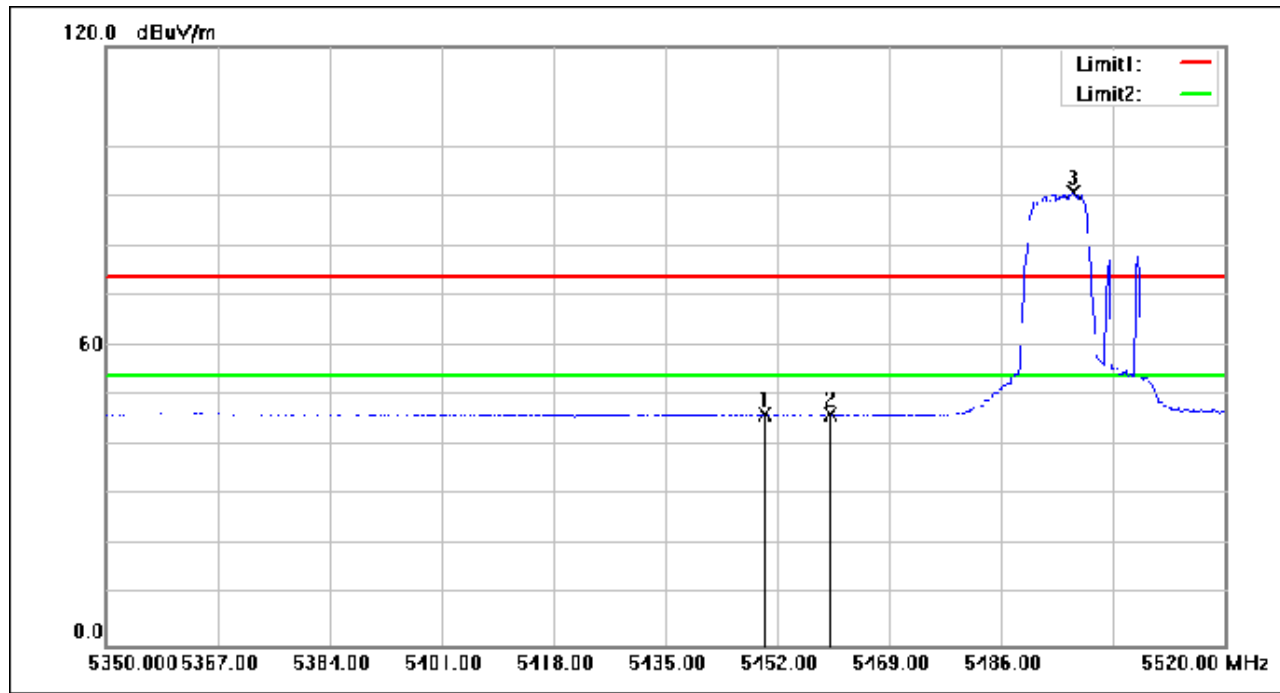

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.130	61.77	-15.32	46.45	54.00	-7.55	AVG
2	5460.000	61.56	-15.30	46.26	54.00	-7.74	AVG
3	5497.050	105.95	-15.25	90.70	54.00	36.70	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 476 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

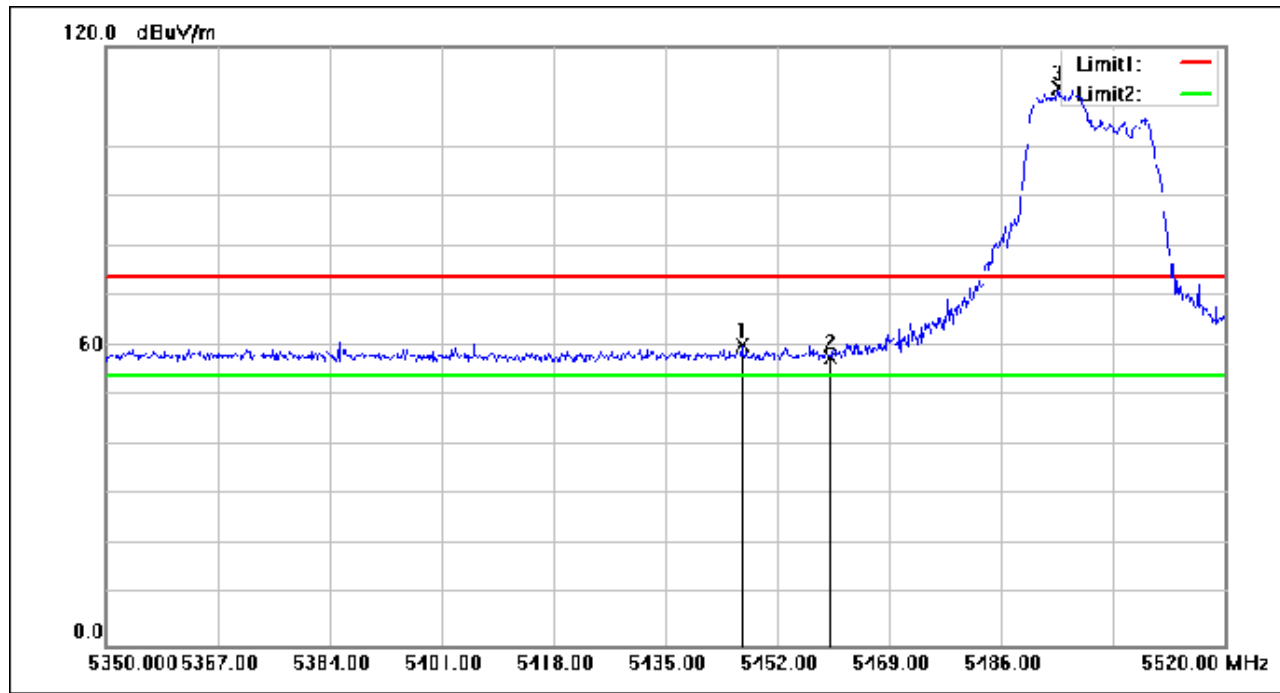

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.560	75.51	-15.32	60.19	74.00	-13.81	peak
2	5460.000	73.18	-15.30	57.88	74.00	-16.12	peak
3	5494.670	127.14	-15.25	111.89	74.00	37.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 477 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

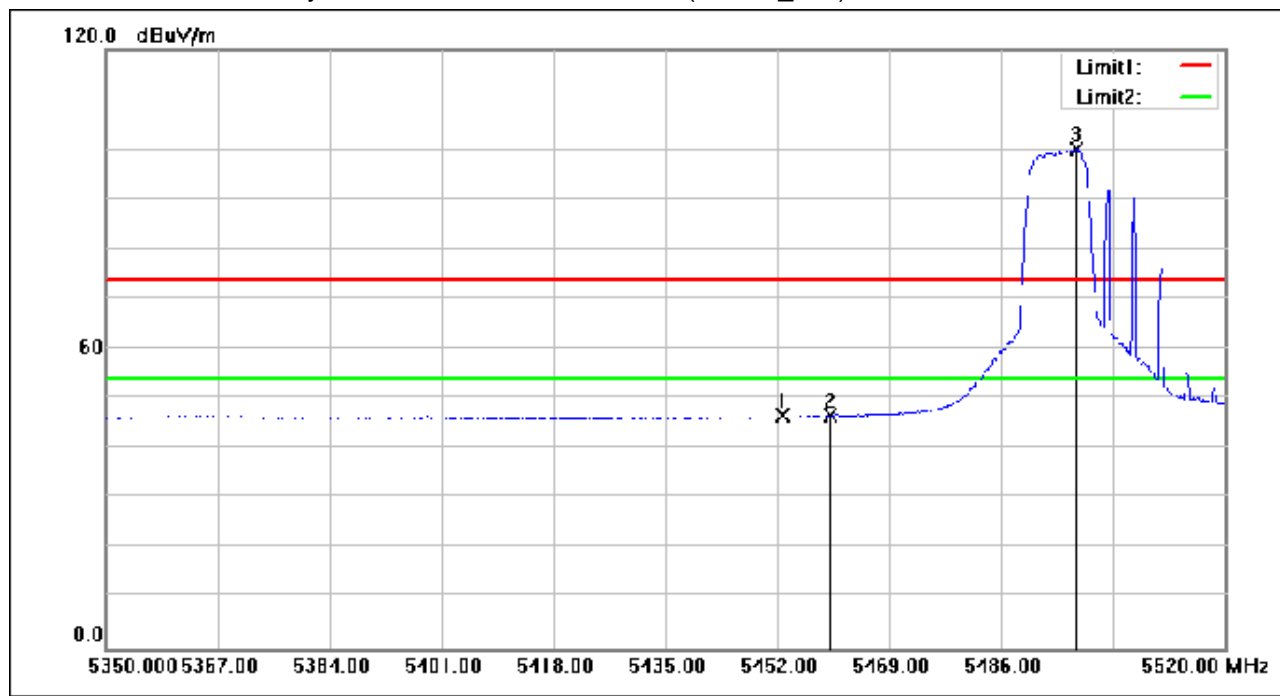

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.680	61.89	-15.30	46.59	54.00	-7.41	AVG
2	5460.000	61.84	-15.30	46.54	54.00	-7.46	AVG
3	5497.390	115.34	-15.25	100.09	54.00	46.09	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 478 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

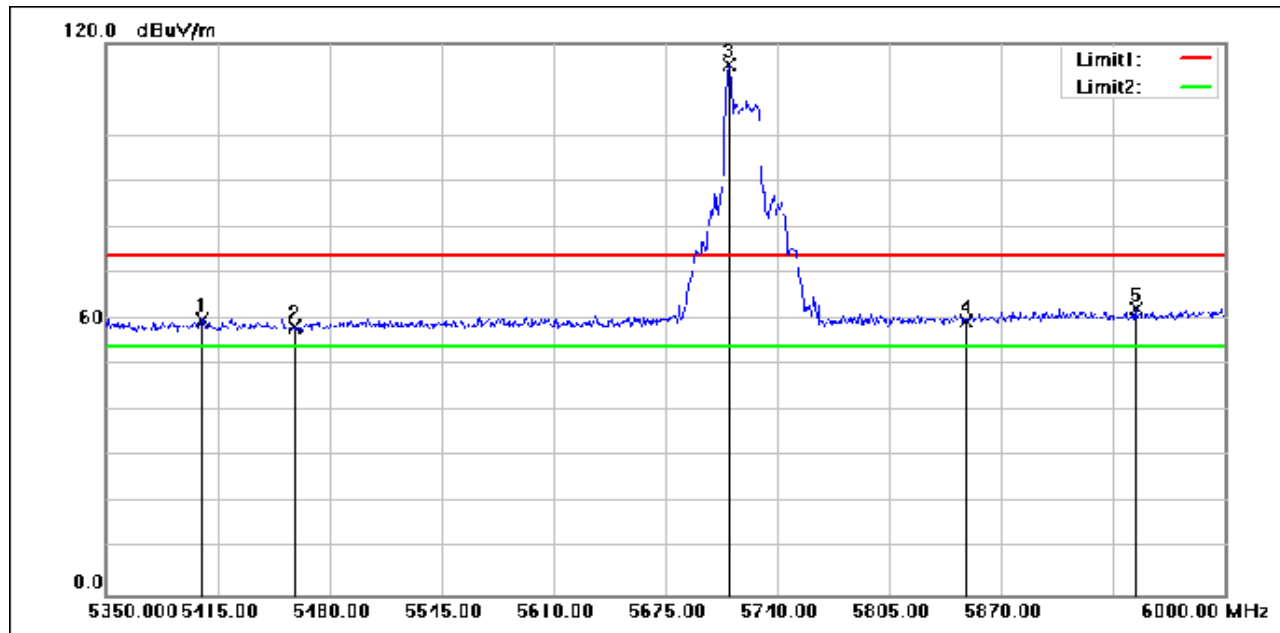

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5405.900	75.22	-15.39	59.83	74.00	-14.17	peak
2	5460.000	73.59	-15.30	58.29	74.00	-15.71	peak
3	5711.400	130.00	-14.63	115.37	74.00	41.37	peak
4	5850.000	73.62	-14.03	59.59	74.00	-14.41	peak
5	5948.000	75.78	-13.41	62.37	74.00	-11.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 479 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

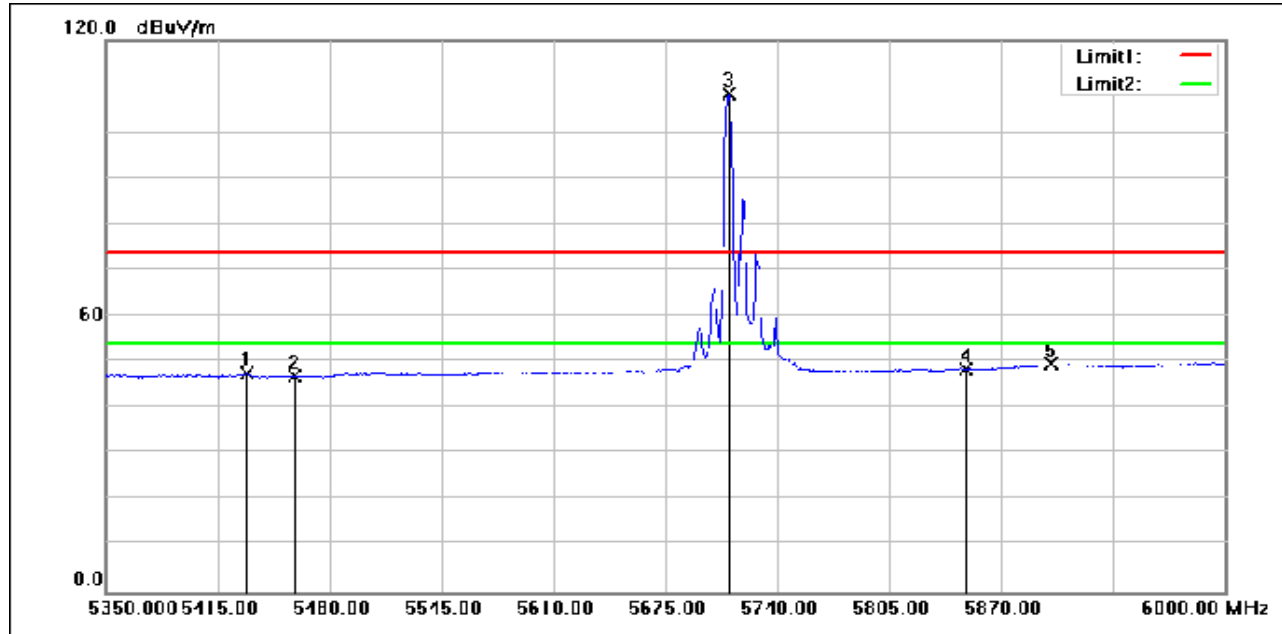

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.900	62.79	-15.34	47.45	54.00	-6.55	AVG
2	5460.000	62.14	-15.30	46.84	54.00	-7.16	AVG
3	5711.400	123.06	-14.63	108.43	54.00	54.43	AVG
4	5850.000	62.51	-14.03	48.48	54.00	-5.52	AVG
5	5898.600	63.30	-13.72	49.58	54.00	-4.42	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 480 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

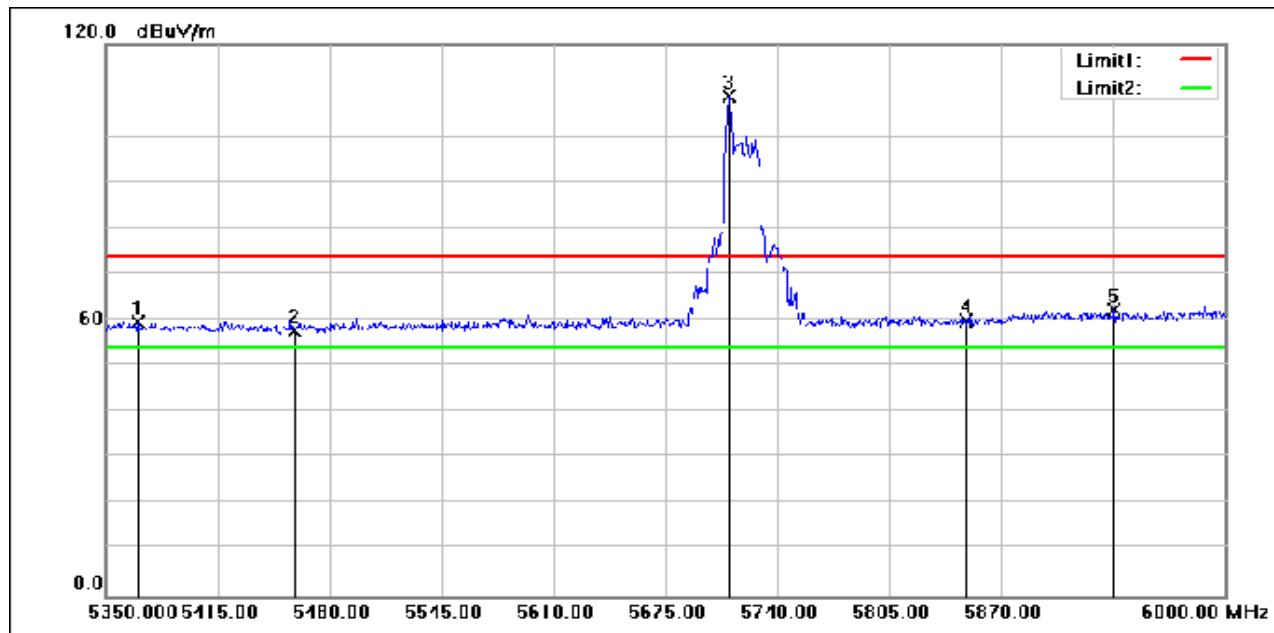

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5368.200	75.09	-15.46	59.63	74.00	-14.37	peak
2	5460.000	73.08	-15.30	57.78	74.00	-16.22	peak
3	5711.400	123.50	-14.63	108.87	74.00	34.87	peak
4	5850.000	73.83	-14.03	59.80	74.00	-14.20	peak
5	5935.650	75.66	-13.48	62.18	74.00	-11.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 481 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

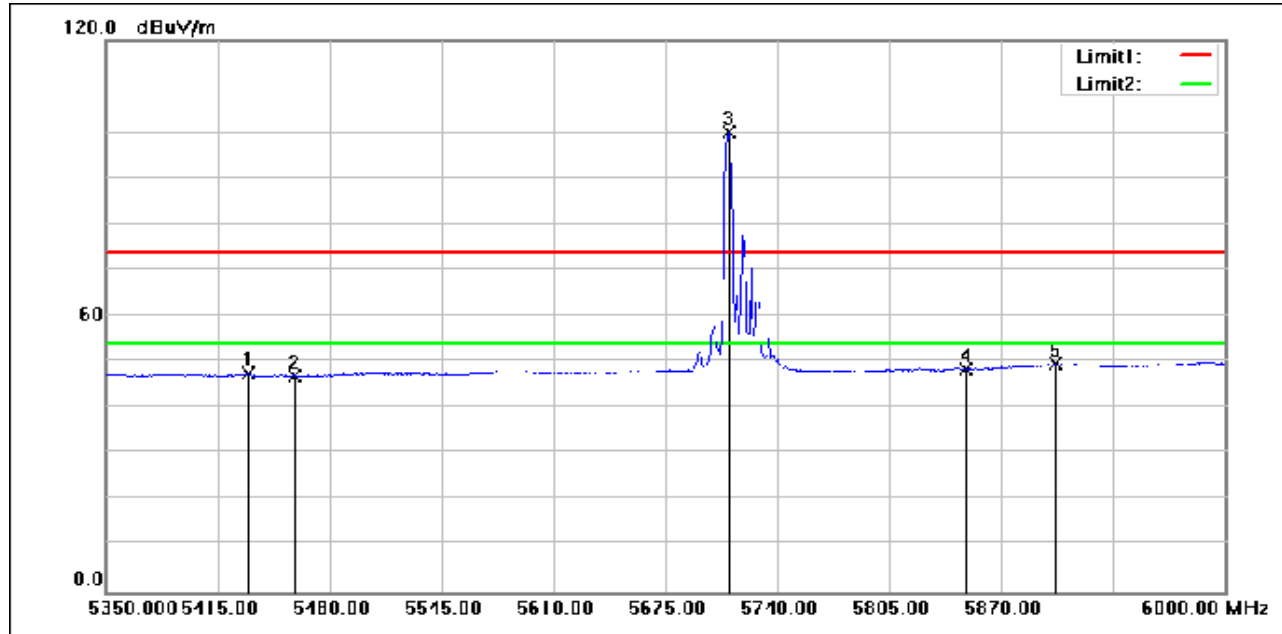

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.550	62.75	-15.34	47.41	54.00	-6.59	AVG
2	5460.000	62.23	-15.30	46.93	54.00	-7.07	AVG
3	5712.050	114.77	-14.63	100.14	54.00	46.14	AVG
4	5850.000	62.52	-14.03	48.49	54.00	-5.51	AVG
5	5901.200	63.29	-13.70	49.59	54.00	-4.41	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 482 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

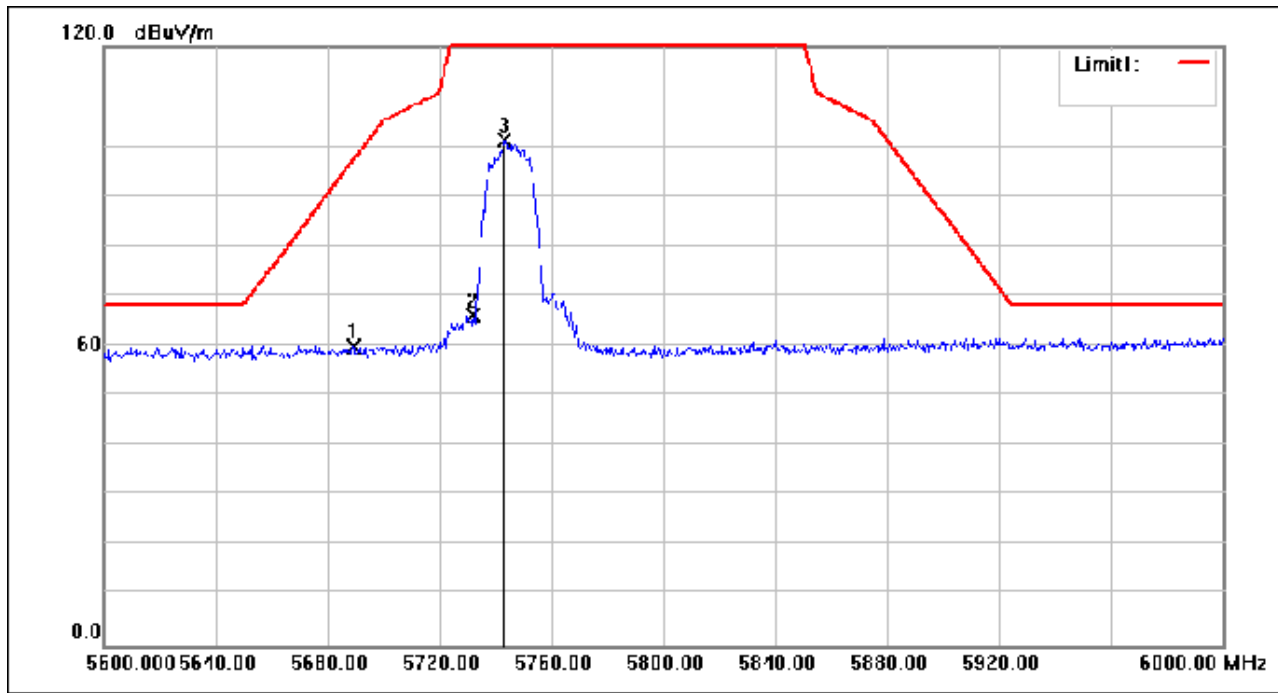

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5689.200	74.49	-14.71	59.78	97.21	-37.43	peak
2	5732.000	80.78	-14.55	66.23	135.00	-68.77	peak
3	5743.200	115.68	-14.51	101.17	135.00	-33.83	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 483 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

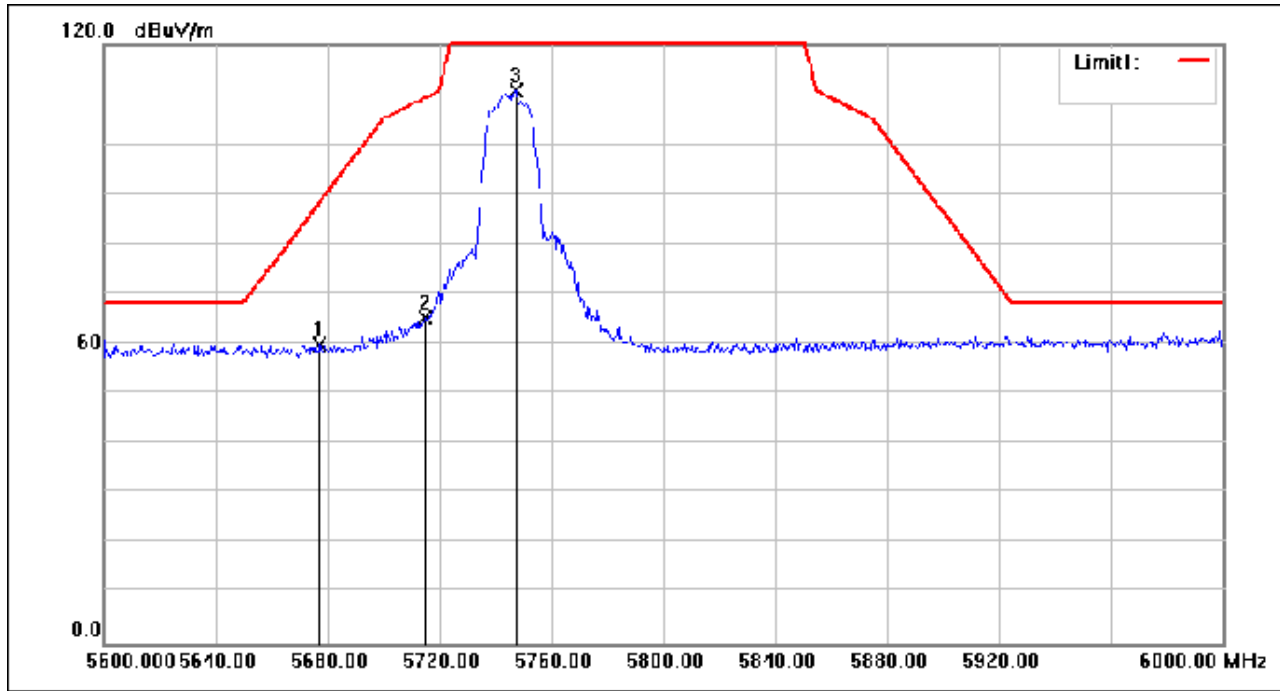

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5677.200	74.54	-14.76	59.78	88.33	-28.55	peak
2	5714.800	79.77	-14.62	65.15	109.34	-44.19	peak
3	5747.200	125.22	-14.48	110.74	135.00	-24.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 484 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

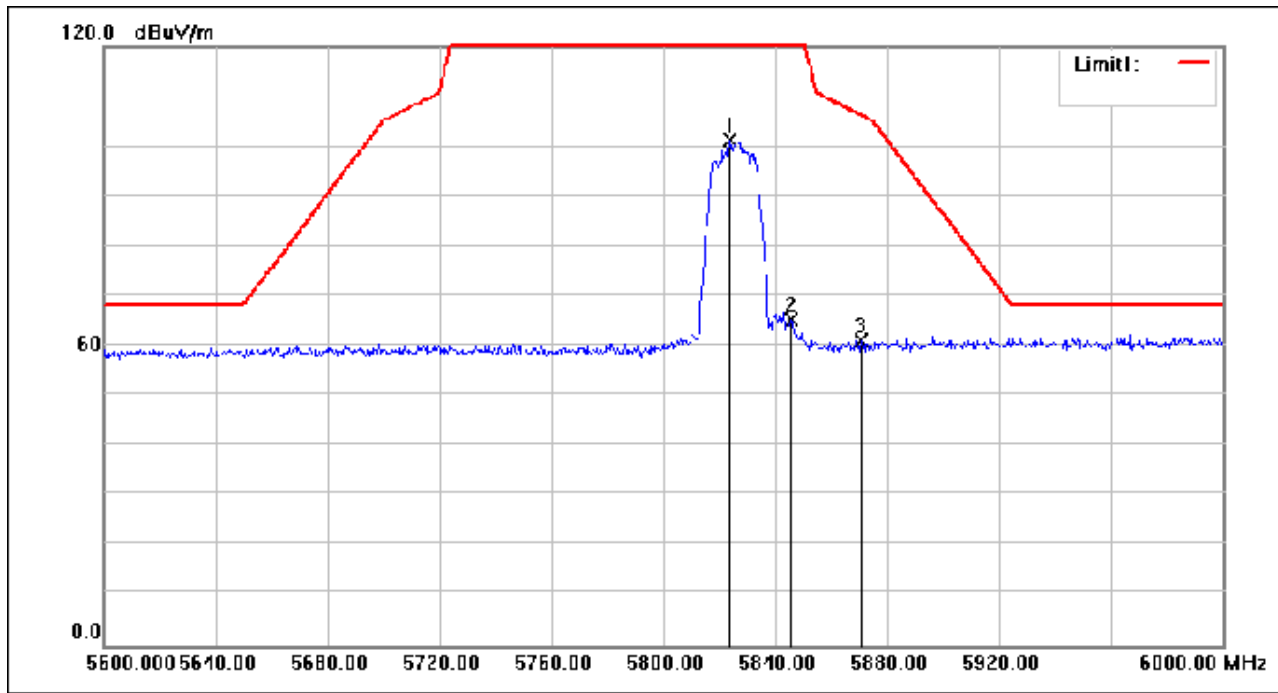

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.600	115.30	-14.14	101.16	135.00	-33.84	peak
2	5845.600	79.26	-14.04	65.22	135.00	-69.78	peak
3	5870.400	74.90	-13.90	61.00	106.49	-45.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 485 of 929

Test Mode: 04; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

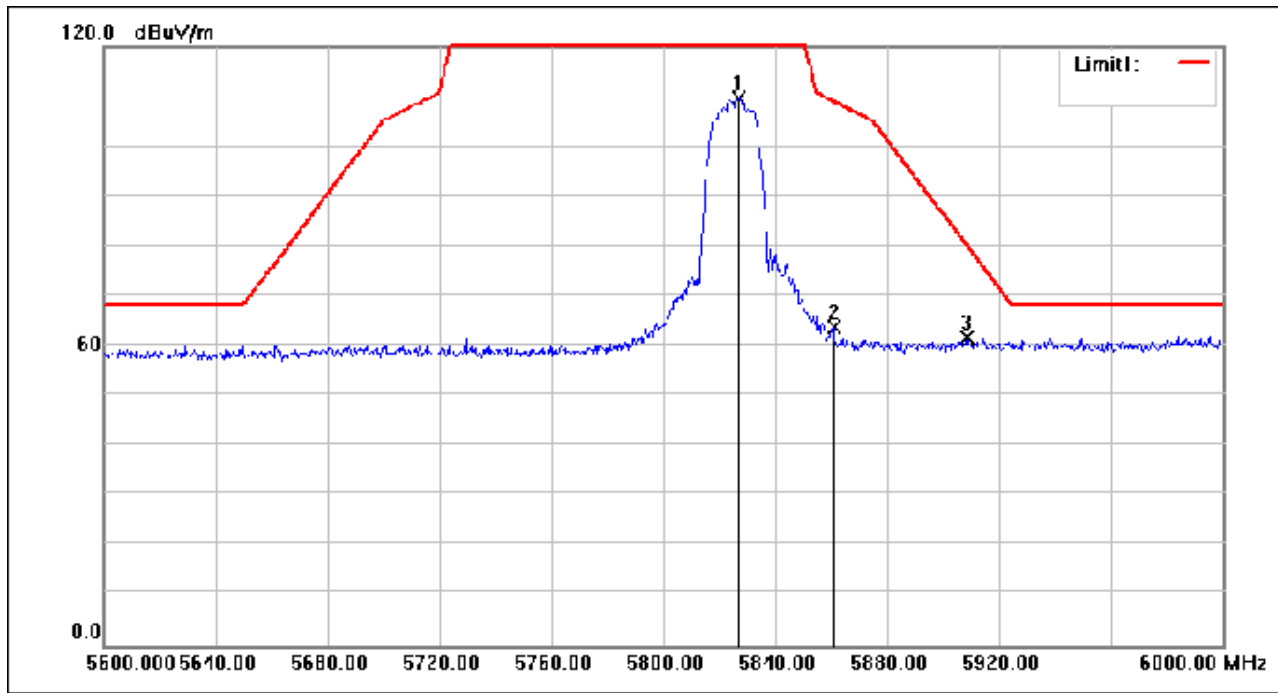

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.800	123.65	-14.13	109.52	135.00	-25.48	peak
2	5860.800	77.73	-13.96	63.77	109.18	-45.41	peak
3	5908.400	75.23	-13.65	61.58	80.48	-18.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 486 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

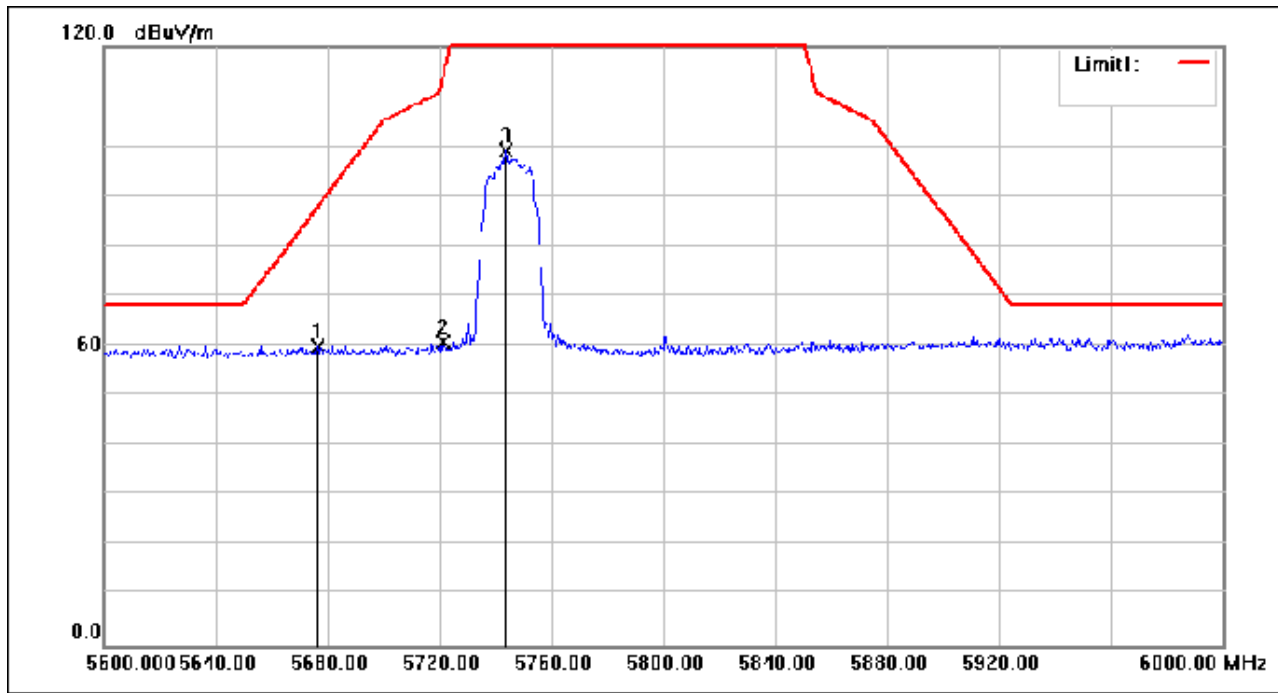

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5676.400	74.61	-14.76	59.85	87.74	-27.89	peak
2	5721.200	75.31	-14.60	60.71	113.54	-52.83	peak
3	5743.600	113.55	-14.51	99.04	135.00	-35.96	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 487 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

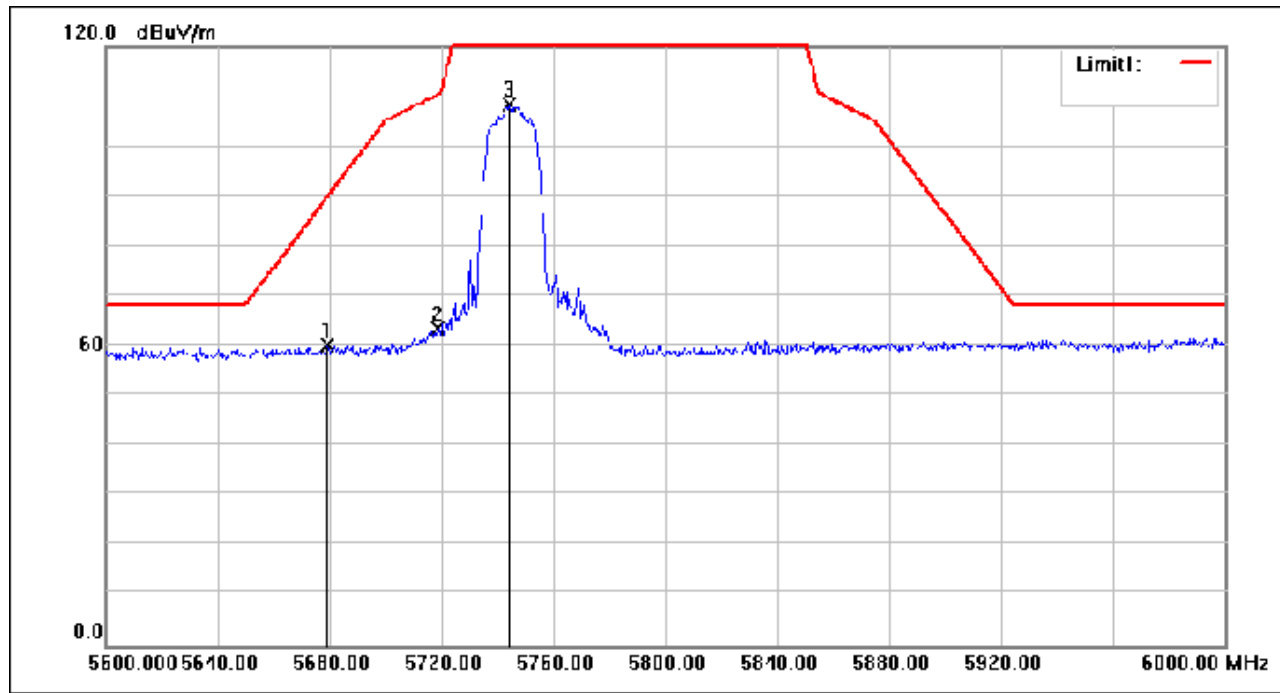

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5679.200	74.77	-14.75	60.02	89.81	-29.79	peak
2	5718.800	78.12	-14.61	63.51	110.46	-46.95	peak
3	5744.400	122.88	-14.49	108.39	135.00	-26.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 488 of 929

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

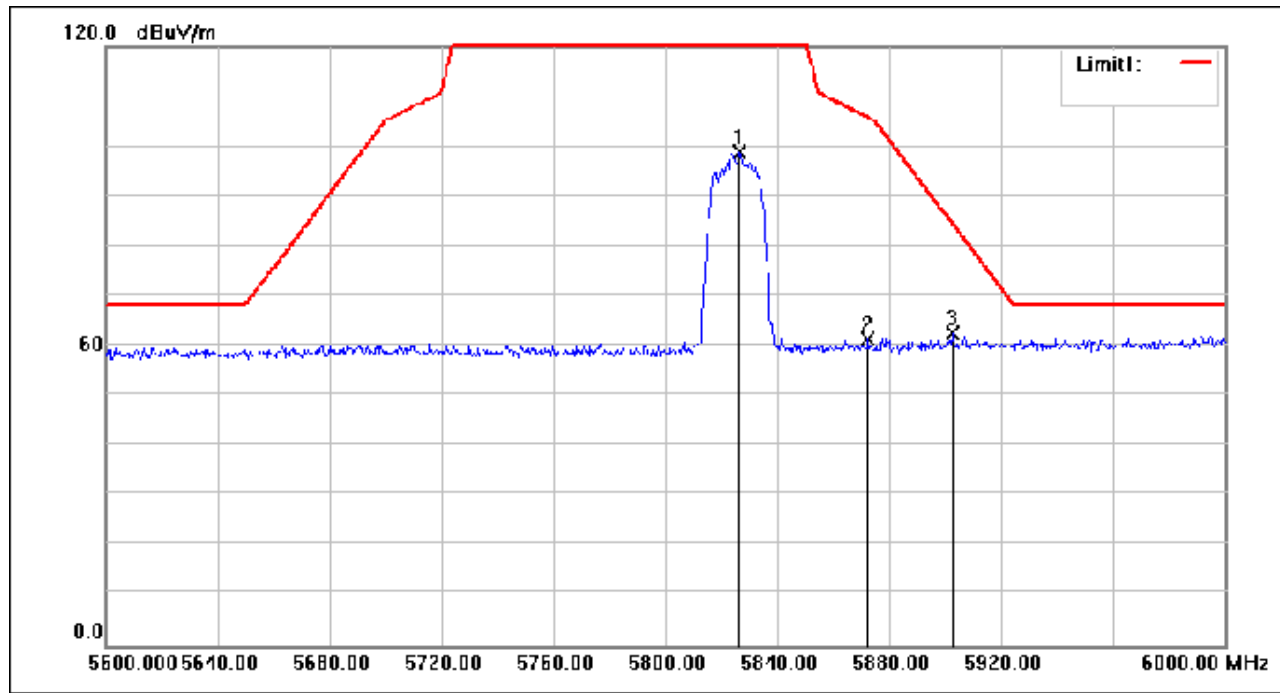

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.400	113.12	-14.13	98.99	135.00	-36.01	peak
2	5872.400	75.26	-13.89	61.37	105.93	-44.56	peak
3	5902.800	76.20	-13.69	62.51	84.63	-22.12	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 489 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

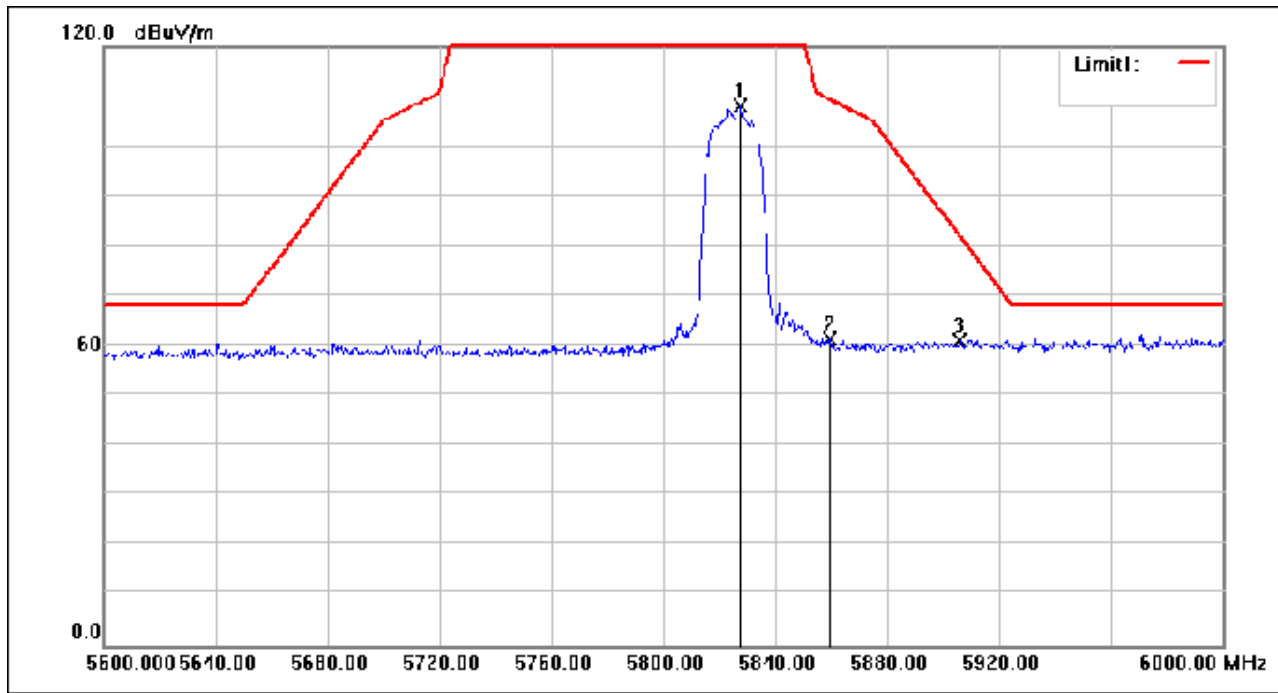

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5827.600	122.17	-14.13	108.04	135.00	-26.96	peak
2	5859.600	75.41	-13.96	61.45	109.51	-48.06	peak
3	5906.000	74.80	-13.67	61.13	82.26	-21.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 490 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

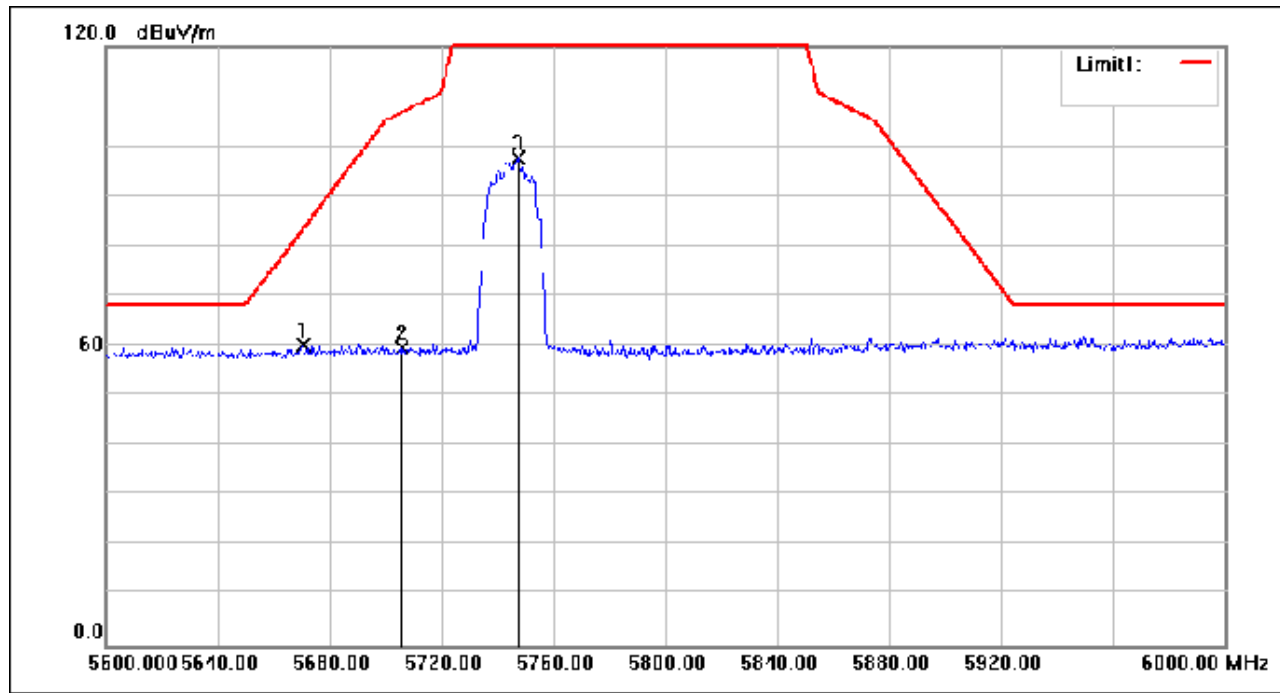

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.400	74.79	-14.78	60.01	83.30	-23.29	peak
2	5706.000	74.17	-14.65	59.52	106.88	-47.36	peak
3	5747.200	112.21	-14.48	97.73	135.00	-37.27	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 491 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

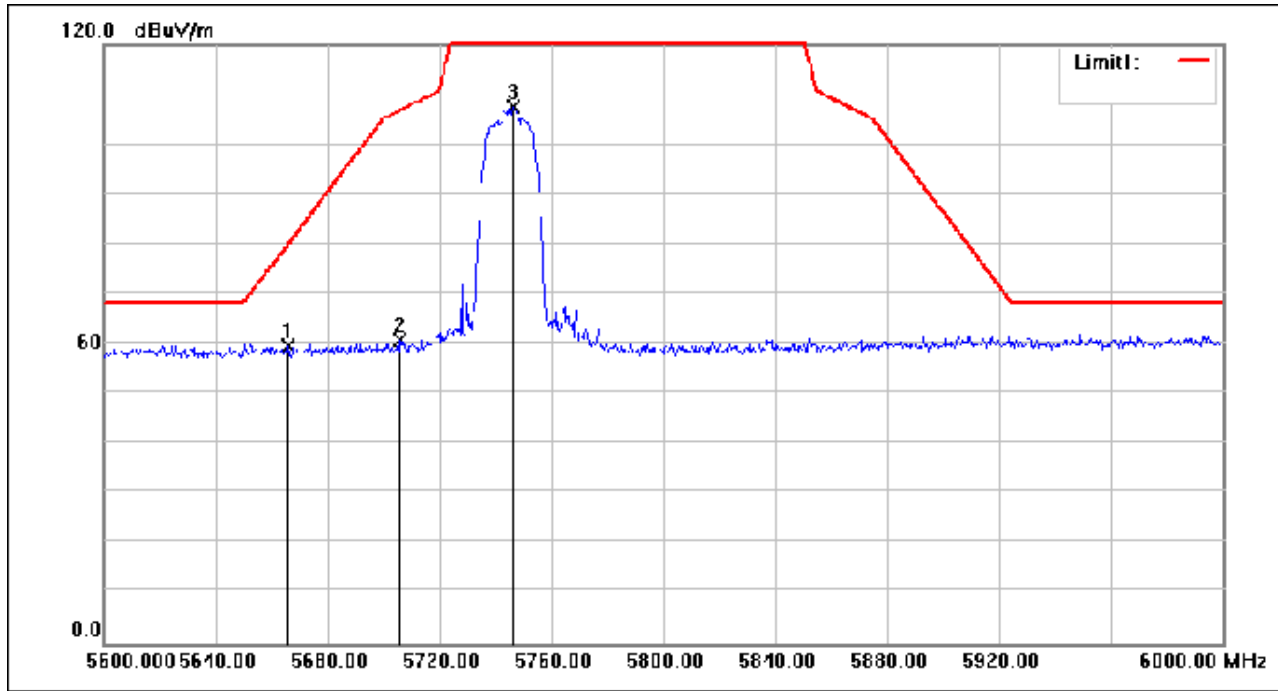

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5666.000	74.31	-14.80	59.51	80.04	-20.53	peak
2	5705.600	75.39	-14.65	60.74	106.77	-46.03	peak
3	5746.400	121.99	-14.49	107.50	135.00	-27.50	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 492 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

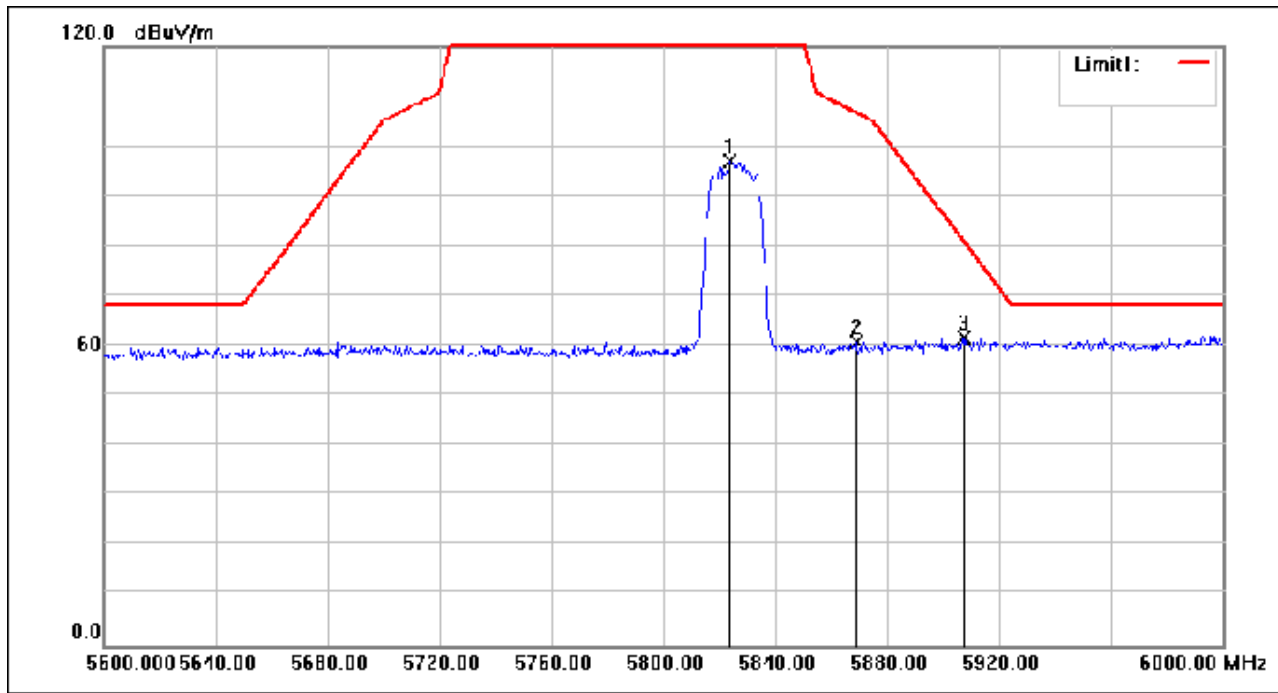

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.600	111.27	-14.14	97.13	135.00	-37.87	peak
2	5868.800	74.80	-13.91	60.89	106.94	-46.05	peak
3	5907.200	75.40	-13.67	61.73	81.37	-19.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 493 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

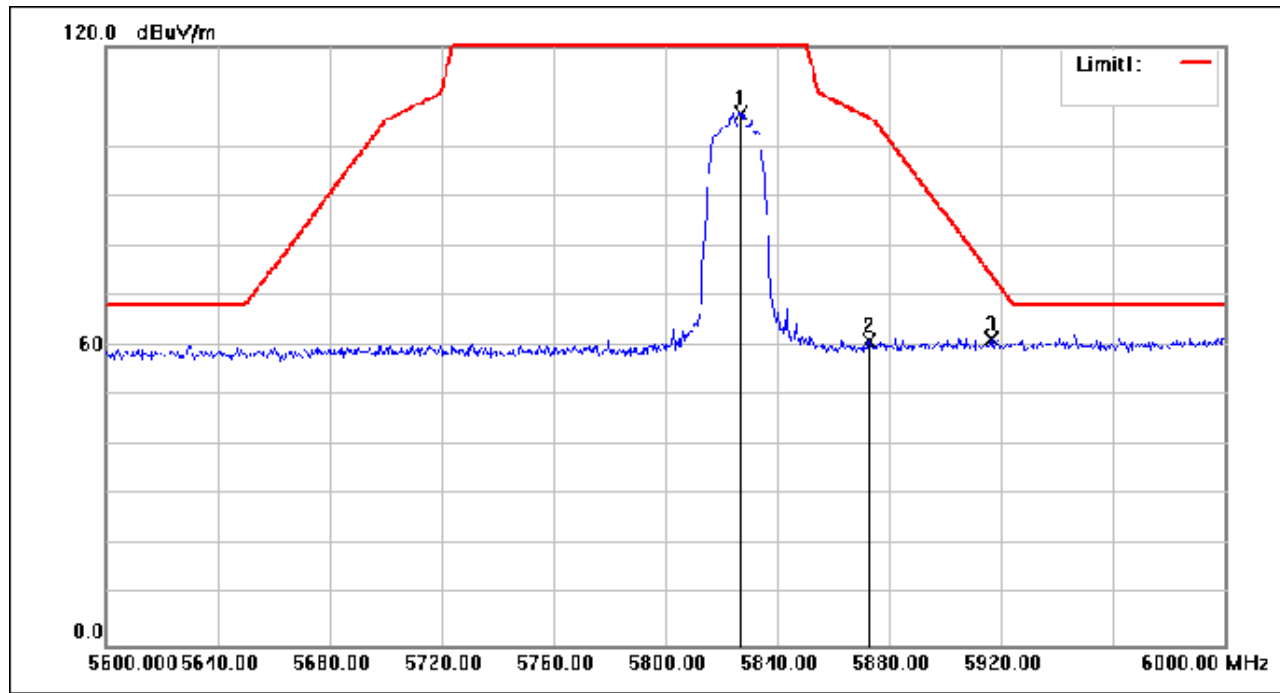

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.800	120.72	-14.13	106.59	135.00	-28.41	peak
2	5872.800	74.85	-13.88	60.97	105.82	-44.85	peak
3	5916.400	74.83	-13.61	61.22	74.56	-13.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 494 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

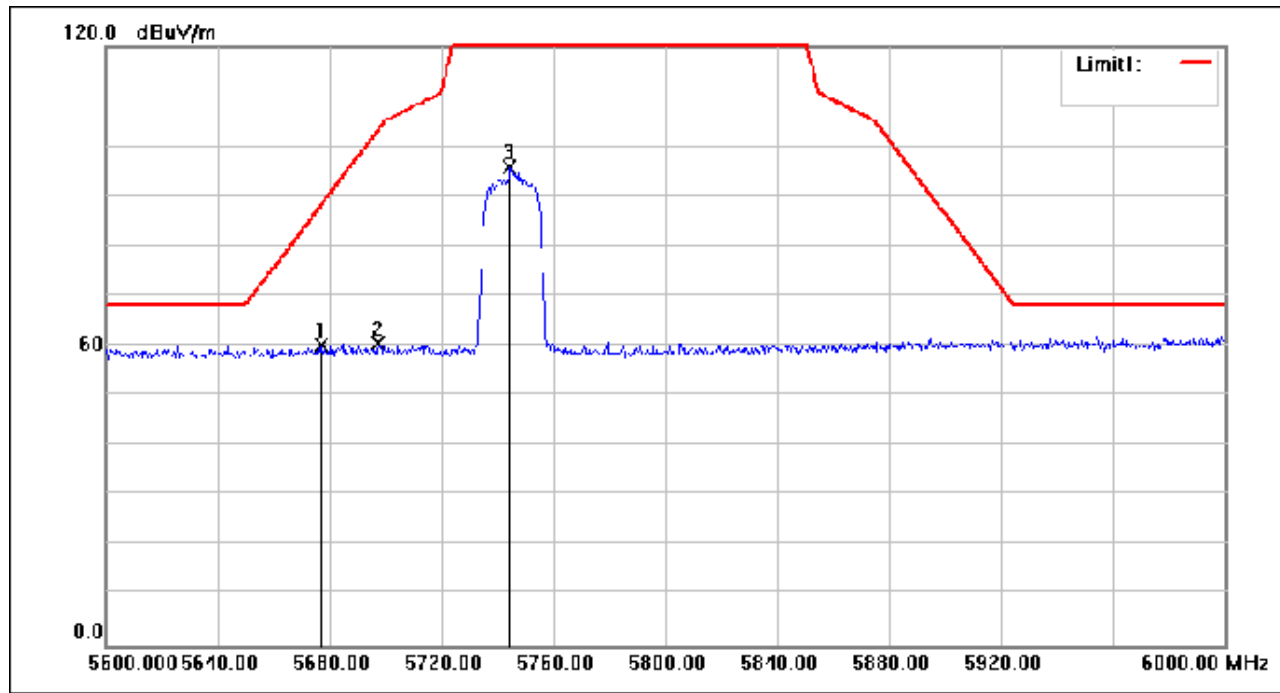

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5676.800	74.82	-14.76	60.06	88.03	-27.97	peak
2	5697.200	75.09	-14.69	60.40	103.13	-42.73	peak
3	5744.400	110.28	-14.49	95.79	135.00	-39.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 495 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

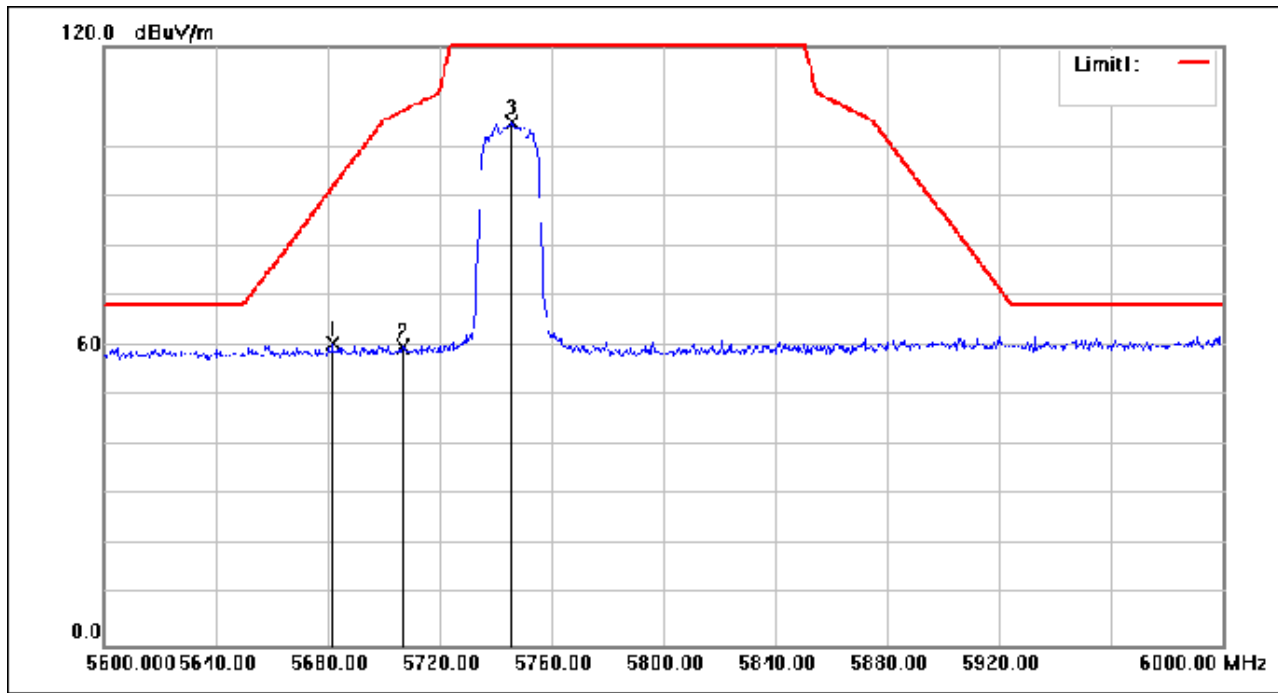

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5681.600	75.17	-14.74	60.43	91.58	-31.15	peak
2	5706.800	74.63	-14.65	59.98	107.10	-47.12	peak
3	5745.600	119.26	-14.49	104.77	135.00	-30.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 496 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

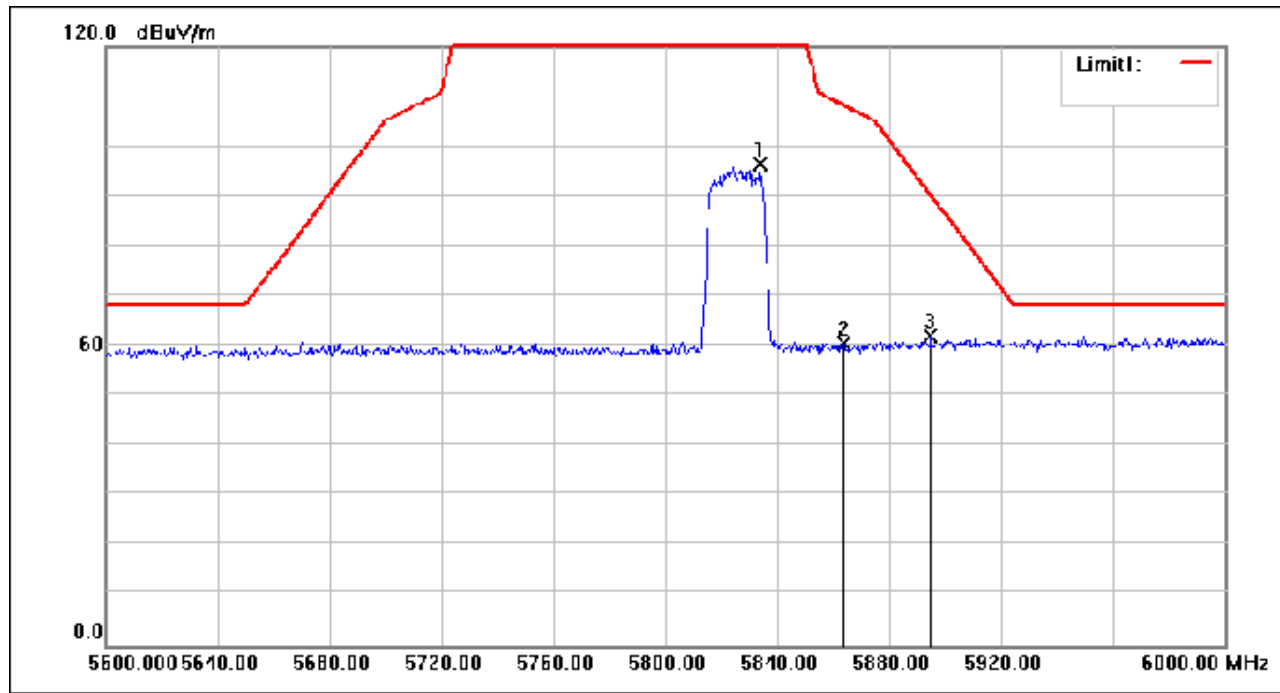

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5834.000	110.47	-14.10	96.37	135.00	-38.63	peak
2	5863.600	74.51	-13.94	60.57	108.39	-47.82	peak
3	5894.800	75.83	-13.74	62.09	90.55	-28.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 497 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

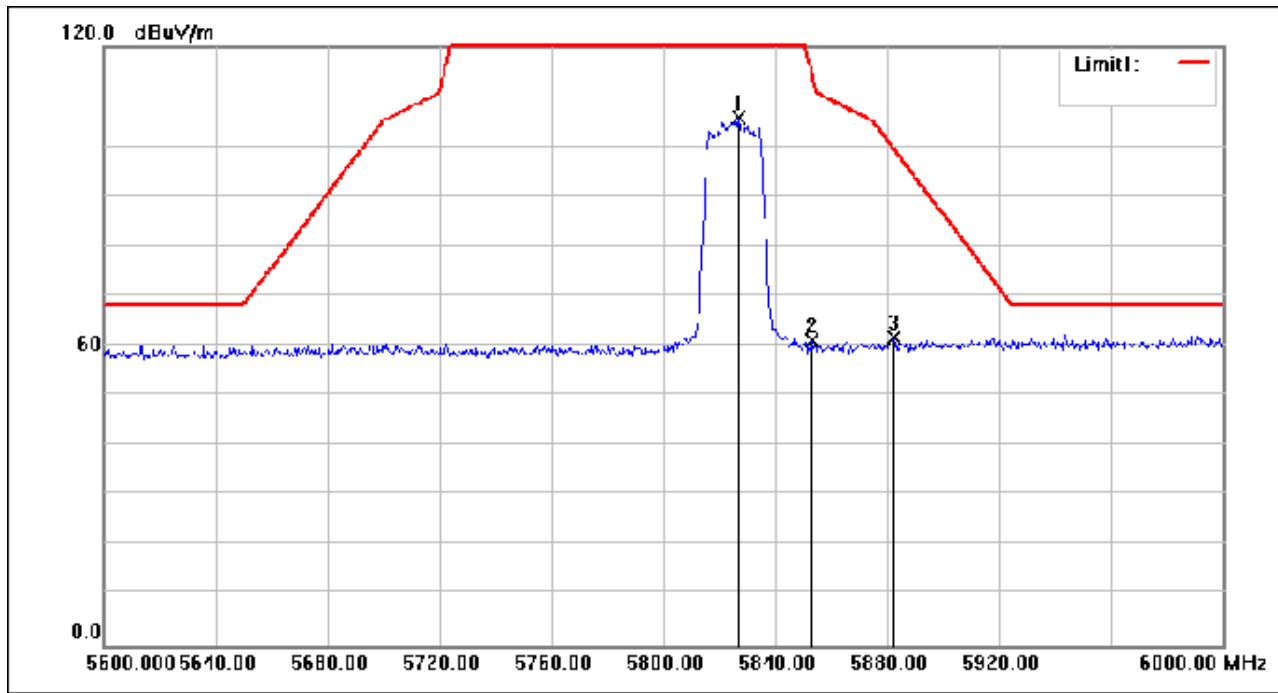

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.800	120.02	-14.13	105.89	135.00	-29.11	peak
2	5852.800	75.09	-14.01	61.08	115.82	-54.74	peak
3	5882.400	75.42	-13.82	61.60	99.72	-38.12	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 498 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

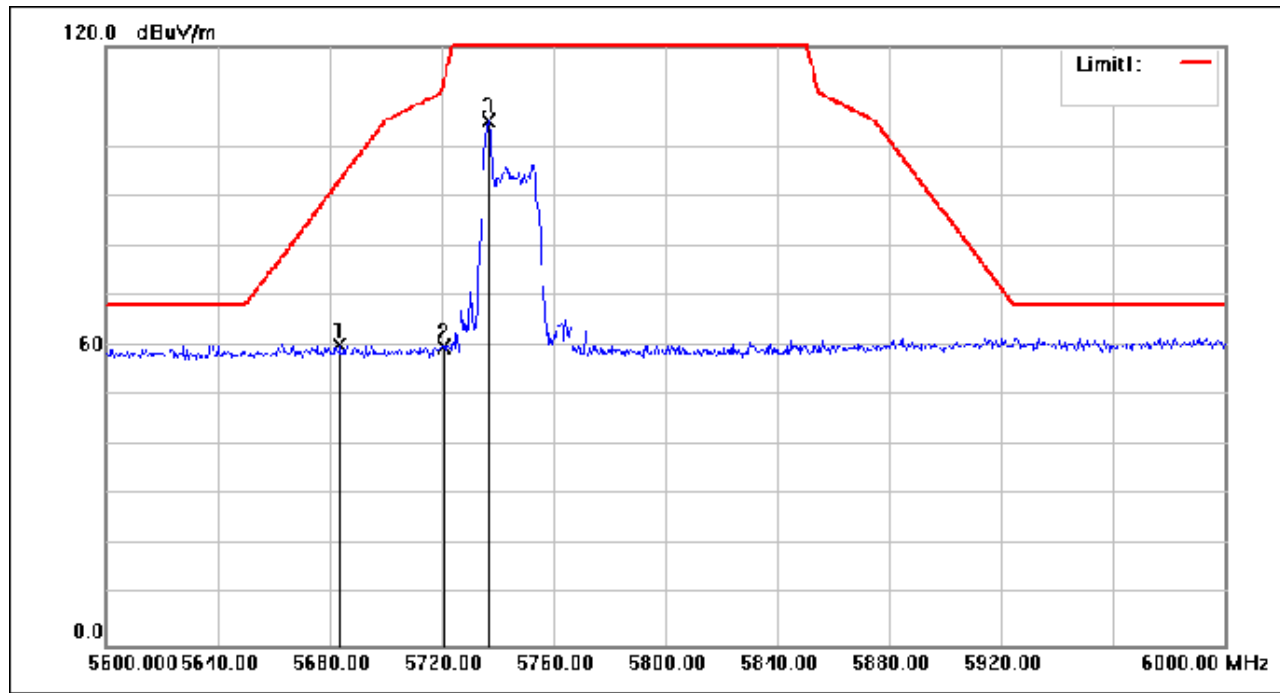

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5683.600	75.03	-14.74	60.29	93.06	-32.77	peak
2	5720.800	74.55	-14.60	59.95	112.62	-52.67	peak
3	5736.800	119.76	-14.53	105.23	135.00	-29.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 499 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

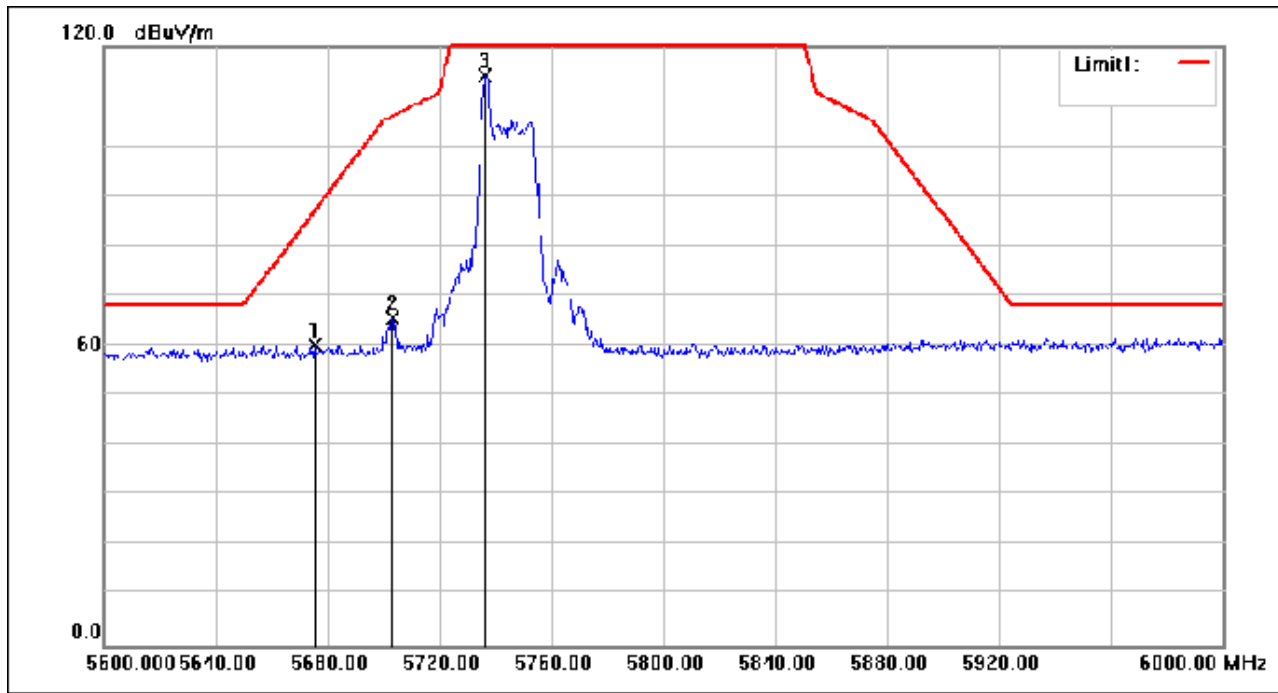

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5675.200	74.85	-14.77	60.08	86.85	-26.77	peak
2	5703.200	80.13	-14.66	65.47	106.10	-40.63	peak
3	5736.400	128.61	-14.53	114.08	135.00	-20.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 500 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

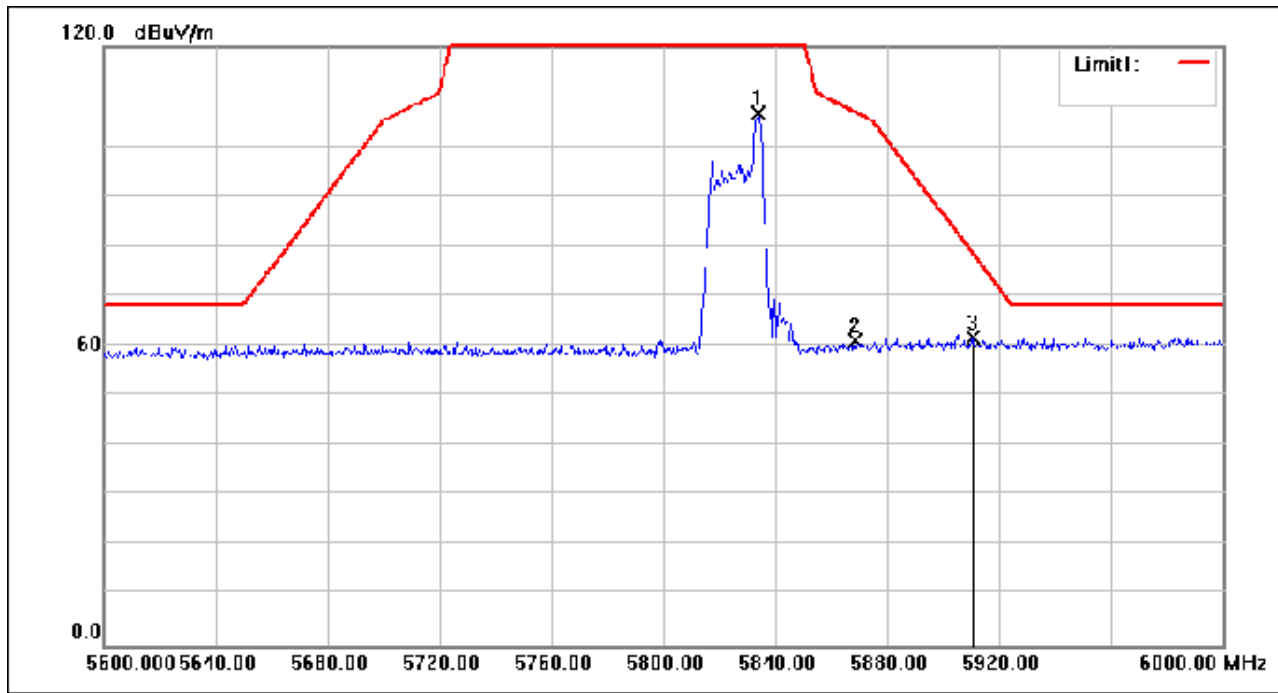

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5834.000	120.84	-14.10	106.74	135.00	-28.26	peak
2	5868.400	74.99	-13.91	61.08	107.05	-45.97	peak
3	5910.400	75.29	-13.65	61.64	79.00	-17.36	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 501 of 929

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ax(RU26_Right); Bandwidth: 20MHz; Channel: High

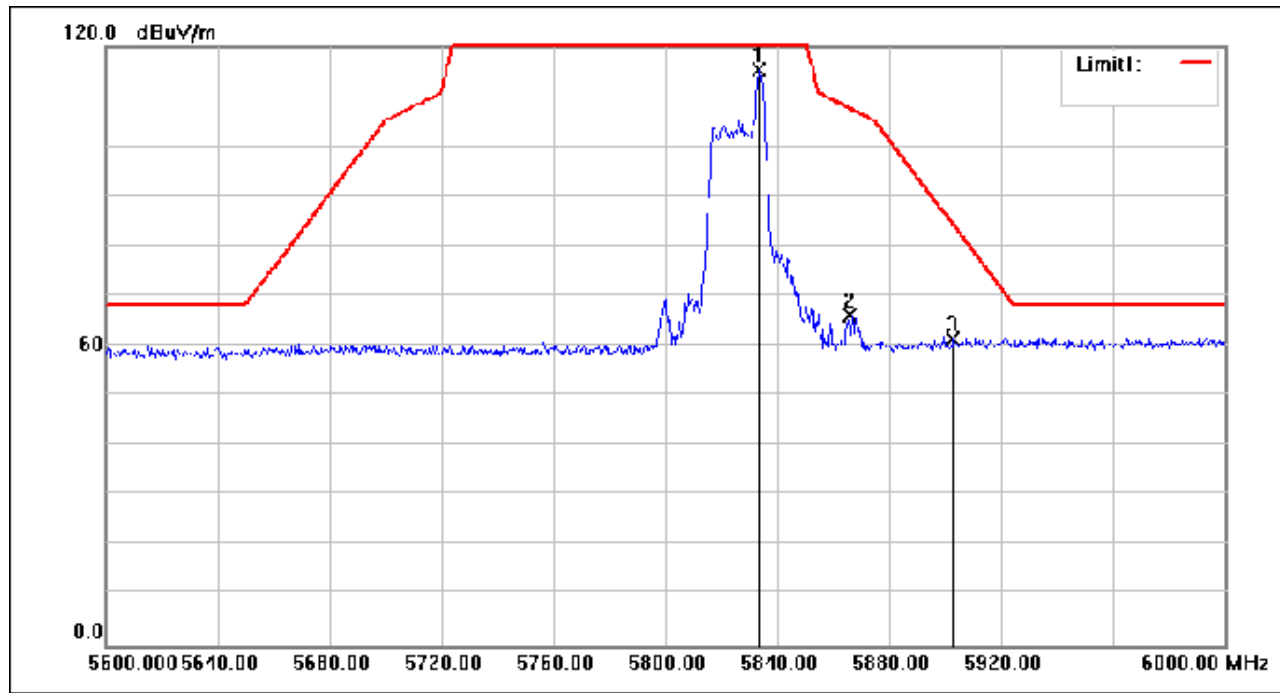

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5833.200	129.53	-14.10	115.43	135.00	-19.57	peak
2	5865.600	79.99	-13.93	66.06	107.83	-41.77	peak
3	5902.800	75.04	-13.69	61.35	84.63	-23.28	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 502 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

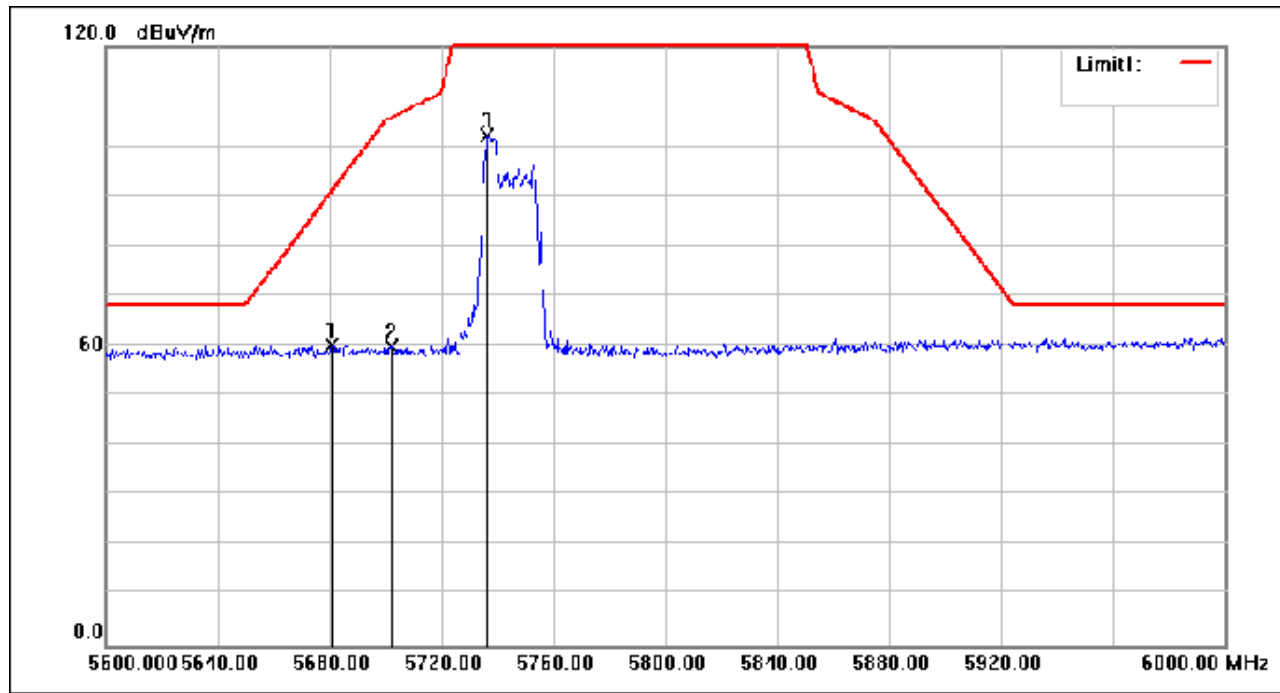

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5680.800	74.83	-14.75	60.08	90.99	-30.91	peak
2	5702.000	74.60	-14.67	59.93	105.76	-45.83	peak
3	5736.400	116.71	-14.53	102.18	135.00	-32.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 503 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

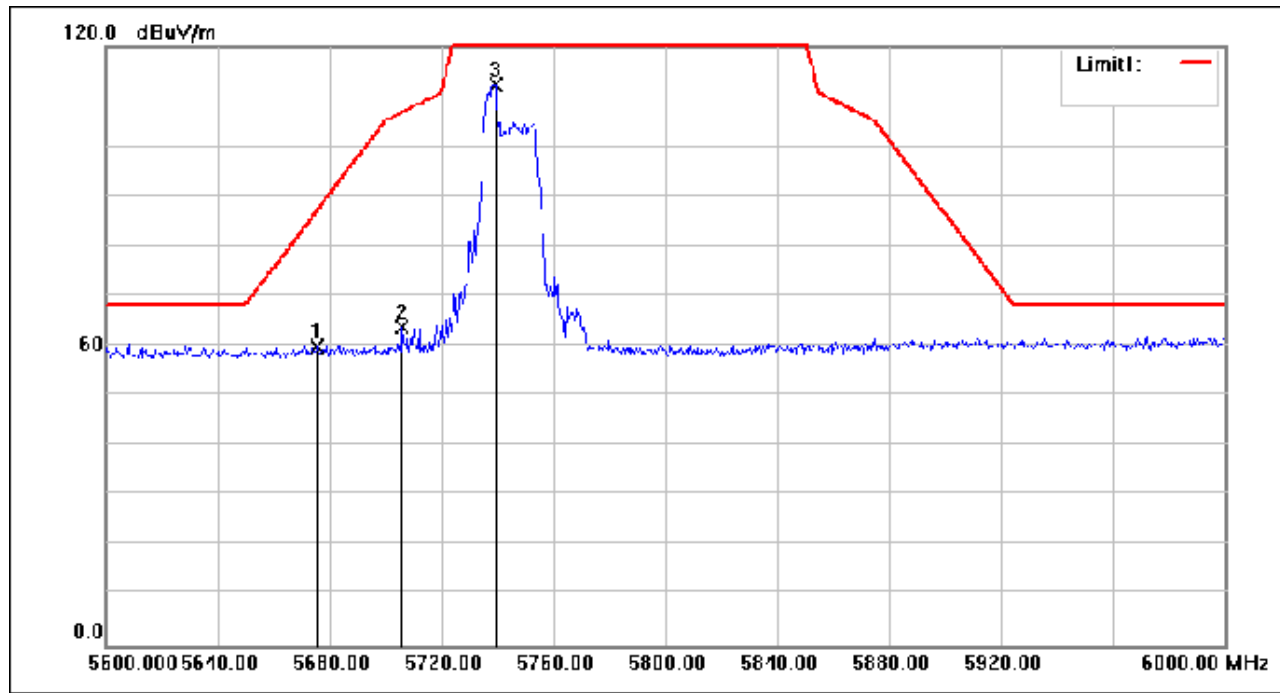

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5675.600	74.70	-14.76	59.94	87.14	-27.20	peak
2	5706.000	78.38	-14.65	63.73	106.88	-43.15	peak
3	5739.200	126.85	-14.52	112.33	135.00	-22.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 504 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

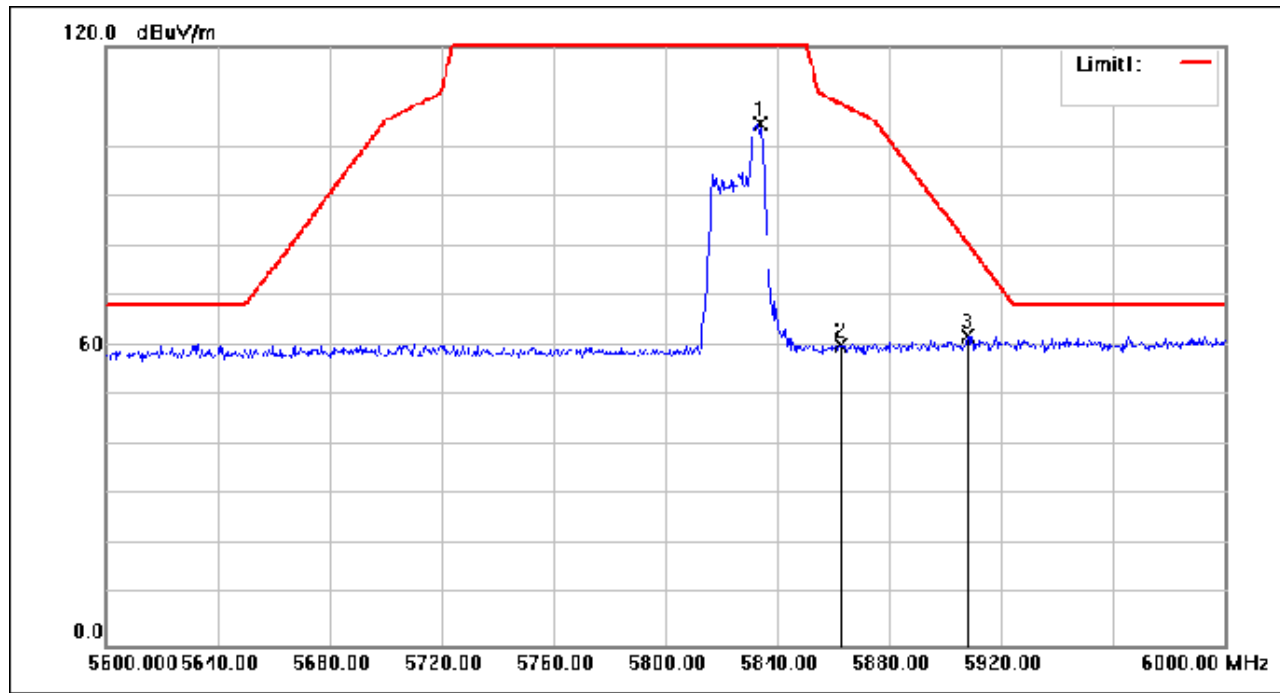

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5833.600	118.75	-14.10	104.65	135.00	-30.35	peak
2	5862.800	74.25	-13.95	60.30	108.62	-48.32	peak
3	5908.000	75.56	-13.67	61.89	80.78	-18.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 505 of 929

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ax(RU52_Right); Bandwidth: 20MHz; Channel: High

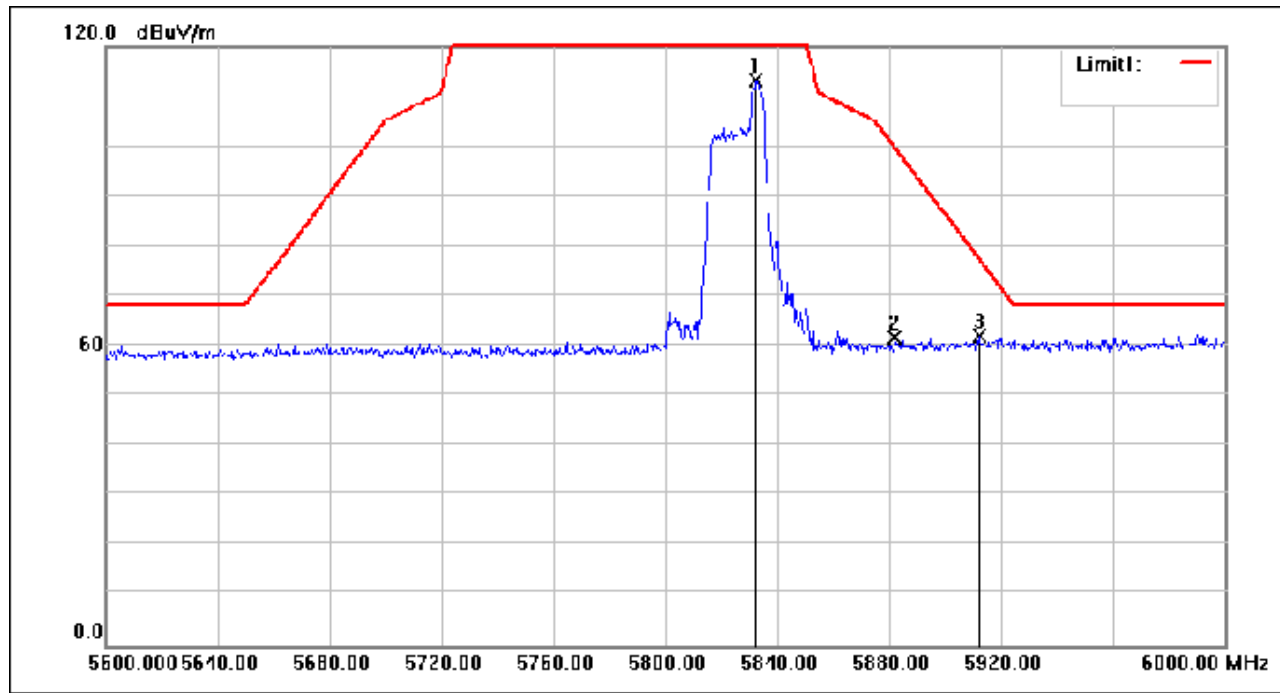

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5832.400	127.44	-14.10	113.34	135.00	-21.66	peak
2	5882.000	75.47	-13.82	61.65	100.02	-38.37	peak
3	5912.000	75.72	-13.63	62.09	77.82	-15.73	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 506 of 929

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

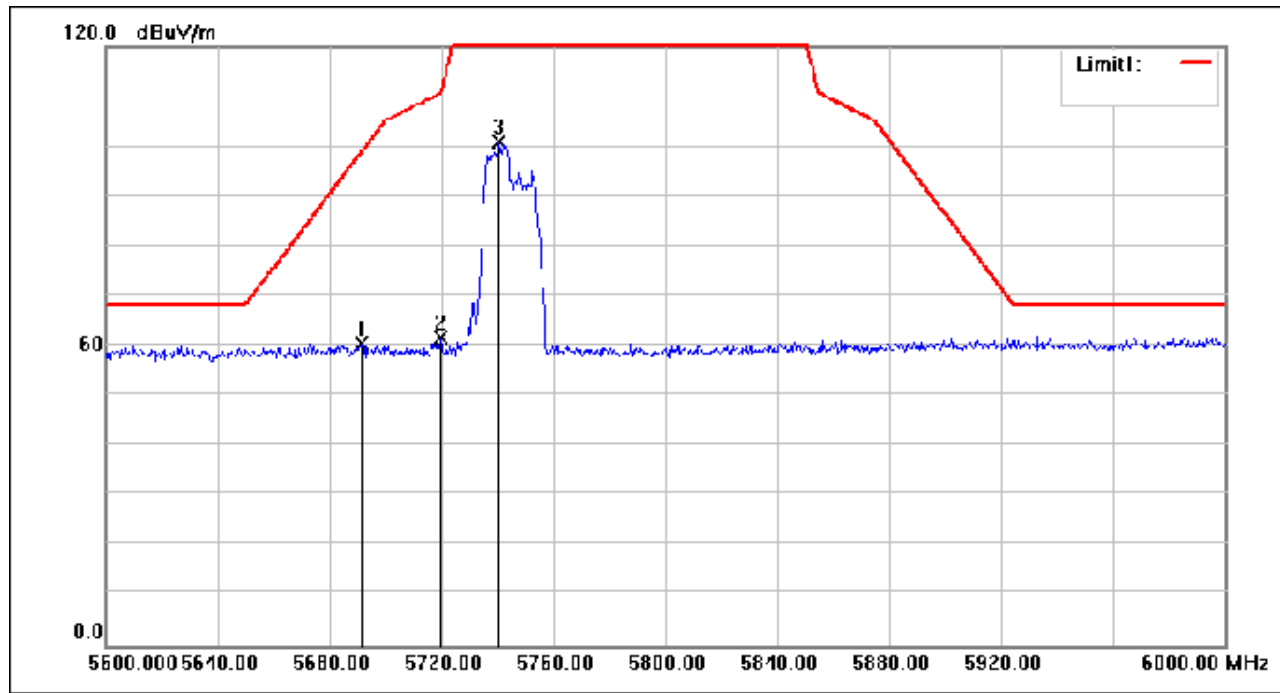

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5691.600	75.17	-14.71	60.46	98.98	-38.52	peak
2	5719.600	76.11	-14.60	61.51	110.69	-49.18	peak
3	5740.400	115.42	-14.52	100.90	135.00	-34.10	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 507 of 929

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

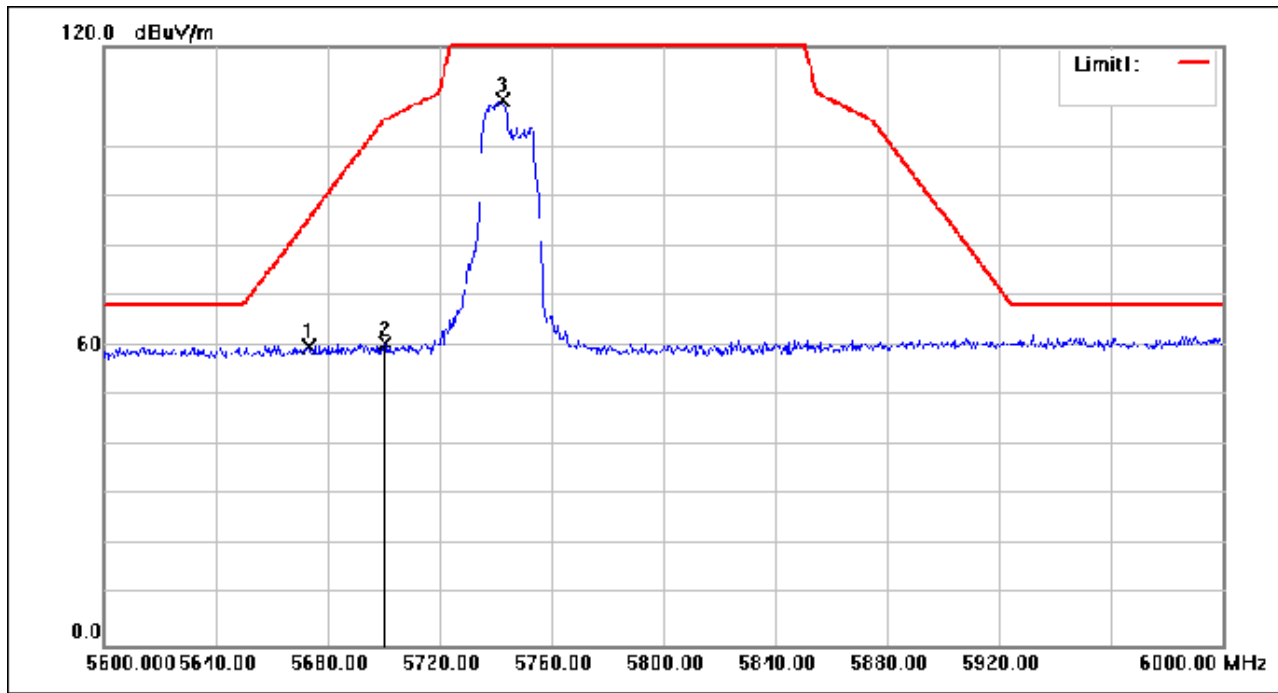

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5673.200	74.73	-14.77	59.96	85.37	-25.41	peak
2	5700.400	75.19	-14.67	60.52	105.31	-44.79	peak
3	5742.800	123.91	-14.51	109.40	135.00	-25.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 508 of 929

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

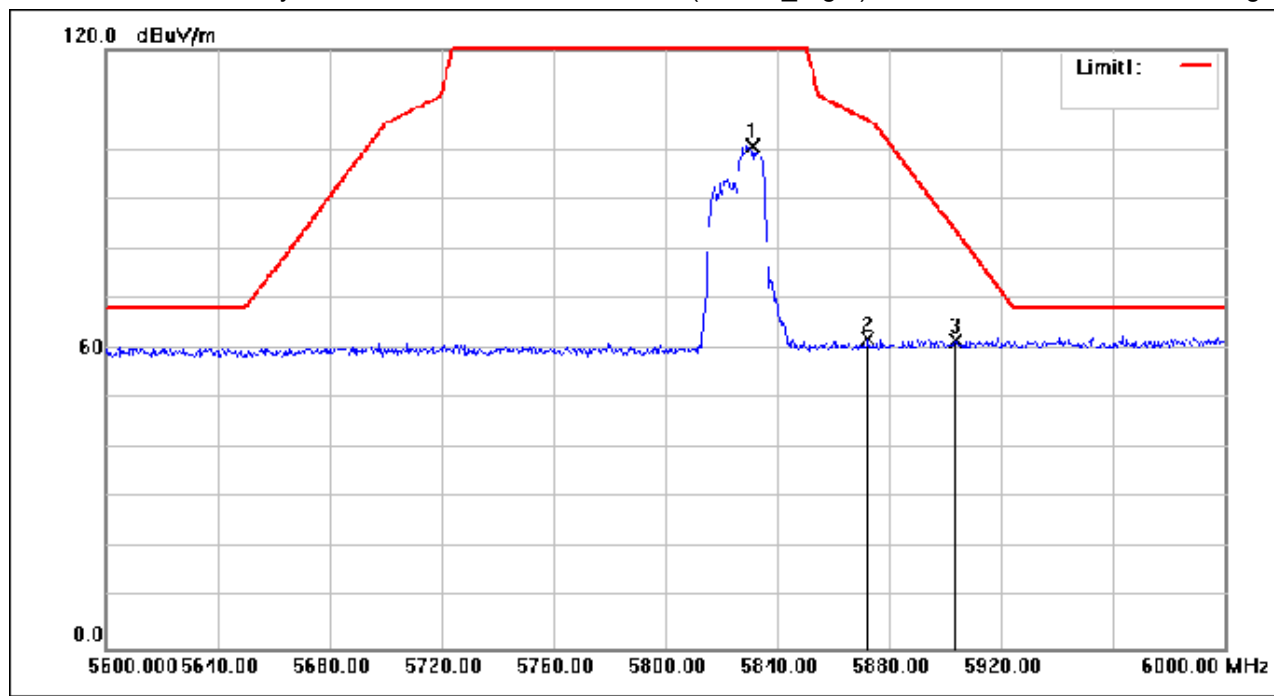

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5831.200	114.71	-14.12	100.59	135.00	-34.41	peak
2	5872.400	75.89	-13.89	62.00	105.93	-43.93	peak
3	5903.600	75.23	-13.69	61.54	84.04	-22.50	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 509 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

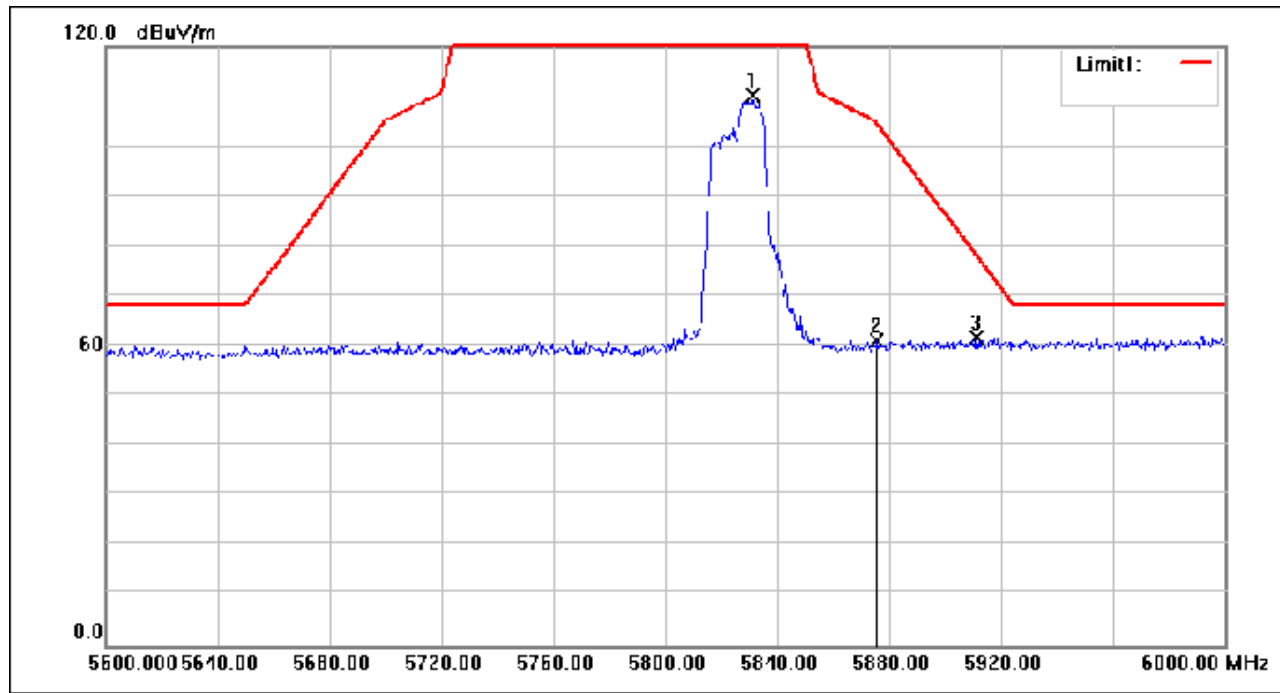

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5831.200	124.51	-14.12	110.39	135.00	-24.61	peak
2	5875.600	74.98	-13.86	61.12	104.76	-43.64	peak
3	5911.200	75.24	-13.64	61.60	78.41	-16.81	peak

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 510 of 929

PCB Antenna

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

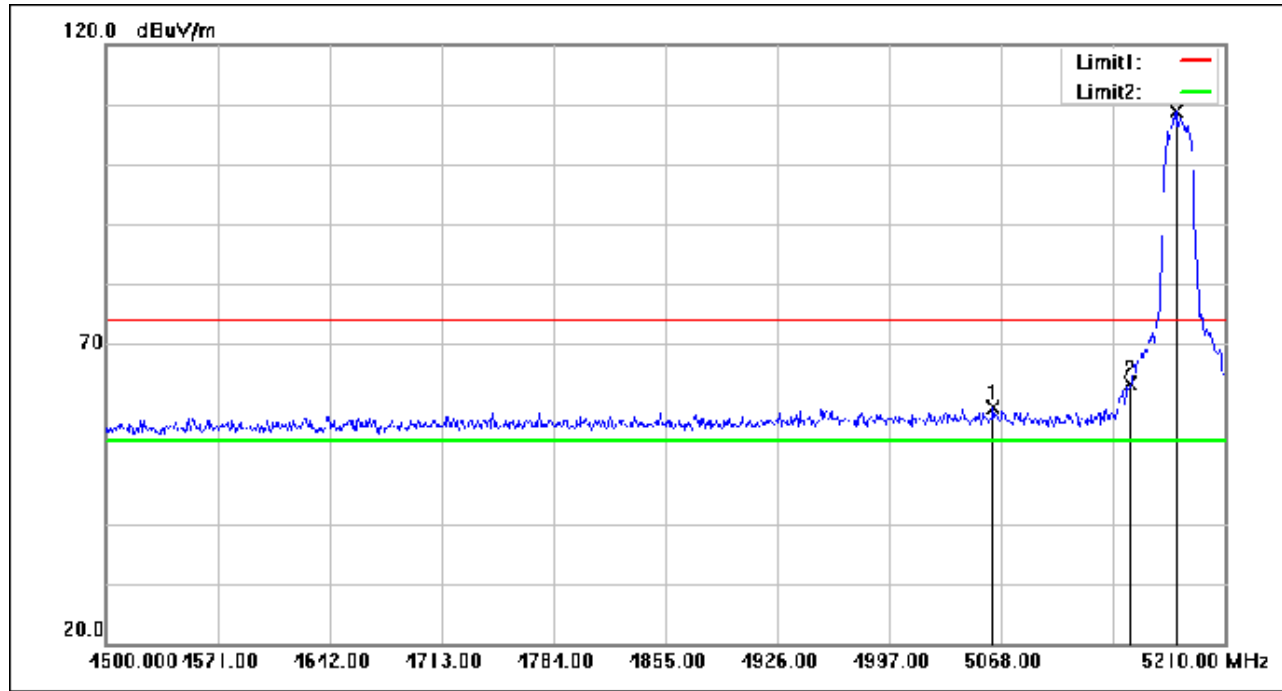

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5063.030	75.18	-15.69	59.49	74.00	-14.51	peak
2	5150.000	78.77	-15.49	63.28	74.00	-10.72	peak
3	5179.470	124.40	-15.46	108.94	74.00	34.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 511 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

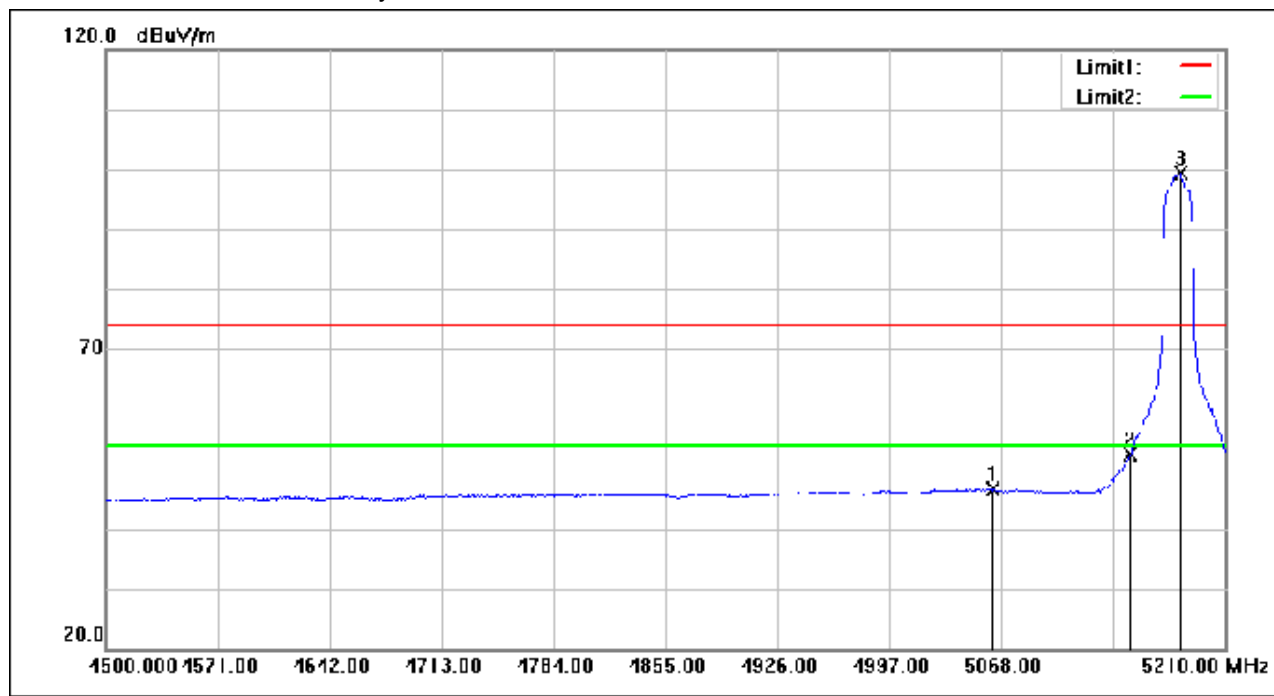

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5062.320	62.33	-15.69	46.64	54.00	-7.36	AVG
2	5150.000	67.83	-15.49	52.34	54.00	-1.66	AVG
3	5181.600	114.74	-15.46	99.28	54.00	45.28	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 512 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

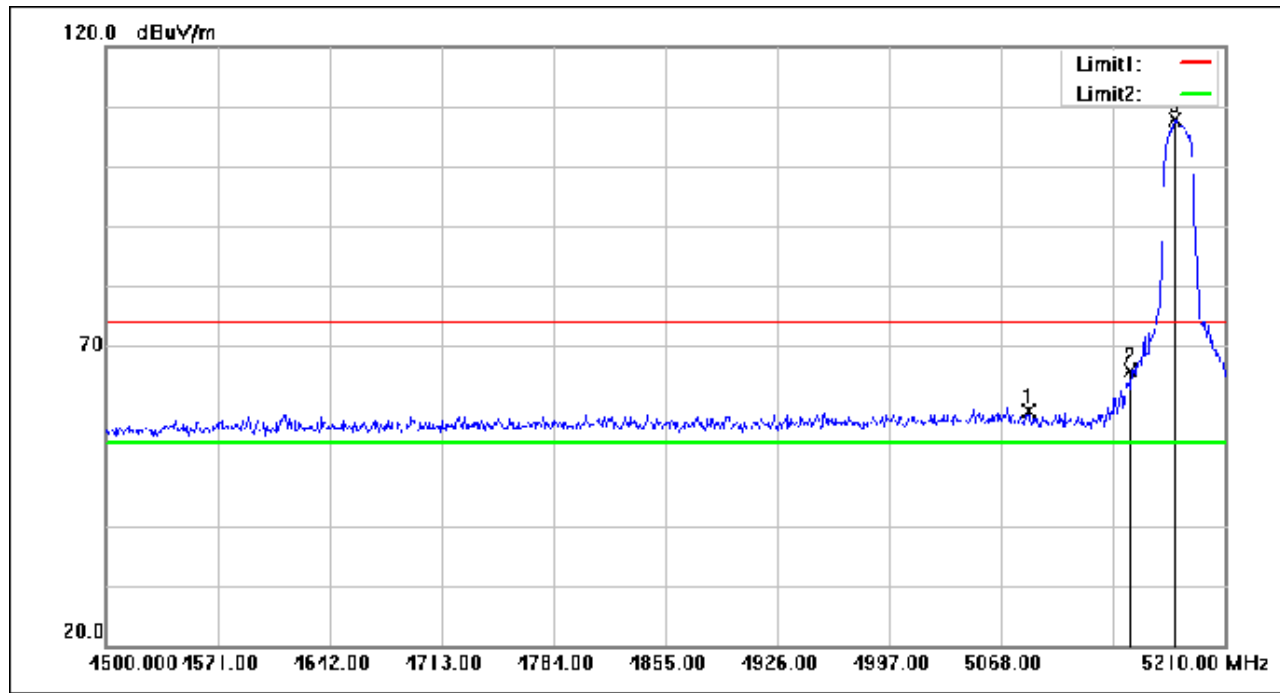

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.750	74.89	-15.64	59.25	74.00	-14.75	peak
2	5150.000	81.35	-15.49	65.86	74.00	-8.14	peak
3	5178.050	123.27	-15.46	107.81	74.00	33.81	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 513 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

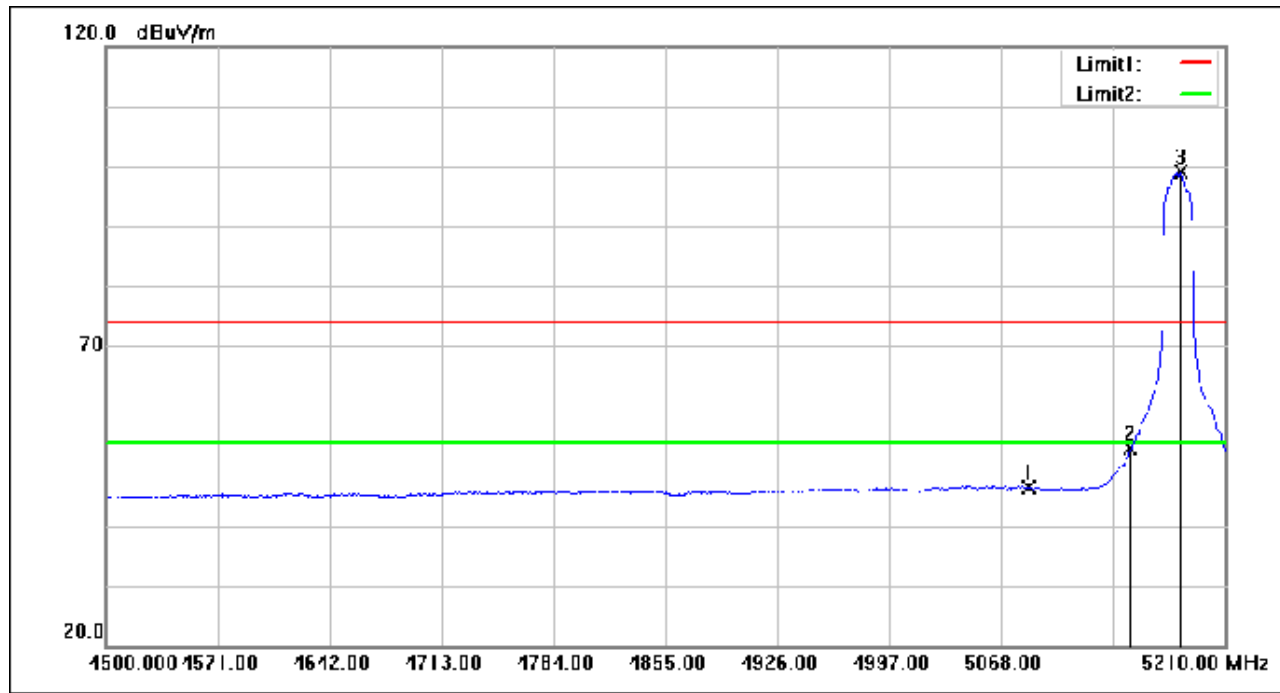

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.750	62.11	-15.64	46.47	54.00	-7.53	AVG
2	5150.000	68.45	-15.49	52.96	54.00	-1.04	AVG
3	5181.600	114.54	-15.46	99.08	54.00	45.08	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 514 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

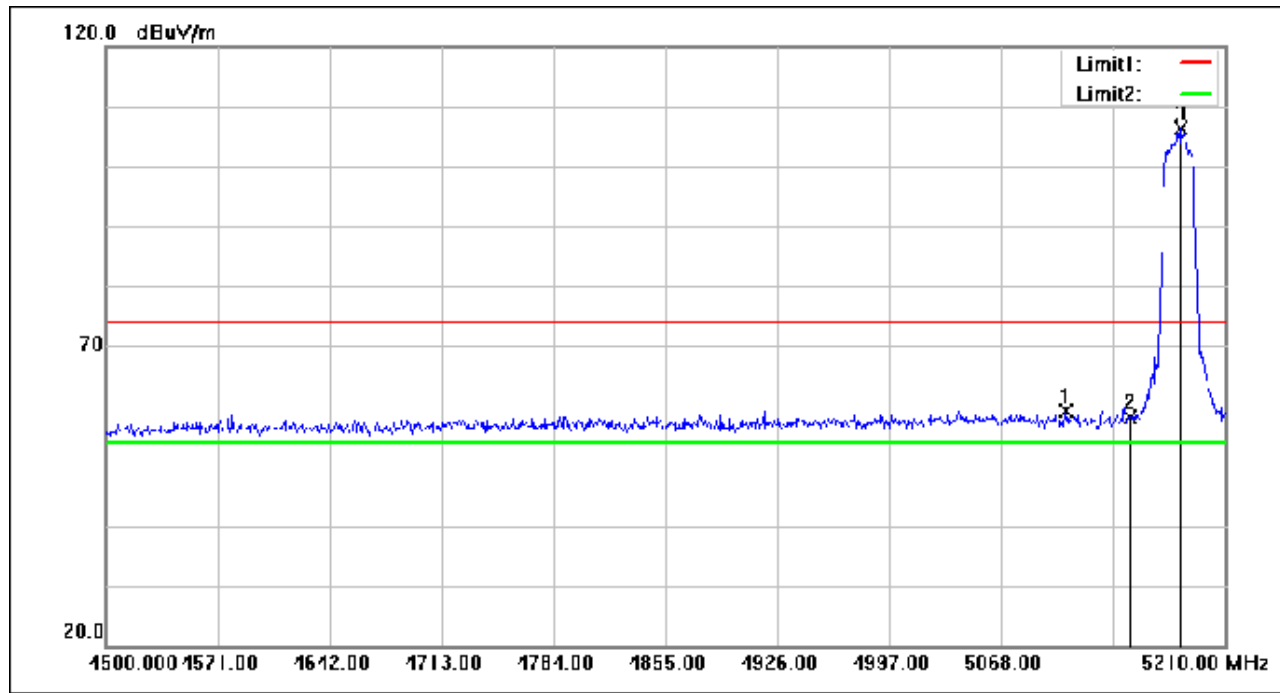

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5109.180	74.72	-15.58	59.14	74.00	-14.86	peak
2	5150.000	73.55	-15.49	58.06	74.00	-15.94	peak
3	5181.600	121.85	-15.46	106.39	74.00	32.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 515 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

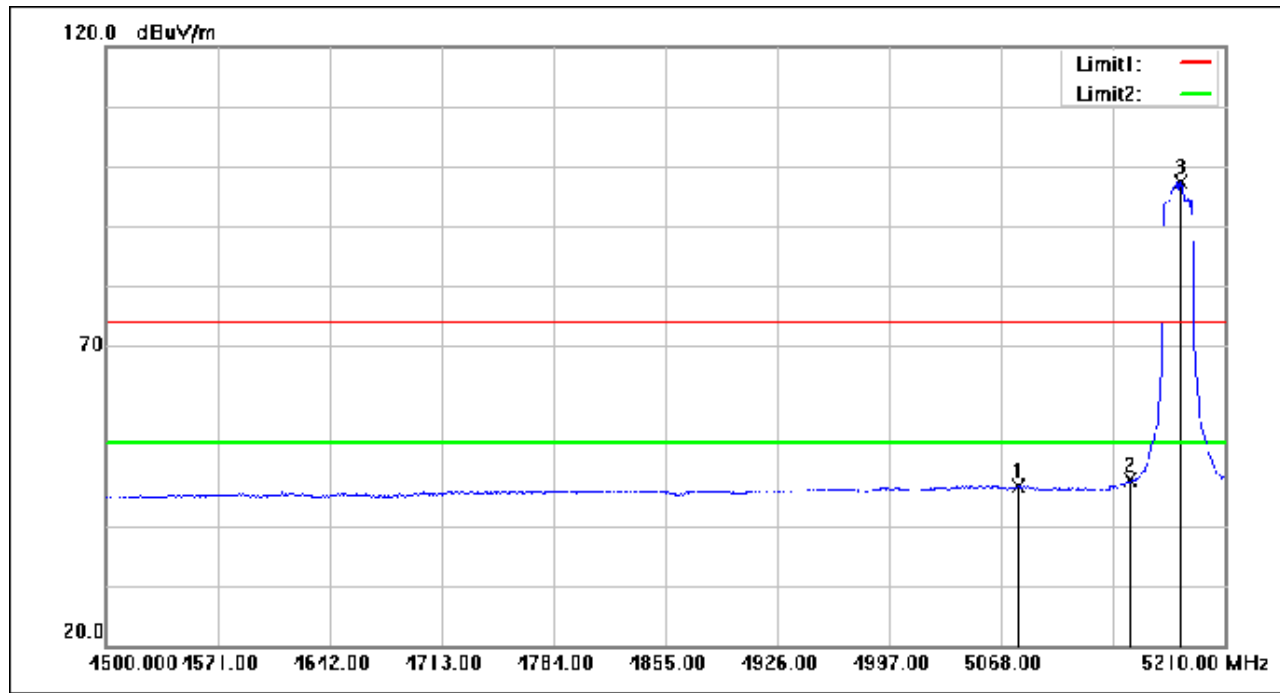

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.650	62.25	-15.66	46.59	54.00	-7.41	AVG
2	5150.000	63.16	-15.49	47.67	54.00	-6.33	AVG
3	5181.600	112.90	-15.46	97.44	54.00	43.44	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 516 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

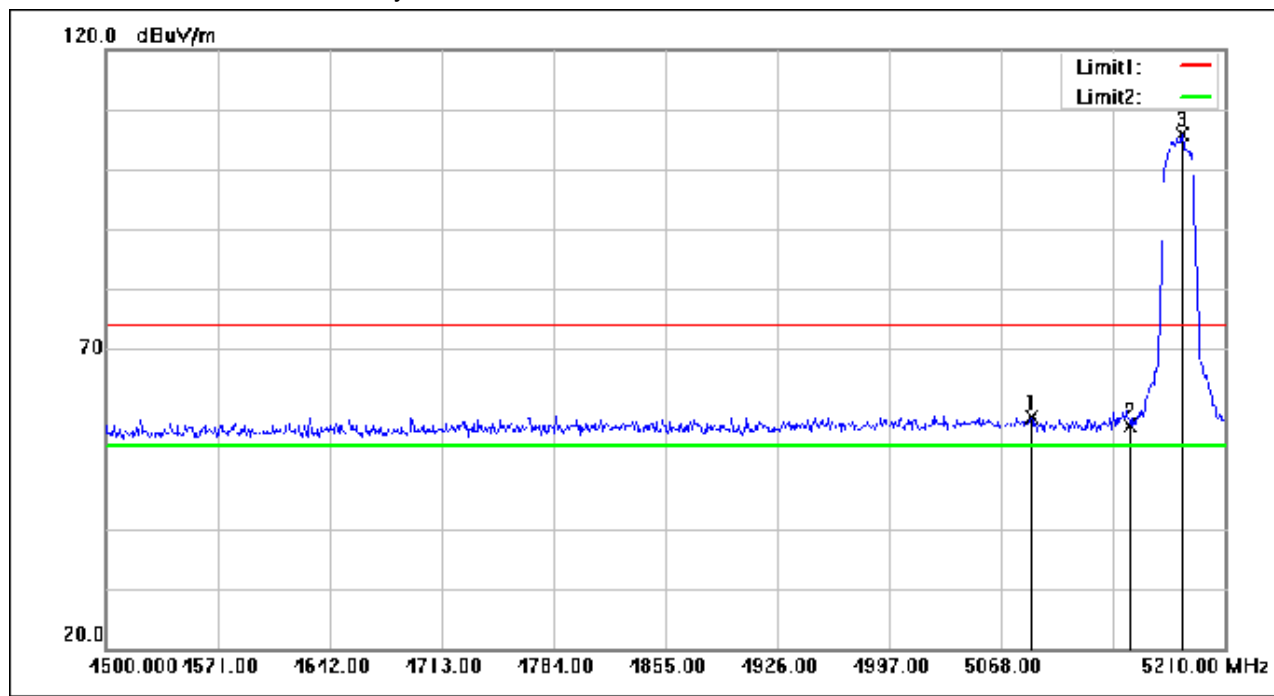

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.170	74.25	-15.63	58.62	74.00	-15.38	peak
2	5150.000	72.54	-15.49	57.05	74.00	-16.95	peak
3	5183.020	121.45	-15.45	106.00	74.00	32.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 517 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

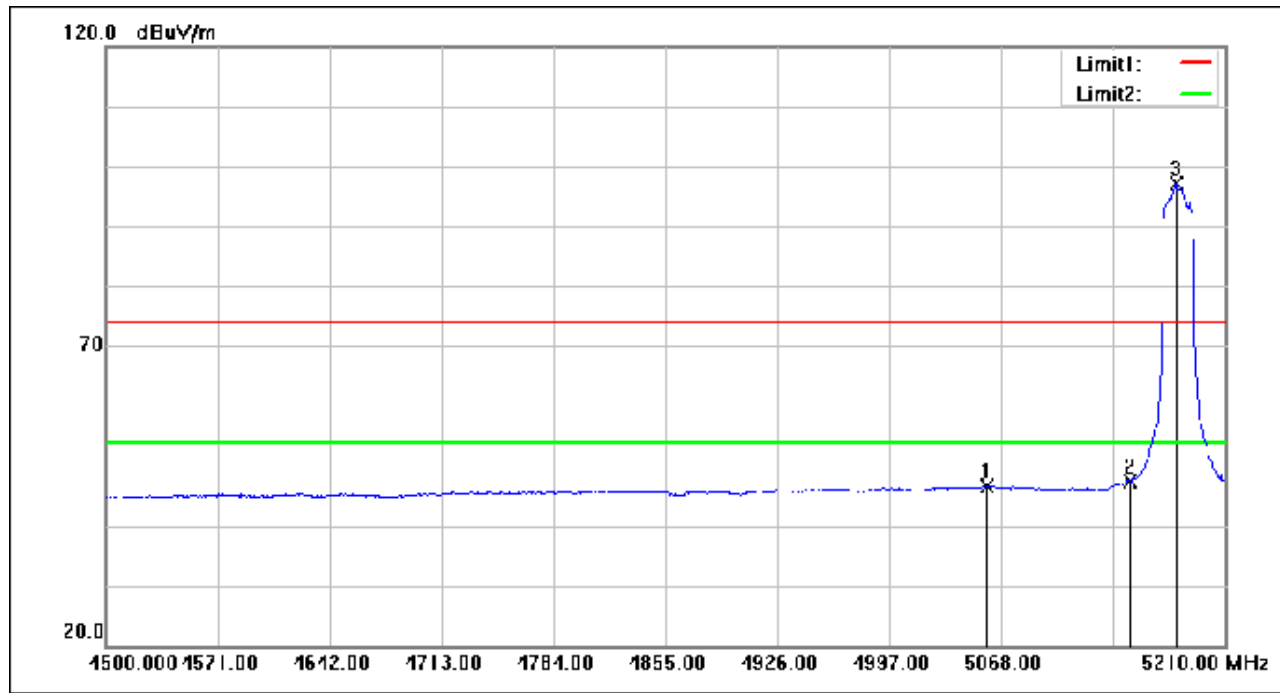

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5058.770	62.44	-15.70	46.74	54.00	-7.26	AVG
2	5150.000	62.85	-15.49	47.36	54.00	-6.64	AVG
3	5178.760	112.52	-15.46	97.06	54.00	43.06	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 518 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

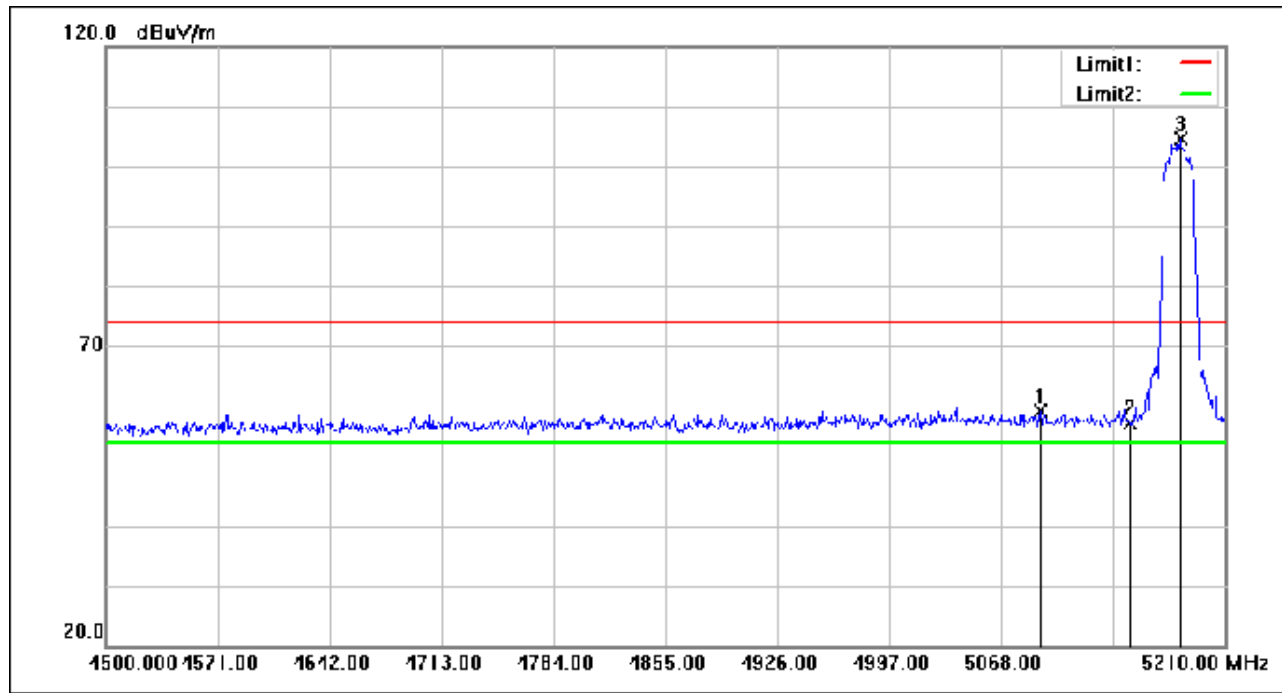

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5092.850	74.71	-15.62	59.09	74.00	-14.91	peak
2	5150.000	72.66	-15.49	57.17	74.00	-16.83	peak
3	5181.600	120.18	-15.46	104.72	74.00	30.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 519 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

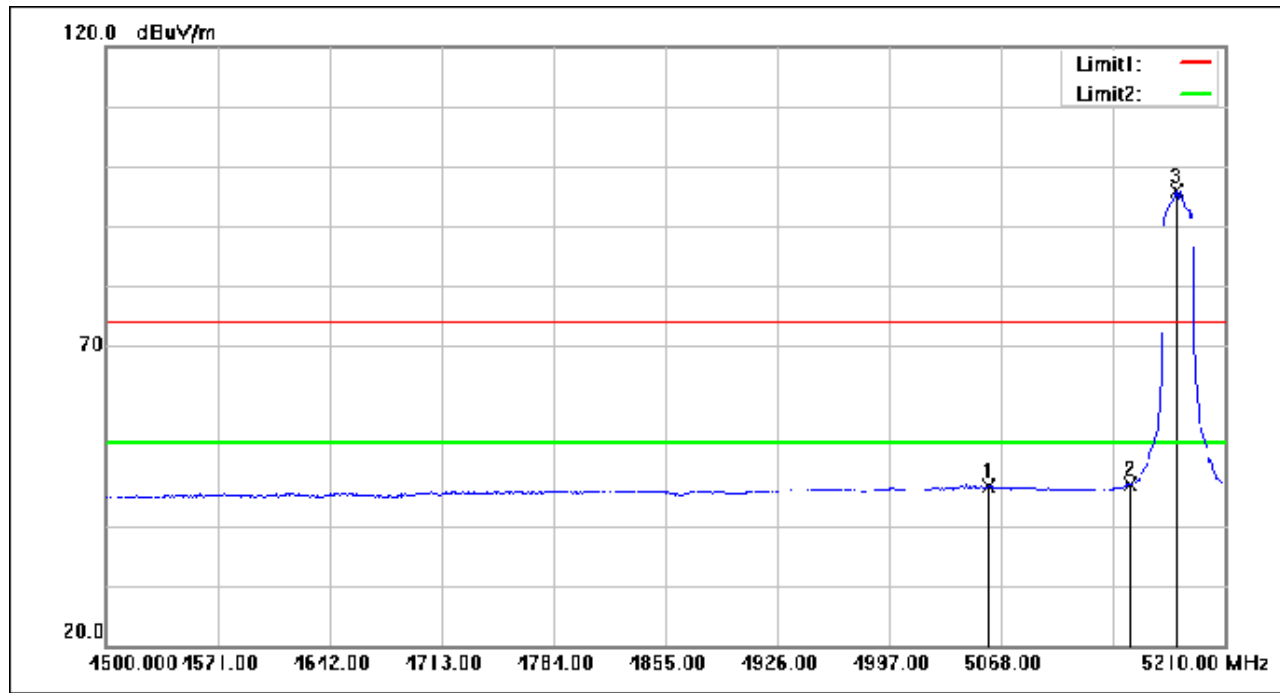

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5060.190	62.29	-15.69	46.60	54.00	-7.40	AVG
2	5150.000	62.41	-15.49	46.92	54.00	-7.08	AVG
3	5178.760	111.28	-15.46	95.82	54.00	41.82	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 520 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

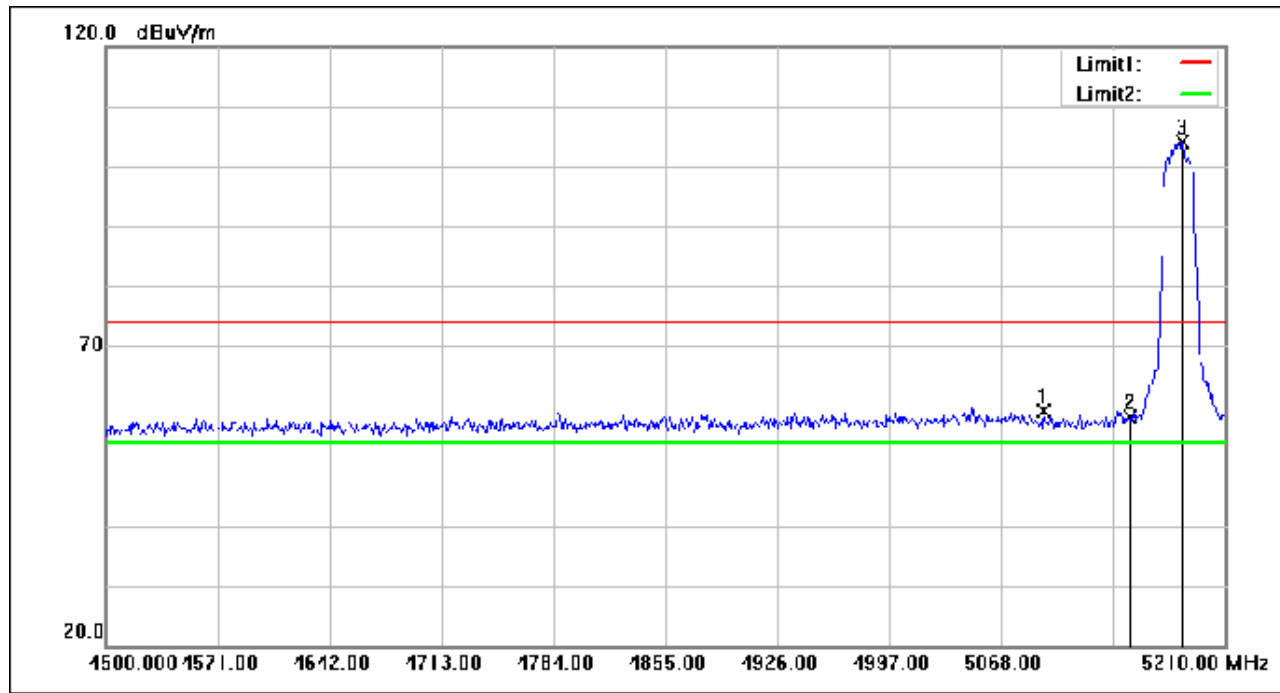

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5094.980	74.84	-15.61	59.23	74.00	-14.77	peak
2	5150.000	73.71	-15.49	58.22	74.00	-15.78	peak
3	5183.020	119.65	-15.45	104.20	74.00	30.20	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 521 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

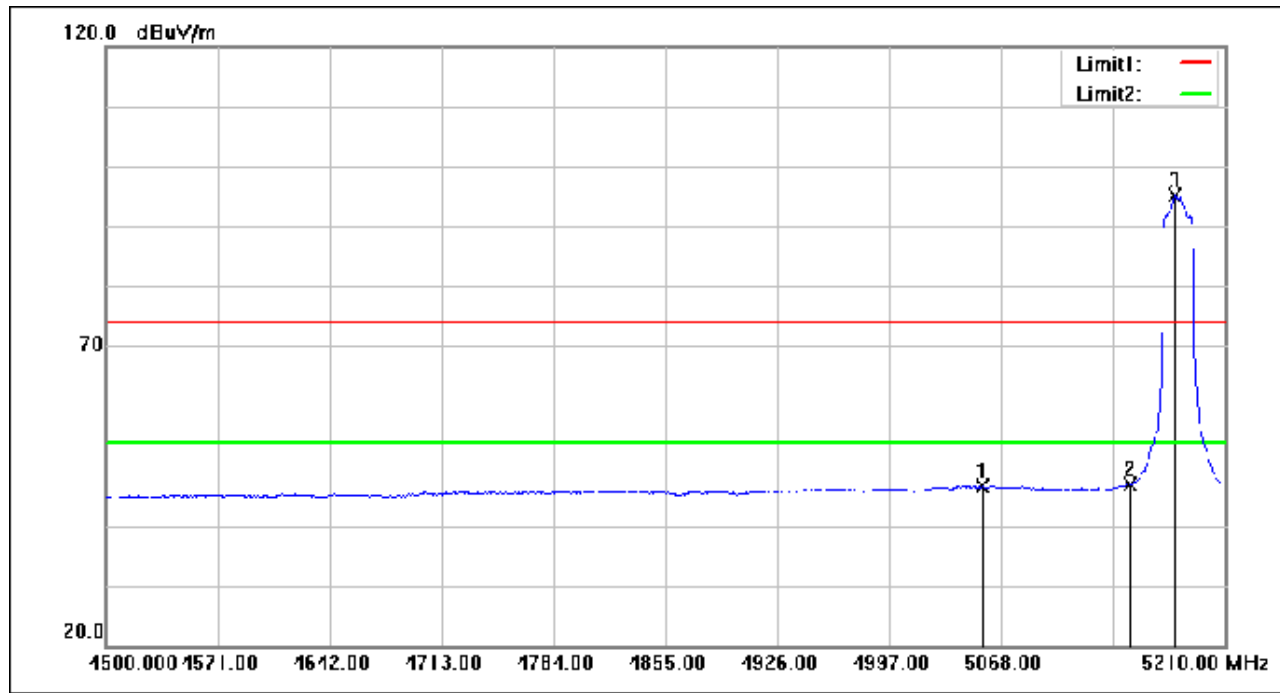

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5055.930	62.39	-15.71	46.68	54.00	-7.32	AVG
2	5150.000	62.43	-15.49	46.94	54.00	-7.06	AVG
3	5178.050	110.48	-15.46	95.02	54.00	41.02	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 522 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

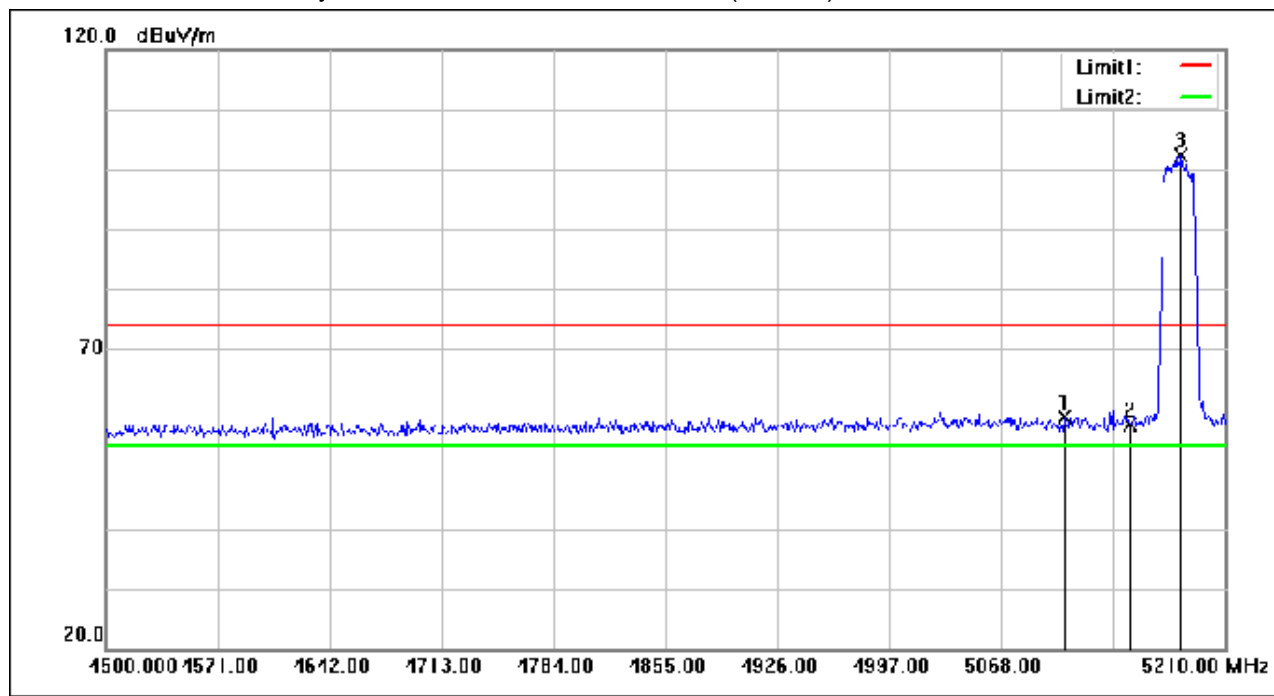

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5107.760	74.19	-15.59	58.60	74.00	-15.40	peak
2	5150.000	72.78	-15.49	57.29	74.00	-16.71	peak
3	5182.310	117.88	-15.46	102.42	74.00	28.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 523 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

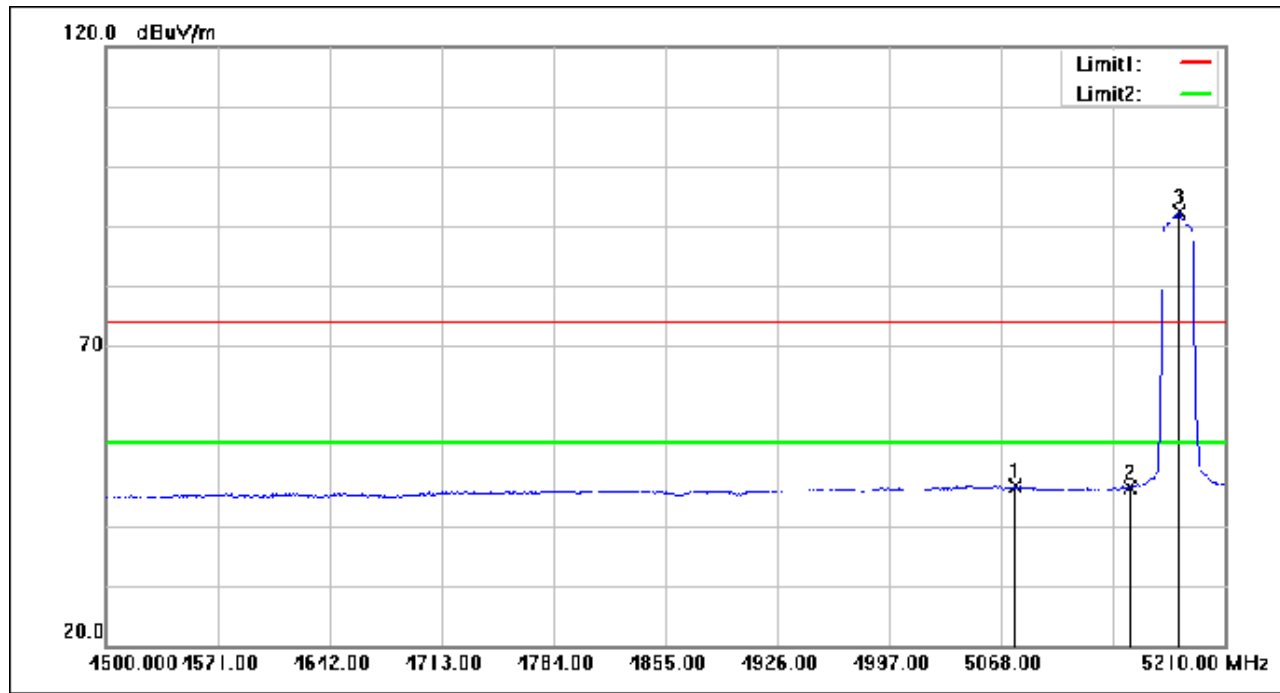

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.230	62.25	-15.66	46.59	54.00	-7.41	AVG
2	5150.000	61.95	-15.49	46.46	54.00	-7.54	AVG
3	5180.890	107.79	-15.46	92.33	54.00	38.33	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 524 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

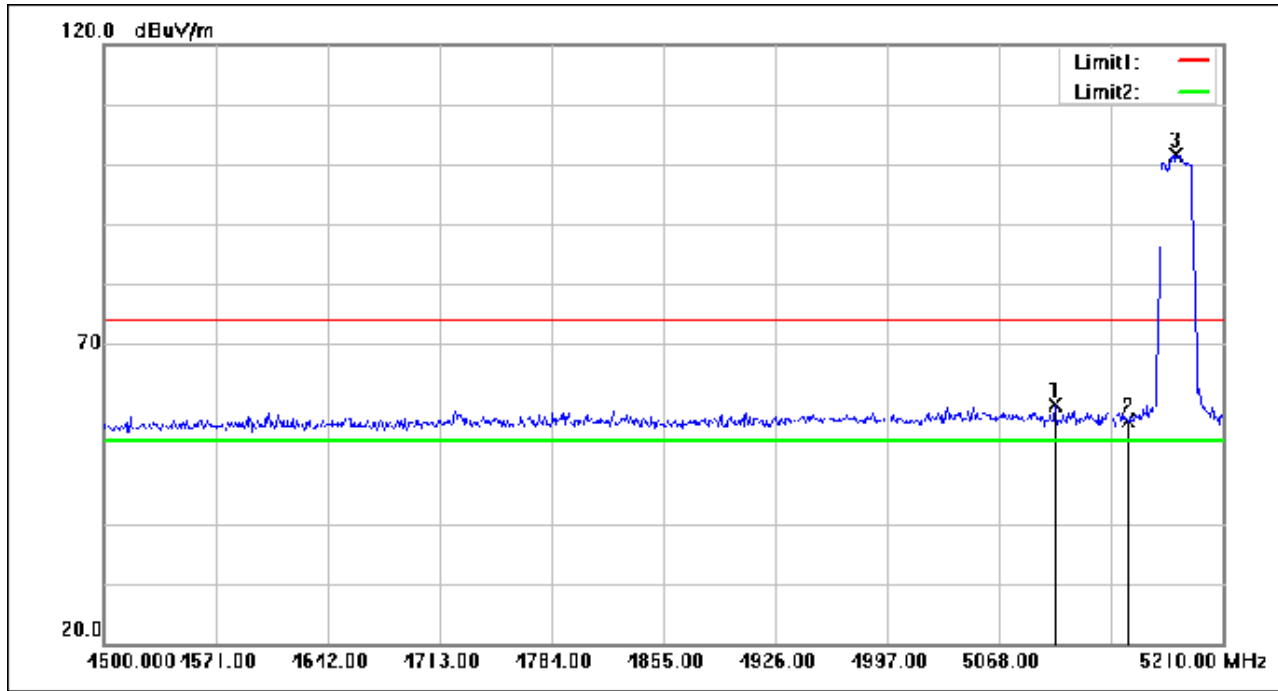

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5103.500	75.46	-15.59	59.87	74.00	-14.13	peak
2	5150.000	72.60	-15.49	57.11	74.00	-16.89	peak
3	5180.180	117.15	-15.46	101.69	74.00	27.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 525 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

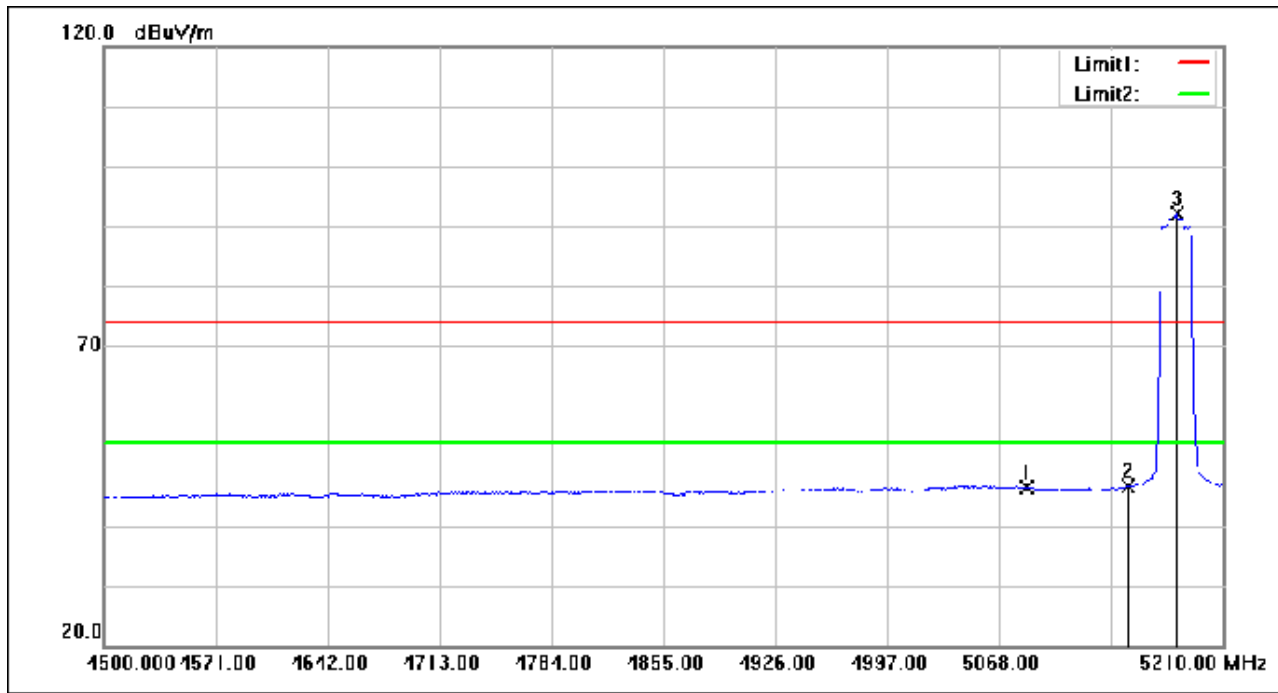

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5085.040	62.11	-15.64	46.47	54.00	-7.53	AVG
2	5150.000	62.15	-15.49	46.66	54.00	-7.34	AVG
3	5180.890	107.53	-15.46	92.07	54.00	38.07	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 526 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

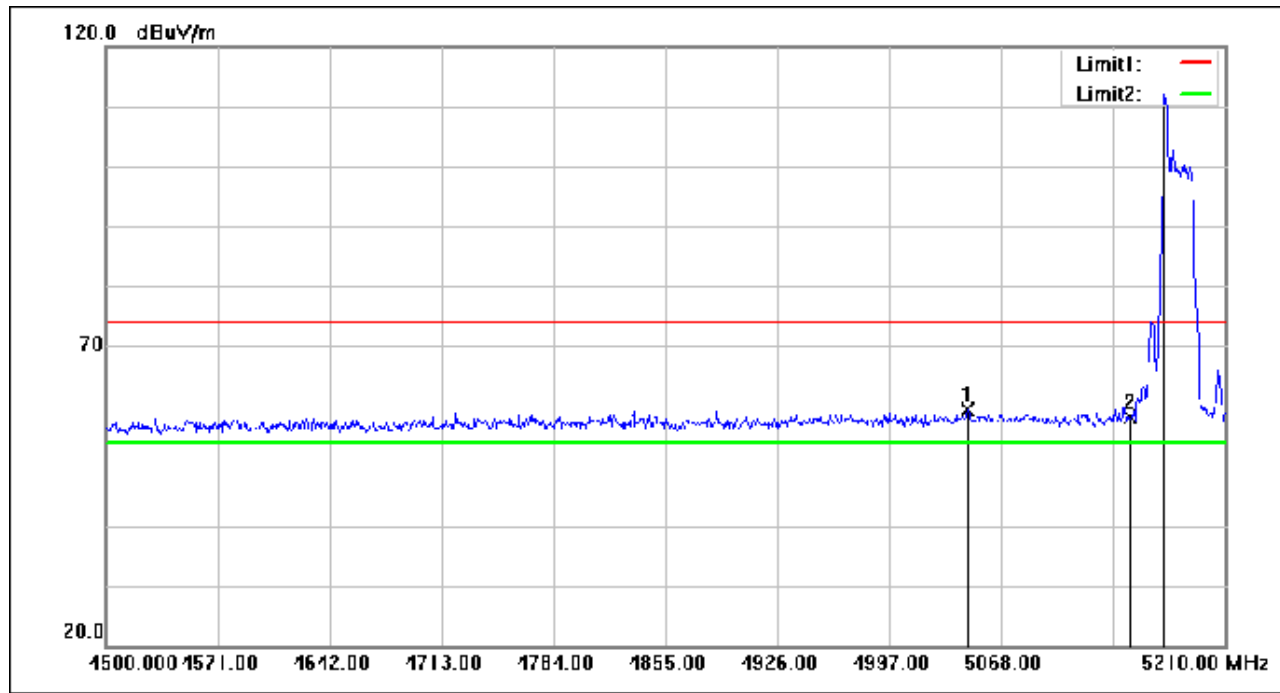

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5046.700	75.14	-15.73	59.41	74.00	-14.59	peak
2	5150.000	73.65	-15.49	58.16	74.00	-15.84	peak
3	5171.660	127.54	-15.47	112.07	74.00	38.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 527 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

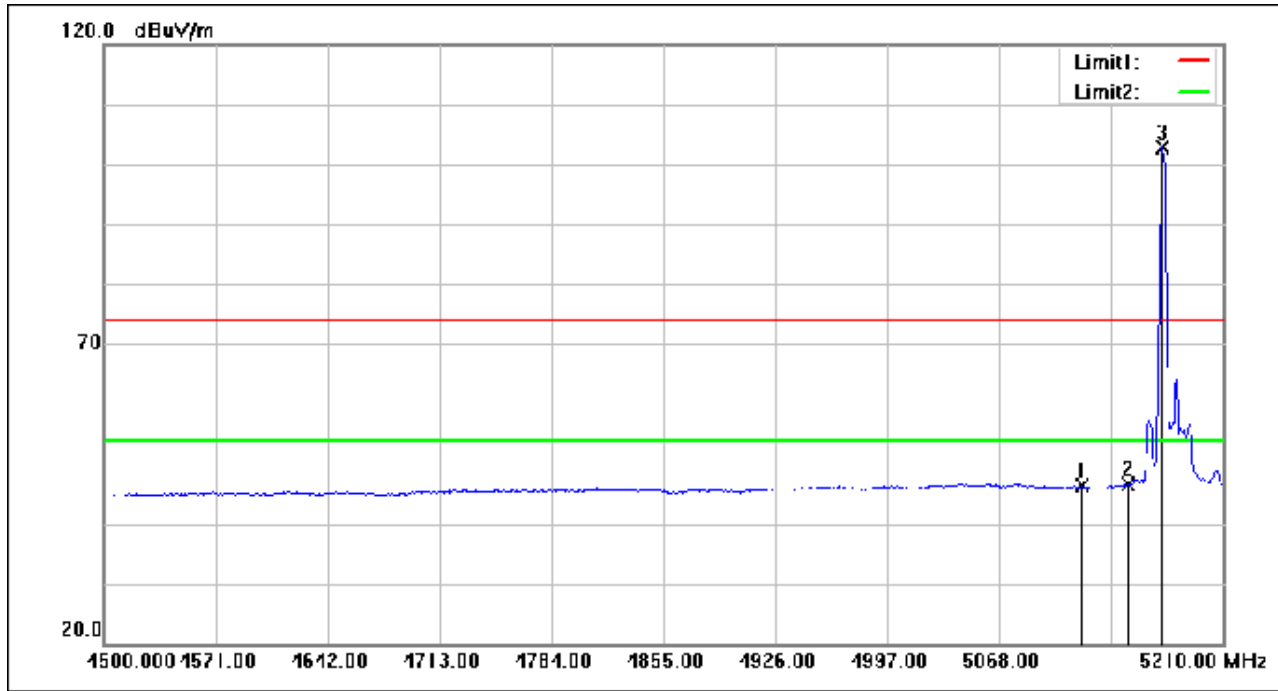

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.540	61.93	-15.56	46.37	54.00	-7.63	AVG
2	5150.000	62.02	-15.49	46.53	54.00	-7.47	AVG
3	5171.660	118.47	-15.47	103.00	54.00	49.00	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 528 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

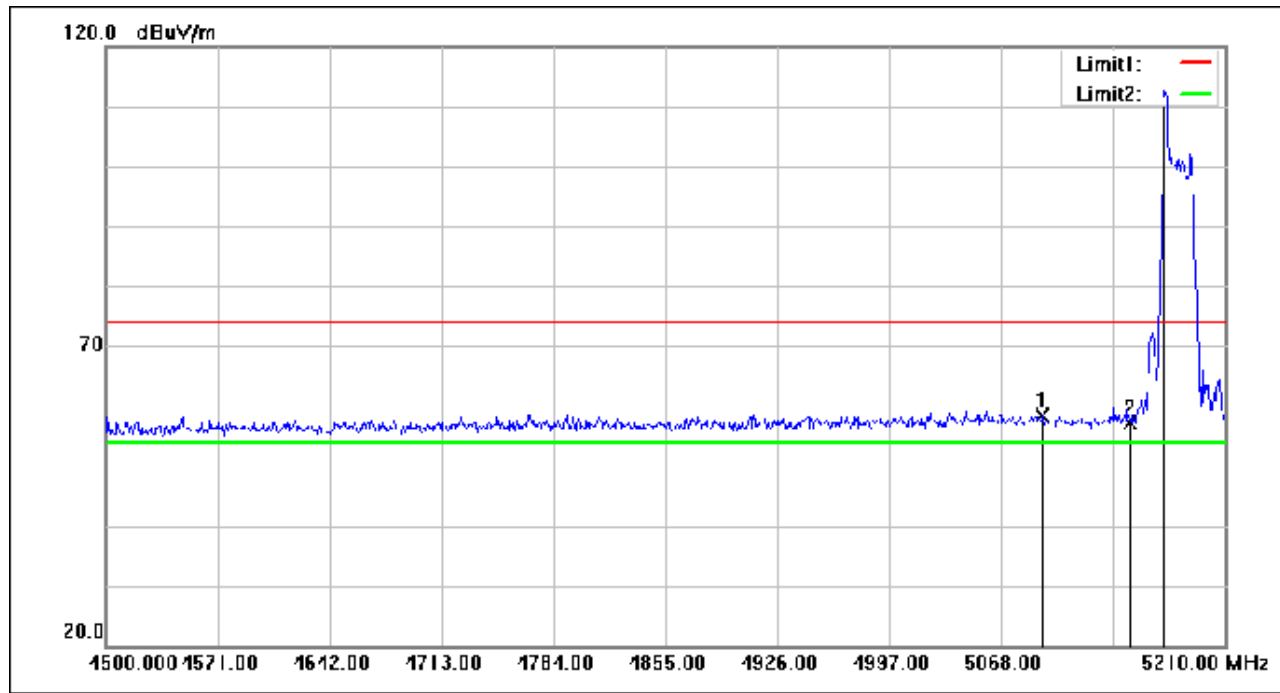

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5094.270	74.07	-15.61	58.46	74.00	-15.54	peak
2	5150.000	72.74	-15.49	57.25	74.00	-16.75	peak
3	5171.660	128.18	-15.47	112.71	74.00	38.71	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 529 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

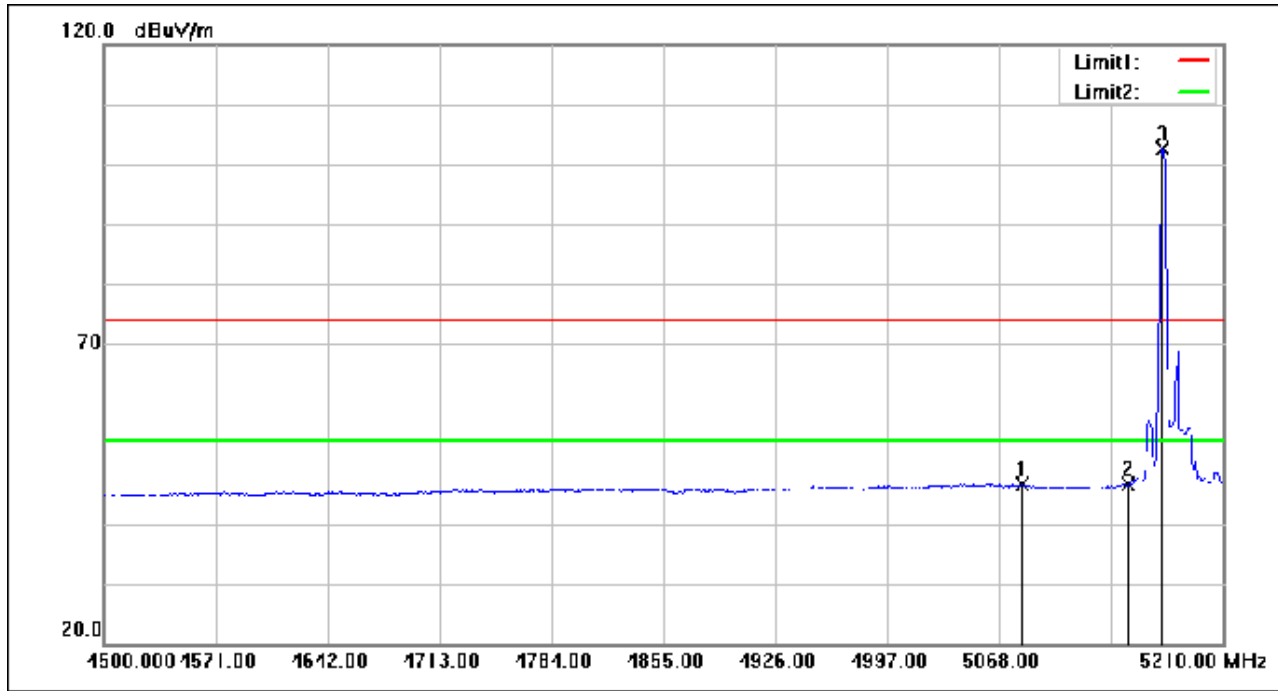

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.200	62.28	-15.64	46.64	54.00	-7.36	AVG
2	5150.000	62.14	-15.49	46.65	54.00	-7.35	AVG
3	5171.660	118.14	-15.47	102.67	54.00	48.67	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 530 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

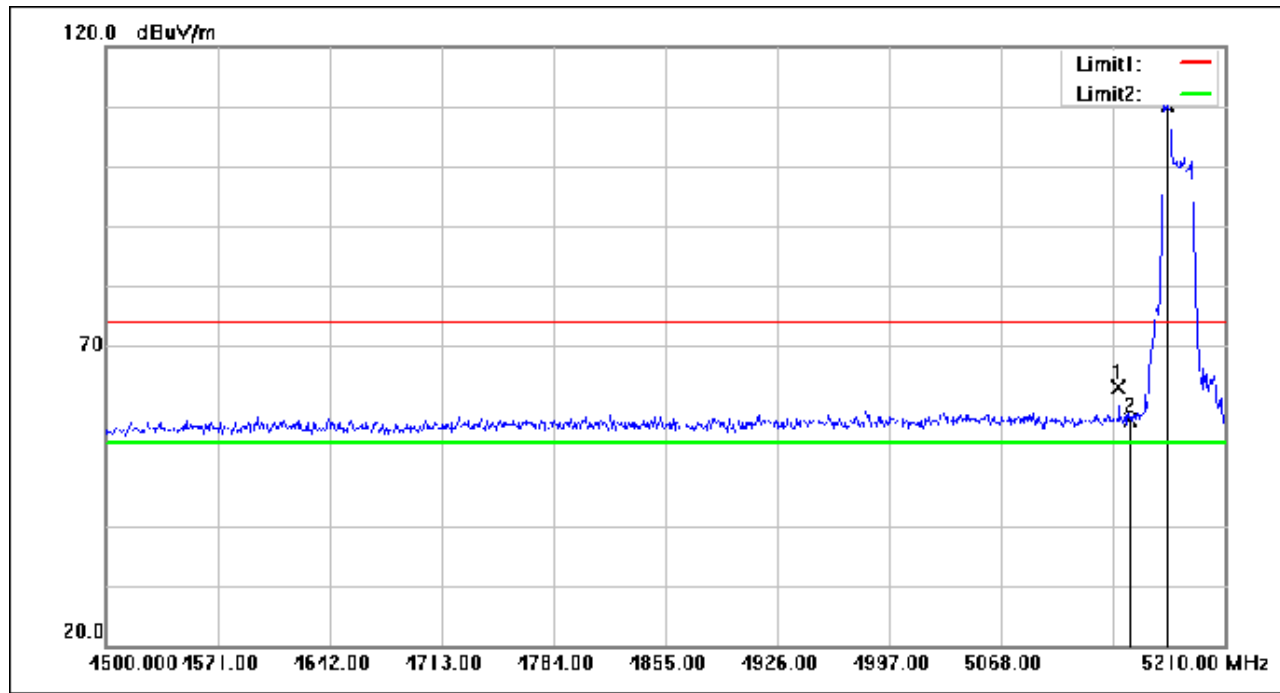

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.550	78.56	-15.50	63.06	74.00	-10.94	peak
2	5150.000	73.05	-15.49	57.56	74.00	-16.44	peak
3	5173.080	125.88	-15.46	110.42	74.00	36.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 531 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

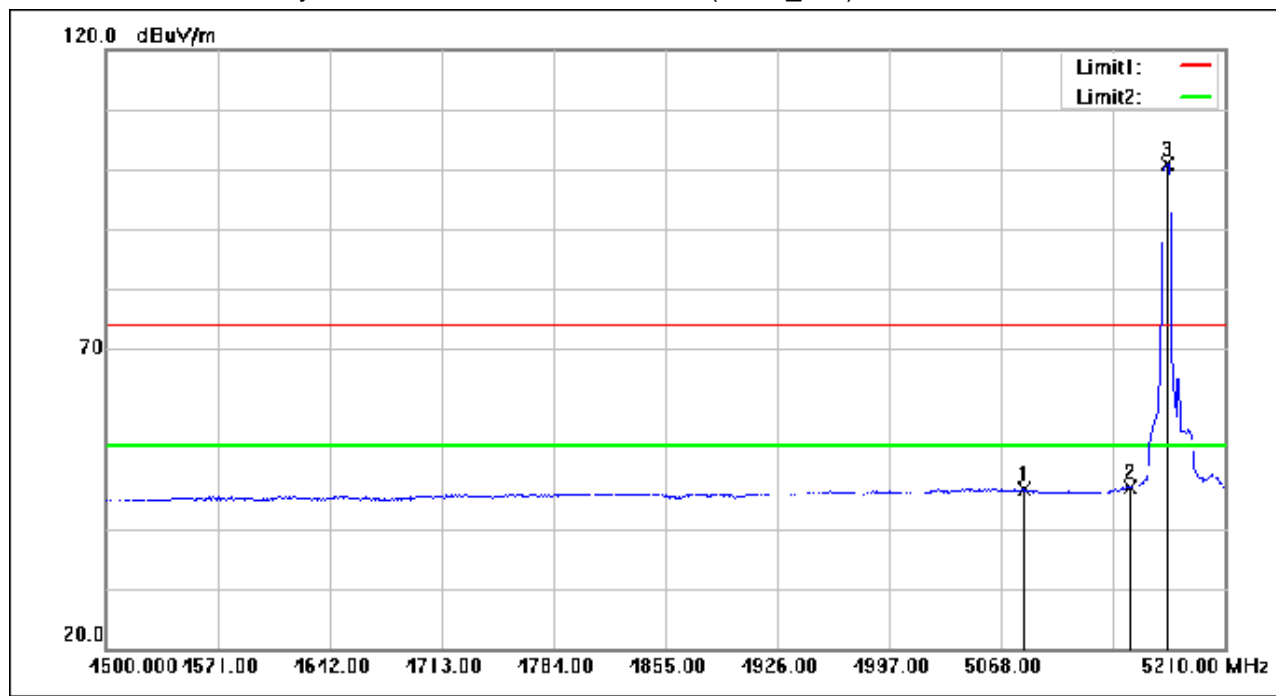

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5082.200	62.30	-15.64	46.66	54.00	-7.34	AVG
2	5150.000	62.38	-15.49	46.89	54.00	-7.11	AVG
3	5173.080	116.39	-15.46	100.93	54.00	46.93	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 532 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

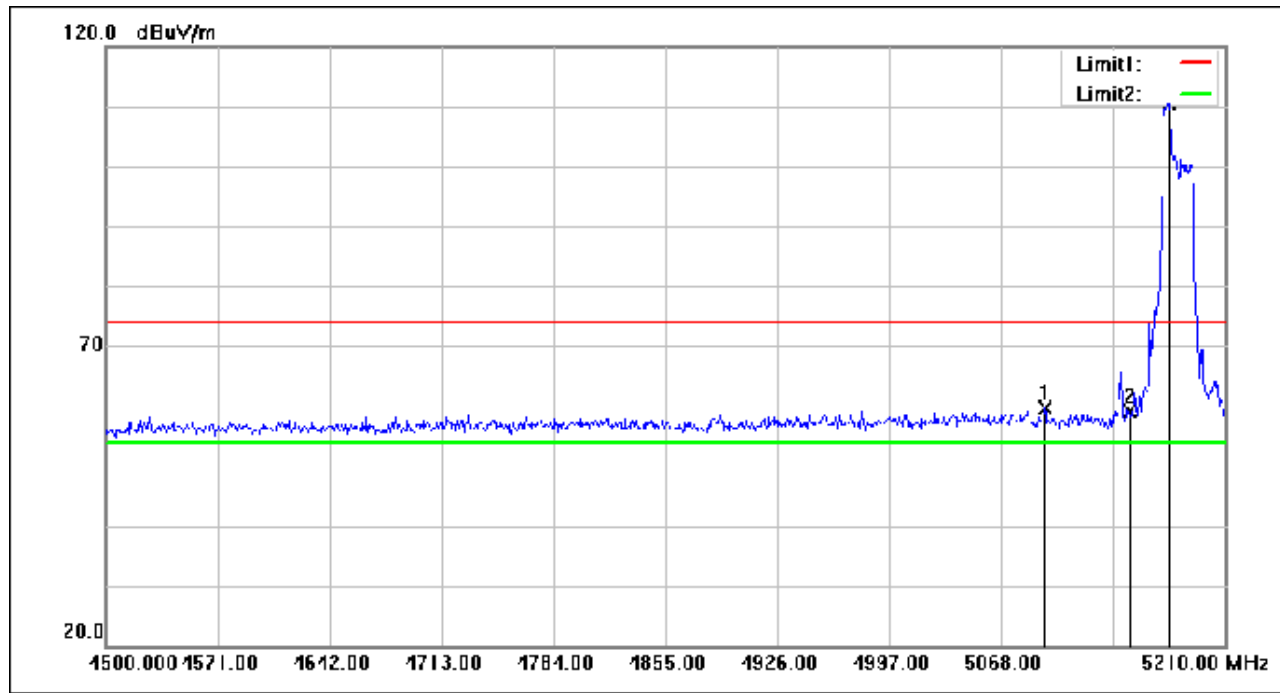

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5095.690	75.14	-15.61	59.53	74.00	-14.47	peak
2	5150.000	74.57	-15.49	59.08	74.00	-14.92	peak
3	5174.500	126.08	-15.46	110.62	74.00	36.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 533 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

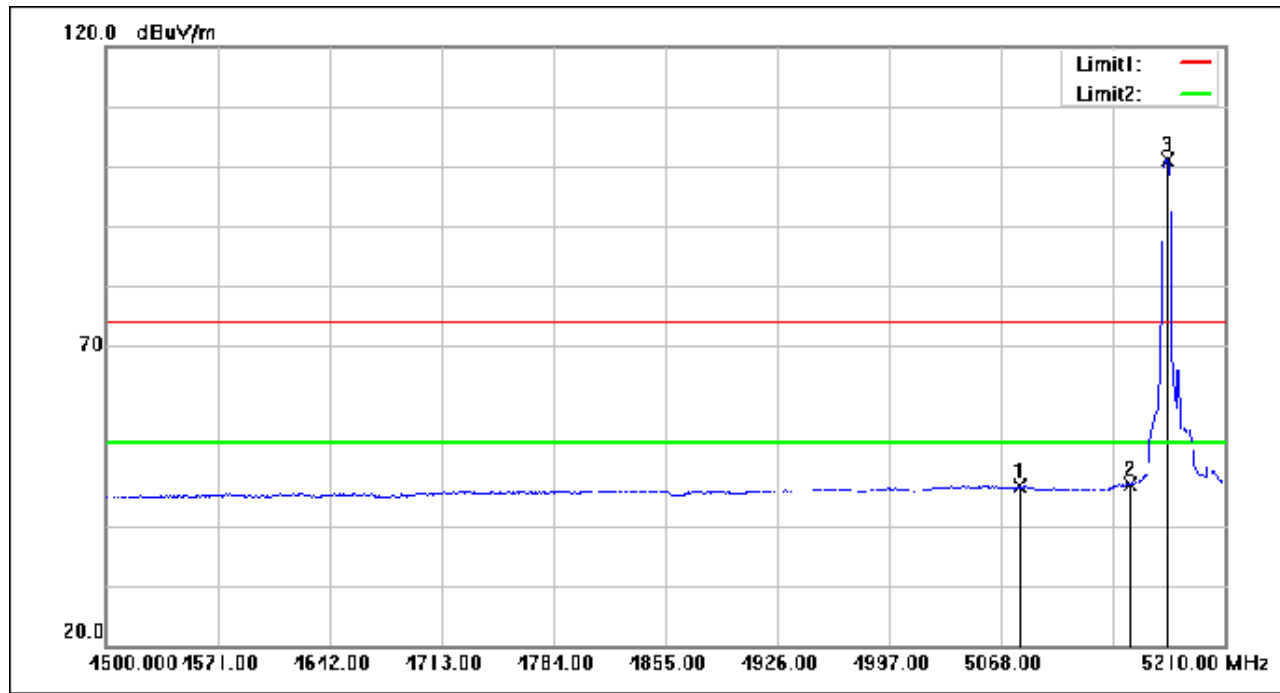

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.070	62.19	-15.64	46.55	54.00	-7.45	AVG
2	5150.000	62.45	-15.49	46.96	54.00	-7.04	AVG
3	5173.080	116.51	-15.46	101.05	54.00	47.05	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 534 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

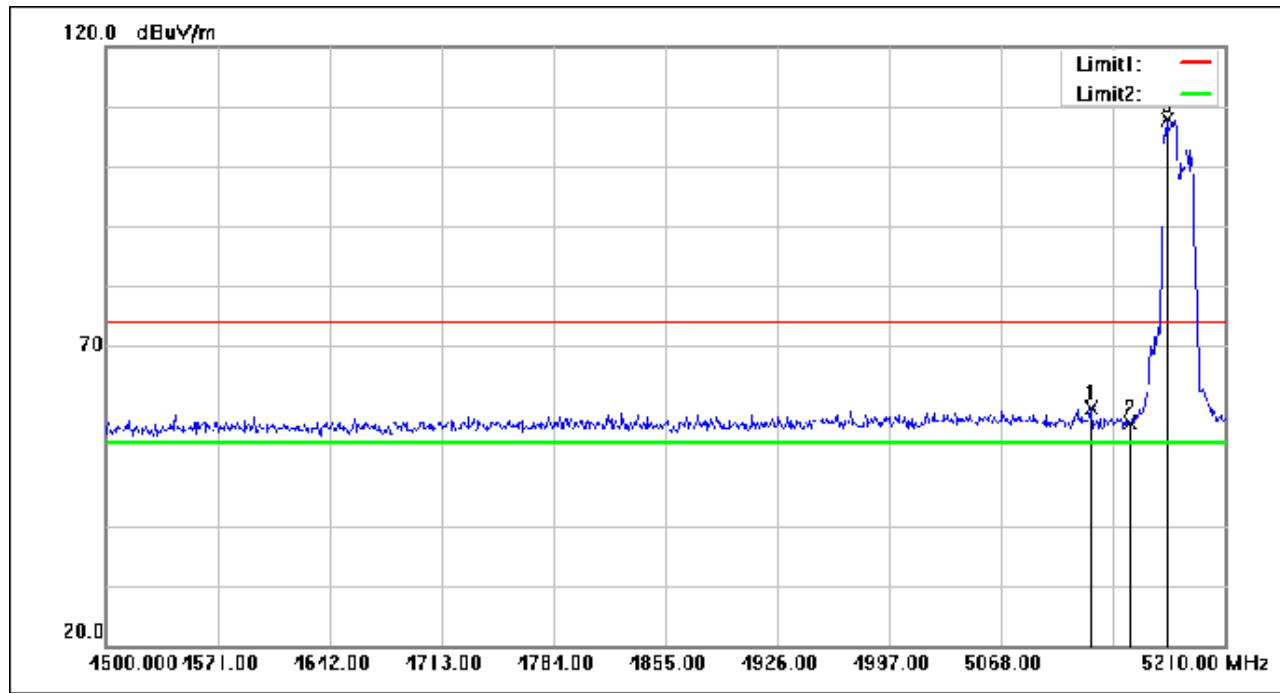

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.800	75.21	-15.54	59.67	74.00	-14.33	peak
2	5150.000	72.57	-15.49	57.08	74.00	-16.92	peak
3	5173.080	123.38	-15.46	107.92	74.00	33.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 535 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

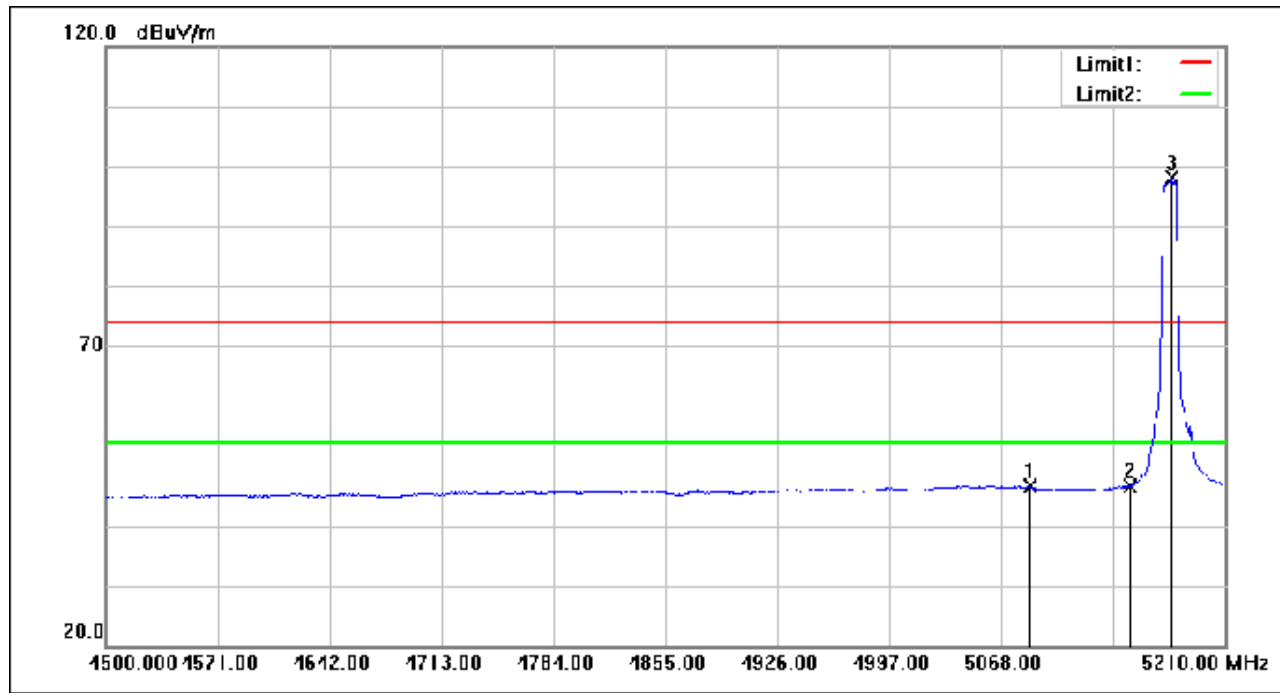

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.460	62.20	-15.63	46.57	54.00	-7.43	AVG
2	5150.000	62.24	-15.49	46.75	54.00	-7.25	AVG
3	5176.630	113.61	-15.46	98.15	54.00	44.15	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 536 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

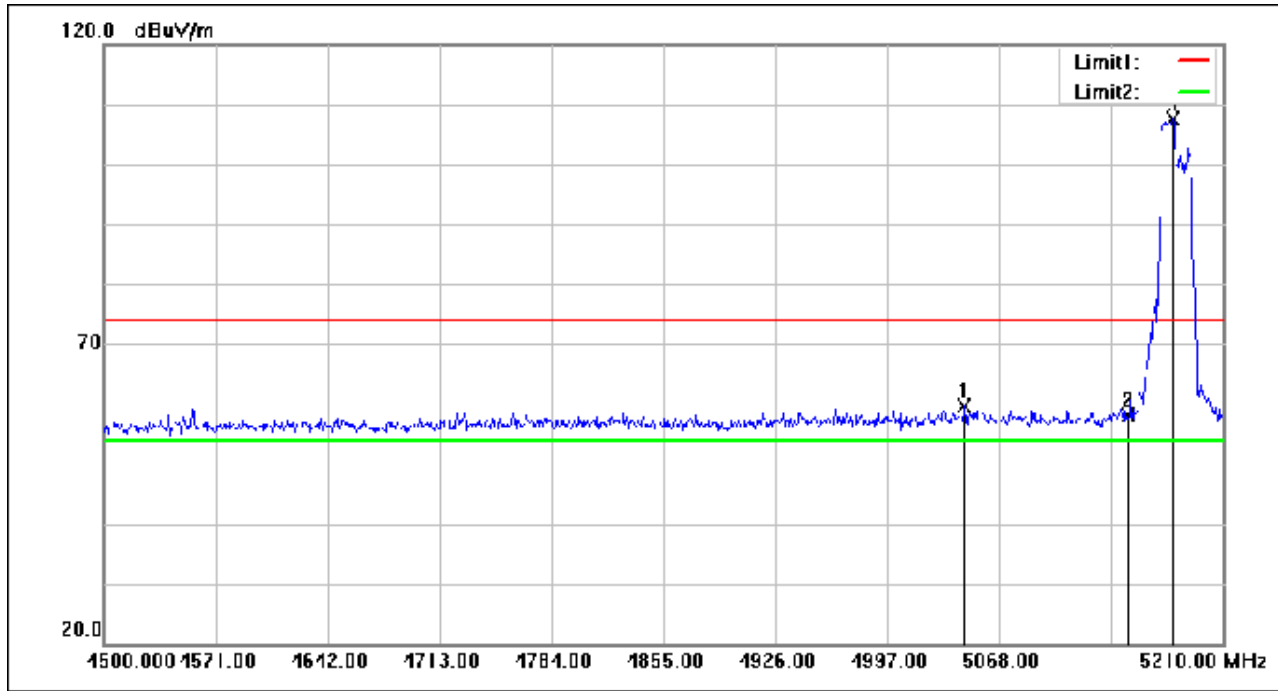

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.990	75.24	-15.73	59.51	74.00	-14.49	peak
2	5150.000	73.54	-15.49	58.05	74.00	-15.95	peak
3	5178.050	123.16	-15.46	107.70	74.00	33.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 537 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

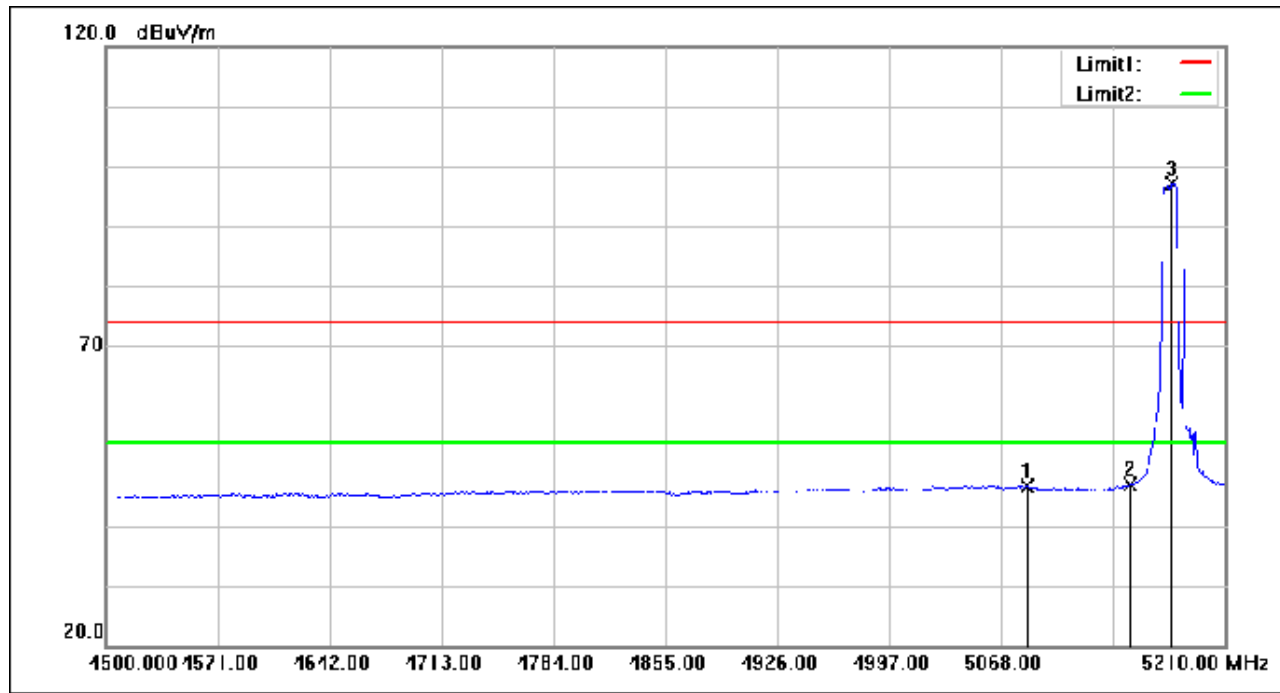

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5084.330	62.32	-15.64	46.68	54.00	-7.32	AVG
2	5150.000	62.28	-15.49	46.79	54.00	-7.21	AVG
3	5176.630	112.65	-15.46	97.19	54.00	43.19	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 538 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

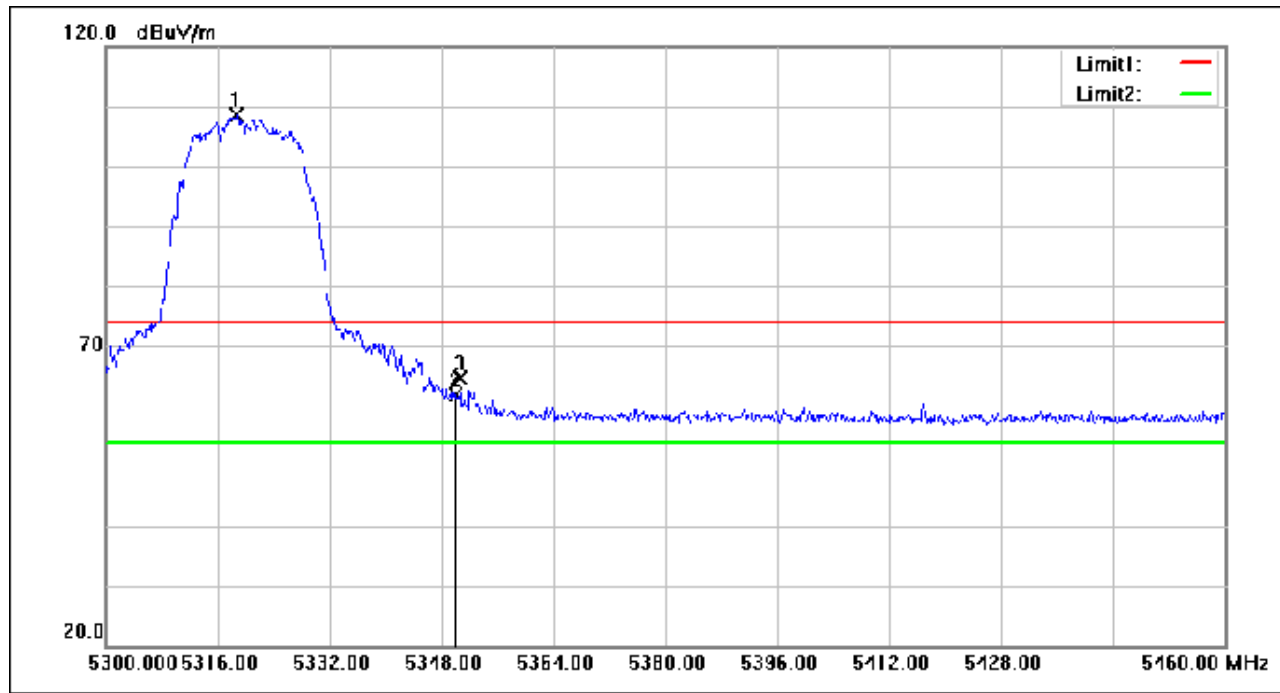

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.720	124.15	-15.46	108.69	74.00	34.69	peak
2	5350.000	77.25	-15.49	61.76	74.00	-12.24	peak
3	5350.720	80.19	-15.49	64.70	74.00	-9.30	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 539 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

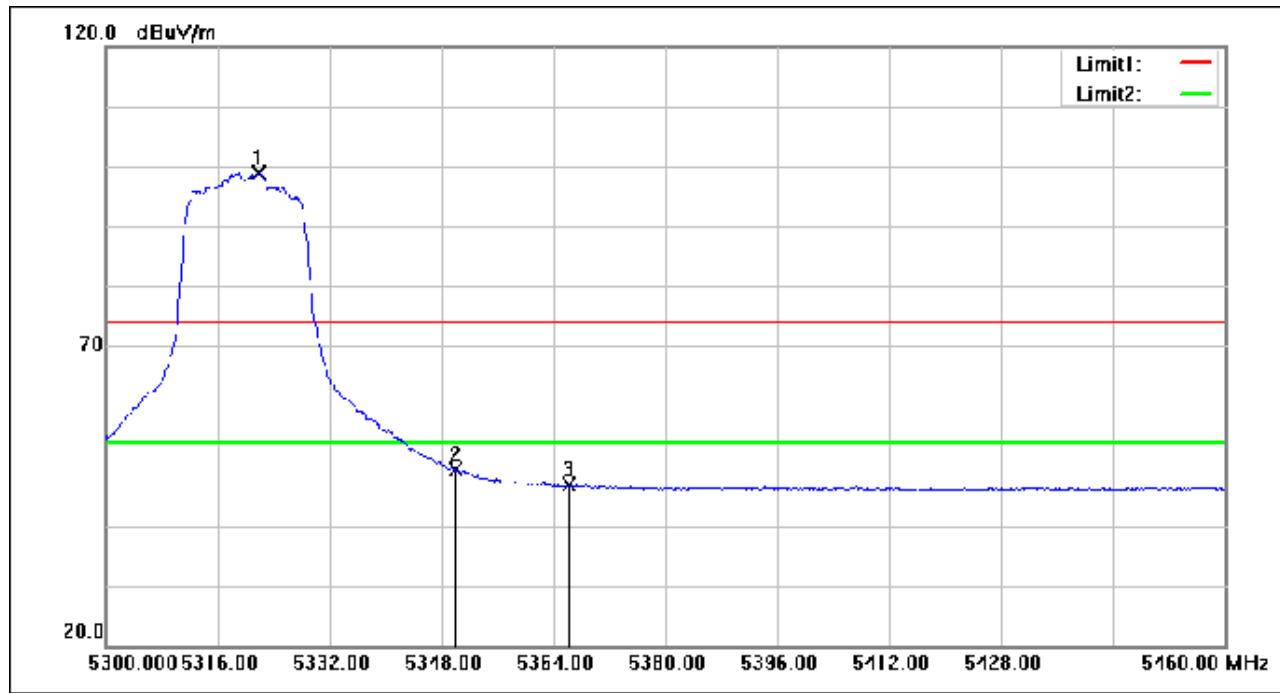

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.920	114.42	-15.46	98.96	54.00	44.96	AVG
2	5350.000	64.81	-15.49	49.32	54.00	-4.68	AVG
3	5366.240	62.35	-15.47	46.88	54.00	-7.12	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 540 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

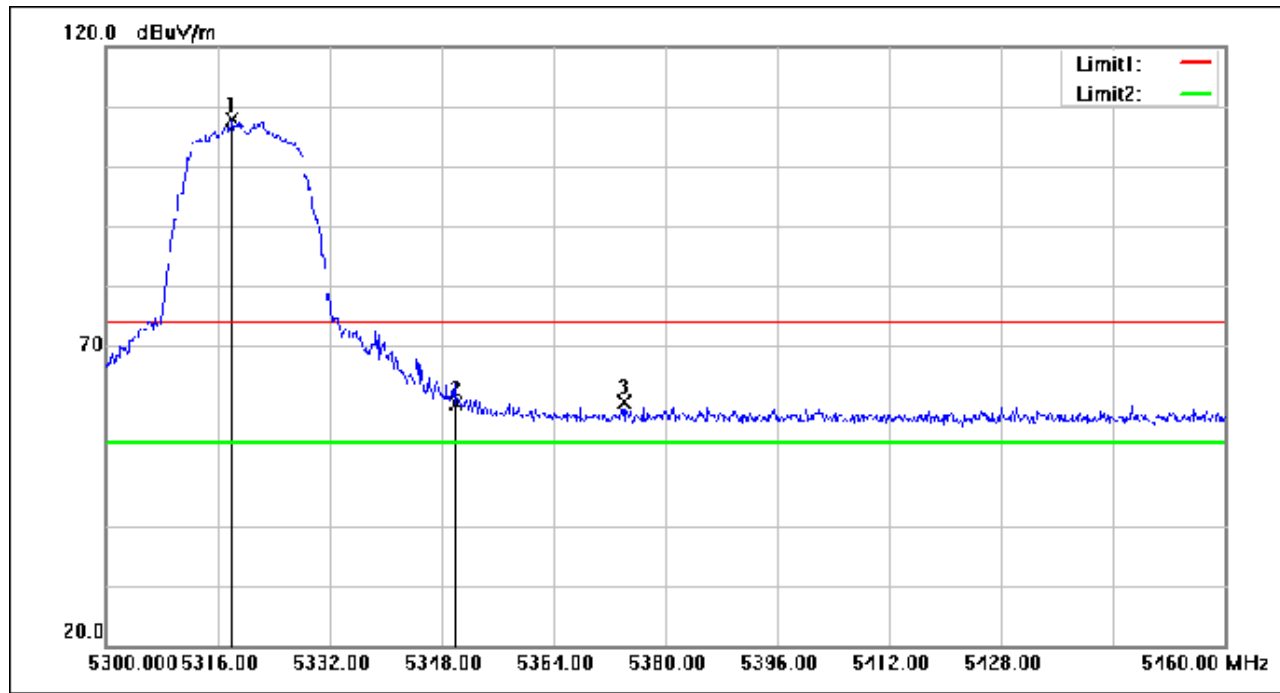

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.080	123.41	-15.46	107.95	74.00	33.95	peak
2	5350.000	75.88	-15.49	60.39	74.00	-13.61	peak
3	5374.080	76.19	-15.45	60.74	74.00	-13.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 541 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

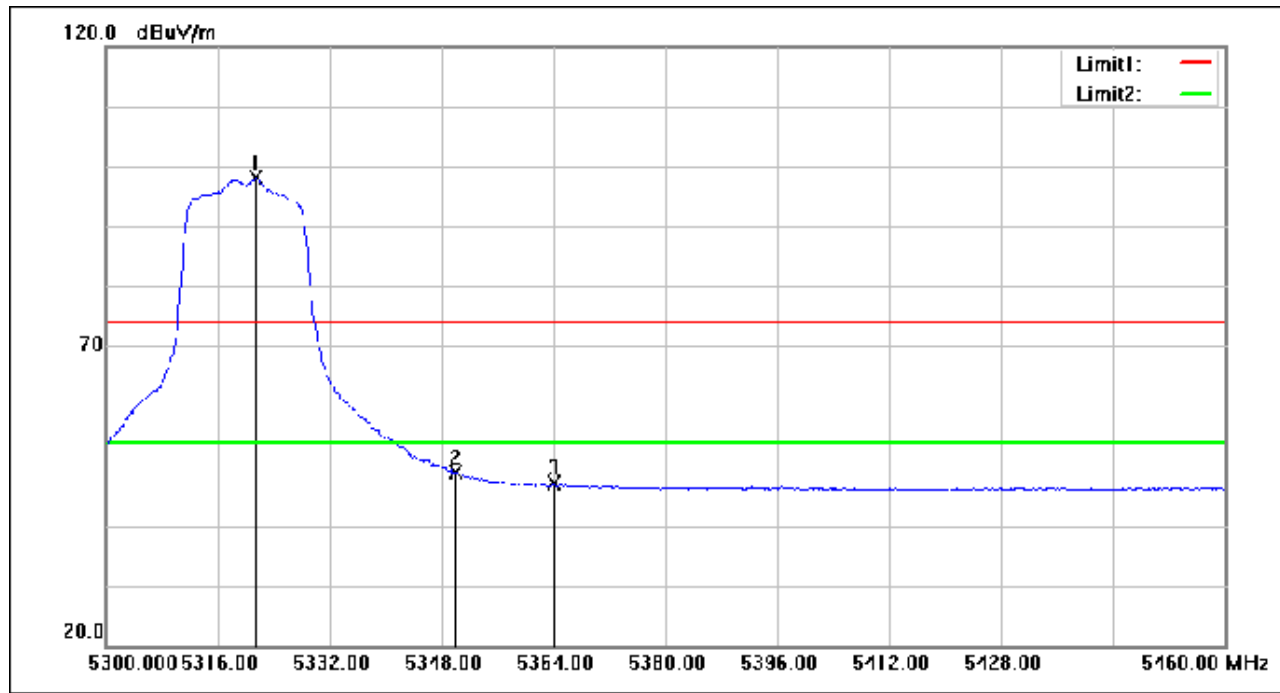

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.440	113.50	-15.46	98.04	54.00	44.04	AVG
2	5350.000	64.36	-15.49	48.87	54.00	-5.13	AVG
3	5364.000	62.48	-15.47	47.01	54.00	-6.99	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 542 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

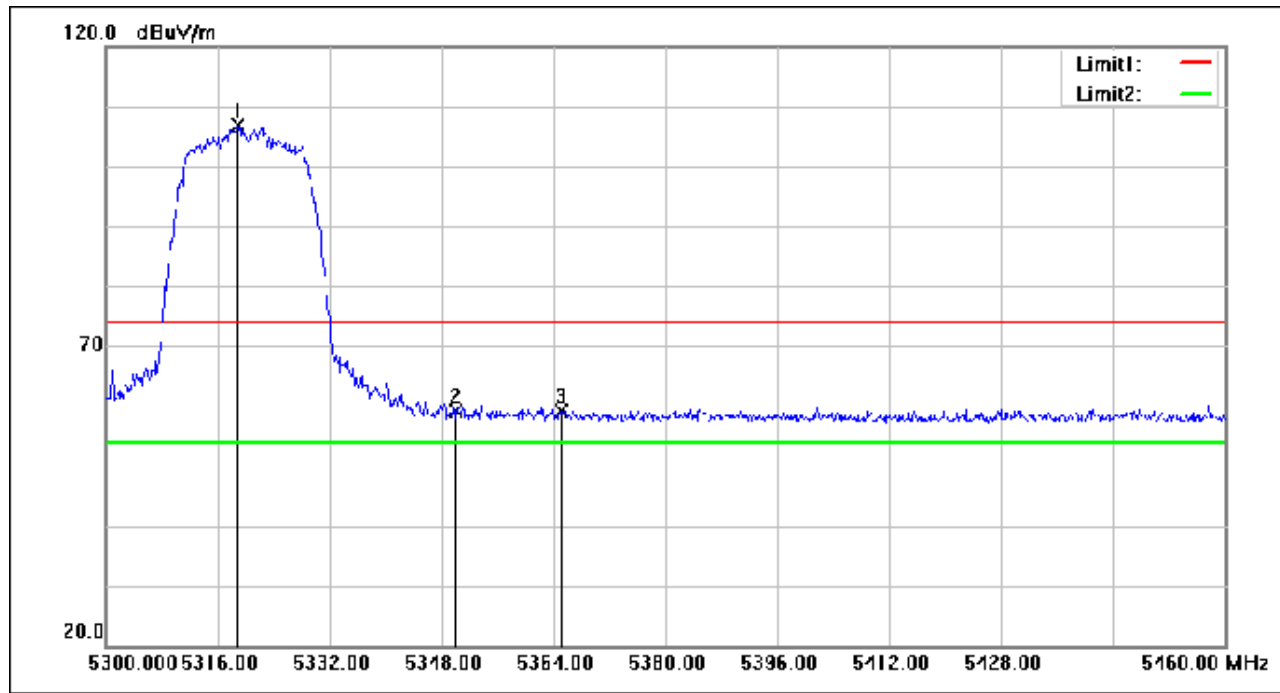

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.880	122.35	-15.46	106.89	74.00	32.89	peak
2	5350.000	74.60	-15.49	59.11	74.00	-14.89	peak
3	5365.120	74.63	-15.47	59.16	74.00	-14.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 543 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

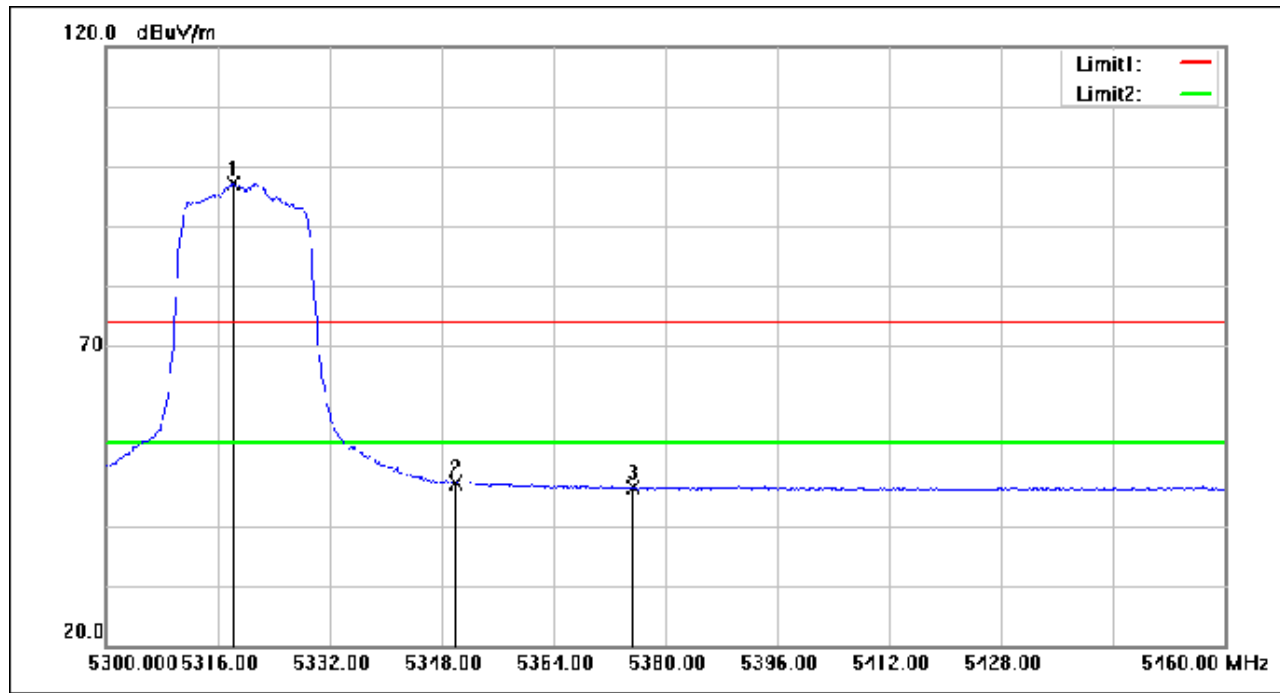

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	112.67	-15.46	97.21	54.00	43.21	AVG
2	5350.000	62.52	-15.49	47.03	54.00	-6.97	AVG
3	5375.360	61.94	-15.45	46.49	54.00	-7.51	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 544 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

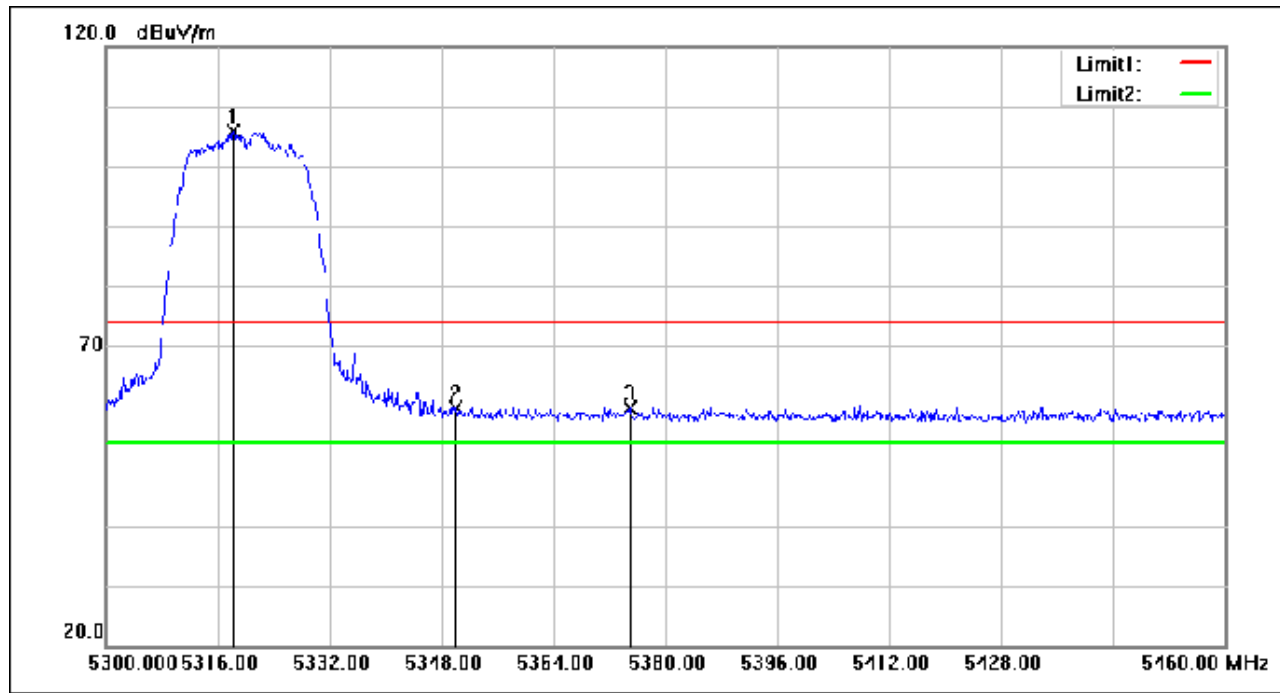

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.240	121.35	-15.46	105.89	74.00	31.89	peak
2	5350.000	75.21	-15.49	59.72	74.00	-14.28	peak
3	5374.880	75.16	-15.45	59.71	74.00	-14.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 545 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

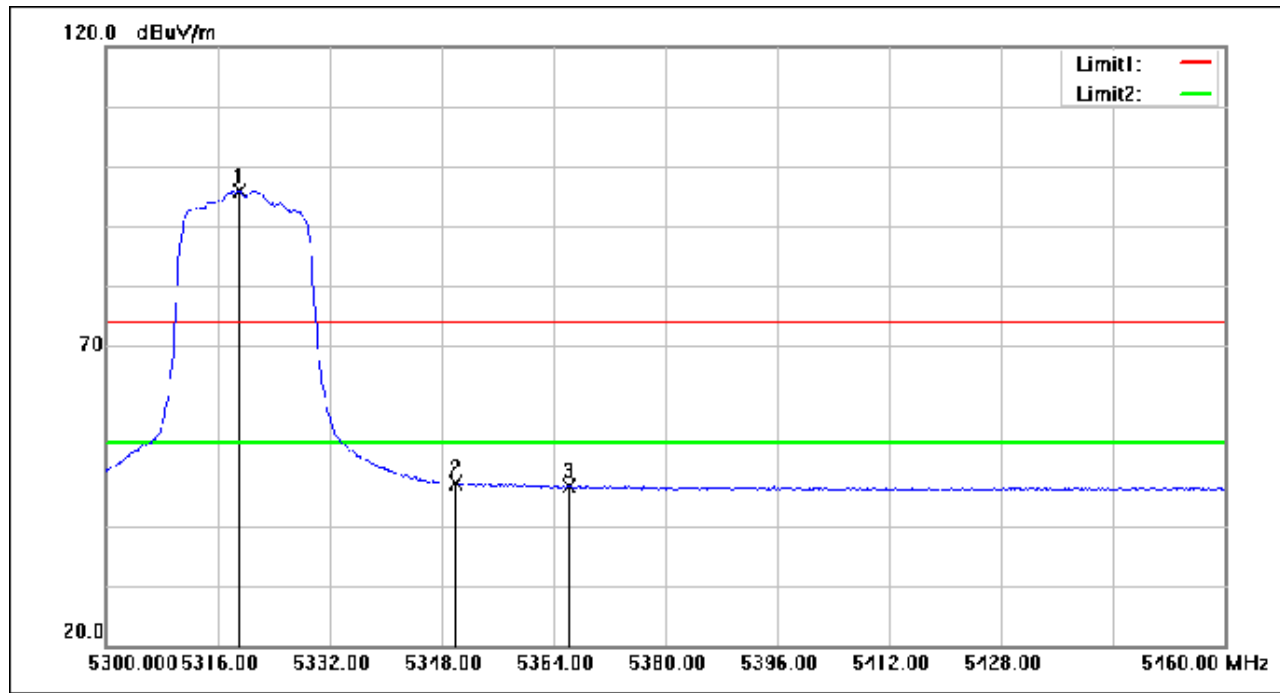

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.040	111.42	-15.46	95.96	54.00	41.96	AVG
2	5350.000	62.70	-15.49	47.21	54.00	-6.79	AVG
3	5366.240	62.10	-15.47	46.63	54.00	-7.37	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 546 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

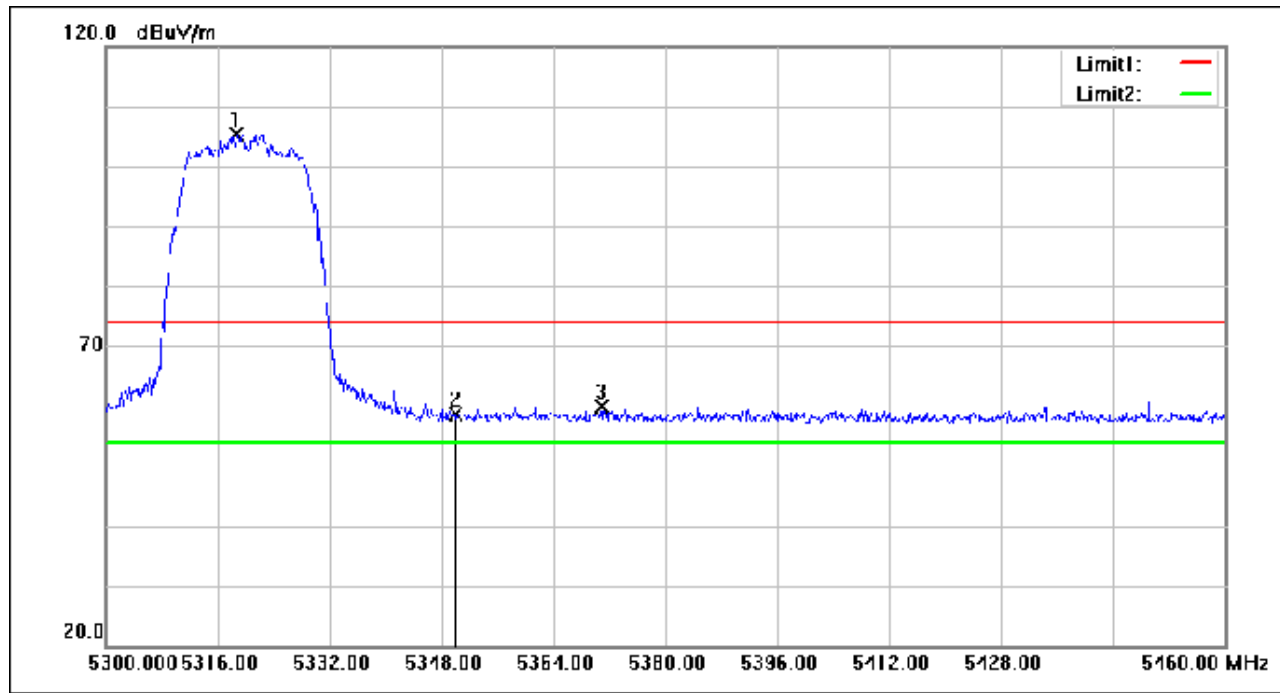

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.720	120.96	-15.46	105.50	74.00	31.50	peak
2	5350.000	74.02	-15.49	58.53	74.00	-15.47	peak
3	5370.880	75.23	-15.45	59.78	74.00	-14.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 547 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

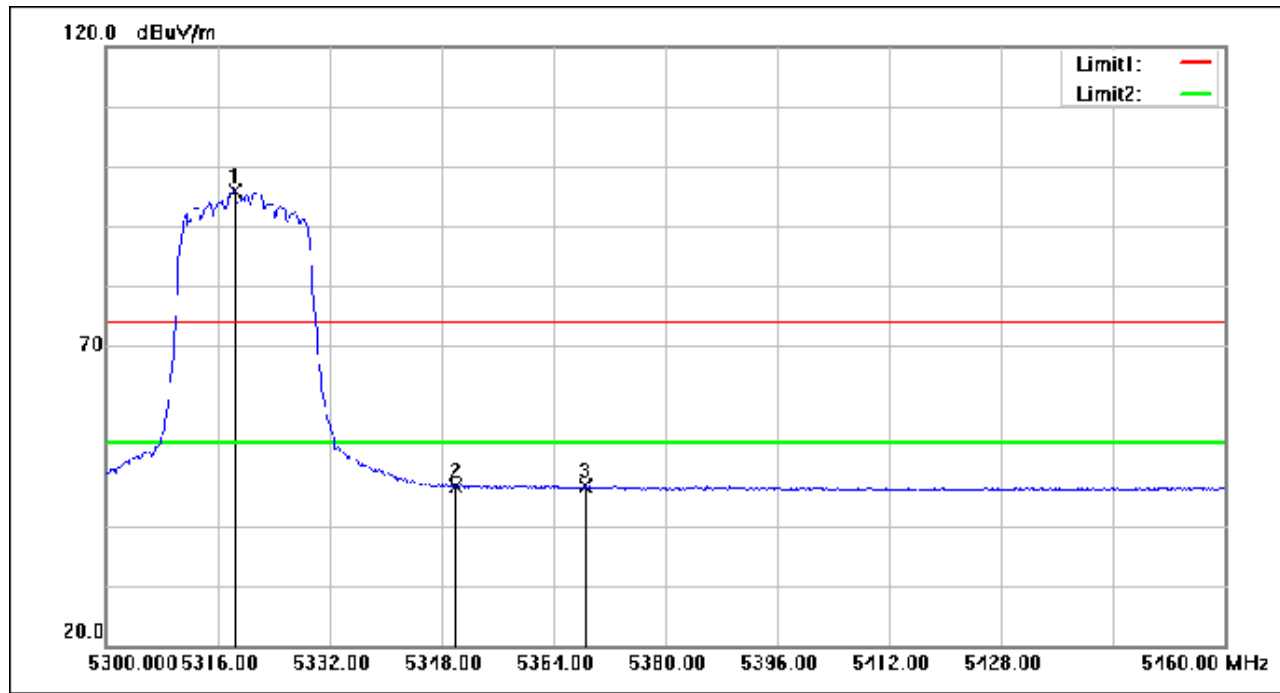

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.400	111.39	-15.46	95.93	54.00	41.93	AVG
2	5350.000	62.06	-15.49	46.57	54.00	-7.43	AVG
3	5368.480	62.07	-15.45	46.62	54.00	-7.38	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 548 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

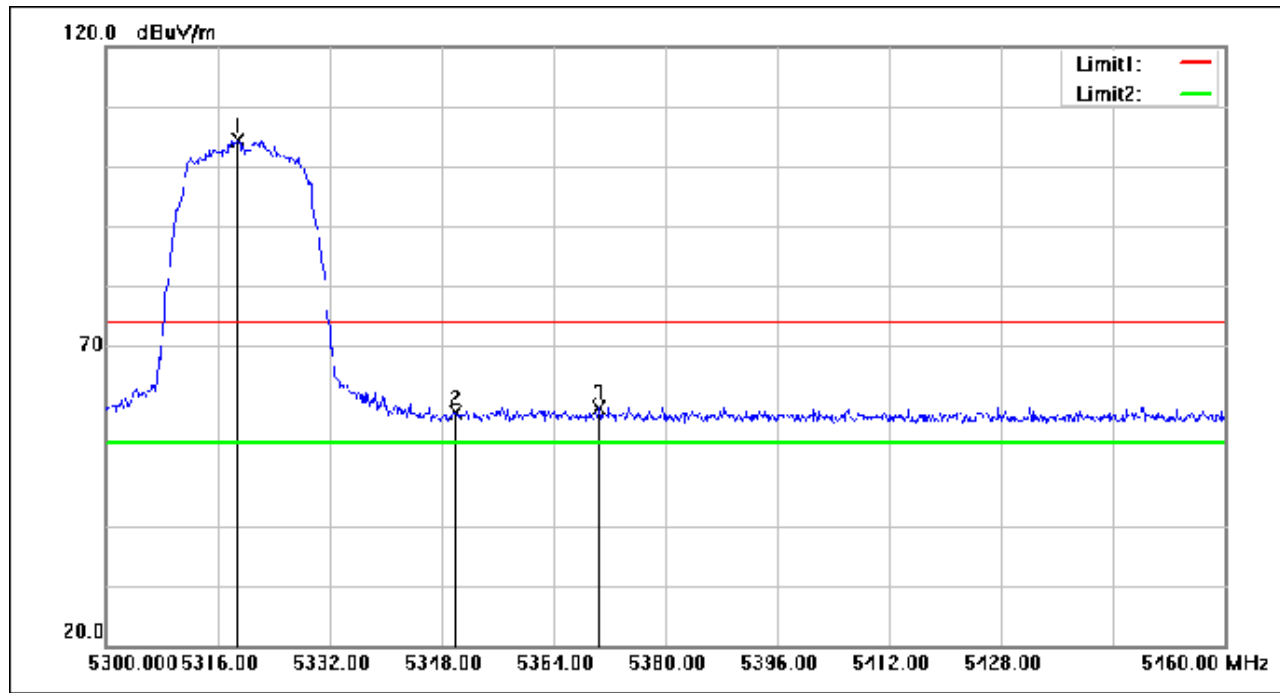

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.880	119.78	-15.46	104.32	74.00	30.32	peak
2	5350.000	74.28	-15.49	58.79	74.00	-15.21	peak
3	5370.560	75.02	-15.45	59.57	74.00	-14.43	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 549 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

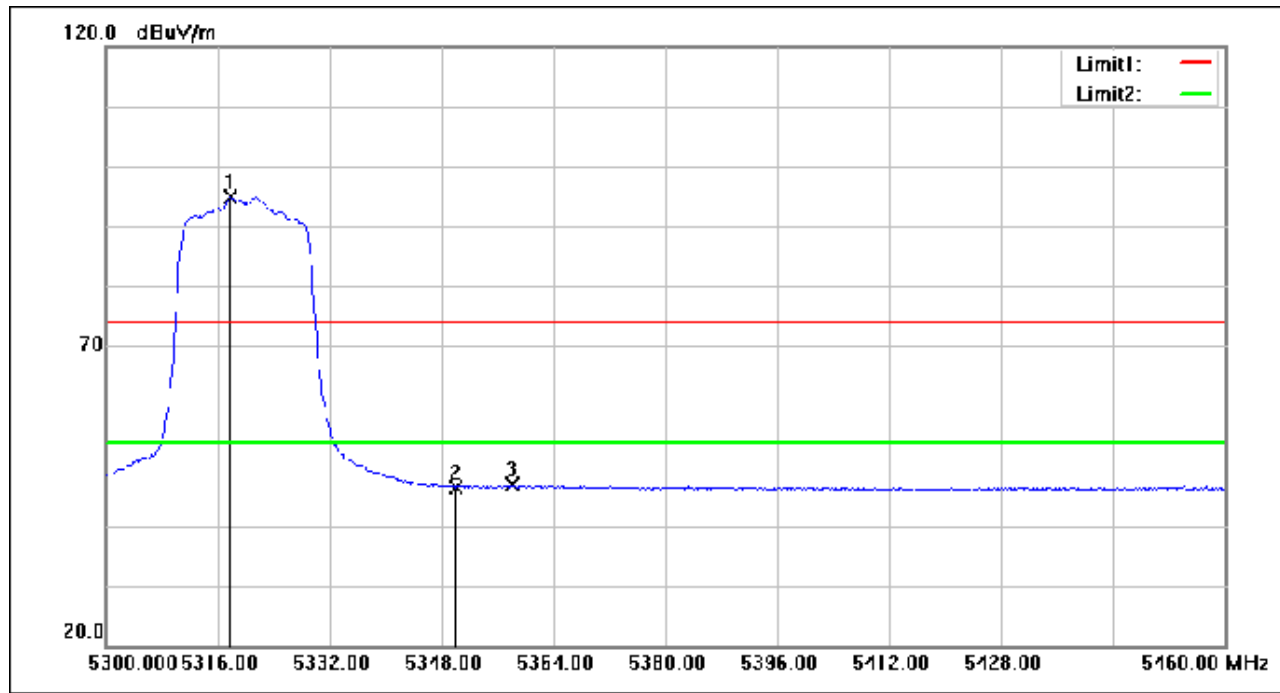

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5317.760	110.36	-15.46	94.90	54.00	40.90	AVG
2	5350.000	61.88	-15.49	46.39	54.00	-7.61	AVG
3	5358.080	62.23	-15.47	46.76	54.00	-7.24	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 550 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

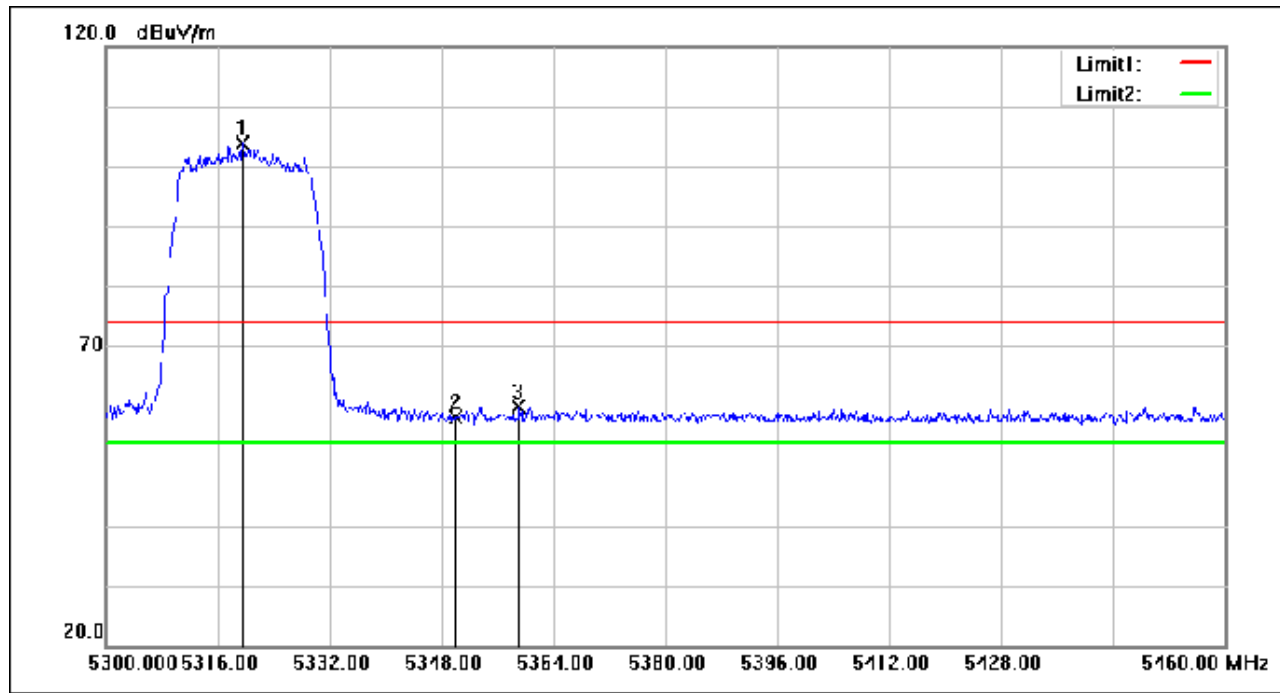

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.520	119.26	-15.46	103.80	74.00	29.80	peak
2	5350.000	73.65	-15.49	58.16	74.00	-15.84	peak
3	5359.040	75.26	-15.47	59.79	74.00	-14.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 551 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

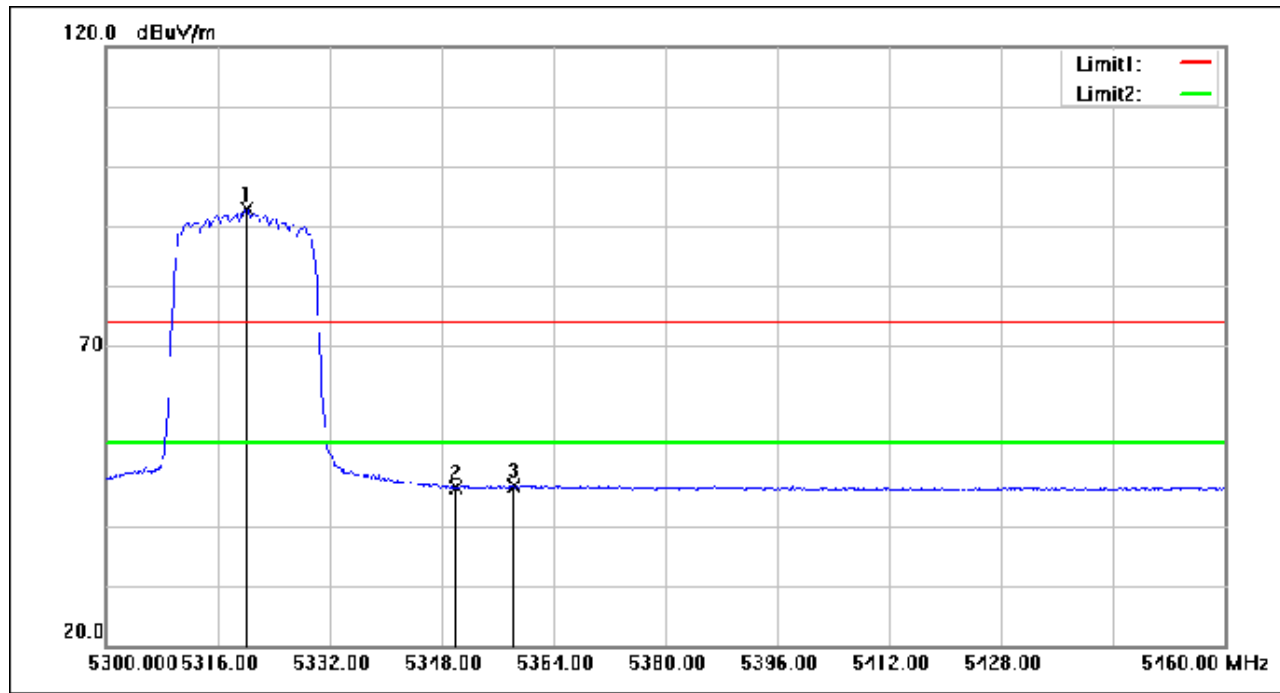

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.160	108.32	-15.46	92.86	54.00	38.86	AVG
2	5350.000	61.85	-15.49	46.36	54.00	-7.64	AVG
3	5358.240	62.20	-15.47	46.73	54.00	-7.27	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 552 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

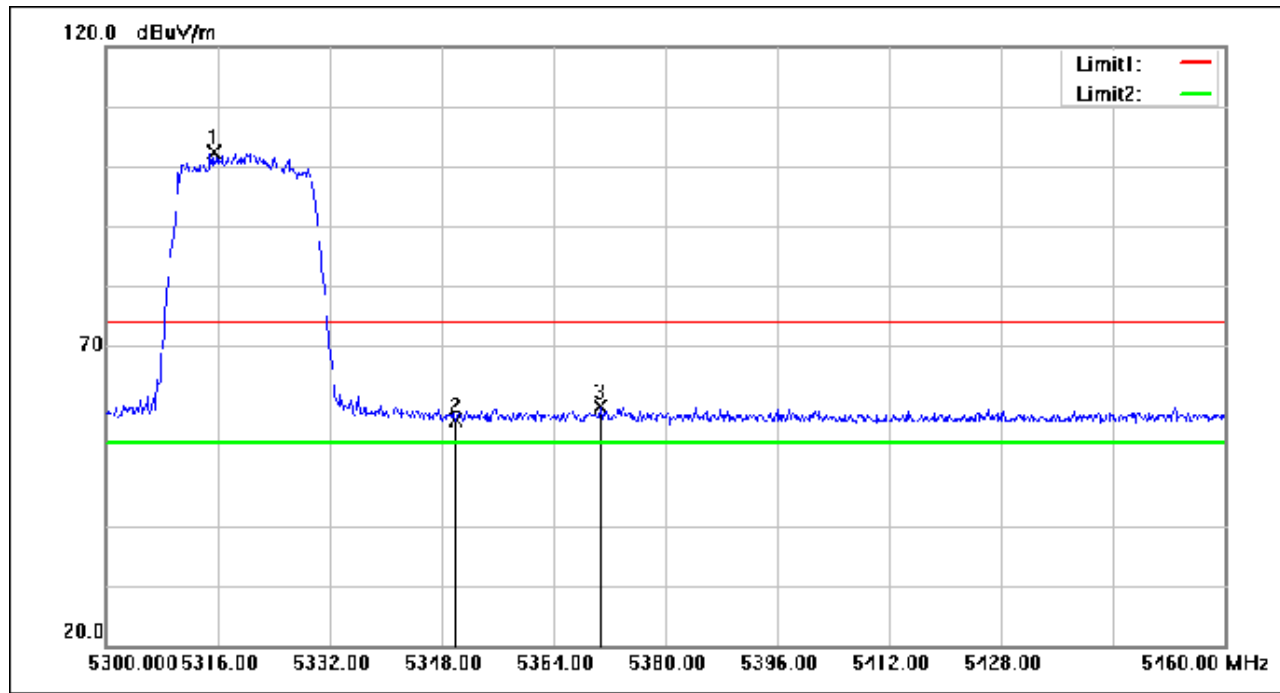

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5315.360	117.96	-15.46	102.50	74.00	28.50	peak
2	5350.000	73.07	-15.49	57.58	74.00	-16.42	peak
3	5370.720	75.24	-15.45	59.79	74.00	-14.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 553 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

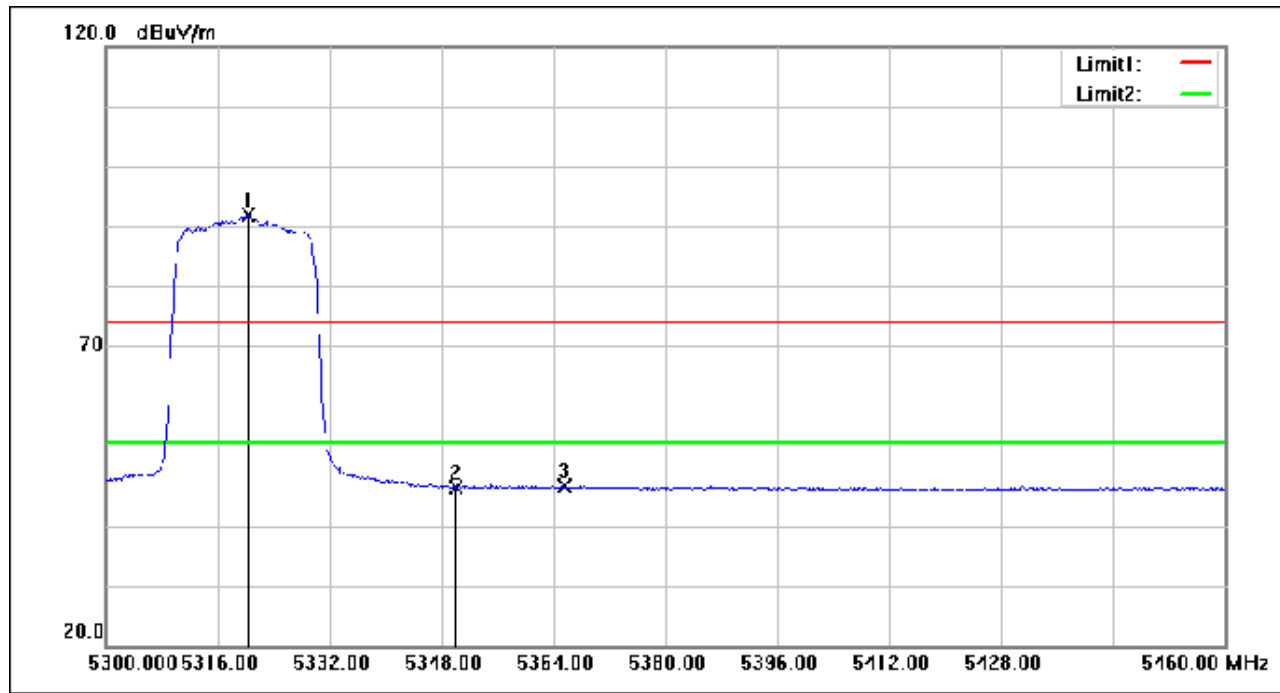

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5320.320	107.37	-15.46	91.91	54.00	37.91	AVG
2	5350.000	61.96	-15.49	46.47	54.00	-7.53	AVG
3	5365.600	62.09	-15.47	46.62	54.00	-7.38	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 554 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU26_Right); Bandwidth: 20MHz; Channel: High

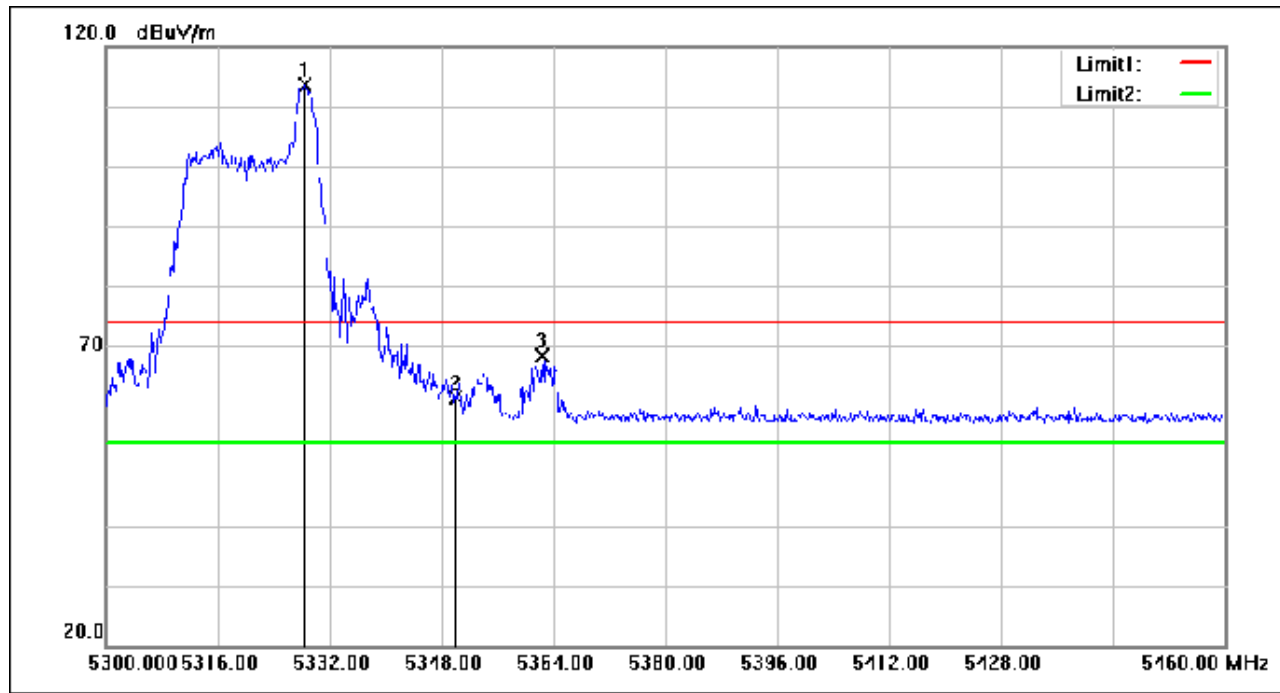

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	129.19	-15.47	113.72	74.00	39.72	peak
2	5350.000	76.97	-15.49	61.48	74.00	-12.52	peak
3	5362.400	83.84	-15.47	68.37	74.00	-5.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 555 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU26_Right); Bandwidth: 20MHz; Channel: High

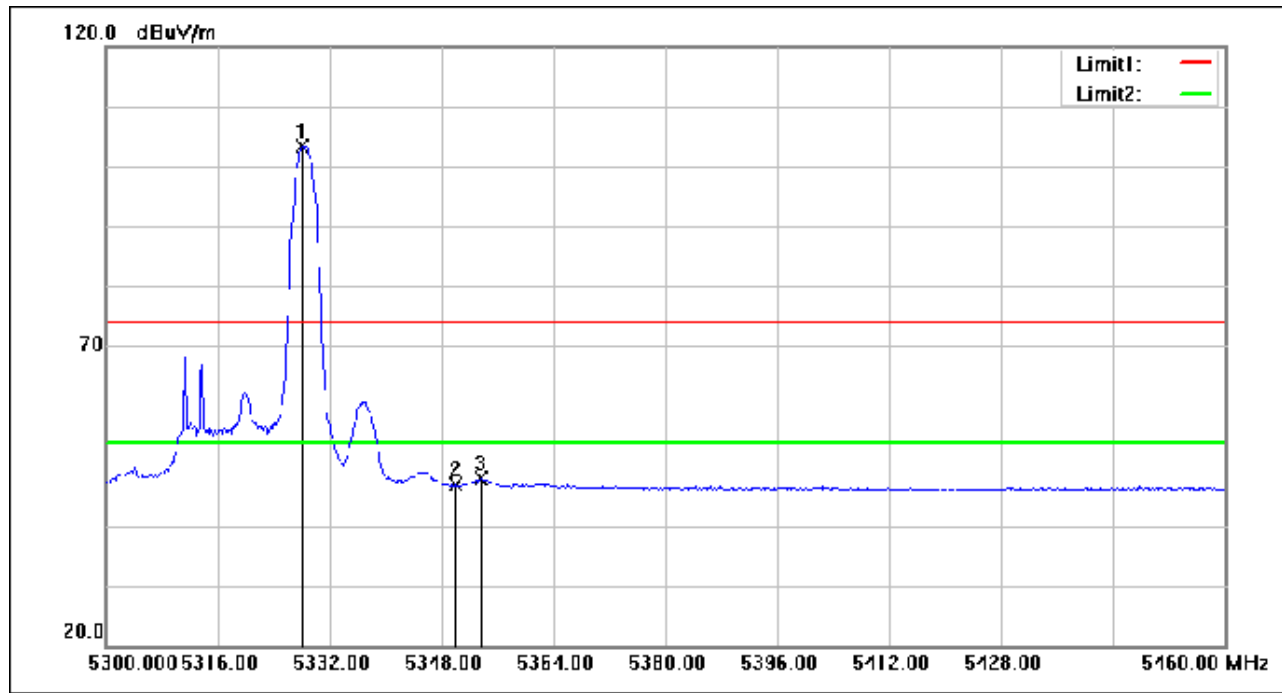

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.000	118.85	-15.47	103.38	54.00	49.38	AVG
2	5350.000	62.26	-15.49	46.77	54.00	-7.23	AVG
3	5353.600	63.39	-15.49	47.90	54.00	-6.10	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 556 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

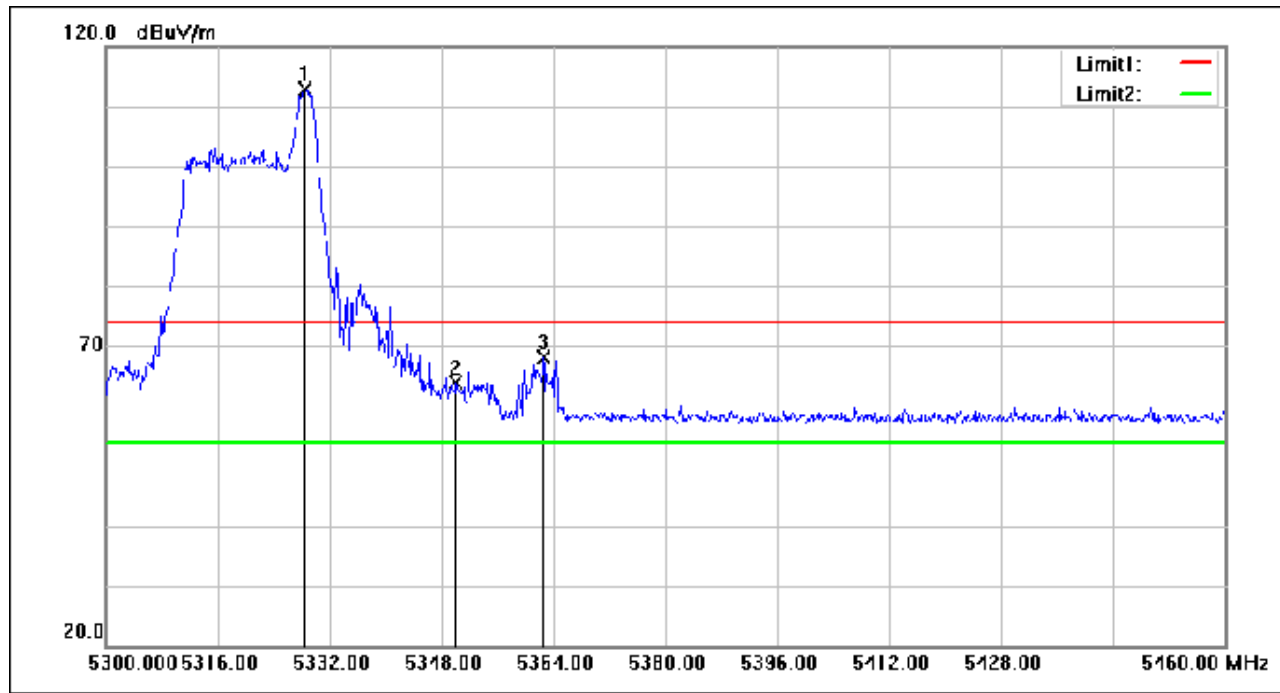

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	128.33	-15.47	112.86	74.00	38.86	peak
2	5350.000	79.27	-15.49	63.78	74.00	-10.22	peak
3	5362.560	83.52	-15.47	68.05	74.00	-5.95	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 557 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

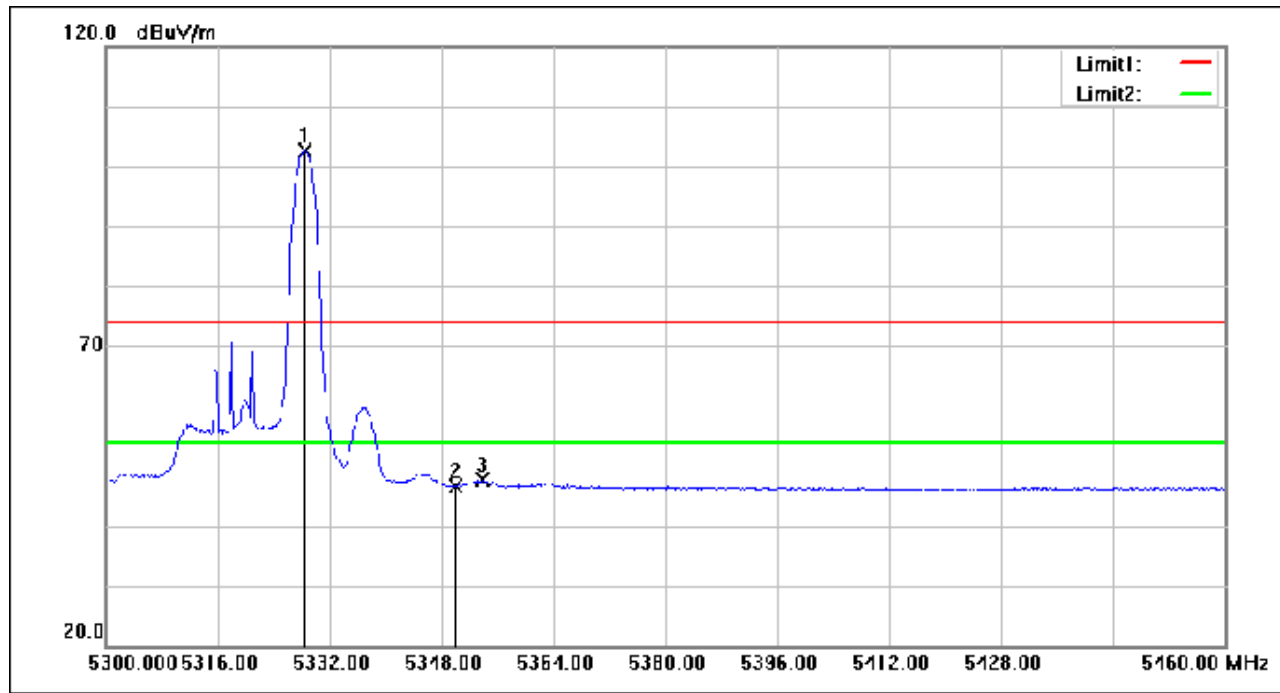

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.480	118.07	-15.47	102.60	54.00	48.60	AVG
2	5350.000	62.15	-15.49	46.66	54.00	-7.34	AVG
3	5353.760	63.20	-15.49	47.71	54.00	-6.29	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 558 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

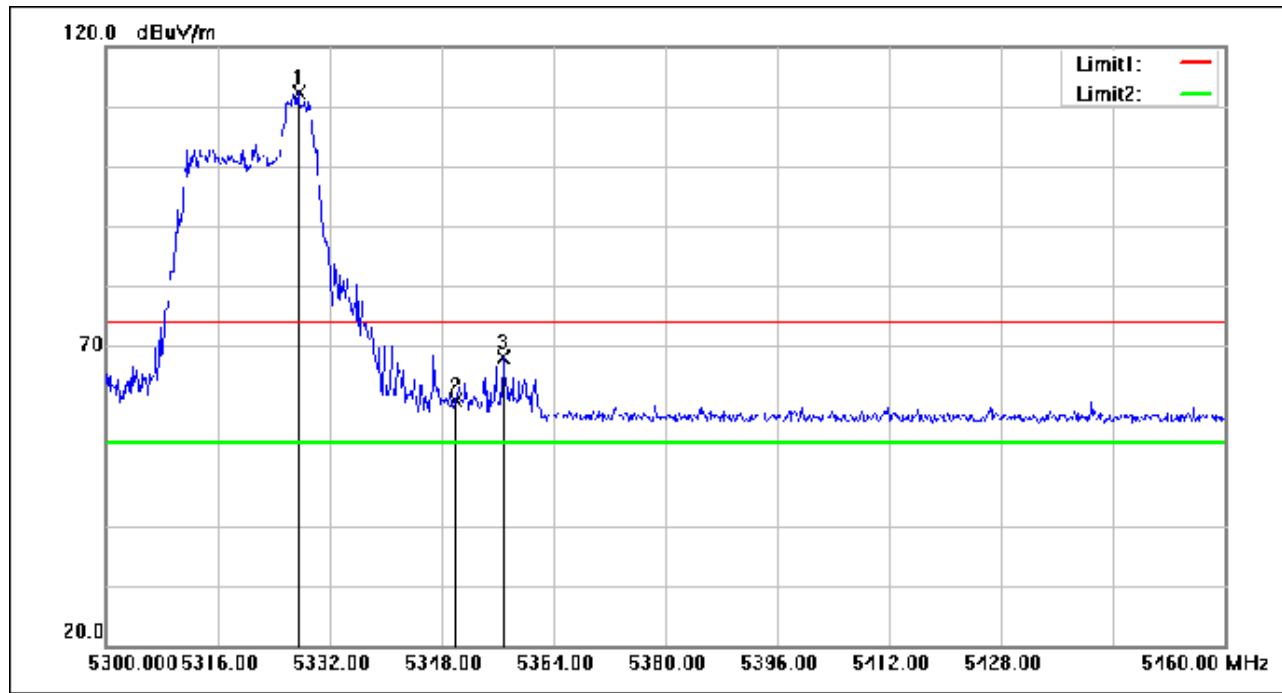

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.520	127.88	-15.47	112.41	74.00	38.41	peak
2	5350.000	76.26	-15.49	60.77	74.00	-13.23	peak
3	5356.800	83.58	-15.48	68.10	74.00	-5.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 559 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU52_Right); Bandwidth: 20MHz; Channel: High

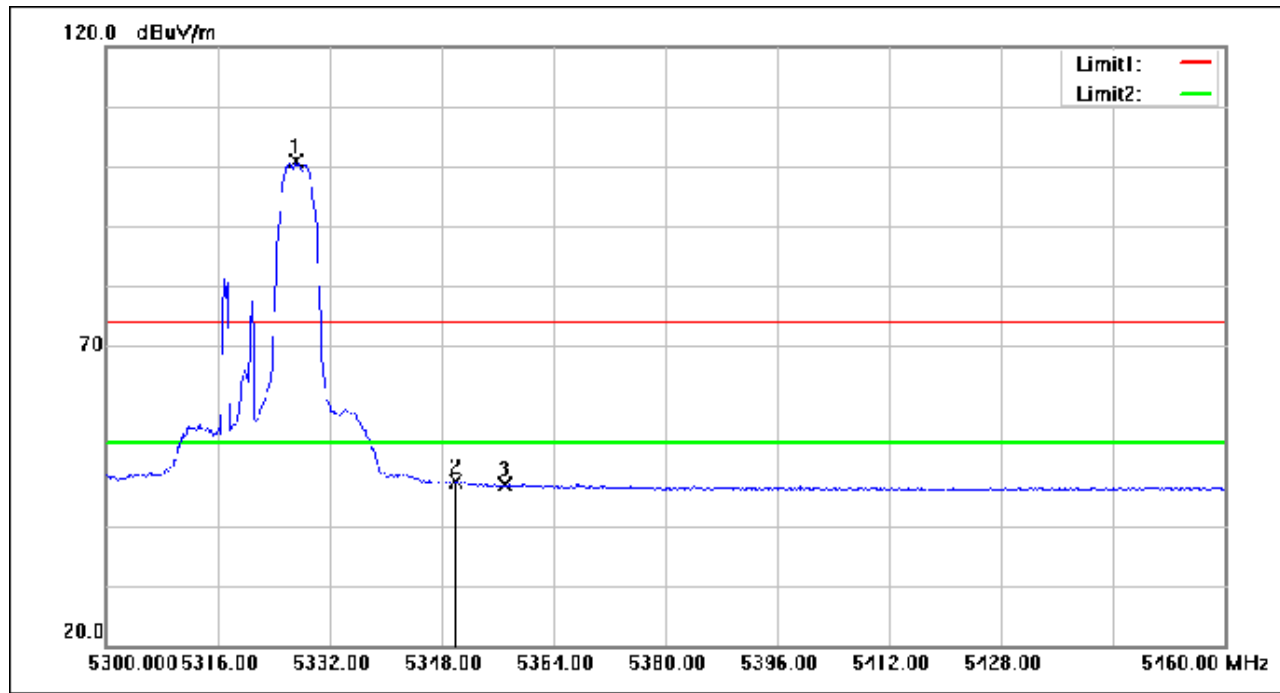

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.200	116.39	-15.46	100.93	54.00	46.93	AVG
2	5350.000	62.96	-15.49	47.47	54.00	-6.53	AVG
3	5357.120	62.35	-15.48	46.87	54.00	-7.13	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 560 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

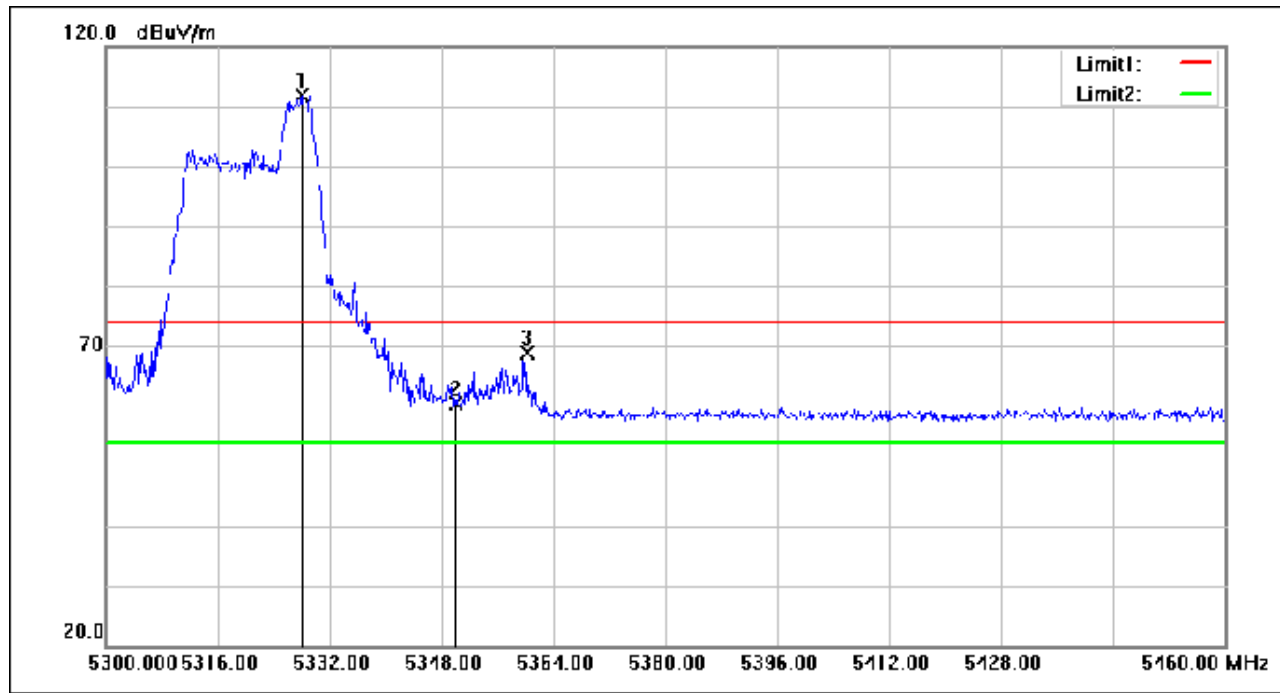

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5328.000	127.42	-15.47	111.95	74.00	37.95	peak
2	5350.000	75.85	-15.49	60.36	74.00	-13.64	peak
3	5360.160	84.39	-15.47	68.92	74.00	-5.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 561 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

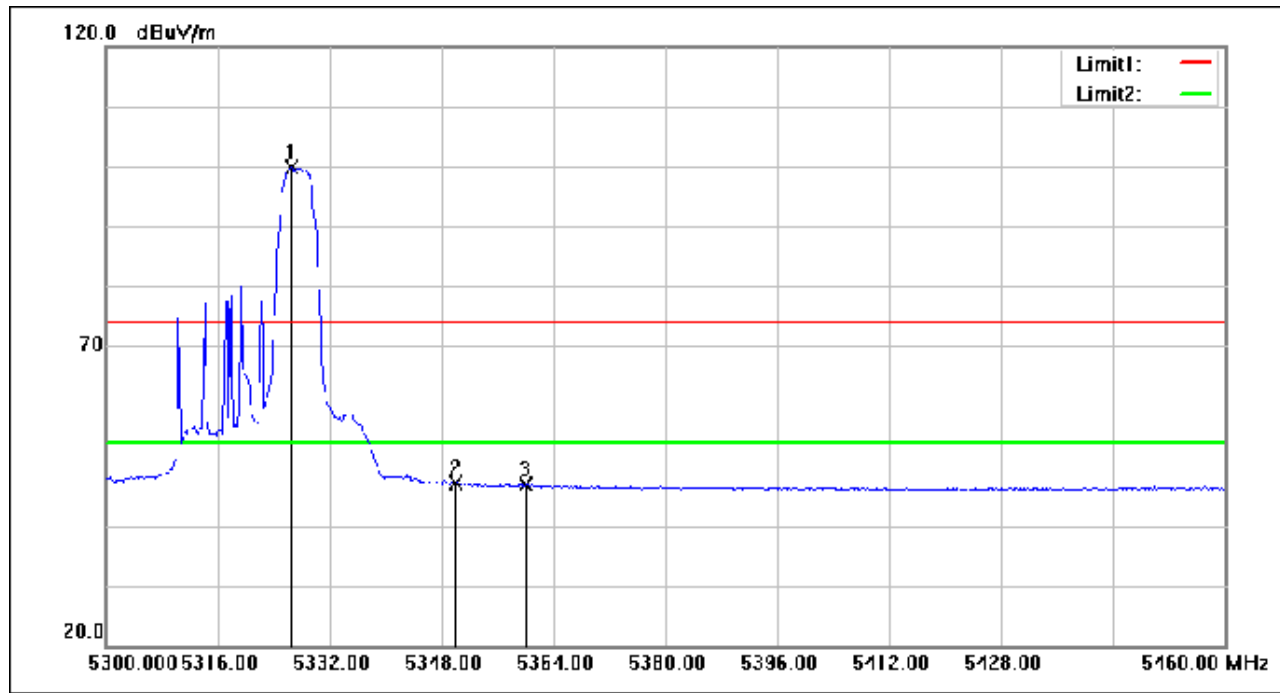

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5326.560	115.32	-15.47	99.85	54.00	45.85	AVG
2	5350.000	62.58	-15.49	47.09	54.00	-6.91	AVG
3	5360.000	62.42	-15.47	46.95	54.00	-7.05	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 562 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

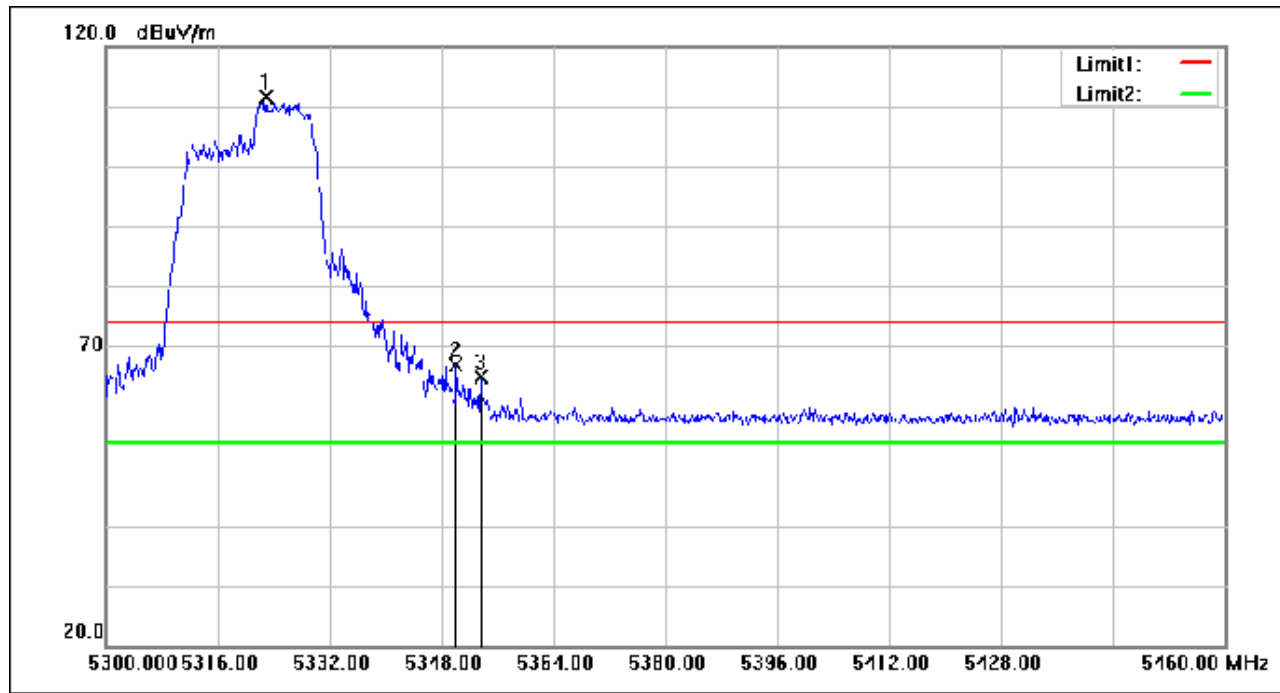

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.880	127.09	-15.47	111.62	74.00	37.62	peak
2	5350.000	82.47	-15.49	66.98	74.00	-7.02	peak
3	5353.600	80.29	-15.49	64.80	74.00	-9.20	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 563 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

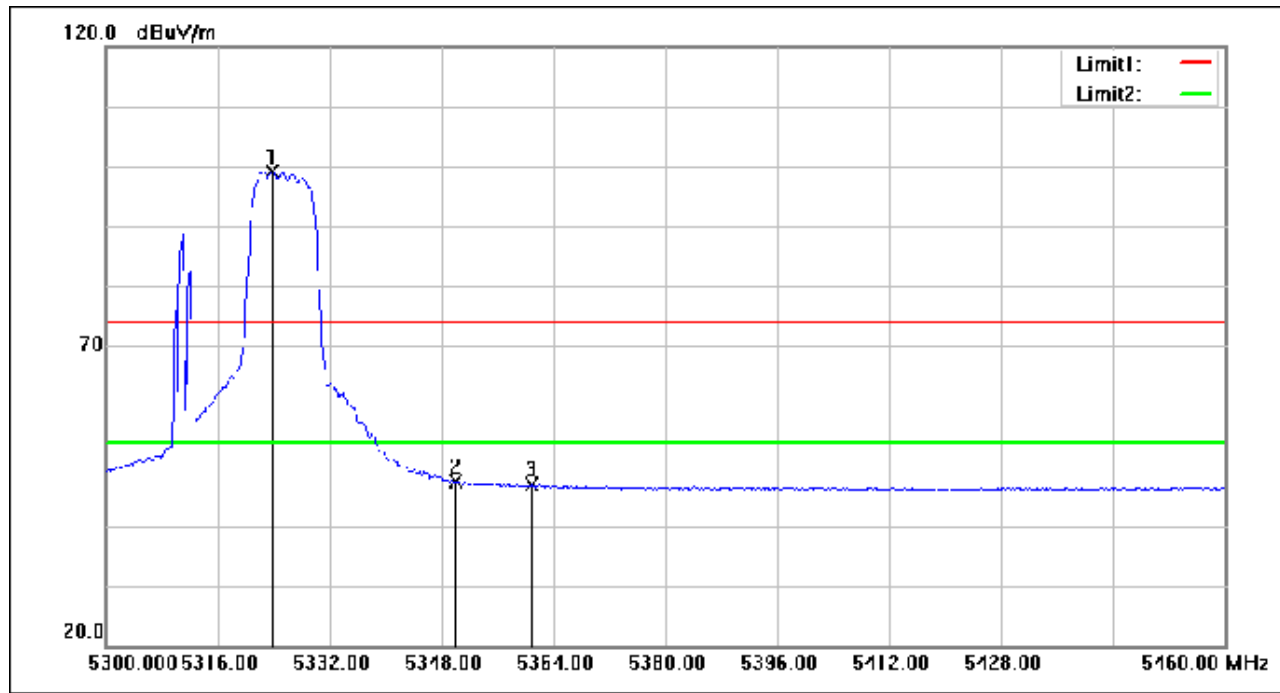

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.680	114.60	-15.47	99.13	54.00	45.13	AVG
2	5350.000	62.81	-15.49	47.32	54.00	-6.68	AVG
3	5360.800	62.29	-15.47	46.82	54.00	-7.18	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 564 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

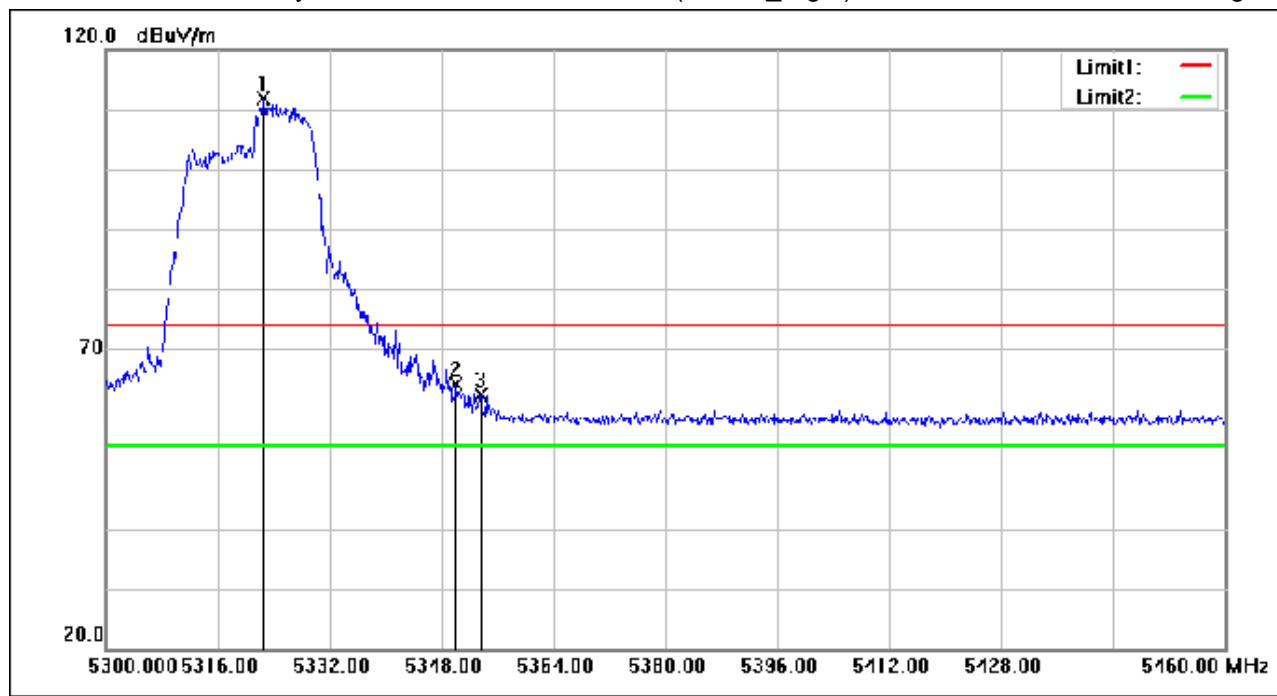

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.560	127.23	-15.47	111.76	74.00	37.76	peak
2	5350.000	79.73	-15.49	64.24	74.00	-9.76	peak
3	5353.600	77.91	-15.49	62.42	74.00	-11.58	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 565 of 929

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

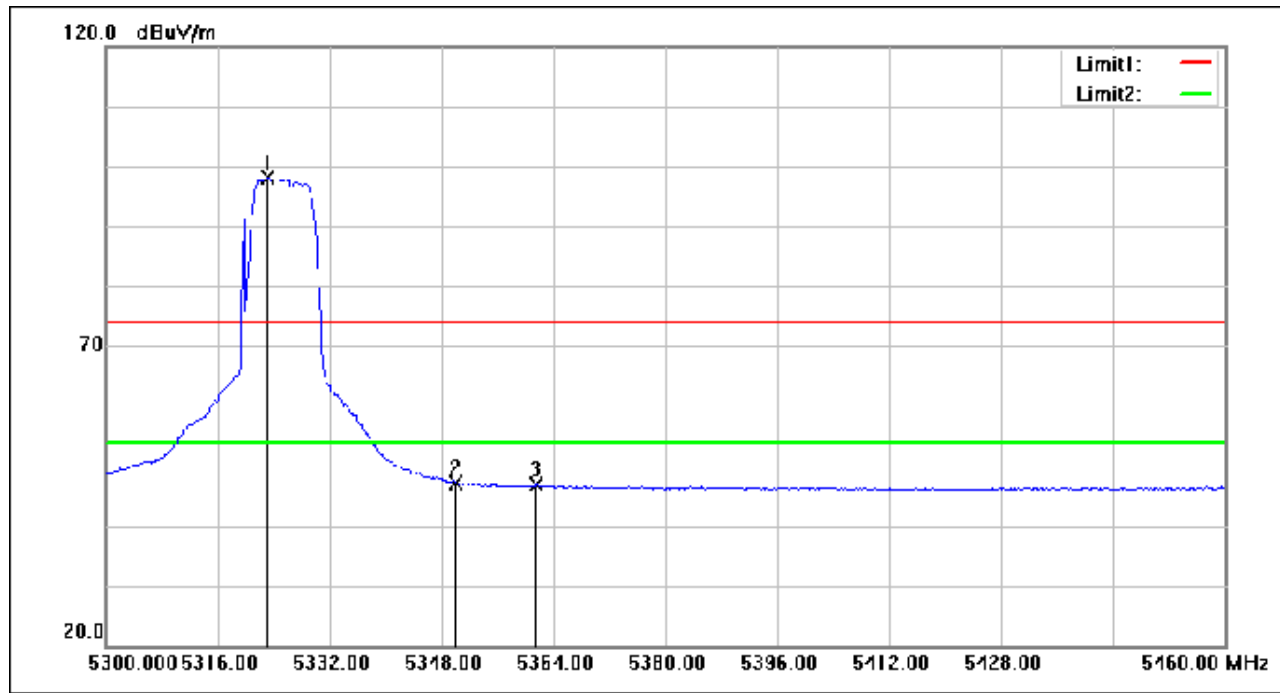

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.040	113.60	-15.47	98.13	54.00	44.13	AVG
2	5350.000	62.74	-15.49	47.25	54.00	-6.75	AVG
3	5361.600	62.34	-15.47	46.87	54.00	-7.13	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 566 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

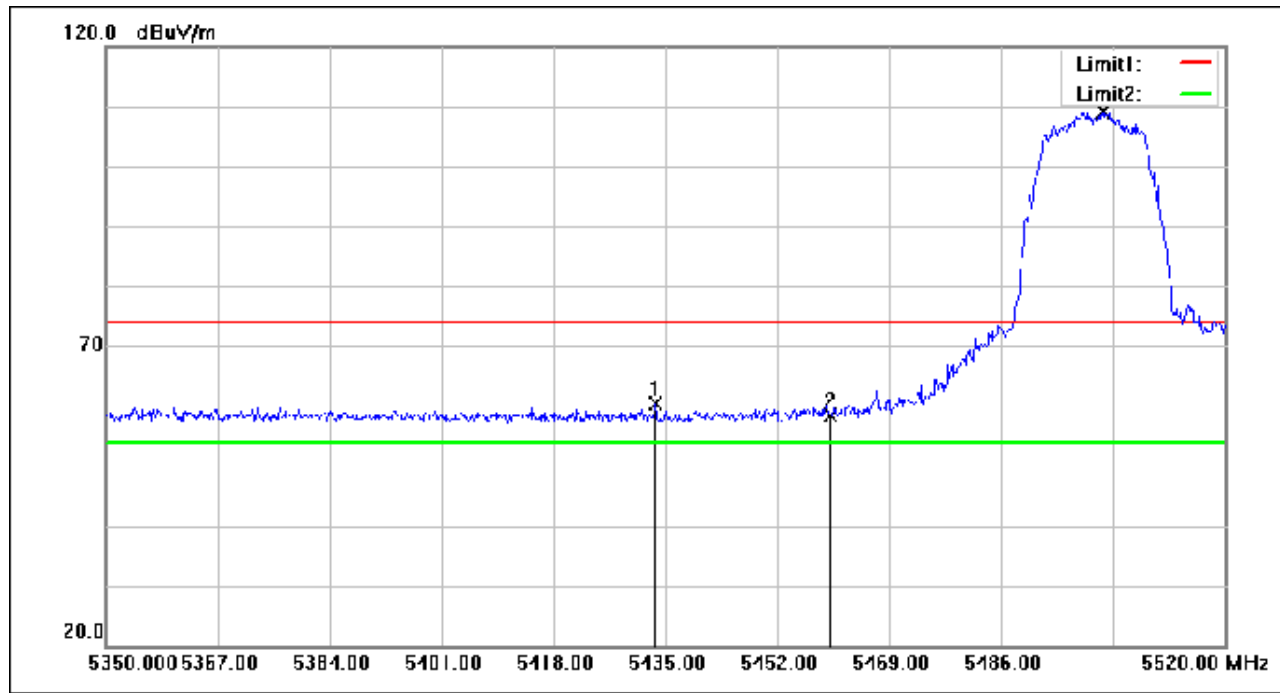

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.470	75.68	-15.34	60.34	74.00	-13.66	peak
2	5460.000	73.71	-15.30	58.41	74.00	-15.59	peak
3	5501.470	124.30	-15.25	109.05	74.00	35.05	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 567 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

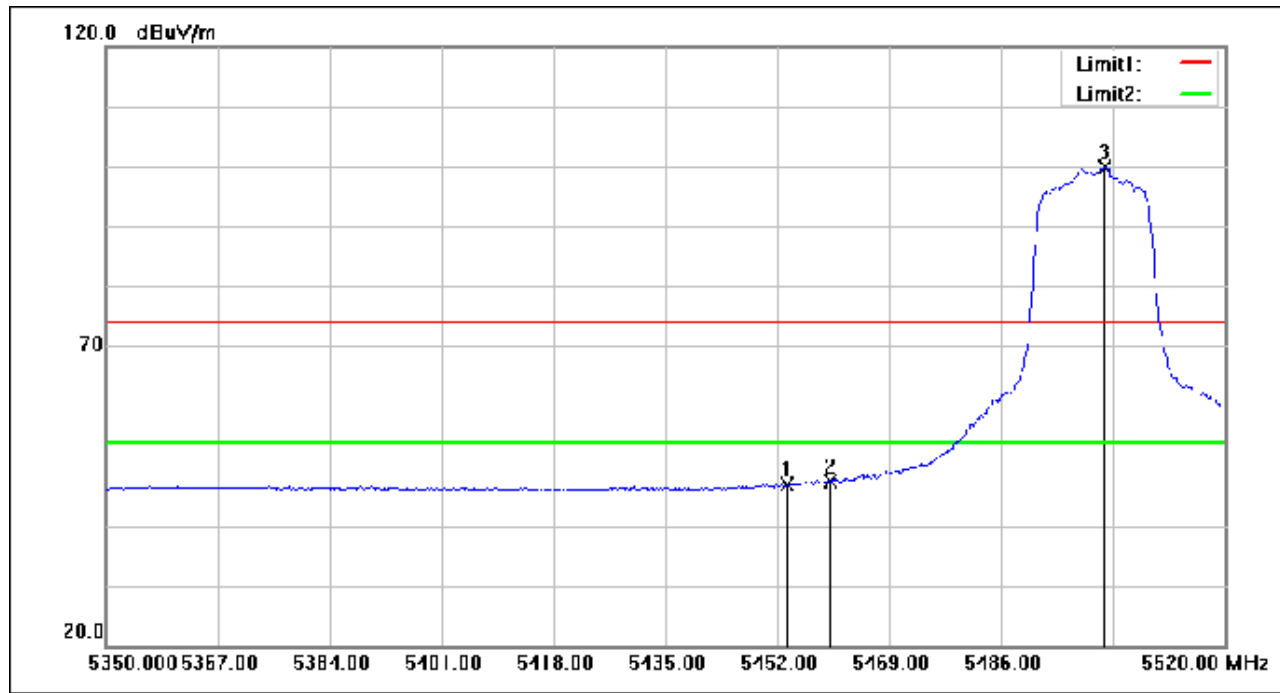

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.360	62.27	-15.30	46.97	54.00	-7.03	AVG
2	5460.000	62.71	-15.30	47.41	54.00	-6.59	AVG
3	5501.810	115.17	-15.25	99.92	54.00	45.92	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 568 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

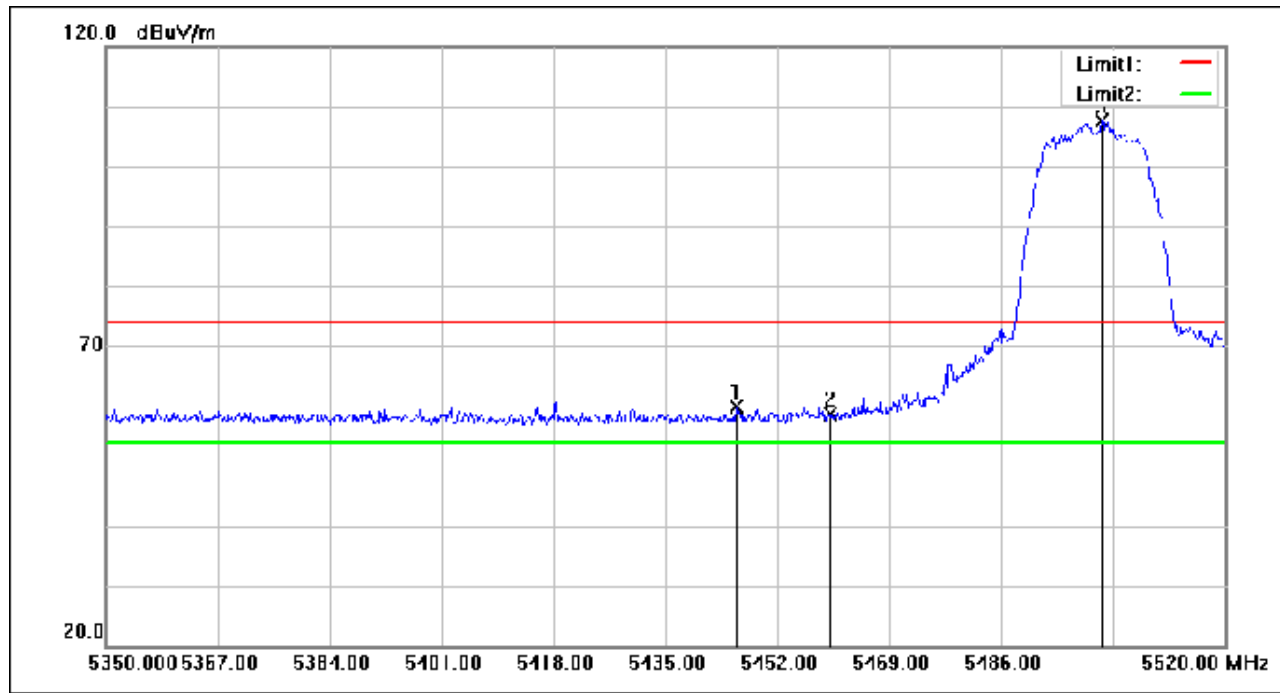

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.710	75.16	-15.32	59.84	74.00	-14.16	peak
2	5460.000	73.87	-15.30	58.57	74.00	-15.43	peak
3	5501.300	122.79	-15.25	107.54	74.00	33.54	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 569 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

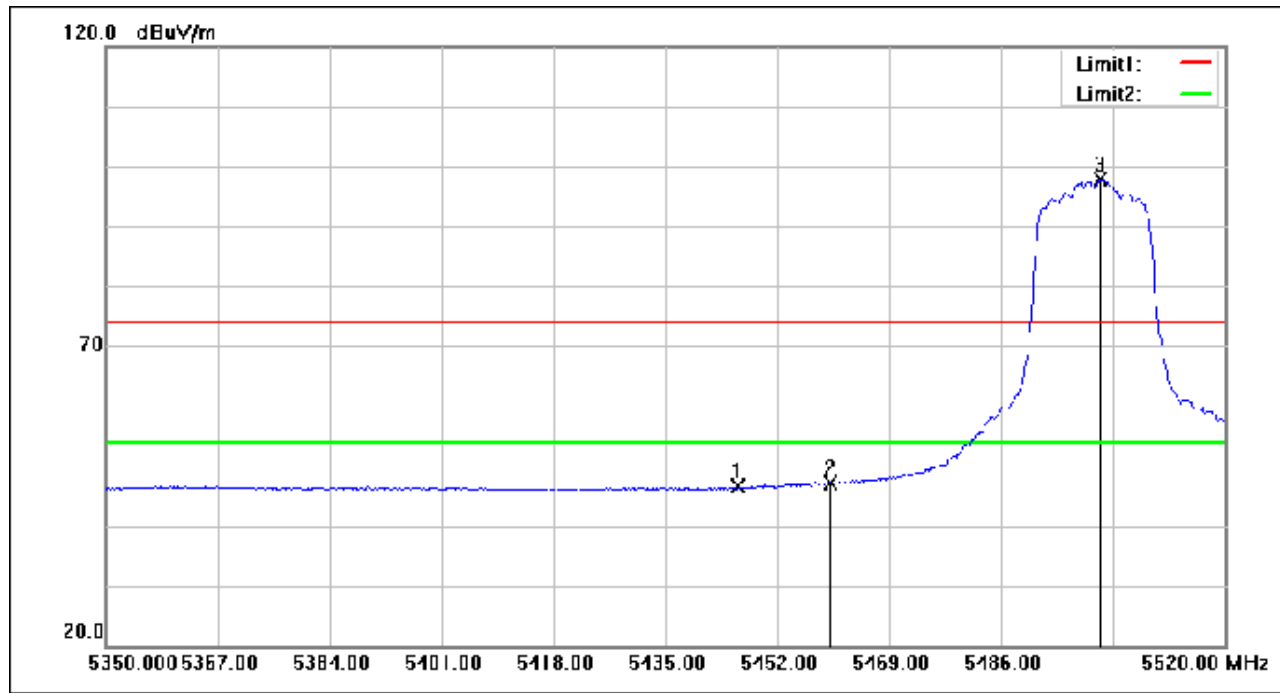

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.050	61.87	-15.32	46.55	54.00	-7.45	AVG
2	5460.000	62.50	-15.30	47.20	54.00	-6.80	AVG
3	5501.130	113.12	-15.25	97.87	54.00	43.87	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 570 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

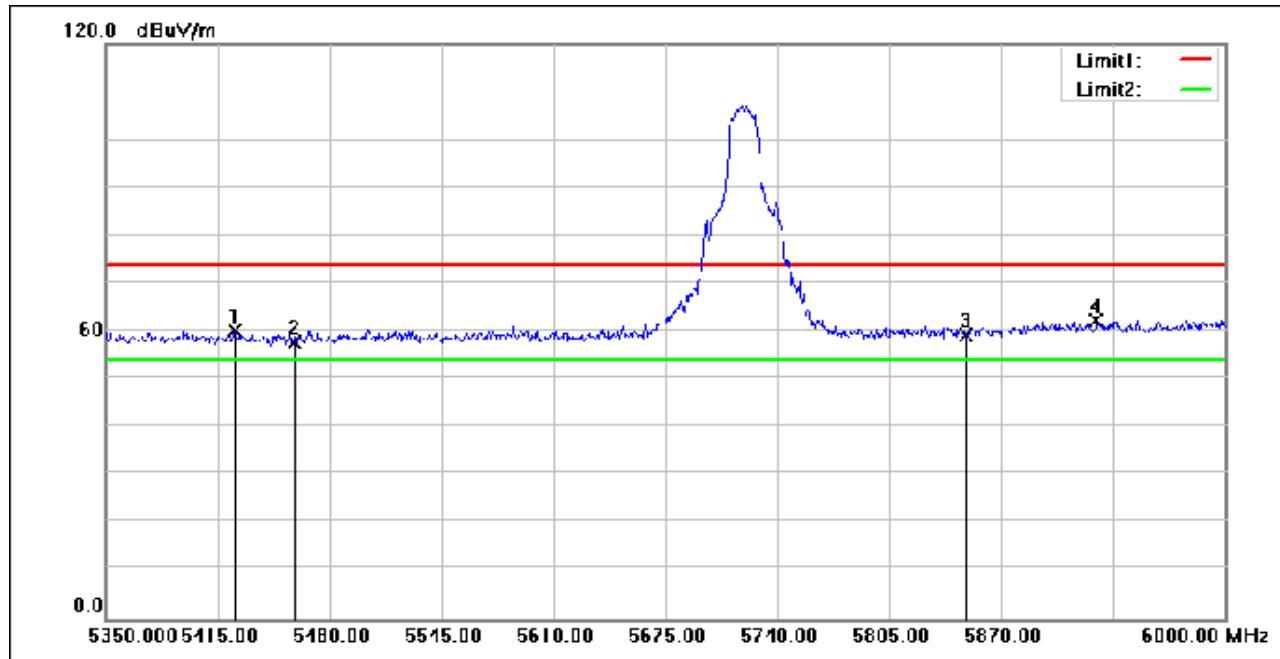

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.750	75.49	-15.36	60.13	74.00	-13.87	peak
2	5460.000	73.18	-15.30	57.88	74.00	-16.12	peak
3	5850.000	73.40	-14.03	59.37	74.00	-14.63	peak
4	5925.250	75.88	-13.55	62.33	74.00	-11.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 571 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

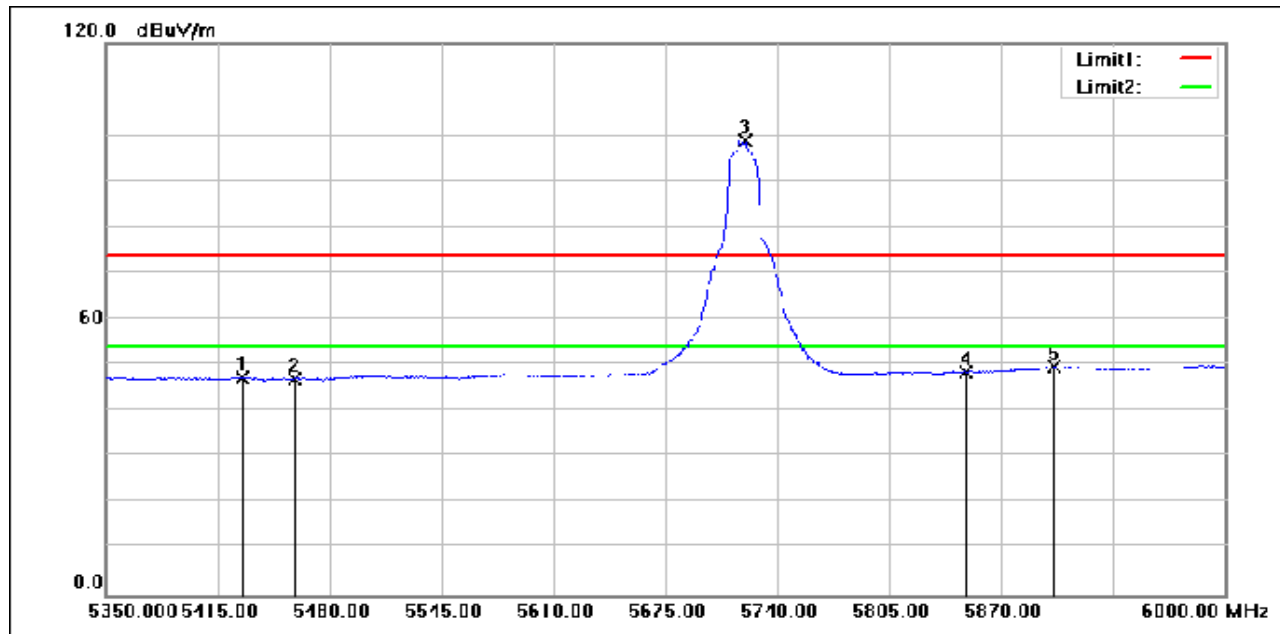

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.300	62.73	-15.35	47.38	54.00	-6.62	AVG
2	5460.000	62.24	-15.30	46.94	54.00	-7.06	AVG
3	5721.150	113.50	-14.60	98.90	54.00	44.90	AVG
4	5850.000	62.55	-14.03	48.52	54.00	-5.48	AVG
5	5900.550	63.34	-13.71	49.63	54.00	-4.37	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 572 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

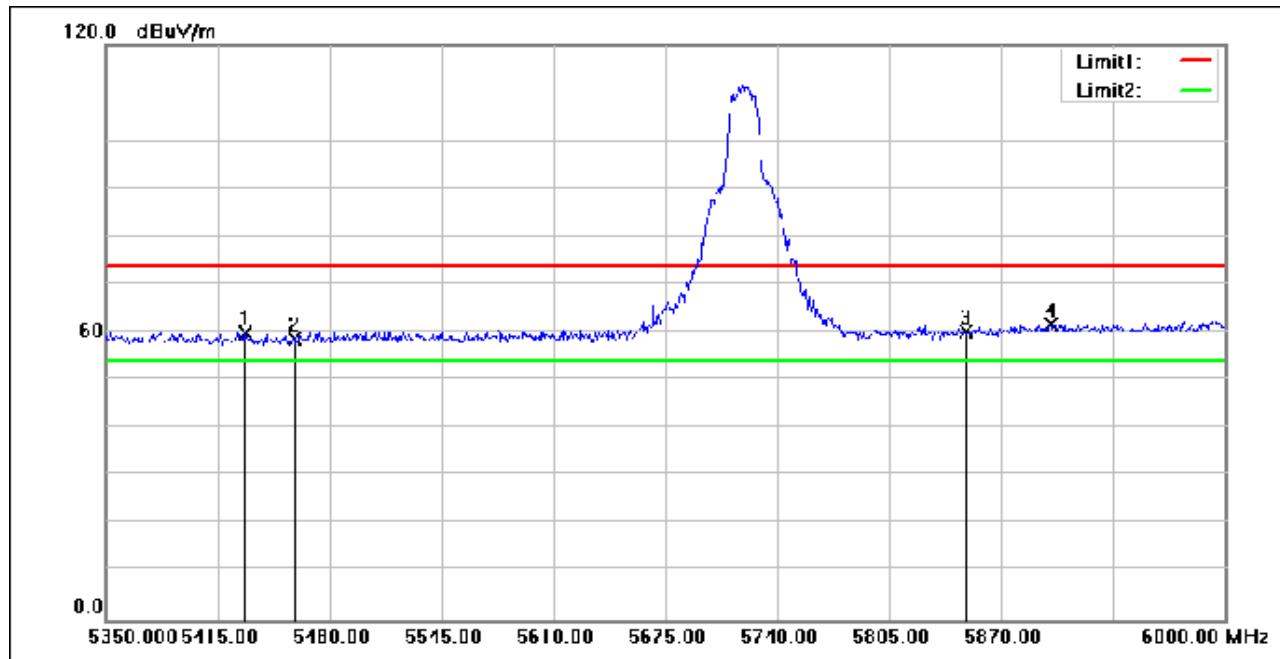

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.600	75.16	-15.34	59.82	74.00	-14.18	peak
2	5460.000	73.94	-15.30	58.64	74.00	-15.36	peak
3	5850.000	74.12	-14.03	60.09	74.00	-13.91	peak
4	5898.600	75.38	-13.72	61.66	74.00	-12.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 573 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

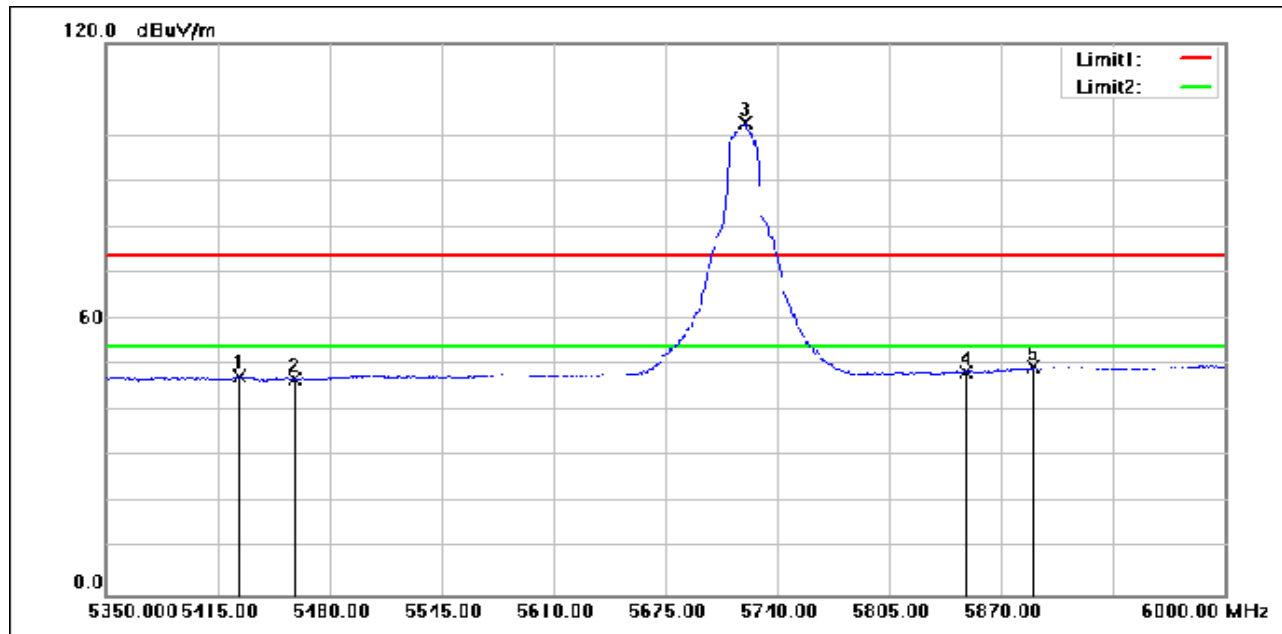

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.350	62.85	-15.36	47.49	74.00	-26.51	peak
2	5460.000	62.23	-15.30	46.93	54.00	-7.07	AVG
3	5721.150	117.37	-14.60	102.77	54.00	48.77	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5888.850	63.35	-13.79	49.56	54.00	-4.44	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 574 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

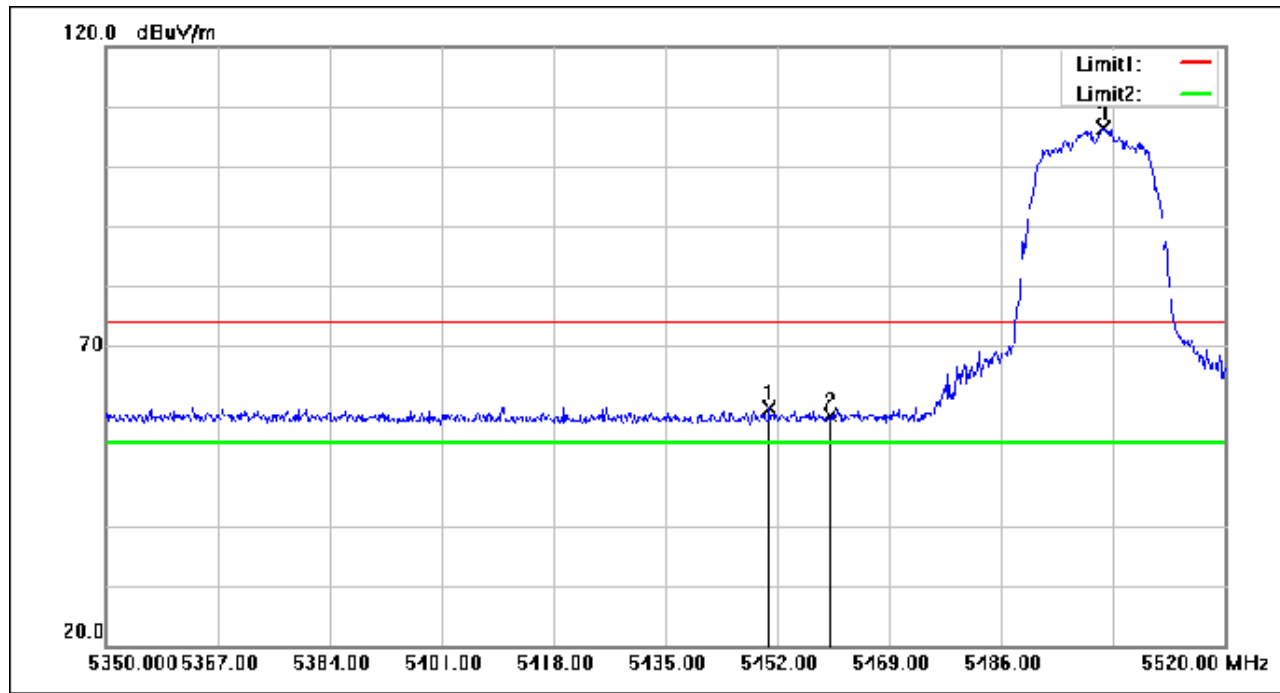

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.810	74.83	-15.31	59.52	74.00	-14.48	peak
2	5460.000	73.57	-15.30	58.27	74.00	-15.73	peak
3	5501.470	121.71	-15.25	106.46	74.00	32.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 575 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

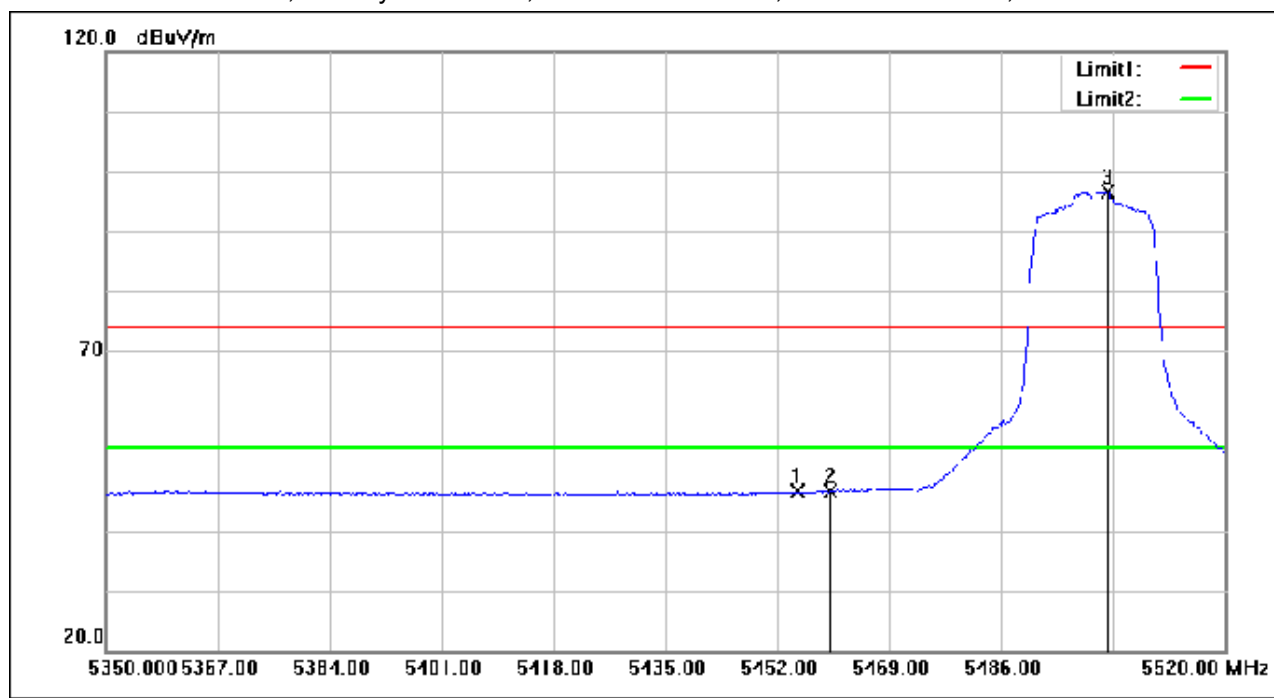

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.060	61.86	-15.30	46.56	54.00	-7.44	AVG
2	5460.000	61.97	-15.30	46.67	54.00	-7.33	AVG
3	5502.150	111.81	-15.25	96.56	54.00	42.56	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 576 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

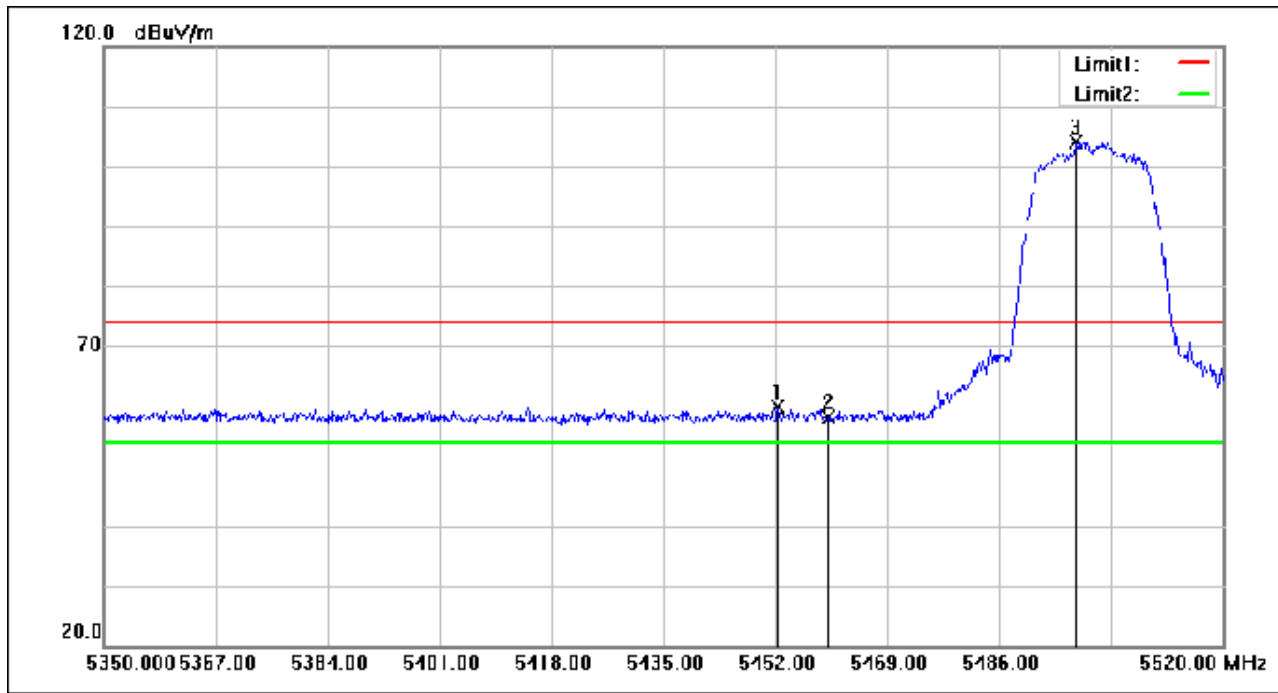

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.340	75.26	-15.30	59.96	74.00	-14.04	peak
2	5460.000	73.35	-15.30	58.05	74.00	-15.95	peak
3	5497.730	119.44	-15.25	104.19	74.00	30.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 577 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

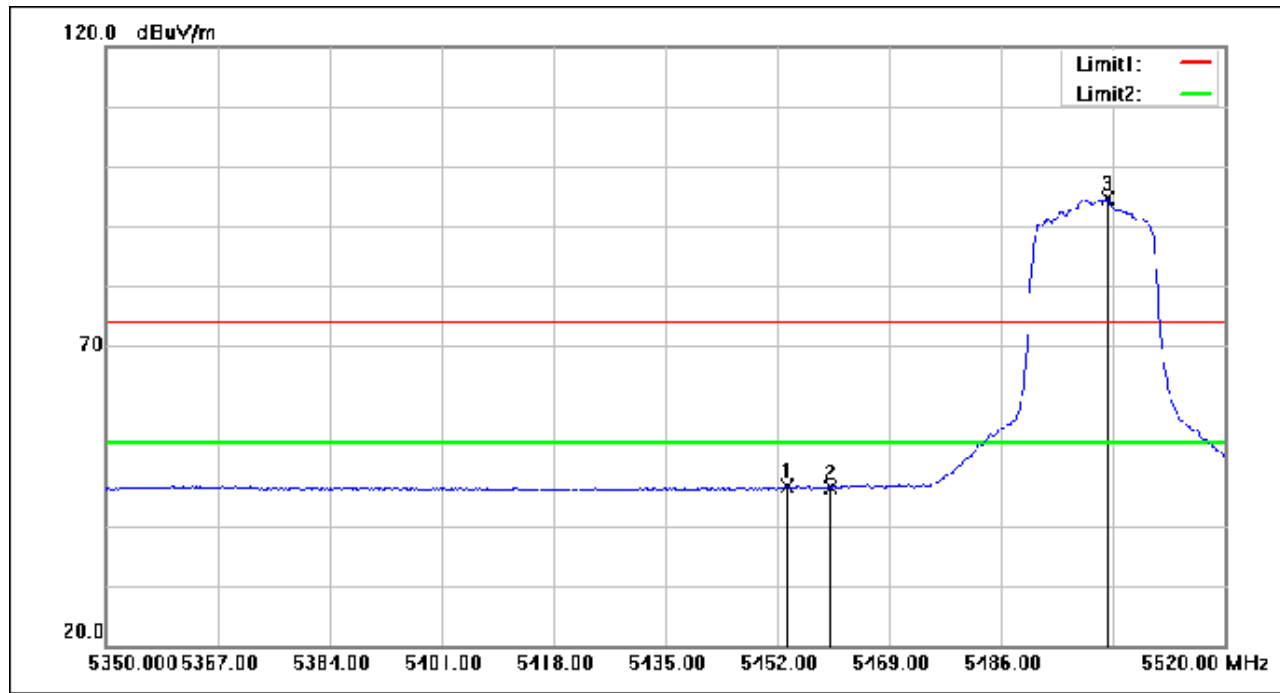

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.360	61.97	-15.30	46.67	54.00	-7.33	AVG
2	5460.000	61.71	-15.30	46.41	54.00	-7.59	AVG
3	5502.150	109.79	-15.25	94.54	54.00	40.54	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 578 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

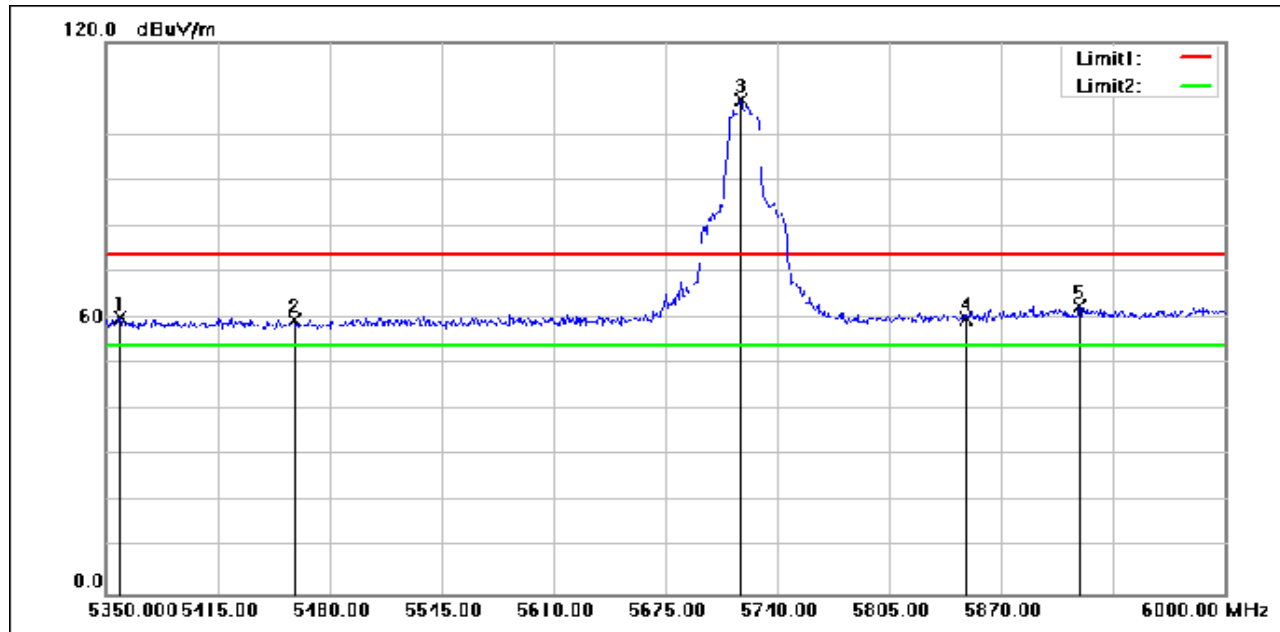

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5358.450	75.65	-15.47	60.18	74.00	-13.82	peak
2	5460.000	74.84	-15.30	59.54	74.00	-14.46	peak
3	5718.550	122.27	-14.61	107.66	74.00	33.66	peak
4	5850.000	74.01	-14.03	59.98	74.00	-14.02	peak
5	5915.500	76.13	-13.62	62.51	74.00	-11.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 579 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

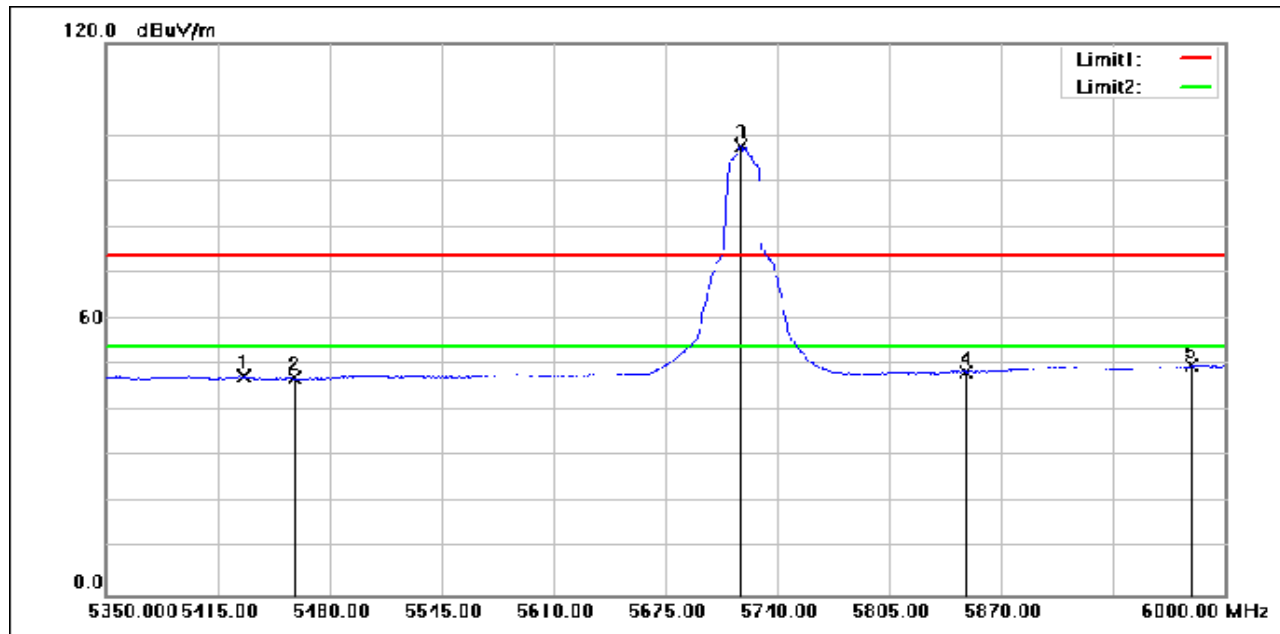

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.90	-15.35	47.55	54.00	-6.45	AVG
2	5460.000	62.41	-15.30	47.11	54.00	-6.89	AVG
3	5718.550	112.40	-14.61	97.79	54.00	43.79	AVG
4	5850.000	62.58	-14.03	48.55	54.00	-5.45	AVG
5	5980.500	63.02	-13.20	49.82	54.00	-4.18	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 580 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

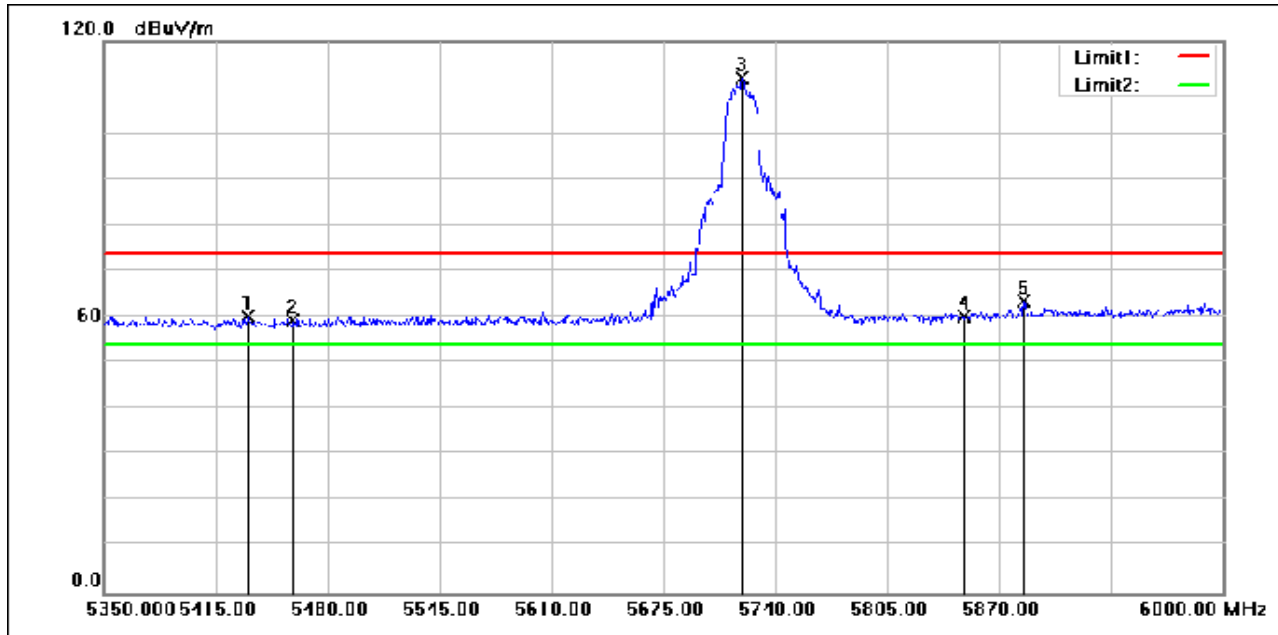

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.850	75.63	-15.34	60.29	74.00	-13.71	peak
2	5460.000	74.57	-15.30	59.27	74.00	-14.73	peak
3	5720.500	126.79	-14.60	112.19	74.00	38.19	peak
4	5850.000	74.08	-14.03	60.05	74.00	-13.95	peak
5	5884.300	77.16	-13.81	63.35	74.00	-10.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 581 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

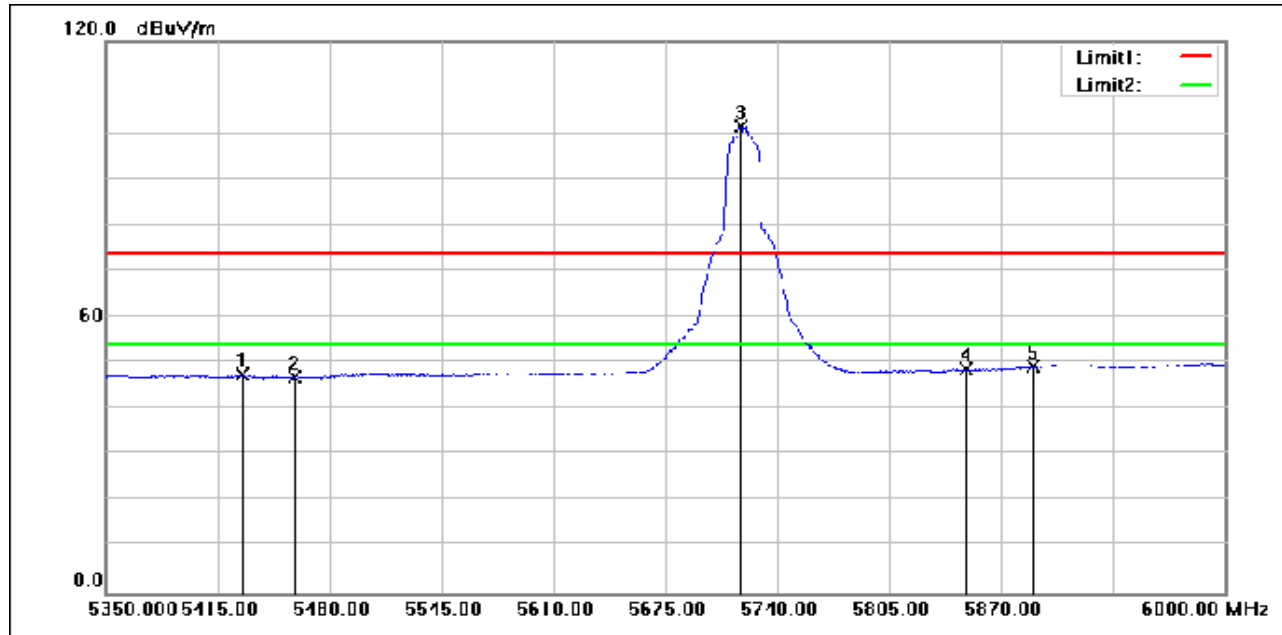

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.300	62.79	-15.35	47.44	54.00	-6.56	AVG
2	5460.000	62.25	-15.30	46.95	54.00	-7.05	AVG
3	5718.550	116.20	-14.61	101.59	54.00	47.59	AVG
4	5850.000	62.68	-14.03	48.65	54.00	-5.35	AVG
5	5888.850	63.07	-13.79	49.28	54.00	-4.72	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 582 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

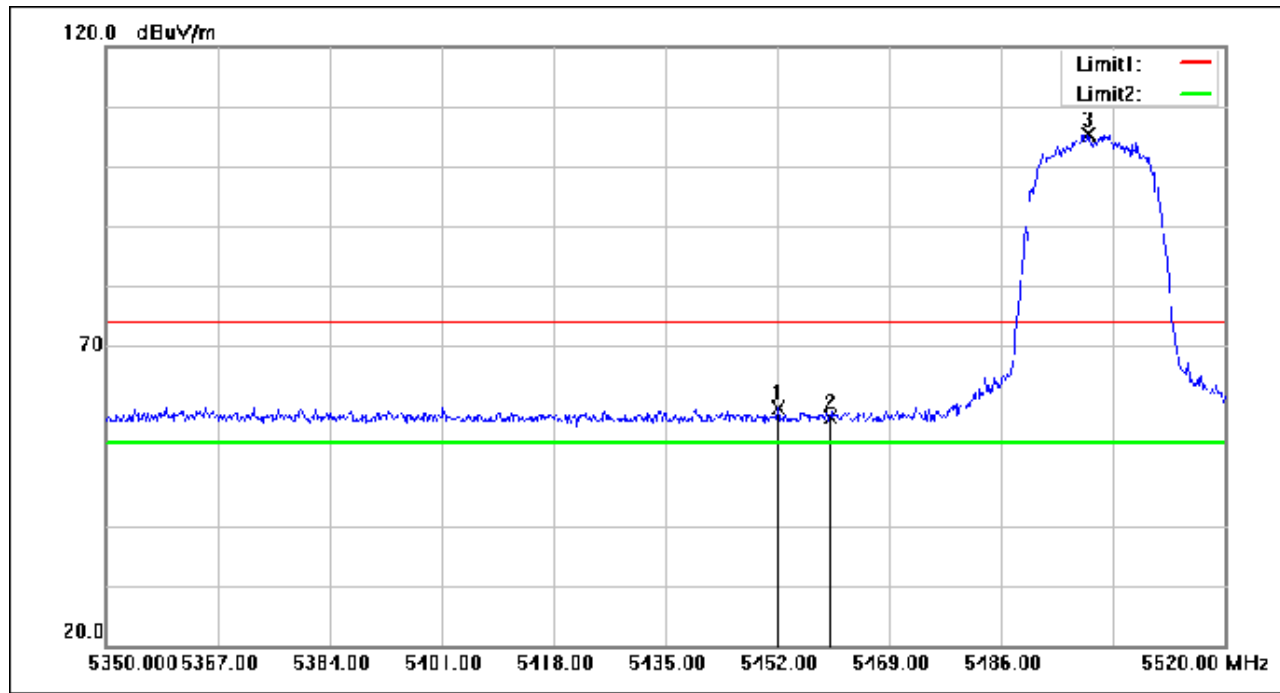

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.170	74.91	-15.30	59.61	74.00	-14.39	peak
2	5460.000	73.34	-15.30	58.04	74.00	-15.96	peak
3	5499.260	120.63	-15.25	105.38	74.00	31.38	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 583 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

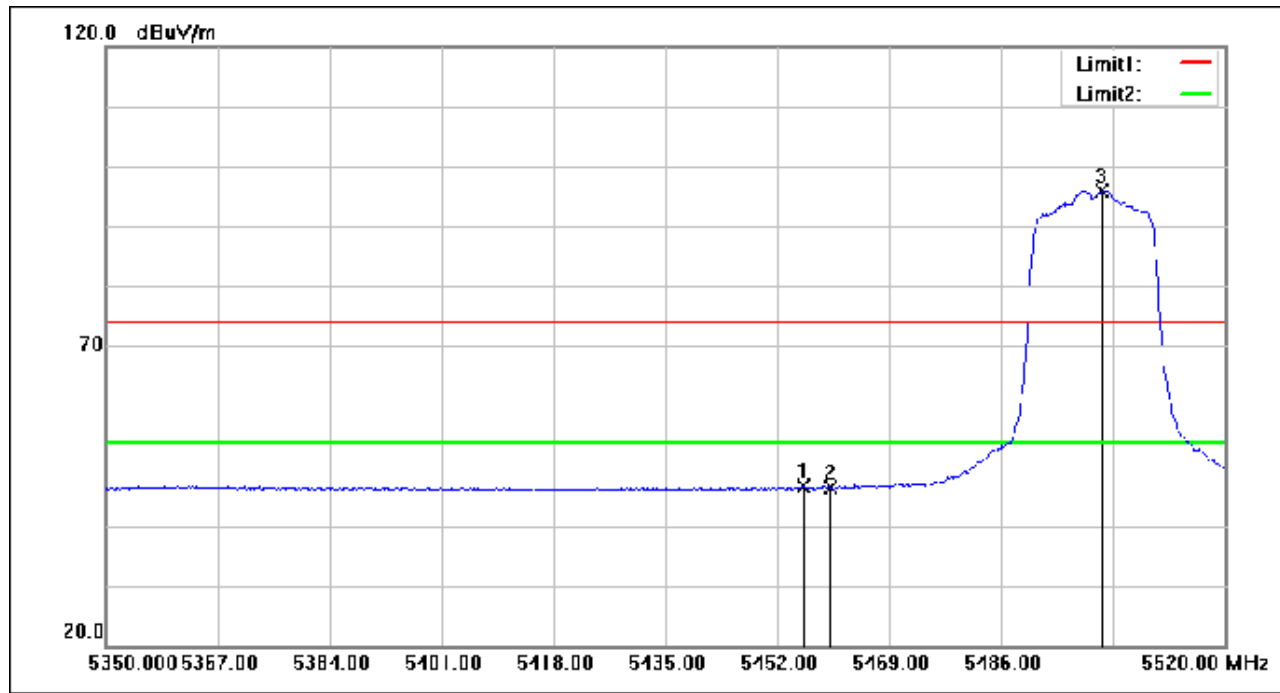

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.910	61.86	-15.30	46.56	54.00	-7.44	AVG
2	5460.000	61.56	-15.30	46.26	54.00	-7.74	AVG
3	5501.300	111.24	-15.25	95.99	54.00	41.99	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 584 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

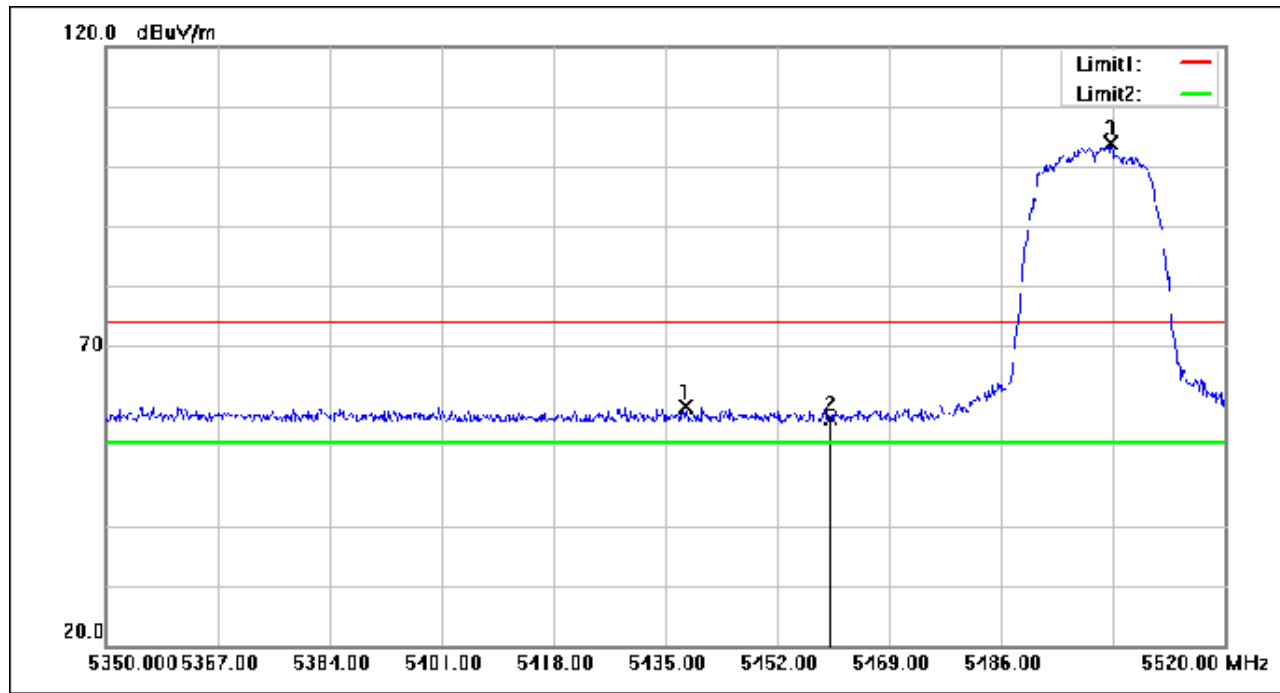

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.060	75.15	-15.34	59.81	74.00	-14.19	peak
2	5460.000	73.26	-15.30	57.96	74.00	-16.04	peak
3	5502.660	119.22	-15.24	103.98	74.00	29.98	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 585 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

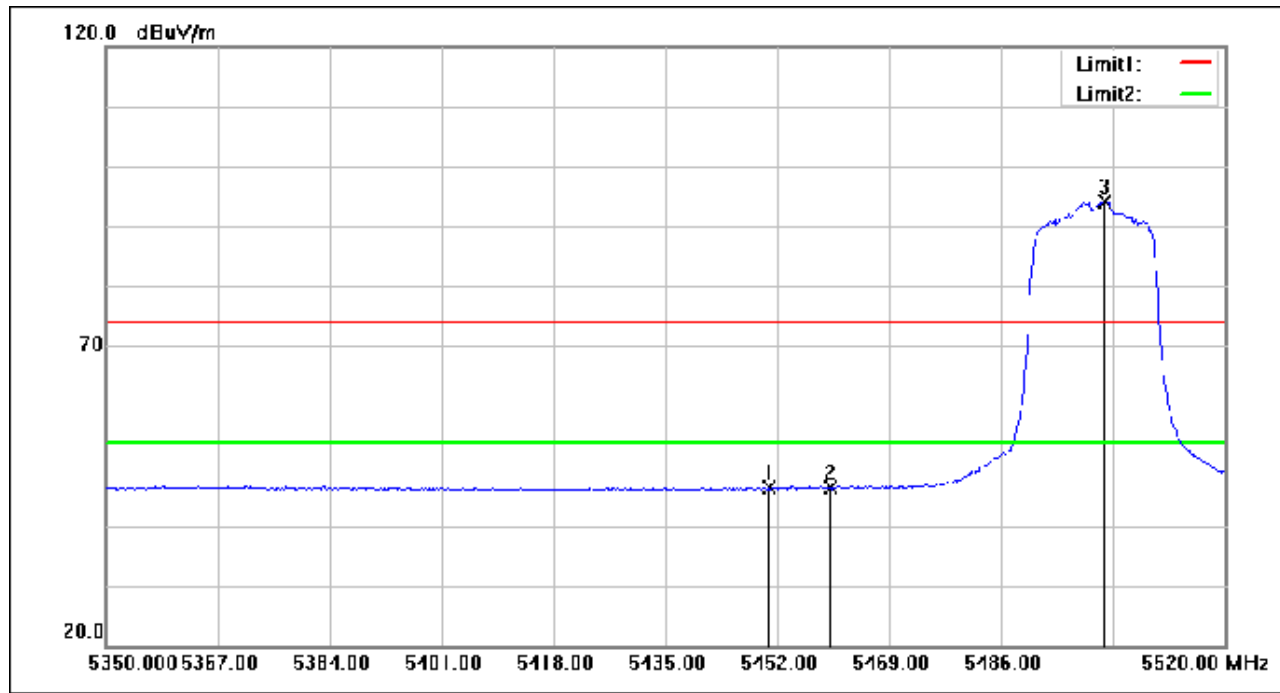

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.640	61.75	-15.32	46.43	54.00	-7.57	AVG
2	5460.000	61.58	-15.30	46.28	54.00	-7.72	AVG
3	5501.640	109.37	-15.25	94.12	54.00	40.12	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 586 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: CH144(5720MHz)

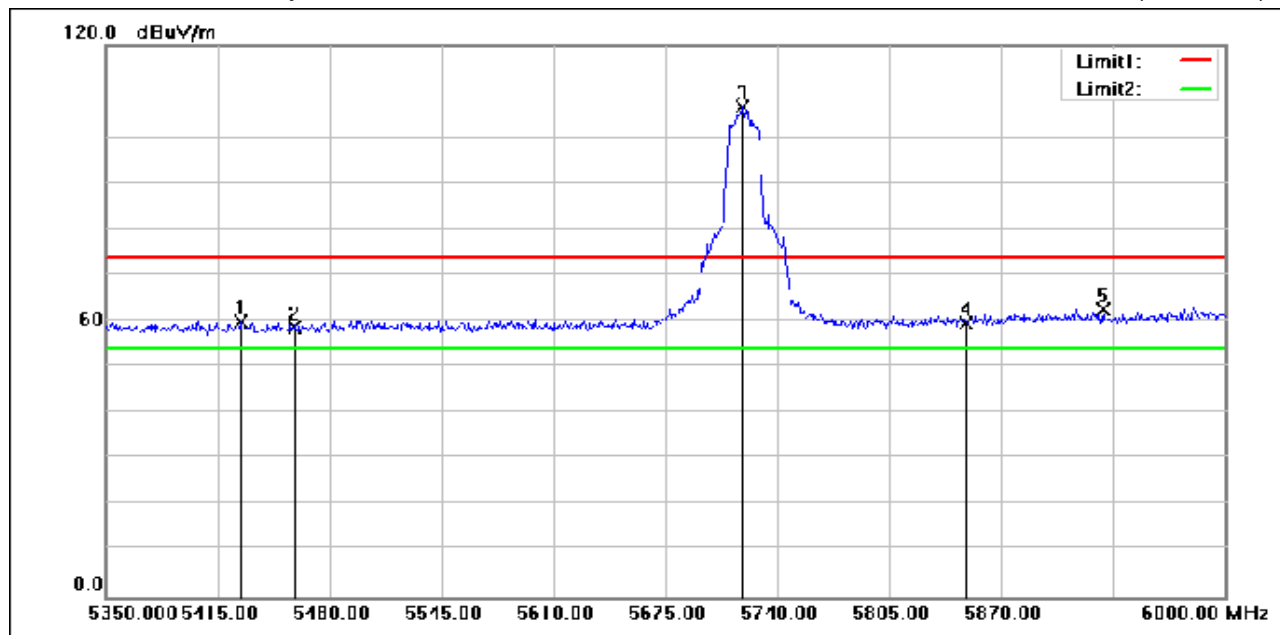

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.000	75.15	-15.36	59.79	74.00	-14.21	peak
2	5460.000	73.93	-15.30	58.63	74.00	-15.37	peak
3	5719.200	121.19	-14.61	106.58	74.00	32.58	peak
4	5850.000	73.53	-14.03	59.50	74.00	-14.50	peak
5	5929.150	76.10	-13.53	62.57	74.00	-11.43	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 587 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

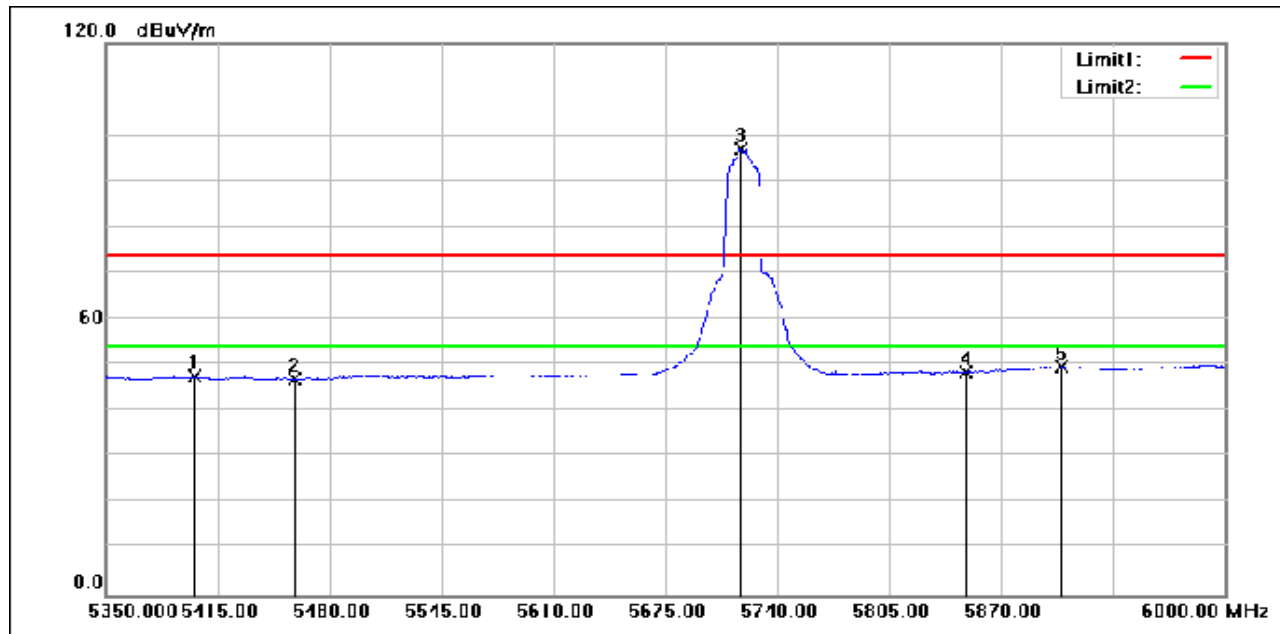

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5401.350	62.88	-15.40	47.48	54.00	-6.52	AVG
2	5460.000	62.29	-15.30	46.99	54.00	-7.01	AVG
3	5718.550	111.73	-14.61	97.12	54.00	43.12	AVG
4	5850.000	62.63	-14.03	48.60	54.00	-5.40	AVG
5	5905.100	63.39	-13.68	49.71	54.00	-4.29	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 588 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

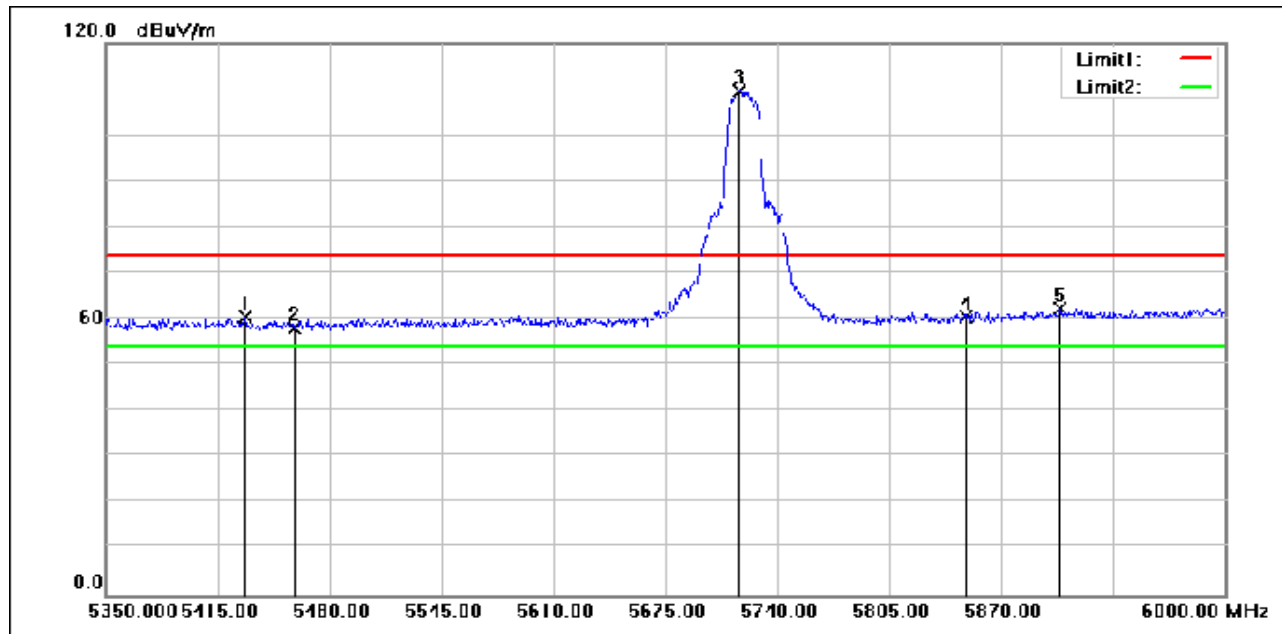

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.600	75.81	-15.34	60.47	74.00	-13.53	peak
2	5460.000	73.43	-15.30	58.13	74.00	-15.87	peak
3	5717.900	124.25	-14.61	109.64	74.00	35.64	peak
4	5850.000	74.50	-14.03	60.47	74.00	-13.53	peak
5	5903.800	76.02	-13.69	62.33	74.00	-11.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 589 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

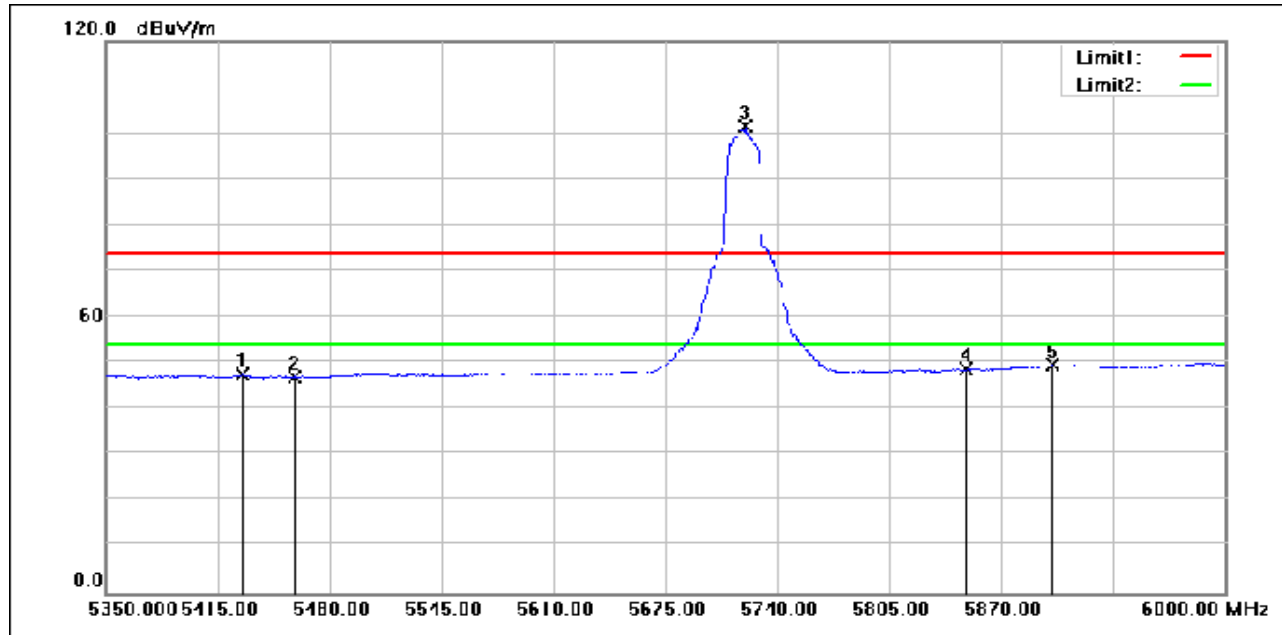

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.300	62.76	-15.35	47.41	54.00	-6.59	AVG
2	5460.000	62.26	-15.30	46.96	54.00	-7.04	AVG
3	5721.150	116.09	-14.60	101.49	54.00	47.49	AVG
4	5850.000	62.68	-14.03	48.65	54.00	-5.35	AVG
5	5899.900	63.32	-13.72	49.60	54.00	-4.40	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 590 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

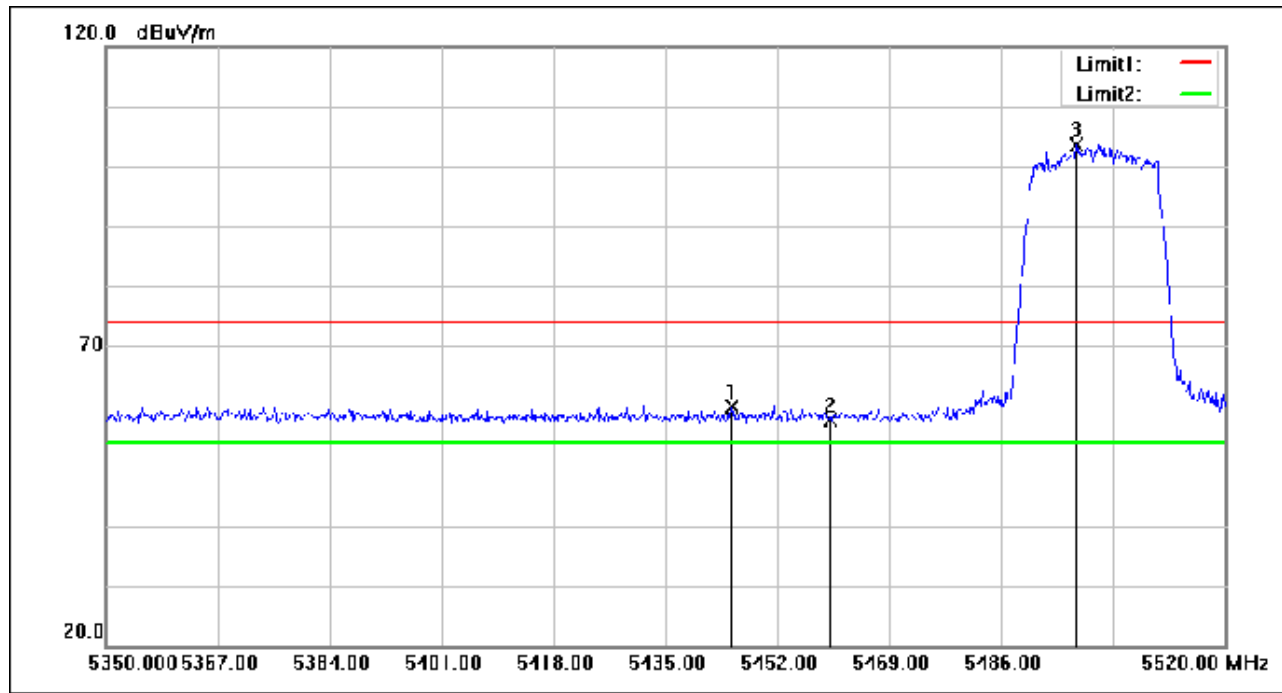

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.030	75.21	-15.32	59.89	74.00	-14.11	peak
2	5460.000	72.95	-15.30	57.65	74.00	-16.35	peak
3	5497.390	118.95	-15.25	103.70	74.00	29.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 591 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

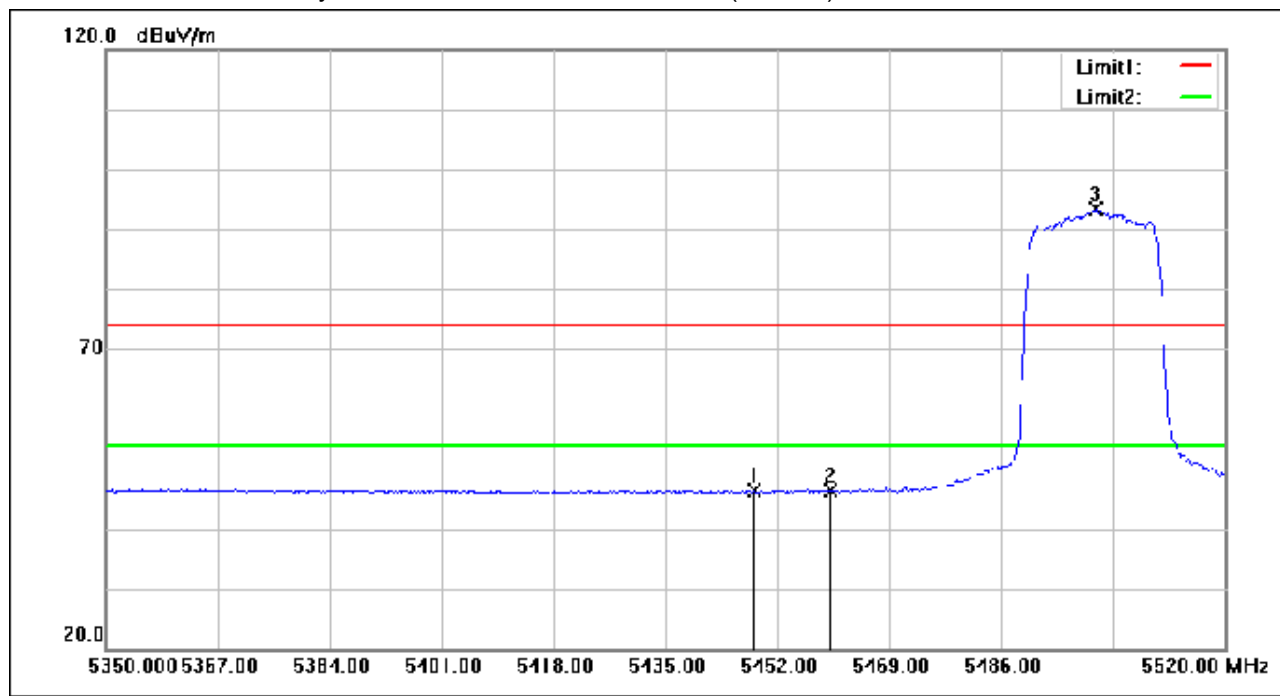

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.430	61.74	-15.32	46.42	54.00	-7.58	AVG
2	5460.000	61.58	-15.30	46.28	54.00	-7.72	AVG
3	5500.450	108.62	-15.25	93.37	54.00	39.37	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 592 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

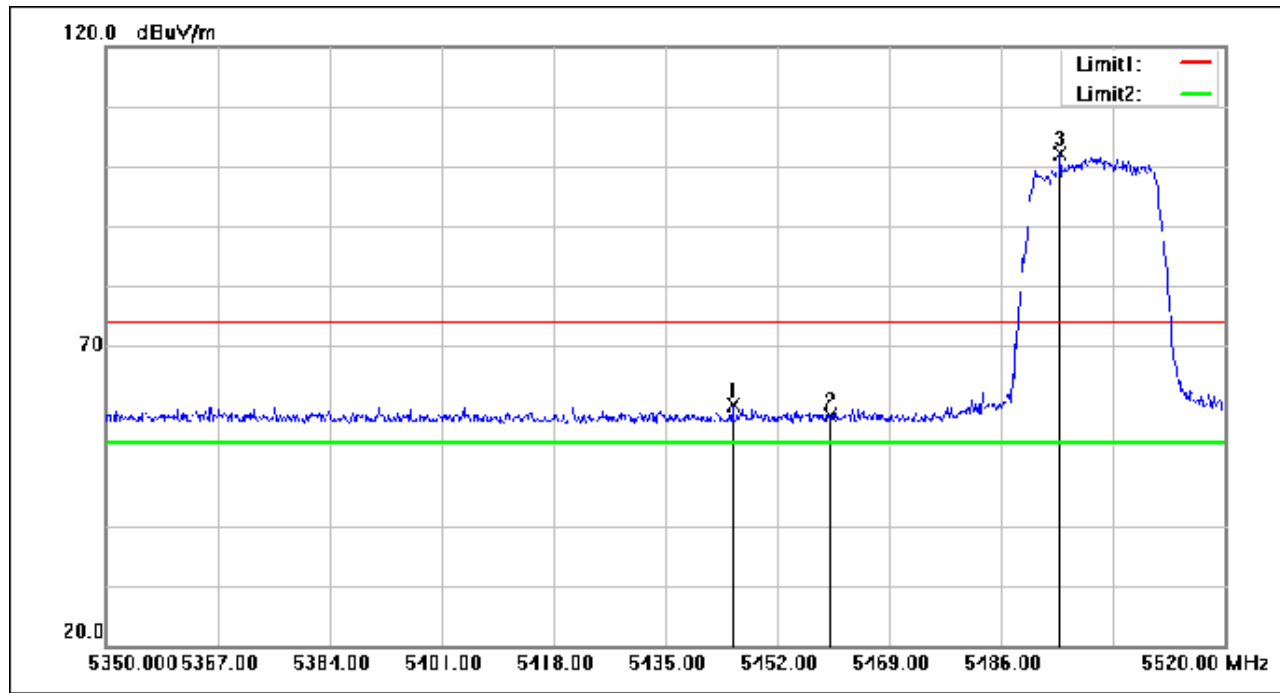

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.200	75.36	-15.32	60.04	74.00	-13.96	peak
2	5460.000	73.64	-15.30	58.34	74.00	-15.66	peak
3	5495.010	117.41	-15.25	102.16	74.00	28.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 593 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

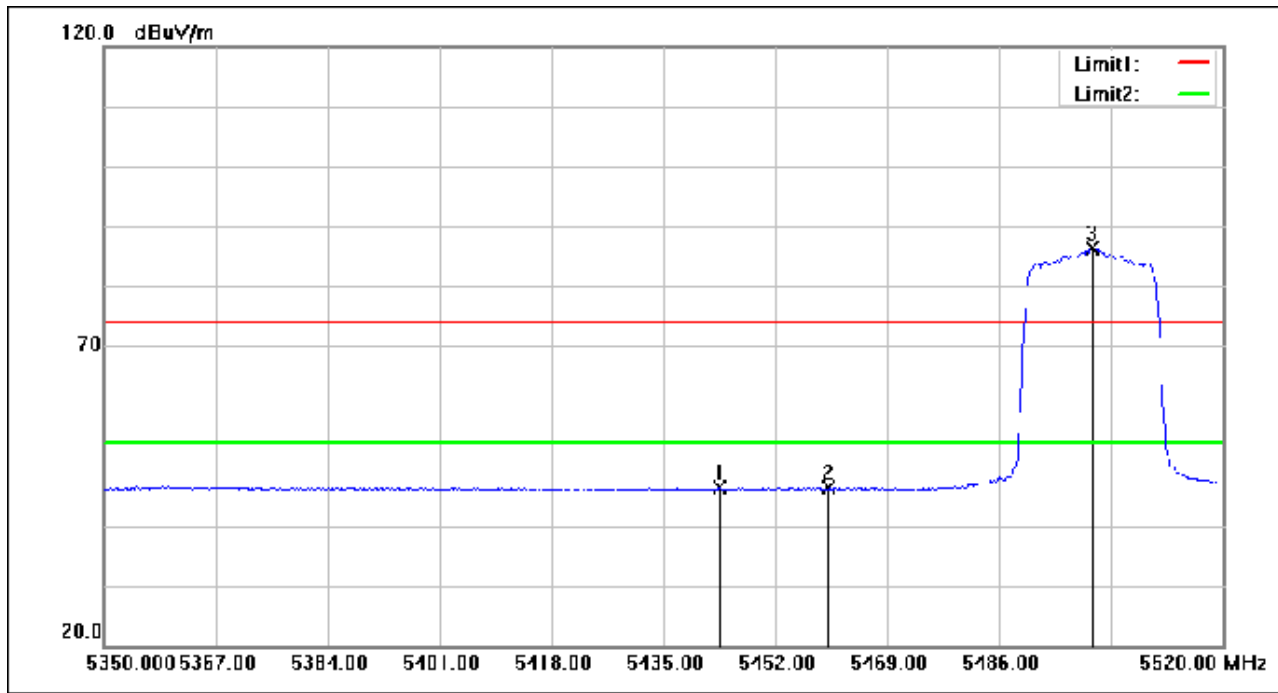

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.500	61.64	-15.32	46.32	54.00	-7.68	AVG
2	5460.000	61.59	-15.30	46.29	54.00	-7.71	AVG
3	5500.110	101.67	-15.25	86.42	54.00	32.42	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 594 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

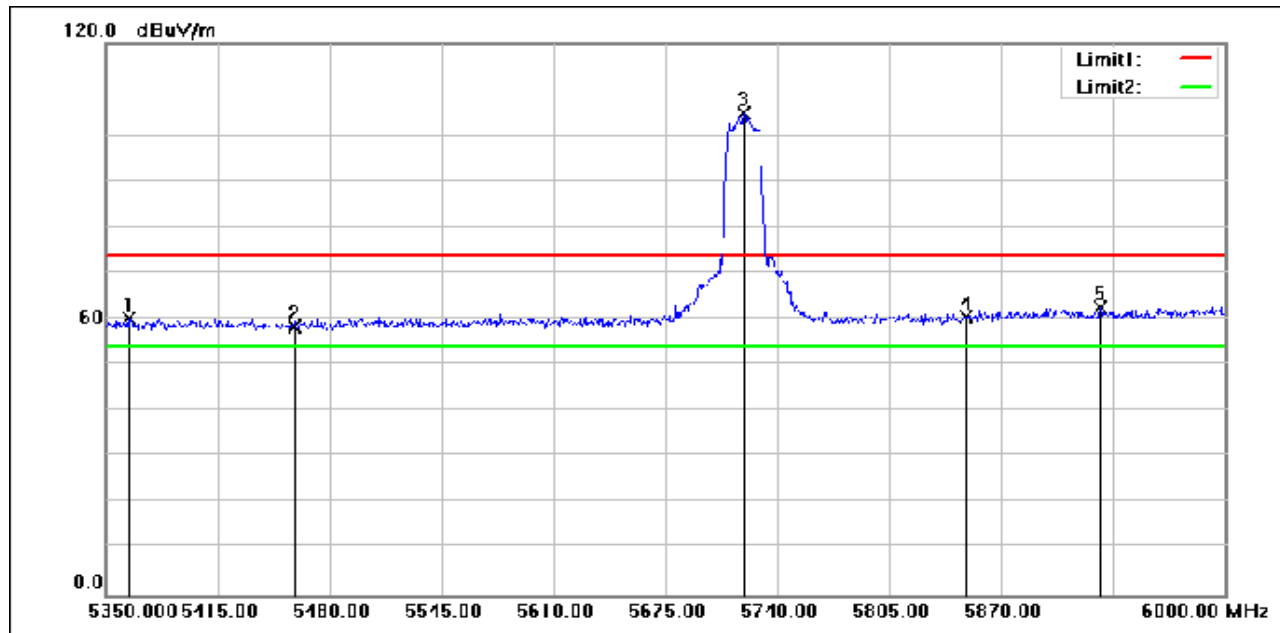

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5363.000	75.76	-15.47	60.29	74.00	-13.71	peak
2	5460.000	73.70	-15.30	58.40	74.00	-15.60	peak
3	5720.500	119.45	-14.60	104.85	74.00	30.85	peak
4	5850.000	74.61	-14.03	60.58	74.00	-13.42	peak
5	5927.200	76.12	-13.54	62.58	74.00	-11.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 595 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

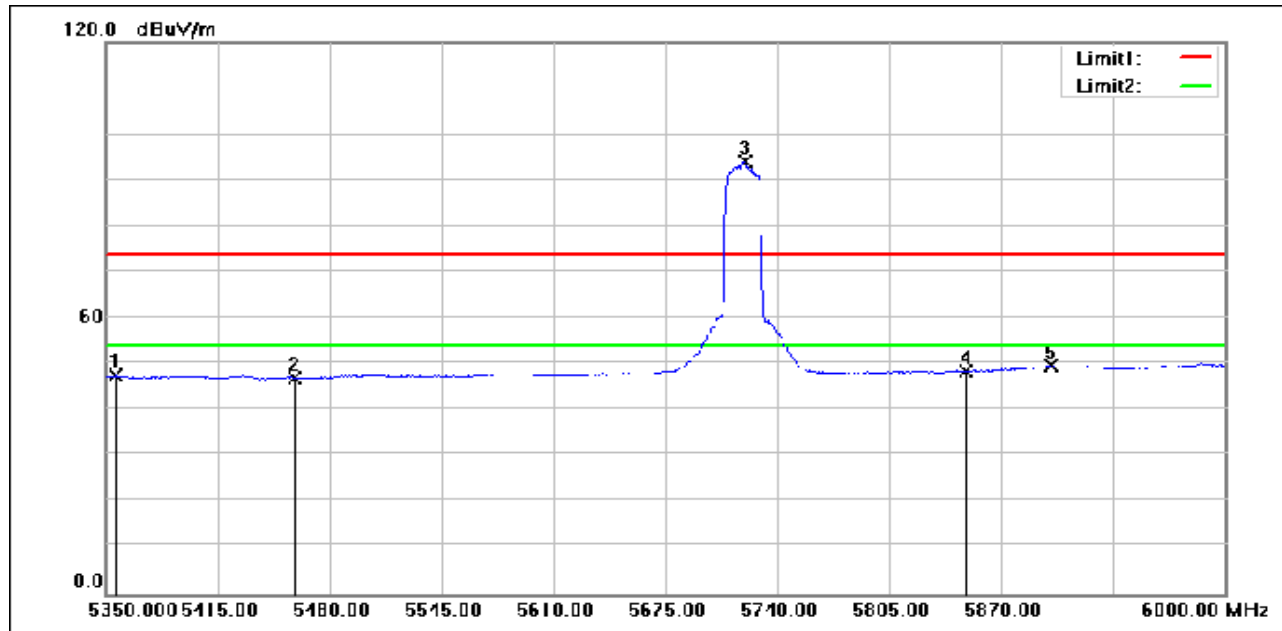

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5355.850	62.98	-15.49	47.49	54.00	-6.51	AVG
2	5460.000	62.25	-15.30	46.95	54.00	-7.05	AVG
3	5721.150	108.73	-14.60	94.13	54.00	40.13	AVG
4	5850.000	62.60	-14.03	48.57	54.00	-5.43	AVG
5	5899.250	63.39	-13.72	49.67	54.00	-4.33	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 596 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(Full RU); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

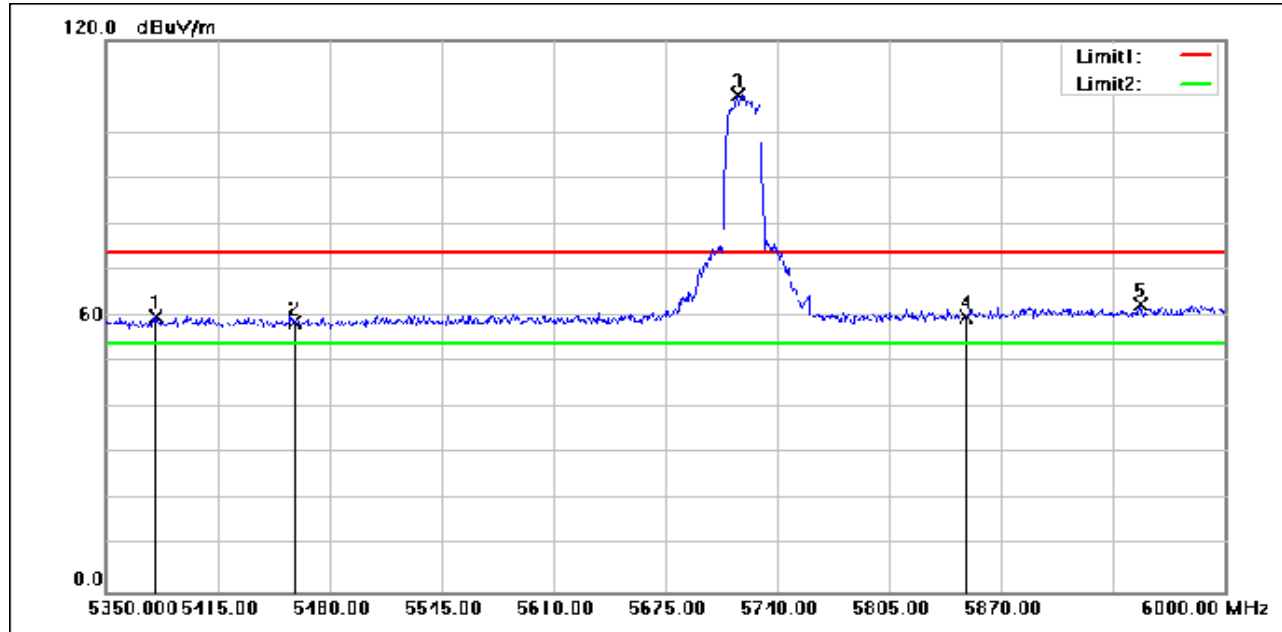

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5379.250	75.32	-15.44	59.88	74.00	-14.12	peak
2	5460.000	73.86	-15.30	58.56	74.00	-15.44	peak
3	5716.600	122.77	-14.61	108.16	74.00	34.16	peak
4	5850.000	73.96	-14.03	59.93	74.00	-14.07	peak
5	5950.600	75.83	-13.39	62.44	74.00	-11.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 597 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

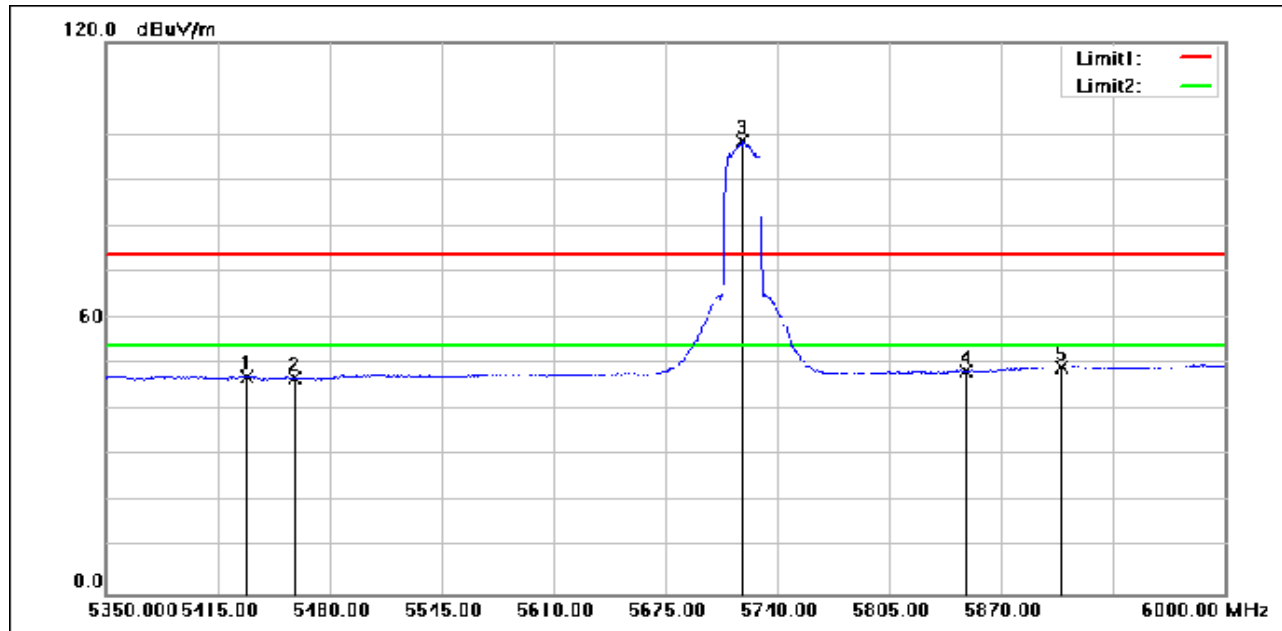

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.900	62.70	-15.34	47.36	54.00	-6.64	AVG
2	5460.000	62.21	-15.30	46.91	54.00	-7.09	AVG
3	5719.850	113.22	-14.60	98.62	54.00	44.62	AVG
4	5850.000	62.58	-14.03	48.55	54.00	-5.45	AVG
5	5905.100	63.17	-13.68	49.49	54.00	-4.51	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 598 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

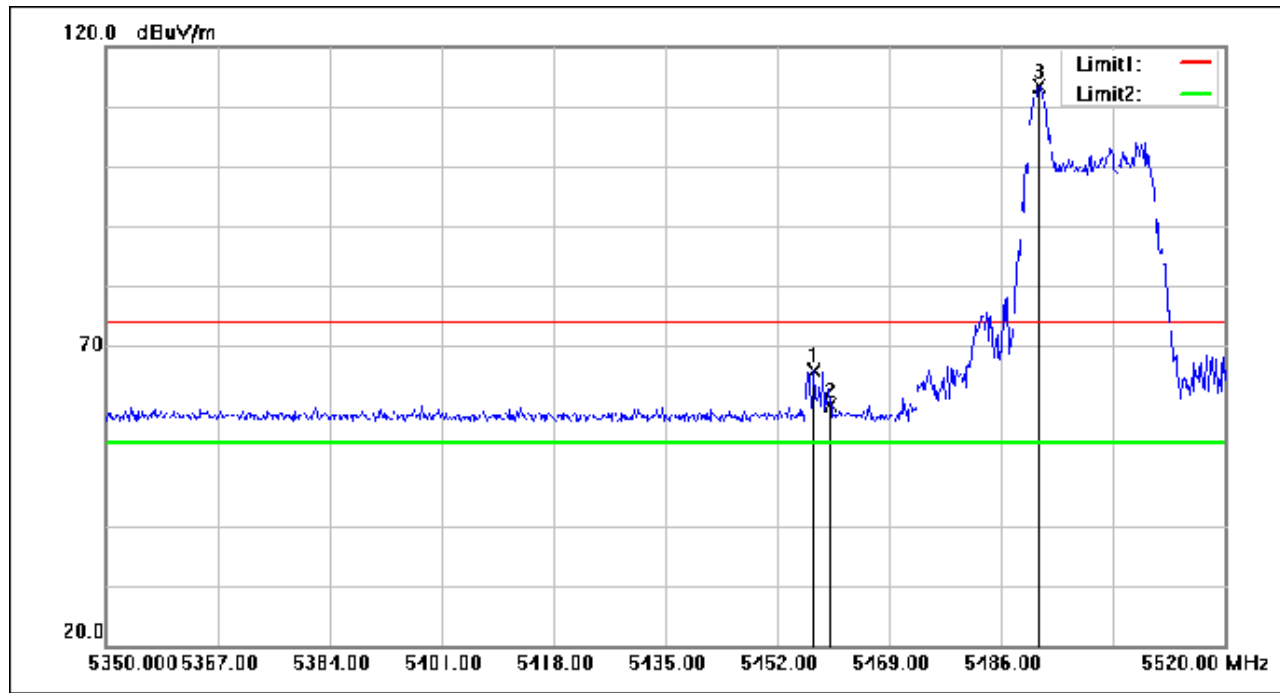

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.610	81.25	-15.30	65.95	74.00	-8.05	peak
2	5460.000	75.44	-15.30	60.14	74.00	-13.86	peak
3	5491.780	128.64	-15.26	113.38	74.00	39.38	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 599 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

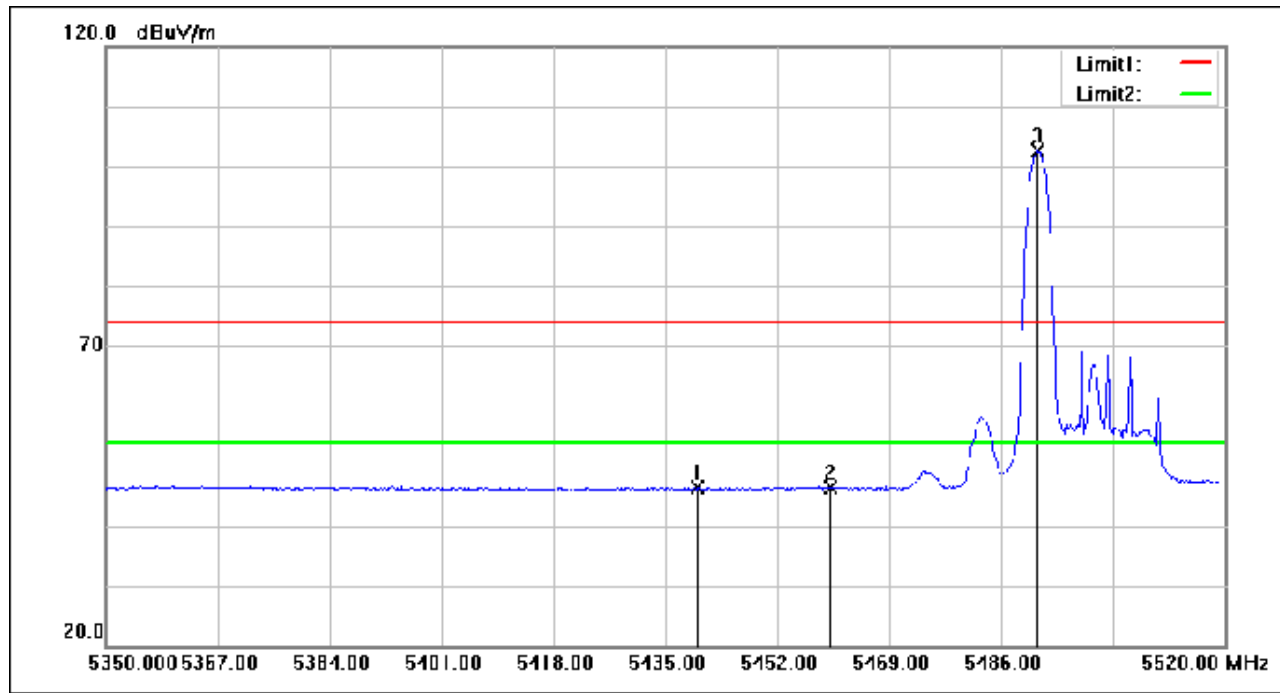

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.760	61.77	-15.34	46.43	54.00	-7.57	AVG
2	5460.000	61.71	-15.30	46.41	54.00	-7.59	AVG
3	5491.610	117.95	-15.26	102.69	54.00	48.69	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 600 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

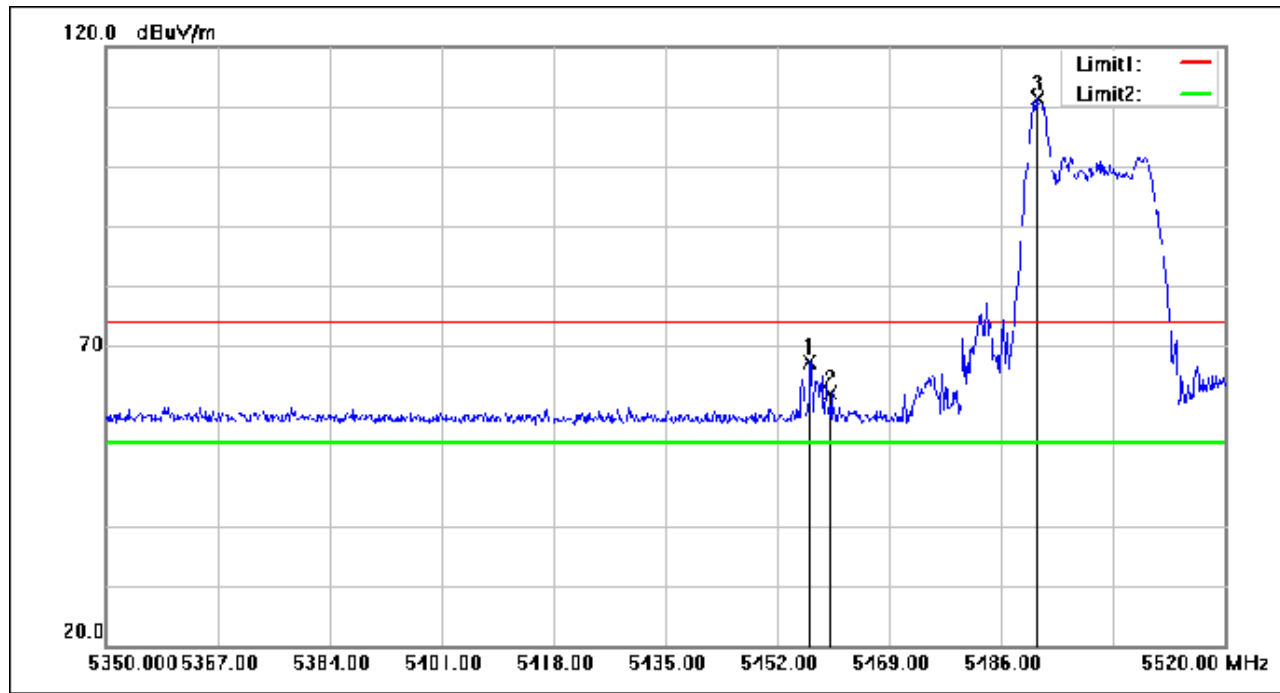

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.930	82.80	-15.30	67.50	74.00	-6.50	peak
2	5460.000	77.33	-15.30	62.03	74.00	-11.97	peak
3	5491.440	126.74	-15.26	111.48	74.00	37.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 601 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

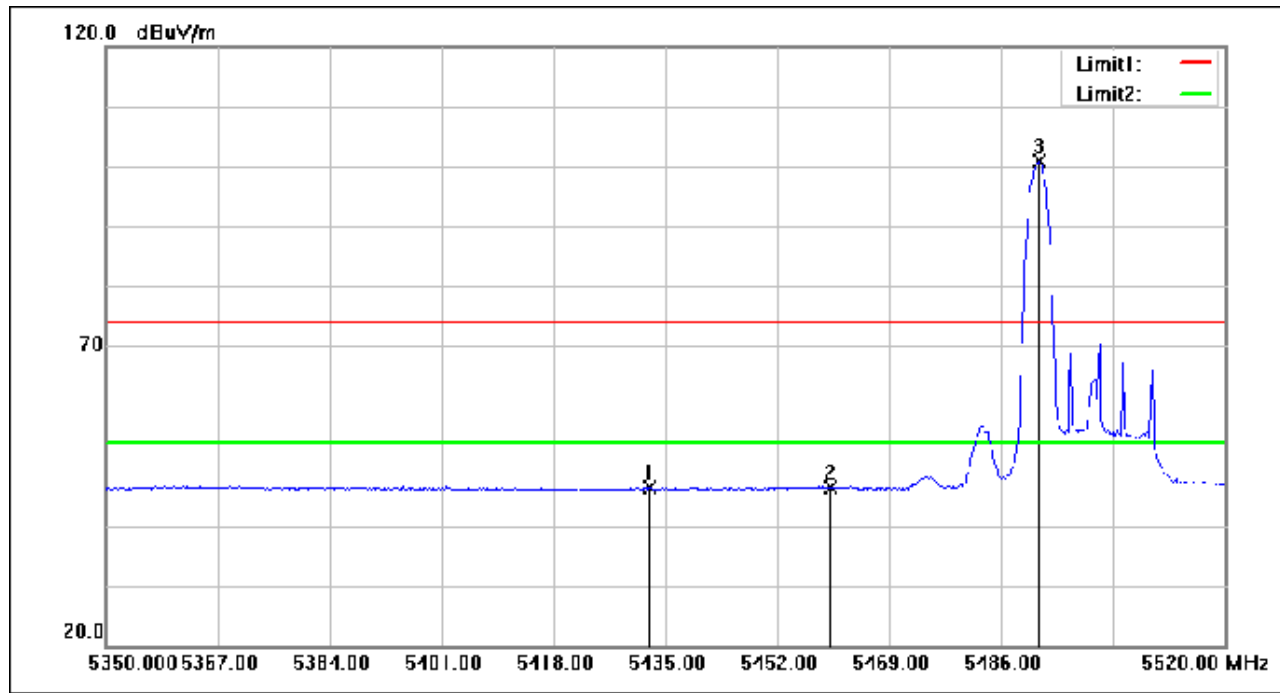

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.620	61.76	-15.34	46.42	54.00	-7.58	AVG
2	5460.000	61.73	-15.30	46.43	54.00	-7.57	AVG
3	5491.780	116.02	-15.26	100.76	54.00	46.76	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 602 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

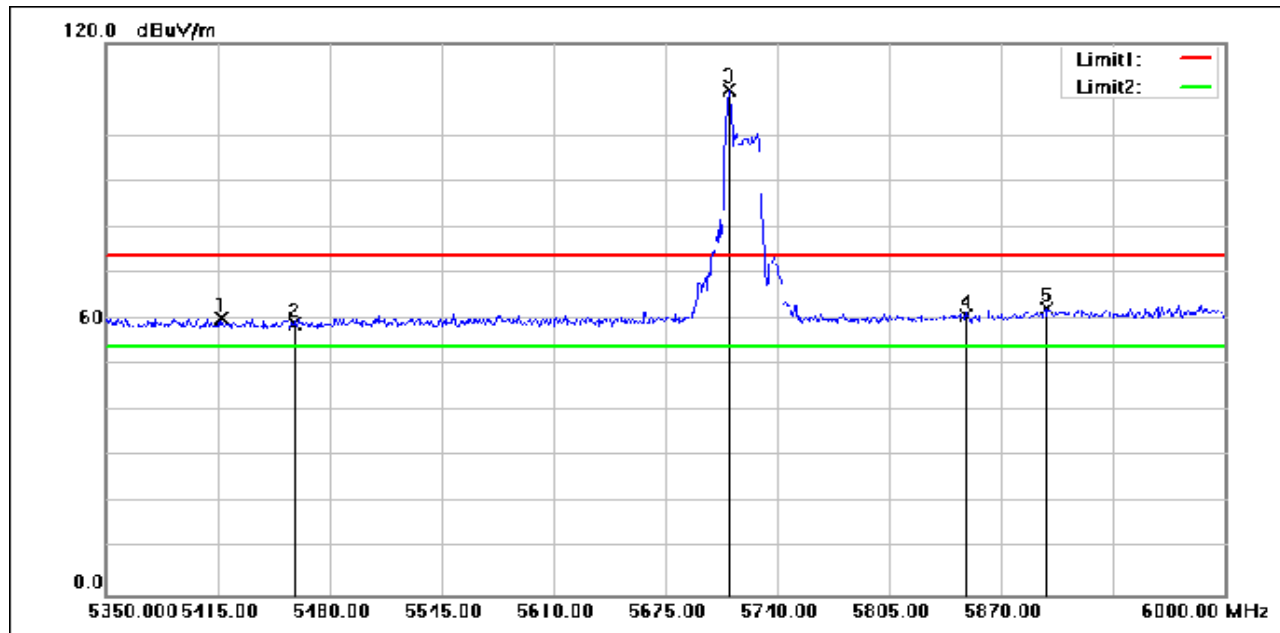

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.950	75.55	-15.37	60.18	74.00	-13.82	peak
2	5460.000	74.24	-15.30	58.94	74.00	-15.06	peak
3	5712.050	124.70	-14.63	110.07	74.00	36.07	peak
4	5850.000	74.75	-14.03	60.72	74.00	-13.28	peak
5	5896.000	75.90	-13.74	62.16	74.00	-11.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 603 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

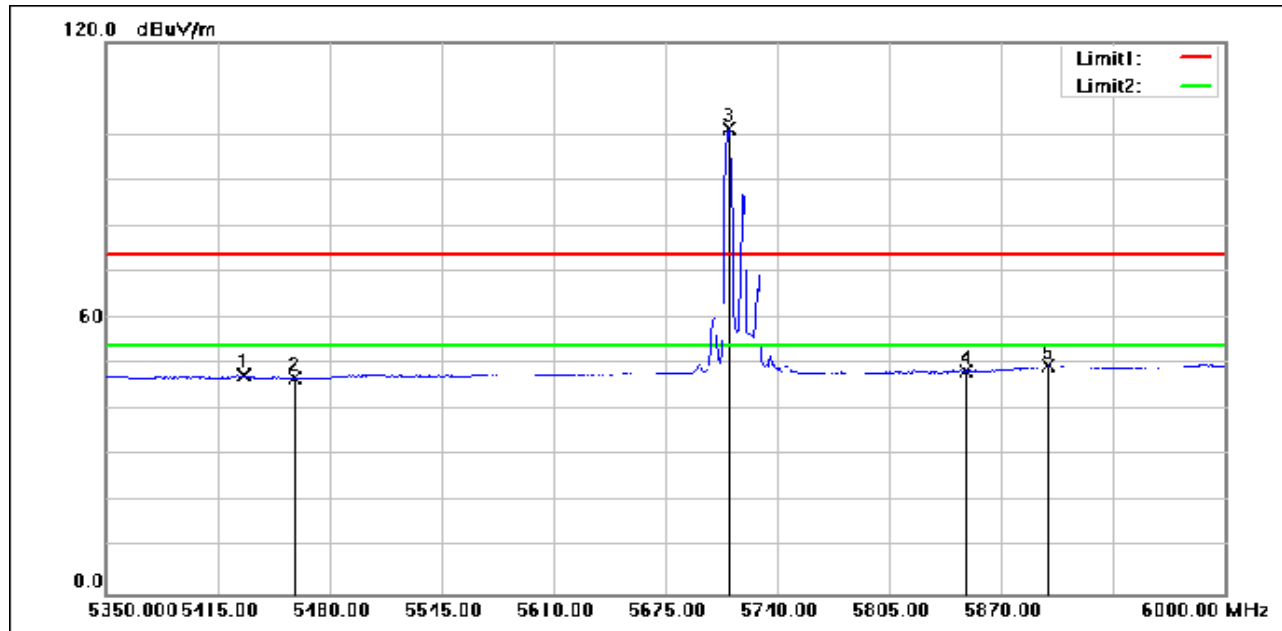

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.79	-15.35	47.44	54.00	-6.56	AVG
2	5460.000	62.20	-15.30	46.90	54.00	-7.10	AVG
3	5711.400	115.78	-14.63	101.15	54.00	47.15	AVG
4	5850.000	62.62	-14.03	48.59	54.00	-5.41	AVG
5	5897.300	63.27	-13.72	49.55	54.00	-4.45	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 604 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

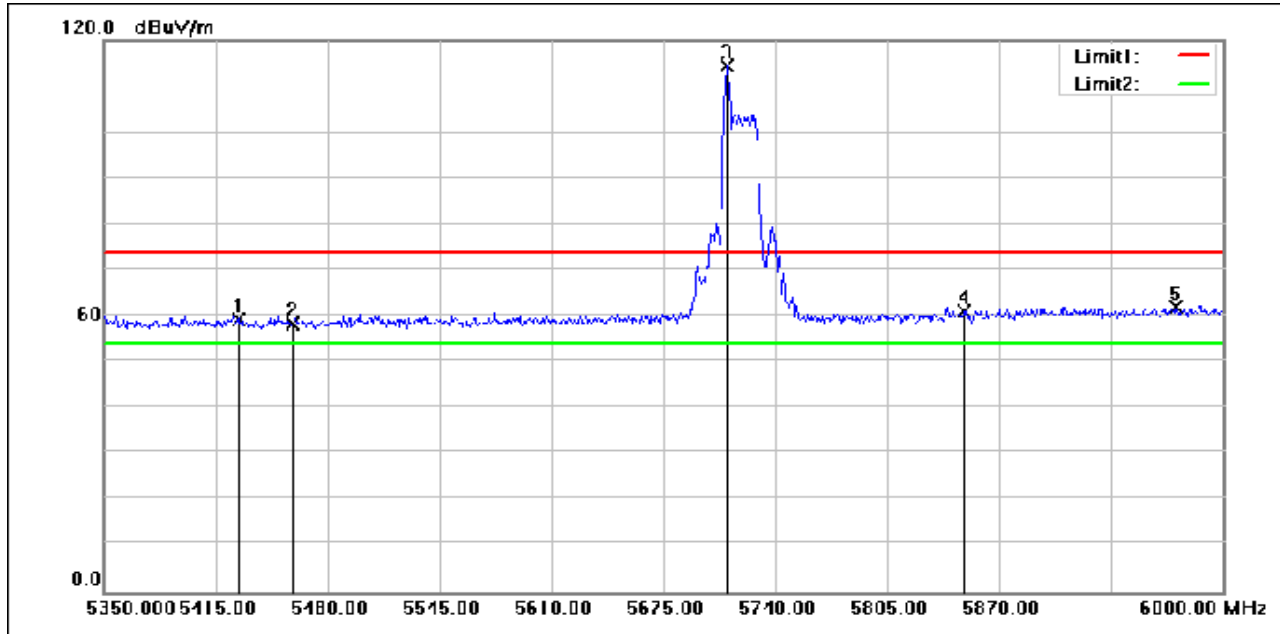

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5428.000	74.76	-15.36	59.40	74.00	-14.60	peak
2	5460.000	73.59	-15.30	58.29	74.00	-15.71	peak
3	5712.050	129.04	-14.63	114.41	74.00	40.41	peak
4	5850.000	75.08	-14.03	61.05	74.00	-12.95	peak
5	5972.700	75.18	-13.25	61.93	74.00	-12.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 605 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

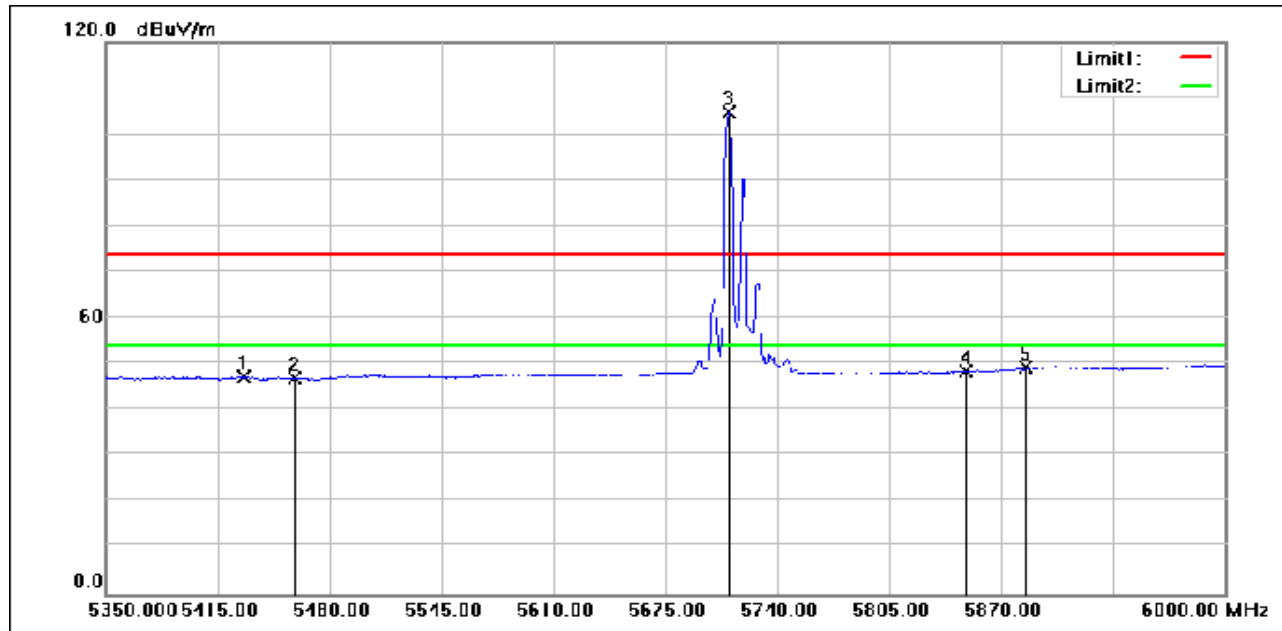

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.950	62.70	-15.35	47.35	54.00	-6.65	AVG
2	5460.000	62.21	-15.30	46.91	54.00	-7.09	AVG
3	5712.050	119.53	-14.63	104.90	54.00	50.90	AVG
4	5850.000	62.61	-14.03	48.58	54.00	-5.42	AVG
5	5884.300	63.02	-13.81	49.21	54.00	-4.79	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 606 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

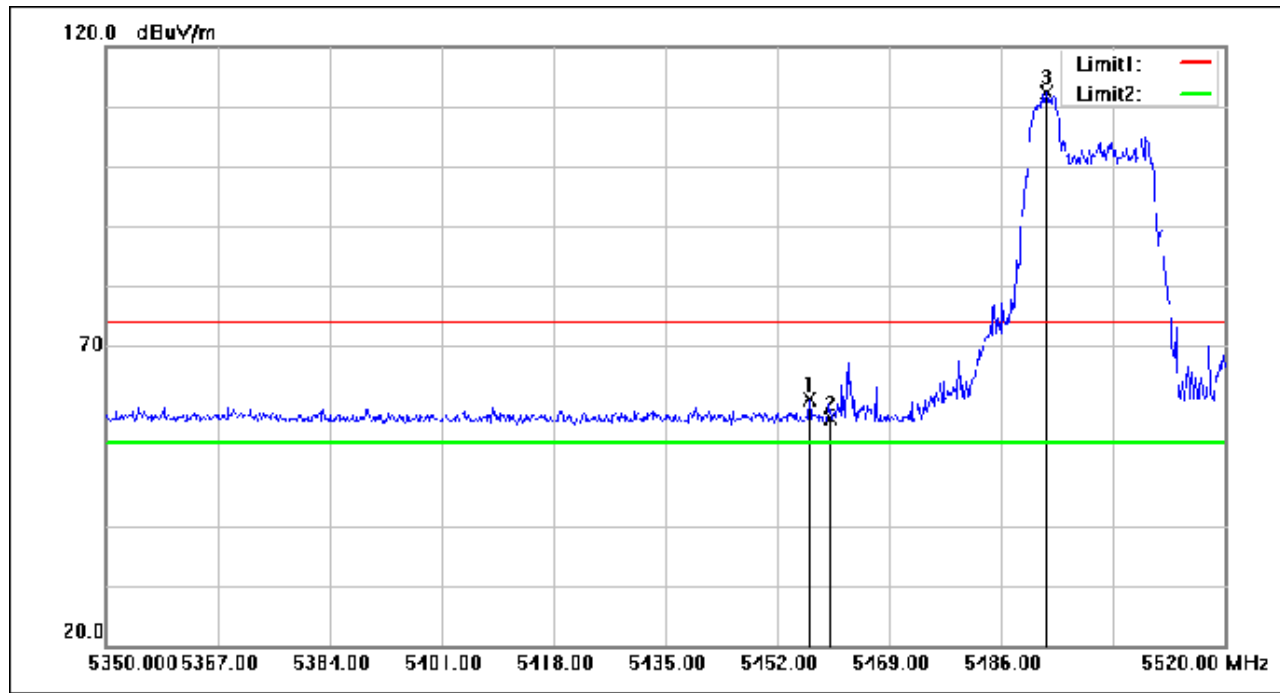

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.760	76.42	-15.30	61.12	74.00	-12.88	peak
2	5460.000	73.14	-15.30	57.84	74.00	-16.16	peak
3	5492.970	127.64	-15.25	112.39	74.00	38.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 607 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz; Channel: Low

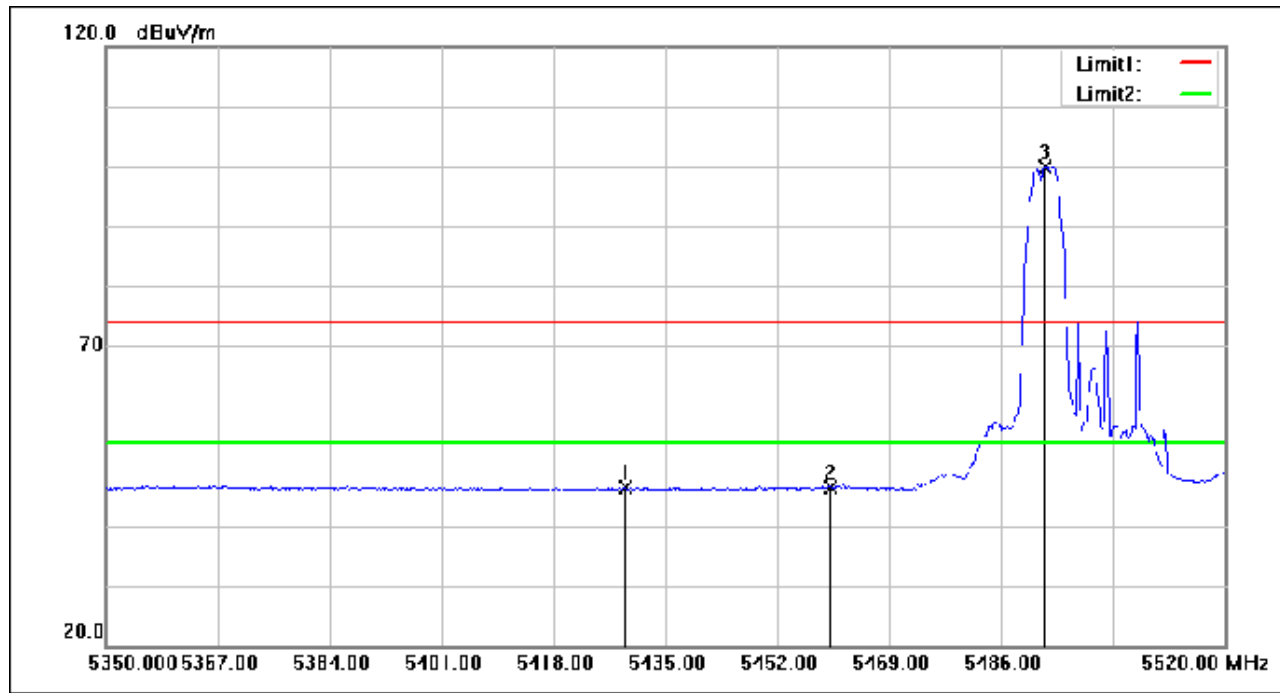

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.050	61.73	-15.35	46.38	54.00	-7.62	AVG
2	5460.000	61.67	-15.30	46.37	54.00	-7.63	AVG
3	5492.630	115.18	-15.25	99.93	54.00	45.93	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 608 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

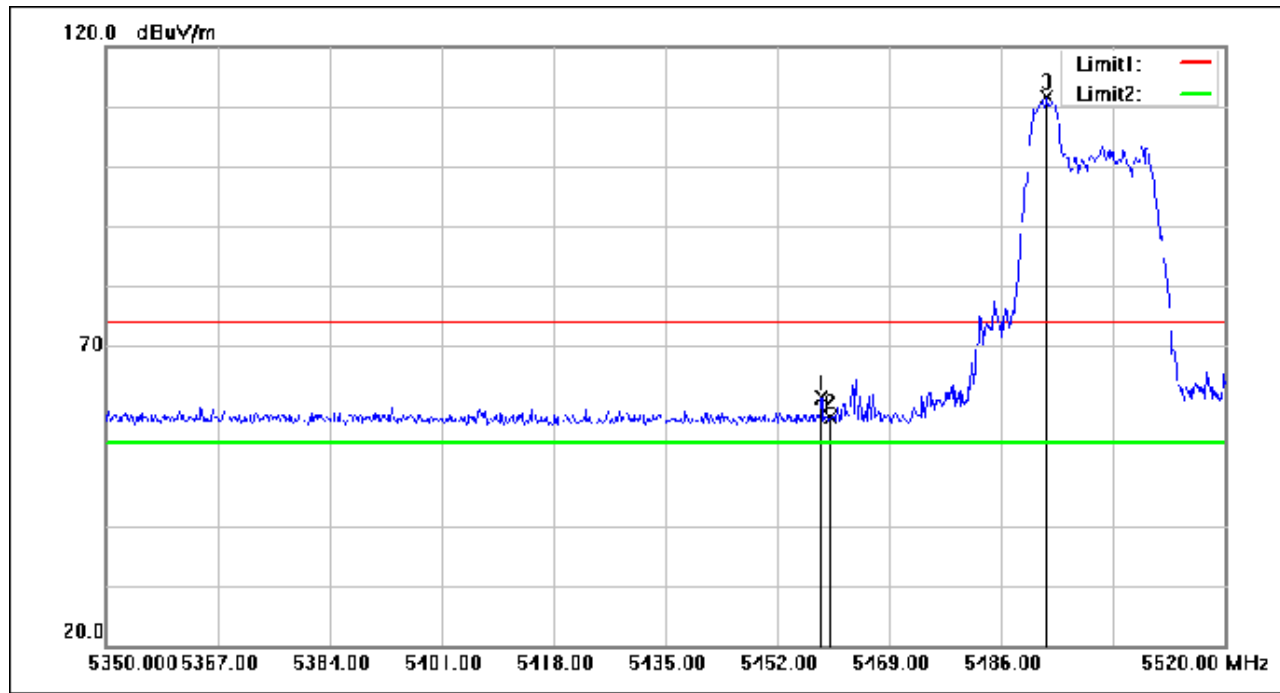

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.630	76.72	-15.30	61.42	74.00	-12.58	peak
2	5460.000	73.32	-15.30	58.02	74.00	-15.98	peak
3	5492.970	126.81	-15.25	111.56	74.00	37.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 609 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

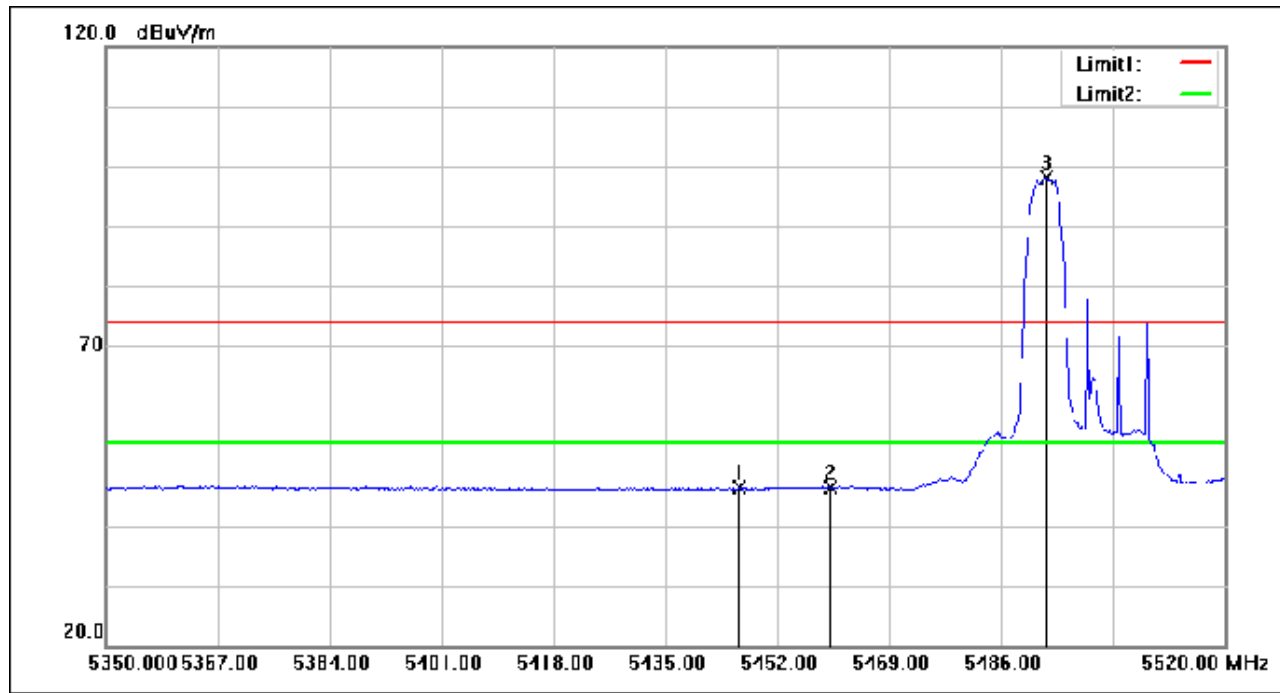

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.220	61.80	-15.32	46.48	54.00	-7.52	AVG
2	5460.000	61.59	-15.30	46.29	54.00	-7.71	AVG
3	5492.970	113.50	-15.25	98.25	54.00	44.25	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 610 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

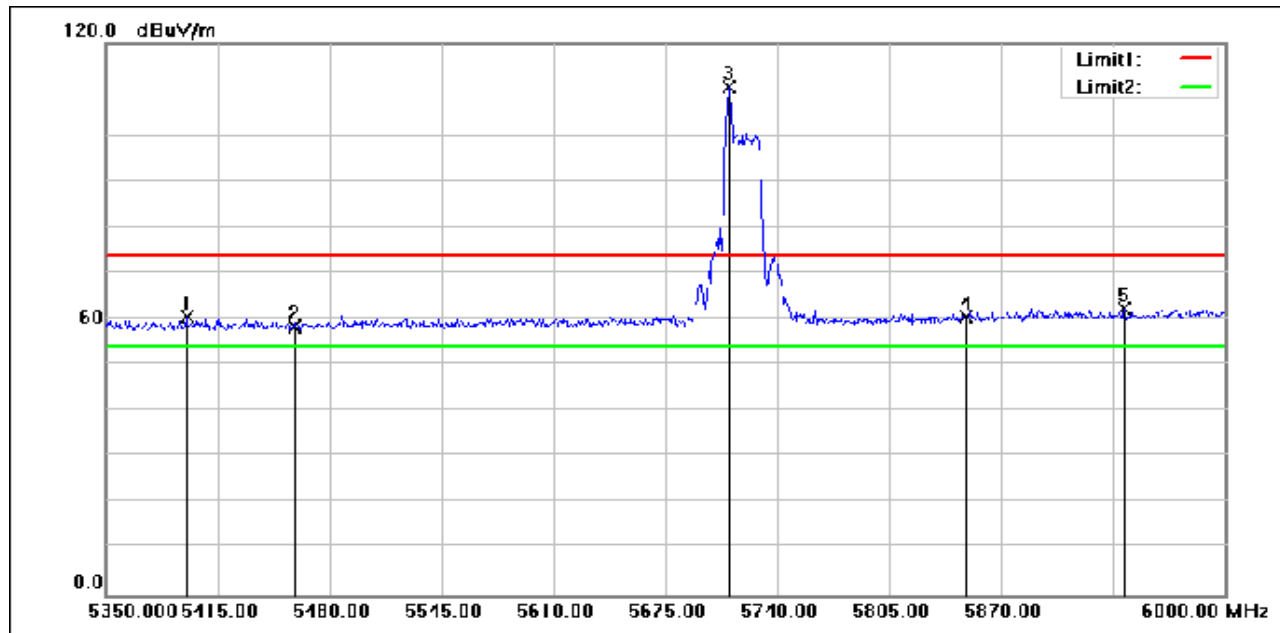

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5396.800	75.79	-15.41	60.38	74.00	-13.62	peak
2	5460.000	73.70	-15.30	58.40	74.00	-15.60	peak
3	5712.050	125.17	-14.63	110.54	74.00	36.54	peak
4	5850.000	74.34	-14.03	60.31	74.00	-13.69	peak
5	5941.500	75.62	-13.45	62.17	74.00	-11.83	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 611 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

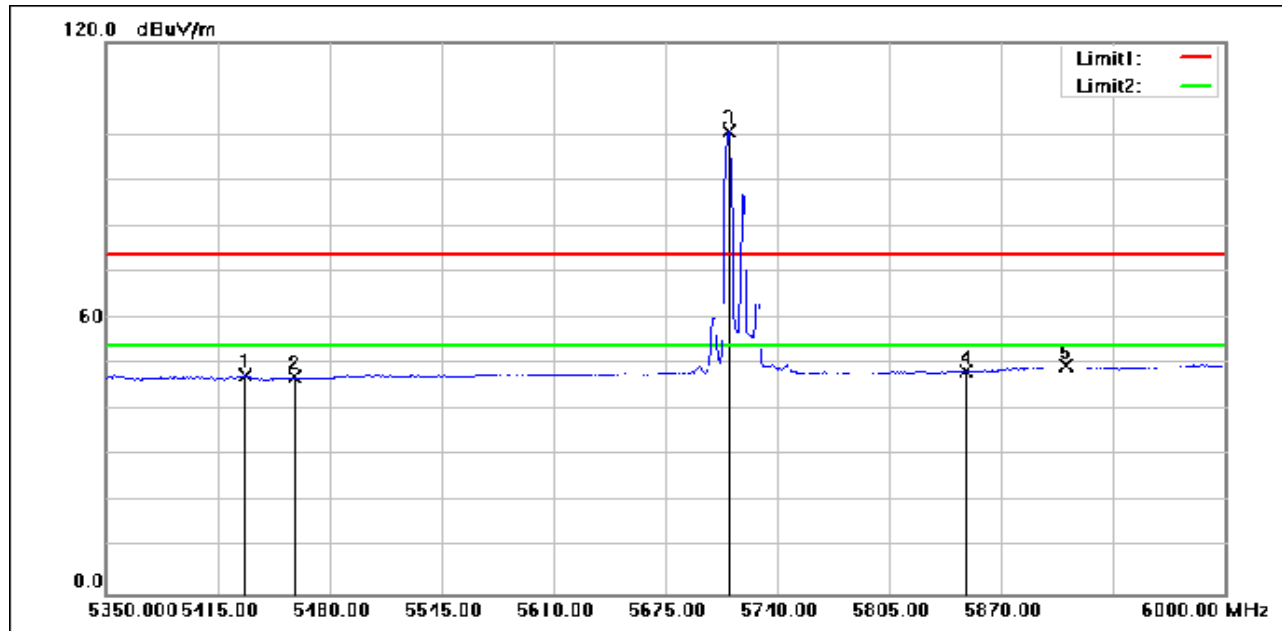

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.600	62.77	-15.34	47.43	54.00	-6.57	AVG
2	5460.000	62.47	-15.30	47.17	54.00	-6.83	AVG
3	5711.400	115.33	-14.63	100.70	54.00	46.70	AVG
4	5850.000	62.63	-14.03	48.60	54.00	-5.40	AVG
5	5907.700	63.19	-13.67	49.52	54.00	-4.48	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 612 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

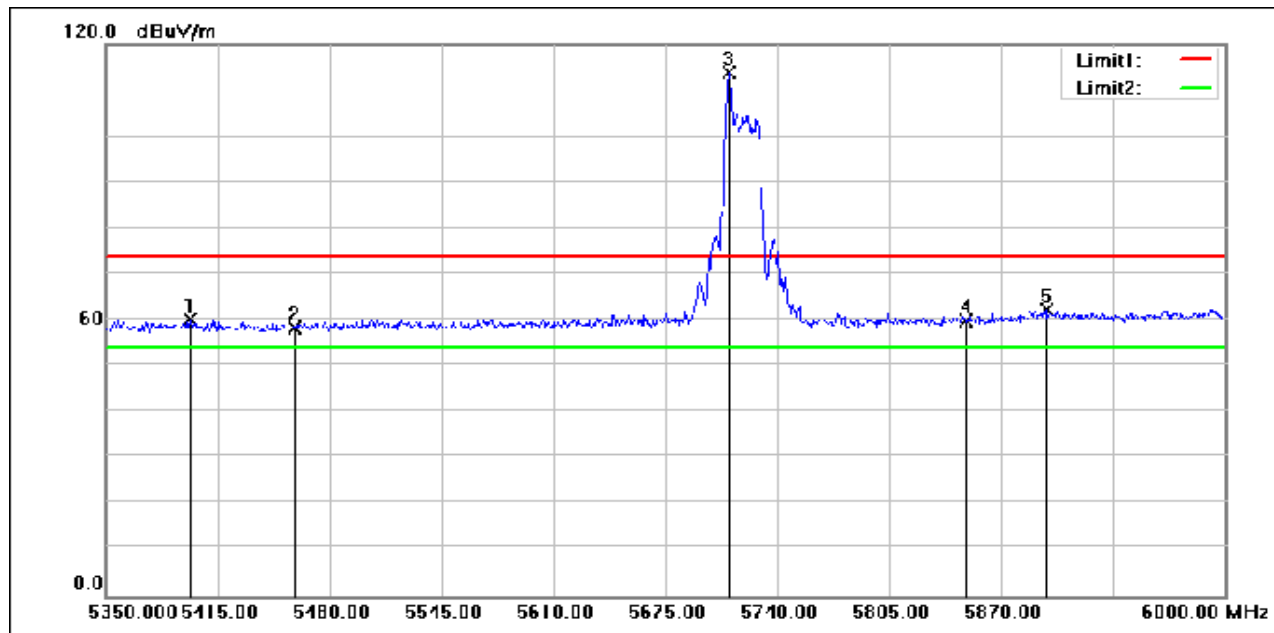

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5398.750	75.63	-15.41	60.22	74.00	-13.78	peak
2	5460.000	73.53	-15.30	58.23	74.00	-15.77	peak
3	5711.400	128.38	-14.63	113.75	74.00	39.75	peak
4	5850.000	73.75	-14.03	59.72	74.00	-14.28	peak
5	5896.000	75.97	-13.74	62.23	74.00	-11.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 613 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

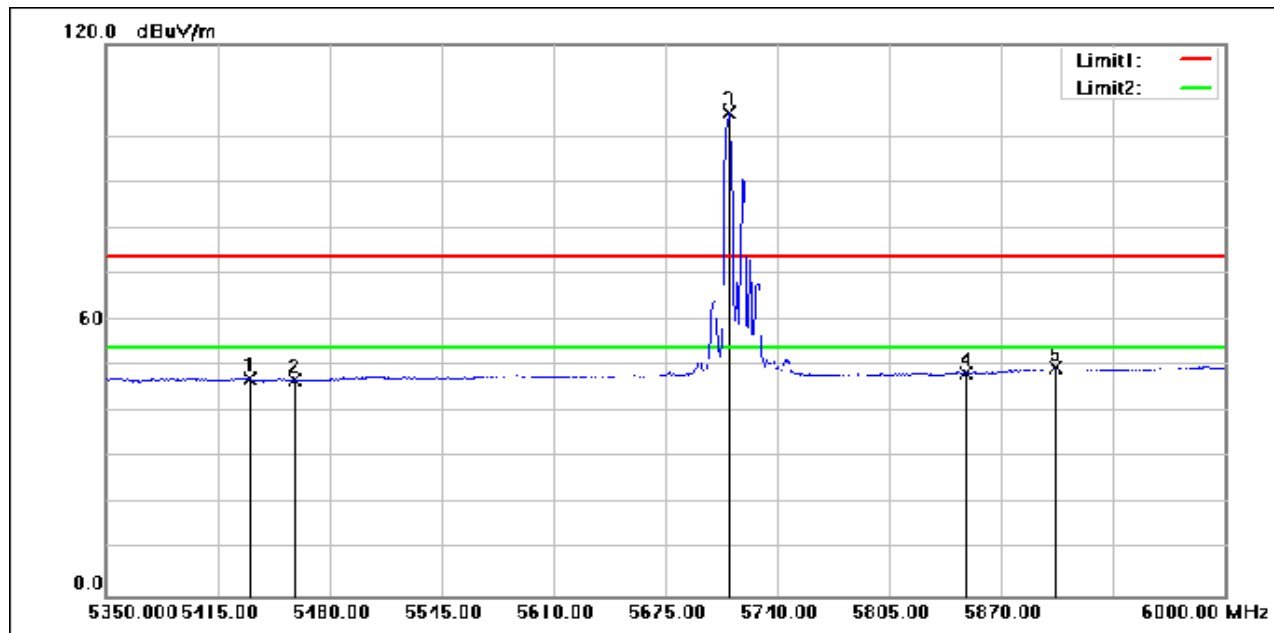

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.200	62.70	-15.34	47.36	54.00	-6.64	AVG
2	5460.000	62.26	-15.30	46.96	54.00	-7.04	AVG
3	5712.050	119.84	-14.63	105.21	54.00	51.21	AVG
4	5850.000	62.56	-14.03	48.53	54.00	-5.47	AVG
5	5901.200	63.26	-13.70	49.56	54.00	-4.44	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 614 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

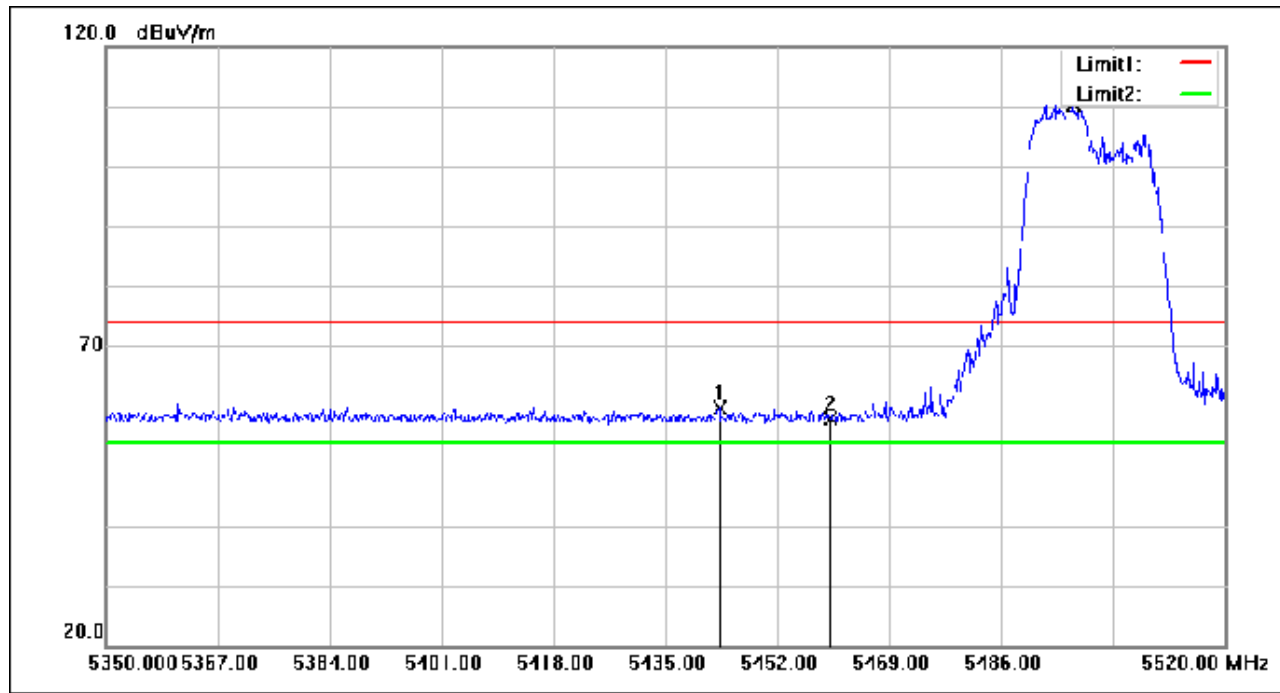

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.160	75.05	-15.32	59.73	74.00	-14.27	peak
2	5460.000	73.07	-15.30	57.77	74.00	-16.23	peak
3	5497.050	125.54	-15.25	110.29	74.00	36.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 615 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

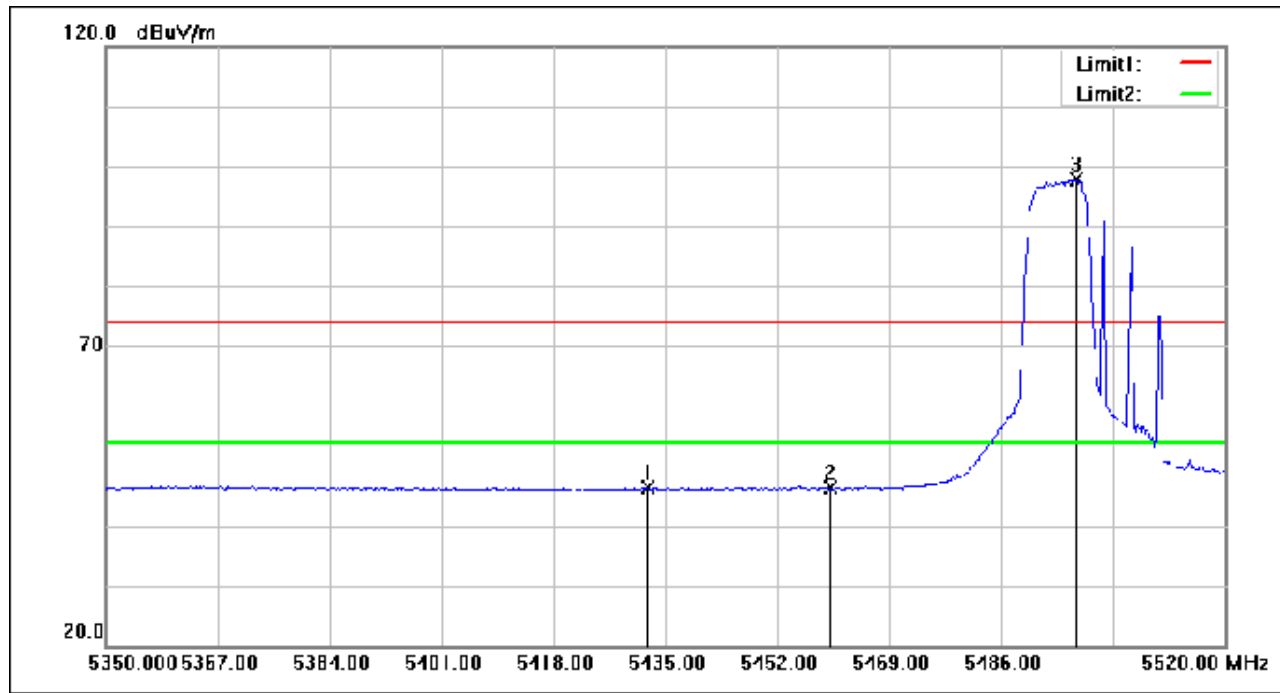

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.450	61.84	-15.34	46.50	54.00	-7.50	AVG
2	5460.000	61.56	-15.30	46.26	54.00	-7.74	AVG
3	5497.390	113.03	-15.25	97.78	54.00	43.78	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 616 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

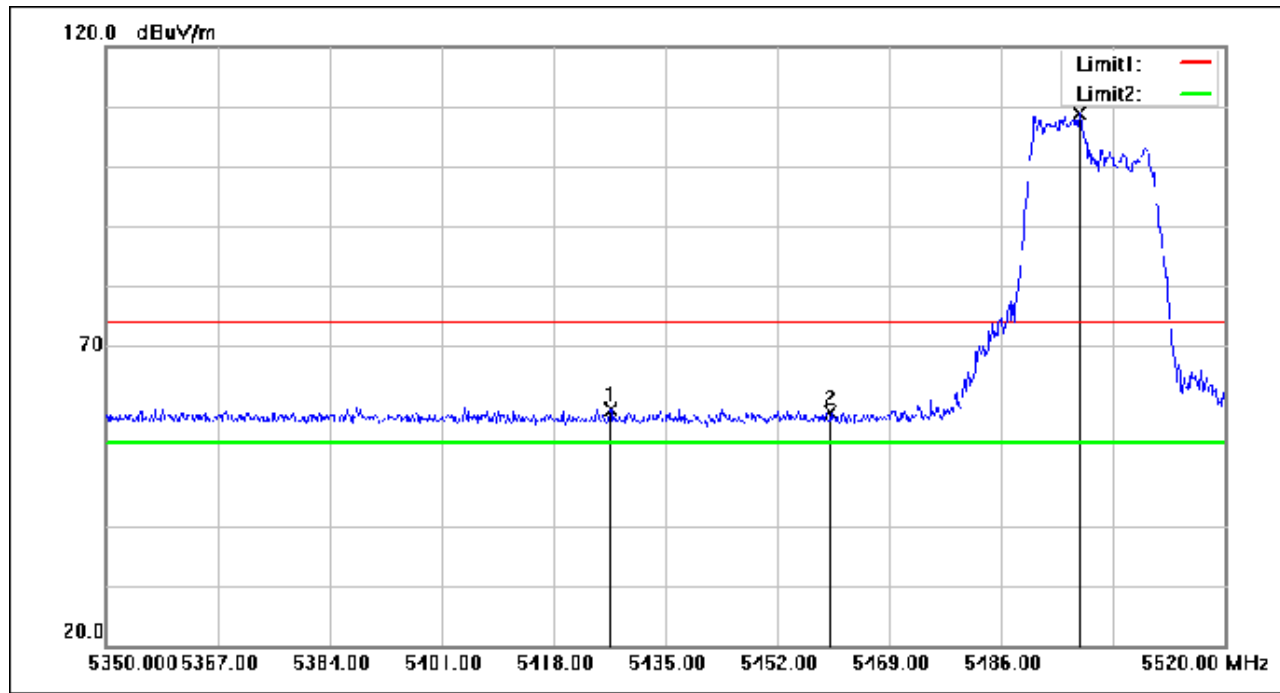

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.670	74.79	-15.36	59.43	74.00	-14.57	peak
2	5460.000	74.10	-15.30	58.80	74.00	-15.20	peak
3	5497.900	124.19	-15.25	108.94	74.00	34.94	peak