


# AMIMON LTD

## WHDI TRANSMITTER MODULE

Model : AMN11100


02 Nov 2007

Report No.: SL07090602-AMN-001(15.407)(AMN11100)  
(This report supersedes NONE)

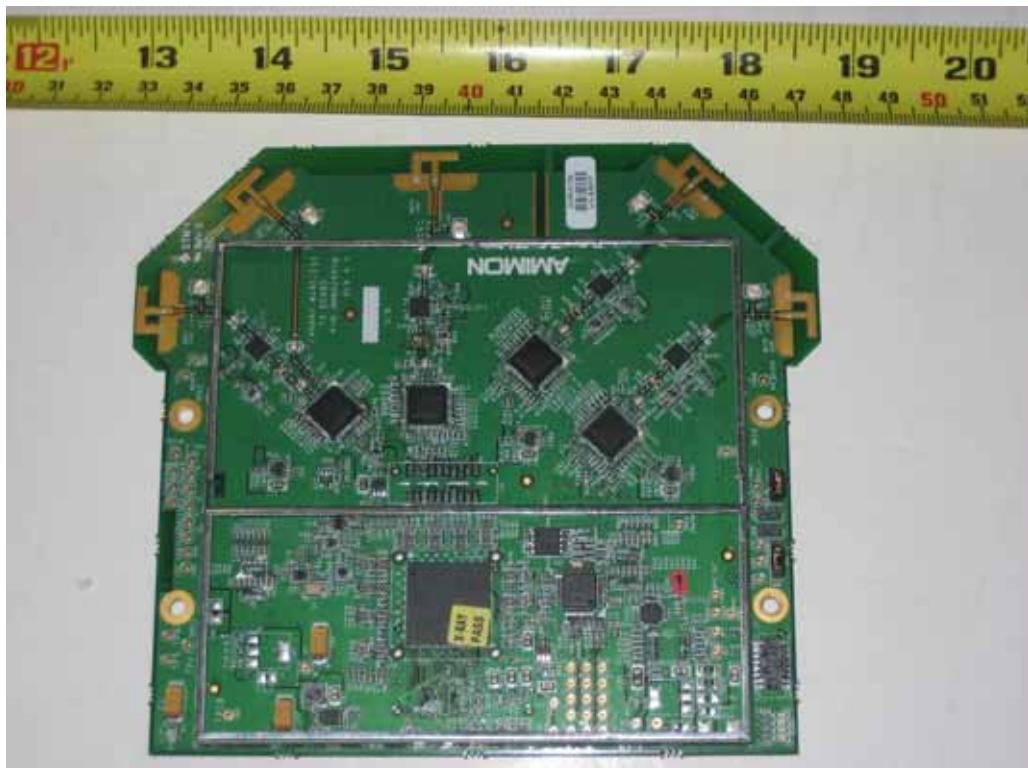

Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Kent Kim	
Kent Kim Test Engineer	Leslie Bai Engineering Reviewer

This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.

# EMC Test Report

To: FCC Part 15.407

SIEMIC, INC.  
Accessing global markets

**SIEMIC ACREDITATION DETAILS: NVLAP Lab Code: 200729-0**

United States Department of Commerce  
National Institute of Standards and Technology



**Certificate of Accreditation to ISO/IEC 17025:1999**

NVLAP LAB CODE: 200729-0

**SIEMIC Laboratories**  
San Jose, CA

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in  
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.  
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

2007-01-01 through 2007-12-31

Effective dates



*Dale S. Bruce*  
For the National Institute of Standards and Technology

## SIEMIC ACREDITATION DETAILS: FCC Registration No. 783147

### FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046

January 27, 2005

Registration Number: 783147

SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, CA 95131

Attention: Leslie Bai

Re: Measurement facility located at San Jose  
3 & 10 meter site  
Date of Renewal: January 27, 2005

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,  
  
Phyllis Parrish  
Information Technician

**SIEMIC ACREDITATION DETAILS: Industry of Canada Registration No. 4842-1**Industry  
CanadaIndustrie  
Canada

April 28, 2006

OUR FILE: 46405-4842  
Submission No: 114591

Siemic Inc.  
1206 Ringwood Ave.,  
San Jose, CA 95131

Dear Sir/Madame:

The Bureau has received your application for the Alternate Test Site and the filing is satisfactory to Industry Canada.

Please reference to the file number (4842-1 ) in the body of all test reports containing measurements performed on the site.

Renewal of the filing is required every two years.

If you have any questions, you may contact the Bureau at the telephone number below or by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca). Please reference our file number above for all correspondence.

Yours sincerely,

Robert Corey  
Manager Certification  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
Ottawa, Ontario  
K2H 8S2  
Tel. No. (613) 990-3869

## SIEMIC ACREDITATION DETAILS: Japan VCCI Registration No. 2195



**Voluntary Control Council for Interference  
by Information Technology Equipment**  
7F MOA Bldg, 2-3-5, Azabudai,  
Minato-Ku, Tokyo, Japan, 106-0041  
Tel+81-3-5575-3138  
Fax+81-3-5575-3137  
<http://www.vcciar.jp>

February 12, 2004

**TO: SIEMIC, INC.**

**Membership NO: 2195**

We confirmed your payment for annual membership fee and admission fee. Thank you very much for your remitting.

Please find enclosed VCCI documents. As admission fee and annual membership fee were confirmed, your company registered as VCCI official member.

From now on, it is possible for your company to submit conformity verification report or/and application for registration of measurement facilities.

Please find necessary forms for your submission from VCCI web-site.  
[www.vcciar.jp](http://www.vcciar.jp)

When you submit conformity verification report, please submit to Ms. Yoko Inagaki / [inagaki@vcciar.jp](mailto:inagaki@vcciar.jp) and application for registration of measurement facilities, please submit to Mr. Masaru Denda / [denda@vcciar.jp](mailto:denda@vcciar.jp)

Their address, phone and fax number are absolutely same as L. Please refer address indicated on top right-hand corner of this page.

If you have any other questions regarding membership, feel free to contact me.  
Thank you very much.

Best Regards,

Naoko Hori (Ms.)  
VCCI  
[hori@vcciar.jp](mailto:hori@vcciar.jp)

Enclosure

**SIEMIC ACREDITATION DETAILS: Japan RF Technologies Accreditation No. MRF050927**

**RFT**

# Certificate

This is to certify that the  
Quality Management System  
of

**SIEMIC , Inc.**

2206 Ringwood Avenue  
San Jose, California 95131 U.S.A

has been authorized to carry out Japan Specified Radio Equipment test by  
order and under supervision of RF Technologies Co., Ltd. according to  
Notification No.88 of Radio Law.

An assessment of the laboratory was conducted according to the "Procedure and  
Conditions for Appointments of 2.4GHz Band Low power data communications system  
that Bluetooth and Wireless LAN test with reference to ISO/IEC 17025  
by an RF Technologies Co., Ltd. auditor.

**Audit Report No. MRF050927**

  
Kazuyuki Sarashina

Auditor  
RF Technologies Co., Ltd.

  
Toshihiro Kogami

President  
RF Technologies Co., Ltd.

Audit Date  
September 27th, 2005

Issued Date  
October 5th, 2005

This Certificate is valid until September 26<sup>th</sup> 2006 or next schedule audit.

No.006 Registered Certification Body  
RF Technologies Co., Ltd.  
472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan



**SIEMIC ACREDITATION DETAILS: Korea MIC Lab Code: KR0032**

**시험기관지정서**  
***Certificate***  
*of Designated Testing Laboratory*

지정번호(No.) : KR0032

시험기관명 : (주)현대고정인증기술원

(Name of Lab.) (Hyundai Calibration & Certification Technologies Co., Ltd)

주 소 : 경기도 이천시 부발읍 아미리 산136-1

(Address) (137-1, Ami-ri, Bubal-eup, Icheon-si, Kyunggi-Do, Korea)  
2206 Ringwood Avenue San Jose, CA, USA.

시험분야 및 범위 : 유선(Telecommunication Part)

(Area & Category) 무선(Radio Communication Part)

전자파장해(EMI) : 미국지사 포함

전자파내성(EMS) : 미국지사 포함

전기안전(Safety)

전자파흡수율(SAR)

위 기관을 정보통신기기시험기관지정및관리등에관한규칙에  
의해 정보통신기기시험기관으로 지정합니다.

*This is to certify that  
the above mentioned laboratory is designated  
as the testing laboratory in accordance with  
the Regulations on Designation of Testing Laboratory  
for Information and Communication Equipment.*

2005년(Year) 7월(Month) 5일(Date)



**전파연구소장**

*Director General of Radio Research Laboratory  
Ministry of Information and Communication  
Republic of Korea*

**SIEMIC ACREDITATION DETAILS: Korea CAB ID: US0160**


**UNITED STATES DEPARTMENT OF COMMERCE**  
**National Institute of Standards and Technology**  
 Gaithersburg, Maryland 20889

April 17, 2006

Mr. Leslie Bai  
 SIEMIC Laboratories  
 2206 Ringwood Avenue  
 San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Ministry of Informatics and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC Tel MRA. The pertinent information about your laboratory's designation is as follows:

CAB Name: SIEMIC Laboratories  
 Identification No.: US0160  
 Scope:

Coverage	Standards	Date of Recognition
Electro Magnetic Interference	1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference	April 13, 2006
Electro Magnetic Susceptibility	1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility	April 13, 2006

You may submit test data to RRL to verify that the equipment to be imported into Korea satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements.

The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions please contact Mr. Jagindar (Jee) Dhillon at (301) 975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman  
 Group Leader, Standards Coordination and Conformity Group

cc: Jagindar Dhillon



## SIEMIC ACREDITATION DETAILS: Taiwan BSMI Accreditation No. SL2-IN-E-1130R



UNITED STATES DEPARTMENT OF COMMERCE  
National Institute of Standards and Technology  
Gaithersburg, Maryland 20889

May 3, 2006

Mr. Leslie Bai  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Chinese Taipei's Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. You may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements. The pertinent designation information is as follows:

- BSMI number: **SL2-IN-E-1130R** (Must be applied to the test reports)
- U.S. Identification No: **US0160**
- Scope of Designation: **CNS 13438**
- Authorized signatory: **Mr. Leslie Bai**

The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions, please contact Mr. Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman  
Group Leader, Standards Coordination and Conformity Group

cc: Jagindar Dhillon

## SIEMIC ACREDITATION DETAILS: Taiwan NCC CAB ID: US0160



UNITED STATES DEPARTMENT OF COMMERCE  
National Institute of Standards and Technology  
Gaithersburg, Maryland 20889

August 8, 2006

Mr. Leslie Bai  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that SIEMIC Laboratories has been recognized by the Chinese Taipei's National Communications Commission (NCC) under the Asia Pacific Economic Cooperation for Telecommunications and Information, Mutual Recognition Arrangement (APEC Tel MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC Tel MRA.

You may submit test data to NCC to verify that the equipment to be imported into Chinese Taipei satisfies their applicable requirements using the following guidelines:

- Your laboratory's assigned 6-digit U.S. identification number is **US0160**. You should reference this number in your correspondence.
- The scope of designation is limited to **LP9002**. Your designation will remain in force as long as your accreditation remains valid for the scope of designation.

If you have any questions please contact Mr. Jogindar Dhillon via email at [dhillon@nist.gov](mailto:dhillon@nist.gov) or via fax at 301-975-5414. The names of all recognized laboratories will be posted on the NIST website at <http://ts.nist.gov/mra>. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman  
Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon

## SIEMIC ACREDITATION DETAILS: Mexico NOM Recognition



CAMARA NACIONAL  
DE LA INDUSTRIA  
ELECTRONICA, DE  
TELECOMUNICACIONES  
E INFORMATICA

### Laboratorio Valentín V. Rivero

Méjico D.F. a 16 de octubre de 2006.

LESLIE BAI  
DIRECTOR OF CERTIFICATION  
SIEMIC LABORATORIES, INC.  
ACCEESSING GLOBAL MARKETS  
P R E S E N T E

En contestación a su escrito de fecha 5 de septiembre del año en curso, le comento que estamos muy interesados en su intención de firmar un Acuerdo de Reconocimiento Mutuo, para lo cual adjunto a este escrito encontrara el Acuerdo en idioma inglés y español prellenado de los cuales le pido sea revisado y en su caso corregido, para que si está de acuerdo poder firmarlo para mandarlo con las autoridades Mexicanas para su visto bueno y así poder ejercer dicho acuerdo.

Aprovecha este escrito para mencionarle que nuestro intermediano gestor será la empresa Isabel de México, S. A. de C. V., empresa que ha colaborado durante mucho tiempo con nosotros en lo referente a la evaluación de la conformidad y que cuenta con amplia experiencia en la gestión de la certificación de cumplimiento con Normas Oficiales Mexicanas de producto en México.

Me despido de usted enviándole un cordial saludo y esperando sus comentarios al Acuerdo que nos ocupa.

Atentamente:

Ing. Faustino Sánchez González  
Gerente Técnico del Laboratorio de  
CANIETI

## SIEMIC ACREDITATION DETAILS: Hong Kong OFTA Recognition No. D23/16V



Your Ref. 叢函號 : D23/16 V  
Our Ref. 本局號 :

Telephone 電話 : (852) 2961 6320  
(852) 2838 5004  
Fax No. 圖文傳真 :  
E-mail 電郵地址 : 20 July 2005

Mr. Leslie Bai  
Director of Certification,  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, California 95131  
USA

Dear Mr. Bai,

### Application of Recognised Testing Agency (RTA)

Referring your submission of 28 June 2005 in relation to the application of RTA, I am pleased to inform you that OFTA has appointed SIEMIC Laboratories (SIEMIC) as a Recognised Testing Agency (RTA) :

Please note that, under the Hong Kong Telecommunications Equipment Evaluation and Certification (HKTEC) Scheme, SIEMIC is authorized to conduct evaluation tests on telecommunications equipment against the following HKTA specifications :

Scope of recognition (HKTA Specifications) :  
1001, 1002, 1004, 1006, 1007, 1008  
1010, 1015, 1016  
1022, 1026, 1027, 1029  
1030, 1031, 1032, 1033, 1034, 1035, 1039  
1041, 1042, 1043, 1045, 1047, 1048  
2001

You are requested to refer to and comply with the code of practice and guidelines for RTA as given in the Information Note OFTA 1411 "Recognised Testing Agency (RTA) for Conducting Evaluation Test of Telecommunications Equipment", which can be downloaded from OFTA's homepage at <http://www.ofta.gov.hk/tec/information-notes.html>.

If you have any queries, please do not hesitate to contact me.

Yours sincerely,



(K K Sin)  
for Director-General  
of Telecommunications



Title: RF Test Report of Amimon Ltd, model : AMN11100  
To FCC 15.407 2007

Serial# SL07090602-AMN-001(15.407)(AMN11100)  
Issue Date 02 Nov 2007  
Page 13 of 98  
[www.siemic.com](http://www.siemic.com)

---

This page has been left blank intentionally.

---

## CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION .....	16
2	TECHNICAL DETAILS.....	17
3	MODIFICATION .....	18
4	TEST SUMMARY .....	19
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	20
	ANNEX A. TEST INSTRUMENT & METHOD .....	89
	ANNEX B EUT AND TEST SETUP PHOTOGRAPHS .....	93
	ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	94
	ANNEX D USER MANUAL, BLOCK & CIRCUIT DIAGRAM.....	98



Title: RF Test Report of Amimon Ltd, model : AMN11100  
To FCC 15.407 2007

Serial# SL07090602-AMN-001(15.407)(AMN11100)  
Issue Date 02 Nov 2007  
Page 15 of 98  
[www.siemic.com](http://www.siemic.com)

---

This page has been left blank intentionally.



## 1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the Amimon Ltd WHDI Transmitter Module, against the current Stipulated Standards. The WHDI Transmitter Module have demonstrated compliance with the FCC 15.407 2007.

### EUT Information

**EUT Description** : WHDI™ - Wireless High Definition Interface - sets new standards for quality wireless high-definition video connectivity. It provides a high-quality, uncompressed wireless link which can support delivery of video data at rates equivalent to up to 1.5Gbps (including uncompressed 1080i and 720p). These equivalent data rates can be delivered on a single 20MHz channel in the 5GHz unlicensed band, conforming to worldwide 5GHz spectrum regulations. Range is beyond 100 feet, through walls, and latency is less than one millisecond. WHDI™ enables a wireless video link that offers the same functionality, cost and quality as a wired link. Practically all of the hundreds of millions of wired connections between video sources and displays today are based on delivery of uncompressed video. In order to replace these wired links, the wireless interface needs to be uncompressed as well.

This module is acting as Transmitter or Downlink unit most of the time, It has 4 transmitting Antenna and one receiving antenna.

This will be a PTP operation device.

**Model No** : AMN11100  
**Serial No** : A3017  
**Input Power** : 3.3 Vdc

**Classification Per Stipulated Test Standard** : Spread Spectrum System / device  
: Spatial Multiplexing MIMO System with the antenna's elements are always driven incoherently at each frequency.

## 2 TECHNICAL DETAILS

Purpose	Compliance testing of WHDI Transmitter Module with stipulated standard
Applicant / Client	Amimon Ltd
Manufacturer	Amimon Ltd 2 Maskit St. Herzlia , Israel , 46733
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	SL07090602-AMN-001(15.407)(AMN11100)
Date EUT received	15 October 2007
Standard applied	FCC 15.407 2007
Dates of test (from – to)	15 October 2007 - 26 October 2007
No of Units:	N/A
Equipment Category:	DSS
Trade Name:	Amimon Ltd
Model :	AMN11100
RF Operating Frequency (ies)	5180~5220MHz
Number of Channels :	3
Modulation :	Amimon Proprietary Modulation
FCC ID :	VQSAMN12100R44
IC ID :	None

### **3 MODIFICATION**

**NONE**

## 4 TEST SUMMARY

The product was tested in accordance with the following specifications.  
 All Testing has been performed according to below product classification:

Spread Spectrum System / device  
 Spatial Multiplexing MIMO System with the antenna's elements are always driven incoherently at each frequency

### Test Results Summary

Test Standard		Description	Pass / Fail
47 CFR Part 15 Subpart E	RSS 210 Issue 6		
15.205	RSS210(A8.5)	Restricted Band of Operation	
15.207	RSSGen(7.2.2)	Conducted Emissions Voltage	
15.209		Radiated Emissions Limits; General Requirements	
15.407(a)(2)	RSS210(A9.2)(2)	Occupied Bandwidth	Pass
15.407(a)(2)	RSS210(A9.2)(2)	Peak Output Power	Pass
15.407(a)(2)	RSS210(A9.2)(2)	Peak Power Spectral Density	Pass
15.407(a)(2)		Power Reduction (antenna gain > 6dBi)	Pass
15.407(a)(6)		Peak Excursion Ratio	Pass
15.407(b)(6)	RSSGen(7.2.2)	AC Conducted Emissions	Pass
15.407(b)(2)	RSS210(A9.3)(2)	Radiated Spurious Emissions > 1GHz	Pass
15.407(b)(6)	RSS210(A9.3)(2)	Radiated Spurious Emissions < 1GHz	Pass
15.407(f)	RSSGen(5.5)	RF Exposure (MPE)	Pass
15.407(g)	RSS210(A9.5)(e)	Frequency Stability	N/A
	RSS210(A9.5)(g)	User Manual	Pass
ANSI C63.4: 2003			
PS: All measurement uncertainties are not taken into consideration for all presented test result.			

## **5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 Antenna Requirement**

**Requirement(s):** 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna is printed inverted antenna. Antenna gain is 1.9 dBi for 5.8GHz. There is total of 4 Antenna. Spatial Multiplexing MIMO System with the antenna's elements are always driven incoherently at each frequency.

The directional antenna gain will be = gain of each antenna = 1.9dBi

PS: The connector is for future option and is not physical connected.




## 5.2 Conducted Emissions Voltage

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.


Test Date : October 18 2007

Test Date : October 1

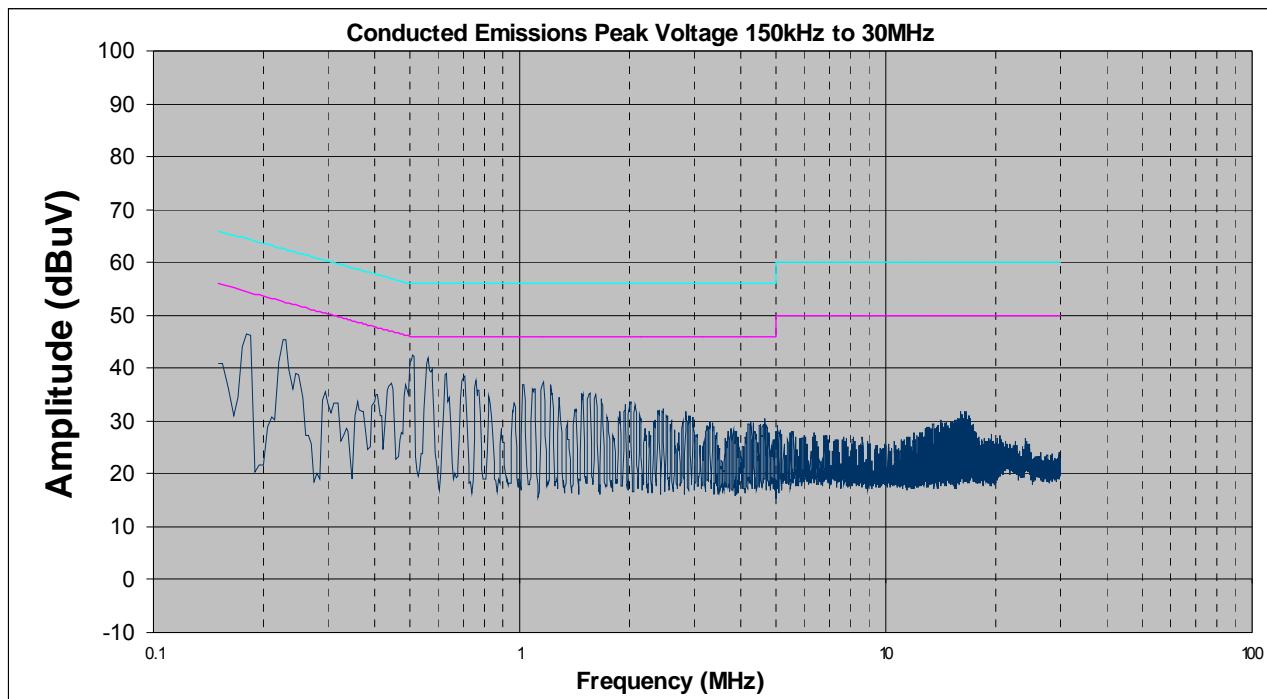**Results:**
**Note –**
**Quasi-Peak Limit**


**Phase Line Plot at 120Vac, 60Hz**

Line Under Test	Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Neutral	0.52	42.10	56.00	-13.90	41.26	46.00	-4.74
Neutral	0.56	42.00	56.00	-14.00	41.16	46.00	-4.84
Neutral	0.63	38.90	56.00	-17.10	38.12	46.00	-7.88
Neutral	0.23	45.30	62.45	-17.15	44.39	52.45	-8.06
Neutral	0.19	46.30	64.04	-17.74	45.37	54.04	-8.66
Neutral	0.71	38.60	56.00	-17.40	37.83	46.00	-8.17

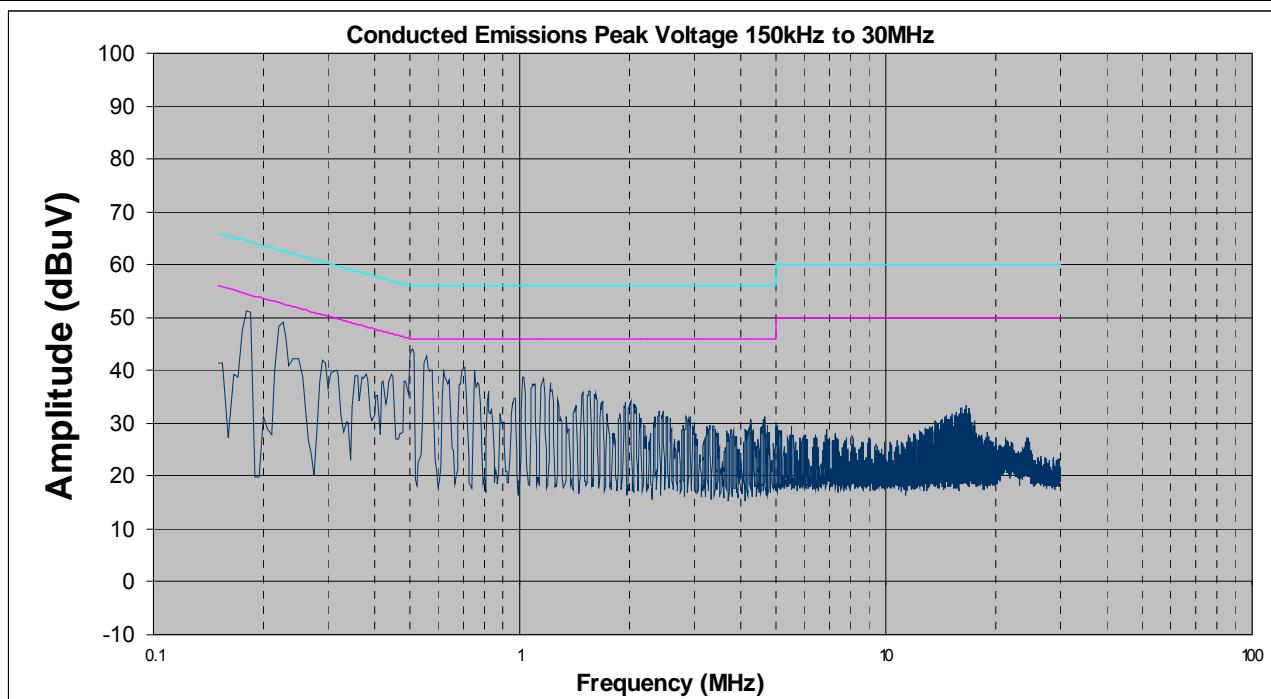

**Neutral Line Plot at 120Vac, 60Hz**

Line Under Test	Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Line	0.19	50.50	63.86	-13.36	50.40	53.86	-3.46
Line	0.32	45.40	59.71	-14.31	45.20	49.71	-4.51
Line	0.45	42.10	56.88	-14.78	42.00	46.88	-4.88
Line	0.58	44.30	56.00	-11.70	44.20	46.00	-1.80
Line	0.97	42.80	56.00	-13.20	42.70	46.00	-3.30
Line	0.97	42.80	56.00	-13.20	42.70	46.00	-3.30

## 5.3 Occupied Bandwidth

1. Conducted Measurement  
EUT was set for low , mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions


Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : October 18 2007  
Tested By : Kent Kim

**Requirement(s):** The 26dB bandwidths were measured at the antenna terminal using a spectrum analyzer. 26 dB BW spectrum analyzer setting: RBW = approximately 1% of the emission BW and VBW = approximately 3 times RBW.


## Test Result :

Frequency (MHz)	Channel	Measured 26dB Bandwidth (MHz)
5180	Chain 1	22.58
	Chain 2	22.42
	Chain 3	22.33
	Chain 4	22.83
5200	Chain 1	22.58
	Chain 2	22.75
	Chain 3	22.67
	Chain 4	22.58
5220	Chain 1	22.58
	Chain 2	22.75
	Chain 3	22.67
	Chain 4	22.58


Refer to the attached plots.

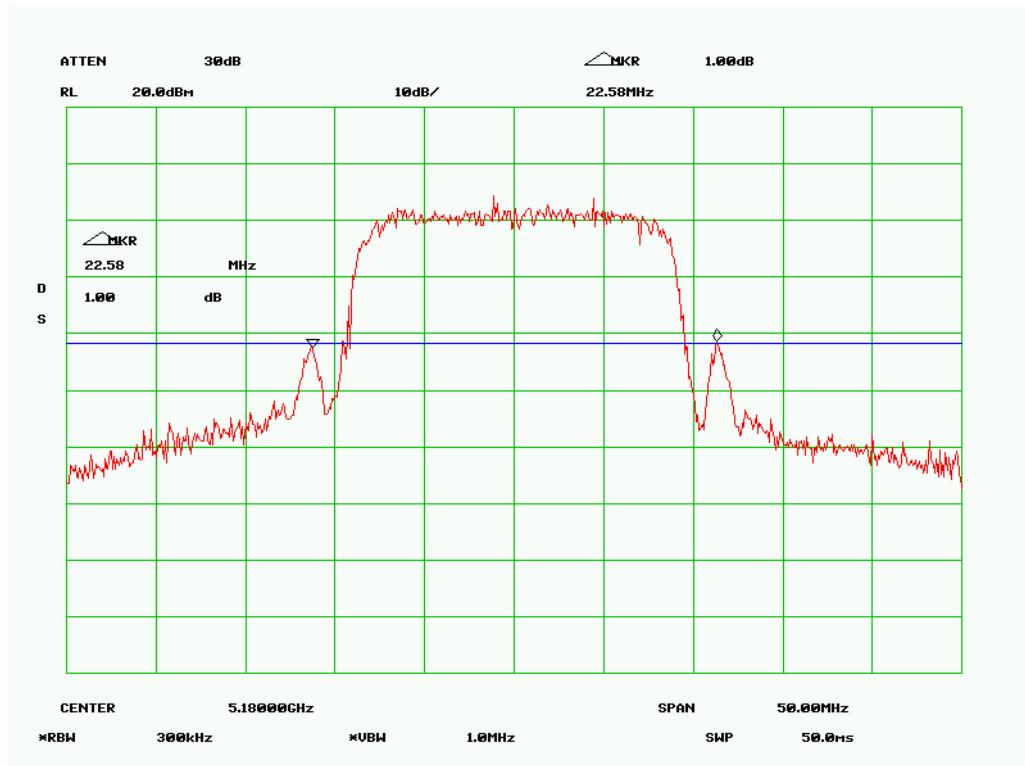


**26 dB Bandwidth - Low Channel () -Chain 1**

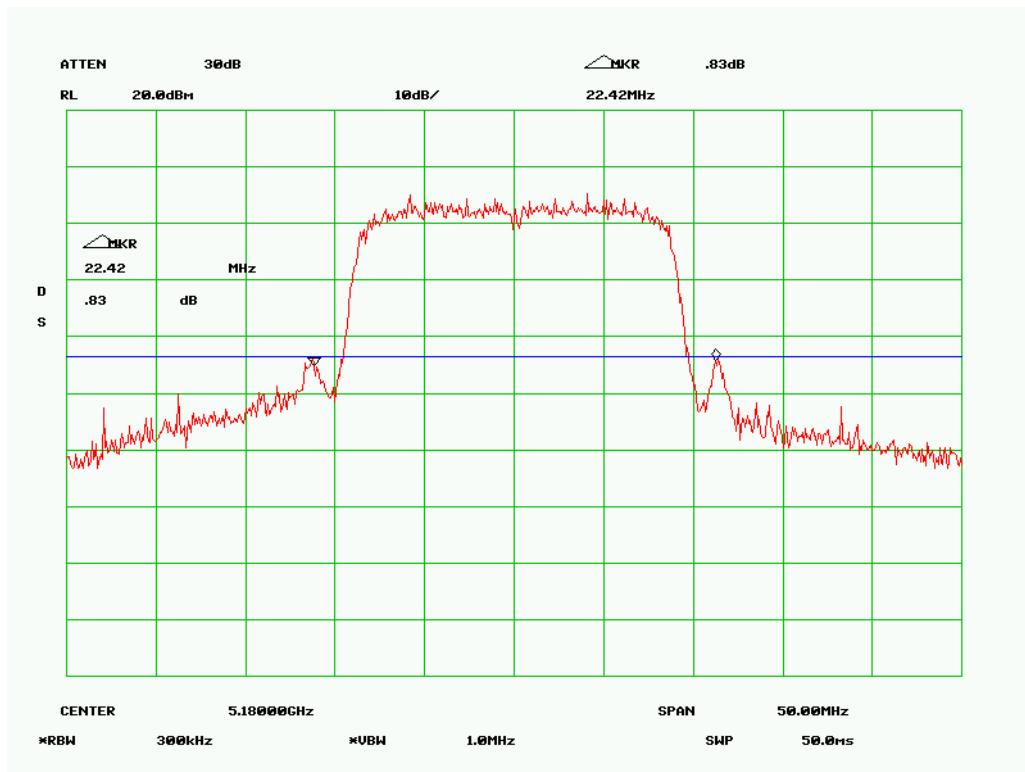


**26 dB Bandwidth - Low Channel () -Chain 2**

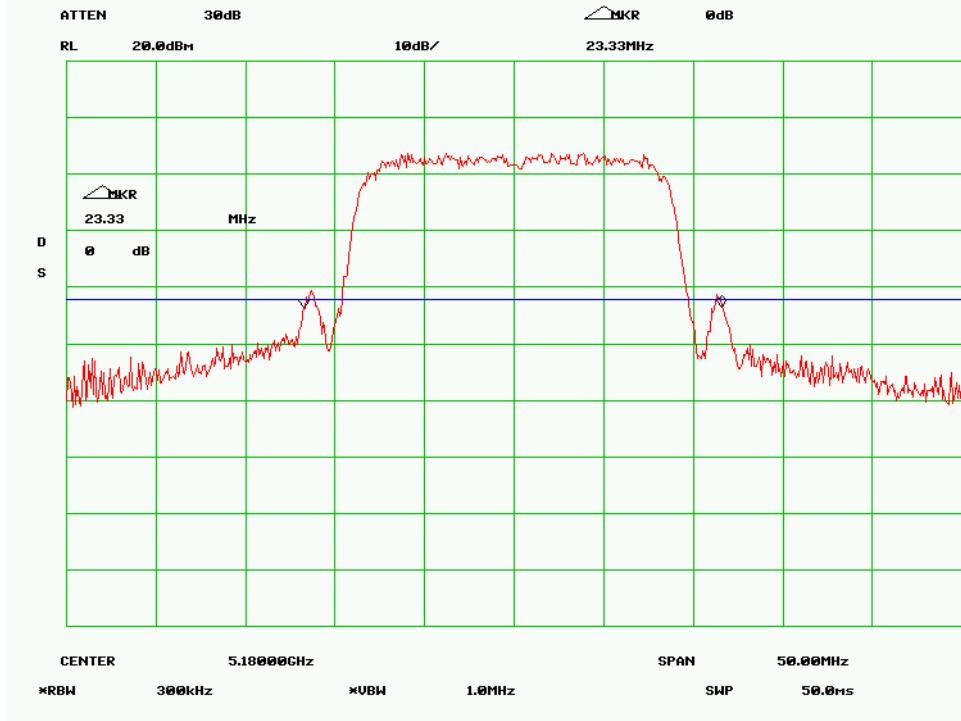


26 dB Bandwidth - Low Channel () -Chain 3

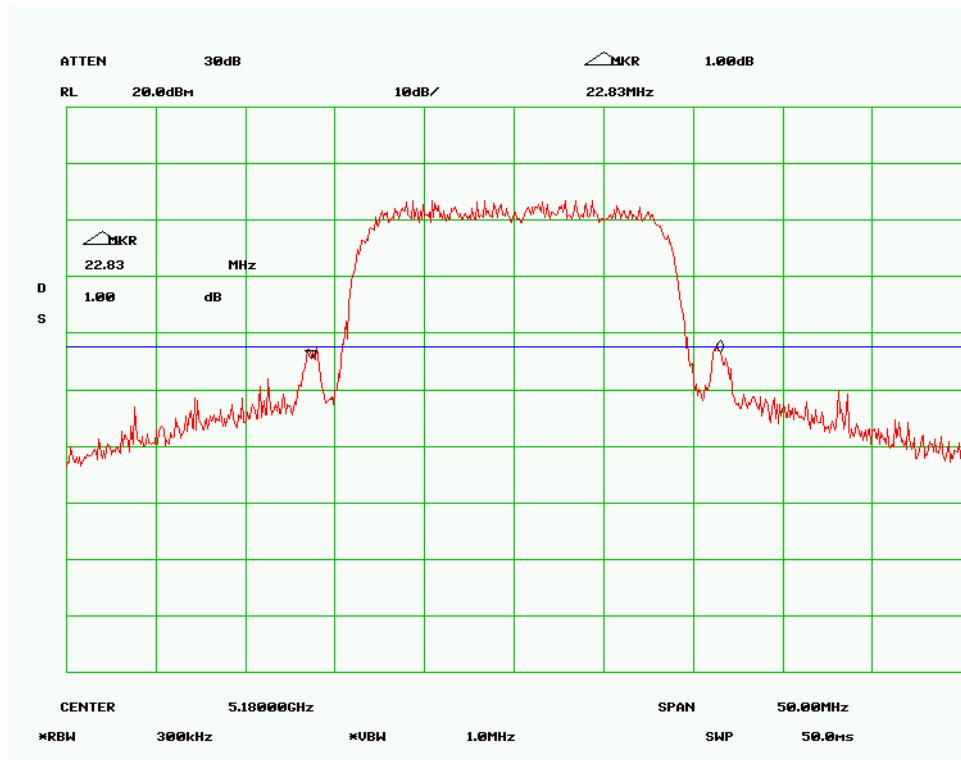


26 dB Bandwidth - Low Channel () -Chain 4

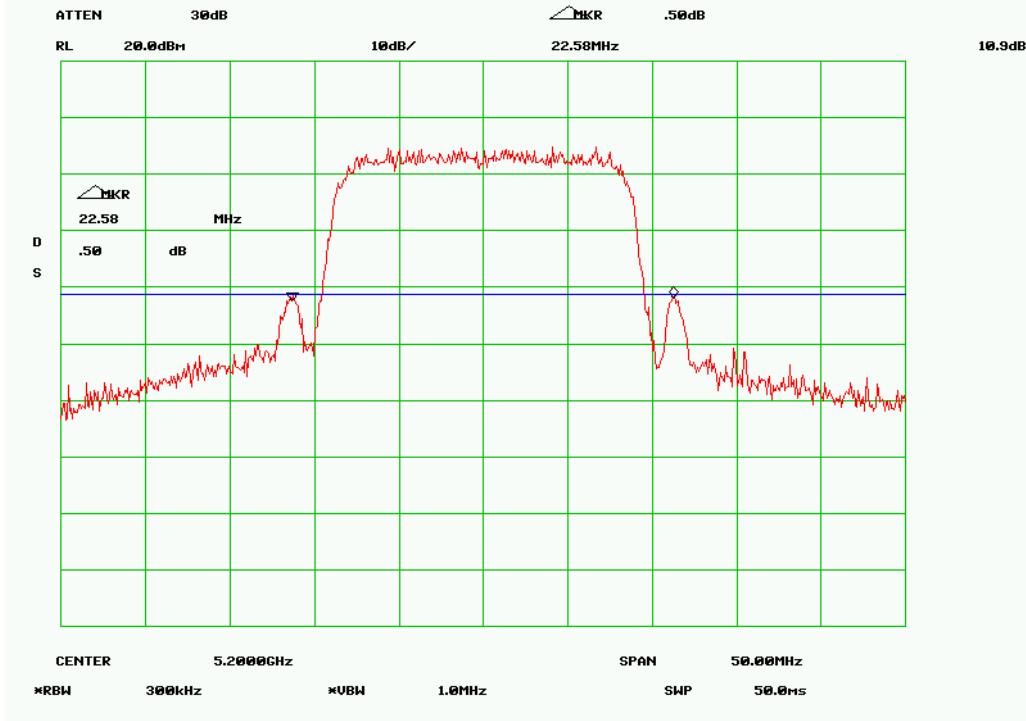


26 dB Bandwidth - Mid Channel () -Chain 1

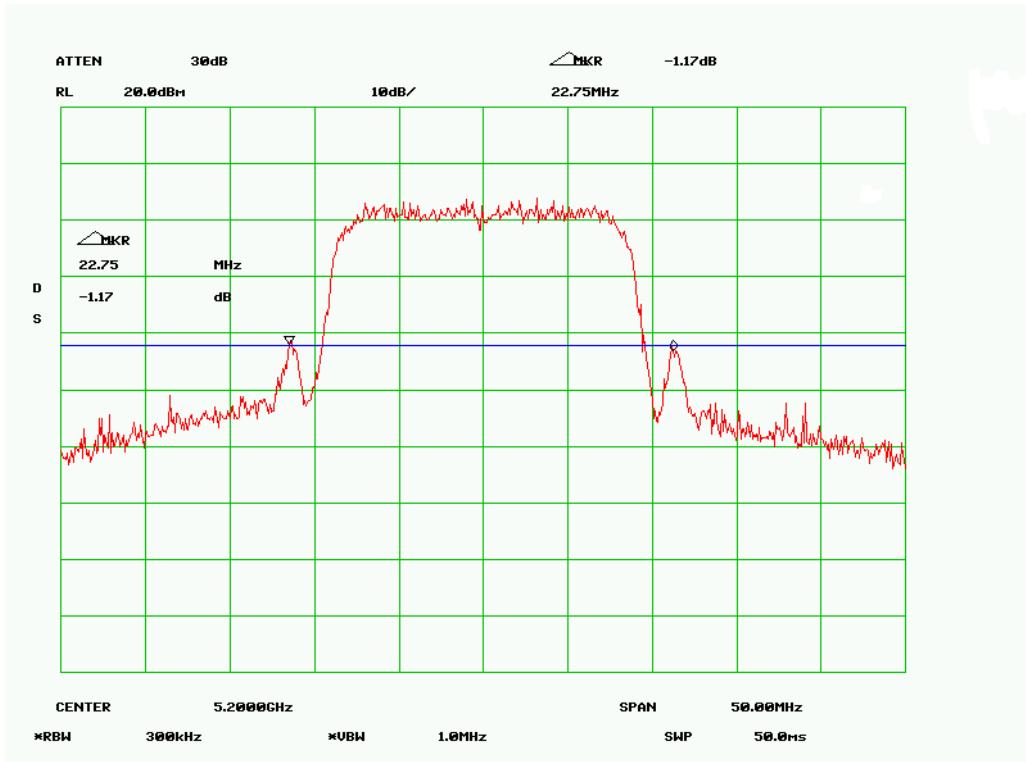


26 dB Bandwidth - Mid Channel () -Chain 2

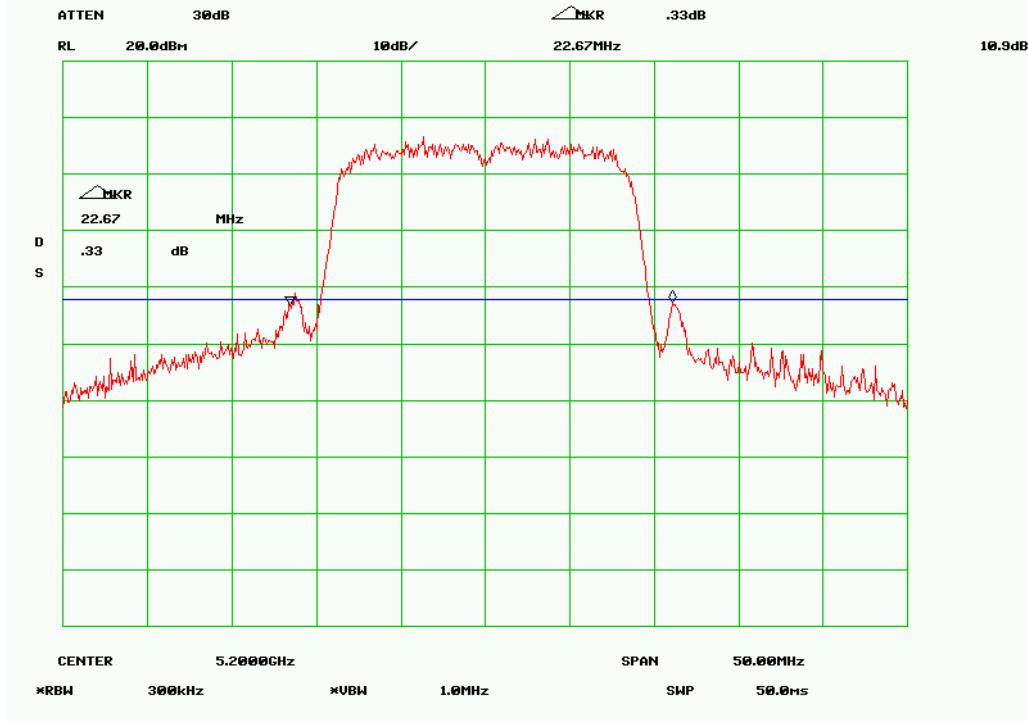


26 dB Bandwidth - Mid Channel () -Chain 3

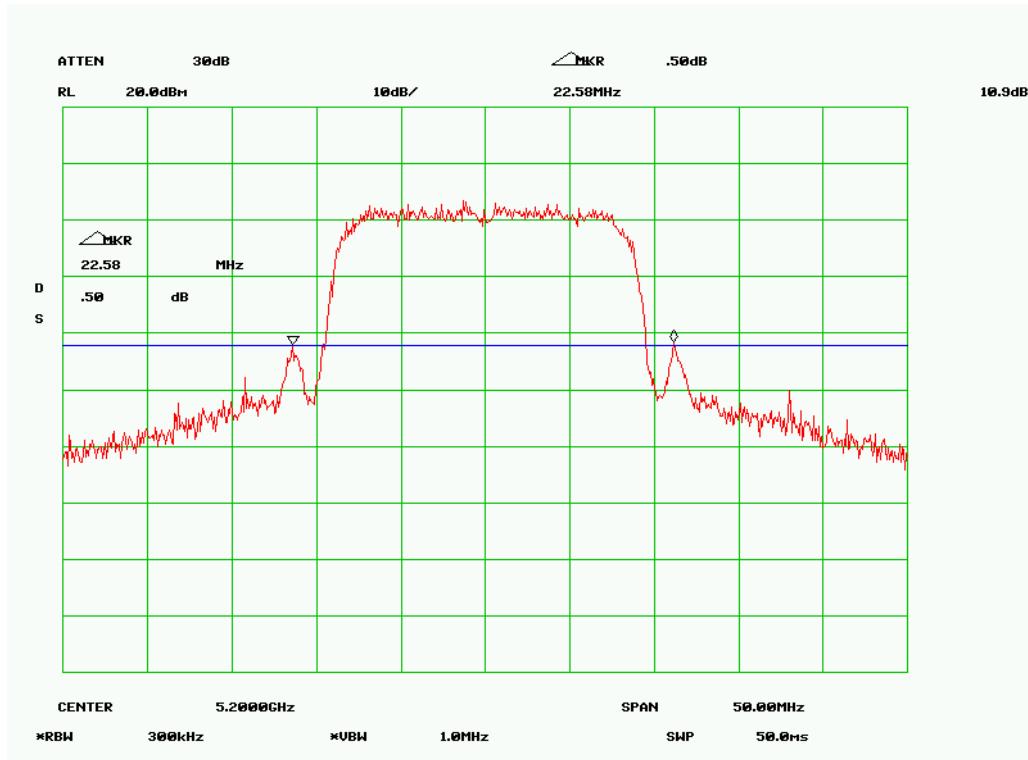


26 dB Bandwidth - Mid Channel () -Chain 4

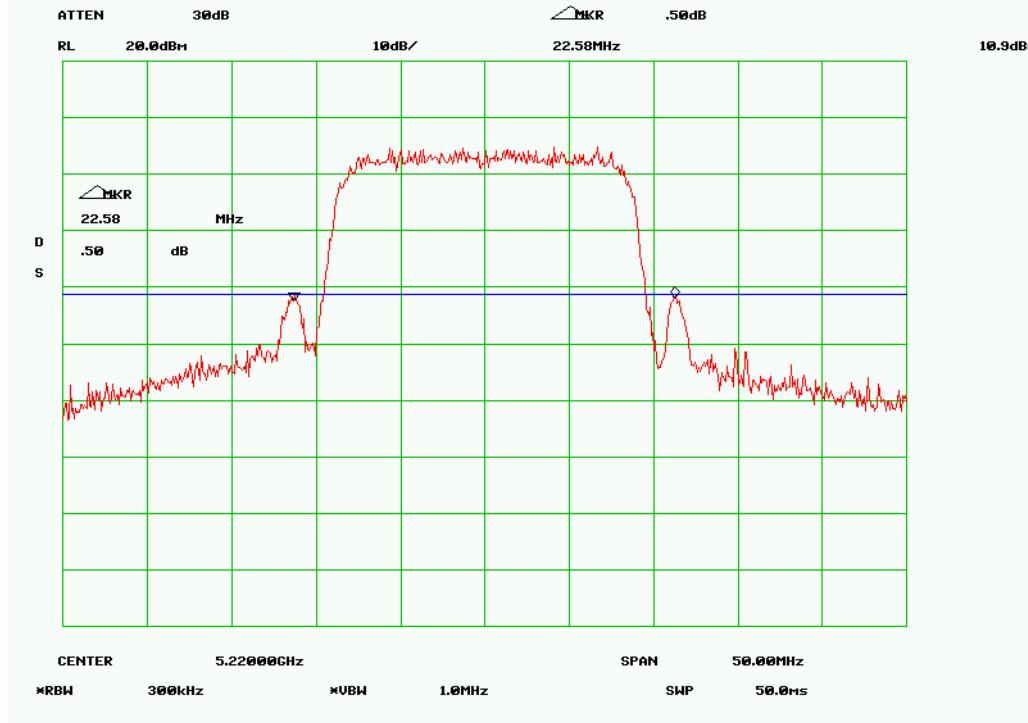


26 dB Bandwidth - High Channel () – Chain 1

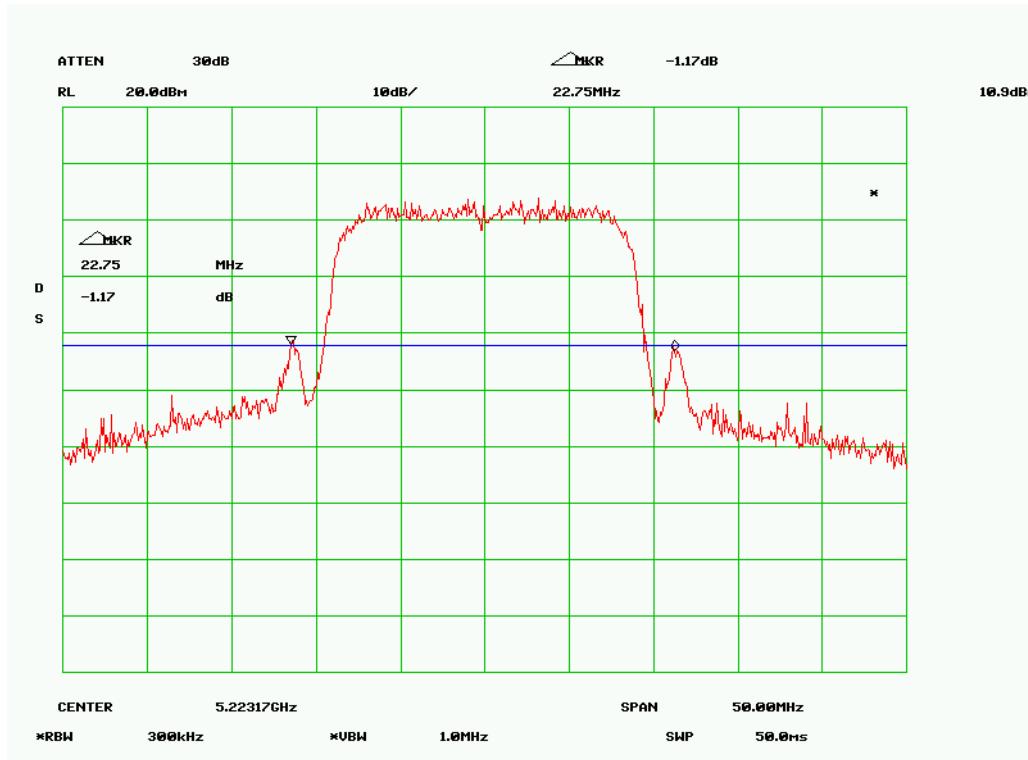

26 dB Bandwidth - High Channel () – Chain 2

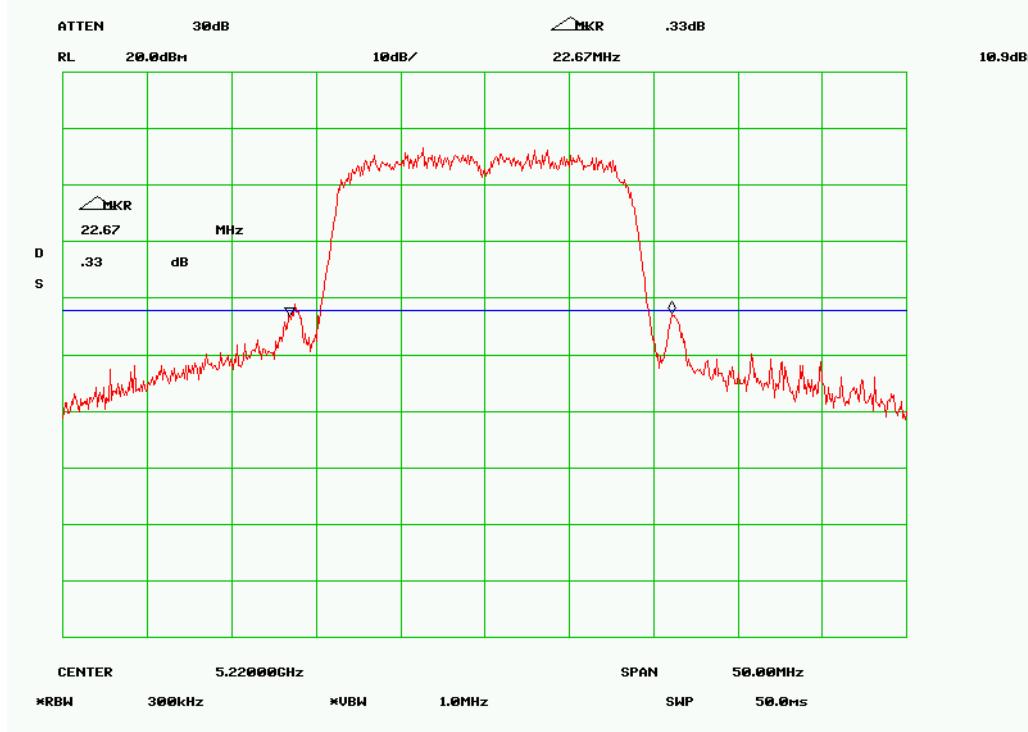

26 dB Bandwidth - High Channel () – Chain 3

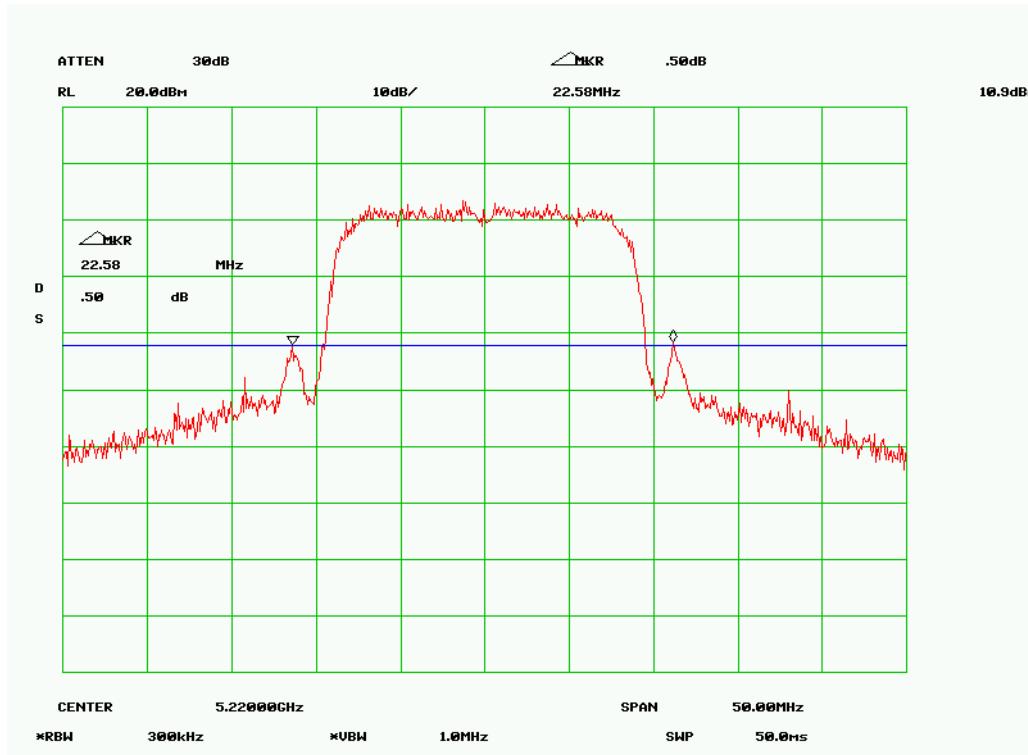

26 dB Bandwidth - High Channel () – Chain 4

## 5.1 Peak Power Spectral Density

### 1. Conducted Measurement

EUT was set for low , mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

### 2 Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.

3 Environmental Conditions      Temperature      23°C  
      Relative Humidity      50%  
      Atmospheric Pressure      1019mbar

4 Test Date : October 18 2007


Tested By : Kent Kim

**Requirement(s):** 47 CFR §15.407(a)(2)


**Procedures:** The peak power spectral density measured at the antenna terminal using a spectrum analyzer. RBW=1MHz, VBW=3MHz, sample Detector with power averaging. Peak power spectral density limit is 4 dBm in any 1 MHz band.

### Test Result :


Frequency (MHz)	Channel	Measured PPSD (dBm/MHz)	Total PPSD (dBm/MHz)	Cable Loss (dB)	Corrected Total PPSD (dBm/MHz)	Limit (dBm/MHz)
5180	Chain 1	-5.82	0.08	0.8	0.88	4
	Chain 2	-5.23				
	Chain 3	-6.35				
	Chain 4	-6.46				
5200	Chain 1	-5.24	0.72	0.8	1.52	4
	Chain 2	-4.56				
	Chain 3	-5.99				
	Chain 4	-5.54				
5220	Chain 1	-5.58	0.55	0.8	1.35	4
	Chain 2	-4.61				
	Chain 3	-5.89				
	Chain 4	-5.94				

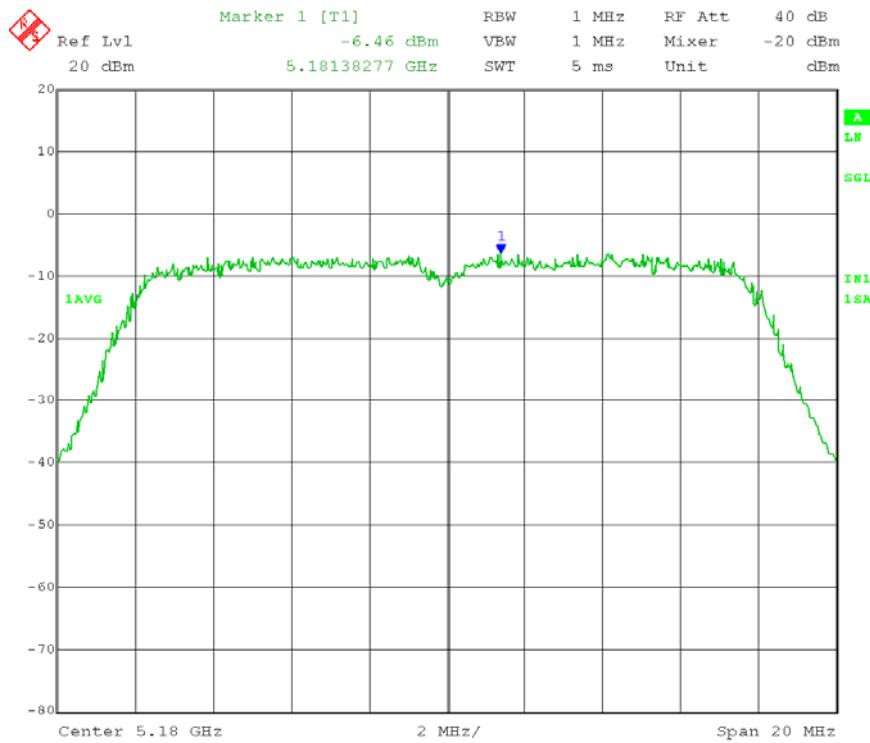


### PPSD Low CH – Chain 1

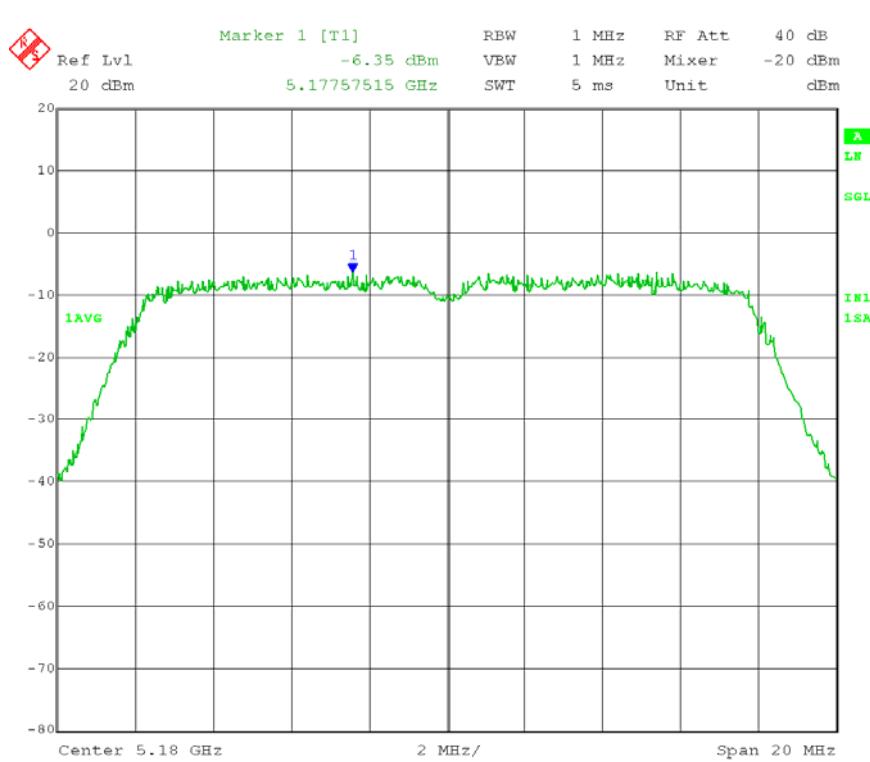


### PPSD Low CH – Chain 2

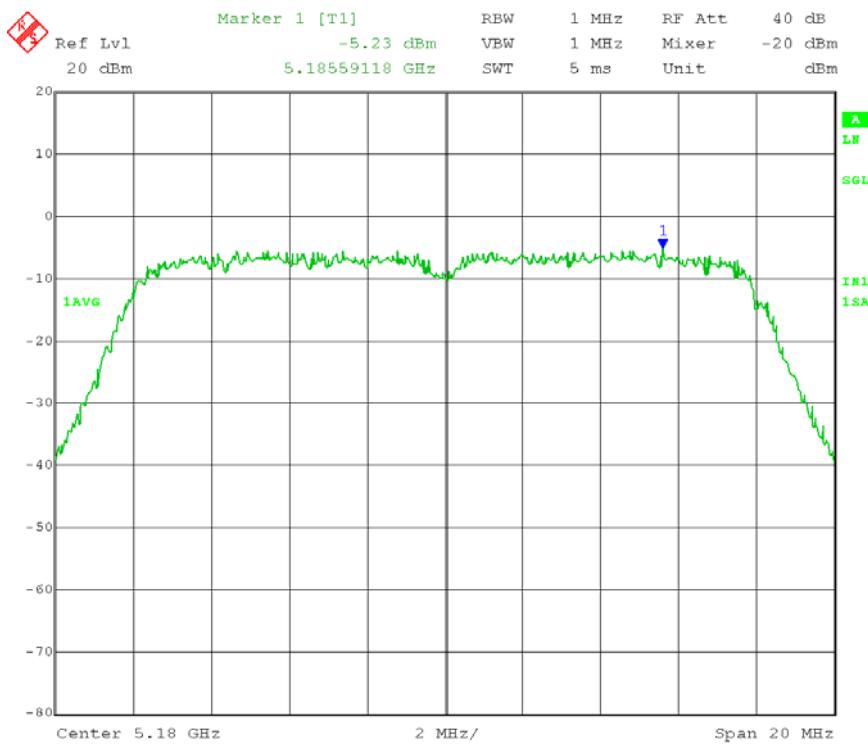


## PPSD Low CH – Chain 3

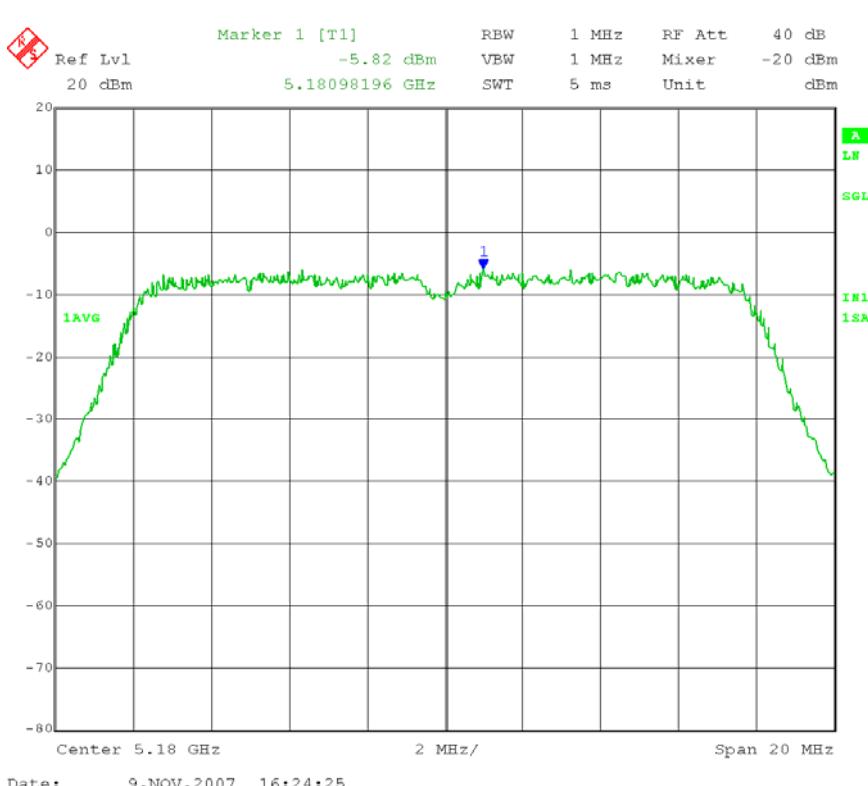


## PPSD Low CH – Chain 4

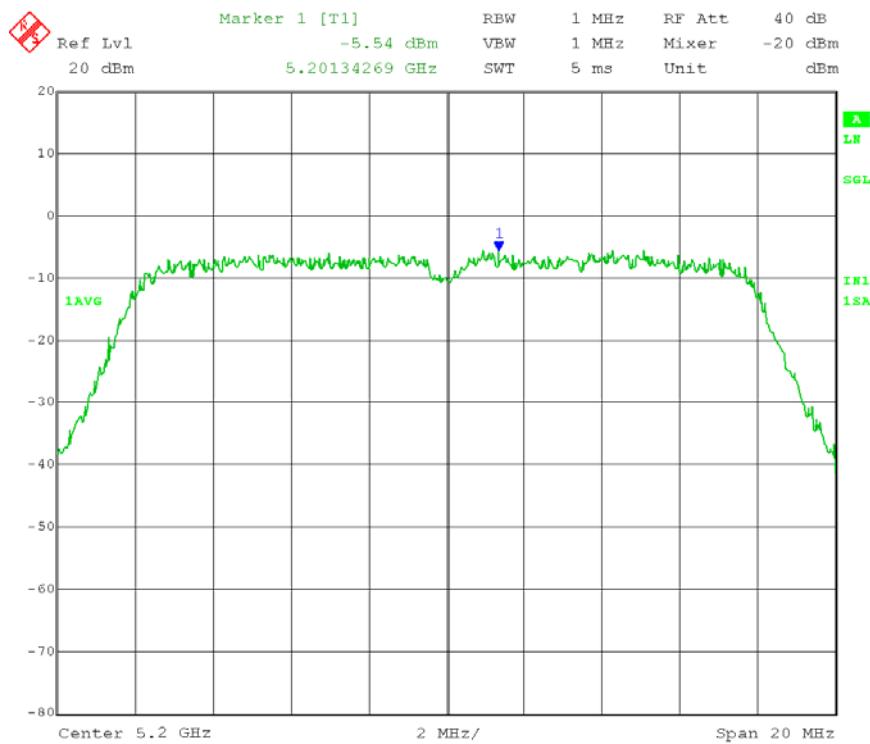


### PPSD Mid CH – Chain 1

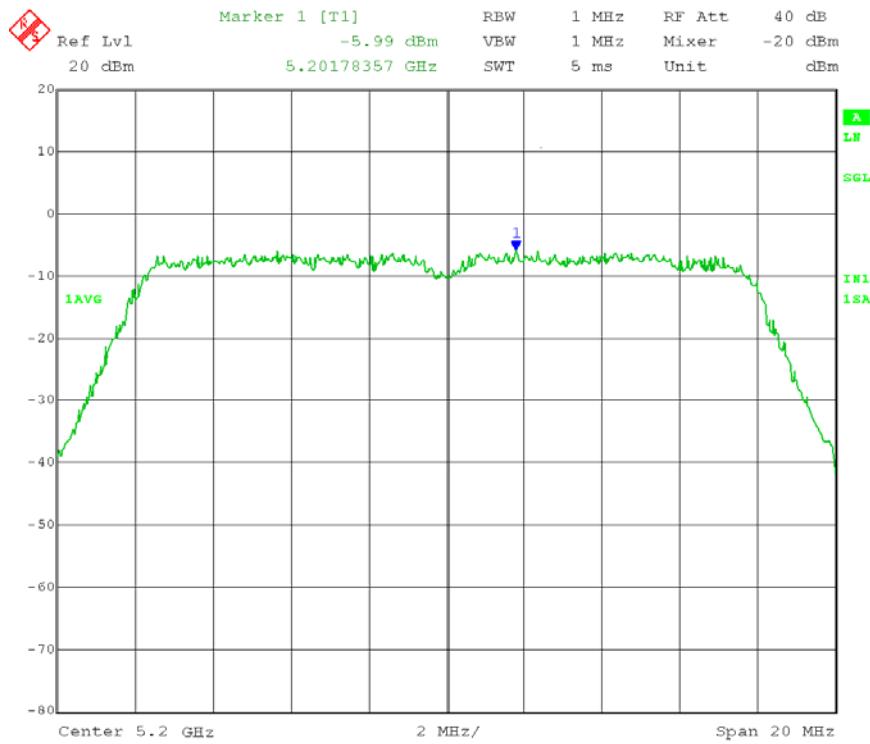


### PPSD Mid CH – Chain 2

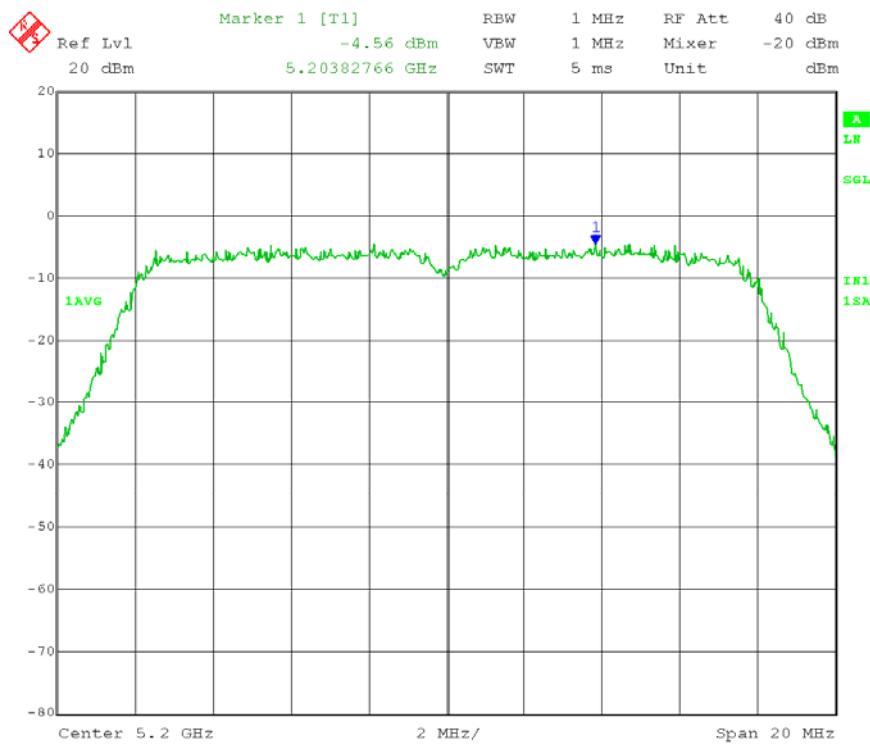


### PPSD Mid CH – Chain 3

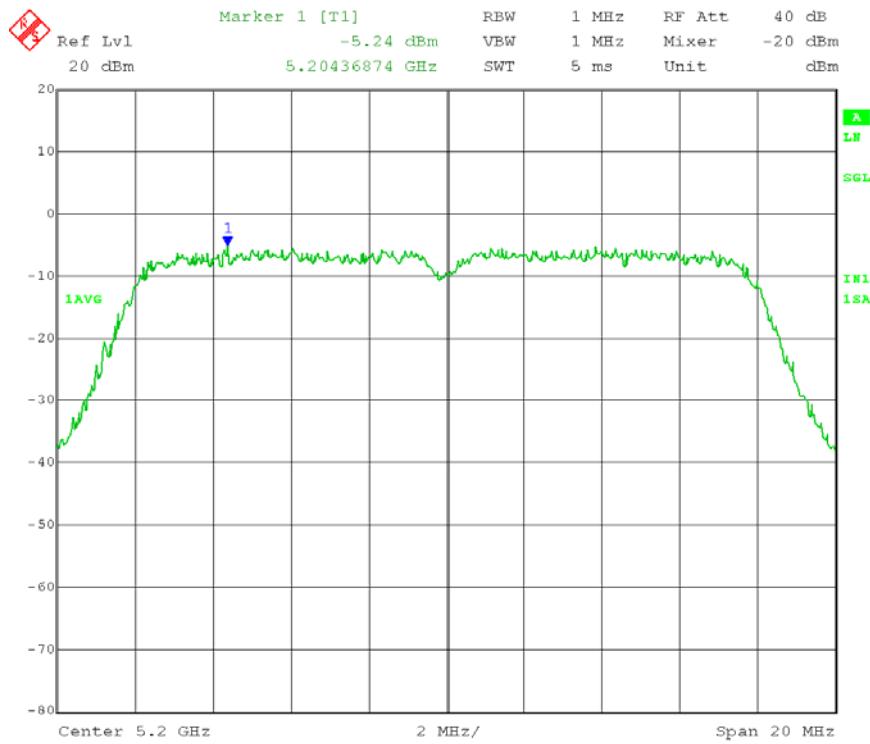


### PPSD Mid CH – Chain 4

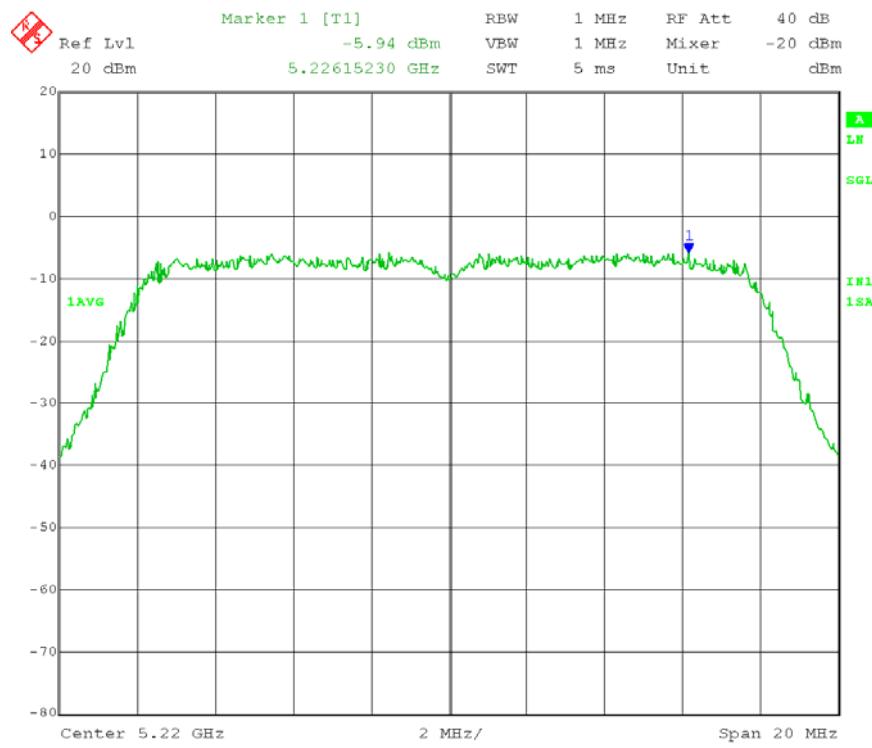


## PPSD High CH – Chain 1

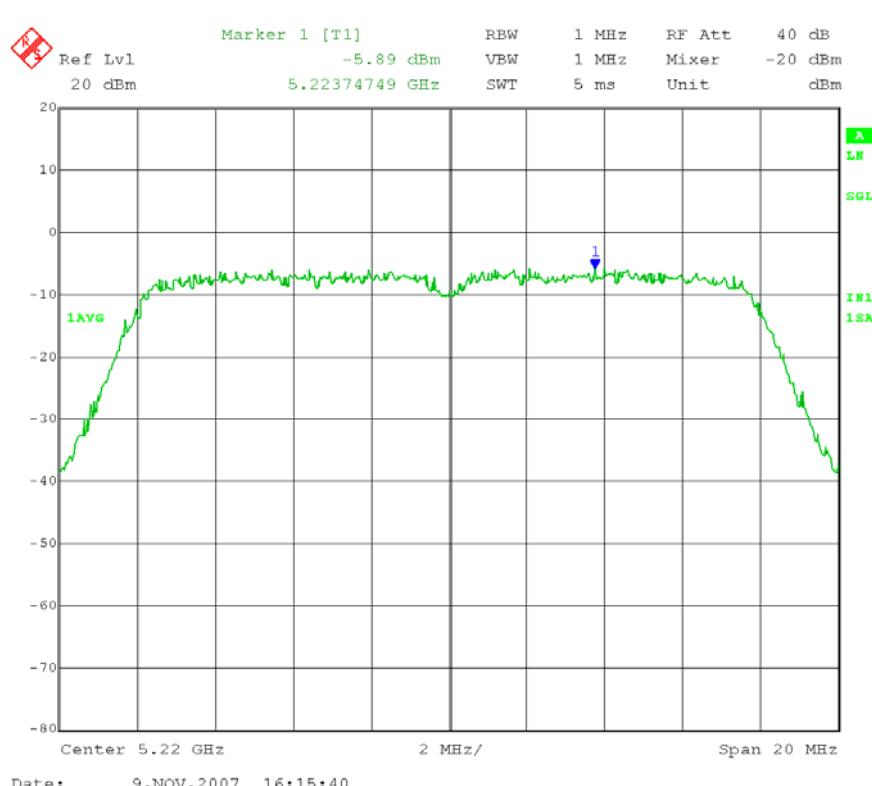

## PPSD High CH – Chain 2

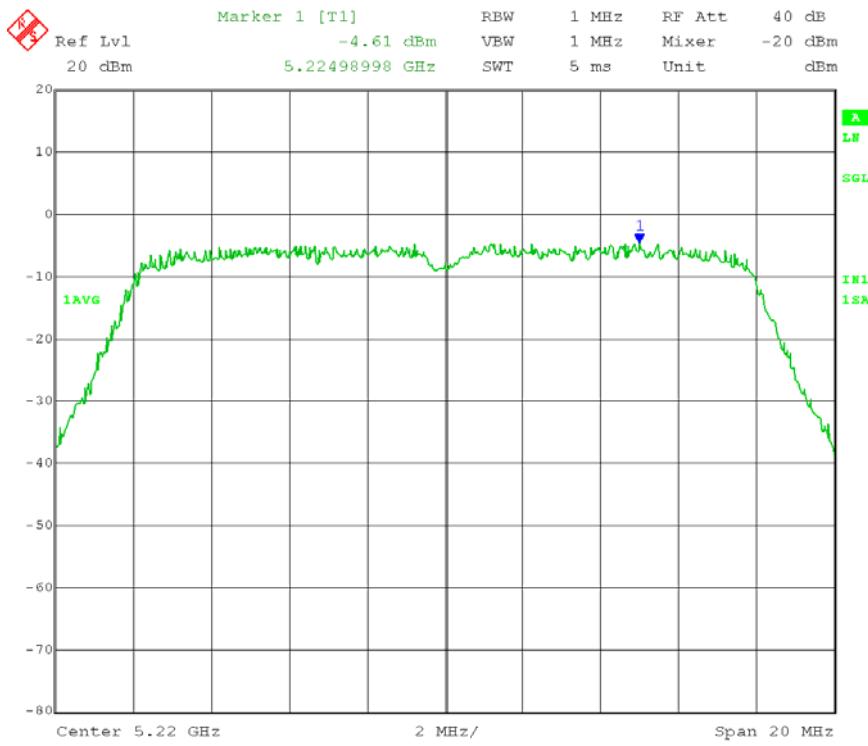

## PPSD High CH – Chain 3

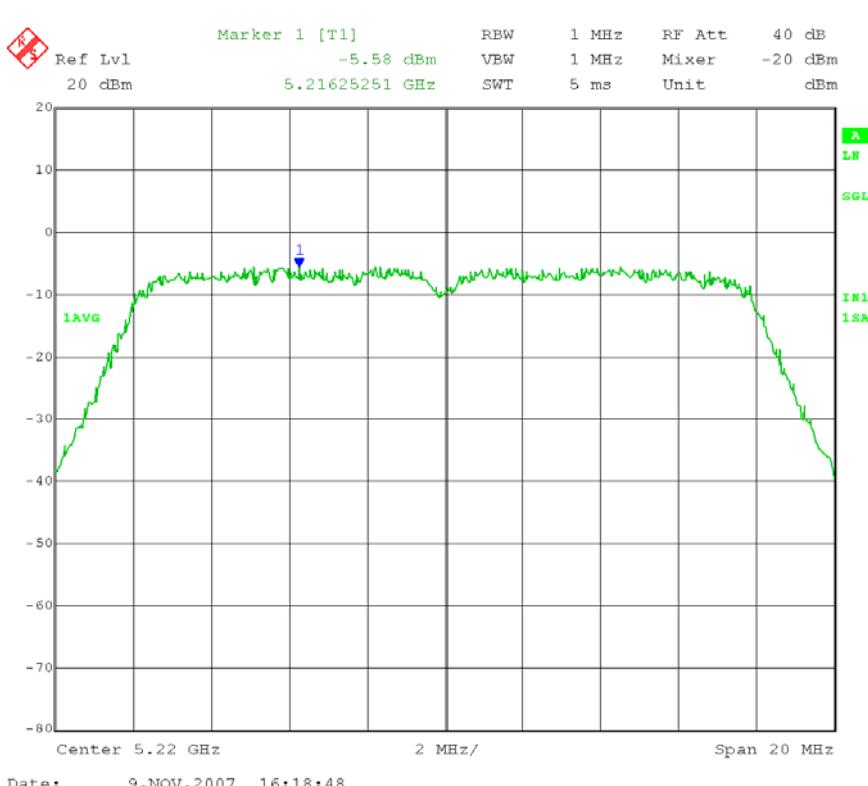

## PPSD High CH – Chain 4

## 5.2 Peak Output Power

1. Conducted Measurement  
EUT was set for low , mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions
 


Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : October 26 2007  
Tested By : Kent Kim

**Requirement(s):** 47 CFR §15.407(a)(2)


**Procedures:** The peak output power was measured at the antenna terminal using Acceptable Procedures: Peak conducted transmit output power outlined in FCC DA 02-2138 Appendix A. 100KHz VBW was determined, where  $T = \infty \mu\text{sec}$ .  
Conducted Peak Power Limit is 50mW (17 dBm).

### Test Result :


Frequency (MHz)	Channel	Measured Power (dBm)	Total Power (dBm)	Cable Loss (dB)	Corrected Total Power (dBm)	Limit (dBm)
5180	Chain 1	6.5	12.14	0.8	12.94	17
	Chain 2	7.1				
	Chain 3	5.4				
	Chain 4	5.2				
5200	Chain 1	7.5	12.52	0.8	13.32	17
	Chain 2	7.1				
	Chain 3	5.9				
	Chain 4	5.1				
5220	Chain 1	7.5	12.90	0.8	13.7	17
	Chain 2	7.9				
	Chain 3	5.9				
	Chain 4	5.8				

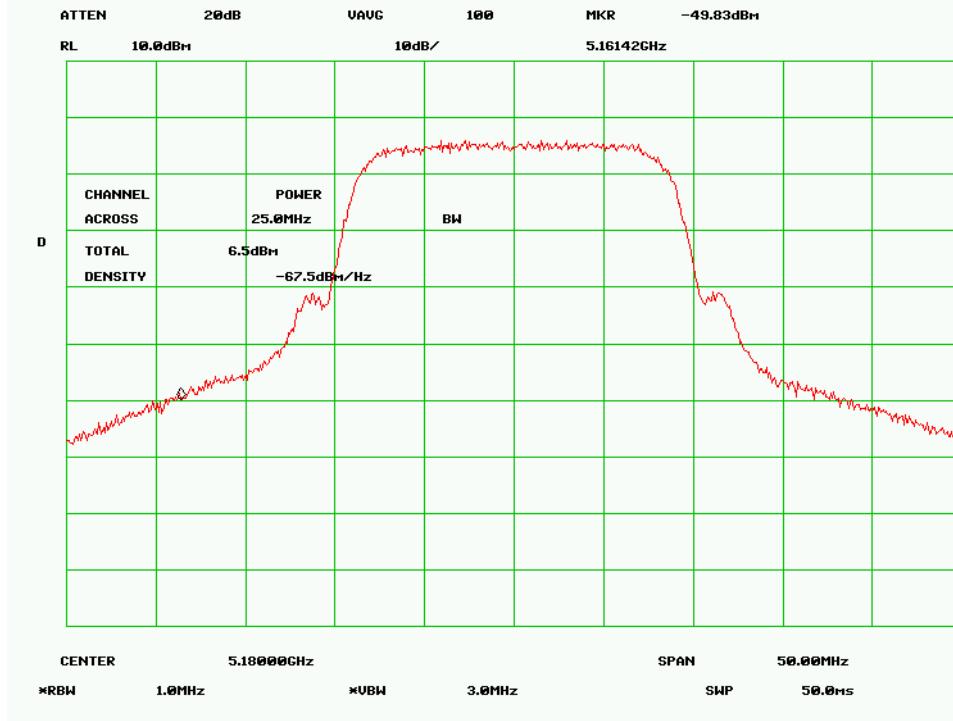


Output Power Low Channel Chain-1

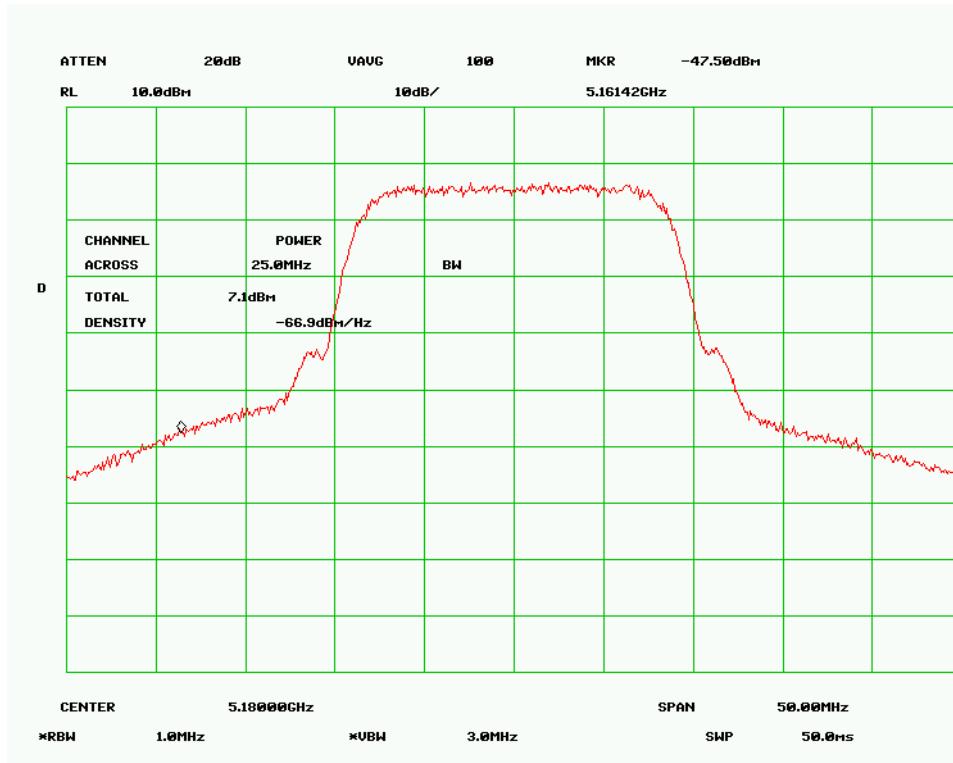


Output Power Low Channel Chain-2

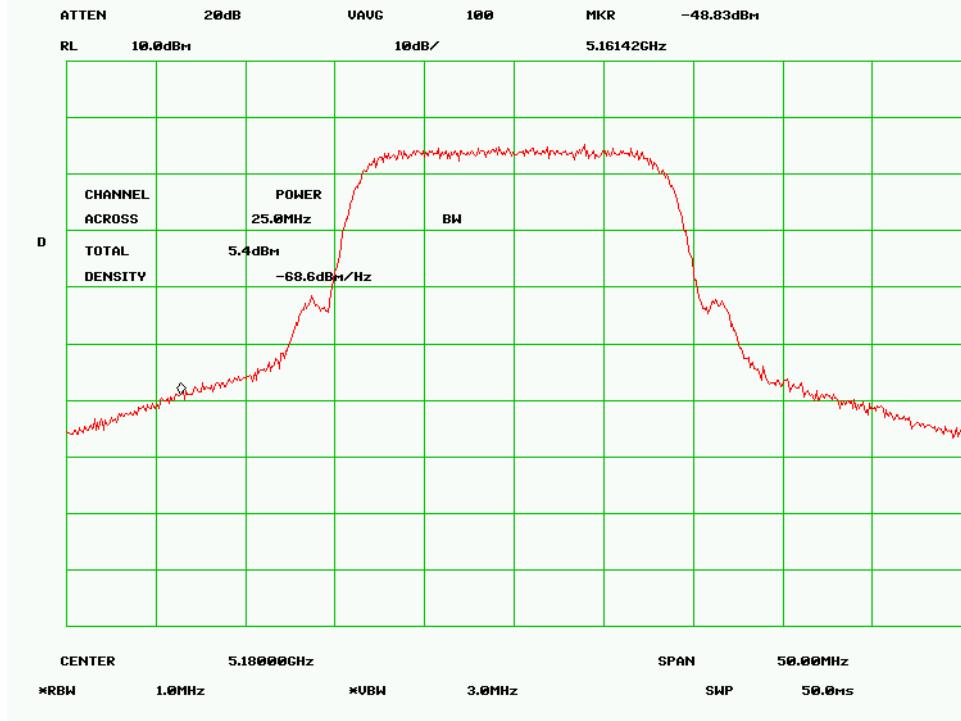


Output Power Low Channel Chain-3

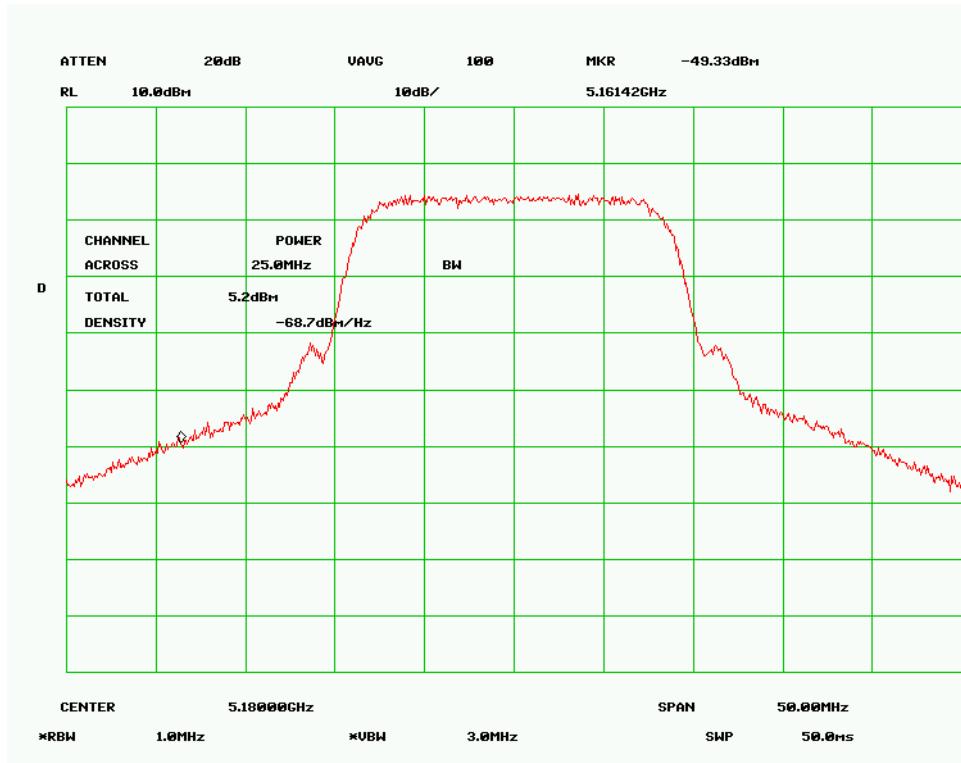


Output Power Low Channel Chain-4

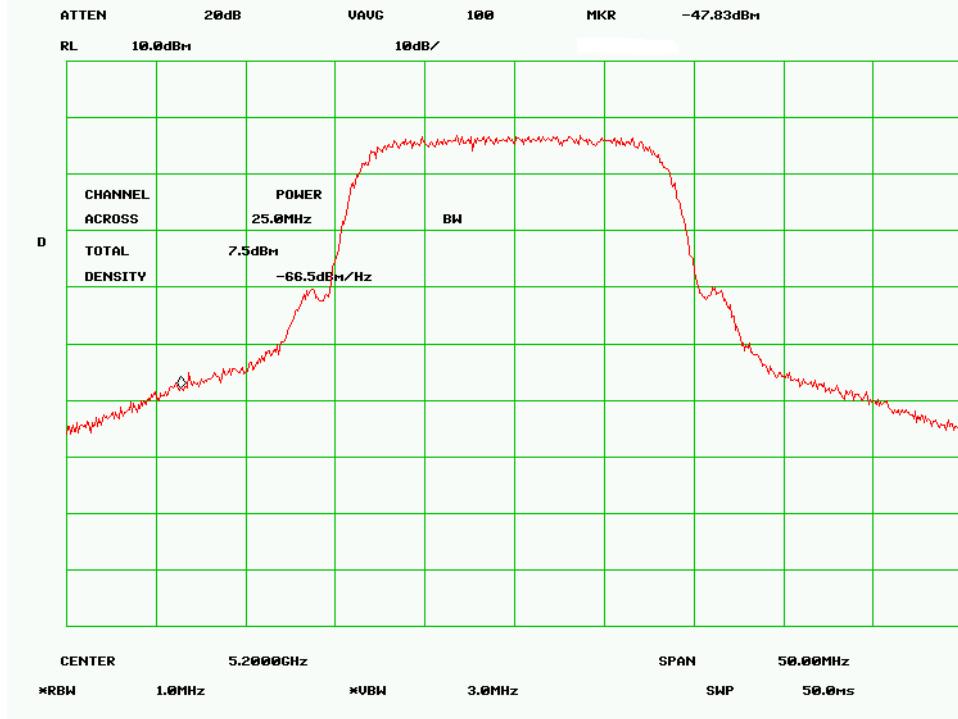


Output Power Mid Channel Chain-1

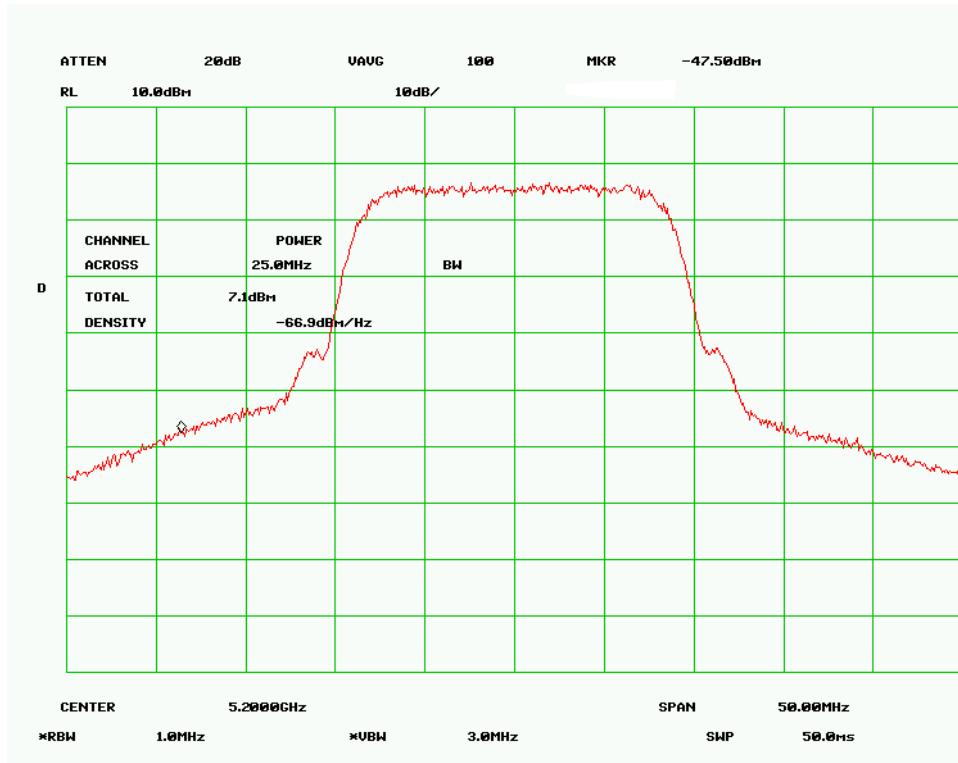


Output Power Mid Channel Chain-2

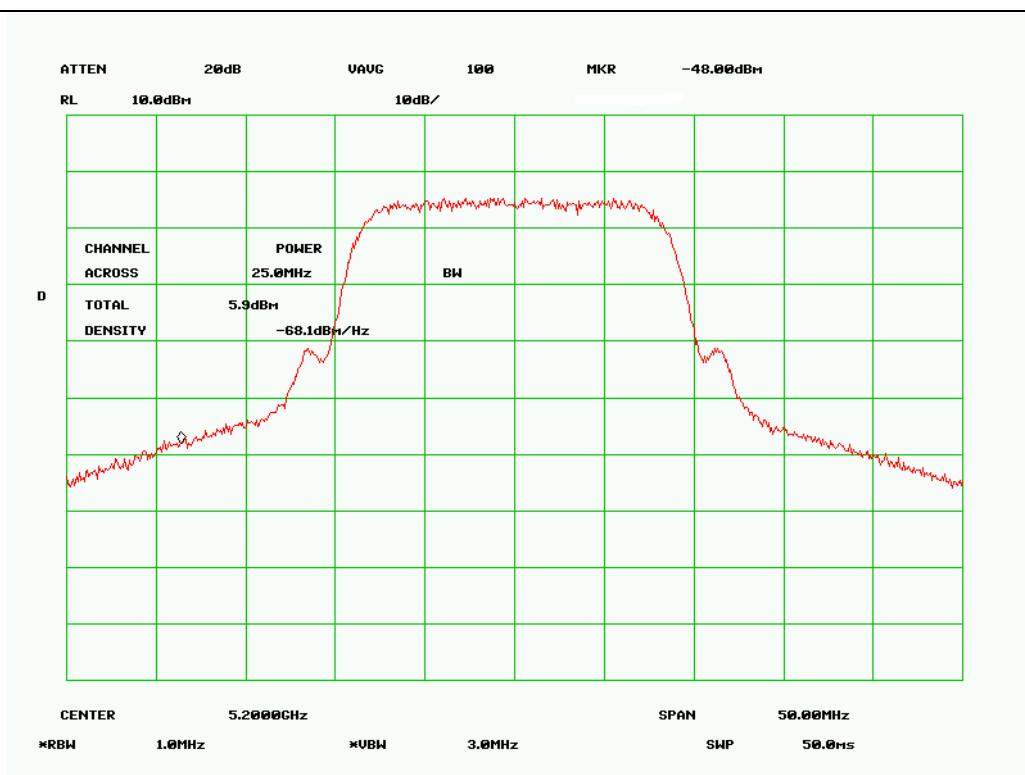


Output Power Mid Channel Chain-3

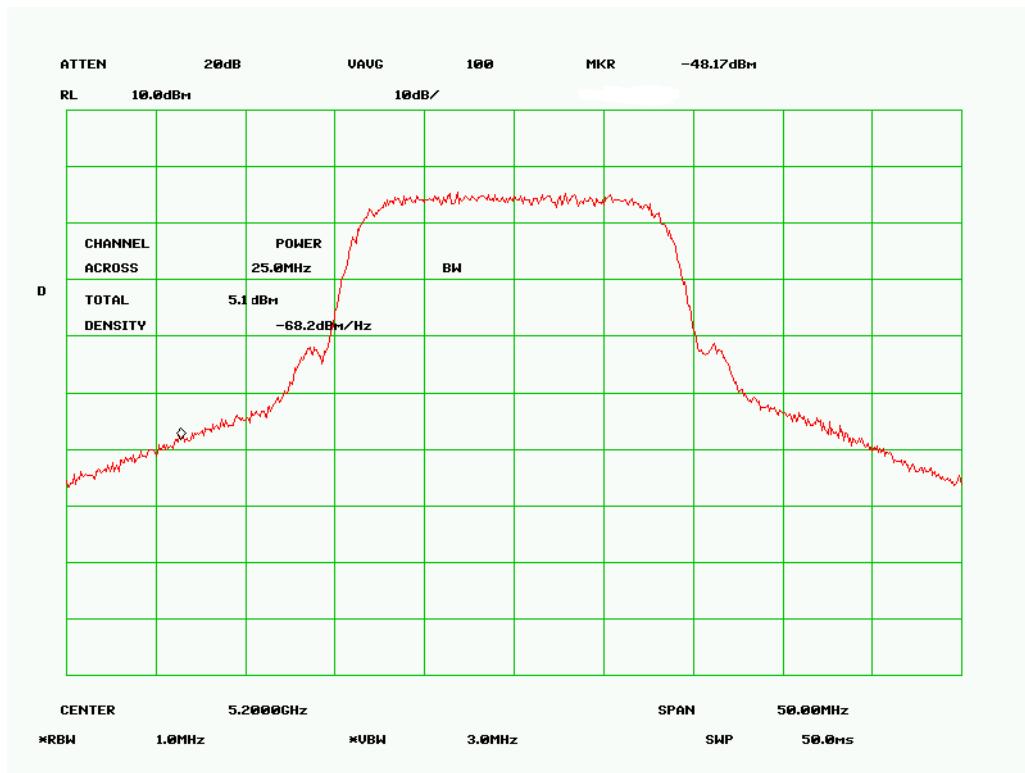


Output Power Mid Channel Chain-4

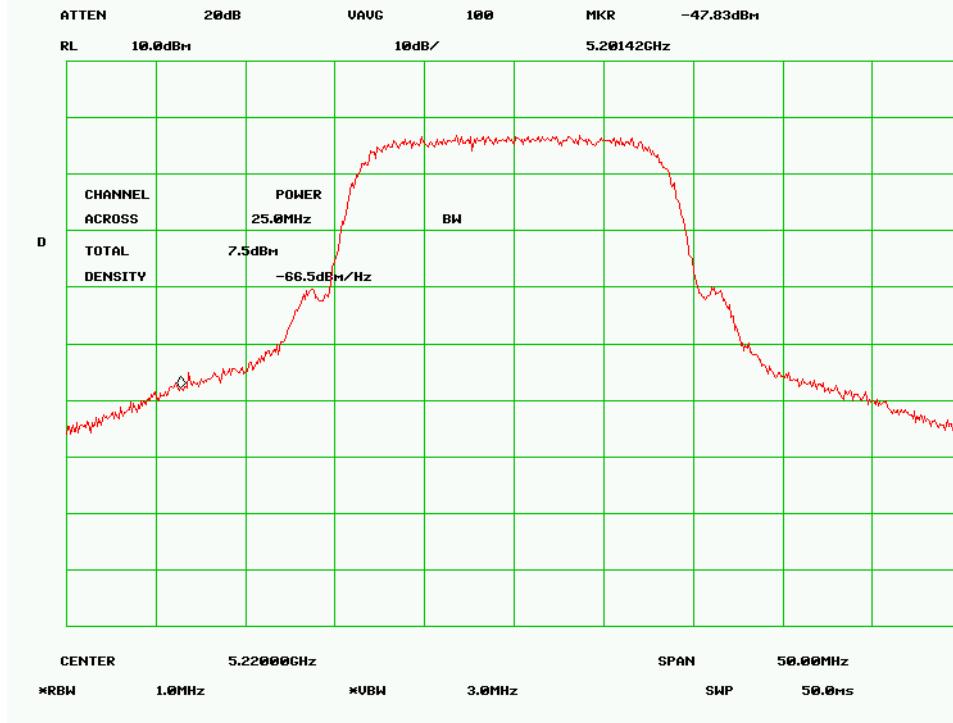


Output Power High Channel Chain-1

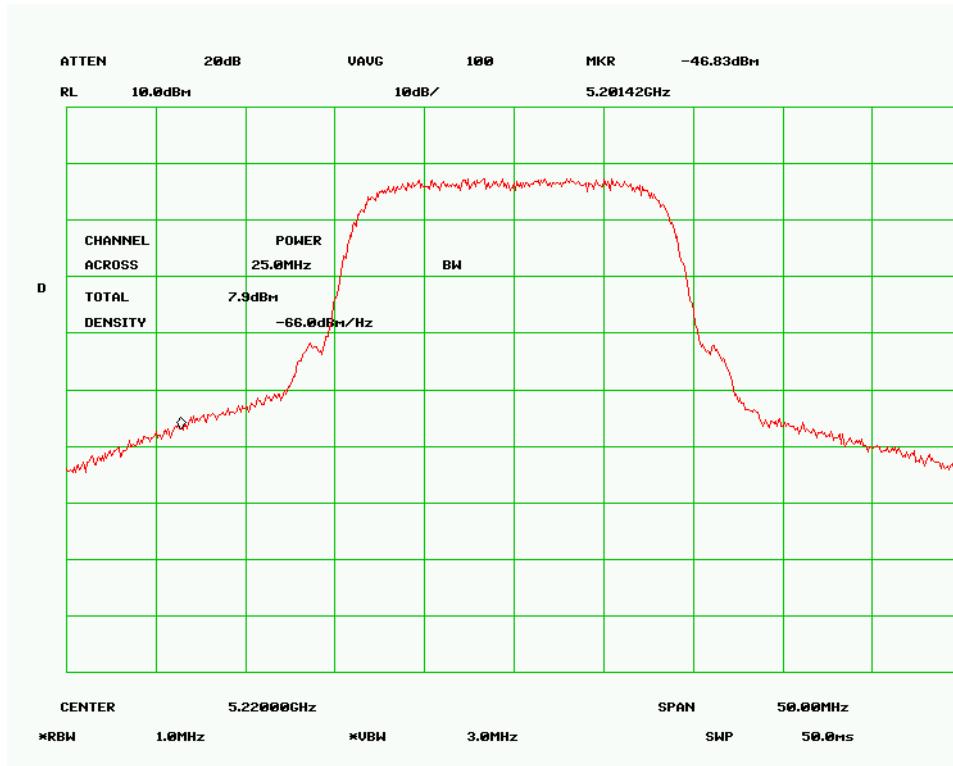

Output Power High Channel Chain-2

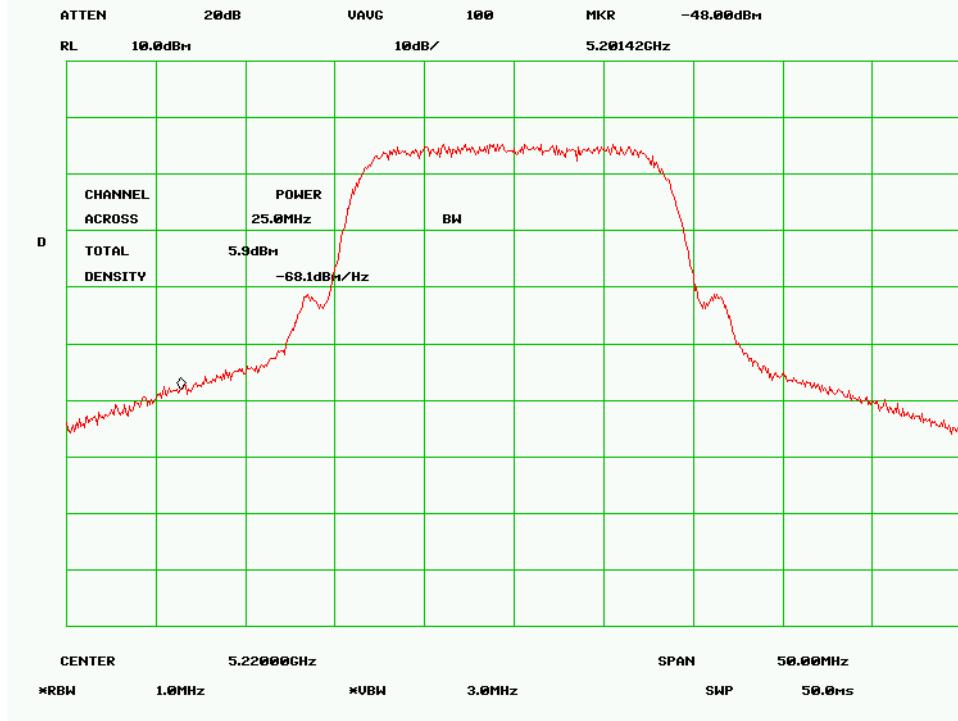

Output Power High Channel Chain-3

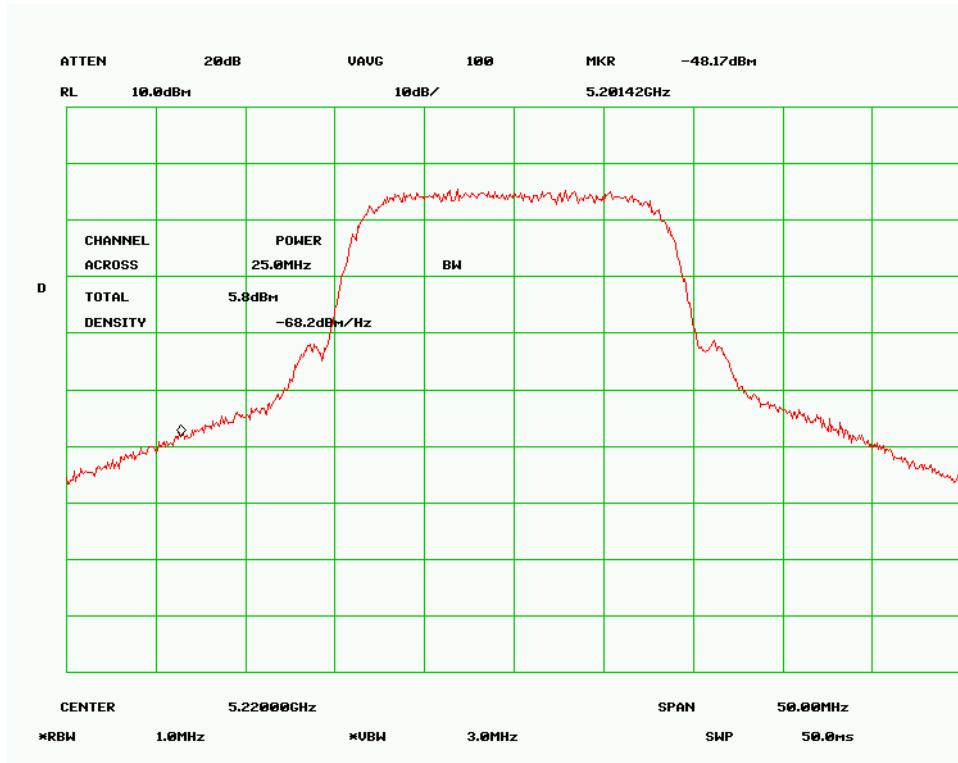

Output Power High Channel Chain-4

## 5.3 Band Edge & Antenna Port Emission

1. Conducted Measurement  
EUT was set for low , mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. 


Environmental Conditions	Temperature	23°C
	Relative Humidity	50%
	Atmospheric Pressure	1019mbar
4. Test Date : October 18 2007  
Tested By : Kent Kim


**Requirement(s):** 47 CFR §15.407(b)(2)


**Procedures:** The spurious emissions was measured at the antenna terminal using a spectrum analyzer. bandwidths at hi and low channels with the highest output power.


Out of Band Emission Limit: -27 dBm / MHz (EIRP)


## Test Result:

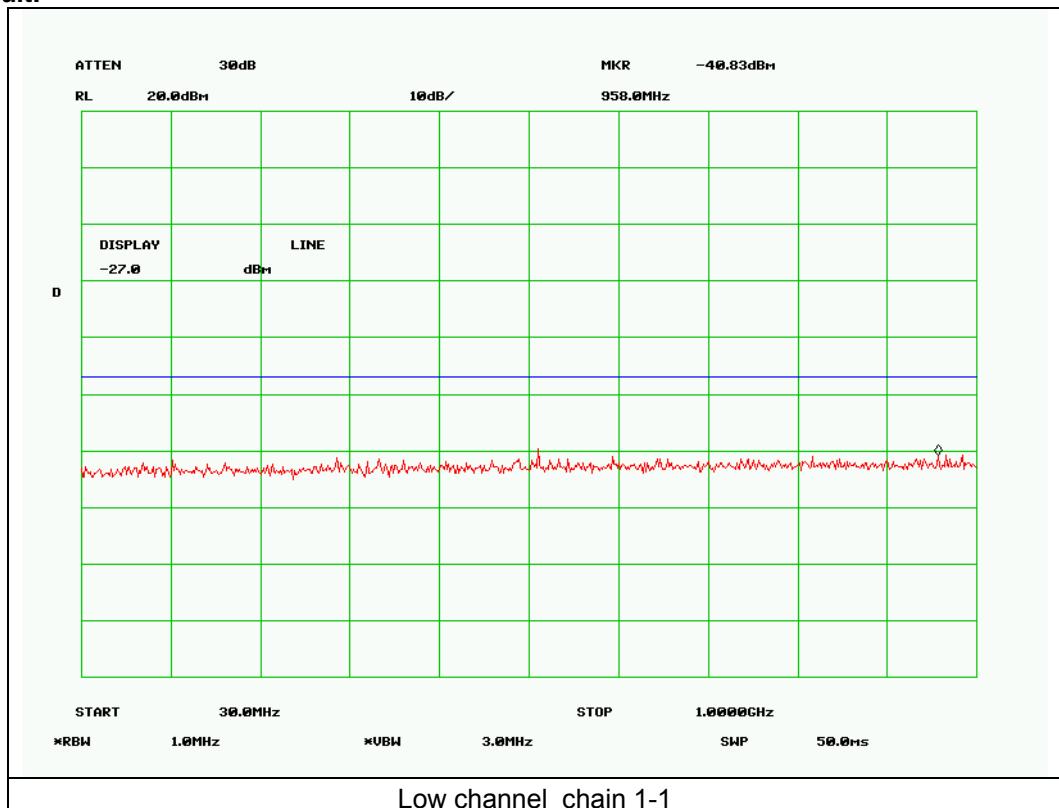


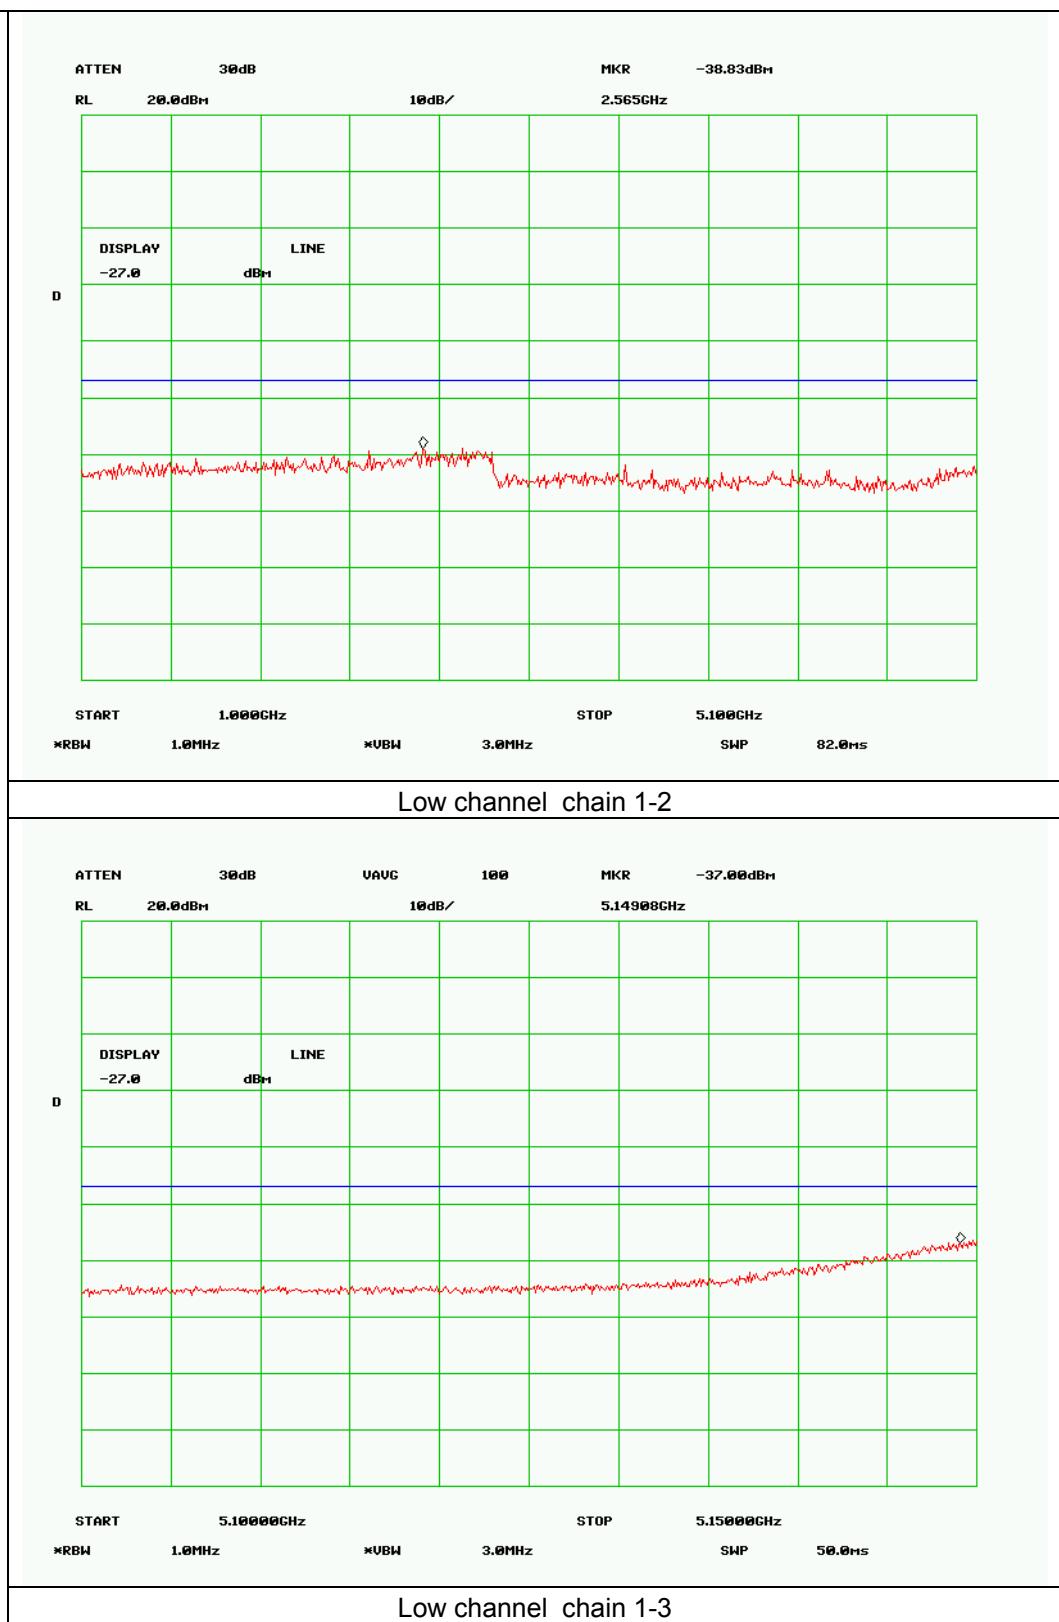


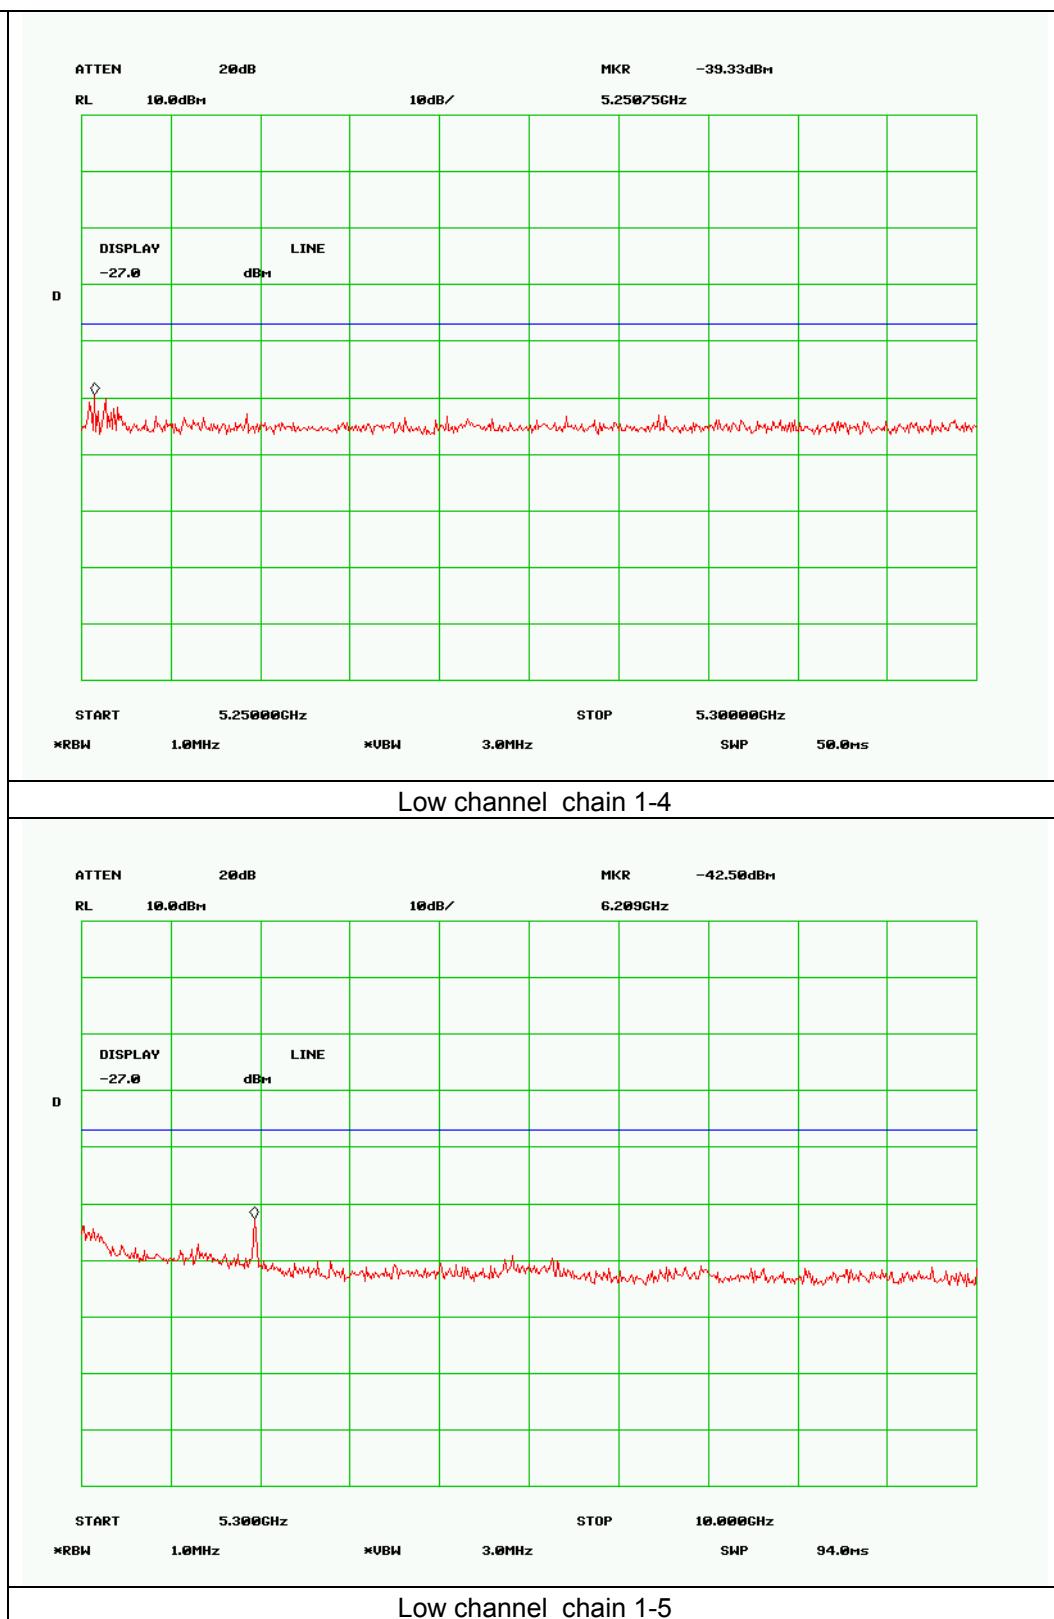


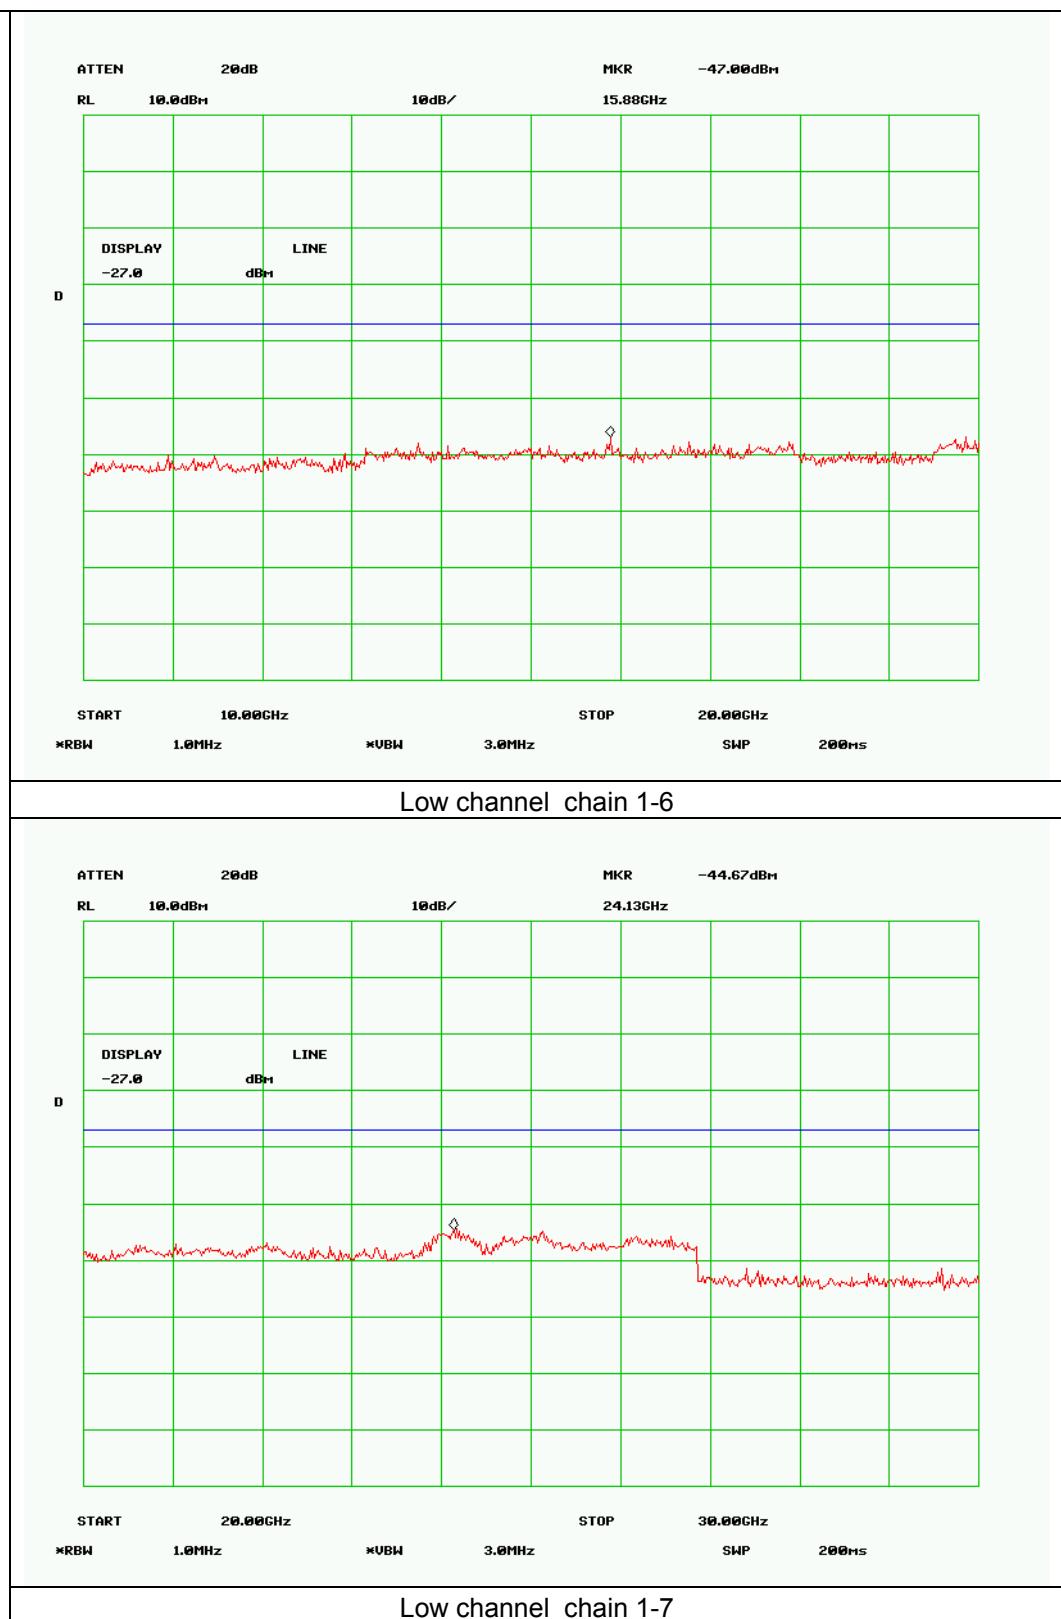


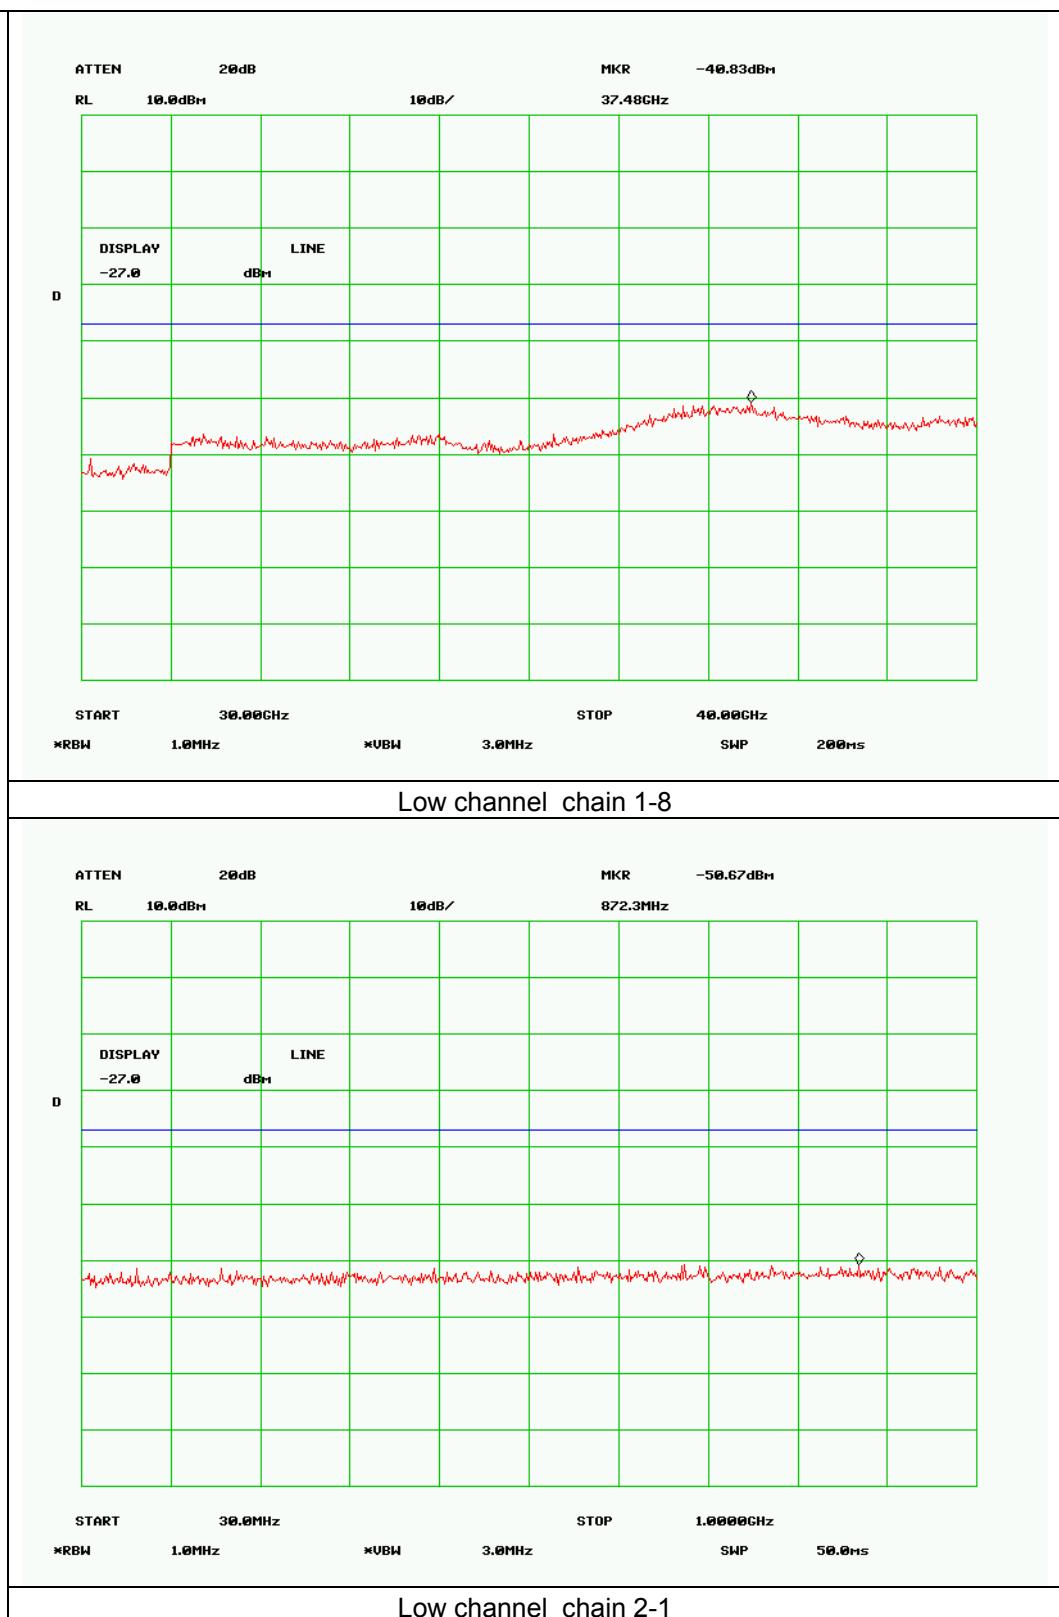

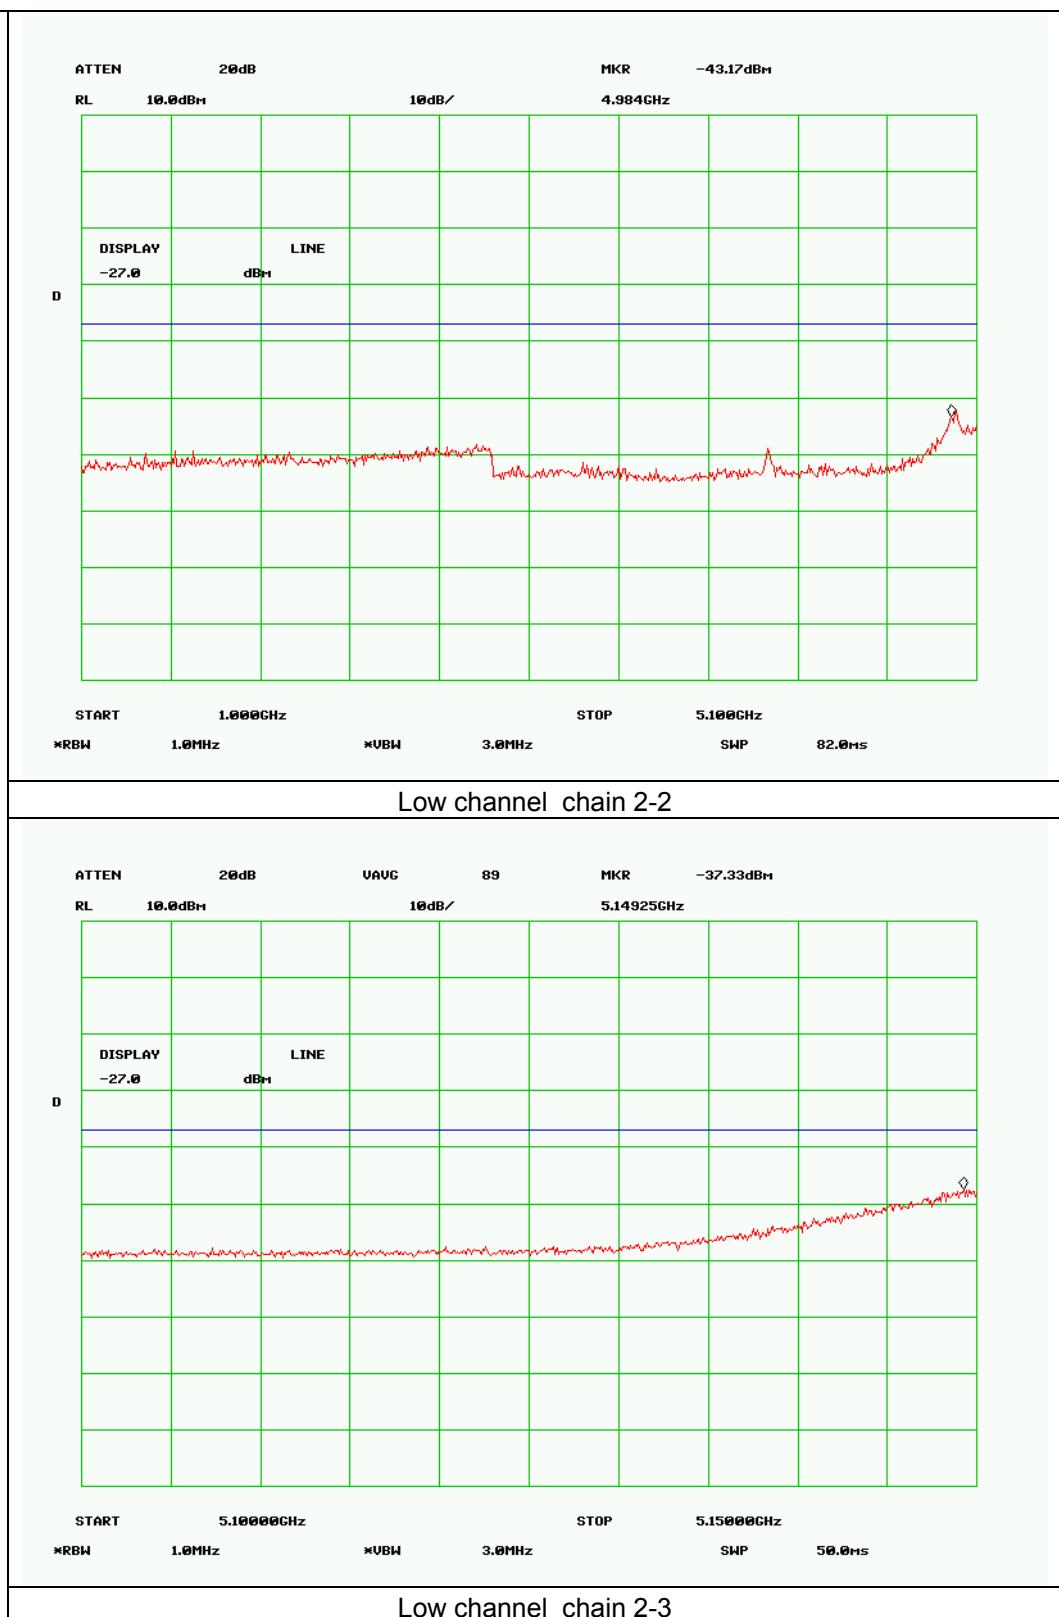

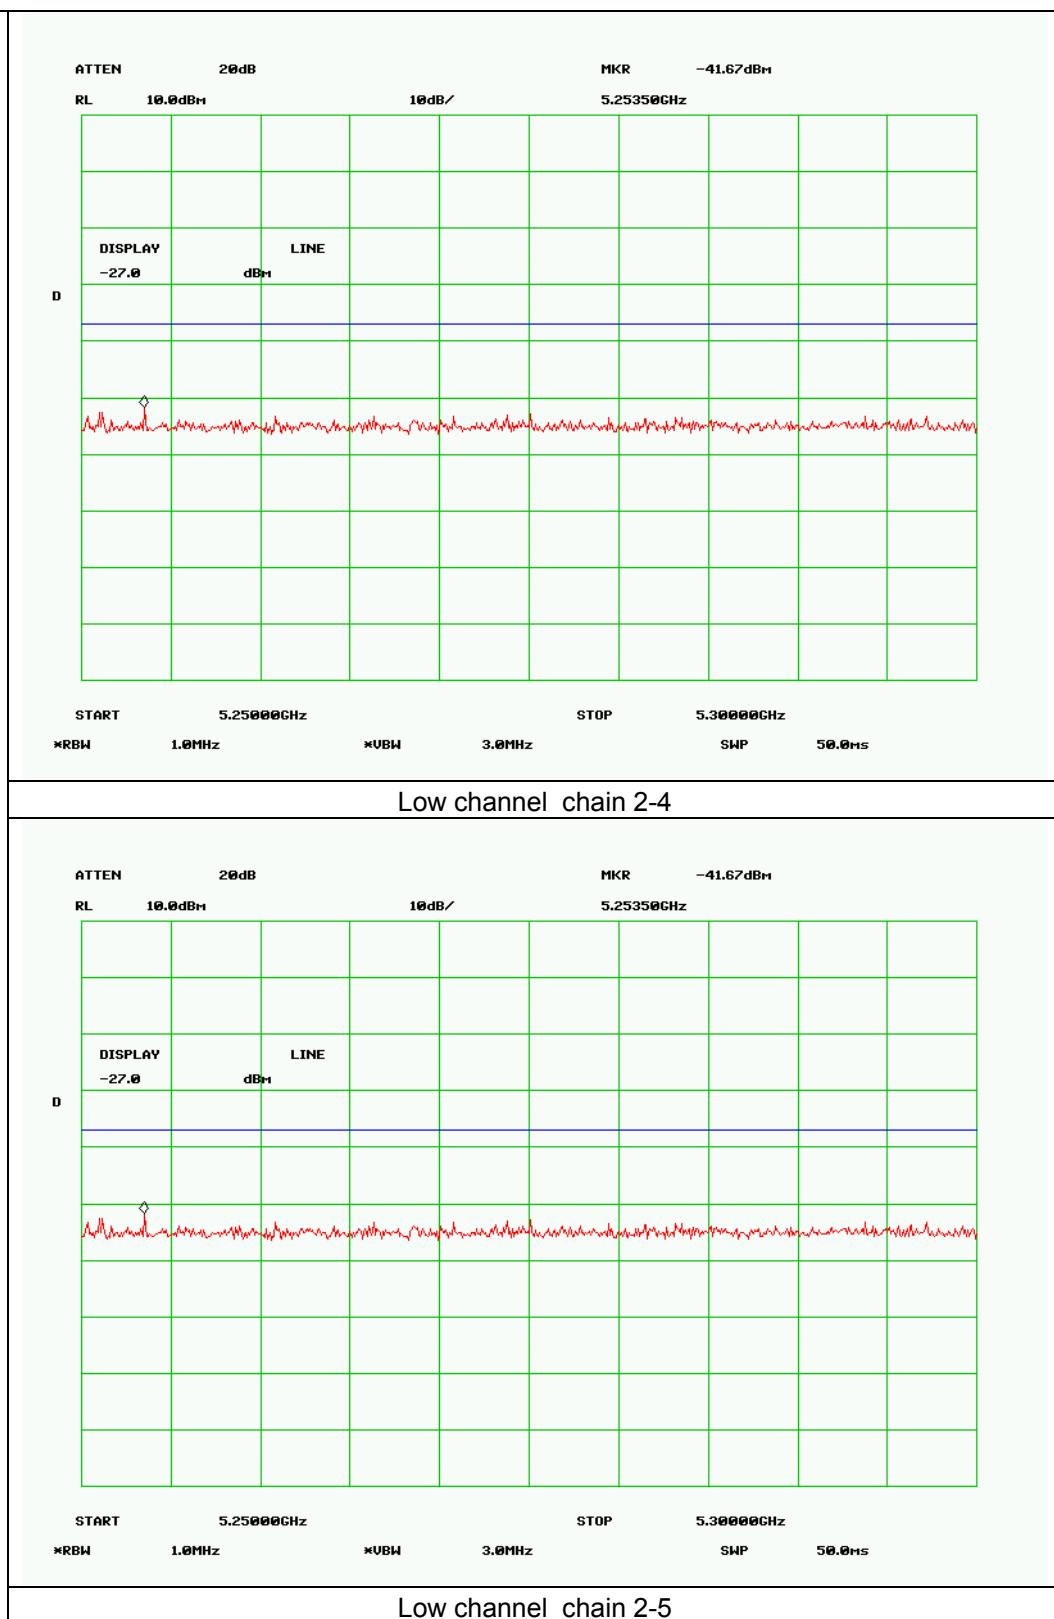


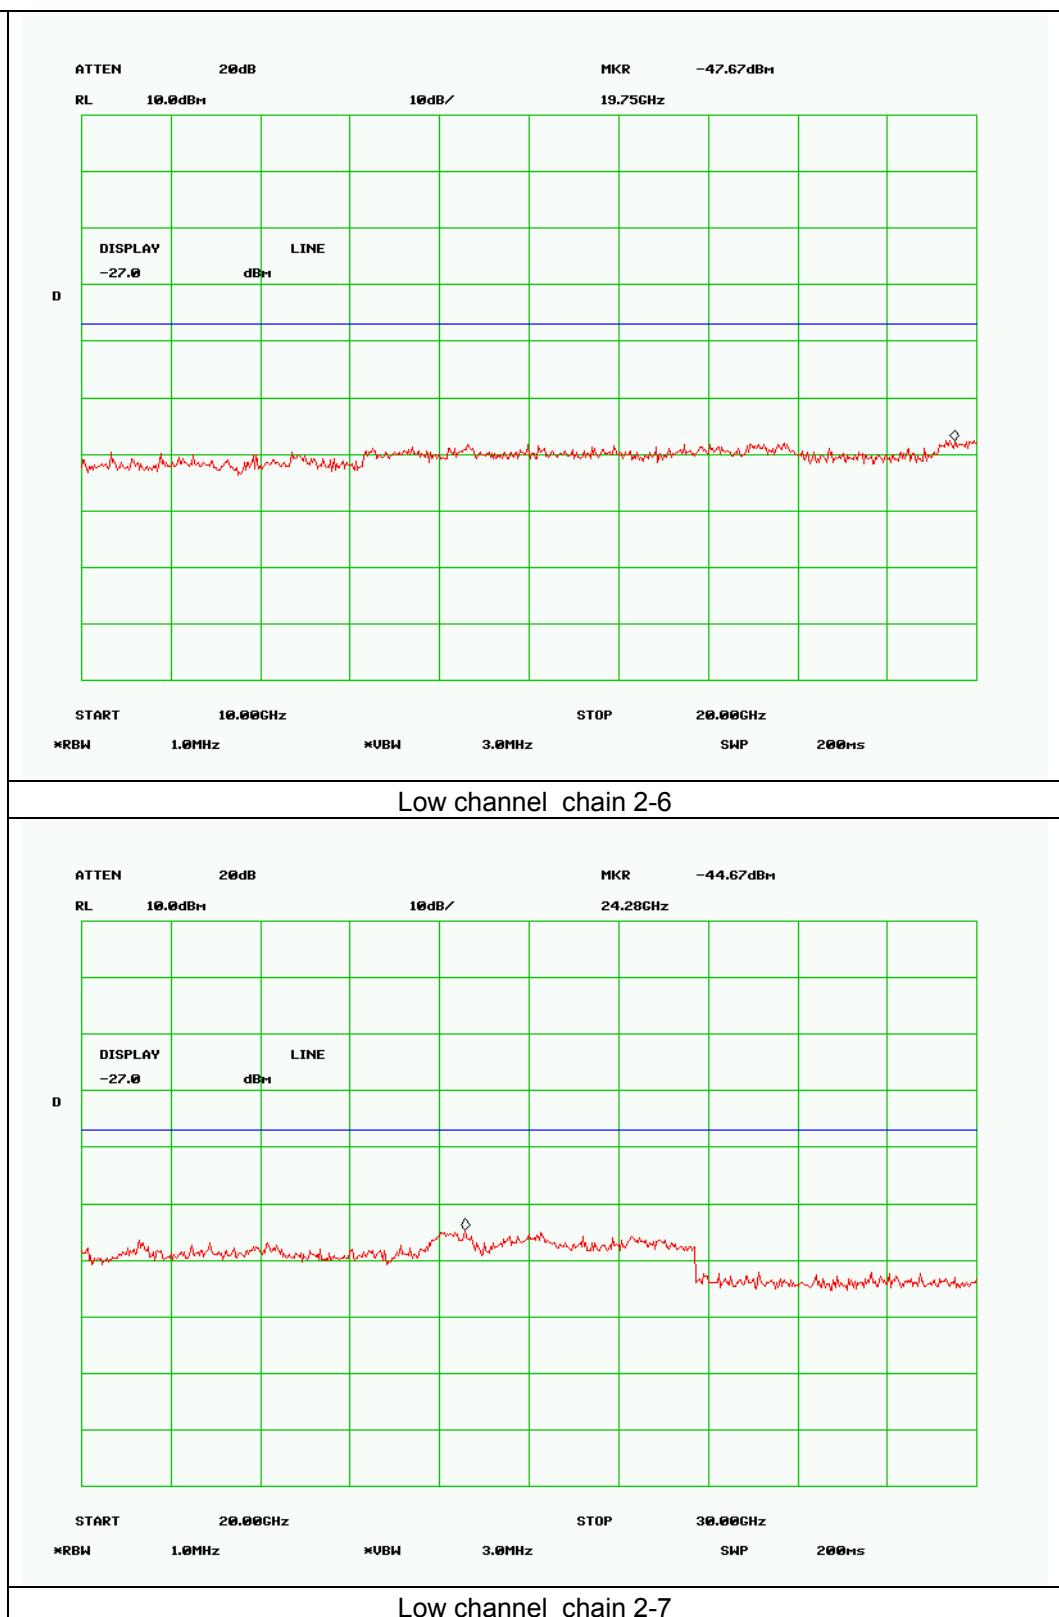

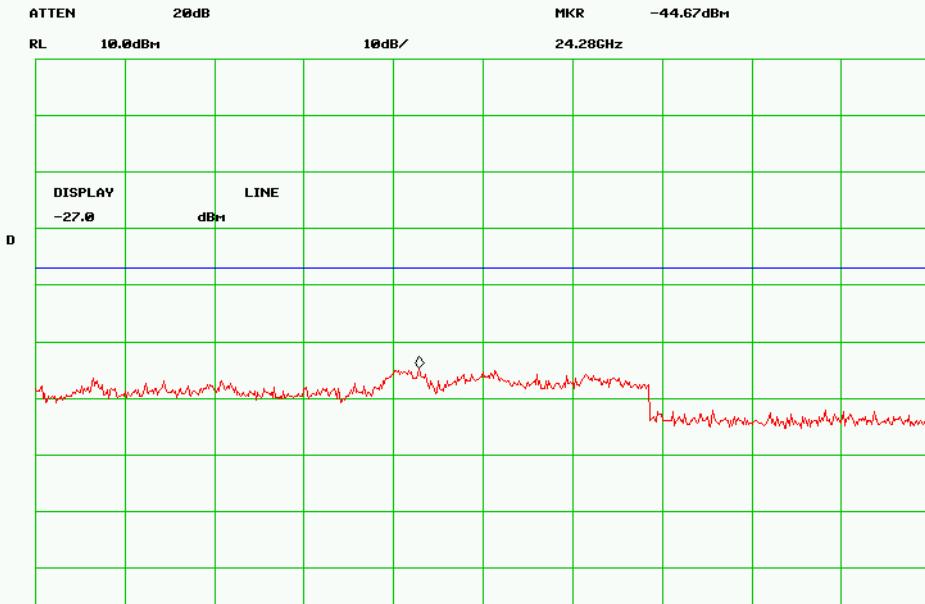



START 20.00GHz STOP 30.00GHz  
 xRBW 1.0MHz xUBW 3.0MHz SWP 200ms


### Low channel chain 2-8

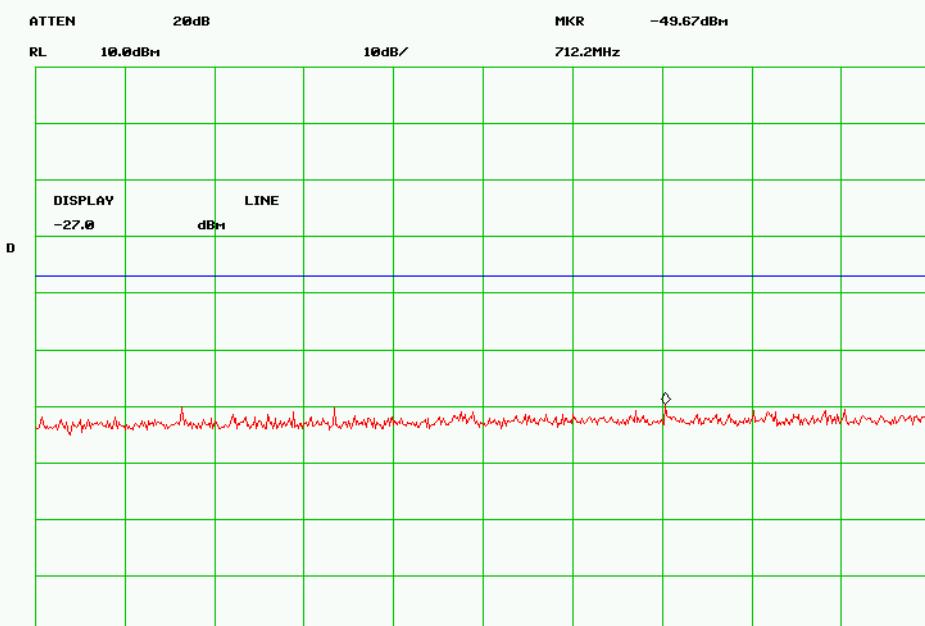

START 30.0MHz STOP 1.0000GHz  
 xRBW 1.0MHz xUBW 3.0MHz SWP 50.0ms

### Low channel chain 3-1

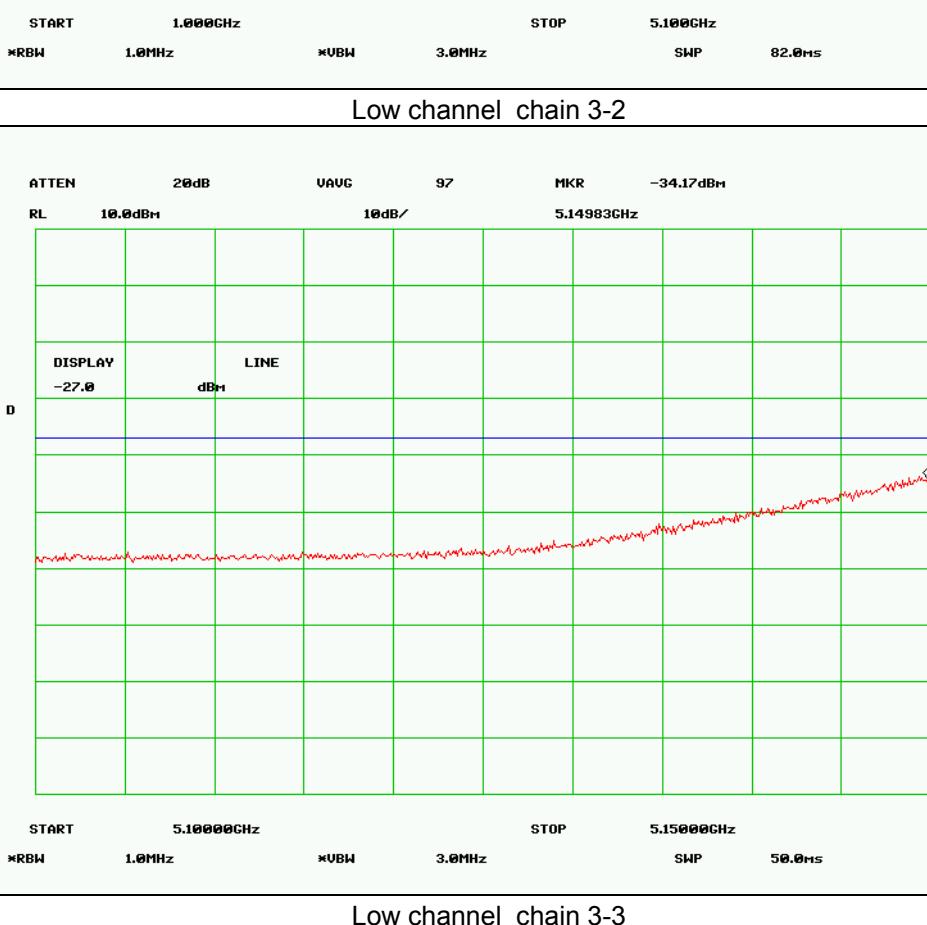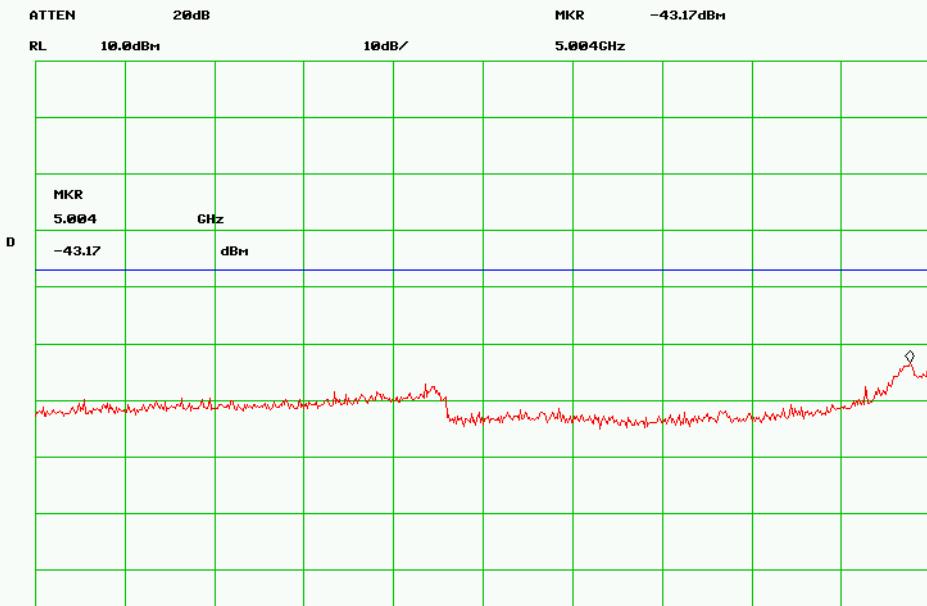


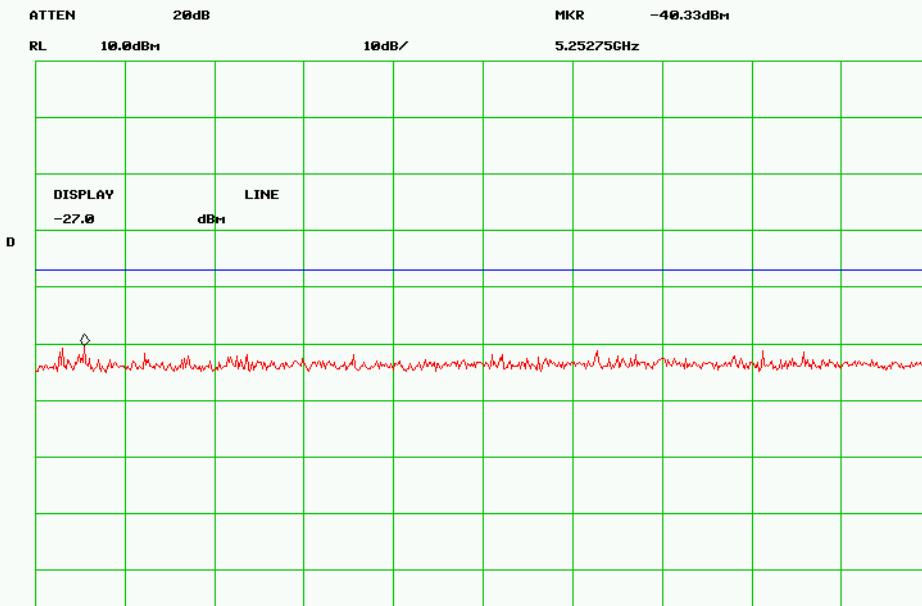

START 5.25000GHz STOP 5.30000GHz

RBW 1.0MHz VBW 3.0MHz SWP 50.0ms


#### Low channel chain 3-4

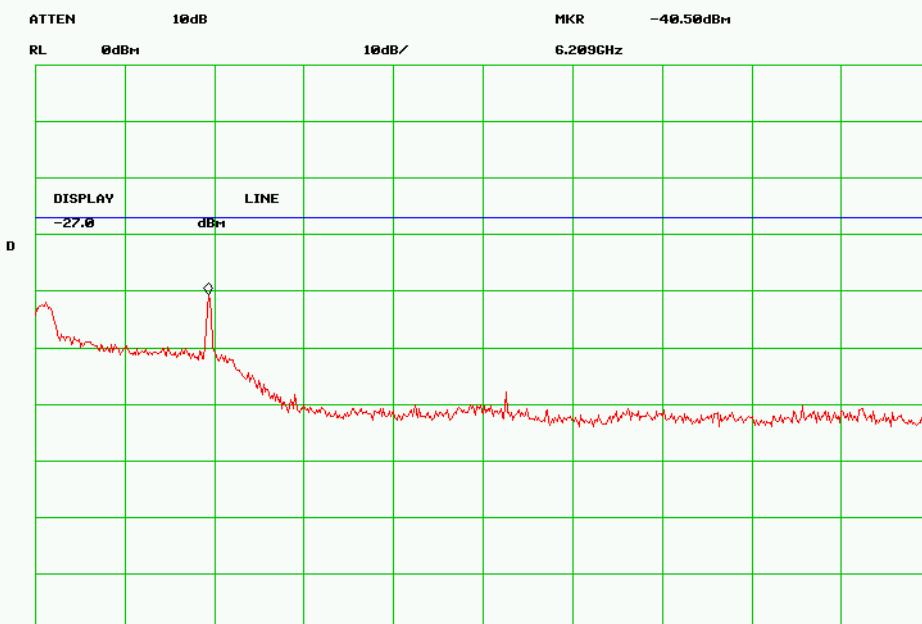

START 5.300GHz STOP 10.000GHz

RBW 1.0MHz VBW 3.0MHz SWP 94.0ms


#### Low channel chain 3-5

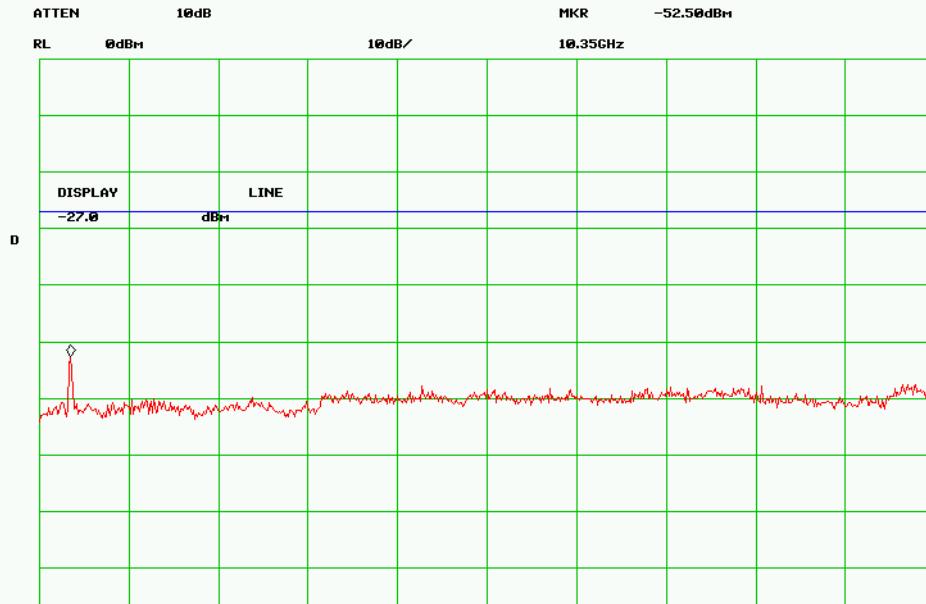

START 10.00GHz STOP 20.00GHz

RBW 1.0MHz XUBW 3.0MHz SWP 200ms


Low channel chain 3-6

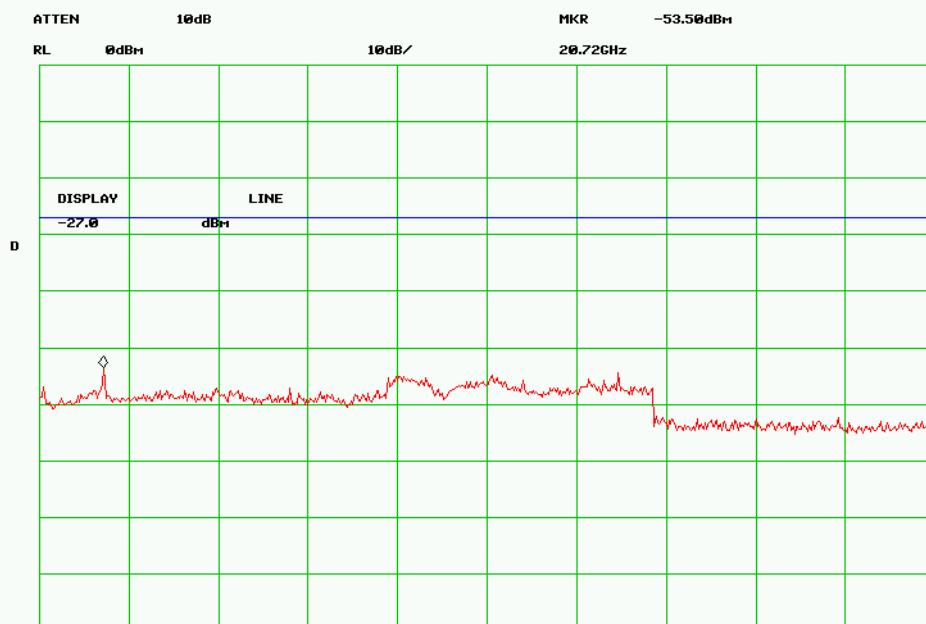

START 20.00GHz STOP 30.00GHz


RBW 1.0MHz XUBW 3.0MHz SWP 200ms

Low channel chain 3-7

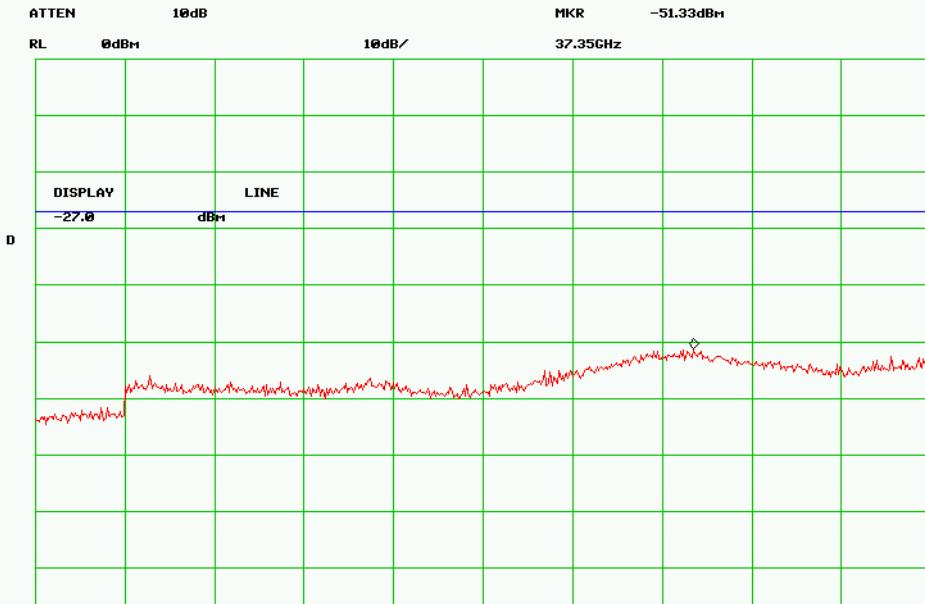


START 30.00GHz  
 RBW 1.0MHz xUBW 3.0MHz SWP 200ms

**Low channel chain 3-8**

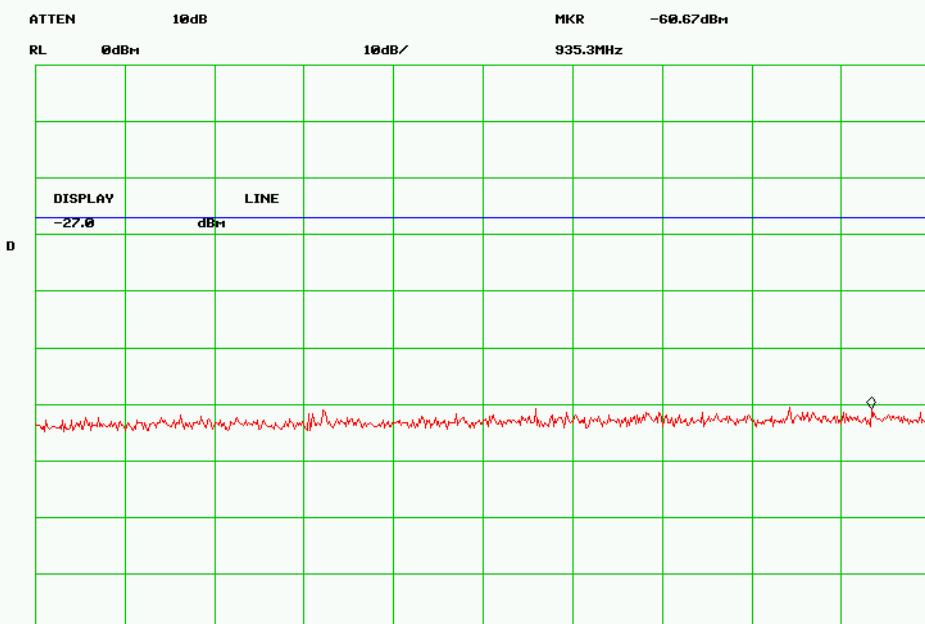


START 30.0MHz  
 RBW 1.0MHz xUBW 3.0MHz SWP 50.0ms

**Low channel chain 4-1**

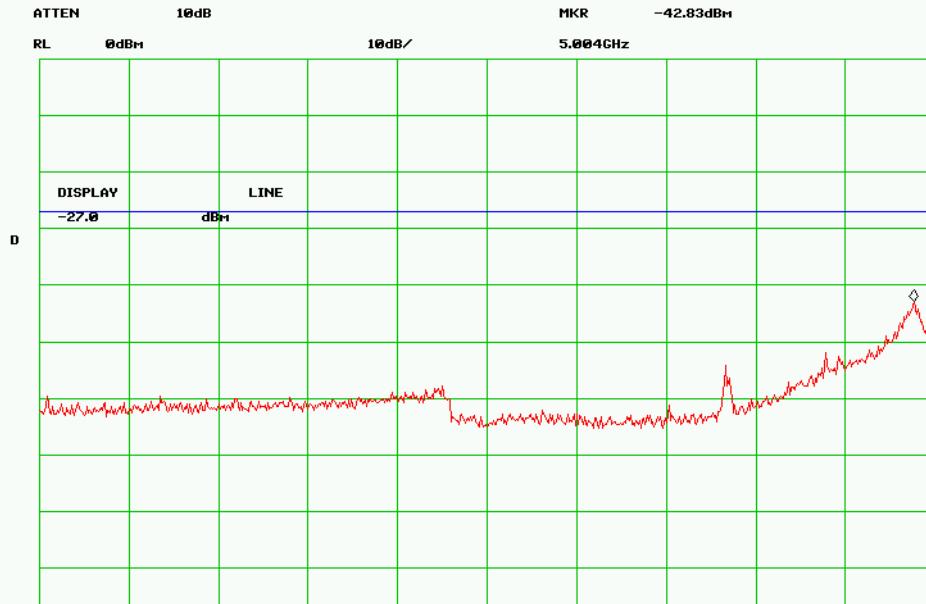


**START** 1.000GHz **STOP** 5.100GHz  
**RBW** 1.0MHz **VBW** 3.0MHz **SWP** 82.0ms


#### Low channel chain 4-2

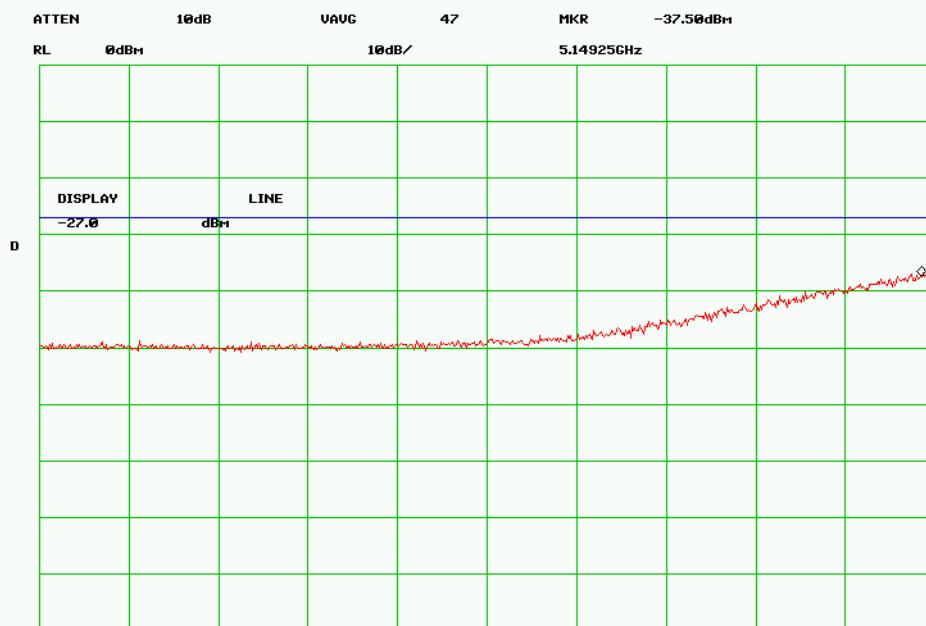

**START** 5.10000GHz **STOP** 5.15000GHz  
**RBW** 1.0MHz **VBW** 3.0MHz **SWP** 50.0ms


#### Low channel chain 4-3

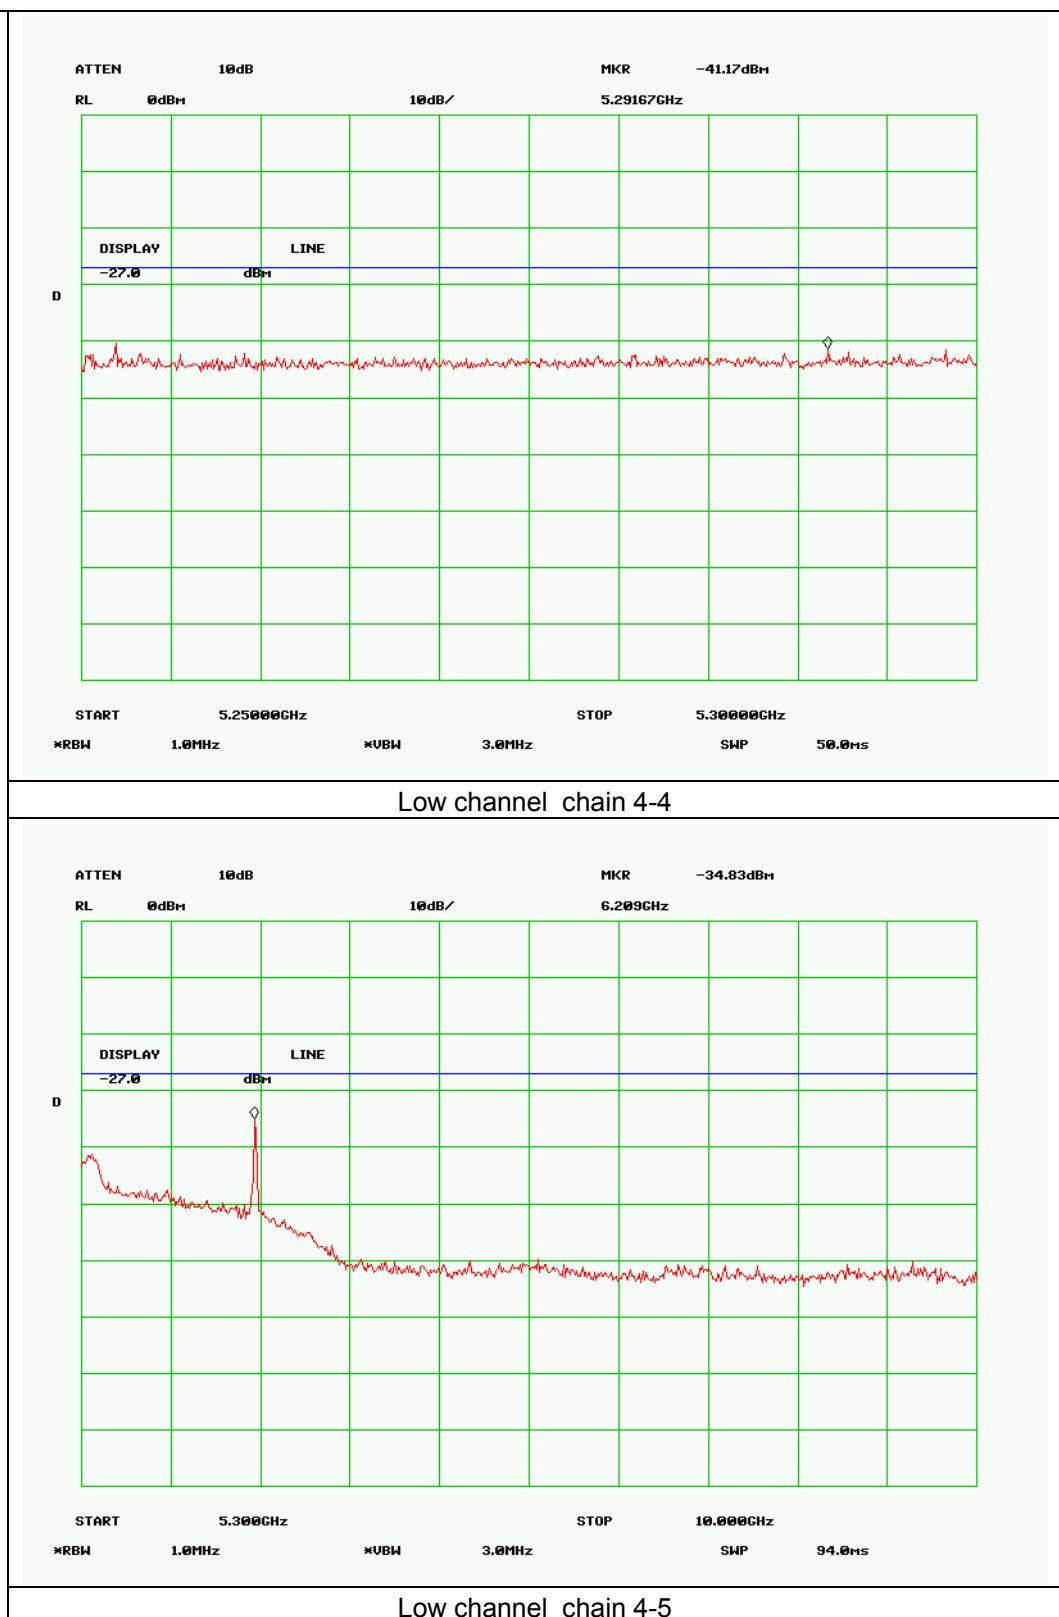

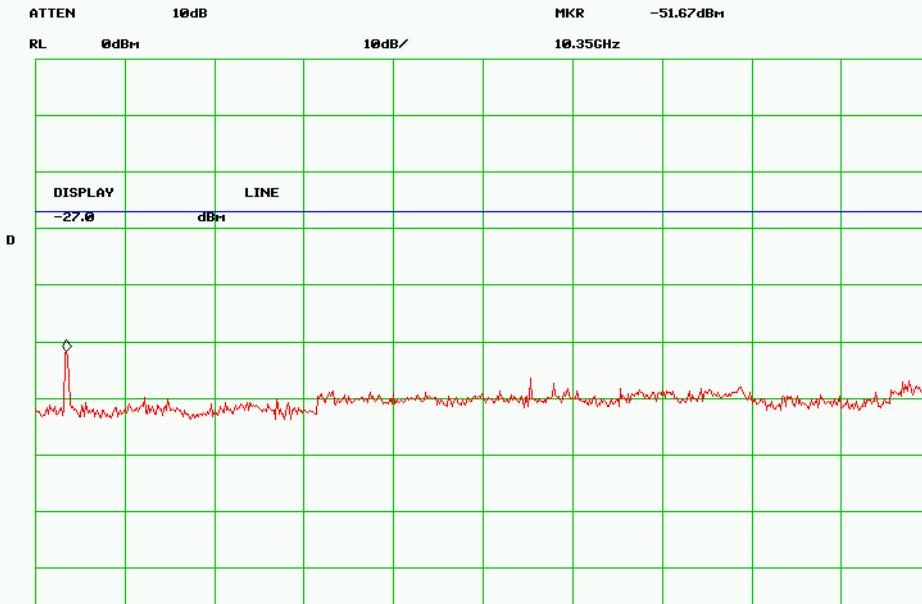


START 10.00GHz STOP 20.00GHz  
 xRBW 1.0MHz xVBW 3.0MHz SWP 200ms

Low channel chain 4-6

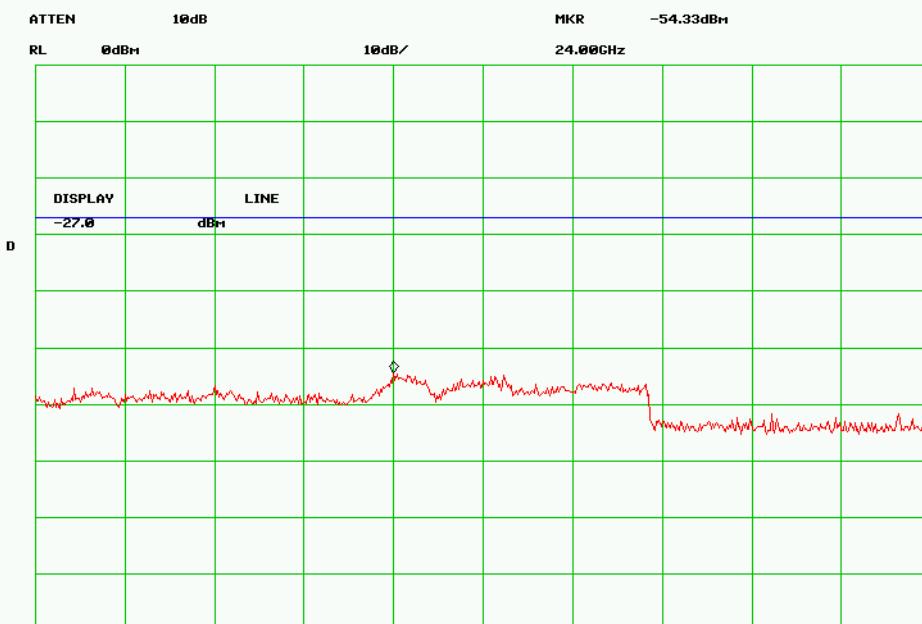


START 20.00GHz STOP 30.00GHz  
 xRBW 1.0MHz xVBW 3.0MHz SWP 200ms

Low channel chain 4-7

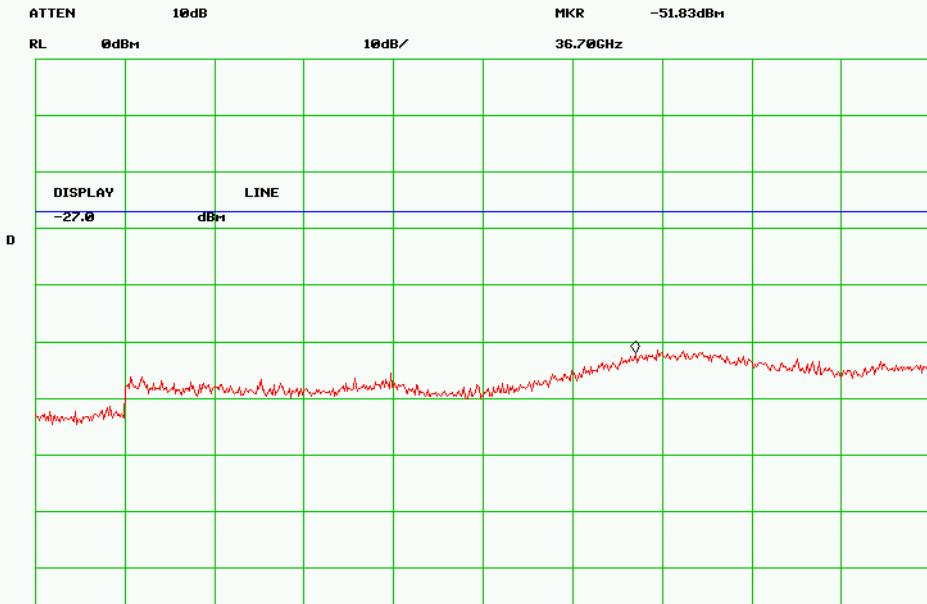


**START** **30.00GHz** **STOP** **40.00GHz**  
**RBW** **1.0MHz** **VBW** **3.0MHz** **SWP** **200ms**

### Low channel chain 4-8

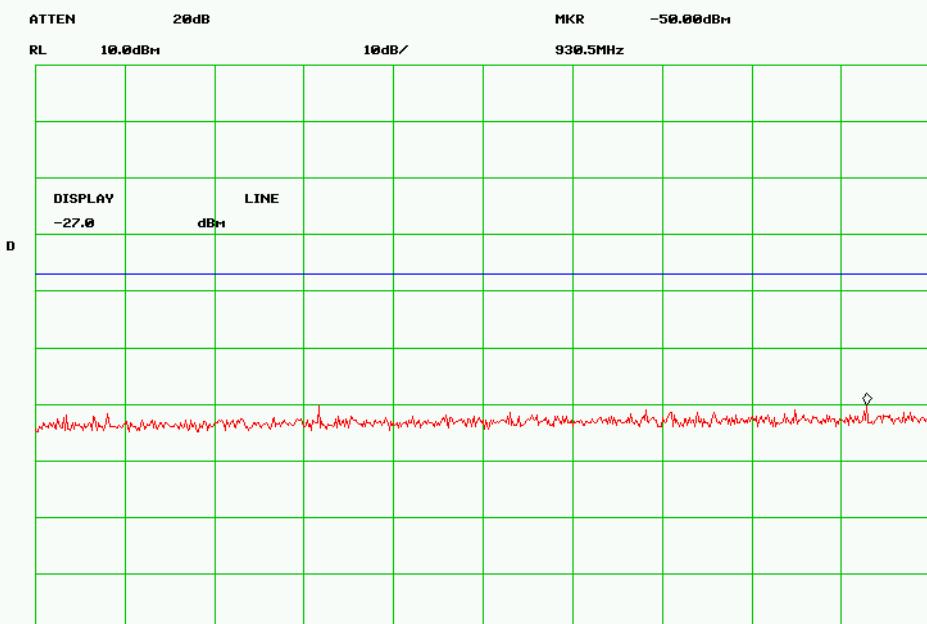


**START** **30.0MHz** **STOP** **1.0000GHz**  
**RBW** **1.0MHz** **VBW** **3.0MHz** **SWP** **50.0ms**


### High channel chain 1-1

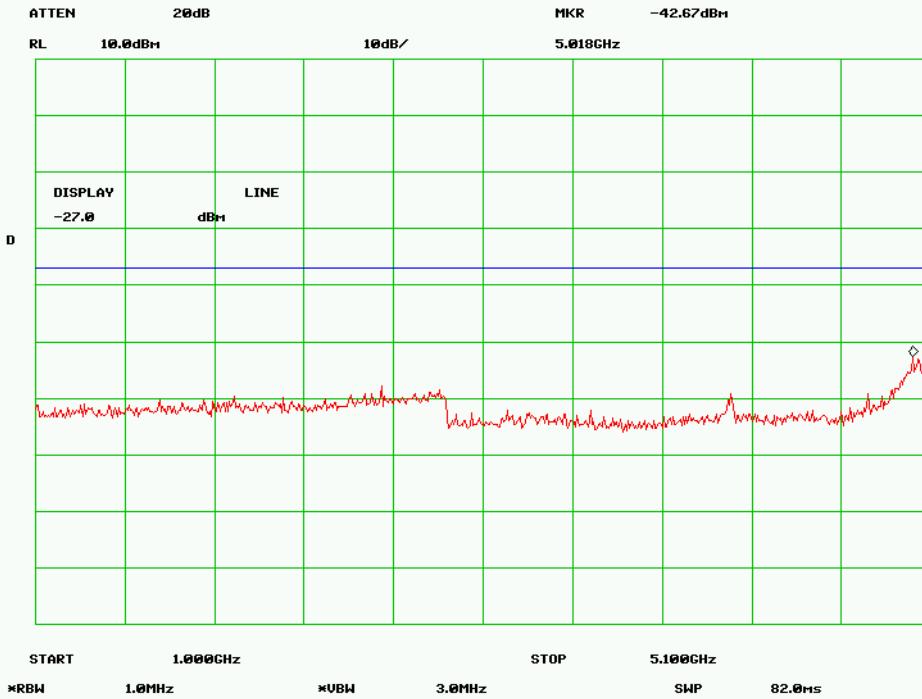

High channel chain 1-2

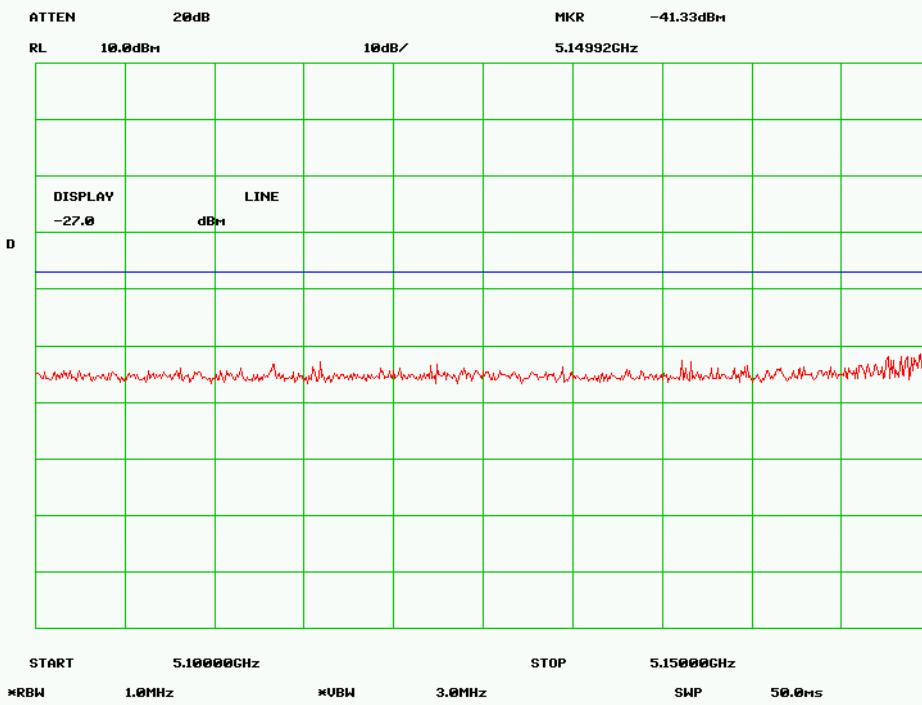


High channel chain 1-3

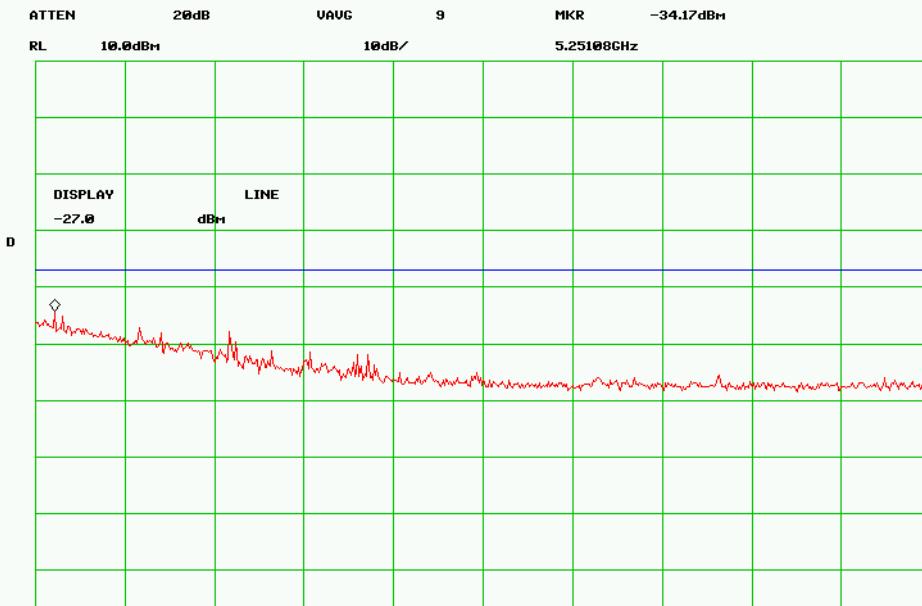

START 5.25000GHz STOP 5.30000GHz

RBW 1.0MHz VBW 3.0MHz SWP 50.0ms


High channel chain 1-4

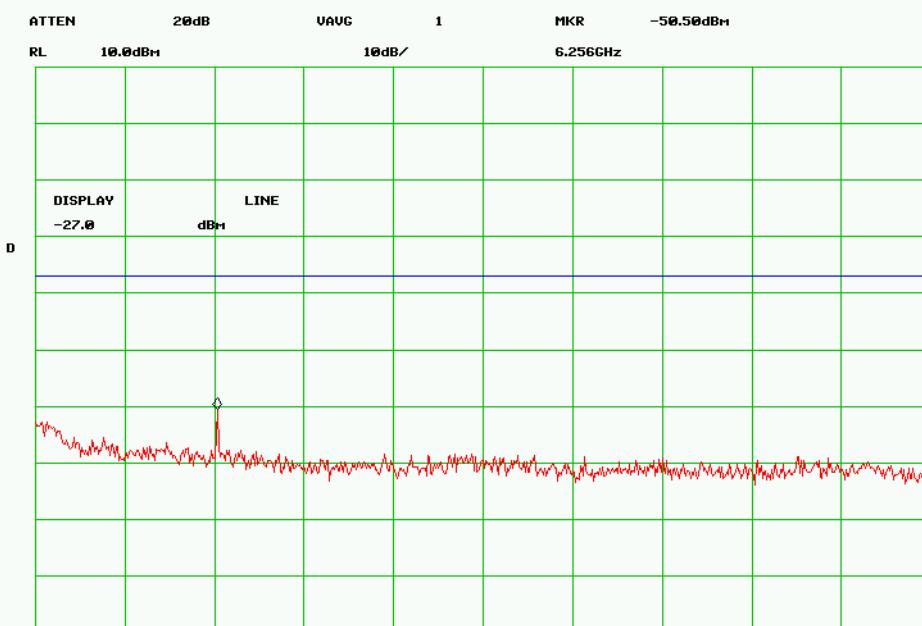



START 5.300GHz STOP 10.000GHz

RBW 1.0MHz VBW 3.0MHz SWP 94.0ms

High channel chain 1-5

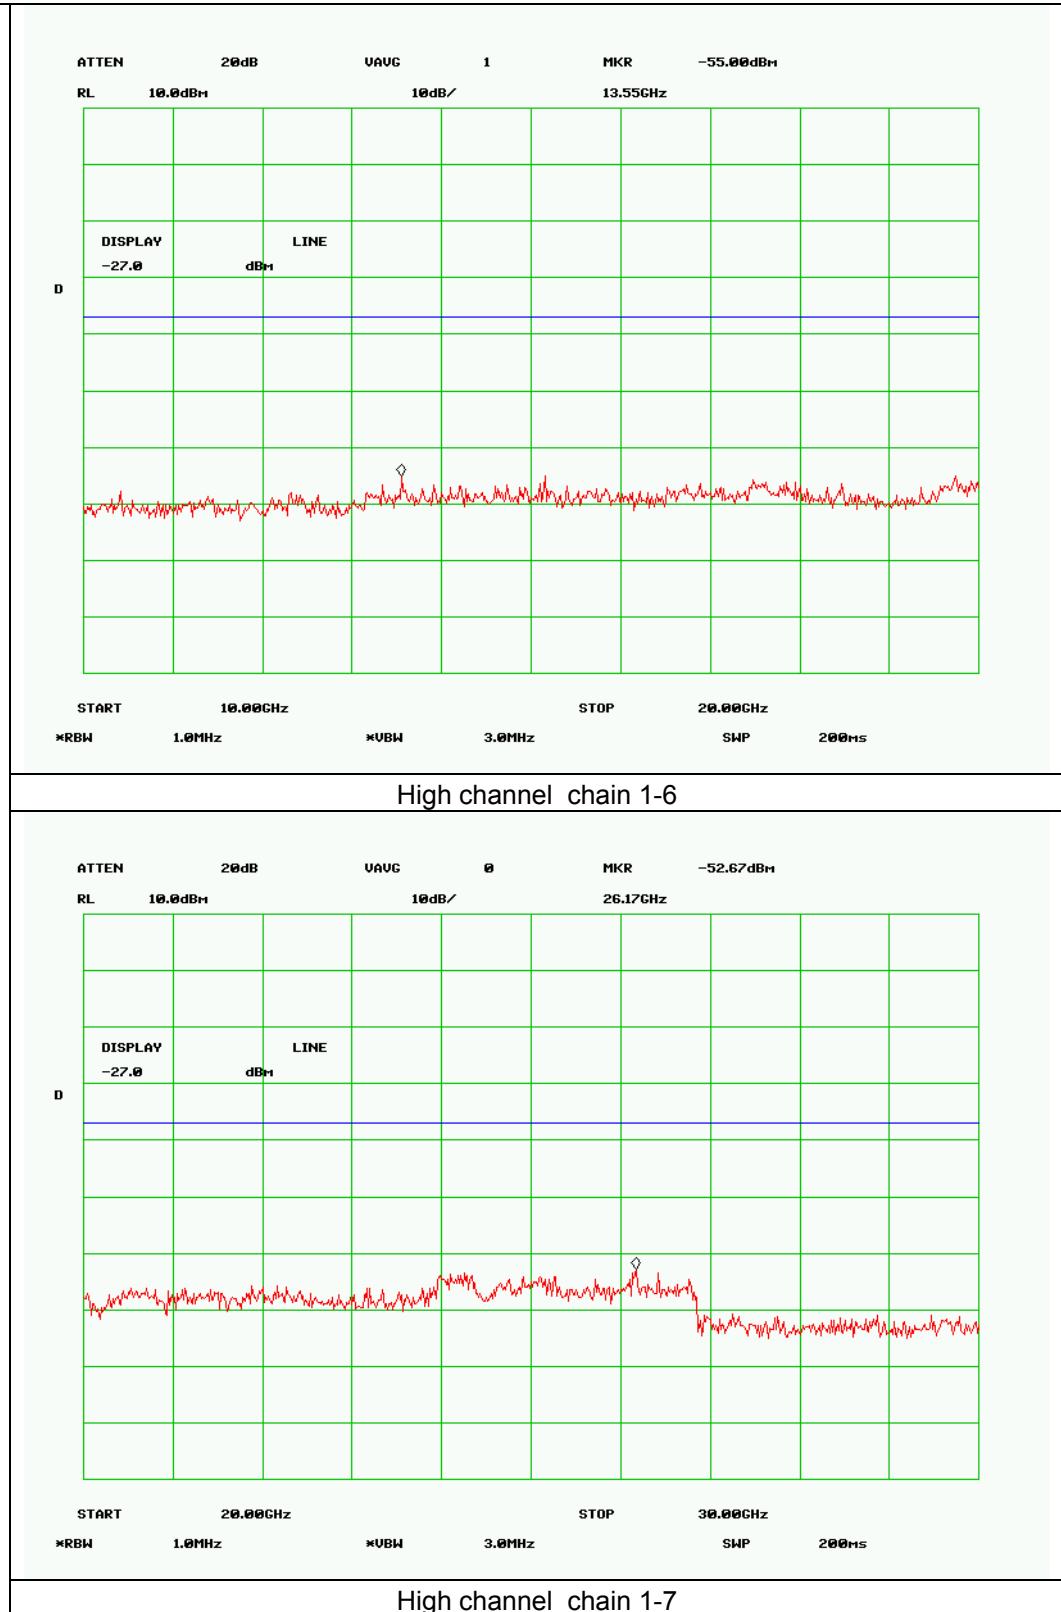

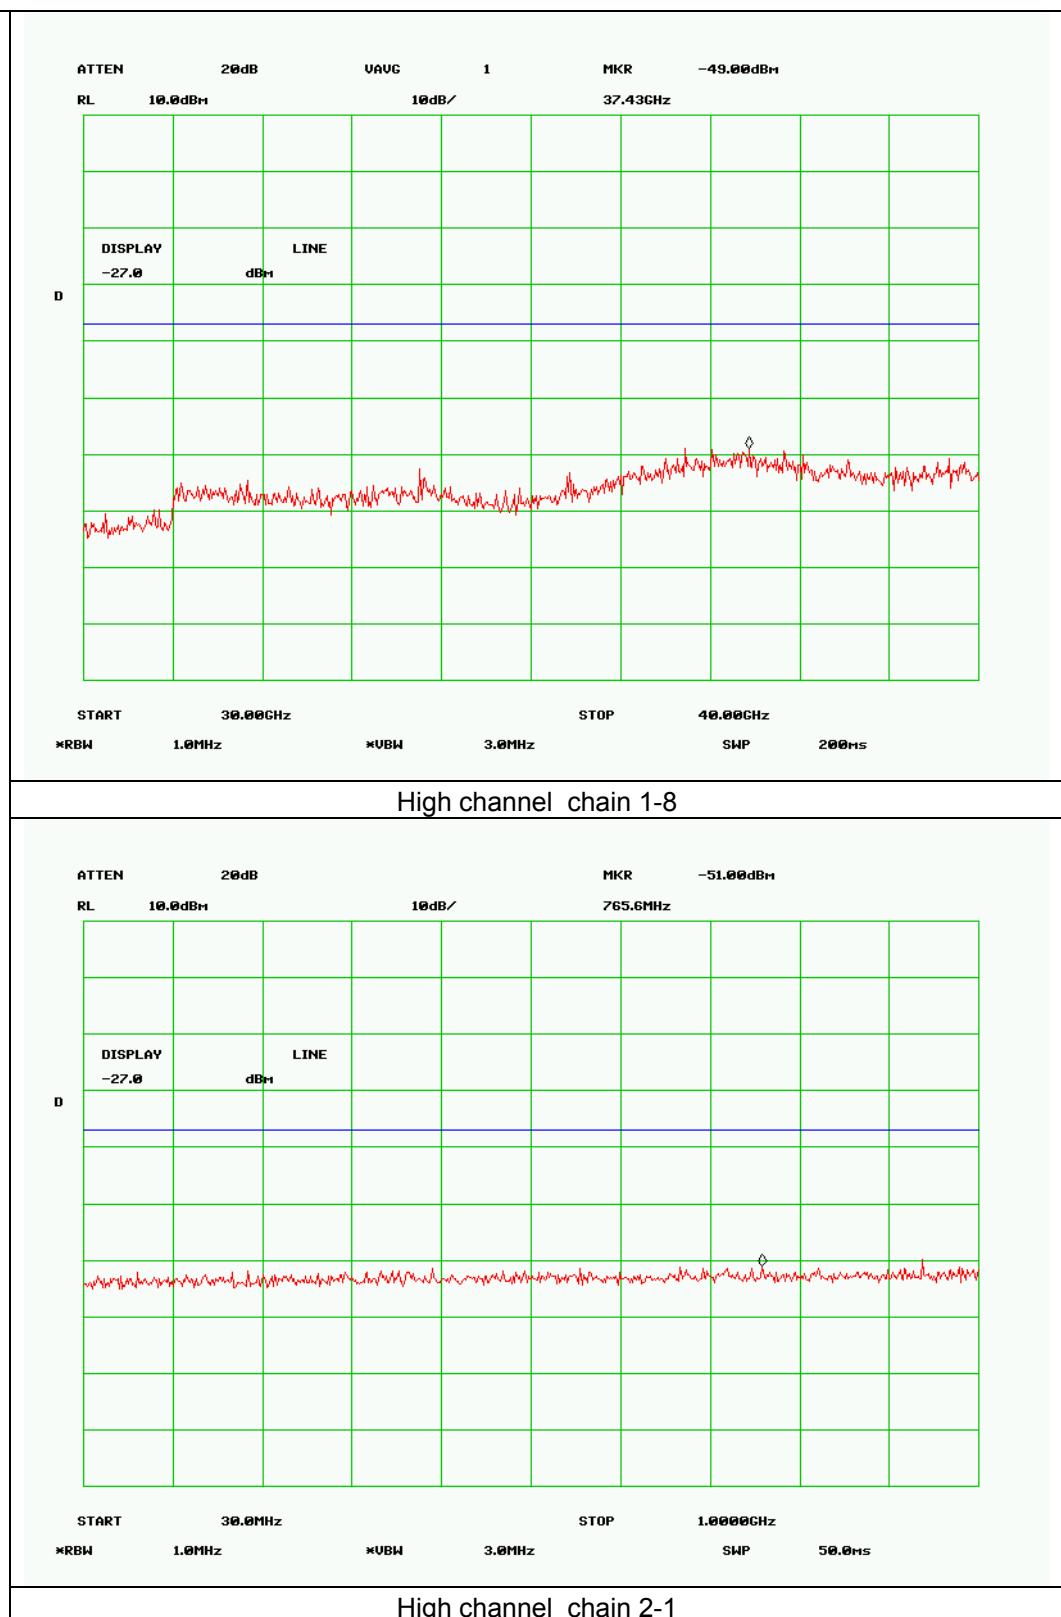


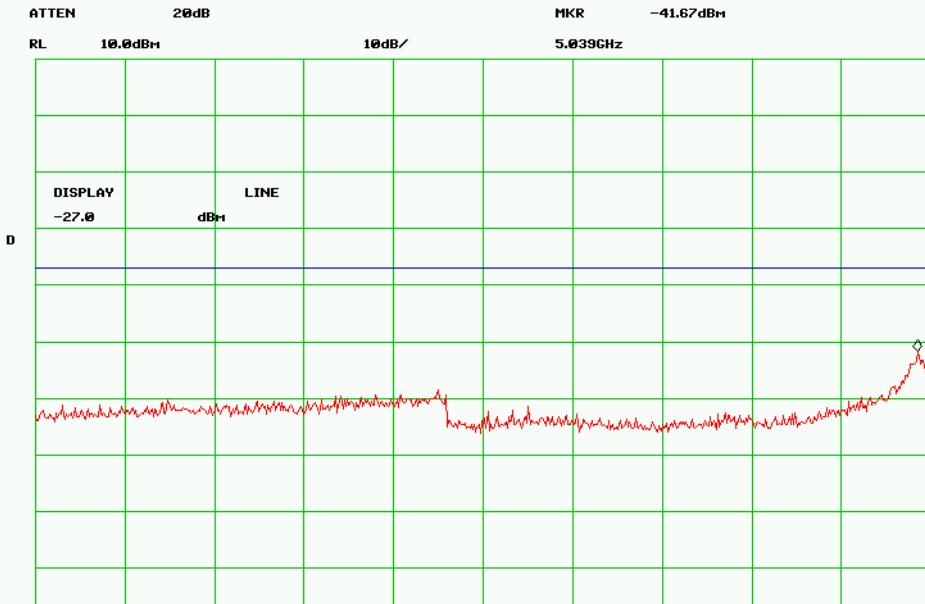

START 1.000GHz STOP 5.100GHz

RBW 1.0MHz VBW 3.0MHz SWP 82.0ms


### High channel chain 2-2

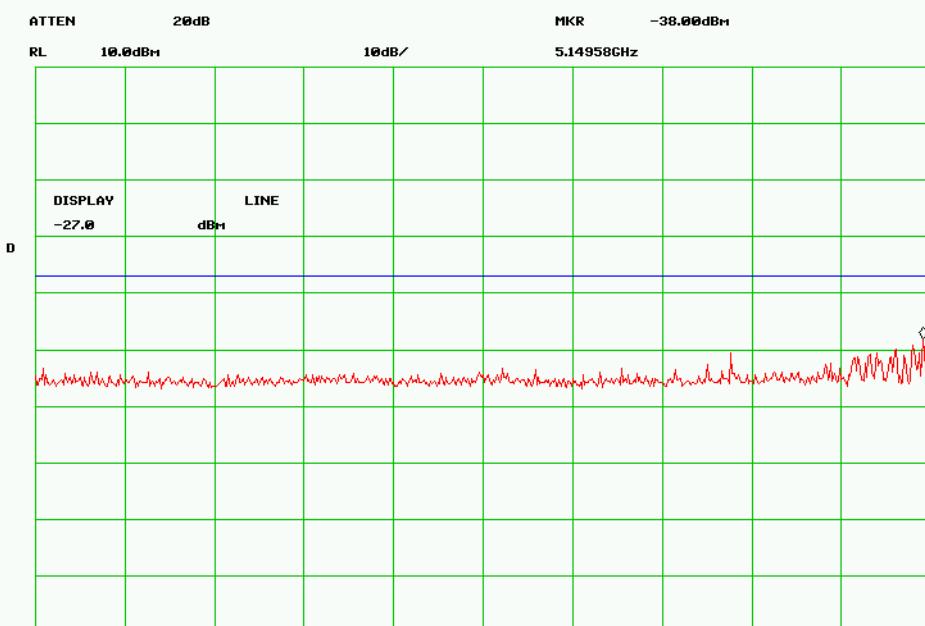


START 5.10000GHz STOP 5.15000GHz

RBW 1.0MHz VBW 3.0MHz SWP 50.0ms

### High channel chain 2-3

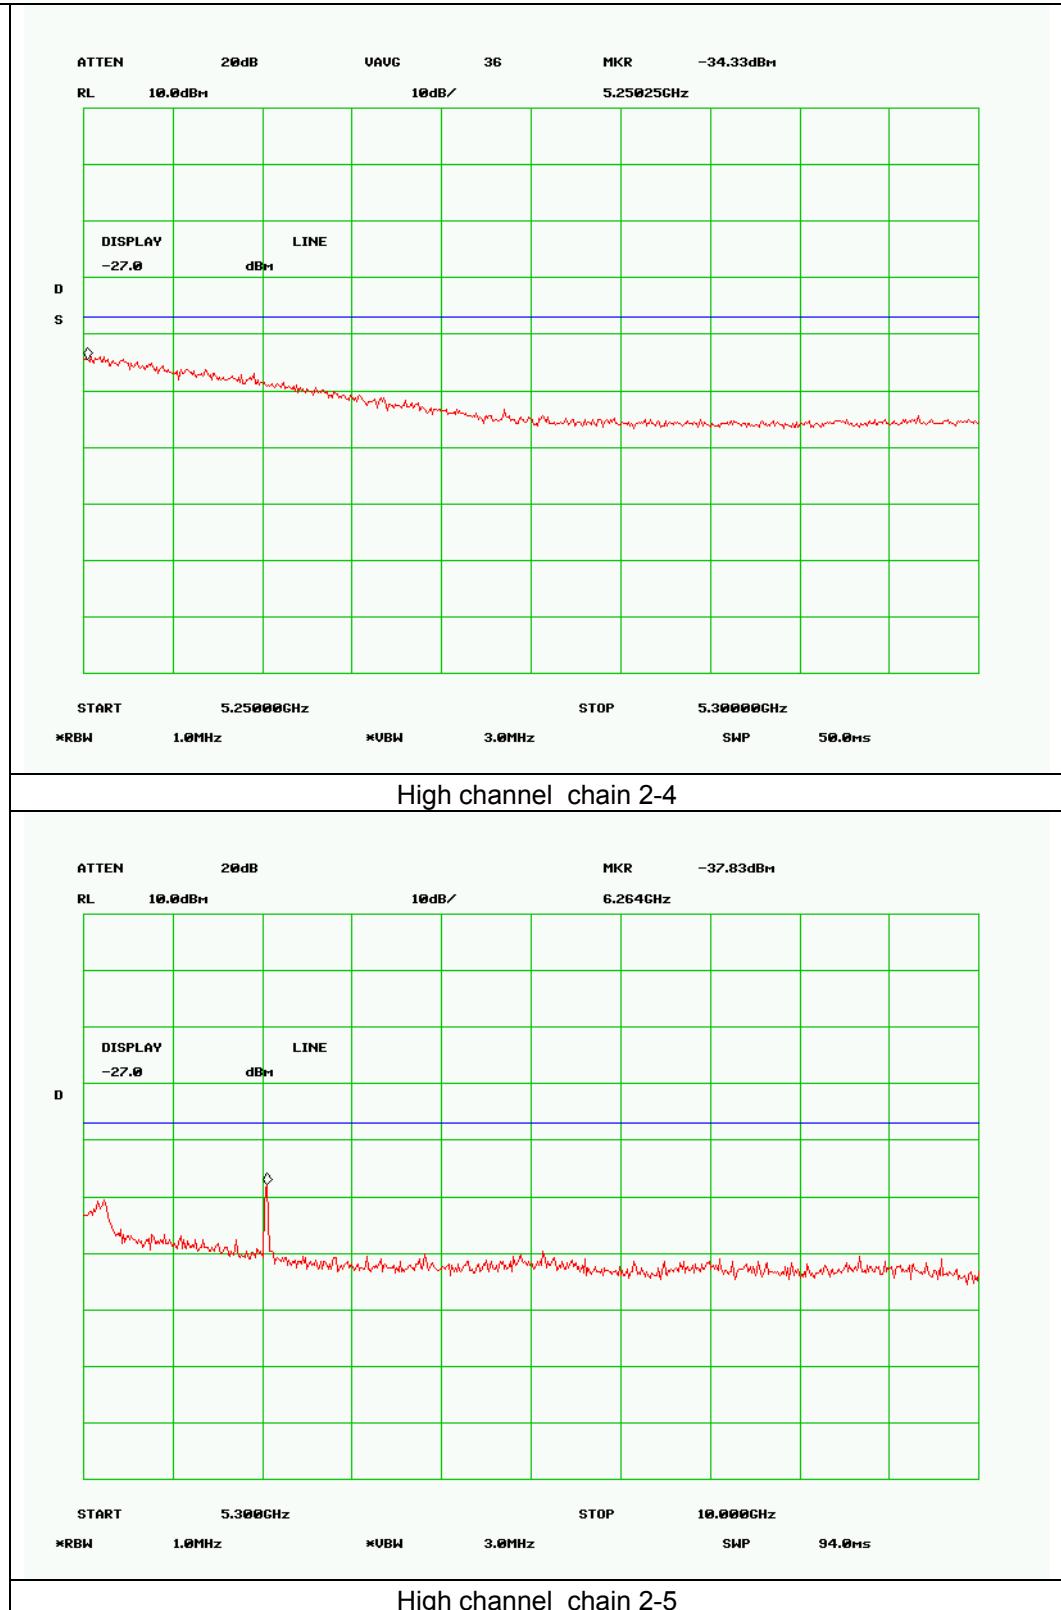


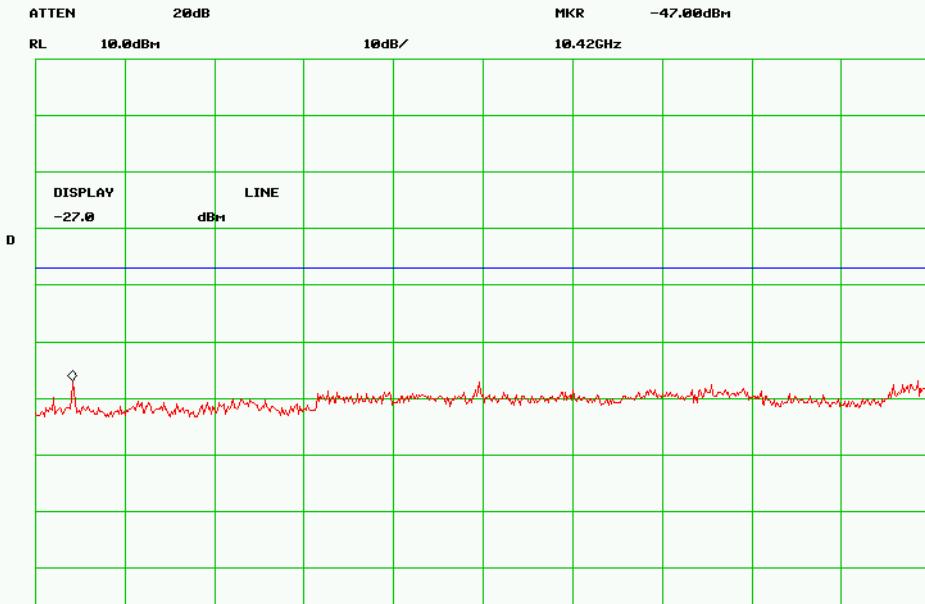

START 10.00GHz STOP 20.00GHz

RBW 1.0MHz VBW 3.0MHz SWP 200ms


### High channel chain 2-6

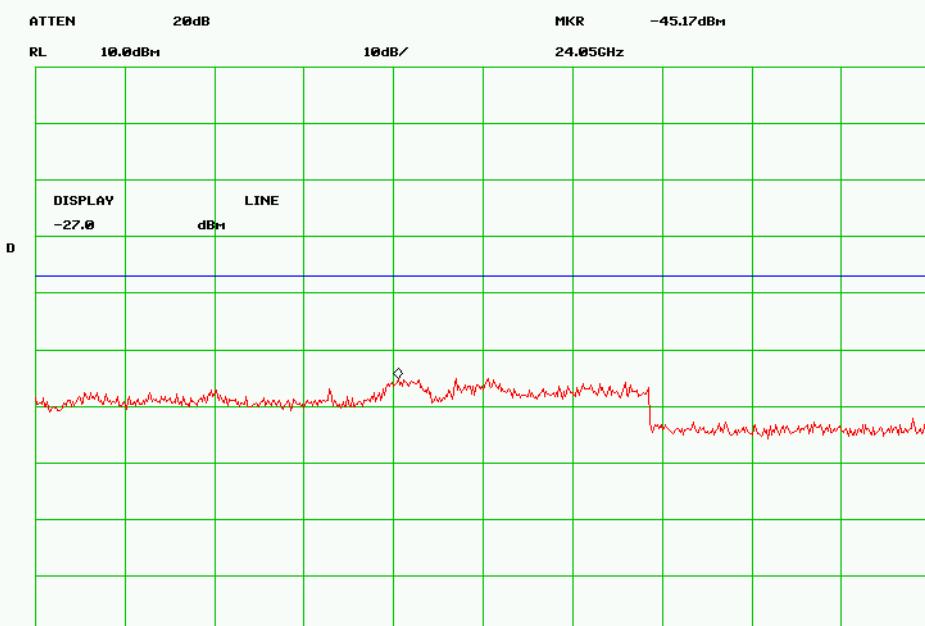


START 20.00GHz STOP 30.00GHz

RBW 1.0MHz VBW 3.0MHz SWP 200ms

### High channel chain 2-7

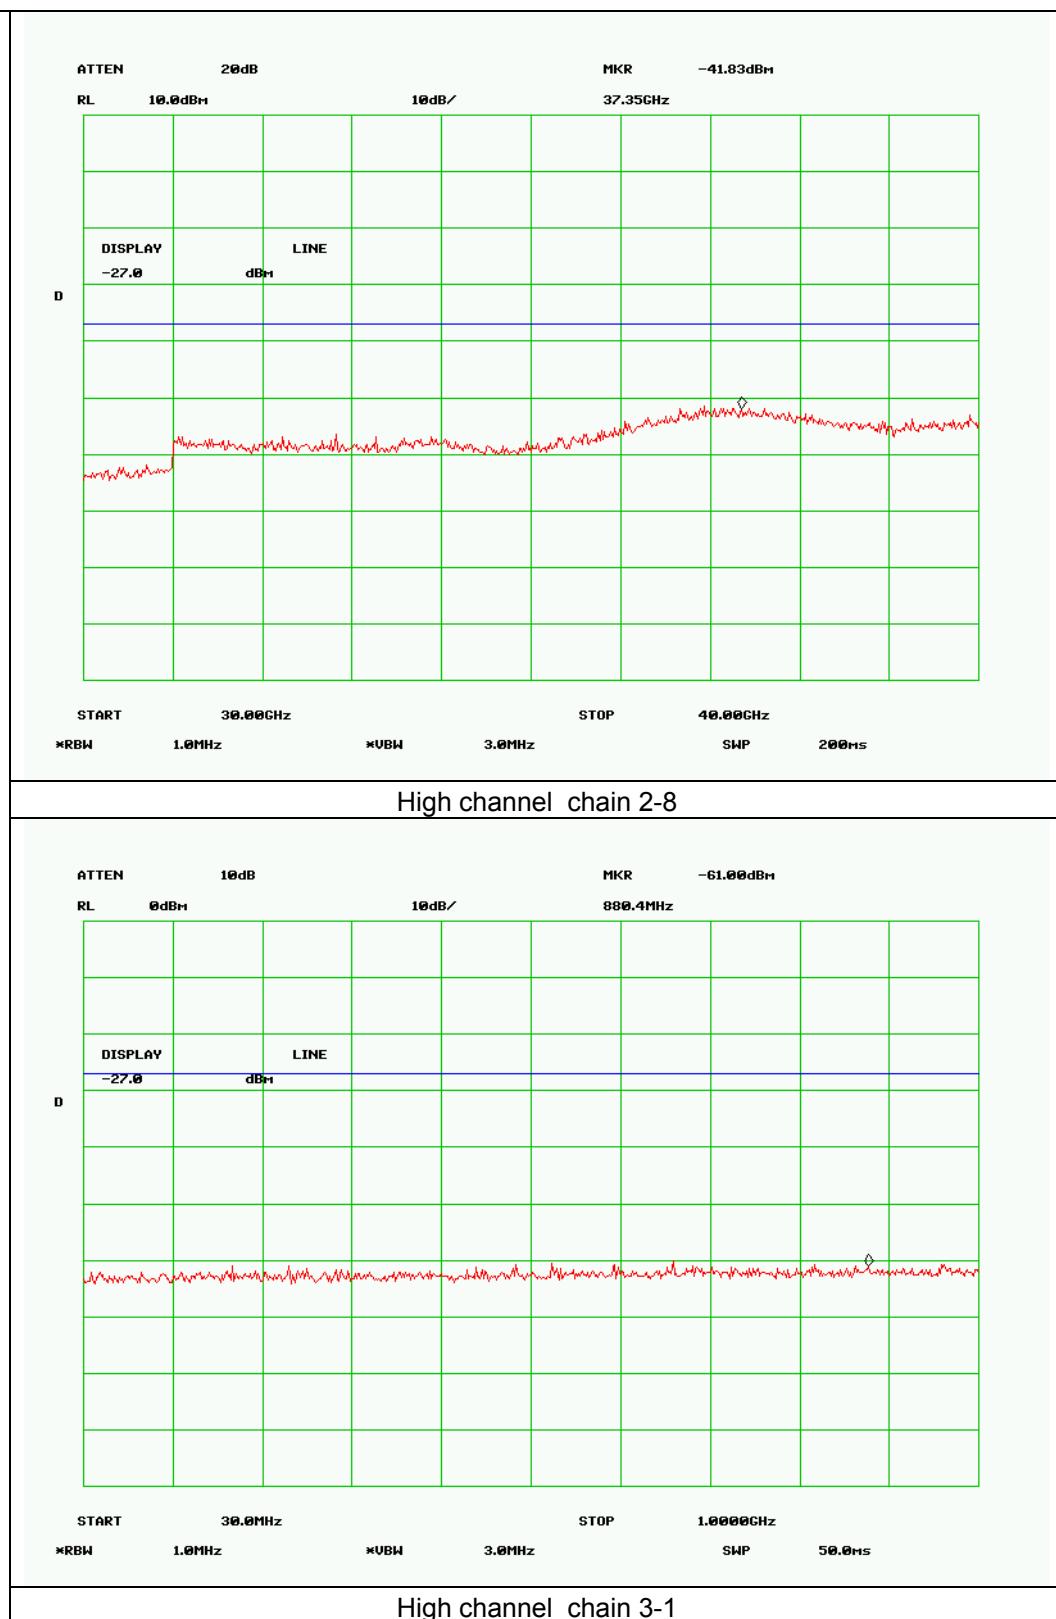


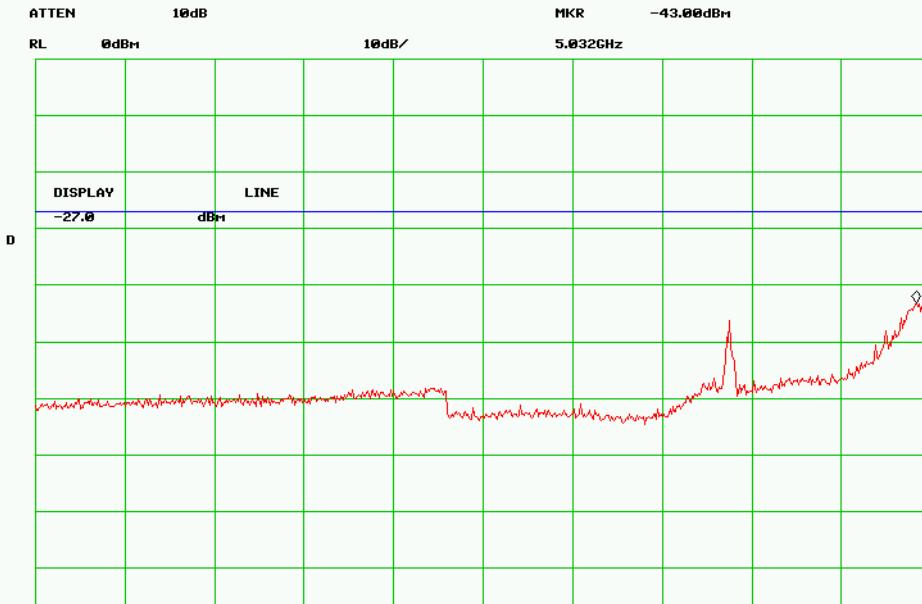

START 1.000GHz STOP 5.100GHz

RBW 1.0MHz VBW 3.0MHz SWP 82.0ms


### High channel chain 3-2

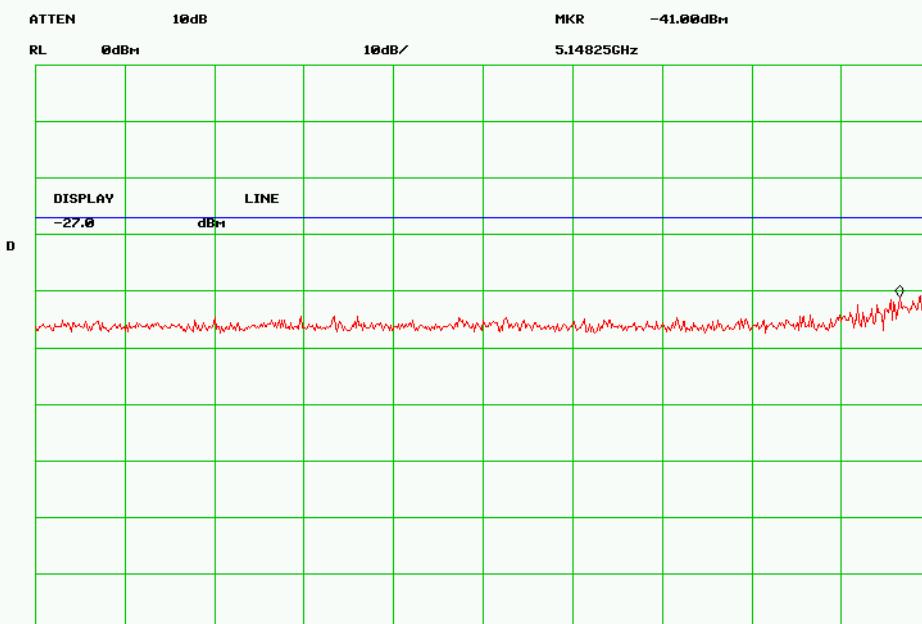

START 5.10000GHz STOP 5.15000GHz

RBW 1.0MHz VBW 3.0MHz SWP 50.0ms


### High channel chain 3-3

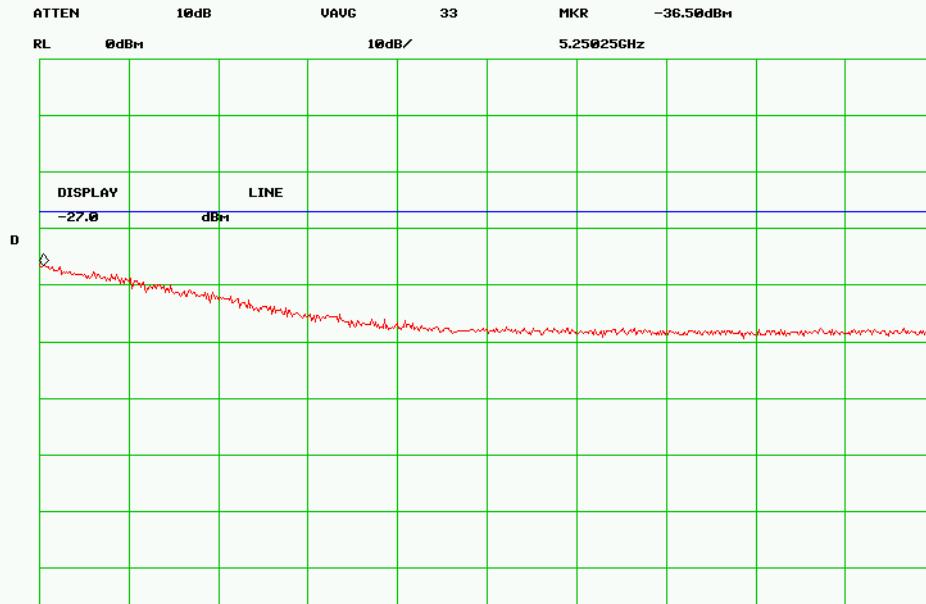

START 5.25000GHz STOP 5.30000GHz

RBW 1.0MHz VBW 3.0MHz SWP 50.0ms



### High channel chain 3-4

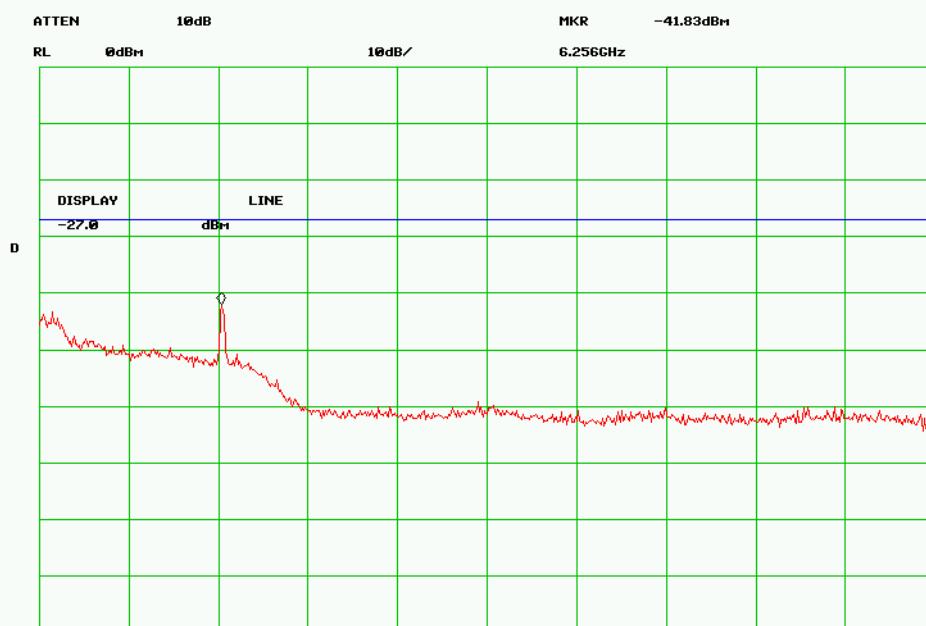


START 5.300GHz STOP 10.000GHz


RBW 1.0MHz VBW 3.0MHz SWP 94.0ms

### High channel chain 3-5

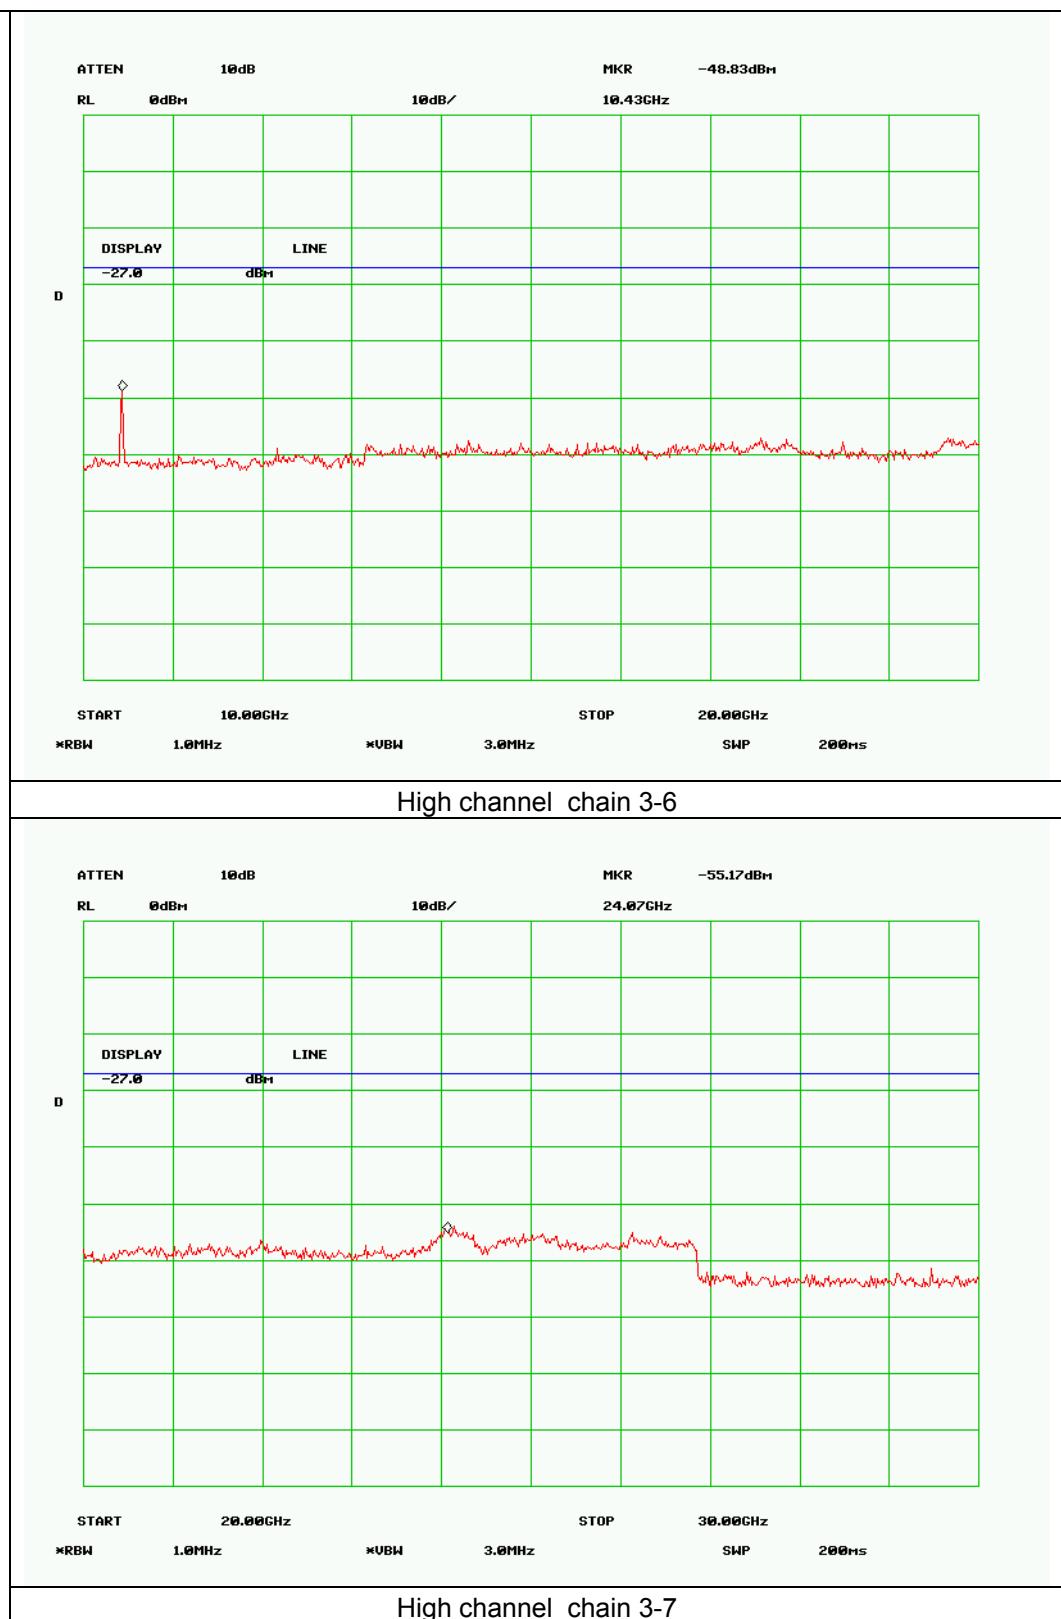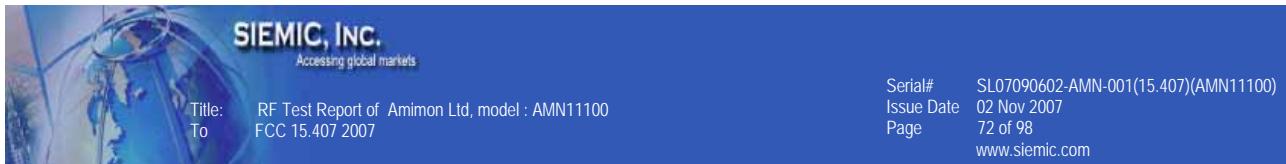

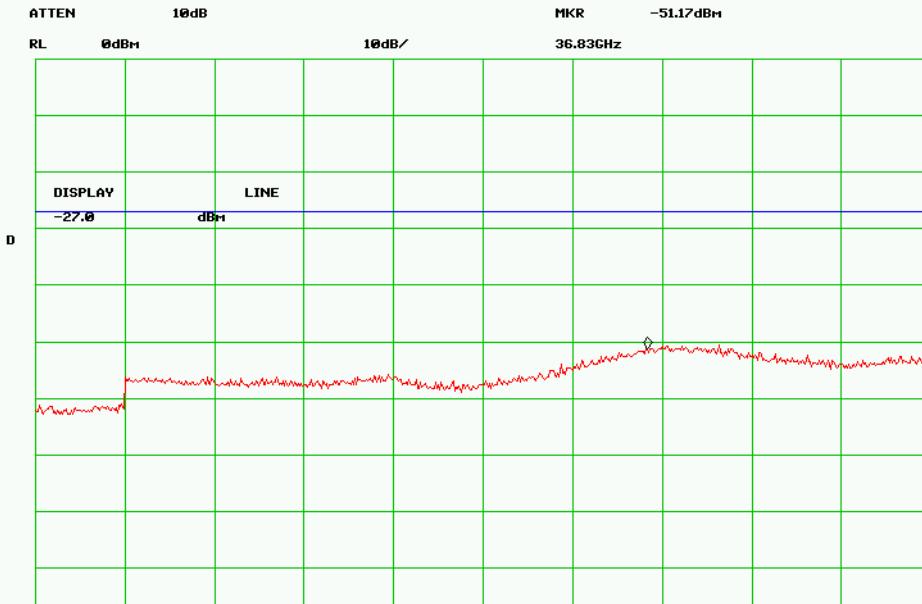


High channel chain 3-8

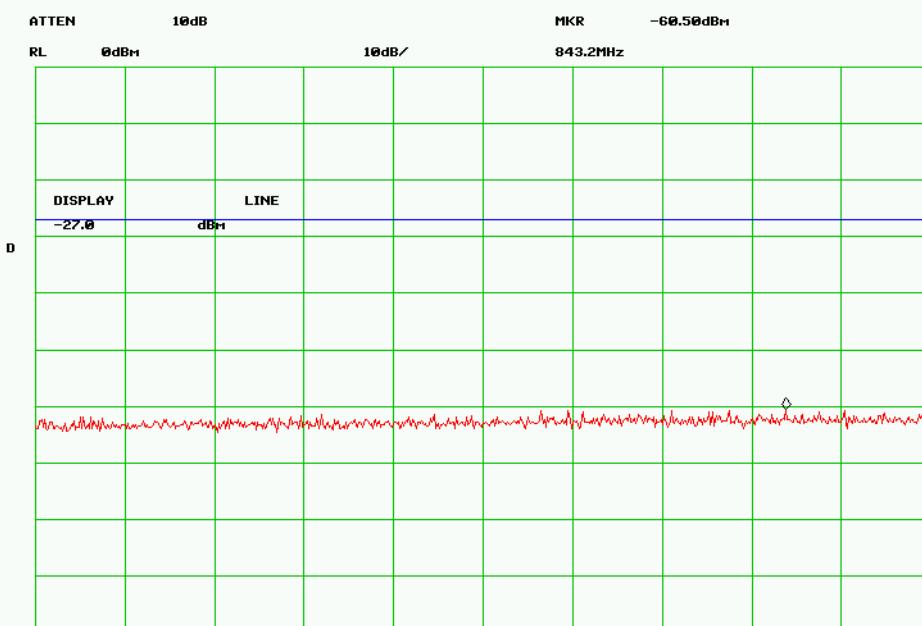


High channel chain 4-1





High channel chain 4-2

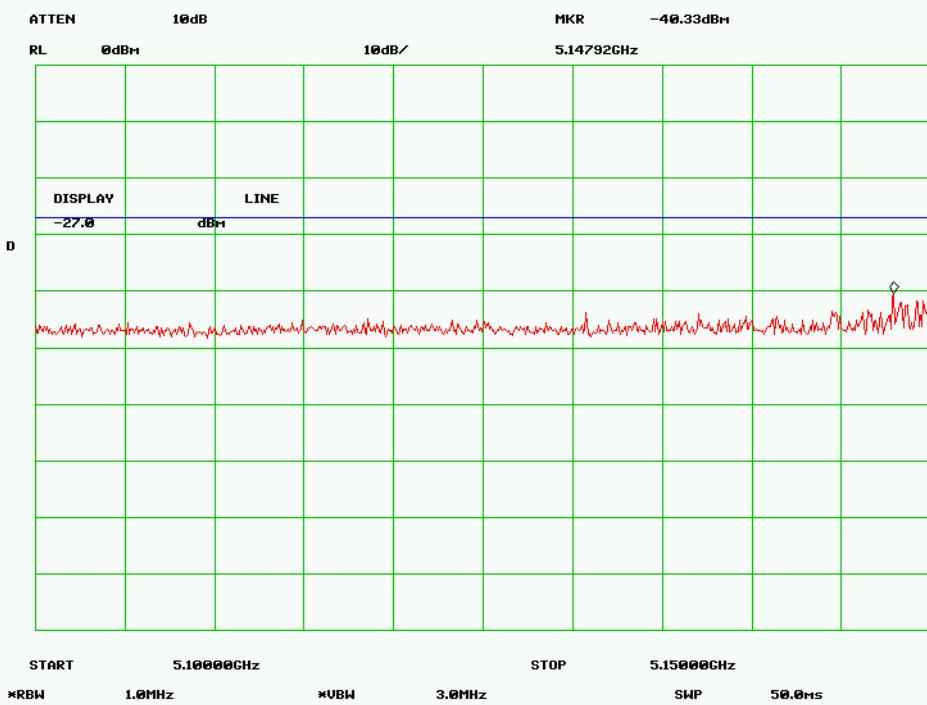

High channel chain 4-3

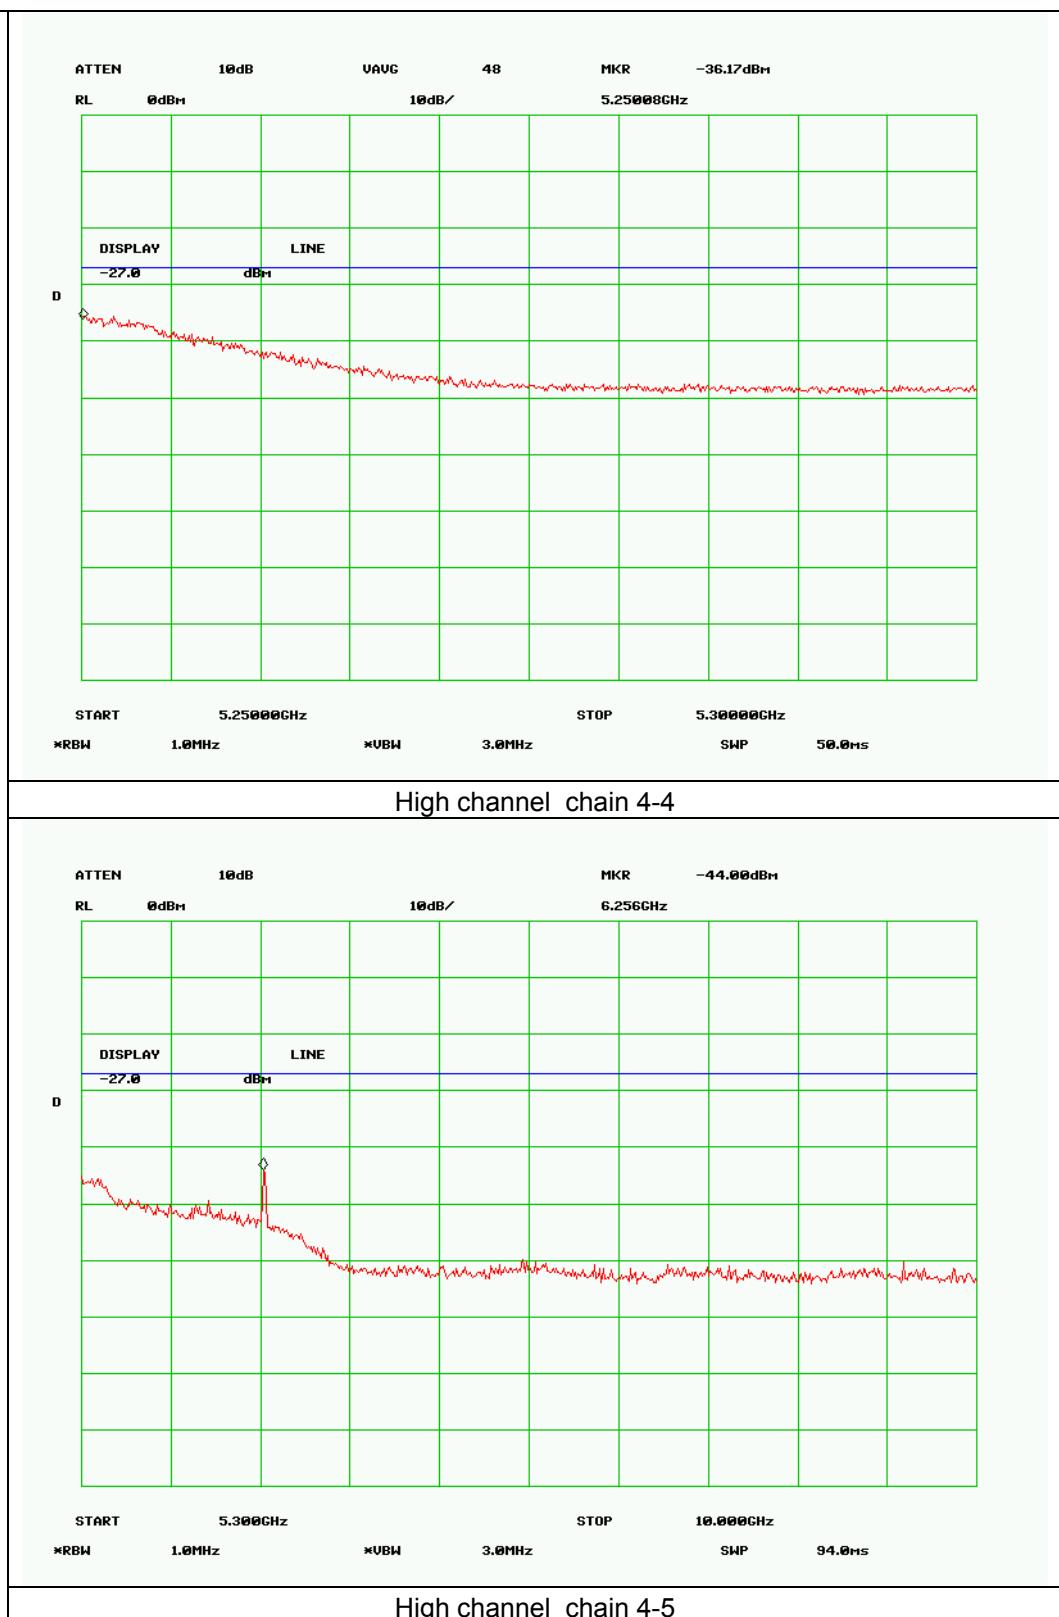

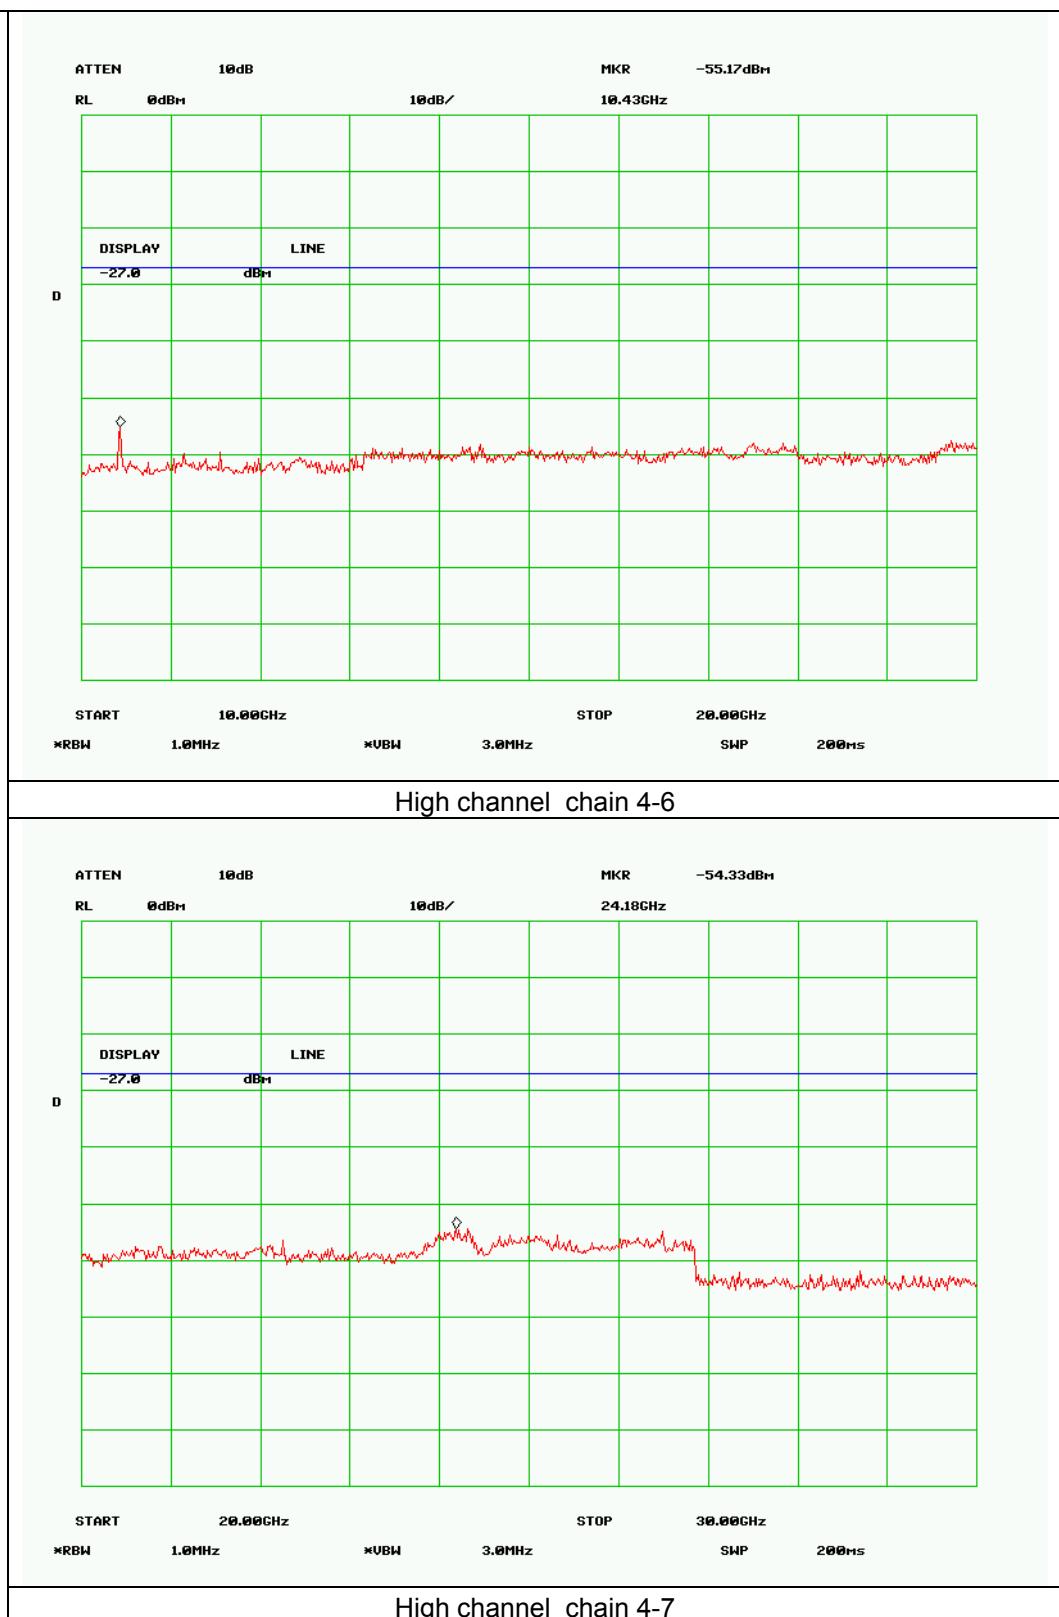

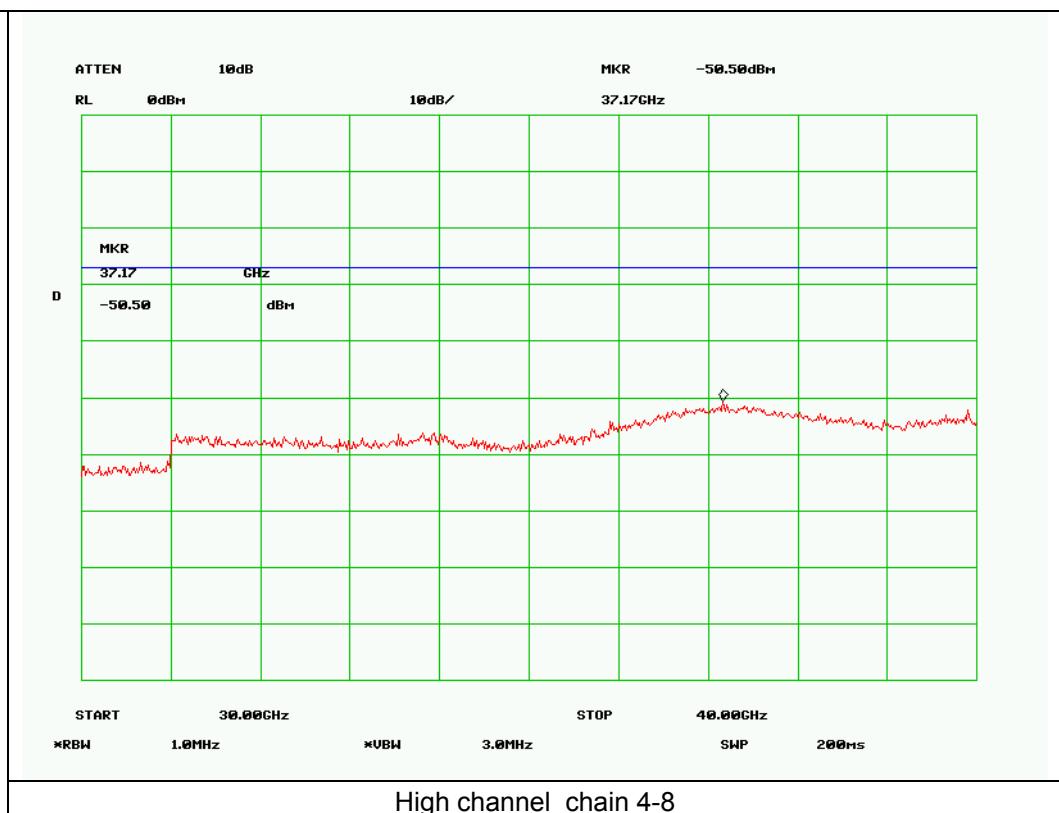

## 5.4 Radiated Spurious Emission < 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz (QP only @ 3m & 10m) is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions      Temperature 23°C  
    Relative Humidity 50%  
    Atmospheric Pressure 1019mbar

Test date : Oct 03 2007


Tested By : Kent Kim

**Requirement(s):** 47 CFR §15.407(b)(6)/15.209

**Procedures:** Radiated emissions were measured according to ANSI C63.4. Equipment was tested at low, mid and hi channel with different channel bandwidth and reported the worse case.

Sample Calculation: Corrected Amplitude = Raw Amplitude + Antenna Factor + Cable Loss

### Test Result:

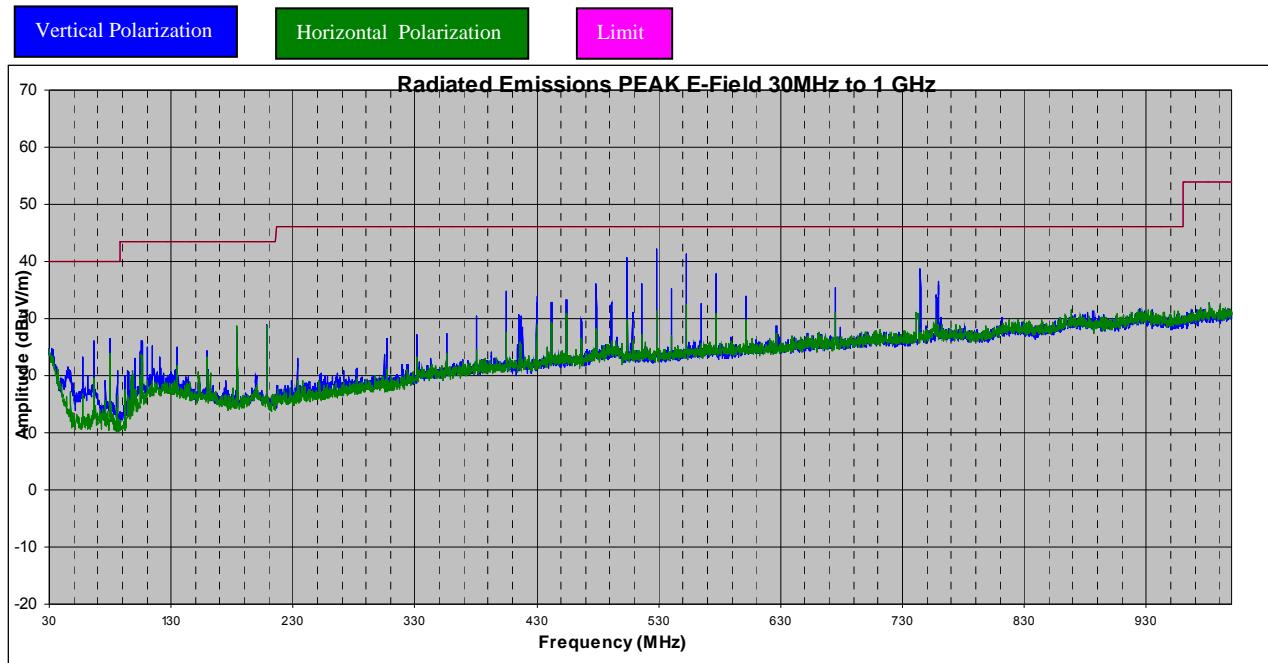

**Radiated Emission Plot (Transmit Mode)**



### Radiated Emissions Data (Transmit Mode)

Frequency (MHz)	Azimuth (degrees)	Measure (Avg/QP)	Antenna Polarity (H/V)	Antenna Height (m)	Raw Amplitude @ 3m (dBuV/m)	ACF (dB)	CBL loss (dB)	Corrected Amplitude @ 3m (dBuV/m)	Limit @3m (dBuV/m)	Delta (dBuV/m)
528.38	270	QP	V	1	23.10	17.8	1.8	42.7	46	-3.30
552.96	270	QP	V	1	21.70	18.2	1.8	41.7	46	-4.30
503.80	270	QP	V	1	21.80	17.7	1.8	41.3	46	-4.70
516.08	270	QP	V	1	17.40	17.6	1.8	36.8	46	-9.20
479.23	270	QP	V	1	15.40	17.1	1.6	34.1	46	-11.90
745.00	180	QP	V	1	14.50	20.5	2	37	46	-9.00

## 5.5 Radiated Spurious Emissions > 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 40GHz is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions      Temperature 23°C  
    Relative Humidity 50%  
    Atmospheric Pressure 1019mbar

Test date : Oct 26 2007

Tested By : Kent Kim

**Requirement(s):** 47 CFR §15.407(b)(2)

**Procedures:** Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 1MHz resolution bandwidth and a 10Hz video bandwidth was used. The EUT was tested at low and high with the highest output power. Emissions were investigated up to 40 GHz.

- 27 dBm = 68.2 dB $\mu$ V/m at 3 meter distance.

Sample Calculation: EUT Field Strength = Raw Amplitude – Amplifier Gain + Antenna Factor + Cable Loss + Filter Attenuation (if used)

**Test Result:**

**@ 5180MHz @1 Meter**

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
6.216	240	V	1	36.3	35.40	3.96	9.54	66.12	68.20	-2.08	PK	
6.216	240	H	1	34.1	35.40	3.96	9.54	63.92	68.20	-4.28	PK	
11.49	0	H	1.3	27.3	40.80	5.81	9.54	64.37	68.20	-3.83	PK	NOISE FLOOR
11.49	90	V	1	30.1	40.80	5.81	9.54	67.17	68.20	-1.03	PK	NOISE FLOOR

Emission was scanned up to 40GHz.

**@ 5200MHz @1 Meter**

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
6.232	240	V	1	35.7	35.40	3.96	9.54	65.52	68.20	-2.68	PK	
6.232	240	H	1	33.6	35.40	3.96	9.54	63.42	68.20	-4.78	PK	
10.4	240	H	1	30.2	40.50	5.54	9.54	66.70	68.20	-1.50	PK	NOISE FLOOR
10.4	240	V	1	30.4	40.50	5.54	9.54	66.90	68.20	-1.30	PK	NOISE FLOOR

Emission was scanned up to 40GHz.

**@ 5220MHz @1 Meter**

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
6.264	240	V	1	37.1	35.40	3.96	9.54	66.92	68.20	-1.28	PK	
6.264	90	H	1	36.2	35.40	3.96	9.54	66.02	68.20	-2.18	PK	
10.44	0	H	1.3	27.1	40.50	5.54	9.54	63.60	68.20	-4.60	PK	NOISE FLOOR
10.44	90	V	1	30.6	40.50	5.54	9.54	67.10	68.20	-1.10	PK	NOISE FLOOR

Emission was scanned up to 40GHz.

## 5.6 Peak Excursion Ratio

1. Conducted Measurement  
EUT was set for low , mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions
 


Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : October 20 2007  
Tested By : Kent Kim

**Requirement(s):** 47 CFR §15.407(a)(6)


**Procedures:** The peak excursion ratio was measured at the antenna terminal using a spectrum analyzer. Trace A setting: RBW = VBW = 1 MHz (peak detector). Trace B setting: RBW = 1 MHz and VBW = 1MHz (sample detector).

**Test Result :**


Frequency (MHz)	Channel	Measured Peak Excursion (dB)	Limit (dB)
5180	Chain 1	12.83	13
	Chain 2	11.83	
	Chain 3	11.67	
	Chain 4	11.66	
5200	Chain 1	12.34	13
	Chain 2	12.50	
	Chain 3	11.67	
	Chain 4	12.83	
5220	Chain 1	12.34	13
	Chain 2	12.17	
	Chain 3	12.50	
	Chain 4	12.00	

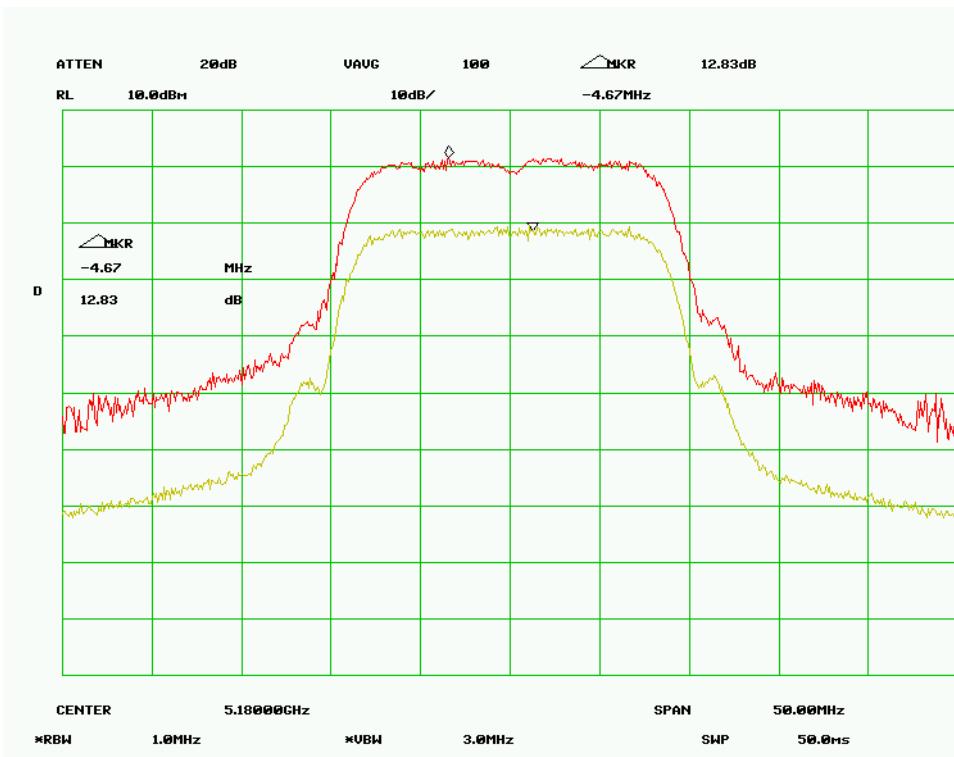


Peak Excursion , Low Channel Chain 1

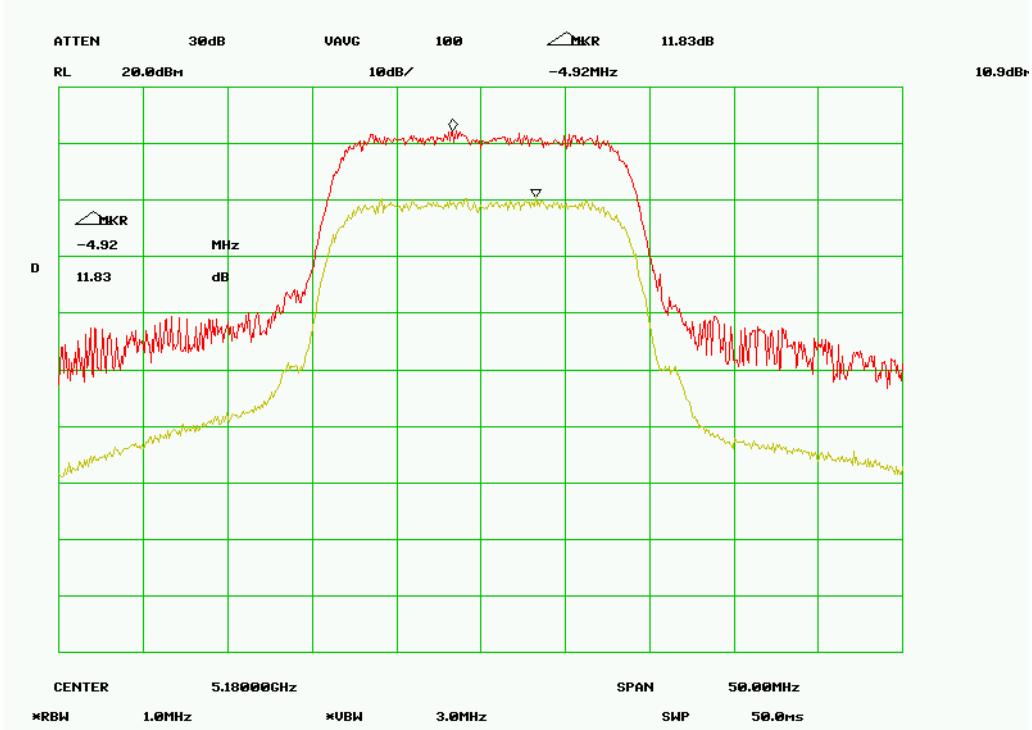


Peak Excursion ,Low Channel Chain 2

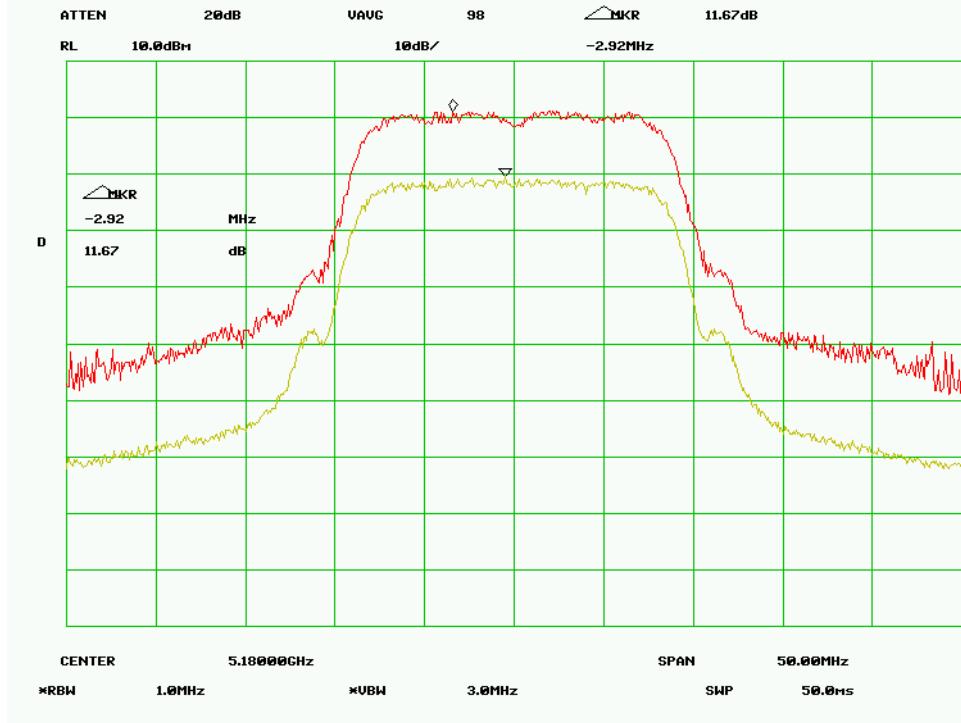


Peak Excursion ,Low Channel Chain 3

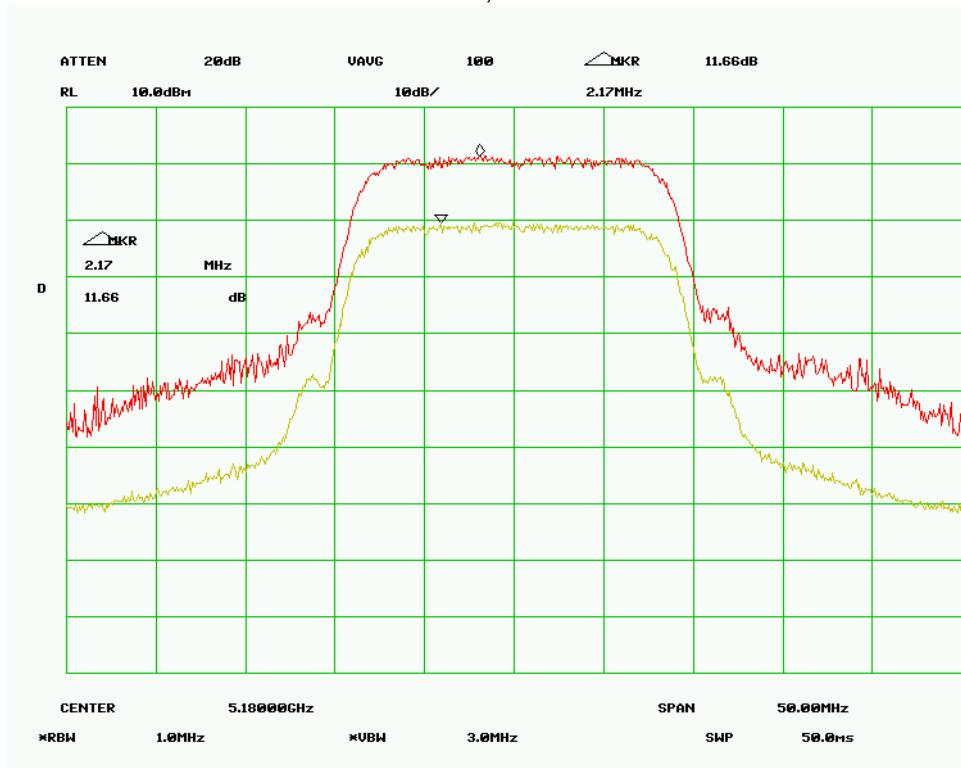


Peak Excursion ,Low Channel Chain 4

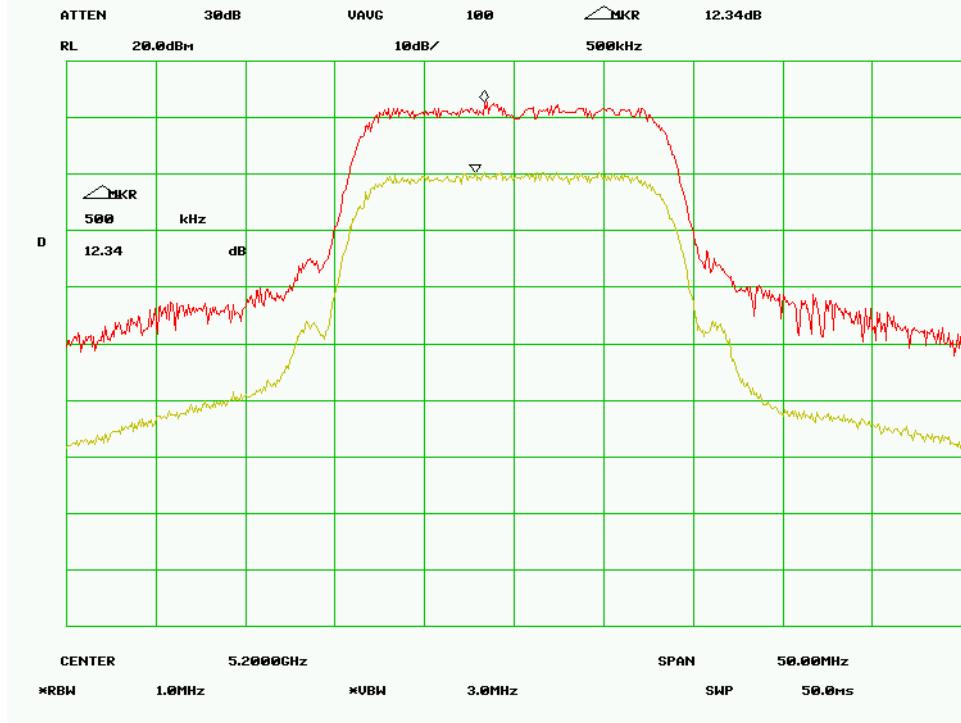


Peak Excursion ,Mid Channel Chain 1

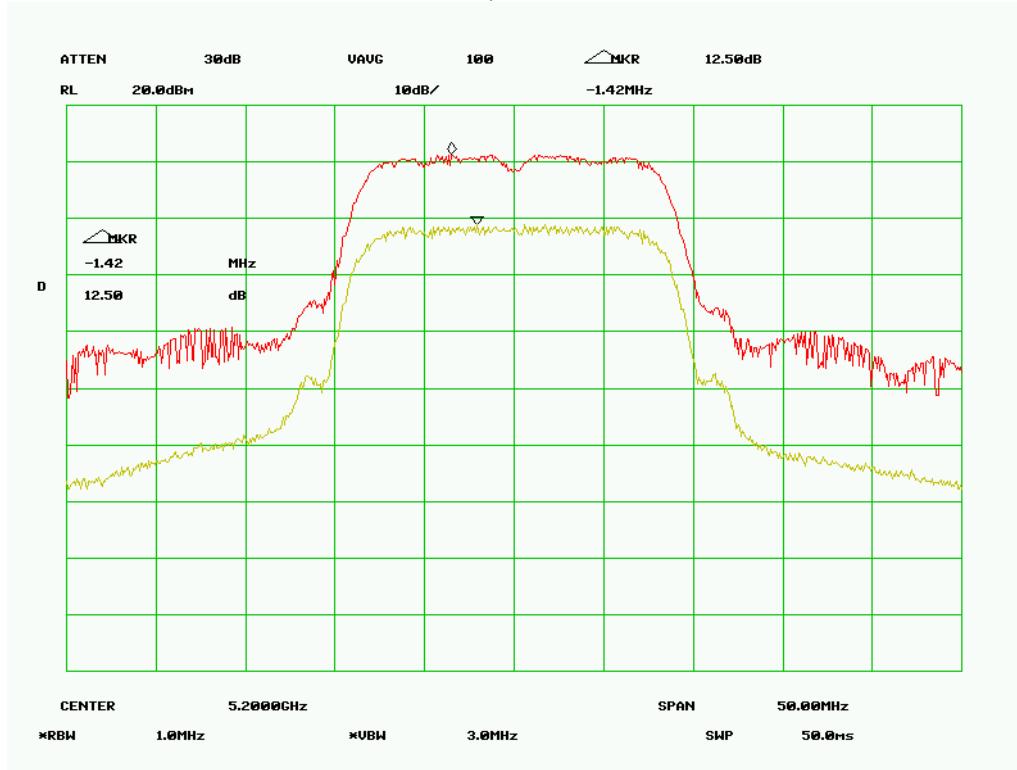


Peak Excursion ,Mid Channel Chain 2

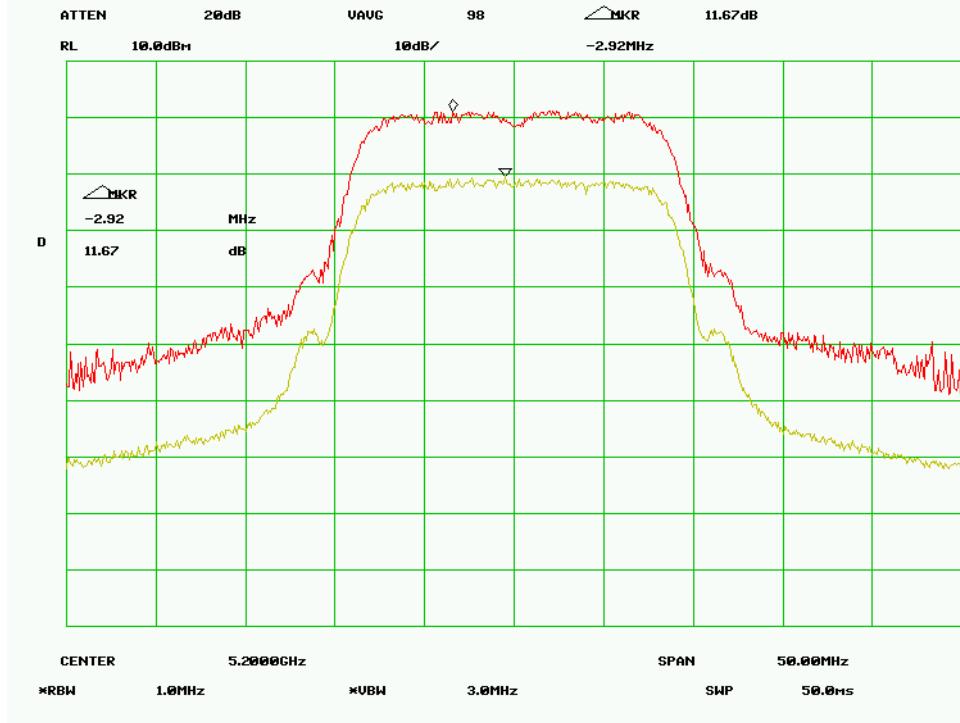


Peak Excursion ,Mid Channel Chain 3

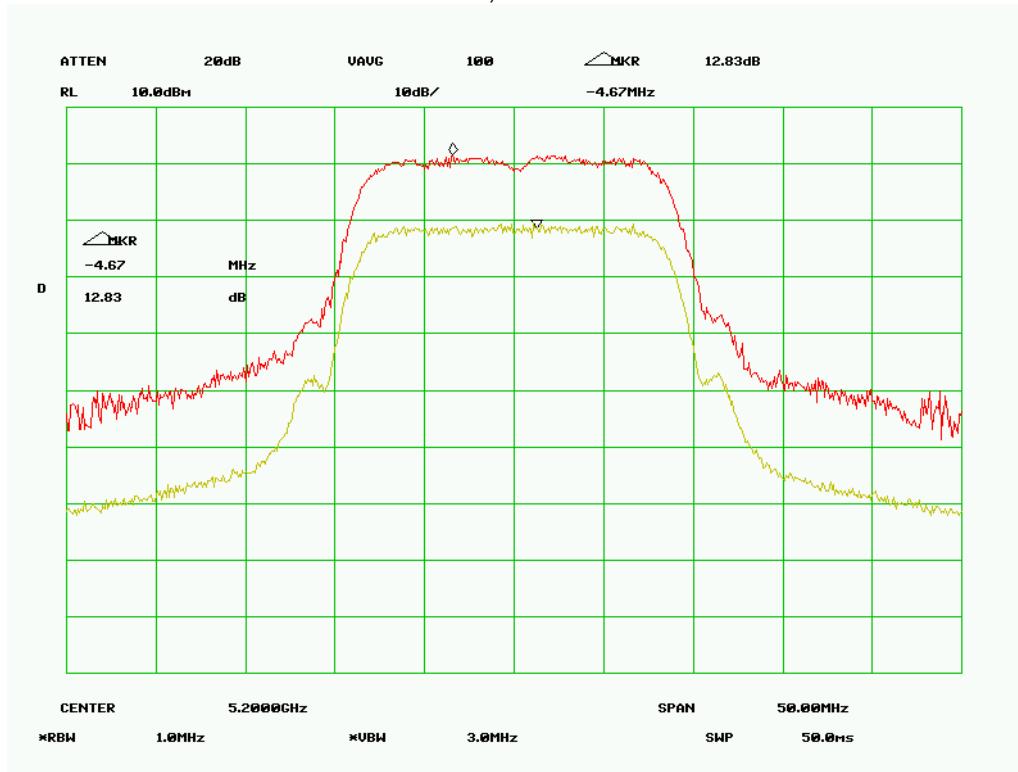


Peak Excursion ,Mid Channel Chain 4

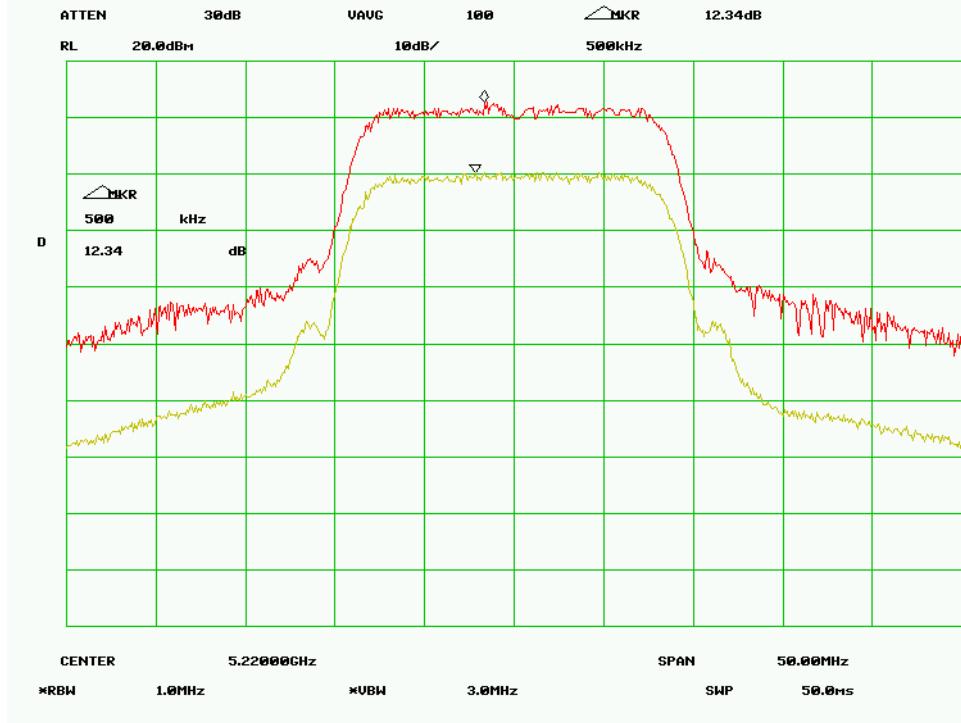


Peak Excursion , High Channel Chain 1

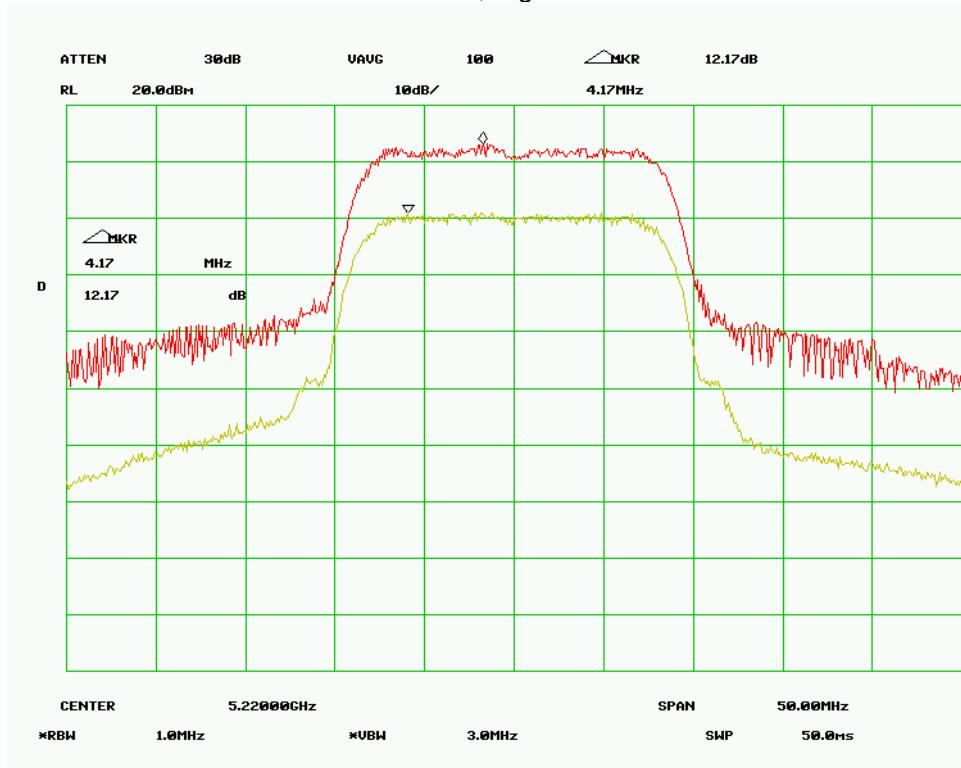

Peak Excursion ,High Channel Chain 2

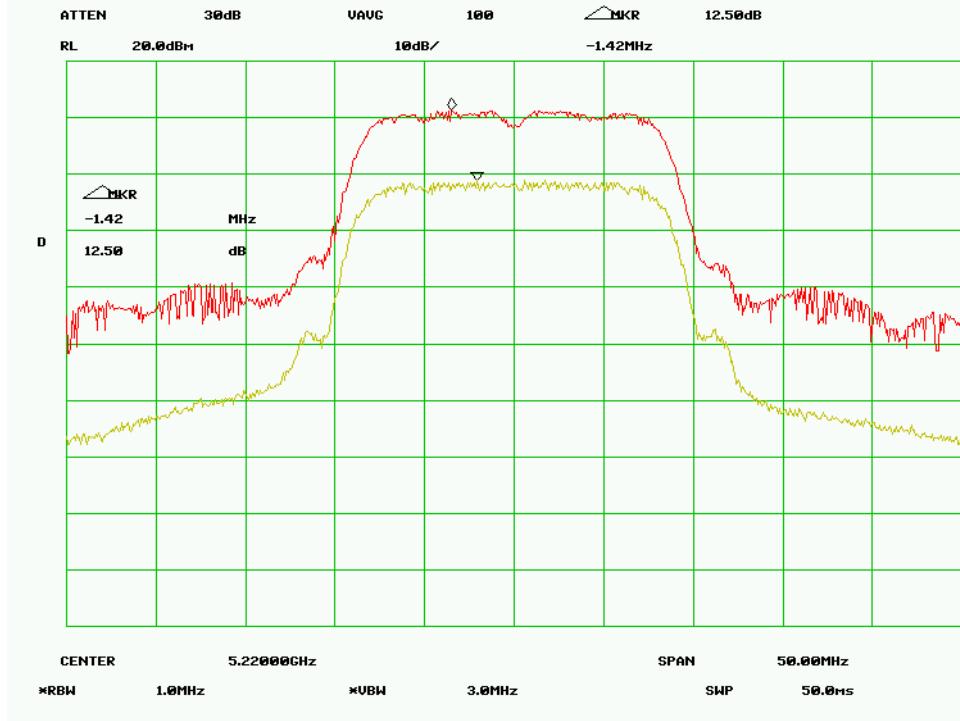

Peak Excursion ,High Channel Chain 3

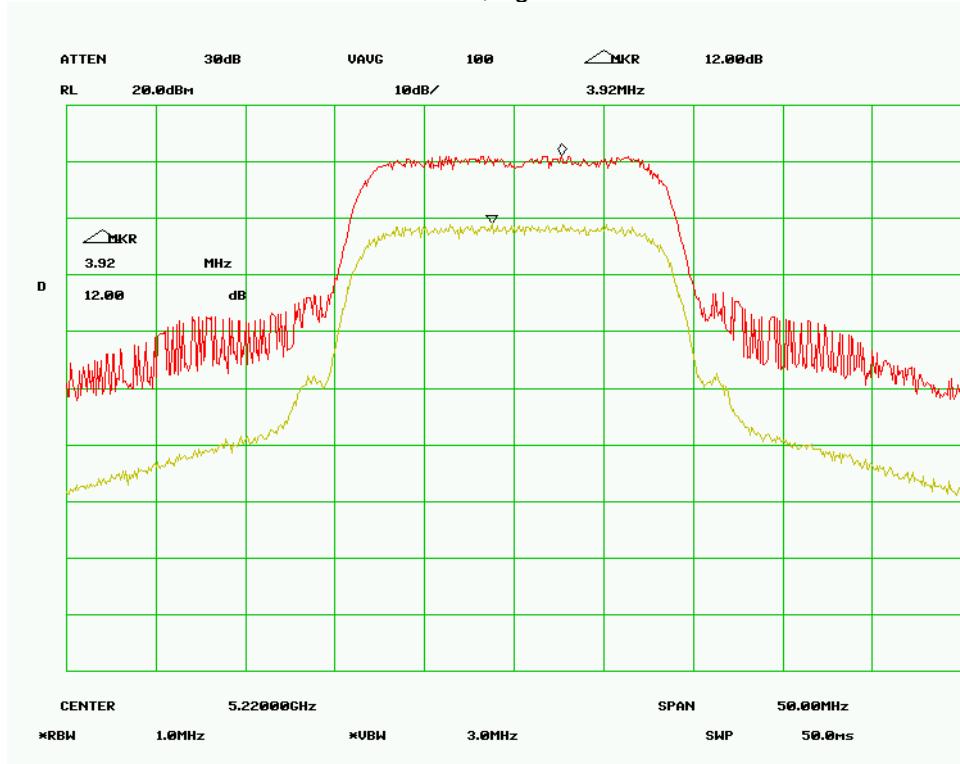

Peak Excursion ,High Channel Chain 4

## Annex A. TEST INSTRUMENT & METHOD

### Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Manufacturer	Model	CAL Due Date
Spectrum Analyzer	HP	8568B	04/26/2008
Quasi-Peak Adapter	HP	85650A	04/26/2008
RF Pre-Selector	HP	85685A	04/26/2008
Spectrum Analyzer	HP	8564E	05/01/2008
EMI Receiver	Rohde & Schwarz	ESIB 40	02/07/2008
R&S LISN	R&S	ESH2-Z5	04/27/2008
CHASE LISN	Chase	MN2050B	04/26/2008
Antenna(1 ~18GHz)	Emco	3115	08/17/2008
Antenna (30MHz~2GHz)	Sunol Sciences	JB1	10/04/2008
Chamber	Lingren	3m	09/28/2008
Pre-Amplifier(1 ~ 26GHz)	HP	8449	05/01/2008
DMM	Fluke	73III	05/01/2008
Variac	KRM	AEEC-2090	See Note
DMM	Fluke	51II	See Note
Horn Antenna (18~40GHz)	Com Power	AH-840	5/21/2008
Microwave Pre-Amp (18~40GHz)	Com Power	PA-840	5/21/2008

Note: No calibration required.



## Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

### Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a  $50\Omega/50\mu\text{H}$  EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

### Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

### Sample Calculation Example

At 20 MHz limit =  $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver =  $40.00 \text{ dB}\mu\text{V}$   
(Calibrated for system losses)

Therefore, Q-P margin =  $47.96 - 40.00 = 7.96$  i.e. **7.96 dB below limit**

## Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


### EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10<sup>th</sup> Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

### Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

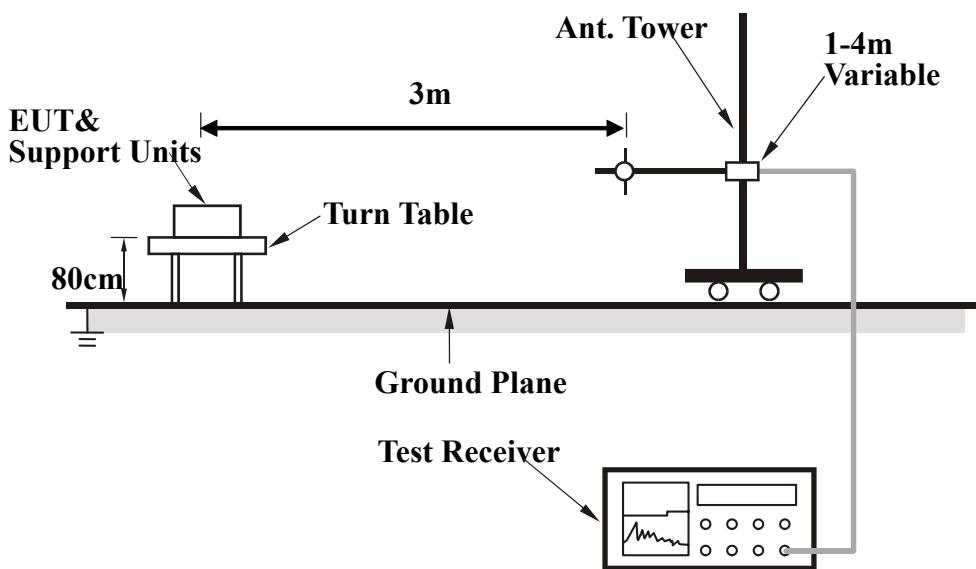

## **Test Method**

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

## **Sample Calculation Example**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$

$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



Title: RF Test Report of Amimon Ltd, model : AMN11100  
To FCC 15.407 2007

Serial# SL07090602-AMN-001(15.407)(AMN11100)  
Issue Date 02 Nov 2007  
Page 93 of 98  
[www.siemic.com](http://www.siemic.com)

## Annex B EUT AND TEST SETUP PHOTOGRAPHS

**Please see the attachment.**

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


### EUT TEST CONDITIONS

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**


The following is a description of supporting equipment and details of cables used with the EUT.

<b>Equipment Description (Including Brand Name)</b>	<b>Model &amp; Serial Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Laptop PC	IBM	Serial to USB Cable : 1 meter.

## Block Configuration Diagram for Radiated Emission

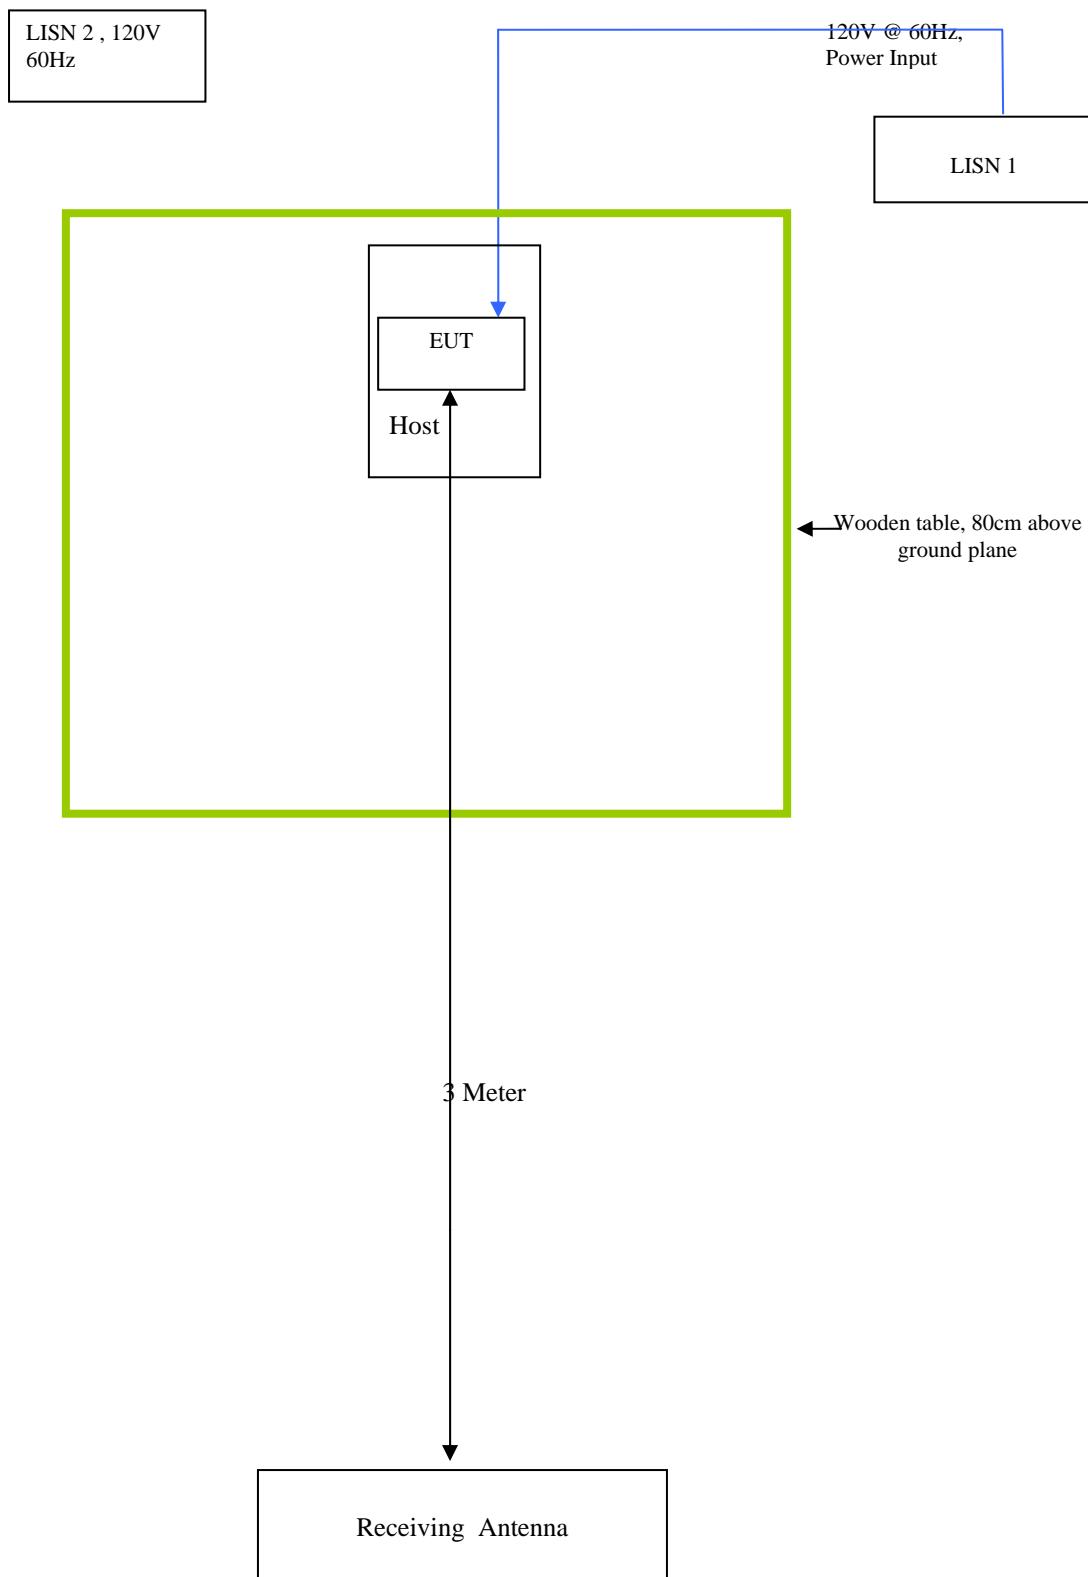

## Block Configuration Diagram for Conducted Emission

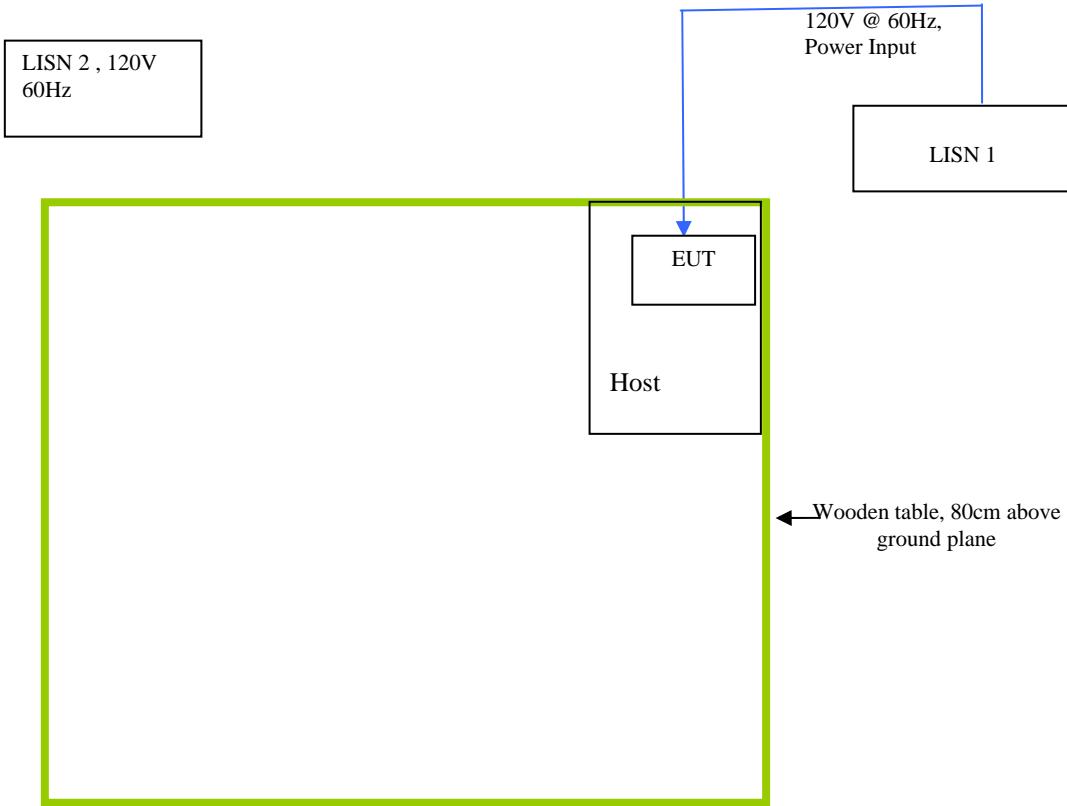

## **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
<b>Emissions Testing</b>	The EUT was controlled via PC Using manufacturer's program.
<b>Others Testing</b>	TX mode is Special mode with full power.



Title: RF Test Report of Amimon Ltd, model : AMN11100  
To FCC 15.407 2007

Serial# SL07090602-AMN-001(15.407)(AMN11100)  
Issue Date 02 Nov 2007  
Page 98 of 98  
[www.siemic.com](http://www.siemic.com)

## Annex D USER MANUAL, BLOCK & CIRCUIT DIAGRAM

**Please see attachment**