



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03



Certificate # 3939.01

EMC TEST REPORT

Applicant:	Juniper Systems, Inc.
Address:	1132 W 1700 N Logan, UT 84321 USA

Manufacturer or Supplier:	Juniper Systems, Inc.
Address:	1132 W 1700 N Logan, UT 84321 USA
Product:	Archer4
Brand Name:	Juniper Systems
Model Name:	AR4
FCC ID:	VSFAR4
Date of tests:	Jan. 05, 2024 ~ May. 15, 2024

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

FCC Part 15, Subpart B, Class A
 FCC Part 15, Subpart B, Class B
 ANSI C63.4:2014

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department

Date: May. 15, 2024

Date: May. 15, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EUT.....	4
1.2 SUMMARY OF TEST RESULTS	11
1.3 MEASUREMENT UNCERTAINTY.....	11
1.4 DESCRIPTION OF TEST MODES.....	12
1.5 DESCRIPTION OF SUPPORT UNITS.....	13
2 EMISSION TEST	14
2.1 CONDUCTED EMISSION MEASUREMENT.....	14
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	14
2.1.2 TEST INSTRUMENTS.....	14
2.1.3 TEST PROCEDURES	15
2.1.4 DEVIATION FROM TEST STANDARD	15
2.1.5 TEST SETUP.....	15
2.1.6 EUT OPERATING CONDITIONS.....	16
2.1.7 TEST RESULTS	17
2.2 RADIATED EMISSION MEASUREMENT.....	19
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	19
2.2.2 TEST INSTRUMENTS.....	20
2.2.3 TEST PROCEDURE.....	21
2.2.4 DEVIATION FROM TEST STANDARD	22
2.2.5 TEST SETUP	23
2.2.6 EUT OPERATING CONDITIONS	23
2.2.7 TEST RESULTS	24
3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	28



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-231218W001EM01	Original release	May. 15, 2024



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Archer4	
BRAND NAME	Juniper Systems	
MODEL NAME	AR4	
NOMINAL VOLTAGE	12Vdc (adapter or host equipment) 3.8Vdc (Li-ion, battery)	
MODULATION TYPE	BT_LE	GFSK
	Bluetooth	GFSK, $\pi/4$ -DQPSK, 8DPSK
	NFC	ASK
	WLAN	DSSS, OFDM, OFDMA
	GPS/GALILEO/GLO NASS/BDS/SBAS	BPSK
	LTE	QPSK/16QAM/64QAM
	5G NR	DFT-s-OFDM($\pi/2$ BPSK,QPSK,16QAM,64QAM,256QAM); CP-OFDM(QPSK,16QAM,64QAM,256QAM);
OPERATING FREQUENCY	Bluetooth/BT_LE	2402MHz ~ 2480MHz
	NFC	13.56 MHz
	WLAN	2412 ~ 2462MHz for 11b/g/n(HT20/40)/ ax(HE20/40)/ax(20M RU26/52/106/242) /(40M RU26/52/106/242/484) 5180 ~ 5240MHz, 5260 ~ 5320 MHz, 5500 ~ 5700MHz, 5745 ~ 5825 MHz for 802.11a/n/ac/ax (20MHz), 802.11ax20 (RU 26/52/106/242);802.11 n/ac/ax (40MHz), 802.11ax40 (RU 484);802.11ac/ax(80MHz), 802.11ax80 (RU 996);802.11ac/ax (160MHz), 802.11ax160 (RU full) 5955 ~ 6415MHz/6435 ~ 6525MHz/6525 ~ 6875MHz/6875 ~ 7115MHz for 802.11ax (HE20/40/80/160), RU26/52/106/242/484/996/996*2
	GPS/GALILEO/GLO NASS/BDS/SBAS	1559MHz ~ 1610MHz
	LTE	1850.7MHz ~ 1909.3MHz (FOR LTE Band2) 1710.7MHz ~ 1754.3MHz (FOR LTE Band4) 824.7MHz ~ 848.3MHz (FOR LTE Band5)



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

	<p>2502.5MHz ~ 2567.5MHz (FOR LTE Band7) 699.7MHz ~ 715.3MHz (FOR LTE Band12) 779.5MHz ~ 784.5MHz (FOR LTE Band13) 790.5MHz ~ 795.5MHz (FOR LTE Band14) 1850.7MHz ~ 1914.3MHz (FOR LTE Band25) 814.7MHz ~ 848.3MHz (FOR LTE Band26) 2307.5MHz ~ 2312.5MHz (FOR LTE Band30) 2572.5MHz ~ 2617.5MHz (FOR LTE Band38) 2498.5MHz ~ 2687.5MHz (FOR LTE Band41) 1710.7MHz ~ 1779.3MHz (FOR LTE Band66) 665.5MHz ~ 695.5MHz (FOR LTE Band71) 1853.3MHz ~ 1906.7MHz (FOR LTE Band2C) 825.6MHz ~ 847.4MHz (FOR LTE Band5B) 2505.5MHz ~ 2564.7MHz (FOR LTE Band7C) 701.5MHz ~ 713.5MHz (FOR LTE Band12B) 2499.3MHz ~ 2686.7MHz (FOR LTE Band41C) 1712.5MHz ~ 1782.3MHz (FOR LTE Band66B) 1713.3MHz ~ 1776.7MHz (FOR LTE Band66C)</p> <p>LTE DL CA:</p> <p>CA_25A-25A CA_25A-41A CA_26A-41A CA_26A-41C CA_2A-2A CA_41A-41A CA_4A-4A CA_5A-5A CA_66A-66A CA_7A-7A</p> <p>LTE UL&DL CA:</p> <p>CA_12A-25A CA_12A-30A CA_12A-30A-66A CA_12A-66A CA_12A-66A-66A CA_12B CA_13A-66A-66A CA_14A-30A CA_14A-30A-66A CA_14A-30A-66A-66A CA_14A-66A CA_14A-66A-66A CA_25A-26A CA_2A-12A CA_2A-12A-30A</p>
--	---



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

	CA_2A-12A-66A CA_2A-12A-66A-66A CA_2A-12B CA_2A-13A CA_2A-13A-66A CA_2A-14A CA_2A-14A-30A CA_2A-14A-66A CA_2A-14A-66A-66A CA_2A-2A-12A CA_2A-2A-12A-30A CA_2A-2A-12B CA_2A-2A-14A CA_2A-2A-14A-30A CA_2A-2A-14A-66A CA_2A-2A-30A CA_2A-2A-4A-5A CA_2A-2A-4A-71A CA_2A-2A-5A CA_2A-2A-5A-30A CA_2A-2A-66A-71A CA_2A-2A-71A CA_2A-2A-7A CA_2A-2A-7A-66A CA_2A-30A CA_2A-30A-66A CA_2A-30A-66A-66A CA_2A-4A CA_2A-4A-12A CA_2A-4A-13A CA_2A-4A-4A CA_2A-4A-4A-5A CA_2A-4A-5A CA_2A-4A-71A CA_2A-4A-7A-7A CA_2A-5A CA_2A-5A-30A CA_2A-5A-66A CA_2A-5B CA_2A-5B-30A CA_2A-5B-66A CA_2A-66A CA_2A-66A-66A CA_2A-66A-66A-71A CA_2A-66A-71A
--	---



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

	CA_2A-66C CA_2A-66C-71A CA_2A-71A CA_2A-7A CA_2A-7A-12A CA_2A-7A-66A CA_2A-7A-7A CA_2C CA_2C-12A-30A CA_2C-5A CA_2C-66A CA_30A-66A CA_30A-66A-66A CA_41A-41C CA_41C CA_41D CA_4A-12A CA_4A-12A-30A CA_4A-12B CA_4A-13A CA_4A-30A CA_4A-4A-12A CA_4A-4A-13A CA_4A-4A-30A CA_4A-4A-5A CA_4A-4A-71A CA_4A-4A-7A CA_4A-5A CA_4A-5A-30A CA_4A-71A CA_4A-7A-12A CA_4A-7A-7A CA_4A-7C CA_5A-25A CA_5A-30A CA_5A-30A-66A CA_5A-5A-66A CA_5A-7A CA_5B CA_5B-30A CA_5B-30A-66A CA_5B-66A CA_5B-66A-66A CA_66A-66A-71A CA_66A-66C
--	--



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

		CA_66A-71A CA_66B CA_66C CA_66C-71A CA_7A-12A CA_7A-66A CA_7B CA_7C
	5G NR	SA: n2 (1852.5MHz ~1907.5MHz) n5(826.5MHz ~ 846.5MHz) n25(1852.5MHz ~ 1912.5MHz) n41(2506.02 ~ 2679.99MHz) n66(1712.5 ~ 1777.5MHz) n71(665.5 ~ 695.5MHz) n77(Part27Q)(3460.02 ~ 3540MHz) n77(Part27O)(3710.01 ~ 3969.99MHz) n78(Part27Q)(3460.02 ~ 3540MHz) NR DL CA: CA_n41A-n66A CA_n41A-n71A CA_n71B CA_n66A-n71A CA_n2A-n66A CA_n5A-n66A CA_n2A-n5A CA_n66(2A) CA_n2A-n77A CA_n5A-n77A CA_n66A-n77A CA_n71(2A) CA_n66B CA_n71A-n77A ENDC DC_12A_n2A DC_12A_n66A DC_12A-66A_n2A DC_12A-66A_n66A DC_13A_n2A DC_13A_n66A DC_13A_n77A DC_13A-66A_n2A DC_13A-66A_n66A DC_14A_n2A DC_14A_n66A



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

	DC_14A_n77A DC_14A-30A_n2A DC_14A-30A_n66A DC_14A-66A_n2A DC_14A-66A_n66A DC_2A-(n)71AA DC_2A_n5A DC_2A_n66A DC_2A_n71A DC_2A_n77A DC_2A-12A_n2A DC_2A-12A_n66A DC_2A-13A_n66A DC_2A-14A_n2A DC_2A-14A_n66A DC_2A-2A_n5A DC_2A-2A_n66A DC_2A-2A_n71A DC_2A-2A_n77A DC_2A-5A_n2A DC_2A-5A_n66A DC_2A-66A_n5A DC_2A-66A_n66A DC_2A-66A_n71A DC_30A_n5A DC_30A_n66A DC_5A_n2A DC_5A_n66A DC_5A_n77A DC_5A-66A_n2A DC_66A-(n)71AA DC_66A_n2A DC_66A_n41A DC_66A_n5A DC_66A_n71A DC_66A_n77A DC_66C_n71A DC_71A_n2A DC_71A_n66A
HW VERSION	DVT2
SW VERSION	JH_U_000.00.040.00_USERDEBUG_PCAT
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: with shielded cable, w/o ferrite core, 1.0 meter



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

**ACCESSORY
DEVICES**

Refer to note as below

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
AC Adapter	Juniper	SHENZHEN MERRYKING ELECTRONICS CO.,LTD.	MK-PQ181EX	I/P: 100-240Vac, 0.5A, O/P: 12.0Vdc, 1.5A
Battery 1	CHOLIPOW	SHENZHEN CHOLIPOWER TECHNOLOGY CO.,LTD	CLP983	Capacity: 3.8Vdc, 4500mAh
Battery 2	CHOLIPOW	SHENZHEN CHOLIPOWER TECHNOLOGY CO.,LTD	CLP984	Capacity: 3.8Vdc, 8300mAh
Battery 3	GUANGWEI	SHENZHEN GUANGWEI ELECTRONIC TECHNOLOGY CO.,LTD	GW300	Capacity: 3.7Vdc, 300mAh
USB Cable	Keli	KELI TECHNOLOGY DEVELOPMENT CO.,LTD	KLC-5243	Signal Line, 1.0meter
LCD Panel	KOTL	JIN LONG MACHINERY&ELE CTRONICS (Hangzhou) CO., LTD.	304-T0662A-001- A2	6.26inch TFT, 1080(H)*2280(V) resolution



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B		
Standard Section	Test Item	Result
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Compliance
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance
	Radiated Emission Test (Above 1GHz)	Compliance

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	±2.70dB
Radiated emissions	30MHz~1GHz	±4.98dB
	1GHz ~6GHz	±4.70dB
	6GHz ~18GHz	±4.60dB
	18GHz ~40GHz	±4.12dB



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
Radiated emission test	
1	LTE B5 Idle+Adapter +USB cable +SD+Scanner+Scanning
2	LTE B12 Idle+Adapter +USB cable +SD+GNSS receiver +MPG4
3	LTE B13 Idle+Adapter +USB cable +SD+NFC
4	LTE B14 Idle+Adapter +USB cable +SD+Back Camera On+Flashlight On
5	LTE B26 Idle+Adapter (Tpye c port) +USB cable +SD+Front Camera On
6	LTE B71 Idle+USB Link+USB cable +SD+Data Transmission+PC to EUT
7	N5 Idle+USB Link+USB cable +SD+Data Transmission+PC to SD
8	N71 Idle+powered by battery+SD+Earphone+MPG4
Conducted emission test	
1	LTE B5 Idle+Adapter +USB cable +SD+Scanner+Scanning
2	LTE B12 Idle+Adapter +USB cable +SD+GNSS receiver +MPG4
3	LTE B13 Idle+Adapter +USB cable +SD+NFC
4	LTE B14 Idle+Adapter +USB cable +SD+Back Camera On+Flashlight On
5	LTE B26 Idle+Adapter (Tpye c port) +USB cable +SD+Front Camera On
6	LTE B71 Idle+USB Link+USB cable +SD+Data Transmission+PC to EUT
7	N5 Idle+USB Link+USB cable +SD+Data Transmission+PC to SD

NOTE:

1. For conducted emission test, Pre-scan all mode, mode 2 was the worst case and only this mode was presented in this report.
2. For radiated emission test, Pre-scan all mode, test mode 4 was the worst case and only this mode was presented in this report



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad L440	R90FTFKP	N/A
2	Earphone	MI	N/A	N/A	N/A
3	Adapter	MI	MDY-12-EA	N/A	N/A
4	Micro SD	SAM SUNG	N/A	N/A	N/A
5	USB Cable	MI	N/A	N/A	N/A
6	Universal radio communication tester	Rohde&Schwarz	CMW500	N/A	N/A
7	Printer	HP	hp LaserJet 1300	CNSJF75989	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1m;
2	N/A
3	N/A
4	N/A



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

2 EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.107 A CLASS B)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.107 B CLASS A)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

2.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 14,23	Feb. 13,24
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 13,24	Feb. 12,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 10,23	Mar. 09,24
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 09,24	Mar. 08,25

NOTE: 1. The test was performed in CE shielded room.



2.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

2.1.4 DEVIATION FROM TEST STANDARD


No deviation.

2.1.5 TEST SETUP



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

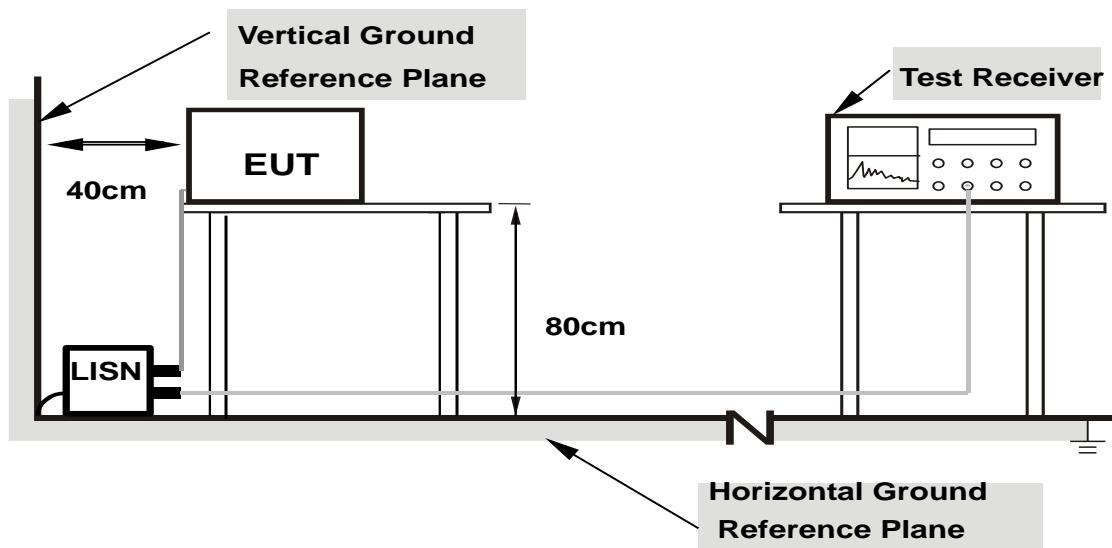

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

2.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03


2.1.7 TEST RESULTS

TEST VOLTAGE	Input 120 Vac, 60 Hz		Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz		
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH		TESTED BY	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.162000	---	32.04	55.36	23.32	L1	ON	9.8
0.162000	47.12	---	65.36	18.24	L1	ON	9.8
0.440000	---	37.02	47.06	10.04	L1	ON	9.8
0.440000	43.62	---	57.06	13.44	L1	ON	9.8
0.684000	---	29.96	46.00	16.04	L1	ON	9.8
0.684000	36.29	---	56.00	19.71	L1	ON	9.8
0.912000	---	29.72	46.00	16.28	L1	ON	9.8
0.912000	36.04	---	56.00	19.96	L1	ON	9.8
1.664000	---	26.77	46.00	19.23	L1	ON	9.8
1.664000	33.62	---	56.00	22.38	L1	ON	9.8
2.776000	---	25.82	46.00	20.18	L1	ON	9.9
2.776000	31.89	---	56.00	24.11	L1	ON	9.9

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

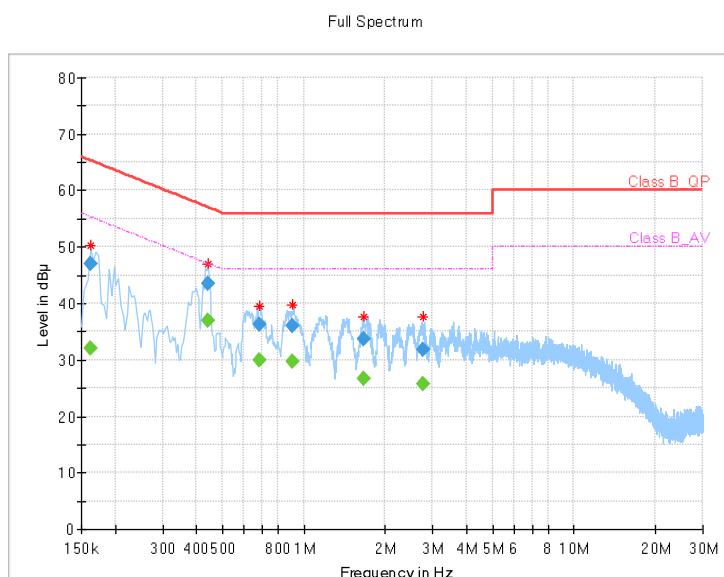



BUREAU
VERITAS


Test Report No.: W7L-231218W001EM03

TEST VOLTAGE	Input 120 Vac, 60 Hz		Detector Function & Resolution Bandwidth		Quasi-Peak (QP) / Average (AV), 9 kHz		
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH		TESTED BY		Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	27.40	55.57	28.17	N	ON	9.7
0.158000	44.12	---	65.57	21.45	N	ON	9.7
0.436000	---	30.41	47.14	16.73	N	ON	9.6
0.436000	38.34	---	57.14	18.80	N	ON	9.6
0.684000	---	22.17	46.00	23.83	N	ON	9.7
0.684000	30.39	---	56.00	25.61	N	ON	9.7
0.924000	---	21.69	46.00	24.31	N	ON	9.7
0.924000	29.72	---	56.00	26.28	N	ON	9.7
1.708000	---	20.35	46.00	25.65	N	ON	9.8
1.708000	29.02	---	56.00	26.98	N	ON	9.8
2.492000	---	19.27	46.00	26.73	N	ON	9.8
2.492000	27.91	---	56.00	28.09	N	ON	9.8

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

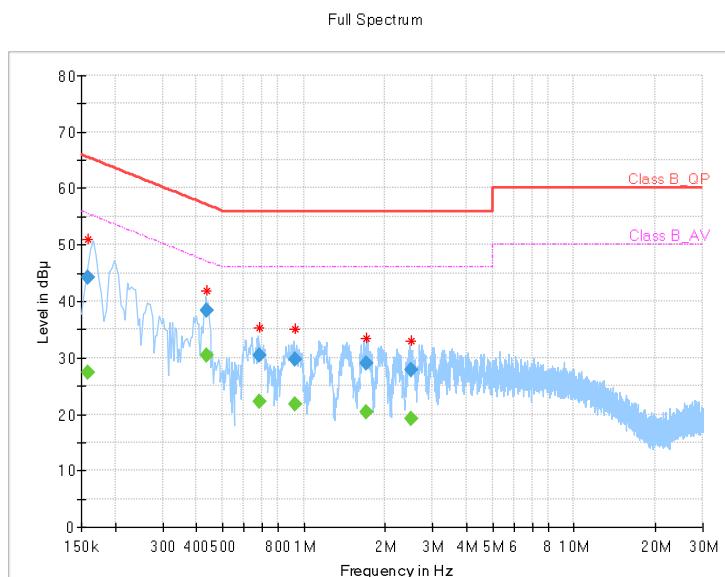



2.2 RADIATED EMISSION MEASUREMENT

2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 3 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B, Class A	FCC 15B, Class B
30-88	49	40
88-216	53.5	43.5
216-960	56	46
960-1000	59.5	54
Above 1000	Avg: 59.5 Peak: 79.5	Avg: 54 Peak: 74

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. QP detector shall be applied if not specified.



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

2.2.2 TEST INSTRUMENTS

Frequency range below 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 18,23	Feb. 17,24
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 17,24	Feb. 16,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 27,24	Mar. 26,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 05,24	May. 04,25
E3 Test Software	E3	V 9.160323	N/A	N/A	N/A

Frequency range above 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 29,23	Nov. 28,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-003 61	15433	Sep.03, 23	Sep.02, 24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 27,24	Mar. 26,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.09,24	May.08,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb. 16,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 16,24	Feb. 15,25
E3 Test Software	E3	V 9.160323	N/A	N/A	N/A

NOTE: 1. The test was performed in 3m chamber.

2. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2.2.3 TEST PROCEDURE

<Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Emission level – Limit value.



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

NOTE:

- . The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- . The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
- . For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
- . Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- . Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
- . Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
- . Margin value = Emission level – Limit value.

2.2.4 DEVIATION FROM TEST STANDARD

No deviation.




BUREAU
VERITAS


Test Report No.: W7L-231218W001EM03

2.2.5 TEST SETUP

<Frequency Range below 1GHz>

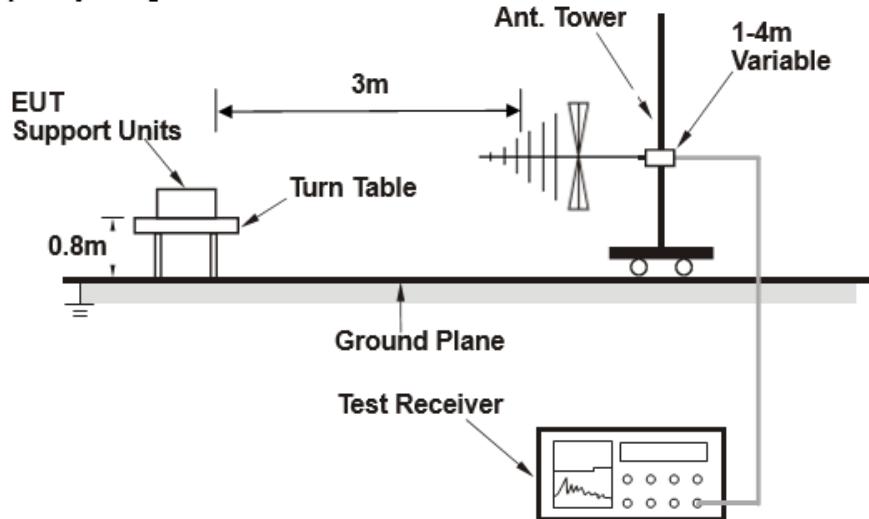

<Frequency Range above 1GHz>

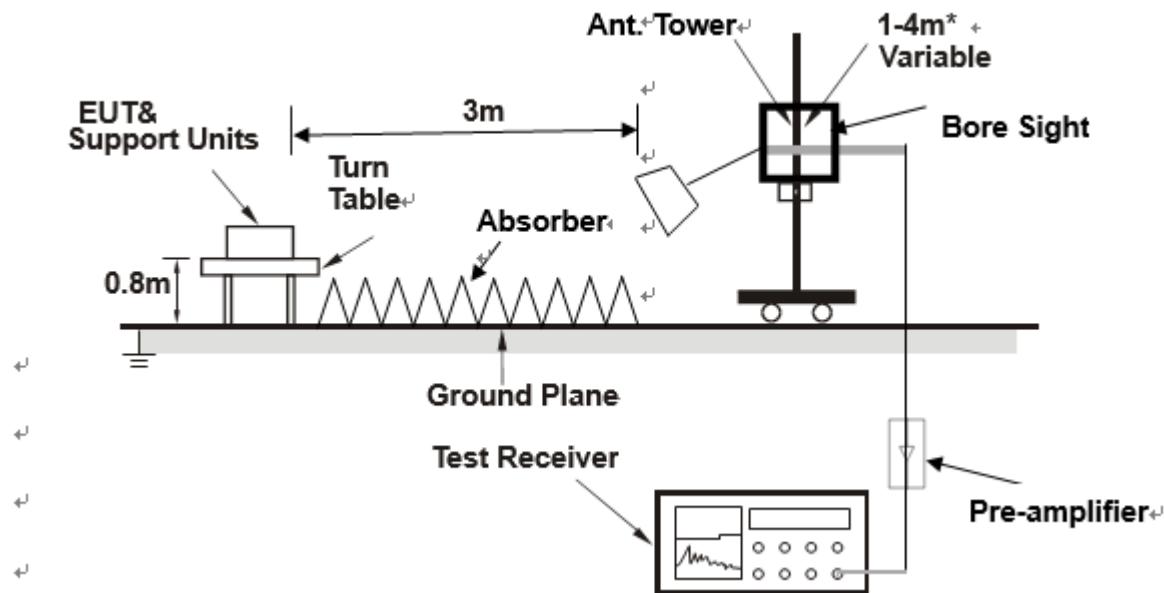

Note: Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.

2.2.6 EUT OPERATING CONDITIONS

Same as item 2.1.6.



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03

2.2.7 TEST RESULTS


TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Freq	Level	Read	Limit	Over	Remark	Pol/Phase
		Line	Line	Factor		
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	
1 QP	30.000	23.29	34.13	40.00	-16.71	-10.84 QP
2	62.980	21.84	45.49	40.00	-18.16	-23.65 Peak
3	83.350	17.32	40.64	40.00	-22.68	-23.32 Peak
4	155.130	23.44	42.07	43.50	-20.06	-18.63 Peak
5 PP	288.990	35.62	50.80	46.00	-10.38	-15.18 Peak
6	551.860	27.05	36.55	46.00	-18.95	-9.50 Peak

REMARKS:

1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)- Amplifier Gain
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

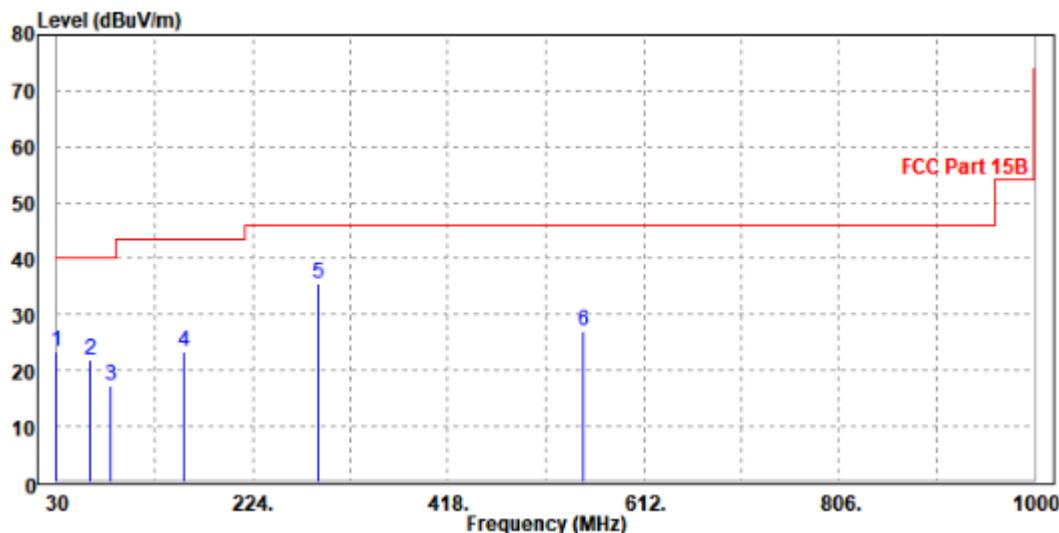



BUREAU
VERITAS

Test Report No.: W7L-231218W001EM03


TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70% RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak , 120 kHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Freq	Level	Read	Limit	Over	Factor	Remark	Pol/Phase
		MHz	dBuV/m	dBuV	Line	Limit	
1	31.940	27.56	39.11	40.00	-12.44	-11.55	QP Vertical
2 PP	62.980	35.53	58.88	40.00	-4.47	-23.35	QP Vertical
3	84.320	32.77	55.45	40.00	-7.23	-22.68	QP Vertical
4	138.640	35.69	54.17	43.50	-7.81	-18.48	QP Vertical
5	193.930	24.50	41.46	43.50	-19.00	-16.96	QP Vertical
6	286.080	34.27	49.18	46.00	-11.73	-14.91	QP Vertical

REMARKS:

1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Amplifier Gain
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

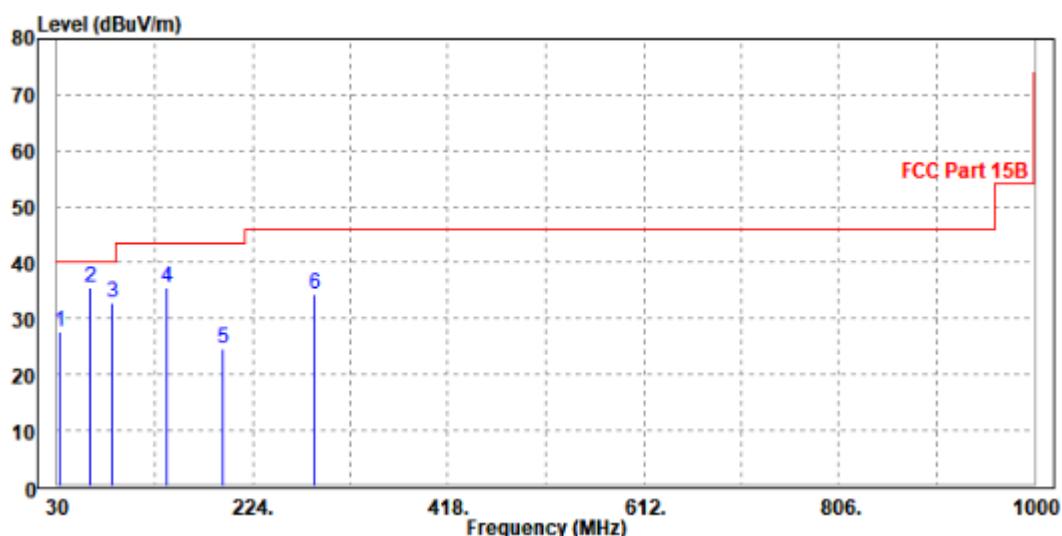



BUREAU
VERITAS


Test Report No.: W7L-231218W001EM03

TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
3703	43.17	48.45	74	-30.83	33.04	9.49	47.81	100	94	Peak
3703	34.37	39.65	54	-19.63	33.04	9.49	47.81	100	94	Average
5182	48.42	49.48	74	-25.58	34.27	11.2	46.53	100	0	Peak
5182	40.32	41.38	54	-13.68	34.27	11.2	46.53	100	0	Average
6746	49.16	47.6	74	-24.84	35.55	12.62	46.61	100	80	Peak
6746	43.67	42.11	54	-10.33	35.55	12.62	46.61	100	80	Average

REMARKS:

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower .For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
4. Only emissions significantly above equipment noise floor are reported.

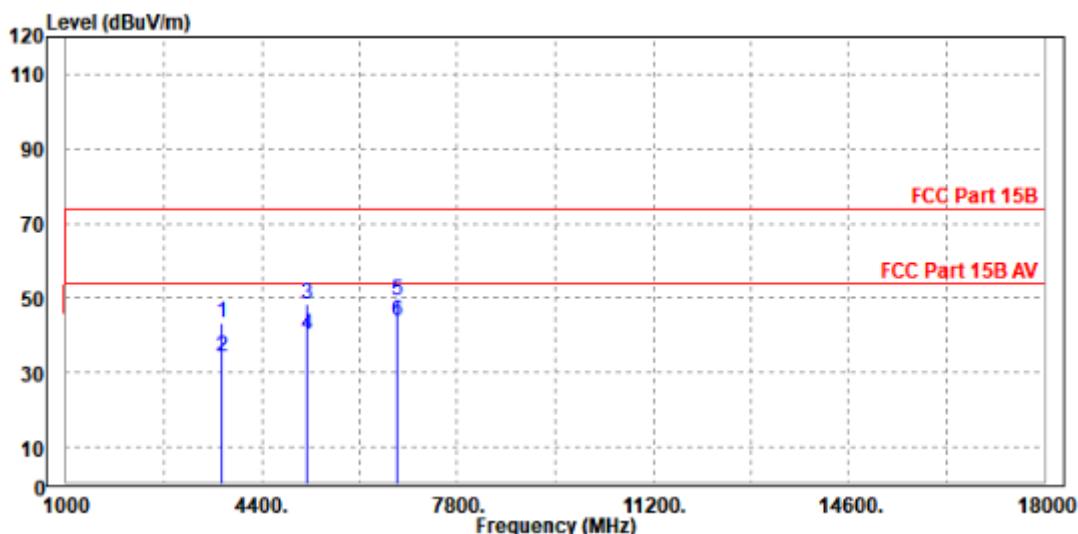



BUREAU
VERITAS


Test Report No.: W7L-231218W001EM03

TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2547	42.34	48.4	74	-31.66	32.15	7.96	46.17	100	60	Peak
2547	33.57	39.63	54	-20.43	32.15	7.96	46.17	100	60	Average
5182	48	48.88	74	-26	34.45	11.2	46.53	100	125	Peak
5182	41.51	42.39	54	-12.49	34.45	11.2	46.53	100	125	Average
6542	48.92	47.38	74	-25.08	35.69	12.5	46.65	100	360	Peak
6542	43.41	41.87	54	-10.59	35.69	12.5	46.65	100	360	Average

REMARKS:

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower .For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
4. Only emissions significantly above equipment noise floor are reported.

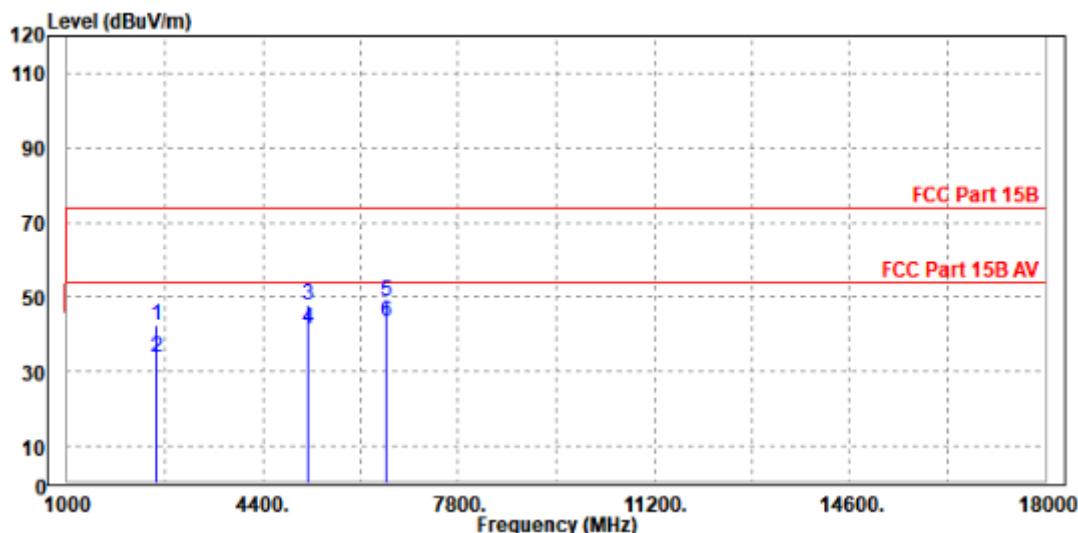



3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---