

FCC TEST REPORT

(Part 15, Subpart C)

Applicant:	Juniper Systems, Inc.
Address:	1132 W 1700 N Logan, UT 84321 USA



Manufacturer or Supplier:	Juniper Systems, Inc.
Address:	1132 W 1700 N Logan, UT 84321 USA
Product:	Archer4
Brand Name:	Juniper Systems
Model Name:	AR4
FCC ID:	VSFAR4
Date of tests:	Jan. 05, 2024 ~ May. 15, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

☒ **ANSI C63.10-2020**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: May. 15, 2024	 Date: May. 15, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	10
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	11
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
2.3 DUTY CYCLE OF TEST SIGNAL	15
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	16
2.5 DESCRIPTION OF SUPPORT UNITS	16
3 TEST TYPES AND RESULTS.....	17
3.1 CONDUCTED EMISSION MEASUREMENT	17
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
3.1.2 TEST INSTRUMENTS.....	17
3.1.3 TEST PROCEDURES	18
3.1.4 DEVIATION FROM TEST STANDARD	18
3.1.5 TEST SETUP	19
3.1.6 EUT OPERATING CONDITIONS	19
3.1.7 TEST RESULTS	20
3.2 RADIATED EMISSION MEASUREMENT	22
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	22
3.2.2 TEST INSTRUMENTS.....	23
3.2.3 TEST PROCEDURES	26
3.2.4 DEVIATION FROM TEST STANDARD	26
3.2.5 TEST SETUP	27
3.2.6 EUT OPERATING CONDITIONS	28
3.2.7 TEST RESULTS	29
3.3 6 DB BANDWIDTH MEASUREMENT	90
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	90
3.3.2 TEST INSTRUMENTS.....	90
3.3.3 TEST PROCEDURE.....	90
3.3.4 DEVIATION FROM TEST STANDARD	91
3.3.5 TEST SETUP	91



3.3.6	EUT OPERATING CONDITIONS	91
3.3.7	TEST RESULTS	92
3.4	CONDUCTED OUTPUT POWER.....	93
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	93
3.4.2	TEST SETUP	93
3.4.3	TEST INSTRUMENTS.....	93
3.4.4	TEST PROCEDURES	93
3.4.5	DEVIATION FROM TEST STANDARD	93
3.4.6	EUT OPERATING CONDITIONS	93
3.4.7	TEST RESULTS	94
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	94
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	95
3.5	POWER SPECTRAL DENSITY MEASUREMENT	96
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	96
3.5.2	TEST SETUP	96
3.5.3	TEST INSTRUMENTS.....	96
3.5.4	TEST PROCEDURE.....	96
3.5.5	DEVIATION FROM TEST STANDARD	96
3.5.6	EUT OPERATING CONDITION	96
3.5.7	TEST RESULTS	97
3.6	OUT OF BAND EMISSION MEASUREMENT	98
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	98
3.6.2	TEST SETUP	98
3.6.3	TEST INSTRUMENTS.....	98
3.6.4	TEST PROCEDURE.....	98
3.6.5	DEVIATION FROM TEST STANDARD	99
3.6.6	EUT OPERATING CONDITION	99
3.6.7	TEST RESULTS	99
3.7	ANTENNA REQUIREMENTS.....	100
3.7.1	STANDARD APPLICABLE	100
3.7.2	ANTENNA CONNECTED CONSTRUCTION	100
3.7.3	ANTENNA GAIN	100
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	101
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	102



Test Report No.: W7L-231218W001RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-231218W001RF02	Original release	May. 15, 2024



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
15.207	AC Power Conducted Emission	Compliance	A
15.205 15.209	Radiated Emissions	Compliance	A/B
15.247(d)	Out of band Emission Measurement	Compliance	A
15.247(a)(2)	6dB bandwidth	Compliance	A
15.247(b)	Conducted Output power	Compliance	A
15.247(e)	Power Spectral Density	Compliance	A
15.203	Antenna Requirement	Compliance	A

Note : Except RSE and AC Power Conducted Emission, other data please refer to Appendix B.

*Test Lab Information Reference

Lab A:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. : 525120; Designation No. : CN1171;

Lab B:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Archer4
BRAND NAME	Juniper Systems
MODEL NAME	AR4
NOMINAL VOLTAGE	12Vdc(adapter or host equipment) 3.8Vdc (Li-ion, battery)
MODULATION	DSSS, OFDM, GFSK, OFDMA
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n(HT20)/ax(HE20): up to 144.4 Mbps 802.11n(HT40)/ax(HE40): up to 300 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps 802.11ax 20 (RU26/52/106/242): up to 286.8Mbps 802.11ax 40 (RU484): up to 573.5Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20/40) /ax(HE20/40) 2402-2480MHz for BT-LE(GFSK) 2412-2462MHz for ax(20M RU26/52/106/242)/ax (40M RU484)
MAX. OUTPUT POWER	WLAN: 495.7mW (Maximum) BT-LE: 8.53mW (Maximum) RU WLAN: 617.85mW (Maximum)
ANTENNA TYPE	ANT 6: PIFA Antenna with 1.24dBi gain for WIFI ANT 8: PIFA Antenna with -3.21dBi gain for WIFI PIFA Antenna with 1.24dBi gain for BLE
HW VERSION	DVT2
SW VERSION	JH_U_000.00.040.00_USERDEBUG_PCAT
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: with shielded cable, w/o ferrite core, 1.0 meter



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. EUT operating function.:

MODULATION MODE	TX/RX FUNCTION
802.11b	2TX /2RX
802.11g	2TX /2RX
802.11n(HT20)/ax(HE20)	2TX /2RX
802.11n(HT40)/ax(HE40)	2TX /2RX
802.11ax (20MHz RU 26/52/106/242)	2TX /2RX
802.11ax (40MHz RU 484)	2TX /2RX
BT_LE(1MHz)	1TX /1RX
BT_LE(2MHz)	1TX /1RX
BT_LE(S2)	1TX /1RX
BT_LE(S8)	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

**5. List of Accessory:**

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
AC Adapter	Juniper	SHENZHEN MERRYKING ELECTRONICS CO.,LTD.	MK-PQ181EX	I/P: 100-240Vac, 0.5A, O/P: 12.0Vdc, 1.5A
Battery 1	CHOLIPOW	SHENZHEN CHOLIPOWER TECHNOLOGY CO.,LTD	CLP983	Capacity: 3.8Vdc, 4500mAh
Battery 2	CHOLIPOW	SHENZHEN CHOLIPOWER TECHNOLOGY CO.,LTD	CLP984	Capacity: 3.8Vdc, 8300mAh
Battery 3	GUANGWEI	SHENZHEN GUANGWEI ELECTRONIC TECHNOLOGY CO.,LTD	GW300	Capacity: 3.7Vdc, 300mAh
USB Cable	Keli	KELI TECHNOLOGY DEVELOPMENT CO.,LTD	KLC-5243	Signal Line,1.0meter
LCD Panel	KOTL	JIN LONG MACHINERY&ELE CTRONICS (Hangzhou) CO., LTD.	304-T0662A-001- A2	6.26inch TFT, 1080(H)*2280(V) resolution



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), 802.11ax20 (HE20); 802.11ax20 (RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), 802.11ax40 (HE40); 802.11ax40 (RU 484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11ax 40 (RU 484)	3 to 9	3	OFDMA	MCS0
BT-LE	0 to 39	19	GFSK	0.5



RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11ax HE20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax HE40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0
802.11ax 20 (RU 26/52/106/242)	1 to 11	1, 11	OFDMA	MCS0
802.11ax 40 (RU 484)	3 to 9	3, 9	OFDMA	MCS0

POWER LINE CONDUCTED EMISSION TEST

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11ax 40 (RU 484)	3 to 9	3	OFDMA	MCS0



BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11ax HE20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0
802.11ax 20 (RU 26/52/106/242)	1 to 11	1,11	OFDMA	MCS0
802.11ax 40 (RU 484)	3 to 9	3 ,9	OFDMA	MCS0



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11ax HE20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax HE40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0
802.11ax 20 (RU 26/52/106/242)	1 to 11	1,11	OFDMA	MCS0
802.11ax 40 (RU 484)	3 to 9	3 ,9	OFDMA	MCS0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 12.0V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC 12.0V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC 12.0V By Adapter	Carl Xie
APCM	25deg. C, 60%RH	DC 3.8V By Battery	James Fu



Test Report No.: W7L-231218W001RF02

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix B Of this test report..



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thinkpad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1.The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 15,23	Feb. 14,24
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 14,24	Feb. 13,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 11,23	Mar. 10,24
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 10,24	Mar. 09,25

NOTE:

1. The test was performed in CE shielded room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

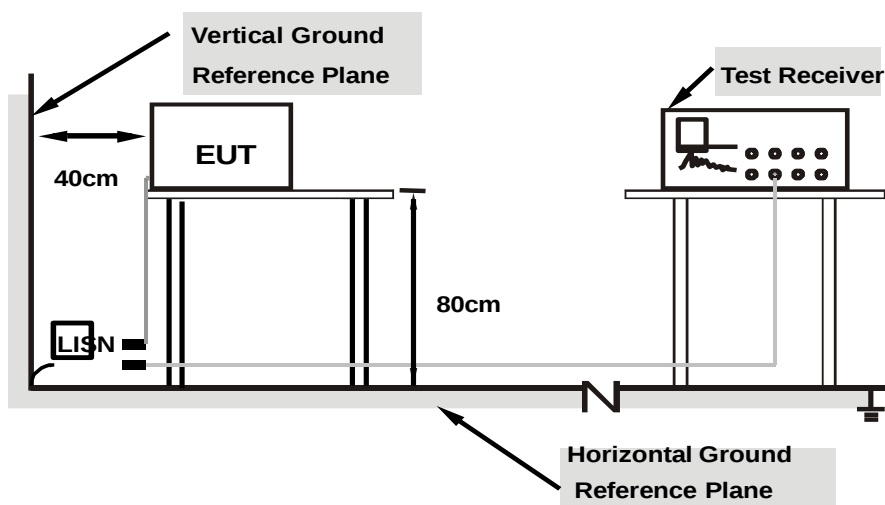

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



3.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.388000	---	32.34	48.11	15.77	L1	ON	9.8
0.388000	42.29	---	58.11	15.82	L1	ON	9.8
0.552000	---	25.30	46.00	20.70	L1	ON	9.8
0.552000	35.75	---	56.00	20.25	L1	ON	9.8
0.788000	---	22.91	46.00	23.09	L1	ON	9.8
0.788000	32.24	---	56.00	23.76	L1	ON	9.8
1.316000	---	22.53	46.00	23.47	L1	ON	9.8
1.316000	31.04	---	56.00	24.96	L1	ON	9.8
2.316000	---	19.47	46.00	26.53	L1	ON	9.8
2.316000	30.07	---	56.00	25.93	L1	ON	9.8
4.592000	---	19.12	46.00	26.88	L1	ON	9.7
4.592000	27.06	---	56.00	28.94	L1	ON	9.7

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.


3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Limit value - Emission level

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

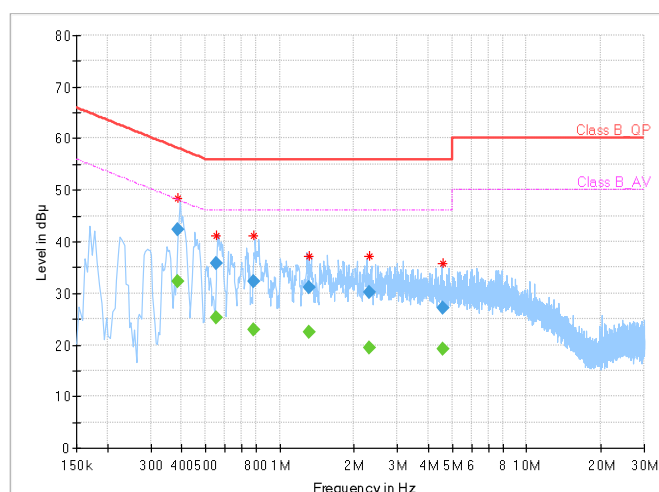



**BUREAU
VERITAS**


Test Report No.: W7L-231218W001RF02

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.224000	---	33.49	52.67	19.18	N	ON	9.6
0.224000	39.91	---	62.67	22.76	N	ON	9.6
0.396000	---	42.98	47.94	4.96	N	ON	9.6
0.396000	48.52	---	57.94	9.42	N	ON	9.6
0.556000	---	35.09	46.00	10.91	N	ON	9.7
0.556000	41.57	---	56.00	14.43	N	ON	9.7
0.816000	---	30.06	46.00	15.94	N	ON	9.7
0.816000	38.67	---	56.00	17.33	N	ON	9.7
1.480000	---	28.70	46.00	17.30	N	ON	9.7
1.480000	34.79	---	56.00	21.21	N	ON	9.7
2.376000	---	24.15	46.00	21.85	N	ON	9.8
2.376000	32.48	---	56.00	23.52	N	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

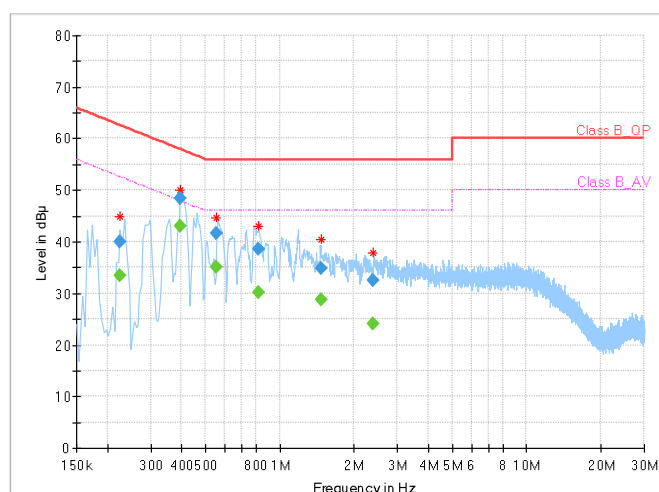

**3.2 RADIATED EMISSION MEASUREMENT****3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 19,23	Feb. 18,24
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 18,24	Feb. 17,25
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 19,23	Feb. 18,24
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 18,24	Feb. 17,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.04, 23	Sep.03, 24
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120-3	3.2.06	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 06,23	May. 05,24
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 05,24	May. 04,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 27,24	Mar. 26,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 05,24	May. 04,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.09,24	May.08,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 18,23	Feb. 17,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,24	Feb. 16,25
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 12,23	Aug. 11,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 15,23	Feb. 14,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,24	Feb. 13,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 15,23	Feb. 14,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,24	Feb. 13,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,23	Sep.02,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,26
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,26



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation




BUREAU
VERITAS


Test Report No.: W7L-231218W001RF02

3.2.5 TEST SETUP


<Frequency Range 9KHz~30MHz >

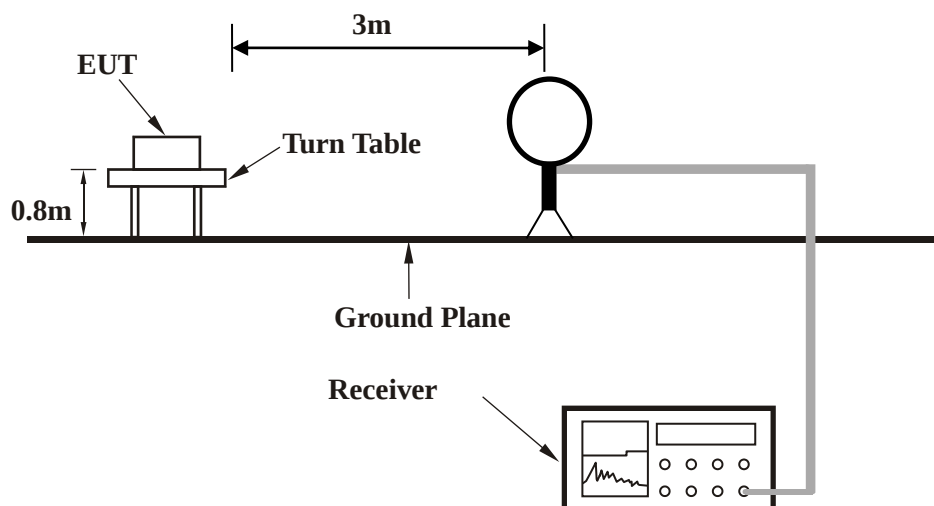

< Frequency Range 30MHz~1GHz >

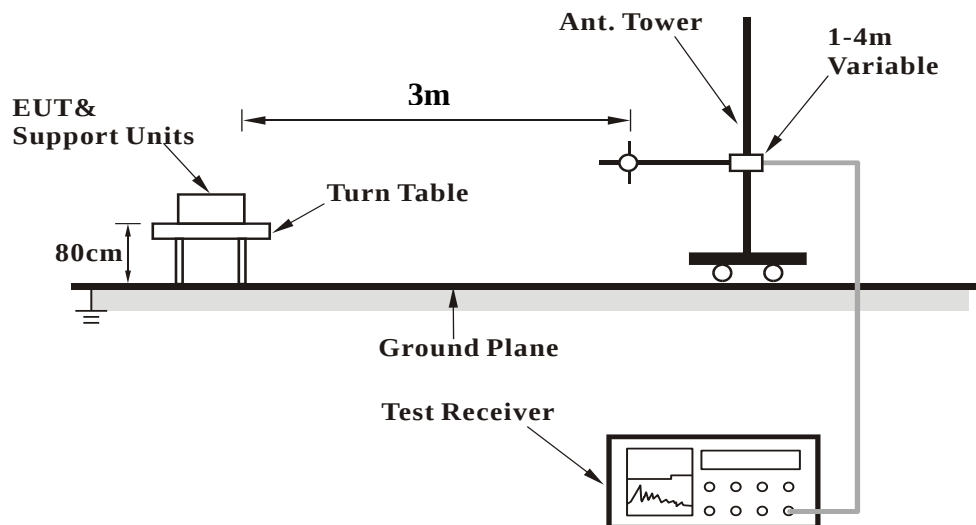

<Frequency Range above 1GHz>

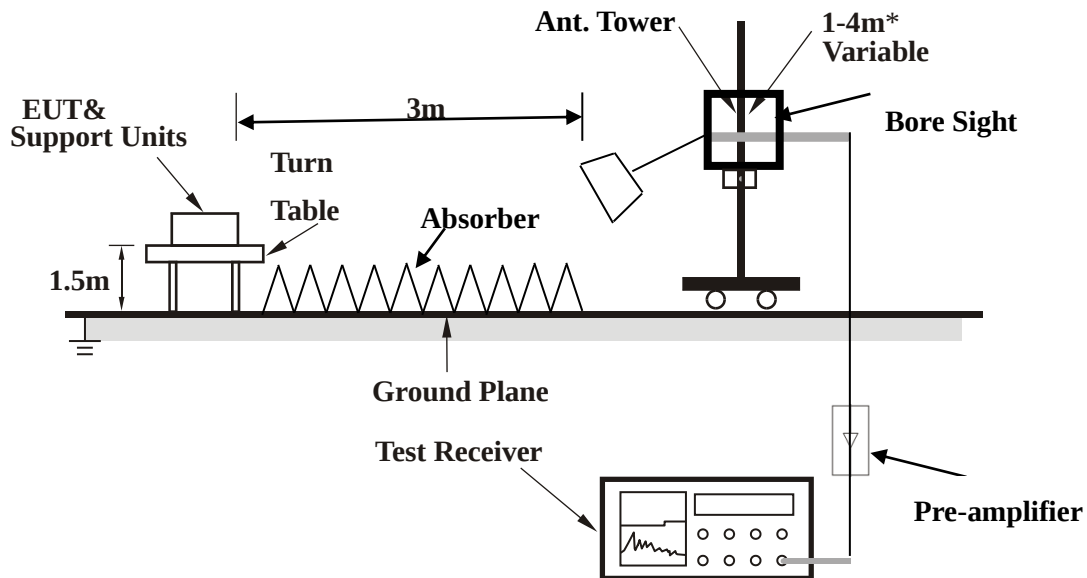

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
62.010	32.75	56.38	40.00	-7.25	7.32	6.32	37.27	100	0	QP
139.610	26.55	47.57	43.50	-16.95	9.15	6.70	36.87	100	0	QP
155.130	26.03	44.66	43.50	-17.47	11.38	6.79	36.80	100	0	QP
197.810	24.80	43.87	43.50	-18.70	10.58	6.98	36.63	100	0	QP
282.200	35.47	50.77	46.00	-10.53	14.05	7.26	36.61	100	0	QP
736.160	29.64	35.58	46.00	-16.36	23.00	8.46	37.40	100	0	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission Level – Limit value.

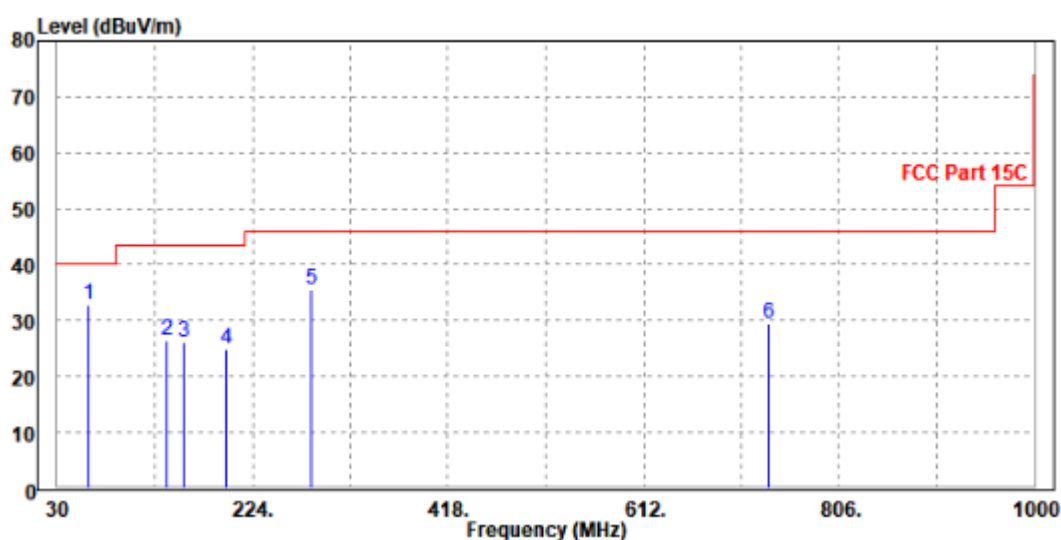



**BUREAU
VERITAS**


Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
31.940	30.28	41.83	40.00	-9.72	19.67	6.16	37.38	100	360	QP
61.040	35.04	58.36	40.00	-4.96	7.66	6.31	37.29	100	360	QP
154.160	32.25	49.45	43.50	-11.25	12.81	6.80	36.81	100	360	QP
195.870	25.08	42.03	43.50	-18.42	12.72	6.97	36.64	100	360	QP
284.140	29.24	44.17	46.00	-16.76	14.41	7.27	36.61	100	360	QP
361.740	24.89	37.72	46.00	-21.11	16.45	7.47	36.75	100	360	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission Level – Limit value.

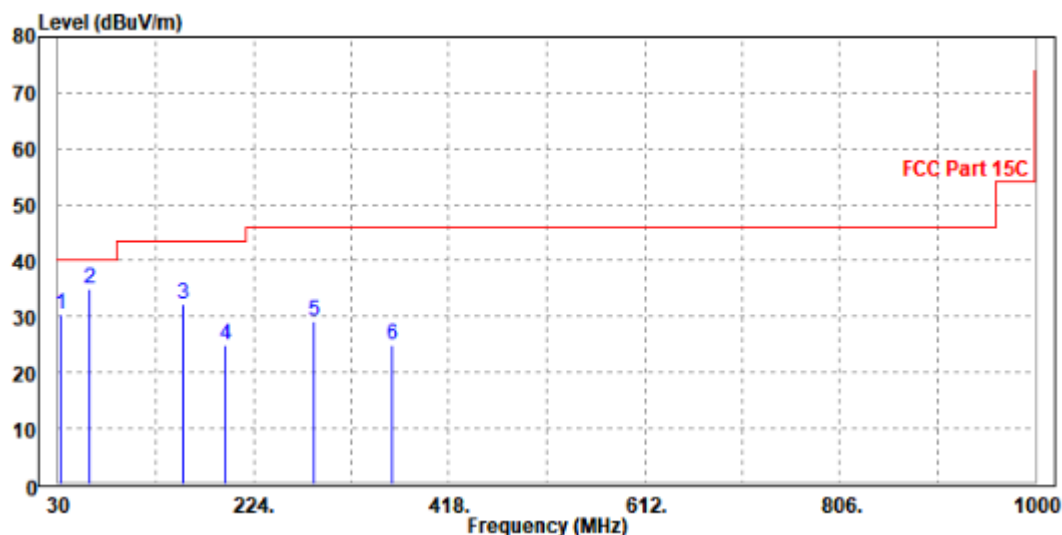

**ABOVE 1GHz WORST-CASE DATA:**

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,351.000	39.86	54.00	14.14	5.59	H	291.4	2.00
1	2,390.000	35.52	54.00	18.48	5.77	H	220.5	1.00
1	2,411.500	92.28			5.92	H	292.2	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,347.500	54.20	74.00	19.80	5.58	H	293.7	2.00
1	2,390.000	47.94	74.00	26.06	5.77	H	209.6	1.00
1	2,412.000	101.91			5.92	H	281.4	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,353.000	39.08	54.00	14.92	5.59	V	137.9	1.00
1	2,390.000	35.30	54.00	18.70	5.77	V	250.6	2.00
1	2,412.500	96.13			5.92	V	1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,345.500	51.99	74.00	22.01	5.58	V	291.4	2.00
1	2,390.000	49.87	74.00	24.13	5.77	V	148.7	1.00
1	2,412.000	105.06			5.92	V	1	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.66	74.00	22.34	40.04	54.00	13.96	13.53	H	0.9	2.00
2	7,311.000	54.76	74.00	19.24	44.01	54.00	9.99	18.89	H	27.2	2.00

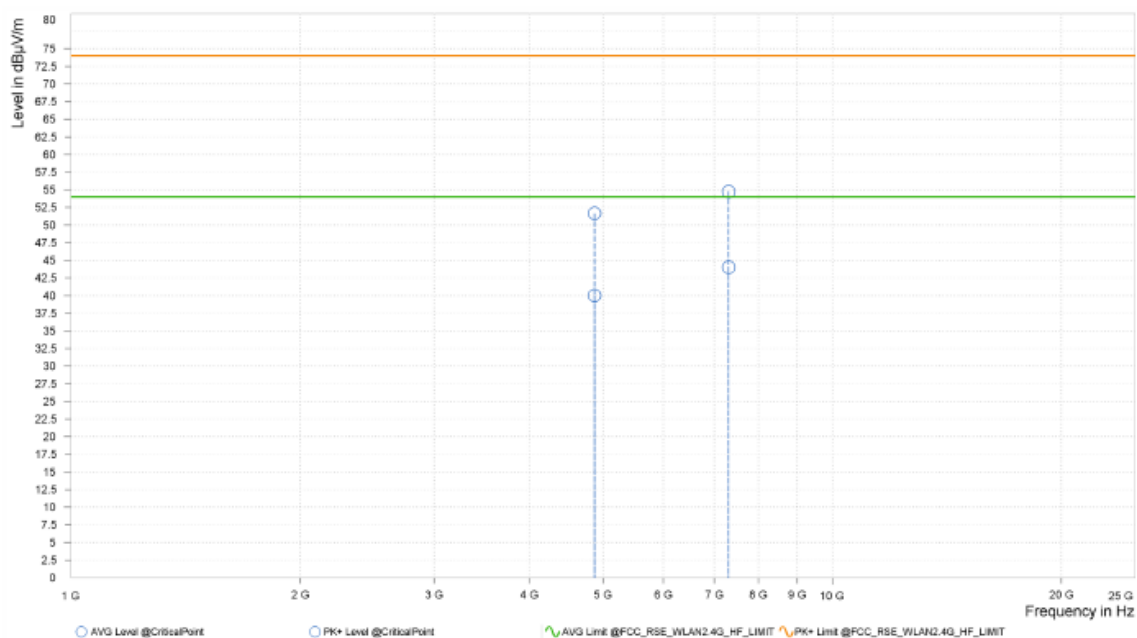




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.94	74.00	23.06	41.63	54.00	12.37	13.53	V	0.9	2.00
2	7,311.000	54.91	74.00	19.09	44.18	54.00	9.82	18.89	V	0.9	2.00

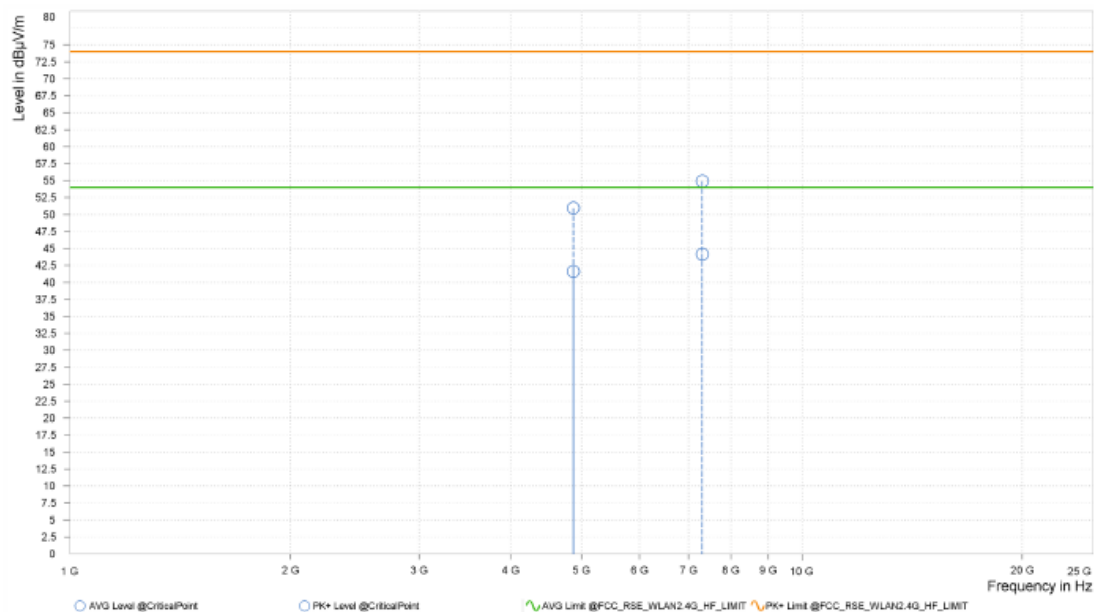

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
2. 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	90.64			5.83	H	222.1	2.00
2	2,483.500	33.87	54.00	20.13	5.91	H	97.4	1.00
2	2,499.500	35.64	54.00	18.36	6.02	H	97.4	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.500	101.78			5.82	H	299.4	1.00
2	2,483.500	47.47	74.00	26.53	5.91	H	154.7	1.00
2	2,499.500	51.28	74.00	22.72	6.02	H	219.6	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,462.500	98.52			5.82	V	106.9	1.00
2	2,483.500	37.01	54.00	16.99	5.91	V	220.9	2.00
2	2,484.000	36.91	54.00	17.09	5.92	V	220.9	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.000	106.29			5.82	V	359	1.00
2	2,483.500	50.42	74.00	23.58	5.91	V	218.4	2.00
2	2,490.000	50.90	74.00	23.10	5.96	V	218.4	2.00

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
2. 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	48.85	54.00	5.15	5.77	H	142.7	1.00
1	2,390.000	50.64	54.00	3.36	5.77	H	218.4	2.00
1	2,405.500	96.94			5.88	H	218.4	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	68.25	74.00	5.75	5.77	H	140.4	1.00
1	2,390.000	69.54	74.00	4.46	5.77	H	140.4	1.00
1	2,408.000	109.76			5.89	H	359.1	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	45.25	54.00	8.75	5.77	V	295.8	1.00
1	2,390.000	45.76	54.00	8.24	5.77	V	295.8	1.00
1	2,410.000	91.21			5.91	V	358	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	62.90	74.00	11.10	5.77	V	287.4	1.00
1	2,390.000	63.35	74.00	10.65	5.77	V	287.4	1.00
1	2,408.500	106.51			5.90	V	287.4	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.18	74.00	24.82	38.74	54.00	15.26	13.53	H	359	2.00
2	7,311.000	55.38	74.00	18.62	44.15	54.00	9.85	18.89	H	359	2.00

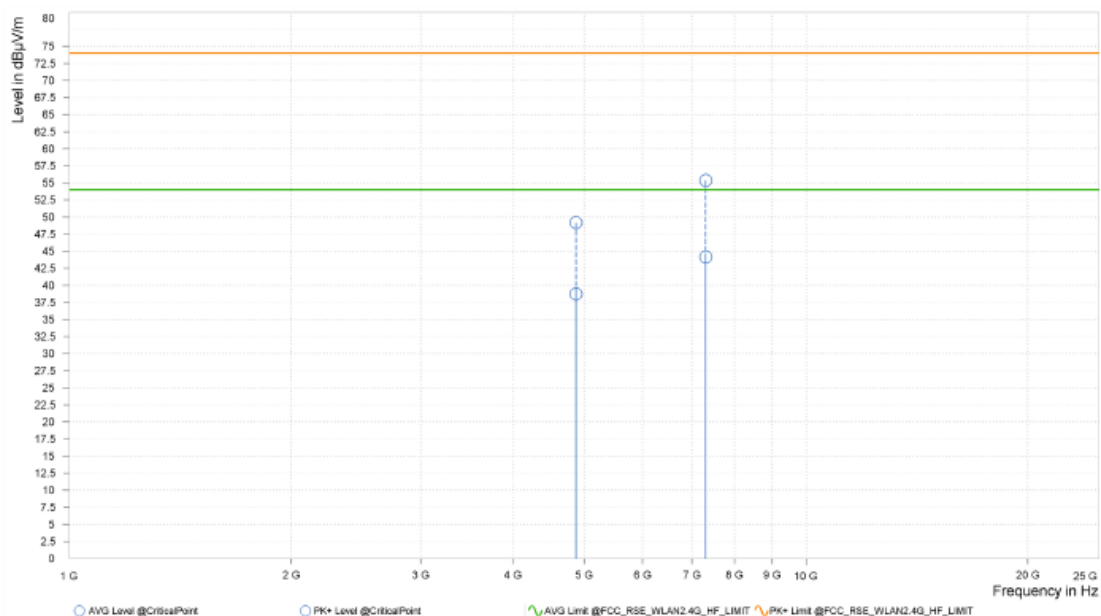




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.55	74.00	24.45	39.07	54.00	14.93	13.53	V	335.2	1.00
2	7,311.000	56.36	74.00	17.64	43.97	54.00	10.03	18.89	V	271.1	2.00

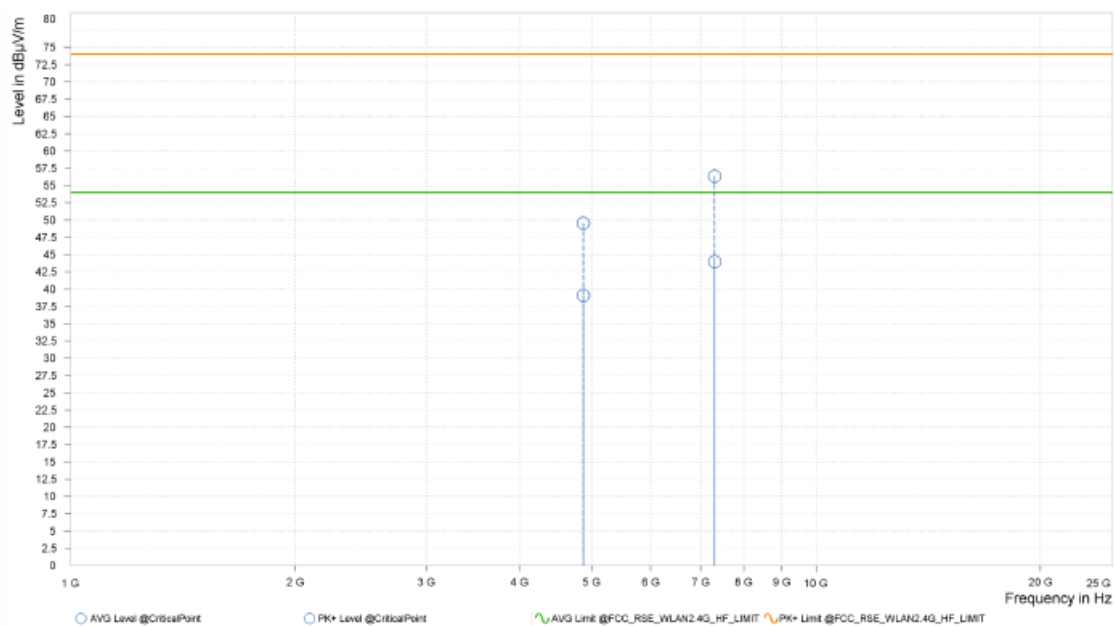

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.500	98.55			5.81	H	355	2.00
2	2,483.500	45.51	54.00	8.49	5.91	H	217.2	2.00
2	2,484.000	45.01	54.00	8.99	5.92	H	217.2	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.000	110.30			5.82	H	218.4	2.00
2	2,483.500	61.73	74.00	12.27	5.91	H	142.8	1.00
2	2,484.500	61.39	74.00	12.61	5.92	H	218.4	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	95.60			5.83	V	359.1	1.00
2	2,483.500	41.61	54.00	12.39	5.91	V	144	1.00
2	2,484.000	40.83	54.00	13.17	5.92	V	144	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.000	104.33			5.83	V	1	1.00
2	2,483.500	56.50	74.00	17.50	5.91	V	145.2	1.00
2	2,484.500	57.65	74.00	16.35	5.92	V	145.2	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2462MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	45.92	54.00	8.08	5.77	H	1	1.00
1	2,390.000	46.50	54.00	7.50	5.77	H	1	1.00
1	2,410.500	96.84			5.91	H	1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	63.22	74.00	10.78	5.77	H	1	1.00
1	2,390.000	63.63	74.00	10.37	5.77	H	359	1.00
1	2,410.000	109.12			5.91	H	1	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	46.28	54.00	7.72	5.77	V	292.2	1.00
1	2,390.000	47.03	54.00	6.97	5.77	V	292.2	1.00
1	2,411.000	95.00			5.91	V	1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	62.43	74.00	11.57	5.77	V	289.8	1.00
1	2,390.000	63.30	74.00	10.70	5.77	V	289.8	1.00
1	2,411.000	107.22			5.91	V	289.8	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.75	74.00	24.25	38.90	54.00	15.10	13.53	H	331.6	1.00
2	7,311.000	54.84	74.00	19.16	44.15	54.00	9.85	18.89	H	359	2.00

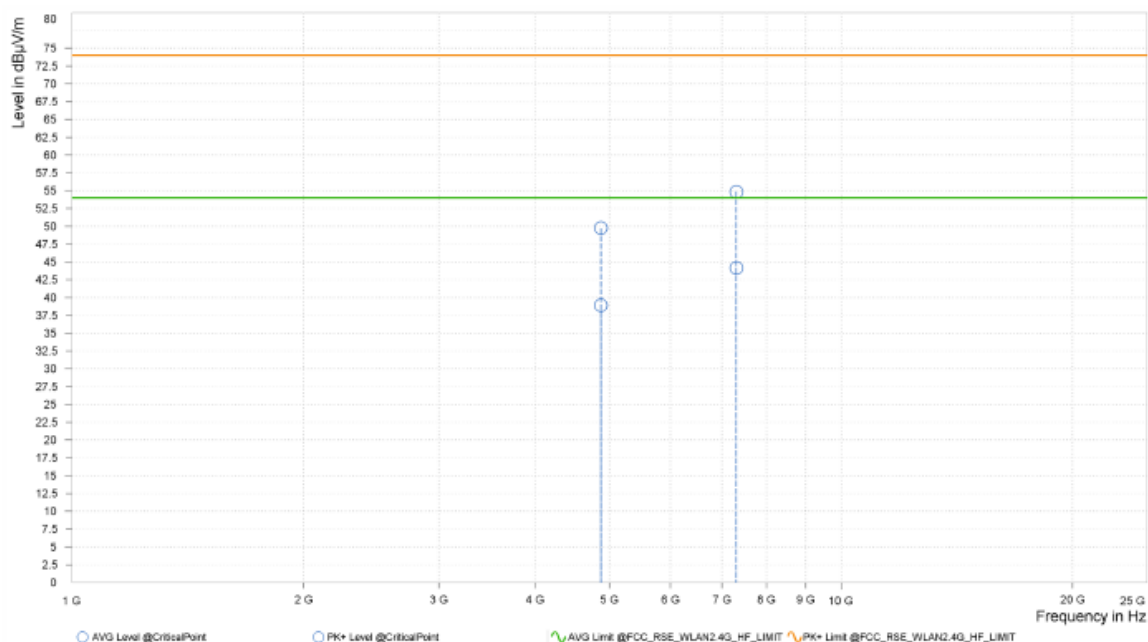




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.41	74.00	24.59	39.12	54.00	14.88	13.53	V	90.1	1.00
2	7,311.000	55.64	74.00	18.36	44.20	54.00	9.80	18.89	V	336.2	1.00

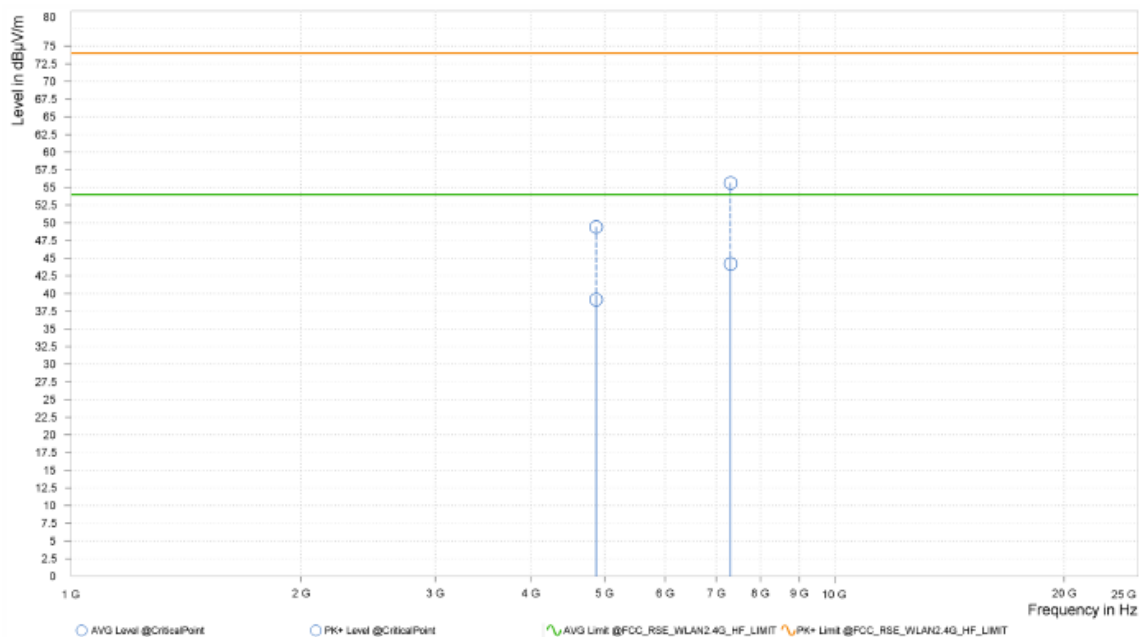

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2437MHz: Fundamental frequency.

**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.500	99.25			5.81	H	217.4	2.00
2	2,483.500	47.41	54.00	6.59	5.91	H	217.4	2.00
2	2,484.000	46.88	54.00	7.12	5.92	H	217.4	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	109.92			5.83	H	293.3	1.00
2	2,483.500	64.51	74.00	9.49	5.91	H	145.1	1.00
2	2,484.500	62.77	74.00	11.23	5.92	H	145.1	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,464.000	93.85			5.81	V	145.2	1.00
2	2,483.500	46.17	54.00	7.83	5.91	V	145.2	1.00
2	2,484.000	45.17	54.00	8.83	5.92	V	145.2	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,459.000	105.83			5.84	V	346	1.00
2	2,483.500	64.97	74.00	9.03	5.91	V	359	2.00
2	2,484.000	66.60	74.00	7.40	5.92	V	145.1	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2462MHz: Fundamental frequency.

BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.500	50.24	54.00	3.76	5.77	H	1	1.00
3	2,390.000	50.50	54.00	3.50	5.77	H	1	1.00
3	2,424.500	92.86			5.95	H	359.1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,388.500	66.76	74.00	7.24	5.76	H	1	1.00
3	2,390.000	66.51	74.00	7.49	5.77	H	1	1.00
3	2,416.500	104.97			5.95	H	298.2	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.500	49.44	54.00	4.56	5.77	V	300.5	1.00
3	2,390.000	49.14	54.00	4.86	5.77	V	300.5	1.00
3	2,429.000	88.71			5.94	V	212.5	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,388.500	65.78	74.00	8.22	5.76	V	295.8	1.00
3	2,390.000	64.32	74.00	9.68	5.77	V	295.8	1.00
3	2,425.500	101.16			5.94	V	147.5	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2422MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.74	74.00	25.26	38.67	54.00	15.33	13.53	H	271.1	2.00
2	7,311.000	55.06	74.00	18.94	44.16	54.00	9.84	18.89	H	271.1	2.00

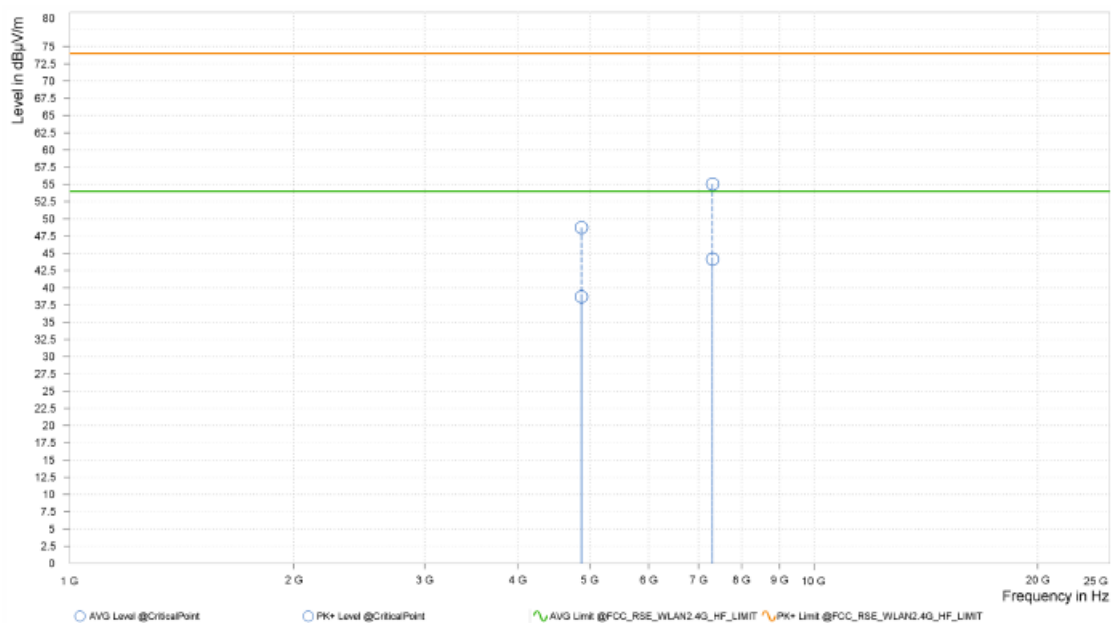




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.78	74.00	24.22	38.79	54.00	15.21	13.53	V	1	2.00
2	7,311.000	55.04	74.00	18.96	44.27	54.00	9.73	18.89	V	269.9	2.00

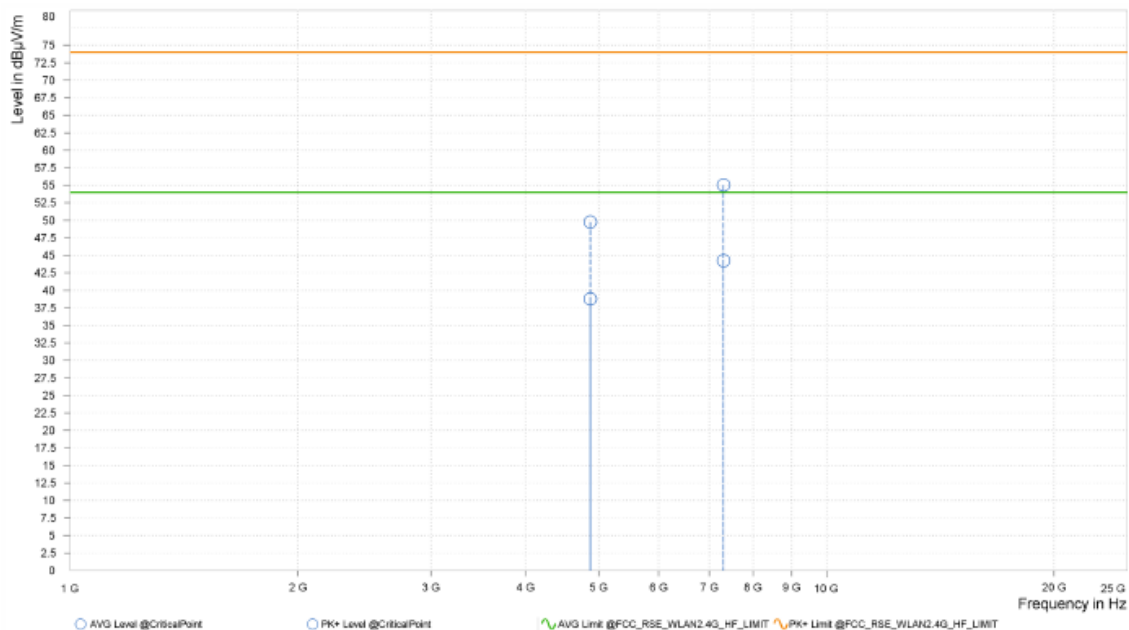

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
2. 2437MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,442.500	94.12			5.91	H	203	2.00
4	2,483.500	49.64	54.00	4.36	5.91	H	150	1.00
4	2,484.000	49.58	54.00	4.42	5.92	H	150	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,453.500	107.00			5.87	H	212.5	2.00
4	2,483.500	63.05	74.00	10.95	5.91	H	212.5	2.00
4	2,484.500	63.13	74.00	10.87	5.92	H	212.5	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,448.500	91.68			5.90	V	357.4	1.00
4	2,483.500	42.27	54.00	11.73	5.91	V	304.2	1.00
4	2,484.000	41.28	54.00	12.72	5.92	V	211.3	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,455.500	103.45			5.86	V	148.7	1.00
4	2,483.500	47.88	74.00	26.12	5.91	V	73.4	1.00
4	2,487.500	48.46	74.00	25.54	5.94	V	1	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2452MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	46.09	54.00	7.91	5.77	H	355	2.00
1	2,390.000	47.46	54.00	6.54	5.77	H	355	2.00
1	2,415.500	95.28			5.95	H	59.4	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.000	61.37	74.00	12.63	5.76	H	4.9	1.00
1	2,390.000	62.16	74.00	11.84	5.77	H	74.6	1.00
1	2,415.500	109.94			5.95	H	1	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	47.34	54.00	6.66	5.77	V	1	1.00
1	2,390.000	47.70	54.00	6.30	5.77	V	1	1.00
1	2,409.500	96.90			5.90	V	1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	63.84	74.00	10.16	5.77	V	1	1.00
1	2,390.000	64.49	74.00	9.51	5.77	V	357.7	1.00
1	2,409.500	109.13			5.90	V	1	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.32	74.00	23.68	38.95	54.00	15.05	13.53	H	0.9	2.00
2	7,311.000	54.37	74.00	19.63	44.18	54.00	9.82	18.89	H	0.9	2.00

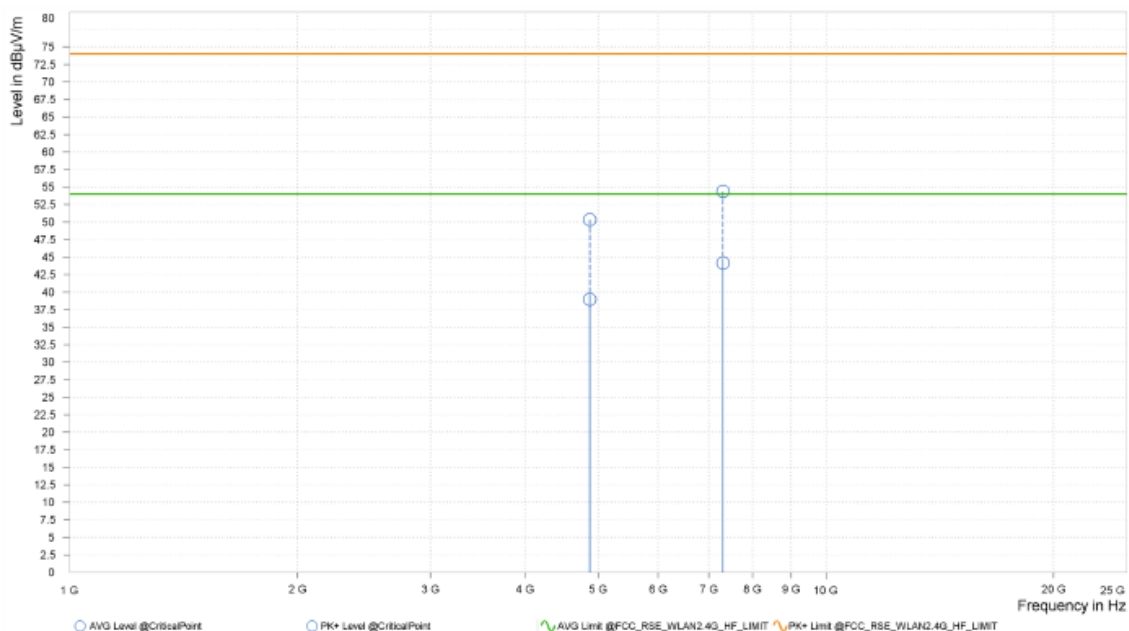




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.29	74.00	23.71	38.95	54.00	15.05	13.53	V	24.8	2.00
2	7,311.000	54.71	74.00	19.29	44.18	54.00	9.82	18.89	V	24.8	2.00

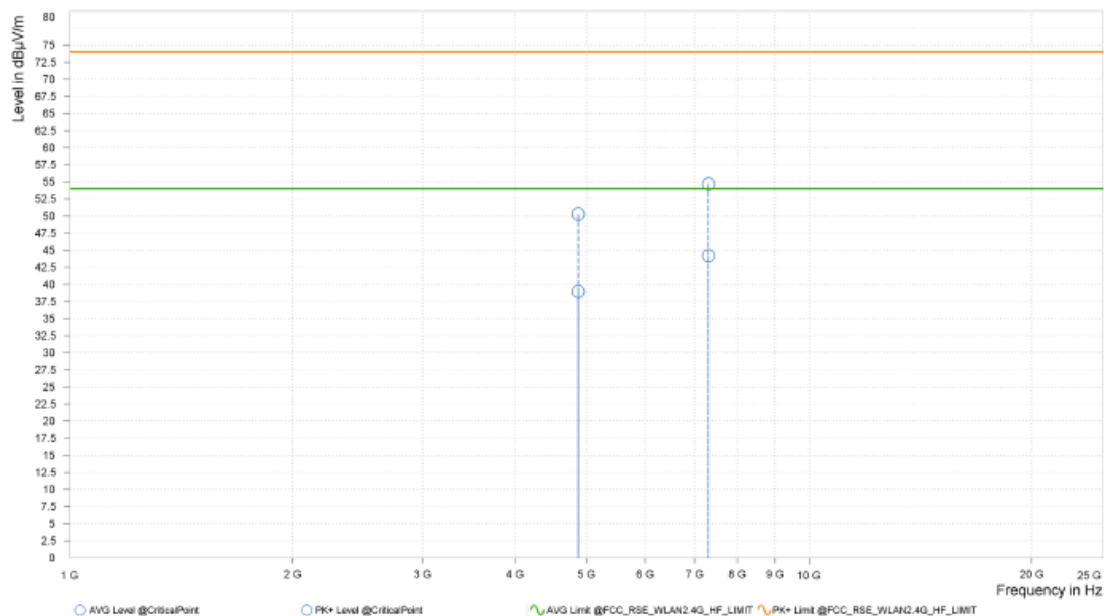

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,462.500	99.44			5.82	H	210.1	2.00
2	2,483.500	46.82	54.00	7.18	5.91	H	210.1	2.00
2	2,484.000	46.54	54.00	7.46	5.92	H	210.1	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.000	110.89			5.82	H	209	2.00
2	2,483.500	63.25	74.00	10.75	5.91	H	4.9	1.00
2	2,484.000	63.84	74.00	10.16	5.92	H	209	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.000	94.38			5.83	V	357.3	1.00
2	2,483.500	45.32	54.00	8.68	5.91	V	151.1	1.00
2	2,484.000	44.47	54.00	9.53	5.92	V	151.1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,459.500	105.84			5.84	V	151.1	1.00
2	2,483.500	61.07	74.00	12.93	5.91	V	151.1	1.00
2	2,484.000	60.54	74.00	13.46	5.92	V	151.1	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,387.000	50.96	54.00	3.04	5.75	H	4.9	1.00
3	2,390.000	48.89	54.00	5.11	5.77	H	357.8	1.00
3	2,425.000	93.59			5.94	H	1	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,388.000	68.03	74.00	5.97	5.76	H	0.9	2.00
3	2,390.000	65.24	74.00	8.76	5.77	H	5	1.00
3	2,427.000	106.64			5.94	H	359.1	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	49.02	54.00	4.98	5.76	V	1	1.00
3	2,390.000	49.24	54.00	4.76	5.77	V	1	1.00
3	2,420.000	88.30			5.95	V	304.1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,387.500	66.84	74.00	7.16	5.75	V	359	1.00
3	2,390.000	66.35	74.00	7.65	5.77	V	357.7	1.00
3	2,429.000	104.19			5.94	V	306.5	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2422MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.91	74.00	23.09	38.74	54.00	15.26	13.53	H	0.9	2.00
2	7,311.000	55.45	74.00	18.55	44.13	54.00	9.87	18.89	H	272.2	2.00

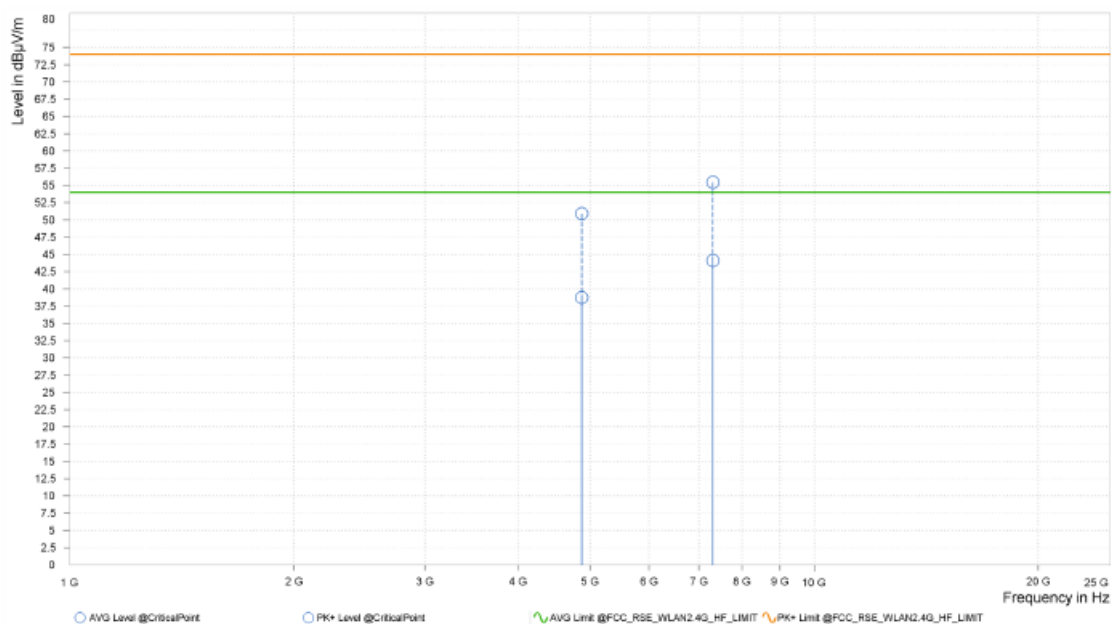




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.95	74.00	25.05	38.94	54.00	15.06	13.53	V	269.8	2.00
2	7,311.000	55.81	74.00	18.19	44.12	54.00	9.88	18.89	V	269.8	2.00

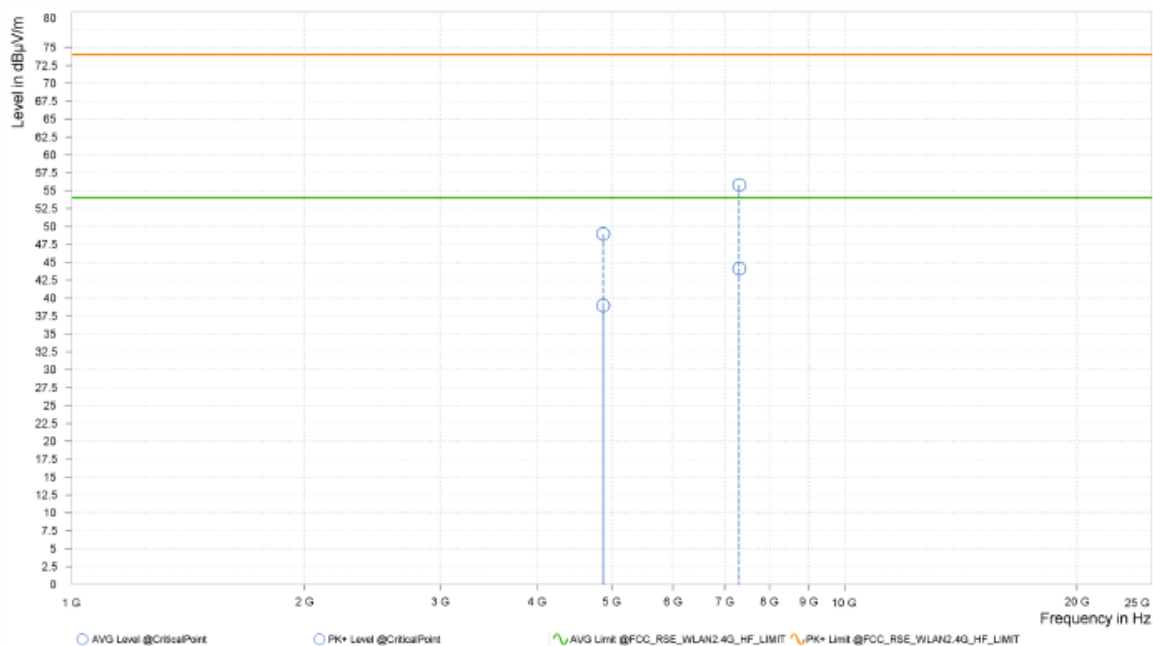

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,448.000	91.53			5.90	H	59.4	2.00
4	2,483.500	49.34	54.00	4.66	5.91	H	71	1.00
4	2,484.000	49.28	54.00	4.72	5.92	H	71	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,453.000	106.77			5.88	H	158.3	1.00
4	2,483.500	66.02	74.00	7.98	5.91	H	158.3	1.00
4	2,484.000	65.46	74.00	8.54	5.92	H	158.3	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,456.000	87.78			5.86	V	148.8	1.00
4	2,483.500	43.13	54.00	10.87	5.91	V	72.2	1.00
4	2,484.000	42.85	54.00	11.15	5.92	V	72.2	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,447.000	101.36			5.90	V	155.9	1.00
4	2,483.500	58.87	74.00	15.13	5.91	V	155.9	1.00
4	2,484.500	60.37	74.00	13.63	5.92	V	211.3	2.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission Level.
- 2452MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

2.4G WIFI-RU

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	58.84	65.53	74.00	-15.16	31.78	7.74	46.21	100	200	Peak
2390.000	48.99	55.68	54.00	-5.01	31.78	7.74	46.21	100	200	Average
2412.000	113.97	120.59	/	/	31.82	7.77	46.21	100	200	Peak
2412.000	106.86	113.48	/	/	31.82	7.77	46.21	100	200	Average
2483.500	50.91	57.25	74.00	-23.09	31.97	7.88	46.19	100	200	Peak
2483.500	43.18	49.52	54.00	-10.82	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	59.91	66.48	74.00	-14.09	31.90	7.74	46.21	140	45	Peak
2390.000	47.30	53.87	54.00	-6.70	31.90	7.74	46.21	140	45	Average
2412.000	112.02	118.52	/	/	31.94	7.77	46.21	140	45	Peak
2412.000	103.99	110.49	/	/	31.94	7.77	46.21	140	45	Average
2483.500	51.12	57.36	74.00	-22.88	32.07	7.88	46.19	140	45	Peak
2483.500	43.47	49.71	54.00	-10.53	32.07	7.88	46.19	140	45	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	58.67	65.36	74.00	-15.33	31.78	7.74	46.21	100	240	Peak
2390.000	43.97	50.66	54.00	-10.03	31.78	7.74	46.21	100	240	Average
2437.000	116.91	123.43	/	/	31.87	7.81	46.20	100	240	Peak
2437.000	108.33	114.85	/	/	31.87	7.81	46.20	100	240	Average
2483.500	56.86	63.20	74.00	-17.14	31.97	7.88	46.19	100	240	Peak
2483.500	43.79	50.13	54.00	-10.21	31.97	7.88	46.19	100	240	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	57.36	63.93	74.00	-16.64	31.90	7.74	46.21	130	40	Peak
2390.000	43.26	49.83	54.00	-10.74	31.90	7.74	46.21	130	40	Average
2437.000	114.24	120.64	/	/	31.99	7.81	46.20	130	40	Peak
2437.000	106.46	112.86	/	/	31.99	7.81	46.20	130	40	Average
2483.500	53.33	59.57	74.00	-20.67	32.07	7.88	46.19	130	40	Peak
2483.500	43.62	49.86	54.00	-10.38	32.07	7.88	46.19	130	40	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	59.24	65.93	74.00	-14.76	31.78	7.74	46.21	180	200	Peak
2390.000	40.26	46.95	54.00	-13.74	31.78	7.74	46.21	180	200	Average
2462.000	117.90	124.33	/	/	31.92	7.84	46.19	180	200	Peak
2462.000	108.67	115.10	/	/	31.92	7.84	46.19	180	200	Average
2483.500	67.62	73.96	74.00	-6.38	31.97	7.88	46.19	180	200	Peak
2483.500	43.58	49.92	54.00	-10.42	31.97	7.88	46.19	180	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	58.52	65.09	74.00	-15.48	31.90	7.74	46.21	100	20	Peak
2390.000	42.87	49.44	54.00	-11.13	31.90	7.74	46.21	100	20	Average
2462.000	111.59	117.91	/	/	32.03	7.84	46.19	100	20	Peak
2462.000	104.03	110.35	/	/	32.03	7.84	46.19	100	20	Average
2483.500	59.42	65.66	74.00	-14.58	32.07	7.88	46.19	100	20	Peak
2483.500	49.75	55.99	54.00	-4.25	32.07	7.88	46.19	100	20	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	59.78	66.47	74.00	-14.22	31.78	7.74	46.21	180	200	Peak
2390.000	40.77	47.46	54.00	-13.23	31.78	7.74	46.21	180	200	Average
2412.000	113.28	119.90	/	/	31.82	7.77	46.21	180	200	Peak
2412.000	102.54	109.16	/	/	31.82	7.77	46.21	180	200	Average
2483.500	51.69	58.03	74.00	-22.31	31.97	7.88	46.19	180	200	Peak
2483.500	40.95	47.29	54.00	-13.05	31.97	7.88	46.19	180	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	60.43	67.00	74.00	-13.57	31.90	7.74	46.21	100	355	Peak
2390.000	40.57	47.14	54.00	-13.43	31.90	7.74	46.21	100	355	Average
2412.000	107.79	114.29	/	/	31.94	7.77	46.21	100	355	Peak
2412.000	97.54	104.04	/	/	31.94	7.77	46.21	100	355	Average
2483.500	50.24	56.48	74.00	-23.76	32.07	7.88	46.19	100	355	Peak
2483.500	40.55	46.79	54.00	-13.45	32.07	7.88	46.19	100	355	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	52.31	59.00	74.00	-21.69	31.78	7.74	46.21	100	215	Peak
2390.000	40.60	47.29	54.00	-13.40	31.78	7.74	46.21	100	215	Average
2437.000	113.34	119.86	/	/	31.87	7.81	46.20	100	215	Peak
2437.000	101.60	108.12	/	/	31.87	7.81	46.20	100	215	Average
2483.500	54.23	60.57	74.00	-19.77	31.97	7.88	46.19	100	215	Peak
2483.500	41.37	47.71	54.00	-12.63	31.97	7.88	46.19	100	215	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.96	57.53	74.00	-23.04	31.90	7.74	46.21	100	355	Peak
2390.000	40.58	47.15	54.00	-13.42	31.90	7.74	46.21	100	355	Average
2437.000	109.97	116.37	/	/	31.99	7.81	46.20	100	355	Peak
2437.000	98.17	104.57	/	/	31.99	7.81	46.20	100	355	Average
2483.500	51.11	57.35	74.00	-22.89	32.07	7.88	46.19	100	355	Peak
2483.500	40.59	46.83	54.00	-13.41	32.07	7.88	46.19	100	355	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.34	58.03	74.00	-22.66	31.78	7.74	46.21	100	30	Peak
2390.000	40.36	47.05	54.00	-13.64	31.78	7.74	46.21	100	30	Average
2462.000	112.99	119.42	/	/	31.92	7.84	46.19	100	30	Peak
2462.000	101.83	108.26	/	/	31.92	7.84	46.19	100	30	Average
2483.500	57.16	63.50	74.00	-16.84	31.97	7.88	46.19	100	30	Peak
2483.500	42.22	48.56	54.00	-11.78	31.97	7.88	46.19	100	30	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.78	58.35	74.00	-22.22	31.90	7.74	46.21	100	0	Peak
2390.000	41.28	47.85	54.00	-12.72	31.90	7.74	46.21	100	0	Average
2462.000	106.73	113.05	/	/	32.03	7.84	46.19	100	0	Peak
2462.000	96.14	102.46	/	/	32.03	7.84	46.19	100	0	Average
2483.500	54.32	60.56	74.00	-19.68	32.07	7.88	46.19	100	0	Peak
2483.500	41.79	48.03	54.00	-12.21	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.93	58.62	74.00	-22.07	31.78	7.74	46.21	100	200	Peak
2390.000	42.83	49.52	54.00	-11.17	31.78	7.74	46.21	100	200	Average
2412.000	109.55	116.17	/	/	31.82	7.77	46.21	100	200	Peak
2412.000	99.87	106.49	/	/	31.82	7.77	46.21	100	200	Average
2483.500	51.14	57.48	74.00	-22.86	31.97	7.88	46.19	100	200	Peak
2483.500	41.68	48.02	54.00	-12.32	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	53.50	60.07	74.00	-20.50	31.90	7.74	46.21	100	0	Peak
2390.000	43.28	49.85	54.00	-10.72	31.90	7.74	46.21	100	0	Average
2412.000	105.82	112.32	/	/	31.94	7.77	46.21	100	0	Peak
2412.000	95.33	101.83	/	/	31.94	7.77	46.21	100	0	Average
2483.500	52.39	58.63	74.00	-21.61	32.07	7.88	46.19	100	0	Peak
2483.500	41.34	47.58	54.00	-12.66	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.80	58.49	74.00	-22.20	31.78	7.74	46.21	100	200	Peak
2390.000	41.56	48.25	54.00	-12.44	31.78	7.74	46.21	100	200	Average
2437.000	111.93	118.45	/	/	31.87	7.81	46.20	100	200	Peak
2437.000	101.27	107.79	/	/	31.87	7.81	46.20	100	200	Average
2483.500	51.61	57.95	74.00	-22.39	31.97	7.88	46.19	100	200	Peak
2483.500	41.81	48.15	54.00	-12.19	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.83	58.40	74.00	-22.17	31.90	7.74	46.21	100	0	Peak
2390.000	41.23	47.80	54.00	-12.77	31.90	7.74	46.21	100	0	Average
2437.000	107.05	113.45	/	/	31.99	7.81	46.20	100	0	Peak
2437.000	96.54	102.94	/	/	31.99	7.81	46.20	100	0	Average
2483.500	52.26	58.50	74.00	-21.74	32.07	7.88	46.19	100	0	Peak
2483.500	41.79	48.03	54.00	-12.21	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.96	57.65	74.00	-23.04	31.78	7.74	46.21	100	200	Peak
2390.000	41.27	47.96	54.00	-12.73	31.78	7.74	46.21	100	200	Average
2462.000	109.64	116.07	/	/	31.92	7.84	46.19	100	200	Peak
2462.000	100.82	107.25	/	/	31.92	7.84	46.19	100	200	Average
2483.500	56.21	62.55	74.00	-17.79	31.97	7.88	46.19	100	200	Peak
2483.500	44.10	50.44	54.00	-9.90	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.66	58.23	74.00	-22.34	31.90	7.74	46.21	100	360	Peak
2390.000	41.48	48.05	54.00	-12.52	31.90	7.74	46.21	100	360	Average
2462.000	103.91	110.23	/	/	32.03	7.84	46.19	100	360	Peak
2462.000	93.79	100.11	/	/	32.03	7.84	46.19	100	360	Average
2483.500	51.60	57.84	74.00	-22.40	32.07	7.88	46.19	100	360	Peak
2483.500	41.61	47.85	54.00	-12.39	32.07	7.88	46.19	100	360	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (20MHz) (RU 242):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	62.63	69.32	74.00	-11.37	31.78	7.74	46.21	100	205	Peak
2390.000	50.87	57.56	54.00	-3.13	31.78	7.74	46.21	100	205	Average
2412.000	108.31	114.93	/	/	31.82	7.77	46.21	100	205	Peak
2412.000	96.37	102.99	/	/	31.82	7.77	46.21	100	205	Average
2483.500	49.86	56.20	74.00	-24.14	31.97	7.88	46.19	100	205	Peak
2483.500	41.52	47.86	54.00	-12.48	31.97	7.88	46.19	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	59.49	66.06	74.00	-14.51	31.90	7.74	46.21	100	0	Peak
2390.000	47.72	54.29	54.00	-6.28	31.90	7.74	46.21	100	0	Average
2412.000	105.19	111.69	/	/	31.94	7.77	46.21	100	0	Peak
2412.000	93.57	100.07	/	/	31.94	7.77	46.21	100	0	Average
2483.500	50.10	56.34	74.00	-23.90	32.07	7.88	46.19	100	0	Peak
2483.500	40.61	46.85	54.00	-13.39	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.83	58.52	74.00	-22.17	31.78	7.74	46.21	100	200	Peak
2390.000	41.55	48.24	54.00	-12.45	31.78	7.74	46.21	100	200	Average
2437.000	112.02	118.54	/	/	31.87	7.81	46.20	100	200	Peak
2437.000	96.46	102.98	/	/	31.87	7.81	46.20	100	200	Average
2483.500	50.60	56.94	74.00	-23.40	31.97	7.88	46.19	100	200	Peak
2483.500	41.23	47.57	54.00	-12.77	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.92	57.49	74.00	-23.08	31.90	7.74	46.21	100	0	Peak
2390.000	40.72	47.29	54.00	-13.28	31.90	7.74	46.21	100	0	Average
2437.000	105.48	111.88	/	/	31.99	7.81	46.20	100	0	Peak
2437.000	94.82	101.22	/	/	31.99	7.81	46.20	100	0	Average
2483.500	50.11	56.35	74.00	-23.89	32.07	7.88	46.19	100	0	Peak
2483.500	41.28	47.52	54.00	-12.72	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.66	56.35	74.00	-24.34	31.78	7.74	46.21	100	200	Peak
2390.000	40.07	46.76	54.00	-13.93	31.78	7.74	46.21	100	200	Average
2462.000	111.46	117.89	/	/	31.92	7.84	46.19	100	200	Peak
2462.000	100.15	106.58	/	/	31.92	7.84	46.19	100	200	Average
2483.500	59.50	65.84	74.00	-14.50	31.97	7.88	46.19	100	200	Peak
2483.500	50.14	56.48	54.00	-3.86	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.92	56.49	74.00	-24.08	31.90	7.74	46.21	100	0	Peak
2390.000	40.22	46.79	54.00	-13.78	31.90	7.74	46.21	100	0	Average
2462.000	103.57	109.89	/	/	32.03	7.84	46.19	100	0	Peak
2462.000	93.53	99.85	/	/	32.03	7.84	46.19	100	0	Average
2483.500	53.39	59.63	74.00	-20.61	32.07	7.88	46.19	100	0	Peak
2483.500	44.61	50.85	54.00	-9.39	32.07	7.88	46.19	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	65.44	72.13	74.00	-8.56	31.78	7.74	46.21	100	200	Peak
2390.000	50.96	57.65	54.00	-3.04	31.78	7.74	46.21	100	200	Average
2422.000	107.62	114.20	/	/	31.84	7.78	46.20	100	200	Peak
2422.000	95.57	102.15	/	/	31.84	7.78	46.20	100	200	Average
2483.500	49.91	56.25	74.00	-24.09	31.97	7.88	46.19	100	200	Peak
2483.500	40.50	46.84	54.00	-13.50	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	53.66	60.23	74.00	-20.34	31.90	7.74	46.21	100	0	Peak
2390.000	44.69	51.26	54.00	-9.31	31.90	7.74	46.21	100	0	Average
2422.000	101.43	107.89	/	/	31.96	7.78	46.20	100	0	Peak
2422.000	90.49	96.95	/	/	31.96	7.78	46.20	100	0	Average
2483.500	50.34	56.58	74.00	-23.66	32.07	7.88	46.19	100	0	Peak
2483.500	40.47	46.71	54.00	-13.53	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	55.52	62.21	74.00	-18.48	31.78	7.74	46.21	100	200	Peak
2390.000	45.81	52.50	54.00	-8.19	31.78	7.74	46.21	100	200	Average
2437.000	106.82	113.34	/	/	31.87	7.81	46.20	100	200	Peak
2437.000	95.23	101.75	/	/	31.87	7.81	46.20	100	200	Average
2483.500	55.40	61.74	74.00	-18.60	31.97	7.88	46.19	100	200	Peak
2483.500	45.61	51.95	54.00	-8.39	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.78	58.35	74.00	-22.22	31.90	7.74	46.21	100	0	Peak
2390.000	43.00	49.57	54.00	-11.00	31.90	7.74	46.21	100	0	Average
2437.000	100.80	107.20	/	/	31.99	7.81	46.20	100	0	Peak
2437.000	89.27	95.67	/	/	31.99	7.81	46.20	100	0	Average
2483.500	51.60	57.84	74.00	-22.40	32.07	7.88	46.19	100	0	Peak
2483.500	42.89	49.13	54.00	-11.11	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.61	56.30	74.00	-24.39	31.78	7.74	46.21	100	200	Peak
2390.000	39.89	46.58	54.00	-14.11	31.78	7.74	46.21	100	200	Average
2452.000	103.10	109.57	/	/	31.90	7.83	46.20	100	200	Peak
2452.000	90.77	97.24	/	/	31.90	7.83	46.20	100	200	Average
2483.500	62.21	68.55	74.00	-11.79	31.97	7.88	46.19	100	200	Peak
2483.500	50.78	57.12	54.00	-3.22	31.97	7.88	46.19	100	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.34	56.91	74.00	-23.66	31.90	7.74	46.21	100	0	Peak
2390.000	40.56	47.13	54.00	-13.44	31.90	7.74	46.21	100	0	Average
2452.000	96.27	102.63	/	/	32.01	7.83	46.20	100	0	Peak
2452.000	84.44	90.80	/	/	32.01	7.83	46.20	100	0	Average
2483.500	51.26	57.50	74.00	-22.74	32.07	7.88	46.19	100	0	Peak
2483.500	41.85	48.09	54.00	-12.15	32.07	7.88	46.19	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2452MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF02


Worst case harmonic:

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4844.000	44.37	46.09	74.00	-29.63	-1.72	Peak	Horizontal
2 PP	7273.000	47.30	44.89	74.00	-26.70	2.41	Peak	Horizontal

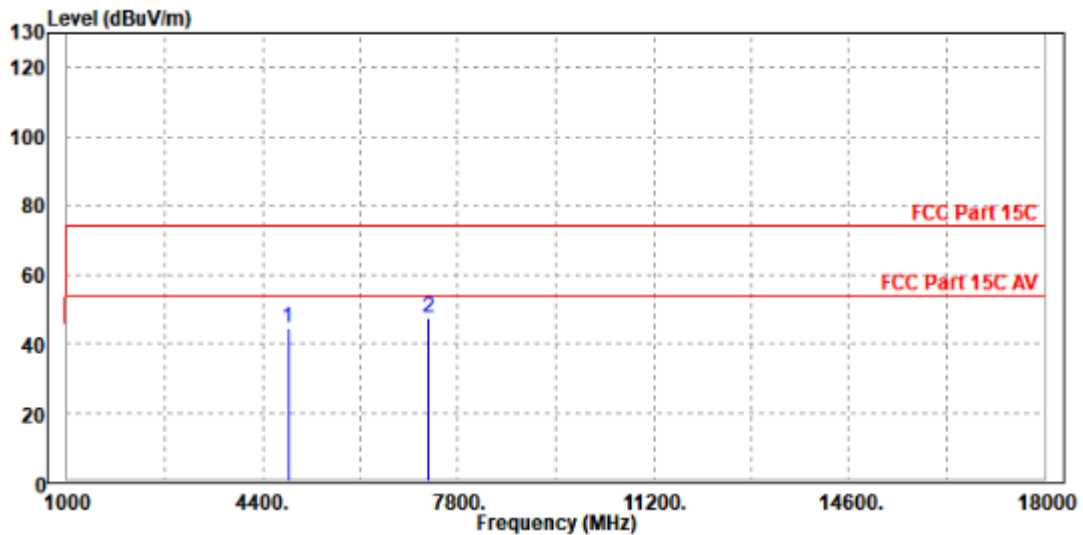




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4842.000	43.07	44.79	74.00	-30.93	-1.72	Peak	Vertical
2 PP	7266.000	46.44	43.95	74.00	-27.56	2.49	Peak	Vertical

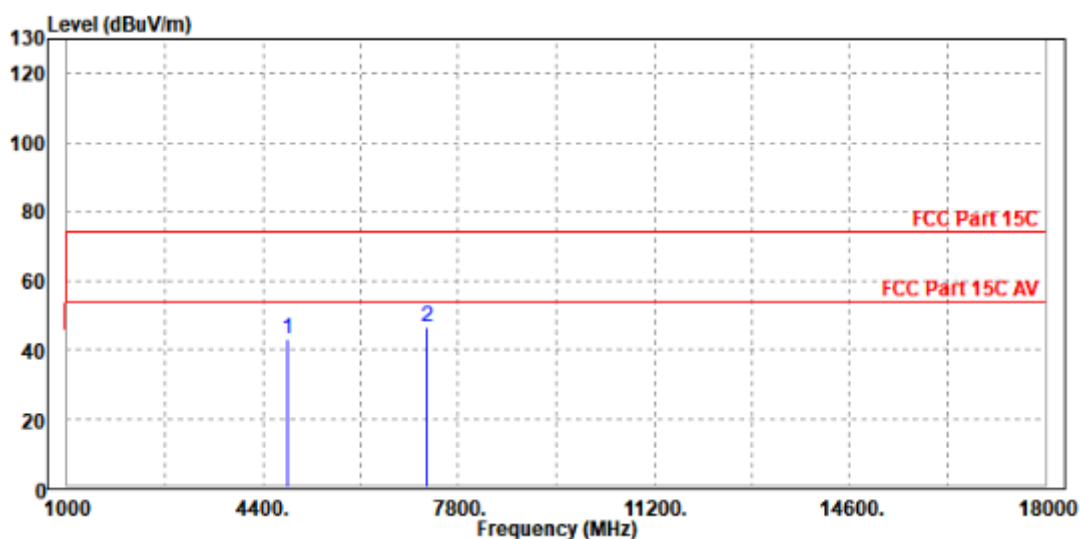

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

BT-LE _S2


CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	66.618	31.31	40.00	8.69	-10.32	H	0.9	2.00
1	136.215	30.86	43.50	12.64	-12.41	H	355	2.00
1	176.761	28.04	43.50	15.46	-10.74	H	96.5	2.00
1	263.334	30.41	46.00	15.59	-6.71	H	230.3	2.00
1	375.611	28.49	46.00	17.51	-3.66	H	5.8	1.00
1	598.275	32.94	46.00	13.06	-1.82	H	5.8	1.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission level.

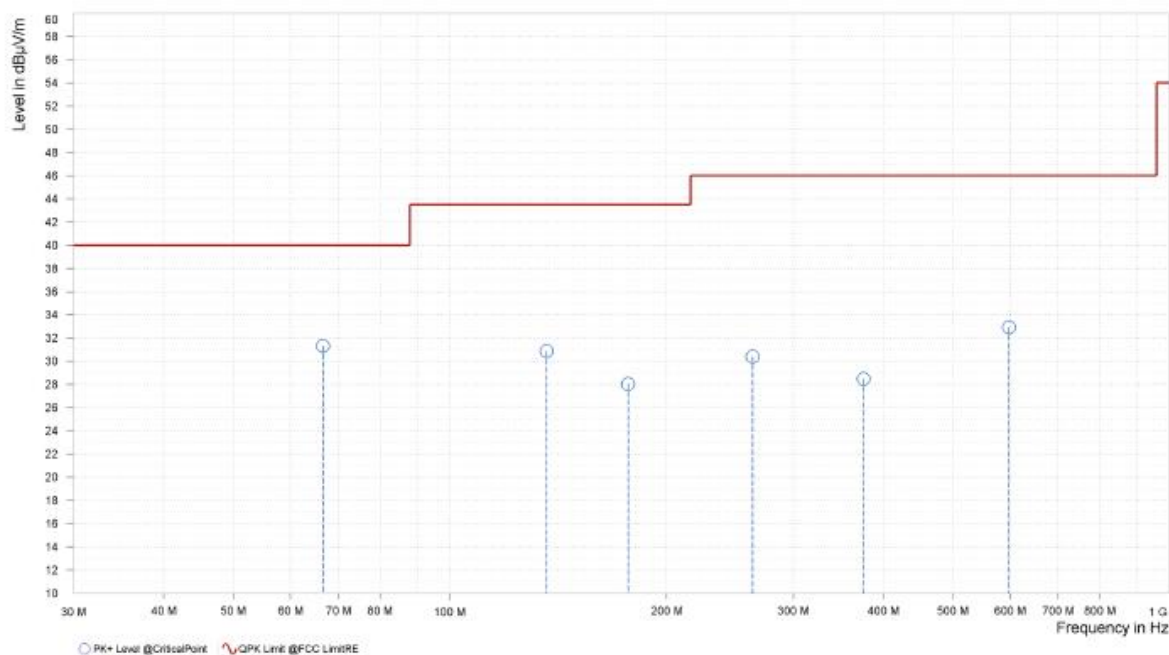

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	43.289	30.26	40.00	9.74	-7.58	V	0.9	2.00
1	61.671	27.51	40.00	12.49	-9.38	V	229.1	2.00
1	133.208	23.50	43.50	20.00	-12.32	V	359	2.00
1	260.618	30.52	46.00	15.48	-6.77	V	359	2.00
1	377.066	31.37	46.00	14.63	-3.61	V	229.1	2.00
1	737.082	42.25	46.00	3.75	0.37	V	0.9	2.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission level.

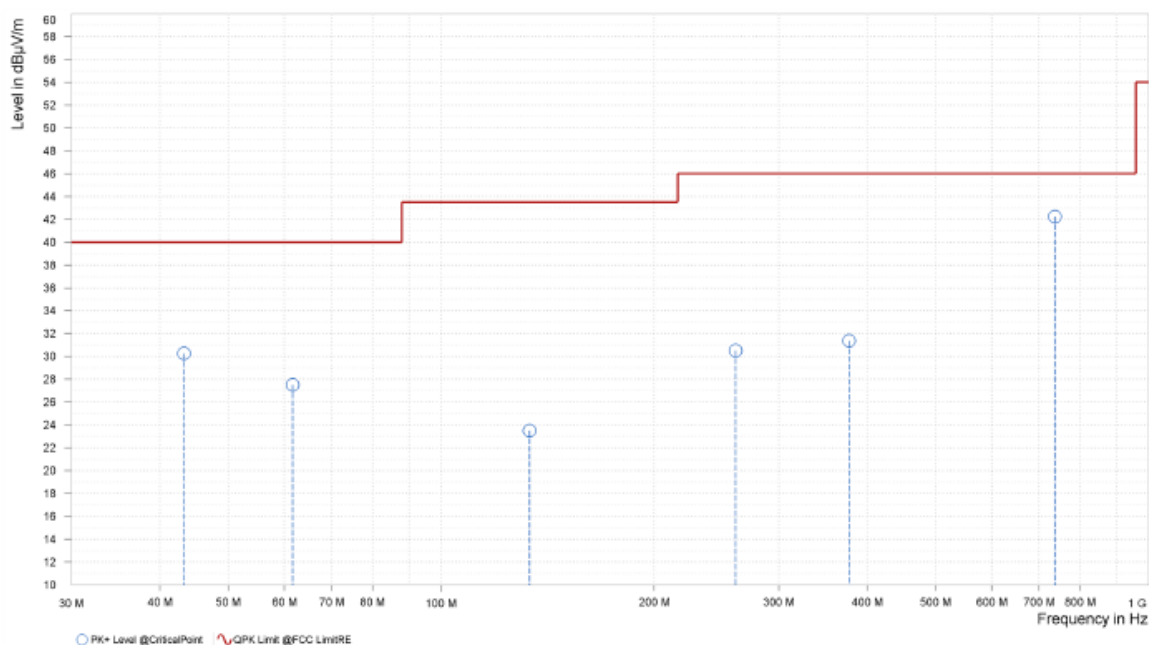

**ABOVE 1GHz TEST DATA**

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,353.000	30.94	54.00	23.06	-1.25	H	170.2	2.00
5	2,390.000	30.91	54.00	23.09	-1.05	H	360	2.00
5	2,402.000	72.93			-0.96	H	219.2	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,332.000	46.25	74.00	27.75	-1.31	H	289	1.00
5	2,390.000	44.93	74.00	29.07	-1.05	H	-0.1	2.00
5	2,402.000	89.06			-0.96	H	218	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,330.000	30.83	54.00	23.17	-1.32	V	4.2	1.00
5	2,390.000	30.92	54.00	23.08	-1.05	V	1.3	2.00
5	2,402.000	68.28			-0.96	V	91.8	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,363.000	46.98	74.00	27.02	-1.22	V	147.9	1.00
5	2,390.000	45.03	74.00	28.97	-1.05	V	23.3	2.00
5	2,402.000	82.72			-0.96	V	91.8	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.44	74.00	23.56	39.82	54.00	14.18	4.96	H	228.1	1.00
3	7,320.000	55.46	74.00	18.54	44.23	54.00	9.77	11.14	H	228.1	1.00

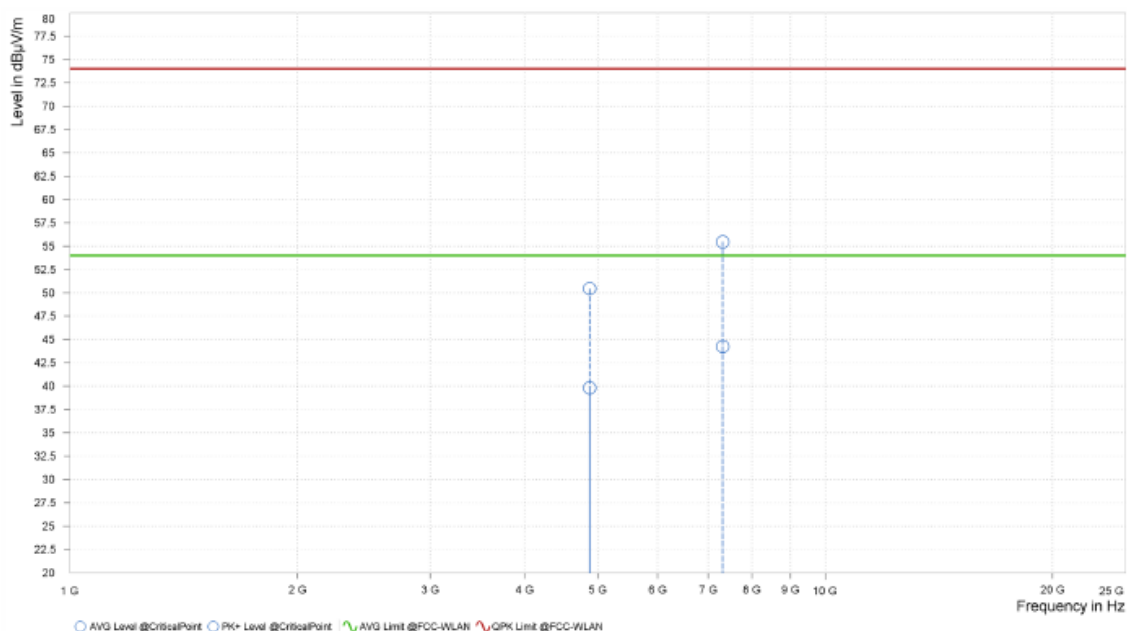




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.69	74.00	23.31	39.88	54.00	14.12	4.96	V	359	2.00
3	7,320.000	54.73	74.00	19.27	44.01	54.00	9.99	11.14	V	359	2.00

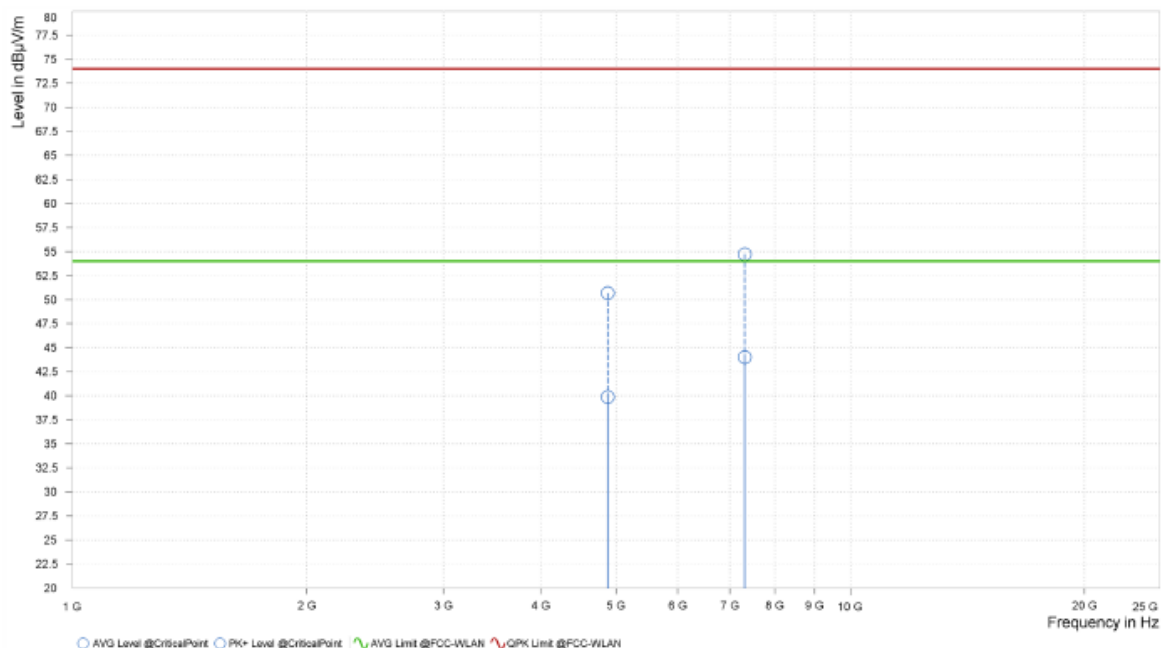

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	76.35			-0.88	H	218	2.00
6	2,483.500	31.20	54.00	22.80	-0.87	H	218	2.00
6	2,492.300	31.26	54.00	22.74	-0.84	H	121.2	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	91.37			-0.88	H	91.8	1.00
6	2,483.500	46.31	74.00	27.69	-0.87	H	42.8	1.00
6	2,483.720	49.09	74.00	24.91	-0.87	H	4.2	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	71.59			-0.88	V	3.6	1.00
6	2,483.500	31.15	54.00	22.85	-0.87	V	341	1.00
6	2,491.200	31.38	54.00	22.62	-0.85	V	317.2	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.420	90.49			-0.88	V	146.8	1.00
6	2,483.500	45.36	74.00	28.64	-0.87	V	340.9	1.00
6	2,486.800	51.72	74.00	22.28	-0.86	V	267	2.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2480MHz: Fundamental frequency.

BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

BT-LE _2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,352.500	30.94	54.00	23.06	-1.25	H	216.2	1.00
5	2,390.000	30.94	54.00	23.06	-1.05	H	217.9	2.00
5	2,404.000	57.34			-0.94	H	217.9	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,359.000	46.44	74.00	27.56	-1.23	H	59.6	1.00
5	2,390.000	45.49	74.00	28.51	-1.05	H	121.2	2.00
5	2,403.500	88.95			-0.94	H	218	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,321.000	30.93	54.00	23.07	-1.36	V	44	1.00
5	2,390.000	30.92	54.00	23.08	-1.05	V	44	1.00
5	2,404.000	53.39			-0.94	V	99.1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,352.000	46.83	74.00	27.17	-1.25	V	359	1.00
5	2,390.000	44.77	74.00	29.23	-1.05	V	360.1	1.00
5	2,403.500	82.31			-0.94	V	91.9	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2404MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.32	74.00	23.68	39.72	54.00	14.28	4.96	H	359	1.00
3	7,320.000	55.38	74.00	18.62	44.00	54.00	10.00	11.14	H	359	2.00

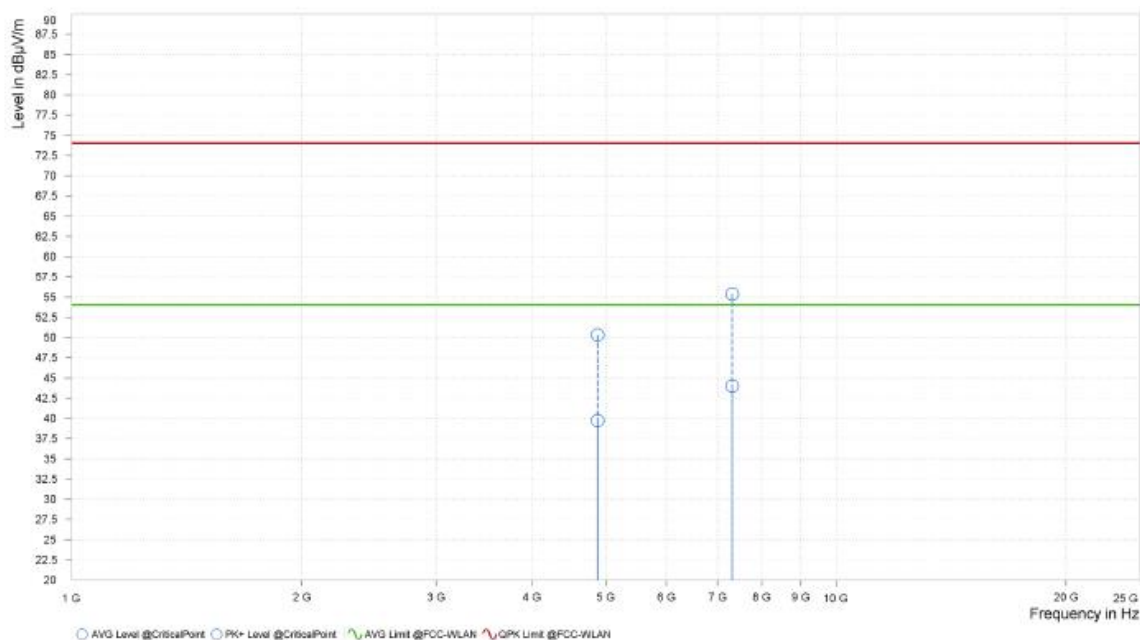




**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.33	74.00	23.67	39.69	54.00	14.31	4.96	V	0.9	2.00
3	7,320.000	54.32	74.00	19.68	43.89	54.00	10.11	11.14	V	359	2.00

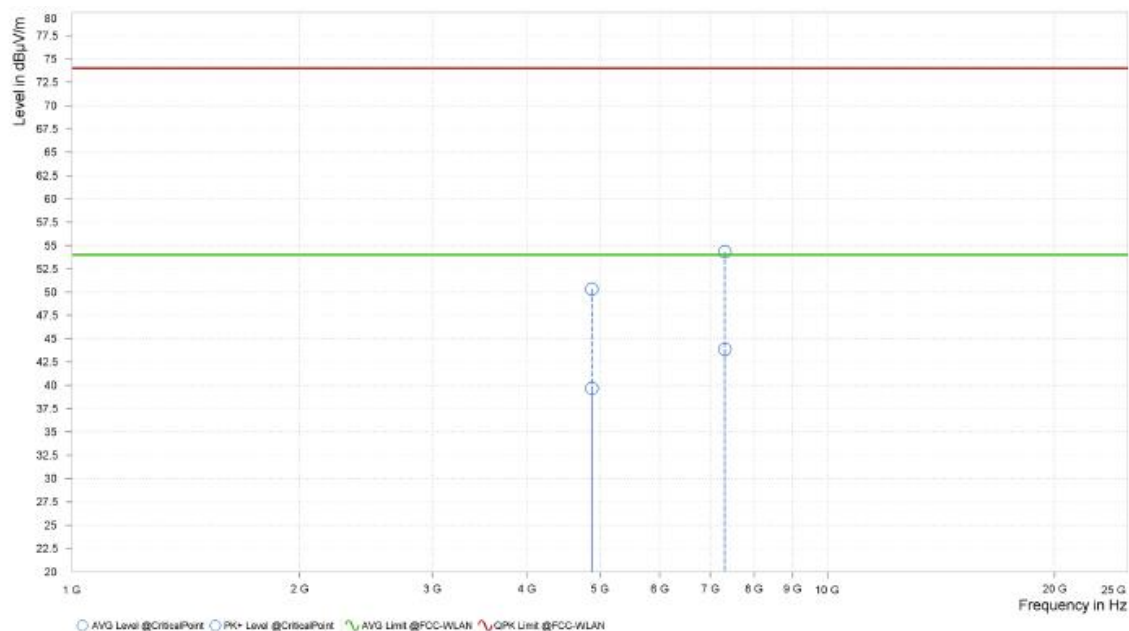

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.900	60.17			-0.88	H	216.8	2.00
6	2,483.880	31.15	54.00	22.85	-0.87	H	0	1.00
6	2,492.200	31.22	54.00	22.78	-0.84	H	42.8	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.420	93.11			-0.88	H	143.2	1.00
6	2,483.620	44.94	74.00	29.06	-0.87	H	360.1	1.00
6	2,484.400	46.61	74.00	27.39	-0.87	H	-0.1	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.900	58.90			-0.88	V	149.2	1.00
6	2,483.880	31.09	54.00	22.91	-0.87	V	149.2	1.00
6	2,491.940	31.28	54.00	22.72	-0.84	V	296.2	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.900	86.55			-0.88	V	7.1	1.00
6	2,483.620	45.41	74.00	28.59	-0.87	V	0	1.00
6	2,484.140	52.65	74.00	21.35	-0.87	V	-0.1	2.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2478MHz: Fundamental frequency.

BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

BT-LE _S2

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,353.000	30.84	54.00	23.16	-1.25	H	220.5	2.00
5	2,390.000	30.85	54.00	23.15	-1.05	H	290.2	1.00
5	2,402.000	79.42			-0.96	H	220.5	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,360.500	46.33	74.00	27.67	-1.23	H	1.2	2.00
5	2,390.000	44.77	74.00	29.23	-1.05	H	360	2.00
5	2,402.000	89.22			-0.96	H	220.4	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,353.000	30.90	54.00	23.10	-1.25	V	4.1	1.00
5	2,390.000	30.86	54.00	23.14	-1.05	V	360	2.00
5	2,402.000	72.56			-0.96	V	94.2	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,321.000	46.08	74.00	27.92	-1.36	V	358.8	1.00
5	2,390.000	45.15	74.00	28.85	-1.05	V	290.2	1.00
5	2,402.000	81.86			-0.96	V	69.8	2.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.20	74.00	23.80	39.71	54.00	14.29	4.96	H	224.3	1.00
3	7,320.000	54.31	74.00	19.69	43.91	54.00	10.09	11.14	H	1	2.00

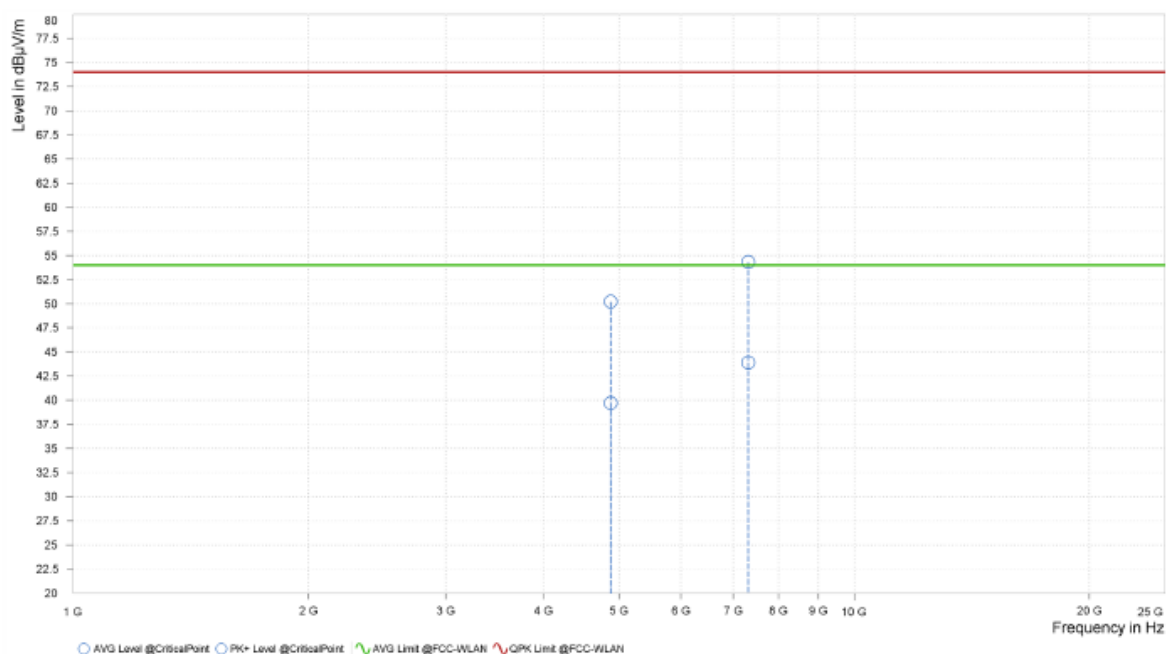




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4.880.000	50.45	74.00	23.55	39.74	54.00	14.26	4.96	V	0.9	2.00
3	7.320.000	54.07	74.00	19.93	43.79	54.00	10.21	11.14	V	131	2.00

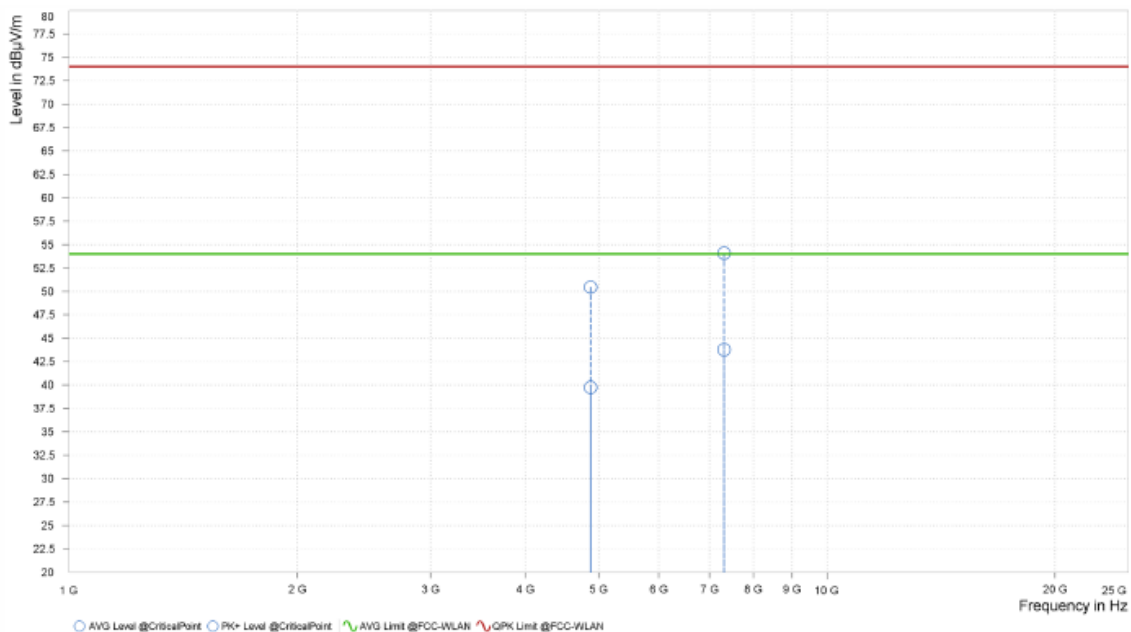

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	81.05			-0.88	H	219.3	2.00
6	2,483.500	31.15	54.00	22.85	-0.87	H	219.3	2.00
6	2,492.080	31.18	54.00	22.82	-0.84	H	122.4	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	92.67			-0.88	H	143.2	1.00
6	2,483.500	45.57	74.00	28.43	-0.87	H	360.1	1.00
6	2,483.940	46.90	74.00	27.10	-0.87	H	143.2	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	79.96			-0.88	V	145.6	1.00
6	2,483.500	31.08	54.00	22.92	-0.87	V	-0.1	2.00
6	2,491.860	31.35	54.00	22.65	-0.84	V	316.2	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	88.01			-0.88	V	141.9	1.00
6	2,483.500	45.31	74.00	28.69	-0.87	V	220.4	2.00
6	2,490.540	47.21	74.00	26.79	-0.85	V	73.4	2.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2480MHz: Fundamental frequency.

BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

BT-LE _S8

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,343.000	30.96	54.00	23.04	-1.28	H	0	1.00
5	2,390.000	30.96	54.00	23.04	-1.05	H	20.1	2.00
5	2,402.000	85.53			-0.96	H	216.9	2.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,373.000	46.10	74.00	27.90	-1.18	H	360	1.00
5	2,390.000	44.94	74.00	29.06	-1.05	H	140.7	1.00
5	2,402.000	90.07			-0.96	H	219.2	2.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,352.500	30.96	54.00	23.04	-1.25	V	360.1	1.00
5	2,390.000	30.94	54.00	23.06	-1.05	V	360	2.00
5	2,402.000	77.98			-0.96	V	102.6	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,321.500	46.03	74.00	27.97	-1.36	V	316.2	2.00
5	2,390.000	45.49	74.00	28.51	-1.05	V	0	1.00
5	2,402.000	82.48			-0.96	V	23.3	2.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	51.41	74.00	22.59	39.63	54.00	14.37	4.96	H	133.3	2.00
3	7,320.000	55.50	74.00	18.50	43.62	54.00	10.38	11.14	H	359	1.00

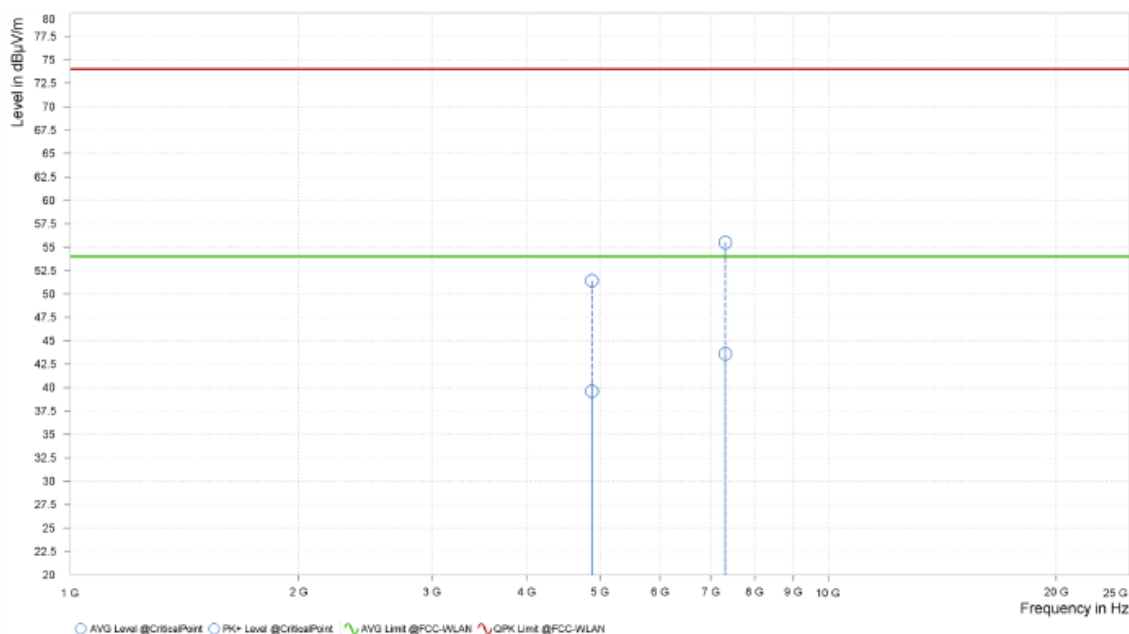




BUREAU
VERITAS

Test Report No.: W7L-231218W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ QPK Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.78	74.00	23.22	39.88	54.00	14.12	4.96	V	0.9	2.00
3	7,320.000	54.00	74.00	20.00	43.56	54.00	10.44	11.14	V	359	1.00

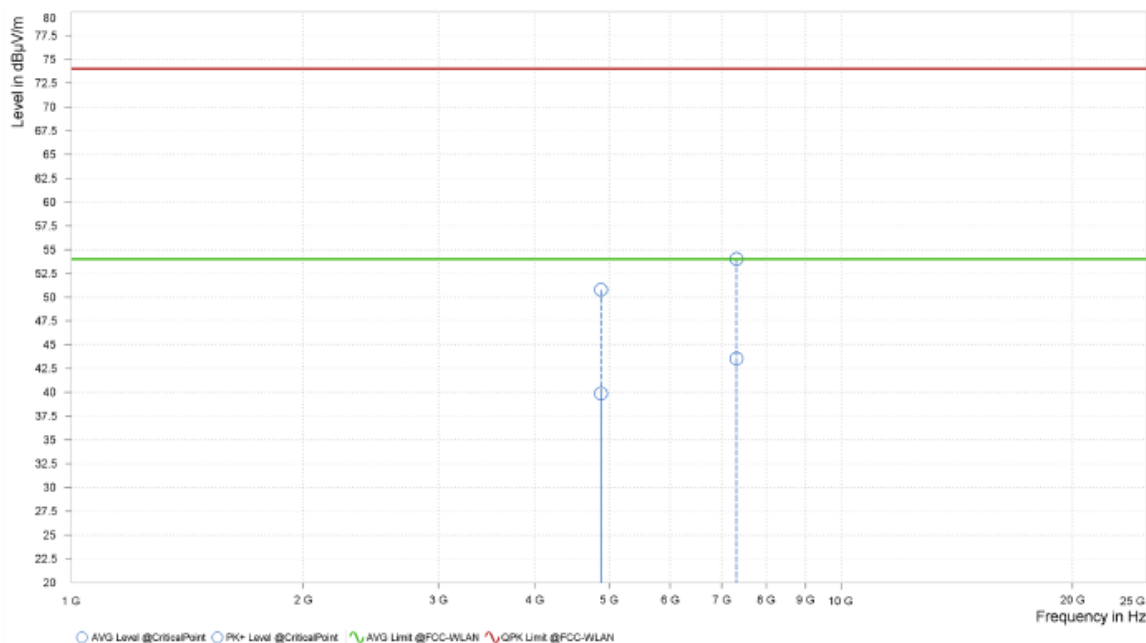

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	89.01			-0.88	H	164.7	1.00
6	2,483.500	31.14	54.00	22.86	-0.87	H	164.7	1.00
6	2,492.080	31.22	54.00	22.78	-0.84	H	4.1	1.00

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.420	92.66			-0.88	H	145.6	1.00
6	2,483.500	45.73	74.00	28.27	-0.87	H	145.6	1.00
6	2,490.320	46.30	74.00	27.70	-0.85	H	293.8	1.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	90.27			-0.88	V	192.2	1.00
6	2,483.500	45.43	74.00	28.57	-0.87	V	360	1.00
6	2,490.760	48.84	74.00	25.16	-0.85	V	355.8	2.00

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	82.90			-0.88	V	3.5	1.00
6	2,483.500	31.13	54.00	22.87	-0.87	V	1.1	2.00
6	2,492.960	31.29	54.00	22.71	-0.84	V	143.2	1.00

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 15,23	Feb. 14,24
Power Meter	ANRITSU	ML2495A	1506002	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 15,23	Feb. 14,24
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.09,24	May.08,25
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 15,23	Feb. 14,24
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 14,24	Feb. 13,25

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

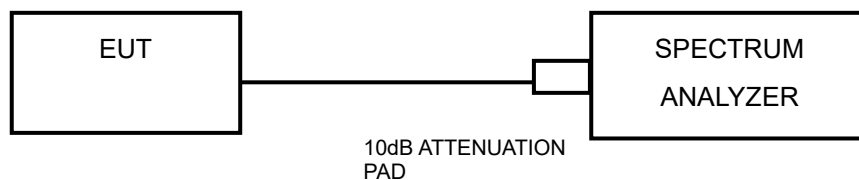

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-231218W001RF02

3.3.7 TEST RESULTS

Please Refer to Appendix B Of this test report..




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

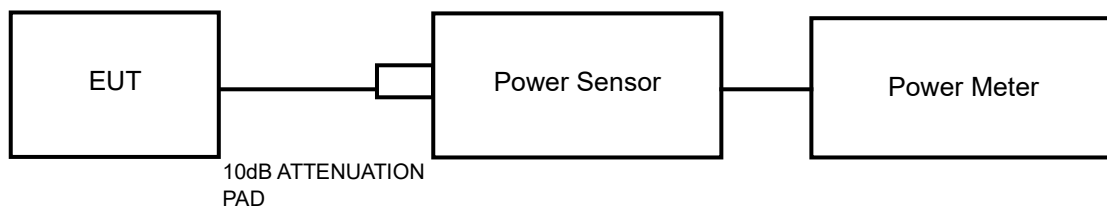

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-231218W001RF02

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix B Of this test report..



Test Report No.: W7L-231218W001RF02

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix B Of this test report..




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-231218W001RF02

3.5.7 TEST RESULTS

Please Refer to Appendix B Of this test report..




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

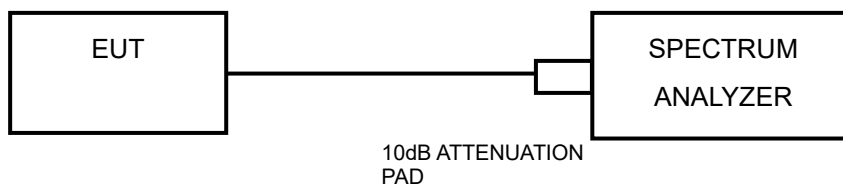

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix B Of this test report..



3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

According to FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain=GANT +Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain= $10 \log(NANT/ Nss)$ dB;

For power measurements on IEEE 802.11 devices,Array Gain = 0 dB for $NANT \leq 4$;

The EUT supports Cyclic Delay Diversity (CDD) mode,

For power measurements,the directional GANT is set equal to the antenna having the highest gain as following formulas.

Directional Gain = Max.Gain + Array Gain.

For PSD measurements,the directional GANT is calculation is following F)2)f)ii of KDB 662911 D01 v02r01.

The directional gain is calculated as following table.

2.4GHz	Ant 1 (dBi)	Ant 2 (dBi)	DG For Power (dBi)	DG For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	1.24	-3.21	1.24	2.31	0.00	0.00

NOTE :DG= directional gain, Power Limit Reduction = DG For Power Gain -6dbi<0

PSD Limit Reduction = DG For PSD – 6dBi<0. Therefore, it is not necessary to reduce maximum peak output power and PSD limit.



Test Report No.: W7L-231218W001RF02

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-231218W001RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--