

# Certification of Compliance

## CFR 47 Part 15 Subpart B

Test Report File No. :	08-IST-0032	Date of Issue :	January 22, 2008
Model(s)	:	LT3288	
Kind of Product	:	32" LCD TV Monitor	
Applicant	:	Goldwin Co., Ltd.	
Address	:	#1016, Doosan Venturesigm, Pyeongchon-dong, Dongan-gu, Anyang-city, Gyeonggi-do, Korea.	
Manufacturer	:	AKI INC.,	
Address	:	Znoe d, Minzhu 99 Industrial Town, Xihuan Road, Shajing Street, Baoan District, Shenzhen, China	

### Test Result

Positive

Negative

Reviewed By



S.J. Cho / EMC Group Manager

Approved By



J.H. Lee / Chief

### Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 16 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



## TABLE OF CONTENTS

<b>Table of contents</b>	2	
<b>Information of test laboratory, Environmental conditions, Power used, Product information</b>	3	
<b>Descriptions of test</b>		
Conducted Emission	4	
Radiated Emission	5	
<b>Equipment Under Test</b>	6	
<b>Summary</b>	7	
 ■ <b>Test Conditions and Data - Emissions</b>		
◆ Conducted Emissions	0.15MHz - 30MHz	Applicable
Test Conditions / Data and Plots		8-10
◆ Radiated Emissions	30MHz - 1GHz	Applicable
Test Conditions / Data and Plots		11-12
 ■ <b>Appendix</b>		
A. The Photos of Test Setup		13-14
B. The Photos of Equipment Under Test		15-16

*Note:*

## INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. ([FCC Filing Lab.](#))

400-19, Singal-Dong, Giheung-Gu, Yongin-Si,  
Gyeonggi-Do, 446-599, Korea

TEL : +82 31 326 6700      FAX : +82 31 326 6797

## ENVIRONMENTAL CONDITIONS

Temperature	19 °C
Humidity	43 %
Atmospheric pressure	1012 mbar

## POWER SUPPLY SYSTEM USED

Power supply system	120 Vac, 60 Hz (Refer to the product information)
---------------------	--

## PRODUCT INFORMATION

LCD Panel	LC320W01(LG PHILIPS LCD)
Power Source	AC 100-240, 50/60Hz
Power Consumption	135 W (Max.)
Screen Size	32"
Aspect Ratio	16:9
Resolution	1366x768 (WXGA)
Contrast Ratio	1200:1
Brightness	500cd/m <sup>2</sup>
Viewing	Over 170 degrees
TV System	NTSC, ATSC

- EMC suppression device is not used during the test.
- Please refer to user's manual.


## DESCRIPTIONS OF TEST

### Conducted Emissions:


The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a  $50 \Omega/50 \mu\text{H}$  LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 KHz or for "quasi-peak" & "Average" within a bandwidth of 9 KHz.

#### -Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1 m X 1.5 m wooden table 80cm height is placed 40 cm away from the vertical wall and 1.5 m away from the other wall of the shielded room. The Hyup-Rip KNW-407 and EMCO 3725/2 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80 cm from the LISN and powered from the EMCO LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30 MHz. The bandwidth of the receiver was set to 10 kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

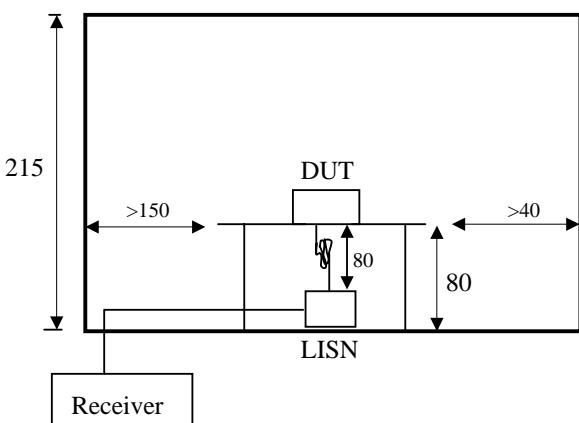

< Side View >

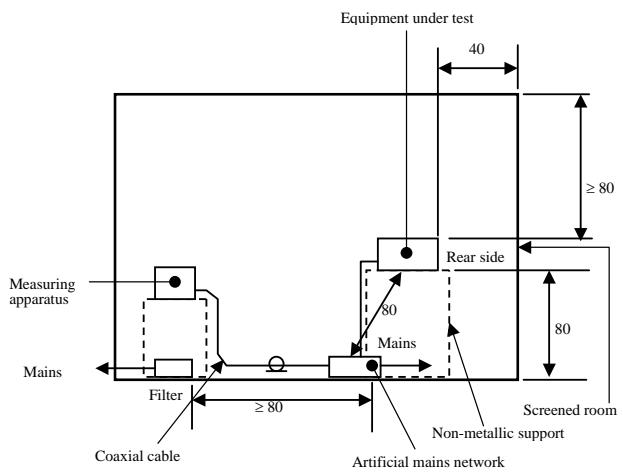

< Concept Drawing >


## DESCRIPTION OF TEST

### Radiated Emissions:

The measurement was performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120 KHz.

#### -Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1000 MHz using S/B bi-log antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

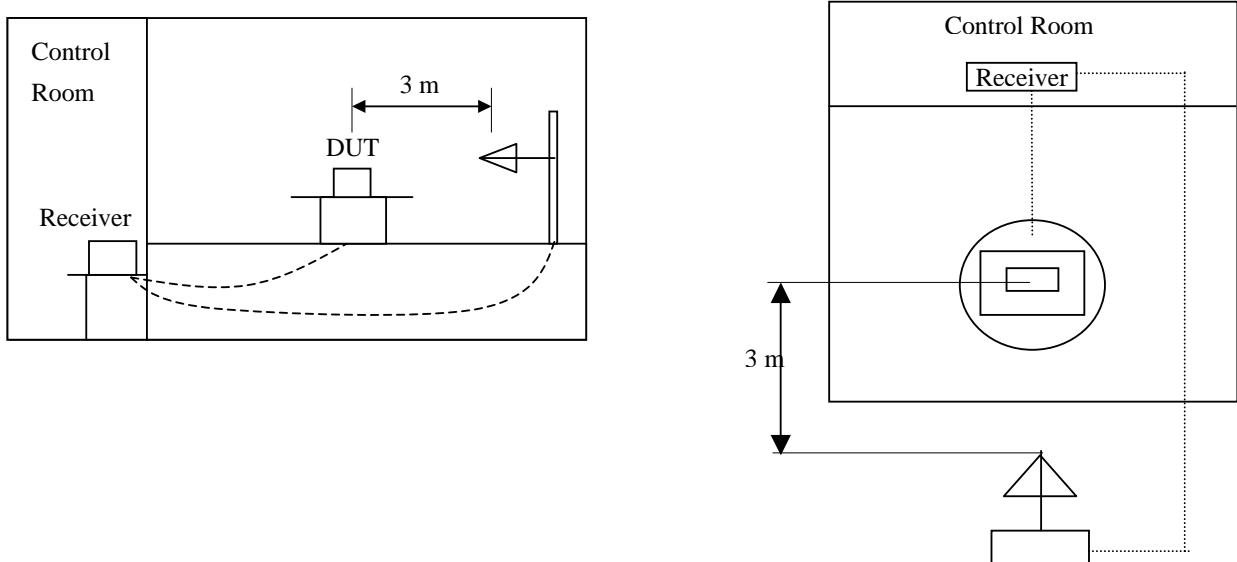

## Equipment Under Test

### EUT Type :

- Table-Top.
- Floor-Standing.
- Table-Top and Floor-Standing(Combination).

### Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby Mode
- Operational Condition : ■ 1024 x 768, 60 Hz

The test results of followings are the representative of worst case emissions for the available resolution can be adjusted.

It is investigated the emission characteristic for RGB mode.

### Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.	FCC	Compliance Info.
PC	dx6120 MT	HP	CNG5500MJV	DoC	
Keyboard	SK-2885	HP	N/A	DoC	
PS/2 Mouse	M-UV96	HP	N/A	DoC	
Printer	A0302380	Northern Telecom	2516S60951	DS46XU225C-L	
Serial Mouse	M-M28	Logitech	LCA53305547	DZL210365	
DVD Recorder	DG-M22D2D	Daewoo Electronics.	N/A	-	

### Connecting Interface Cables :

- Unshielded AC power cable(without ferrite core) : 1.8 m
- Shielded monitor's signal cable (with two ferrite core) : 1.5 m
- Shielded Printer's signal cable (without ferrite core) : 1.8 m
- PC Audio In cable (without ferrite core) 1.5 m

Note :



## TEST CONDITIONS AND DATA

### Conducted Emissions

[Applicable]

#### ◆ Test Equipment Used

**The test equipment used is calibrated in regular for every year.**

<u>Model Name</u>	<u>Manufacturer</u>	<u>Descriptions</u>	<u>Calibration Date</u>	<u>Serial Number</u>
ESCI	Rohde & Schwarz	EMI Test Receiver	June 26, 2007	100373
KNW-407	Hyup-Rip	LISN	Oct. 11, 2007	8-833-10
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	May 21, 2007	357.8810.52

#### ◇ Auxiliary Equipment Used

<u>Model Name</u>	<u>Manufacturer</u>	<u>Descriptions</u>
-------------------	---------------------	---------------------

#### ◇ Accessories including cables

<u>Name</u>	<u>Length</u>	<u>Port and Descriptions</u>
-------------	---------------	------------------------------

#### ◆ Environmental Conditions

Temperature	19.0 °C
Humidity	43 %
Atmosphere pressure	1012 mbar

#### ◆ Test Program

See Test configuration page 6.

#### ◆ Test Date

December 17, 2007


#### ◆ Test Area

Conducted Room

*Note : The equipment used is calibrated in regular for every year.*

*The test results of followings are the representative of the worst case emissions for resolutions that are available.*


Conducted Emissions

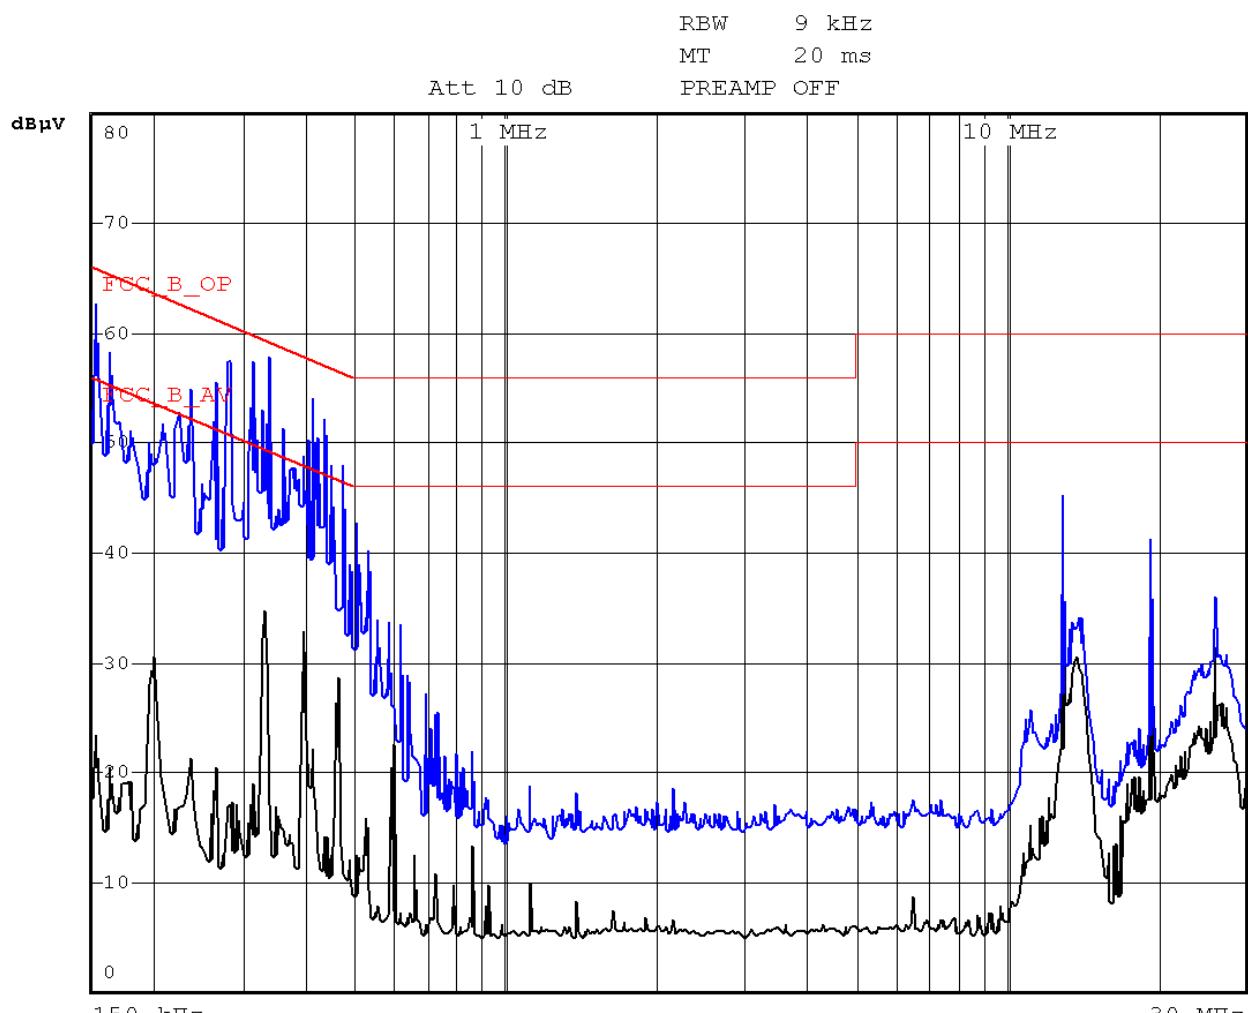

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss [dB]	Cable Loss [dB $\mu$ V]	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.15	50.65	20.94	66.00	56.00	0.12	0.80	51.57	21.86	14.43	34.14
0.20	46.80	31.20	63.69	53.69	0.12	0.80	47.72	32.12	15.97	21.57
0.33	43.05	35.10	59.45	49.45	0.13	0.13	43.31	35.36	16.14	14.09
0.40	44.01	32.28	57.96	47.96	0.14	0.19	44.34	32.61	13.62	15.35
13.03	44.24	40.31	60.00	50.00	0.64	0.49	45.37	41.44	14.63	8.56

Note :

Conducted Emissions

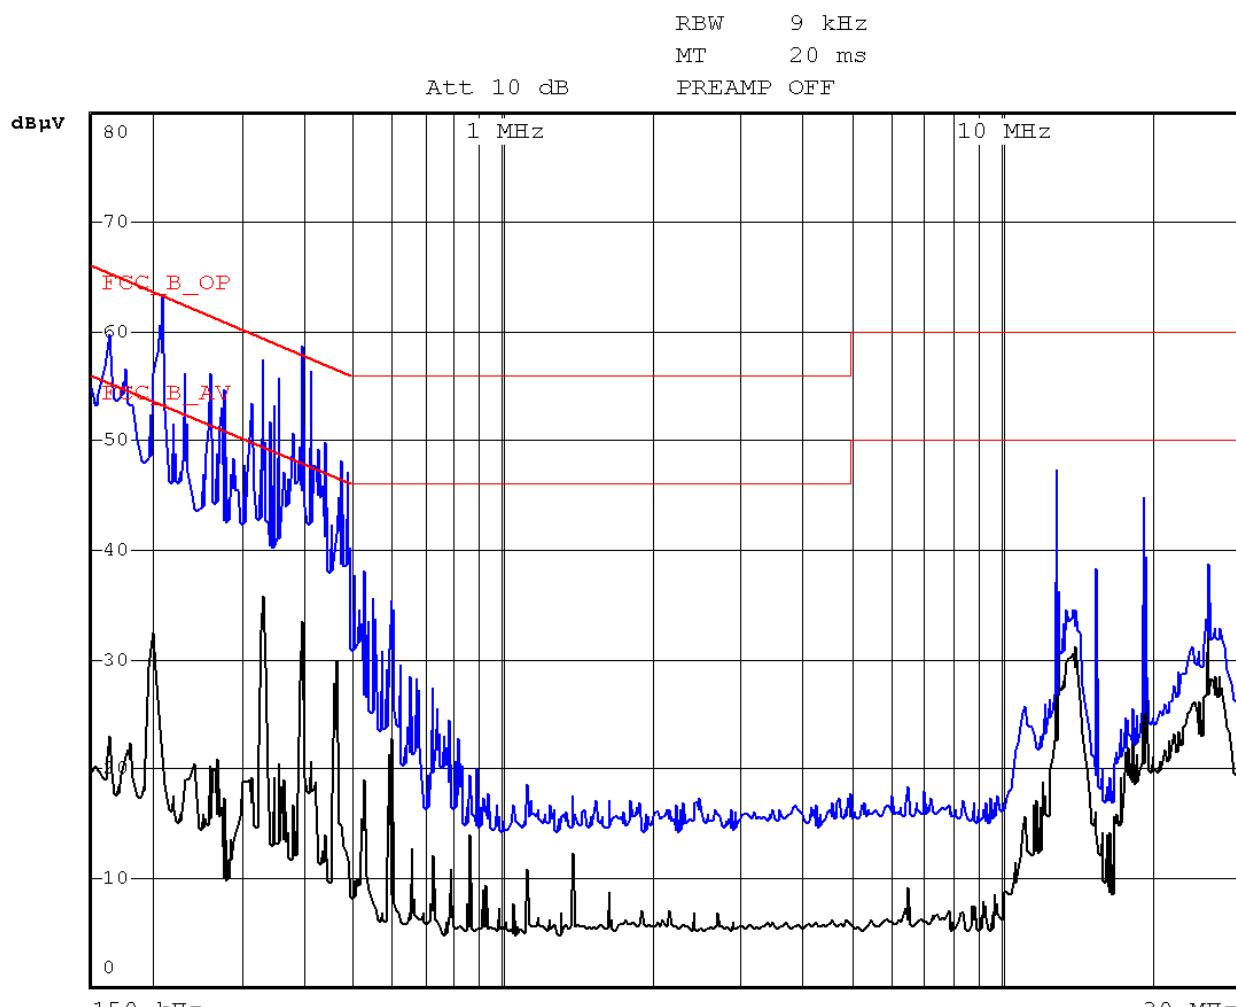

Model Name : LT3288      Op cond : 120Vac 60Hz  
Phase : Neutral (RGB)

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss [dB]	Cable Loss [dB $\mu$ V]	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.15	50.93	21.87	66.00	56.00	0.12	0.80	51.85	22.79	14.15	33.21
0.20	48.40	32.20	63.78	53.78	0.12	0.80	49.32	33.12	14.46	20.66
0.33	43.86	35.86	59.45	49.45	0.12	0.13	44.11	36.11	15.34	13.34
0.40	44.56	32.84	57.94	47.94	0.12	0.19	44.87	33.15	13.07	14.79
13.02	45.62	41.65	60.00	50.00	0.44	0.49	46.55	42.58	13.45	7.42

Note :

## TEST CONDITIONS AND DATA

### Radiated Emissions

[Applicable]

#### ◆ Test Equipment Used

**The test equipment used is calibrated in regular for every year.**

<u>Model Name</u>	<u>Manufacturer</u>	<u>Descriptions</u>	<u>Calibration Date</u>	<u>Serial Number</u>
ESCS 30	Rohde & Schwarz	Test Receiver	Aug. 28, 2007	100171
VULB9160	Schwarzbeck	Antenna	Aug. 10, 2007	3048

#### ◇ Auxiliary Equipment Used

Model Name      Manufacturer      Descriptions

#### ◇ Accessories including cables

Name      Length      Port and Descriptions

#### ◆ Environmental Conditions

Temperature      5 °C  
Humidity      46 %  
Atmosphere pressure      1014 mbar

◆ Test Program      See test configuration page 6.

◆ Test Date      December 18, 2007

◆ Test Area      Open Area Test Site #2 (3m)

*Note : The equipment used is calibrated in regular for every year.*

*The test results of followings are the representative of the worst case emissions for resolutions that are available.*

**Radiated Emissions**

Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1024x768, 60Hz	78.13	23.20	8.09	2.56	V	40.00	33.85	6.15
	143.37	13.00	12.61	3.63	V	43.50	29.24	14.26
	212.50	21.70	9.51	4.35	V	43.50	35.56	7.94
	286.33	17.40	12.06	5.16	H	46.00	34.62	11.38
	357.91	16.60	13.76	5.53	V	46.00	35.89	10.11
	429.49	17.40	15.61	5.87	V	46.00	38.88	7.12
	650.68	14.00	19.75	7.75	V	46.00	41.50	4.50

*End of Data*

*Note:*

**Appendix A. The Photos of Test Setup**



**Conducted Emissions - Front View**



**Conducted Emissions - Rear View**

**Appendix A. The Photos of Test Setup**



**Radiated Emissions - Front View**



**Radiated Emissions - Rear View**

**Appendix A. The Photos of EUT**



**Front View**



**Rear View**

**Appendix A. The Photos of EUT**



Left View



Right View