

# FCC Radio Test Report

## FCC ID: VW3DIW387

This report concerns (check one):  Original Grant  Class I Change  Class II Change

**Project No.** : 1802C015A  
**Equipment** : Android TV DIW387 UHD  
**Test Model** : DIW387 UHD  
**Series Model** : N/A  
**P/N** : 253775312  
**S/N** : 618220036736  
**Applicant** : SAGEMCOM BROADBAND SAS  
**Address** : 250 Route de l' Empereur - 92848 RUEIL  
MALMAISON CEDEX- FRANCE

**Date of Receipt** : Jul. 10, 2018  
**Date of Test** : Jul. 11, 2018 ~ Jul. 28, 2018  
**Issued Date** : Sep. 14, 2018  
**Tested by** : BTL Inc.

**Testing Engineer** : Kai Xu  
(Kai Xu)

**Technical Manager** : Shawn Xiao  
(Shawn Xiao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

 NVLAP<sup>®</sup>  
TESTING  
NVLAP LAB CODE 200788-0

## Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

	Page
<b>1 . CERTIFICATION</b>	7
<b>2 . SUMMARY OF TEST RESULTS</b>	8
<b>2.1 TEST FACILITY</b>	9
<b>2.2 MEASUREMENT UNCERTAINTY</b>	9
<b>3 . GENERAL INFORMATION</b>	10
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	10
<b>3.2 DESCRIPTION OF TEST MODES</b>	12
<b>3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	12
<b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	13
<b>3.5 DESCRIPTION OF SUPPORT UNITS</b>	13
<b>4 . EMC EMISSION TEST</b>	14
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	14
<b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	14
<b>4.1.2 TEST PROCEDURE</b>	14
<b>4.1.3 DEVIATION FROM TEST STANDARD</b>	14
<b>4.1.4 TEST SETUP</b>	15
<b>4.1.5 EUT OPERATING CONDITIONS</b>	15
<b>4.1.6 EUT TEST CONDITIONS</b>	15
<b>4.1.7 TEST RESULTS</b>	15
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	16
<b>4.2.1 RADIATED EMISSION LIMITS</b>	16
<b>4.2.2 TEST PROCEDURE</b>	17
<b>4.2.3 DEVIATION FROM TEST STANDARD</b>	17
<b>4.2.4 TEST SETUP</b>	18
<b>4.2.5 EUT OPERATING CONDITIONS</b>	19
<b>4.2.6 EUT TEST CONDITIONS</b>	19
<b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>	19
<b>4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)</b>	19
<b>4.2.9 TEST RESULTS (ABOVE 1000MHZ)</b>	19
<b>5 . NUMBER OF HOPPING CHANNEL</b>	20
<b>5.1 APPLIED PROCEDURES</b>	20
<b>5.1.1 TEST PROCEDURE</b>	20
<b>5.1.2 DEVIATION FROM STANDARD</b>	20
<b>5.1.3 TEST SETUP</b>	20
<b>5.1.4 EUT OPERATION CONDITIONS</b>	20
<b>5.1.5 EUT TEST CONDITIONS</b>	20
<b>5.1.6 TEST RESULTS</b>	20
<b>6 . AVERAGE TIME OF OCCUPANCY</b>	21

	Table of Contents	Page
<b>6.1 APPLIED PROCEDURES / LIMIT</b>		21
<b>6.1.1 TEST PROCEDURE</b>		21
<b>6.1.2 DEVIATION FROM STANDARD</b>		21
<b>6.1.3 TEST SETUP</b>		21
<b>6.1.4 EUT OPERATION CONDITIONS</b>		22
<b>6.1.5 EUT TEST CONDITIONS</b>		22
<b>6.1.6 TEST RESULTS</b>		22
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>		23
<b>7.1 APPLIED PROCEDURES / LIMIT</b>		23
<b>7.1.1 TEST PROCEDURE</b>		23
<b>7.1.2 DEVIATION FROM STANDARD</b>		23
<b>7.1.3 TEST SETUP</b>		23
<b>7.1.4 EUT TEST CONDITIONS</b>		23
<b>7.1.5 TEST RESULTS</b>		23
<b>8 . BANDWIDTH TEST</b>		24
<b>8.1 APPLIED PROCEDURES</b>		24
<b>8.1.1 TEST PROCEDURE</b>		24
<b>8.1.2 DEVIATION FROM STANDARD</b>		24
<b>8.1.3 TEST SETUP</b>		24
<b>8.1.4 EUT OPERATION CONDITIONS</b>		24
<b>8.1.5 EUT TEST CONDITIONS</b>		24
<b>8.1.6 TEST RESULTS</b>		24
<b>9 . MAXIMUM OUTPUT POWER TEST</b>		25
<b>9.1 APPLIED PROCEDURES / LIMIT</b>		25
<b>9.1.1 TEST PROCEDURE</b>		25
<b>9.1.2 DEVIATION FROM STANDARD</b>		25
<b>9.1.3 TEST SETUP</b>		25
<b>9.1.4 EUT OPERATION CONDITIONS</b>		25
<b>9.1.5 EUT TEST CONDITIONS</b>		25
<b>9.1.6 TEST RESULTS</b>		25
<b>10 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>		26
<b>10.1 APPLIED PROCEDURES / LIMIT</b>		26
<b>10.1.1 TEST PROCEDURE</b>		26
<b>10.1.2 DEVIATION FROM STANDARD</b>		26
<b>10.1.3 TEST SETUP</b>		26
<b>10.1.4 EUT OPERATION CONDITIONS</b>		26
<b>10.1.5 EUT TEST CONDITIONS</b>		26
<b>10.1.6 TEST RESULTS</b>		26
<b>11 . MEASUREMENT INSTRUMENTS LIST</b>		27
<b>12 . EUT TEST PHOTO</b>		30

Table of Contents	Page
APPENDIX A - CONDUCTED EMISSION	34
APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)	37
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	42
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	49
APPENDIX E - NUMBER OF HOPPING CHANNEL	74
APPENDIX F - AVERAGE TIME OF OCCUPANCY	76
APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT	89
APPENDIX H - BANDWIDTH	94
APPENDIX I - MAXIMUM OUTPUT POWER	99
APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION	104

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCP-1-1802C015A	Original Issue.	Sep. 14, 2018

## 1. CERTIFICATION

Equipment : Android TV DIW387 UHD  
Brand Name : SAGEMCOM  
Test Model : DIW387 UHD  
Series Model N/A  
P/N : 253775312  
S/N : 618220036736  
Applicant : SAGEMCOM BROADBAND SAS  
Manufacturer : SAGEMCOM BROADBAND SAS  
Address : 250 Route de l' Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE  
Date of Test : Jul. 11, 2018 ~ Jul. 28, 2018  
Test Sample : Engineering Sample No.: D180705661  
Standard(s) : FCC Part15, Subpart C (15.247)/ ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1802C015A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

**Test results included in this report is only for the Bluetooth EDR part.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247(a)(1)	Maximum output power	PASS	
15.247(d) 15.209 15.205	Radiated Spurious Emission	PASS	
15.247(a)(1)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(1)(iii)	Average Time Of Occupancy	PASS	
15.203	Antenna Requirement	PASS	

Note:

(1)" N/A" denotes test is not applicable in this test report

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

## 2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor)  $k=1.96$  or  $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2\times U_c(y)$ .

The BTL measurement uncertainty as below table:

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

### C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67dB
Hopping Channel Separation	53.46MHz
Peak Output Power	0.95dB
Number of Hopping Frequency	53.46MHz
Temperature	0.08°C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Android TV DIW387 UHD	
Brand Name	SAGEMCOM	
Test Model	DIW387 UHD	
Series Model	N/A	
Model Difference	N/A	
P/N	253775312	
S/N	618220036736	
Hardware Version	PCBA 253775268	
Software Version	BCM SDK:17.1 BOMODE:6	
Output Power (Max.)	Operation Frequency	2402 ~ 2480 MHz
	Modulation Technology	GFSK(1Mbps) $\pi/4$ -DQPSK(2Mbps) 8-DPSK(3Mbps)
	Bit Rate of Transmitter	
	Output Power Max.	3.35 dBm(1Mbps) 2.85 dBm(3Mbps)
Power Source	DC voltage supplied from AC/DC adapter. Brand / Model: SAGEMCOM / NBS24K120200VU	
Power Rating	I/P: 100-120V~50/60Hz 0.6A    O/P: 12V---2.0A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	3.59

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode <b>Note (1)</b>

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode <b>Note (1)</b>

**Note:**


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software Version	cmd		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	0A	0A	0A
Parameters(3Mbps)	0A	0A	0A

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

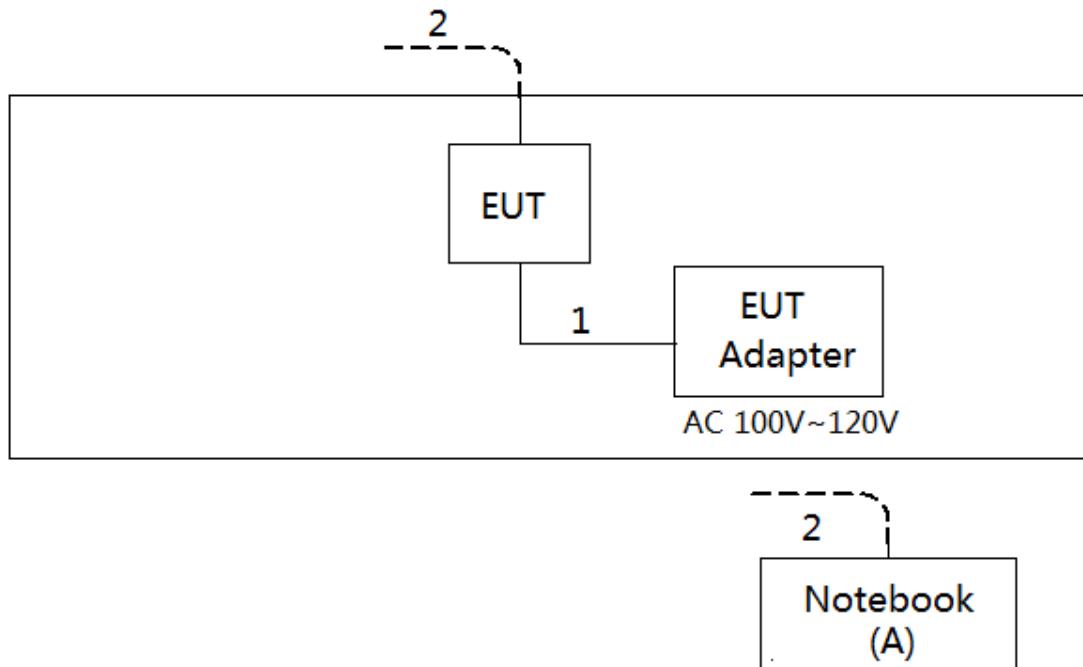

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	Dell	DCSM	DOC	G7K832X

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	2m	DC Cable
2	NO	NO	10m	RJ45 Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " \* " decreases with the logarithm of the frequency
- (2) The test result calculated as following:  

$$\text{Measurement Value} = \text{Reading Level} + \text{Correct Factor}$$

$$\text{Correct Factor} = \text{Insertion Loss} + \text{Cable Loss} + \text{Attenuator Factor(if use)}$$

$$\text{Margin Level} = \text{Measurement Value} - \text{Limit Value}$$

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

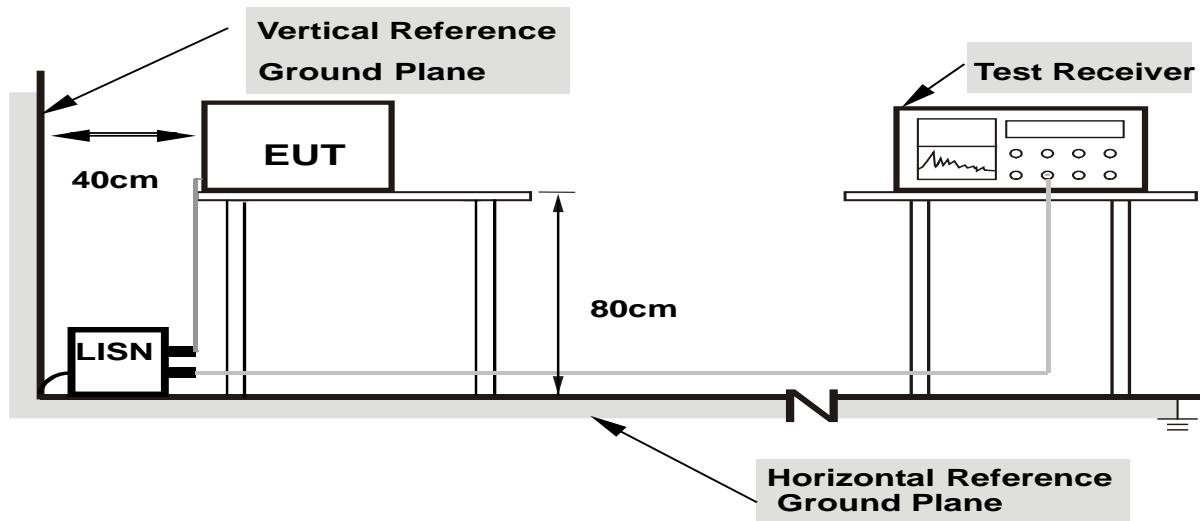

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT(9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

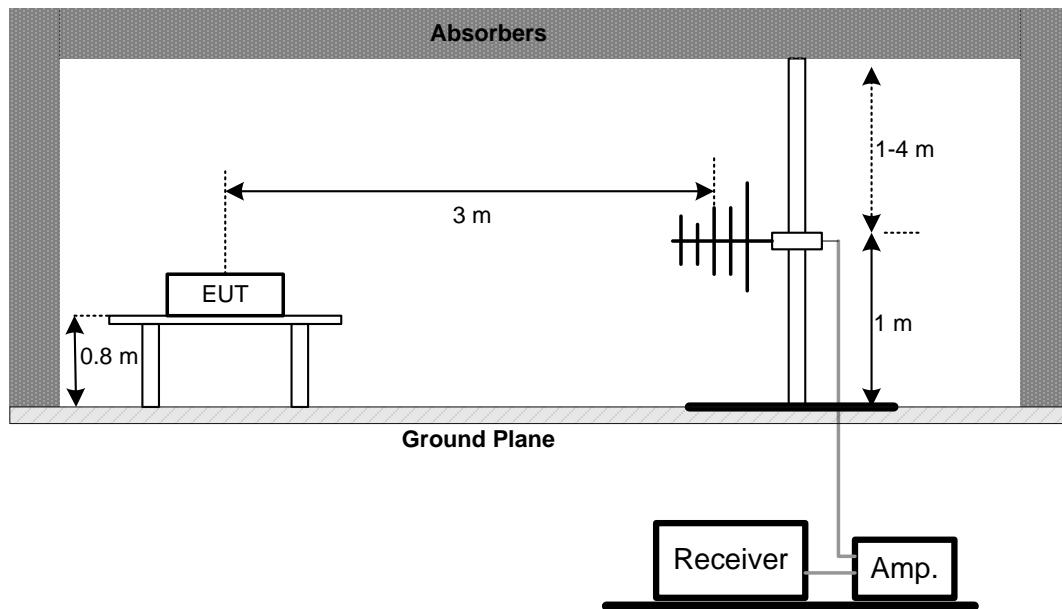

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

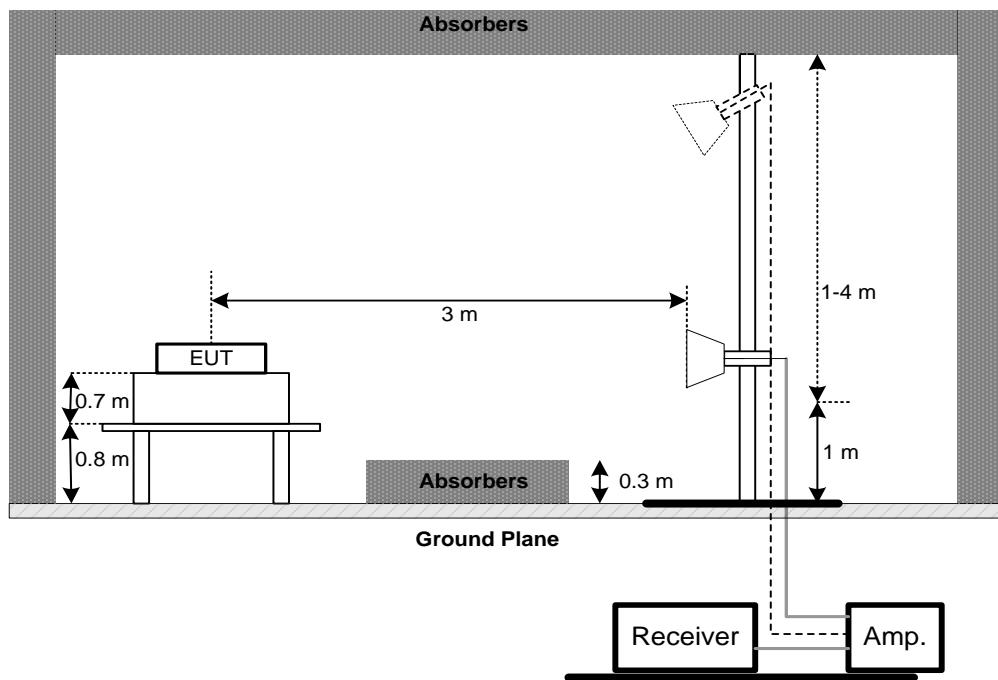

(C) For Radiated Emissions Below 30MHz

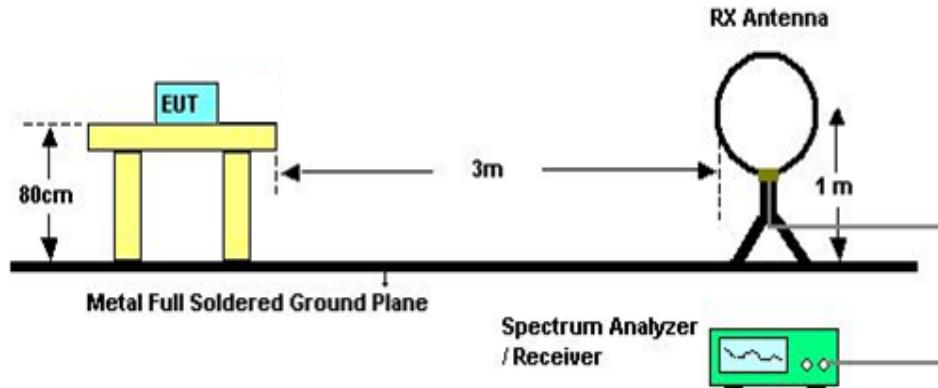

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

#### 4.2.9 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. NUMBER OF HOPPING CHANNEL

### 5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

### 5.1.2 DEVIATION FROM STANDARD

No deviation.

### 5.1.3 TEST SETUP



### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

### 5.1.6 TEST RESULTS

Please refer to the Appendix E

## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS


#### 6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

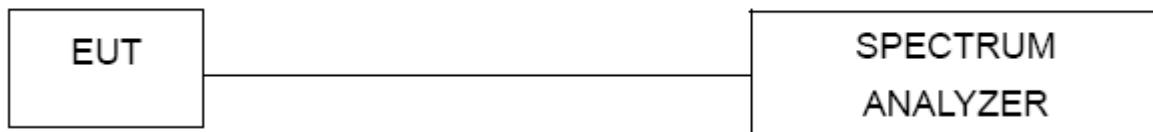

#### **6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **6.1.5 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### **6.1.6 TEST RESULTS**

Please refer to the Appendix F

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

## 7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


### 7.1.1 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels  
Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = Auto  
Detector function = Peak  
Trace = Max Hold

### 7.1.2 DEVIATION FROM STANDARD

No deviation.

### 7.1.3 TEST SETUP

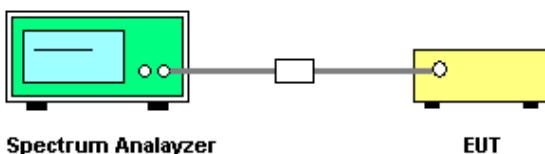

#### 7.1.4 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Relative Humidity: 35%

## 7.1.5 TEST RESULTS

Please refer to the Appendix G

## 8. BANDWIDTH TEST

## 8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as shown in the block diagram below,
- b. Spectrum Setting: RBW = 30KHz, VBW = 100KHz, Sweep Time = Auto.

### 8.1.2 DEVIATION FROM STANDARD

No deviation.

### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Relative Humidity: 55%

## 8.1.6 TEST RESULTS

### 3.1.3 TEST RESULTS

## 9. MAXIMUM OUTPUT POWER TEST

### 9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)	Maximum Output Power	0.125Watt or 21dBm	2400-2483.5	PASS

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### 9.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

#### 9.1.2 DEVIATION FROM STANDARD

No deviation.

#### 9.1.3 TEST SETUP



#### 9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 9.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 9.1.6 TEST RESULTS

Please refer to the Appendix I

## 10. ANTENNA CONDUCTED SPURIOUS EMISSION

### 10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### 10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

#### 10.1.2 DEVIATION FROM STANDARD

No deviation.

#### 10.1.3 TEST SETUP



#### 10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 10.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 10.1.6 TEST RESULTS

Please refer to the Appendix J

## 11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
2	LISN	EMCO	3816/2	52765	Mar. 11, 2019
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 11, 2019
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Oct. 19, 2018

Radiated Emission Measurement - 9KHZ TO 30MHZ					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019

Radiated Emission Measurement - 30MHZ TO 1000MHZ					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	May. 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019

**Radiated Emission Measurement - Above 1GHz**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	emci	CA500-SMSM-12M (1-26.5GHz)	N/A	Sep. 29, 2018
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

**Number of Hopping Channel**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Average Time of Occupancy**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Hopping Channel Separation Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Bandwidth**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Maximum Output Power**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Antenna Conducted Spurious Emission**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


## Line

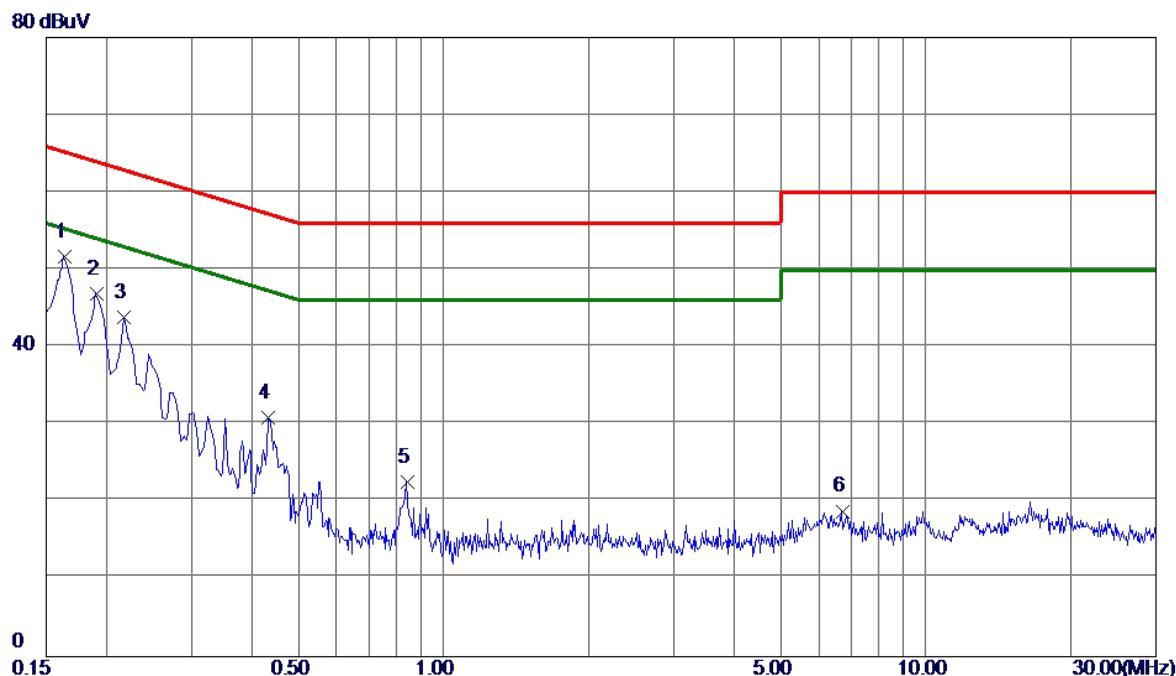

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector		Comment
							Detector	Comment	
1 *	0.1635	41.94	9.74	51.68	65.28	-13.60	Peak		
2	0.1905	37.14	9.73	46.87	64.01	-17.14	Peak		
3	0.2175	34.10	9.72	43.82	62.91	-19.09	Peak		
4	0.4335	21.19	9.76	30.95	57.19	-26.24	Peak		
5	0.8430	12.83	9.77	22.60	56.00	-33.40	Peak		
6	6.7200	8.86	9.94	18.80	60.00	-41.20	Peak		

Test Mode: TX Mode

Neutral

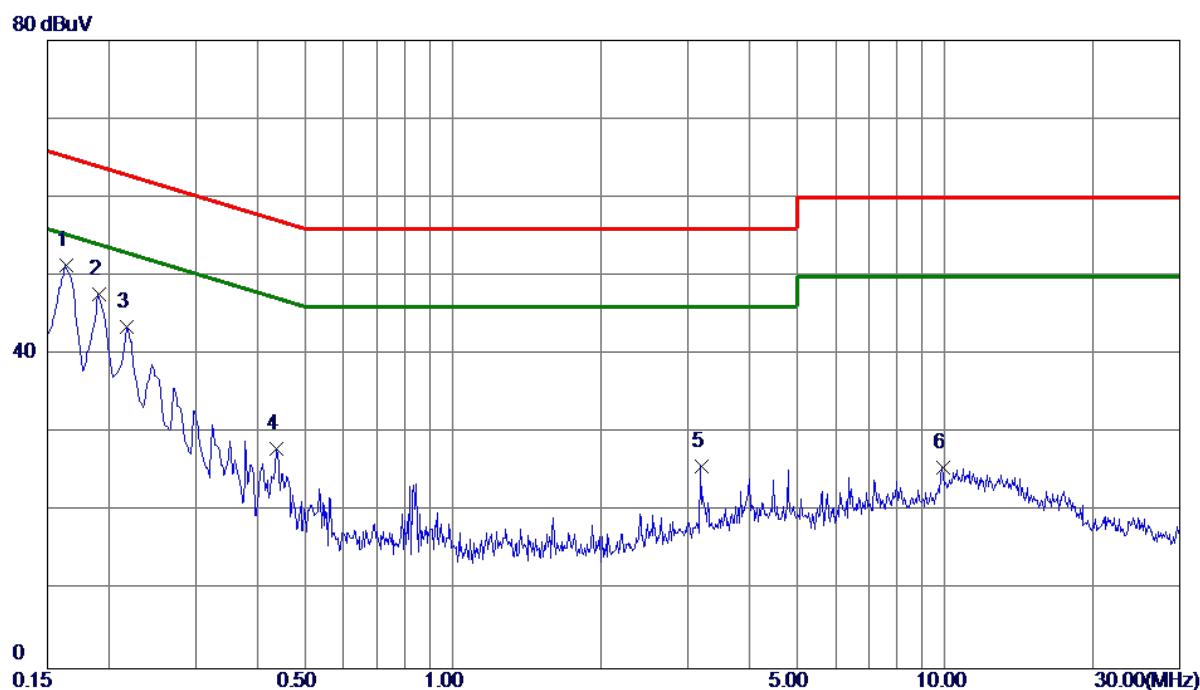


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1635	41.56	9.74	51.30	65.28	-13.98	Peak	
2	0.1905	37.90	9.73	47.63	64.01	-16.38	Peak	
3	0.2175	33.79	9.72	43.51	62.91	-19.40	Peak	
4	0.4380	18.26	9.76	28.02	57.10	-29.08	Peak	
5	3.2055	15.90	9.86	25.76	56.00	-30.24	Peak	
6	9.9105	15.58	10.04	25.62	60.00	-34.38	Peak	

## APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)

Test Mode: TX Mode


Ant 0°

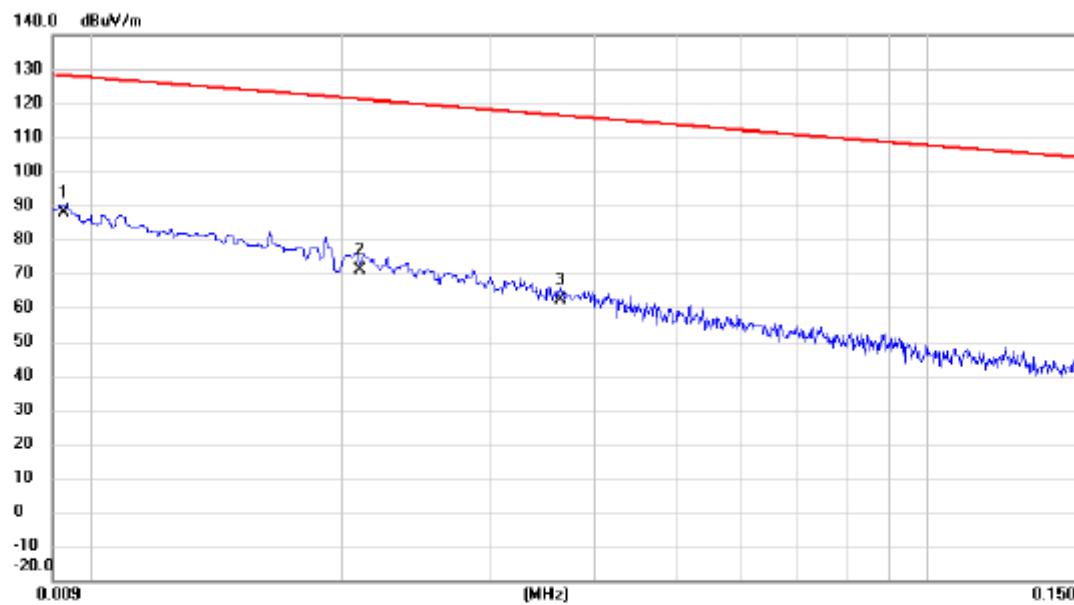

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0093	66.90	21.06	87.96	128.24	-40.28	AVG	
2		0.0210	51.26	19.59	70.85	121.16	-50.31	AVG	
3		0.0364	43.26	19.13	62.39	116.38	-53.99	AVG	

Test Mode: TX Mode


Ant 0°

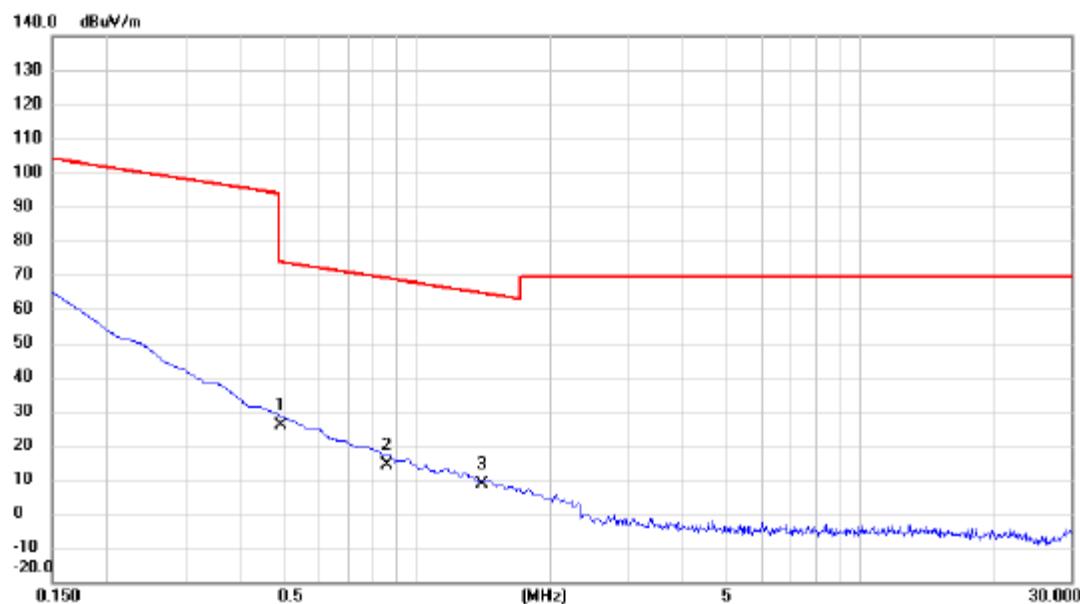

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.4941	9.34	16.47	25.81	73.73	-47.92	QP	
2		0.8573	-1.65	16.05	14.40	68.94	-54.54	QP	
3		1.4037	-7.07	15.74	8.67	64.66	-55.99	QP	

Test Mode: TX Mode


Ant 90°

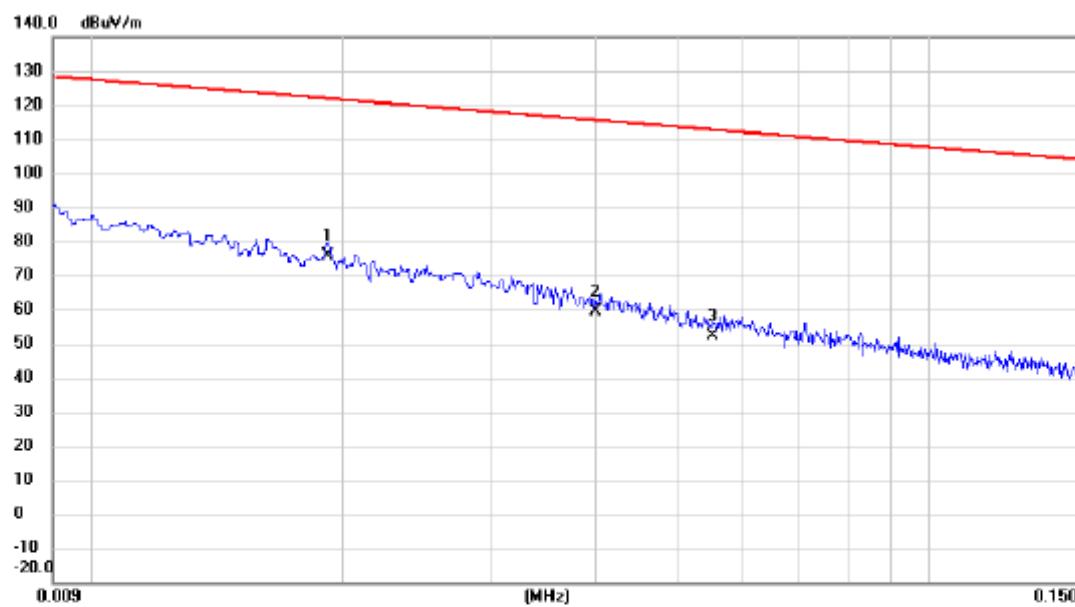

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1	*	0.0192	55.91	19.72	75.63	121.94	-46.31	AVG	
2		0.0400	40.57	19.02	59.59	115.56	-55.97	AVG	
3		0.0552	33.51	18.63	52.14	112.77	-60.63	AVG	

Test Mode: TX Mode

Ant 90°

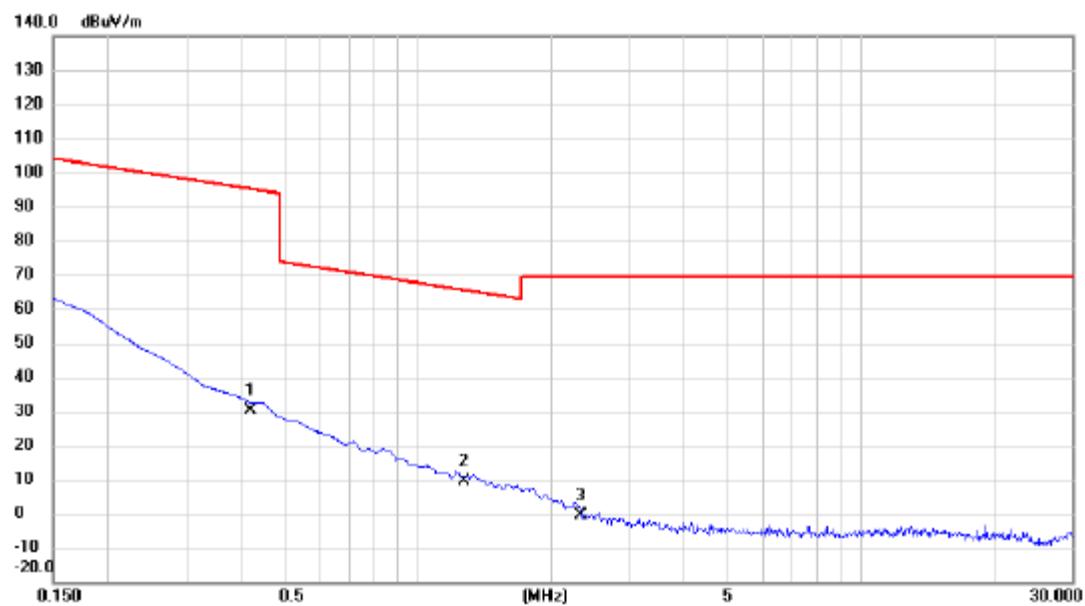


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.4187	13.52	16.54	30.06	95.17	-65.11	AVG
2	*	1.2694	-6.56	15.79	9.23	65.53	-56.30	QP
3		2.3291	-16.10	15.42	-0.68	69.54	-70.22	QP

**APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: TX 2402MHz\_CH00\_1Mbps

## Vertical


80 dBuV/m

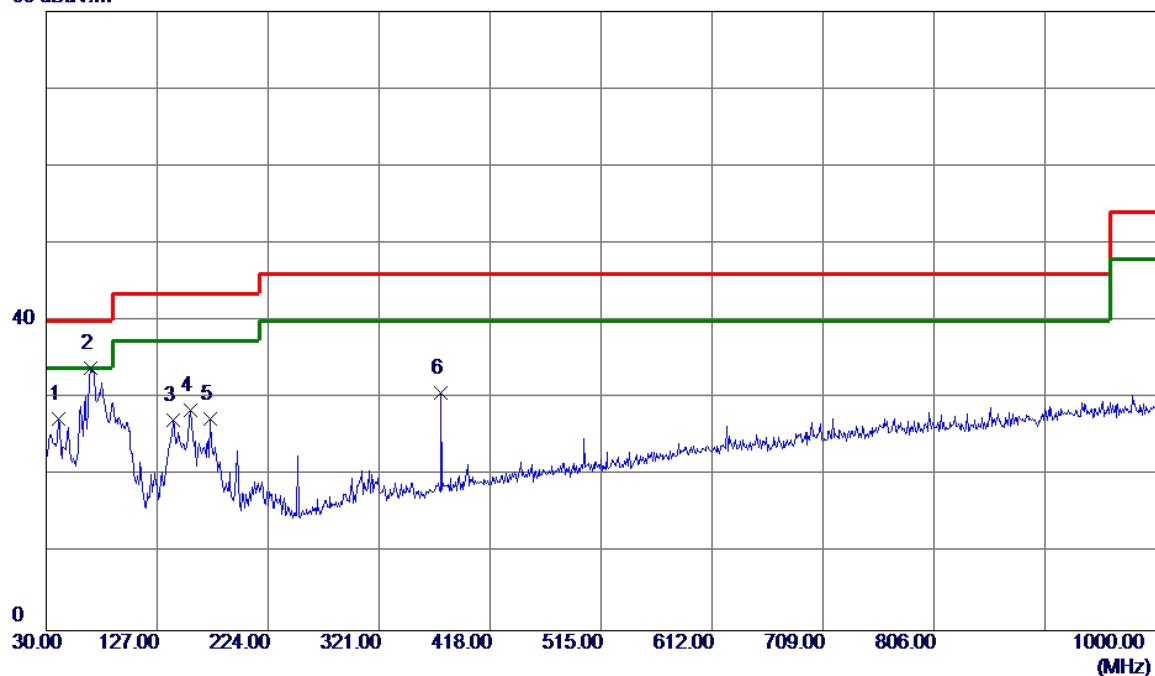

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment	
								Measurement	Margin
1	40.6699	41.20	-13.85	27.35	40.00	-12.65	Peak		
2 *	68.8000	50.11	-16.20	33.91	40.00	-6.09	Peak		
3	140.5800	41.32	-14.18	27.14	43.50	-16.36	Peak		
4	156.1000	41.70	-13.16	28.54	43.50	-14.96	Peak		
5	173.5600	39.63	-12.23	27.40	43.50	-16.10	Peak		
6	375.3200	42.44	-11.65	30.79	46.00	-15.21	Peak		


Test Mode: TX 2402MHz\_CH00\_1Mbps

## Horizontal

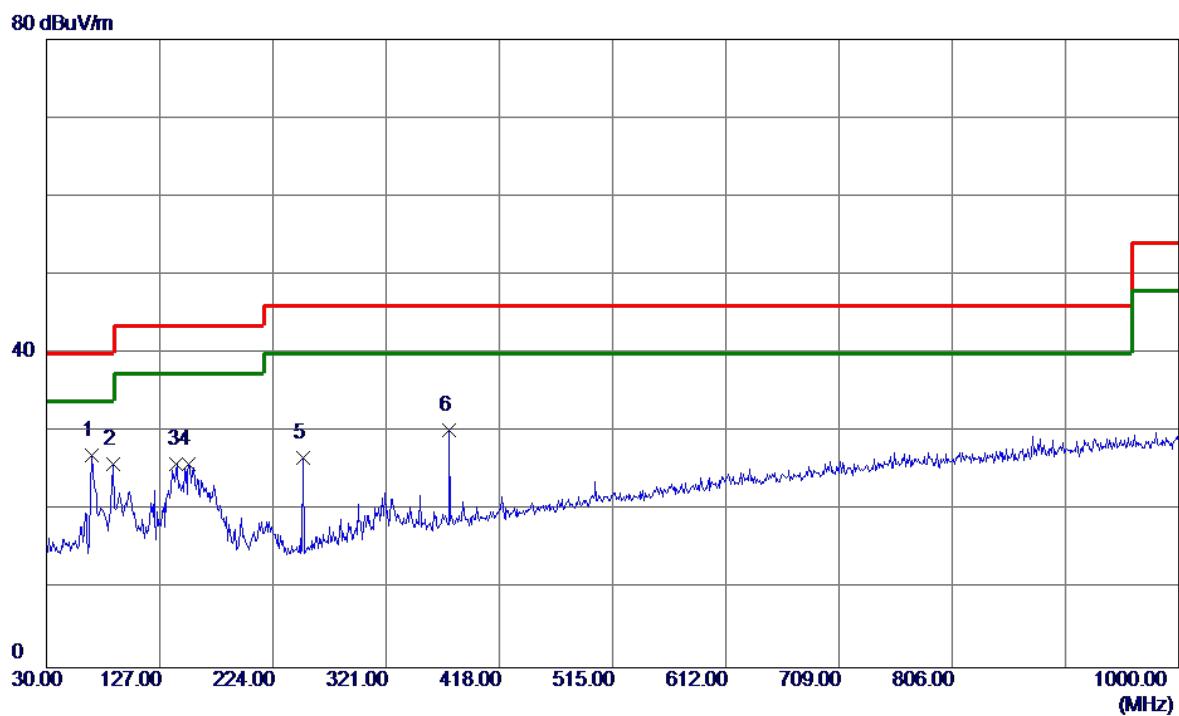

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	68.8000	43.29	-16.20	27.09	40.00	-12.91	Peak	
2	87.2300	44.39	-18.51	25.88	40.00	-14.12	Peak	
3	141.5500	40.06	-14.11	25.95	43.50	-17.55	Peak	
4	152.2200	39.24	-13.39	25.85	43.50	-17.65	Peak	
5	250.1900	41.66	-14.90	26.76	46.00	-19.24	Peak	
6	375.3200	41.95	-11.65	30.30	46.00	-15.70	Peak	


Test Mode: TX 2441MHz \_CH39\_1Mbps

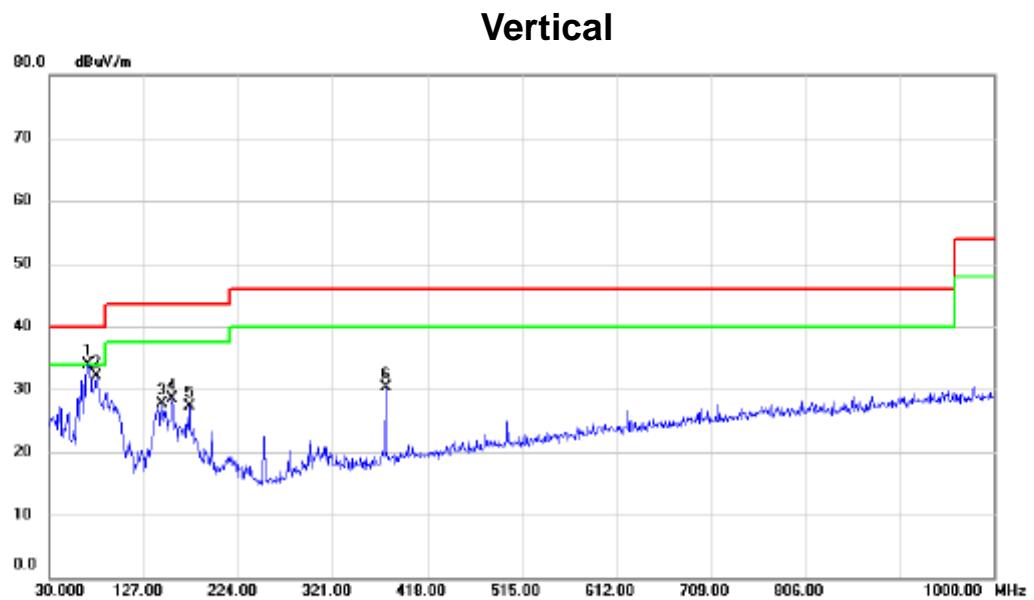

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment		dB	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	68.800	50.10	-16.19	33.91	40.00	-6.09	peak
2		78.500	49.95	-17.89	32.06	40.00	-7.94	peak
3		145.430	41.53	-13.83	27.70	43.50	-15.80	peak
4		156.100	41.70	-13.16	28.54	43.50	-14.96	peak
5		173.560	39.63	-12.23	27.40	43.50	-16.10	peak
6		375.320	41.94	-11.65	30.29	46.00	-15.71	peak

Test Mode: TX 2441MHz\_CH39\_1Mbps


## Horizontal

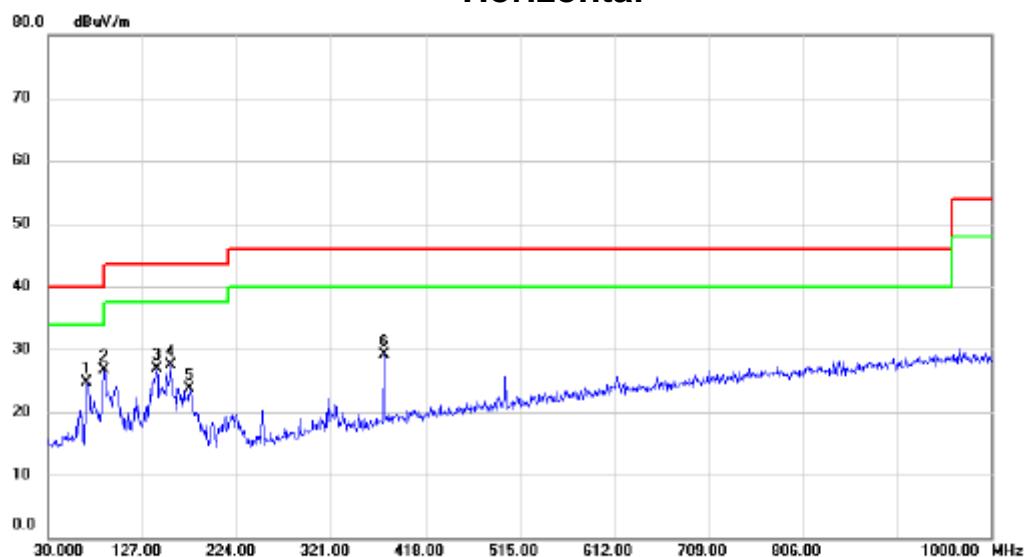

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		69.770	41.18	-16.46	24.72	40.00	-15.28	peak	
2 *		87.230	45.16	-18.51	26.65	40.00	-13.35	peak	
3		141.550	40.95	-14.11	26.84	43.50	-16.66	peak	
4		156.100	40.65	-13.16	27.49	43.50	-16.01	peak	
5		175.500	35.90	-12.18	23.72	43.50	-19.78	peak	
6		375.320	40.73	-11.65	29.08	46.00	-16.92	peak	

Test Mode: TX 2480MHz \_CH78\_1Mbps

## Vertical

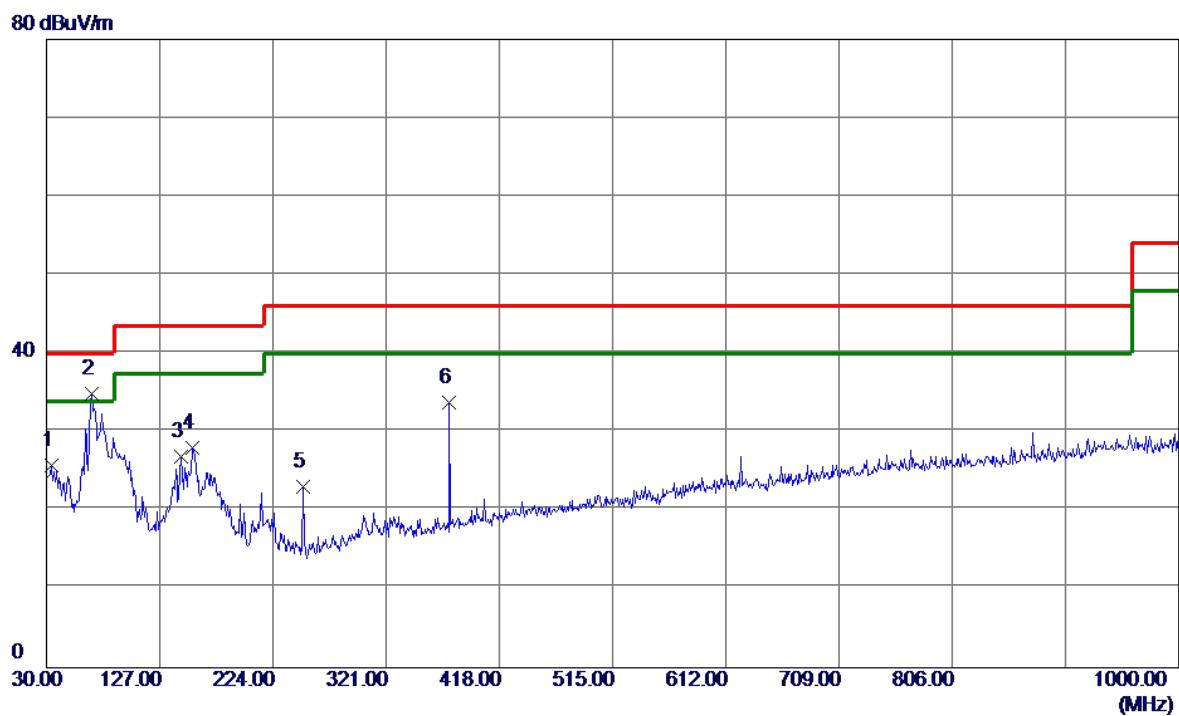


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin			Comment		
						MHz	dBuV/m	dB	dBuV/m	dB	Detector
1	33.8800	40.55	-14.73	25.82	40.00	-14.18	Peak				
2 *	68.8000	51.14	-16.20	34.94	40.00	-5.06	Peak				
3	145.4299	40.69	-13.84	26.85	43.50	-16.65	Peak				
4	155.1300	41.16	-13.22	27.94	43.50	-15.56	Peak				
5	250.1900	37.93	-14.90	23.03	46.00	-22.97	Peak				
6	375.3200	45.41	-11.65	33.76	46.00	-12.24	Peak				

Test Mode: TX 2480MHz\_CH78\_1Mbps

## Horizontal

80 dBuV/m

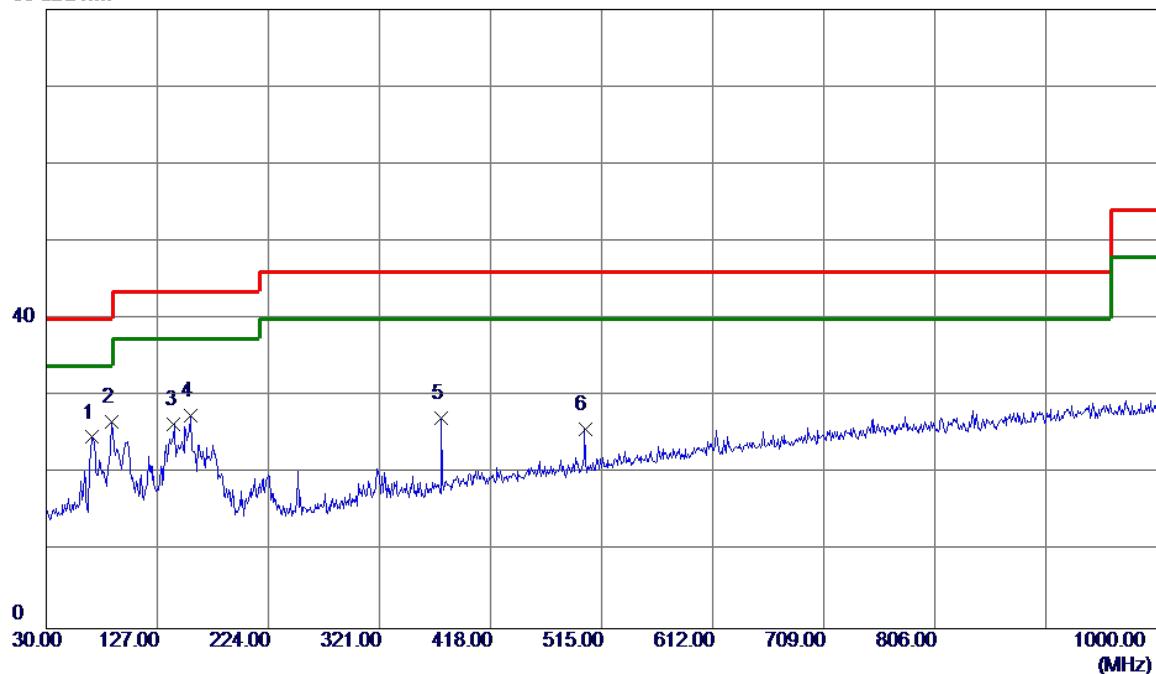


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	69.7699	41.18	-16.46	24.72	40.00	-15.28	Peak	
2 *	87.2300	45.16	-18.51	26.65	40.00	-13.35	Peak	
3	141.5500	40.57	-14.11	26.46	43.50	-17.04	Peak	
4	156.1000	40.65	-13.16	27.49	43.50	-16.01	Peak	
5	375.3200	38.83	-11.65	27.18	46.00	-18.82	Peak	
6	500.4500	34.42	-8.71	25.71	46.00	-20.29	Peak	

## APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode : TX 2402MHz \_CH00\_1Mbps


## Vertical

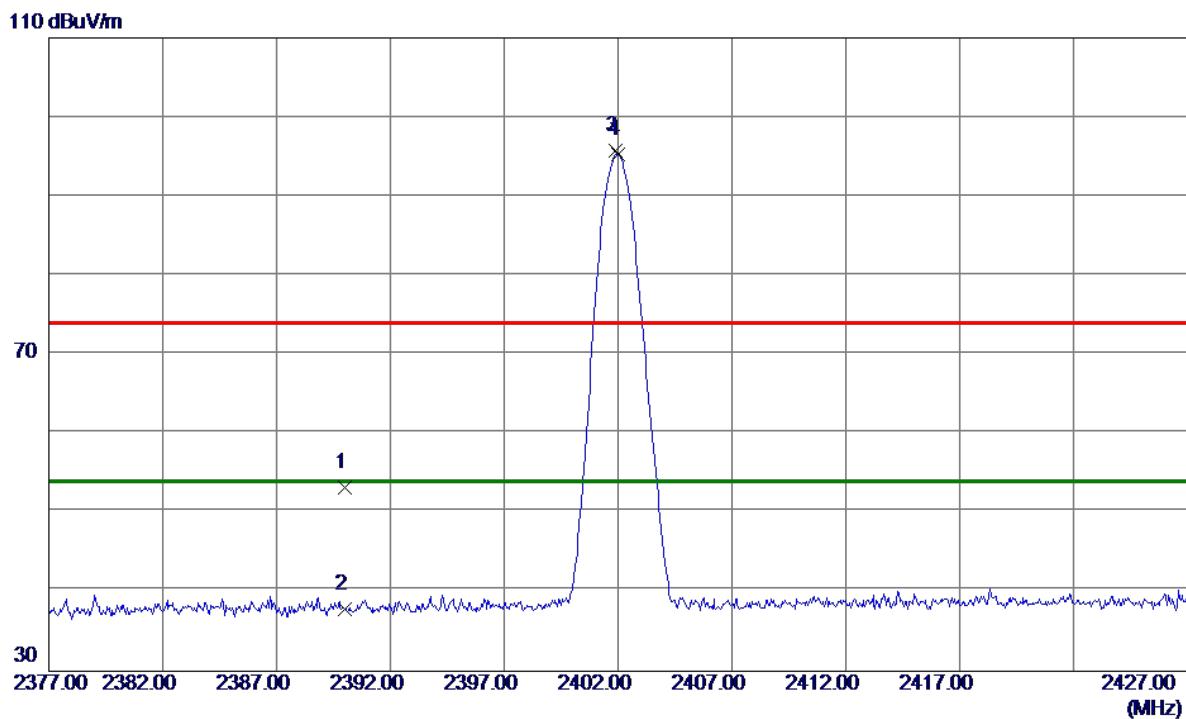

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2390.0000	20.10	33.06	53.16	74.00	-20.84	Peak	
2	2390.0000	4.74	33.06	37.80	54.00	-16.20	AVG	
3	2401.9000	62.69	33.10	95.79	74.00	21.79	Peak	No Limit
4 *	2402.0000	62.20	33.10	95.30	54.00	41.30	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps
-------------	------------------------

### Vertical

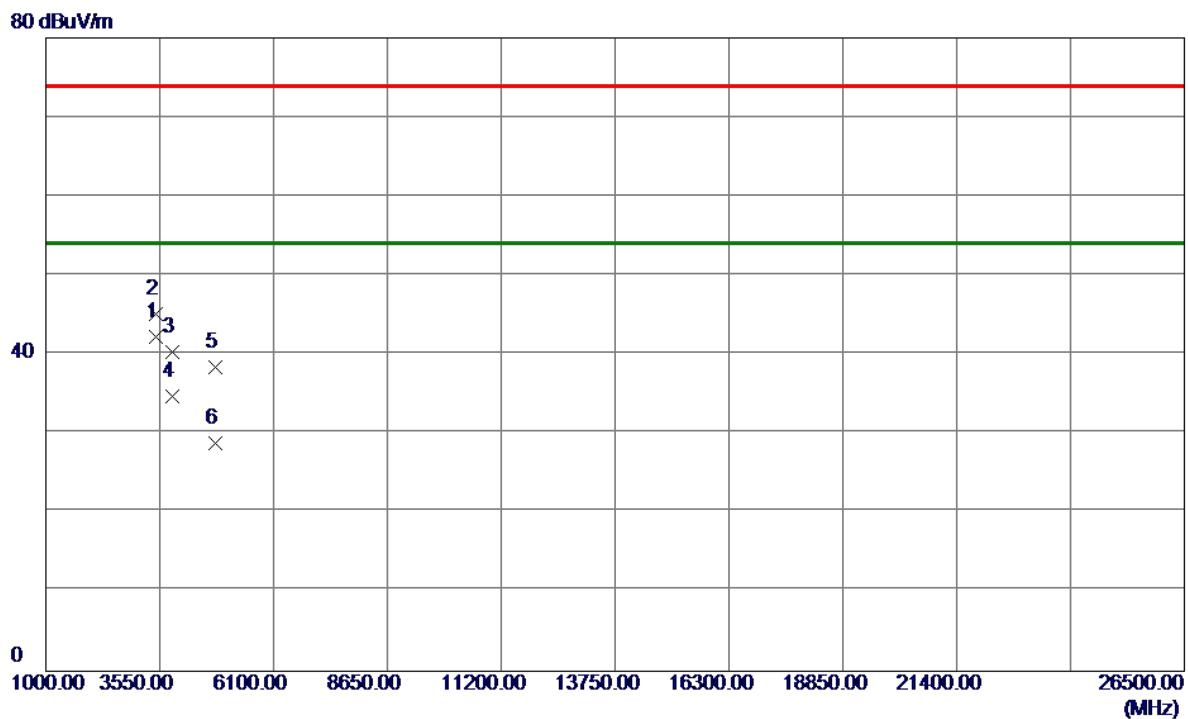


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	3453.3800	39.67	2.61	42.28	54.00	-11.72	AVG	
2	3453.5000	42.57	2.61	45.18	74.00	-28.82	Peak	
3	3843.0600	36.89	3.48	40.37	74.00	-33.63	Peak	
4	3843.1800	31.19	3.48	34.67	54.00	-19.33	AVG	
5	4804.2400	31.80	6.59	38.39	74.00	-35.61	Peak	
6	4804.3300	22.27	6.59	28.86	54.00	-25.14	AVG	

Test Mode : TX 2402MHz \_CH00\_1Mbps

## Horizontal


110 dBuV/m

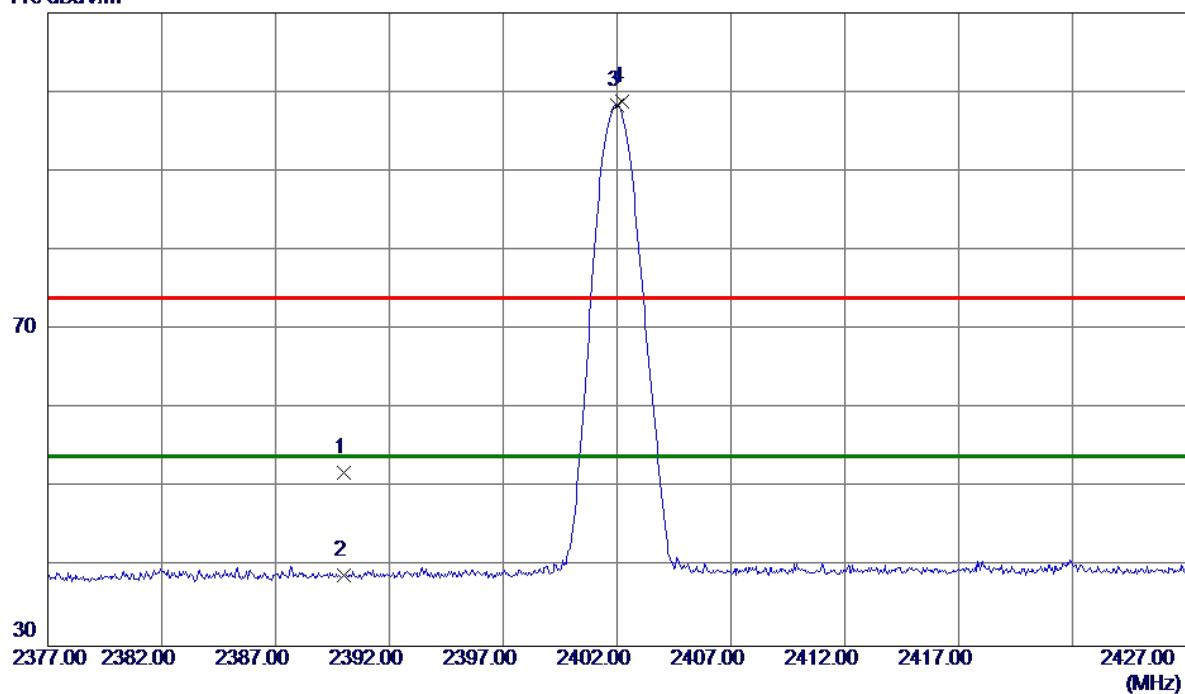

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2390.0000	18.81	33.06	51.87	74.00	-22.13	Peak		
2	2390.0000	5.92	33.06	38.98	54.00	-15.02	AVG		
3 *	2401.9750	65.27	33.10	98.37	54.00	44.37	AVG	No Limit	
4	2402.2250	65.70	33.10	98.80	74.00	24.80	Peak	No Limit	

Test Mode : TX 2402MHz \_CH00\_1Mbps

## Horizontal

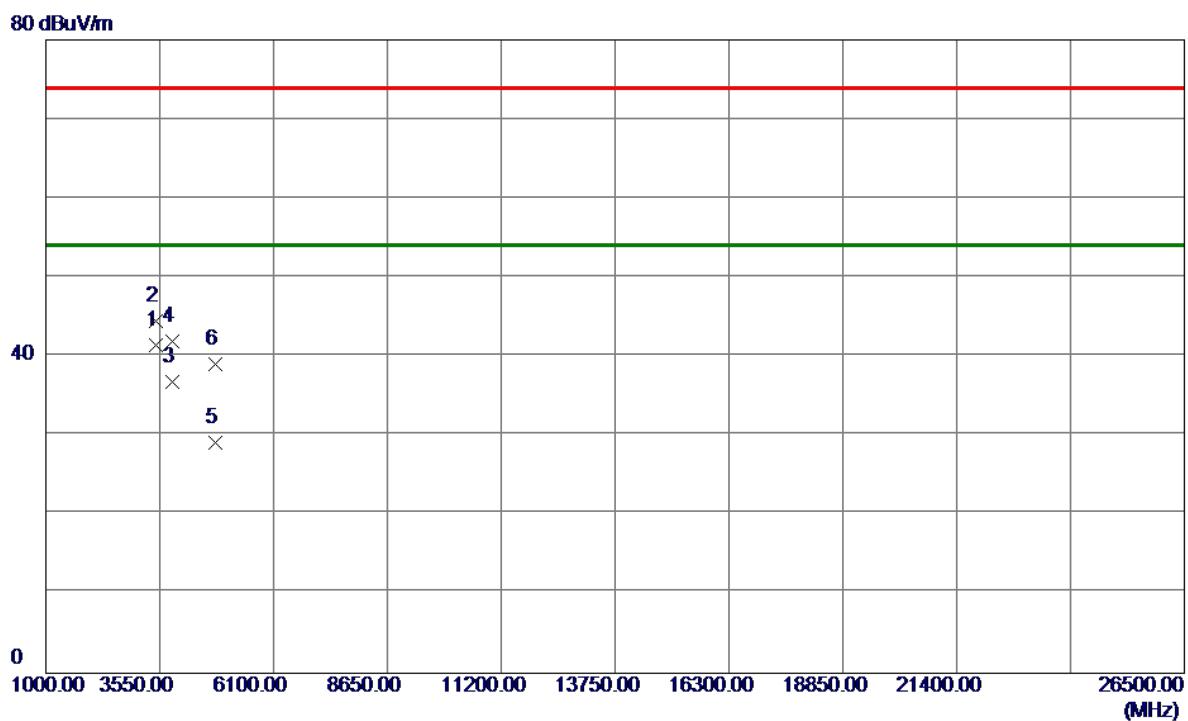


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin dB	Detector	Comment
1 *	3453.3100	38.78	2.61	41.39	54.00	-12.61	AVG	
2	3453.3300	41.86	2.61	44.47	74.00	-29.53	Peak	
3	3843.2200	33.31	3.48	36.79	54.00	-17.21	AVG	
4	3843.3500	38.43	3.48	41.91	74.00	-32.09	Peak	
5	4803.6200	22.55	6.58	29.13	54.00	-24.87	AVG	
6	4804.1300	32.45	6.59	39.04	74.00	-34.96	Peak	

Test Mode : TX 2441MHz \_CH39\_1Mbps

## Vertical


110 dBuV/m

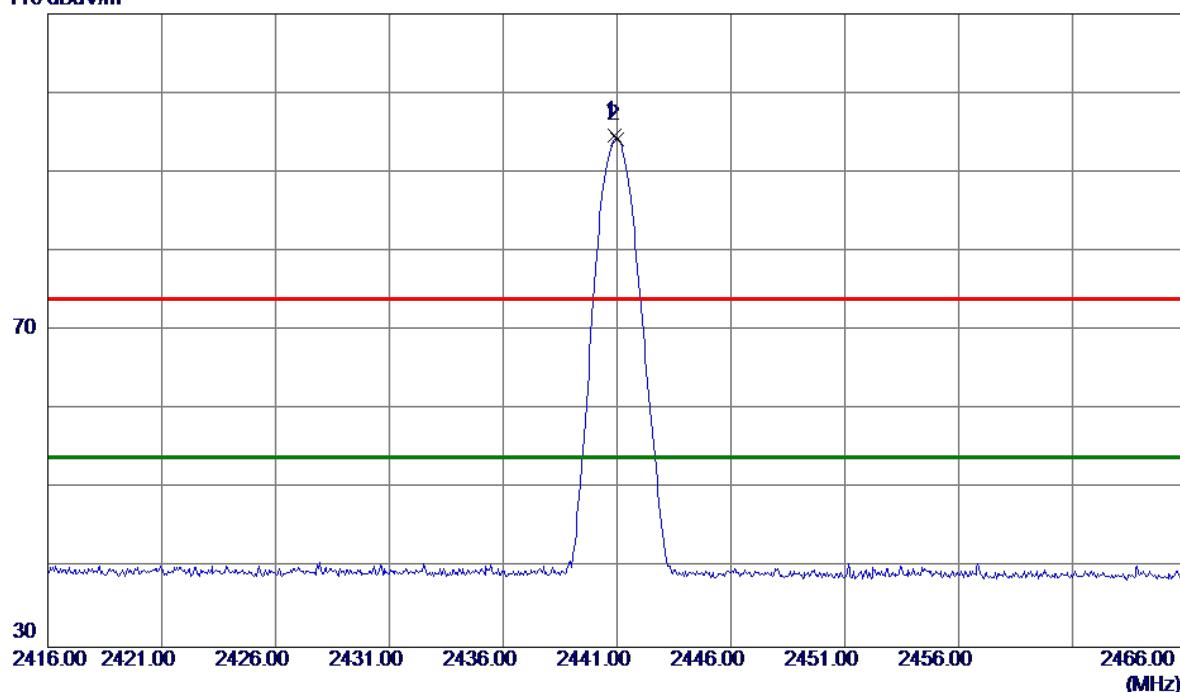

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.9000	61.43	33.25	94.68	74.00	20.68	Peak	No Limit
2 *	2440.9750	60.91	33.25	94.16	54.00	40.16	AVG	No Limit

Test Mode :	TX 2441MHz _CH39_1Mbps
-------------	------------------------


### Vertical

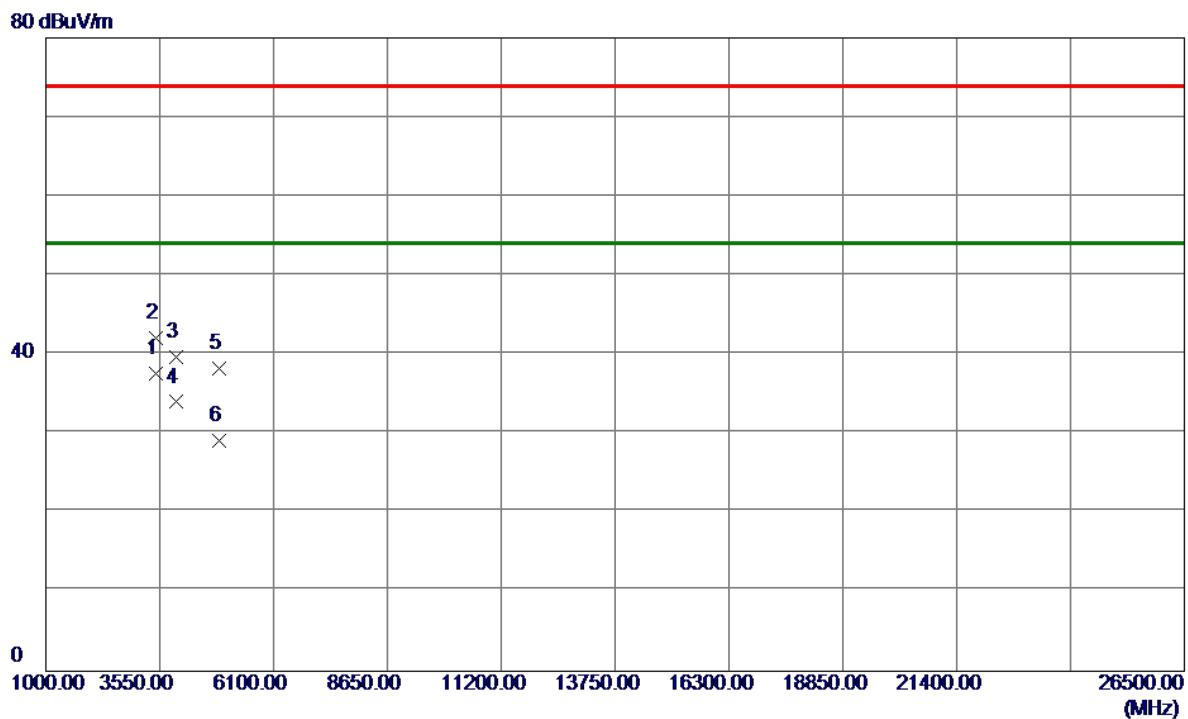

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	3453.3400	34.96	2.61	37.57	54.00	-16.43	AVG	
2	3453.3700	39.41	2.61	42.02	74.00	-31.98	Peak	
3	3905.2700	36.12	3.62	39.74	74.00	-34.26	Peak	
4	3905.6800	30.38	3.62	34.00	54.00	-20.00	AVG	
5	4882.1100	31.35	6.87	38.22	74.00	-35.78	Peak	
6	4882.4600	22.26	6.87	29.13	54.00	-24.87	AVG	

Test Mode : TX 2441MHz \_CH39\_1Mbps


## Horizontal

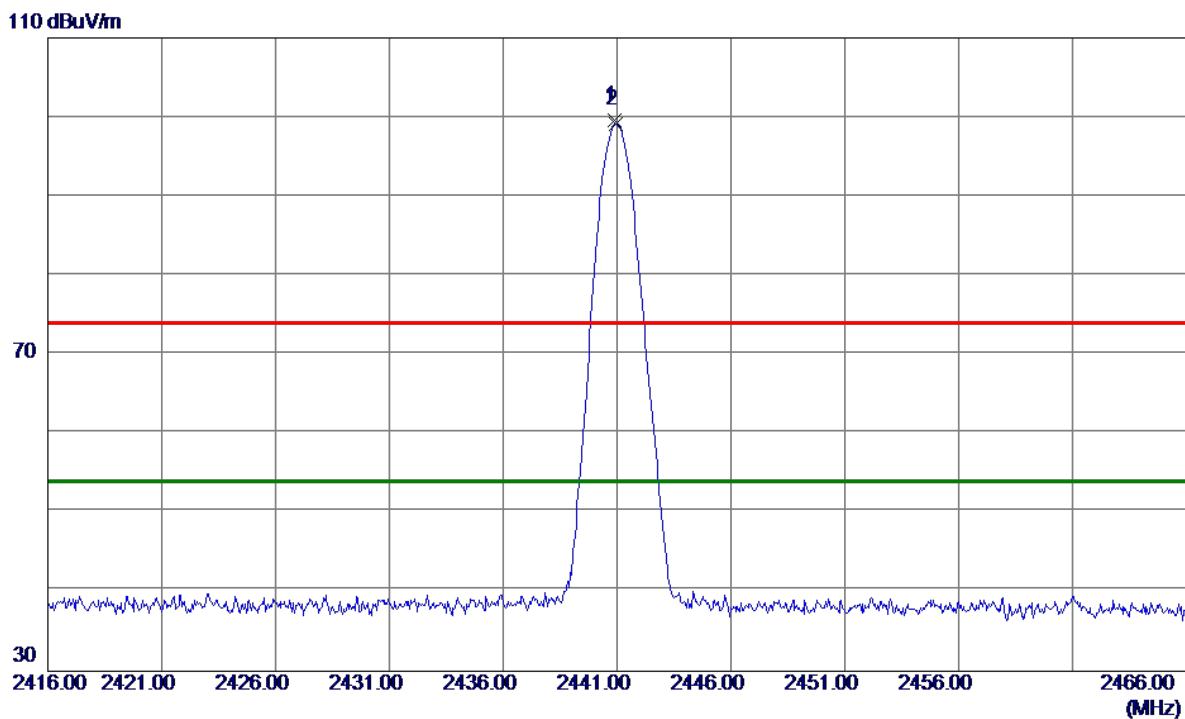

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit Margin			Detector	Comment
					MHz	dBuV/m	dB		
1	2440.9000	66.42	33.25	99.67	74.00	25.67	Peak		No Limit
2 *	2440.9500	65.92	33.25	99.17	54.00	45.17	AVG		No Limit

Test Mode : TX 2441MHz CH39 1Mbps

## Horizontal

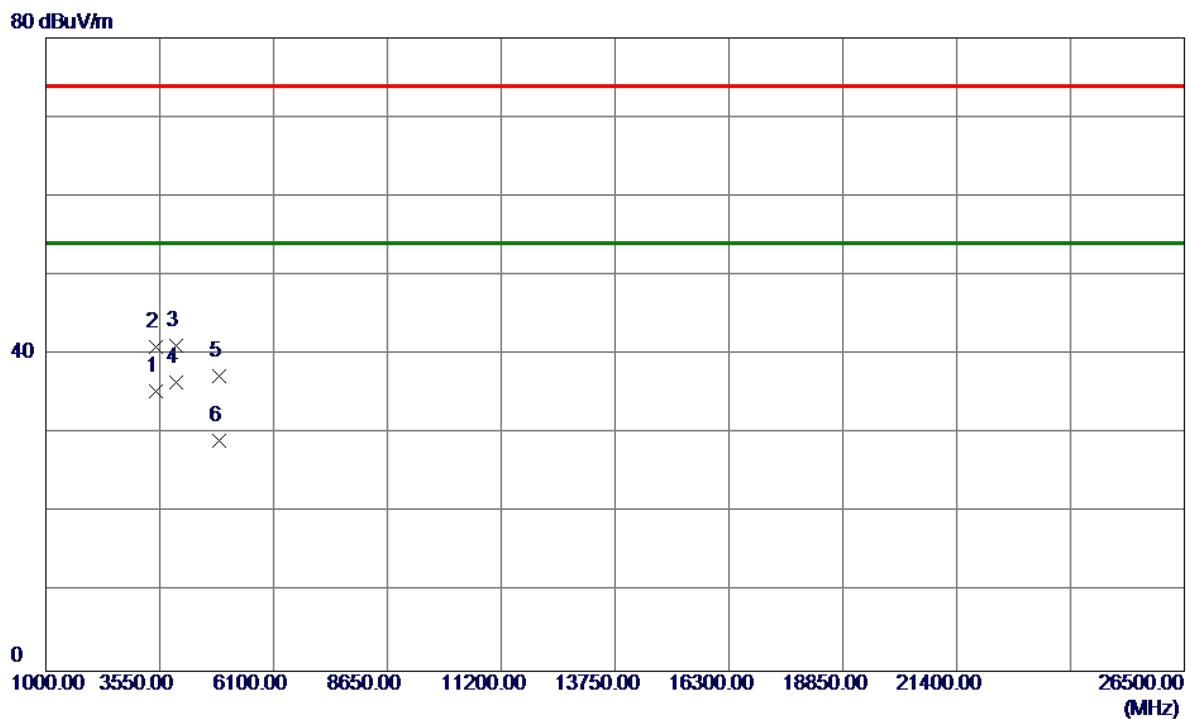


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit Margin		Detector	Comment
					MHz	dBuV/m	dB	dBuV/m
1	3453.3500	32.78	2.61	35.39	54.00	-18.61	AVG	
2	3453.5300	38.38	2.61	40.99	74.00	-33.01	Peak	
3	3905.5900	37.46	3.62	41.08	74.00	-32.92	Peak	
4 *	3905.6600	32.93	3.62	36.55	54.00	-17.45	AVG	
5	4881.7700	30.37	6.87	37.24	74.00	-36.76	Peak	
6	4881.9300	22.21	6.87	29.08	54.00	-24.92	AVG	

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Vertical


110 dBuV/m

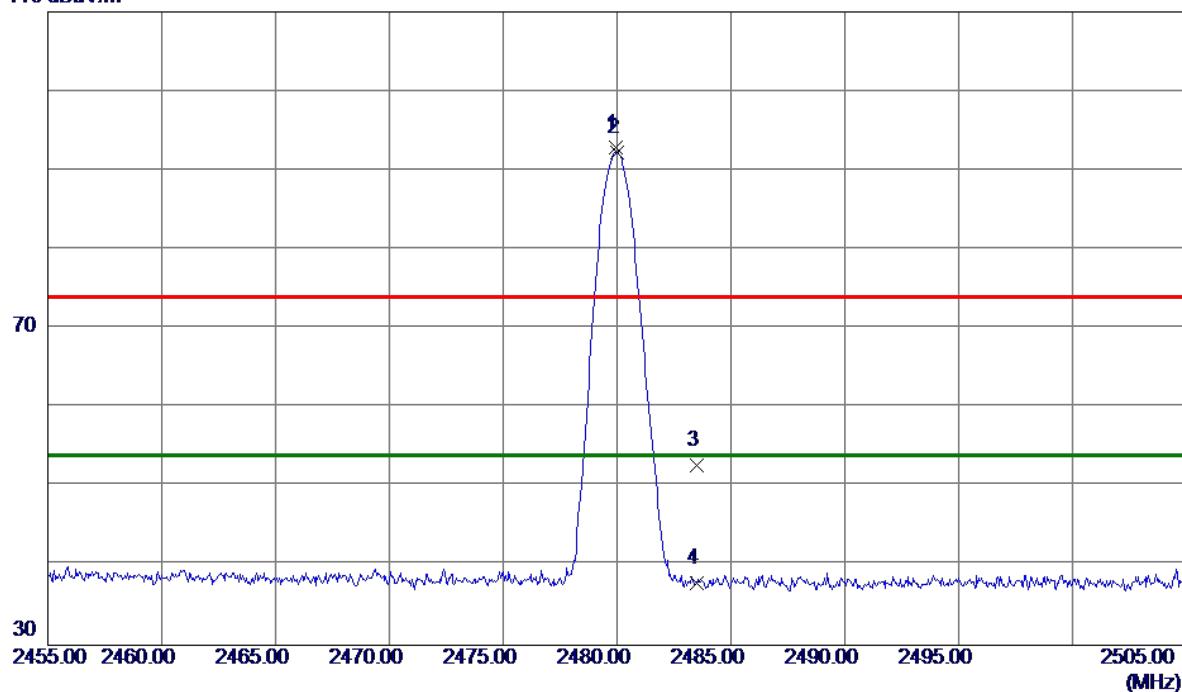

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin	Detector	Comment
1	2479.9250	59.41	33.39	92.80	74.00	18.80	Peak	No Limit
2 *	2479.9750	58.87	33.39	92.26	54.00	38.26	AVG	No Limit
3	2483.5000	19.27	33.41	52.68	74.00	-21.32	Peak	
4	2483.5000	4.47	33.41	37.88	54.00	-16.12	AVG	

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Vertical

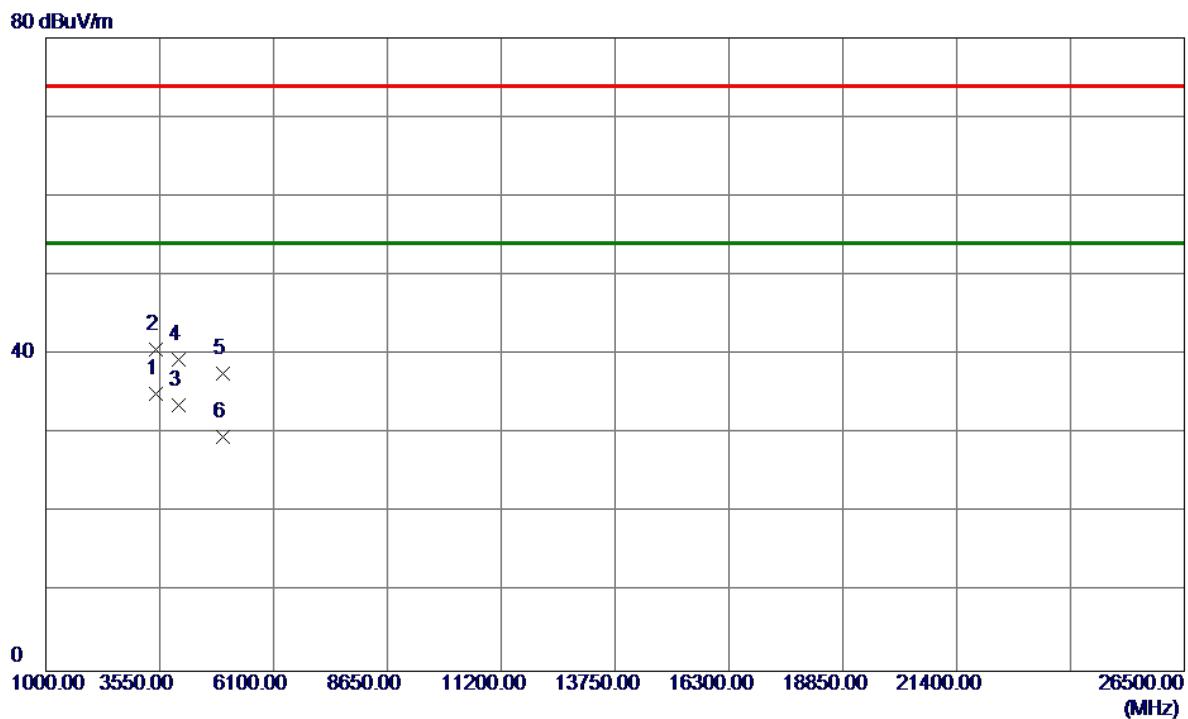


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit Margin		Detector	Comment
					MHz	dBuV/m	dB	dBuV/m
1 *	3453.3500	32.45	2.61	35.06	54.00	-18.94	AVG	
2	3453.3900	38.08	2.61	40.69	74.00	-33.31	Peak	
3	3968.0200	29.84	3.76	33.60	54.00	-20.40	AVG	
4	3968.1800	35.56	3.76	39.32	74.00	-34.68	Peak	
5	4960.3800	30.43	7.15	37.58	74.00	-36.42	Peak	
6	4960.9700	22.42	7.15	29.57	54.00	-24.43	AVG	

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Horizontal


110 dBuV/m

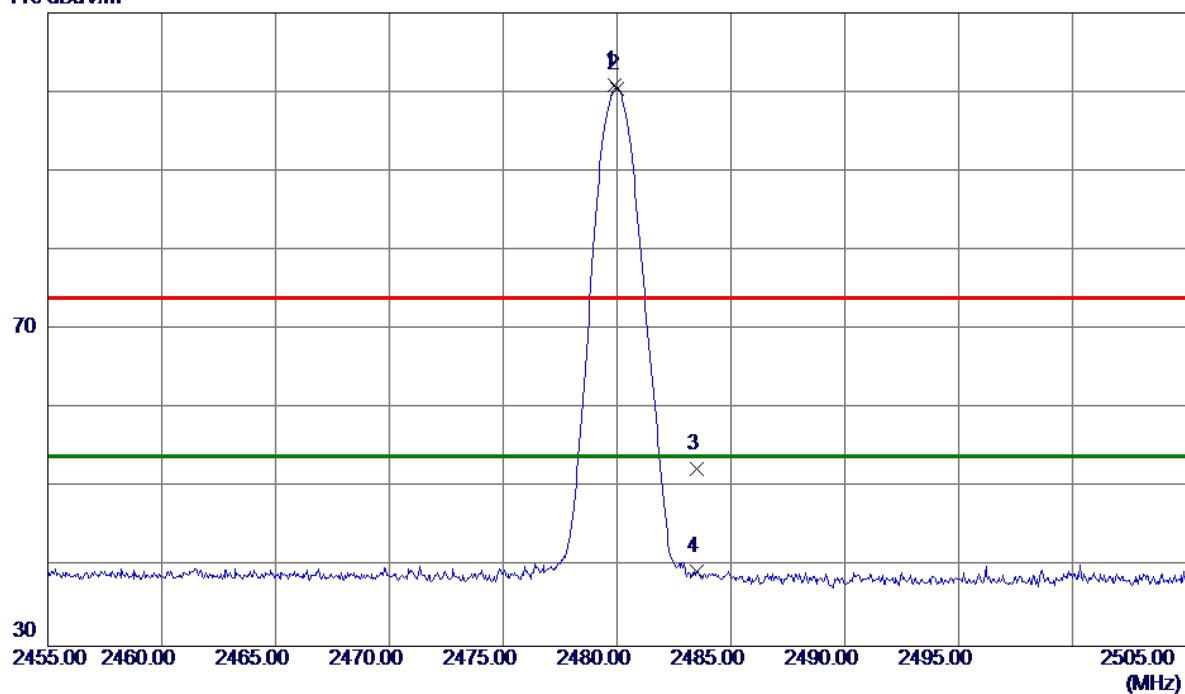

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2479.9000	67.52	33.39	100.91	74.00	26.91	Peak	No Limit
2 *	2479.9750	67.04	33.39	100.43	54.00	46.43	AVG	No Limit
3	2483.5000	19.02	33.41	52.43	74.00	-21.57	Peak	
4	2483.5000	5.98	33.41	39.39	54.00	-14.61	AVG	

Test Mode : TX 2480MHz CH78 1Mbps

## Horizontal

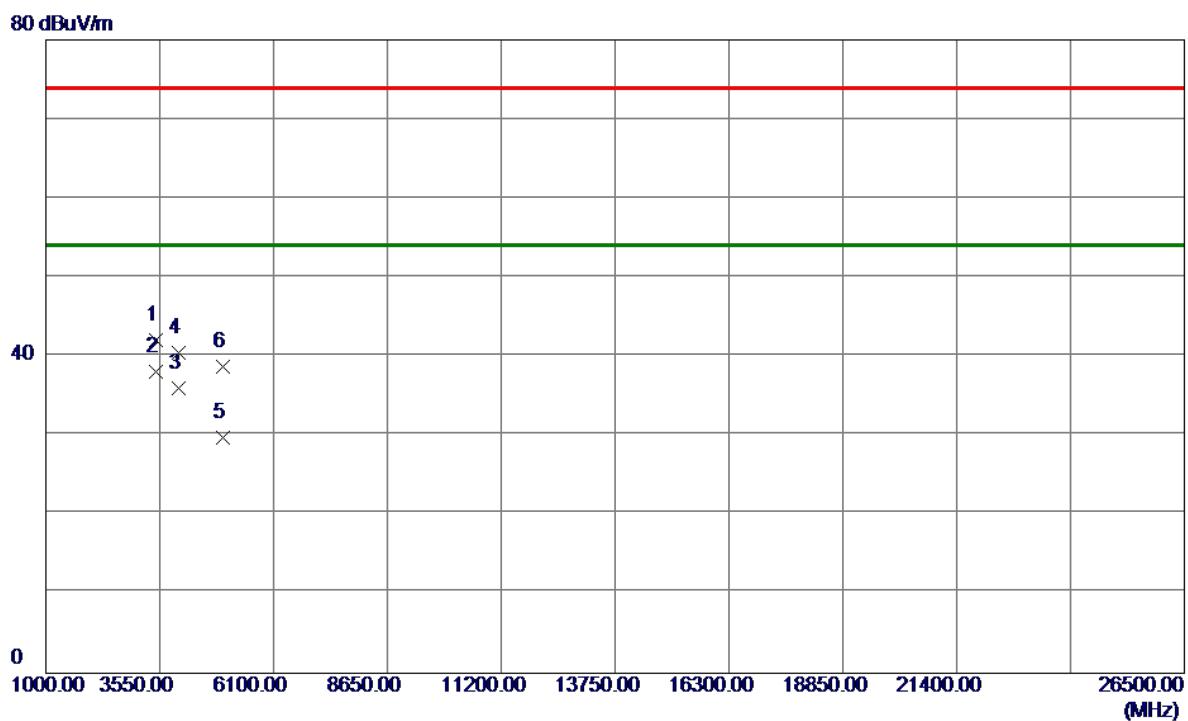


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit Margin			Detector	Comment
					MHz	dBuV/m	dB		
1	3453.1300	39.52	2.61	42.13	74.00	-31.87	Peak		
2 *	3453.3300	35.54	2.61	38.15	54.00	-15.85	AVG		
3	3968.0400	32.30	3.76	36.06	54.00	-17.94	AVG		
4	3968.3400	36.67	3.76	40.43	74.00	-33.57	Peak		
5	4960.5500	22.64	7.15	29.79	54.00	-24.21	AVG		
6	4960.6300	31.54	7.15	38.69	74.00	-35.31	Peak		

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Vertical


110 dBuV/m

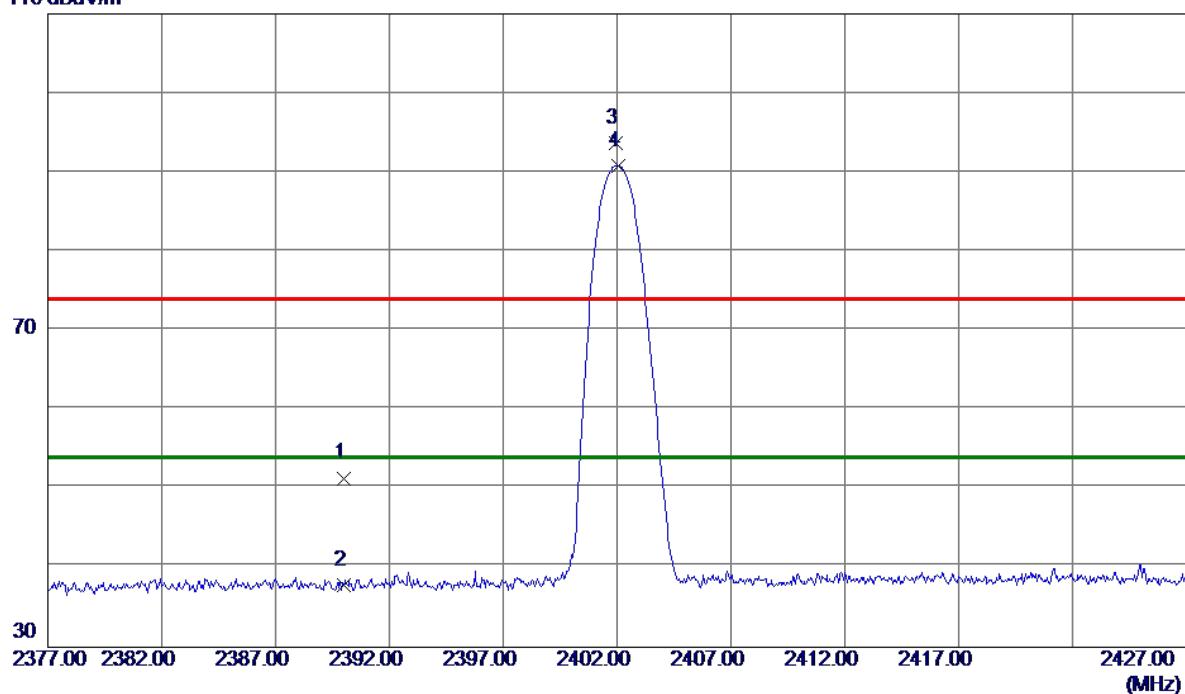

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	18.30	33.06	51.36	74.00	-22.64	Peak	
2	2390.0000	4.77	33.06	37.83	54.00	-16.17	AVG	
3	2401.9250	60.56	33.10	93.66	74.00	19.66	Peak	No Limit
4 *	2402.0500	57.72	33.10	90.82	54.00	36.82	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_3Mbps
-------------	------------------------

### Vertical

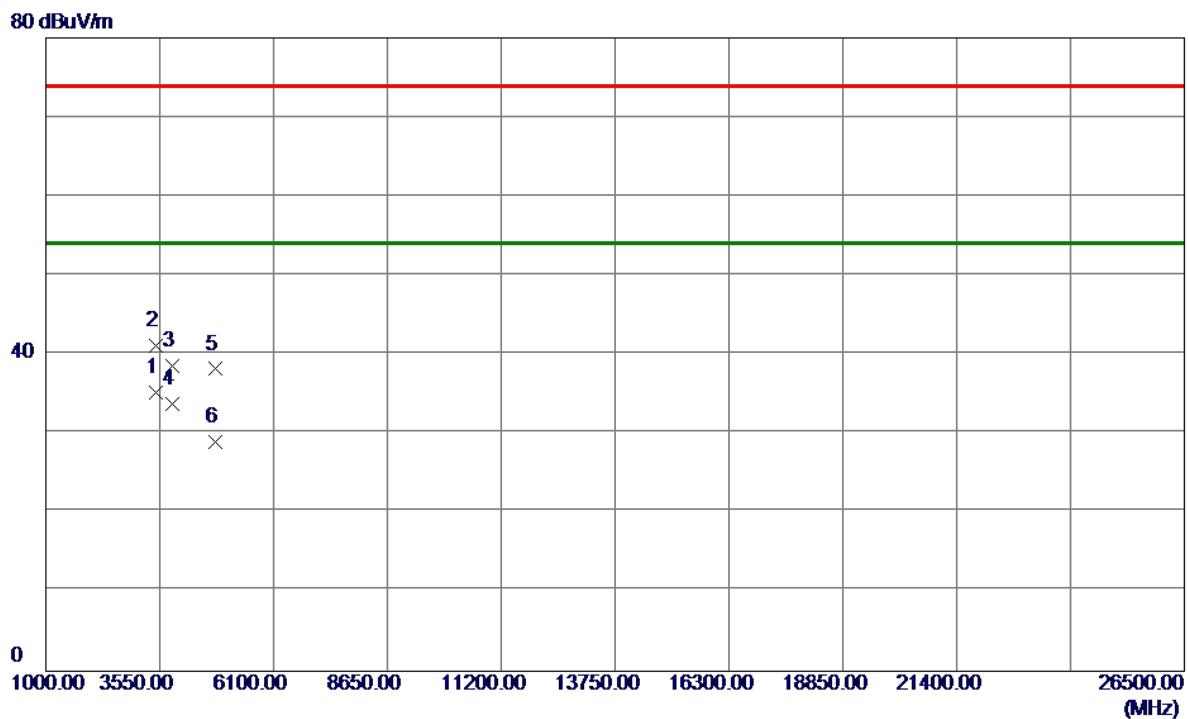


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	3453.3300	32.52	2.61	35.13	54.00	-18.87	AVG	
2	3453.3600	38.57	2.61	41.18	74.00	-32.82	Peak	
3	3842.8000	35.05	3.48	38.53	74.00	-35.47	Peak	
4	3843.2400	30.29	3.48	33.77	54.00	-20.23	AVG	
5	4803.9049	31.57	6.59	38.16	74.00	-35.84	Peak	
6	4803.9300	22.37	6.59	28.96	54.00	-25.04	AVG	

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Horizontal


110 dBuV/m

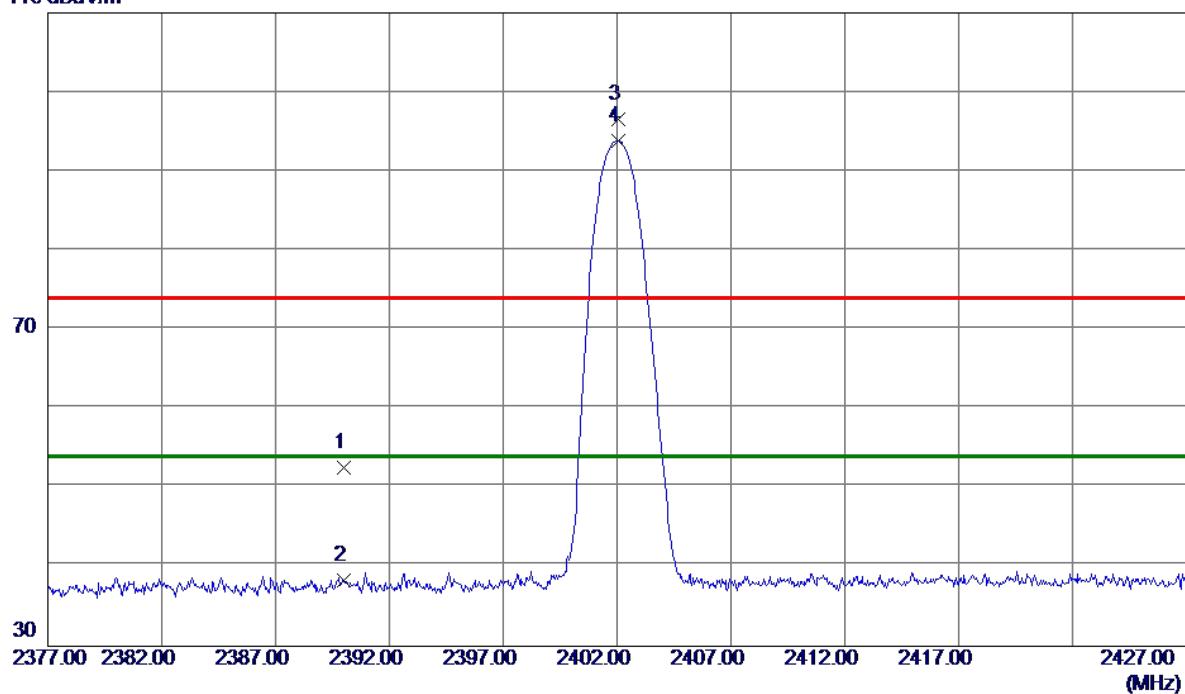

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dB			
1	2390.0000	19.55	33.06	52.61	74.00	-21.39	Peak	
2	2390.0000	5.29	33.06	38.35	54.00	-15.65	AVG	
3	2402.0500	63.50	33.10	96.60	74.00	22.60	Peak	No Limit
4 *	2402.0500	60.69	33.10	93.79	54.00	39.79	AVG	No Limit

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Horizontal

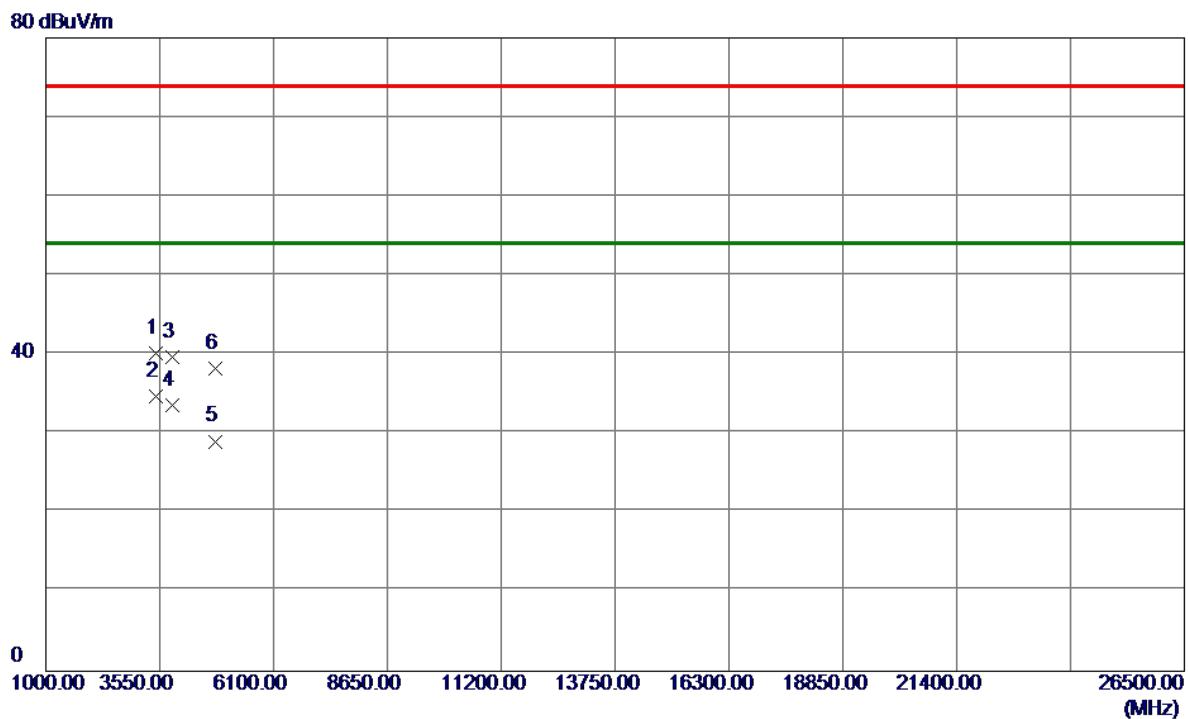


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit Margin		Detector	Comment
					MHz	dBuV/m	dB	dBuV/m
1	3453.1300	37.49	2.61	40.10	74.00	-33.90	Peak	
2 *	3453.3300	32.14	2.61	34.75	54.00	-19.25	AVG	
3	3841.9700	36.16	3.48	39.64	74.00	-34.36	Peak	
4	3842.0800	30.14	3.48	33.62	54.00	-20.38	AVG	
5	4804.1800	22.45	6.59	29.04	54.00	-24.96	AVG	
6	4804.3500	31.67	6.59	38.26	74.00	-35.74	Peak	

Test Mode : TX 2441MHz \_CH39\_3Mbps

## Vertical


110 dBuV/m

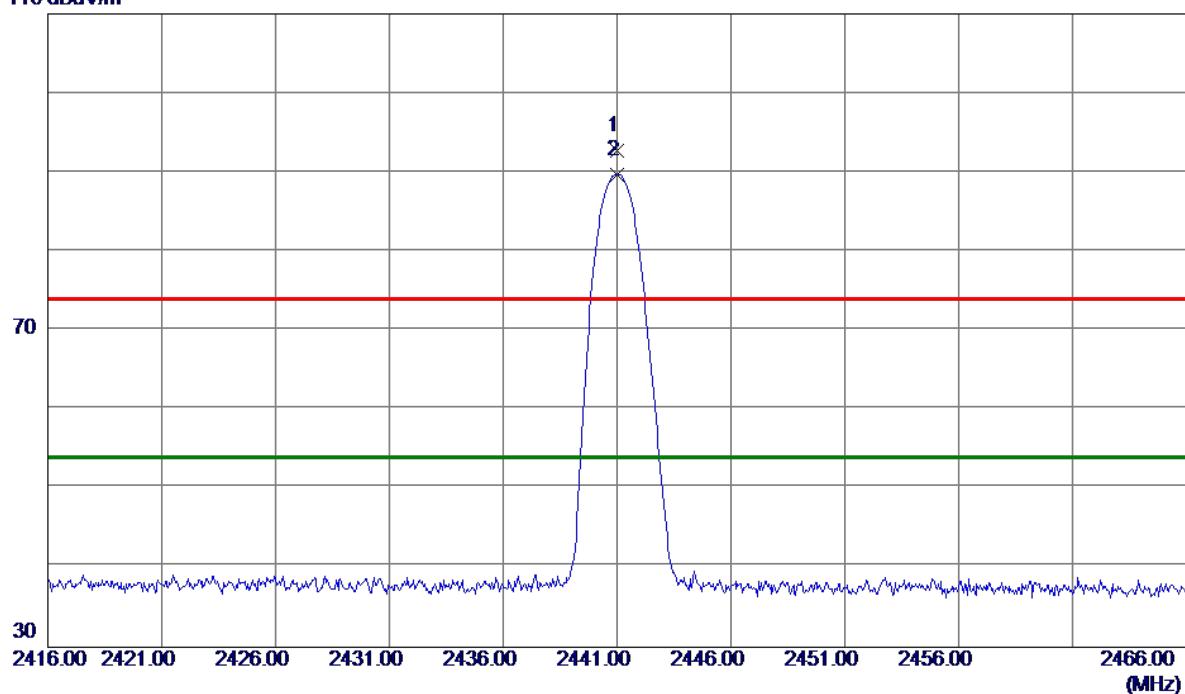

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2441.0000	59.41	33.25	92.66	74.00	18.66	Peak	No Limit
2 *	2441.0250	56.50	33.25	89.75	54.00	35.75	AVG	No Limit

Test Mode :	TX 2441MHz _CH39_3Mbps
-------------	------------------------

### Vertical

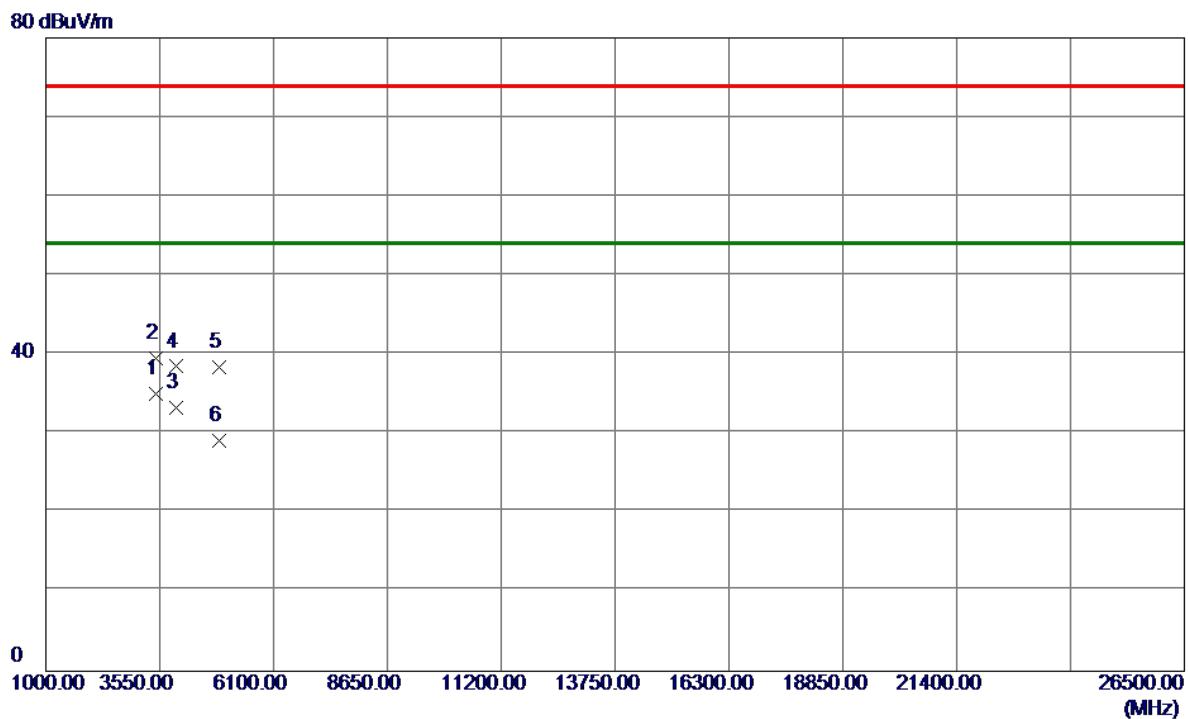


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	3453.3300	32.46	2.61	35.07	54.00	-18.93	AVG	
2	3453.7900	36.84	2.61	39.45	74.00	-34.55	Peak	
3	3905.6300	29.66	3.62	33.28	54.00	-20.72	AVG	
4	3905.9700	34.86	3.62	38.48	74.00	-35.52	Peak	
5	4881.6400	31.56	6.86	38.42	74.00	-35.58	Peak	
6	4882.3600	22.20	6.87	29.07	54.00	-24.93	AVG	

Test Mode : TX 2441MHz \_CH39\_3Mbps

## Horizontal


110 dBuV/m

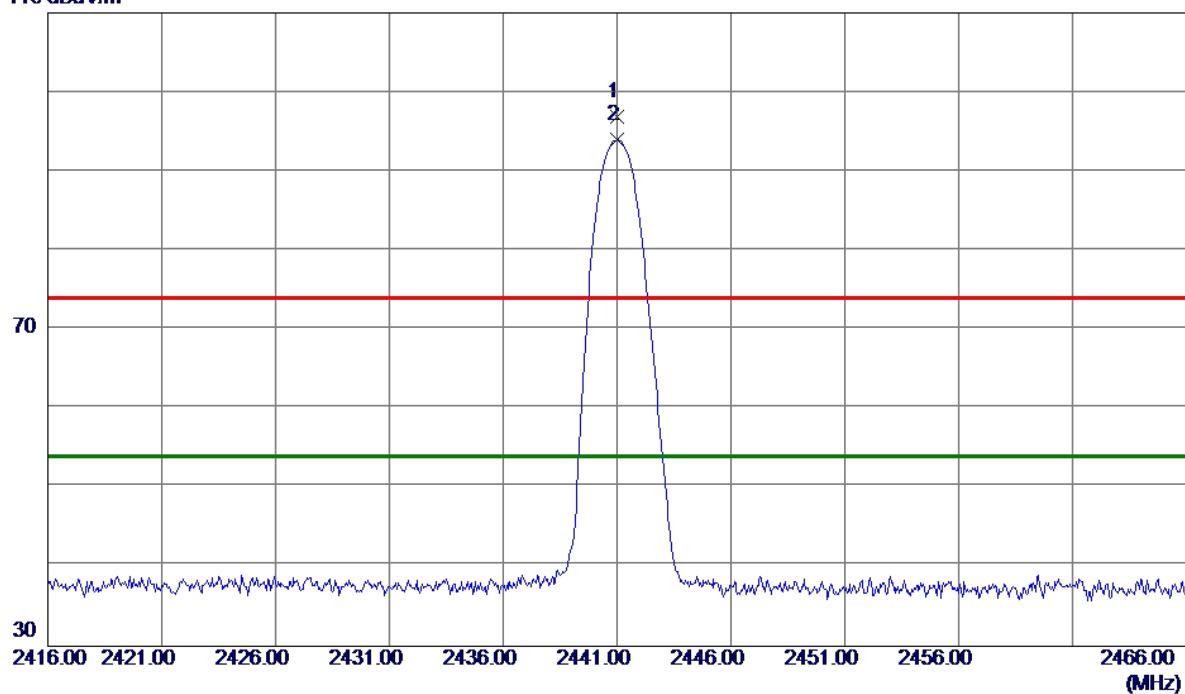

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB	Detector		
1	2440.9750	63.60	33.25	96.85	74.00	22.85	Peak	No Limit
2 *	2441.0000	60.68	33.25	93.93	54.00	39.93	AVG	No Limit

Test Mode : TX 2441MHz CH39 3Mbps

## Horizontal

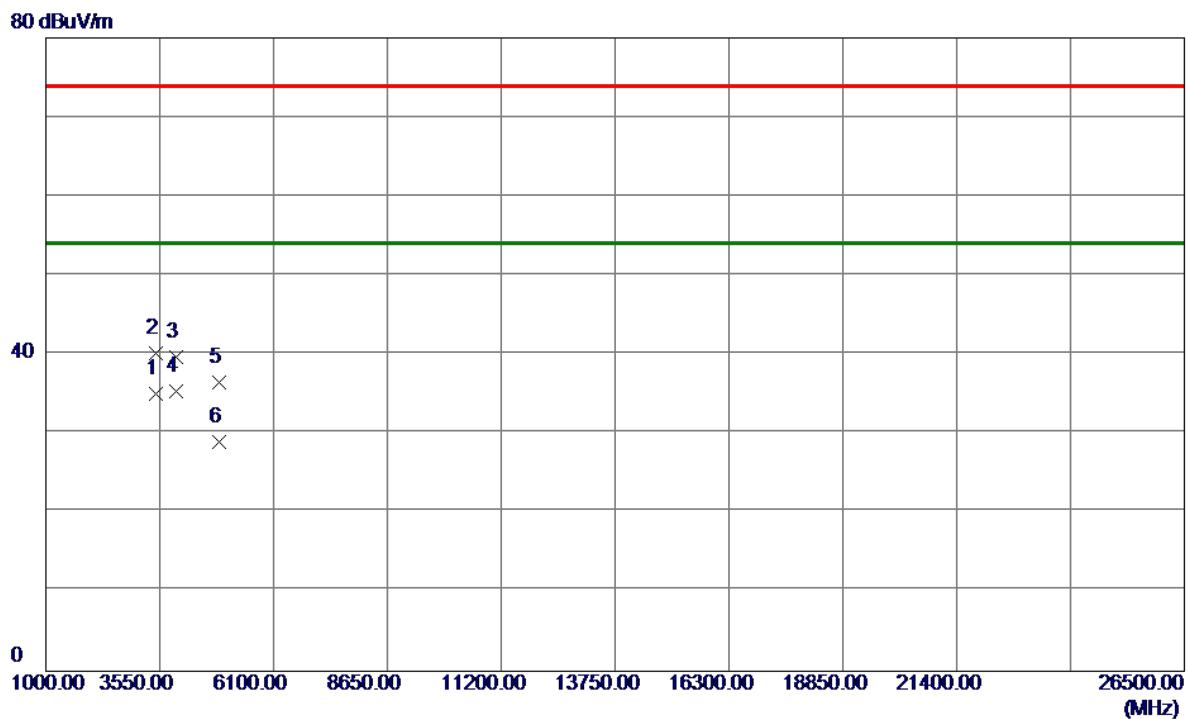


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit Margin		Detector	Comment
					MHz	dBuV/m	dB	dBuV/m
1	3453.3800	32.36	2.61	34.97	54.00	-19.03	AVG	
2	3453.5300	37.56	2.61	40.17	74.00	-33.83	Peak	
3	3905.6200	36.11	3.62	39.73	74.00	-34.27	Peak	
4 *	3905.6800	31.75	3.62	35.37	54.00	-18.63	AVG	
5	4881.8800	29.65	6.87	36.52	74.00	-37.48	Peak	
6	4882.3400	22.16	6.87	29.03	54.00	-24.97	AVG	

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Vertical


110 dBuV/m

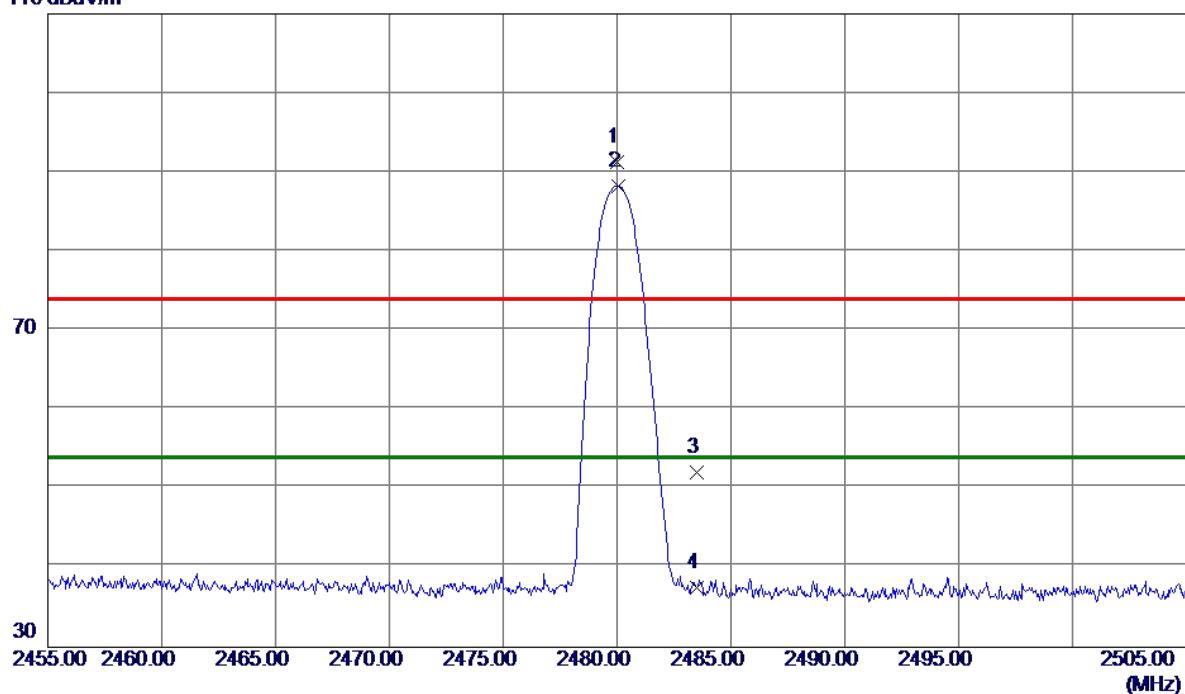

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dB	Detector	Comment
1	2480.0000	57.83	33.39	91.22	74.00	17.22	Peak No Limit
2 *	2480.0500	54.87	33.39	88.26	54.00	34.26	AVG No Limit
3	2483.5000	18.73	33.41	52.14	74.00	-21.86	Peak
4	2483.5000	4.09	33.41	37.50	54.00	-16.50	AVG

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Vertical

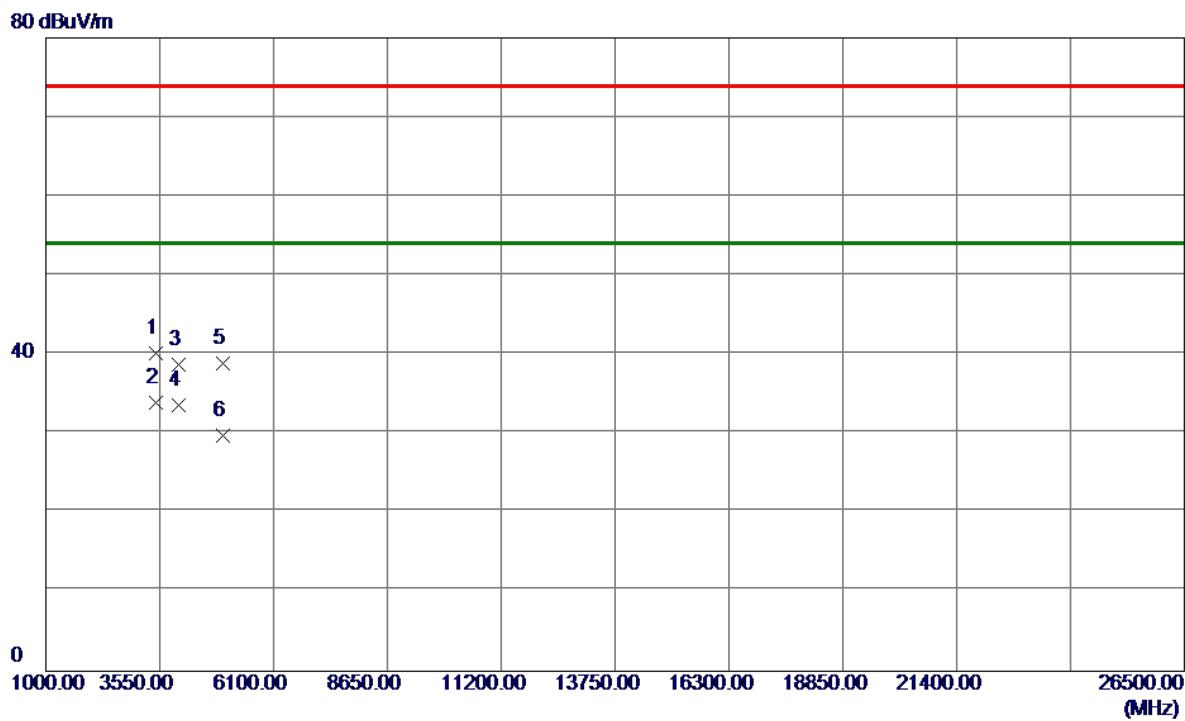


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit Margin		Detector	Comment
					MHz	dBuV/m	dB	dBuV/m
1	3453.3500	37.60	2.61	40.21	74.00	-33.79	Peak	
2 *	3453.3500	31.37	2.61	33.98	54.00	-20.02	AVG	
3	3968.0100	34.91	3.76	38.67	74.00	-35.33	Peak	
4	3968.0500	29.84	3.76	33.60	54.00	-20.40	AVG	
5	4959.7100	31.73	7.15	38.88	74.00	-35.12	Peak	
6	4959.7400	22.59	7.15	29.74	54.00	-24.26	AVG	

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Horizontal


110 dBuV/m

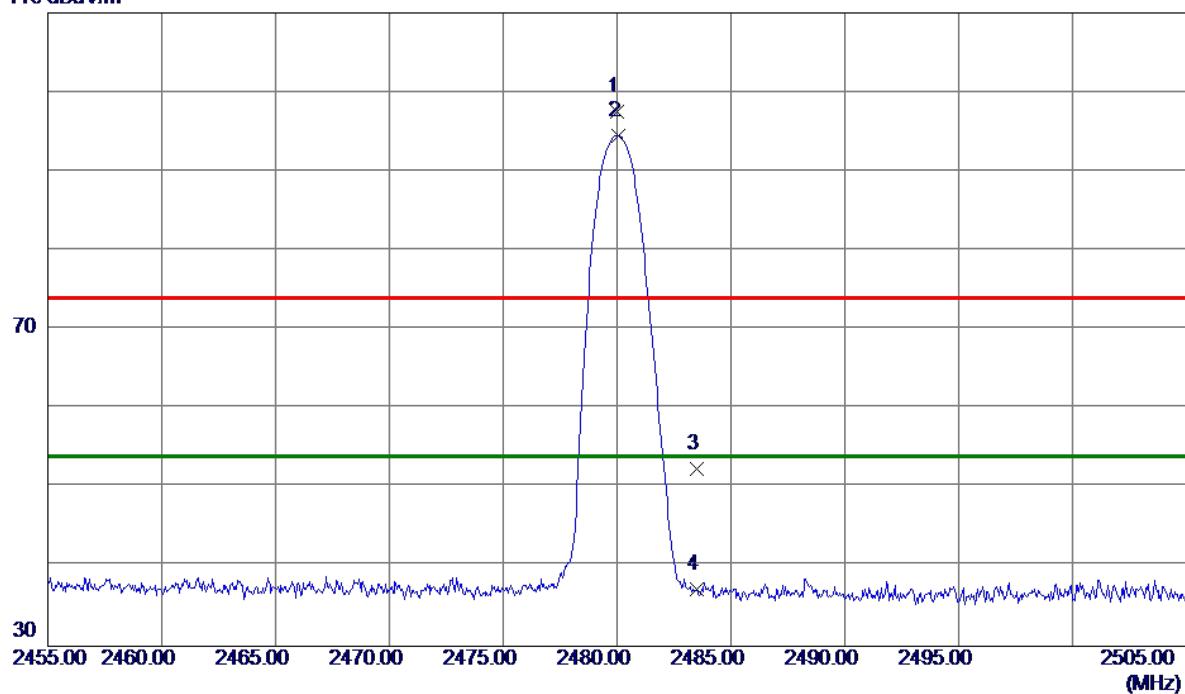

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dB			
1	2480.0000	64.06	33.39	97.45	74.00	23.45	Peak	No Limit
2 *	2480.0500	61.09	33.39	94.48	54.00	40.48	AVG	No Limit
3	2483.5000	19.00	33.41	52.41	74.00	-21.59	Peak	
4	2483.5000	3.73	33.41	37.14	54.00	-16.86	AVG	

Test Mode :	TX 2480MHz _CH78_3Mbps
-------------	------------------------

### Horizontal

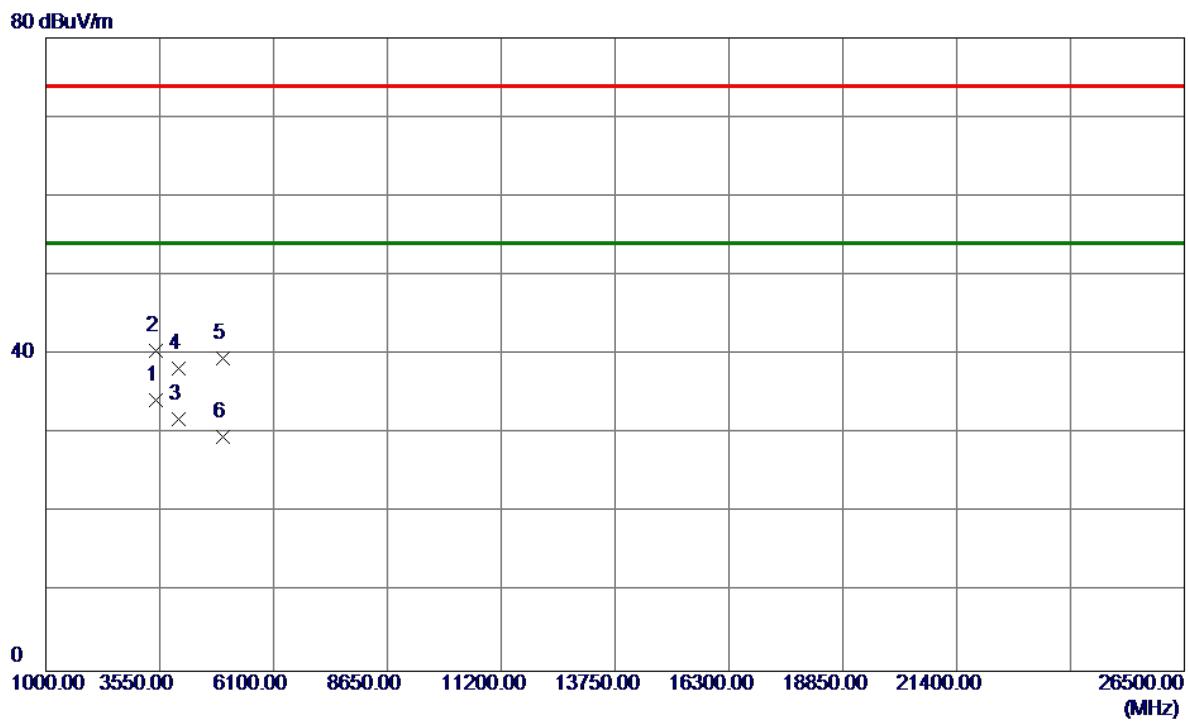


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	3453.3500	31.62	2.61	34.23	54.00	-19.77	AVG	
2	3453.4400	37.91	2.61	40.52	74.00	-33.48	Peak	
3	3967.9700	28.12	3.76	31.88	54.00	-22.12	AVG	
4	3968.4800	34.53	3.76	38.29	74.00	-35.71	Peak	
5	4959.9100	32.36	7.15	39.51	74.00	-34.49	Peak	
6	4960.1700	22.52	7.15	29.67	54.00	-24.33	AVG	

## APPENDIX E - NUMBER OF HOPPING CHANNEL

**Test Mode****Hopping Mode\_1Mbps**


Number of Hopping Channel

79

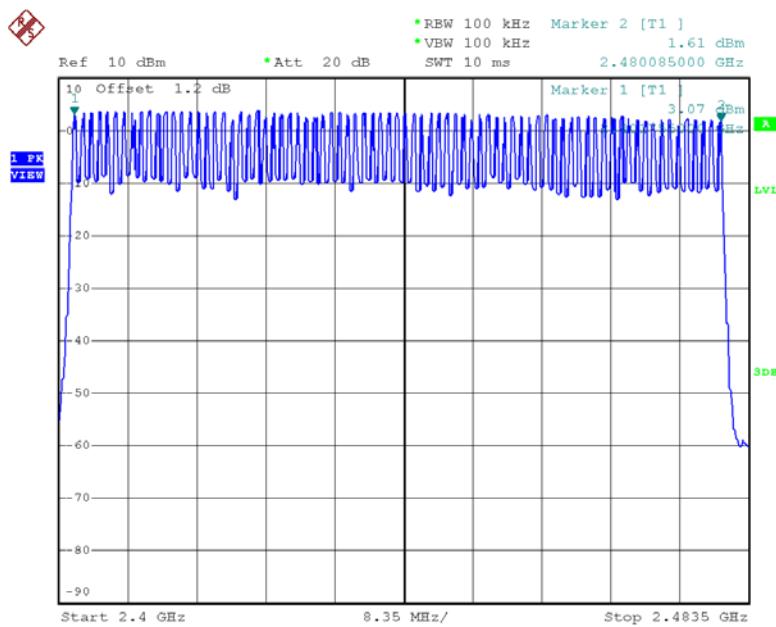**Test Mode****Hopping Mode\_3Mbps**

Number of Hopping Channel

79

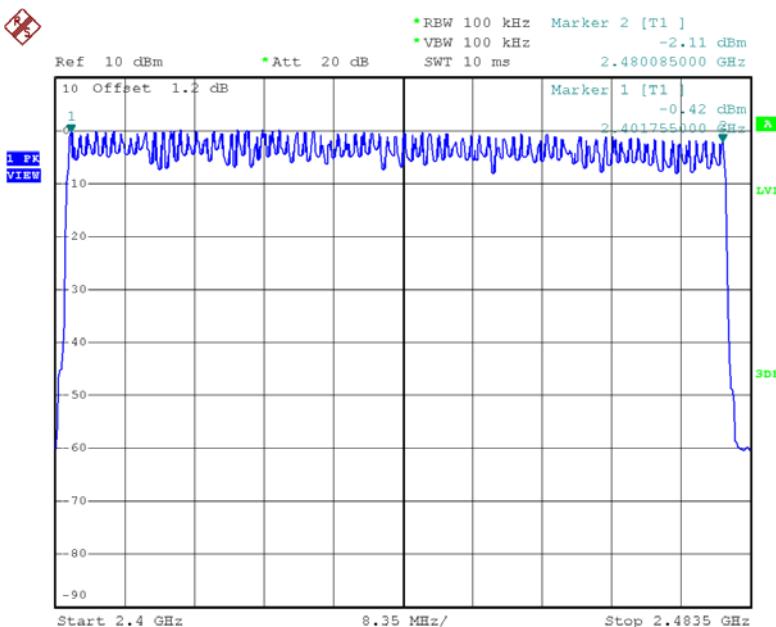


## APPENDIX F - AVERAGE TIME OF OCCUPANCY


Test Mode : TX Mode\_1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.8800	0.3072	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH1	2402	0.3850	0.1232	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.3900	0.1248	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.3850	0.1232	0.4000	Pass


## CH00-DH1

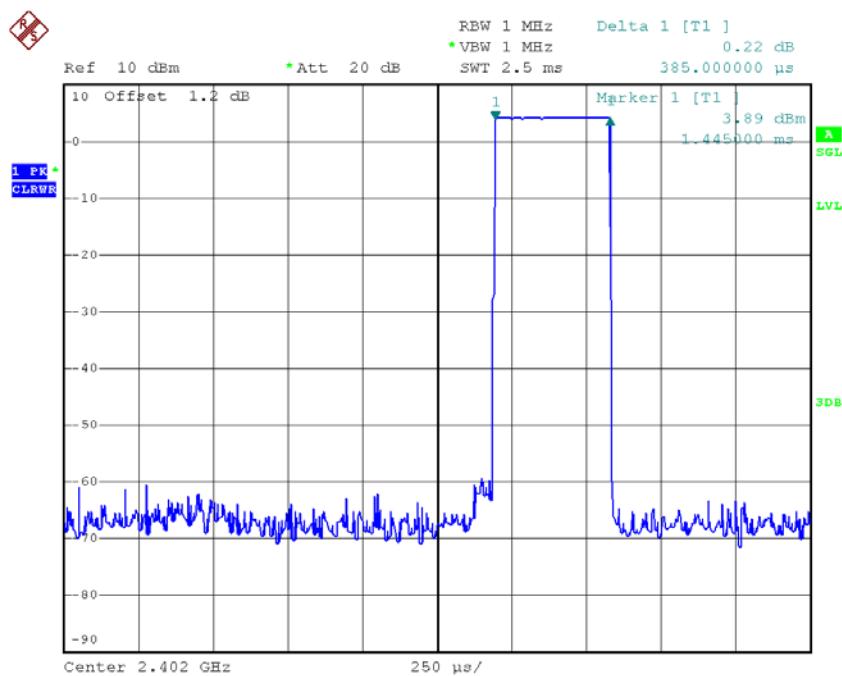


## CH00-DH3

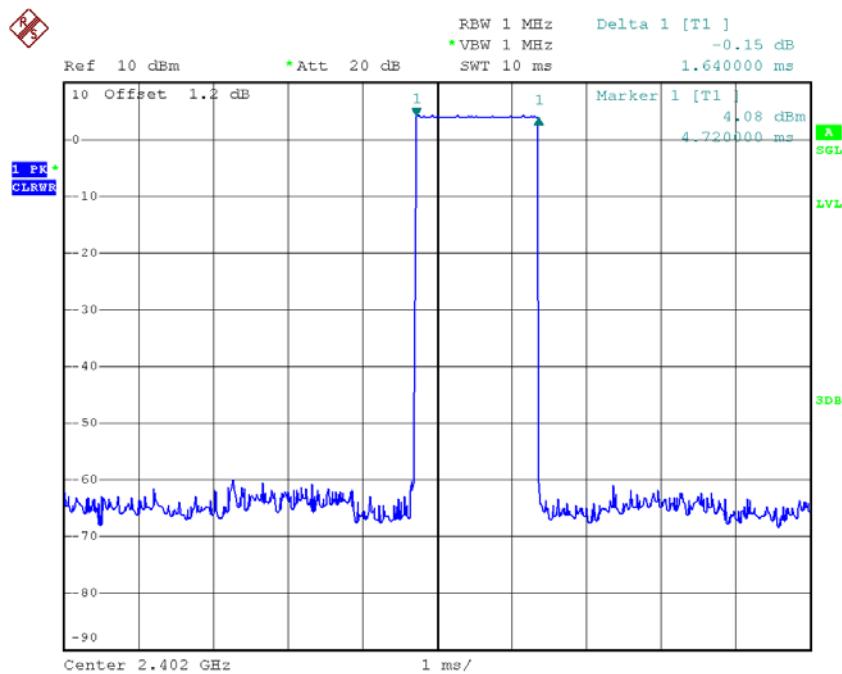


## CH00-DH5

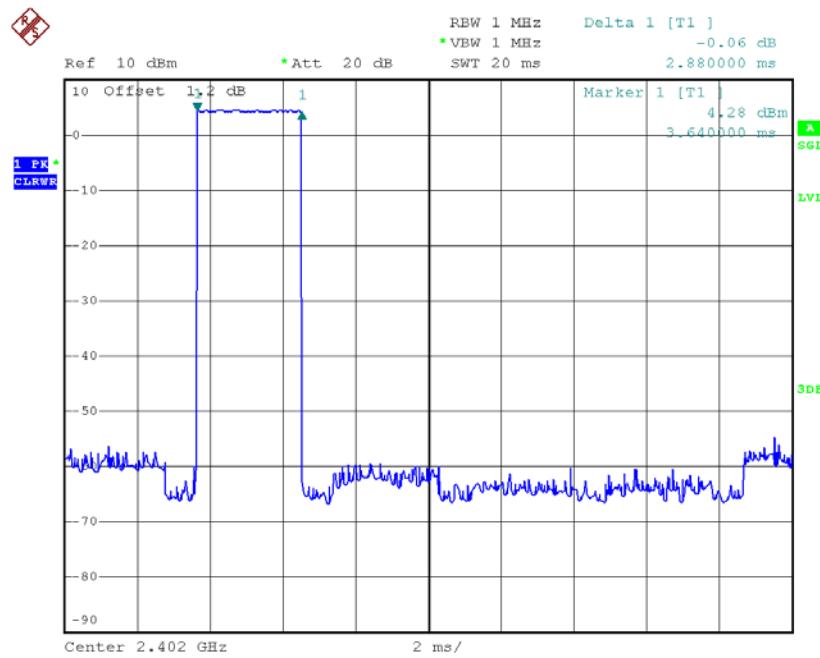


## CH39-DH1

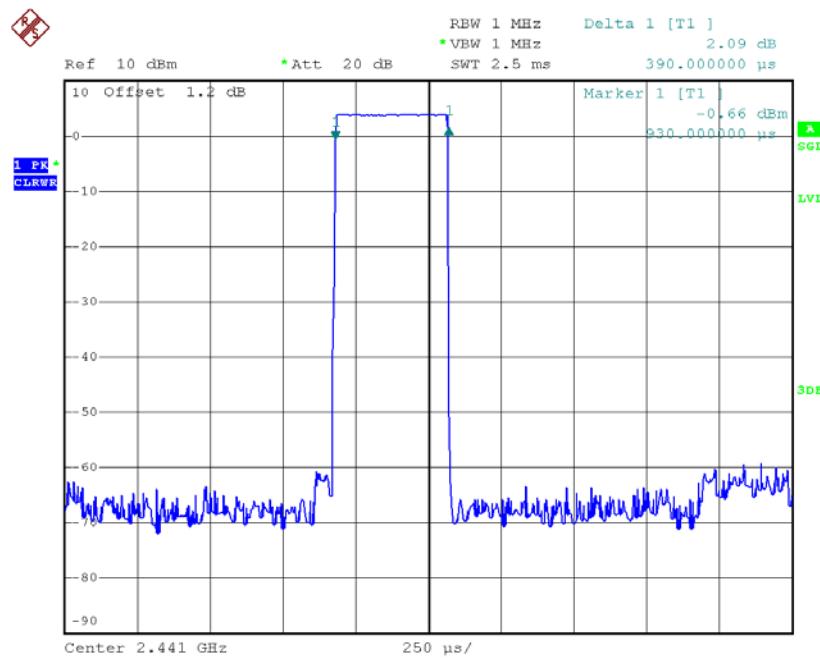


## CH39-DH3

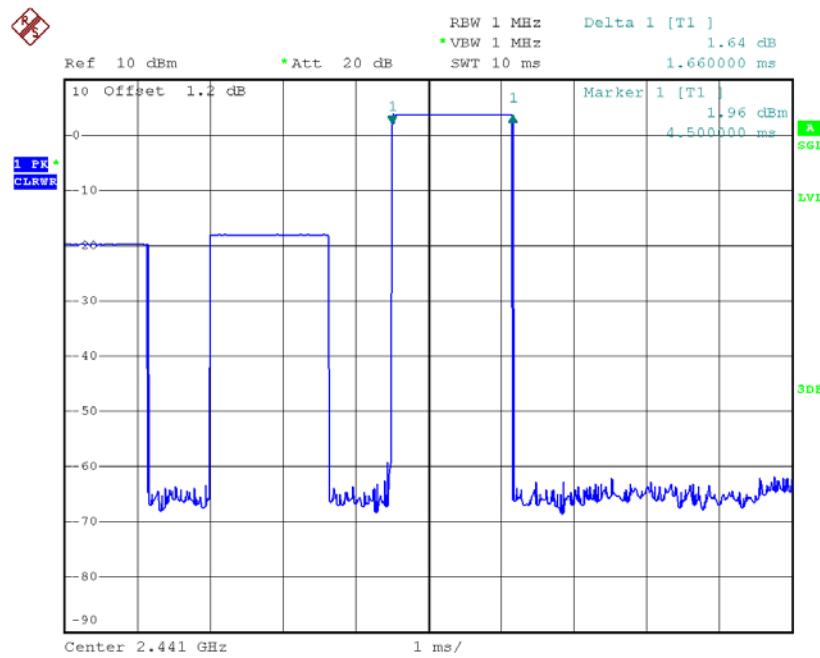


## CH39-DH5

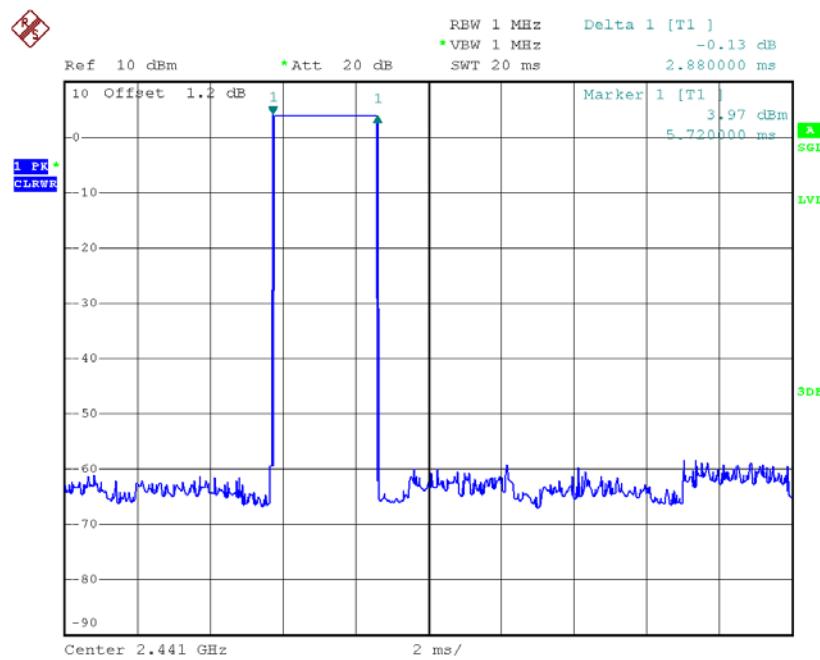


## CH78-DH1

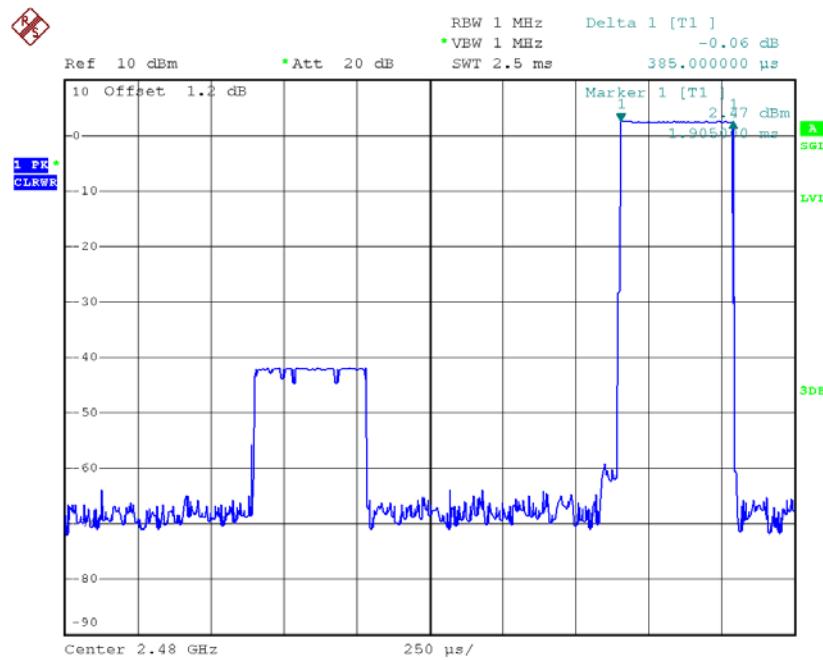

## CH78-DH3

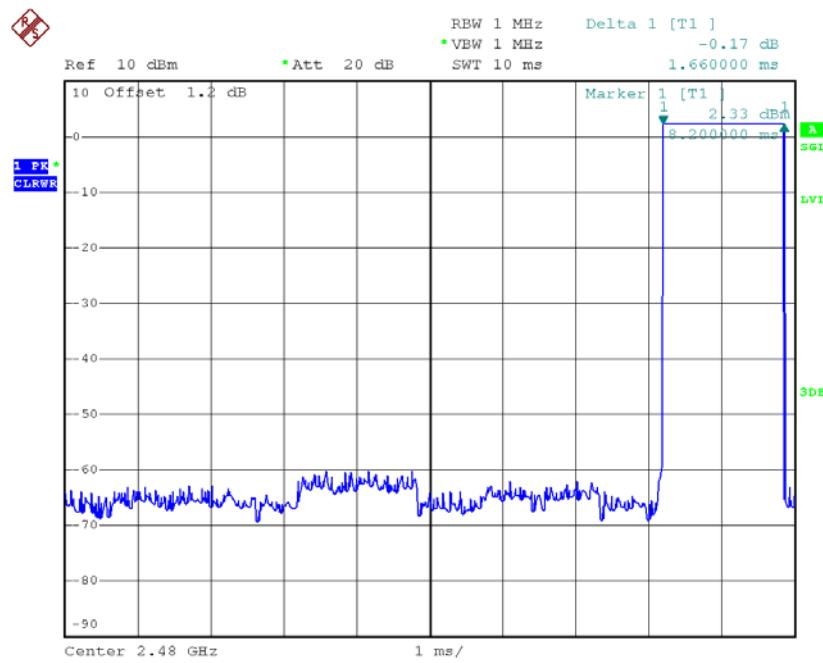


## CH78-DH5

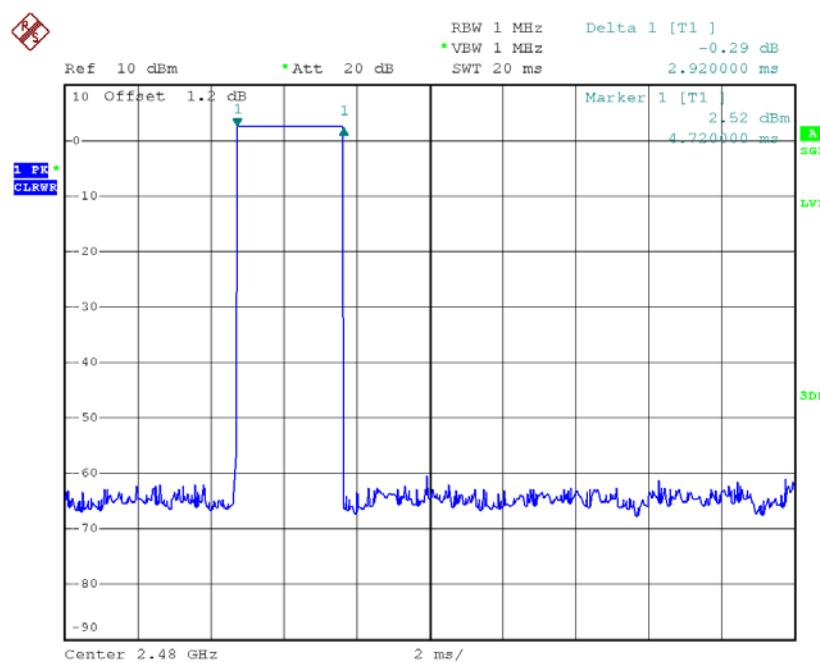


Test Mode : TX Mode\_3Mbps

Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.3900	0.1248	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.3900	0.1248	0.4000	Pass
DH5	2480	2.8800	0.3072	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH1	2480	0.3900	0.1248	0.4000	Pass


## CH00-DH1

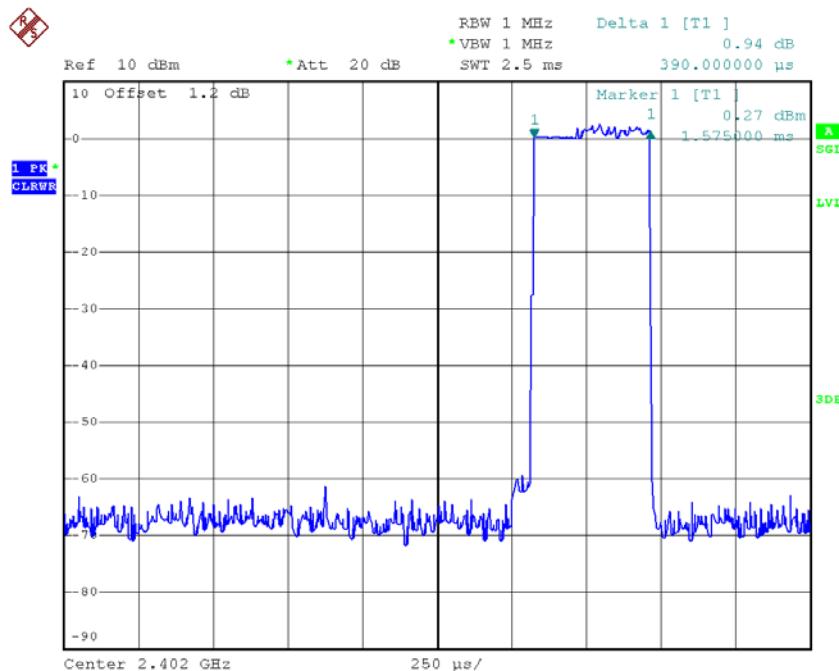


## CH00-DH3

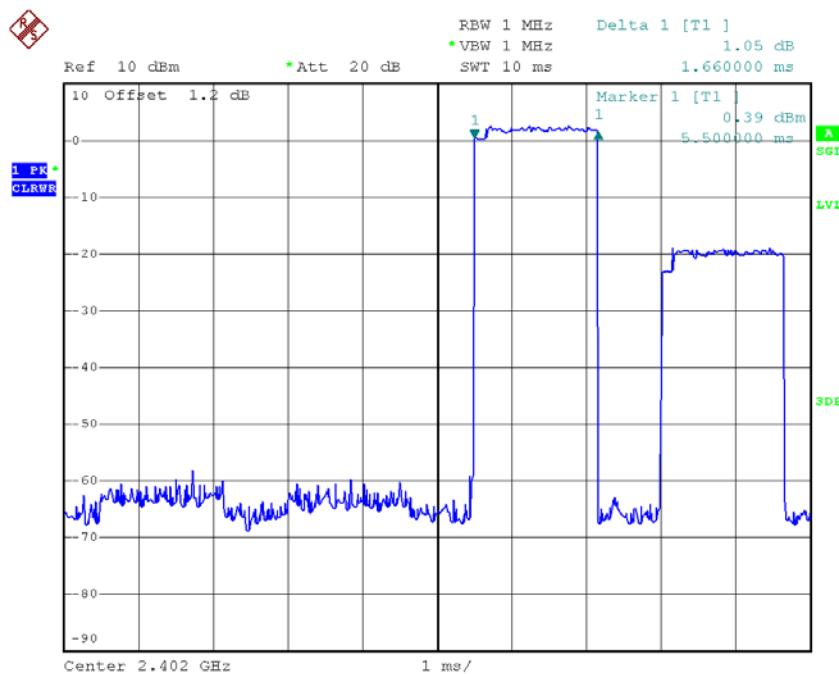


## CH00-DH5

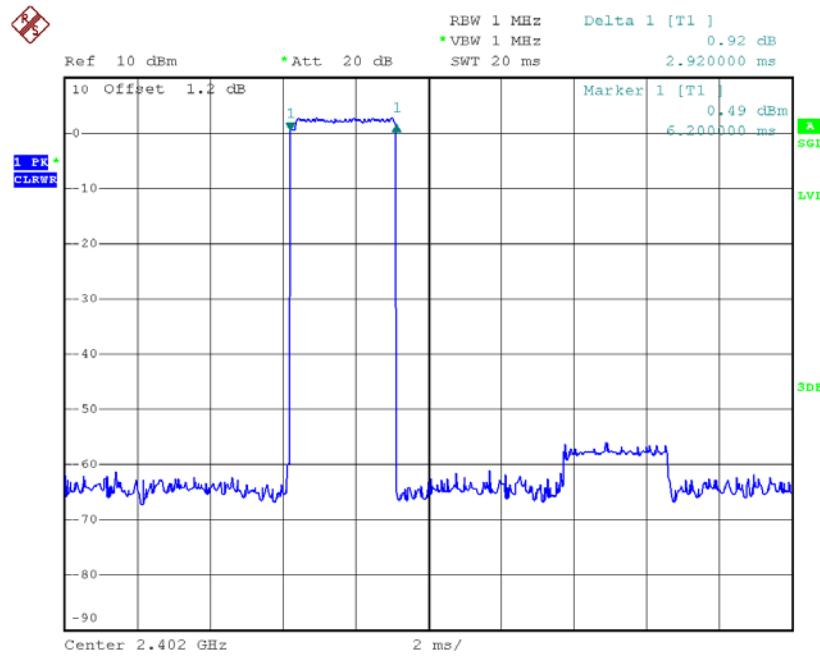


## CH39-DH1

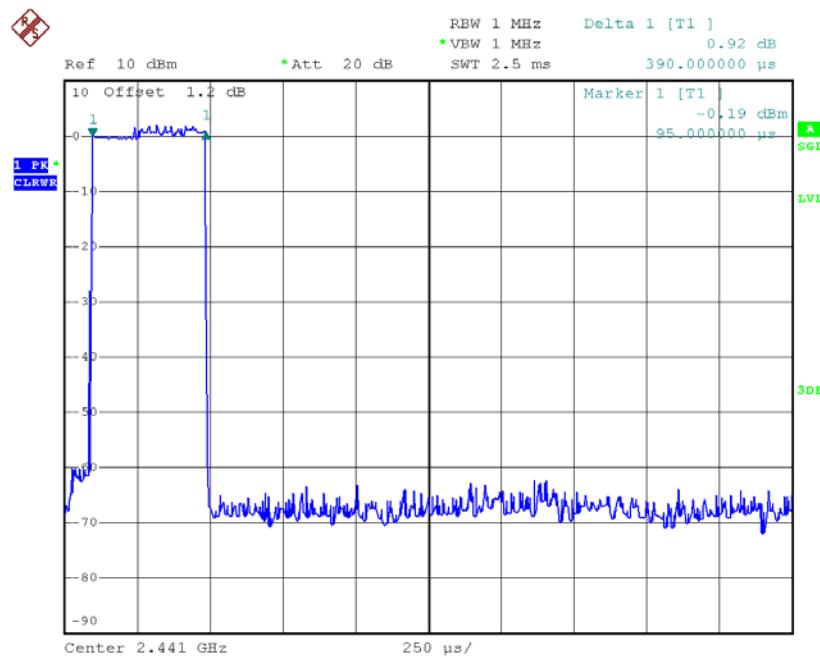


## CH39-DH3

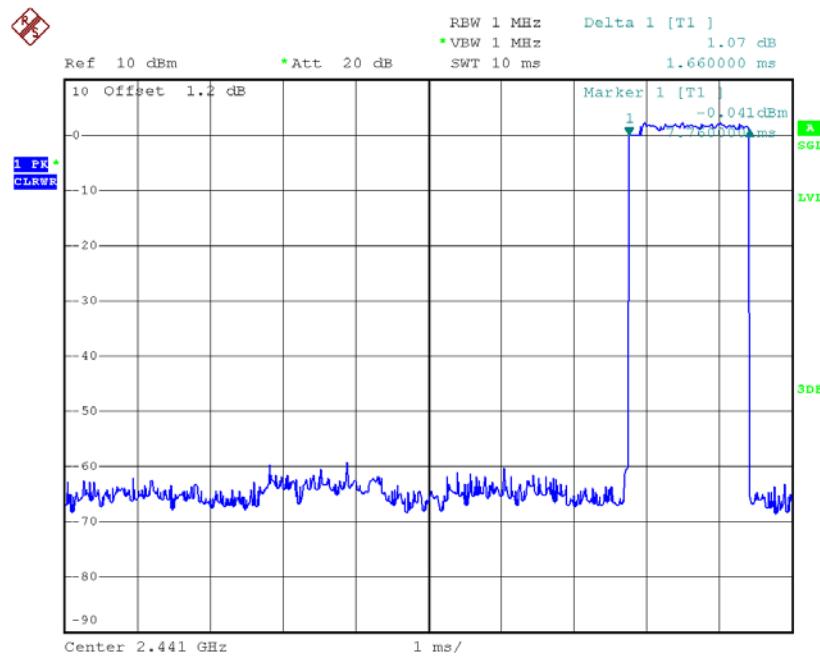


## CH39-DH5

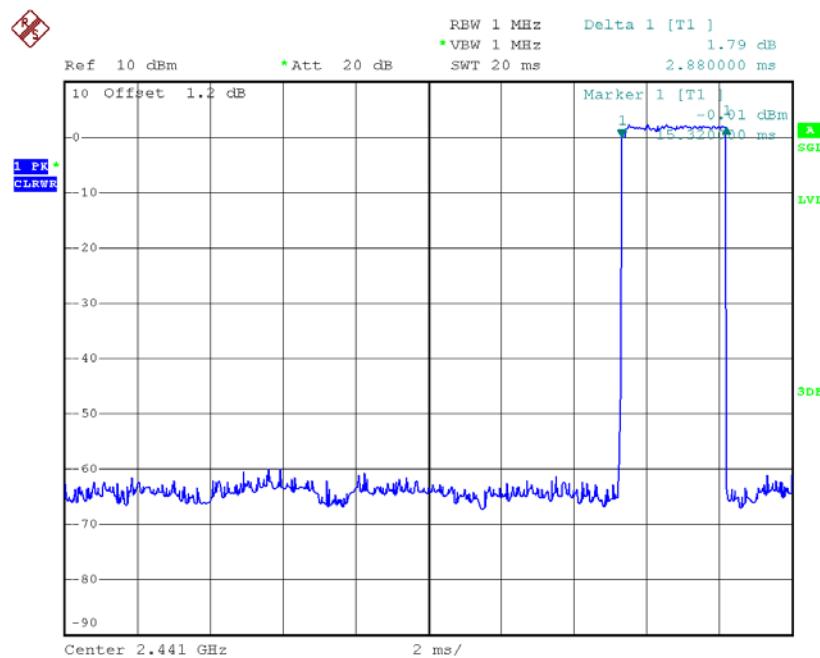


## CH78-DH1

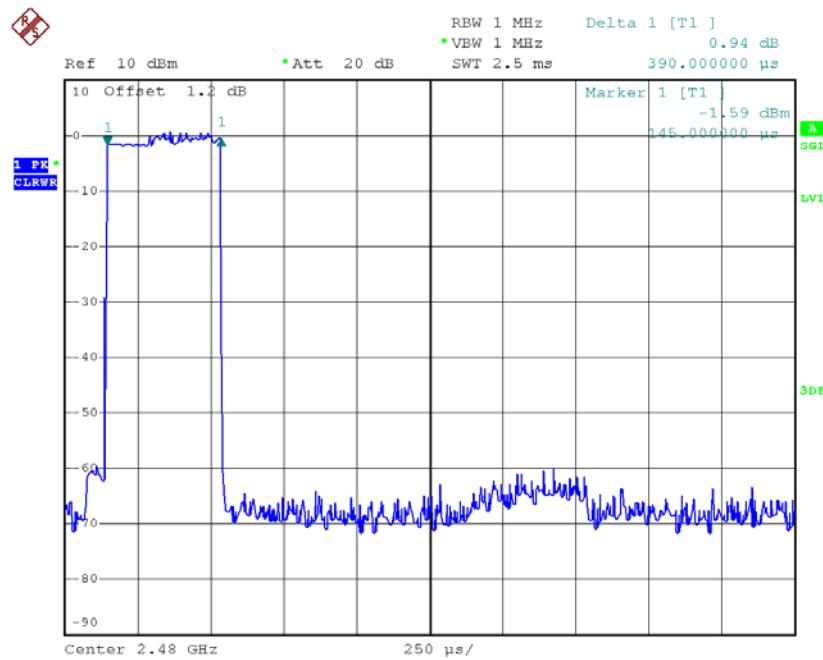

## CH78-DH3

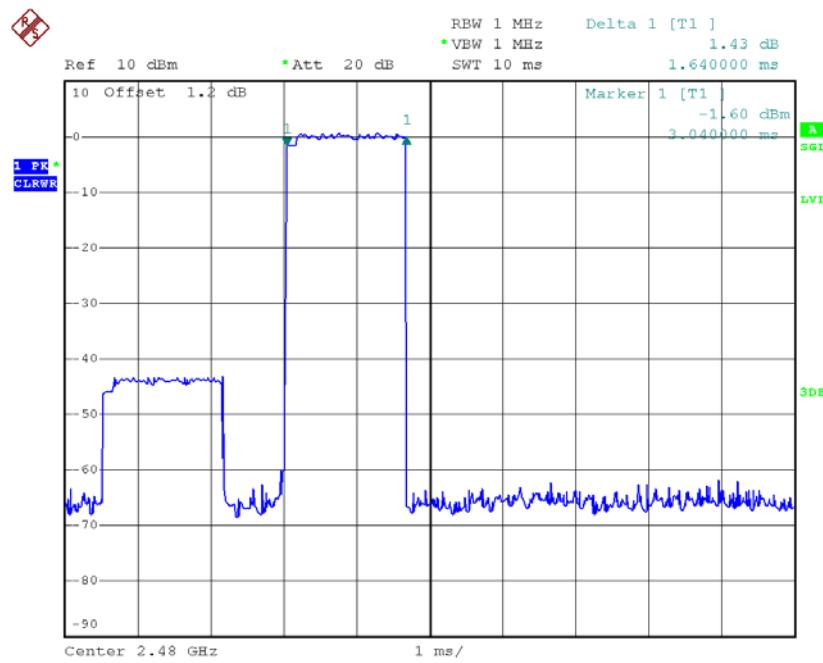


## CH78-DH5

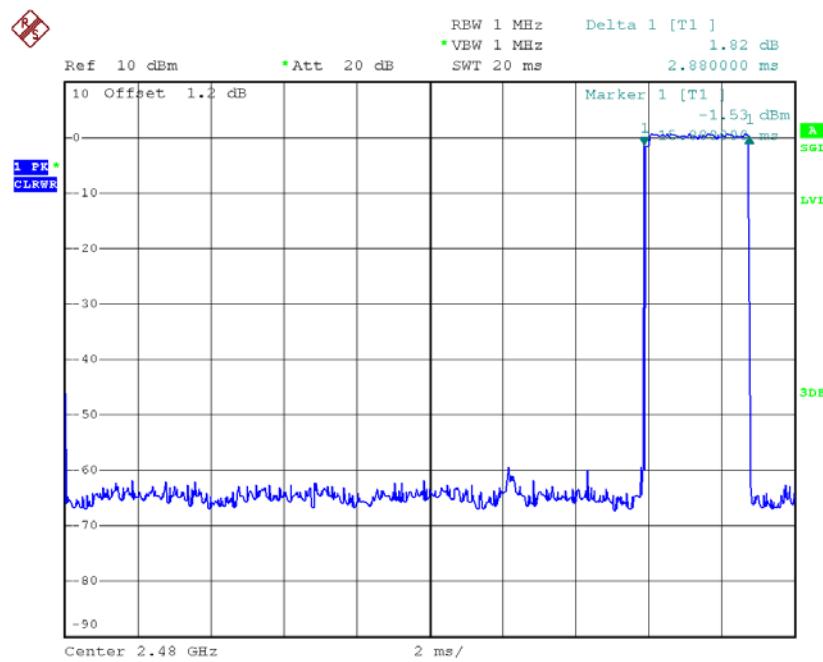


## APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode : Hopping on \_1Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.990	0.647	Pass
2441	1.102	0.626	Pass
2480	1.008	0.629	Pass

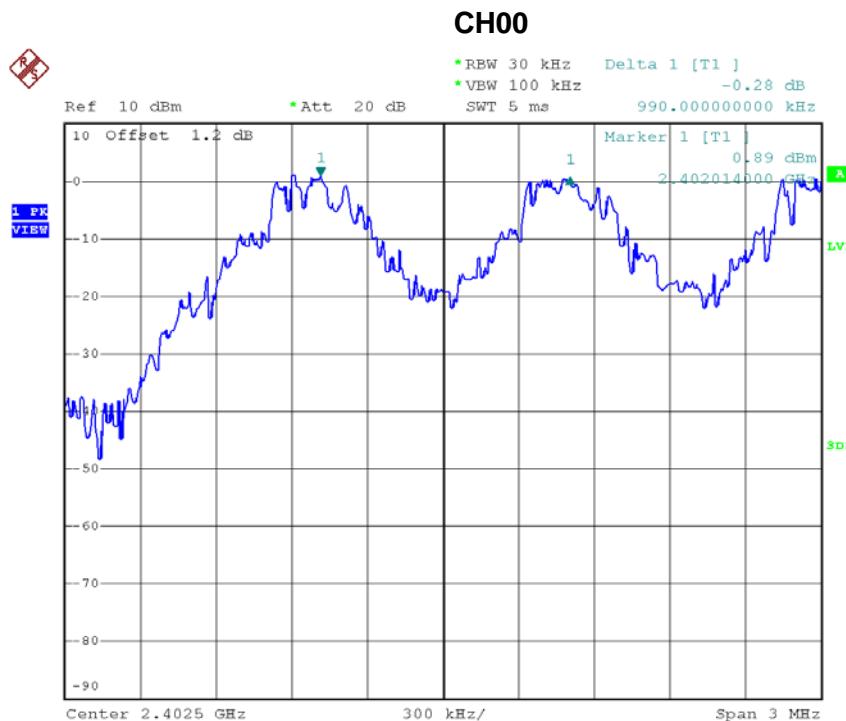

## CH39

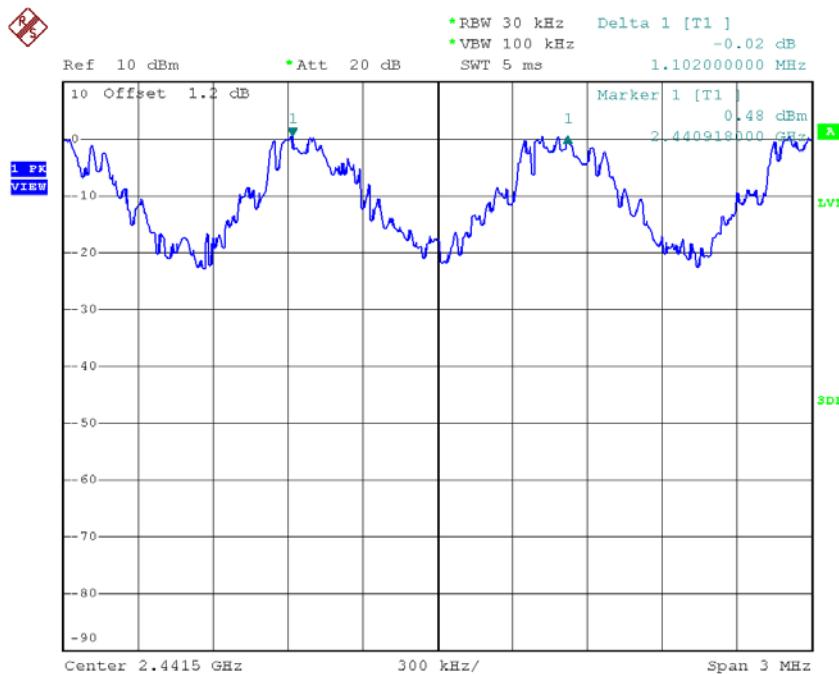


## CH78

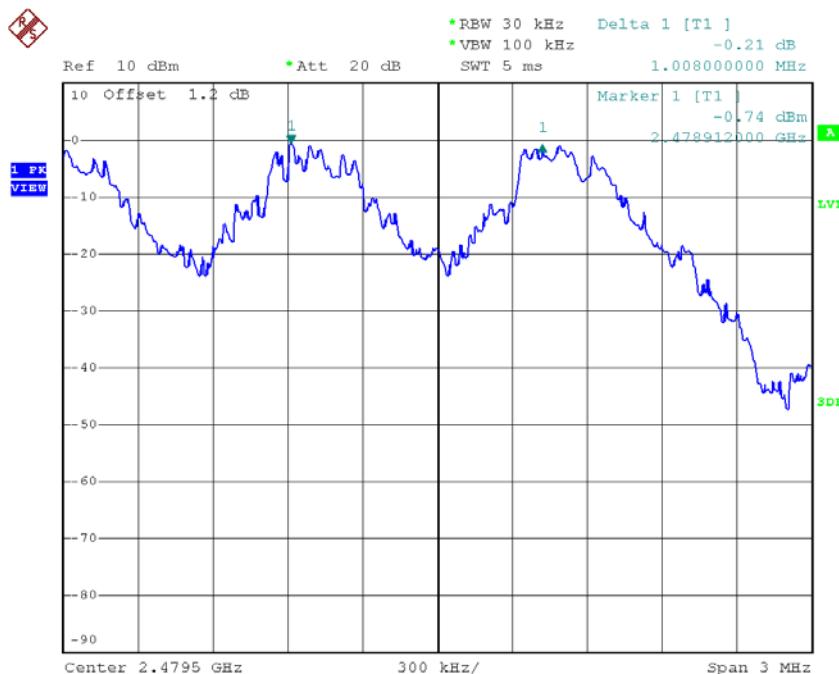


Test Mode : Hopping on \_3Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.104	0.868	Pass
2441	0.910	0.894	Pass
2480	0.905	0.887	Pass

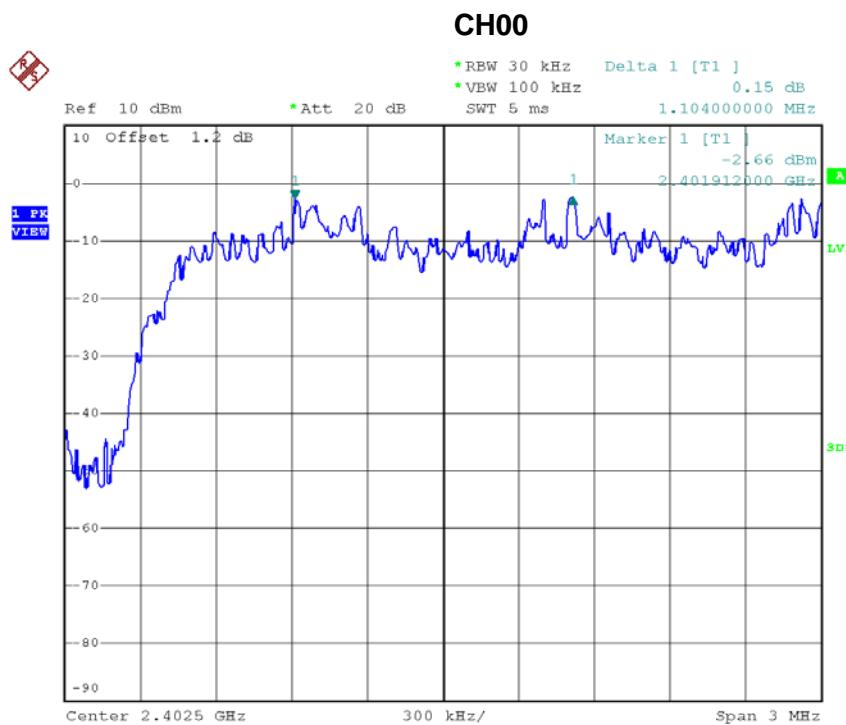

## CH39

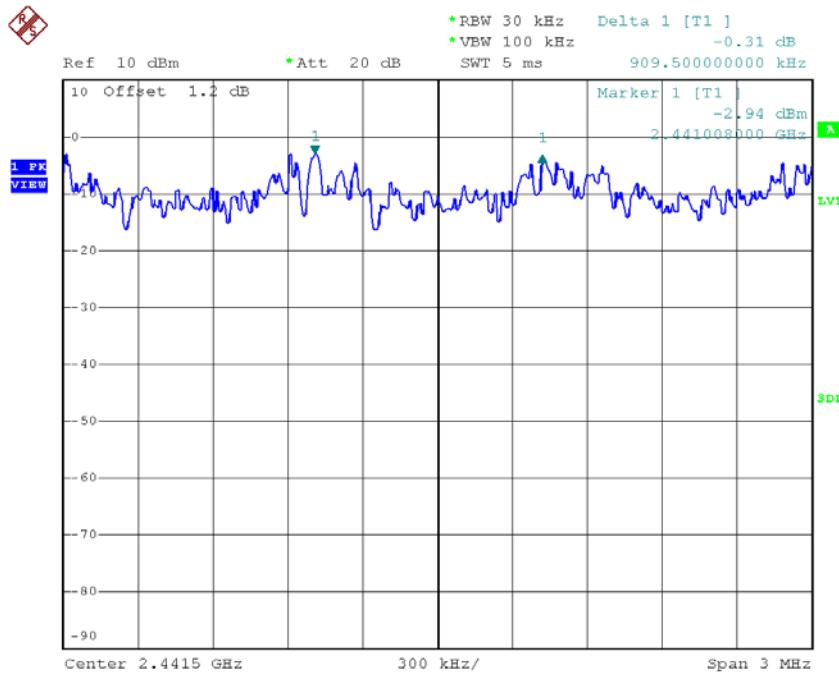


## CH78

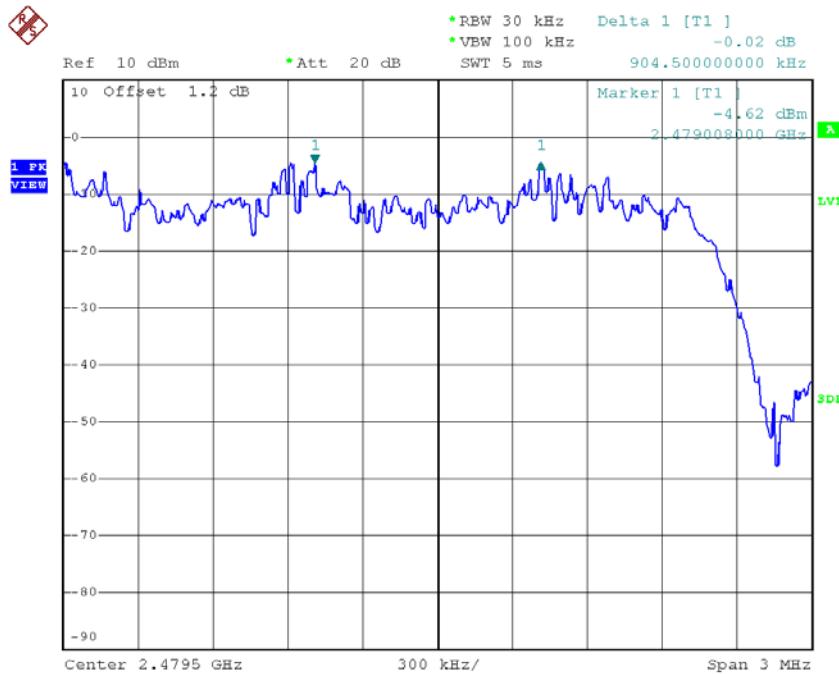


## APPENDIX H - BANDWIDTH

Test Mode : TX Mode \_1Mbps


Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.970	0.892	Pass
2441	0.939	0.884	Pass
2480	0.943	0.888	Pass

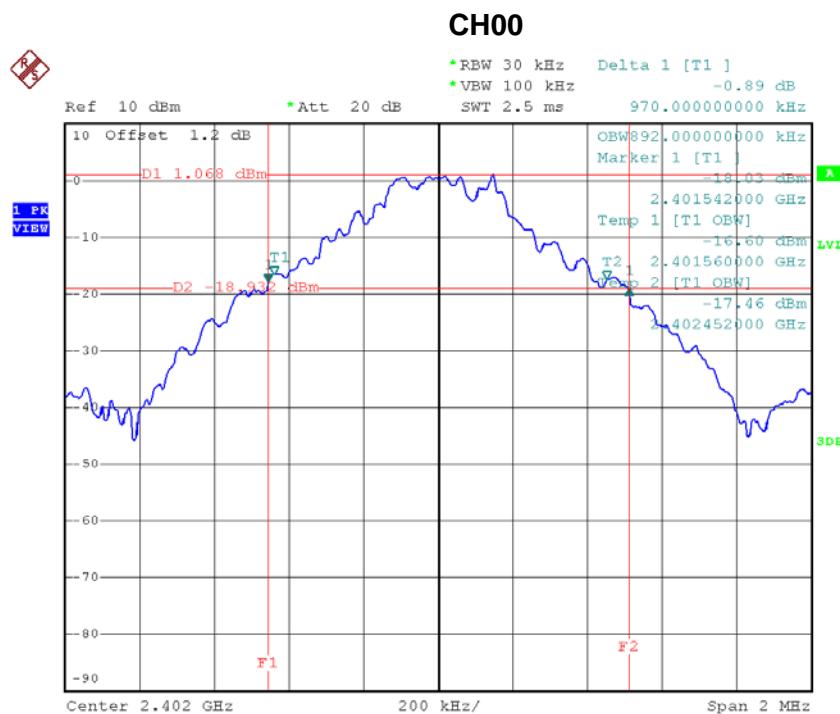

## CH39

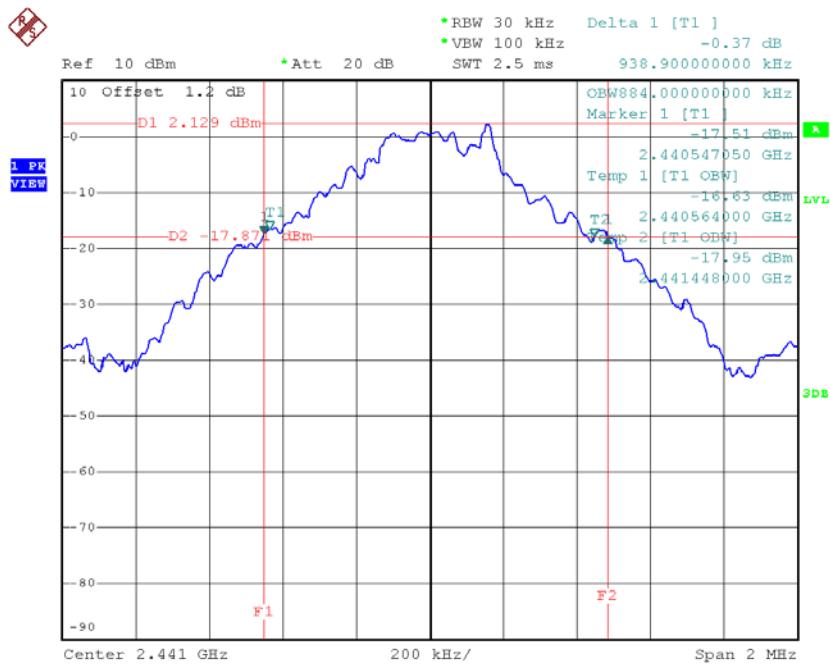


## CH78

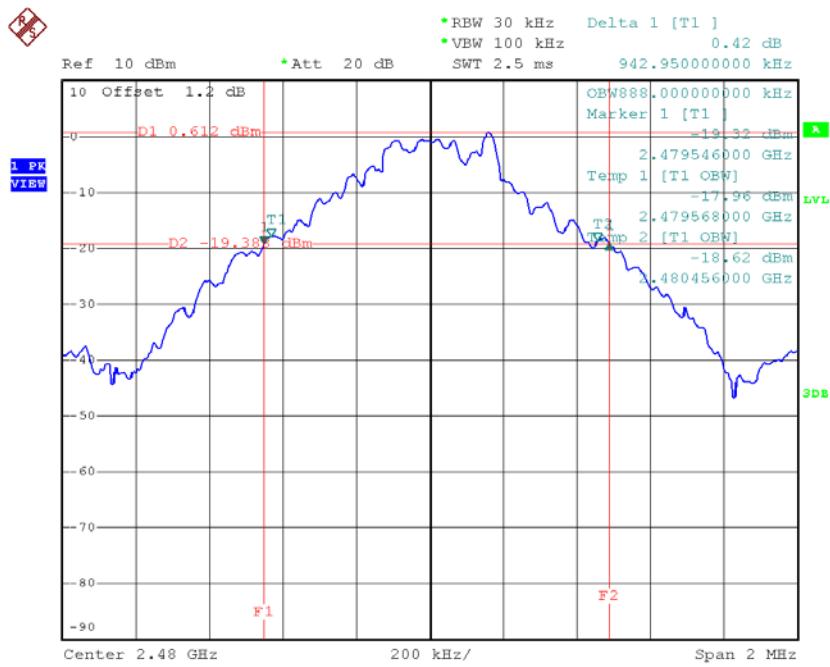


Test Mode : TX Mode \_3Mbps


Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.302	1.208	Pass
2441	1.341	1.216	Pass
2480	1.330	1.212	Pass

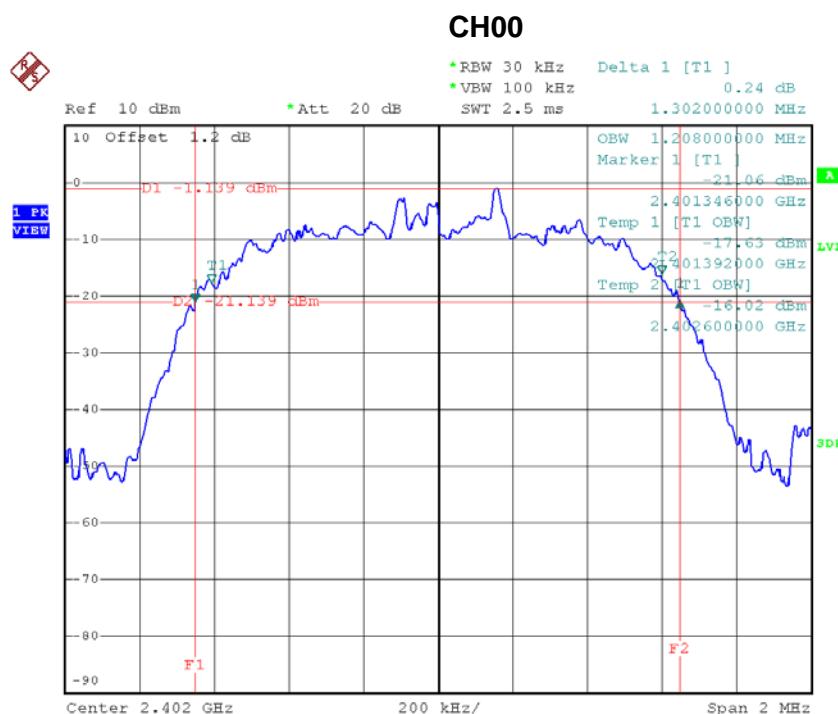

## CH39

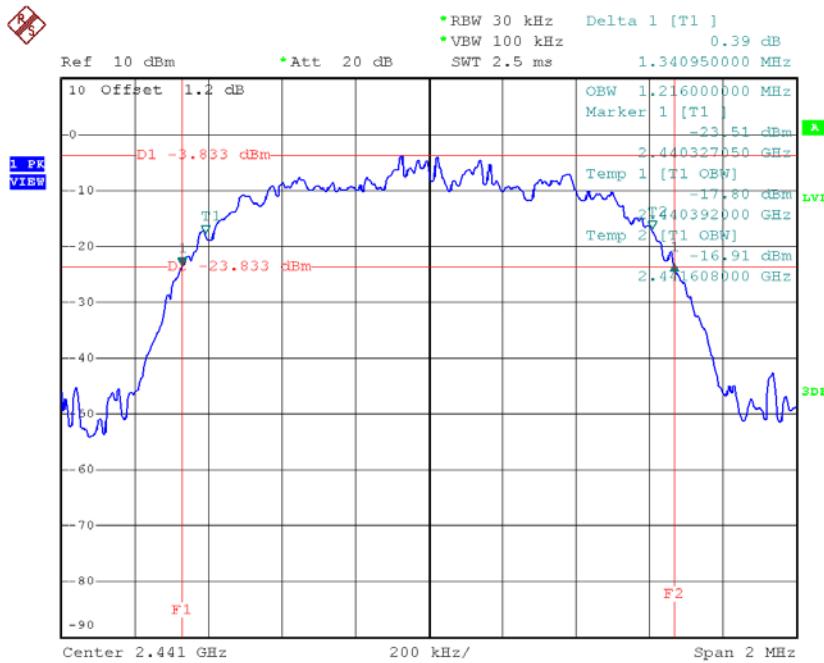

## CH78

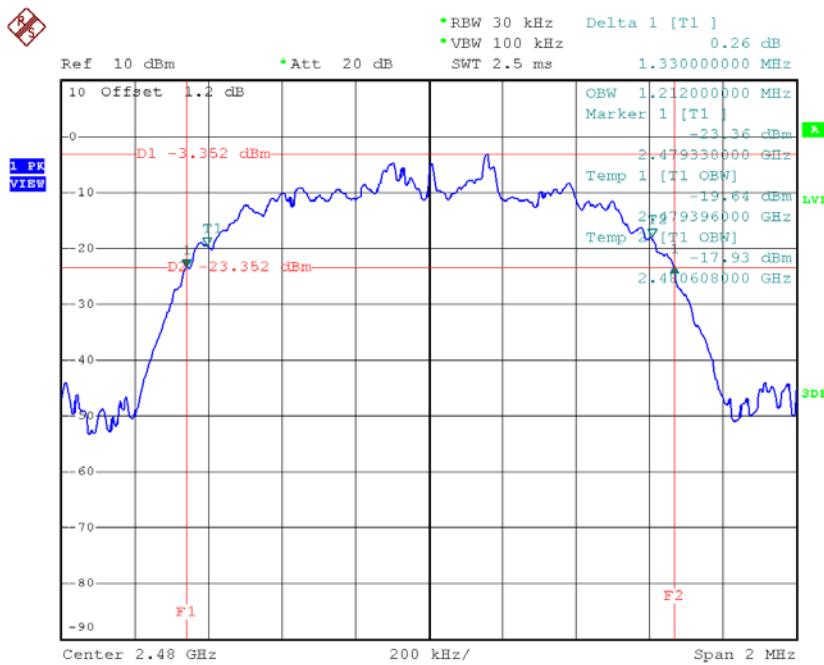


## APPENDIX I - MAXIMUM OUTPUT POWER


Test Mode : TX Mode \_1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.30	0.0021	21.00	0.125	Pass
2441	3.35	0.0022	21.00	0.125	Pass
2480	1.88	0.0015	21.00	0.125	Pass


## CH00

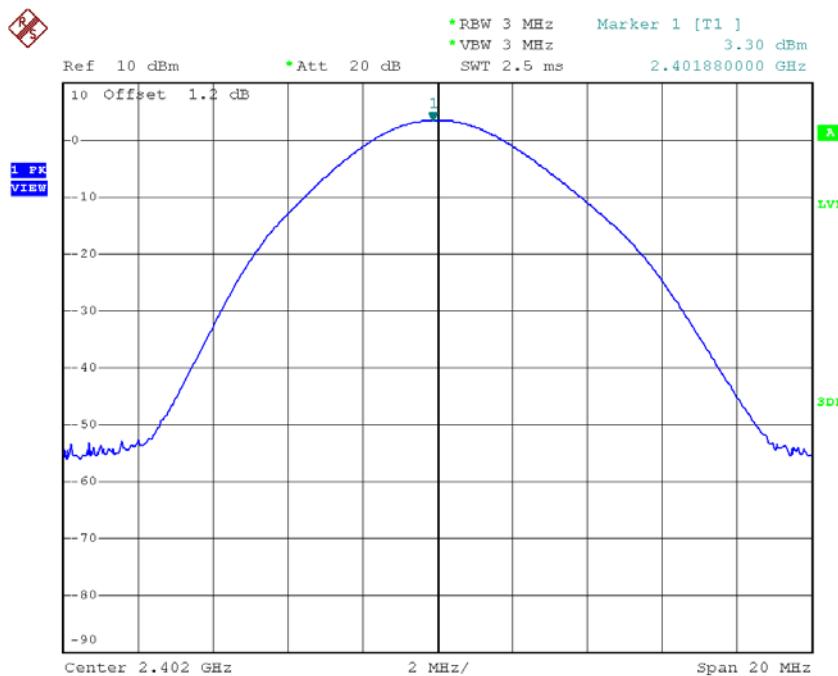

## CH39

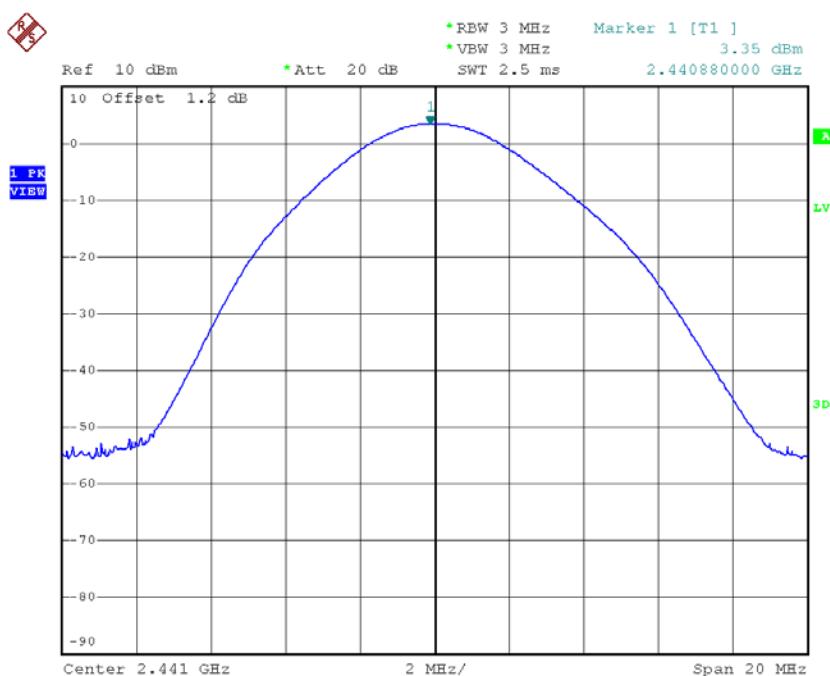


## CH78

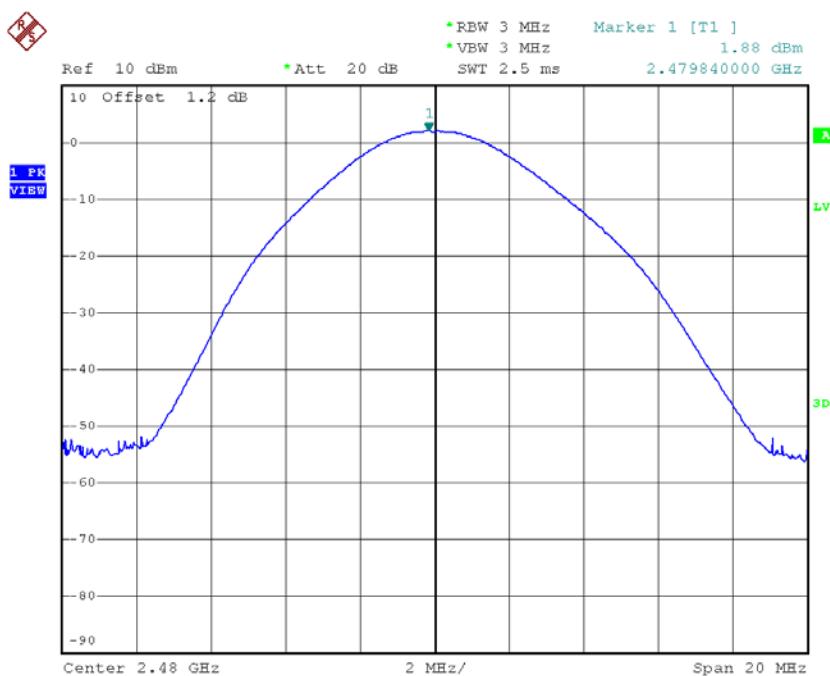


Test Mode : TX Mode \_3Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	2.85	0.0019	21.00	0.125	Pass
2441	2.46	0.0018	21.00	0.125	Pass
2480	0.98	0.0013	21.00	0.125	Pass


## CH00

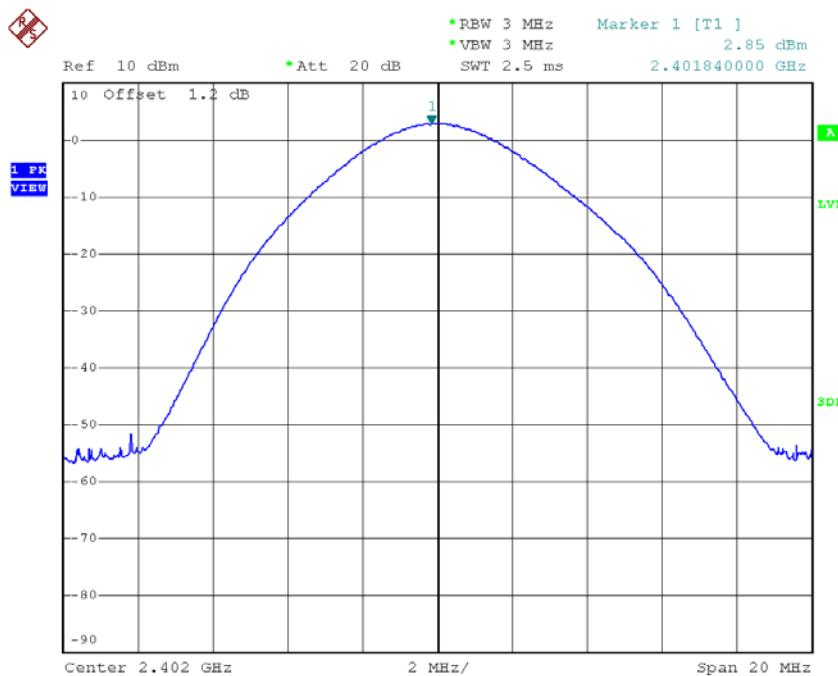

## CH39

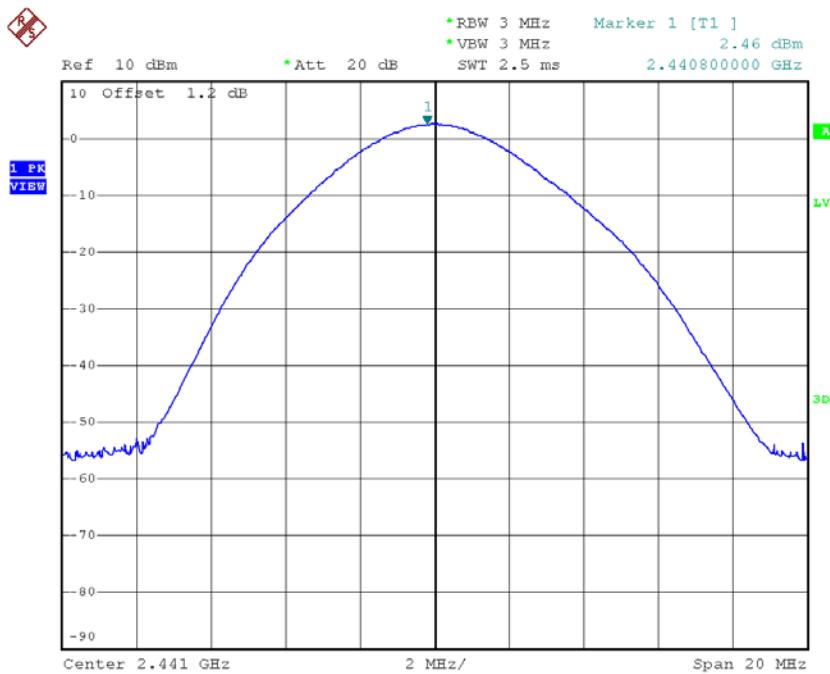


## CH78

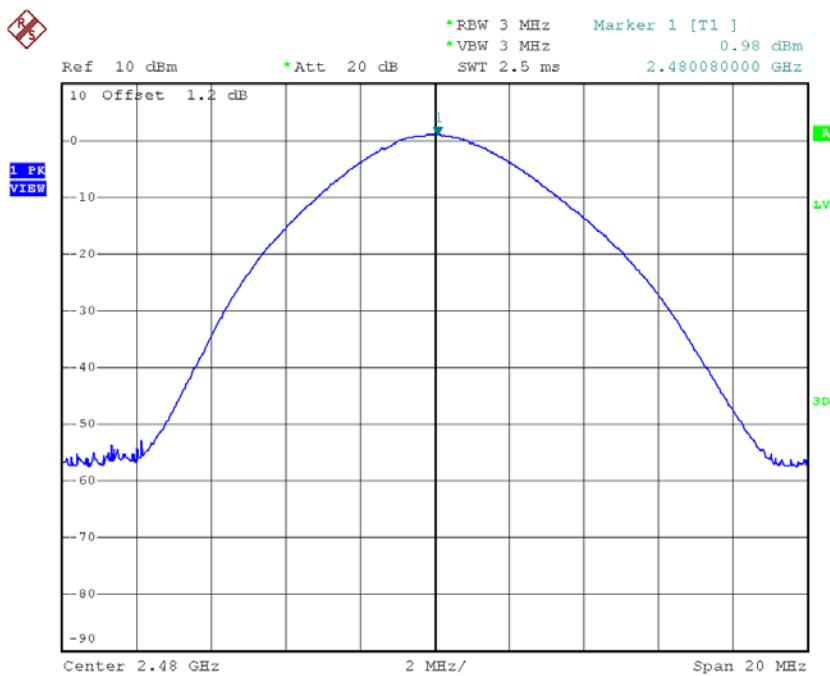


## APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION


### CH00 (Lower) \_1Mbps

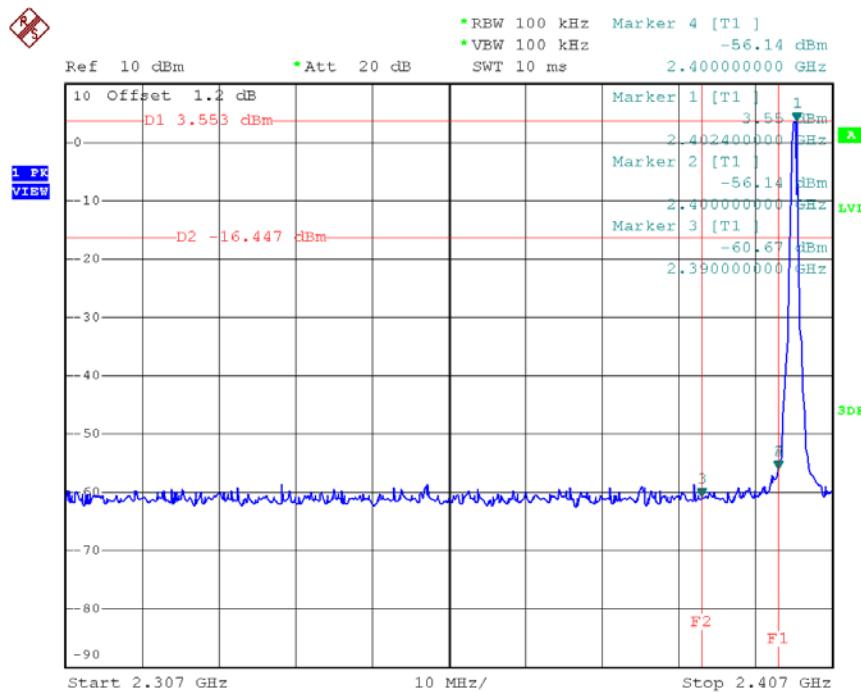


### CH78 (Upper) \_1Mbps

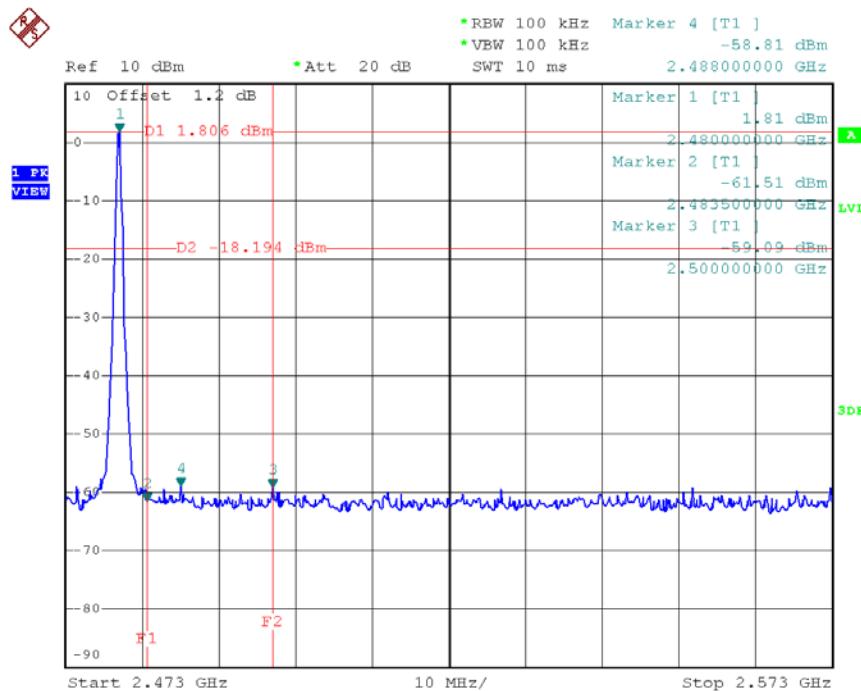



### CH00 Hopping on mode (Lower) \_1Mbps

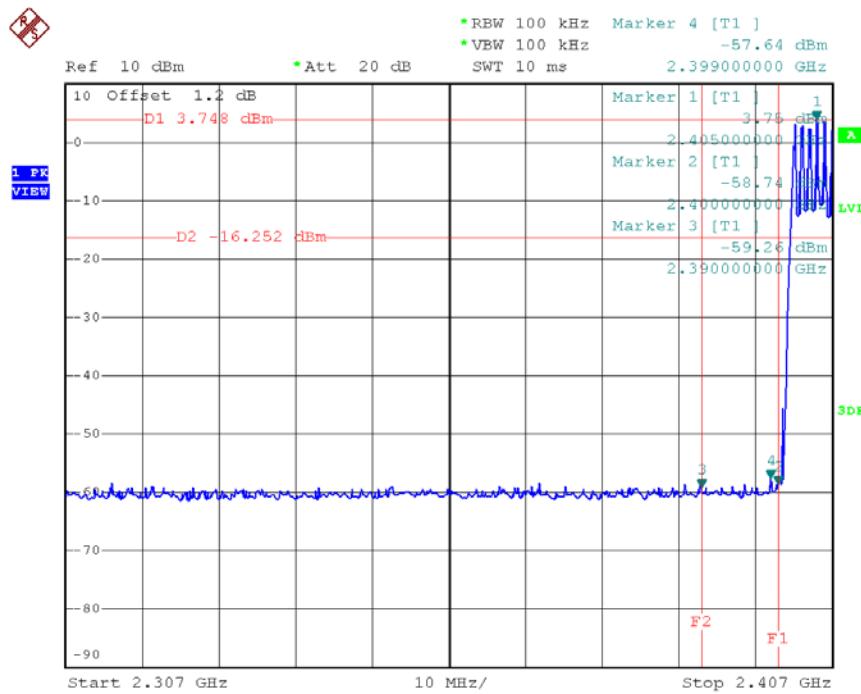


### CH78 Hopping on mode (Upper) \_1Mbps

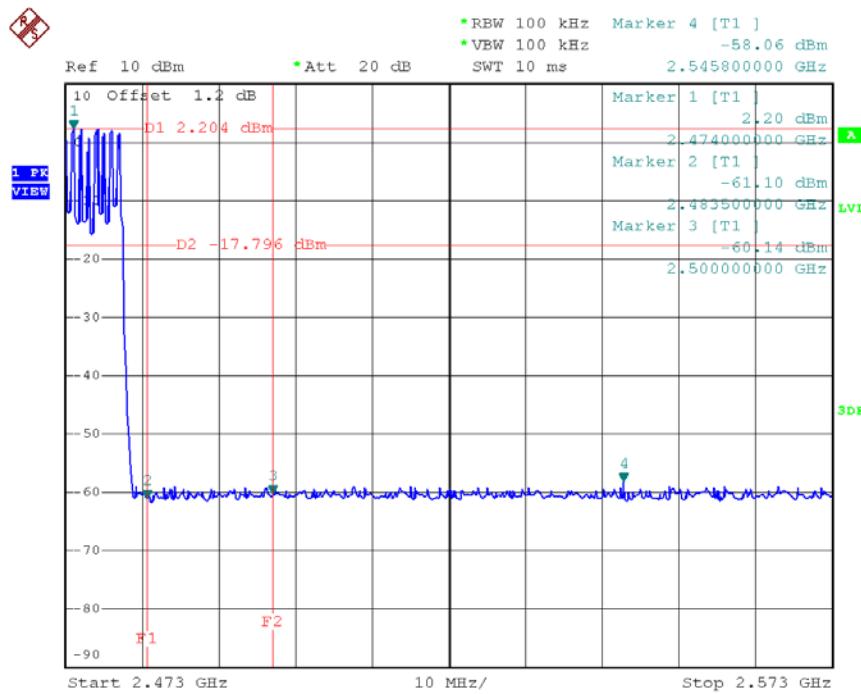




## CH00 (10 Harmonic of the frequency) \_1Mbps

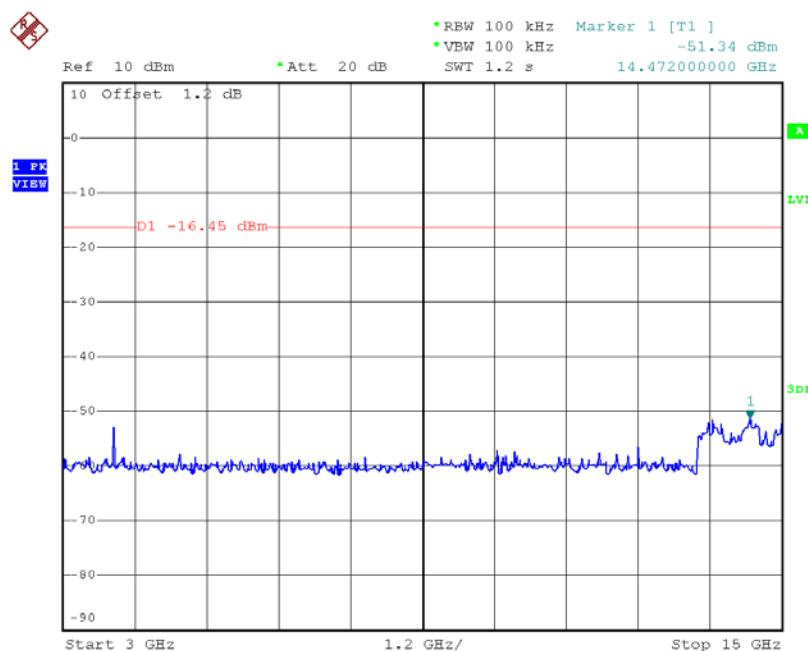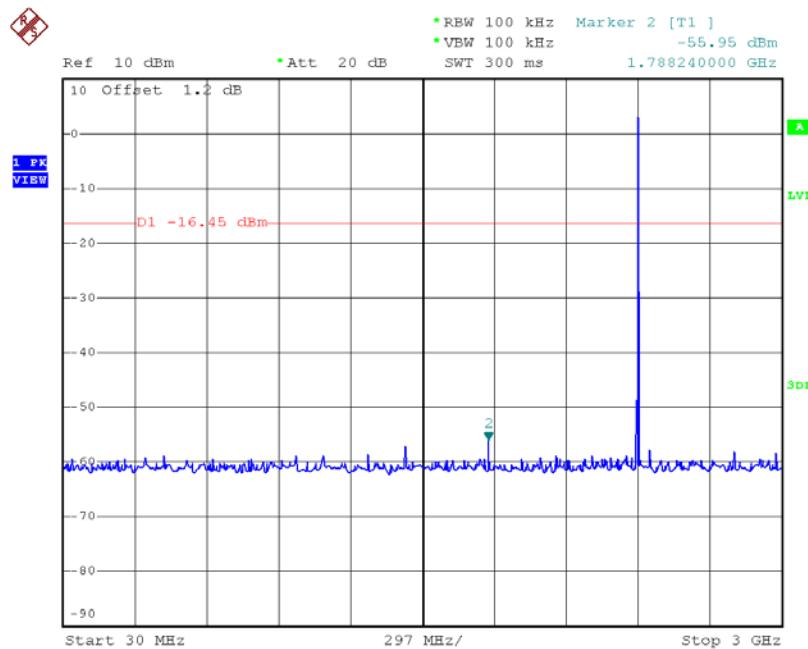


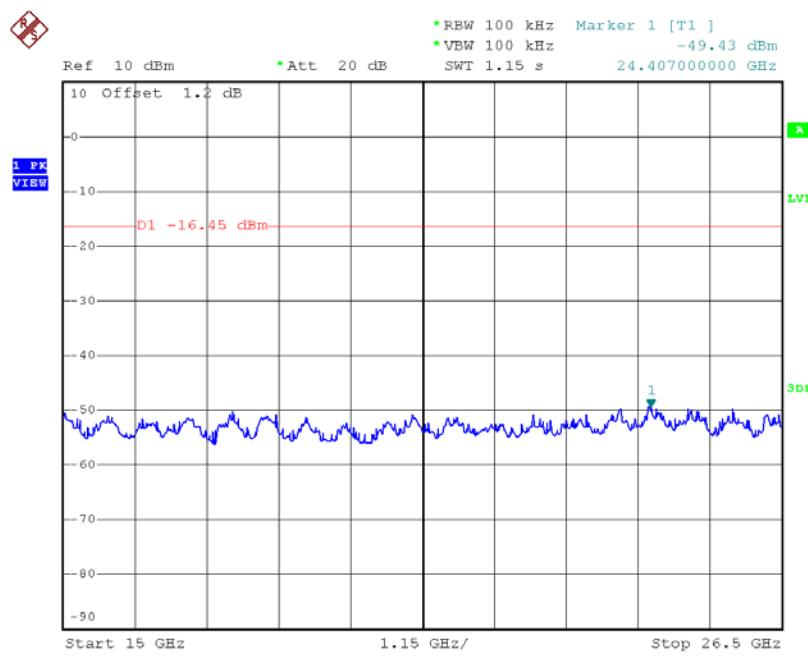



CH39 (10 Harmonic of the frequency) \_1Mbps

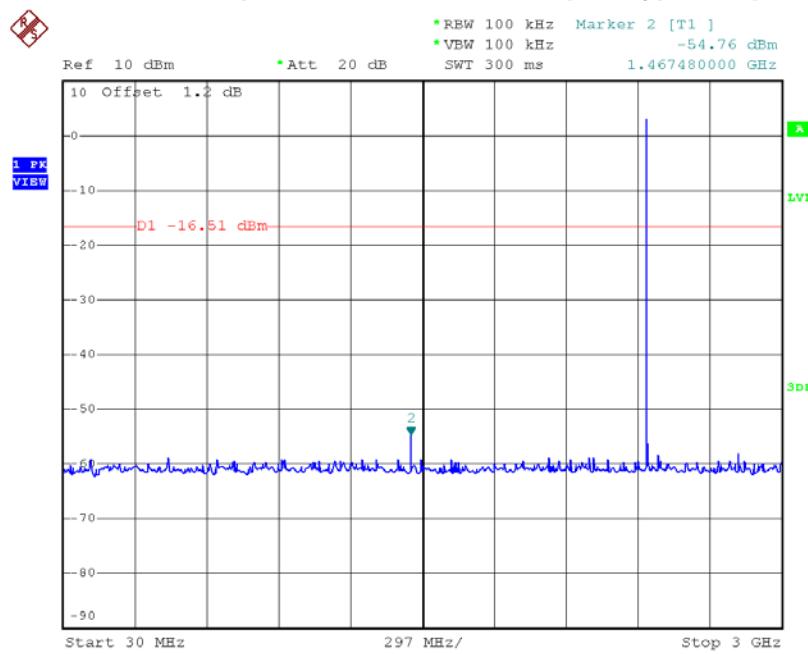

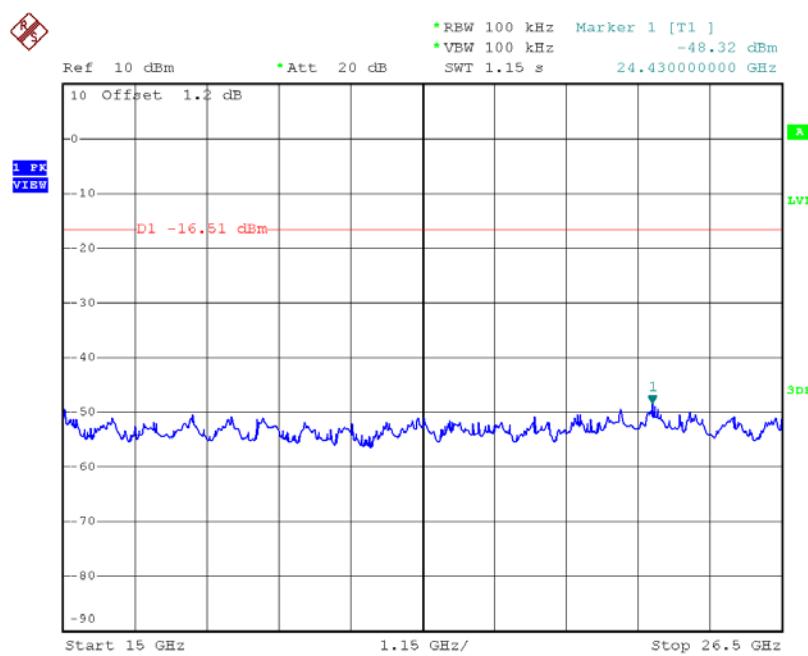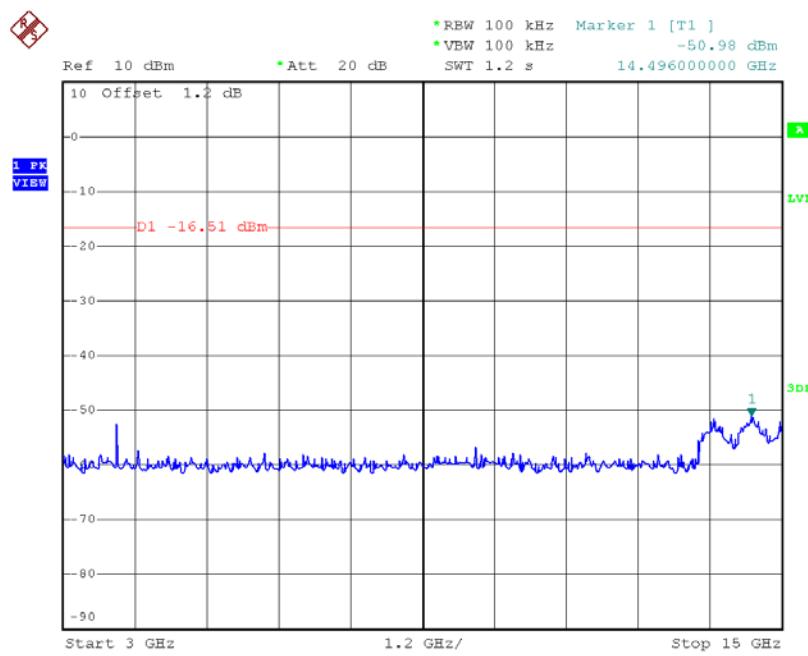


## CH78 (10 Harmonic of the frequency) \_1Mbps

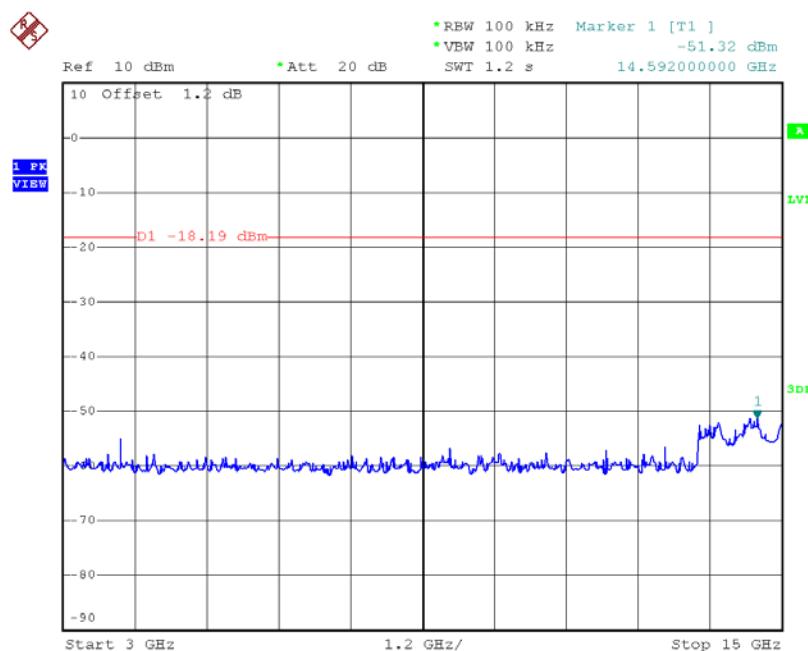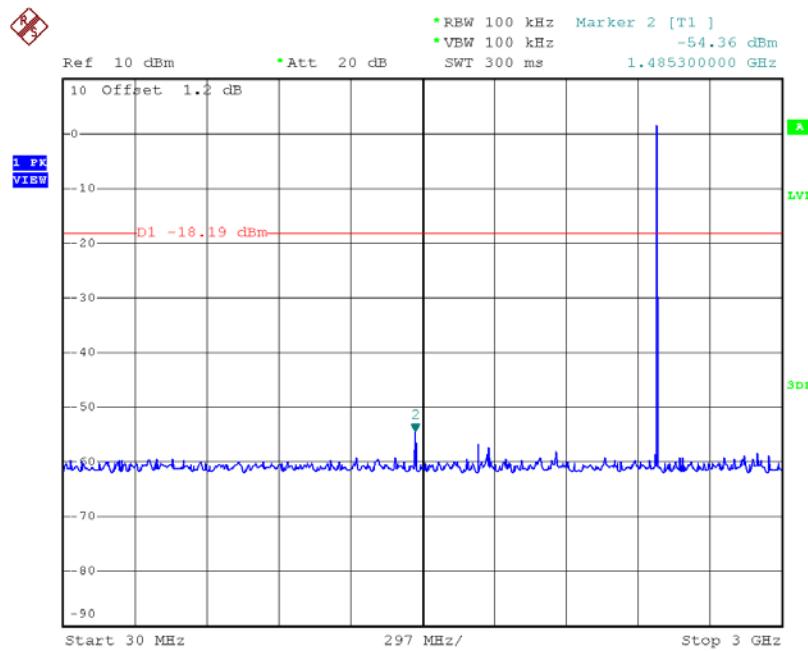

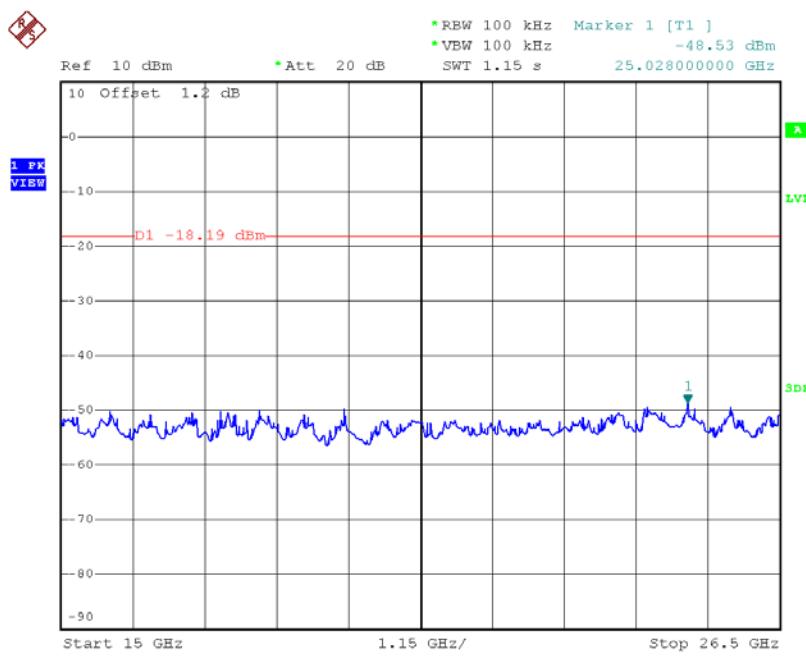

### CH00 (Lower) \_3Mbps

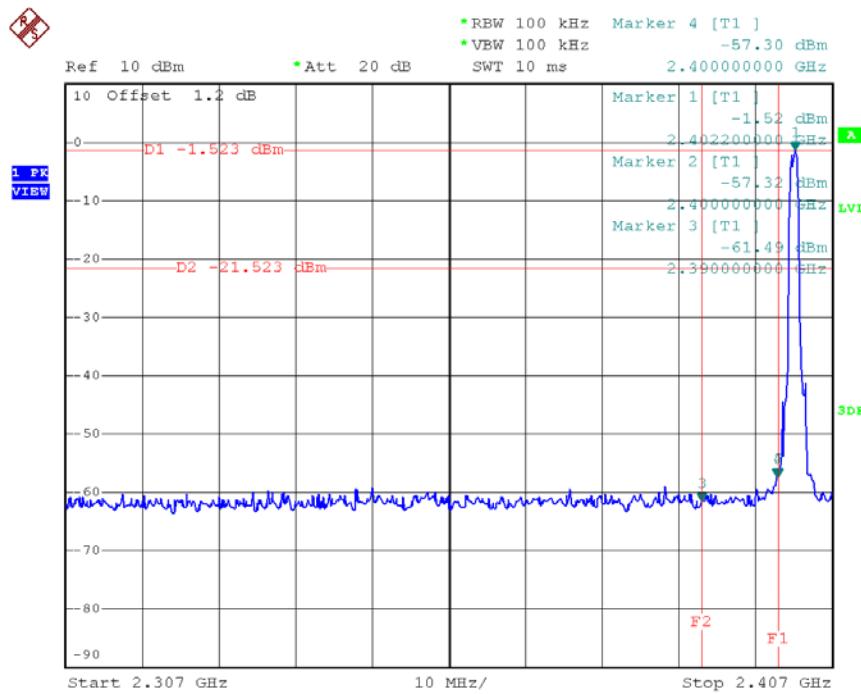

### CH78 (Upper) \_3Mbps

