

F	E	D	C	B	A
REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
00	NA	NA	2024.01.10	First Release	Zhou Cun
3.0	NA	NA	2024.03.20	update Google Fiber logo and remove Wi-Fi7 EXT	Zhou Cun
4.0	NA	NA	2024.04.16	update GFiber logo and SN define	Zhou Cun
5.0	NA	NA	2024.04.24	update QR code content	Zhou Cun
6.0	NA	NA	2024.07.31	update address	Zhou Cun
7.0	NA	NA	2024.09.02	update WiFi7 logo and QR code setting	Zhou Cun

Notes:

1. Printing color: Pantone Cool Grey 10C
2. All font: Google Sans Medium, input 4.5pt, output: 1.1mm.
- All 1D barcode: code 128(code A, Space correction: 1), height: 3mm.

3. FCC ID, Input, GFiber Model Number, GPN fixed.
4. FCC ID: VW3FAST380BA provide by Sagemcom.
5. MAC: AB:CD:EF:00:00:01, total 12 digits.
6. Assembled in Vietnam
7. Factory ID: FY provided by Sagemcom
8. Serial Number: PPPMMYYWWSSSS

Length of the Product Serial Number is 15 characters.

PPP: 3 character product type, FAST380BA=E02, fixed

1st P = R for RG and E for EXT, PP = Vendor to use this in increments (Base 25).

MMM: 3 character manufacturer ID; MMM = 561, fixed

MM = 56 for SGC and The third M to uniquely identify the factory location use 1 (Vietnam) (base 25).

YY: 2 character year; decimal [0-9], eg: 24 for Year 2024

WW: 2 character work week; decimal [0-9]; eg.27 for week #27 of the year

SSSS: 5 character unit serial; from 00001, Base 25

The base-25 system is a numeral system with 25 as its base. The symbols used in this system are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N and O.

This counter is reset every week.


#### 9. GFiber URL QR code Content: (the content is variable)

<https://google.com/fiber/registerdevice>


?sn=E02561244200001&mac=D4351DC7

E490&mo=GEBE320S&gpn=1183662-01

QR code size: 14.4\*14.4 +/-0.5mm ECC: Q, Model: 2, start mode: AUTO  
Element width(dots): 7 (printer 600dpi)

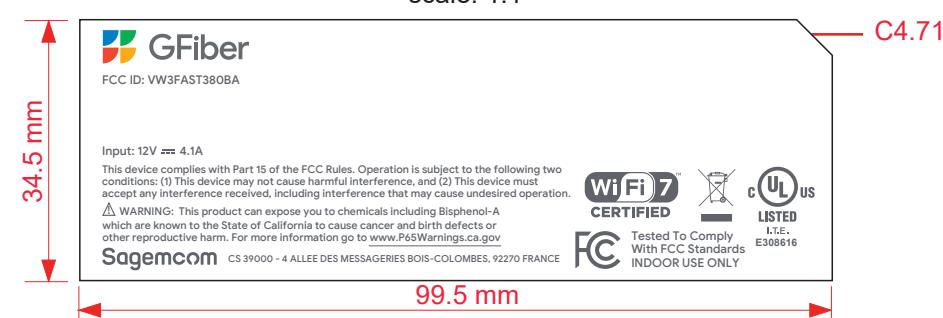

vendor supply

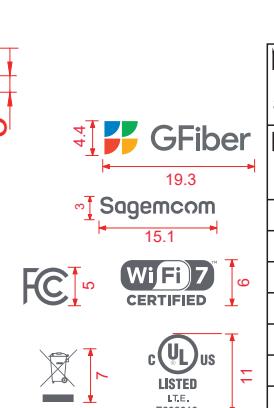

MATERIAL (SPEC.): 50# embossing Mylar+25# matte PP		SCALE 1:1	PART NAME device label	DESIGNED Zhou Cun
FINISH:		SHEET 1/1		
DIM. TOLERANCES		WARPAGE	UNIT mm	CHECKED Aveline
DIM.	TOL.	D(MAX.) =0.2%L		
0~6	$\pm 0.05$		SIZE A4	CUSTOMER MODEL FAST380BA
6~30	$\pm 0.10$	ANGLE TOLERANCES		
30~120	$\pm 0.15$	ANGLE TOL.	PART NO. 500.02857.015	APPROVED
120~300	$\pm 0.20$	$X^\circ$ $\pm 0.20^\circ$		
300~	$\pm 0.25$	$X^\circ$ $\pm 0.10^\circ$	CUSTOMER PART NO.	
CRITICAL DIM. MARK "*"				

Roll direction

F E D C B A