

D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE	
00	N/A	N/A	2024/05/13	First release	Berg Wen	
01	N/A	N/A	2024/06/14	Update device, giftbox label, carton label & pallet label	Berg Wen	
02	N/A	N/A	2024/07/22	Update Temp P/N	Berg Wen	



1 Temp SN Label suspend on actual suitable place.




2.Product Label



3.Giftbox Label



4.Carton Label

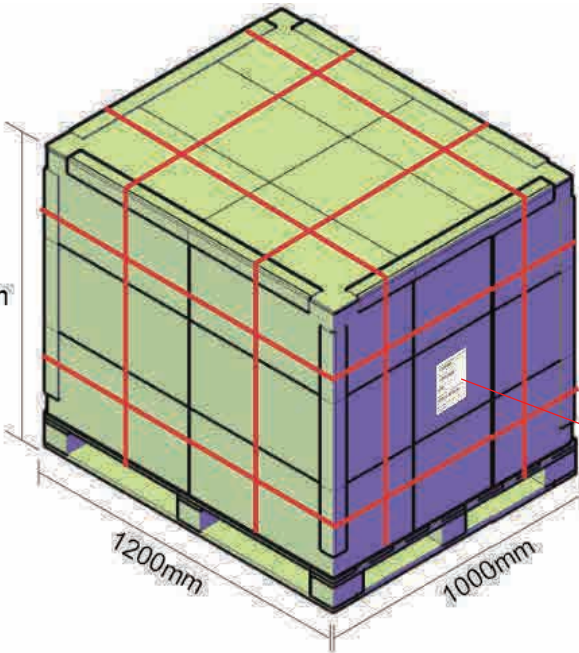

5.Pallet Label


5	Pallet Label	500.01927.005	1/90
4	Carton Label	500.02859.005	1/5
3	Gift box label	500.02858.005	1/1
2	Product Label	500.02863.005	1/1
1	Temp SN Label	503.00912.005	1/1
ITEM	DESCRIPTION	FOXCONN P/N	QUA


MATERIAL (SPEC.)										SCALE	 Foxconn Industrial Internet 富士康工业互联网			
FINISH										SHEET				
Select											UNIT mm	PART NAME F06H005.00 Label Proposal		
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	USR				
0~6		0.05	0.05	0.10					0.20		SIZE A4	MODEL F06H005.00	PART NO. N/A	DESIGNED Berg Wen
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20					
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			CUSTOMER MODEL F5298	CUSTOMER PART NO. N/A	APPROVED Bailey Tan
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30					
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50					
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80					
DRAFT TOLERANCE				±0.2°		CRITICAL DIM. MARK		*						

Temporary SN Label (503.00912.005)

Font: Arial 3 pt
QR code content: PPPMMMYWWSSSSS,
QR code size: 8.7*8.7 +/-0.5mm ECC: M, Model: 2, start mode: AUTO
Element width(dots): 10 (printer 600dpi)

SN: PPPMMMYWWSSSSS
Length of the Product Serial Number is 15 characters.
PPP: 3 character product type, FAST5298=R02
1st P = R for RG and E for EXT, PP = Vendor to use this in increments (Base 25).
MMM: 3 character manufacturer ID; MMM = 561, fixed
MM = 56 for SGC and The third M to uniquely identify the factory location use 1 (Vietnam) (base 25).
YY: 2 character year; decimal [0-9], eg: 24 for Year 2024
WW: 2 character work week; decimal [0-9]; eg.27 for week #27 of the year
SSSSS: 5 character unit serial; from 00001, Base 25
The base-25 system is a numeral system with 25 as its base. The symbols used in this system are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N and O.
This counter is reset every week.

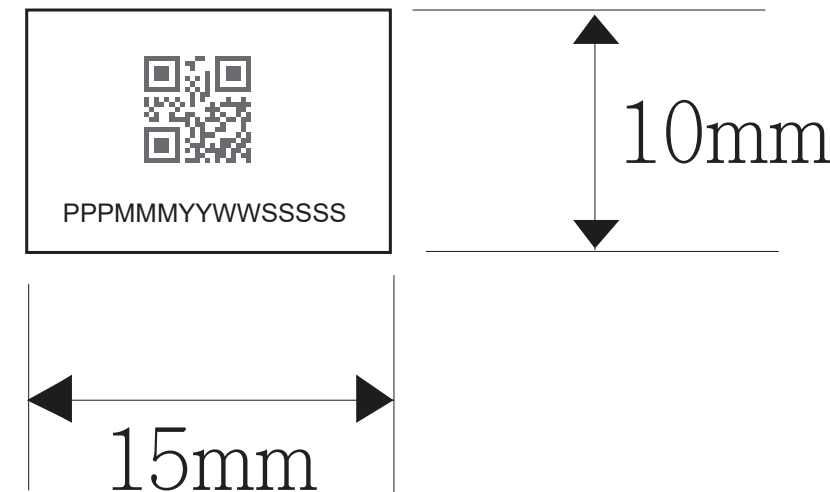


MATERIAL (SPEC.)										SCALE	 Foxconn Industrial Internet 富士康工业互联网		
FINISH										SHEET			
Select										UNIT mm	PART NAME Temp SN Label		
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	USR				
0~6	0.05	0.05	0.10					0.20		SIZE A4	MODEL F06H005.00	PART NO. 503.00912.005	DESIGNED Berg Wen
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20					
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			CUSTOMER MODEL F5298	CUSTOMER PART NO. N/A	APPROVED Bailey Tan
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30					
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50					
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80					
DRAFT TOLERANCE			±0.2°		CRITICAL DIM. MARK				*				

Notes: 標籤製作黏貼方式/F06H005.00/02/03 of 06

- Printing color: Pantone Cool Grey 10C
- All font: Google Sans Medium, input 5.0pt, output: 1.27mm.
All 1D barcode: code 128(code B), height: 3mm.
- FCC ID, Input, GFiber Model Number, GPN fixed.
- FCC ID: VW3FAST5298 provide by Sagemcom.
- MAC: AB:CD:EF:00:00:01, total 12 digits.
- Assembled in Vietnam
- Factory ID: FY provided by Sagemcom
- Serial Number: PPPMMYYWWSSSSS
Length of the Product Serial Number is 15 characters.
PPP: 3 character product type, FAST5298=R02 , fixed
1st P = R for RG and E for EXT, PP = Vendor to use this in increments (Base 25).
MMM: 3 character manufacturer ID; MMM = 561, fixed
MM = 56 for SGC and The third M to uniquely identify the factory location use 1 (Vietnam) (base 25).
YY: 2 character year; decimal [0-9], eg: 24 for Year 2024
WW: 2 character work week; decimal [0-9]; eg.27 for week #27 of the year
SSSSS: 5 character unit serial; from 00001, Base 25
The base-25 system is a numeral system with 25 as its base. The symbols used in this system are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N and O.
code 128(code B), height: 4mm. This counter is reset every week.
- GFiber URL QR code Content: content is fixed
<https://google.com/fiber/registerdevice?sn=CP2142AF2D6&mac=D4351DC7E490&mo=GRAX210T&gpn=1114333-01>
QR code size: 24.3*24.3 +/-0.5mm ECC: M, Model: 2, start mode: AUTO
Element width(dots): 7 (printer 300dpi) QR code in the middle
- REBUILT_MMY
MMYY: Month and Year , Print this when refurbish the devices, if do not take apart the housing, do not print this.


REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
00	NA	NA	2024.01.12	First release	Berg Wen
02	NA	NA	2024.04.26	Update Label size,GFiber logo,SN define & QR code	Berg Wen
03	NA	NA	2024.08.02	Update address	Berg Wen

50 mm

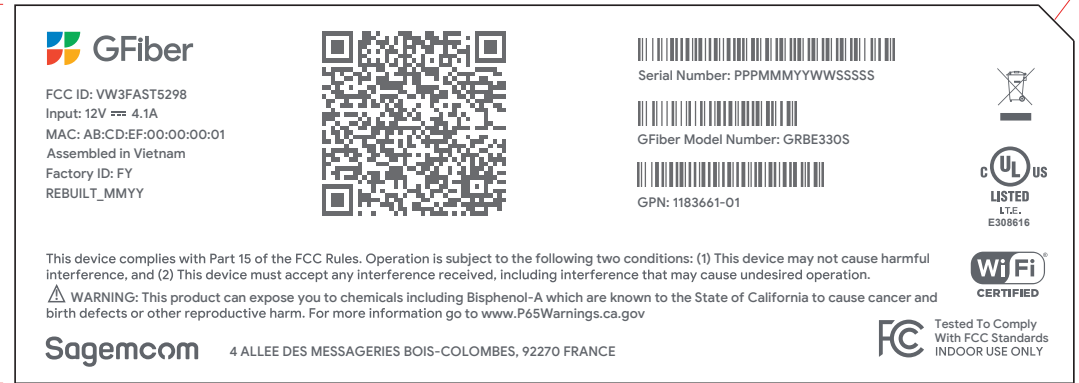


C4.71

140 mm

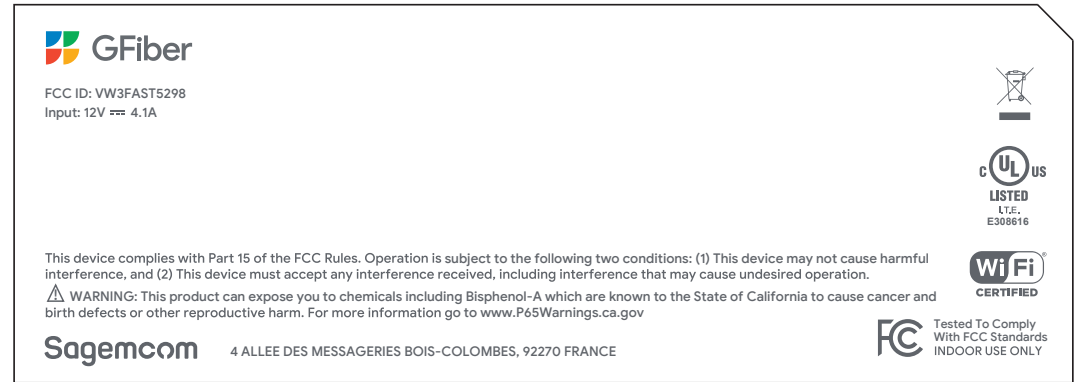

Vendor supply

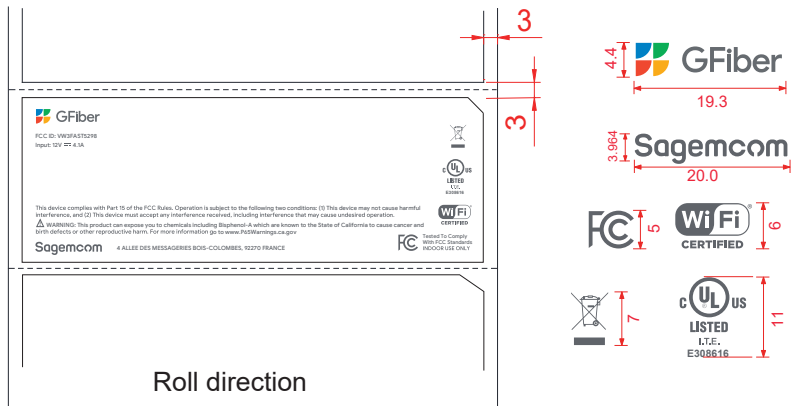

MATERIAL (SPEC.):				SCALE		 Foxconn Industrial Internet 富士康工业互联网					
50# embossing Mylar+25# matte PP				1:1							
FINISH:				SHEET		PART NAME					
				1/1							
				UNIT		Product Label					
				mm							
DIM. TOLERANCES		WARPAGE		SIZE		MODEL		PART NO.		DESIGNED	
DIM.	TOL.	D(MAX.)		A4		F06H005.00		500.0XXXX.005		Berg Wen	
0~6	±0.05	=0.2*L									
6~30	±0.10	ANGLE TOLERANCES									
30~120	±0.15	ANGLE	TOL.								
120~300	±0.20	X°	±0.20°								
300~	±0.25	.X°	±0.10°								
CRITICAL DIM. MARK “*”						CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED	
						FAST5298				Bailey Tan	

DIM. TOLERANCES				WARPAGE	
DIM.	TOL.	D(MAX.)			
0~6	±0.05	=0.2%L			
6~30	±0.10	ANGLE			
30~120	±0.15	ANGLE			
120~300	±0.20	X°		±0.20°	
300~	±0.25	.X°		±0.10°	
CRITICAL DIM. MARK "※"					


標籤製作粘貼方式/F06H005.00/02/04 of 06

Giftbox Label(500.02858.005)

- Notes:
- Printing color: Pantone Cool Grey 10C
 - Font: Google Sans Medium, input 6pt, output: 1.5mm.
 - GFiber Model Number: GRBE330S, fixed.
 - GPN: 1183661-01, fixed code 128(code B), height: 4mm.
 - MAC: AB:CD:EF:00:00:01, total 12 digits, same as device label.
 - Serial Number: PPPMMMYWWSSSSS
Length of the Product Serial Number is 15 characters.
PPP: 3 character product type, FAST5298=R02 , fixed
1st P = R for RG and E for EXT, PP = Vendor to use this in increments (Base 25).
MMM: 3 character manufacturer ID; MMM = 561, fixed
MM = 56 for SGC and The third M to uniquely identify the factory location use 1 (Vietnam)
(base 25).
YY: 2 character year; decimal [0-9], eg: 24 for Year 2024
WW: 2 character work week; decimal [0-9]; eg.27 for week #27 of the year
SSSSS: 5 character unit serial; from 00001, Base 25
The base-25 system is a numeral system with 25 as its base. The symbols used in this system are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N and O.
code 128(code B), height: 4mm. This counter is reset every week.
 - GFiber URL QR code Content: content is fixed
<https://google.com/fiber/registerdevice?sn=CP2142AF2D6&mac=D4351DC7E490&mo=GRAX210T&gpn=1114333-01>
QR code size: 15.5*15.5 +/-0.5mm ECC: M, Model: 2, start mode: AUTO
Element width(dots): 9 (printer 600dpi) QR code in the middle
 - FW: G1.x.x.x - SGI123456, provided by Sagemcom.
 - Assembled in Vietnam
 - Factory ID: FY provided by Sagemcom



D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE	
00	N/A	N/A	2024/04/09	First release	Berg Wen	
01	N/A	N/A	2024/06/14	Update giftbox label	Berg Wen	
02	N/A	N/A	2024.08.02	Update address	Berg Wen	

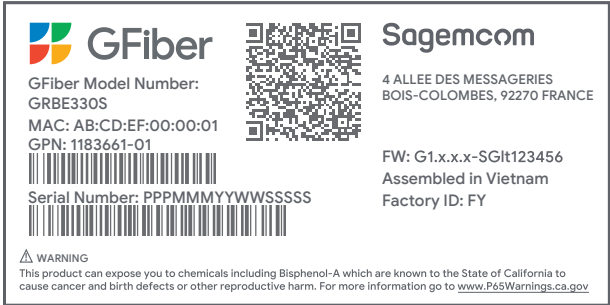


MATERIAL (SPEC.)										SCALE	 Foxconn Industrial Internet 富士康工业互联网				
FINISH										SHEET					
Select										UNIT mm	PART NAME				
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label		USR	Giftbox Label			
0~6		0.05	0.05	0.10					0.20		SIZE A4	MODEL		PART NO.	DESIGNED
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20			F06H005.00		N/A	Berg Wen
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			CUSTOMER MODEL		CUSTOMER PART NO.	APPROVED
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30			F5298		N/A	Bailey Tan
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50						
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80						
DRAFT TOLERANCE				±0.2°		CRITICAL DIM. MARK			*						

標籤製作粘貼方式/F06H005.00/02/06 of 06

Pallet Label(503.01927.005)

Notes:

1. Printing color: Pantone Cool Grey 10C
2. All Font: Google Sans Medium, input 16pt, output: 4mm
All barcode type: code 128(code B), height: 10mm.
3. GFiber Model Number and GPN: 1183661-01 are fixed.
4. QT Y: XXX, follow actual quantity
5. Pallet ID: JWYYDDDBSMMXXXX
JW: Factory Identifier, fixed
YY: 2 Last numbers of the current year, eg: 24
DDD: Calendar Day of manufacturing (0 to 365,
eg: Friday the 12th July is day 193)
BS: Means “pallet”, fixed
MM: Model code.(01 for F5298 GFiber)
XXXX: counter with 4 numeral characters (0 to 9),
(up to 9999 products)
This counter is reset every day.
Length of the Product Serial Number is 15 characters.
6. CARTON COUNT: XX
total 18 carton on the pallet.
- 7.MFG PN: F06H005.00

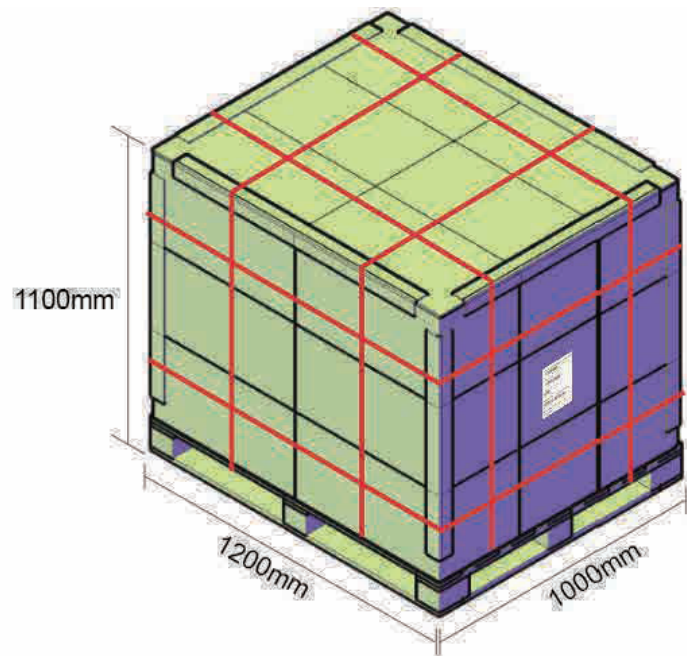

D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE	
00	N/A	N/A	2024/04/09	First release	Berg Wen	
01	N/A	N/A	2024/06/14	Update Pallet label	Berg Wen	

GFiber Model Number: GRBE330S
GPN: 1183661-01
QTY: XXX
Pallet ID: JWYYDDDBSMMXXXX
CARTON COUNT: XX
MFG PN :F06H005.00

165mm

100mm

MATERIAL (SPEC.)										SCALE	 Foxconn Industrial Internet 富士康工业互联网						
FINISH										SHEET							
Select										UNIT mm	PART NAME Pallet Label						
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label						USR		
0~6		0.05	0.05	0.10					0.20		SIZE A4	MODEL F06H005.00		PART NO. N/A		DESIGNED Berg Wen	
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20								
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25								
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30								
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50								
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80			CUSTOMER MODEL F5298		CUSTOMER PART NO. N/A		APPROVED Bailey Tan	
DRAFT TOLERANCE				±0.2°		CRITICAL DIM. MARK			*								