



## FCC PART 15.249

### TEST REPORT

For

**ATMEL NORWAY AS**

VESTRE ROSTEN 79, 7075 TILLER, TRONDHEIM, NORWAY

**FCC ID: VW4A091982**

<b>Report Type:</b> Original Report	<b>Product Type:</b> ATREB215-XPRO
<b>Test Engineer:</b> Dean Liu	<i>Dean Liu</i>
<b>Report Number:</b>	RSZ141215008-00B
<b>Report Date:</b>	2015-03-11
<b>Reviewed By:</b> Sula Huang RF Engineer	<i>Sula Huang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
1.2 OBJECTIVE .....	4
1.3 RELATED SUBMITTAL(S)/GRANT(S) .....	4
1.4 TEST METHODOLOGY .....	4
1.5 TEST FACILITY .....	4
<b>2 SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
2.1 JUSTIFICATION .....	5
2.2 EUT EXERCISE SOFTWARE .....	5
2.3 SUPPORT EQUIPMENT LIST AND DETAILS .....	5
2.4 EXTERNAL CABLE .....	5
2.5 BLOCK DIAGRAM OF TEST SETUP .....	6
<b>3 SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>4 FCC§15.203 - ANTENNA REQUIREMENT .....</b>	<b>8</b>
4.1 APPLICABLE STANDARD .....	8
4.2 ANTENNA CONNECTOR CONSTRUCTION .....	8
<b>5 FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>9</b>
5.1 APPLICABLE STANDARD .....	9
5.2 MEASUREMENT UNCERTAINTY .....	9
5.3 EUT SETUP .....	9
5.4 EMI TEST RECEIVER SETUP .....	10
5.5 TEST PROCEDURE .....	10
5.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
5.7 TEST EQUIPMENT LIST AND DETAILS .....	11
5.8 TEST RESULTS SUMMARY .....	11
5.9 TEST DATA .....	11
<b>6 FCC§15.205, §15.209&amp;§15.249- RADIATED EMISSIONS .....</b>	<b>14</b>
6.1 APPLICABLE STANDARD .....	14
6.2 MEASUREMENT UNCERTAINTY .....	14
6.3 EUT SETUP .....	15
6.4 TEST EQUIPMENT SETUP .....	16
6.5 TEST PROCEDURE .....	16
6.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
6.7 TEST EQUIPMENT LIST AND DETAILS .....	17
6.8 TEST RESULTS SUMMARY .....	17
6.9 TEST DATA .....	17
<b>7 FCC §15.215(C) – 20 DB BANDWIDTH TESTING .....</b>	<b>21</b>
7.1 APPLICABLE STANDARD .....	21
7.2 TEST PROCEDURE .....	21
7.3 TEST EQUIPMENT LIST AND DETAILS .....	21
7.4 TEST DATA .....	21
<b>8 FCC§15.249(D) - OUT OF BAND EMISSION (50 DB ATTENUATION) .....</b>	<b>24</b>
8.1 APPLICABLE STANDARD .....	24

8.2	TEST PROCEDURE .....	24
8.3	TEST EQUIPMENT LIST AND DETAILS.....	24
8.4	TEST DATA .....	25

FINAL

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

The *ATMEL NORWAY AS*'s product, model number: *A09-1982 (FCC ID: VW4A091982)* (the "EUT") in this report was a *ATREB215-XPRO*, was measured approximately: 7.15 cm (L) x3.0 cm (W) x 1.0 cm (H), rated input voltage: DC3.3V from system.

*\* All measurement and test data in this report was gathered from production sample serial number: 1800000151 (Assigned by applicant). The EUT was received on 2014-12-17.*

### 1.2 Objective

This type approval report is prepared on behalf of *ATMEL NORWAY AS* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

### 1.3 Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: VW4A091982

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

### 1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## 2 SYSTEM TEST CONFIGURATION

### 2.1 Justification

The system was configured for testing in engineering mode.

For FSK modulation mode: 407 channels are provided to testing and channel list as follows:  
(Note: The channel separation is 200 kHz.)

Channel	Frequency (MHz)
3	2400.8
.	.
.	.
204	2441
.	.
.	.
409	2482

EUT was tested with Channel 2400.8MHz, 2441MHz and 2482MHz.

### 2.2 EUT Exercise Software

The software “Atmel Studio 6.2” was used during test.


### 2.3 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
Atmel Corp	SAM4L-XplainedPro Board	A09-1783/02	0200005445

### 2.4 External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	No	1.8	USB Port of Laptop	Keyboard
USB Cable	No	No	1.2	USB Port of Laptop	Test Jig

## 2.5 Block Diagram of Test Setup

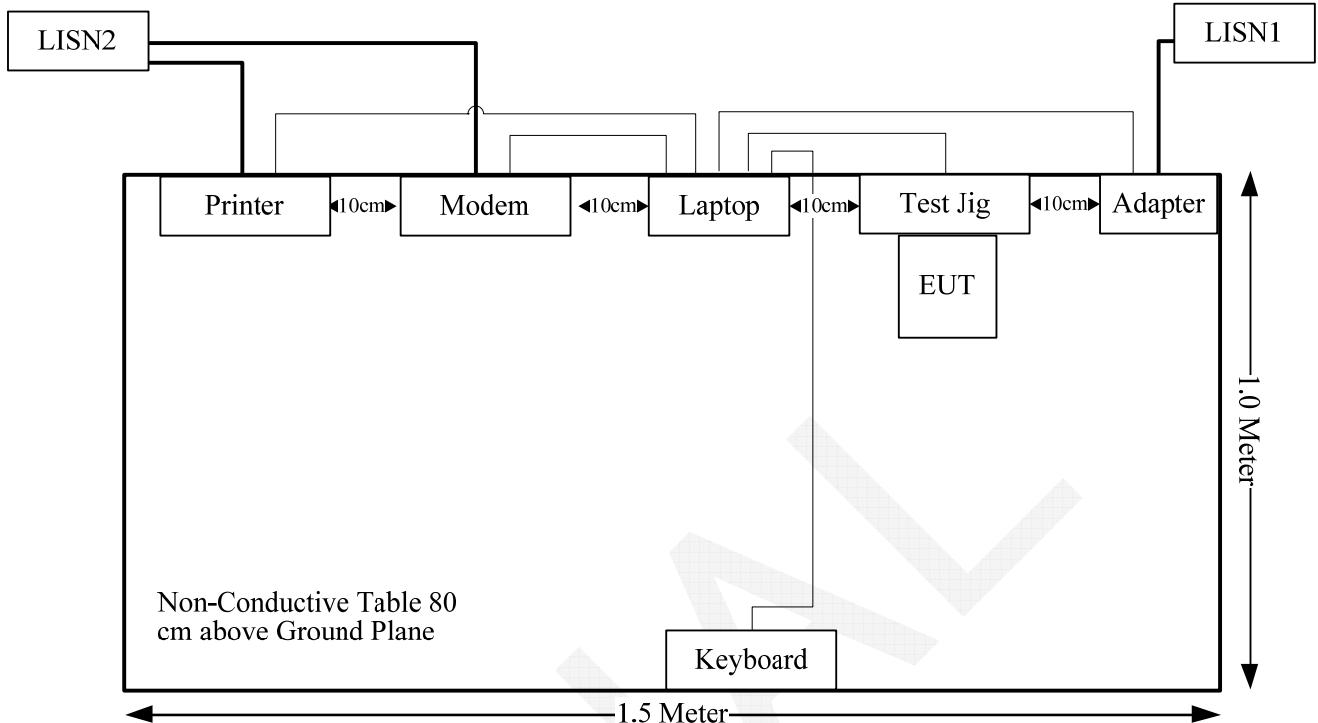

### 3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance
§15.249(d)	Outside of Band Emission (50dB attenuation)	Compliance

## **4 FCC§15.203 - ANTENNA REQUIREMENT**

### **4.1 Applicable Standard**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

### **4.2 Antenna Connector Construction**

The EUT used one 2.4GHz rubber stubby antenna with RP-SMA female straight arrangement and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.



## 5 FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### 5.1 Applicable Standard

FCC§15.207

### 5.2 Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{\text{cisp}}$

Measurement	$U_{\text{cisp}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### 5.3 EUT Setup

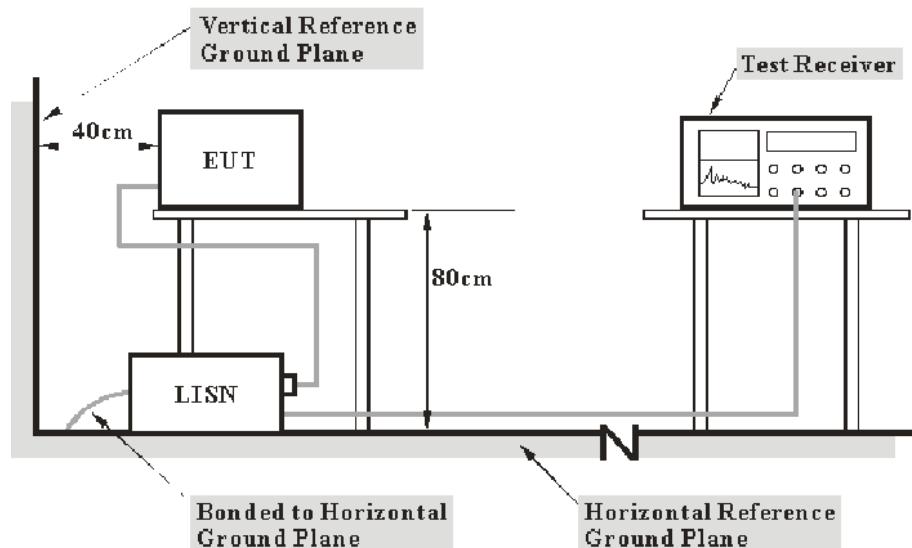

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source

#### 5.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### 5.5 Test Procedure

During the conducted emission test, the adapter of laptop was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

#### 5.6 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## 5.7 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-16	2015-10-16
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## 5.8 Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**13.60 dB at 1.269154 MHz in the Line conducted mode**

## 5.9 Test Data


### Environmental Conditions

Temperature:	21.5 °C
Relative Humidity:	56 %
ATM Pressure:	101.9 kPa

*The testing was performed by Dean Liu on 2014-12-19.*


*Test Mode: Transmitting*

**AC120 V, 60 Hz, Line:**

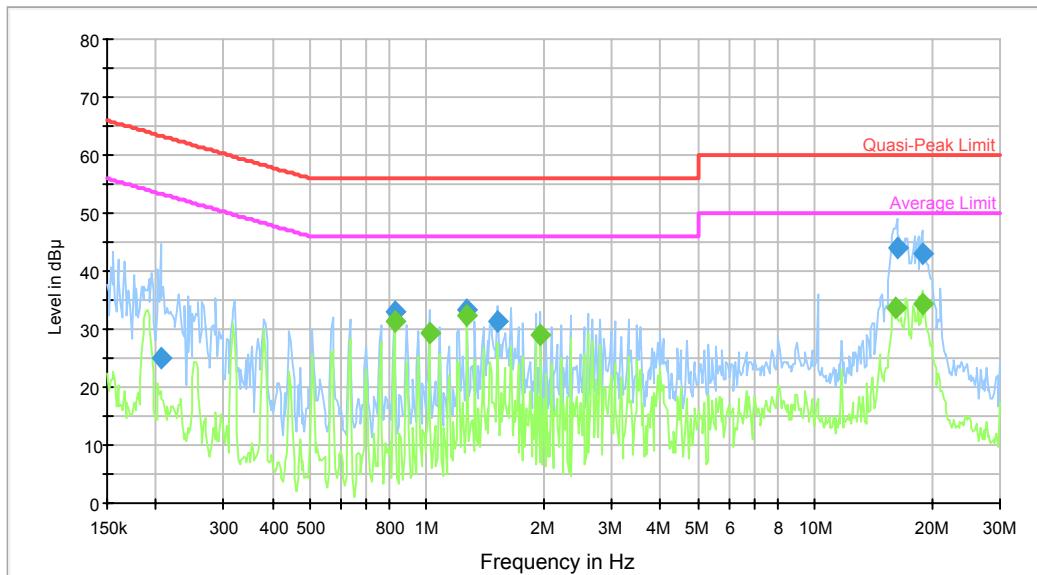

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.206306	24.9	9.000	L1	10.8	38.4	63.4	Compliance
0.825364	33.1	9.000	L1	10.5	22.9	56.0	Compliance
1.269154	33.5	9.000	L1	10.4	22.5	56.0	Compliance
1.524426	31.2	9.000	L1	10.4	24.8	56.0	Compliance
16.251162	44.2	9.000	L1	10.6	15.8	60.0	Compliance
18.907519	43.1	9.000	L1	11.0	16.9	60.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.825364	31.3	9.000	L1	10.5	14.7	46.0	Compliance
1.015358	29.5	9.000	L1	10.4	16.5	46.0	Compliance
1.269154	32.4	9.000	L1	10.4	13.6	46.0	Compliance
1.967177	29.1	9.000	L1	10.4	16.9	46.0	Compliance
16.122185	33.7	9.000	L1	10.6	16.3	50.0	Compliance
18.907519	34.3	9.000	L1	11.0	15.7	50.0	Compliance

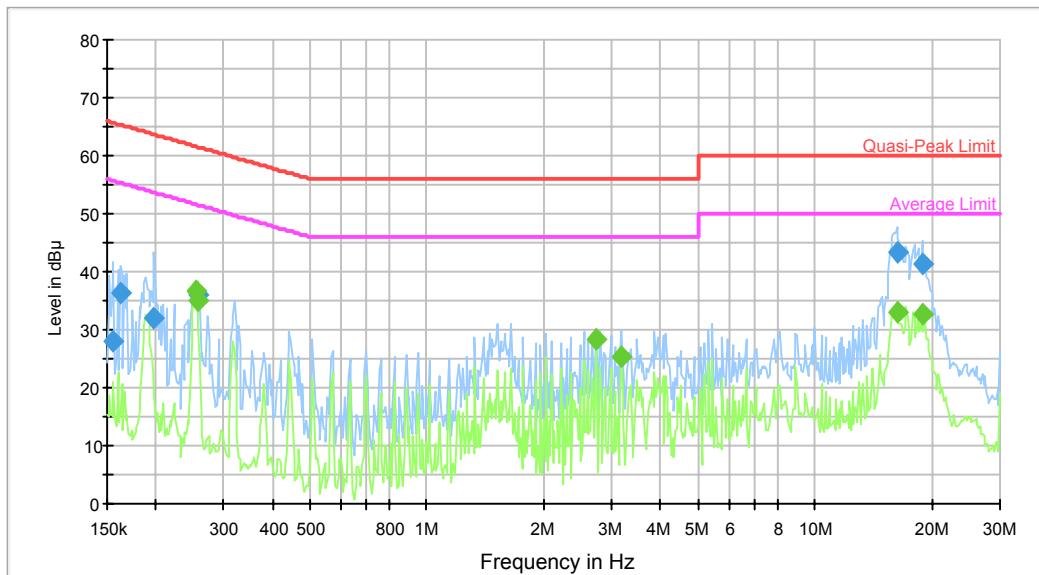**AC120 V, 60 Hz, Neutral:**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.156097	28.1	9.000	N	10.4	37.6	65.7	Compliance
0.162441	36.4	9.000	N	10.5	28.9	65.3	Compliance
0.198249	31.9	9.000	N	11.3	31.7	63.7	Compliance
0.255827	35.9	9.000	N	11.2	25.7	61.6	Compliance
16.251162	43.4	9.000	N	10.6	16.6	60.0	Compliance
18.907519	41.4	9.000	N	11.0	18.6	60.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.253797	36.6	9.000	N	11.2	15.0	51.6	Compliance
0.255827	35.0	9.000	N	11.2	16.5	51.6	Compliance
2.727252	28.2	9.000	N	10.6	17.8	46.0	Compliance
3.173039	25.3	9.000	N	10.7	20.7	46.0	Compliance
16.251162	33.1	9.000	N	10.6	16.9	50.0	Compliance
18.907519	32.7	9.000	N	11.0	17.3	50.0	Compliance

## 6 FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

### 6.1 Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 6.2 Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of  $U_{\text{cisp}}$ 


Measurement	$U_{\text{cisp}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### 6.3 EUT Setup

Below 1 GHz:

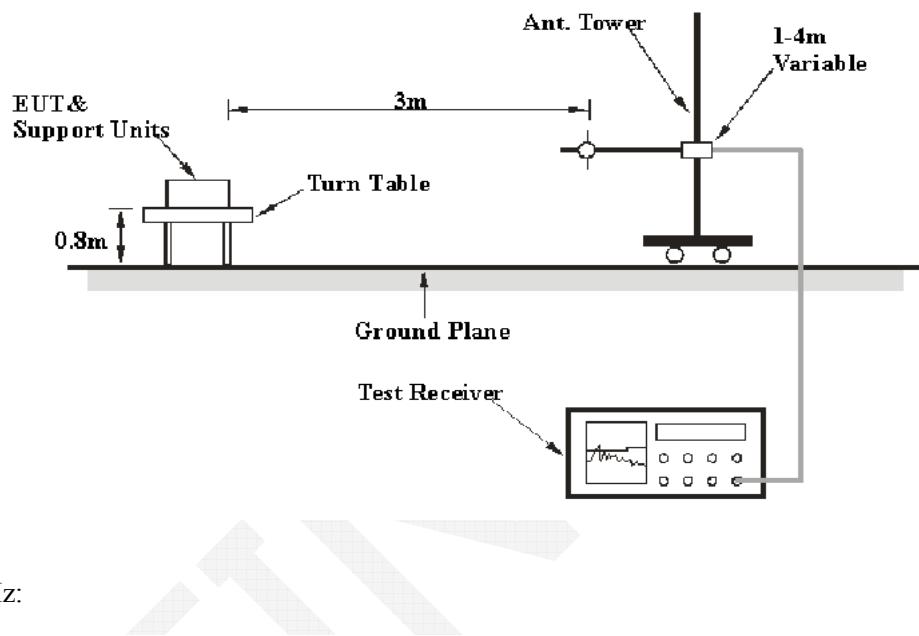

Above 1 GHz:

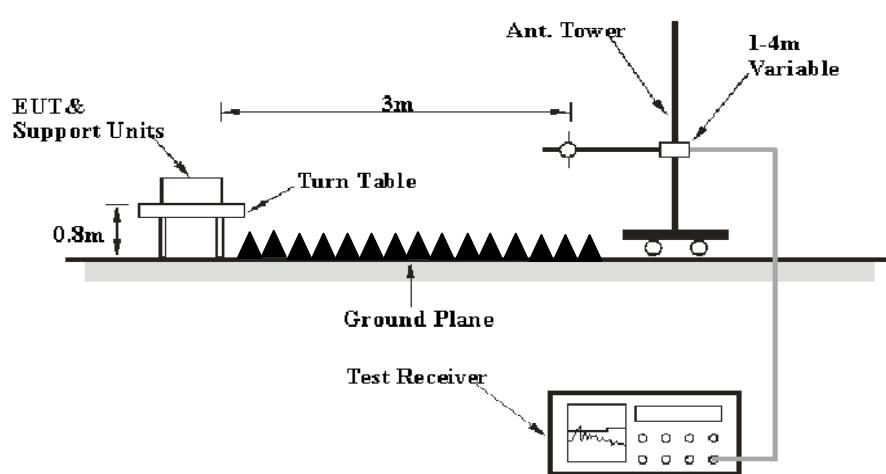

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

#### 6.4 Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

#### 6.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

#### 6.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## 6.7 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## 6.8 Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249, with the worst margin reading of:

**1.69dB at 2400.8 MHz in the Horizontal polarization**

## 6.9 Test Data

### Environmental Conditions

Temperature:	19.6 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa

The testing was performed by Dean Liu on 2014-12-25 and 2015-03-11.

Test Mode: Transmitting  
Below 1GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2400.8 MHz									
54.21	34.21	QP	H	7.71	0.96	21.41	21.47	40.00	18.53
120.36	33.15	QP	V	14.14	1.36	21.41	27.24	43.50	16.26
Low Channel: 2441 MHz									
54.62	33.87	QP	H	7.66	0.95	21.41	21.07	40.00	18.93
122.74	32.47	QP	V	14.25	1.36	21.41	26.67	43.50	16.83
Low Channel: 2482 MHz									
54.55	34.21	QP	H	7.67	0.95	21.41	21.42	40.00	18.58
120.24	33.15	QP	V	14.13	1.36	21.41	27.23	43.50	16.27

Above 1GHz:

## Field Strength (Peak)

Frequency (MHz)	Receiver	Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	15.249	
		Reading (dB $\mu$ V)	Polar (H/V)				Limit (dB $\mu$ V/m)	Margin (dB)
Operating Frequency:2400.8 MHz								
2400.8	68.27	H	25.64	4.42	0.00	98.33	114.00	15.67
2400.8	67.98	V	25.64	4.42	0.00	98.04	114.00	15.96
2390	24.92	H	25.61	4.39	0.00	54.93	74.00	19.07
2390	24.62	V	25.61	4.39	0.00	54.63	74.00	19.37
4801.6	31.26	H	30.58	5.97	27.41	47.28	74.00	26.72
4801.6	30.47	V	30.58	5.97	27.41	46.01	74.00	27.99
7202.4	30.33	H	34.09	7.45	25.91	46.89	74.00	27.11
7202.4	29.92	V	34.09	7.45	25.91	46.10	74.00	27.90
9603.2	36.22	H	35.95	8.79	27.56	47.51	74.00	26.49
9603.2	35.03	V	35.95	8.79	27.56	47.10	74.00	26.90
2634	29.14	H	26.25	4.77	27.44	32.71	74.00	41.29
2634	28.87	V	26.25	4.77	27.44	32.44	74.00	41.56
Operating Frequency:2441 MHz								
2441	68.04	H	25.75	4.40	0.00	98.19	114.00	15.81
2441	67.37	V	25.75	4.40	0.00	97.52	114.00	16.48
4882	31.28	H	30.79	6.08	27.42	40.73	74.00	33.27
4882	30.47	V	30.79	6.08	27.42	39.92	74.00	34.08
7323	37.77	H	34.38	7.51	25.88	47.28	74.00	26.72
7323	36.04	V	34.38	7.51	25.88	46.01	74.00	27.99
9764	29.99	H	36.33	8.83	27.20	46.89	74.00	27.11
9764	29.84	V	36.33	8.83	27.20	46.10	74.00	27.90
3641	32.49	H	29.11	4.97	27.29	47.51	74.00	26.49
3641	31.75	V	29.11	4.97	27.29	47.10	74.00	26.90
1817	30.78	H	24.23	3.59	27.53	31.07	74.00	42.93
1817	31.92	V	24.23	3.59	27.53	32.21	74.00	41.79
Operating Frequency:2482 MHz								
2482	67.99	H	25.85	4.48	0.00	98.33	114.00	15.67
2482	67.47	V	25.85	4.48	0.00	97.81	114.00	16.19
2483.5	26.14	H	25.86	4.49	0.00	56.48	74.00	17.52
2483.5	25.94	V	25.86	4.49	0.00	56.28	74.00	17.72
4964	32.41	H	31.01	5.92	27.43	47.28	74.00	26.72
4964	30.57	V	31.01	5.92	27.43	46.01	74.00	27.99
7446	32.62	H	34.67	7.58	25.99	46.89	74.00	27.11
7446	32.17	V	34.67	7.58	25.99	46.10	74.00	27.90
9928	29.57	H	36.73	8.87	26.63	47.51	74.00	26.49
9928	29.61	V	36.73	8.87	26.63	47.10	74.00	26.90
2714	30.57	H	26.46	4.90	27.50	34.42	74.00	39.58
2714	29.86	V	26.46	4.90	27.50	33.71	74.00	40.29

Field Strength (Average)						
Frequency (MHz)	Peak Measurement @ 3m (dB $\mu$ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dB $\mu$ V/m)	15.249	
					Limit (dB $\mu$ V/m)	Margin (dB)
Operating Frequency: 2400.8 MHz						
2400.8	98.33	H	-6.02	92.31	94.00	1.69 *
2400.8	98.04	V	-6.02	92.02	94.00	1.98 *
2390	54.93	H	-6.02	48.91	54.00	5.09
2390	54.63	V	-6.02	48.61	54.00	5.39
4801.6	47.28	H	-6.02	41.26	54.00	12.74
4801.6	46.01	V	-6.02	39.99	54.00	14.01
7202.4	46.89	H	-6.02	40.87	54.00	13.13
7202.4	46.10	V	-6.02	40.08	54.00	13.92
9603.2	47.51	H	-6.02	41.49	54.00	12.51
9603.2	47.10	V	-6.02	41.08	54.00	12.92
2634	32.71	H	-6.02	26.69	54.00	27.31
2634	32.44	V	-6.02	26.42	54.00	27.58
Operating Frequency: 2441 MHz						
2441	98.19	H	-6.02	92.17	94.00	1.83 *
2441	97.52	V	-6.02	91.50	94.00	2.50 *
4882	40.73	H	-6.02	34.71	54.00	19.29
4882	39.92	V	-6.02	33.90	54.00	20.10
7323	47.28	H	-6.02	41.26	54.00	12.74
7323	46.01	V	-6.02	39.99	54.00	14.01
9764	46.89	H	-6.02	40.87	54.00	13.13
9764	46.10	V	-6.02	40.08	54.00	13.92
3641	47.51	H	-6.02	41.49	54.00	12.51
3641	47.10	V	-6.02	41.08	54.00	12.92
1817	31.07	H	-6.02	25.05	54.00	28.95
1817	32.21	V	-6.02	26.19	54.00	27.81
Operating Frequency: 2482 MHz						
2482	98.33	H	-6.02	92.31	94.00	1.69 *
2482	97.81	V	-6.02	91.79	94.00	2.21 *
2483.5	56.48	H	-6.02	50.46	54.00	3.54 *
2483.5	56.28	V	-6.02	50.26	54.00	3.74 *
4964	47.28	H	-6.02	41.26	54.00	12.74
4964	46.01	V	-6.02	39.99	54.00	14.01
7446	46.89	H	-6.02	40.87	54.00	13.13
7446	46.10	V	-6.02	40.08	54.00	13.92
9928	47.51	H	-6.02	41.49	54.00	12.51
9928	47.10	V	-6.02	41.08	54.00	12.92
2714	34.42	H	-6.02	28.40	54.00	25.60
2714	33.71	V	-6.02	27.69	54.00	26.31


\*Within measurement uncertainty!

Note: Calculate Average value based on duty cycle correction factor:

The maximum duty cycle is 50% under normal operation declared by manufacturer.

Duty cycle correction factor =  $20 \times \log(\text{duty cycle}) = 20 \times \log(50\%) = -6.02 \text{ dB}$

Average = Peak + Duty cycle correction factor.

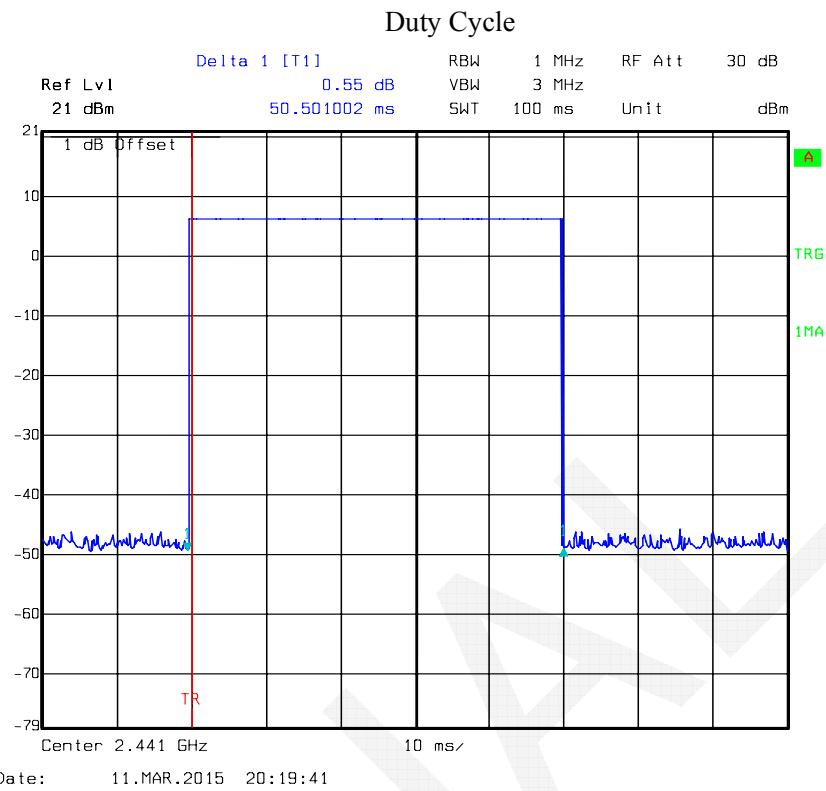

## 7 FCC §15.215(c) – 20 dB BANDWIDTH TESTING

### 7.1 Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### 7.4 Test Data

#### Environmental Conditions

Temperature:	21.8 °C
Relative Humidity:	46 %
ATM Pressure:	101.6kPa

\* The testing was performed by Dean Liu on 2015-01-12.


**Test Result:** Compliant.

Please refer to following tables and plots

*Test Mode: Transmitting*


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2400.8	0.069
Middle	2441	0.069
High	2482	0.069

### Low Channel

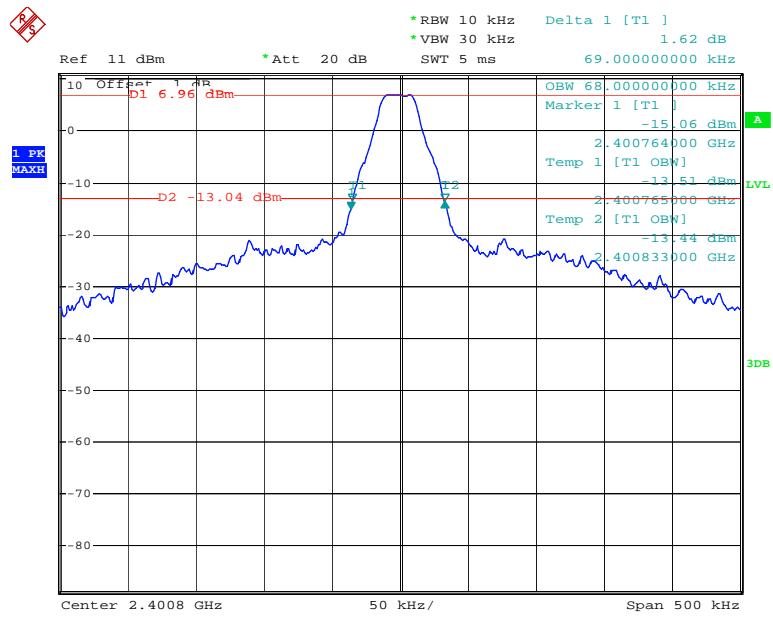


Date: 12.JAN.2015 13:28:58

## Middle Channel

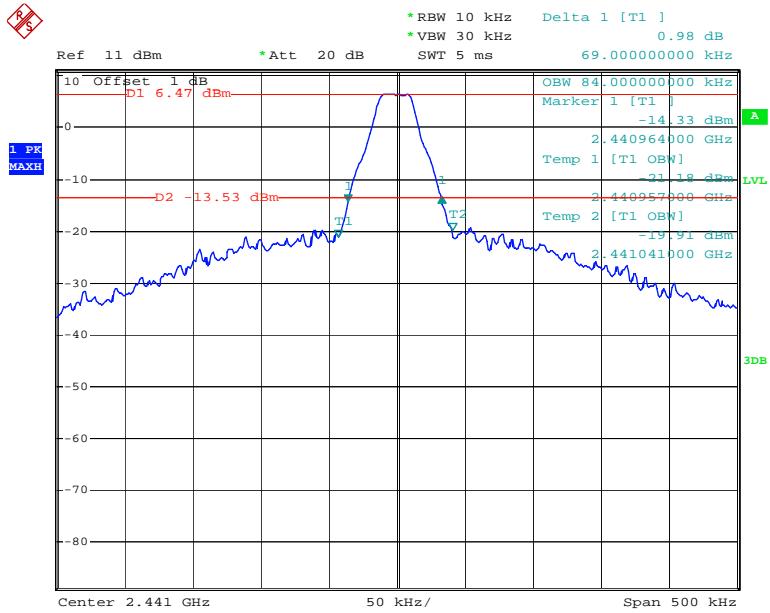

Date: 12.JAN.2015 13:26:36

## High Channel

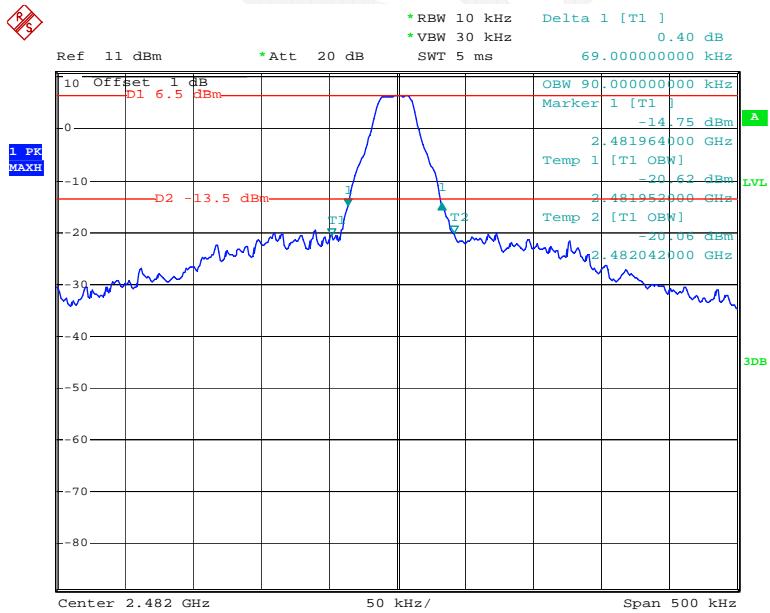

Date: 12.JAN.2015 13:30:01

## **8 FCC§15.249(d) - OUT OF BAND EMISSION (50 dB ATTENUATION)**

### **8.1 Applicable Standard**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

### **8.2 Test Procedure**

2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
4. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
5. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
6. Repeat above procedures until all measured frequencies were complete.

### **8.3 Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## 8.4 Test Data

### Environmental Conditions

Temperature:	21.8 °C
Relative Humidity:	46 %
ATM Pressure:	101.6kPa


\* The testing was performed by Dean Liu on 2015-01-12.

Test Result: Compliant.

Please refer to the following table and plots:


Band Edge	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)
Left	65.77	50
Right	64.25	50

## Band Edge, Left Side

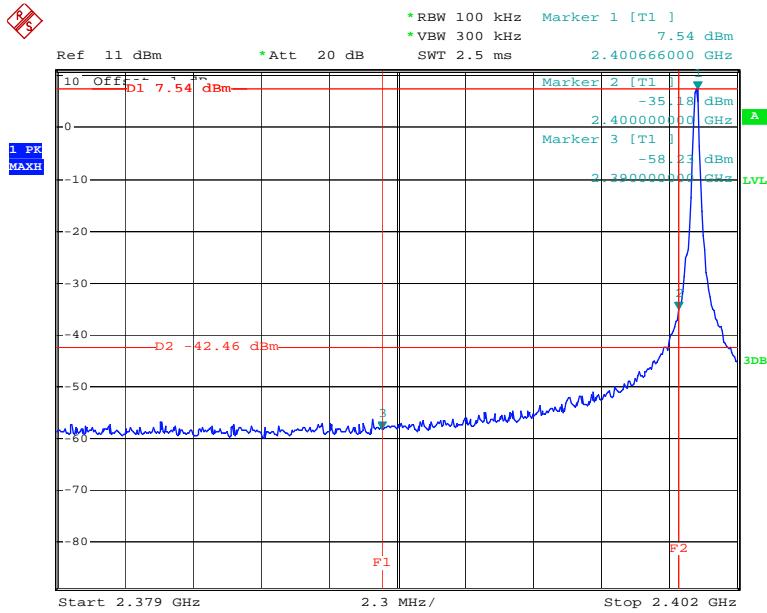

Date: 12.JAN.2015 13:04:37

## Band Edge, Right Side

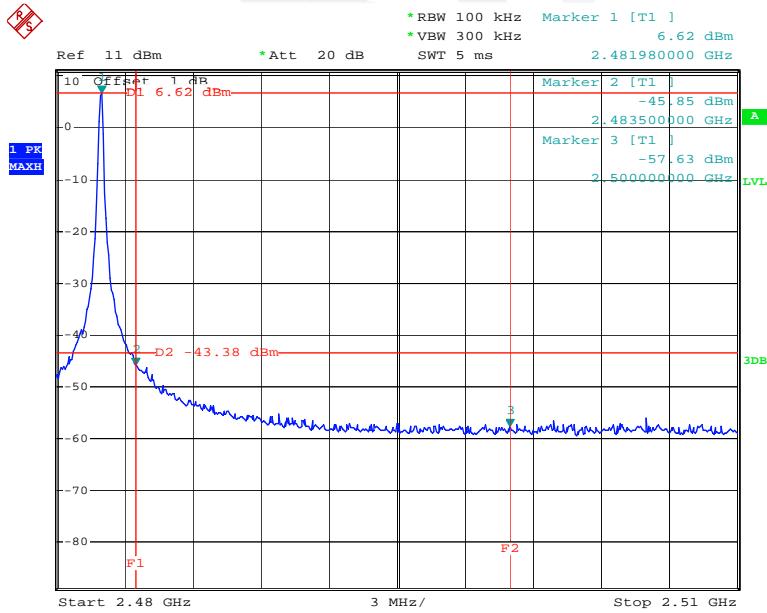

Date: 12.JAN.2015 13:18:33

\*\*\*\*\* END OF REPORT \*\*\*\*\*