



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

Test Report

Product Name: GPS

FCC ID: W2P-LST-4307

MODEL NO. : LST-4307, LST-4306, LST-4308, LST-4309,
LST-4310, LST-4311, LST-4312, LST-4313,
LST-4315

Applicant:

Hongkong Parkly Techology Limited
Flat C 9/F Nan Yuen Building 54 Tai Nan Street Prince Edward Kowloon

Date Received: 01/14/2008

Date Tested: 01/13/2008

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307

TABLE OF CONTENTS



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TABLE OF CONTENTS

APPLICANT: Hongkong Parkly Technology Limited

FCC ID: W2P-LST-4307

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3-5.....POWER LINE CONDUCTED INTERFERENCE AND PLOTS
PAGE 3-5.....RADIATION INTERFERENCE TEST DATA
PAGE 6-9.....OCCUPIED BANDWIDTH AND PLOTS

EXHIBIT INCLUDED:

PAGE 1.....BLOCK DIAGRAM
PAGE 2.....SCHEMATIC
PAGE 3.....USERS MANUAL
PAGE 4.....LABEL SAMPLE
PAGE 5.....LABEL LOCATION
PAGE 6.....EXTERNAL PHOTOGRAPHS
PAGE 7.....INTERNAL PHOTOGRAPHS
PAGE 8.....OPERATIONAL DESCRIPTION
PAGE 9.....TEST SET UP PHOTOGRAPHS

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307

TABLE OF CONTENTS



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100492	Apr.05,2008	1 Year
LISN	ROHDE&SCHWARZ	ENV216	100093	Apr.05,2008	1 Year
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101202	Apr.05,2008	1 Year
Spectrum Analyzer	ANRITSU	MS2651B	6200238316	Apr.05,2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Apr.05,2008	1 Year
Bilog Antenna	Sunol	JB3	A121206	Apr.05,2008	1 Year
Horn Antenna	EMCO	3115	640201028-06	Apr.05,2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Apr.05,2008	1 Year
Cable	Resenberger	N/A	NO.1	Apr.05,2008	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Apr.05,2008	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Apr.05,2008	1 Year
Single Phase Power Line Filter	Kikusui	LIN40MA-PC R-L	LM002352	Apr.05,2008	1 Year
AC Power Source	Kikusui	AC40MA	LM003232	Apr.05,2008	1 Year
Test analyzer	Kikusui	KHA1000	LM003720	Apr.05,2008	1 Year
ESD Tester	Kikusui	KES4021	LM003537	Apr.07,2008	1 Year
Signal Generator	IFR	2032	203002/100	Apr.07,2008	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
Dual Directional Coupler	A&R	DC6080	301508	Apr.05,2008	1 Year
Power Head	A&R	PH2000	301193	Apr.05,2008	1 Year
Power Meter	A&R	PM2002	302799	Apr.05,2008	1 Year
Field Monitor	A&R	FM5004	300329	Apr.05,2008	1 Year
Field Probe	A&R	FP5000	300221	Apr.05,2008	1 Year
EMCPRO System	EM Test	UCS-500-M4	V0648102026	Apr.05,2008	1 Year
EMCPRO System	EM Test	UCS-500-M4	V0648102026	Apr.05,2008	1 Year

Remark:

Test Firm Name: Most Technology Service Co., Ltd.

Test Firm Address:

No. 5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

FCC Registered Test Site Number: 490827

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of MOST TECHNOLOGY SERVICE CO., LTD. The EUT was transmitting a test signal during the testing.

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 uH LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25 with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. The ambient temperature of the EUT was 25 with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS
33 20 dBuV + 10.36 dB + 0.9 dB = 31.26 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost. com Email: szmost@szmost. com

APPLICANT: HongKong Parkly Technology Limited

FCC ID: W2P-LST-4307

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NUMBER: 15.207

REQUIREMENTS:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE: ANSI STANDARD C63.4-2003

THE HIGHEST EMISSION READ FOR LINE 1 WAS 61.54dB_{UV} @ 0.158MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 60.56dB_{UV} @ 0.155MHz.

THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWER LINE CONDUCTED FOR THIS DEVICE.

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307

Conducted Emission Measurement


File : LST-4307

Data : #17

Date: 09/01/13/

Time: 11/11/35

80.0 dBuV

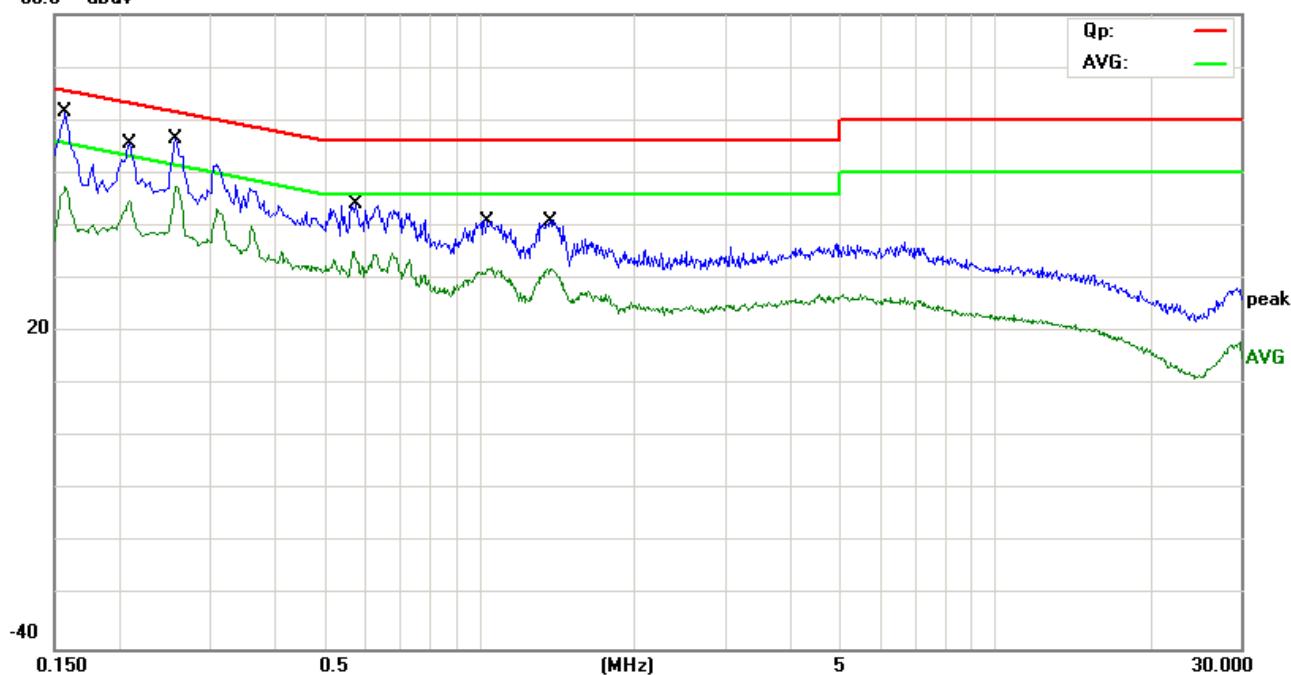

Site site #1

Phase: **L1**

Temperature: 26

Limit: FCC Part 15C Conduction

Power: DC 5V Adaptor AC 120V/60Hz Humidity: 60 %

EUT: GPS

M/N: LST-4307

Mode: ON(FM Mode)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	52.06	9.48	61.54	65.57	-4.03	QP	
2		0.1580	37.64	9.48	47.12	55.57	-8.45	AVG	
3		0.2100	43.77	11.93	55.70	63.21	-7.51	QP	
4		0.2100	32.95	11.93	44.88	53.21	-8.33	AVG	
5		0.2580	44.90	11.61	56.51	61.50	-4.99	QP	
6	*	0.2580	35.89	11.61	47.50	51.50	-4.00	AVG	
7		0.5700	33.42	10.00	43.42	56.00	-12.58	QP	
8		0.5700	25.24	10.00	35.24	46.00	-10.76	AVG	
9		1.0380	30.68	9.96	40.64	56.00	-15.36	QP	
10		1.0380	21.80	9.96	31.76	46.00	-14.24	AVG	
11		1.3580	30.57	9.64	40.21	56.00	-15.79	QP	
12		1.3580	22.35	9.64	31.99	46.00	-14.01	AVG	

*:Maximum data x:Over limit !:over margin

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307

Conducted Emission Measurement


File :LST-4307

Data :#18

Date: 09/01/13/

Time: 11/14/58

80.0 dBuV

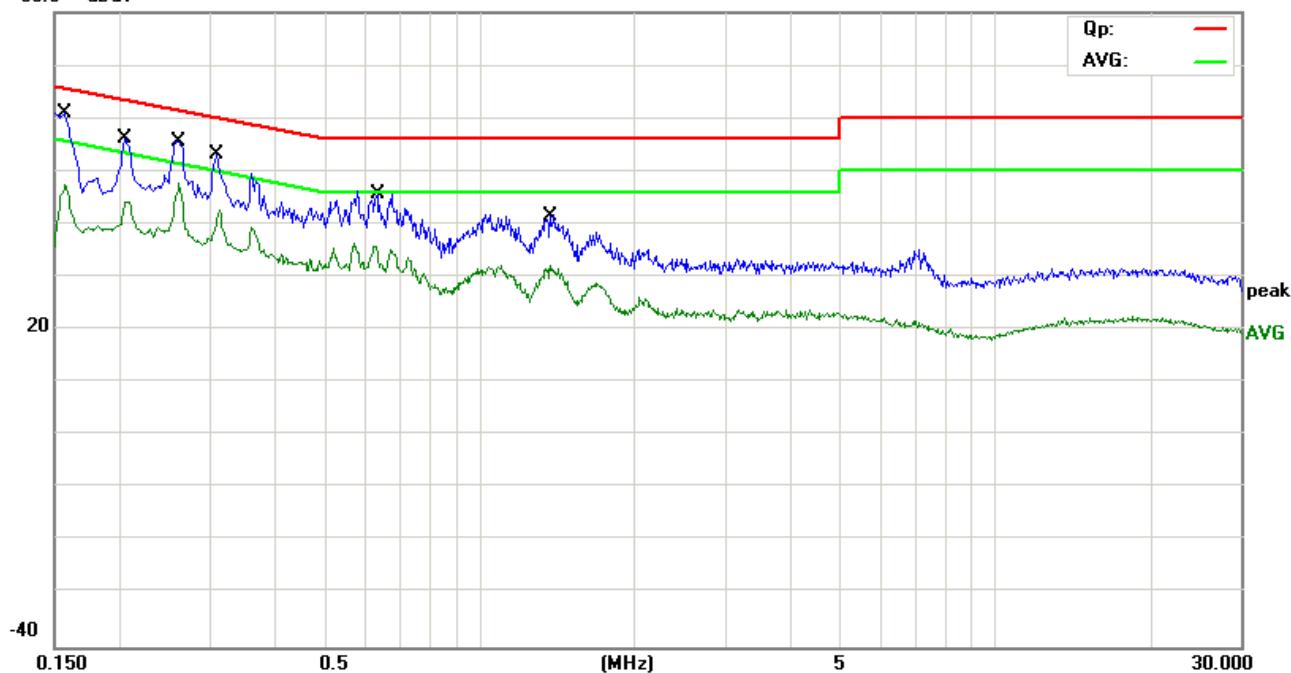

Site site #1

Phase: **N**

Temperature: 26

Limit: FCC Part 15C Conduction

Power: DC 5V Adaptor AC 120V/60Hz Humidity: 60 %

EUT: GPS

M/N: LST-4307

Mode: ON(FM Mode)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1556	51.22	9.34	60.56	65.70	-5.14	QP	
2		0.1556	36.76	9.34	46.10	55.70	-9.60	AVG	
3		0.2060	44.24	11.96	56.20	63.37	-7.17	QP	
4		0.2060	32.07	11.96	44.03	53.37	-9.34	AVG	
5		0.2620	43.98	11.59	55.57	61.37	-5.80	QP	
6	*	0.2620	36.03	11.59	47.62	51.37	-3.75	AVG	
7		0.3100	42.03	11.27	53.30	59.97	-6.67	QP	
8		0.3100	29.69	11.27	40.96	49.97	-9.01	AVG	
9		0.6300	34.50	10.00	44.50	56.00	-11.50	QP	
10		0.6300	25.86	10.00	35.86	46.00	-10.14	AVG	
11		1.3700	27.91	9.63	37.54	56.00	-18.46	QP	
12		1.3700	20.17	9.63	29.80	46.00	-16.20	AVG	

*:Maximum data x:Over limit !:over margin



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: Hongkong Parkly Technology Limited

FCC ID: W2P-LST-4307

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.239, 15.209

REQUIREMENTS:

FIELD STRENGTH of S15.209
Fundamental:

88-108 MHZ	30 - 88 MHz 40 dBuV/m @3M
	88 - 216 MHz 43.5
	216 - 960 MHz 46
47.96 dBuV/m @3m	ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REMARK: Emissions attenuated more than 20 dB below the permissible value are not reported.

Fundamental Radiation Interference Data:

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart C Limit (dBuV/m)
		Avg	QP	Peak	
88.1MHz					
88.100	Vertical	--	42.30	44.21	47.96
88.100	Horizontal	--	40.39	41.18	47.96
98.1MHz					
98.100	Vertical	--	42.25	43.97	47.96
98.100	Horizontal	--	40.82	41.36	47.96
107.9MHz					
107.900	Vertical	--	41.31	43.62	47.96
107.900	Horizontal	--	39.92	40.94	47.96

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: Hongkong Parkly Technology Limited

FCC ID: W2P-LST-4307

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.239, 15.209

REQUIREMENTS:

FIELD STRENGTH of S15.209
Fundamental:

88-108 MHZ	30 - 88 MHz 40 dBuV/m @3M
	88 - 216 MHz 43.5
	216 - 960 MHz 46
47.96 dBuV/m @3m	ABOVE 960 MHz 54 dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

Continued:

General Radiation Interference Data:

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart C Limit (dBuV/m)
		Avg	QP	Peak	
76.56	Horizontal	--	--	30.06	43.5
155.22	Horizontal	--	31.25	33.48	43.5
619.76	Horizontal	--	35.81	37.07	46.0
720.64	Horizontal	--	33.54	35.86	46.0
76.56	Vertical	--	--	31.11	40.0
155.22	Vertical	--	31.87	34.09	40.0
672.14	Vertical	--	36.32	38.70	40.0
912.70	Vertical	--	36.09	38.43	43.5

TEST PROCEDURE: ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector and an appropriate antenna. The resolution bandwidth of spectrum analyzer was 100 kHz below 1 GHz and 1 MHz above 1 GHz. An appropriate sweep speed was used. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: Hongkong Parkly Technology Limited

FCC ID: W2P-LST-4307

NAME OF TEST: Occupied Bandwidth and Band Edge Compliance

RULES PART NUMBER: 15.239, 15.209

REQUIREMENTS: Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.

Band edge emissions plots are included on the following pages

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to 10 dB per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307



Most Technology Service Co., Ltd.

Tel: (86) 755-26825180 Fax: (86) 755-86170310

Http:// www. szmost. com Email: szmost@szmost. com

When the EUT transmits the real MP3 file max volume level.

88.1MHz



APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost. com Email: szmost@szmost. com

98.1MHz



APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307



Most Technology Service Co., Ltd.

Tel: (86) 755-26825180 Fax: (86) 755-86170310

Http:// www. szmost. com Email: szmost@szmost. com

107.9MHz



APPLICANT: HongKong Parkly Technology Limited
FCC ID: W2P-LST-4307