



Measurement of RF Interference from a Part No. WB4343WF3SP-1 WIFI/BLT Module Transmitter

For	California Eastern Laboratories 1253 N. Old Rand Road Wauconda, IL 60084
P.O. Number	204338
Date Tested	May 18 through June 27, 2016
Test Personnel	Richard King
Specification	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Frequency Hopping Spread Spectrum Intentional Radiators within the band 2400-2483.5MHz Industry Canada RSS-247 Industry Canada RSS-GEN

Test Report By:

Richard E. King

Richard King
EMC Engineer

Requested By:

Benjamin White
California Eastern Laboratories

Approved By:

Raymond J. Klouda

Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1. INTRODUCTION		5
1.1 Scope of Tests		5
1.2 Purpose		5
1.3 Deviations, Additions and Exclusions		5
1.4 EMC Laboratory Identification		5
1.5 Laboratory Conditions		5
2. APPLICABLE DOCUMENTS		5
3. EUT SETUP AND OPERATION		6
3.1 General Description		6
3.1.1 Power Input		6
3.1.2 Peripheral Equipment		6
3.1.3 Interconnect Cables		6
3.1.4 Grounding		6
3.2 Software		6
3.3 Operational Mode		6
3.4 EUT Modifications		6
4. TEST FACILITY AND TEST INSTRUMENTATION		6
4.1 Shielded Enclosure		6
4.2 Test Instrumentation		6
4.3 Calibration Traceability		7
4.4 Measurement Uncertainty		7
4.5 Transmitter		7
4.5.1 20dB Bandwidth		7
4.5.1.1 Requirements		7
4.5.1.2 Procedures		7
4.5.1.3 Results		7
4.5.2 Carrier Frequency Separation		8
4.5.2.1 Requirements		8
4.5.2.2 Procedures		8
4.5.2.3 Results		8
4.5.3 Number of Hopping Frequencies		8
4.5.3.1 Requirements		8
4.5.3.2 Procedures		8
4.5.3.3 Results		8
4.5.4 Time of Occupancy		8
4.5.4.1 Requirements		8
4.5.4.2 Procedures		9
4.5.4.3 Results		9
4.5.5 Peak Output Power		9
4.5.5.1 Requirements		9
4.5.5.2 Procedures		9
4.5.5.3 Results		9
4.5.6 Duty Cycle Factor Measurements		9
4.5.6.1 Procedures		9
4.5.6.2 Results		10
4.5.7 Antenna Conducted Spurious Emissions		10
4.5.7.1 Requirements		10
4.5.7.2 Procedures		10

 THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
 WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

4.5.7.3	Results	10
4.5.8	Radiated Spurious Emissions Measurements	10
4.5.8.1	Requirements	10
4.5.8.2	Procedures	10
4.5.8.3	Results	11
4.5.9	Band Edge Compliance	12
4.5.9.1	Requirements	12
4.5.9.2	Procedures	12
4.5.9.2.1	Low Band Edge	12
4.5.9.2.2	High Band Edge	12
4.5.9.3	Results	13
5.	CONCLUSIONS	13
6.	CERTIFICATION	13
7.	ENDORSEMENT DISCLAIMER	13
8.	EQUIPMENT LIST	14
Table 8-1 Equipment List		14

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

REVISION HISTORY

Revision	Date	Description
—	07/07/2016	Initial release

Measurement of RF Emissions from a Part No. WB4343WF3SP-1 Transmitter

1. INTRODUCTION

1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a California Eastern Laboratories WIFI/BLT Module, Part No. WB4343WF3SP-1, no serial numbers assigned, transmitter (hereinafter referred to as the EUT). The EUT is a frequency hopping spread spectrum transmitter. The transmitter was designed to transmit and receive in 2400-2483.5 MHz band using an integral antenna. The EUT was manufactured and submitted for testing by California Eastern Laboratories located in Wauconda, IL.

1.2 Purpose

The test series was performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 2400-2483.5 MHz band.

The test series was also performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements of Industry Canada Radio Standards Specification RSS-Gen Section 8.8 and Industry Canada Radio Standards Specification RSS-247 for Transmitters.

Testing was performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the American Association for Laboratory Accreditation (A2LA), A2LA Lab Code: 1786-01.

1.5 Laboratory Conditions

The temperature at the time of the test was 25.5C and the relative humidity was 49%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subparts C, dated 1 October 2015
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- FCC Public Notice, DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems", Released March 30, 2000
- Industry Canada RSS-247, Issue 1, May 2015, "Spectrum Management and Telecommunications Radio Standards Specification, Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs), and License-Exempt Local Area Network (LE-LAN) Devices"
- Industry Canada RSS-GEN, Issue 4, November 2014, "Spectrum Management and

Telecommunications Radio Standards Specification, General Requirements for Compliance of Radio Apparatus”

3. EUT SETUP AND OPERATION

3.1 General Description

The EUT is a WIFI/BLT Module, Part No. WB4343WF3SP-1. A block diagram of the EUT setup is shown as Figure 1 and Figure 2.

3.1.1 Power Input

The EUT obtained 3.6VDC power to the SMA power connector on the board. The EUT had no external power cable. The 3.6VDC was supplied to the board through two 6-foot long leads.

3.1.2 Peripheral Equipment

No peripheral equipment was submitted with the EUT.

3.1.3 Interconnect Cables

No interconnect cables were submitted with the EUT.

3.1.4 Grounding

Since the EUT was powered with 3.6VDC, it was ungrounded during the tests.

3.2 Software

For all tests the EUT had Firmware Version

BCM4343A1_001_002_009_0018_0028_Generic_UART_37_4MHz_wlbg_ref_hcd loaded onto the device to provide correct load characteristics.

3.3 Operational Mode

For all tests the EUT was placed on an 80cm high non-conductive stand when investigating frequencies between 30MHz and 1GHz. For all tests the EUT was placed on a 150cm high non-conductive stand when investigating frequencies above 1GHz. The EUT was energized.

The unit was programmed to operate in one of the following modes:

- Transmit at 2402MHz
- Transmit at 2440MHz
- Transmit at 2480MHz
- Frequency Hopping

3.4 EUT Modifications

No modifications were required for compliance.

4. TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 8-1.

Conducted and radiated emission tests were performed with an EMI receiver utilizes the bandwidths and detectors specified by the FCC and IC.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emissions Measurements		
Combined Standard Uncertainty	1.06	-1.06
Expanded Uncertainty (95% confidence)	2.12	-2.12

Radiated Emissions Measurements		
Combined Standard Uncertainty	2.09	-2.09
Expanded Uncertainty (95% confidence)	4.19	-4.19

4.5 Transmitter

4.5.1 20dB Bandwidth

4.5.1.1 Requirements

Per section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate within an output power no greater than 125mW.

4.5.1.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.

With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to $\geq 1\%$ of the 20 dB BW. The span was set to approximately 2 to 3 times the 20 dB bandwidth.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

4.5.1.3 Results

The plots on pages 20 through 22 show that the maximum 20 dB bandwidth was 1.12MHz. The 99% bandwidth was measured to be 985.77kHz.

4.5.2 Carrier Frequency Separation

4.5.2.1 Requirements

Per section 15.247 (a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Per section 15.247(a)(1), alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate within an output power no greater than 125mW (21dBm).

4.5.2.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to $>$ to 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels.

When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.

4.5.2.3 Results

Page 23 shows the carrier frequency separation. As can be seen from this plot, the carrier frequency separation is 985.6kHz which is greater than the 2/3 of the 20dB bandwidth of the hopping channel (747.8kHz).

4.5.3 Number of Hopping Frequencies

4.5.3.1 Requirements

Per 15.247(b)(1), frequency hopping systems operating in the 2400- 2483.5MHz band that employ at least 75 non-overlapping hopping channels must have a maximum peak conducted output power that does not exceed 1W (30dBm).

4.5.3.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to \geq to 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.

The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.

4.5.3.3 Results

Page 24 shows the number of hopping frequencies. As can be seen from this plot, the number of hopping frequencies is 79 which is equal to (or greater than) 75 which is the minimum number of required hopping frequencies for systems operating in the 2400-2483.5MHz band that have a maximum peak conducted output power that does not exceed 1W (30dBm).

4.5.4 Time of Occupancy

4.5.4.1 Requirements

Per section 15.247(a)(1)(iii), for frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.4.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 1 MHz. The peak detector and 'Max-Hold' function were engaged. With the span set to 0Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop. The analyzer's display was plotted using a 'screen dump' utility. Then, the sweep time was expanded to 0.4 seconds multiplied by the number of hopping channels employed. In this case the 0.4 seconds multiplied by 79 hopping channels equaled a sweep time expanded to 31.6 seconds.

4.5.4.3 Results

Pages 25 and 26 show the plots for the time of occupancy (dwell time). As can be seen from the plots, the time of occupancy can be determined by 2.88mS multiplied by 94 pulses in 31.6 seconds. This calculated value is equal to 0.27 seconds which is less than the 0.40 seconds maximum allowed.

4.5.5 Peak Output Power

4.5.5.1 Requirements

Per section 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5MHz band and employing at least 75 non-overlapping hopping channels, the maximum peak output conducted power shall not be greater than 1W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below 30dBm by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.5.5.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high hopping frequencies.

4.5.5.3 Results

The results are presented on pages 27 and 30. The maximum peak conducted output power from the transmitter was 0.007W (8.8 dBm) which is below the 1 Watt limit. The maximum EIRP measured from the transmitter was 11.4 dBm or 0.013 W which is below the 4 Watt limit.

4.5.6 Duty Cycle Factor Measurements

4.5.6.1 Procedures

The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting

a zero span width with 1msec/div (adjust this for what you need). The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of the “on-time”. The trace is recorded.

Next the spectrum analyzer center frequency is set to the transmitter frequency with a zero span width and 10msec/div. This shows if the word is longer than 100msec or shorter than 100msec. If the word period is less than 100msec, the display is set to show at least one word. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

4.5.6.2 Results

The plots of the duty cycle are shown on data page 21.

4.5.7 Antenna Conducted Spurious Emissions

4.5.7.1 Requirements

Per section 15.247(c), the spurious emissions in any 100 kHz BW outside the frequency band must be at least 20dB below the highest 100 kHz BW level measured within the band.

4.5.7.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. The frequency hopping function was disabled. The resolution bandwidth (RBW) was set to 100kHz. The peak detector and 'Max-Hold' function were engaged. The emissions in the frequency range from 30MHz to 25GHz were observed and plotted separately with the EUT transmitting at low, middle and high hopping frequencies.

4.5.7.3 Results

The results of the antenna conducted emissions levels were plotted. These plots are presented on pages 32 through 43. These plots show that the spurious emissions were at least 20 dB below the level of the fundamental.

4.5.8 Radiated Spurious Emissions Measurements

4.5.8.1 Requirements

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

4.5.8.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

- 1) For all emissions in the restricted bands, the following procedure was used:
 - a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
 - d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
 - e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
 - f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.

If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10 Hz video bandwidth may be further adjusted by a "duty cycle correction factor", derived from $20 * \log(\text{dwell time}/100\text{msec})$. These readings must be no greater than the limits specified in 15.209(a).

4.5.8.3 Results

Preliminary radiated emissions plots with the EUT transmitting at Low Frequency, Middle Frequency, and High Frequency are shown on pages 44 through 67. Final radiated emissions data are presented on data pages 69 through 74. As can be seen from the data, all emissions measured from the EUT were within the specification limits.

Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are

shown on Figures 3 through 6.

4.5.9 Band Edge Compliance

4.5.9.1 Requirements

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

In addition, the radiated emissions which fall in the restricted band beginning at 2483.5 MHz must meet the general limits of 15.209(a).

4.5.9.2 Procedures

4.5.9.2.1 Low Band Edge

- 1) The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the low band-edge hopping function disabled.
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - a. Center frequency = low band-edge frequency.
 - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c. Resolution bandwidth (RBW) $\geq 1\%$ of the span.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
 - f. The analyzer's display was plotted using a 'screen dump' utility.
- 4) Step 3) was repeated with the frequency hopping function enabled.

4.5.9.2.2 High Band Edge

- 1) The EUT was set to transmit continuously at the channel closest to the high band-edge.
- 2) A double ridged waveguide was placed 3 meters away from the EUT. The antenna was connected to the input of a spectrum analyzer.
- 3) The center frequency of the analyzer was set to the high band edge (2483.5MHz)
- 4) The resolution bandwidth was set to 1MHz.
- 5) To ensure that the maximum or worst case emission level was measured, the following steps were taken:
 - a. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - b. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 6) The highest measured peak reading was recorded.
- 7) The highest measured average reading was recorded.
- 8) Steps 1 through 7 were repeated with the hopping enabled.

4.5.9.3 Results

Pages 75 through 80 show the band-edge compliance results. As can be seen from these plots, the conducted emissions at the low end band edge are within the 20 dB down limits. The radiated emissions at the high end band edge are within the general limits.

5. CONCLUSIONS

It was determined that the California Eastern Laboratories WIFI/BLT Module, Part No. WB4343WF3SP-1 frequency hopping spread spectrum transmitter, no serial numbers assigned, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers and Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 2400-2483.5 MHz, band, when tested per ANSI C63.4-2014.

It was also determined that the California Eastern Laboratories WIFI/BLT Module, Part No. WB4343WF3SP-1 frequency hopping spread spectrum transmitter, no serial numbers assigned, did fully meet the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 8.8 and Section 7.1.2 for receivers and the Industry Canada Radio Standards Specification RSS-Gen Section 8.8 and Radio Standards Specification RSS-247 for transmitters, when tested per ANSI C63.4-2014.

6. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

7. ENDORSEMENT DISCLAIMER

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST or any agency of the Federal Government.

8. EQUIPMENT LIST


Table 8-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	3/2/2016	3/2/2017
APW11	PREAMPLIFIER	PMI	PE2-35-120-5R0-10-12-SFF	PL11685/1241	1GHZ-20GHZ	4/18/2016	4/18/2017
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
CDY0	WORKSTATION	ELITE	WORKSTATION		WINDOWS 7	N/A	
CDY3	LAB COMPUTER	ELITE	WORKSTATION		WINDOWS 7	N/A	
GRD0	SIGNAL GENERATOR	HEWLETT PACKARD	E4432B	US38080222	250KHZ-3.0GHZ	9/1/2015	9/1/2016
MDA9	MULTIMETER	FLUKE CORPORATION	26 III	77311274	I;VDC;VAC;R	9/10/2015	9/10/2016
MPW0	POWER METER	KEYSIGHT	8990B	MY51000388		2/5/2016	2/5/2017
MWPA	WIDEBAND POWER SENSOR	KEYSIGHT	N1923A	MY56080002	50MHZ-18GHZ	2/17/2016	2/17/2017
NHG0	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NTA2	BILOG ANTENNA	TESEQ	6112D	28040	25-1000MHz	10/27/2015	10/27/2016
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-1000MHz	3/23/2016	3/23/2017
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	4/4/2016	4/4/2018
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	3/2/2016	3/2/2018
PHA0	MAGNETIC FIELD PROBE	ELECTRO-METRICS	EM-6882	134	22-230MHz	NOTE 1	
RAKG	RF SECTION	HEWLETT PACKARD	85462A	3549A00284	0.009-6500MHz	2/22/2016	2/22/2017
RAKI	RF SECTION	HEWLETT PACKARD	85462A	3411A00181	0.009-6500MHz	3/4/2016	3/4/2017
RAKJ	RF FILTER SECTION	HEWLETT PACKARD	85460A	3330A00154	---	3/4/2016	3/4/2017
RBA1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100146	20HZ-26.5GHZ	2/12/2016	2/12/2017
RBB0	EMI TEST RECEIVER 20HZ TO 40 GHZ.	ROHDE & SCHWARZ	ESIB40	100250	20 HZ TO 40GHZ	2/16/2016	2/16/2017
RBD1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU40	100009	20Hz-40GHz	2/10/2016	2/10/2017
RBE1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU26	100096	20Hz-26GHz	2/25/2016	2/25/2017
SDL3	POWER SUPPLY	HEWLETT PACKARD	3425A	254	0-20VDC; 0-10A	NOTE 1	
SES0	24VDC POWER SUPPLY	P-TRANS	FS-32024-1M	001	18-27VDC	NOTE 1	
SES1	24VDC POWER SUPPLY	P TRANS	FS-32024-1M	002	18-27VDC	NOTE 1	
SHA0	DC POWER SUPPLY	HEWLETT PACKARD	6642A	MY40000116	0-20V/0-10A	NOTE 1	
SHB0	DC POWER SUPPLY	HEWLETT PACKARD	6644A	MY40000115	0-60V/0-3.5A	NOTE 1	
T2S3	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	BV3544	DC-18GHZ	8/7/2015	8/7/2016
T2SG	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	CD5016	DC-18GHZ	1/5/2016	1/5/2018
WQB0	RE_8546A						
WQC0	HF_8546A						
XLQU	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	---	DC-2GHZ	7/8/2015	7/8/2016
XOB2	ADAPTER	HEWLETT PACKARD	K281C,012	09407	18-26.5GHZ	NOTE 1	
XPR0	HIGH PASS FILTER	K&L MICROWAVE	11SH10-4800/X20000	001	4.8-20GHz	9/22/2015	9/22/2016

I/O: Initial Only

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

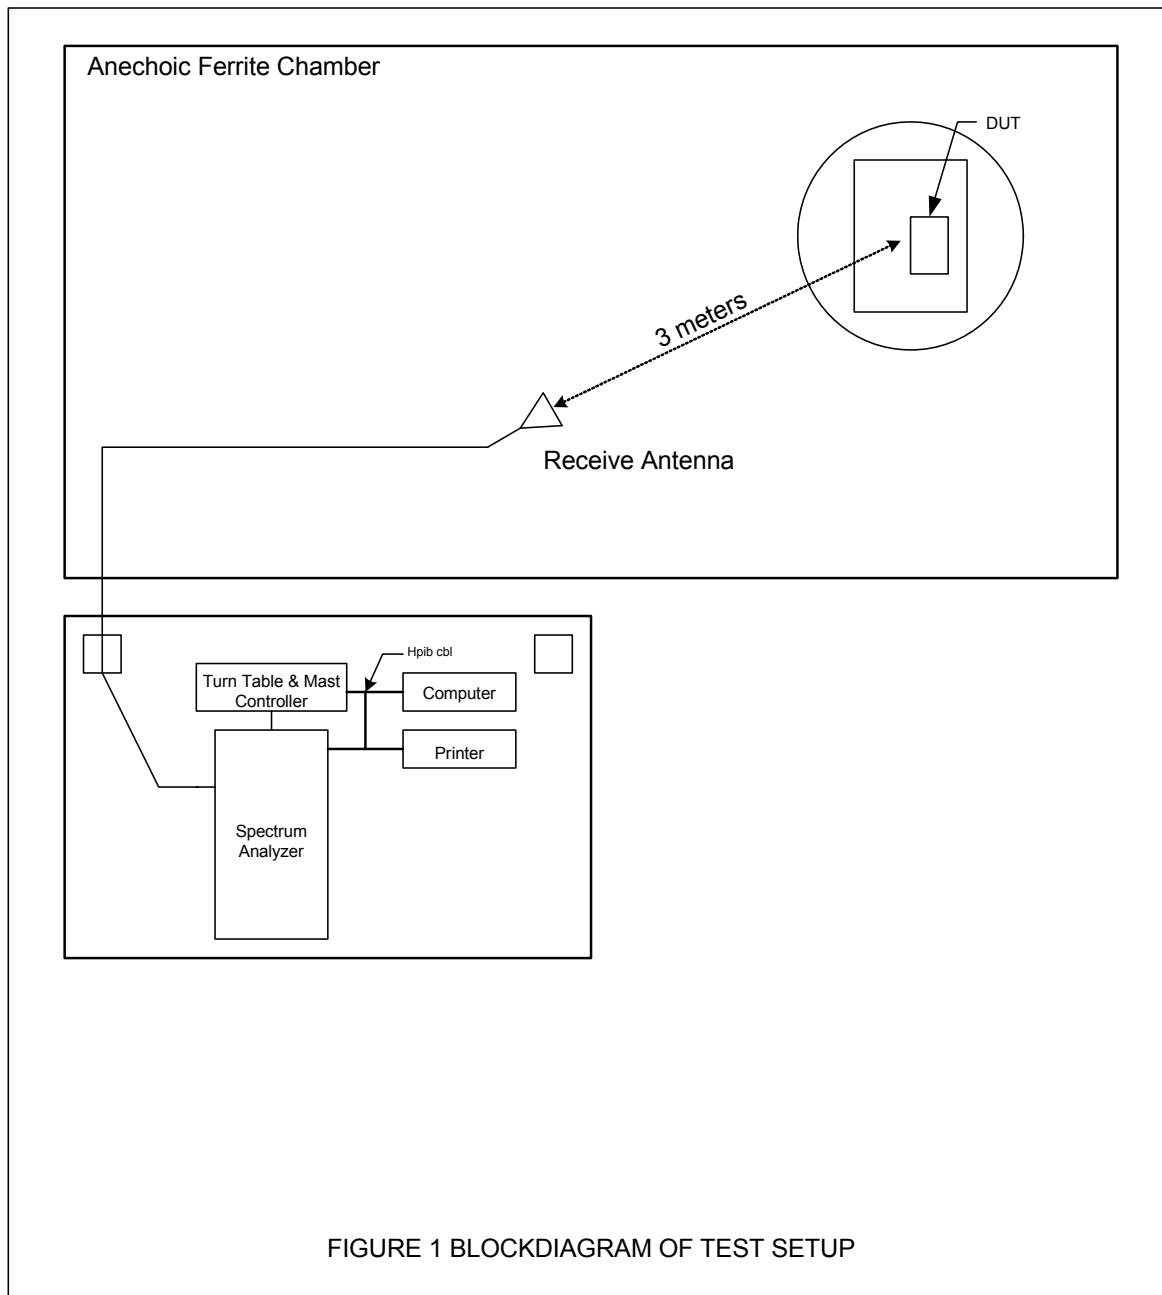

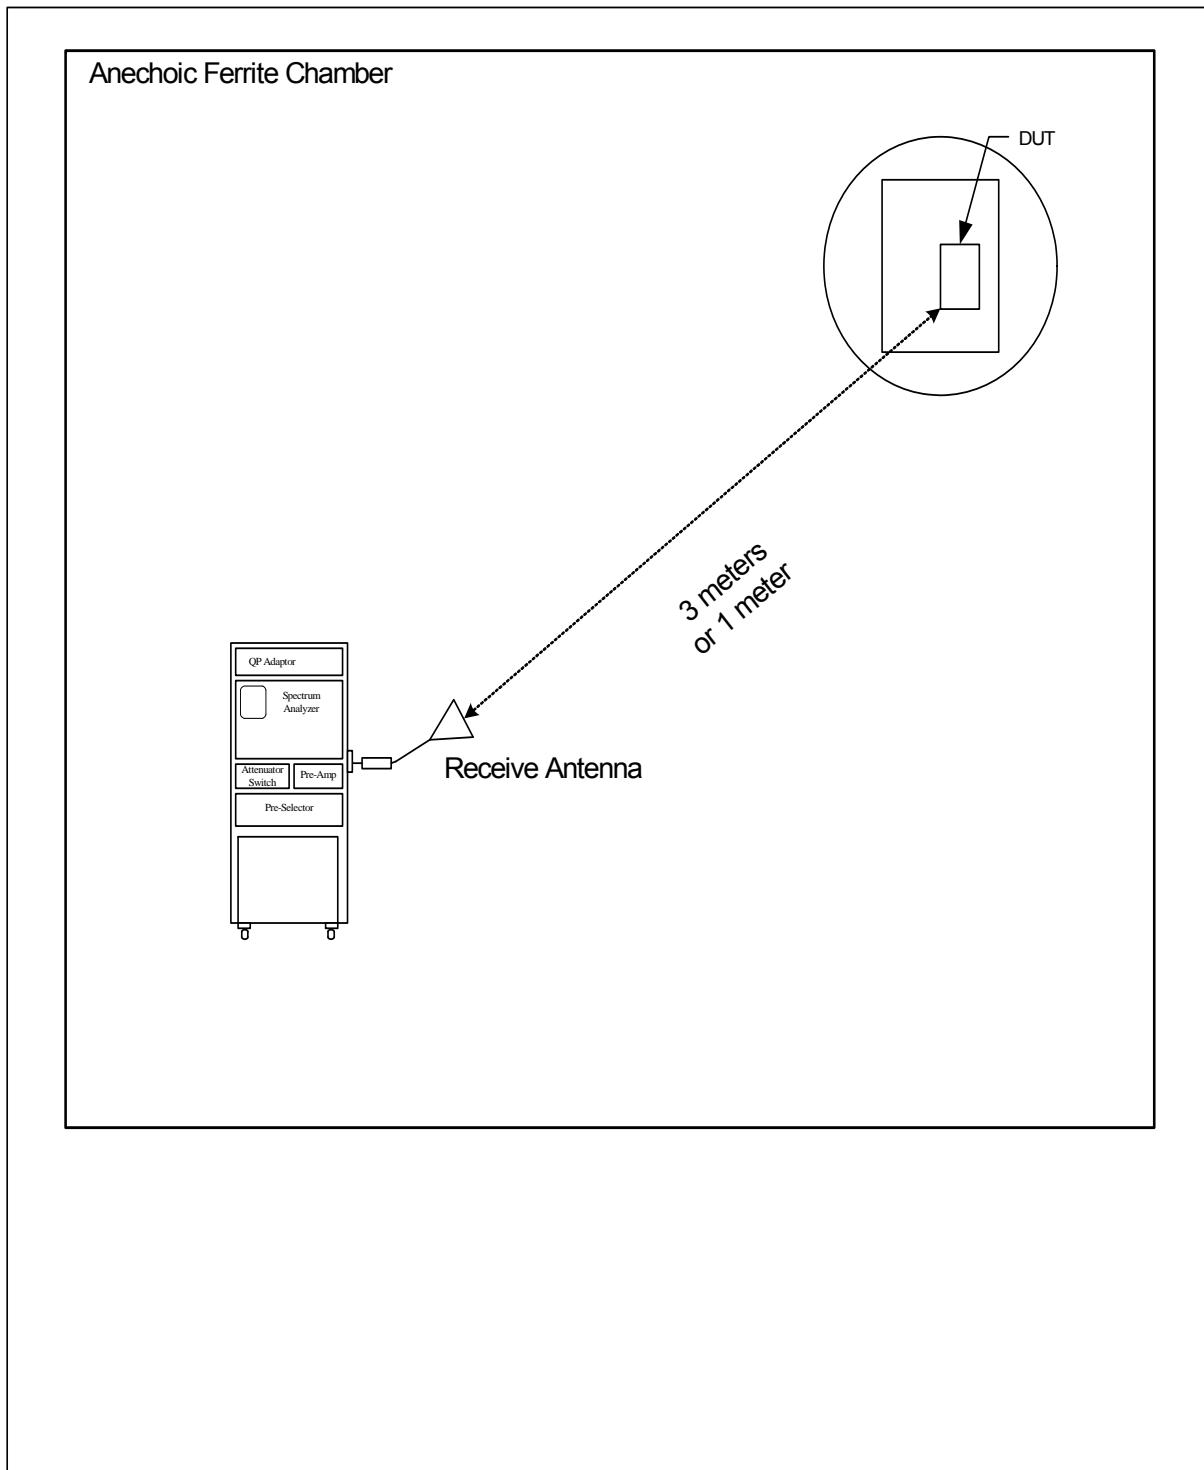


Figure 2: BLOCK DIAGRAM OF TEST SETUP FOR RADIATED EMISSIONS ABOVE 18GHZ

Figure 3



Test Setup for Radiated Emissions – 30MHz to 1GHz, Horizontal Polarization



Test Setup for Radiated Emissions – 30MHz to 18GHz, Vertical Polarization

Figure 4



Test Setup for Radiated Emissions – 2GHz to 18GHz, Horizontal Polarization



Test Setup for Radiated Emissions – 2GHz to 18GHz, Vertical Polarization

Figure 5




Test Setup for Radiated Emissions – 18GHz to 25GHz, Horizontal Polarization



Test Setup for Radiated Emissions – 18GHz to 25GHz, Vertical Polarization

RS

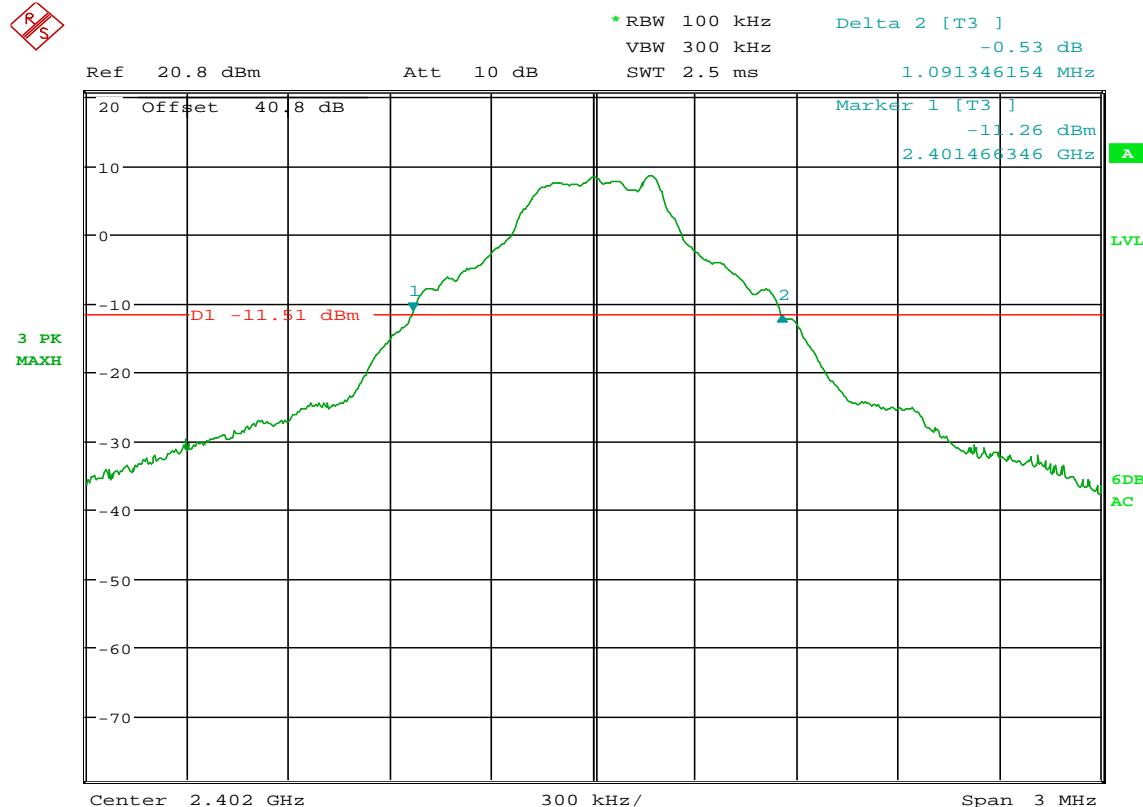


Date: 1.JUN.2016 09:29:49

FCC 15.247 20 dB Bandwidth

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2402MHz
 : PEAK detector
 NOTES : 20 dB bandwidth
 NOTES : Bluetooth Classic
 NOTES :

NOTES

RS

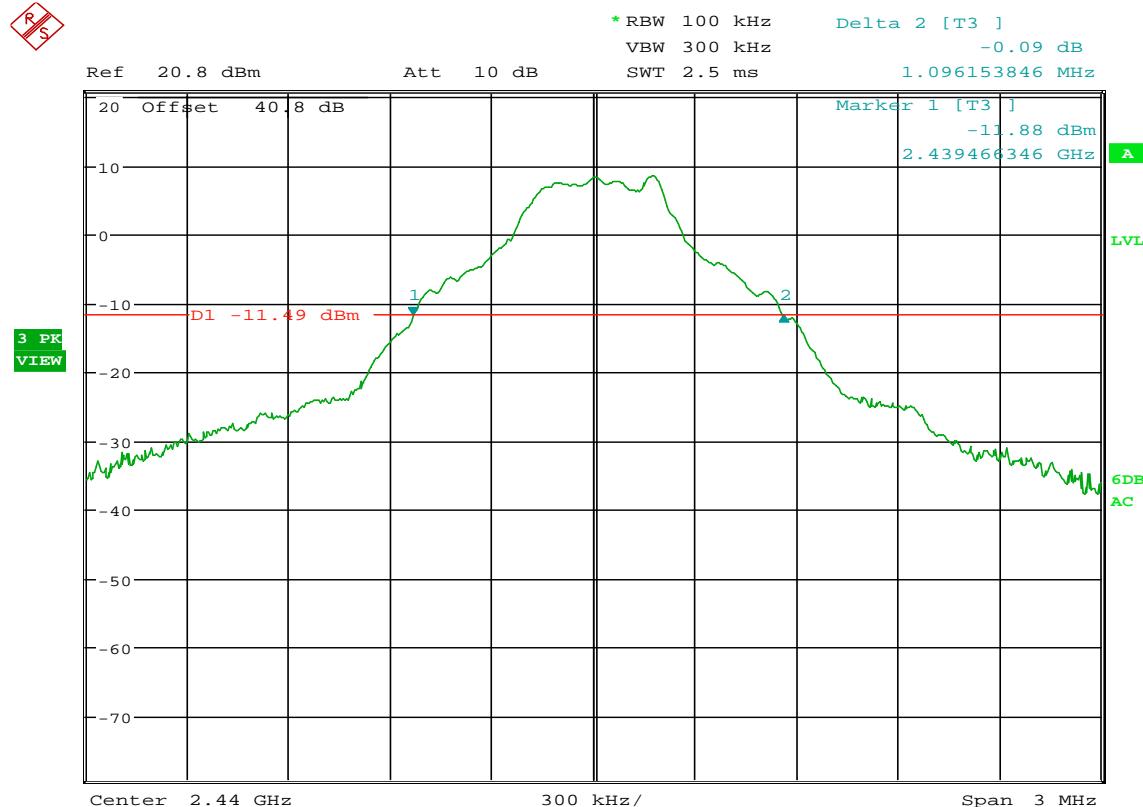


Date: 1.JUN.2016 09:33:46

FCC 15.247 20 dB Bandwidth

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2440MHz
 : PEAK detector
 NOTES : 20 dB bandwidth
 NOTES : Bluetooth Classic
 NOTES :

NOTES

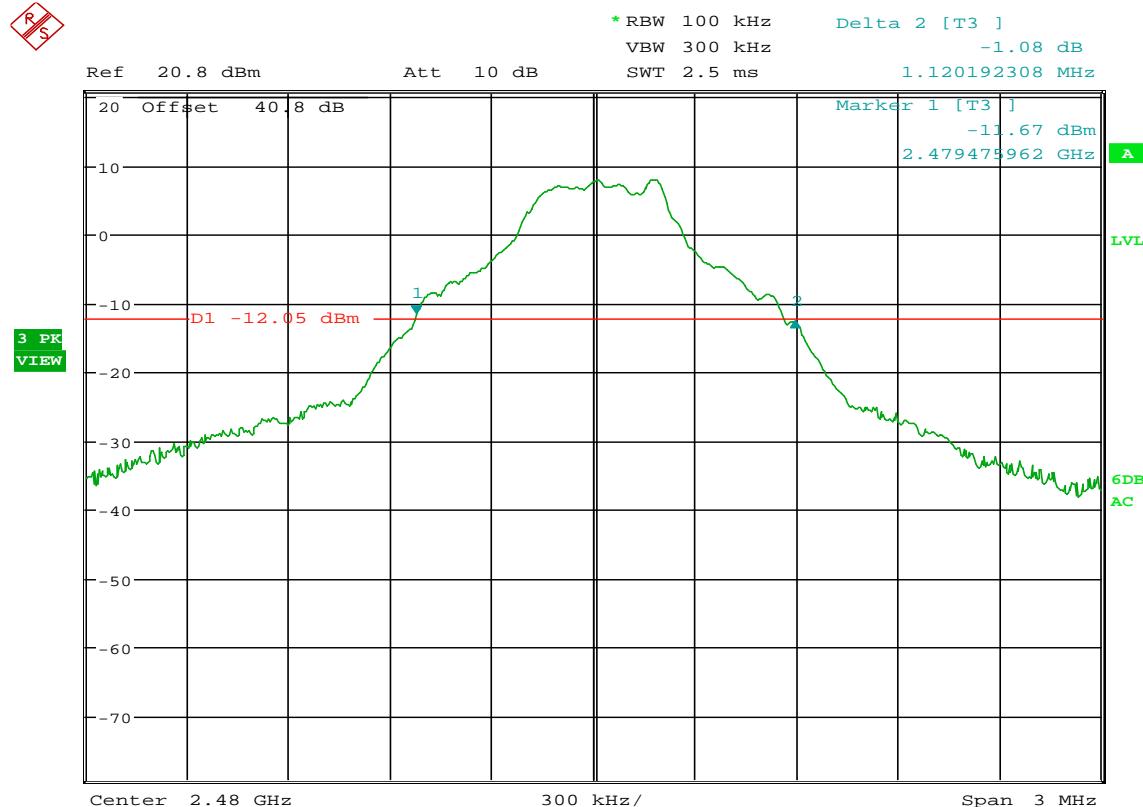
R
S


Date: 1.JUN.2016 09:37:08

FCC 15.247 20 dB Bandwidth

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2480MHz
 : PEAK detector
 NOTES : 20 dB bandwidth
 NOTES : Bluetooth Classic
 NOTES :

NOTES

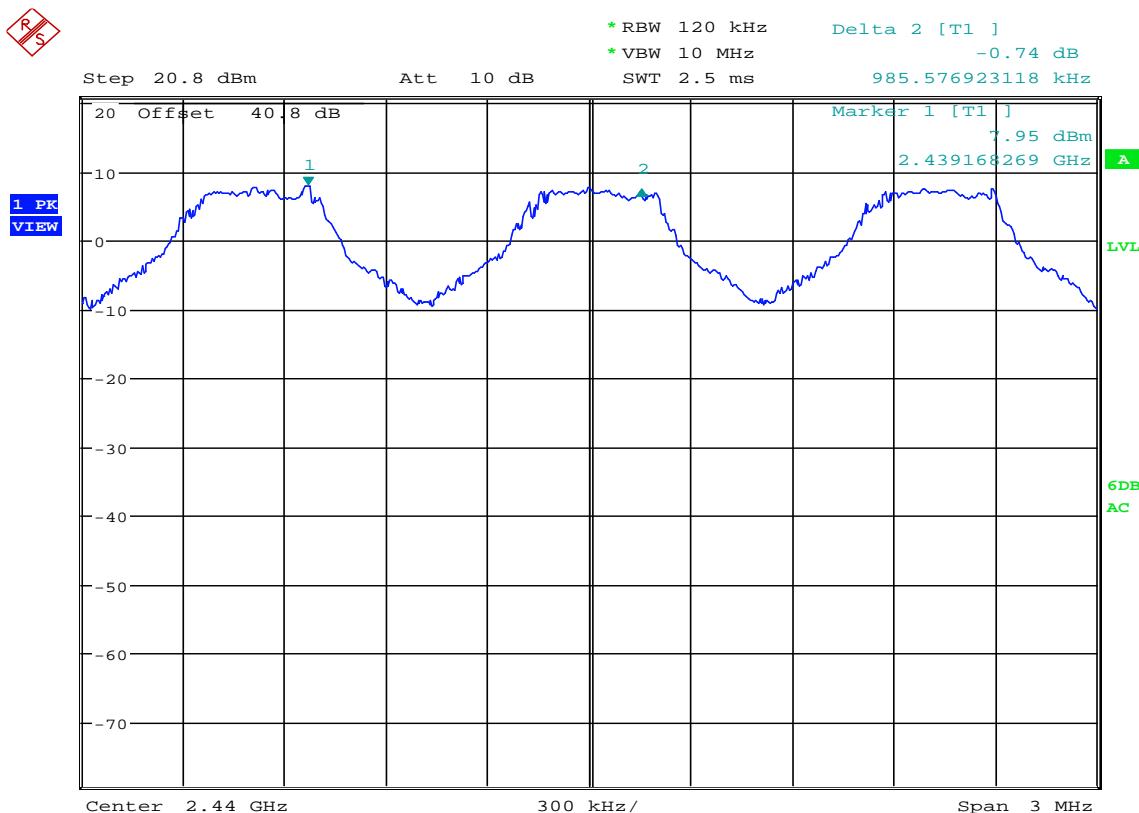


Date: 2.JUN.2016 11:03:41

FCC 15.247 Carrier Frequency Separation

MANUFACTURER : California Eastern Laboratories
MODEL NUMBER : WB4343WF3SP-1
TEST MODE : Frequency Hopping
NOTES : PEAK DETECTOR
NOTES :
NOTES : Bluetooth Classic
NOTES :

NOTES

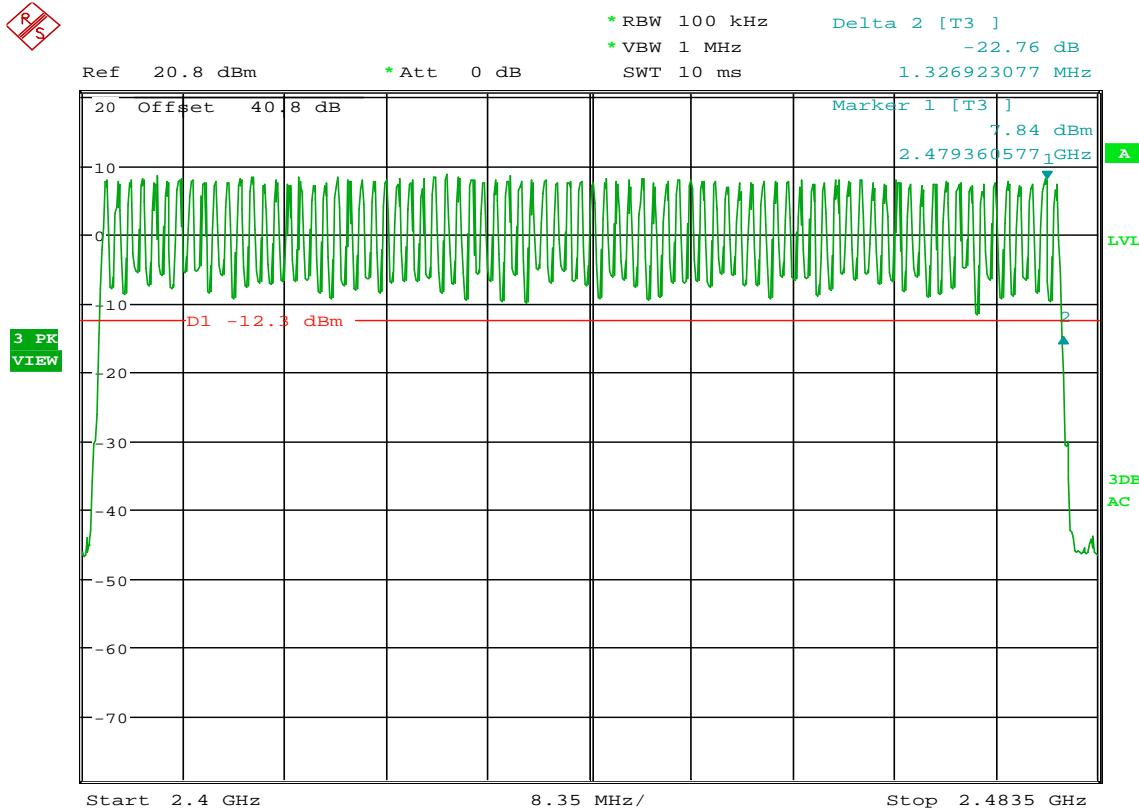
R
S


Date: 1.JUN.2016 13:30:57

FCC 15.247 Frequency Hopping

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Hopping Mode
 : PEAK DETECTOR
 NOTES : 20 dB bandwidth
 NOTES : Bluetooth Classic
 NOTES : 79 Hopping Frequencies

NOTES

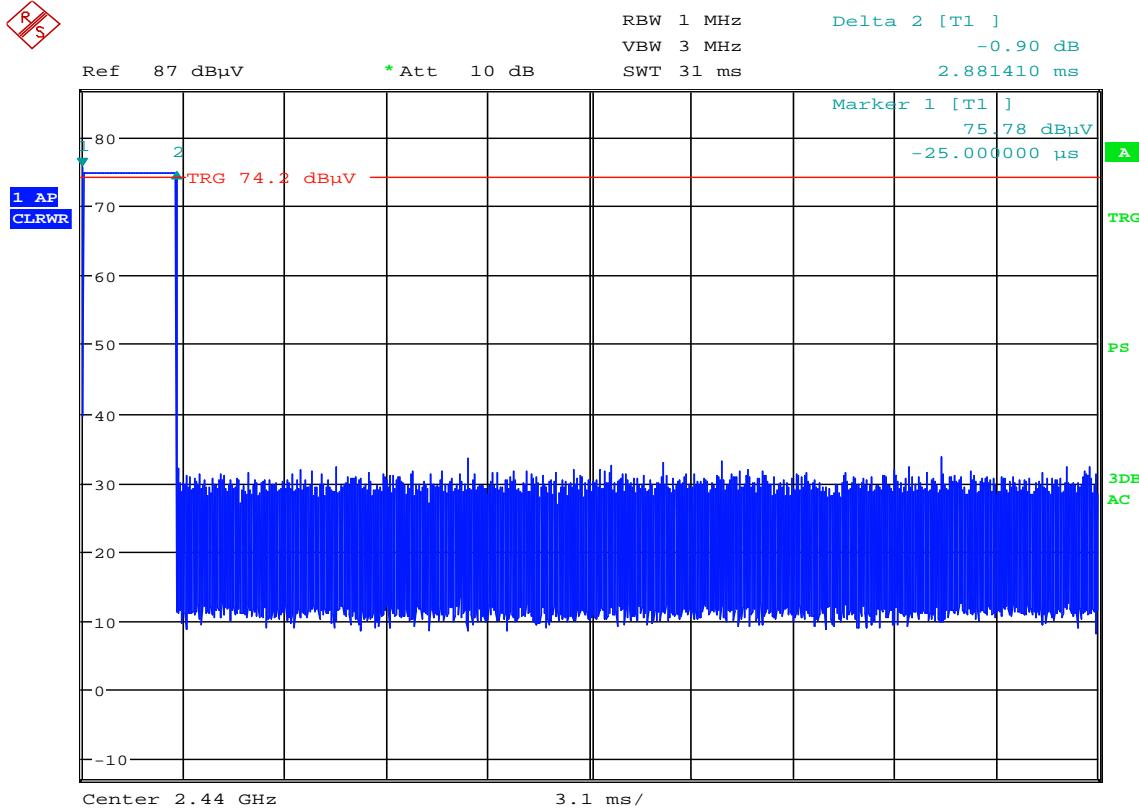
R
S


Date: 27.JUN.2016 11:20:53

FCC 15.247 Time of Occupancy

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2440MHz
 : PEAK detector
 NOTES : Bluetooth Classic
 NOTES : Pulse width = 2.88mS
 NOTES : Number of pulses in 32 S = 94

 NOTES

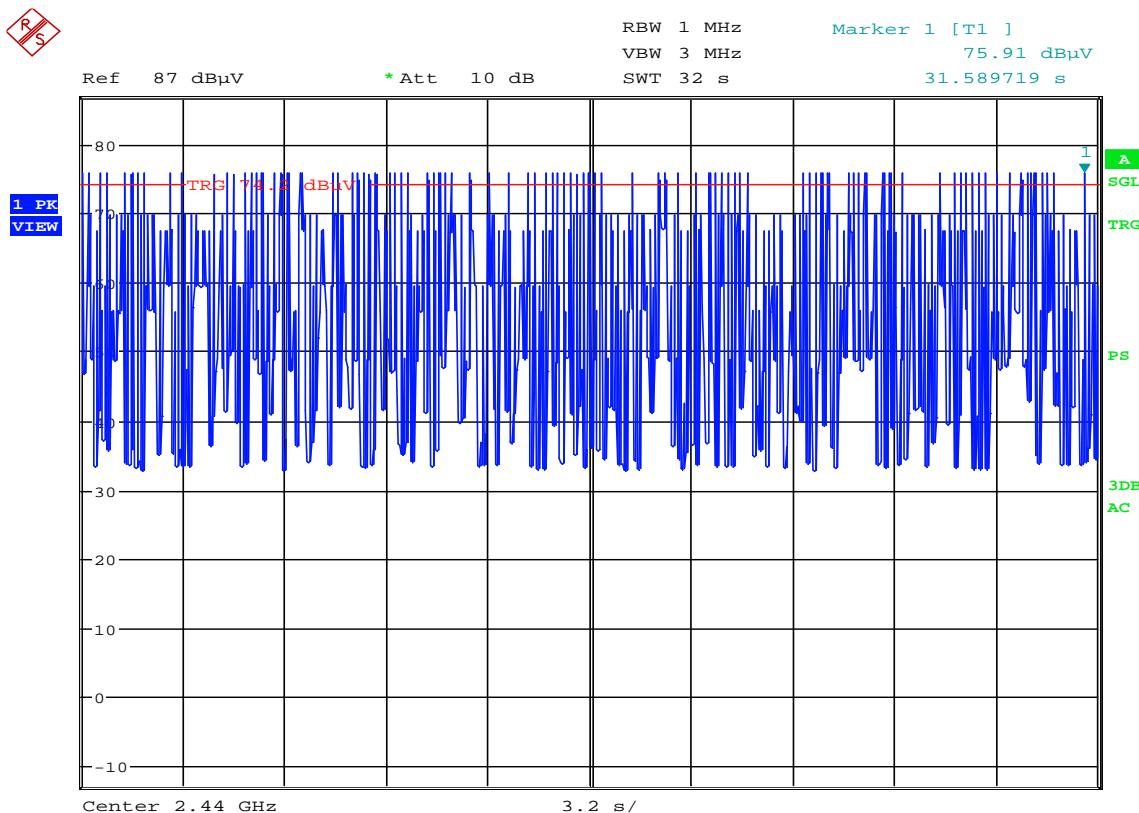


Date: 27.JUN.2016 11:16:22

FCC 15.247 Time of Occupancy

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2440MHz
 : PEAK detector
 NOTES : Bluetooth Classic
 NOTES : Pulse width = 2.88mS
 NOTES : Number of pulses in 32s = 94

NOTES

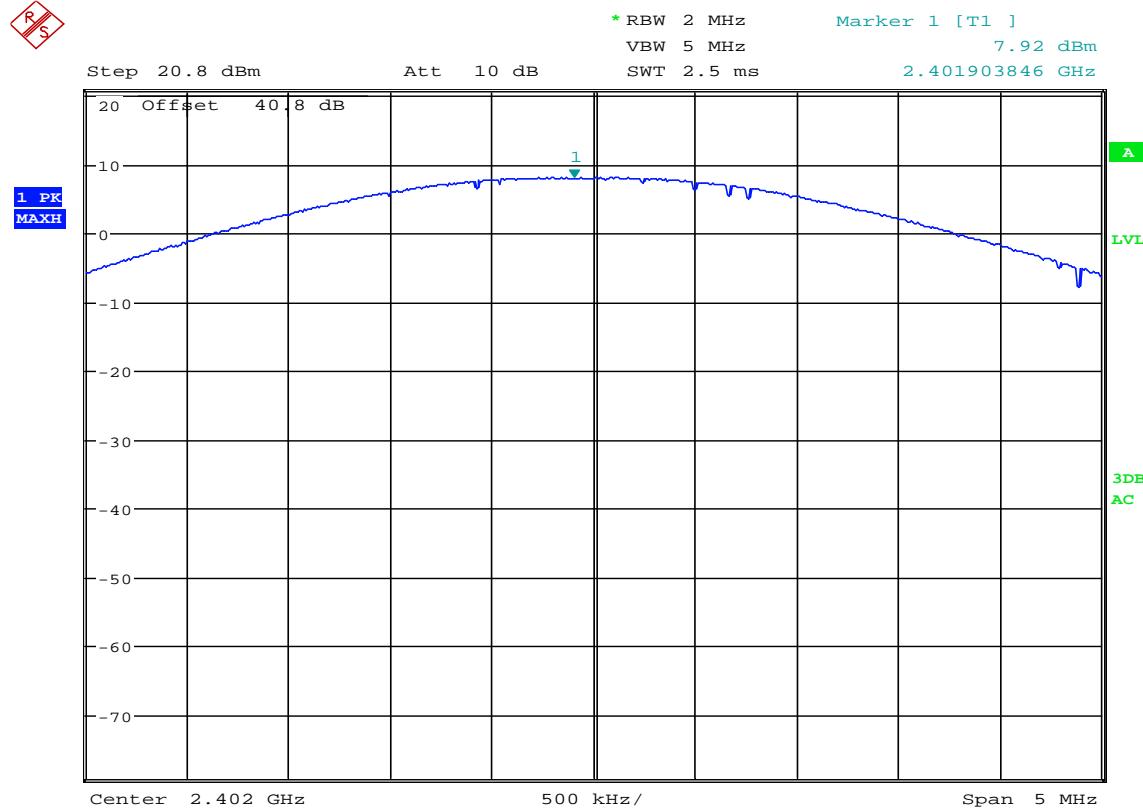



Date: 2.JUN.2016 08:27:30

FCC 15.247 Output Power

MANUFACTURER	: California Eastern Laboratories
MODEL NUMBER	: WB4343WF3SP-1
TEST MODE	: Tx @ 2402MHz
	: PEAK detector
NOTES	: Output Power
NOTES	: Bluetooth Classic
NOTES	:

NOTES

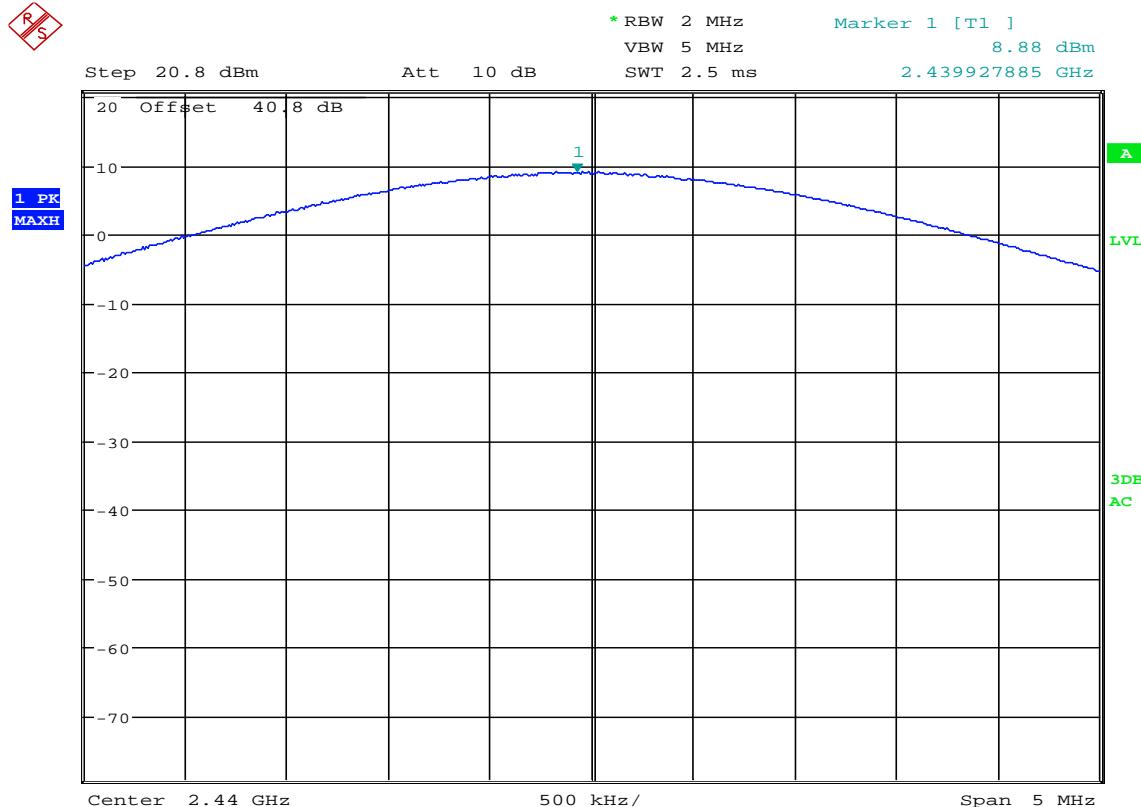



Date: 2.JUN.2016 08:42:01

FCC 15.247 Output Power

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2440MHz
 : PEAK detector
 NOTES : Output Power
 NOTES : Bluetooth Classic
 NOTES :

NOTES

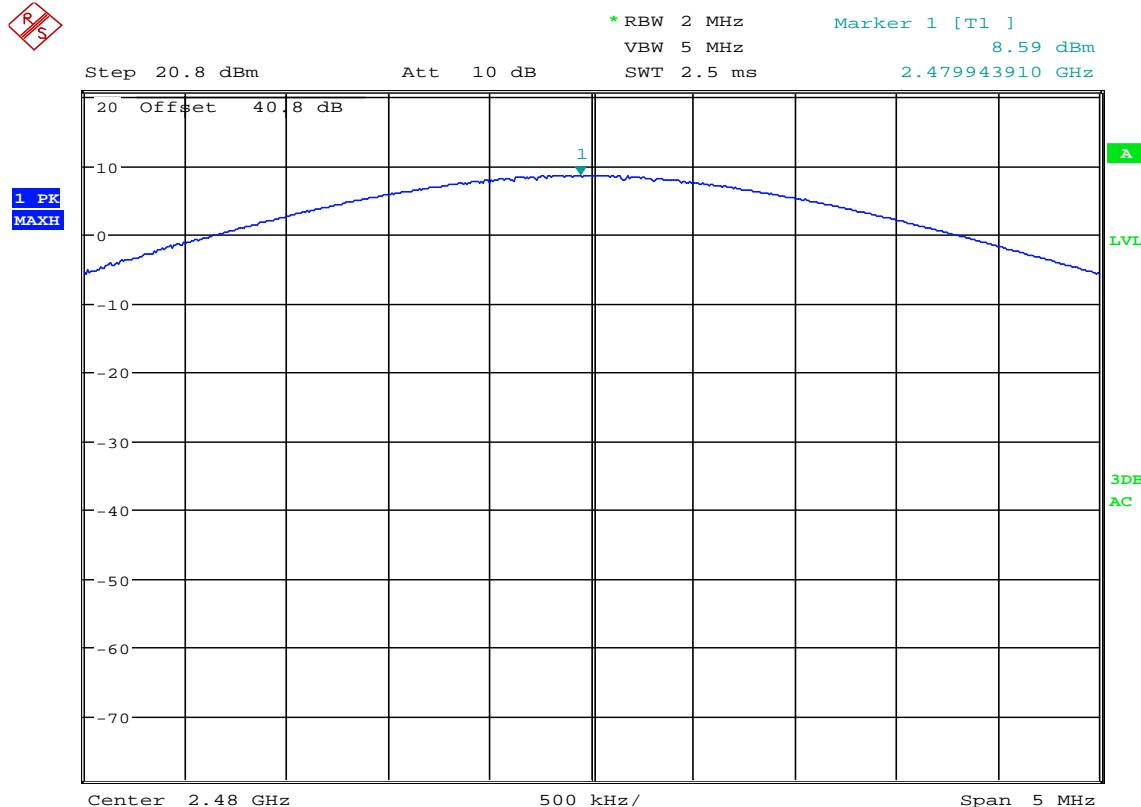Date: 2.JUN.2016 08:44:17

FCC 15.247 Output Power

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2480MHz
 : PEAK detector
 NOTES : Output Power
 NOTES : Bluetooth Classic
 NOTES :

NOTES

Manufacturer : California Eastern Laboratories
Model Number : WIFI/BLT Module
Specification : FCC-15.247 Effective Isotropic Radiated Power (EIRP)
Date : June 6, 2016
Notes : Test Distance is 3 meters


Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Matched	Equivalent		EIRP Total (dBm)	Limit dBm
			SIG. GEN. (dBm)	Ant Gain (dB)	Cable Loss (dB)		
2402.00	H	68.5	6.5	5.7	2.7	9.4	36.0
2402.00	V	60.2	-1.5	5.7	2.7	1.4	36.0
2440.00	H	70.3	8.4	5.8	2.8	11.4	36.0
2440.00	V	60.8	-0.9	5.8	2.8	2.2	36.0
2480.00	H	69.6	7.8	5.7	2.8	10.7	36.0
2480.00	V	61.4	-0.2	5.7	2.8	2.7	36.0

EIRP (dBm) = Matched Signal Generator (dBm) + Antenna Gain (dB) – Cable Loss (dB)

Checked BY

RICHARD E. KING

Richard E. King

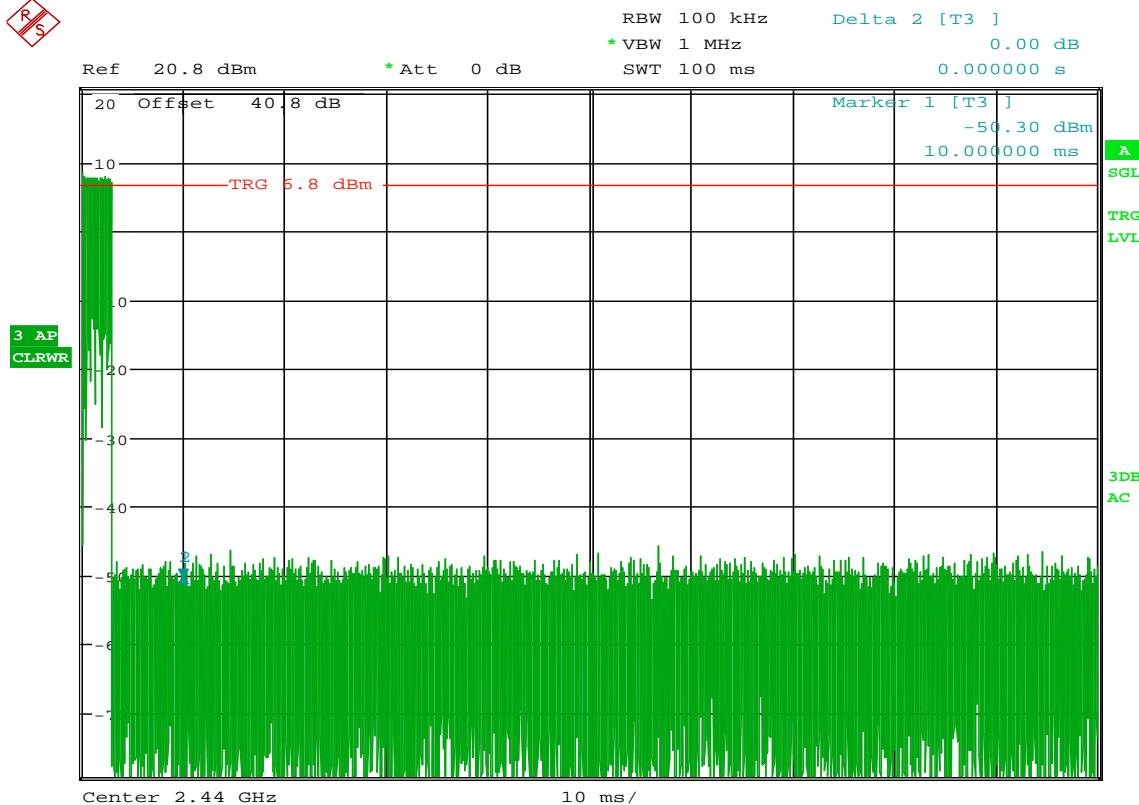
R
S


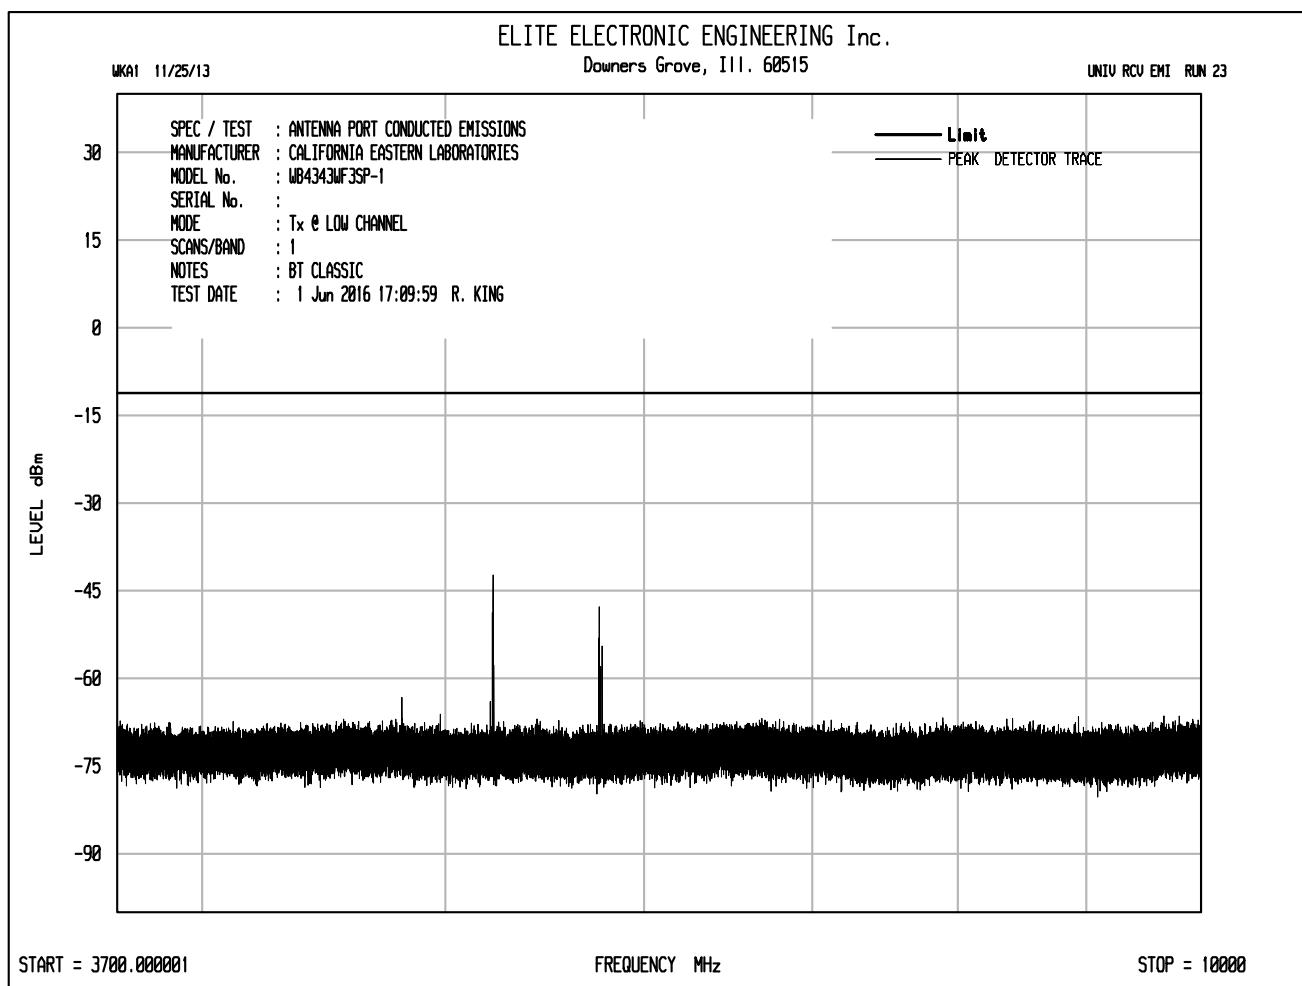
Date: 1.JUN.2016 14:01:58


FCC 15C Duty Cycle


MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Hopping Mode
 : PEAK DETECTOR
 NOTES : Bluetooth Classic
 NOTES : Duty Cycle
 NOTES : Pulse Width = 2.88mS
 NOTES : $DC = 20 * \text{LOG}(\text{On Time}/100\text{mS}) = 20 * \text{Log}(2.88\text{mS}/100\text{mS})$
 : DC = -30.8 dB


 NOTES

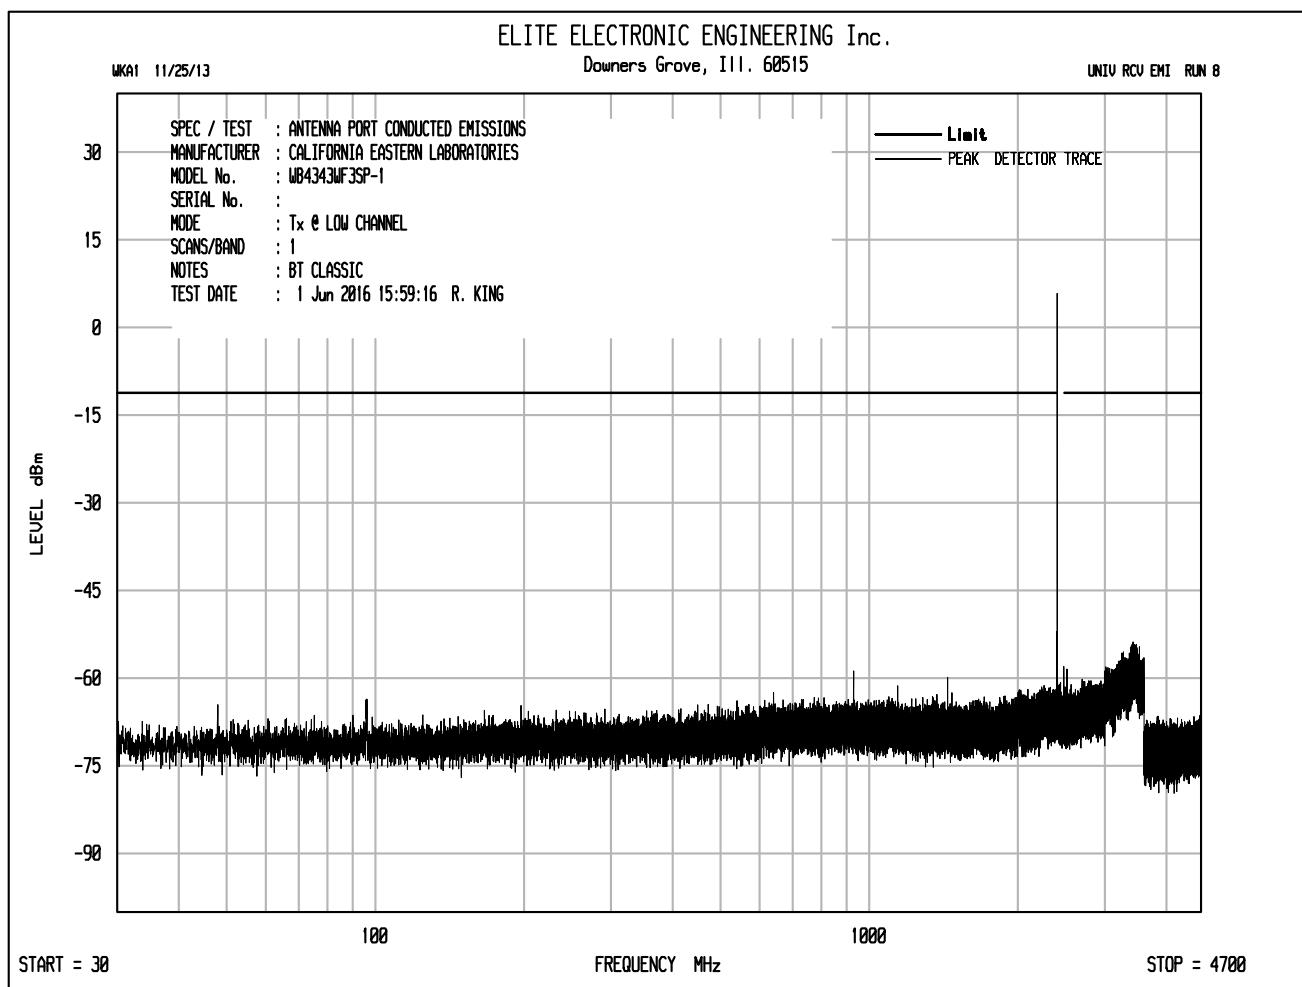





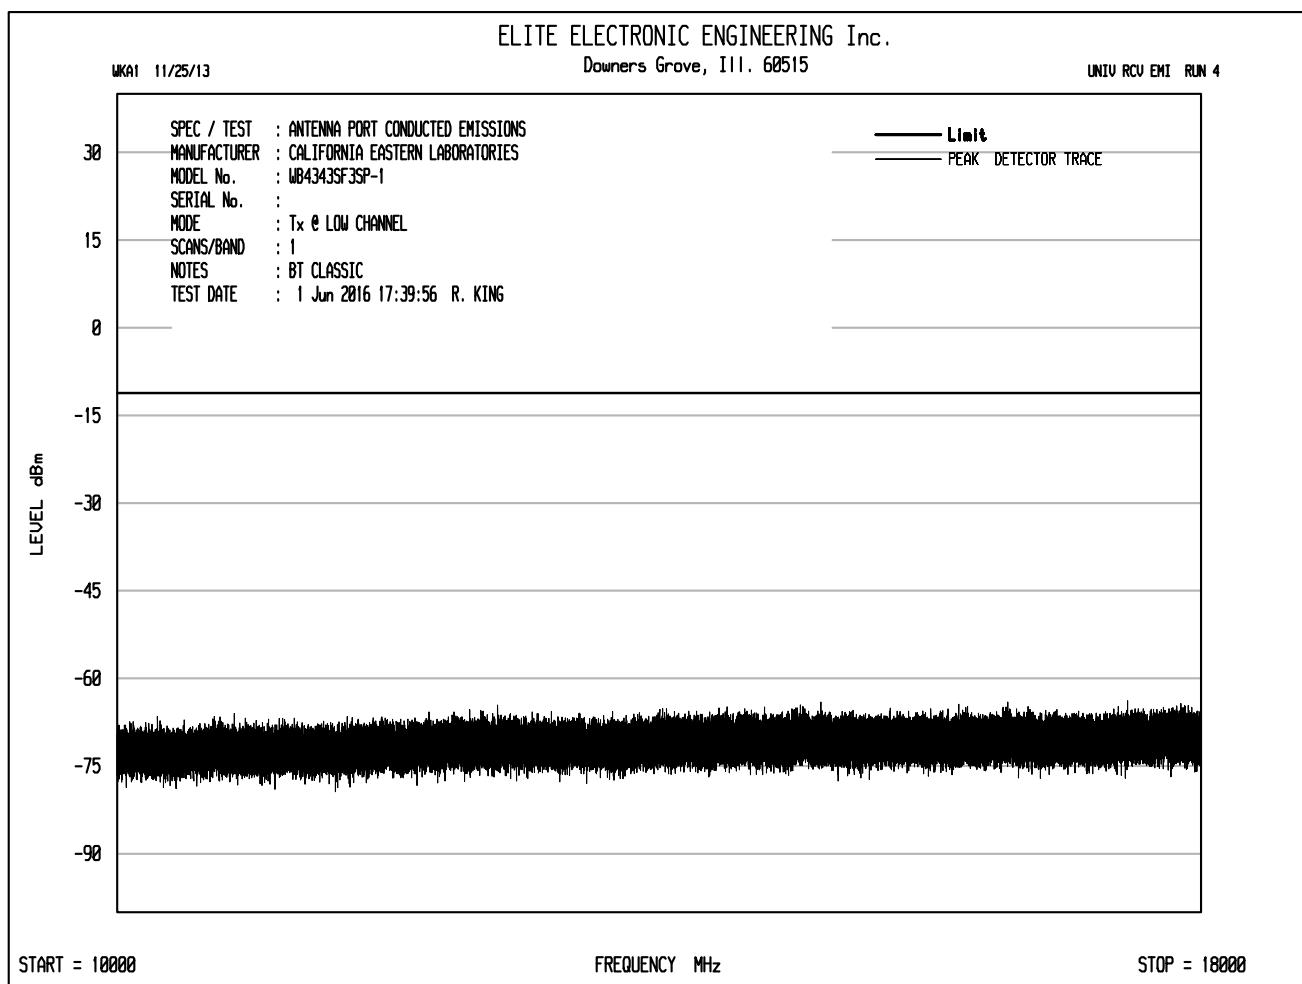


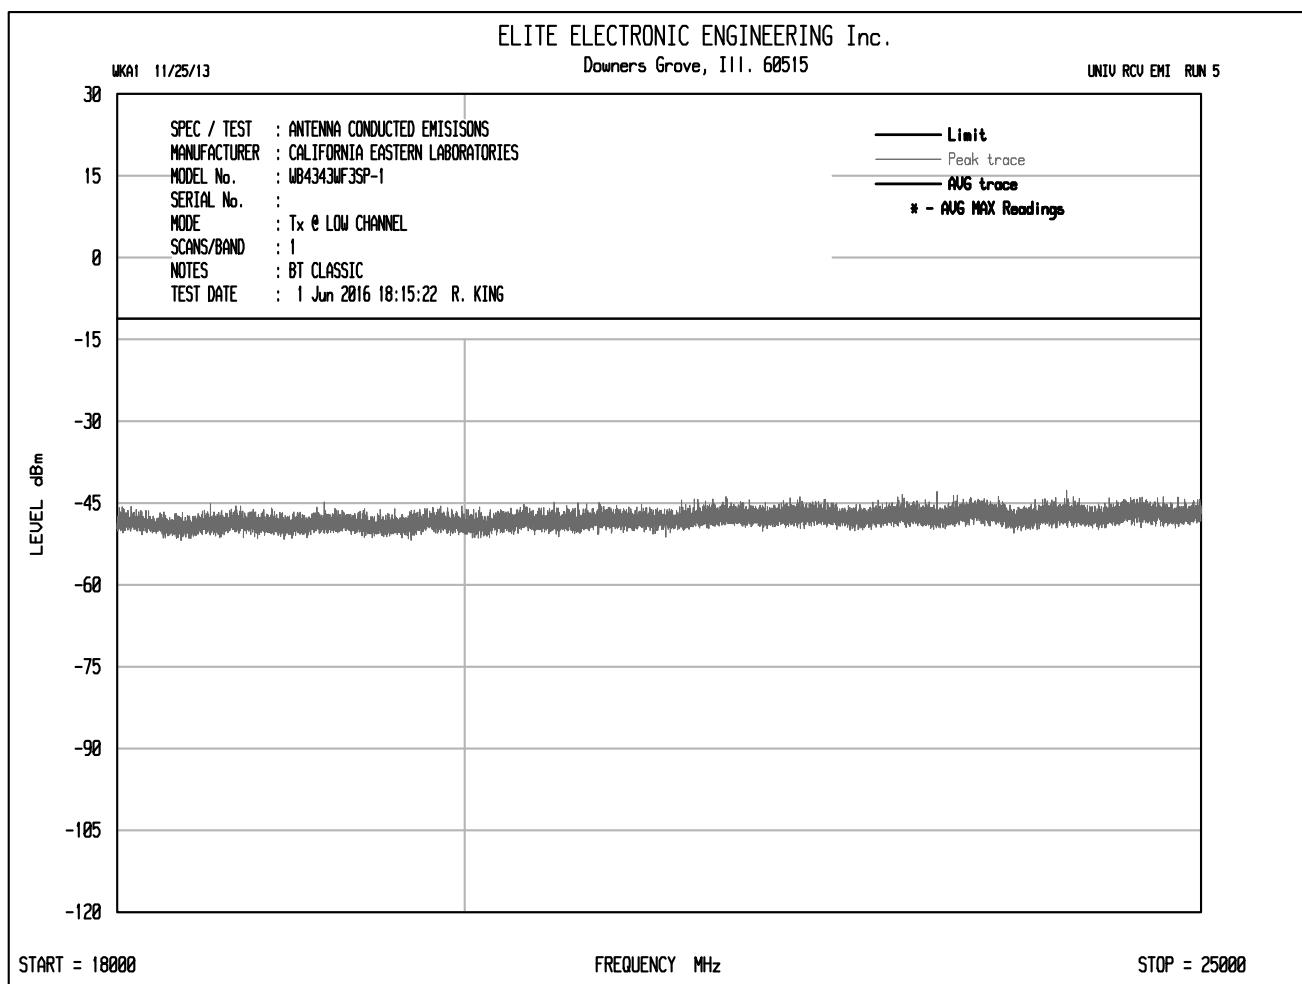


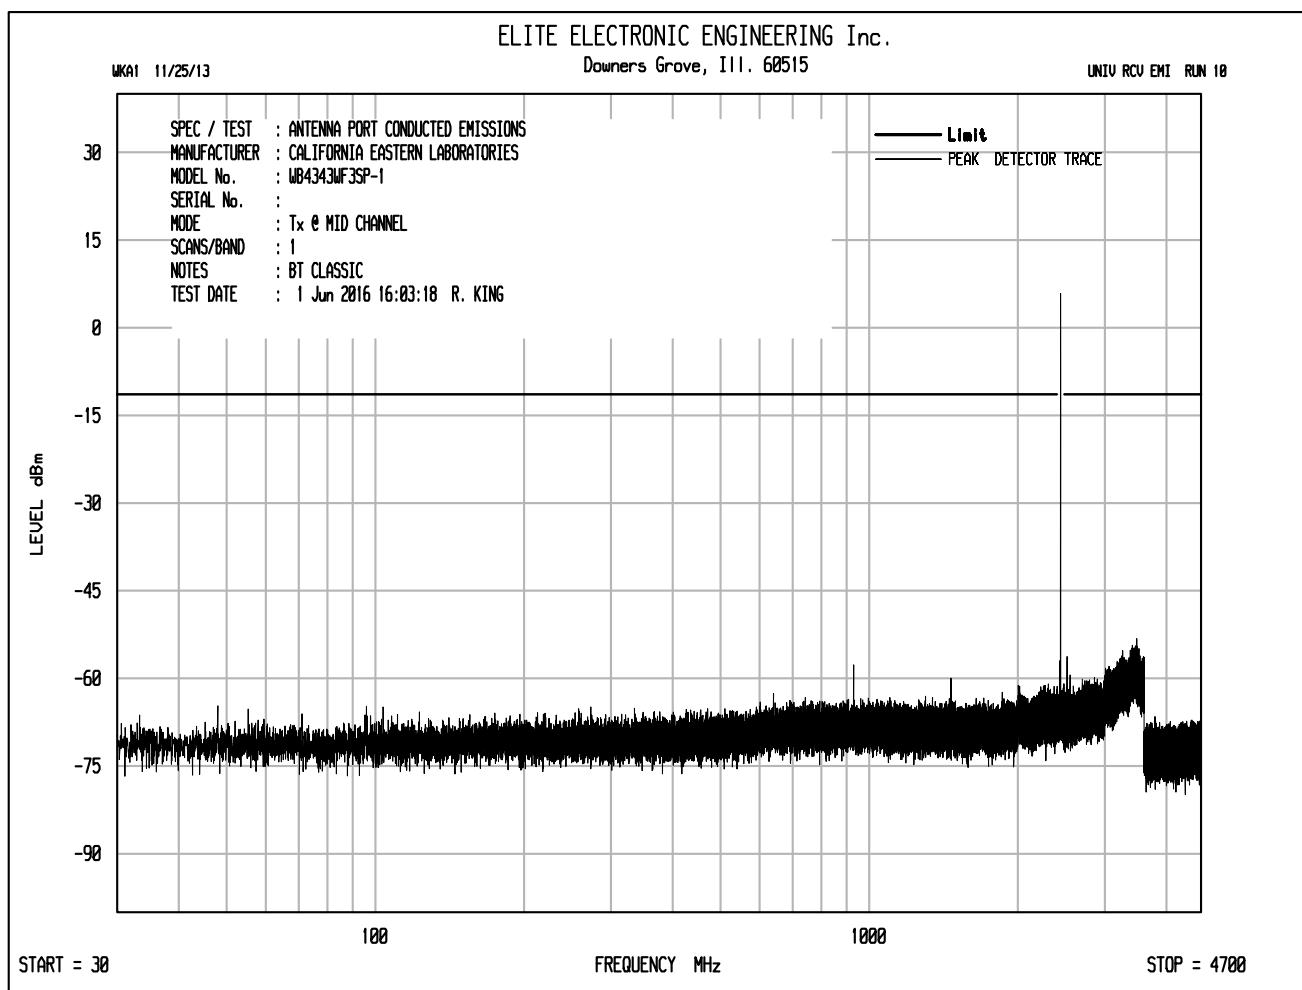


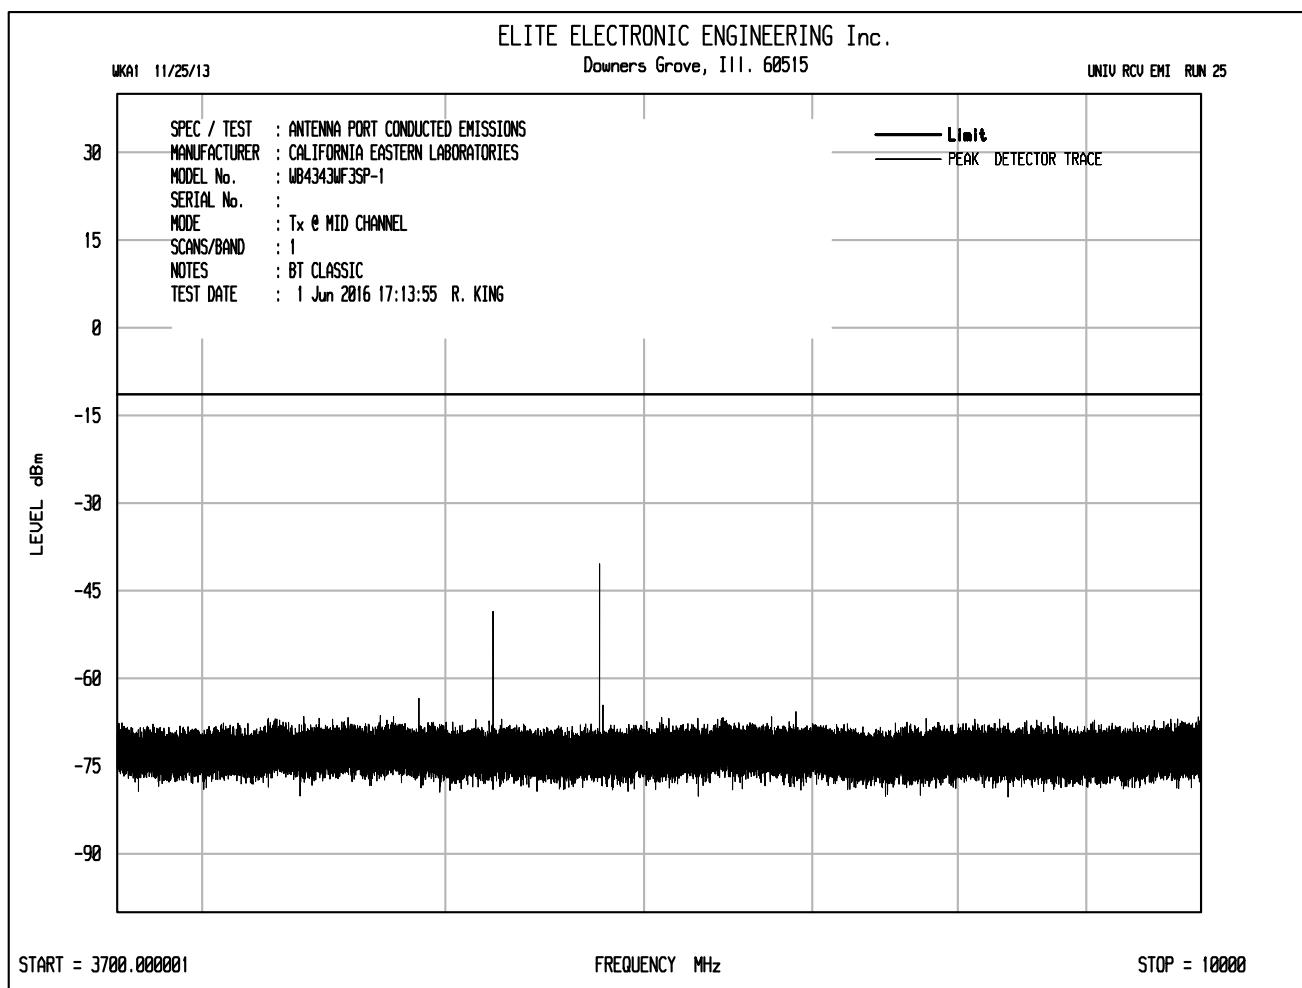


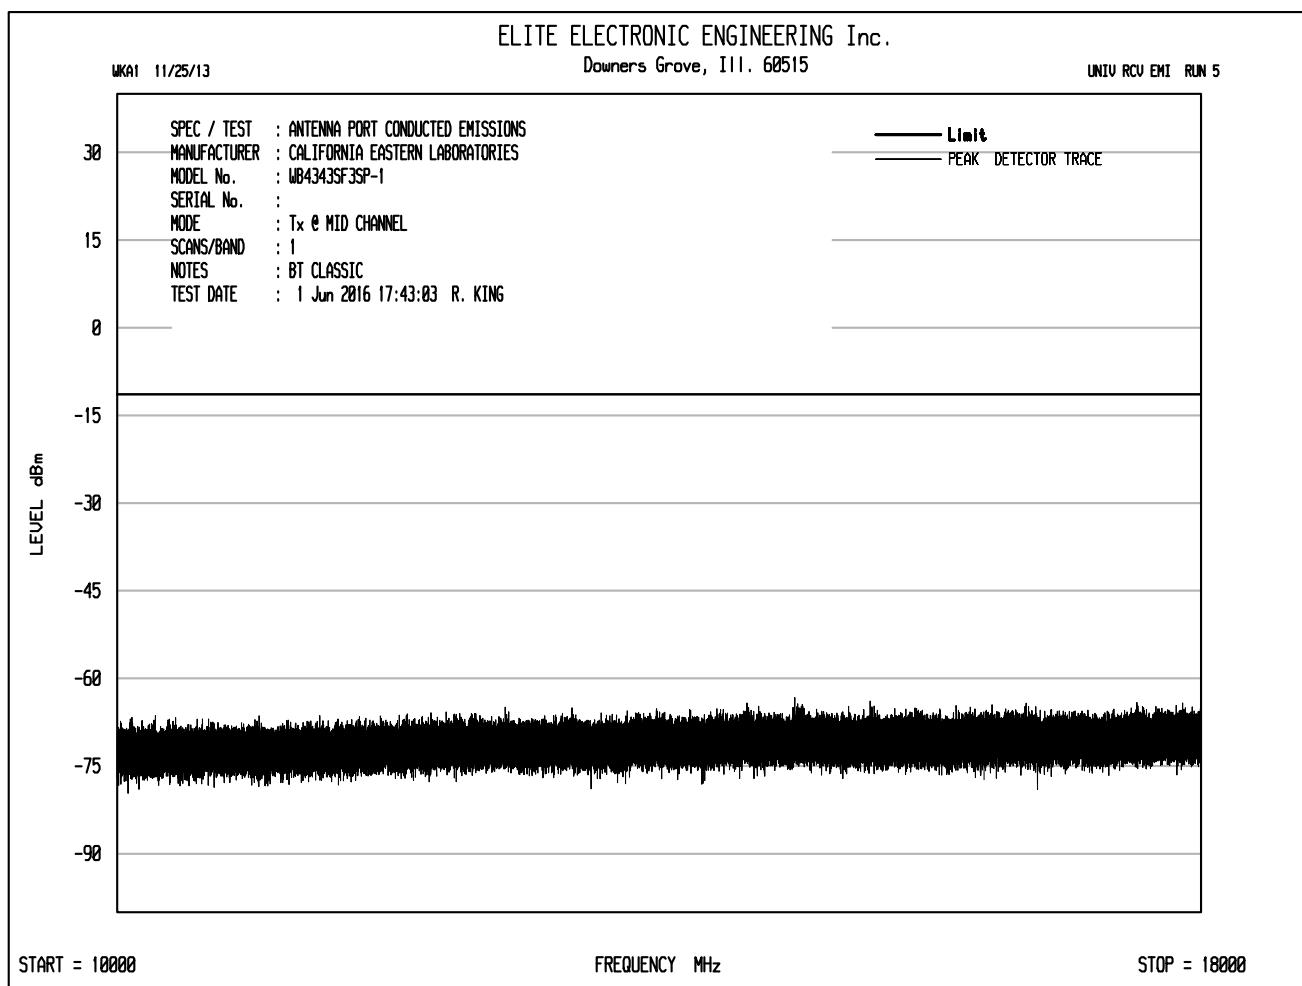


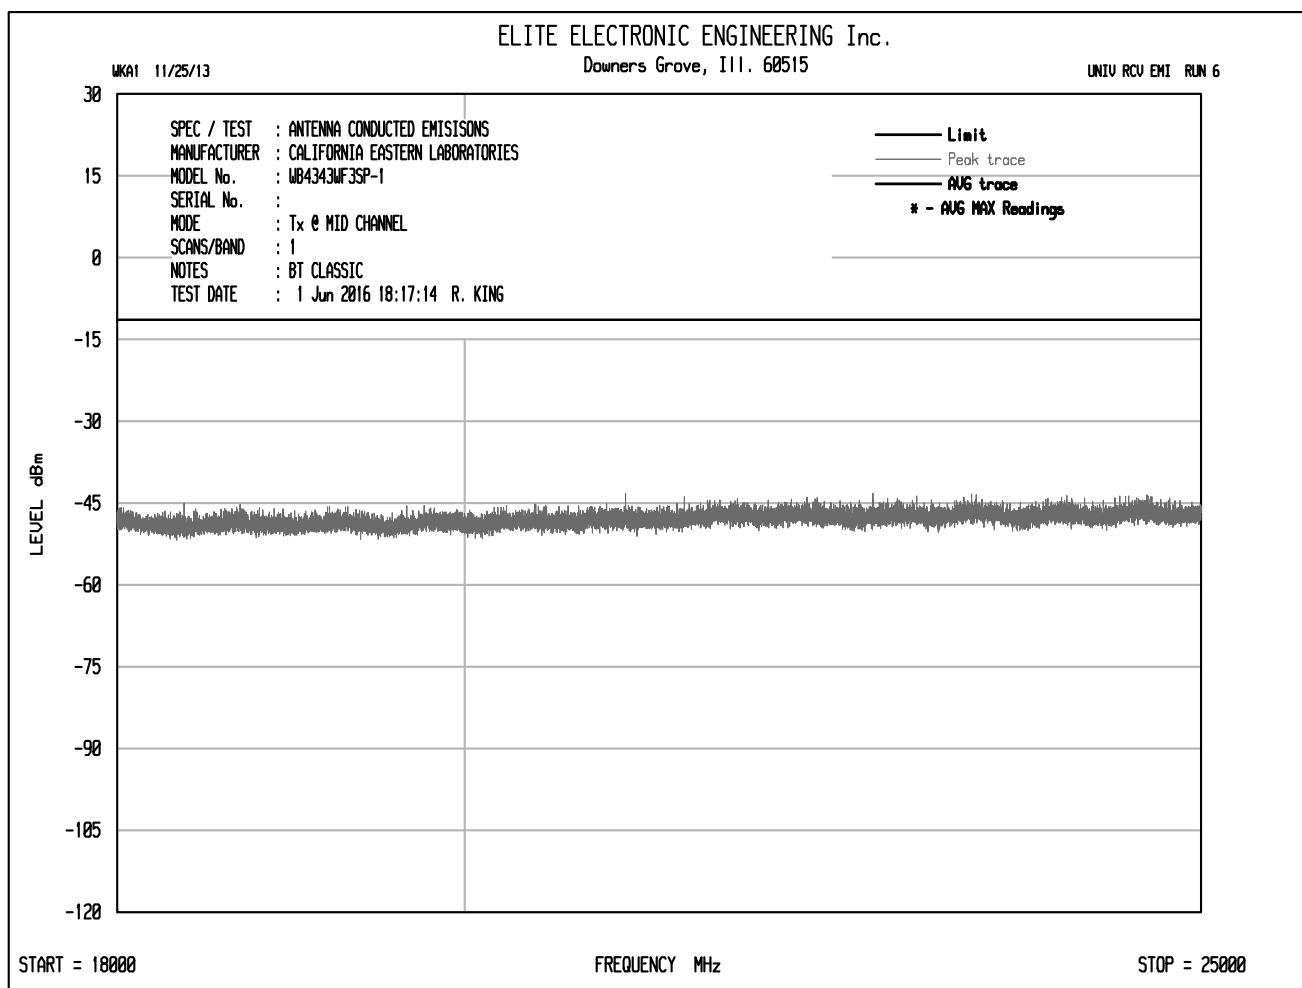


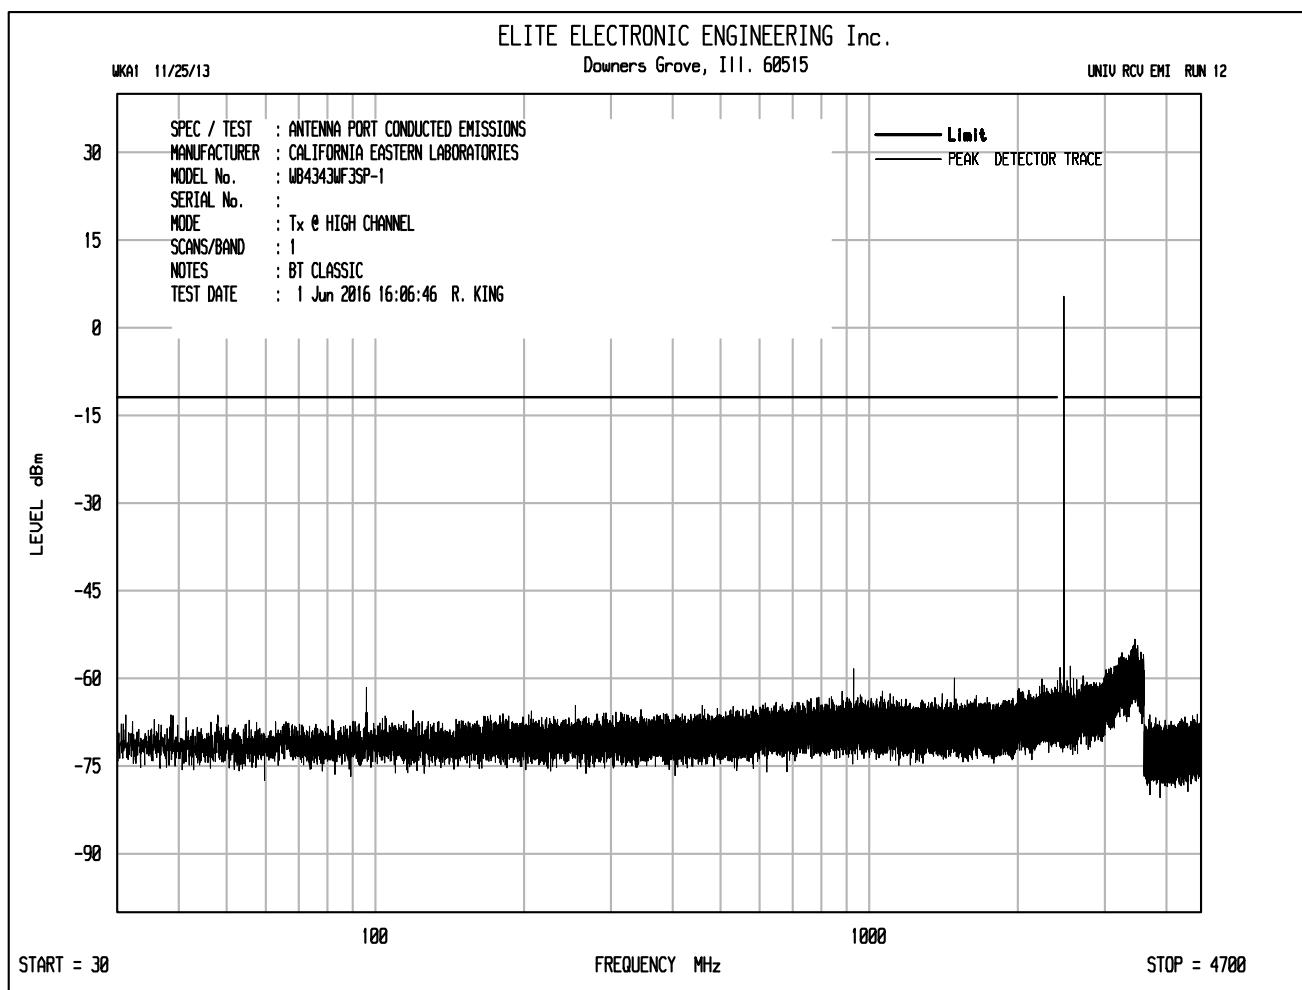


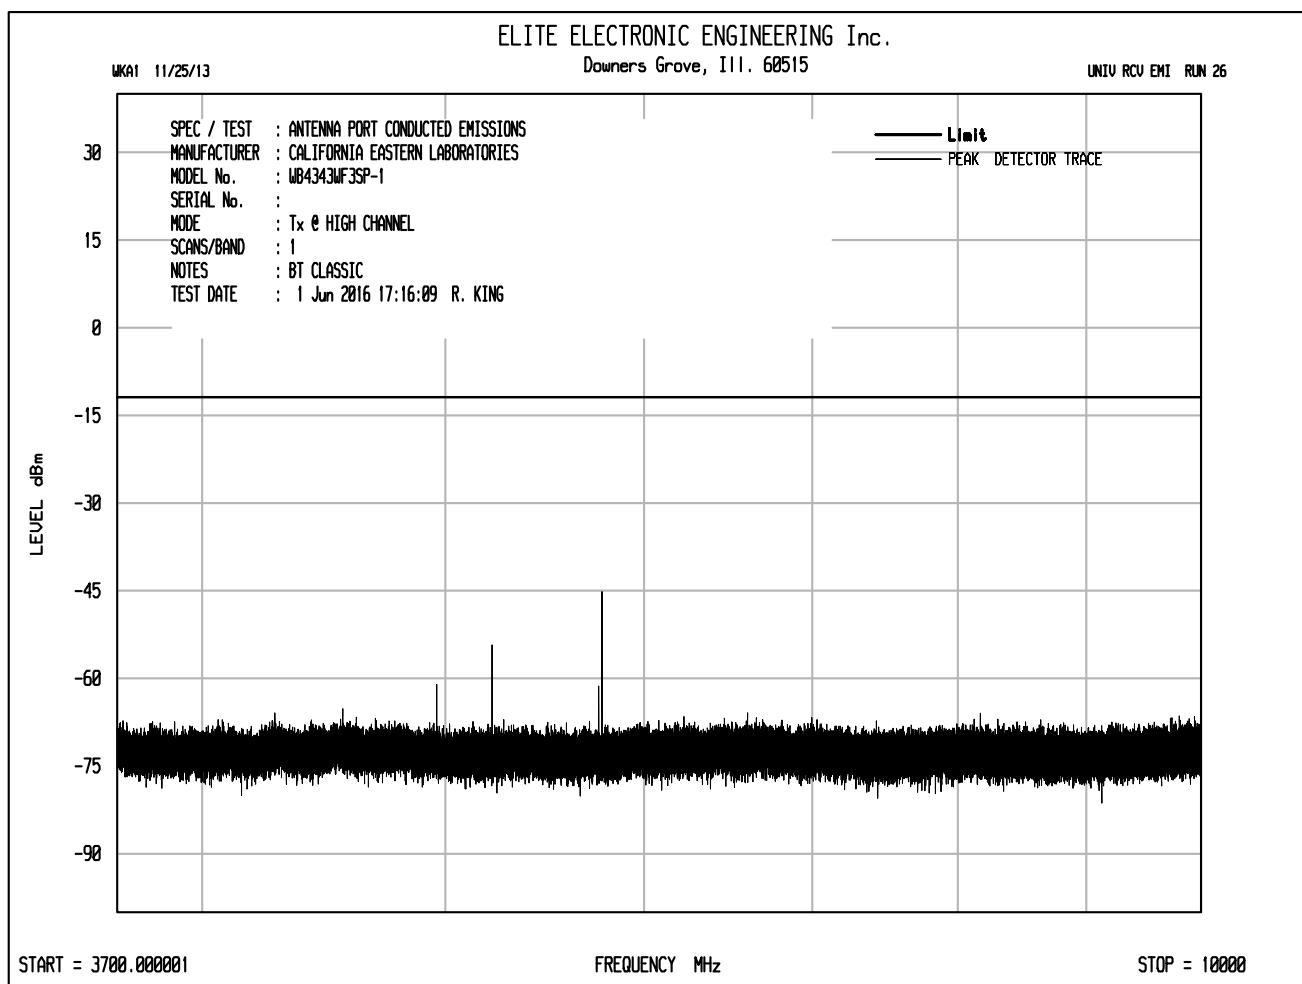


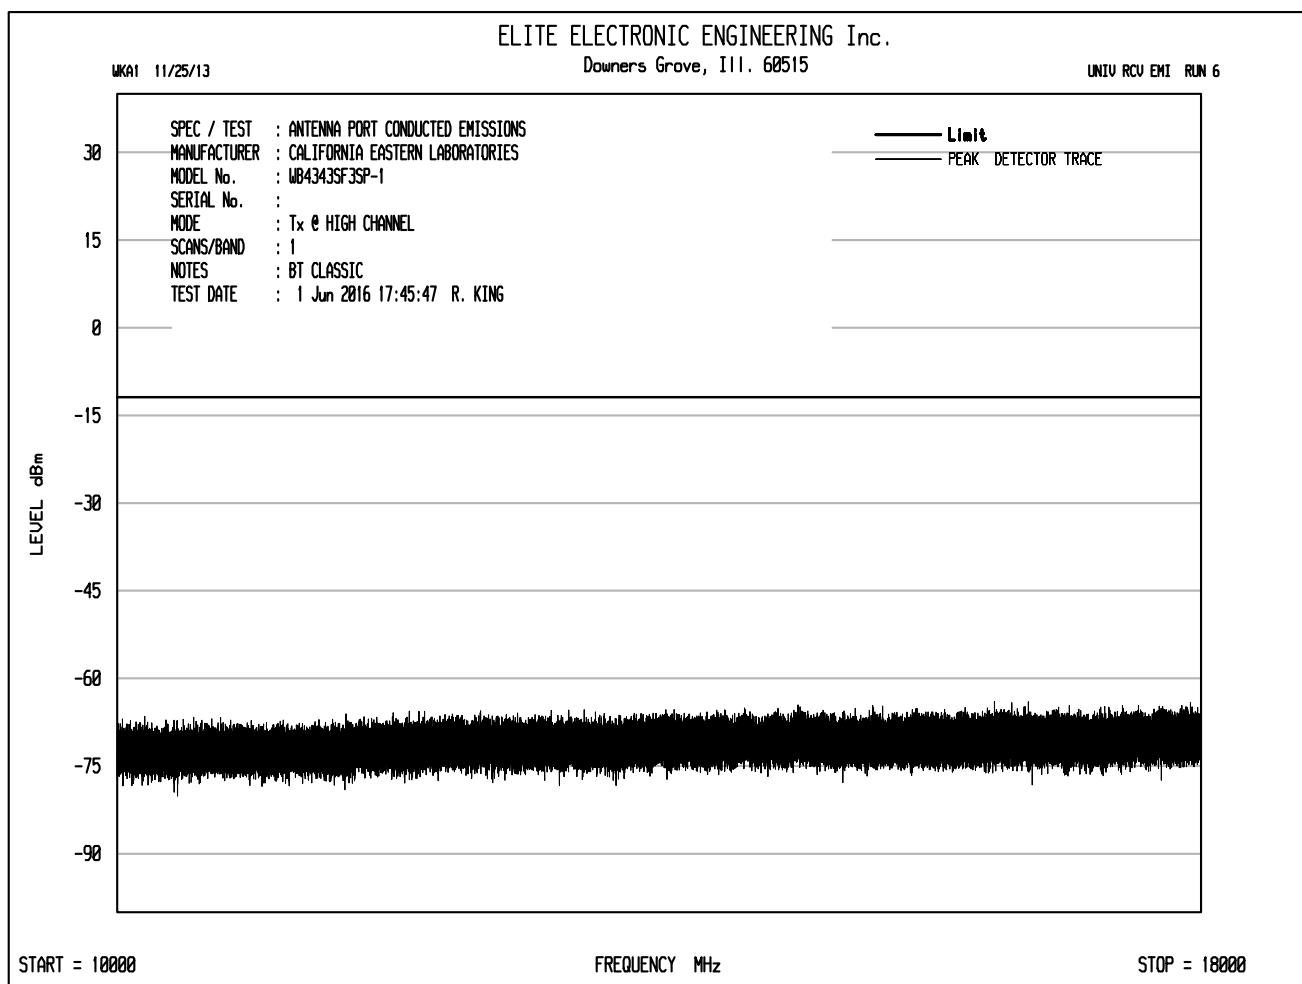


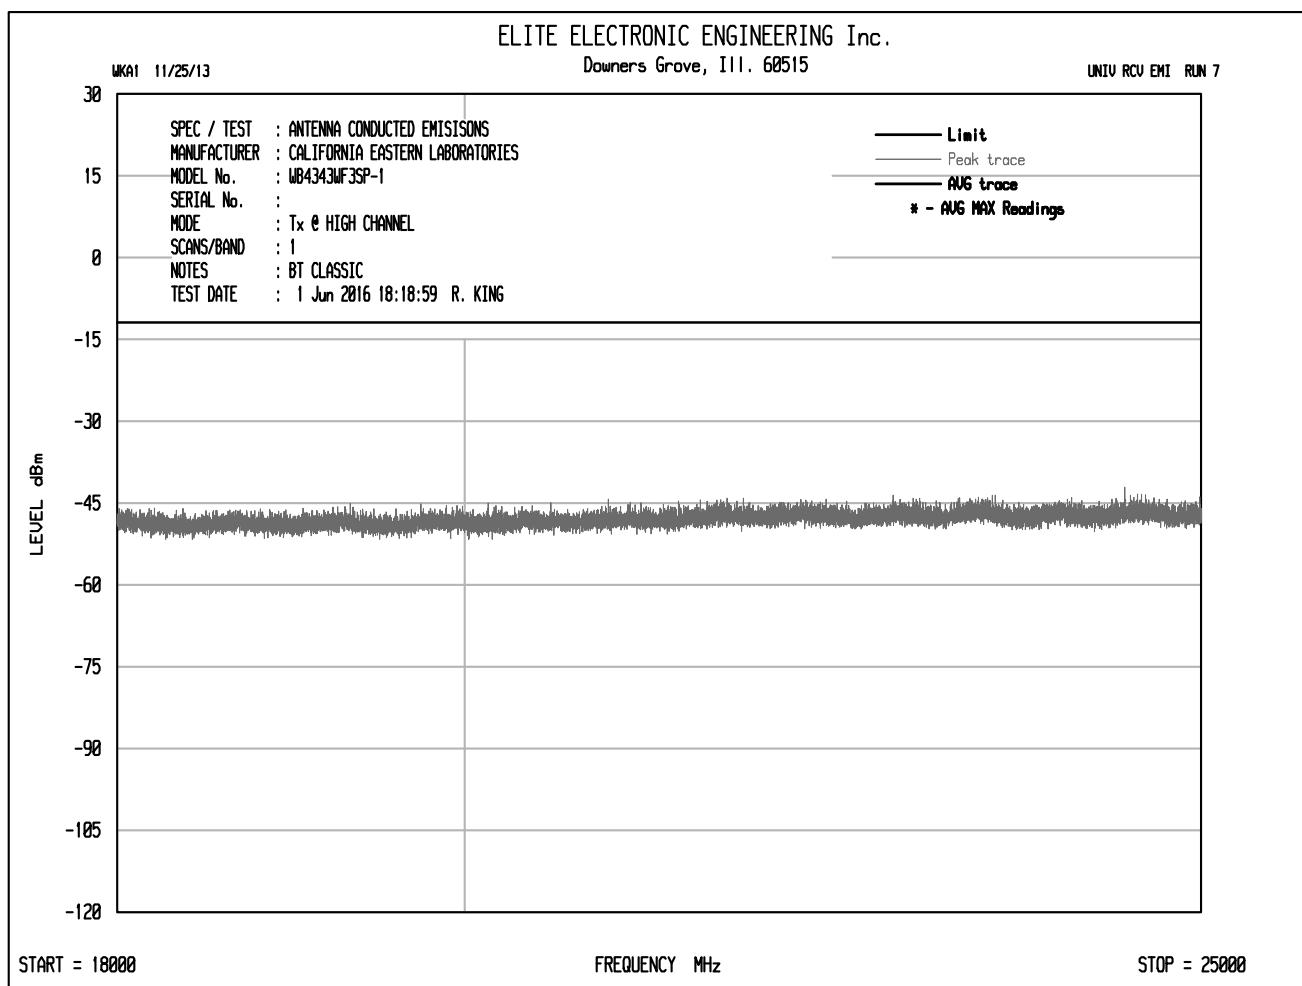


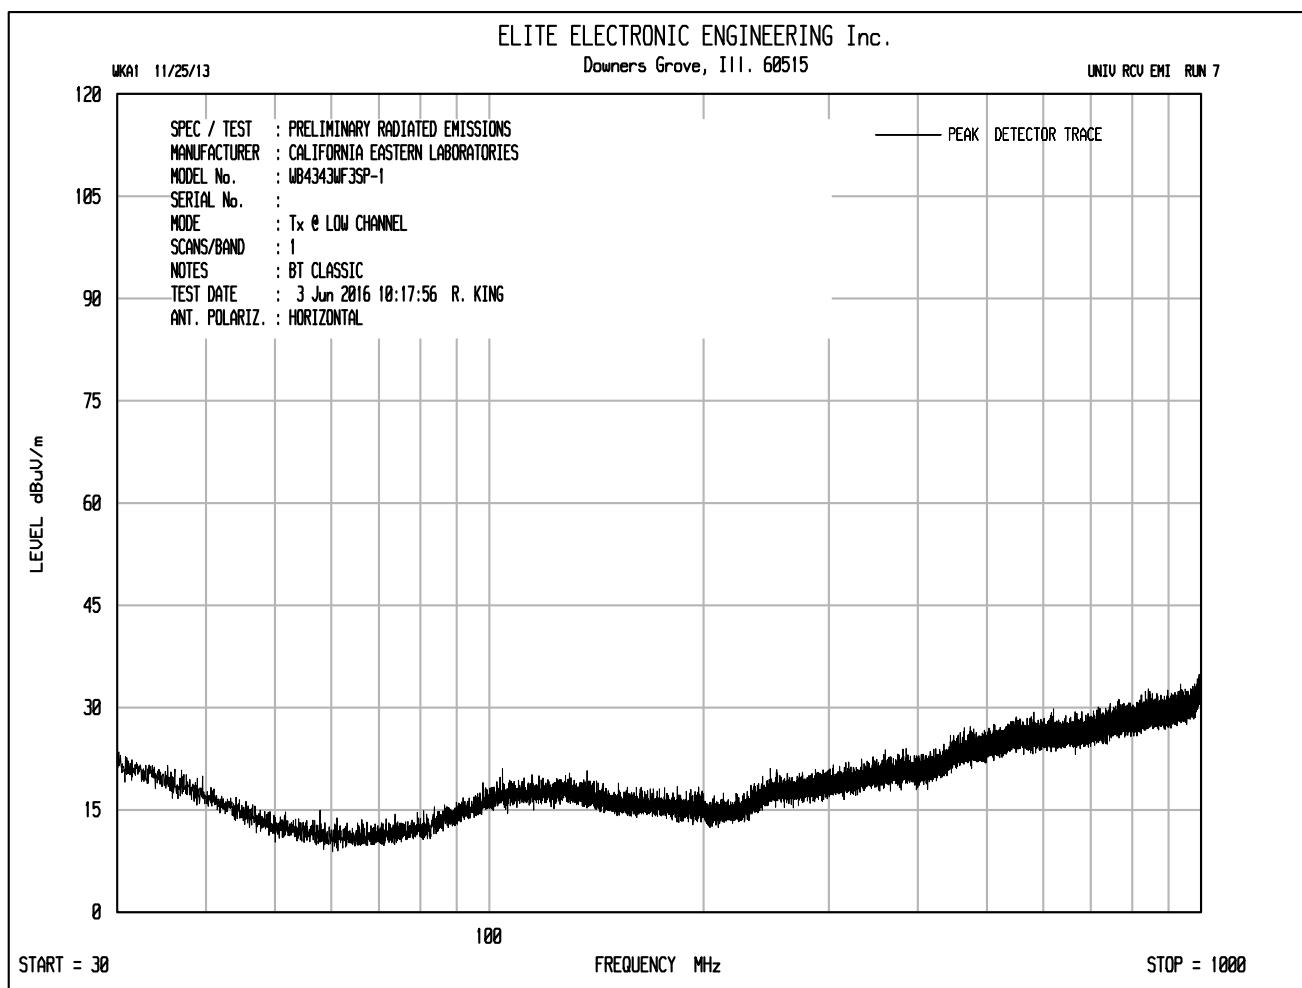


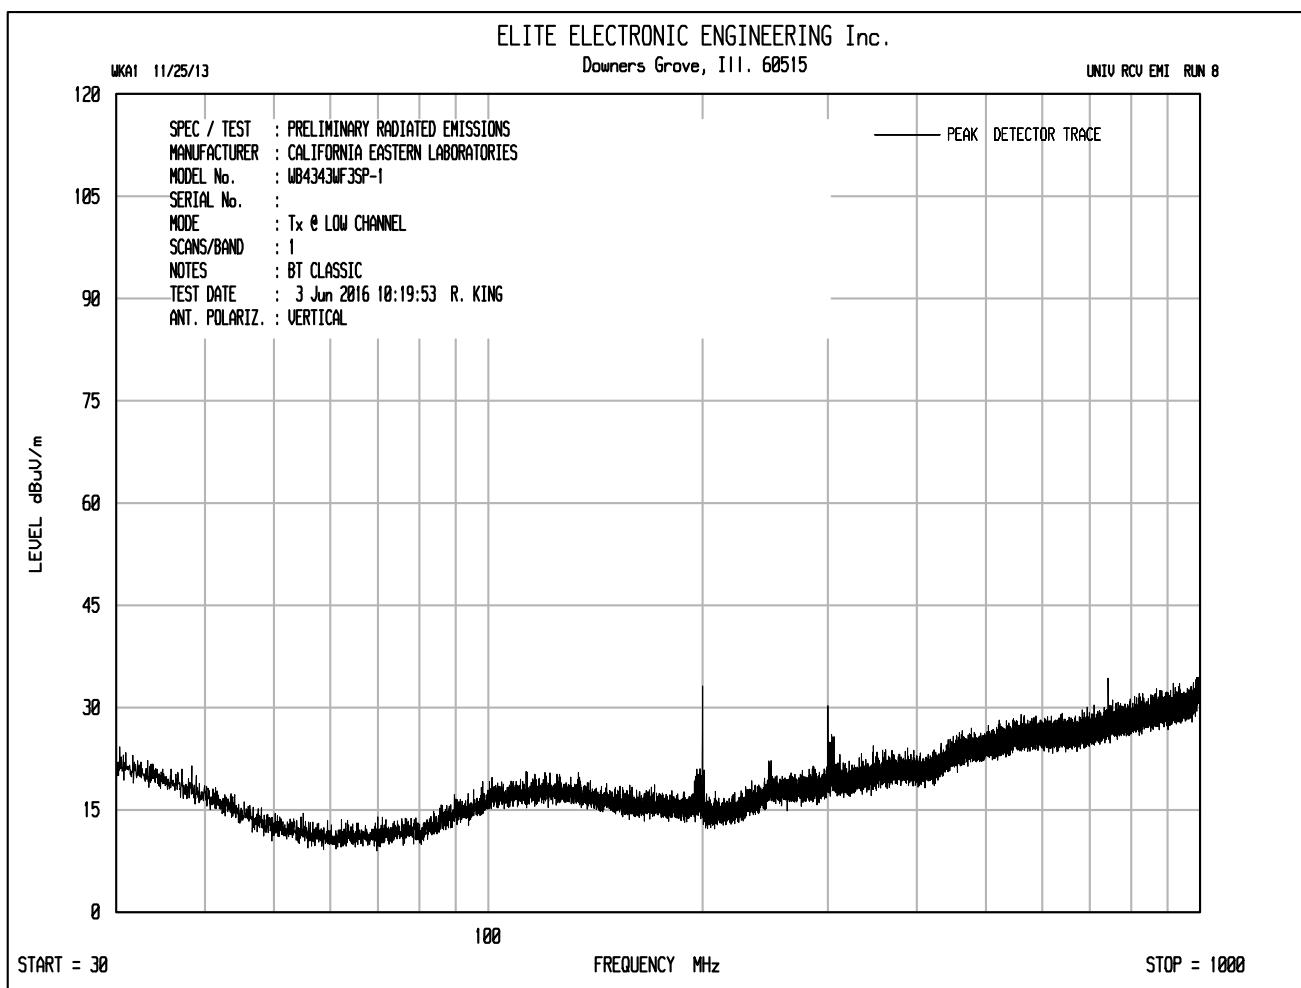


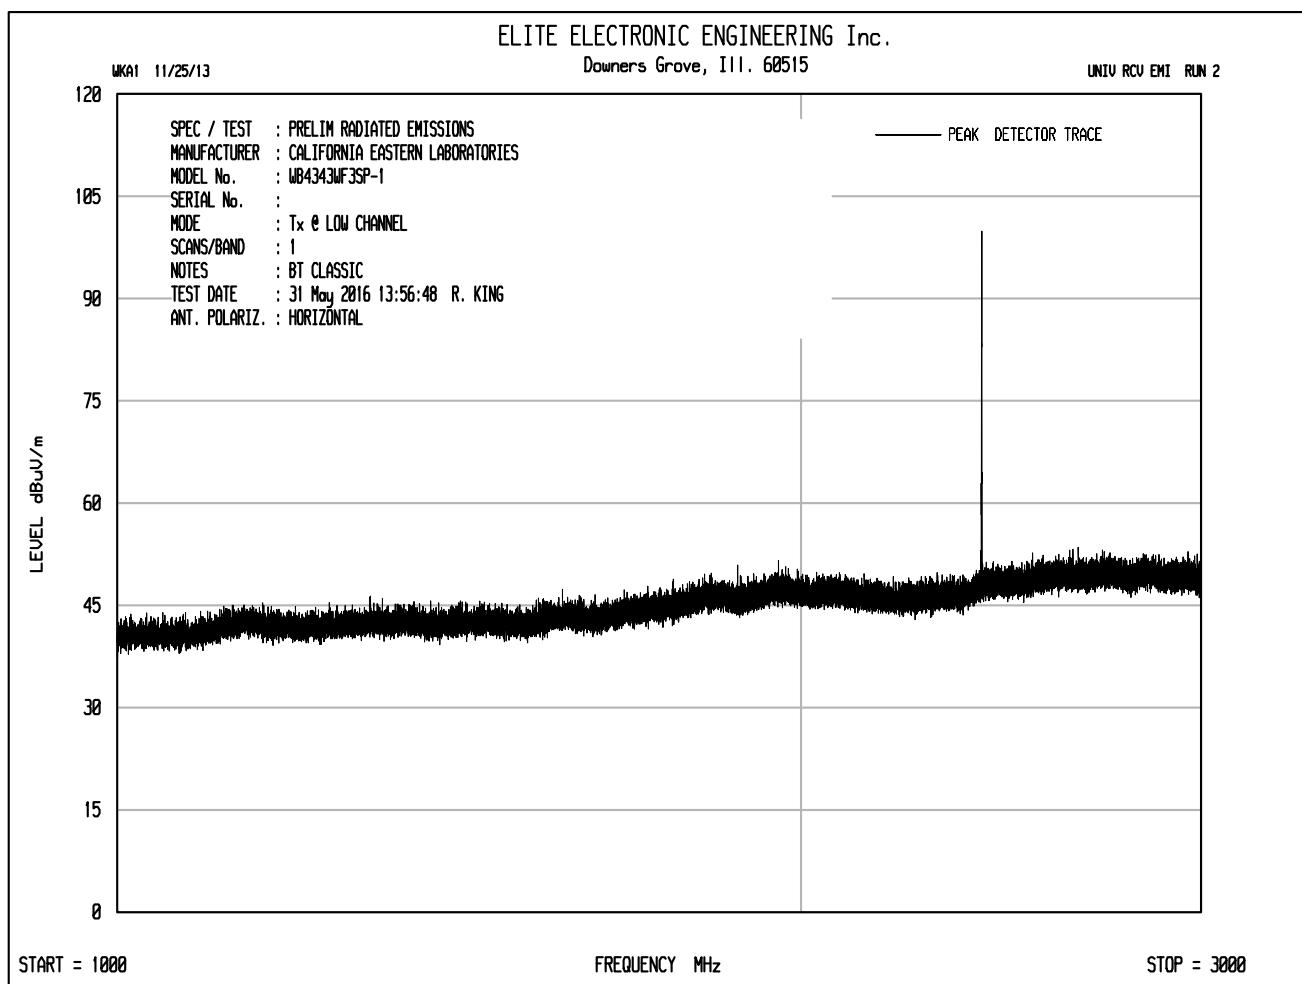


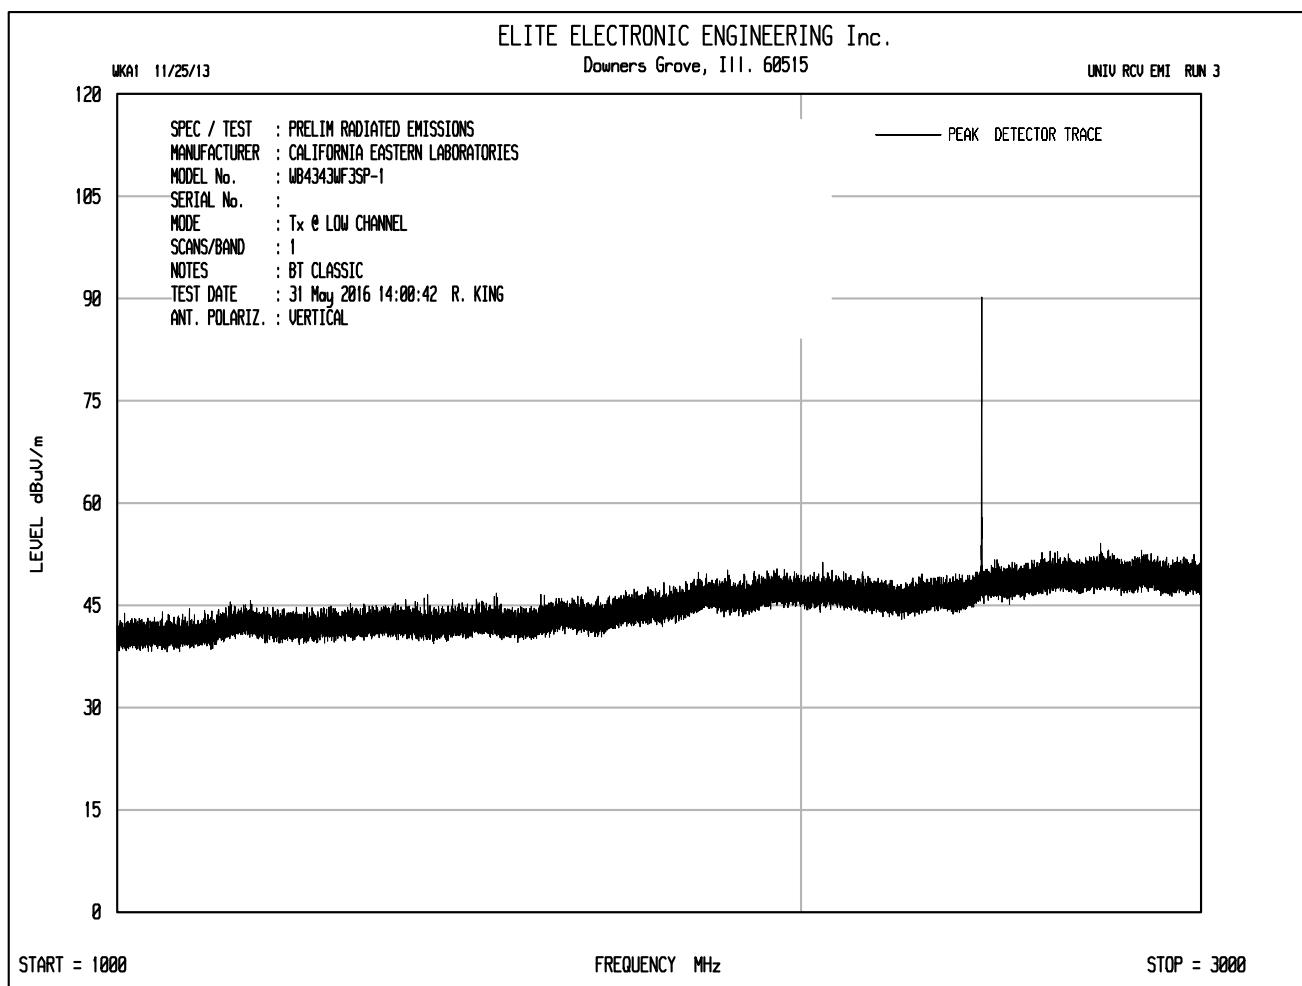


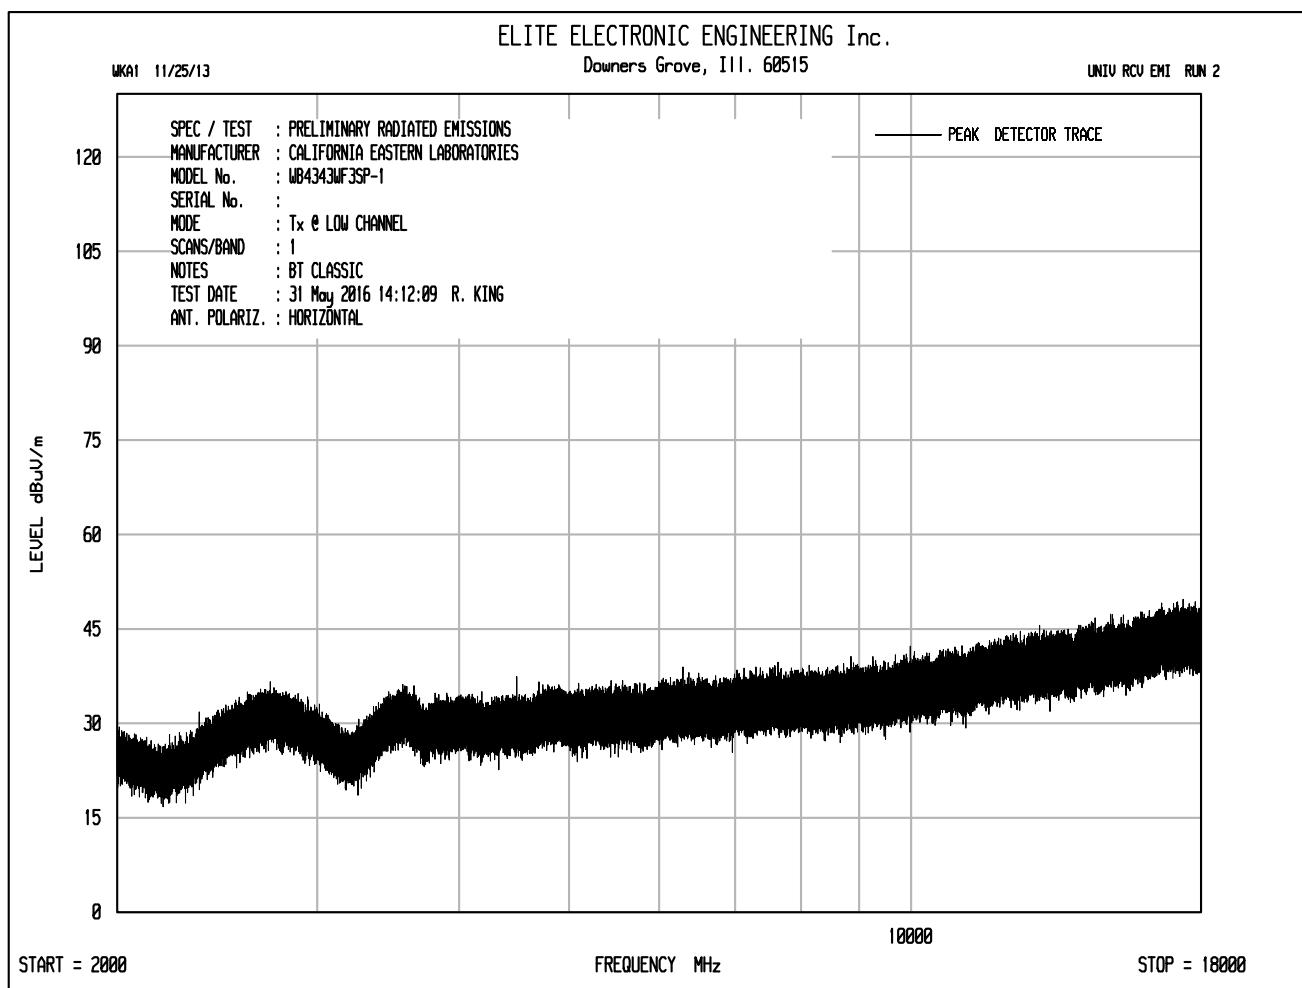


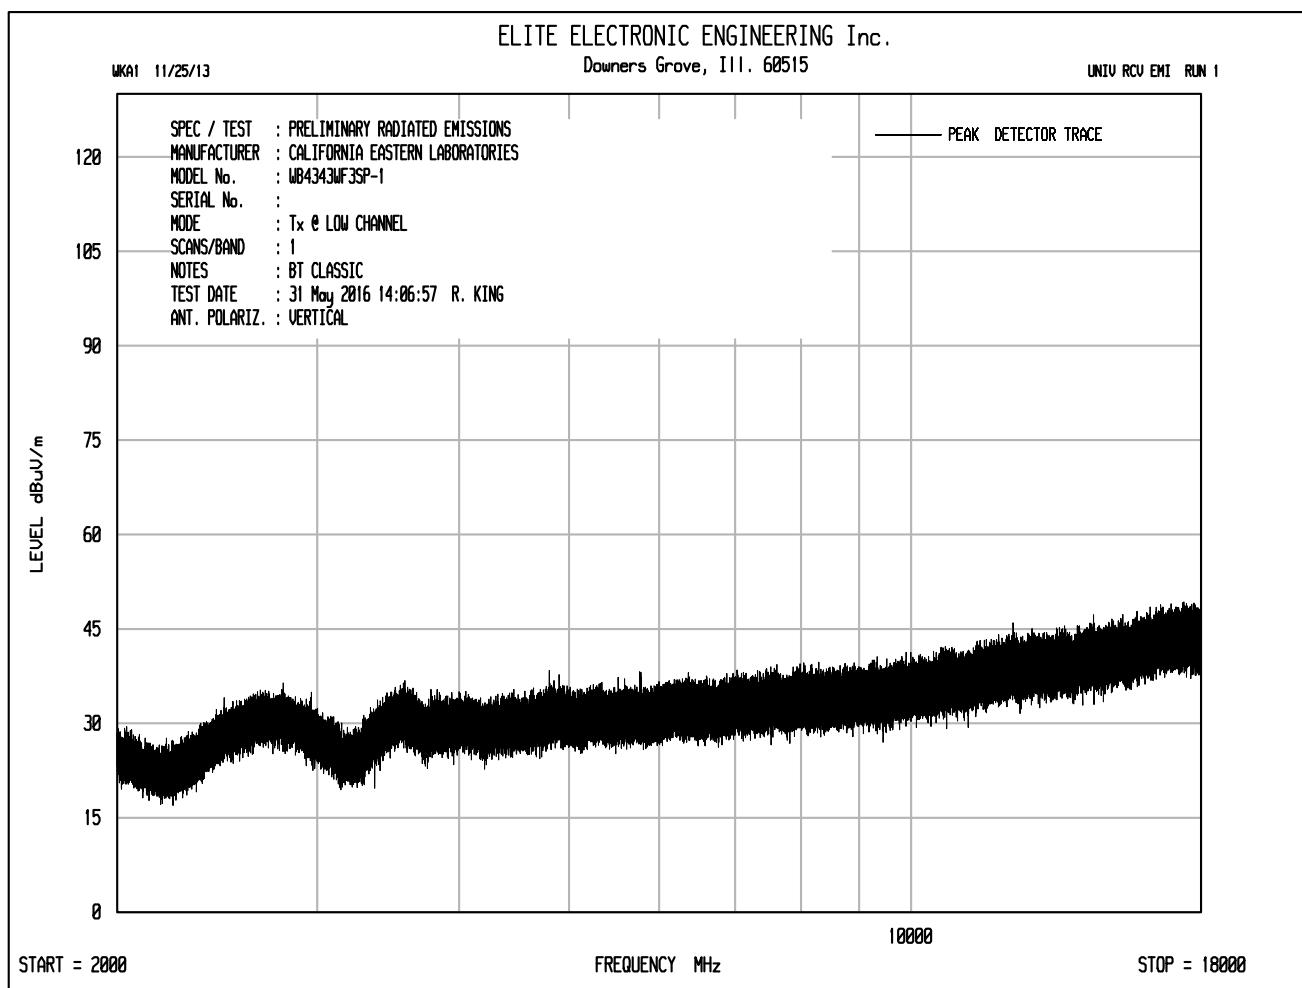


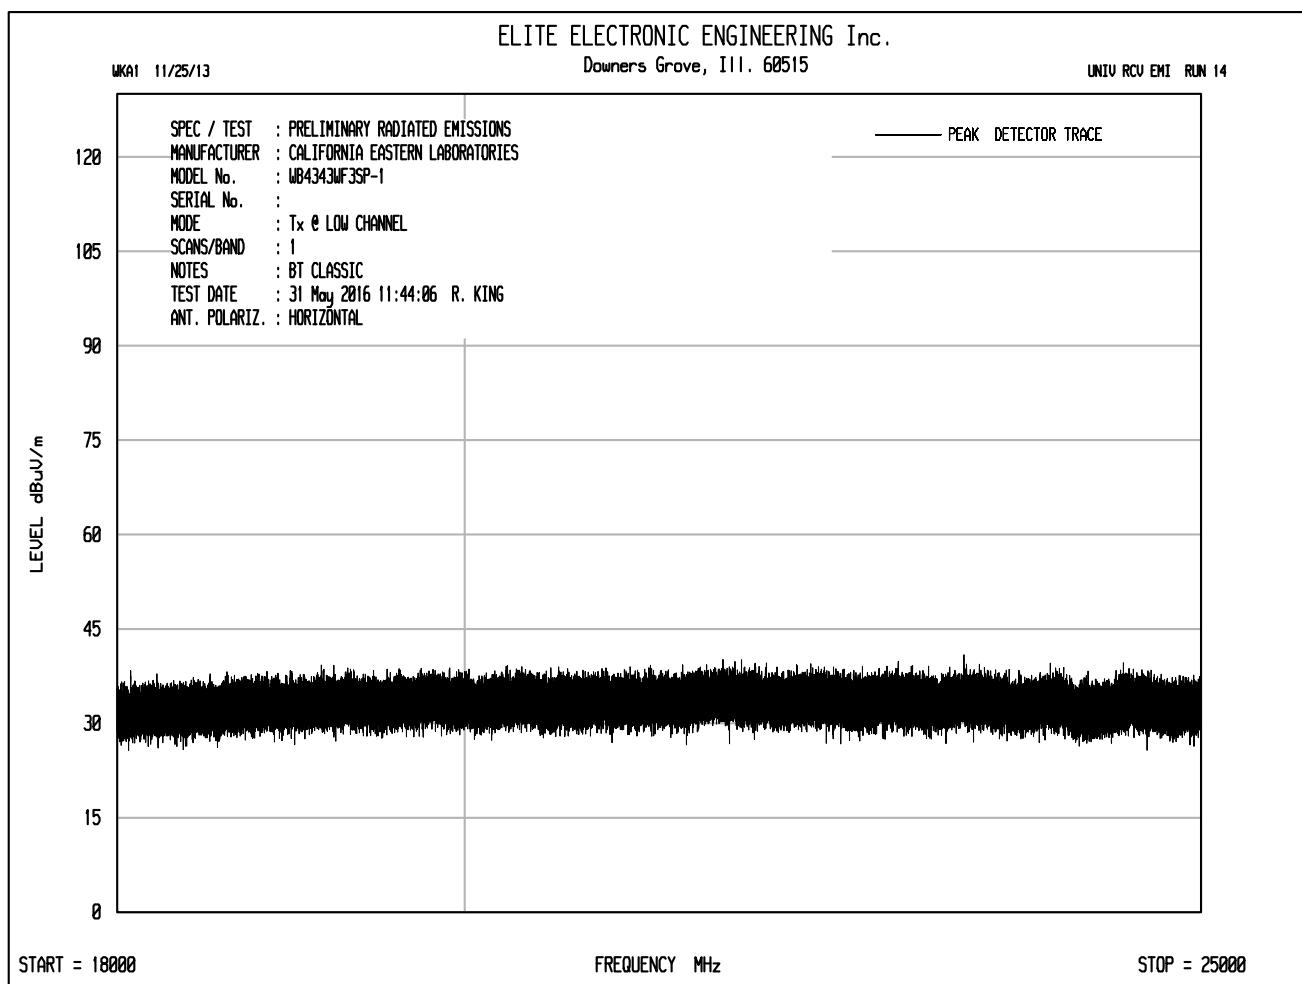


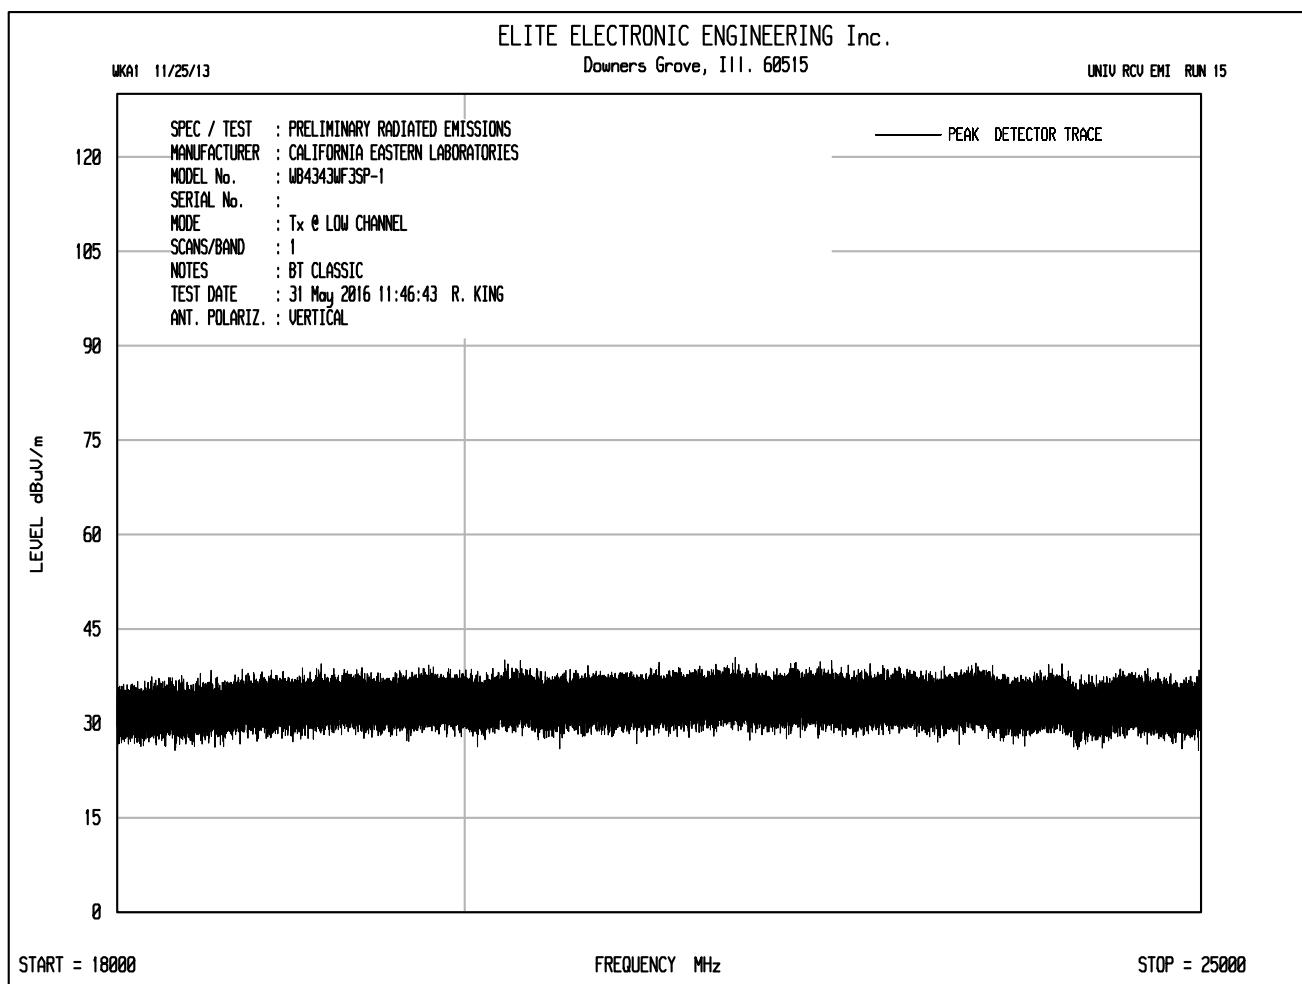


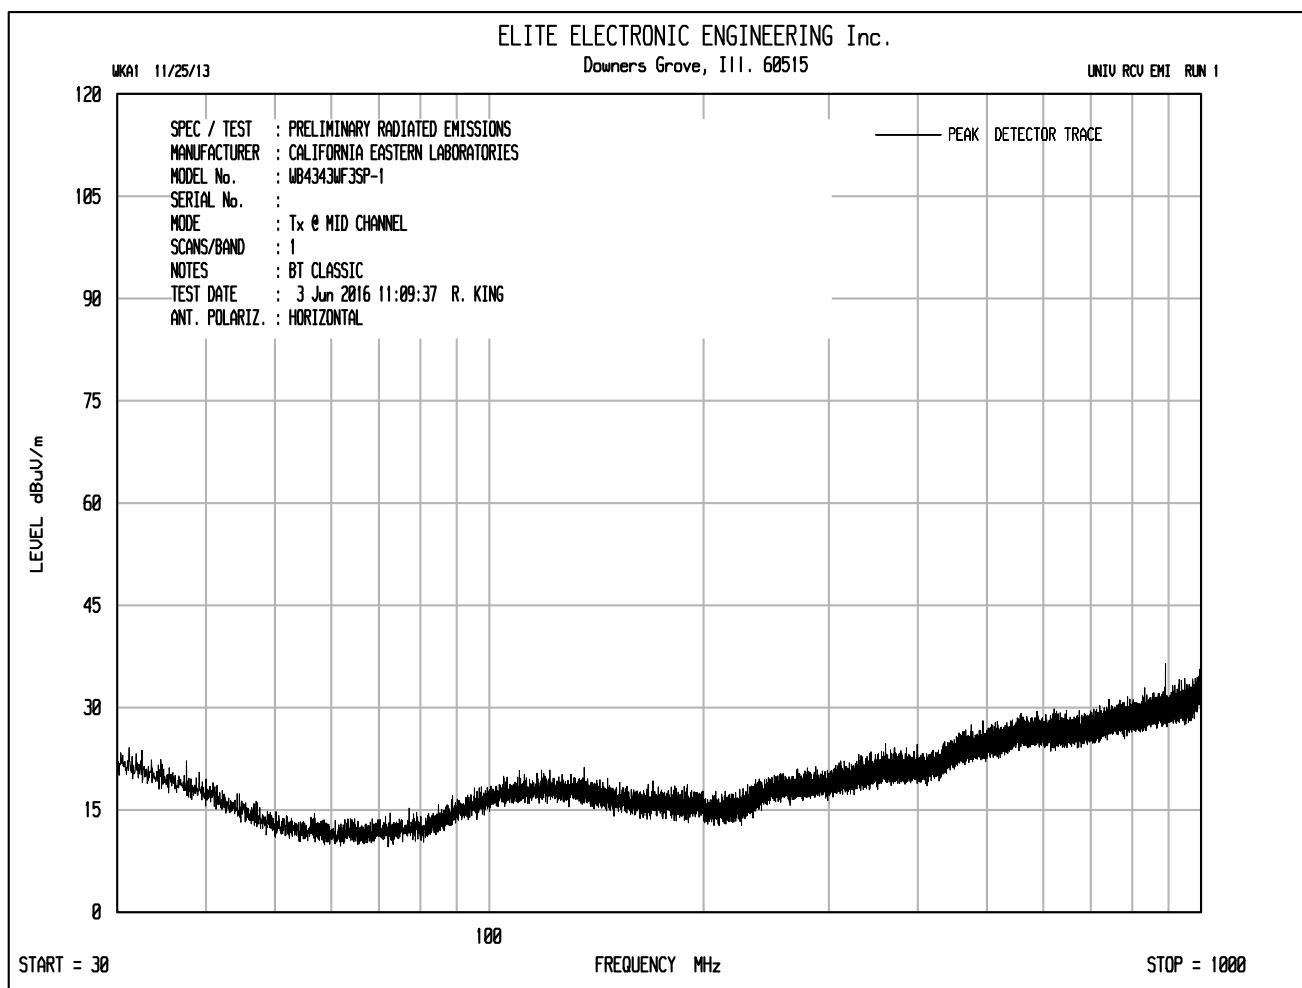


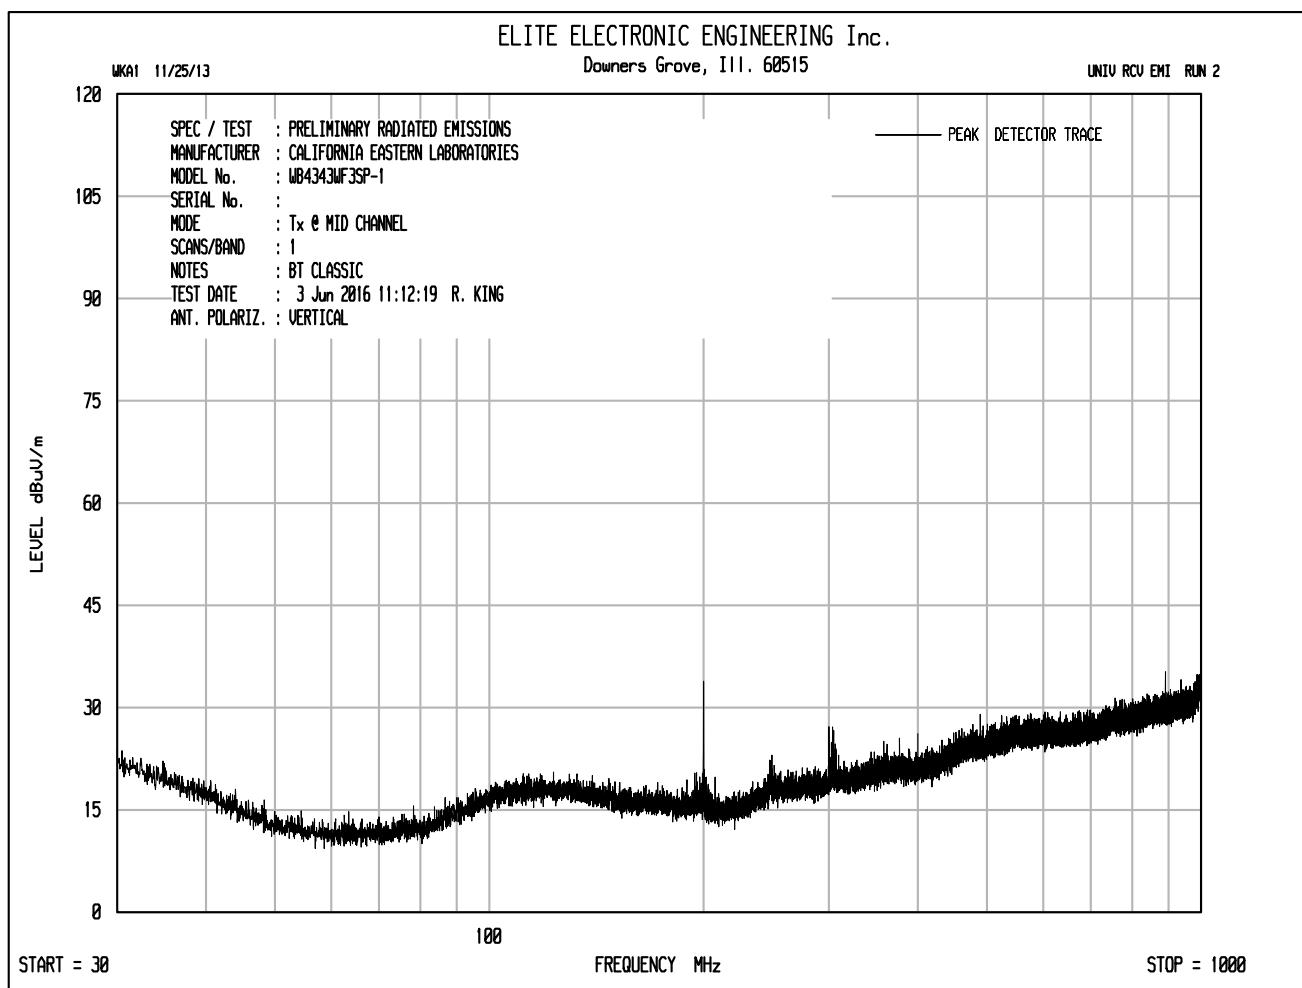


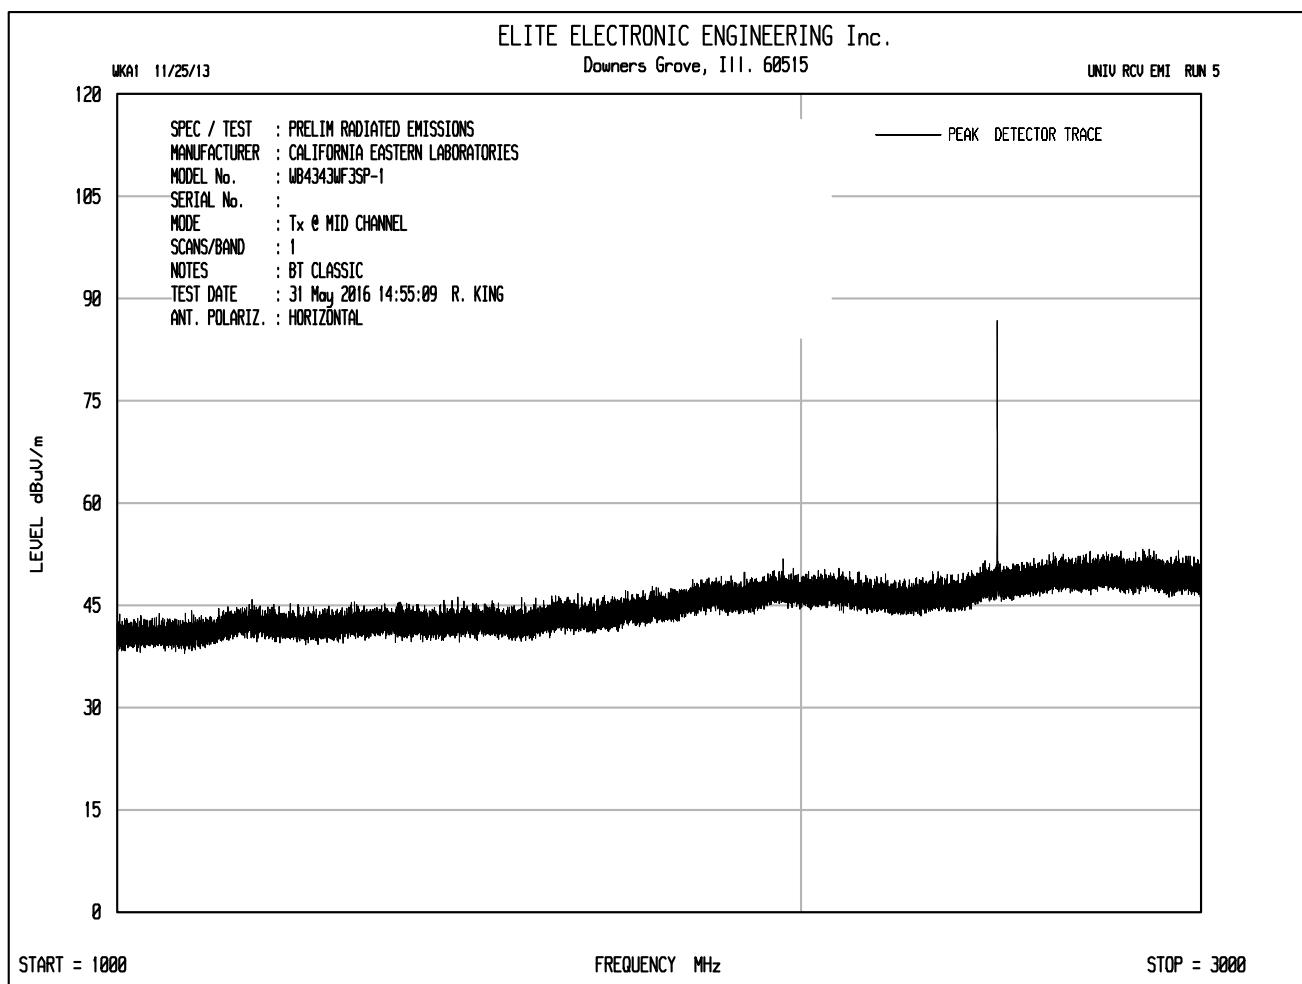


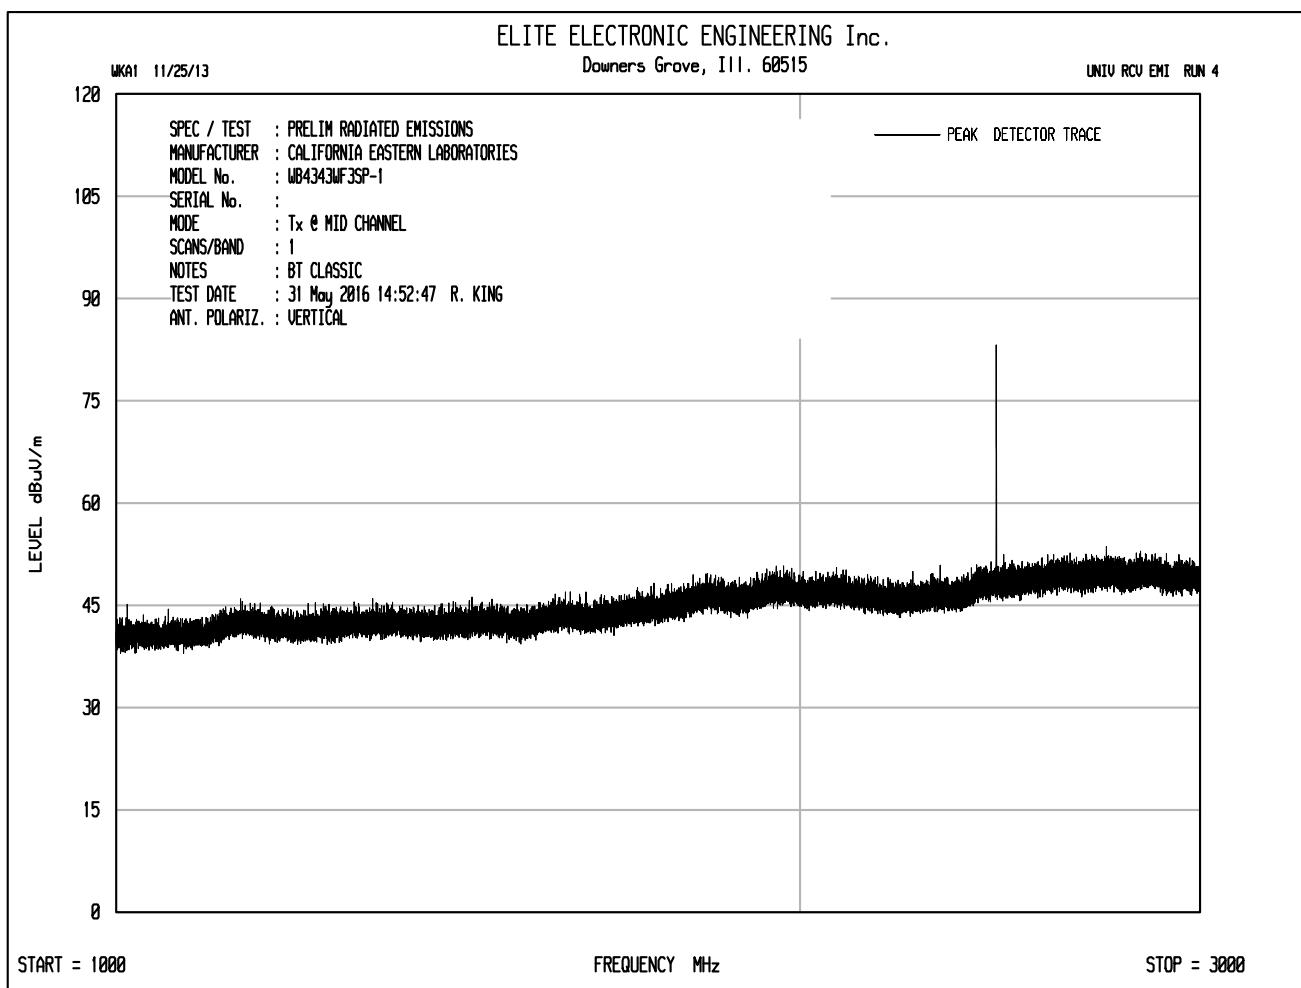


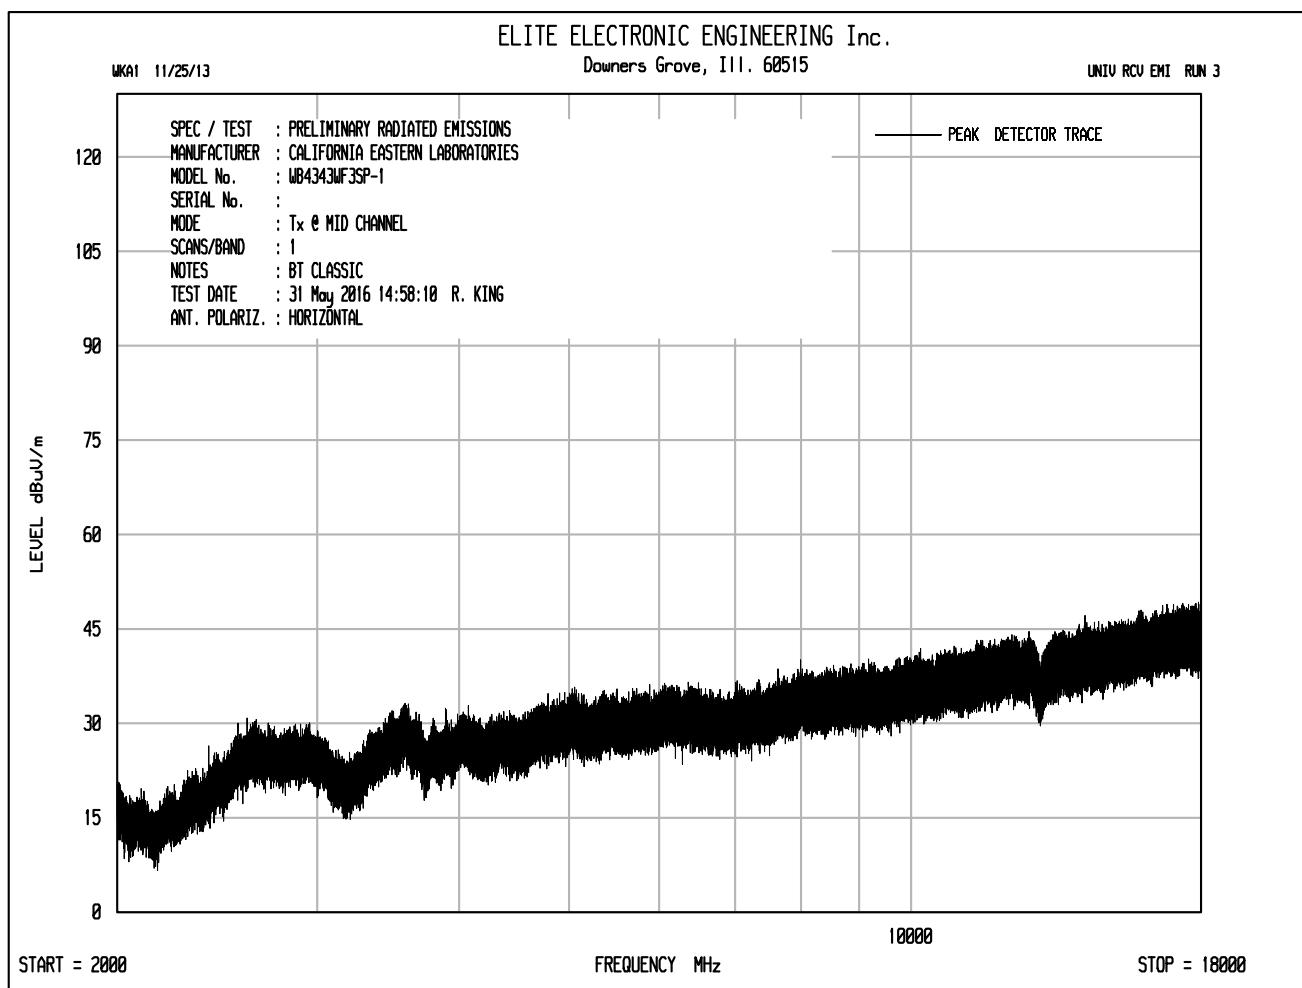


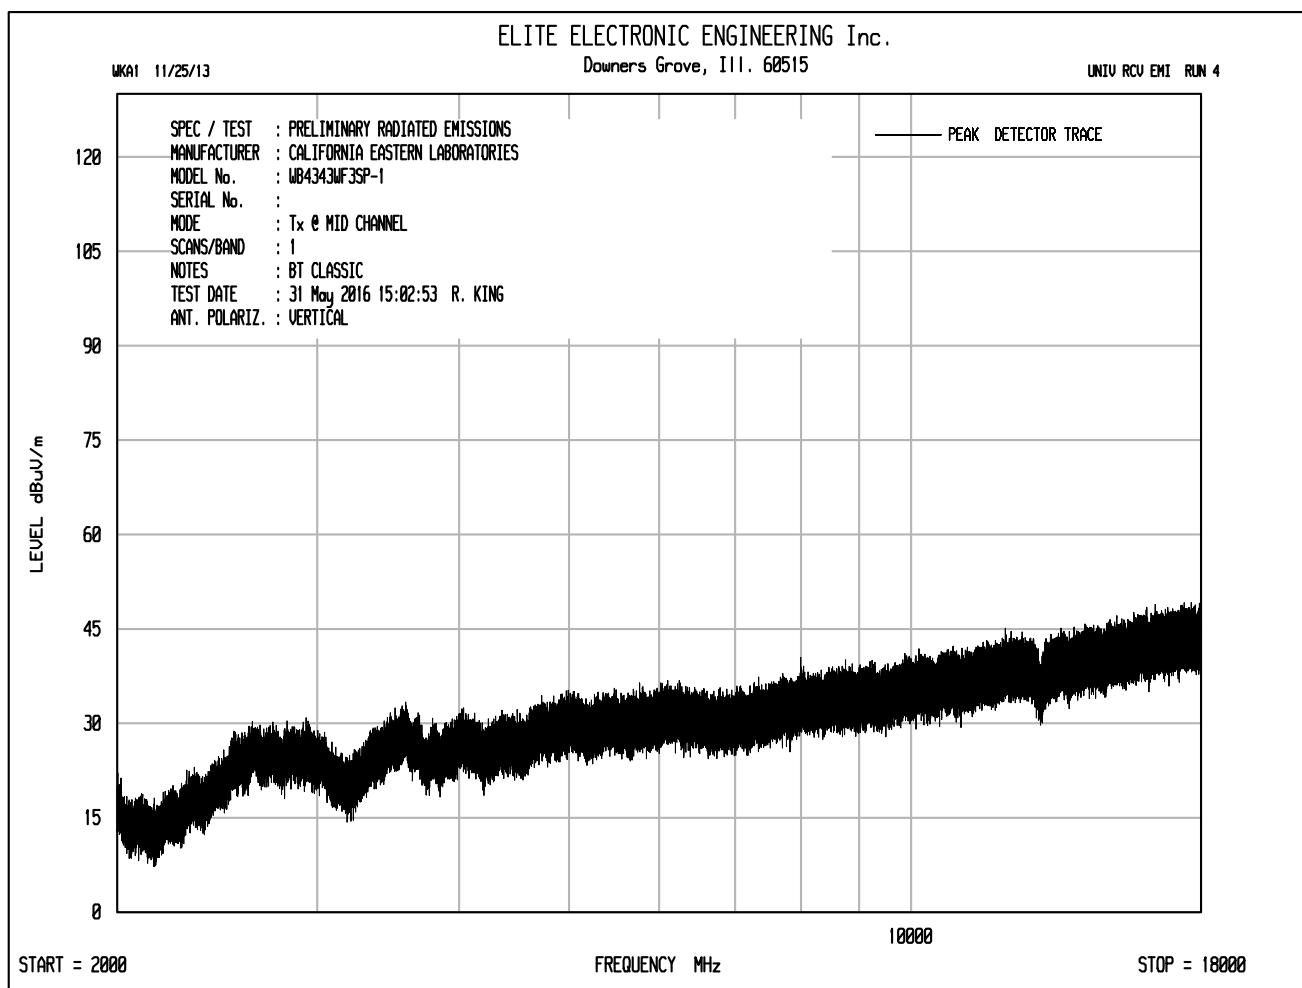


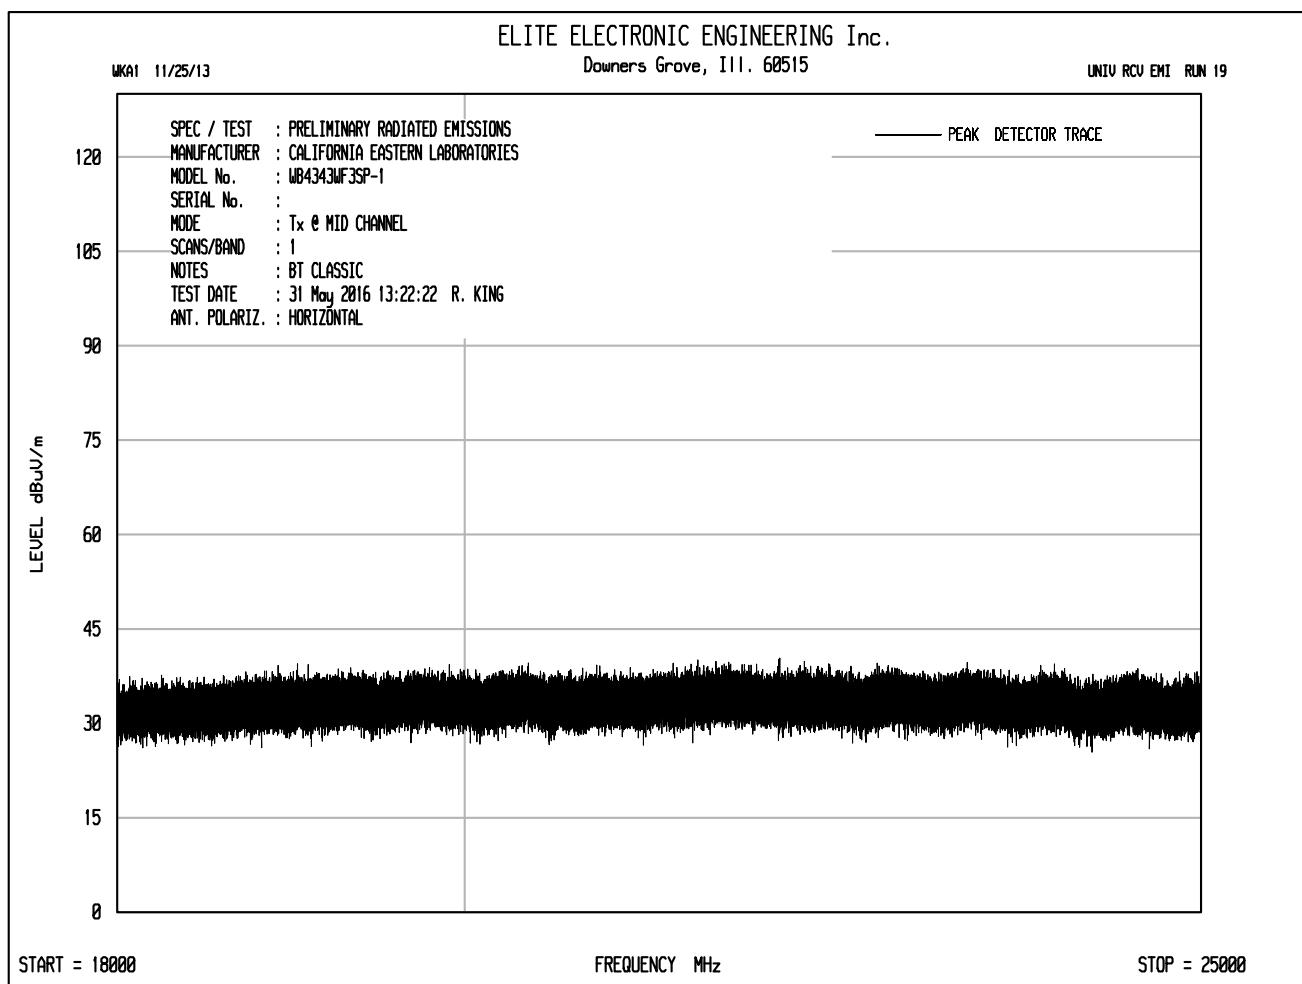


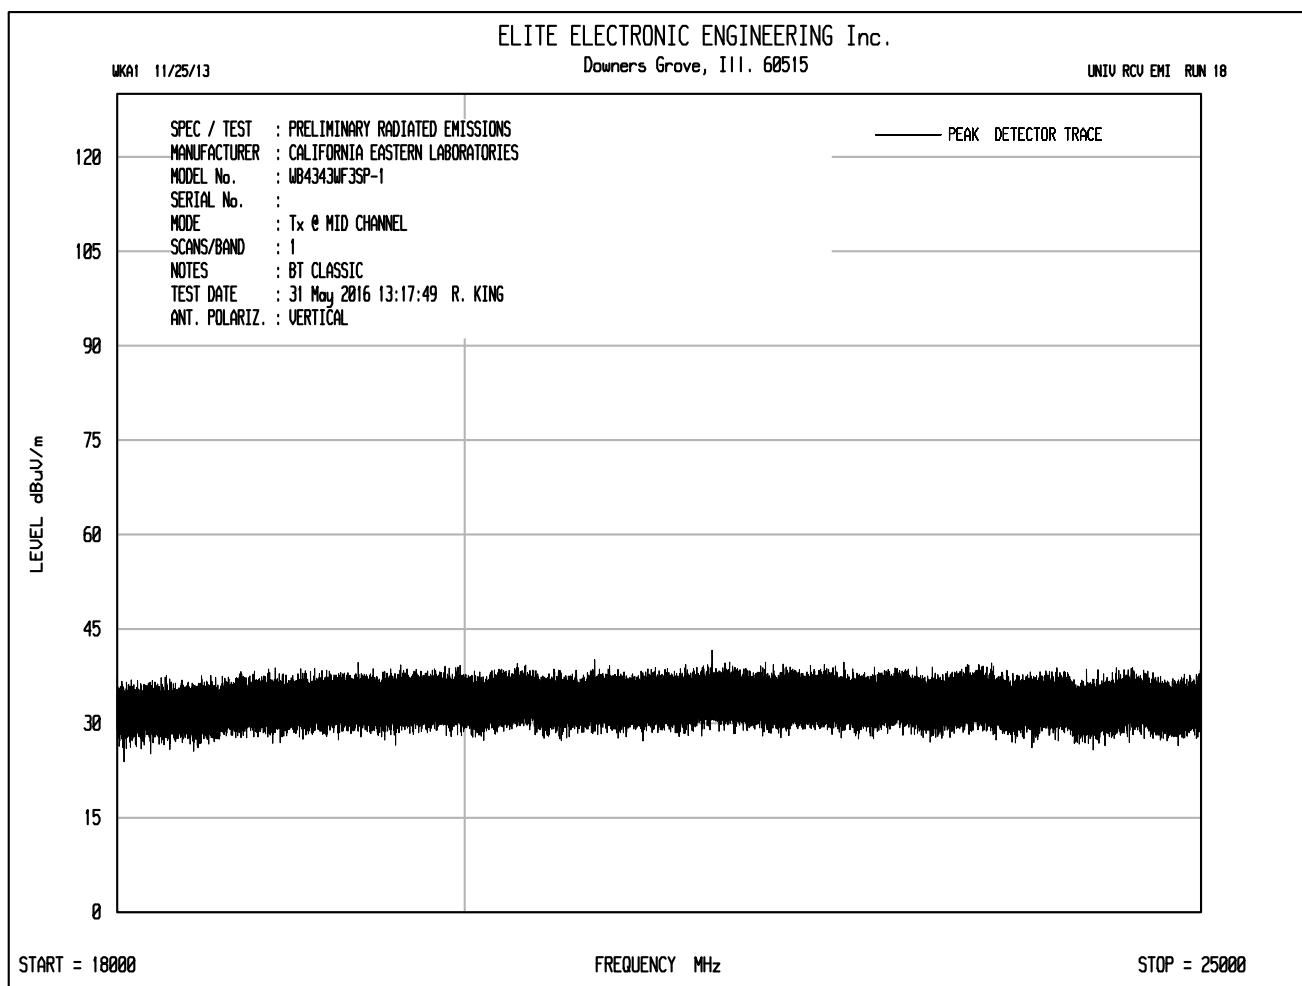


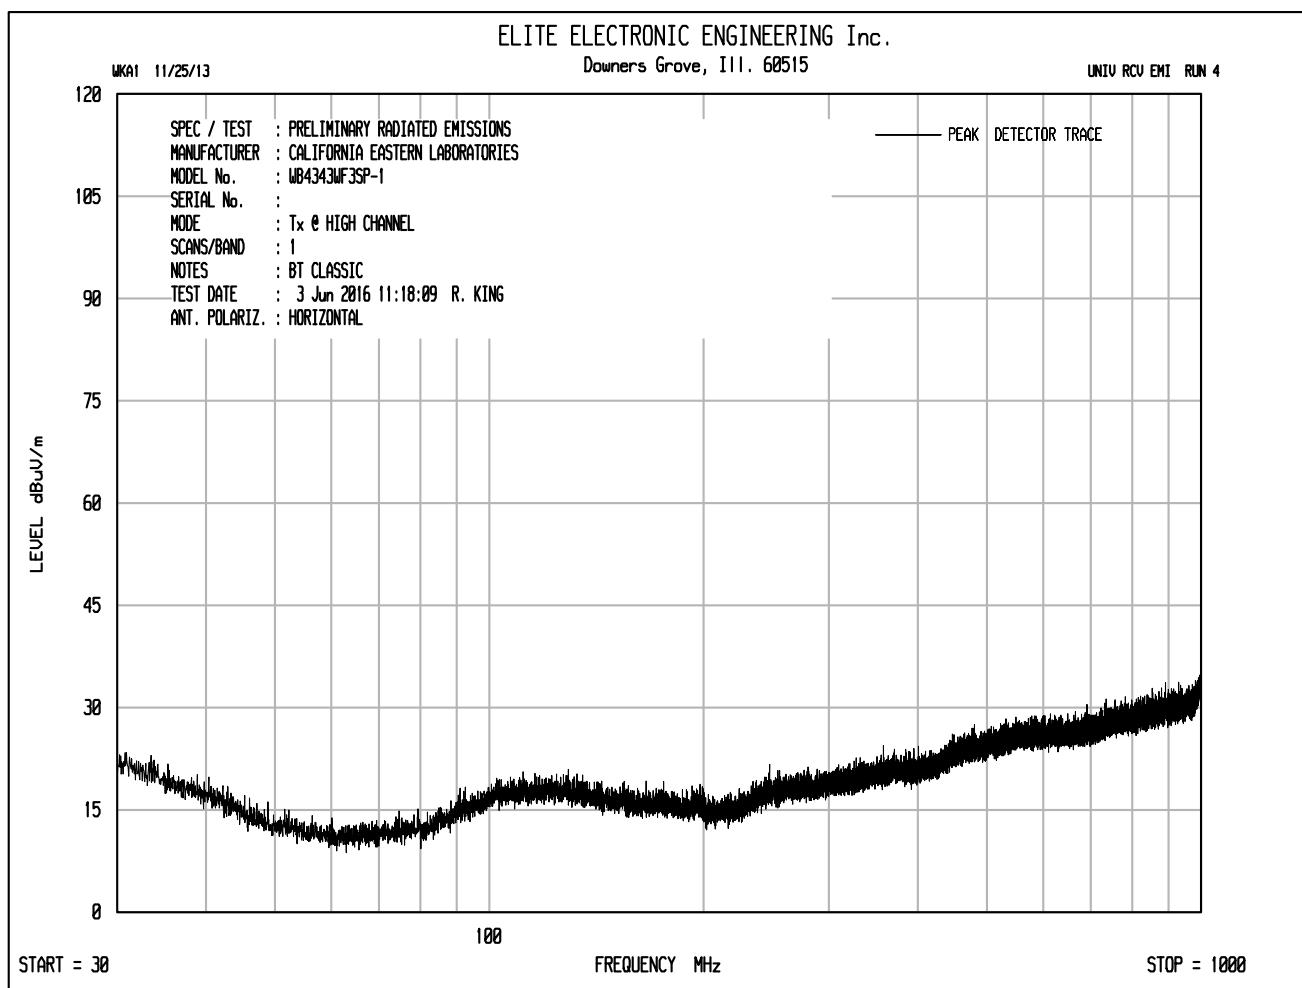


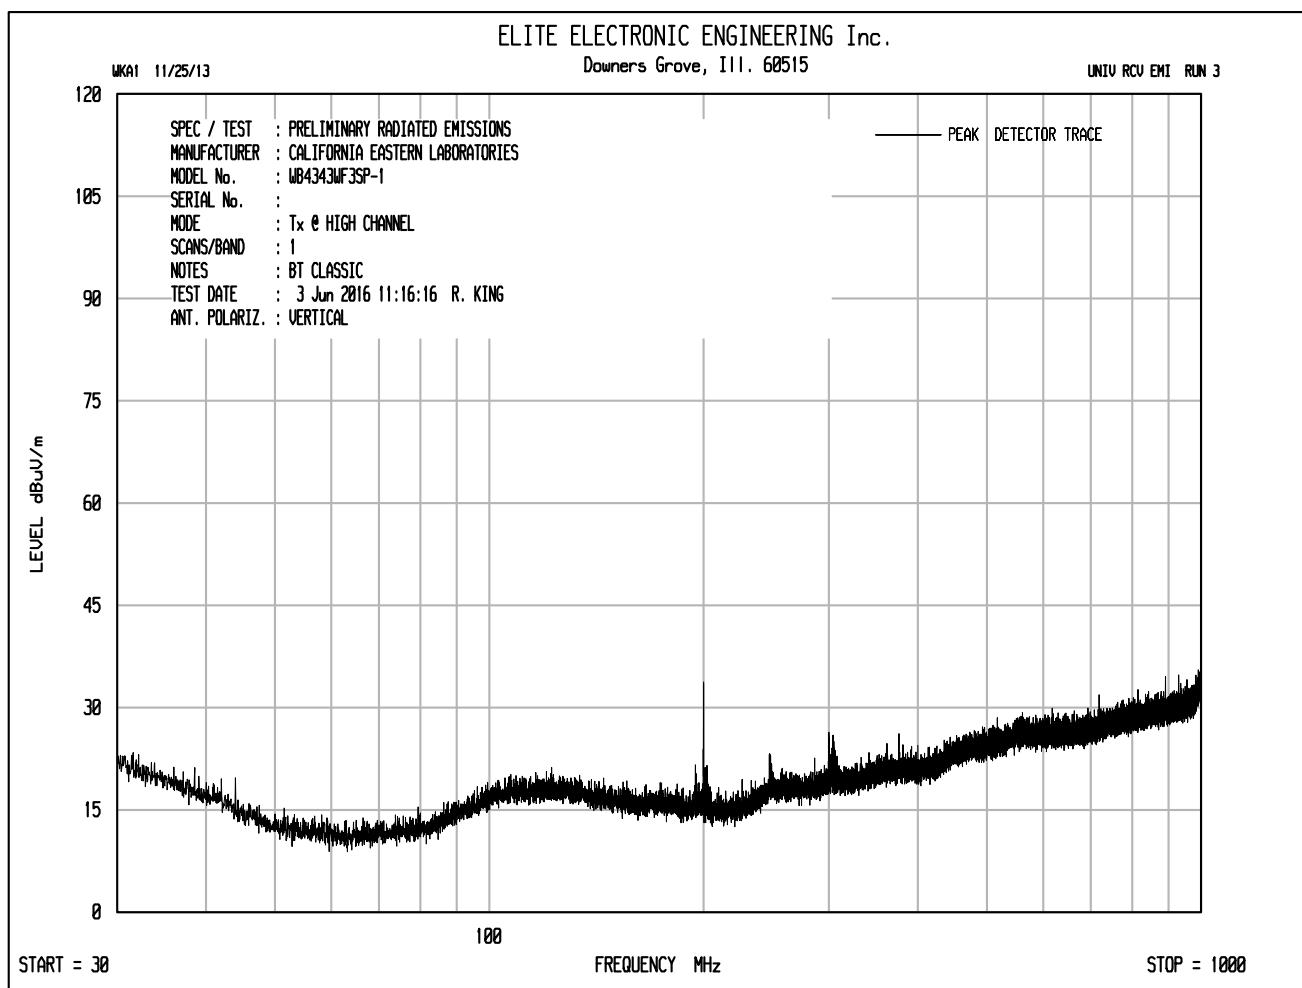


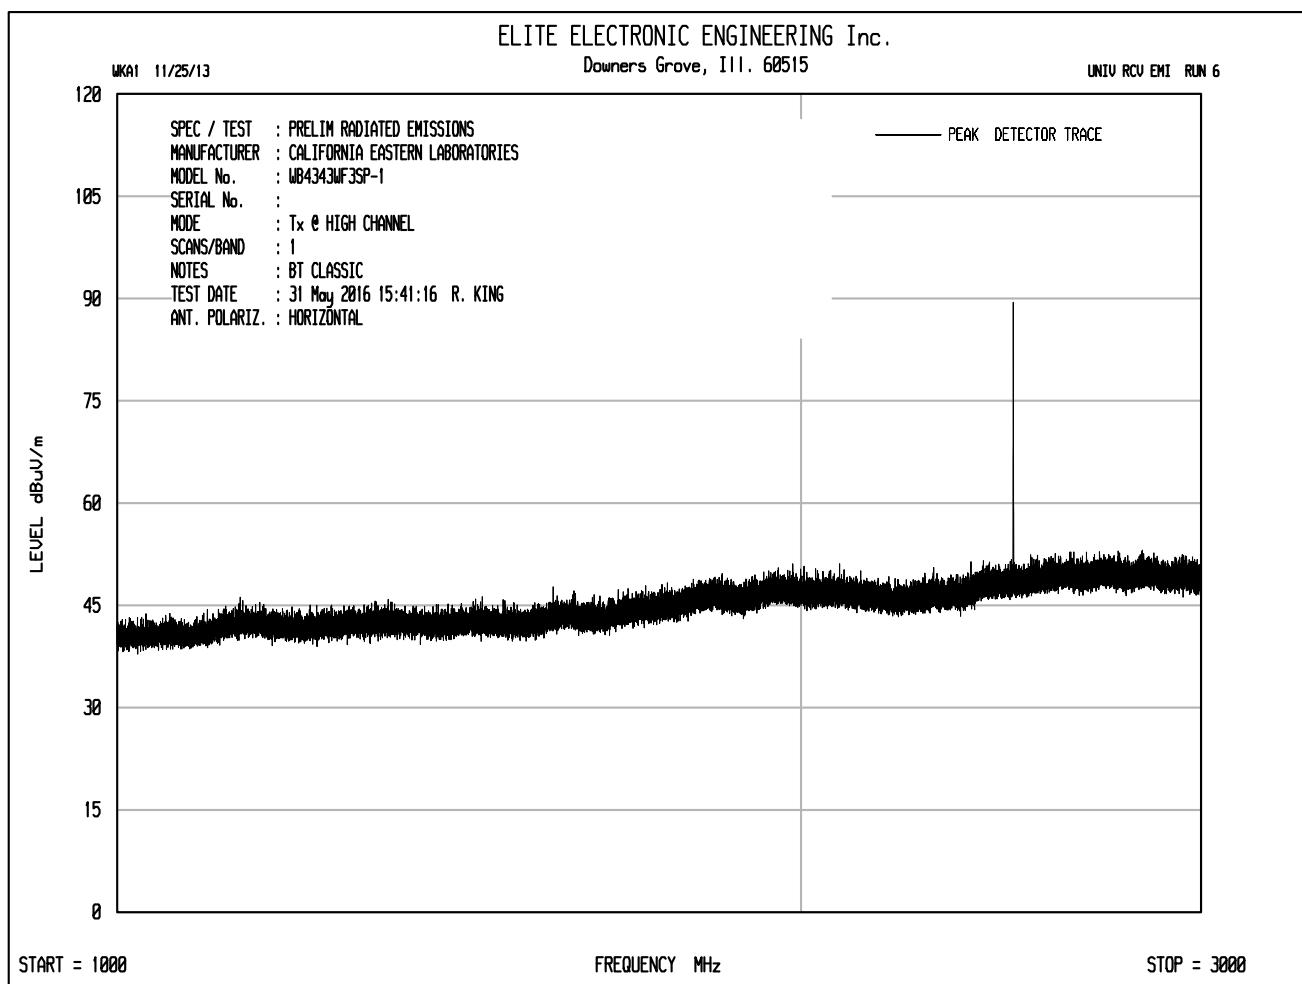


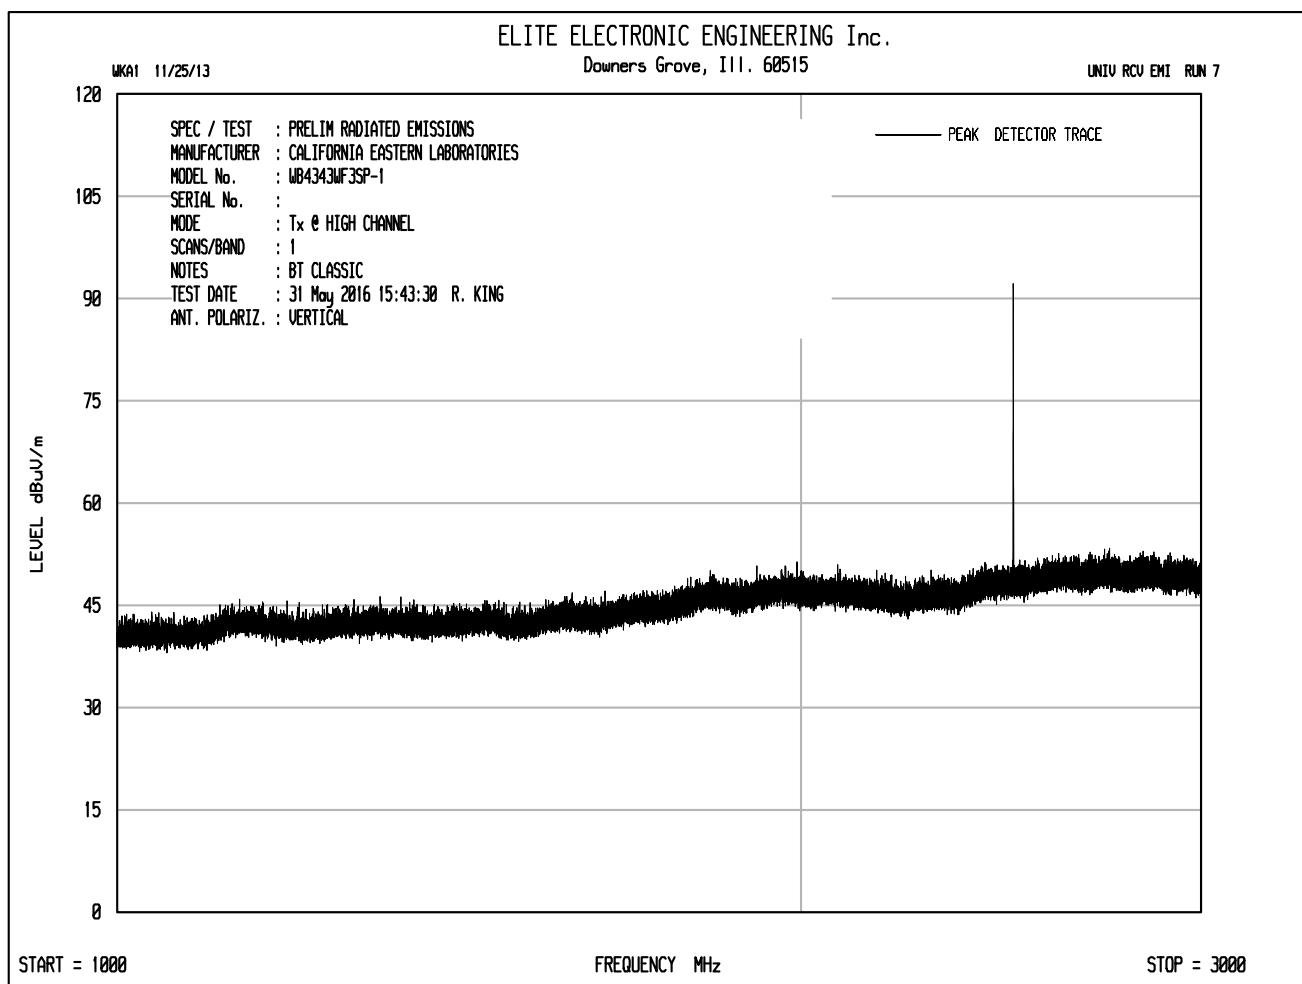

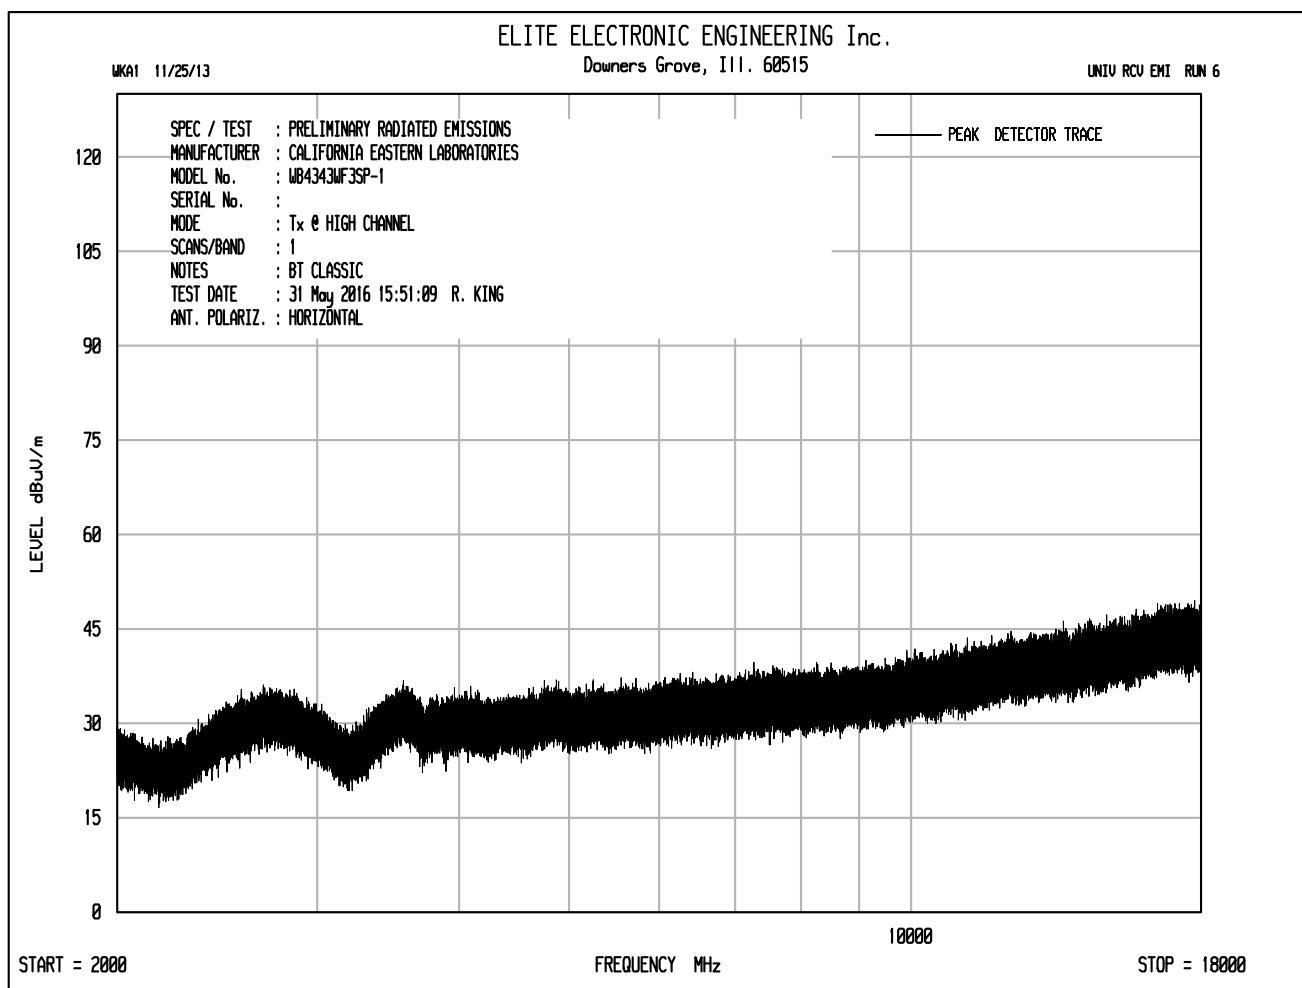

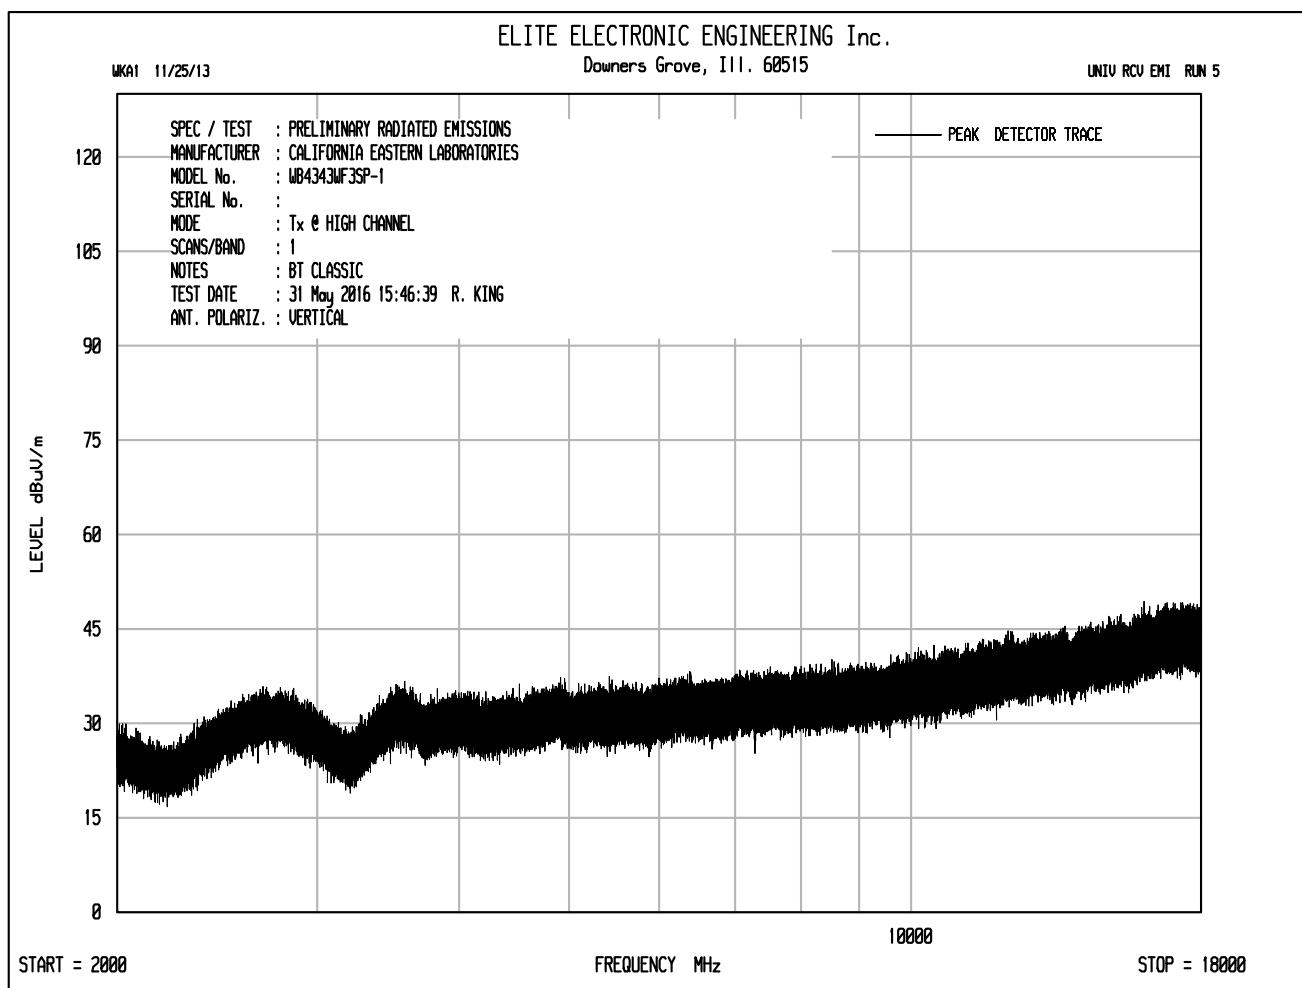

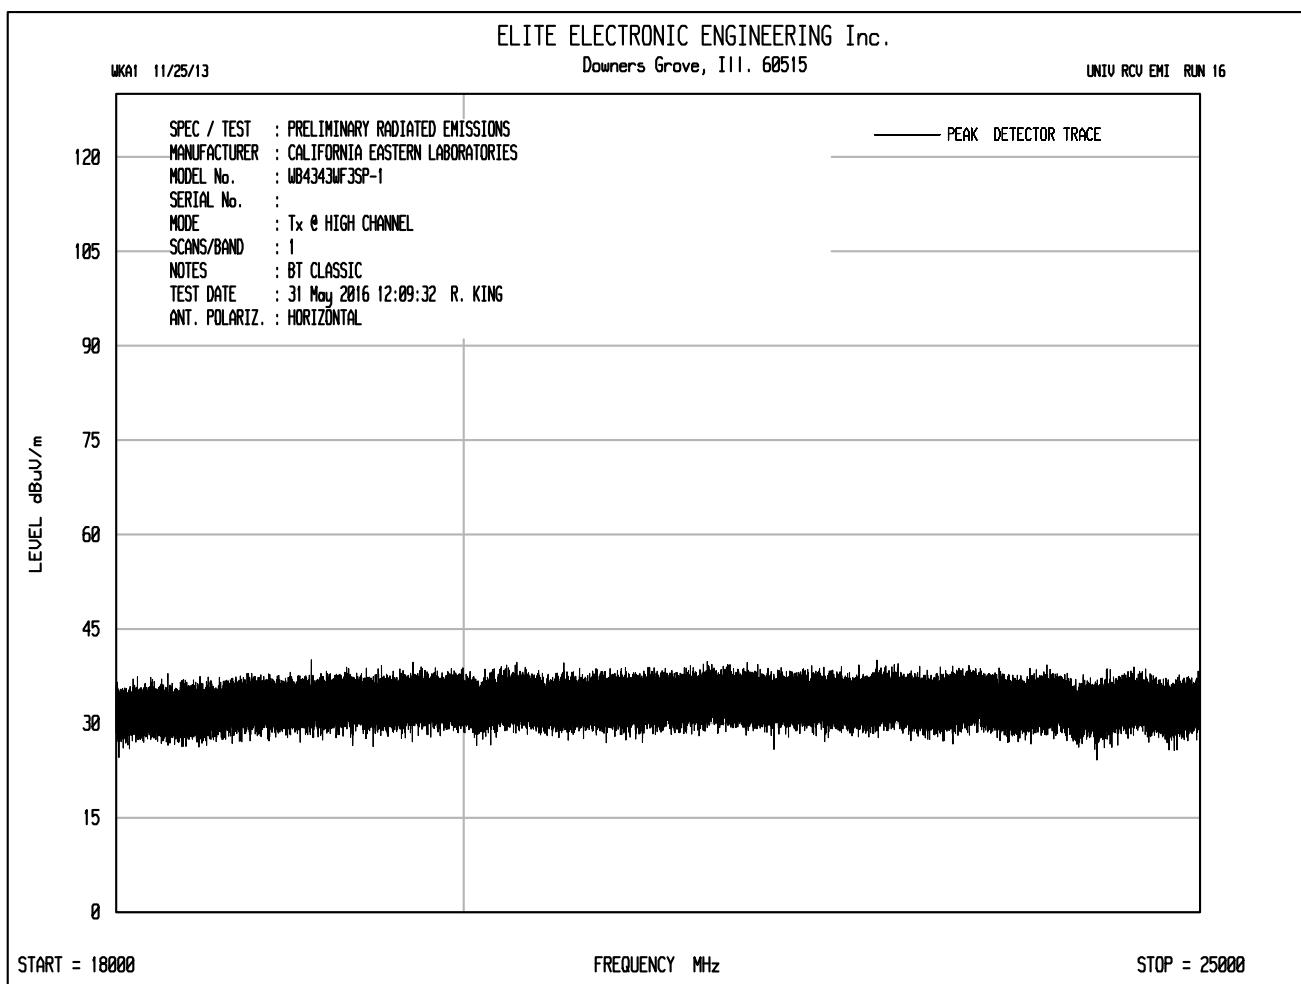

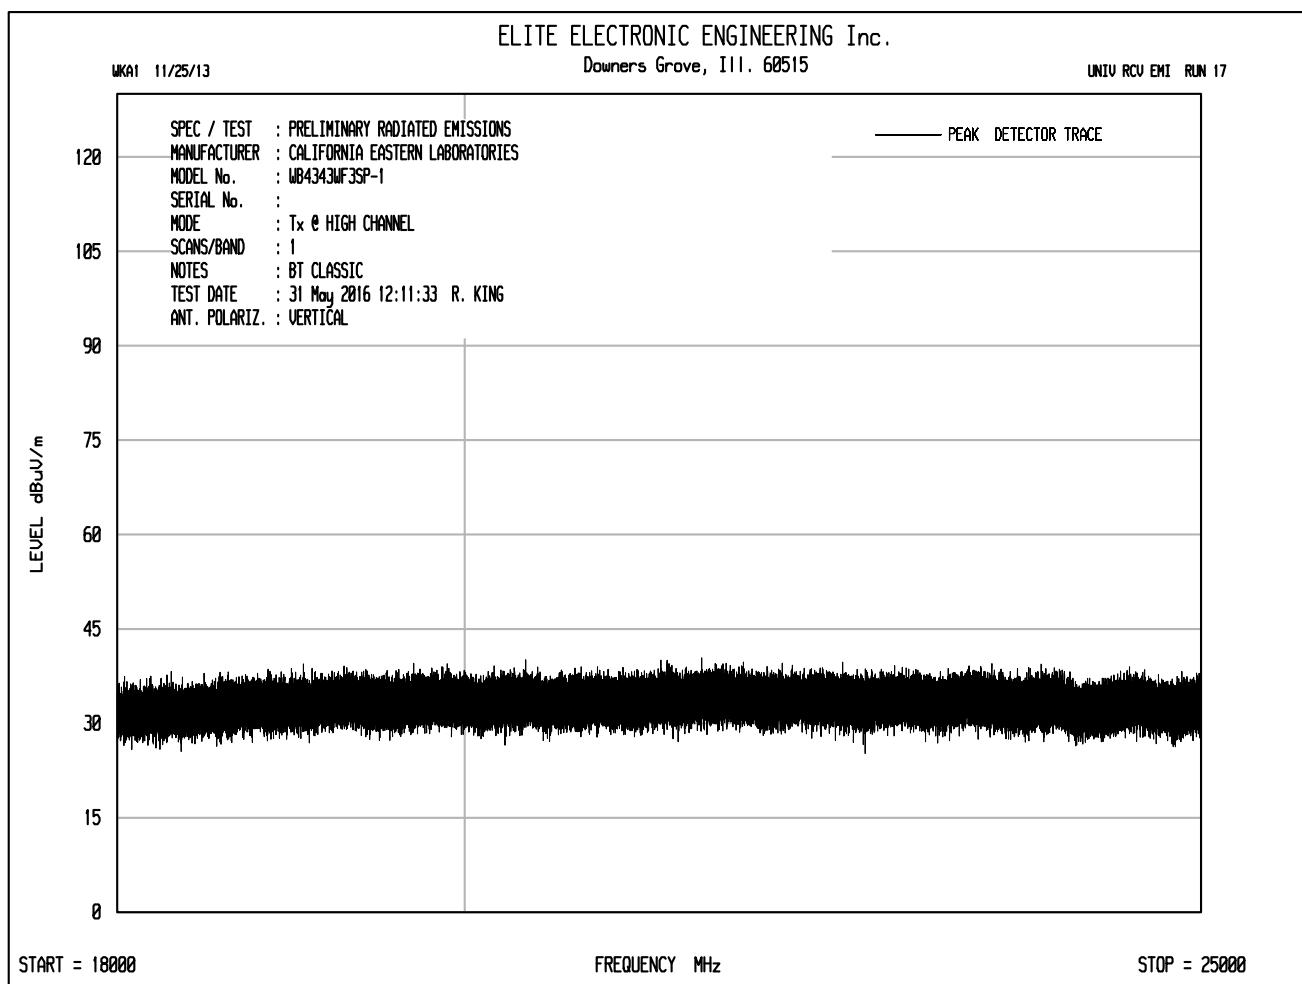

6A

ETR No. EEE1601463

854

DATA SHEET

TEST NO. 1

RADIATED QP EMISSION MEASUREMENTS in a 3 m SEMI-ANECHOIC ROOM

SPECIFICATION : FCC 15B CLASS B

MANUFACTURER : CALIFORNIA EASTERN LABORATORIES

MODEL NO. : WB4343WF3SP-1

SERIAL NO. :

TEST MODE : Tx @ LOW CHANNEL

NOTES :

TEST DATE : 3 Jun 2016 10:49:01

TEST DISTANCE : 3 m

FREQUENCY MHz	QP READING dBuV	ANT FAC dB	CBL FAC dB	EXT ATTN dB	DIST FAC dB	TOTAL dBuV/m	QP LIMIT dBuV/m	AZ ANT		
								deg	HT cm	ANT POL
32.41	-8.3	22.7	.5	0.0	0.0	15.0	40.0	90	340	H
52.74	-6.3	13.5	.5	0.0	0.0	7.6	40.0	45	120	V
88.06	-7.5	14.7	.5	0.0	0.0	7.7	43.5	90	200	H
120.64	-8.0	18.3	.6	0.0	0.0	11.0	43.5	-0	200	H
133.98	-8.0	17.7	.7	0.0	0.0	10.4	43.5	135	120	H
142.02	-8.0	17.0	.8	0.0	0.0	9.8	43.5	225	200	H
167.77	-8.1	15.9	.9	0.0	0.0	8.7	43.5	90	200	H
193.74	-6.0	15.0	1.0	0.0	0.0	9.9	43.5	90	200	V
298.77	-5.9	19.2	1.0	0.0	0.0	14.3	46.0	315	120	V
443.00	-7.0	22.2	1.5	0.0	0.0	16.7	46.0	-0	200	H
476.09	.3	23.4	1.5	0.0	0.0	25.2	46.0	180	120	V
677.78	-7.0	25.0	1.7	0.0	0.0	19.7	46.0	-0	340	V
774.33	-6.7	25.8	1.9	0.0	0.0	21.0	46.0	225	120	H
869.94	-5.9	26.6	2.0	0.0	0.0	22.7	46.0	-0	200	H
951.00	-5.7	27.2	2.0	0.0	0.0	23.5	46.0	270	120	H

Manufacturer : California Eastern Laboratories
 Test Item : WIFI/BLT Module
 Model No. : WB4343WF3SP-1
 Mode : Tx @ 2402MHz Low Channel
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 31st through June 6th, 2016
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp.

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
4804.00	H	48.6		4.8	34.2	-39.3	48.3	261.3	5000.0	-25.6
4804.00	V	49.3		4.8	34.2	-39.3	49.0	281.3	5000.0	-25.0
12010.00	H	47.3	*	8.0	39.1	-39.2	55.2	575.6	5000.0	-18.8
12010.00	V	46.6	*	8.0	39.1	-39.2	54.5	531.6	5000.0	-19.5
19216.00	H	41.9	*	2.2	40.4	-28.6	55.9	625.5	5000.0	-18.1
19216.00	V	42.7	*	2.2	40.4	-28.6	56.8	689.0	5000.0	-17.2

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : California Eastern Laboratories
 Test Item : WIFI/BLT Module
 Model No. : WB4343WF3SP-1
 Mode : Tx @ 2402MHz Low Channel
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 31st through June 6th, 2016
 Notes : Average Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + Duty Cycle Fac

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4804.00	H	37.6		4.8	34.2	-39.3	-30.8	6.5	2.1	500.0	-47.5
4804.00	V	38.6		4.8	34.2	-39.3	-30.8	7.5	2.4	500.0	-46.5
12010.00	H	33.3	*	8.0	39.1	-39.2	-30.8	10.5	3.3	500.0	-43.5
12010.00	V	33.3	*	8.0	39.1	-39.2	-30.8	10.5	3.3	500.0	-43.5
19216.00	H	28.1	*	2.2	40.4	-28.6	-30.8	11.3	3.7	500.0	-42.6
19216.00	V	28.2	*	2.2	40.4	-28.6	-30.8	11.4	3.7	500.0	-42.5

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : California Eastern Laboratories
 Test Item : WIFI/BLT Module
 Model No. : WB4343WF3SP-1
 Mode : Tx @ 2440MHz Mid Channel
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 31st through June 6th, 2016
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp.

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
4880.00	H	46.7		4.9	34.2	-39.3	46.4	210.0	5000.0	-27.5
4880.00	V	46.5		4.9	34.2	-39.3	46.2	204.5	5000.0	-27.8
7320.00	H	45.7	*	6.2	36.2	-39.4	48.6	269.7	5000.0	-25.4
7320.00	V	45.4	*	6.2	36.2	-39.4	48.3	260.3	5000.0	-25.7
12200.00	H	46.8	*	8.0	39.3	-39.1	55.0	562.0	5000.0	-19.0
12200.00	V	46.7	*	8.0	39.3	-39.1	54.9	554.3	5000.0	-19.1
19520.00	H	42.0	*	2.2	40.4	-28.5	56.1	636.2	5000.0	-17.9
19520.00	V	41.8	*	2.2	40.4	-28.5	55.9	620.3	5000.0	-18.1

Checked BY *RICHARD E. KING*

Richard E. King

Manufacturer : California Eastern Laboratories
 Test Item : WIFI/BLT Module
 Model No. : WB4343WF3SP-1
 Mode : Tx @ 2440MHz Mid Channel
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 31st through June 6th, 2016
 Notes : Average Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + Duty Cycle Fac

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4880.00	H	35.8		4.9	34.2	-39.3	-30.4	5.1	1.8	500.0	-48.8
4880.00	V	35.3		4.9	34.2	-39.3	-30.4	4.7	1.7	500.0	-49.3
7320.00	H	32.5	*	6.2	36.2	-39.4	-30.4	5.0	1.8	500.0	-49.0
7320.00	V	32.4	*	6.2	36.2	-39.4	-30.4	4.8	1.7	500.0	-49.1
12200.00	H	33.7	*	8.0	39.3	-39.1	-30.4	11.4	3.7	500.0	-42.5
12200.00	V	33.7	*	8.0	39.3	-39.1	-30.4	11.4	3.7	500.0	-42.5
19520.00	H	27.9	*	2.2	40.4	-28.5	-30.4	11.6	3.8	500.0	-42.4
19520.00	V	27.9	*	2.2	40.4	-28.5	-30.4	11.6	3.8	500.0	-42.3

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : California Eastern Laboratories
 Test Item : WIFI/BLT Module
 Model No. : WB4343WF3SP-1
 Mode : Tx @ 2480MHz High Channel
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 31st through June 6th, 2016
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp.

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
4960.00	H	49.0		4.9	34.2	-39.3	48.7	273.0	5000.0	-25.3
4960.00	V	48.7		4.9	34.2	-39.3	48.5	264.7	5000.0	-25.5
7440.00	H	46.9	*	6.2	36.3	-39.4	50.0	315.6	5000.0	-24.0
7440.00	V	46.5	*	6.2	36.3	-39.4	49.5	299.3	5000.0	-24.5
12400.00	H	46.9	*	8.0	39.4	-39.0	55.3	580.7	5000.0	-18.7
12400.00	V	47.5	*	8.0	39.4	-39.0	55.9	620.8	5000.0	-18.1
19840.00	H	42.4	*	2.2	40.4	-28.2	56.9	699.3	5000.0	-17.1
19840.00	V	42.3	*	2.2	40.4	-28.2	56.8	688.9	5000.0	-17.2
22320.00	H	43.2	*	2.2	40.6	-29.1	56.9	700.5	5000.0	-17.1
22320.00	V	43.0	*	2.2	40.6	-29.1	56.8	690.1	5000.0	-17.2

Checked BY *RICHARD E. KING* :

Richard E. King


Manufacturer : California Eastern Laboratories
 Test Item : WIFI/BLT Module
 Model No. : WB4343WF3SP-1
 Mode : Tx @ 2480MHz High Channel
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 31st through June 6th, 2016
 Notes : Average Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + Duty Cycle Fac

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4960.00	H	38.5		4.9	34.2	-39.3	-30.4	7.9	2.5	500.0	-46.1
4960.00	V	36.5		4.9	34.2	-39.3	-30.4	5.9	2.0	500.0	-48.1
7440.00	H	33.65	*	6.2	36.3	-39.4	-30.4	6.3	2.1	500.0	-47.7
7440.00	V	33.7	*	6.2	36.3	-39.4	-30.4	6.4	2.1	500.0	-47.6
12400.00	H	33.7	*	8.0	39.4	-39.0	-30.4	11.6	3.8	500.0	-42.3
12400.00	V	33.7	*	8.0	39.4	-39.0	-30.4	11.6	3.8	500.0	-42.4
19840.00	H	28.2	*	2.2	40.4	-28.2	-30.4	12.3	4.1	500.0	-41.7
19840.00	V	28.2	*	2.2	40.4	-28.2	-30.4	12.3	4.1	500.0	-41.7
22320.00	H	29.1	*	2.2	40.6	-29.1	-30.4	12.4	4.2	500.0	-41.5
22320.00	V	29.2	*	2.2	40.6	-29.1	-30.4	12.5	4.2	500.0	-41.5

Checked BY *RICHARD E. KING* :

Richard E. King

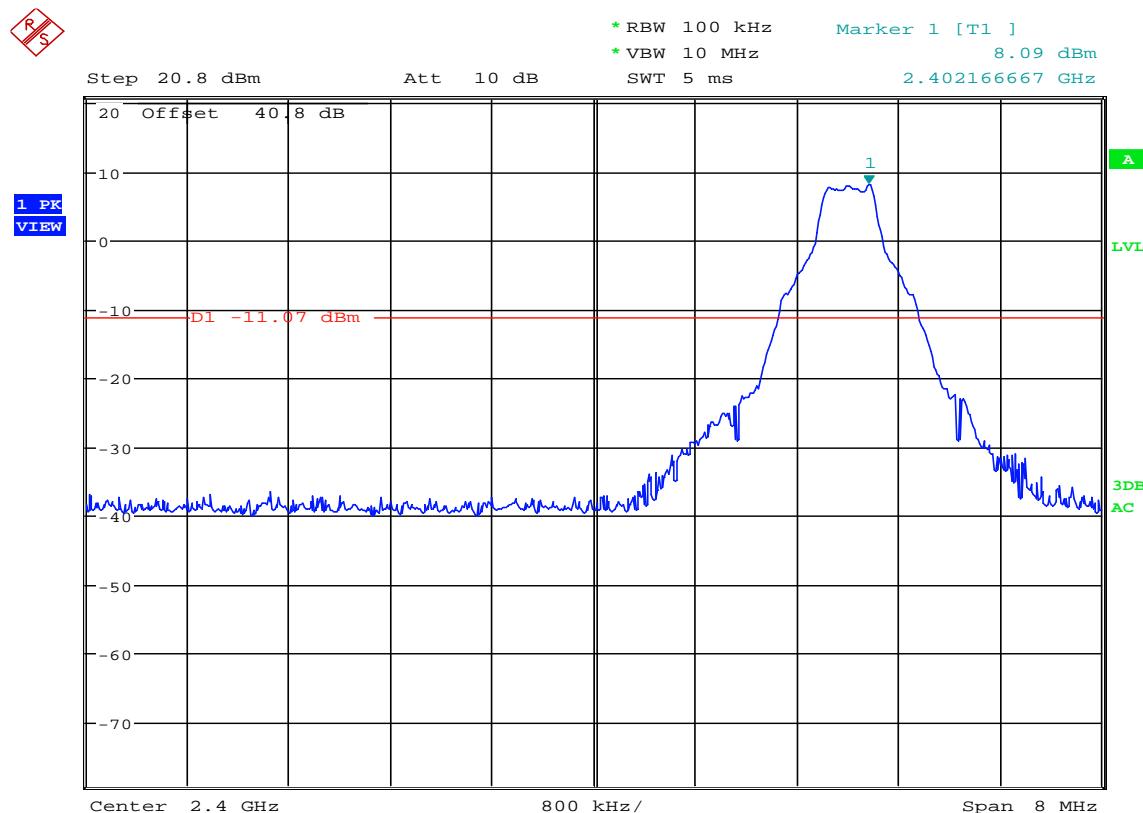


Date: 2.JUN.2016 10:17:57

FCC 15.247 Band-edge Compliance

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Tx @ 2480MHz
 : PEAK detector
 NOTES :
 NOTES : Bluetooth Classic
 NOTES :

NOTES

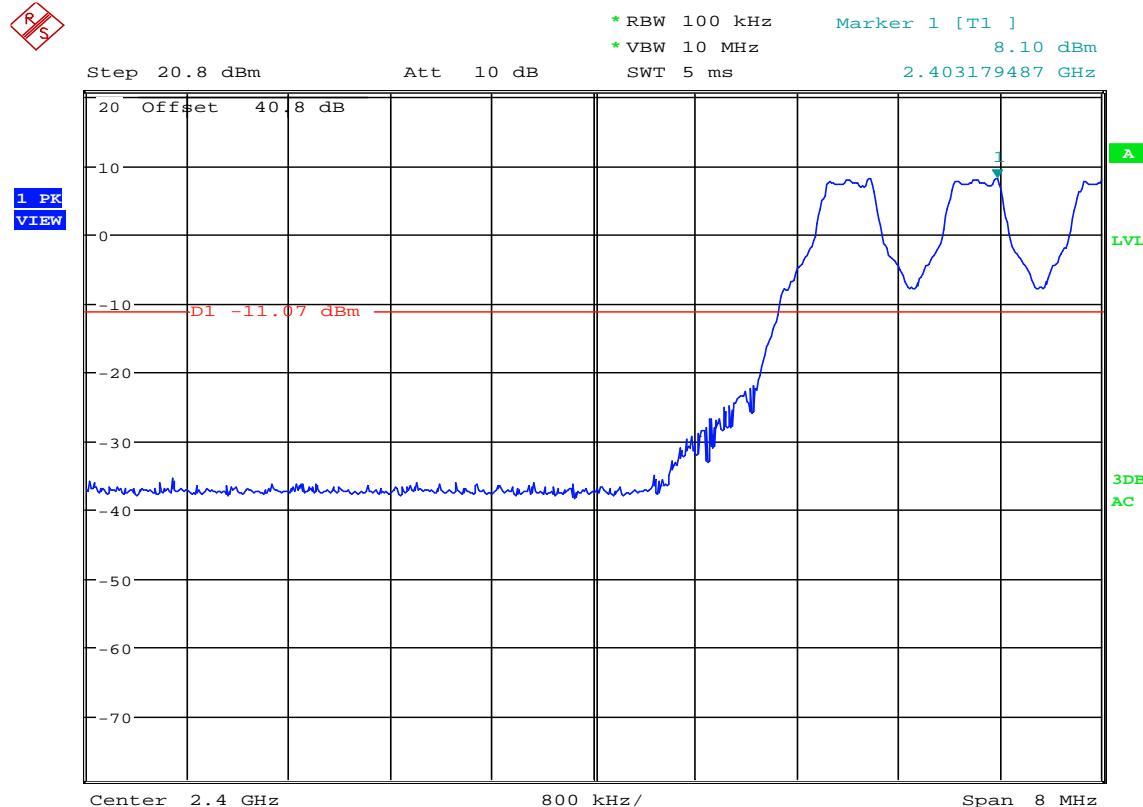Date: 2.JUN.2016 10:35:23

FCC 15.247 Band-edge Compliance

MANUFACTURER : California Eastern Laboratories
 MODEL NUMBER : WB4343WF3SP-1
 TEST MODE : Frequency Hopping
 : PEAK detector
 NOTES :
 NOTES : Bluetooth Classic
 NOTES :

NOTES

Manufacturer : California Eastern Laboratories
Test Item : WIFI/BLT Module
Model No. : WB4343WF3SP-1
Mode : Tx @ 2480MHz High Channel
Test Specification : FCC-15.247, RSS-247 Band-edge Compliance
Date : May 31st through June 6th, 2016
Notes : Peak Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp.

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2483.50	H	16.9		3.5	32.6	0.0	53.0	446.8	5000.0	-21.0
2483.50	V	13.0		3.5	32.6	0.0	49.1	284.2	5000.0	-24.9

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : California Eastern Laboratories
Test Item : WIFI/BLT Module
Model No. : WB4343WF3SP-1
Mode : Tx @ 2480MHz High Channel
Test Specification : FCC-15.247, RSS-247 Band-edge Compliance
Date : May 31st through June 6th, 2016
Notes : Average Measurement with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2483.50	H	8.2		3.5	32.6	0.0	44.3	163.5	500.0	-9.7
2483.50	V	8.2		3.5	32.6	0.0	44.2	162.8	500.0	-9.7

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : California Eastern Laboratories
Test Item : WIFI/BLT Module
Model No. : WB4343WF3SP-1
Mode : Frequency Hopping
Test Specification : FCC-15.247, RSS-247 Band-edge Compliance
Date : May 31st through June 6th, 2016
Notes : Peak Detector with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp.

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2483.50	H	13.0		3.5	32.6	0.0	49.1	284.2	5000.0	-24.9
2483.50	V	13.0		3.5	32.6	0.0	49.1	284.2	5000.0	-24.9

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : California Eastern Laboratories
Test Item : WIFI/BLT Module
Model No. : WB4343WF3SP-1
Mode : Frequency Hopping
Test Specification : FCC-15.247, RSS-247 Band-edge Compliance
Date : May 31st through June 6th, 2016
Notes : Average Measurement with 1MHz Resolution Bandwidth

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2483.50	H	7.0		3.5	32.6	0.0	43.1	142.4	500.0	-10.9
2483.50	V	7.0		3.5	32.6	0.0	43.1	142.4	500.0	-10.9

Checked BY *RICHARD E. KING* :

Richard E. King