



Report No.: SZ12070112S01



SAR TEST REPORT


Issued to

Verykool USA Inc

For

3G Mobile Phone

Model Name : S135
Trade Name : verykool
Brand Name : verykool
FCC ID : WA6S135
Standard : FCC Oet65 Supplement C Jun.2001
47CFR 2.1093
ANSI C95.1-1999
IEEE 1528-2003
MAX SAR : Head: 0.711W/kg
Body: 1.116W/kg
Test date : 2012-7-20
Issue date : 2012-7-20

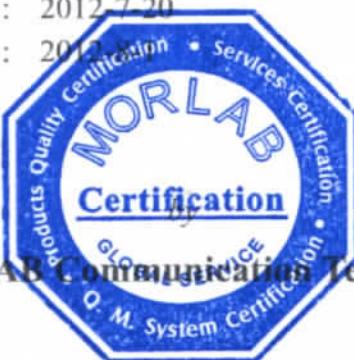

Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Zhu Zhan
Zhu Zhan
Date 2012.8.1

Approved by Wei Yanquan
Wei Yanquan
Date 2012.8.1

Review by Samuel. Peng
Samuel. Peng
Date 2012.8.1

CTIA Authorized Test Lab
LAB CODE 20081223-00
IEEE 1725

OFTA
電訊管理局



GCF
Official Observer of
Global Certification Forum

Bluetooth
BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof, prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRS, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client, enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

DIRECTORY.....	2
1. TESTING LABORATORY.....	4
1.1. Identification of the Responsible Testing Laboratory.....	4
1.2. Identification of the Responsible Testing Location.....	4
1.3. Accreditation Certificate.....	4
1.4. List of Test Equipments.....	4
2. TECHNICAL INFORMATION.....	5
2.1. Identification of Applicant.....	5
2.2. Identification of Manufacturer.....	5
2.3. Equipment Under Test (EUT).....	5
2.3.1. Photographs of the EUT.....	5
2.3.2. Identification of all used EUT.....	5
2.4. Applied Reference Documents.....	6
2.5. Device Category and SAR Limits.....	6
2.6. Test Environment/Conditions.....	7
3. SPECIFIC ABSORPTION RATE (SAR).....	8
3.1. Introduction.....	8
3.2. SAR Definition.....	8
4. SAR MEASUREMENT SETUP.....	9
4.1. The Measurement System.....	9
4.2. Probe.....	9
4.3. Probe Calibration Process.....	11
4.3.1 Dosimetric Assessment Procedure.....	11
4.3.2 Free Space Assessment Procedure.....	11
4.3.2 Temperature Assessment Procedure.....	11
4.4. Phantom.....	12
4.5. Device Holder.....	12
5. TISSUE SIMULATING LIQUIDS.....	13
6. UNCERTAINTY ASSESSMENT.....	15
6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST.....	15
6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK.....	16

7. SAR MEASUREMENT EVALUATION.....	18
7.1. System Setup.....	18
7.2. Validation Results.....	19
8. OPERATIONAL CONDITIONS DURING TEST.....	20
8.1. Informations on the testing.....	20
8.2. Body-worn Configurations.....	21
8.3. Measurement procedure.....	21
8.4. Description of interpolation/extrapolation scheme.....	22
9. 3G MEASUREMENT PROCEDURES.....	23
9.1. Procedures Used To Establish Test Signal.....	23
9.2. SAR Measurement Conditions for WCDMA.....	23
9.3. Output Power Verification.....	23
9.4. Measurement Of Conducted Peak Output Power.....	24
10. TEST RESULTS LIST.....	28
11. MULTIPLE TRANSMITTERS EVALUATION.....	31
ANNEX A EUT SETUP PHOTOS.....	32
ANNEX B GRAPH TEST RESULTS.....	36

Change History		
Issue	Date	Reason for change
1.0	Aug. 1, 2012	First edition

1. Testing Laboratory

1.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co., Ltd.
Department: Morlab Laboratory
Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China
Responsible Test Lab Manager: Mr. Shu Luan
Telephone: +86 755 86130268
Facsimile: +86 755 86130218

1.2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.
Morlab Laboratory
Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

1.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2011-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2011-9-24	1year
4	Synthetizer	Rohde&Schwarz (SML_03, SN:101868)	2011-9-24	1year
5	Amplifier	Nucl udes (ALB216, SN:10800)	2011-9-24	1year
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)	2011-9-24	1year
7	Probe	Satimo (SN:SN_3708_EP80)	2011-9-24	1year
8	Phantom	Satimo (SN:SN_36_08_SAM62)	2011-9-24	1year
9	Liquid	Satimo (Last Calibration: 2012-7-20)	N/A	N.A
10	Dipole 835MHz	Satimo (SN 36/08 DIPC 99)	2011-9-24	1year
11	Dipole 1900MHz	Satimo (SN 36/08 DIPF 102)	2011-9-24	1year
12	Dipole 2450MHz	Satimo (SN 36/08 DIPJ 103)	2011-9-24	1year

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name: Verykool USA Inc
Address: 4350 Executive Dr. #100, San Diego

2.2. Identification of Manufacturer

Company Name: Shenzhen SanMu Communication Technology Co.,Ltd
Address: 3/F Block T2-A,Shenzhen Software Park,Southern Zone,Hi-Tech Industrial Pack,Nanshan,Shenzhen

2.3. Equipment Under Test (EUT)

Model Name: S135
Trade Name: verykool
Brand Name: verykool
Hardware Version: N/A
Software Version: N/A
Frequency Bands: GSM 850MHz / PCS 1900MHz; WCDMA 850MHz/1900MHz;
WIFI802.11 B/G/N;
Modulation Mode: GSM/GPRS: GMSK; EDGE: 8PSK
WIFI802.11B: DSSS; WIFI802.11G: OFDM
Multislot Class GPRS: Multislot Class 12; EDGE: Multislot Class 12
Antenna type: Fixed Internal Antenna
Development Stage: Identical prototype
Battery Model: 4U
Battery specification: 1000mAh3.7V

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	N/A	N/A

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	ANSI C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	IEEE 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
5	KDB 648474 D1	SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
6	KDB941225D1 v02	SAR Measurement Procedures for 3G Devices
7	KDB 2484227	SAR Measurement Procedures for 802.11 a/b/g Transmitters

2.5. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.6. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz PCS 1900MHz WCDMA 850MHz WCDMA1900MHz WIFI 802.11B
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS 1900 MHz Maximum output power(level 0) WCDMA Maximum output power WIFI Maximum output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz ,or to 9262, 9400 and 9538 respectively in the case of WCDMA 19000, or to 4132, 4182 and 4233 respectively in the case of WCDMA 850. The EUT is commanded to operate at maximum transmitting power.

During WIFI SAR test, the EUT was located at channel 1, 6, 11. And EUT was commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

For SAR testing, EUT is in GPRS/EDGE or WCDMA link mode. In GPRS/EDGE link mode, its crest factor is 2, because EUT is set in GPRS/EDGE multi-slot class 12 with 4 uplink slots. In WCDMA and WIFI mode, its crest factor is 1.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Setup

4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2. Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 622091 annexe technique using reference guide at the five frequencies.

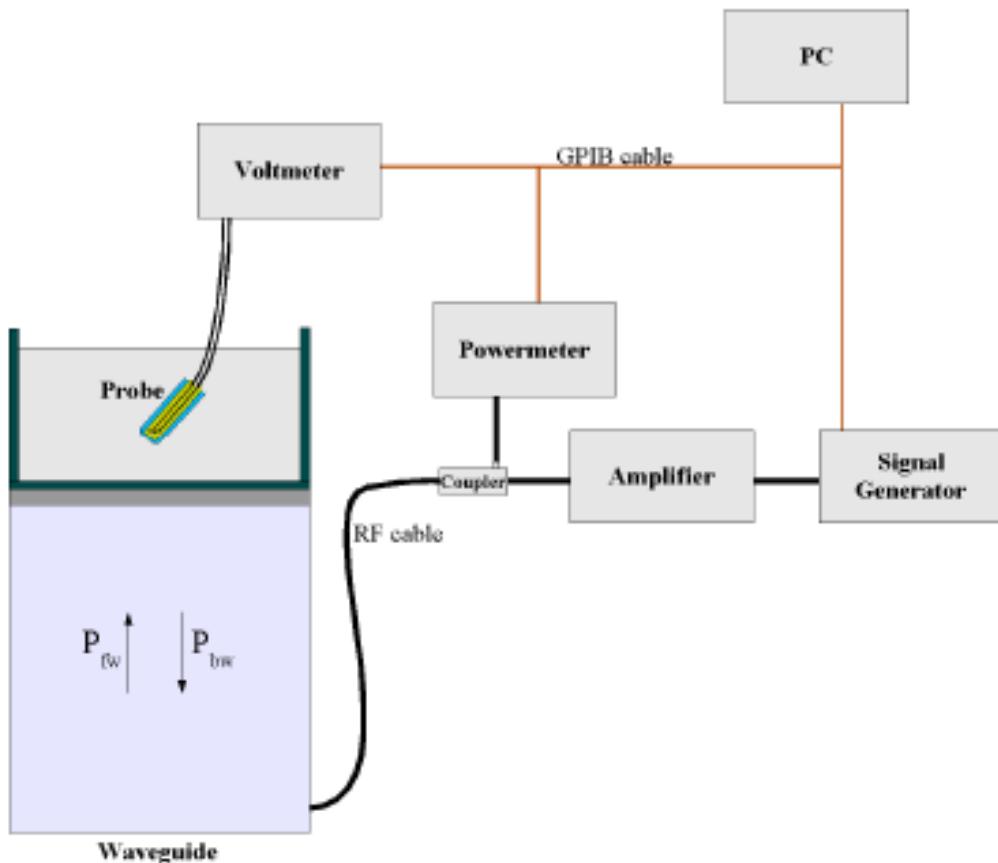

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

- Pfw = Forward Power
- Pbw = Backward Power
- a and b = Waveguide dimensions
- δ = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO
 After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3. Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

4.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),
 C = heat capacity of tissue (brain or muscle),
 ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$


Where:
 σ = simulated tissue conductivity,
 ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

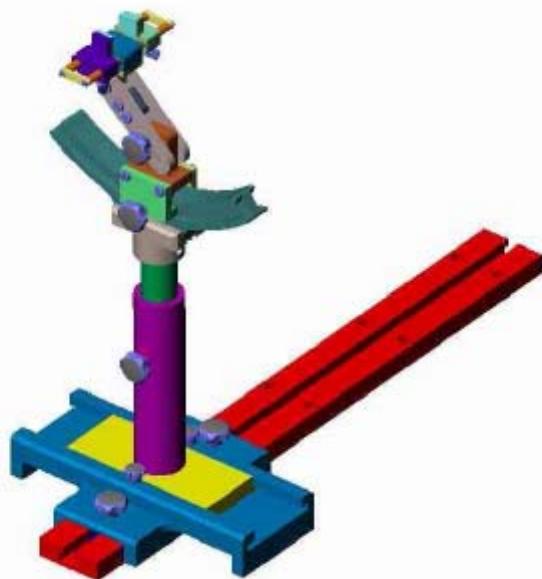

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. Tissue Simulating Liquids

Simulant liquids that are used for testing at frequencies of 850, 1900MHz and 2450MHz. which are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 20litres are needed for an upright head compared to about 25 litres for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15cm.

Following are the recipes for one liter of head and body tissue simulating liquid for frequency band 835 MHz, 1900 MHz and 2450 MHz.

Ingredients (% by weight)	Frequency Band		Frequency Band		Frequency Band	
	835MHz		1900MHz		2450MHz	
Tissue Type	Head	Body	Head	Body	Head	Body
Water	41.45	52.4	54.9	40.4	62.7	73.2
Salt(NaCl)	1.45	1.4	0.18	0.5	0.5	0.04
Sugar	56.0	45.0	0.0	58.0	0.0	0.0
HEC	1.0	1.0	0.0	1.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0.1	0.0	0.0
Triton	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	44.92	0.0	36.8	0.0
Acticide SPX	0.0	0.0	0.0	0.0	0.0	26.7
Dielectric Constant	42.45	56.1	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.91	0.95	1.42	1.45	1.88	1.97

Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.			
Frequency	Description	Permittivity ϵ	Conductivity σ (S/m)
835 MHz	Reference result	41.5	0.90
	$\pm 5\%$ window	39.425 to 43.575	0.855 to 0.945
1900 MHz	Validation value (Jul. 20)	41.675999	0.894409
	Reference result	40	1.40
2450 MHz	$\pm 5\%$ window	38 to 42	1.33 to 1.47
	Validation value (Jul. 20)	38.509998	1.436111
	Reference result	39.7	1.93
	$\pm 5\%$ window	39.622857	1.964313
	Validation value (Jul. 20)		

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the phone holder.

Table 2: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.			
Frequency	Description	Permittivity ϵ	Conductivity σ (S/m)
835 MHz	Reference result ±5% window	55.2 52.44 to 57.96	0.97 0.9215 to 1.0185
	Validation value (Jul. 20)	55.709999	0.9809033
1900 MHz	Reference result ±5% window	53.3 50.635 to 55.965	1.52 1.444 to 1.596
	Validation value (Jul. 20)	52.548876	1.553978
2450 MHz	Reference result ±5% window	52.7	1.95
	Validation value (Jul. 20)	52.548876	1.974257

6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+- %)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞

Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.6	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.3	
								3	

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞

Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.24	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	2.83	M
Combined Standard Uncertainty			RSS				8.83	8.37	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16.7	3

7. SAR Measurement Evaluation


7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz, 1900 MHz and 2450MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments:

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	835MHz:SN 36/08 DIPC 99 1900MHz:SN 36/08 DIPF 102 2450MHz:SN 36/08 DIPJ 103

System Verification Setup Block Diagram

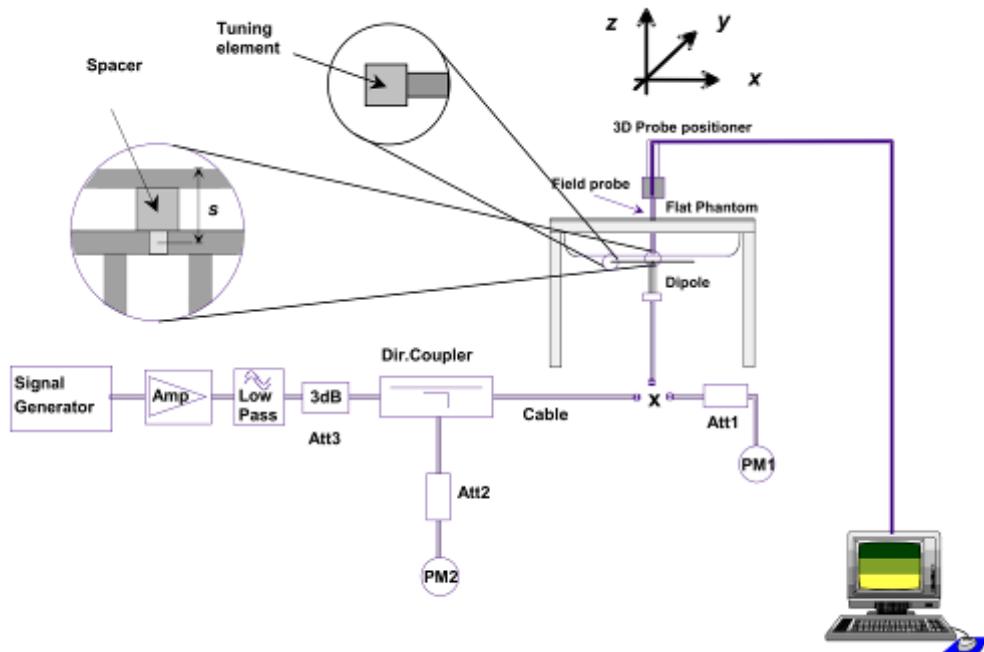

7.2. Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Frequency	835MHz(Head)	835MHz(Body)	1900MHz(Head)	1900MHz(Body)
Target value (1g)	9.714 W/Kg	9.714 W/Kg	39.89 W/Kg	39.89 W/Kg
250 mW input power	2.478 W/Kg	2.386 W/Kg	9.455 W/Kg	9.740 W/Kg
Test value (1g)	9.912 W/Kg	9.544W/Kg	37.820 W/Kg	38.960 W/Kg

Frequency	2450MHz(Head)	2450MHz(Body)
Target value (1g)	53.850 W/Kg	50.820 W/Kg
250 mW input power	12.443 W/Kg	12.789 W/Kg
Test value (1g)	49.772 W/Kg	51.156W/Kg


Note: System checks the specific test data please see page 122~133.

8. Operational Conditions During Test

8.1. Informations on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

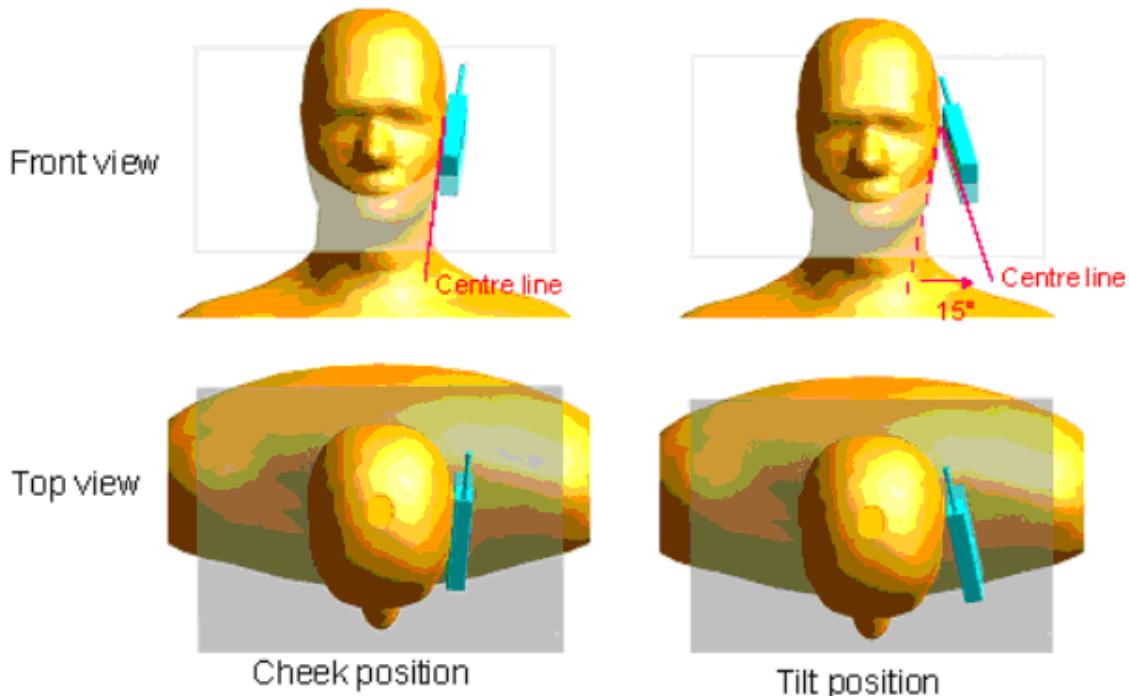

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.


Remark: Please refer to Appendix B for the test setup photos.

8.2. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

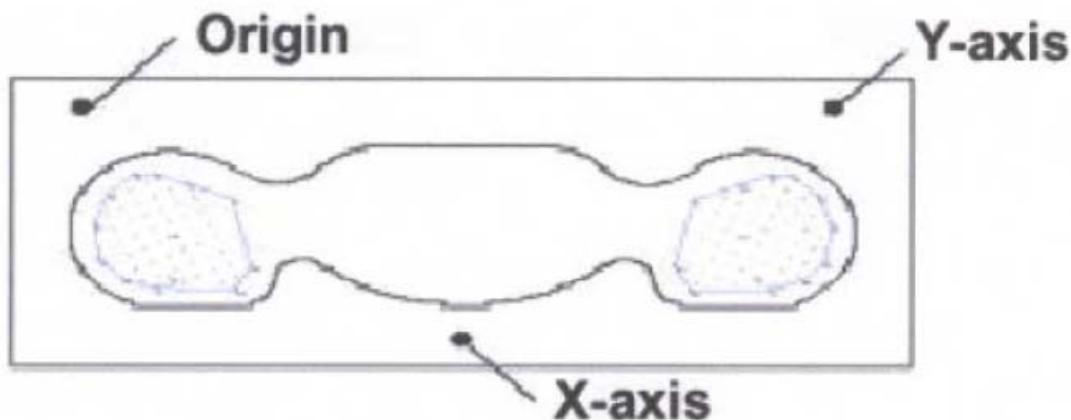

SAR Measurement Points in Area Scan

8.3. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. 3G MEASUREMENT PROCEDURES

9.1. Procedures Used To Establish Test Signal

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

9.2. SAR Measurement Conditions for WCDMA

These procedures were followed according to FCC KDB 941225, October, 2007.

9.3. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all “1s”. Results for all applicable physical channel configurations (DPCCH, DPDCH and spreading codes) should be tabulated in the test report. All configurations that are not supported by the EUT or cannot be measured due to technical or equipment limitations should be clearly identified.

9.4. Measurement Of Conducted Peak Output Power.

1. WCDMA Conducted peak output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.14	23.57	23.25	22.46	22.73	22.51
HSDPA	1	23.12	23.54	23.24	22.45	22.73	22.49
	2	23.13	23.56	23.24	22.44	22.71	22.50
	3	22.70	23.09	22.87	22.01	22.25	22.08
	4	22.66	23.07	22.84	22.03	22.23	22.04
HSUPA	1	23.13	23.56	23.24	22.43	22.72	22.50
	2	21.15	21.57	21.26	20.48	20.73	20.52
	3	22.14	22.58	22.24	21.46	21.75	21.51
	4	21.14	21.59	21.29	20.51	20.75	20.54
	5	23.11	23.55	23.25	22.45	22.70	22.54

2. GSM Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power (dBm)
GSM 850	128	824.2	32.77
	190	836.6	32.80
	251	848.8	32.81
PCS 1900	512	1850.2	28.82
	661	1880.0	29.35
	810	1909.8	29.48

2. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	32.81	32.24	30.69	30.02
	190	836.6	32.92	32.18	30.79	29.74
	251	848.8	32.98	32.15	30.70	30.14
PCS 1900	512	1850.2	29.40	29.13	27.36	26.35
	661	1880.0	29.27	29.30	27.55	26.52
	810	1909.8	29.33	29.63	27.89	26.89

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	23.81	26.22	26.43	27.01
	190	836.6	23.92	26.16	26.53	26.73
	251	848.8	23.98	26.13	26.44	27.13
PCS 1900	512	1850.2	20.4	23.11	23.1	23.34
	661	1880.0	20.27	23.28	23.29	23.51
	810	1909.8	20.33	23.61	23.63	23.88

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

Note: 1. Correct Factor= $10 \log (\text{Duty Cycle})$
 2. Average Power= Peak Power+ Correct Factor

3. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	26.55	26.12	24.25	23.04
	190	836.6	26.40	26.03	24.29	23.13
	251	848.8	26.48	26.07	24.28	23.08
PCS 1900	512	1850.2	26.23	25.03	22.52	21.43
	661	1880.0	26.29	25.11	22.65	21.53
	810	1909.8	26.56	25.37	22.81	21.77

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	17.55	20.1	19.99	20.03
	190	836.6	17.4	20.01	20.03	20.12
	251	848.8	17.48	20.05	20.02	20.07
PCS 1900	512	1850.2	17.23	19.01	18.26	18.42
	661	1880.0	17.29	19.09	18.39	18.52
	810	1909.8	17.56	19.35	18.55	18.76

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

 Note: 1. Correct Factor= $10 \log_{10} (\text{Duty Cycle})$

2. Average Power= Peak Power+ Correct Factor

4. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			802.11B (DSSS)	802.11G (OFDM)	802.11N20 (OFDM)	802.11N40 (DSSS)
WiFi	1	2412	15.34	12.68	12.66	13.23
	6	2437	15.54	13.66	12.61	13.86
	11	2462	15.81	13.79	13.58	13.84

5. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)	
			GFSK	8-DPSK
BT	0	2402	9.728	9.257
	38	2441	9.534	9.065
	79	2480	9.217	8.871

10. Test Results List

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.		SAR(W/Kg), 1g Peak			
Phantom Configurations	Device Test Positions	Antenna Positions	Device Test channel,		
			Channel 128	Channel 190	Channel 251
Right Side Of Head	Cheek/Touch	Internal	/	/	0.327
	Ear/Tilt	Internal	/	/	0.439
Left Side Of Head	Cheek/Touch	Internal	/	/	0.365
	Ear/Tilt	Internal	/	/	0.396
Body (15mm Separation)	GSM	Back upward	Internal	/	/
		Face Upward	Internal	/	/
	GPRS	Back upward	Internal	1.018	1.082
		Face Upward	Internal	0.584	/
	EDGE	Back upward	Internal	/	0.726

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.		SAR(W/Kg), 1g Peak			
Phantom Configurations	Device Test Positions	Antenna Positions	Device Test channel,		
			Channel 512	Channel 661	Channel 810
Right Side Of Head	Cheek/Touch	Internal	/	/	0.494
	Ear/Tilt	Internal	/	/	0.147
Left Side Of Head	Cheek/Touch	Internal	/	/	0.406
	Ear/Tilt	Internal	/	/	0.126
Body (15mm Separation)	GSM	Back upward	Internal	/	/
		Face Upward	Internal	/	/
	GPRS	Back upward	Internal	0.758	0.824
		Face Upward	Internal	/	/
	EDGE	Back upward	Internal	/	/

Note:

1. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 4132	Channel 4182	Channel 4233
Right Side Of Head	Cheek/Touch	Internal	/	/	0.567
	Ear/Tilt	Internal	/	/	0.402
Left Side Of Head	Cheek/Touch	Internal	/	/	0.711
	Ear/Tilt	Internal	/	/	0.285
Body (15mm Separation)	Back upward	Internal	0.928	1.099	1.089
	Face Upward	Internal	/	/	0.618

Note:

1. Maximum SAR for 12.2kbps RMC is 1.099 W/Kg \leq 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 9262	Channel 9400	Channel 9538
Right Side Of Head	Cheek/Touch	Internal	/	/	0.649
	Ear/Tilt	Internal	/	/	0.188
Left Side Of Head	Cheek/Touch	Internal	/	/	0.599
	Ear/Tilt	Internal	/	/	0.168
Body (15mm Separation)	Back upward	Internal	/	/	0.775
	Face Upward	Internal	/	/	0.611

Note:

1. Maximum SAR for 12.2kbps RMC is 0.775W/Kg \leq 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.
2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

Summary of Measurement Results (WLAN 802.11B Band)


Temperature: 21.0~23.8°C, humidity: 54~60%.							
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak				
			Device Test channel				
			Channel 1	Channel 6	Channel 11		
Right Side Of Head	Cheek/Touch	Internal	/	/	0.104		
	Ear/Tilt	Internal	/	/	0.040		
Left Side Of Head	Cheek/Touch	Internal	/	/	0.075		
	Ear/Tilt	Internal	/	/	0.035		
Body (15mm Separation)	Back upward	Internal	/	/	0.106		
	Face Upward	Internal	/	/	0.035		

Note:

- 1.Based on the Measurement Of Conducted Peak Output Power, the max power of 802.11b is 38.mW> 24mW(13.8dBm) ,the SAR test for 802.11b is required, but 802.11g/HT20/HT40 is not required, for the maximum average output power is not 1/4 dB higher than measured on the corresponding 802.11b channels

11. Multiple Transmitters Evaluation

The are two transmitters build in EUT, As follwing :

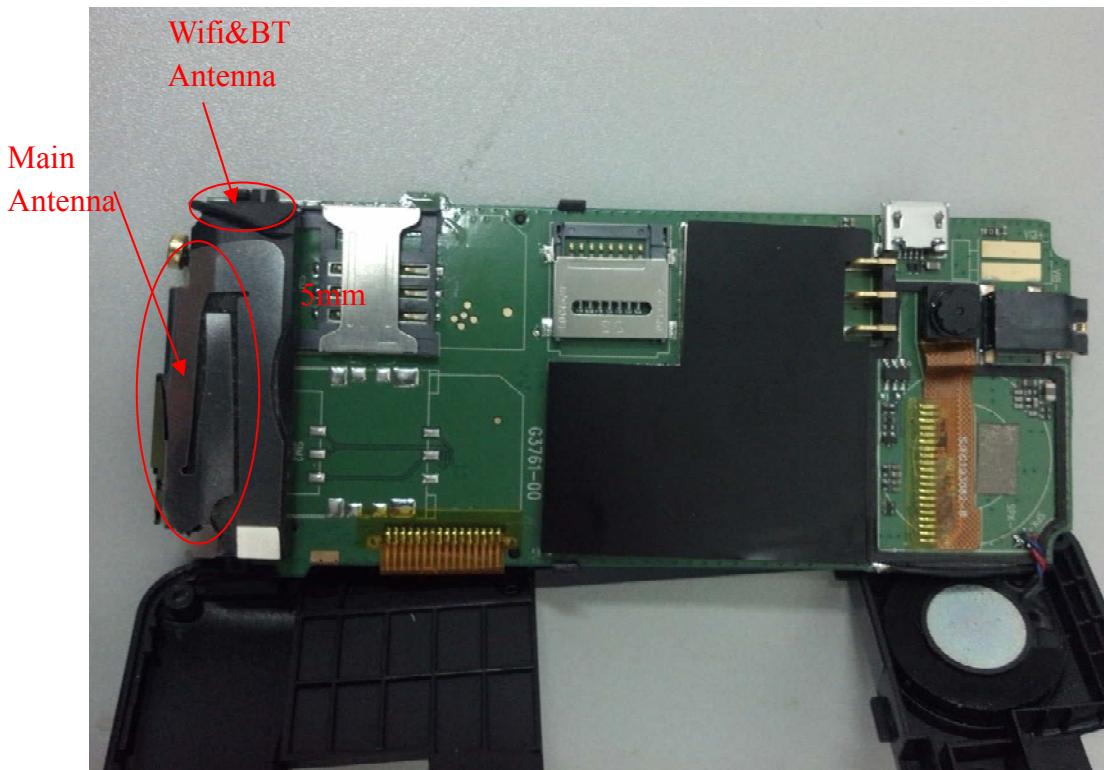

Stand-alone SAR

The Max. Peak output power of Wifi transmitter is $38\text{mW} > 12\text{mW}$ (Pref=12mW) , Wifi antenna and main antenna is $0.5\text{ cm} < 2.5\text{ cm}$, stand-alone SAR evaluation is required for Wifi.

The BT Max. Peak output power is $9\text{mW} \leq 12\text{mW}$ (Pref= 12mW), and the distance between BT antenna and main antenna is $0.5\text{ cm} < 2.5\text{ cm}$, the max 1-g SAR for main antenna is not higher than 1.2W/Kg , standalone SAR evaluation is not required for Bluetooth antenna .

Simultaneous SAR

The GSM and WCDMA can't simultaneous transmitting.

The BT and Wifi can't simultaneous transmitting.


Test Position	GSM&WCDMA SAR _{Max} (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SAR(W/Kg)	$\sum 1\text{-g SAR}_{\text{Max}}(\text{W/Kg})$	
				BT&Main Ant	WiFi&Main Ant
Head SAR	0.711	0	0.104	0.711	0.815
Body SAR	1.116	0	0.106	1.116	1.222

Simultaneous Transmission SAR evaluation is not required for BT and GSM&WCDMA, because the sum of 1g SAR_{Max} is 1.116W/Kg < 1.6W/Kg for BT and GSM&WCDMA.

Simultaneous Transmission SAR evaluation is not required for WiFi and GSM&WCDMA, because the sum of 1g SAR_{Max} is 1.222W/Kg < 1.6W/Kg for BT and GSM&WCDMA.

Annex A EUT Setup Photos

1 EUT Left Head Touch Cheek Position

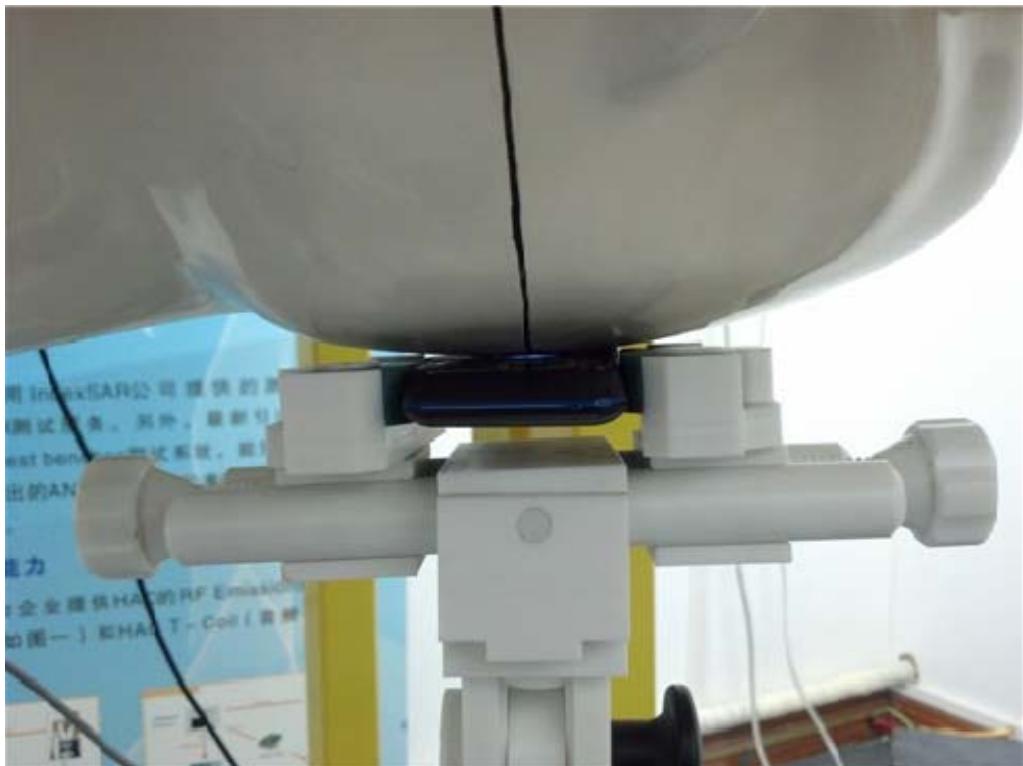

2 EUT Left Head Tilt15 Position



3 EUT Right Head Touch Cheek Position



4 EUT Right Head Tilt15 Position



5 Side Position



6 Side position with earphone



Liquid Level Photo



Annex B Graph Test Results

BAND	PARAMETERS
<u>GSM850</u>	<u>Measurement 1:</u> Right Head with Cheek device position on High Channel in GSM mode <u>Measurement 2:</u> Right Head with Tilt device position on High Channel in GSM mode <u>Measurement 3:</u> Left Head with Cheek device position on High Channel in GSM mode <u>Measurement 4:</u> Left Head with Tilt device position on High Channel in GSM mode <u>Measurement 5:</u> Body position on High Channel in GSM mode <u>Measurement 6:</u> Body position on High Channel in GSM mode <u>Measurement 7:</u> Body position on Low Channel in GPRS mode <u>Measurement 8:</u> Body position on Middle Channel in GPRS mode <u>Measurement 9:</u> Body position on High Channel in GPRS mode <u>Measurement 10:</u> Body position on High Channel in GPRS mode <u>Measurement 11:</u> Body position on Middle Channel in EDGE mode
<u>GSM1900</u>	<u>Measurement 12:</u> Right Head with Cheek device position on High Channel in GSM mode <u>Measurement 13:</u> Right Head with Tilt device position on High Channel in GSM mode <u>Measurement 14:</u> Left Head with Cheek device position on High Channel in GSM mode <u>Measurement 15:</u> Left Head with Tilt device position on High Channel in GSM mode <u>Measurement 16:</u> Body position on High Channel in GSM mode <u>Measurement 17:</u> Body position on High Channel in GSM mode <u>Measurement 18:</u> Body position on Low Channel in GPRS mode <u>Measurement 19:</u> Body position on Middle Channel in GPRS mode <u>Measurement 20:</u> Body position on High Channel in GPRS mode <u>Measurement 21:</u> Body position on High Channel in GPRS mode <u>Measurement 22:</u> Body position on High Channel in EDGE mode
<u>WCDMA</u> <u>850</u>	<u>Measurement 23:</u> Right Head with Cheek device position on Middle Channel in CDMA mode <u>Measurement 24:</u> Right Head with Tilt device position on Middle Channel in CDMA mode <u>Measurement 25:</u> Left Head with Cheek device position on Middle Channel in CDMA mode <u>Measurement 26:</u> Left Head with Tilt device position on Middle Channel in CDMA mode <u>Measurement 27:</u> Body position on Low Channel in CDMA mode <u>Measurement 28:</u> Body position on Middle Channel in CDMA mode

	<u>Measurement 29:</u> Body position on High Channel in CDMA mode <u>Measurement 30:</u> Body position on Middle Channel in CDMA mode
<u>WCDMA</u> <u>1900</u>	<u>Measurement 31:</u> Right Head with Cheek device position on High Channel in CDMA mode <u>Measurement 32:</u> Right Head with Tilt device position on High Channel in CDMA mode <u>Measurement 33:</u> Left Head with Cheek device position on High Channel in CDMA mode <u>Measurement 34:</u> Left Head with Tilt device position on High Channel in CDMA mode <u>Measurement 35:</u> Body position on High Channel in CDMA mode <u>Measurement 36:</u> Body position on High Channel in CDMA mode
<u>802.11b</u>	<u>Measurement 37:</u> Right Head with Cheek device position on High Channel in DSSS mode <u>Measurement 38:</u> Right Head with Tilt device position on High Channel in DSSS mode <u>Measurement 39:</u> Left Head with Cheek device position on High Channel in DSSS mode <u>Measurement 40:</u> Left Head with Tilt device position on High Channel in DSSS mode <u>Measurement 41:</u> Body position on High Channel in DSSS mode <u>Measurement 42:</u> Body position on High Channel in DSSS mode

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 1 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-0.190000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

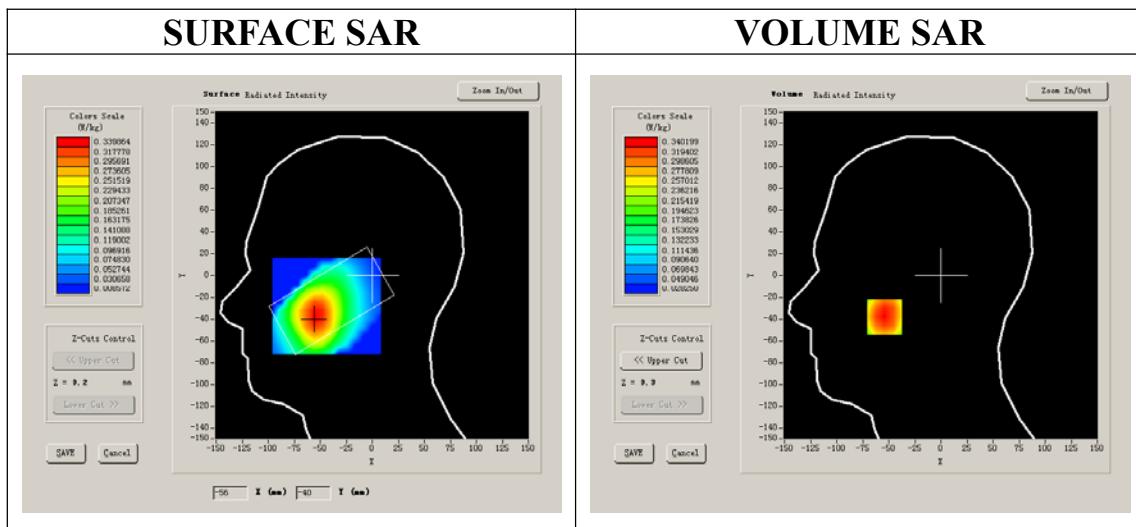



Maximum location: X=-54.00, Y=-38.00

SAR 10g (W/Kg)	0.226937
SAR 1g (W/Kg)	0.326519

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3402	0.2493	0.1779	0.1297	0.0926	0.0662

SAR, Z Axis Scan (X = -54, Y = -38)

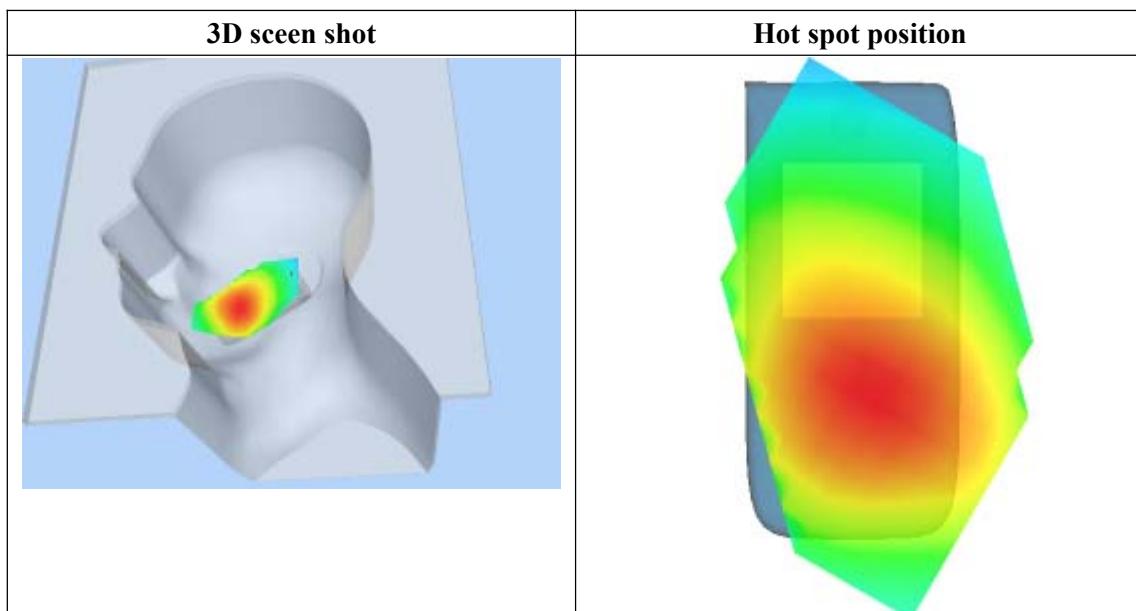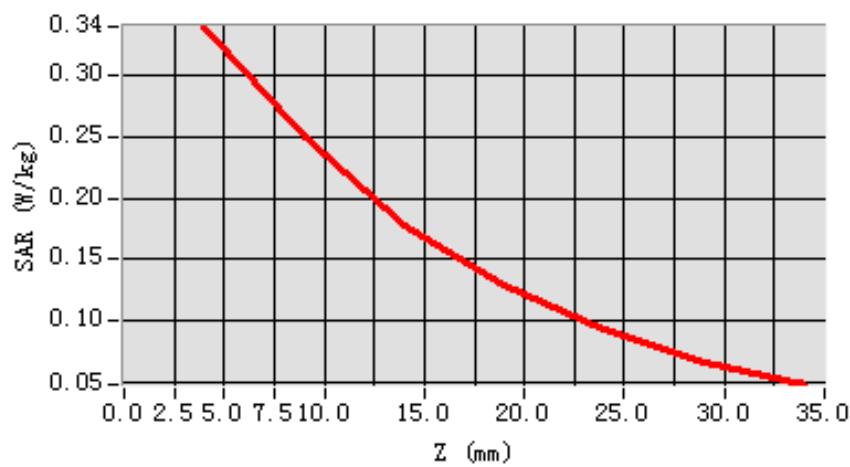

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 39 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-0.480000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

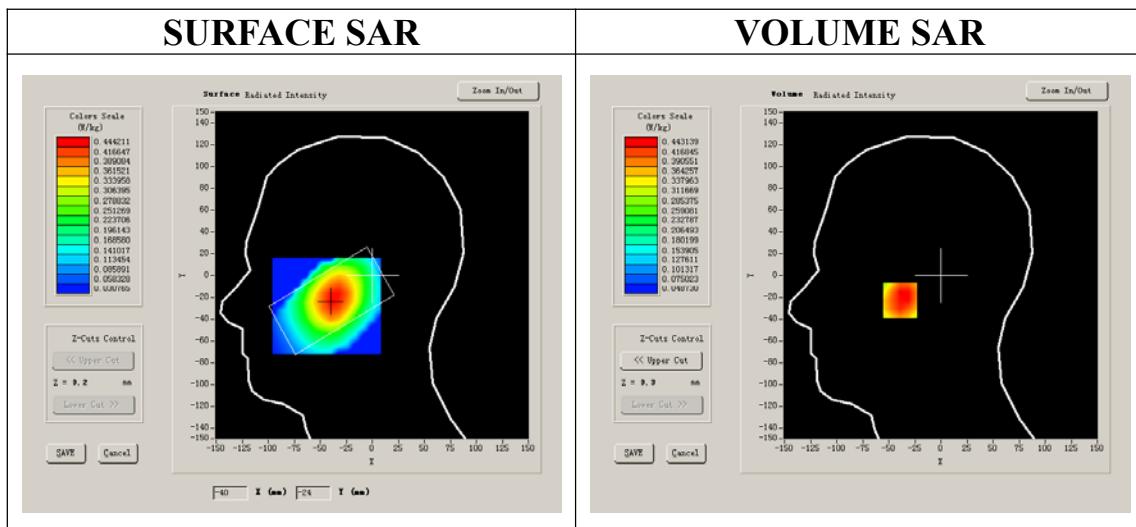



Maximum location: X=-39.00, Y=-23.00

SAR 10g (W/Kg)	0.312315
SAR 1g (W/Kg)	0.438765

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4382	0.3312	0.2576	0.1933	0.1455	0.1062

SAR, Z Axis Scan (X = -39, Y = -23)

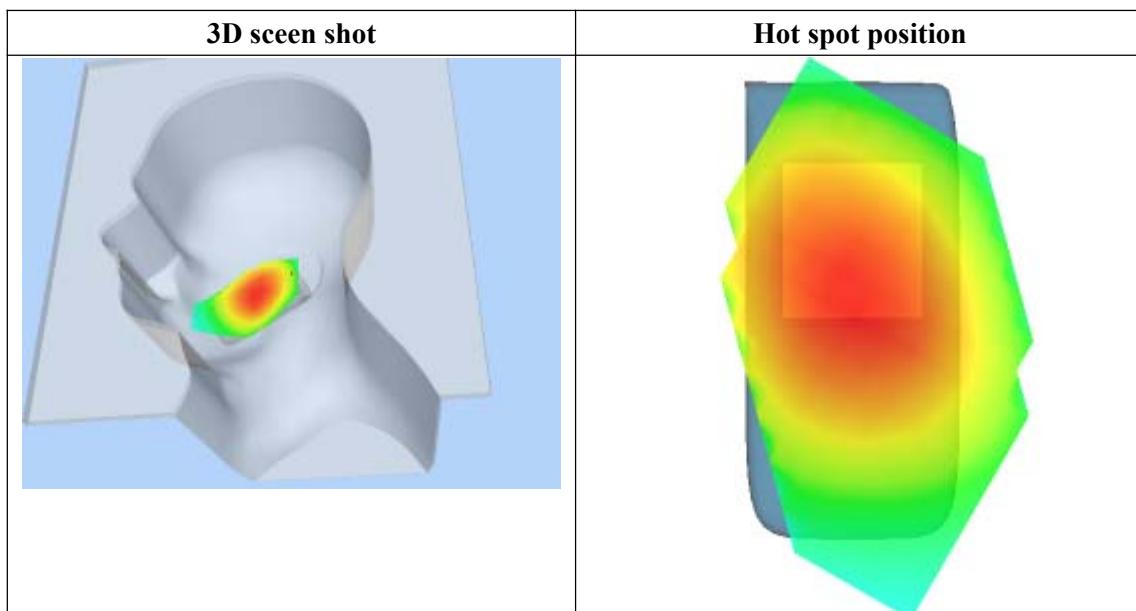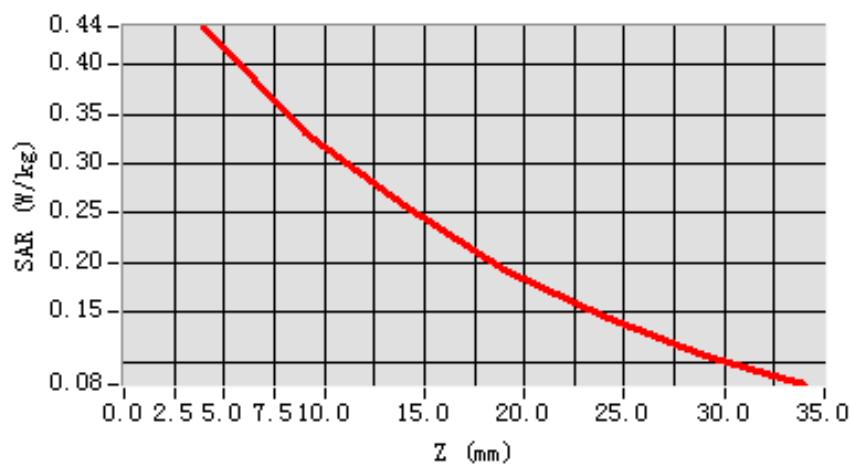

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 0 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-1.810000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

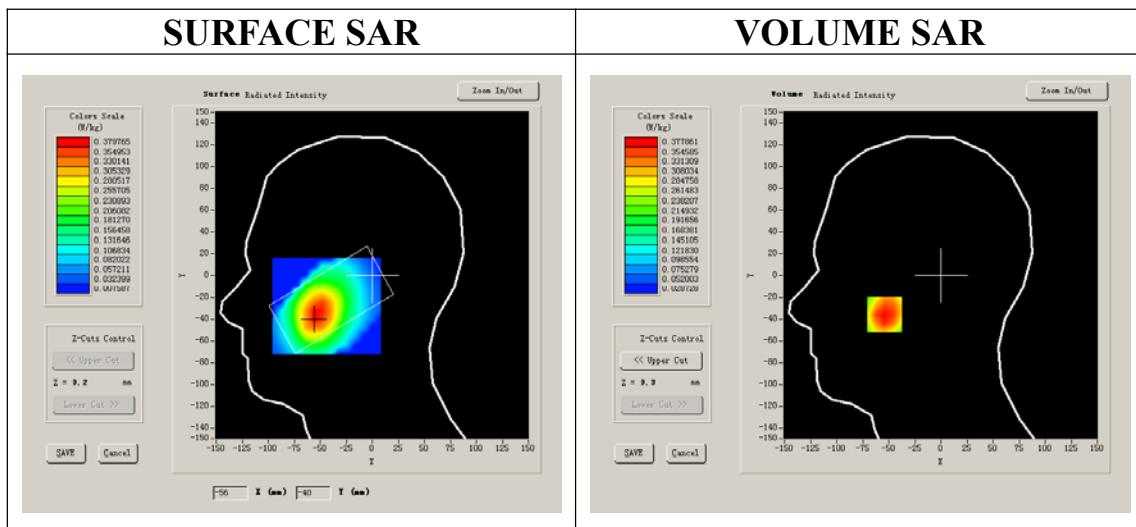



Maximum location: X=-54.00, Y=-36.00

SAR 10g (W/Kg)	0.250122
SAR 1g (W/Kg)	0.365347

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3779	0.2809	0.2009	0.1478	0.1082	0.0766

SAR, Z Axis Scan (X = -54, Y = -36)

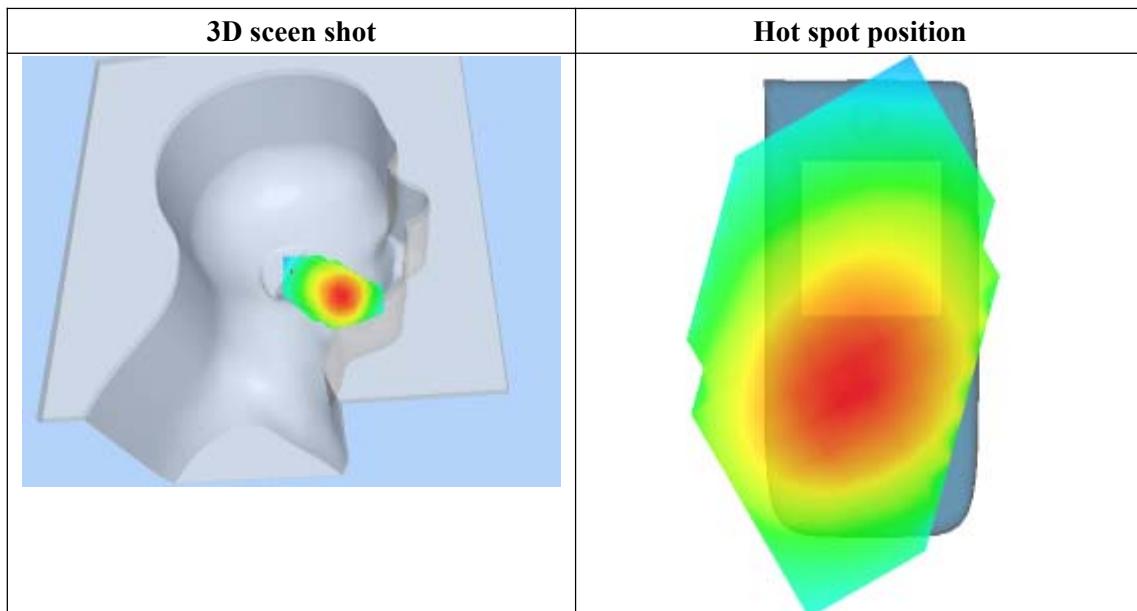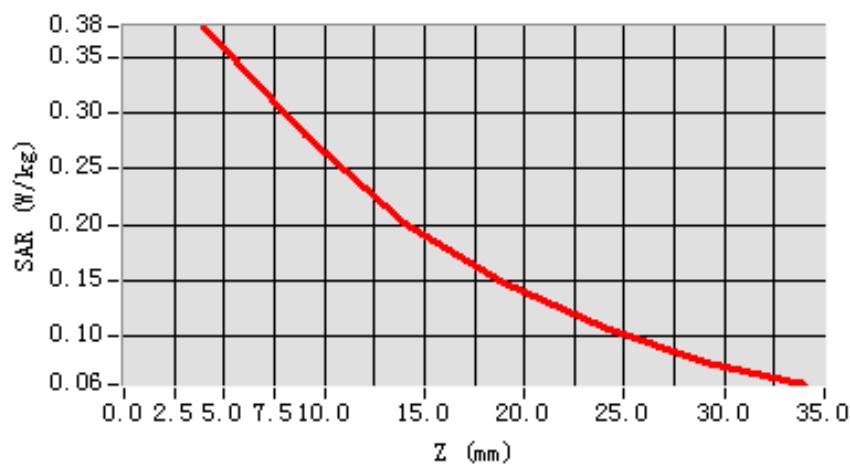

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 38 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-0.580000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

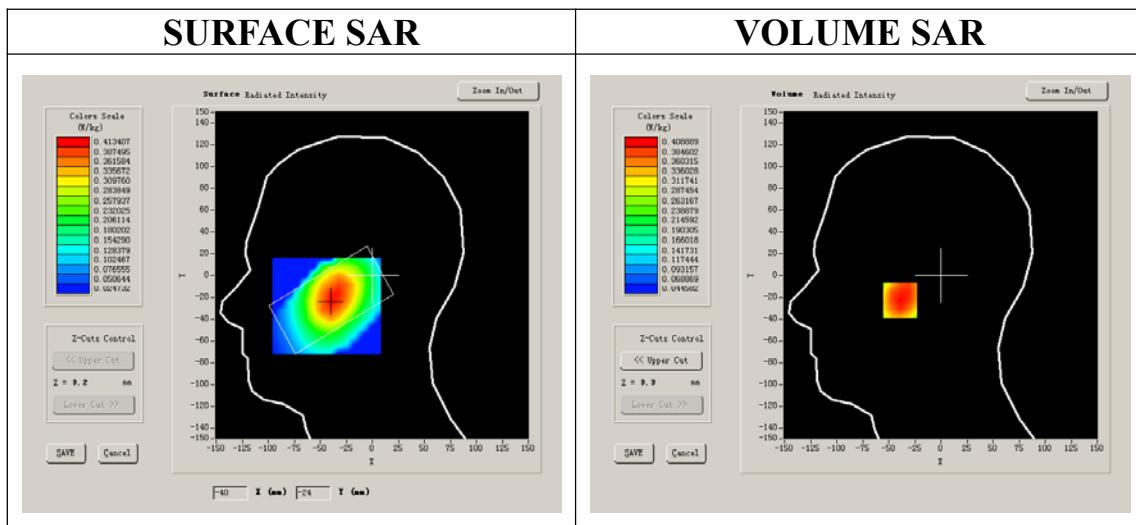



Maximum location: X=-39.00, Y=-23.00

SAR 10g (W/Kg)	0.282903
SAR 1g (W/Kg)	0.395518

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4089	0.3066	0.2302	0.1754	0.1333	0.0939

SAR, Z Axis Scan (X = -39, Y = -23)

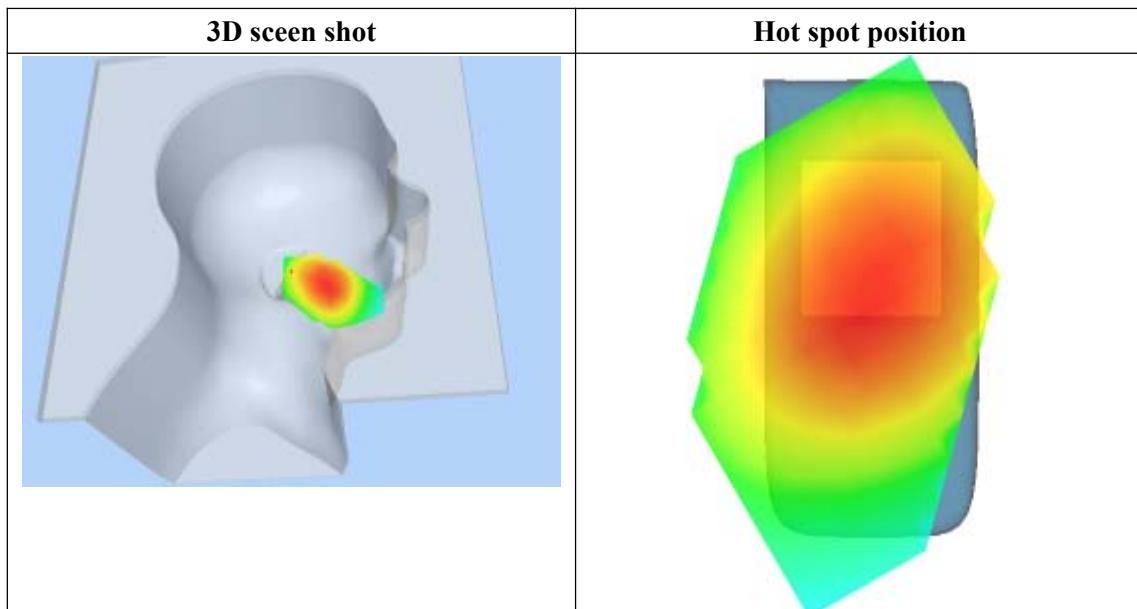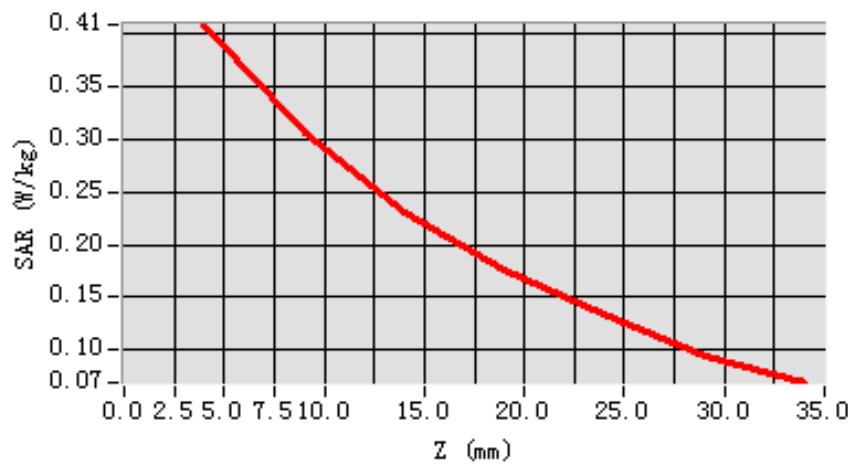

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 6 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550
Conductivity (S/m)	0.974596
Power drift (%)	0.650000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:8

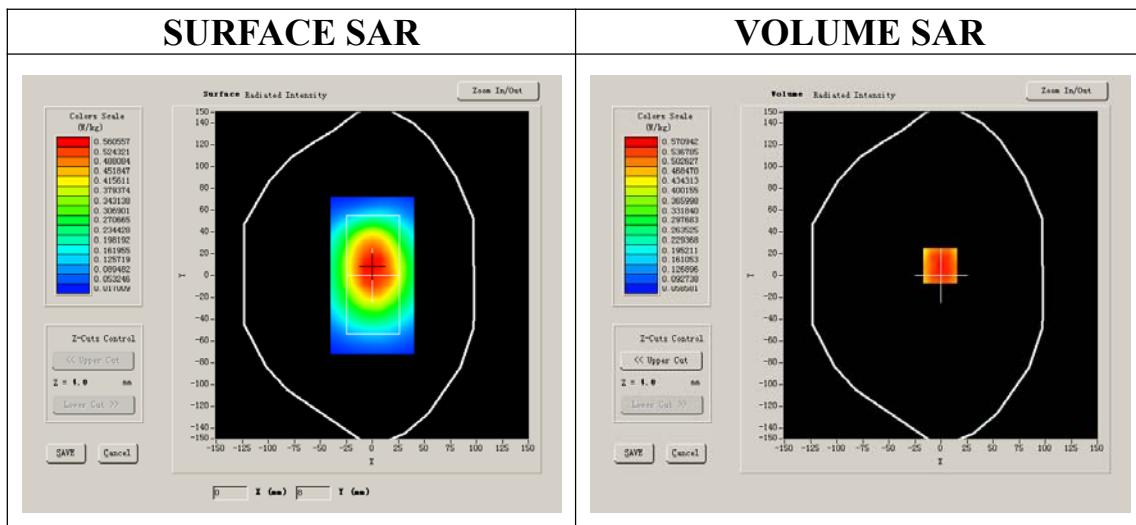



Maximum location: X=-1.00, Y=9.00

SAR 10g (W/Kg)	0.438169
SAR 1g (W/Kg)	0.617333

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6421	0.4660	0.3436	0.2518	0.1768	0.1306

SAR, Z Axis Scan (X = -1, Y = 9)

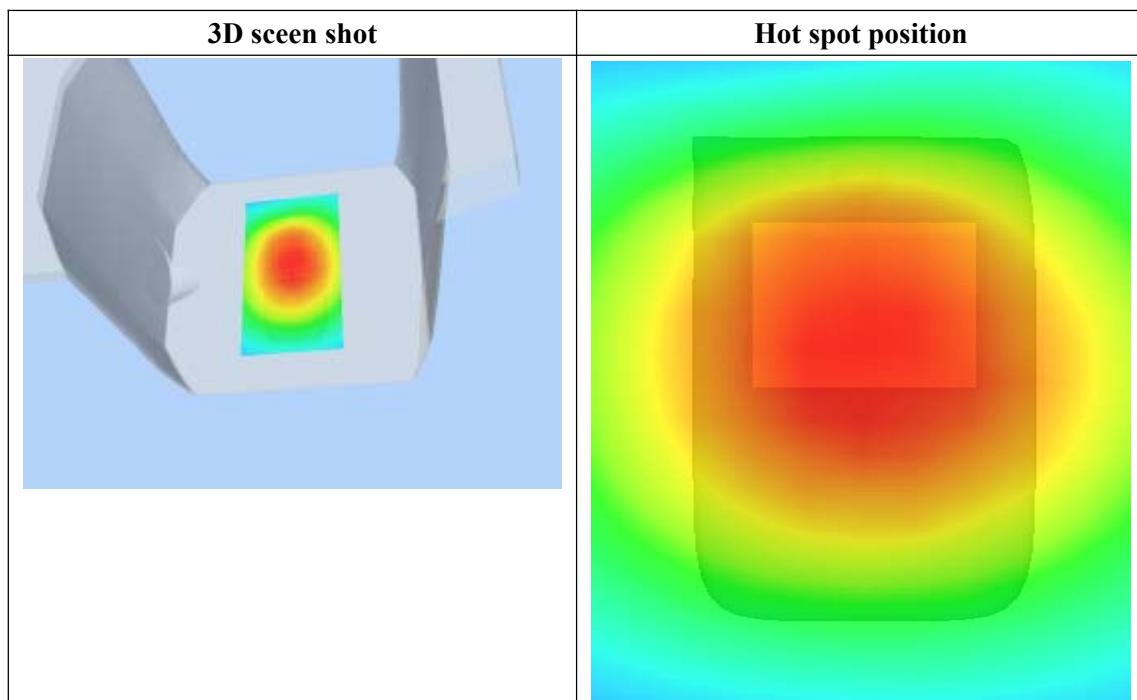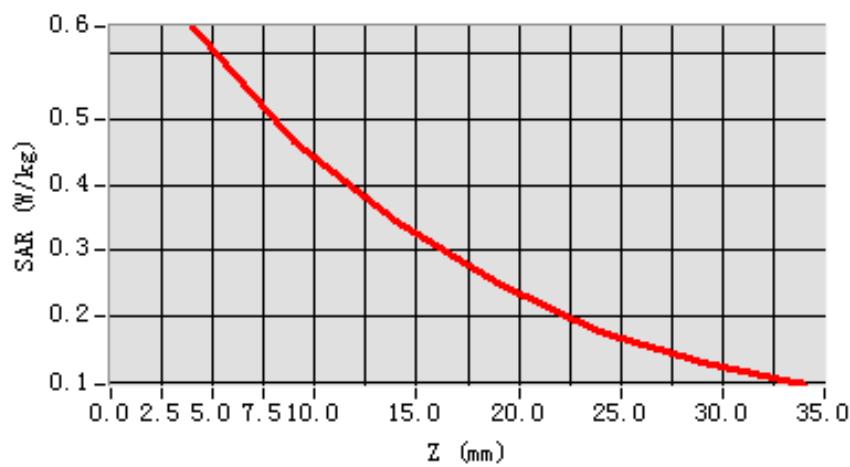

MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550
Conductivity (S/m)	0.974596
Power drift (%)	-0.290000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:8

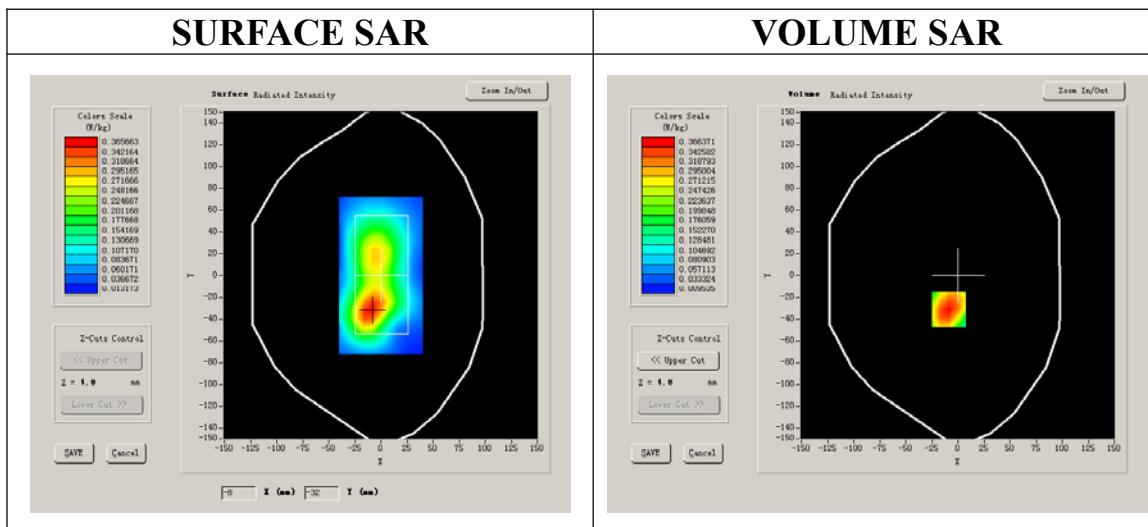


Maximum location: X=-9.00, Y=-31.00

SAR 10g (W/Kg)	0.223408
SAR 1g (W/Kg)	0.381549


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3989	0.2353	0.1425	0.0867	0.0522	0.0308


SAR, Z Axis Scan (X = -9, Y = -31)

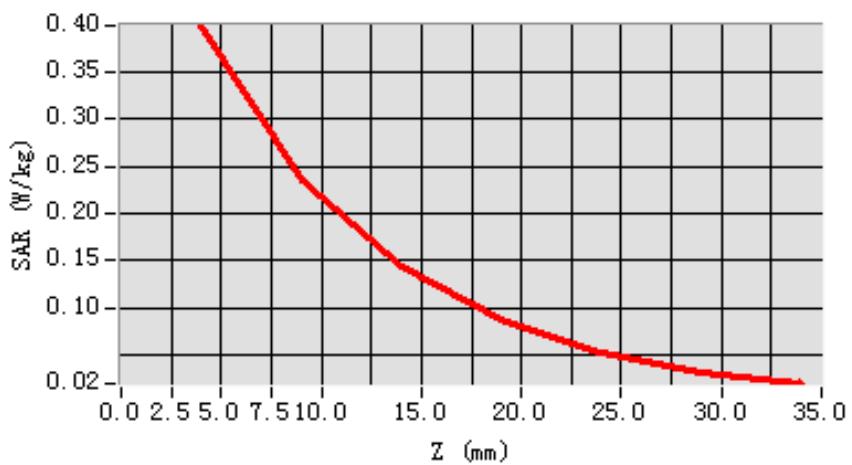

3D screen shot

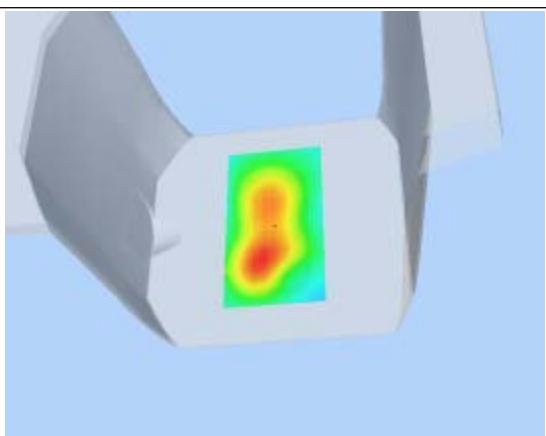

Hot spot position

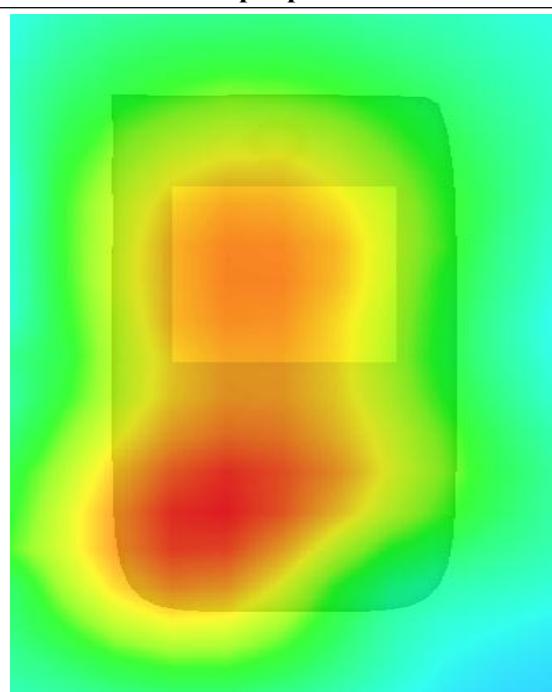

MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 6 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550
Conductivity (S/m)	0.974596
Power drift (%)	0.420000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

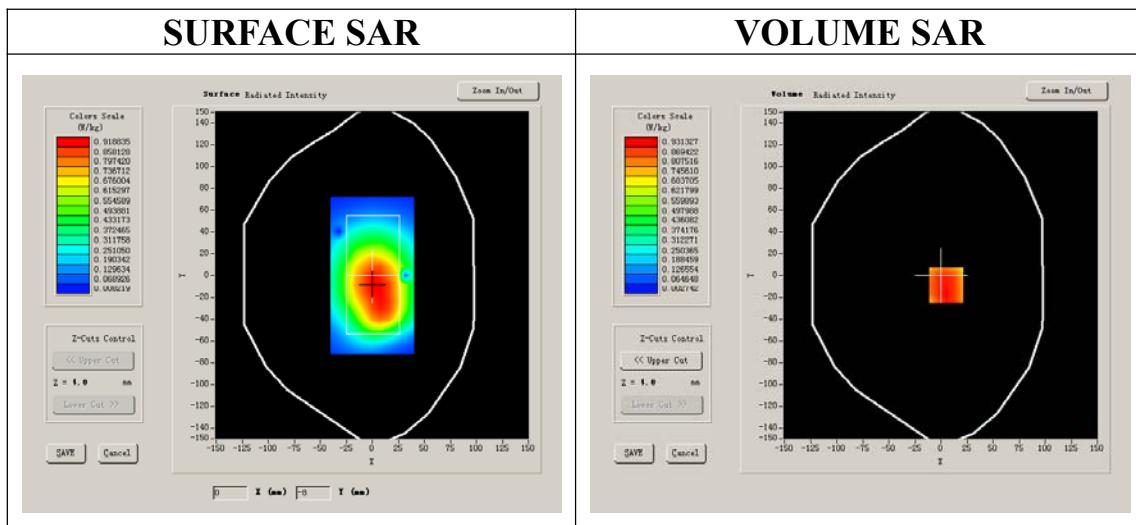



Maximum location: X=5.00, Y=-9.00

SAR 10g (W/Kg)	0.718668
SAR 1g (W/Kg)	1.018025

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0307	0.7586	0.5746	0.4307	0.3145	0.2272

SAR, Z Axis Scan (X = 5, Y = -9)

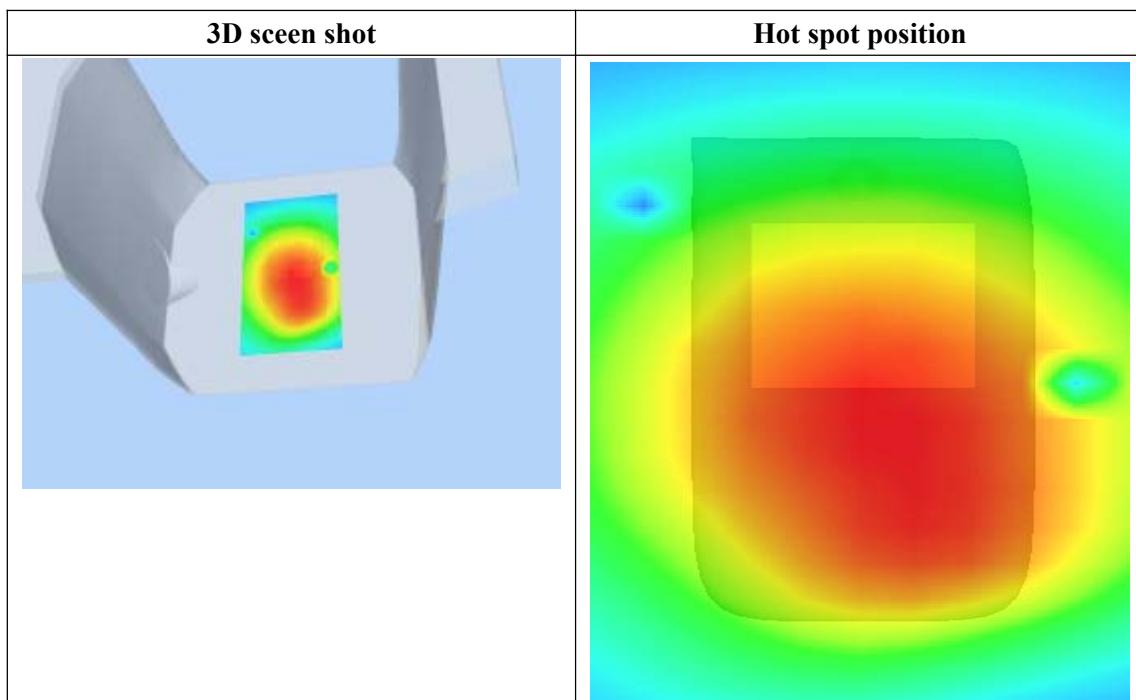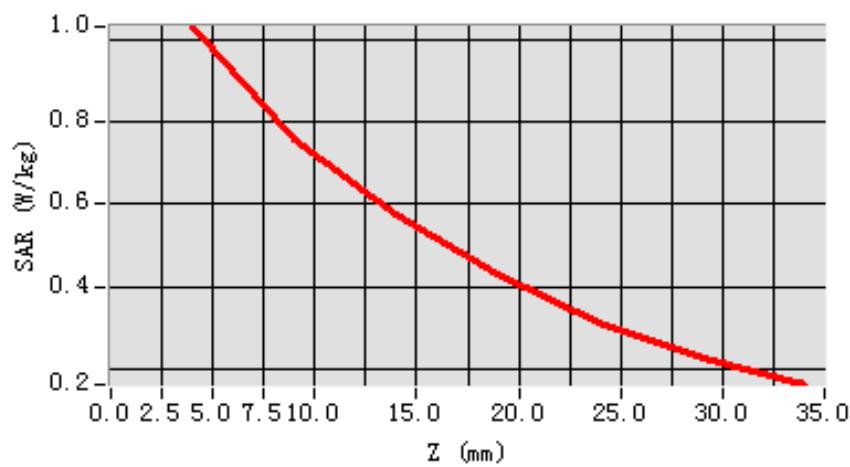

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.599976
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	0.120000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

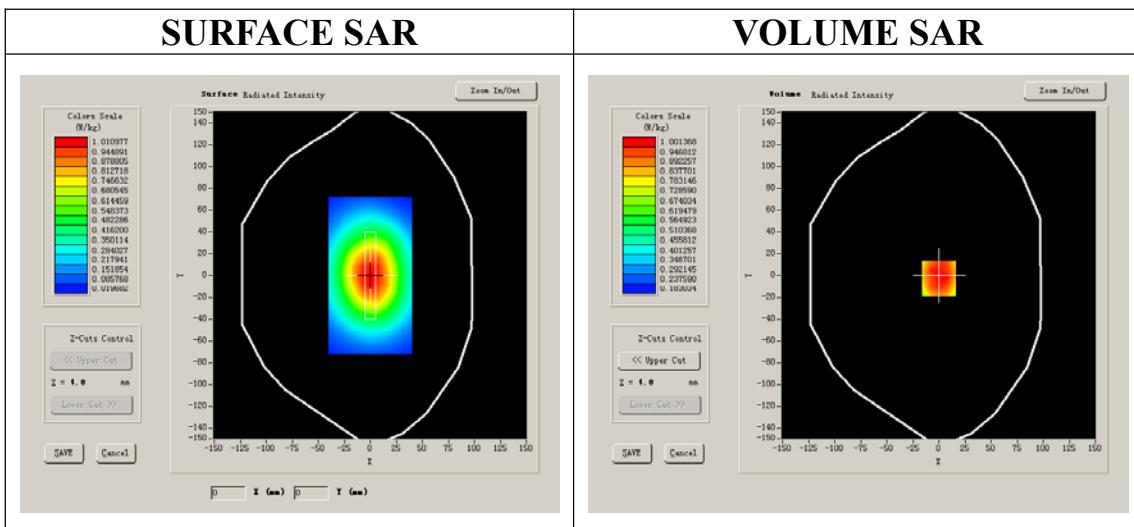



Maximum location: X=0.00, Y=-3.00

SAR 10g (W/Kg)	0.814238
SAR 1g (W/Kg)	1.081668

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0979	0.8831	0.7030	0.5637	0.4429	0.3495

SAR, Z Axis Scan (X = 0, Y = -3)

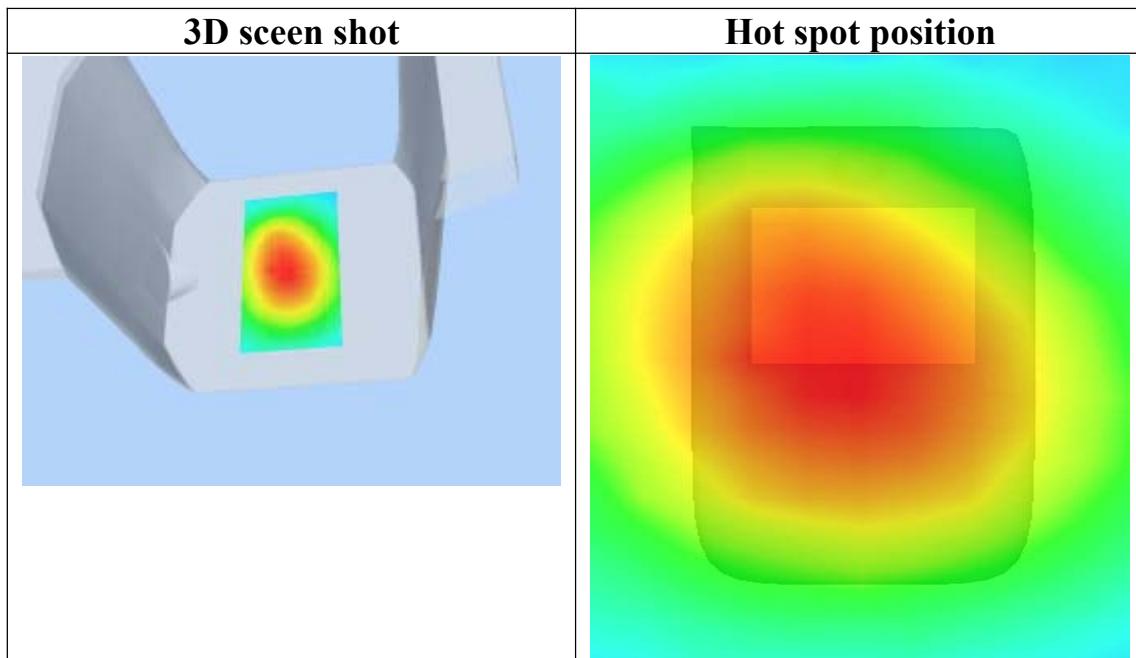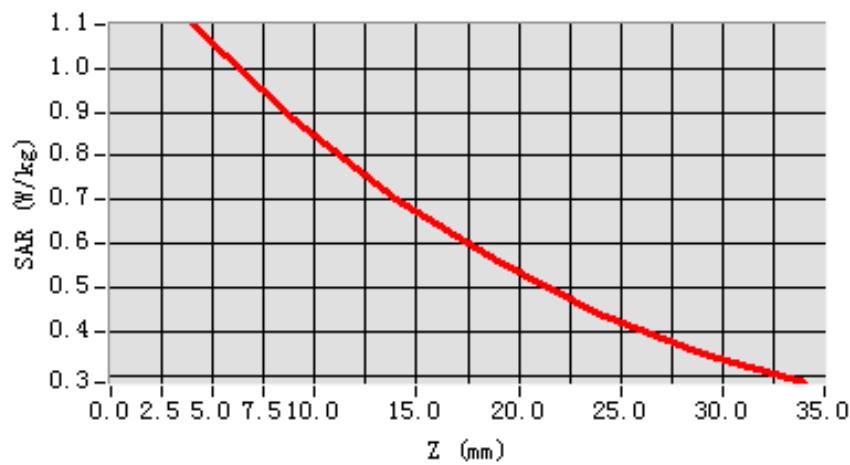

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 9 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850
Conductivity (S/m)	1.005962
Power drift (%)	-1.110000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

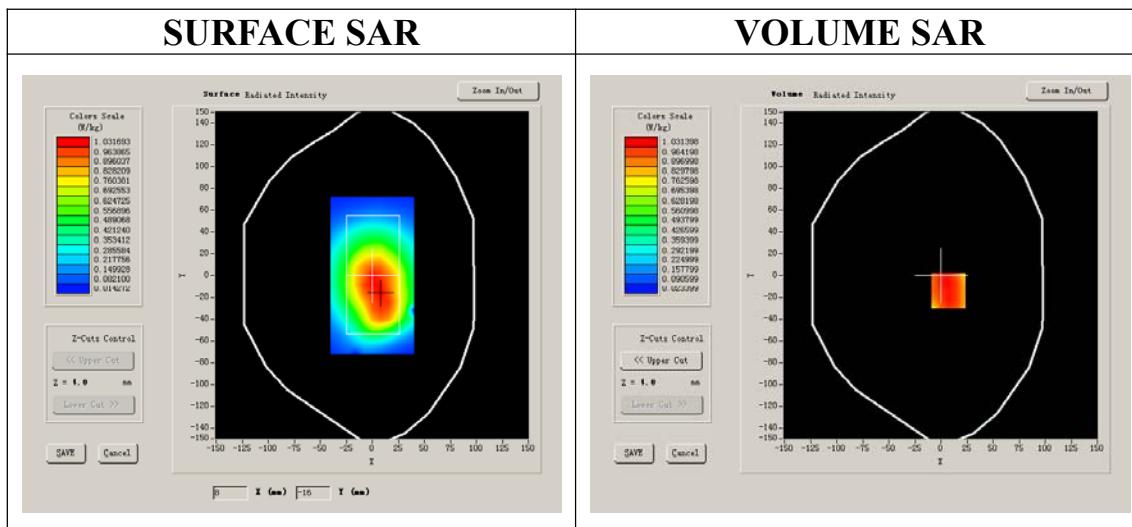



Maximum location: X=7.00, Y=-14.00

SAR 10g (W/Kg)	0.792067
SAR 1g (W/Kg)	1.115670

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1359	0.8634	0.6099	0.4522	0.3241	0.2361

SAR, Z Axis Scan (X = 7, Y = -14)

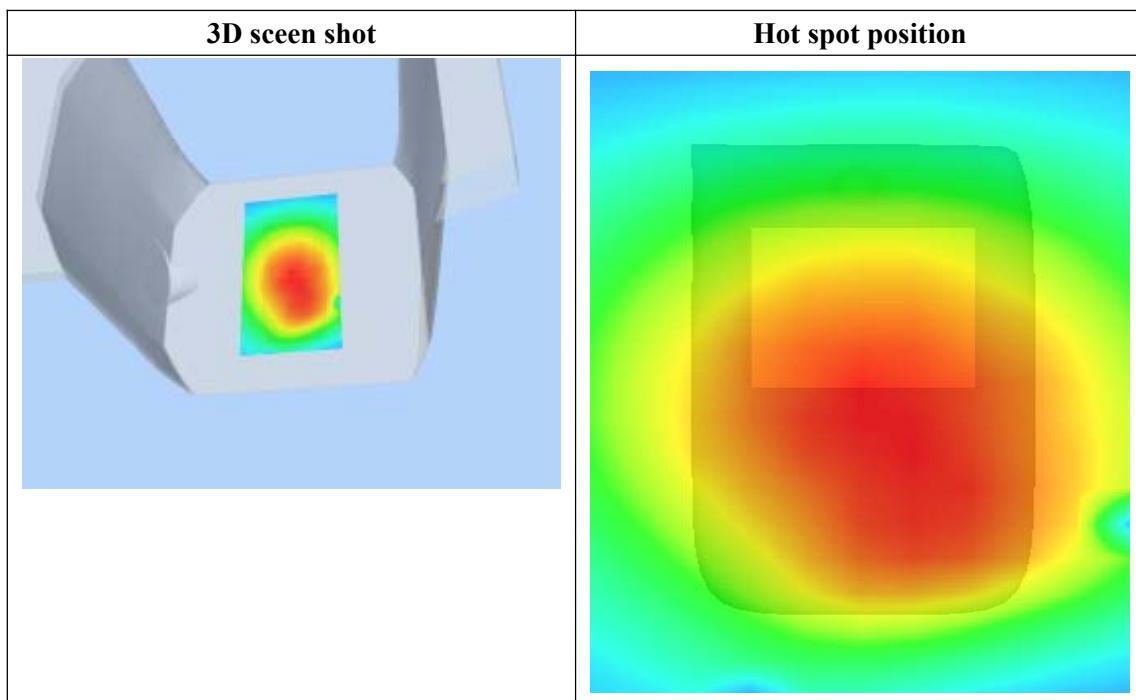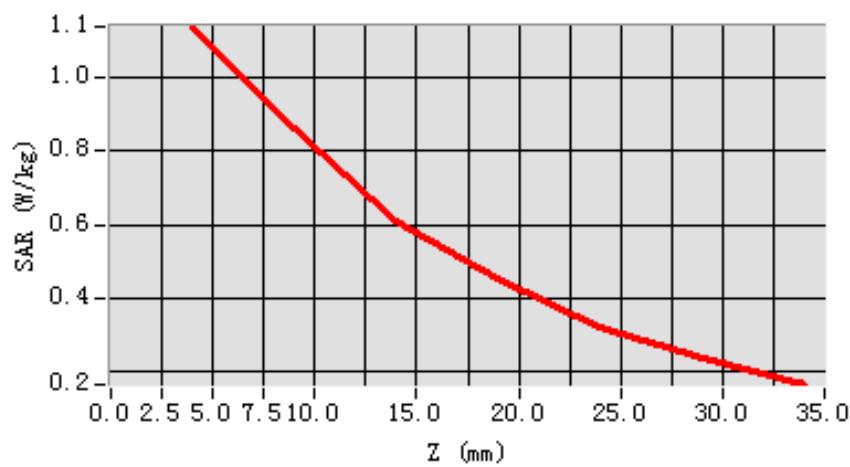

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.770000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

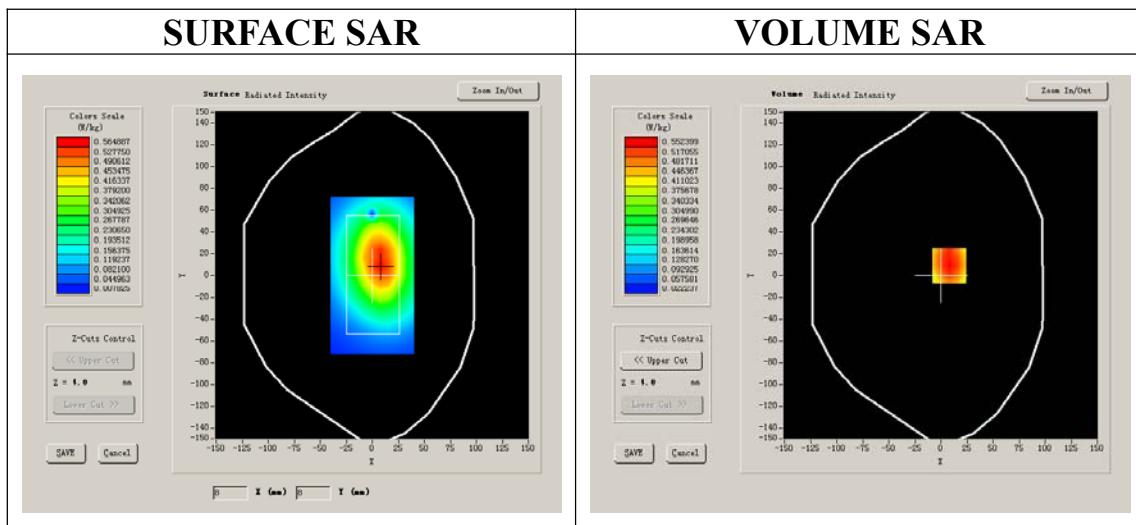



Maximum location: X=8.00, Y=9.00

SAR 10g (W/Kg)	0.396454
SAR 1g (W/Kg)	0.584059

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6272	0.4240	0.3047	0.2111	0.1572	0.1066

SAR, Z Axis Scan (X = 8, Y = 9)

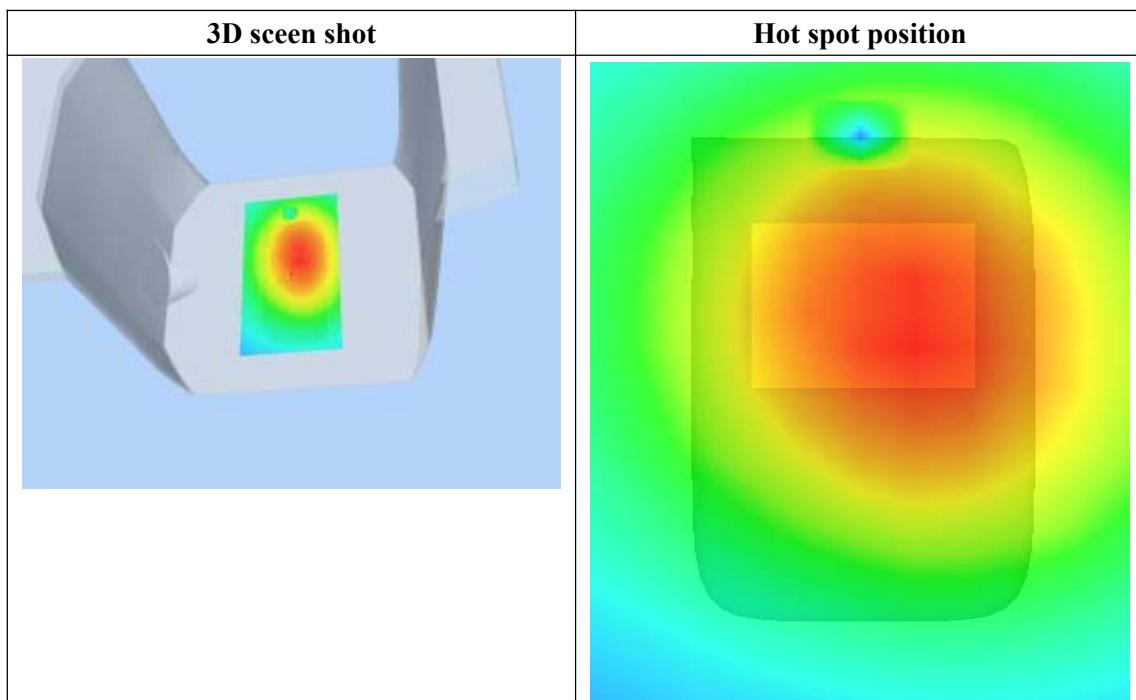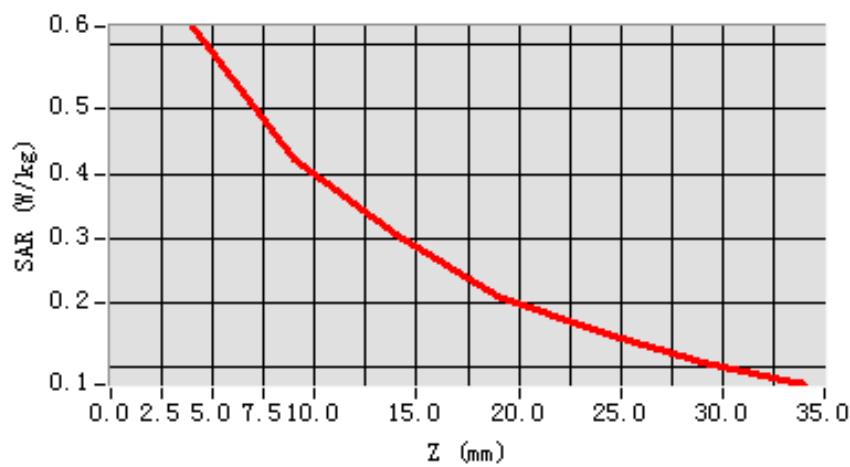

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 4 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	EDGE

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850
Conductivity (S/m)	1.005962
Power drift (%)	-0.440000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

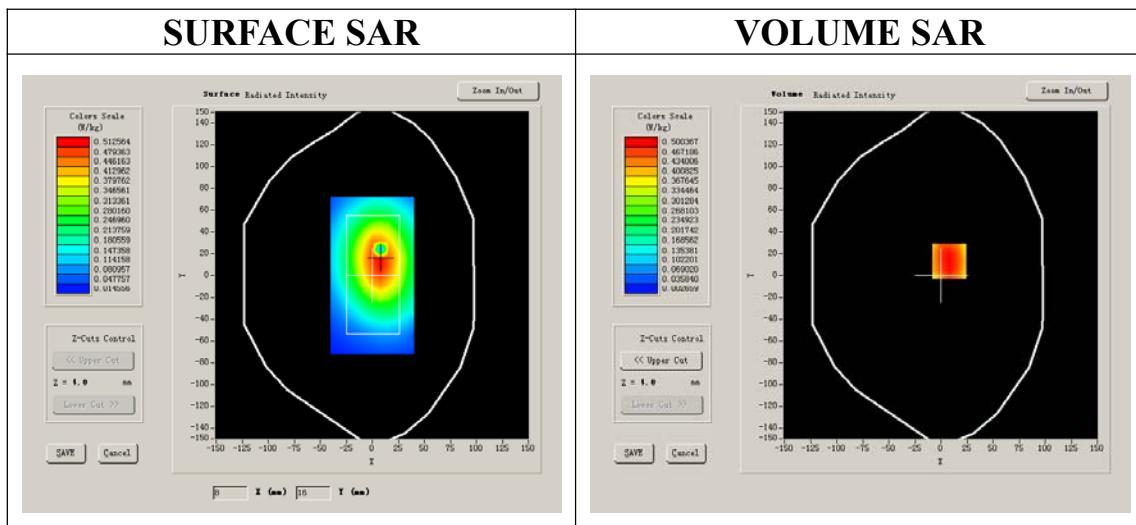



Maximum location: X=8.00, Y=-15.00

SAR 10g (W/Kg)	0.490959
SAR 1g (W/Kg)	0.725892

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7386	0.5297	0.3667	0.2653	0.1883	0.1390

SAR, Z Axis Scan (X = 8, Y = -15)

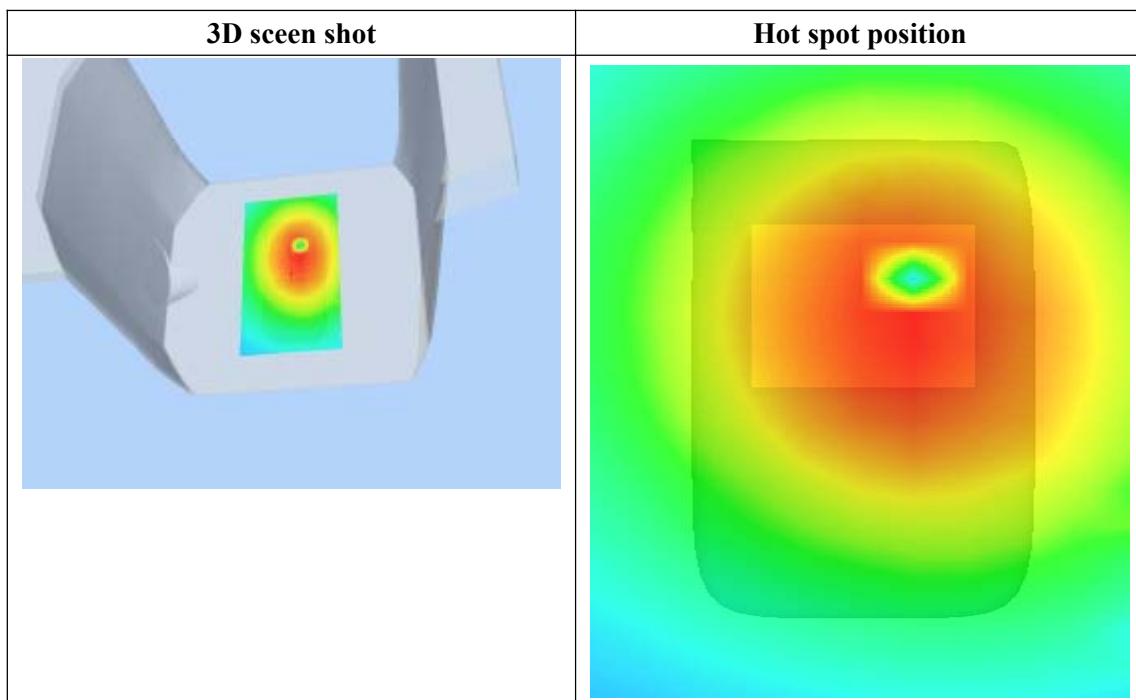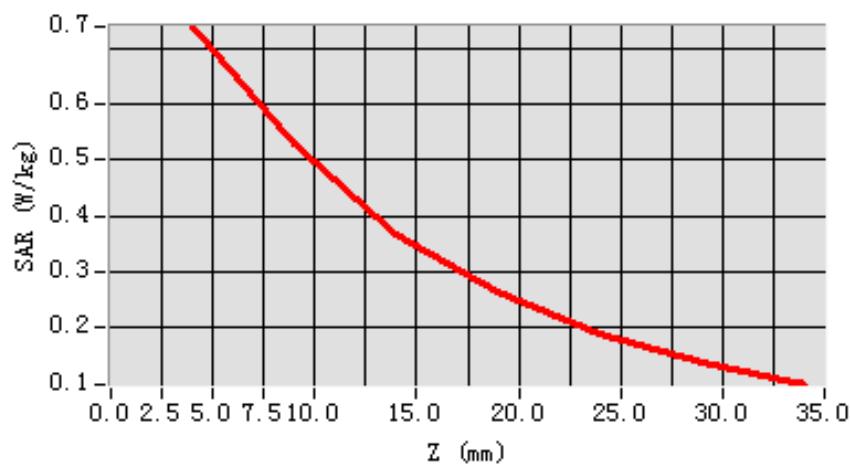

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 13 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	2.040000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

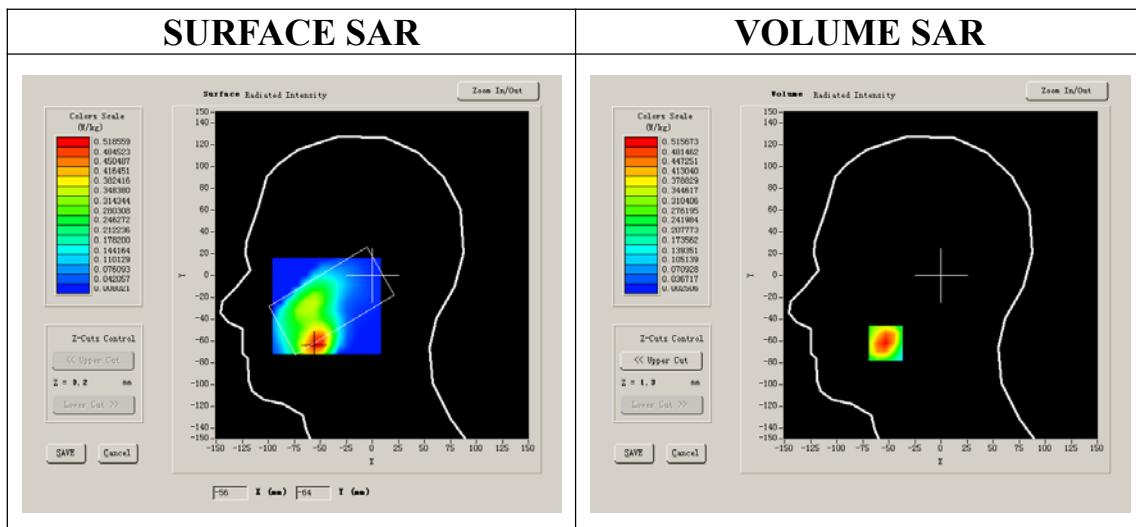



Maximum location: X=-53.00, Y=-62.00

SAR 10g (W/Kg)	0.245802
SAR 1g (W/Kg)	0.493663

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5157	0.2306	0.1124	0.0530	0.0261	0.0139

SAR, Z Axis Scan (X = -53, Y = -62)

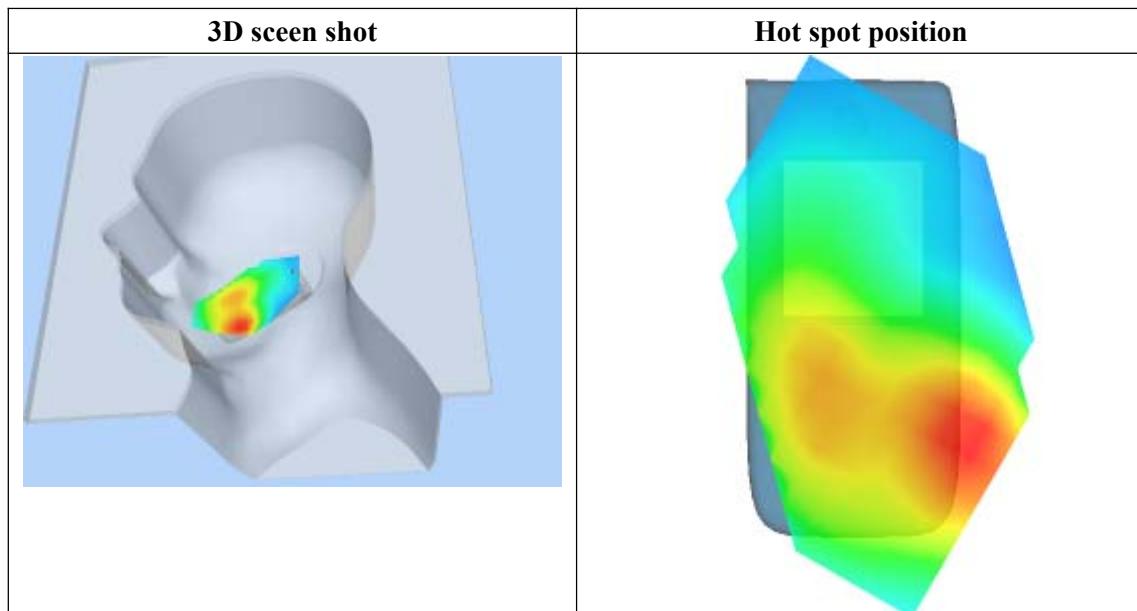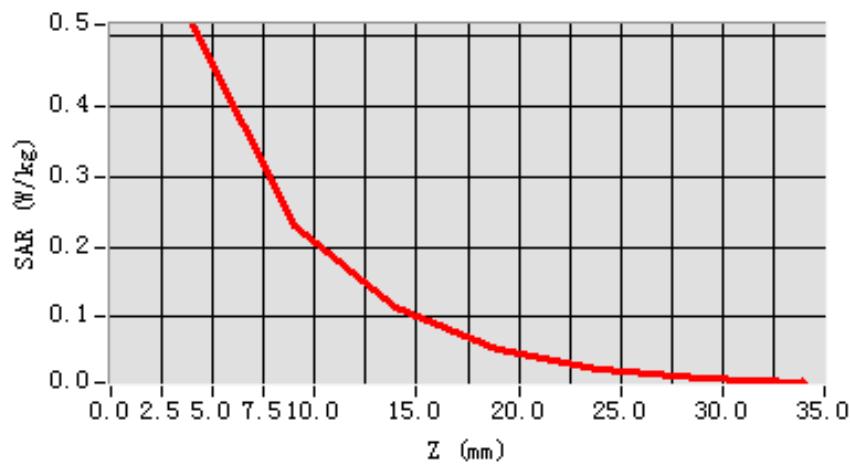

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 27 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	-1.190000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

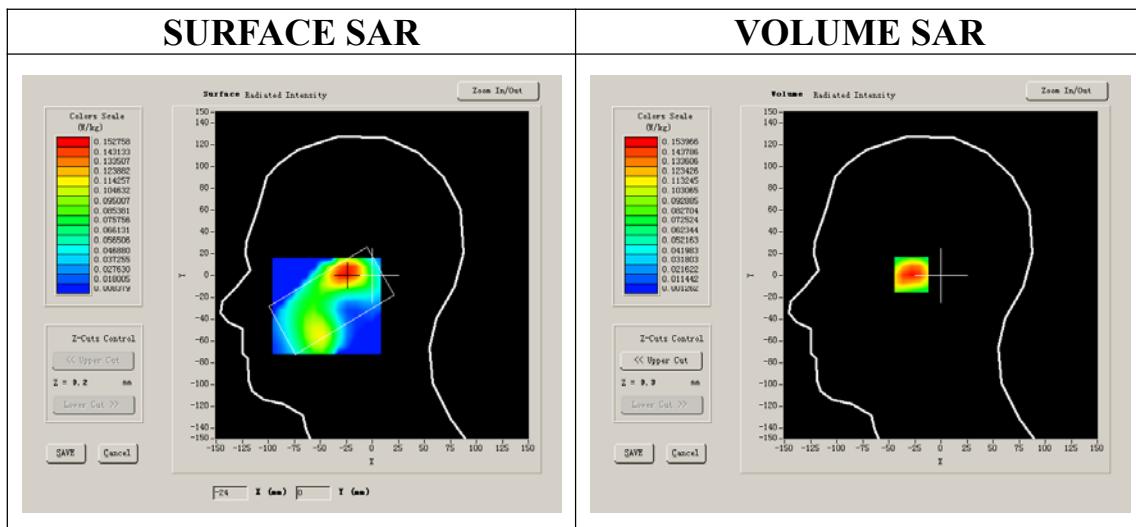



Maximum location: X=-25.00, Y=2.00

SAR 10g (W/Kg)	0.079171
SAR 1g (W/Kg)	0.146635

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1540	0.0819	0.0449	0.0244	0.0122	0.0074

SAR, Z Axis Scan (X = -25, Y = 2)

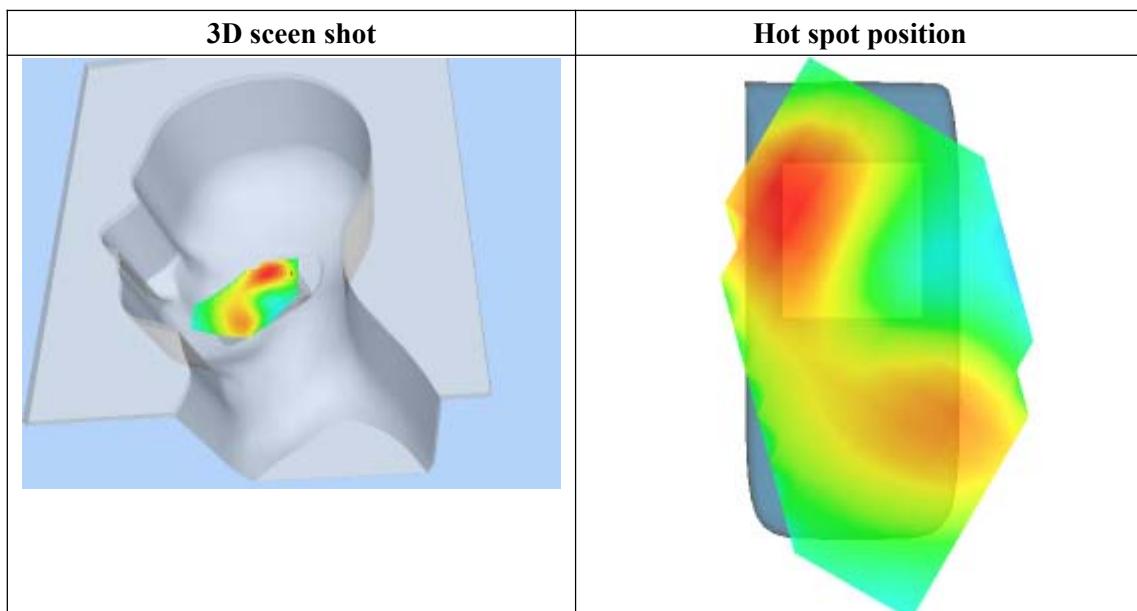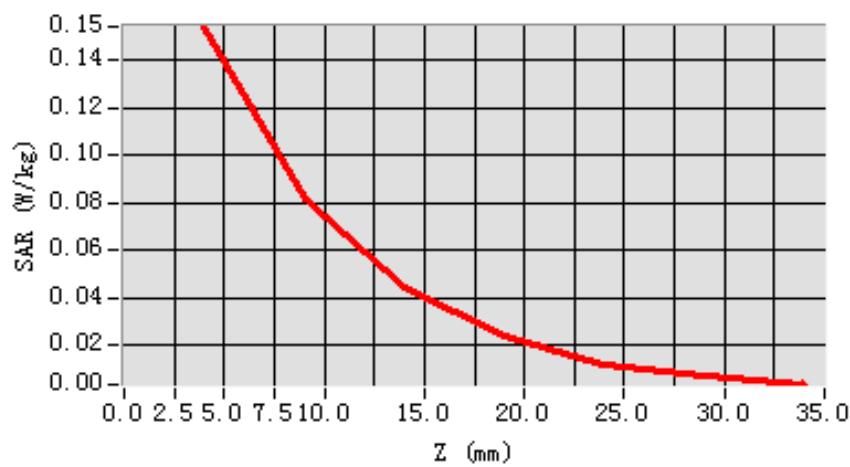

MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 8 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
52.540001	38.509998
14.070000	13.750000
1.469533	1.436111
Power drift (%)	0.590000
Ambient Temperature	22.6°C
Liquid Temperature	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

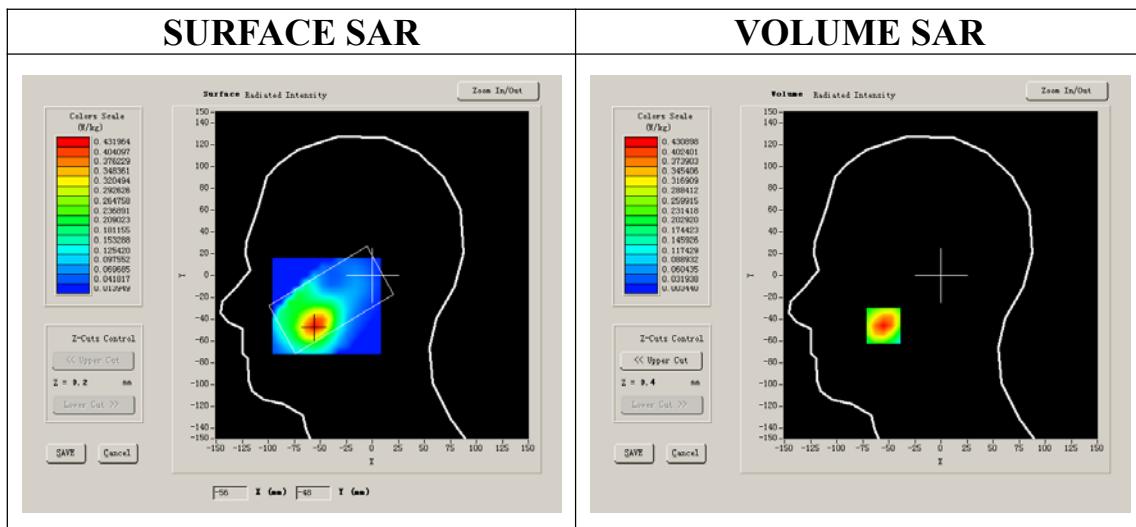



Maximum location: X=-55.00, Y=-46.00

SAR 10g (W/Kg)	0.208311
SAR 1g (W/Kg)	0.406038

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4309	0.2137	0.1050	0.0513	0.0247	0.0116

SAR, Z Axis Scan (X = -55, Y = -46)

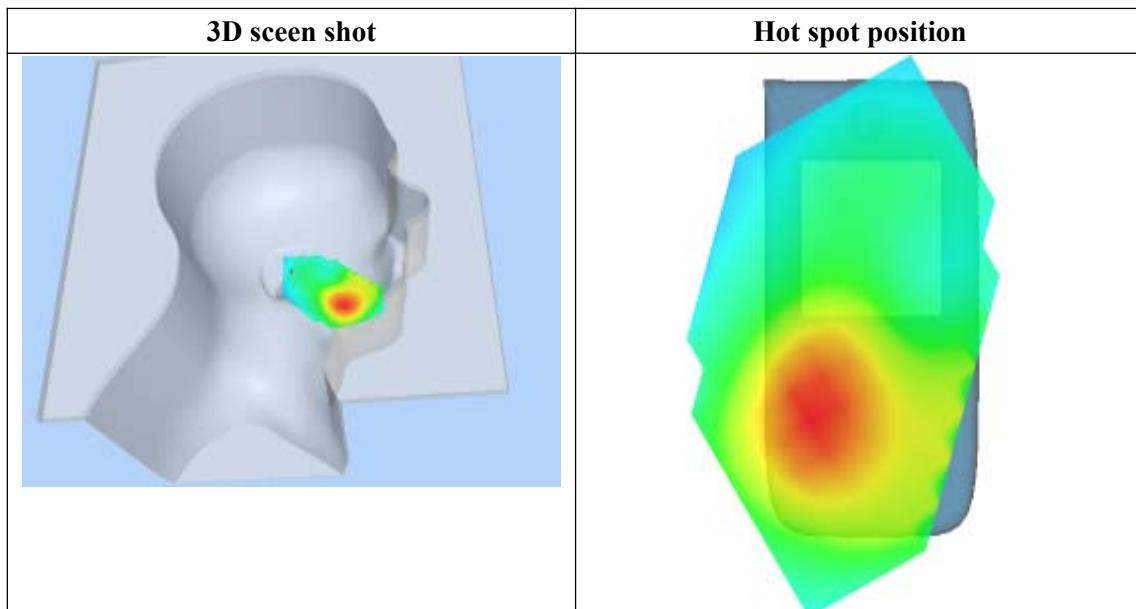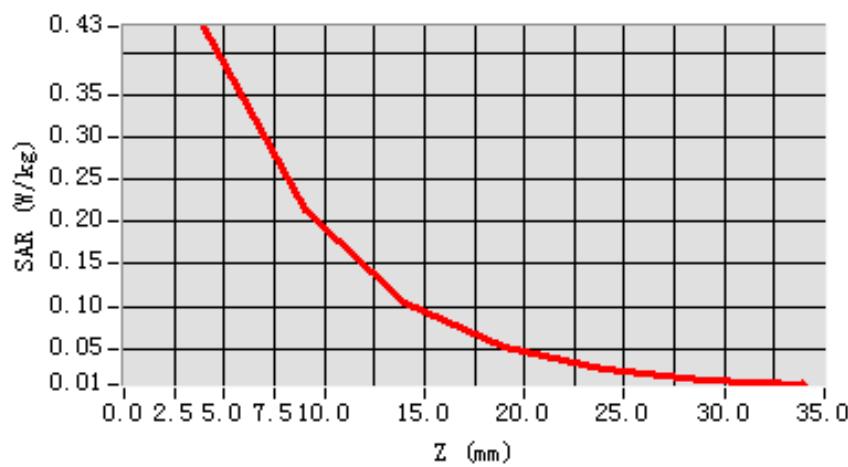

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 24 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift (%)	-0.150000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

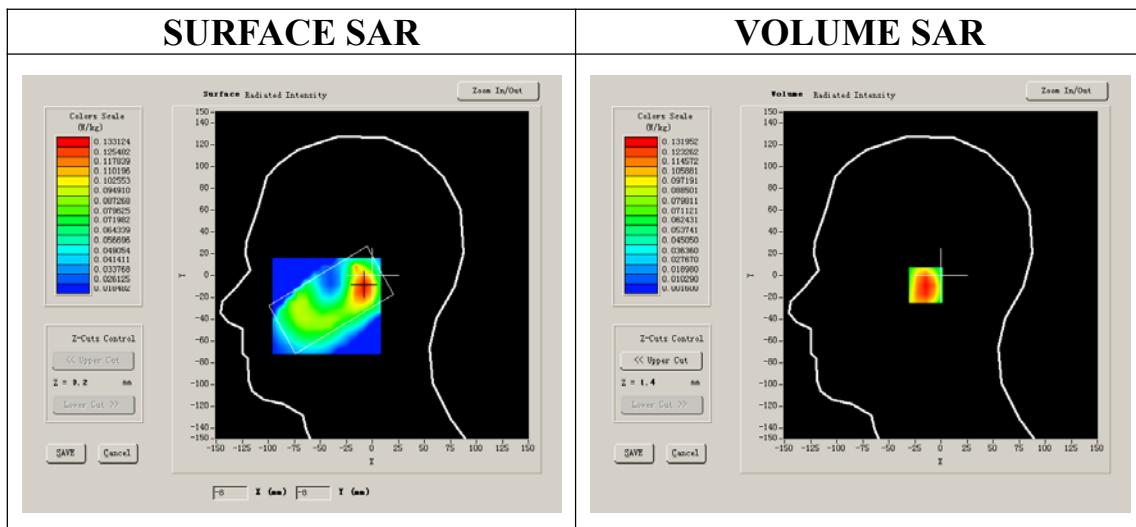



Maximum location: X=-8.00, Y=-9.00

SAR 10g (W/Kg)	0.067995
SAR 1g (W/Kg)	0.125832

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1320	0.0702	0.0369	0.0202	0.0121	0.0072

SAR, Z Axis Scan (X = -8, Y = -9)

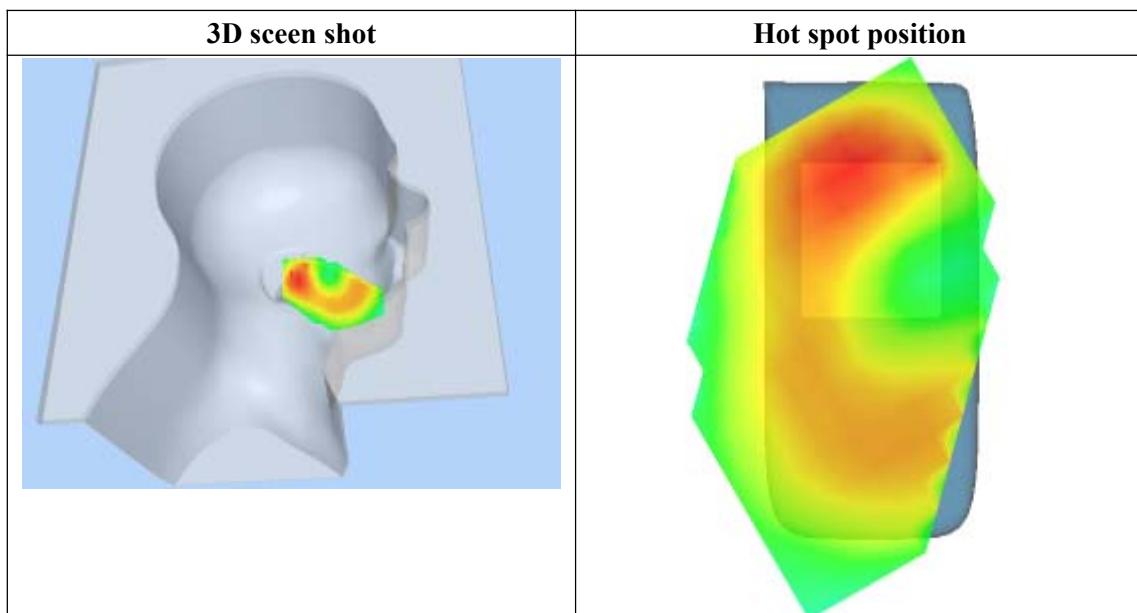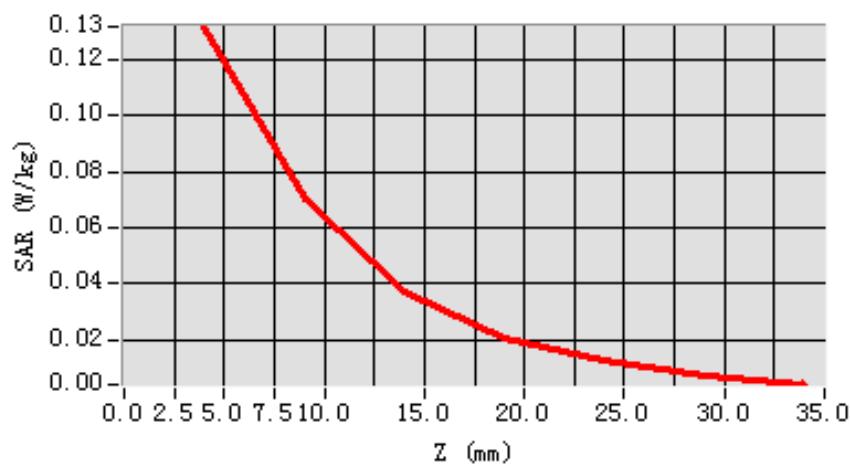

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.560000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

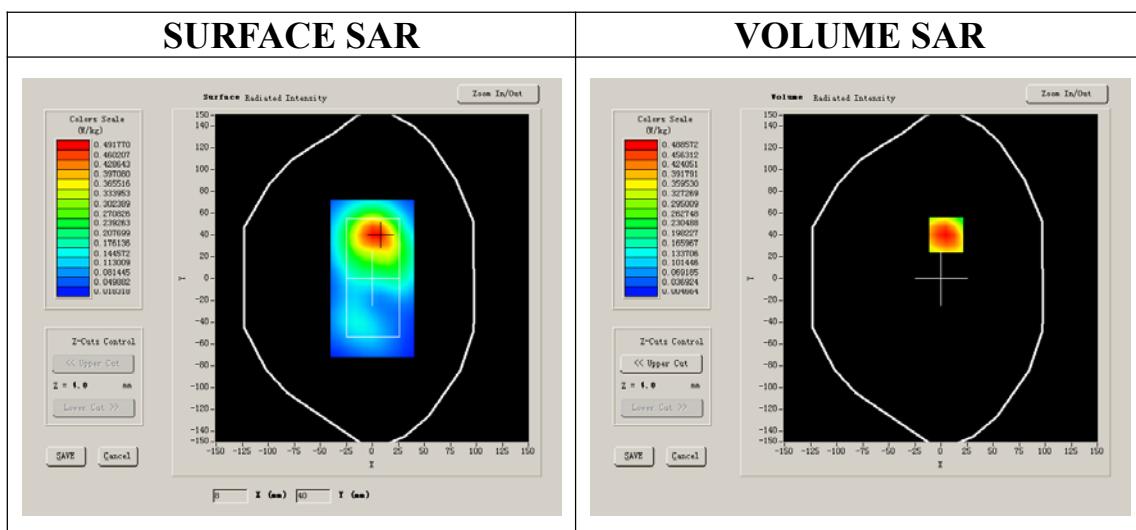



Maximum location: X=5.00, Y=40.00

SAR 10g (W/Kg)	0.260433
SAR 1g (W/Kg)	0.480771

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4999	0.2467	0.1260	0.0631	0.0316	0.0181

SAR, Z Axis Scan (X = 5, Y = 40)

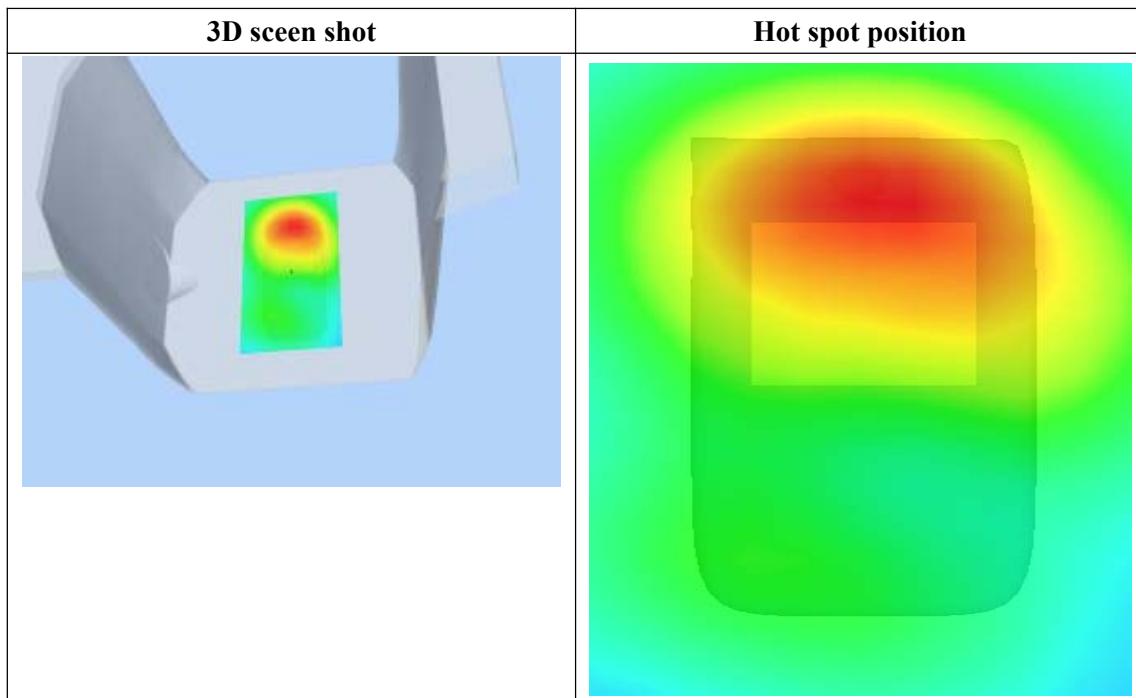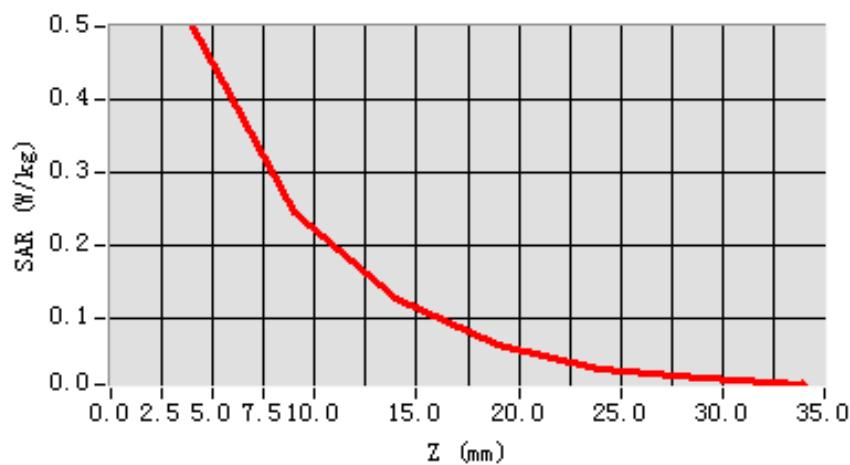

MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 3 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.970000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

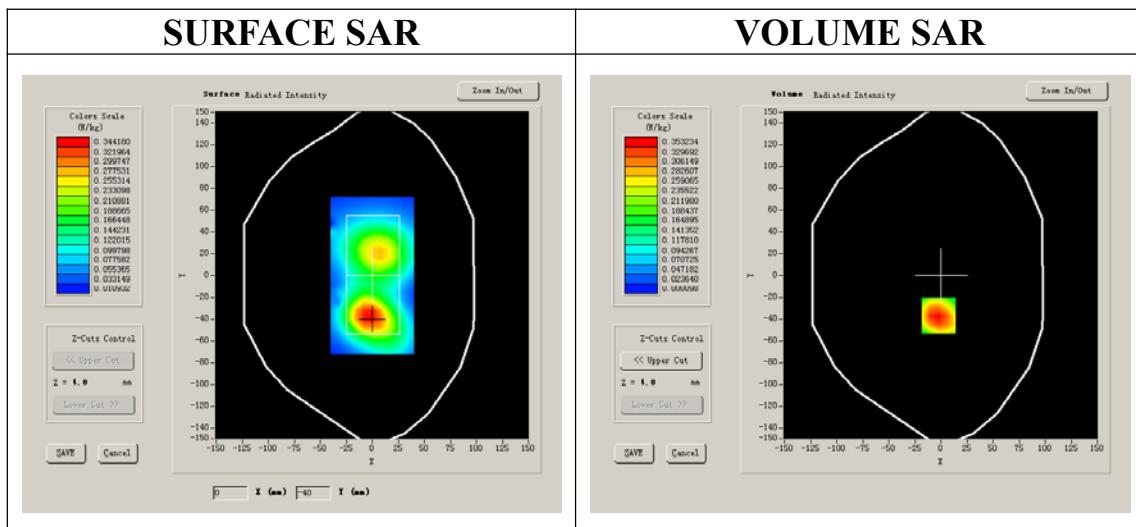



Maximum location: X=-2.00, Y=-37.00

SAR 10g (W/Kg)	0.197220
SAR 1g (W/Kg)	0.372706

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3846	0.1964	0.0968	0.0495	0.0256	0.0132

SAR, Z Axis Scan (X = -2, Y = -37)

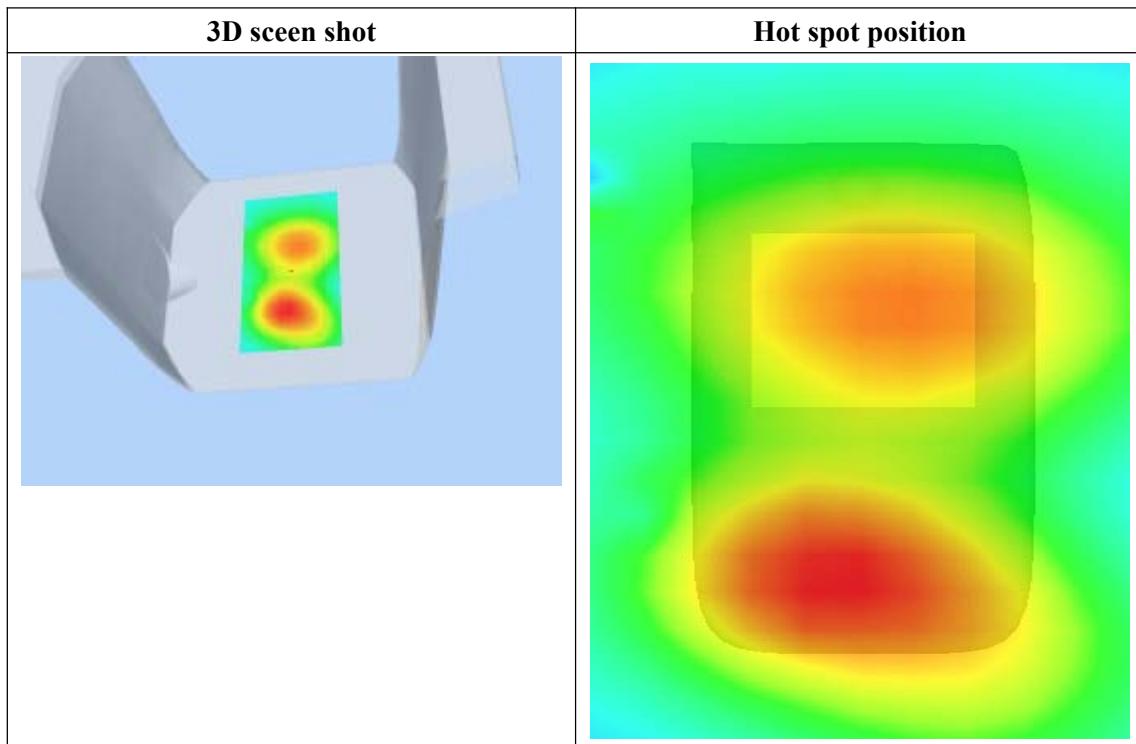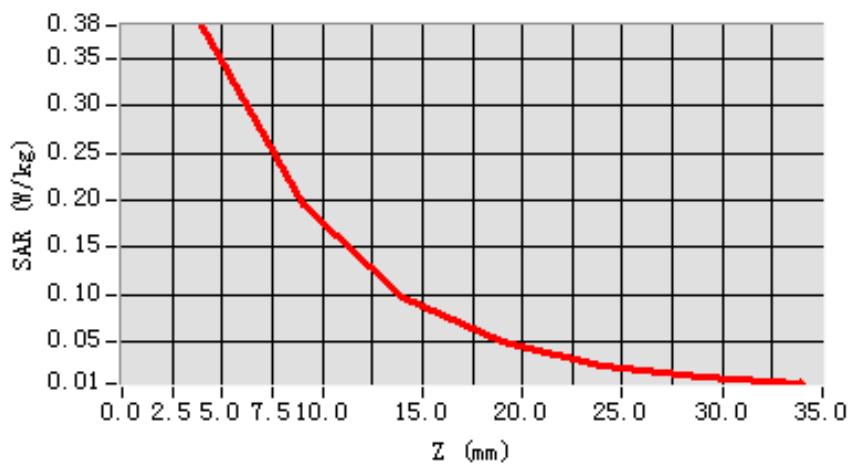

MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	1.210000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

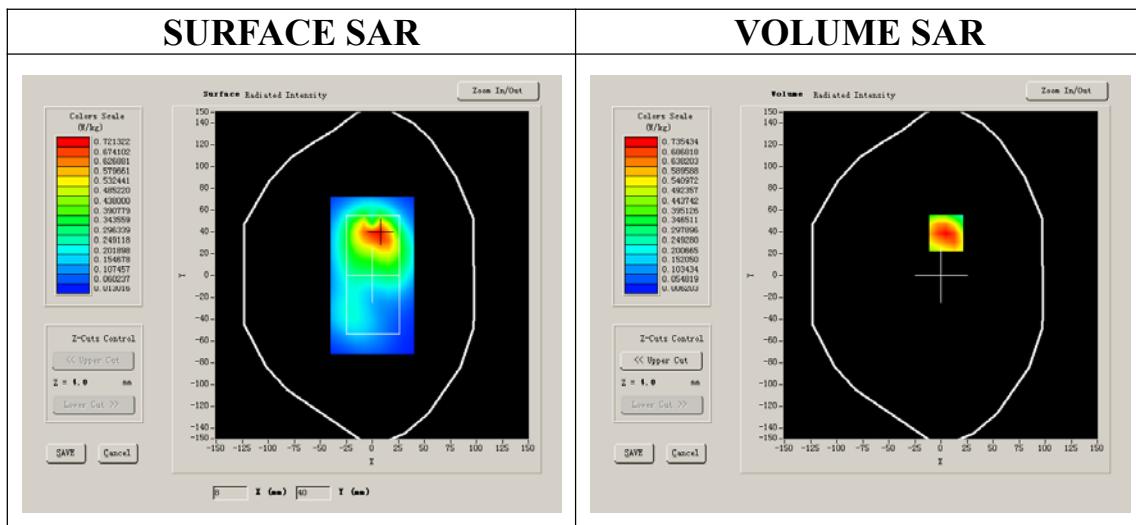



Maximum location: X=5.00, Y=39.00

SAR 10g (W/Kg)	0.401054
SAR 1g (W/Kg)	0.757980

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7965	0.3932	0.1953	0.0969	0.0488	0.0264

SAR, Z Axis Scan (X = 5, Y = 39)

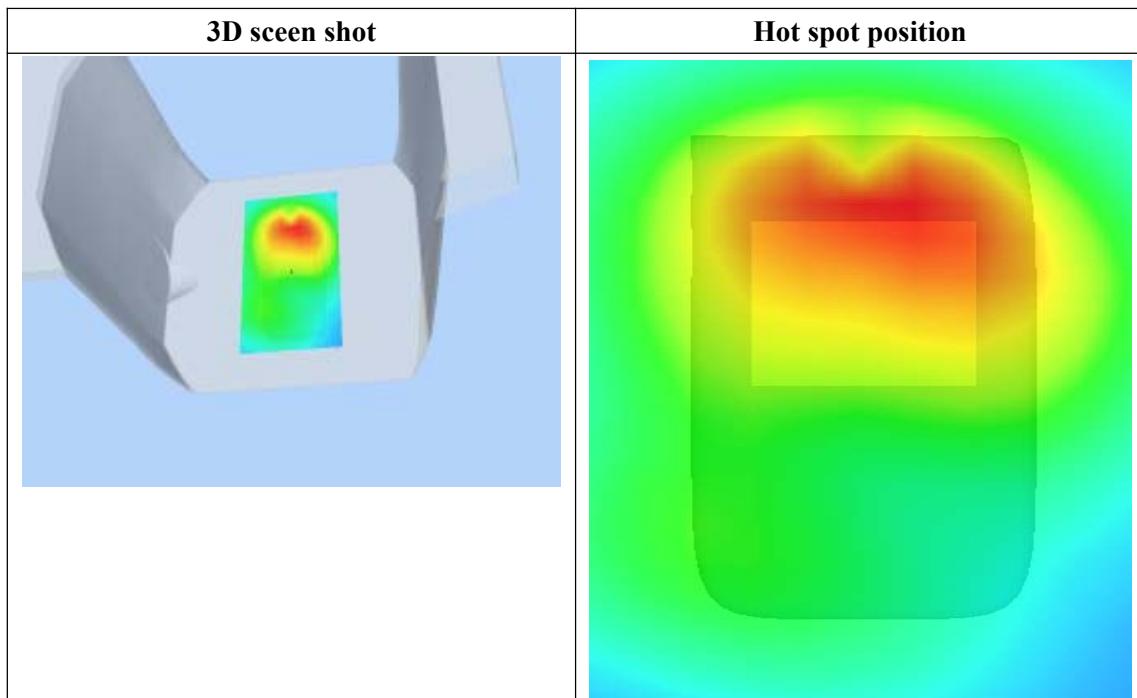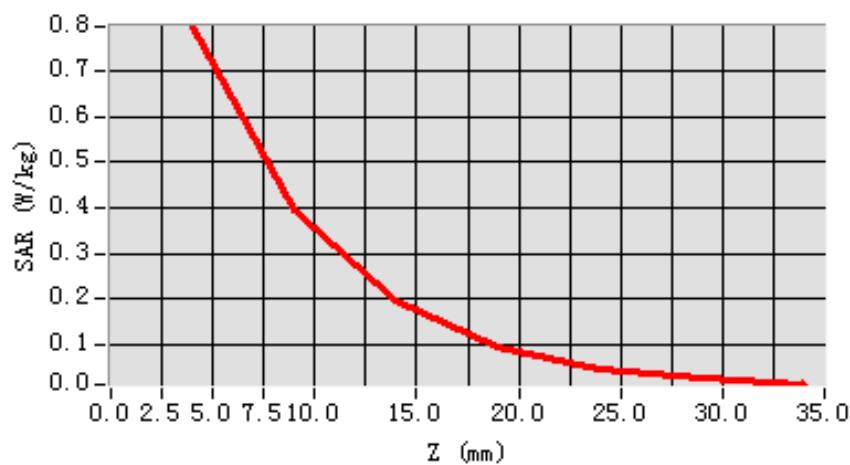

MEASUREMENT 19

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.170000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

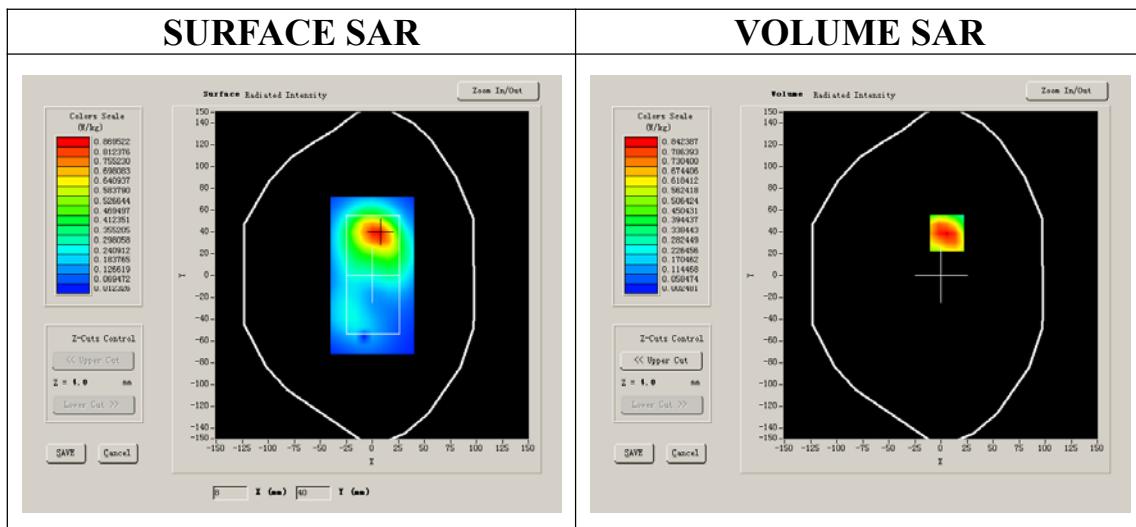



Maximum location: X=6.00, Y=39.00

SAR 10g (W/Kg)	0.432102
SAR 1g (W/Kg)	0.824287

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8620	0.4317	0.2108	0.1064	0.0527	0.0280

SAR, Z Axis Scan (X = 6, Y = 39)

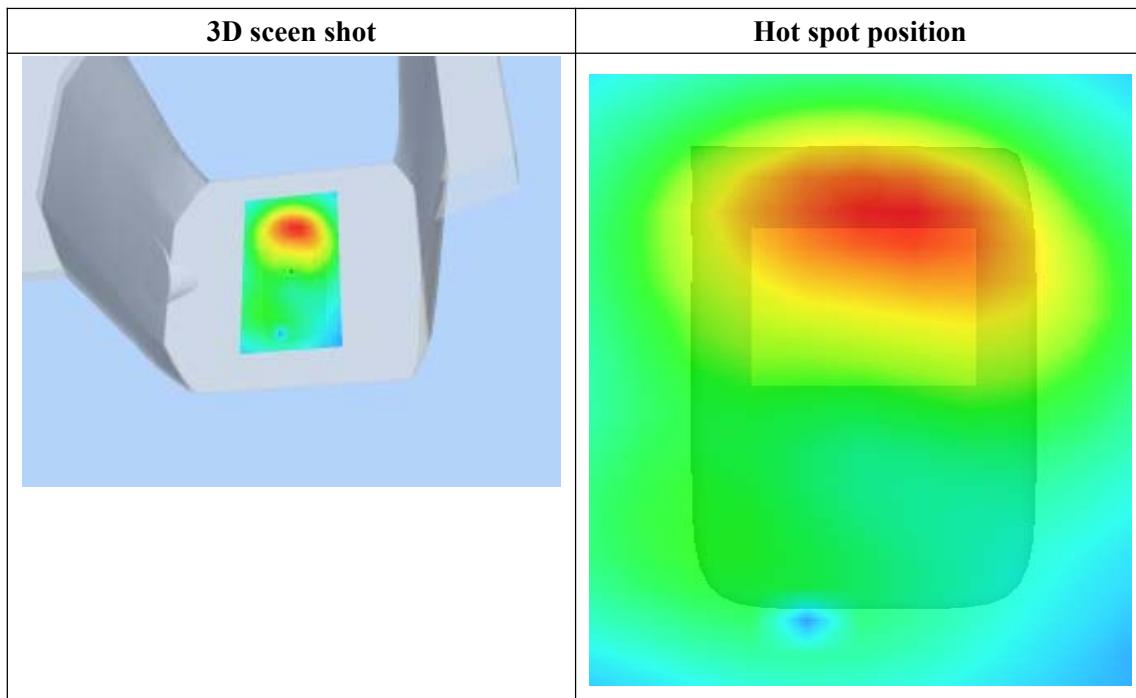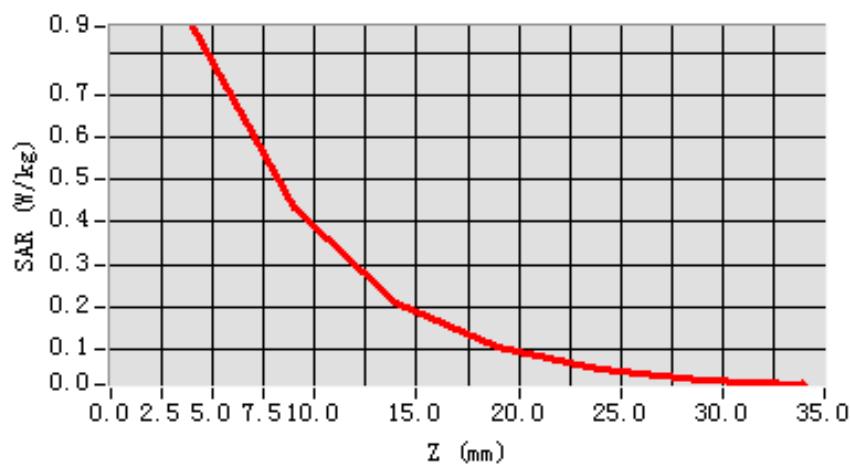

MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.492827
Power drift (%)	-1.190000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

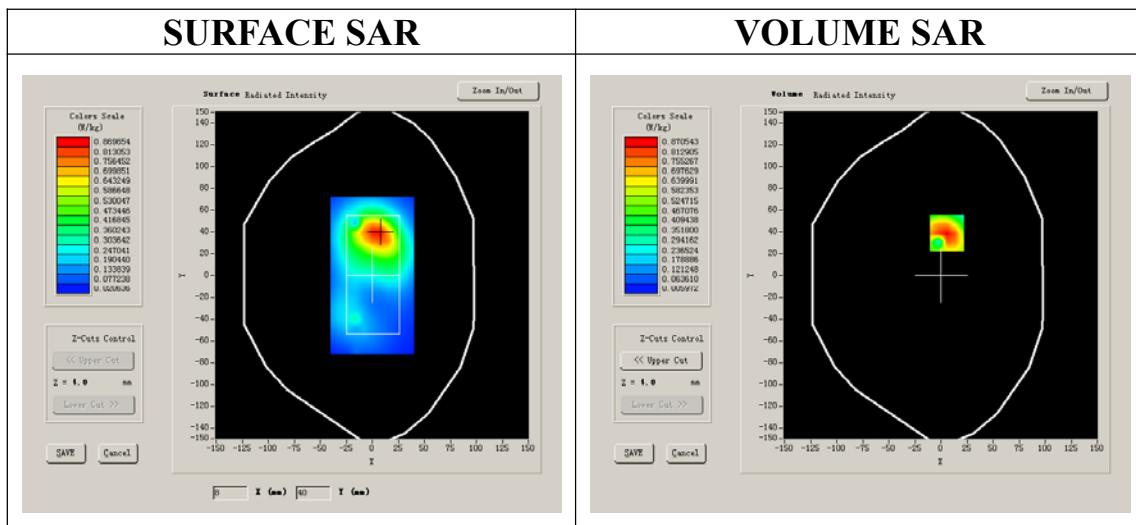



Maximum location: X=6.00, Y=39.00

SAR 10g (W/Kg)	0.430094
SAR 1g (W/Kg)	0.850071

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9010	0.4156	0.2020	0.0996	0.0412	0.0158

SAR, Z Axis Scan (X = 6, Y = 39)

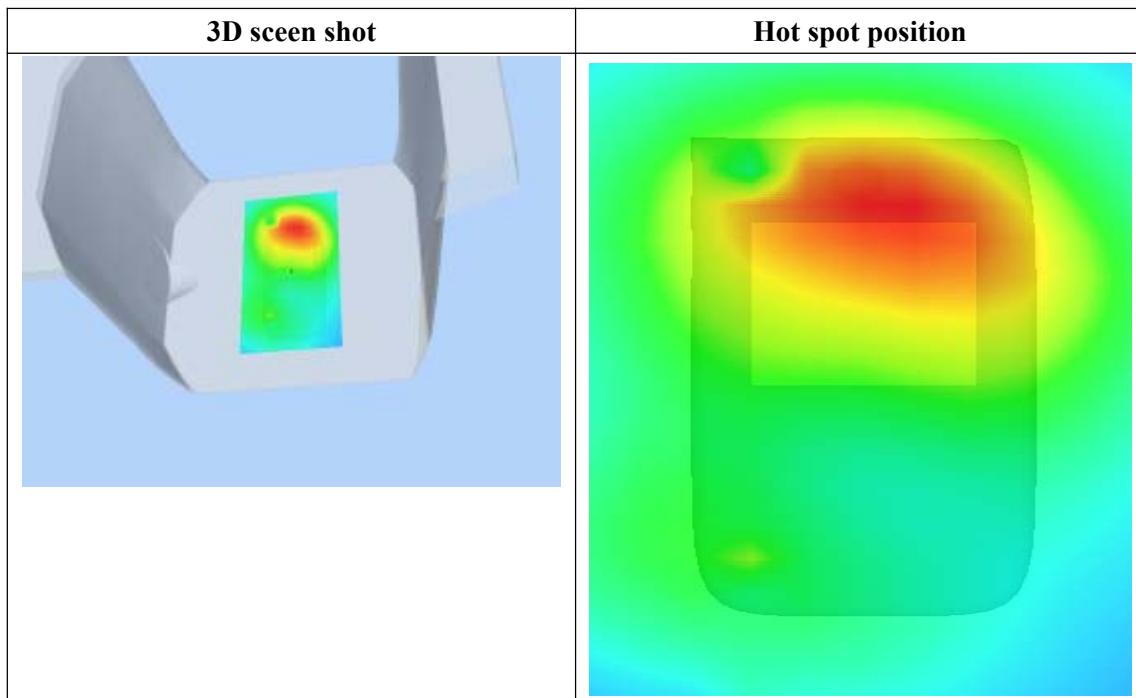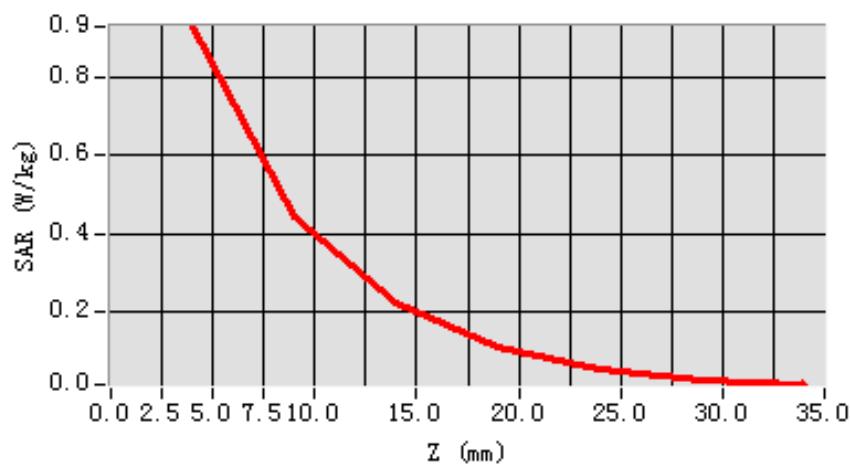

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.492827
Power drift (%)	-0.870000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

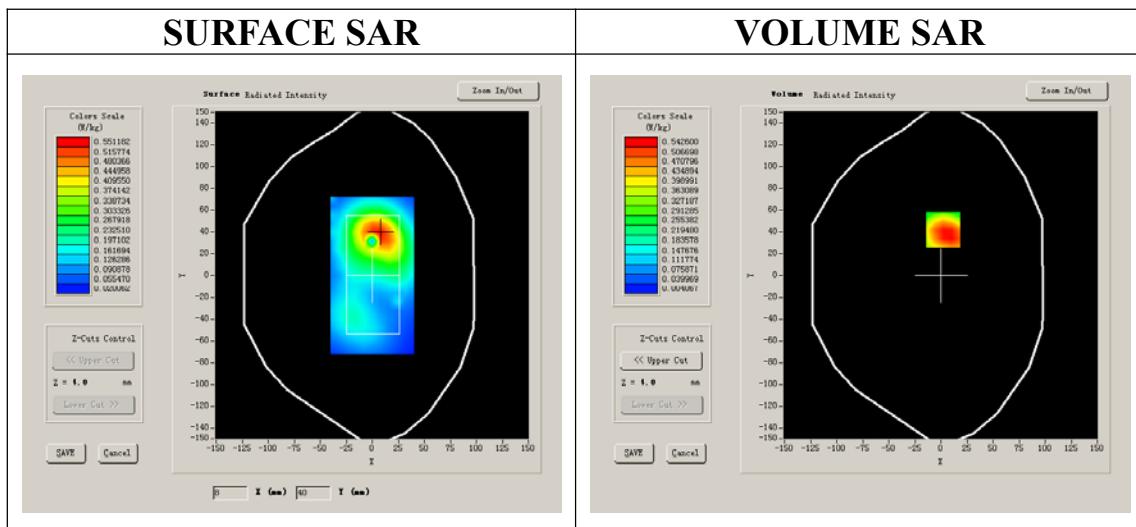



Maximum location: X=2.00, Y=42.00

SAR 10g (W/Kg)	0.297583
SAR 1g (W/Kg)	0.586919

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5486	0.2721	0.1401	0.0712	0.0340	0.0196

SAR, Z Axis Scan (X = 2, Y = 42)

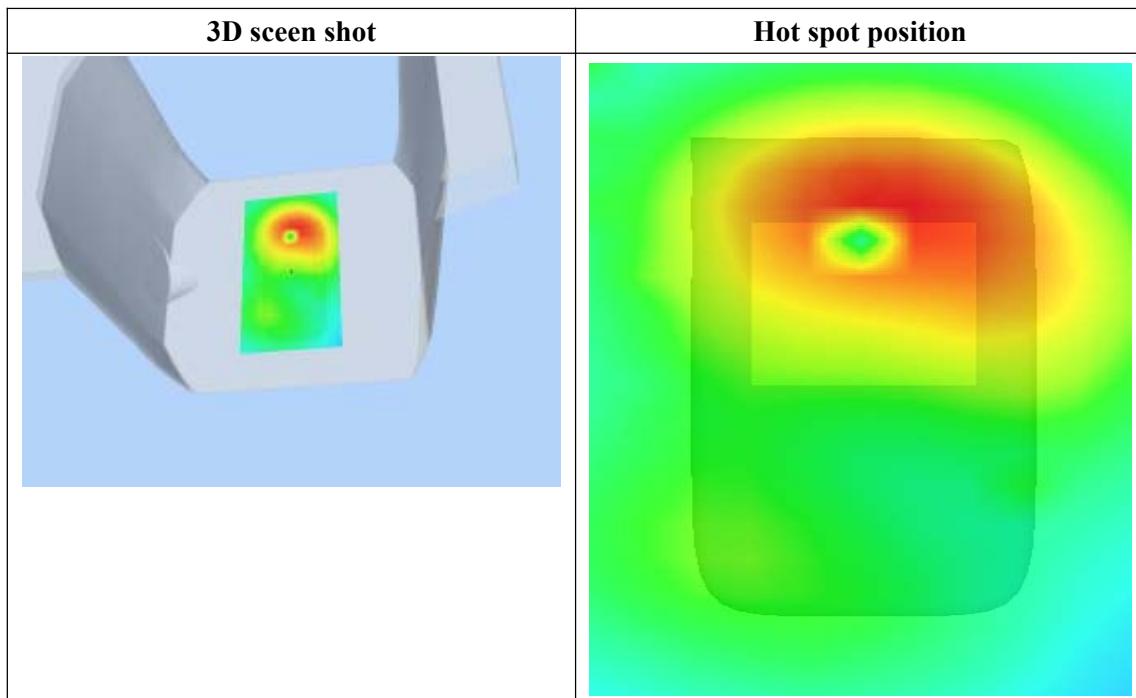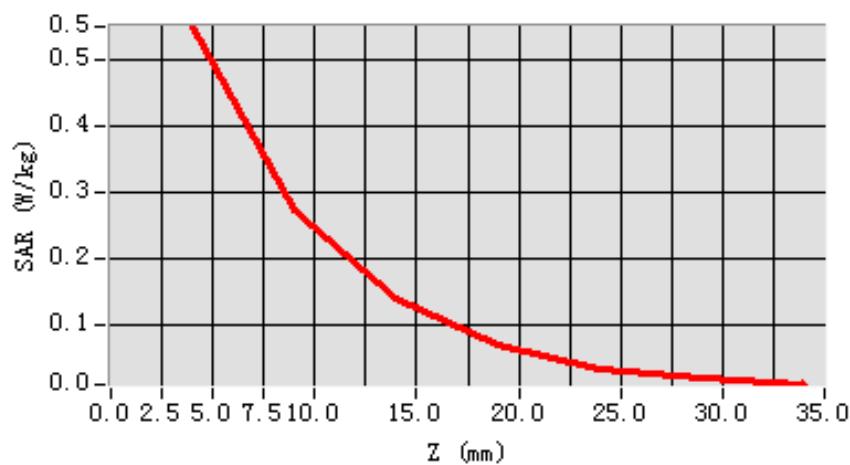

MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	EDGE(2 slot)

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.492827
Power drift (%)	-2.820000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:4

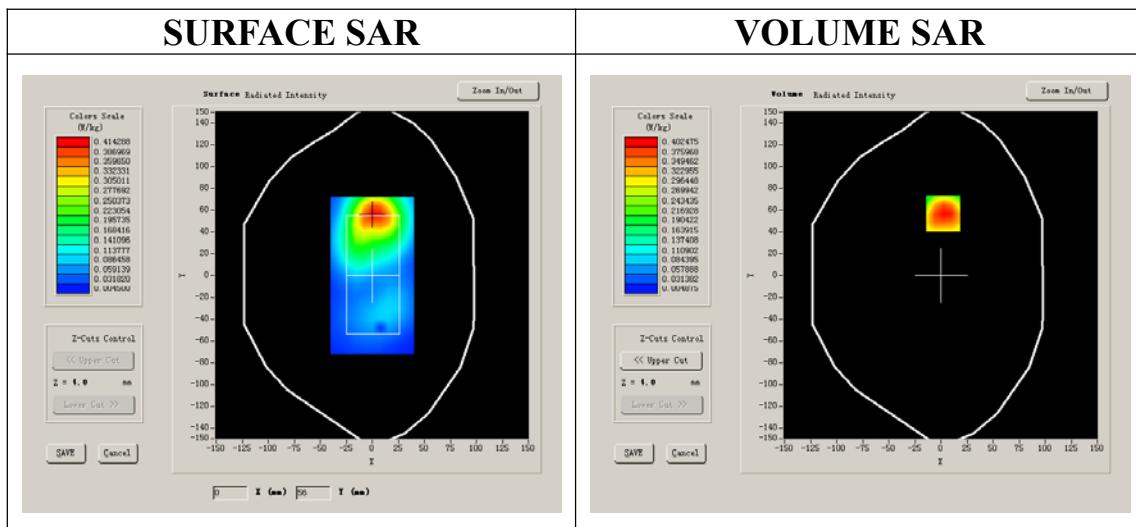



Maximum location: X=2.00, Y=57.00

SAR 10g (W/Kg)	0.219887
SAR 1g (W/Kg)	0.416725

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4304	0.2078	0.1006	0.0501	0.0252	0.0138

SAR, Z Axis Scan (X = 2, Y = 57)

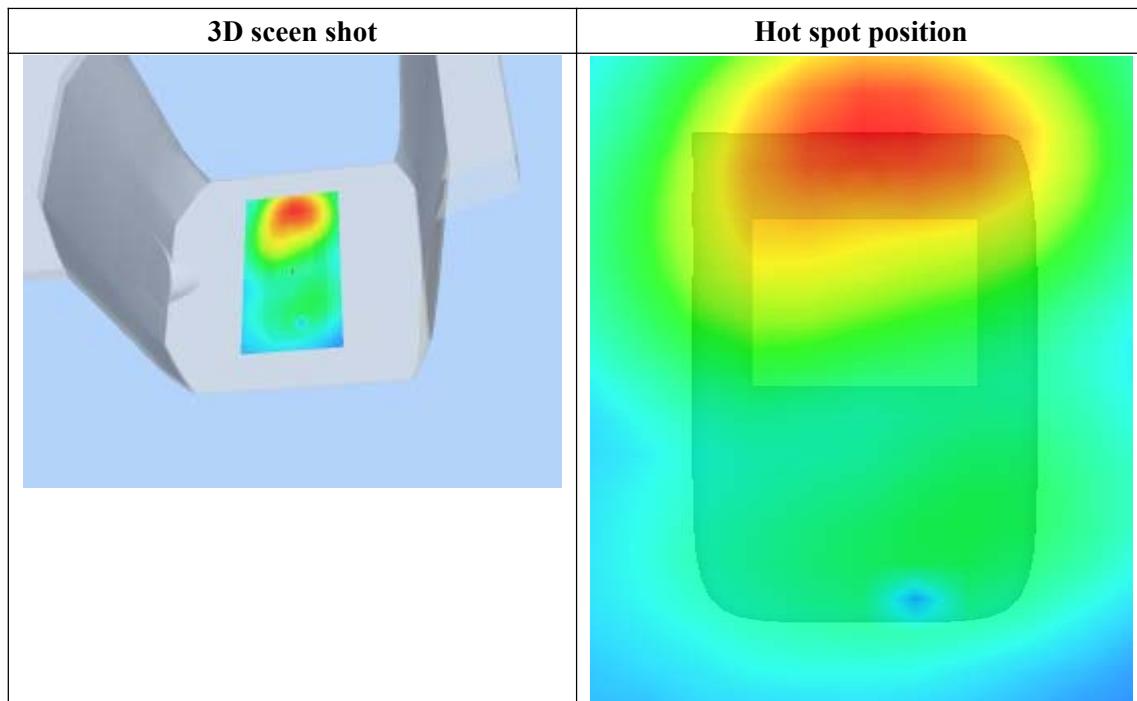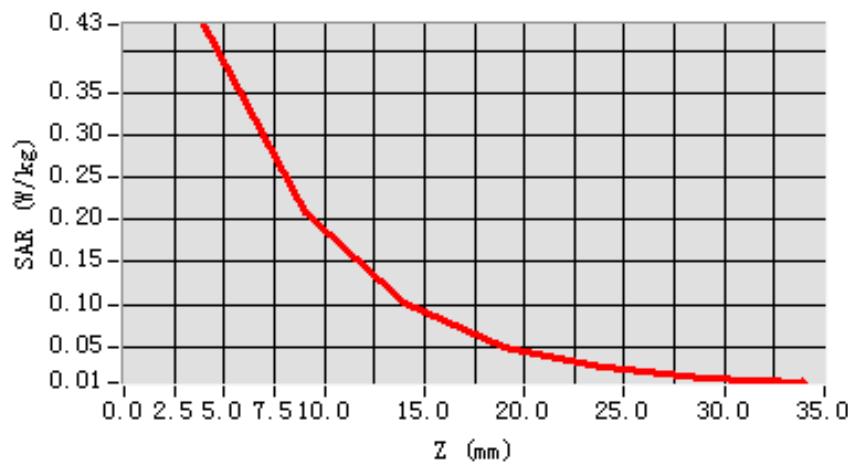

MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 59 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	0.450000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

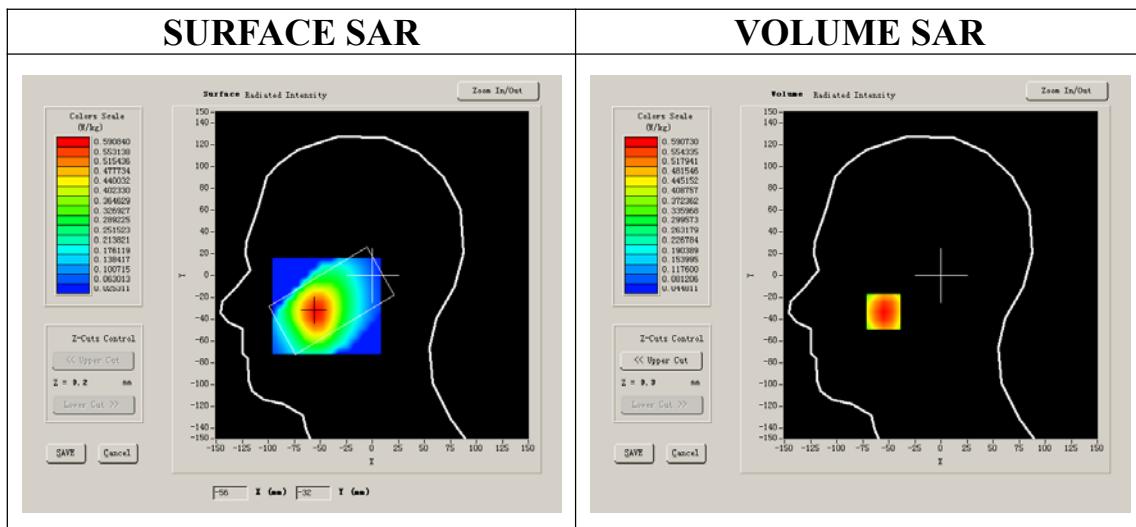



Maximum location: X=-55.00, Y=-33.00

SAR 10g (W/Kg)	0.388599
SAR 1g (W/Kg)	0.566528

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5907	0.4239	0.3054	0.2202	0.1560	0.1113

SAR, Z Axis Scan (X = -55, Y = -33)

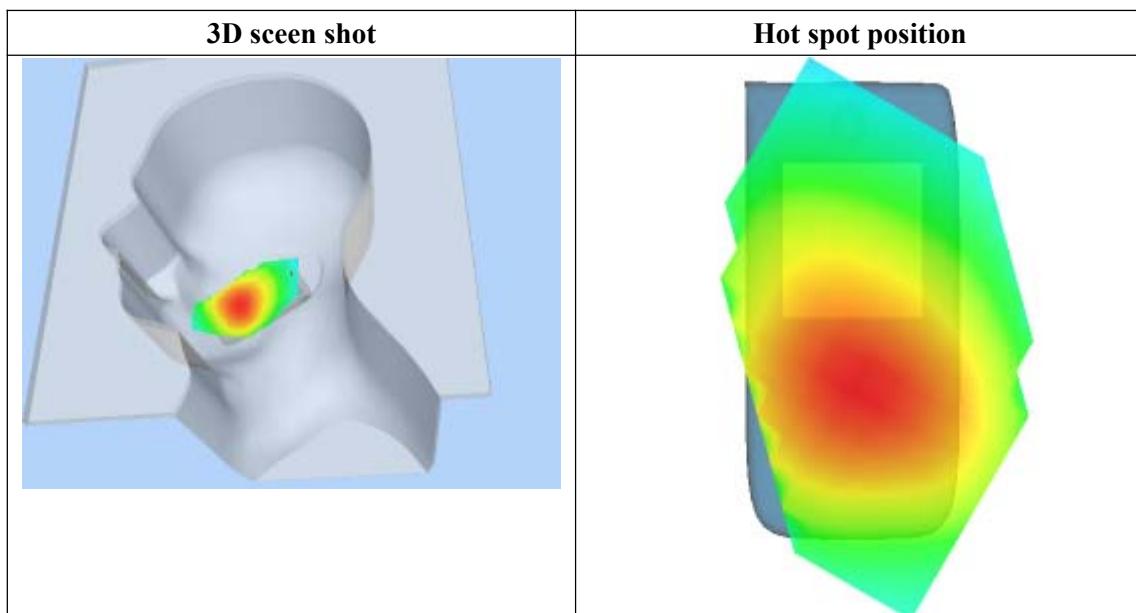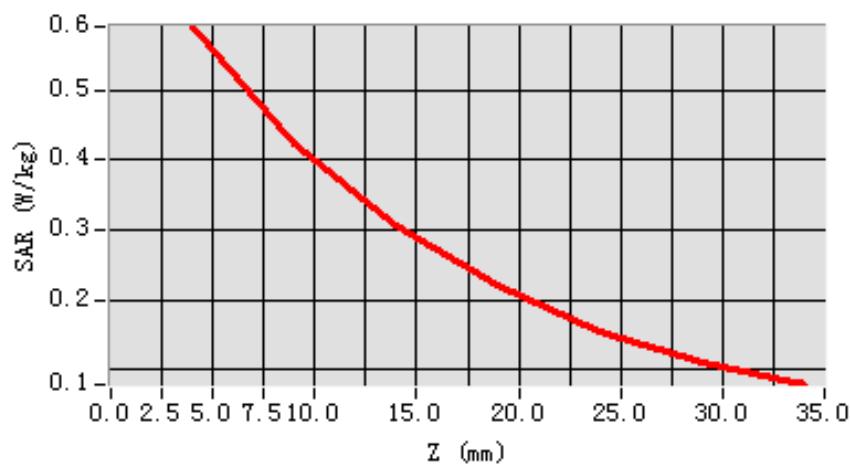

MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 41 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	0.020000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

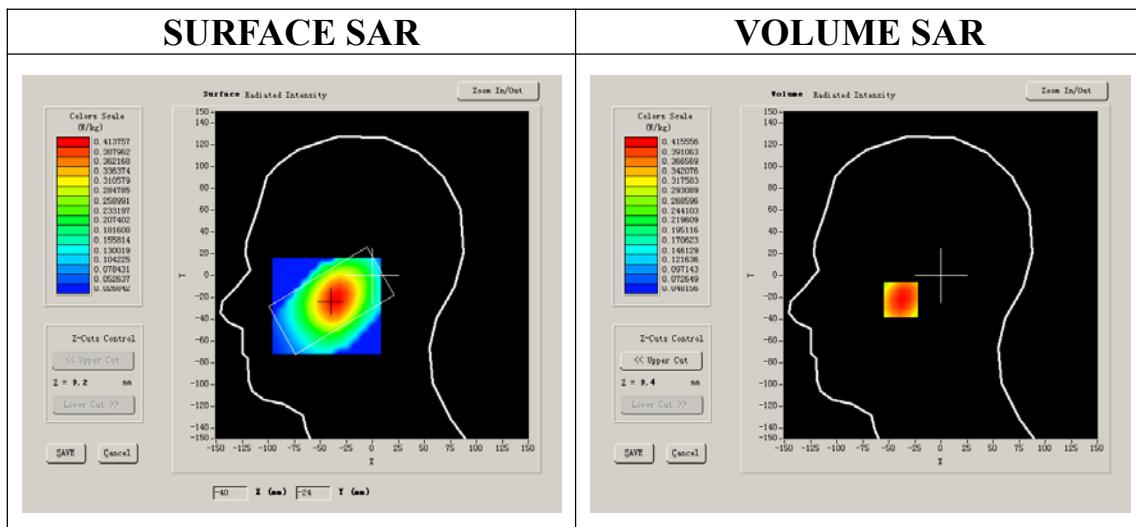



Maximum location: X=-36.00, Y=-22.00

SAR 10g (W/Kg)	0.293117
SAR 1g (W/Kg)	0.401837

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4156	0.3190	0.2454	0.1860	0.1395	0.1017

SAR, Z Axis Scan (X = -36, Y = -22)

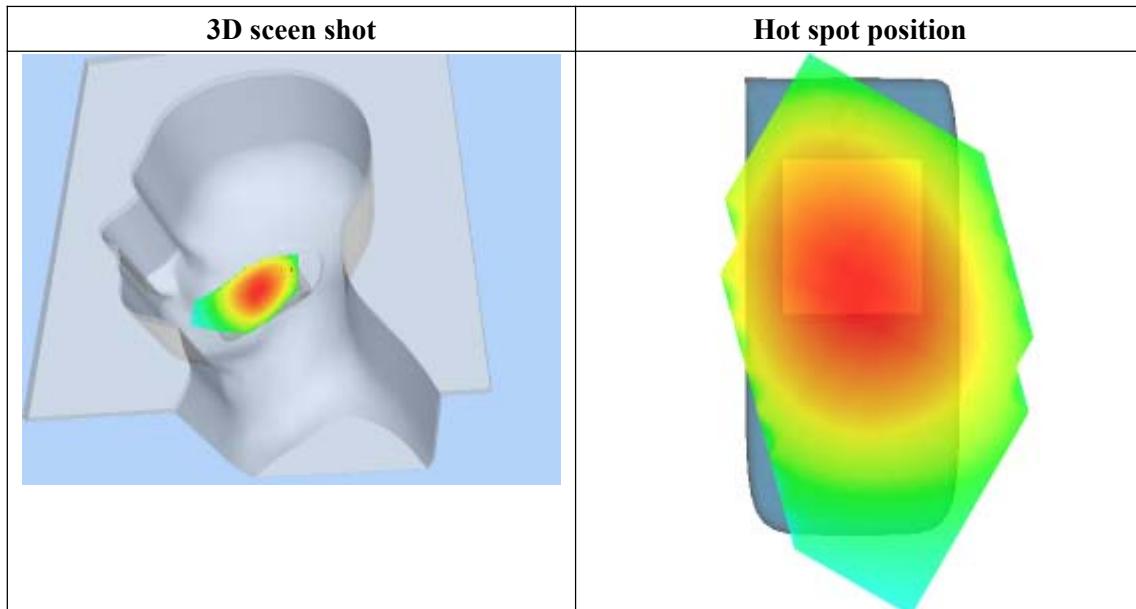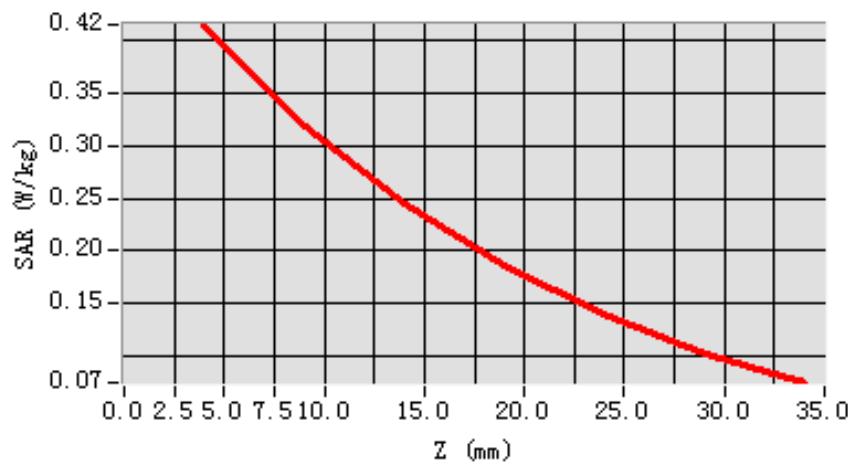

MEASUREMENT 25

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 53 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-0.500000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

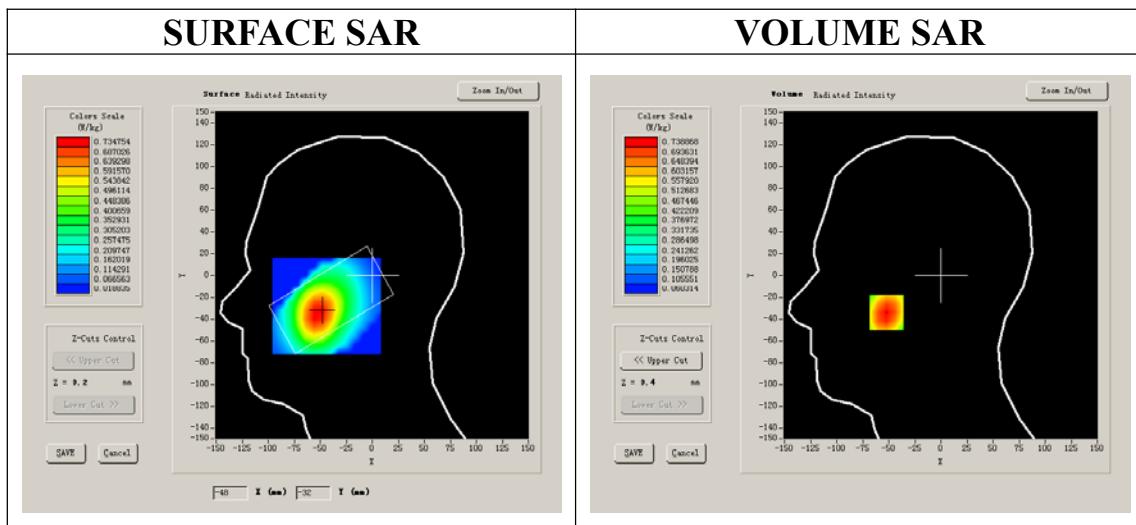



Maximum location: X=-52.00, Y=-34.00

SAR 10g (W/Kg)	0.489694
SAR 1g (W/Kg)	0.710674

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7389	0.5360	0.3947	0.2877	0.2065	0.1474

SAR, Z Axis Scan (X = -52, Y = -34)

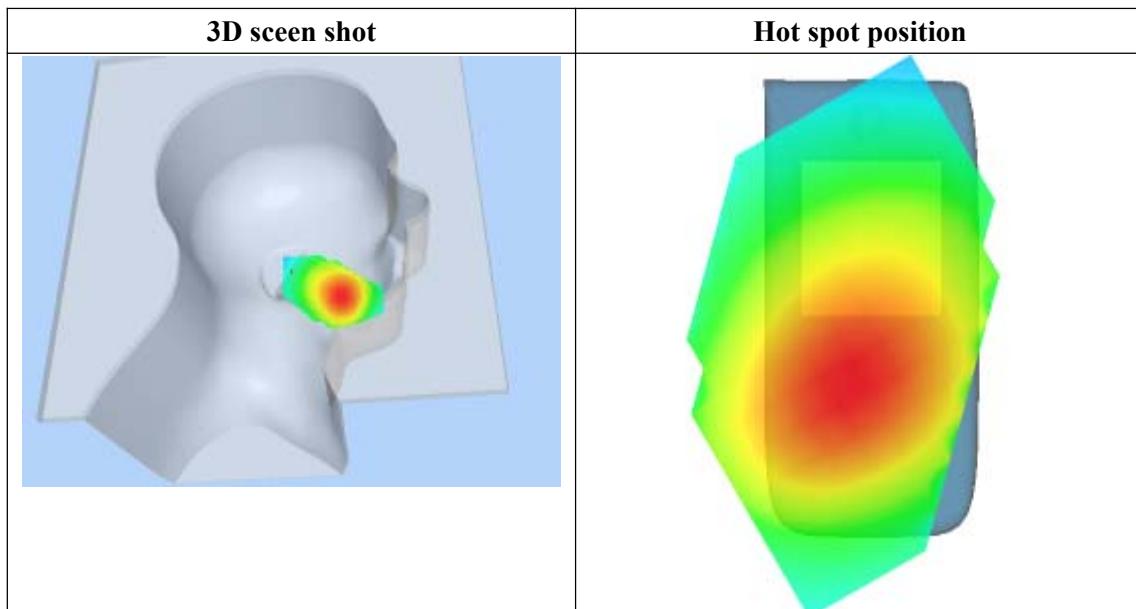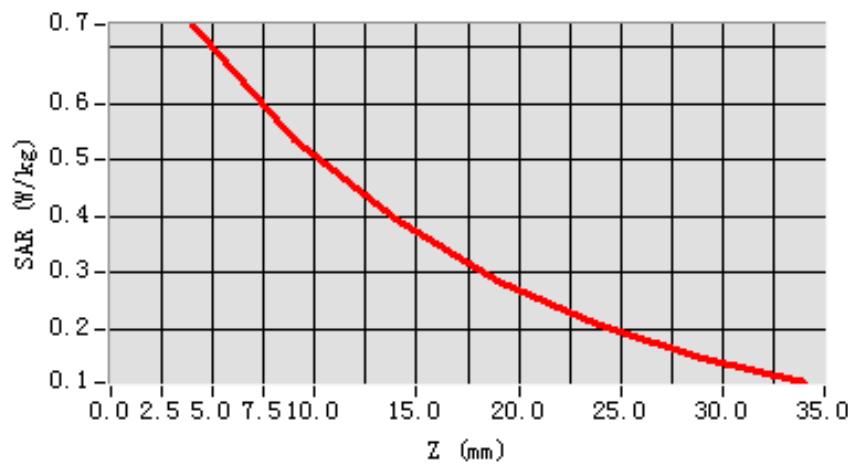

MEASUREMENT 26

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 40 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift (%)	-0.380000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.479, 25.214, 27.196
Crest factor:	1:1

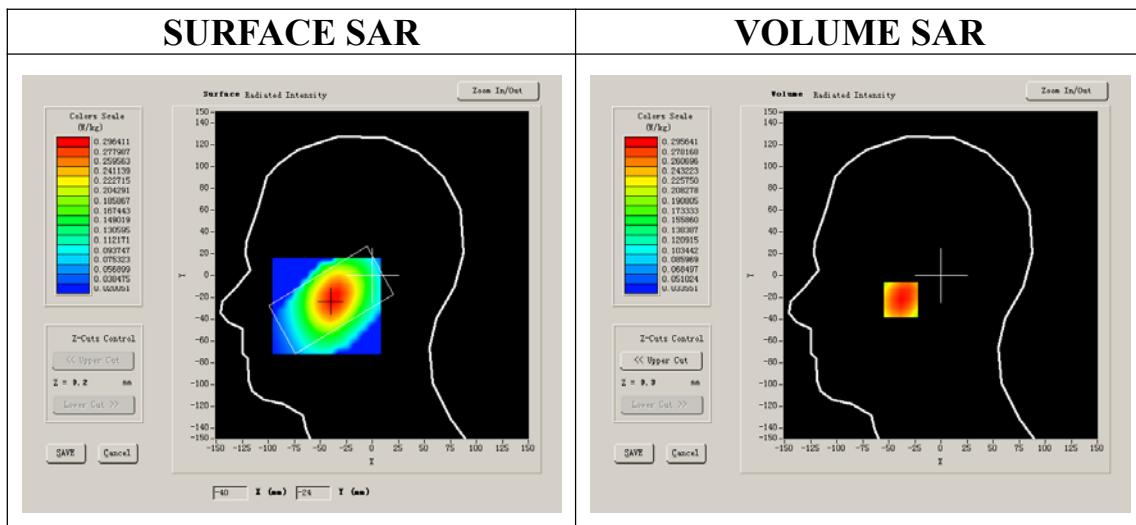



Maximum location: X=-38.00, Y=-22.00

SAR 10g (W/Kg)	0.206885
SAR 1g (W/Kg)	0.285256

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2956	0.2250	0.1729	0.1311	0.0980	0.0714

SAR, Z Axis Scan (X = -38, Y = -22)

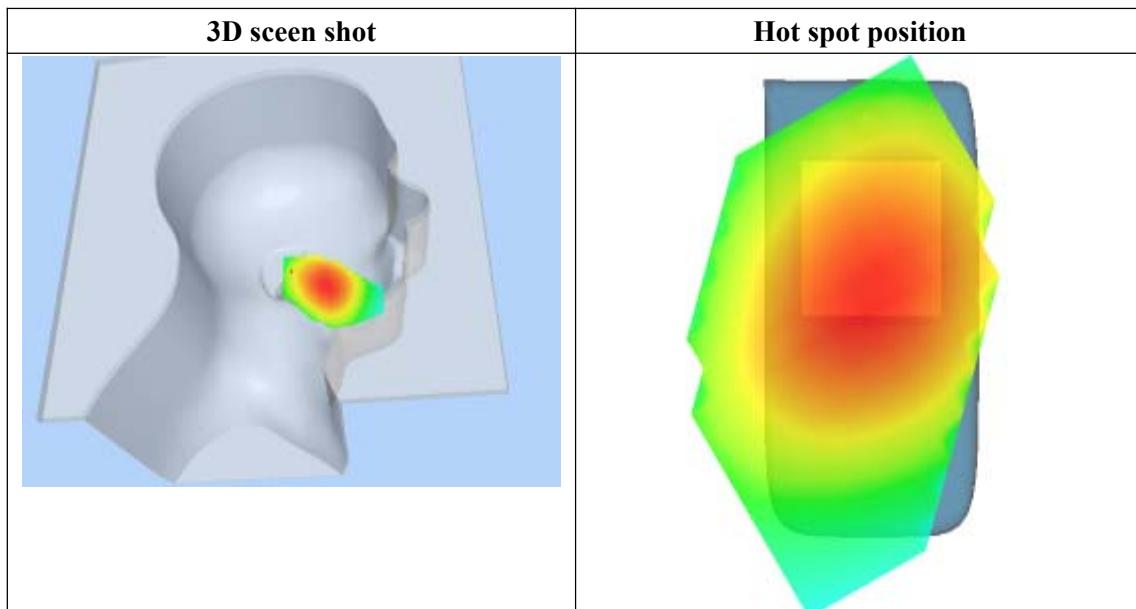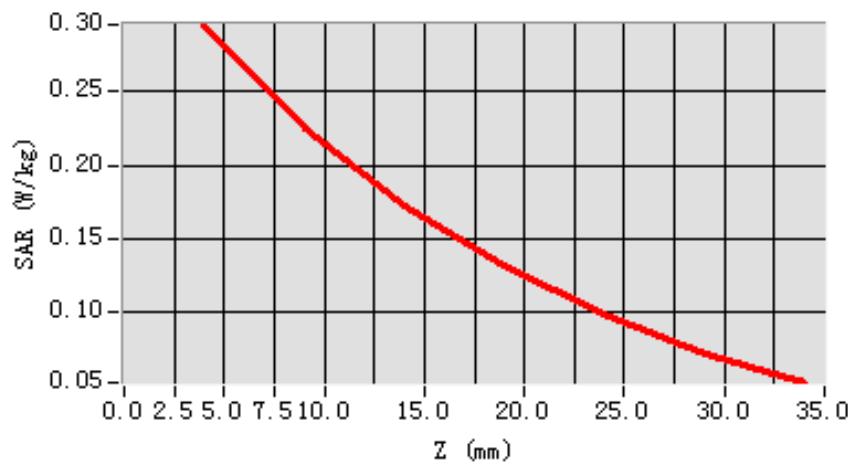

MEASUREMENT 27

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4132):

Frequency (MHz)	826.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	0.090000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

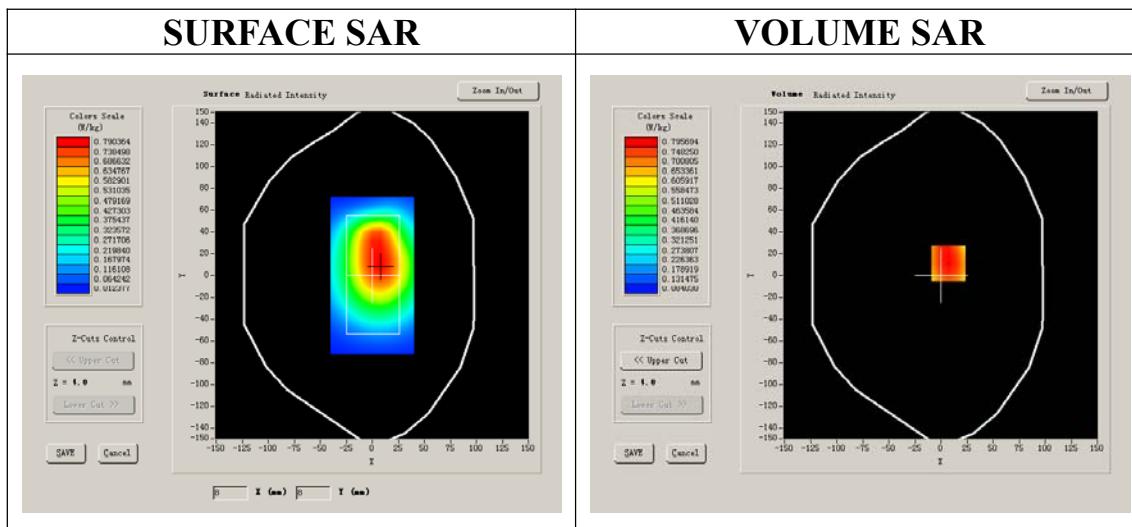



Maximum location: X=7.00, Y=11.00

SAR 10g (W/Kg)	0.665345
SAR 1g (W/Kg)	0.928191

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9592	0.7106	0.5268	0.3883	0.2850	0.2082

SAR, Z Axis Scan (X = 7, Y = 11)

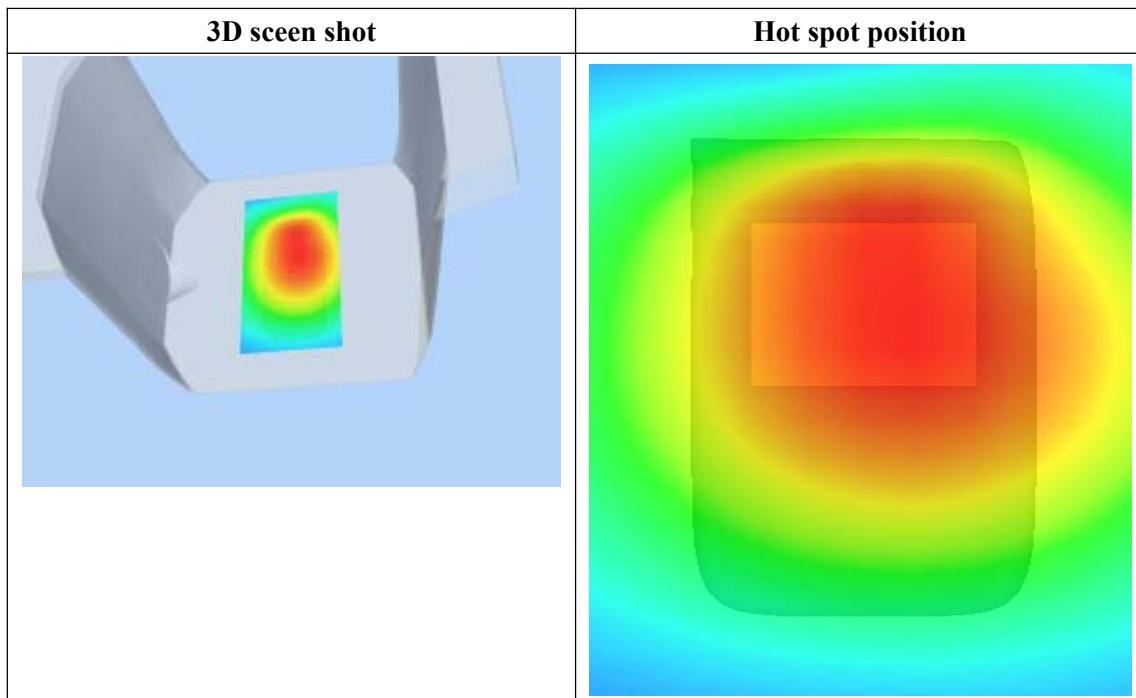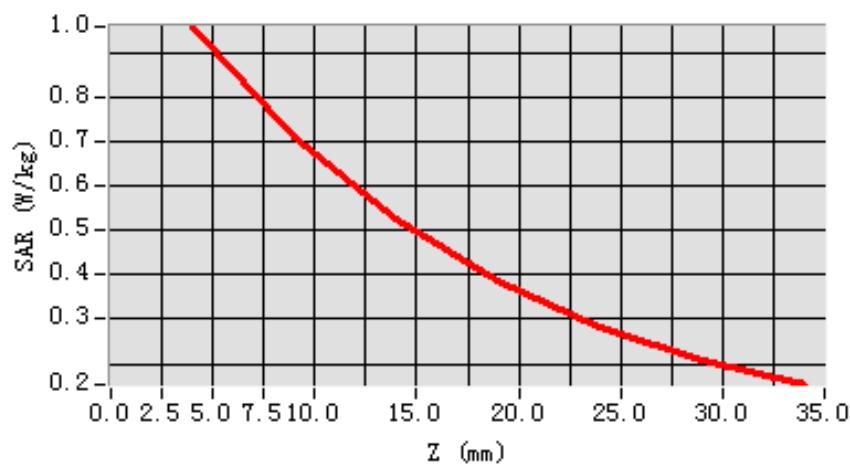

MEASUREMENT 28

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 15 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4182):

Frequency (MHz)	836.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.030000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

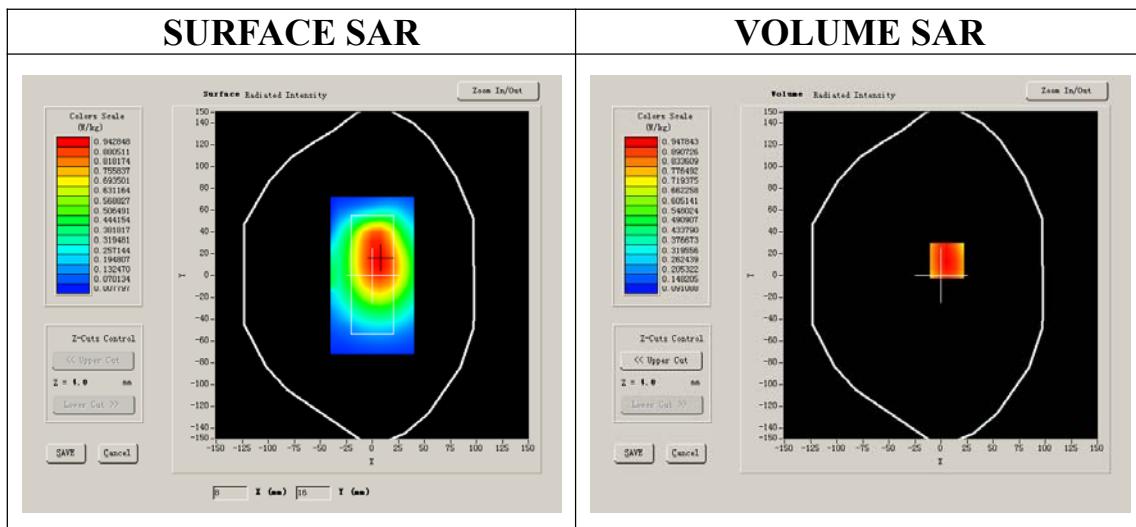



Maximum location: X=6.00, Y=14.00

SAR 10g (W/Kg)	0.787447
SAR 1g (W/Kg)	1.098586

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1375	0.8492	0.6175	0.4562	0.3298	0.2387

SAR, Z Axis Scan (X = 6, Y = 14)

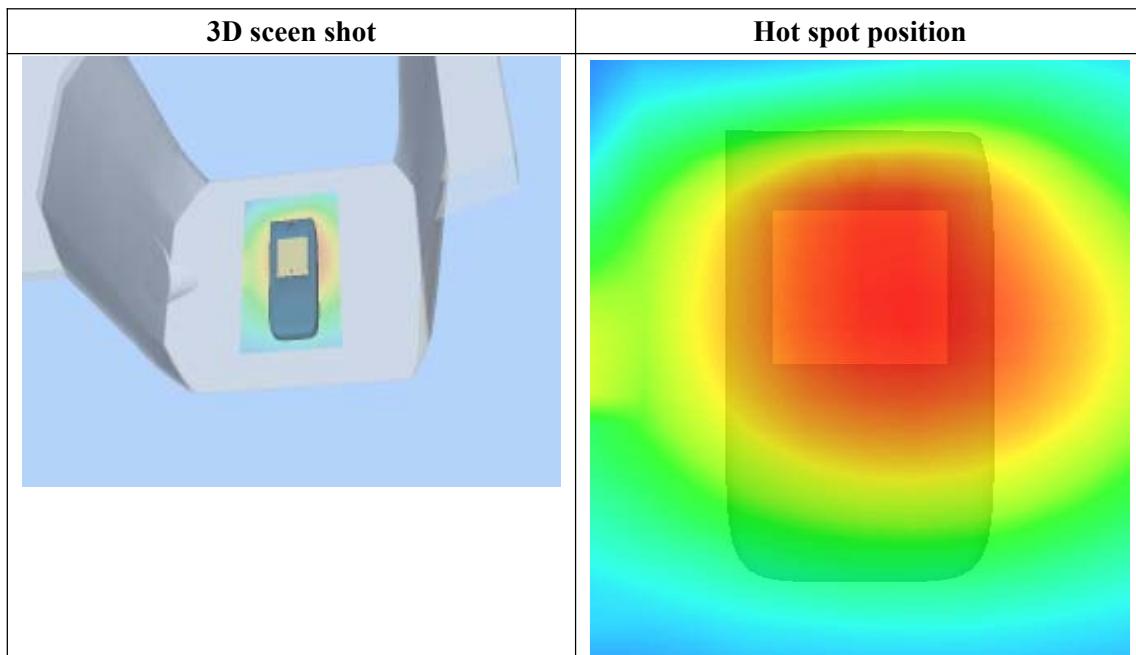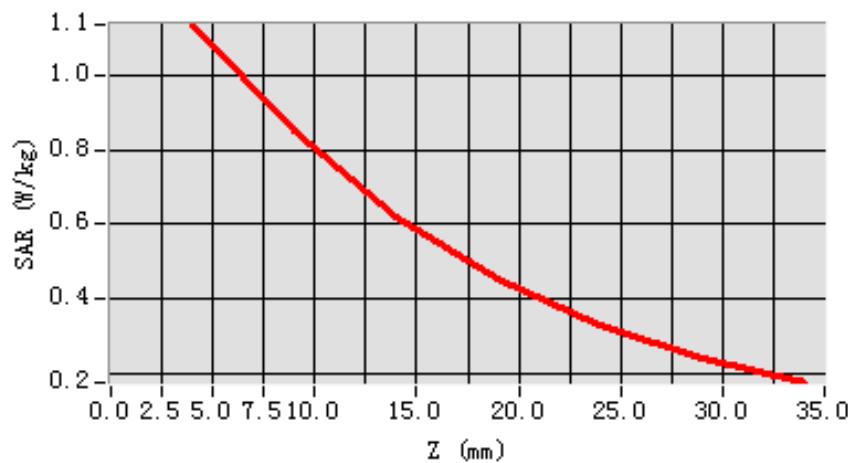

MEASUREMENT 29

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 8/11/2011

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 4233):

Frequency (MHz)	846.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.390000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

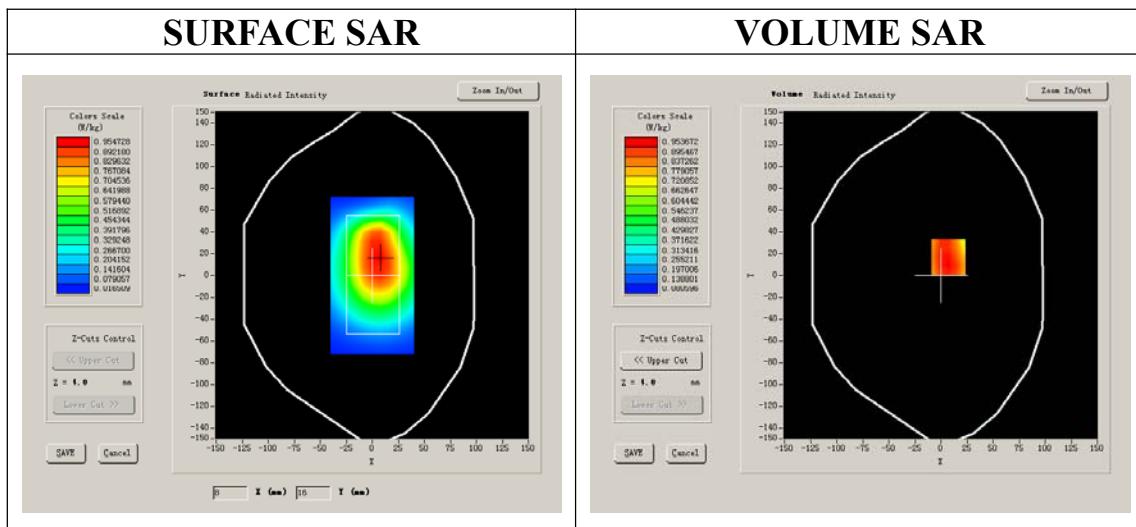



Maximum location: X=7.00, Y=17.00

SAR 10g (W/Kg)	0.777932
SAR 1g (W/Kg)	1.089421

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1285	0.8317	0.6058	0.4391	0.3166	0.2270

SAR, Z Axis Scan (X = 7, Y = 17)

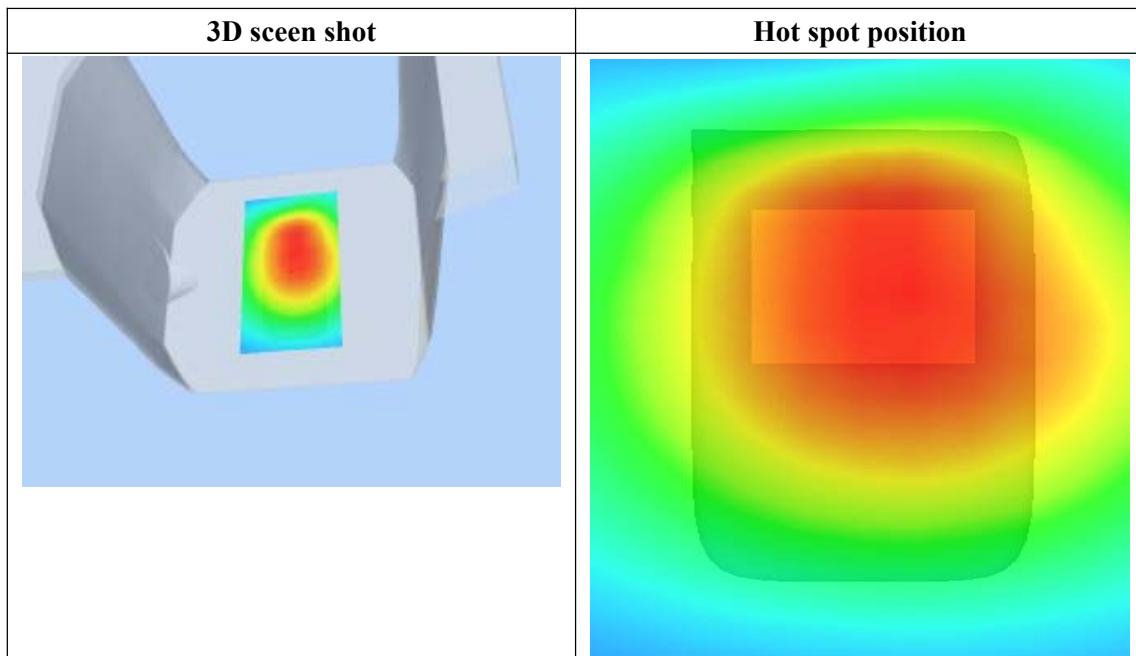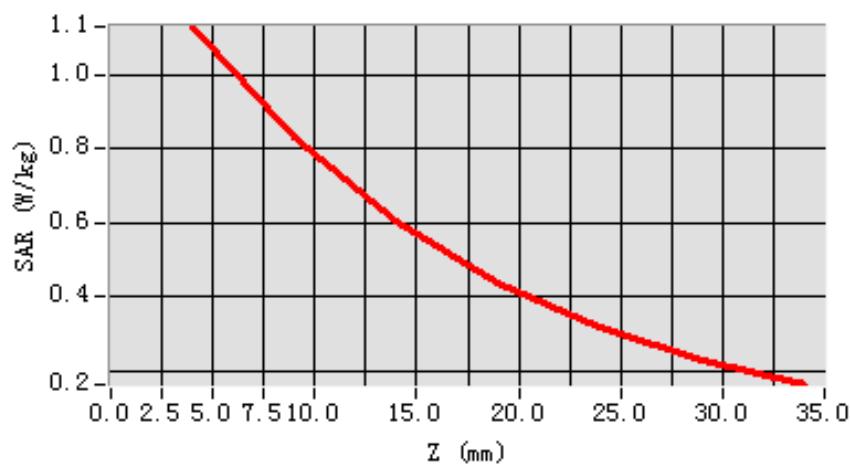

MEASUREMENT 30

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 16 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-1.390000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

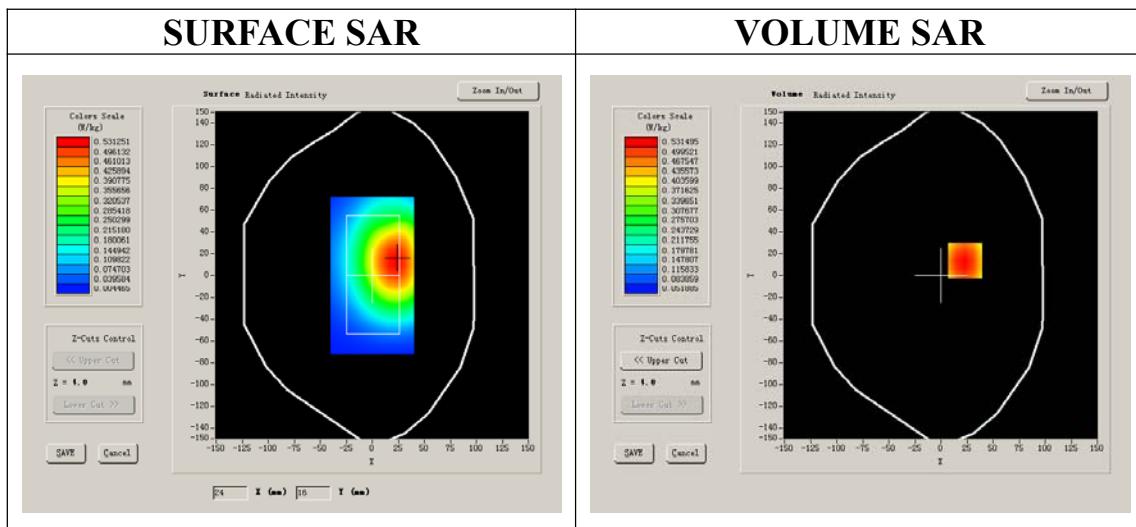



Maximum location: X=23.00, Y=14.00

SAR 10g (W/Kg)	0.435802
SAR 1g (W/Kg)	0.618273

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6378	0.4650	0.3413	0.2506	0.1841	0.1336

SAR, Z Axis Scan (X = 23, Y = 14)

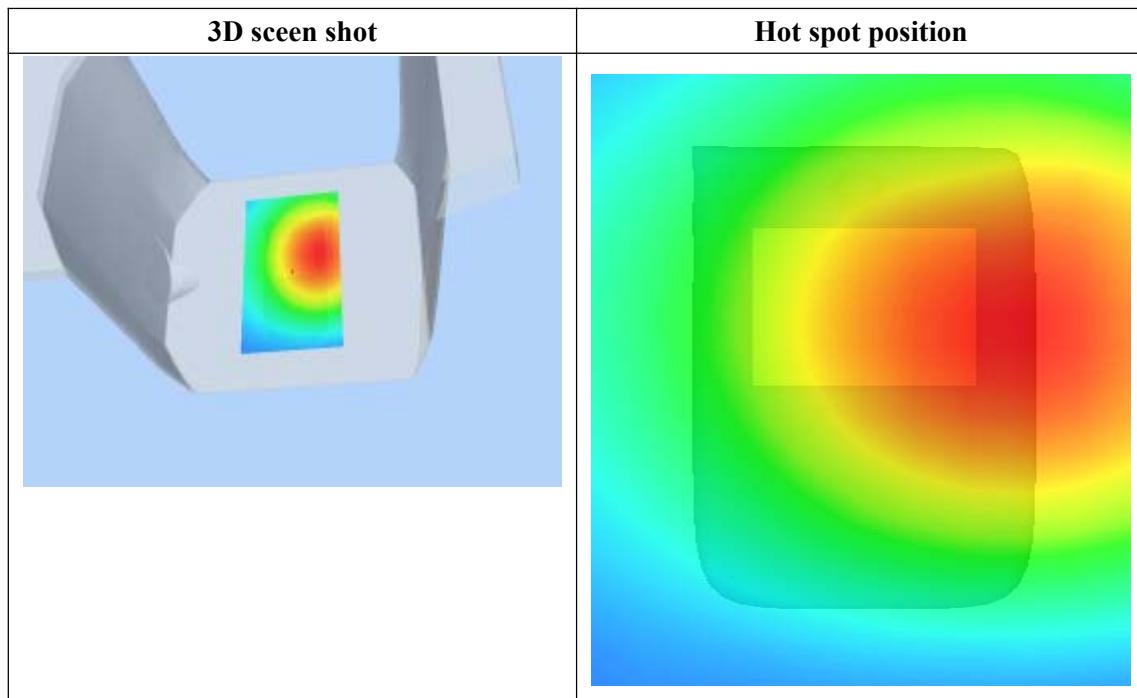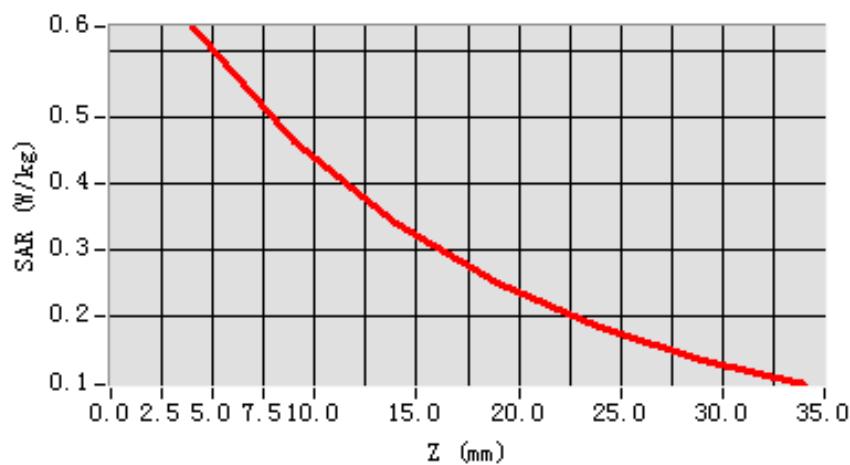

MEASUREMENT 31

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 9 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	0.280000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

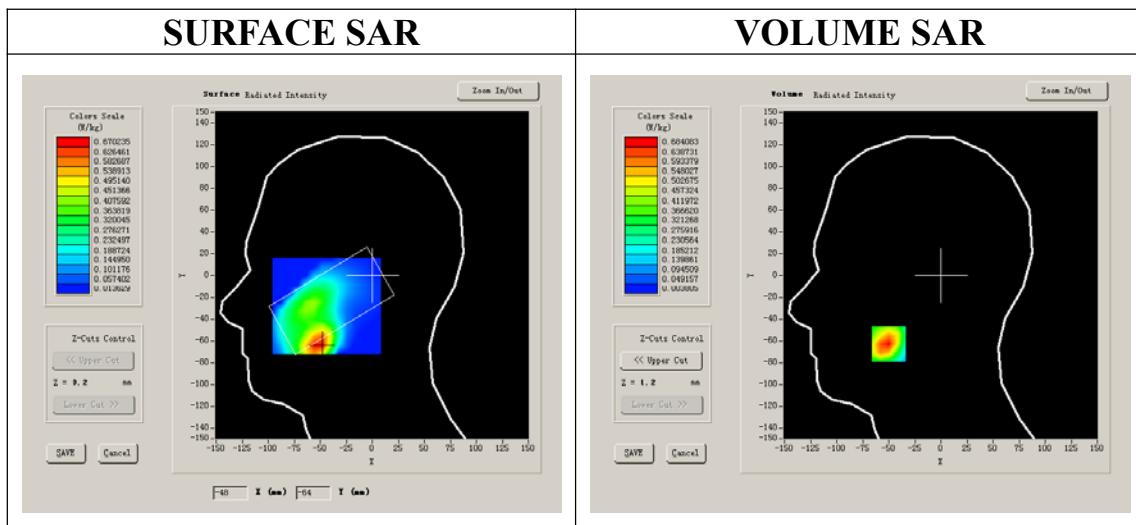



Maximum location: X=-50.00, Y=-63.00

SAR 10g (W/Kg)	0.315161
SAR 1g (W/Kg)	0.648716

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6841	0.3083	0.1463	0.0714	0.0328	0.0181

SAR, Z Axis Scan (X = -50, Y = -63)

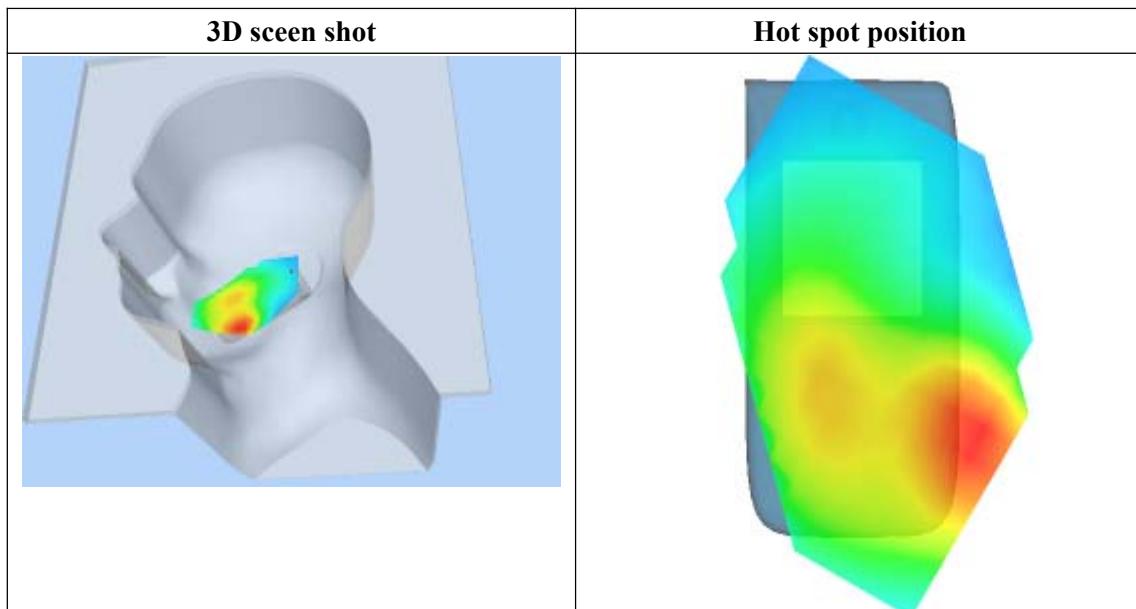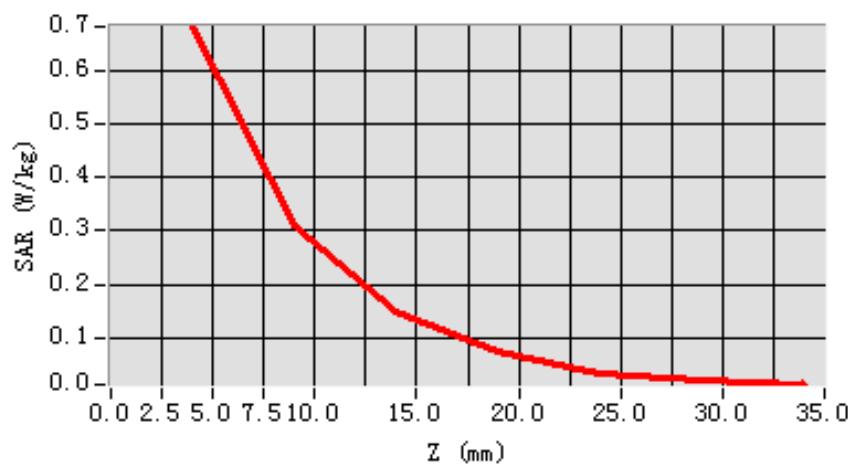

MEASUREMENT 32

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 28 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	0.160000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

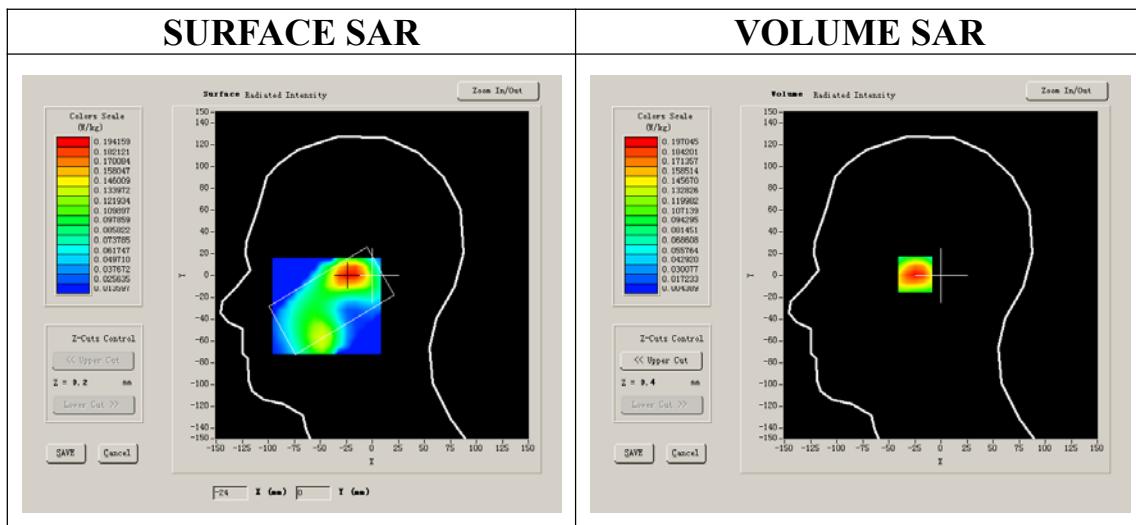



Maximum location: X=-21.00, Y=1.00

SAR 10g (W/Kg)	0.100871
SAR 1g (W/Kg)	0.187656

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1970	0.1051	0.0576	0.0316	0.0151	0.0107

SAR, Z Axis Scan (X = -21, Y = 1)

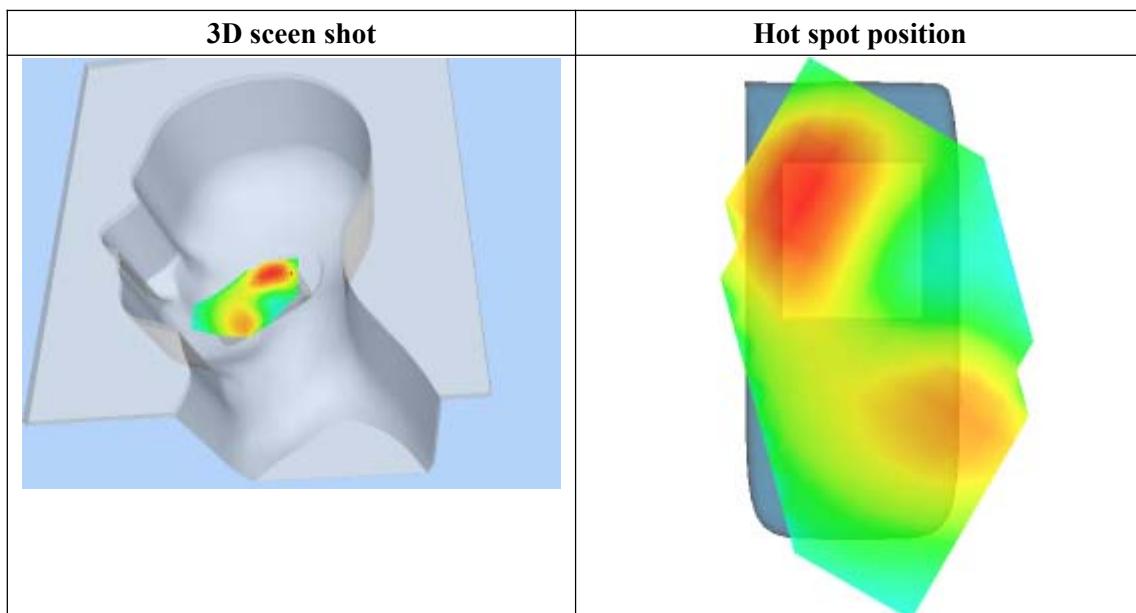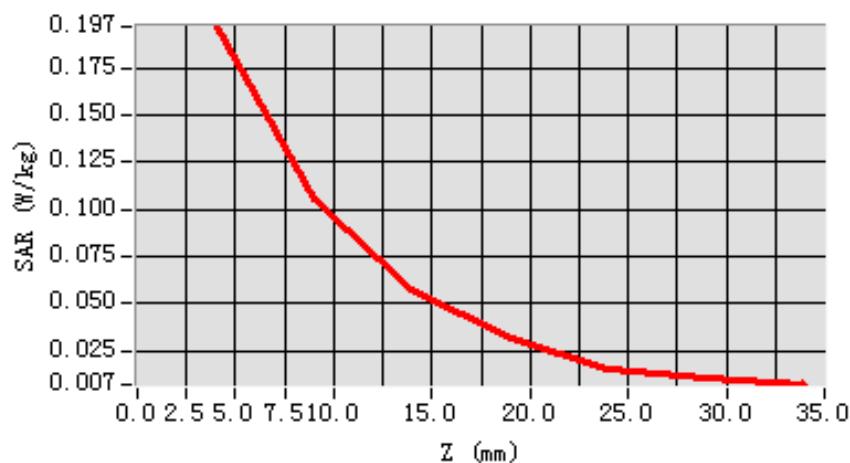

MEASUREMENT 33

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 7 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	-0.500000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

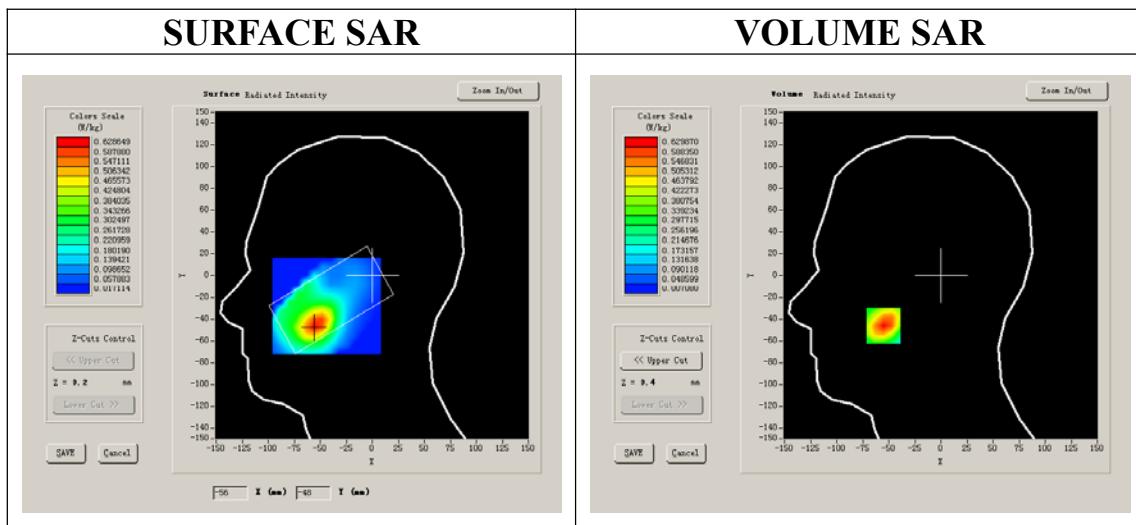



Maximum location: X=-55.00, Y=-46.00

SAR 10g (W/Kg)	0.304702
SAR 1g (W/Kg)	0.598519

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6299	0.3072	0.1505	0.0744	0.0375	0.0171

SAR, Z Axis Scan (X = -55, Y = -46)

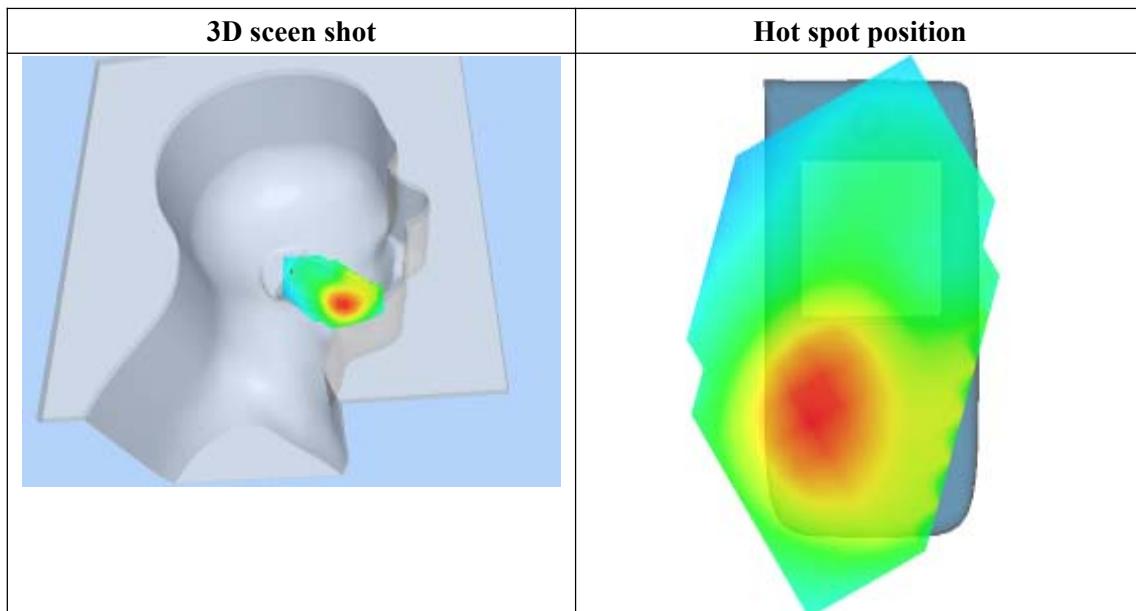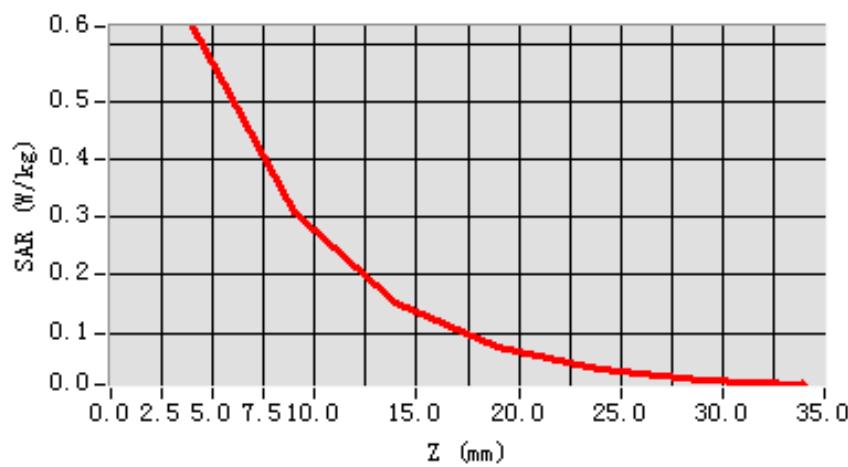

MEASUREMENT 34

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 7 minutes 30 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	1.381800
Power drift (%)	0.190000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

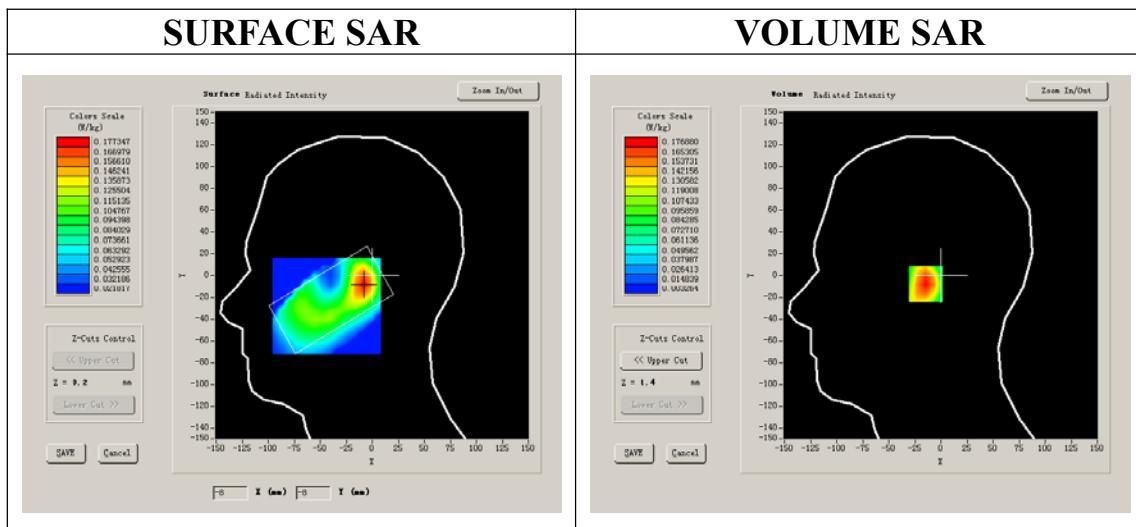



Maximum location: X=-8.00, Y=-8.00

SAR 10g (W/Kg)	0.090839
SAR 1g (W/Kg)	0.167613

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1769	0.0941	0.0496	0.0273	0.0156	0.0106

SAR, Z Axis Scan (X = -8, Y = -8)

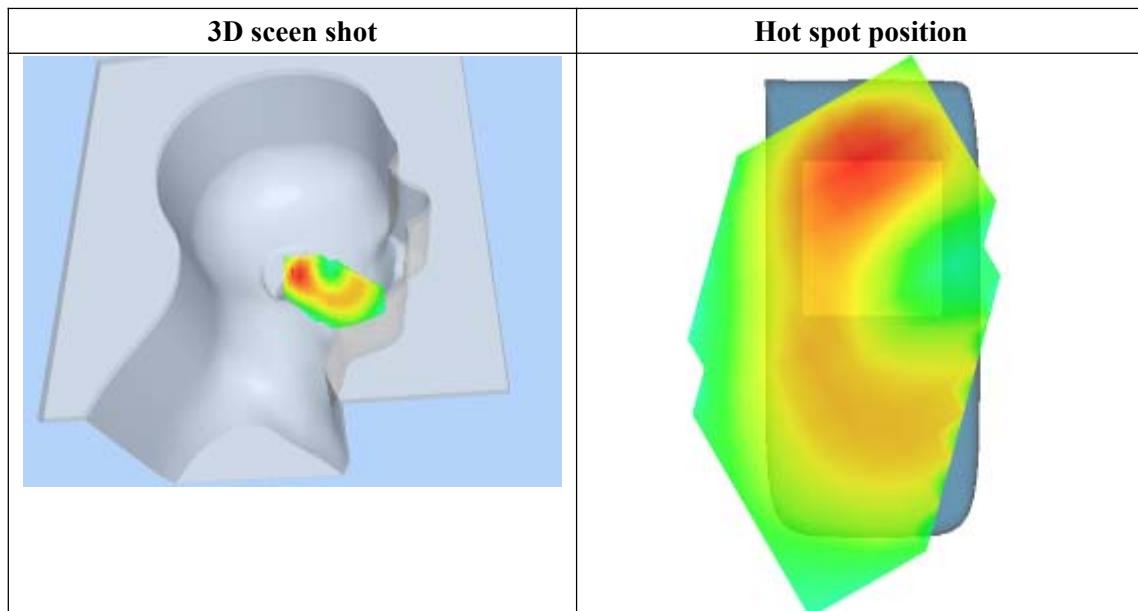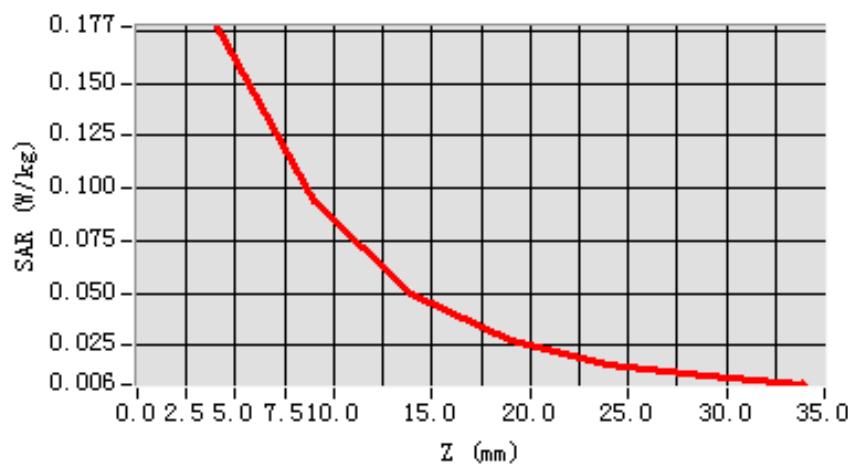

MEASUREMENT 35

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.682085
Power drift (%)	0.060000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

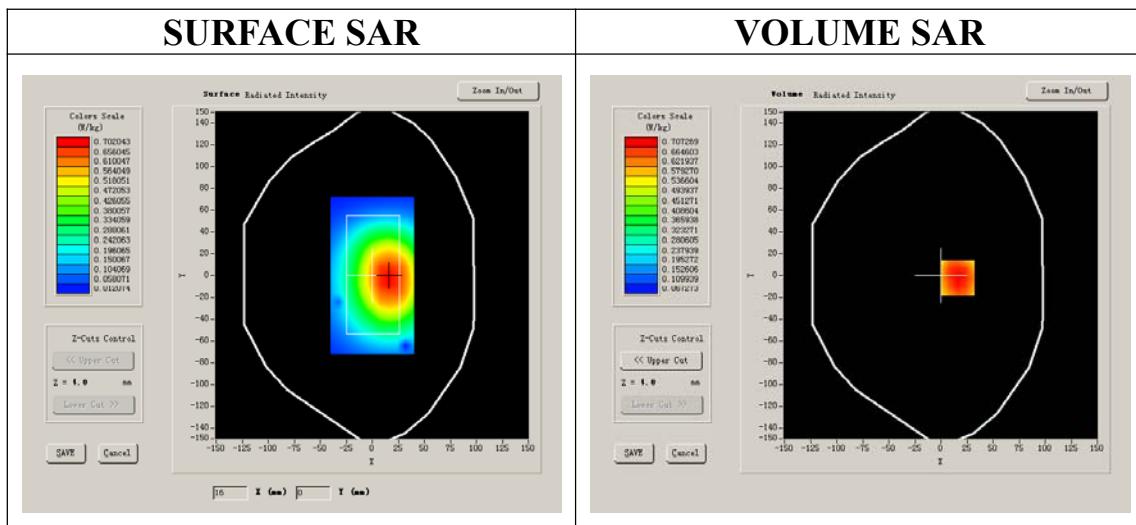



Maximum location: X=16.00, Y=-2.00

SAR 10g (W/Kg)	0.541562
SAR 1g (W/Kg)	0.775194

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8031	0.5868	0.4102	0.3033	0.2227	0.1631

SAR, Z Axis Scan (X = 16, Y = -2)

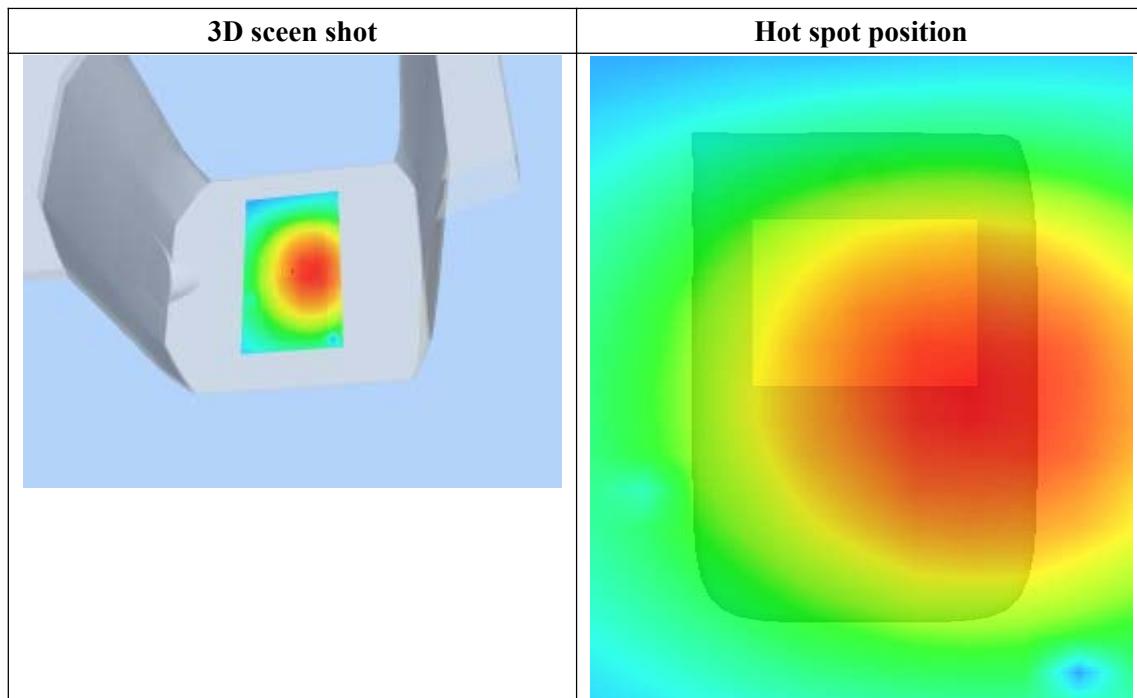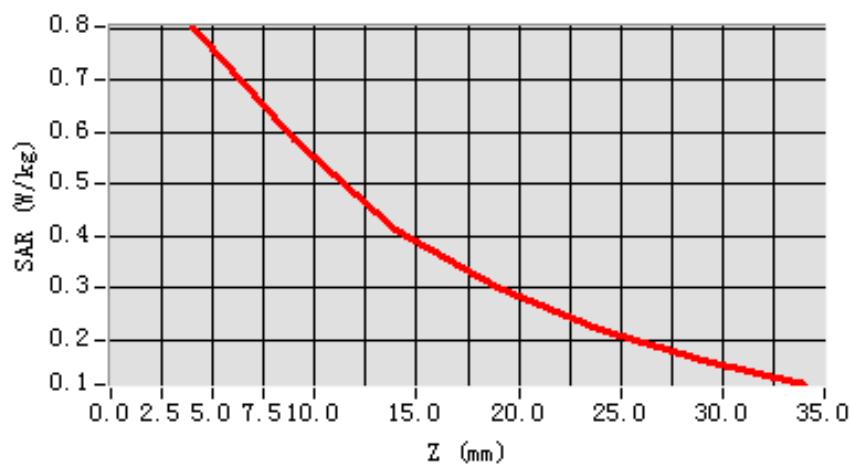

MEASUREMENT 36

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 14 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.658270
Power drift (%)	0.080000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

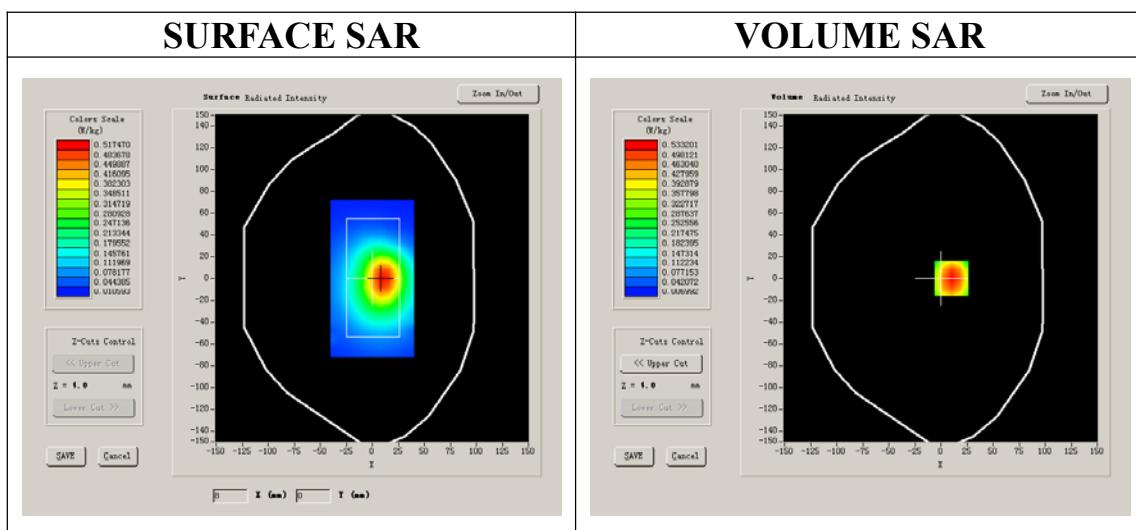



Maximum location: X=10.00, Y=0.00

SAR 10g (W/Kg)	0.324745
SAR 1g (W/Kg)	0.611231

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6399	0.3135	0.1472	0.0767	0.0403	0.0214

SAR, Z Axis Scan (X = 10, Y = 0)

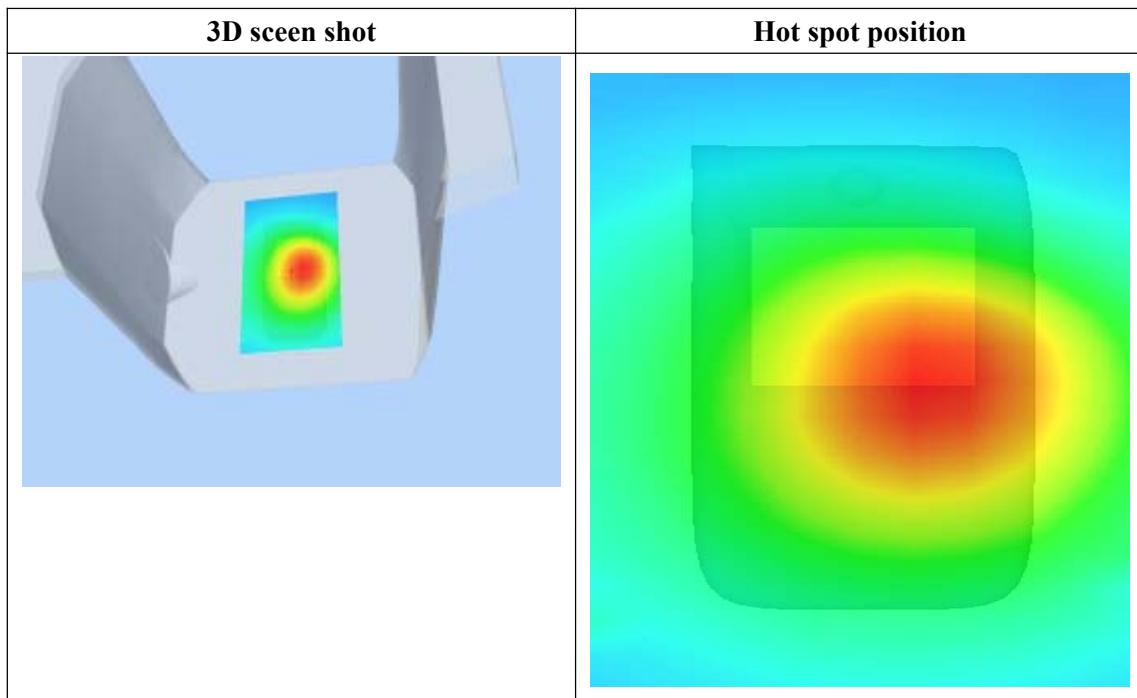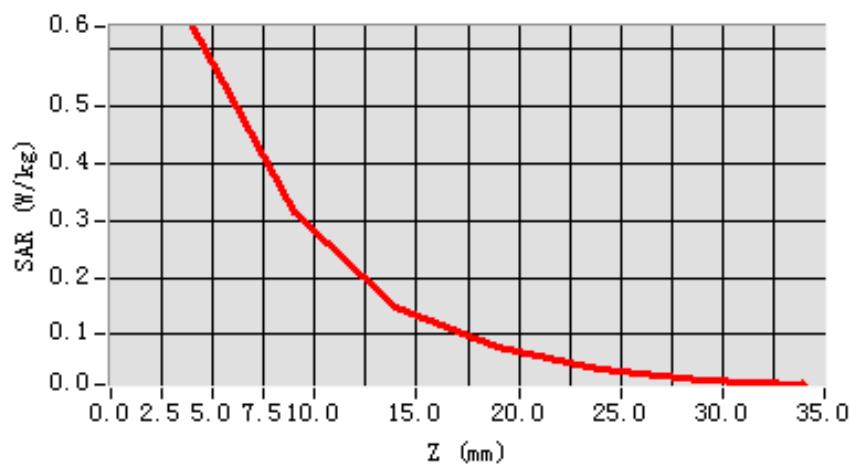

MEASUREMENT 37

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 17 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Cheek
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results

Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	-0.430000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

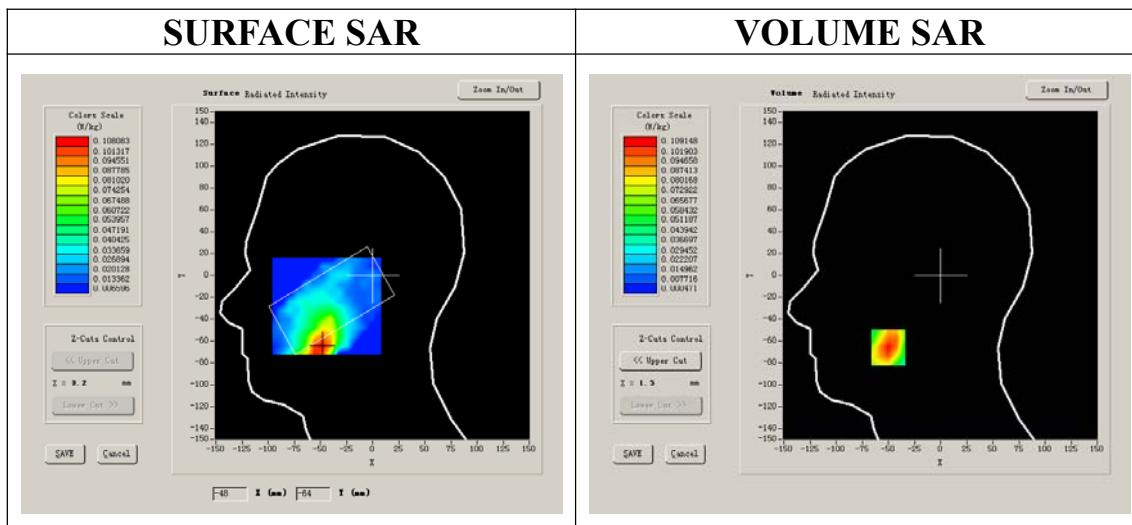



Maximum location: X=-50.00, Y=-66.00

SAR 10g (W/Kg)	0.053260
SAR 1g (W/Kg)	0.104272

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1091	0.0488	0.0294	0.0153	0.0109	0.0064

SAR, Z Axis Scan (X = -50, Y = -66)

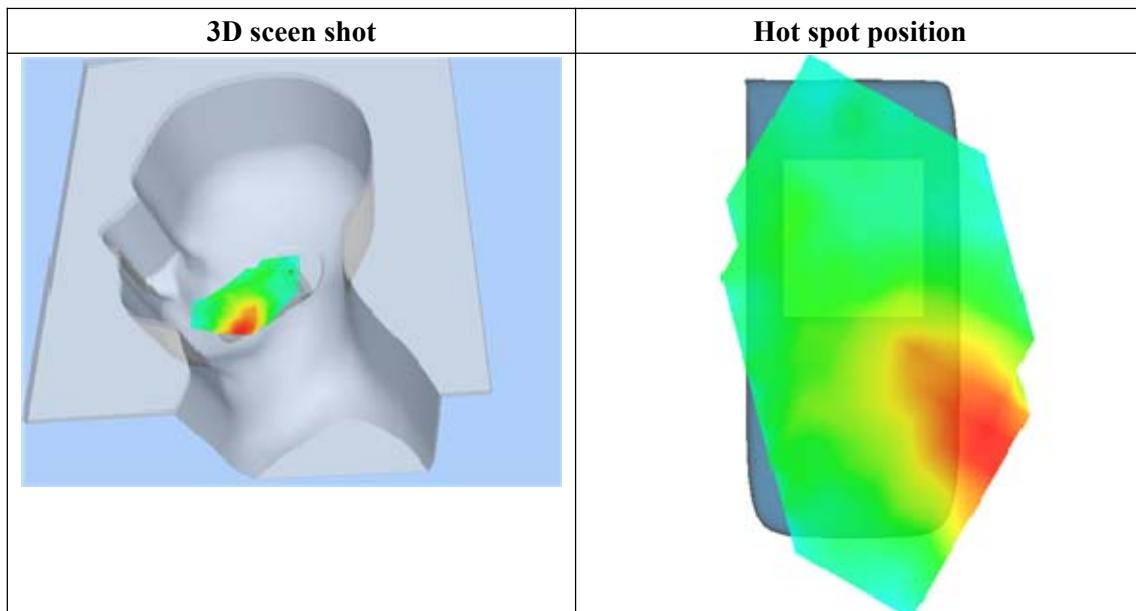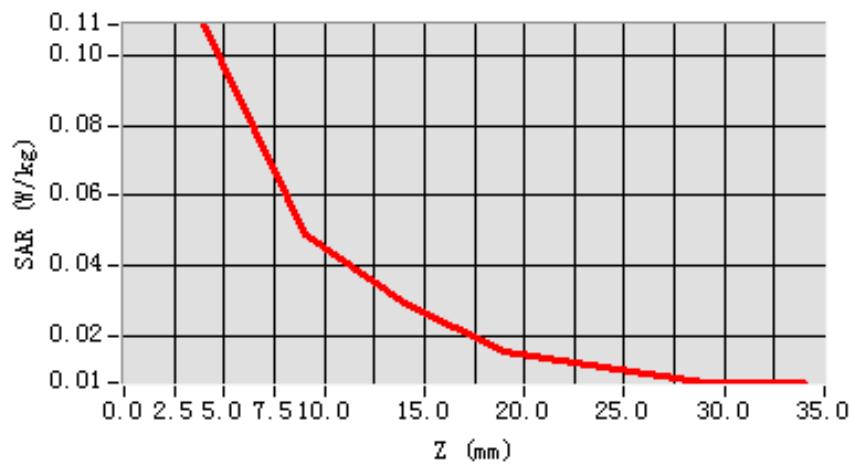

MEASUREMENT 38

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 15 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Tilt
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results

Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	-0.630000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

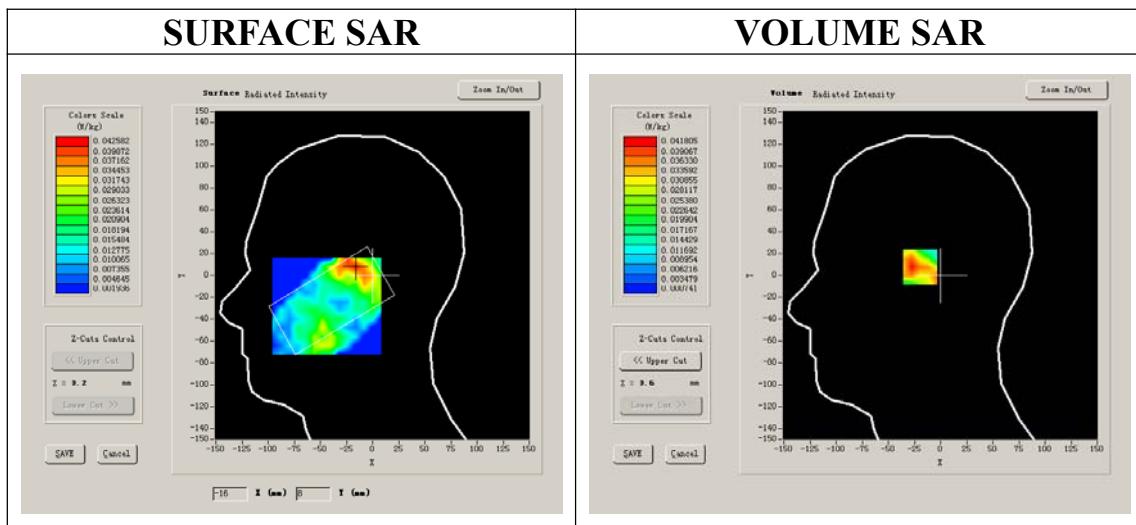



Maximum location: X=-16.00, Y=8.00

SAR 10g (W/Kg)	0.021193
SAR 1g (W/Kg)	0.039778

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0367	0.0166	0.0097	0.0044	0.0074	0.0061

SAR, Z Axis Scan (X = -16, Y = 8)

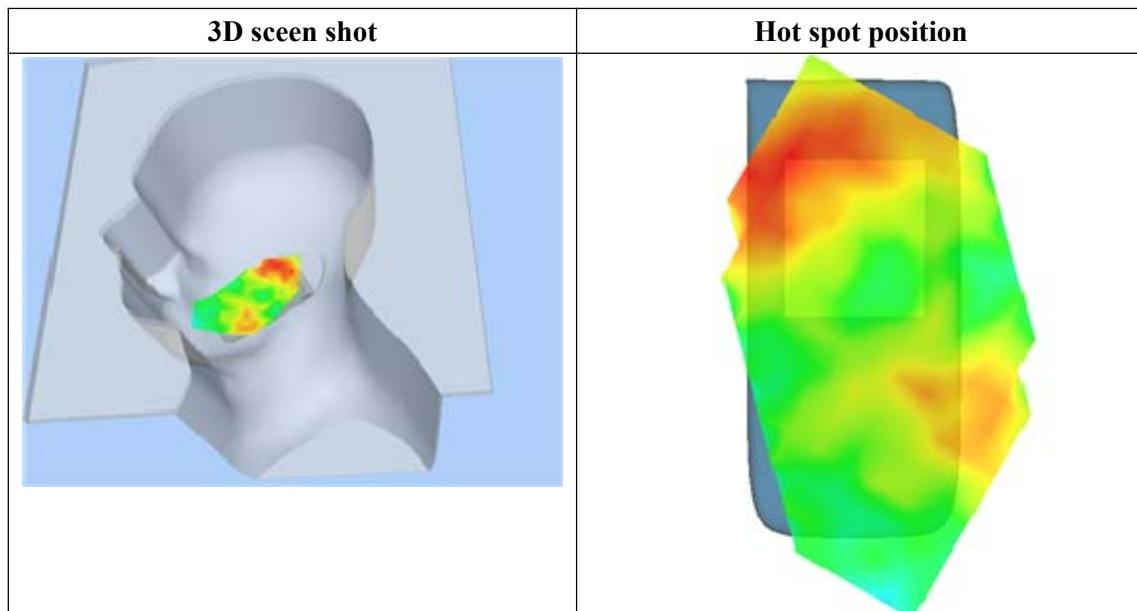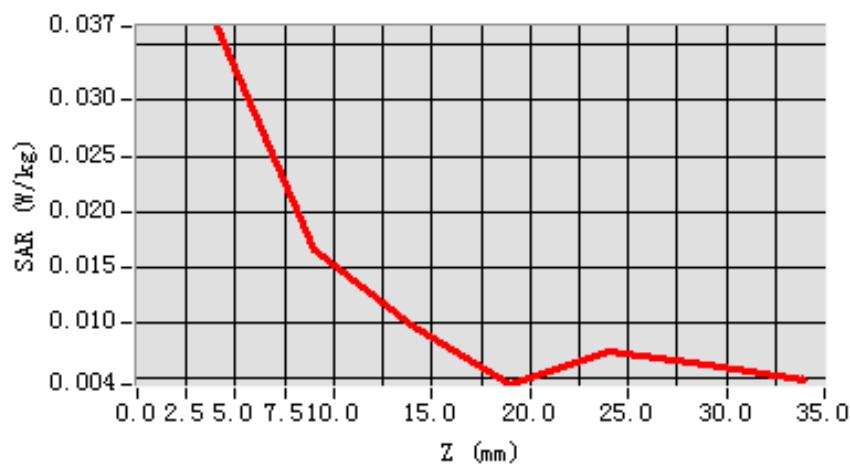

MEASUREMENT 39

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 17 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Cheek
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results

Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	0.510000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

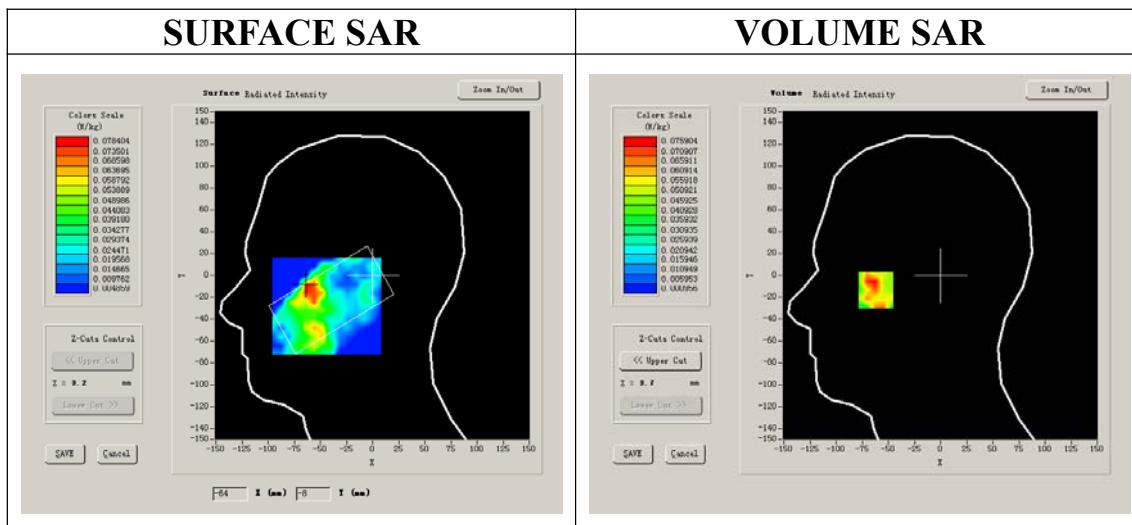



Maximum location: X=-62.00, Y=-11.00

SAR 10g (W/Kg)	0.037081
SAR 1g (W/Kg)	0.074511

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0699	0.0417	0.0278	0.0171	0.0169	0.0019

SAR, Z Axis Scan (X = -62, Y = -11)

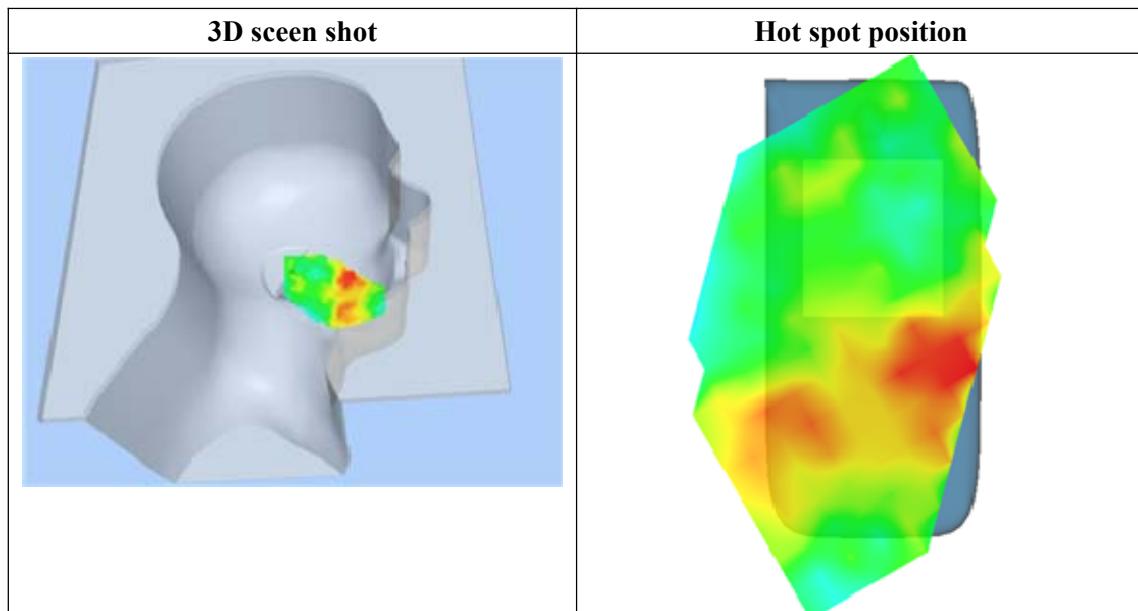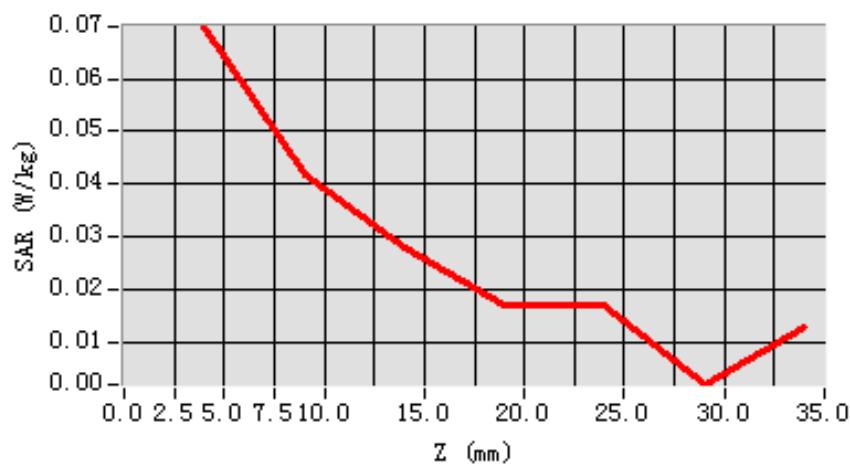

MEASUREMENT 40

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 8 minutes 17 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results

Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	0.620000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

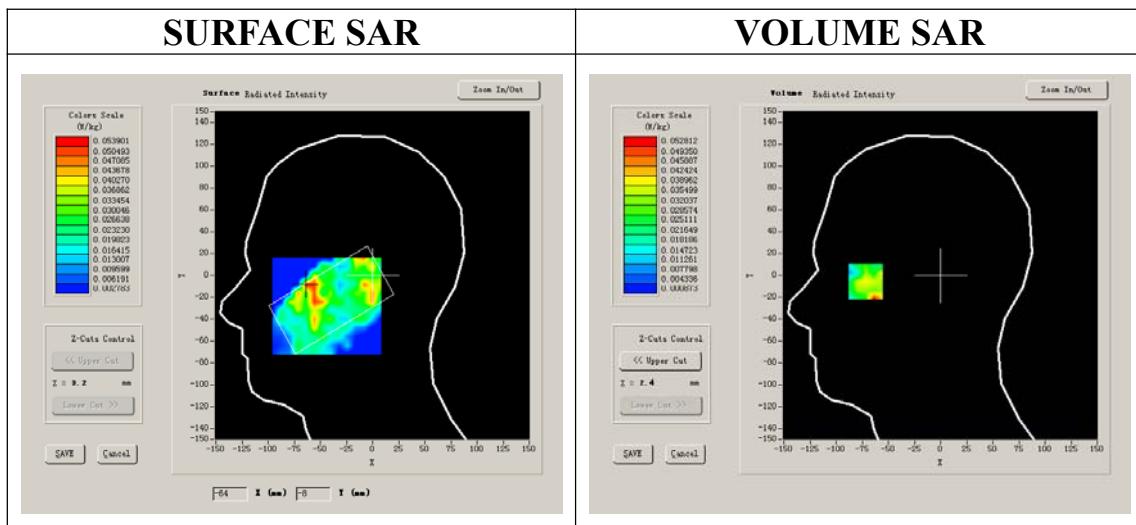



Maximum location: X=-72.00, Y=-2.00

SAR 10g (W/Kg)	0.022408
SAR 1g (W/Kg)	0.035254

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0391	0.0092	0.0046	0.0118	0.0077	0.0097

SAR, Z Axis Scan (X = -72, Y = -2)

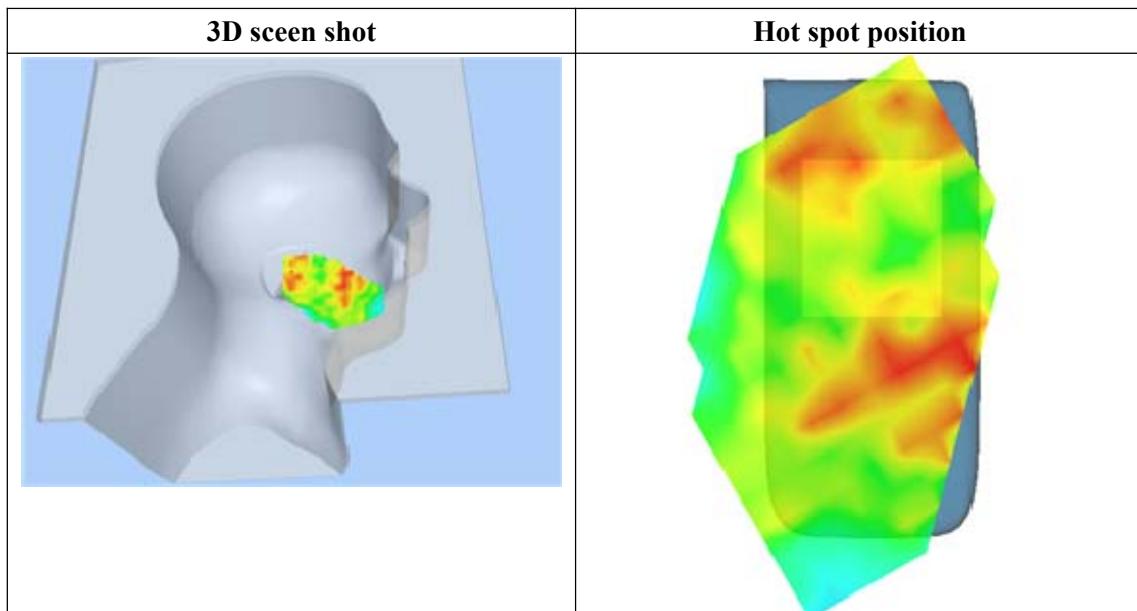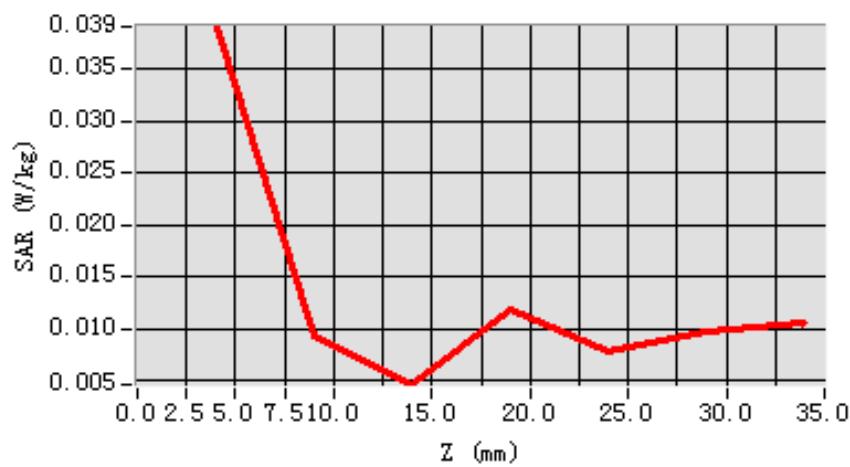

MEASUREMENT 41

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results

Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.710000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

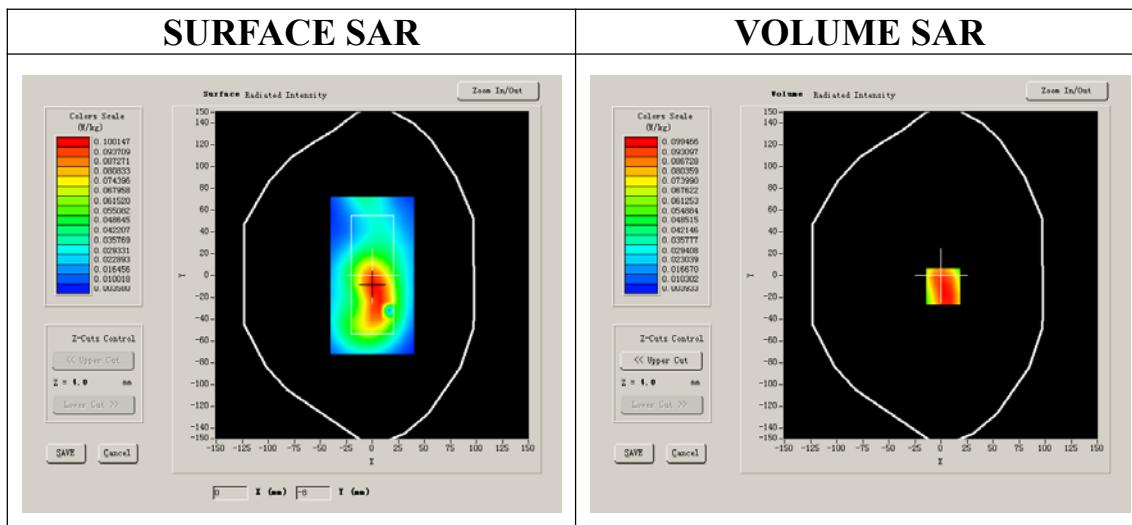



Maximum location: X=2.00, Y=-10.00

SAR 10g (W/Kg)	0.072889
SAR 1g (W/Kg)	0.105965

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1092	0.0795	0.0579	0.0423	0.0303	0.0247

SAR, Z Axis Scan (X = 2, Y = -10)

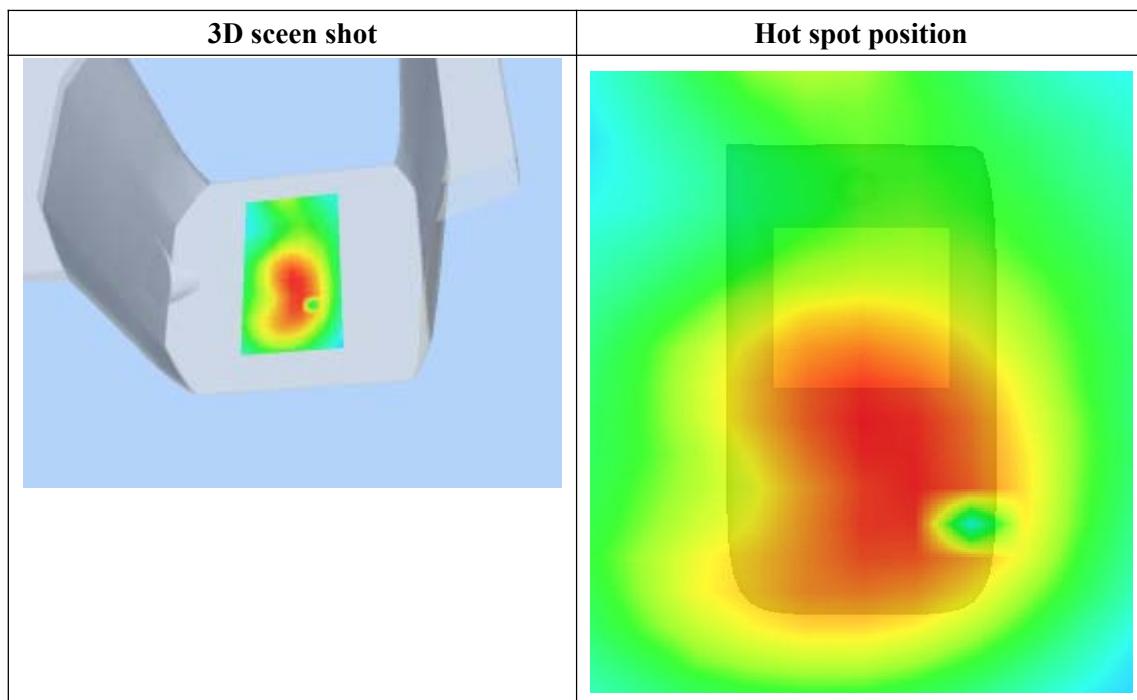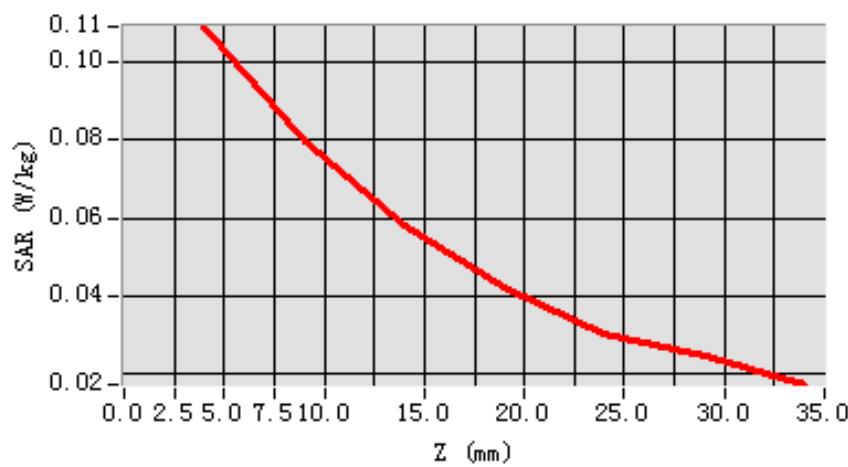

MEASUREMENT 42

Type: Phone measurement (Complete)

Area scan resolution: $dx=8\text{mm}, dy=8\text{mm}$

Zoom scan resolution: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Date of measurement: 20/7/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results

Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.520000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

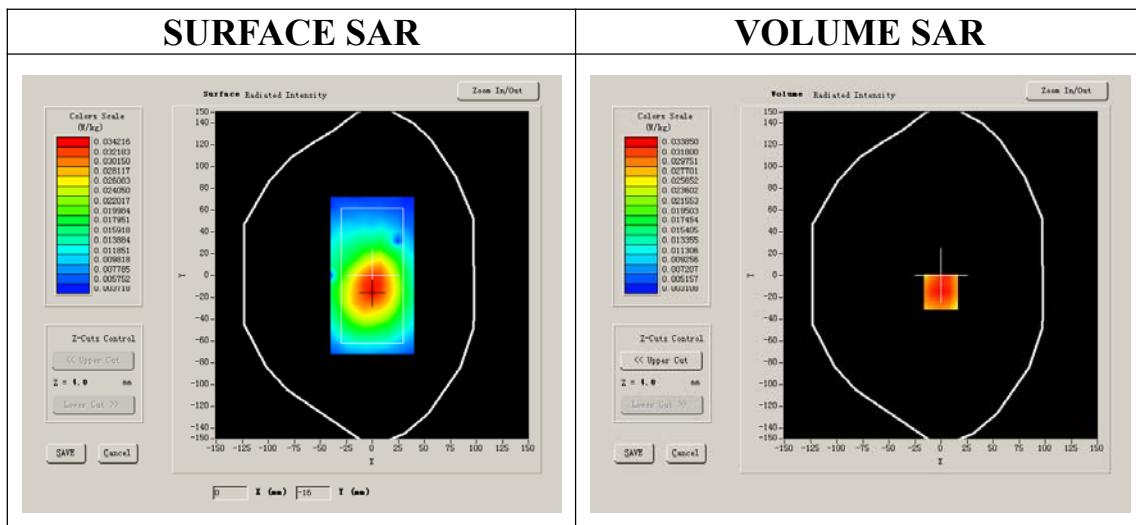



Maximum location: X=0.00, Y=-15.00

SAR 10g (W/Kg)	0.024740
SAR 1g (W/Kg)	0.035394

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0372	0.0283	0.0209	0.0142	0.0105	0.0083

SAR, Z Axis Scan (X = 0, Y = -15)

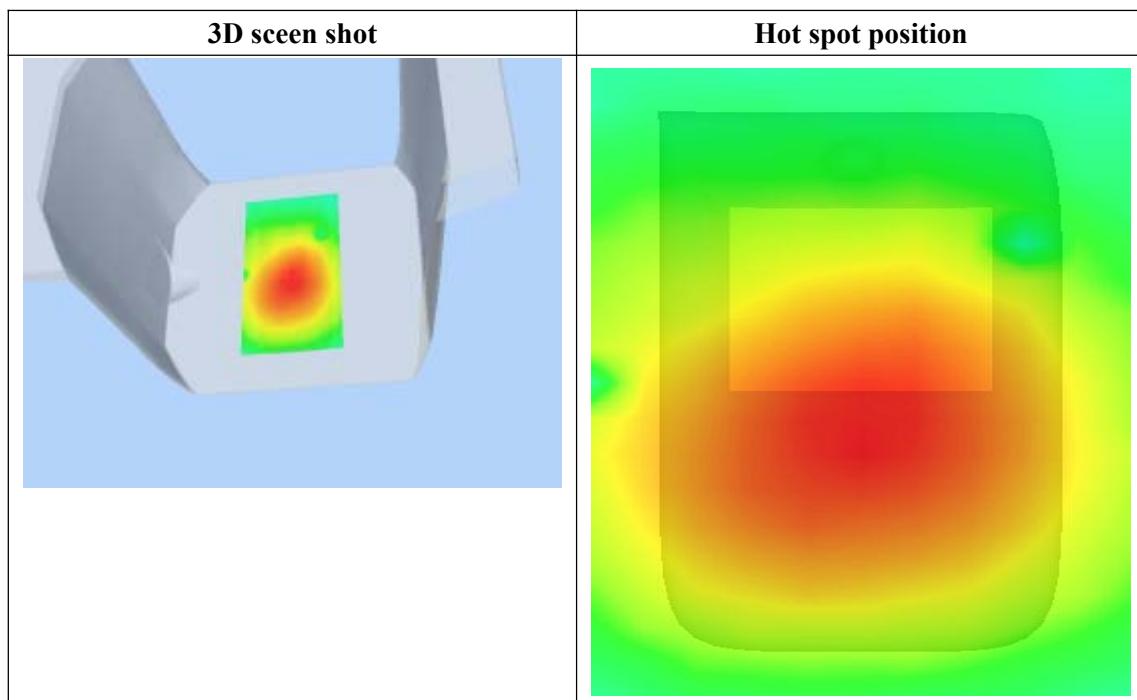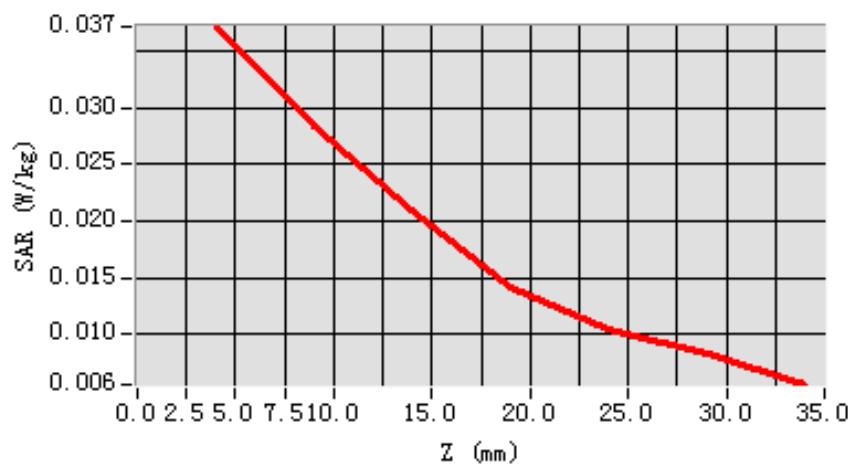

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.675999
Relative permittivity	15.070000
Conductivity (S/m)	0.894409
Power drift (%)	-0.050000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

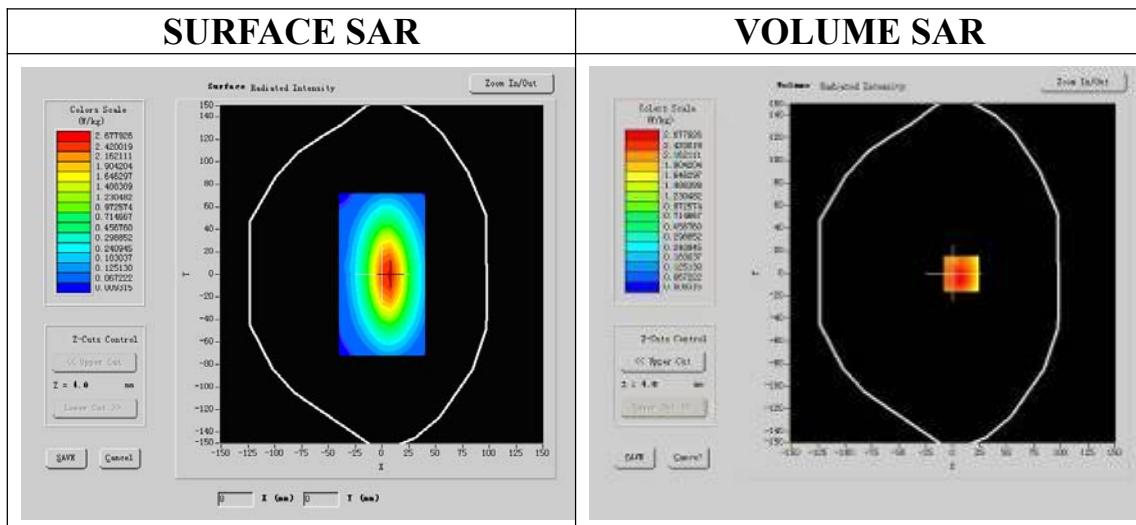


Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.685732
SAR 1g (W/Kg)	2.478462


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	2.4754	1.2251	0.5257	0.2114


SAR, Z Axis Scan (X = 5, Y = 1)

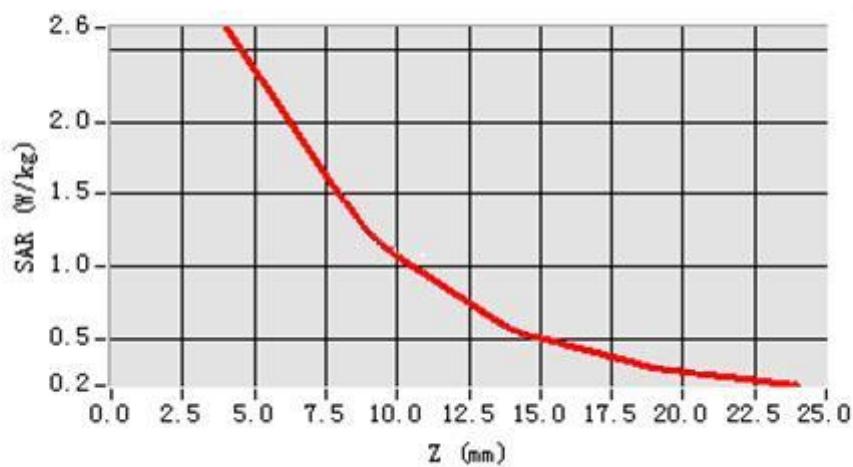

3D screen shot

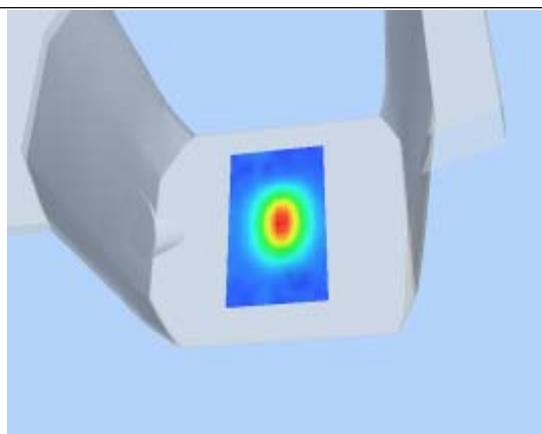

Hot spot position

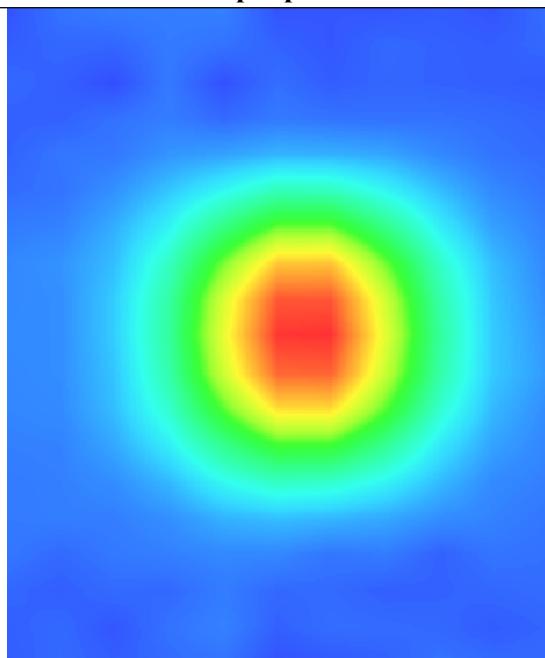

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	0.9809033
Power drift (%)	-0.170000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

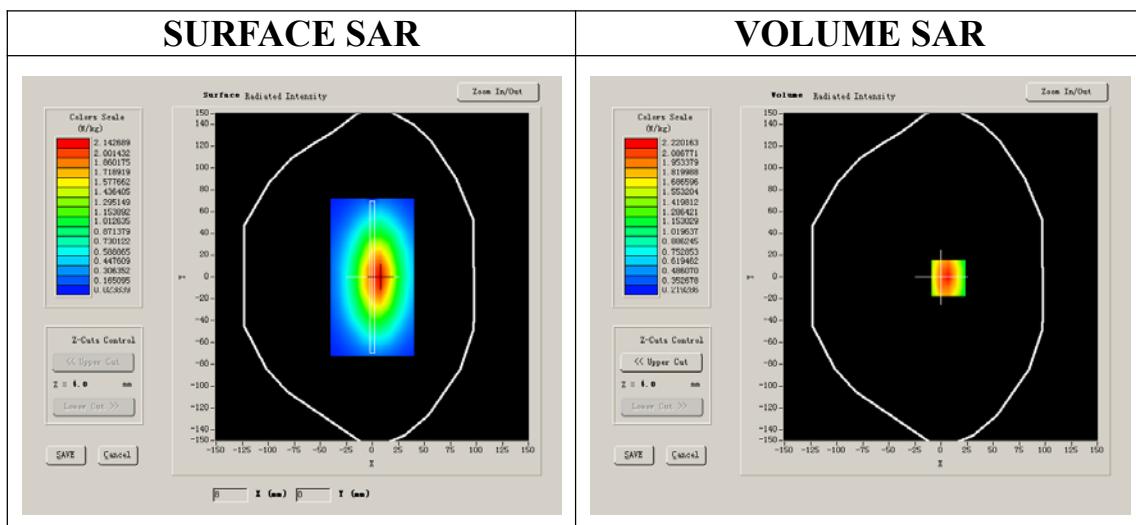



Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.539476
SAR 1g (W/Kg)	2.385979

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143

SAR, Z Axis Scan (X = 7, Y = -1)

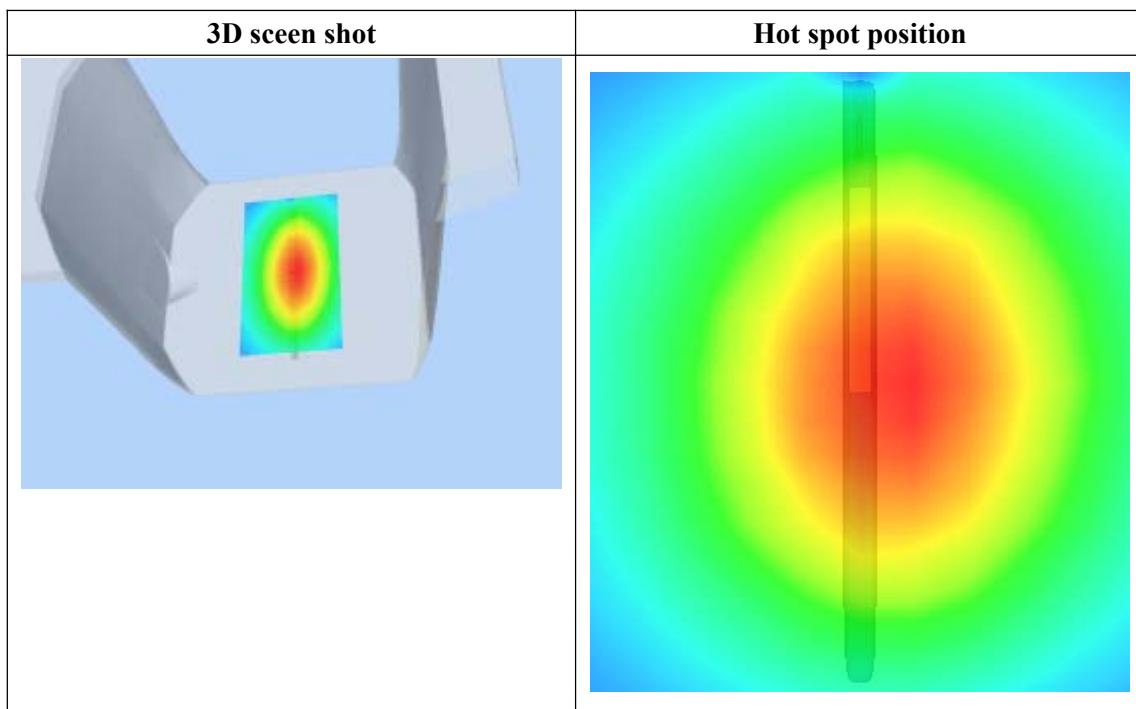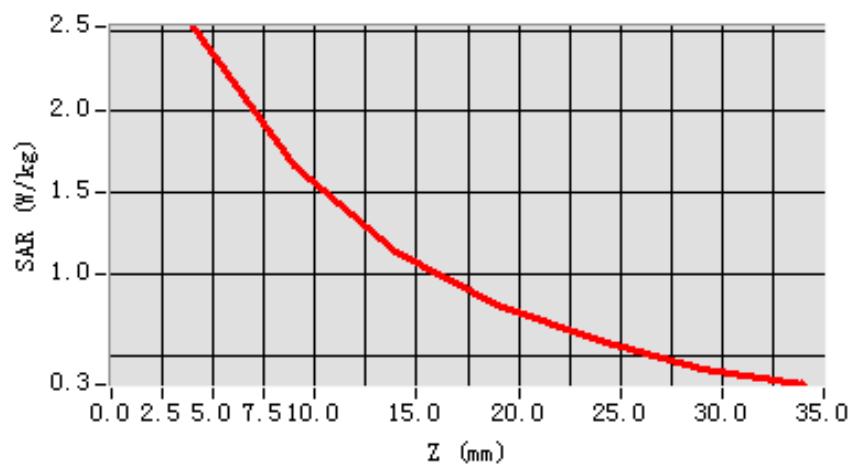

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.509998
Relative permittivity	15.070000
Conductivity (S/m)	1.436111
Power drift (%)	-0.140000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

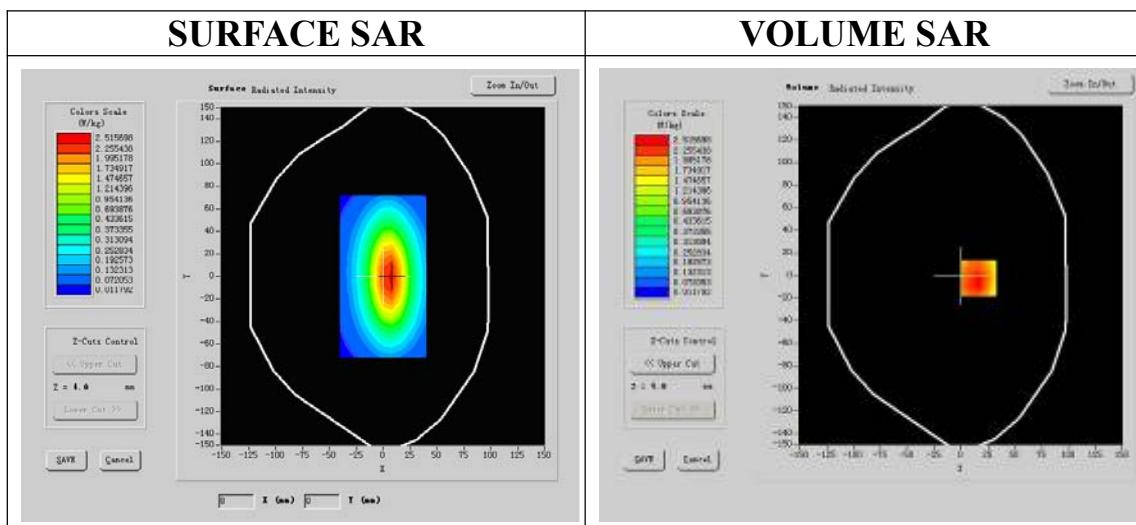



Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	4.884149
SAR 1g (W/Kg)	9.454628

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	9.4148	7.3955	6.3646	4.3955

SAR, Z Axis Scan (X = -1, Y = -50)

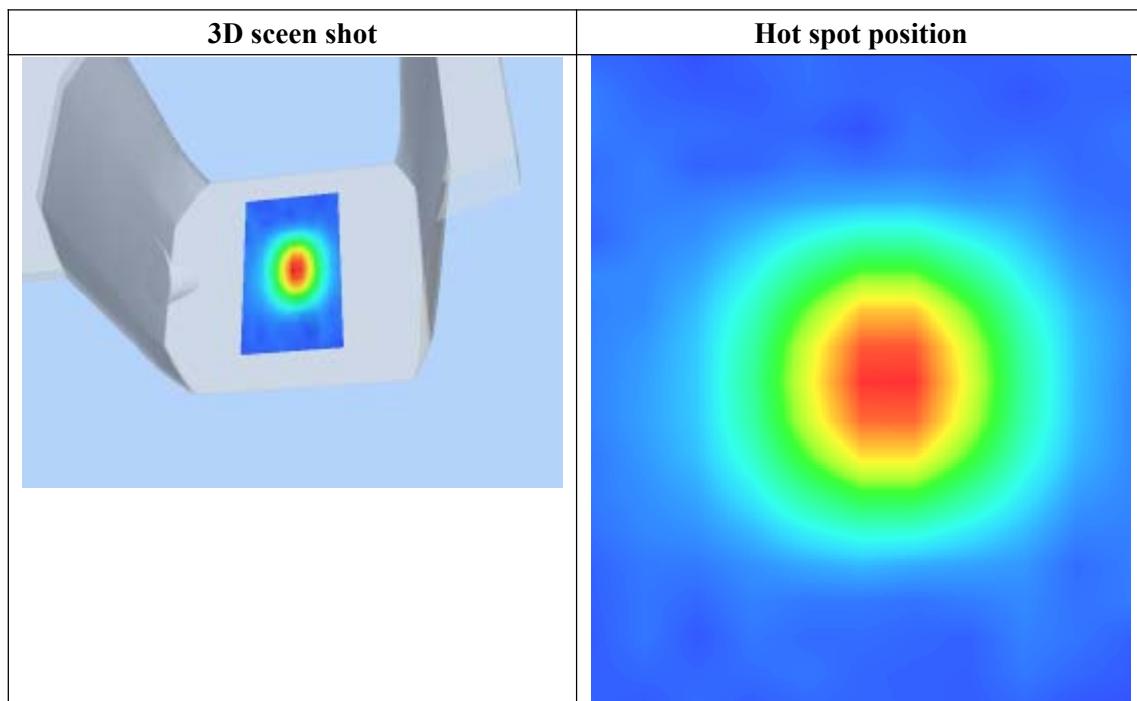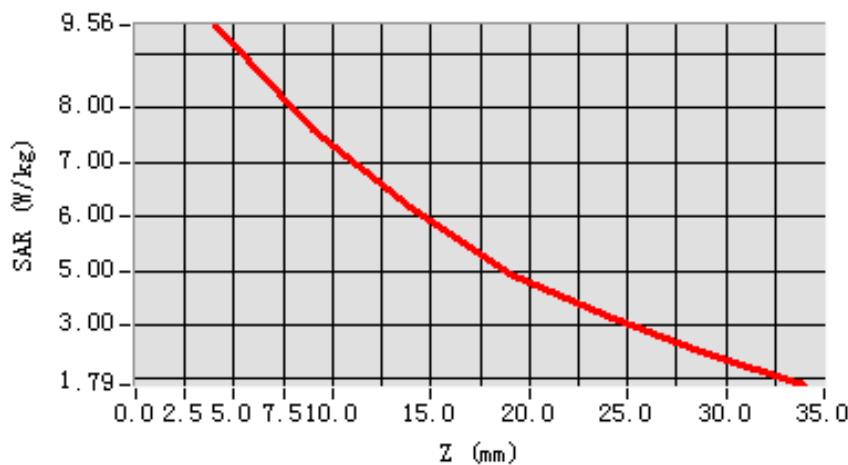

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 13 minutes 26 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.548876
Relative permittivity	14.070000
Conductivity (S/m)	1.553978
Power drift (%)	-0.030000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

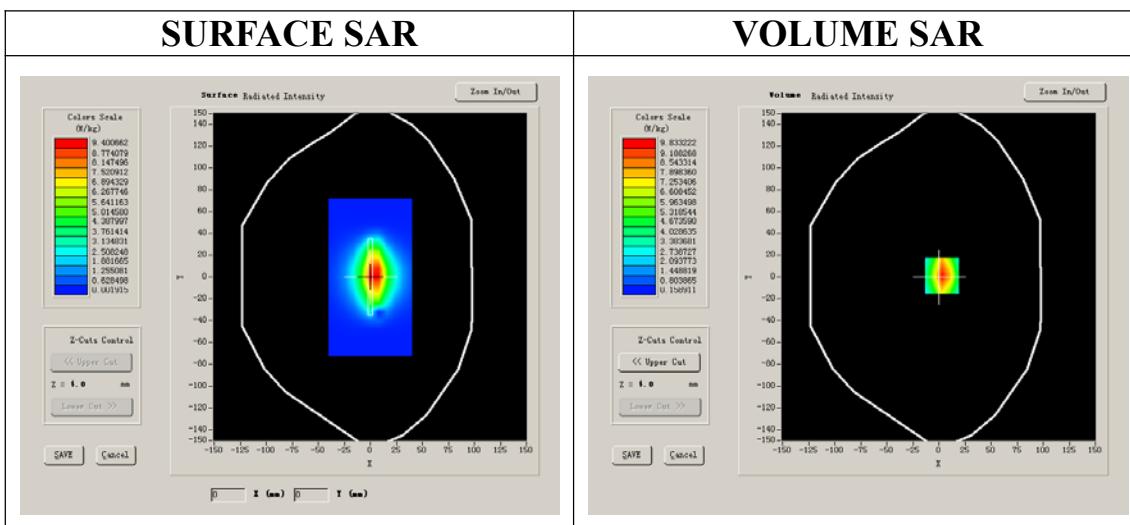



Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	4.981611
SAR 1g (W/Kg)	9.740177

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078

SAR, Z Axis Scan (X = 3, Y = 1)

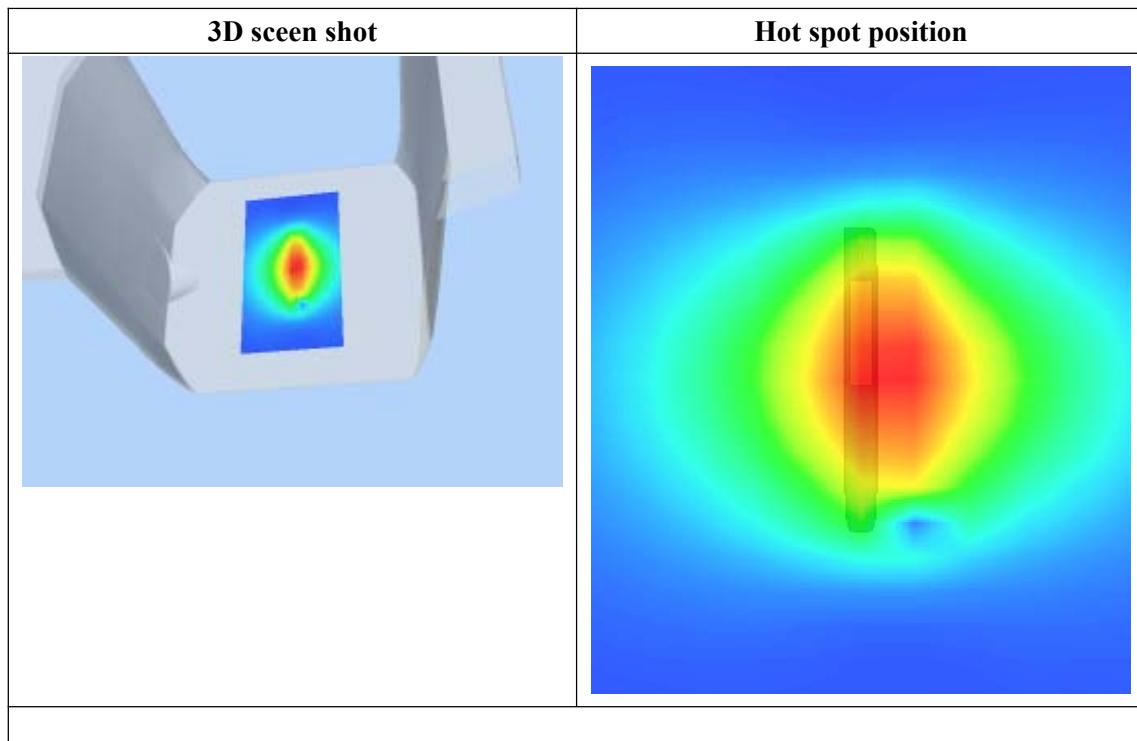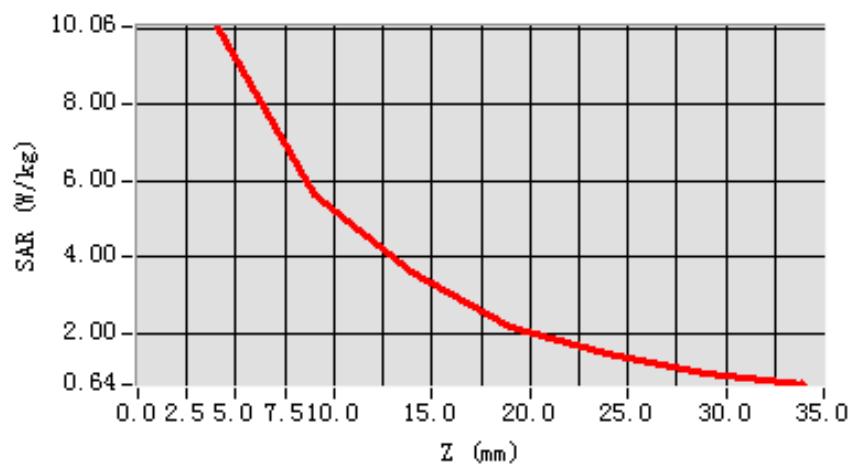

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.622857
Relative permittivity	12.991650
Conductivity (S/m)	1.964313
Power Drift (%)	0.560000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

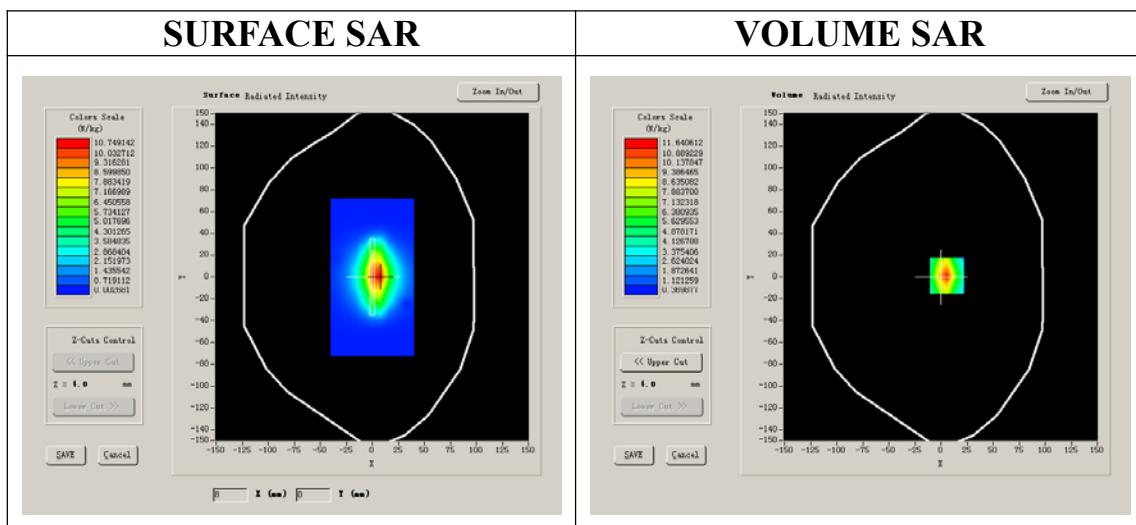



Maximum location: X=6.00, Y=1.00

SAR 10g (W/Kg)	5.938478
SAR 1g (W/Kg)	12.442675

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.7015	6.2096	3.8187	2.4504	1.5036	1.0219

SAR, Z Axis Scan (X = 6, Y = 1)

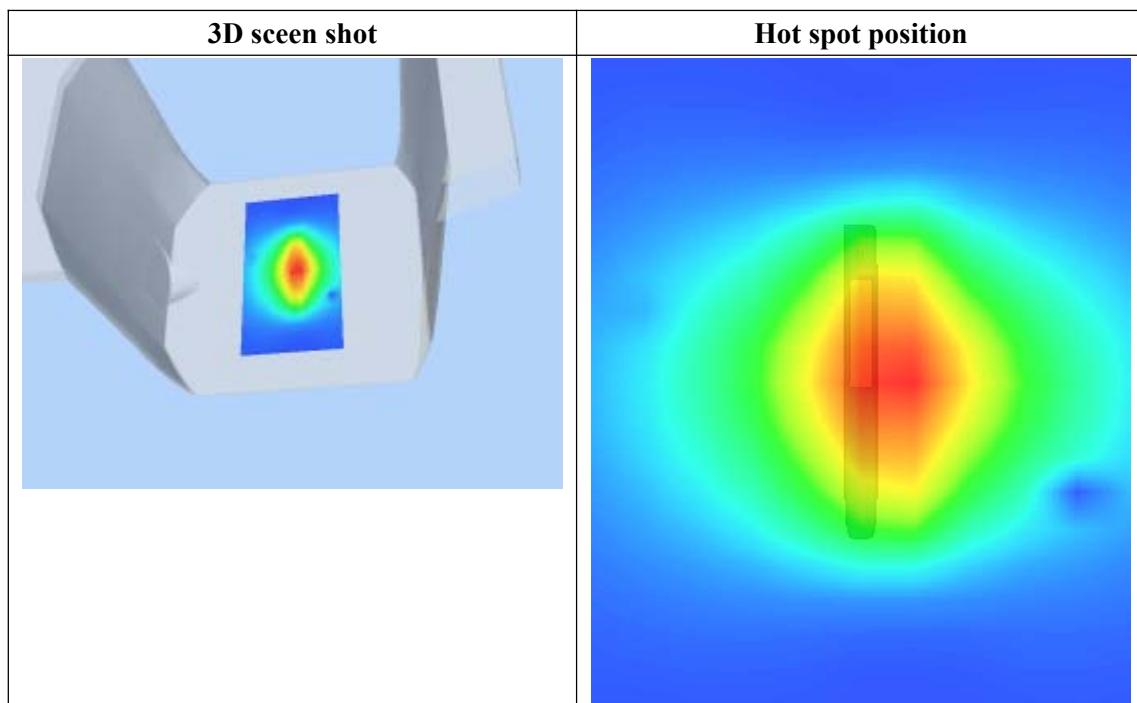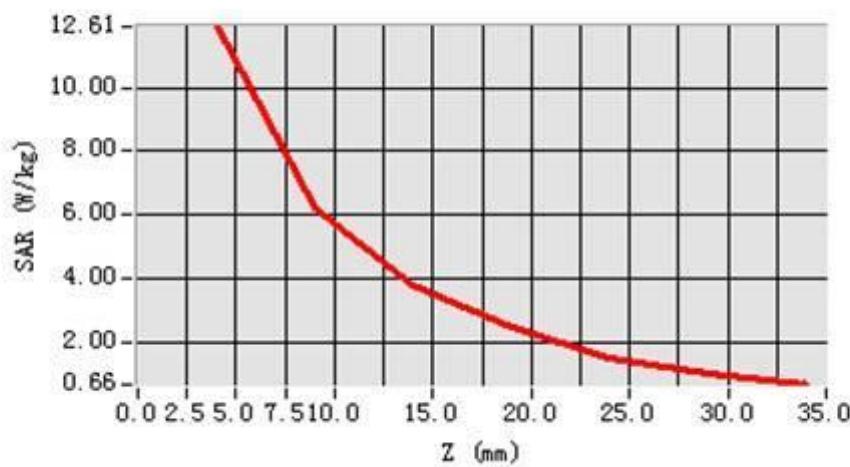

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/7/2012

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.548876
Relative permittivity	12.991650
Conductivity (S/m)	1.974257
Power Drift (%)	1.080000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

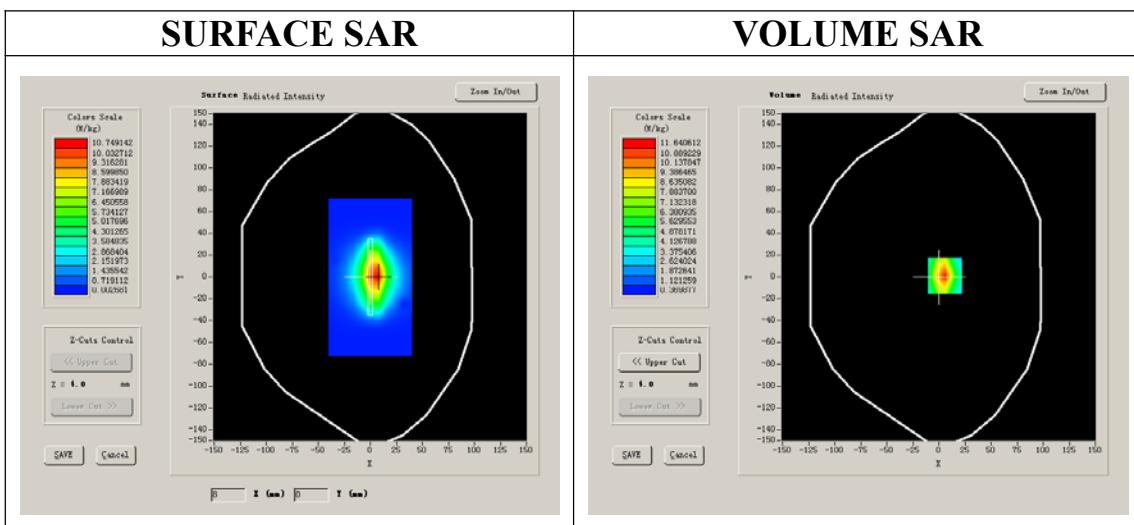

Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	6.256773
SAR 1g (W/Kg)	12.789110

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3.5991	1.3473

SAR, Z Axis Scan (X = -1, Y = -50)

