

SAR TEST REPORT

Specific Absorption Rate

Test Report No : MCCL-3-10-064

Product :	Cellular / PCS GSM / EDGE Phone with Bluetooth & WLAN
Model Name(s) :	VER-01, GD970
Manufacturer :	ModeLabs Manufacture SAS
Applicant :	ModeLabs Manufacture SAS
Application Type :	Certification
Device Category :	Licensed Portable Transmitter Held to Ear (PCE)
Standards :	§ 2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]
Date of Sample Receipt :	March 15, 2010
Date of Issue :	April 14, 2010
Test Device Serial No. :	Pre-Production Sample [S/N: #1]
Test Result :	PASS

SUMMARY

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI / IEEE C95.1(2005) and had been tested in accordance with the measurement procedures specified in FCC/OET bulletin 65 Supplement C (2001) , ANSI / IEEE 1528 – Dec. 2003 and in applicable Industry Canada Radio Standards specifications (RSS)

※ The test results in this test report apply only to sample(s) tested.



Issued under the authority of
E. S. Park / Technical Manager
MCCL



Reviewed by
J. S. Jang /Vice Technical Manager
MCCL



Prepared by
C. H. Jeong / Test Engineer
MCCL

TABLE OF CONTENTS

1. TEST RESULT SUMMARY	3
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 Antenna Description.....	4
2.2 Device Description.....	4
3. INTRODUCTION.....	5
4. SAR MEASUREMENT SYSTEM	6
4.1 SAR Measurement Setup.....	6
4.2 DASY4 E-Field Probe System.....	7
4.3 Phantom.....	9
4.4 Brain & Muscle Simulating Mixture Characterization	10
4.5 Device Holder for Transmitters.....	11
4.6 Validation Dipole	11
5. SAR MEASUREMENT PROCEDURE.....	12
6. DEFINITION OF REFERENCE POINT.....	13
6.1 EAR Reference Point.....	13
6.2 Handset Reference Points.....	14
7. TEST CONFIGURATION POSITIONS.....	15
7.1 Positioning for Cheek/Touch.....	15
7.2 Positioning for Ear / 15° Tilt.....	16
7.3 Body Holster /Belt Clip Configuration.....	17
8. MEASUREMENT UNCERTAINTY.....	18
9. ANSI/IEEE C95.1-2005 RF EXPOSURE LIMITS	19
10. SYSTEM VERIFICATION.....	20
11. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas	23
12. RF CONDUCTED POWER	24
13. MEASUREMENT RESULTS	28
14. TEST EQUIPMENT	31
15. REFERENCES.....	32
APPENDIX A: Validation Test Data.....	33
APPENDIX B: SAR Test Data.....	42
APPENDIX C: Calibration Certificates.....	73

1. TEST RESULT SUMMARY

Model Name(s) :	VER-01, GD970
Date of Test :	March 29 ~ March 31, 2010
Date of Issue :	April 14, 2010
Address of Test Site :	60-39, Kasan-Dong, Kumchon-Gu, Seoul 153-801, Korea.
Responsible Test Engineer :	Eui-Soon Park
Test Engineer :	Chan-ho Jeong
EUT Type :	Cellular / PCS GSM / EDGE Phone with Bluetooth & WLAN
Tx Frequency :	824.20 ~ 848.80 MHz (GSM850) 1850.20 ~ 1909.80 MHz (PCS1900) 2412 MHz ~ 2462 MHz (WLAN)
Rx Frequency :	869.20 ~ 893.80 MHz (GSM850) 1930.20 ~ 1989.80 MHz (PCS1900)
Transmit Output Power :	GSM850: 32.5 dBm PCS1900: 29.5 dBm WLAN : 16 dBm

Maximum Results Found During SAR Evaluation

1. Head Configuration

ANSI / IEEE C95.1(2005) - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg averaged over 1 gram		
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End				
836.6	190	GSM 835	32.07	32.00	Standard	Left Touch	Fixed	0.541

2. Body Worn Configuration

ANSI / IEEE C95.1(2005) - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg averaged over 1 gram		
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End				
836.6	190	GPRS 835[3TX]	31.84	31.82	Standard	20mm [Rear]	Fixed	0.969

3. Measurement Uncertainty

Combine Standard Uncertainty	10.9
Extended Standard Uncertainty	21.8 (k=2% CONFIDENCE LEVEL)

2. DESCRIPTION OF THE DEVICE UNDER TEST

The FCC rules for evaluating portable devices for RF exposure compliance are contained in 47 CFR §2.1093. For purposes of RF exposure evaluation, a portable device is defined as a transmitting device designed to be used with any part of its radiating structure in direct contact with the user's body or within 1.5 centimeters of the body of a user or bystanders under normal operating conditions. This category of devices would include hand-held cellular and PCS telephones that incorporate the radiating antenna into the hand-piece and wireless transmitters that are carried next to the body. Portable devices are evaluated with respect to SAR limits for RF exposure. The applicable SAR limit for portable transmitters used by consumers is 1.6 watts/kg, which is averaged over any one gram of tissue defined as a tissue volume in the shape of a cube.

2.1 Antenna Description

Type :	Fixed
Location :	The inside of the device
Configuration :	Intenna Type Antenna

2.2 Device Description

Manufacturer :	ModeLabs Manufacture SAS
FCC ID :	WCKVER-01
Trade Name :	ModeLabs Manufacture SAS
Model Name :	VER-01, GD970
Serial No :	Pre-Production Sample [S/N: #1]
EUT Type :	Cellular / PCS GSM / EDGE Phone with Bluetooth & WLAN
Mode(s) of Operation :	GSM 850 / PCS1900 / WLAN
Transmit Output Power :	GSM 850 : Level 5 (32.5 dBm) PCS 1900 : Level 0 (29.5 dBm) WLAN : 16 dBm
Mode(s) of Operation :	GSM
Modulation Mode(s) :	GSM
Duty Cycle :	8.3 (GSM) / 4.15 (GPRS) / 2.77 (GPRS) / 2.075 (GPRS)
Transmitting Frequency Range :	824.20 ~ 848.80 MHz (GSM850) 1850.20 ~ 1909.80 MHz (PCS1900) 2412 MHz ~ 2462 MHz (WLAN)
Battery Type :	Standard

3. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable device.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) For localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for safety Levels with Respect to Human Exposure to Radio Frequency Electronic Fields, 3 kHz to 300 GHz. (c) 1992 by the institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-2005 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (ICNIRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields," ICNIRP Report No. 86 (c) ICNIRP, 1986, Bethesda, MD20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). it is also defined as the rate of rf energy absorption per unit mass at a point in an absorbing body. (see Fig. 2.1.)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

Where:

σ = conductivity of the tissue-simulant material (S/m)

ρ = mass density of the tissue-simulant material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

4. SAR MEASUREMENT SYSTEM

An SAR measurement system usually consists of a small diameter isotropic electric field probe, a multiple axis probe positioning system, a test device holder, one or more phantom models, the field probe instrumentation, a computer and other electronic equipment for controlling the probe and making the measurements. Other supporting equipment, such as a network analyzer, power meters and RF signal generators, are also required to measure the dielectric parameters of the simulated tissue media and to verify the measurement accuracy of the SAR system.

4.1 SAR Measurement Setup

Robotic System

Measurement are performed using the DASY4 dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG(SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, Pentium IV computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 4.1)

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The pc consists of the Intel Pentium IV 2.4 GHz computer with Windows 2000 system and SAR measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing,

AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

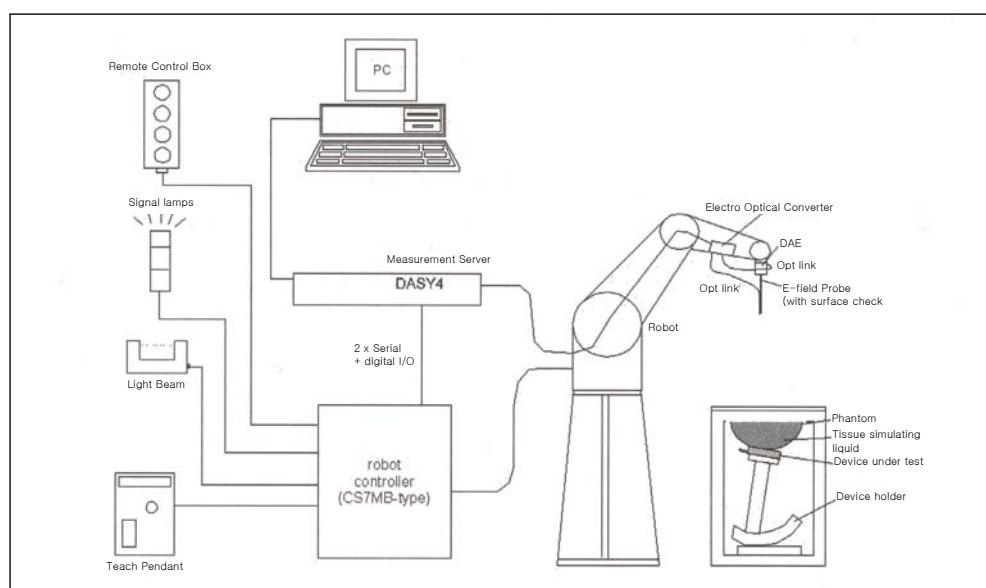


Figure 4.1 SAR Measurement System Setup

System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical Down-link for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

4.2 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig. 4.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box in the robot arm and provides an automatic detection transmitter, the other half to a synchronized receiver. As the probe approach the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches coupling is zero. The distance of the coupling maximum to the surface is probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

Probe Specifications

Construction:	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration:	Basic Broad Band Calibration: in air: 10-3000 MHz Conversion Factors (CF) for HSL 900 and HSL 1800 Additional CF for other liquids and frequencies upon request
Frequency:	10 MHz to 3 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Optical Surface	± 0.2 mm repeatability in air and clear liquids over
Detection:	diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetric measurements up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms




Figure 4.2 Isotropic E-Field Probe

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in [8] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [9] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. 4.3), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe. (see Fig. 4.4)

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

$$\text{SAR} = \frac{|\mathbf{E}|^2 \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

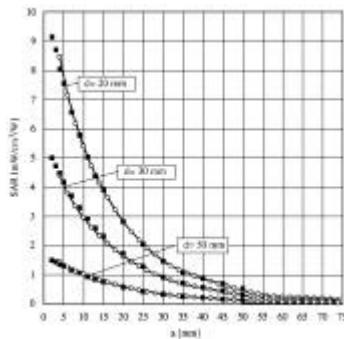


Figure 4.3 E-Field and Temperature measurements at 900MHz [7]

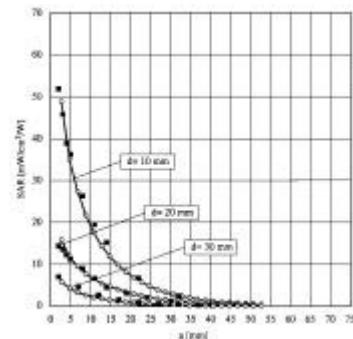


Figure 4.4 E-Field and Temperature measurements at 1.9GHz [7]

4.3 Phantom

The SAM Twin Phantom V4.0 is constructed of the fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 4.5)



Figure 4.5 SAM Twin Phantom

Phantom Specification

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Shell Thickness:

2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm

Filling:

Volume Approx. 25 liters

Dimensions:

Height: adjustable feet; Length: 1000 mm; Width: 500 mm

4.4 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose(HEC) gelling agent and saline solution (see Table 4.1). Preservation with a bacteriocide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulation liquids are according to the data by C. Gabriel and G. Hartagrove [13]. (see Table 4.2)

INGREDIENTS (% by weight)	900MHz	1800MHz	1900MHz	2450MHz
De-ionized water	40.92	52.64	54.90	45.00
DGBE	-	47.00	44.94	55.00
SUGAR	56.50	-	-	-
SALT	1.48	0.36	0.18	-
BACTERIACIDE	0.10	-	-	-
HEC	1.00	-	-	-
Dielectric Constant Target	41.50	40.00	40.00	38.20
Conductivity (S/m) Target	0.97	1.40	1.40	1.80

Table. 4.1 Composition of the Tissue Equivalent Matter

4.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (see Fig. 4.6) enables the rotation of the accurately, and repeatably be positioned according to the IEC, IEEE, CENELEC, FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

*Note : A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure. 4.6 Device Holder

4.6 Validation Dipole

The reference dipole should have a return loss better than -20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

Validation Dipole Specifications

Construction:	Symmetrical dipole with $1/4$ balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with head simulating solutions. Includes distance holder and tripod adaptor.
Calibration:	Calibrated SAR value for specified position and input power at the flat phantom in simulating solution
Frequency:	835 MHz, 1900 MHz
Return Loss:	> 20 dB at specified validation position
Power Capability:	> 100 W ($f < 1$ GHz); > 40 W ($f > 1$ GHz)
Dimensions:	D835V2: dipole length: 161 mm; overall height: 330 mm D1900V2: dipole length: 68 mm; overall height: 300 mm



Figure 4.7 Validation Dipole

5. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure:

- 1) The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.
- 2) The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm x 15mm.
- 3) Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 34mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- 4) The SAR reference value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.

6. DEFINITION OF REFERENCE POINT

6.1 EAR Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-line (Back-Mouth), as shown in Figure 6.2. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Fig. 6.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

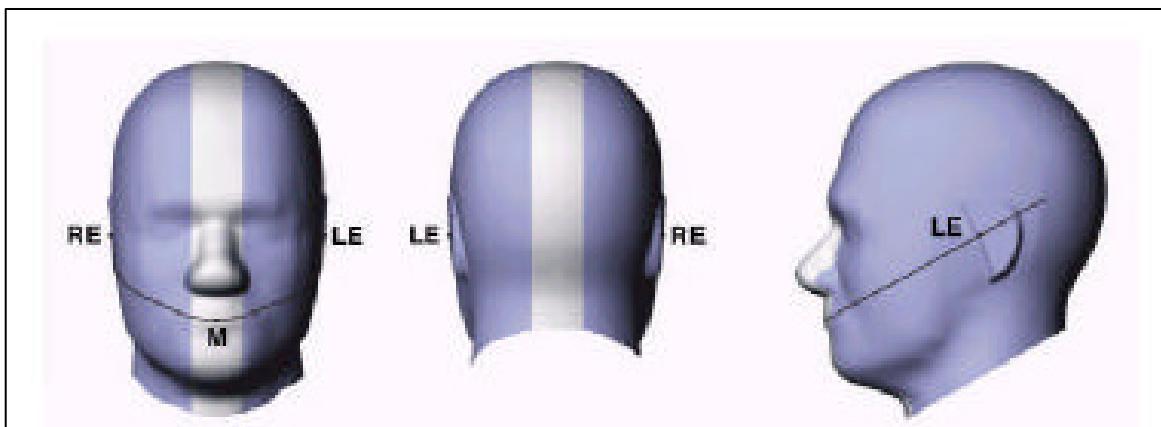


Figure 6.1 Front, back and side view of SAM Twin Phantom

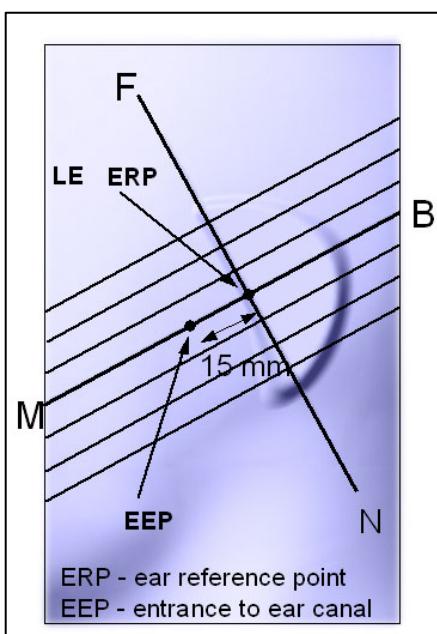


Figure 6.2 Close-Up, side view of ERP

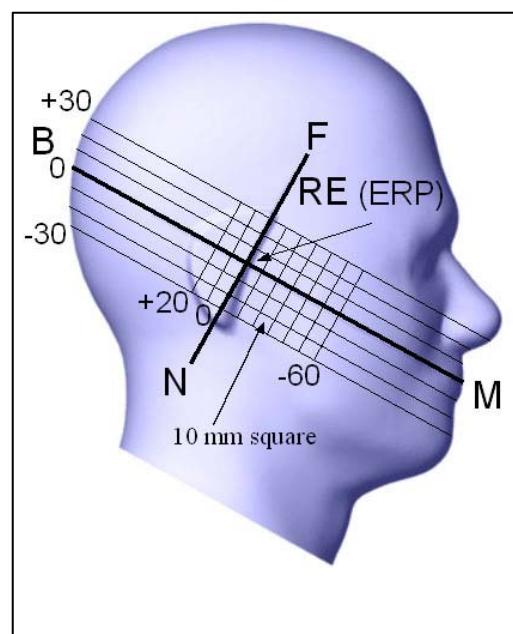


Figure 6.3 Side view of the phantom showing relevant markings

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 6.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

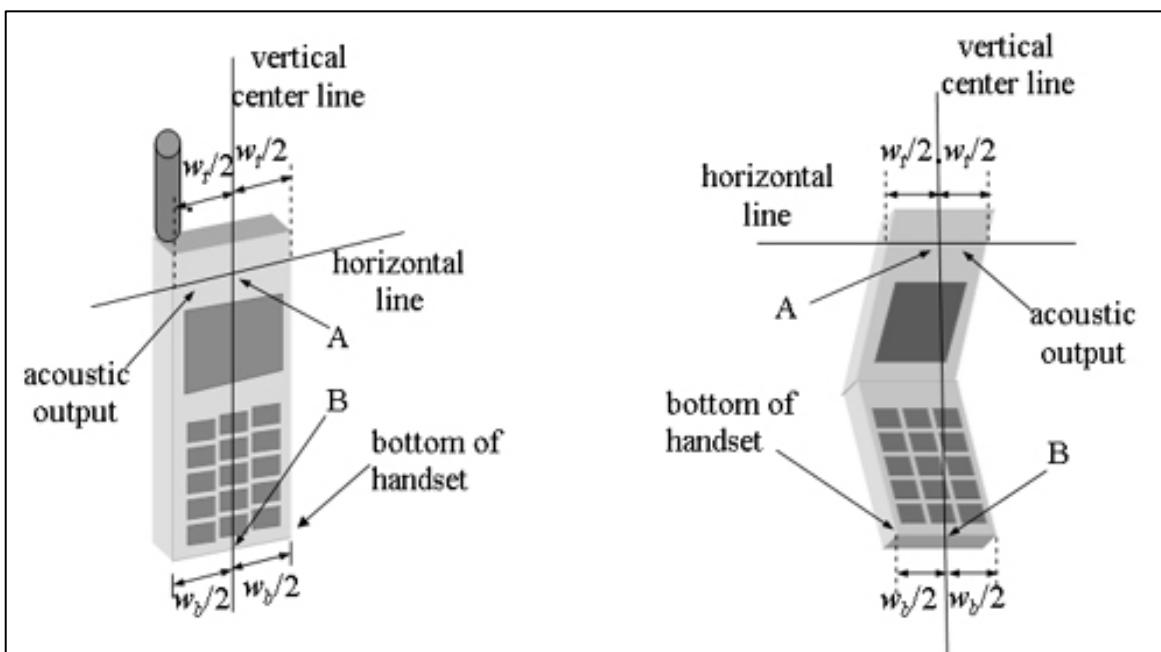


Figure 6.4 Handset Vertical Center & Horizontal Line Reference Points

7. TEST CONFIGURATION POSITIONS

7.1 Positioning for Cheek/Touch

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the phone can also be used with the cover closed, both configurations must be tested.)
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width wt of the handset at the level of the acoustic output (point A on Fig. 6.4), and the midpoint of the width wb of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Fig. 6.4). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Fig. 6.4), especially for clamshell handsets, handsets with lip pieces, and other irregularly-shaped handsets.
- 3) Position the handset close to the surface of the phantom touch that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Fig. 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the pinna (cheek). (see Fig. 7.1) The physical angles of rotation should be noted.

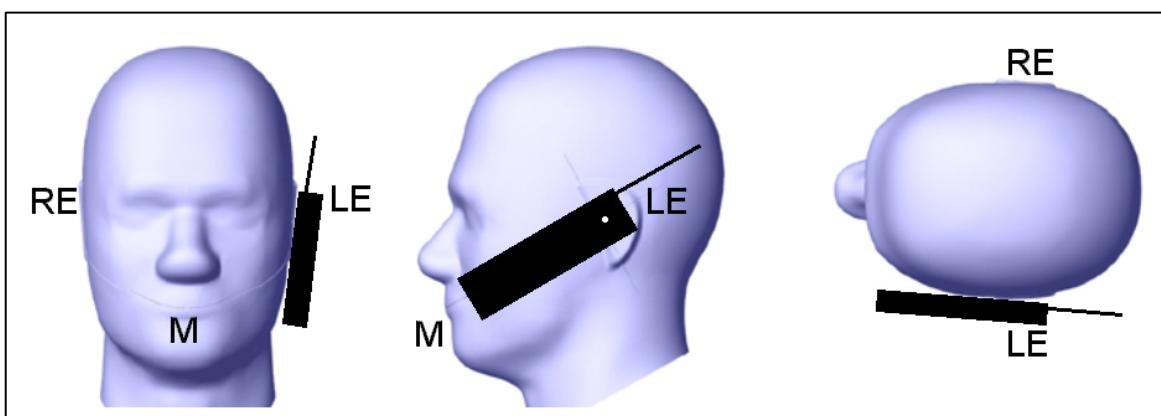


Figure 7.1 Front, Side and Top View of Cheek/Touch Position

7.2 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek/Touch Position”:

- 1) While maintaining the orientation of the phone retract the phone parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
- 2) Rotate the phone around the horizontal line by 15 degree.
- 3) While maintaining the orientation of the phone, move the phone parallel to the reference plane until any part of the phone touches the head. (In this position, point A will be located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the phone shall be reduced. The tilted position is obtained if any part of the phone is in contact of the ear as well as a second part of the phone is contact with the head. (see Fig. 7.2)

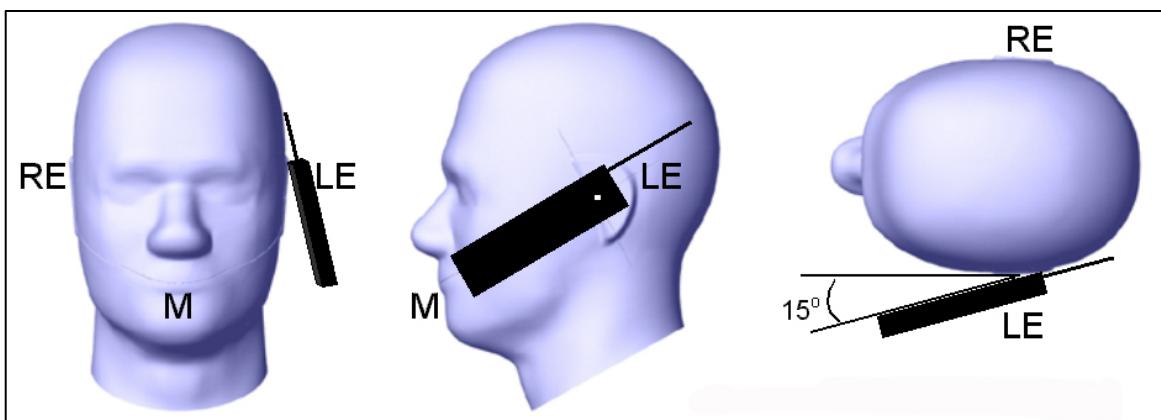


Figure 7.2 Front, Side and Top View of Ear/15° Tilt Position

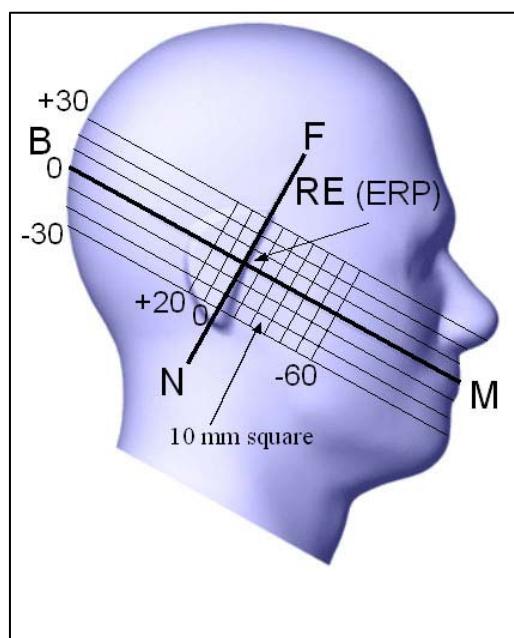


Figure 7.3 Side view of the phantom showing relevant markings

7.3 Body Holster /Belt Clip Configurations

Body-worn operation configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. (see Fig. 7.4) A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all case SAR measurements are performed to investigate the worst case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.



Figure 7.4 Body Holster Configuration

8. MEASUREMENT UNCERTAINTY

$$U(y) = \text{root} \left[(C_1^2 U^2_{pc} / d_1) + (U^2_{al}) + (U^2_{hi}) + (C_4^2 U^2_{be}) + (C_5^2 U^2_{ii}) + (C_6^2 U^2_{dt}) + (C_7^2 U^2_{re} / d_7) + (C_8^2 U^2_{n}) + (C_9^2 U^2_{it}) + (C_{10}^2 U^2_{ac}) + (C_{11}^2 U^2_{pm}) + (C_{12}^2 U^2_{pp}) + (C_{13}^2 U^2_{ei}) + (C_{14}^2 U^2_{pu}) + (C_{15}^2 U^2_{ct}) + (C_{16}^2 U^2_{lc} / d_{16}) + (C_{17}^2 U^2_{lp}) + (C_{18}^2 U^2_{lp} / d_{18}) \right]$$

	Description	Unc.	Prob. Dist.	Divider(d)	Ci (1g)	Std. Unc. (1g)	Veff
Measure. Equipment	U(pc) Probe Calibration	± 5.9%	Normal	1	1	± 5.9%	∞
	U(al) Axial Isotropy	± 4.7%	Rectan.	Root 3	0.7	± 1.9%	∞
	U(hi) Hemispherical Isotropy	± 9.6%	Rectan.	Root 3	0.7	± 3.9%	∞
	U(be) Boundary Effect	± 1.0%	Rectan.	Root 3	1	± 0.6%	∞
	U(li) Linearity	± 4.7%	Rectan.	Root 3	1	± 2.7%	∞
	U(dl) Detection Limits	± 1.0%	Rectan.	Root 3	1	± 0.6%	∞
	U(re) Readout Electronics	± 0.3%	Normal	1	1	± 0.3%	∞
	U(rt) Response Time	± 0.8%	Rectan.	Root 3	1	± 0.5%	∞
	U(it) Integration Time	± 2.6%	Rectan.	Root 3	1	± 1.5%	∞
	U(an) RF Ambient Conditions–Noise	± 3.0%	Rectan.	Root 3	1	± 1.7%	∞
	U(ar) RF Ambient Conditions–Reflection	± 3.0%	Rectan.	Root 3	1	± 1.7%	∞
	U(pm) Probe Positioner Mechanical	± 0.4%	Rectan.	Root 3	1	± 0.2%	∞
	U(pp) Probe Positioning w/ Phantom	± 2.9%	Rectan.	Root 3	1	± 1.7%	∞
	U(ei) Extrapolation and Integration	± 1.0%	Rectan.	Root 3	1	± 0.6%	∞
Test Sample	U(dp) Device Positioning	± 2.8%	Normal	1	1	± 2.8%	35
	U(dh) Device Holder Uncertainty	± 3.6%	Normal	1	1	± 3.6%	5
	U(op) Drift of Output Power	± 5.0%	Rectan.	Root 3	1	± 2.9%	∞
Physical Parameter	U(pu) Phantom Uncertainty	± 4.0%	Rectan.	Root 3	1	± 2.3%	∞
	U(ct) Liquid Conductivity (Target)	± 5.0%	Rectan.	Root 3	0.64	± 1.8%	∞
	U(lc) Liquid Conductivity (Measurement)	± 2.5%	Normal	1	0.64	± 1.6%	∞
	U(lp) Liquid Permittivity (Target)	± 5.0%	Rectan.	Root 3	0.6	± 1.7%	∞
	U(lp) Liquid Permittivity (Measurement)	± 2.5%	Normal	1	0.6	± 1.5%	∞
Uc(y) Combined	± 10.9 %						
Expanded	± 21.8 % (k =2)						

Table 8.1 Worst-Case uncertainty budget for DASY4 assessed according to IEC 62209-1.
The budget is valid for the frequency range 300MHz-3GHz and represents a worst-case analysis.

9. ANSI/IEEE C95.1 –2005 RF EXPOSURE LIMITS

Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
SPATIAL PEAK SAR¹ Brain	1.60	8.00
SPATIAL PEAK SAR² Whole Body	0.08	0.40
SPATIAL PEAK SAR³ Hands, Feet, Ankles, Wrists	4.00	20.00

Table 9.1 Safety Limits for Partial Body Exposure [2]

NOTE:

- 1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2 The Spatial Average value of the SAR averaged over the whole body.
- 3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube)

10. SYSTEM VERIFICATION

Tissue Verification

MEASURED TISSUE PARAMETERS				
Tissue	835MHz Brain		1900MHz Brain	
Date	03/29/2010		03/30/2010	
Liquid Temp (°C)	21.8		21.8	
Liquid Depth (mm)	150 ± 1		150 ± 1	
Parameters	Target	Measured	Target	Measured
DielecTric Constant: ϵ	41.5	42.3	40.0	39.0
Conductivity: σ	0.90	0.92	1.40	1.42
Deviation (%)	ϵ :+1.92 σ :+2.22		ϵ :-2.50 σ :+1.42	

Table 10.1 Simulated Tissue Verification

MEASURED TISSUE PARAMETERS						
Tissue	835MHz Muscle		1900MHz Muscle		2450MHz Muscle	
Date	03/29/2010		03/30/2010		03/31/2010	
Liquid Temp (°C)	21.8		21.8		21.8	
Parameters	Target	Measured	Target	Measured	Target	Measured
DielecTric Constant: ϵ	55.2	56.2	53.3	51.4	52.7	50.9
Conductivity: σ	0.97	0.98	1.52	1.52	1.95	2.00
Deviation (%)	ϵ :+1.81 σ :+1.03		ϵ :-3.56 σ :0.00		ϵ :-3.41 σ :+2.56	

Table 10.2 Simulated Tissue Verification

Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz, 1900MHz, 2450MHz, by using the system validation kit(s). (Graphic Plots Attached)

SYSTEM DIPOLE VALIDATION TARGET & MEASURED						
Tissue	System Validation Kit	Date	Liquid Temp (°C)	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation (%)
835MHz Brain	D835V2, S/N: 471	03/29/2010	21.8	9.66	9.52	-1.44
1900MHz Brain	D1900V2, S/N: 5d017	03/30/2010	21.8	40.5	39.4	-2.71
2450MHz Brain	D2450V2, S/N: 836	03/31/2010	21.8	50.3	49.6	-1.39

Table 10.3 System Validation

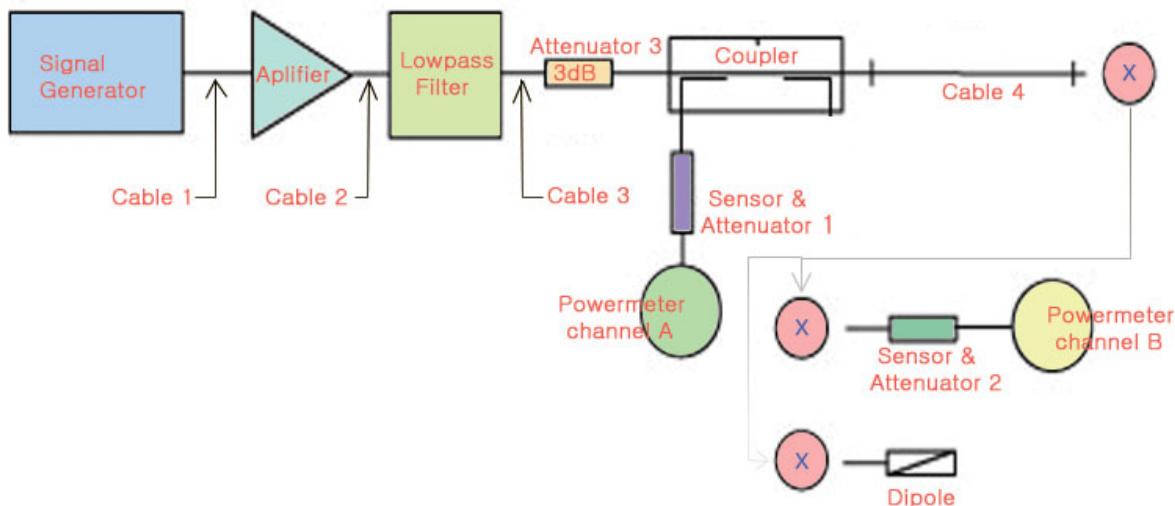
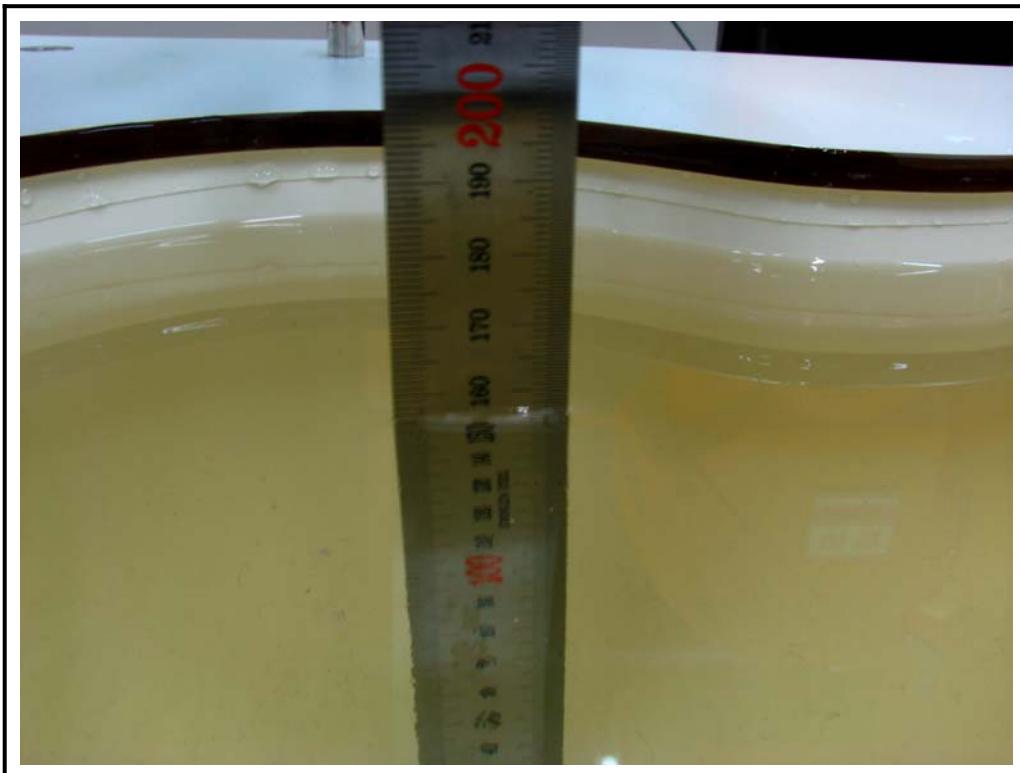
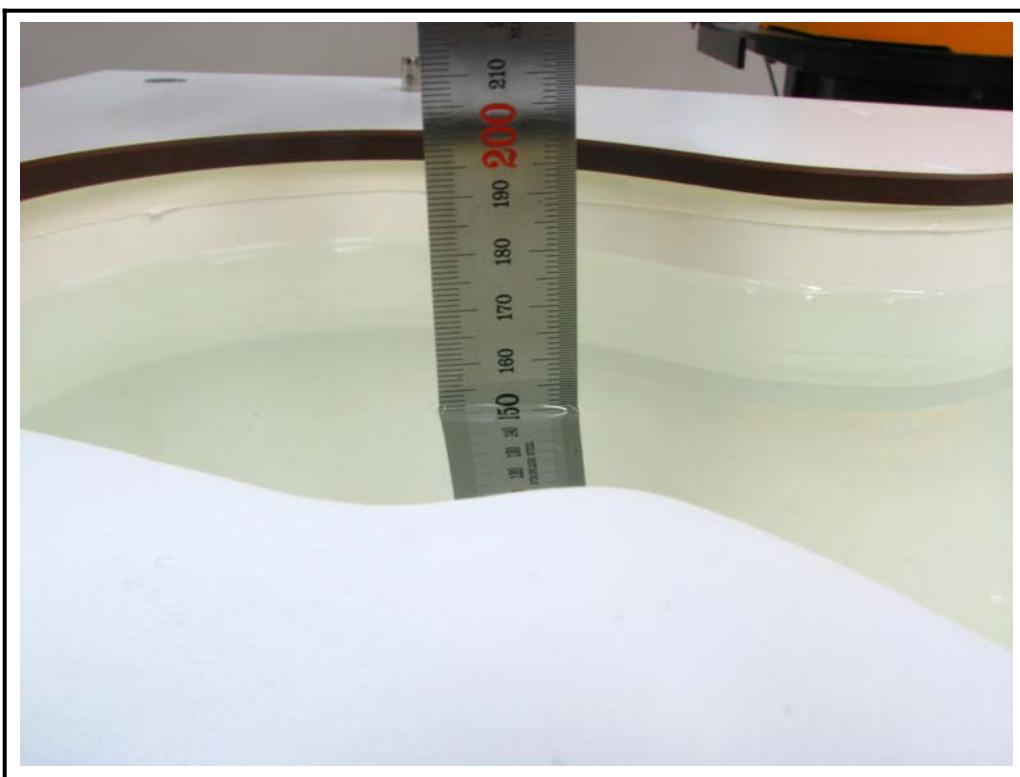


Figure 10.1 Dipole Validation Test Setup

835 MHz Liquid Depth**1900 / 2450 MHz Liquid Depth**

11. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas

11.1 SAR Evaluation Considerations

These procedures were followed according to FCC "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", February 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P _{Ref}	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

Table. 11.1 Output Power Thresholds for Unlicensed Transmitters

Licensed Transmitters	Individual Transmitter	Simultaneous Transmission
Unlicensed Transmitters	<p><u>When there is no simultaneous transmission –</u></p> <ul style="list-style-type: none"> ○ output $\leq 60/f$: SAR not required ○ output $> 60/f$: stand-alone SAR required <p><u>When there is simultaneous transmission – Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> ○ output $\leq 2P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas ○ output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas ○ output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <p><u>Otherwise stand-alone SAR is required</u></p> <p><u>When stand-alone SAR is required</u></p> <ul style="list-style-type: none"> ○ test SAR on highest output channel for each wireless mode and exposure condition ○ if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures 	<p><u>SAR not required:</u> <u>Unlicensed only</u></p> <ul style="list-style-type: none"> ○ when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <p><u>Licensed & Unlicensed</u></p> <ul style="list-style-type: none"> ○ when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas ○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 <p><u>SAR required:</u> <u>Licensed & Unlicensed</u></p> <p>antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u>	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Table. 11.2 SAR Evaluation Requirements for Cellphones with Multiple Transmitters

FCC ID: WCKVER-01

BT Max RF Output Power : 7.96 dBm (6.25 mW)

Antenna separation distance between Main and BT: 6.9 cm

Because the conducted output power level of the BT transmitter is less than Pref, and the BT antenna is more than 2.5 cm from the Main antenna, neither simultaneous SAR nor stand-alone BT SAR are required for the EUT. Based on the output power and antenna separation distance, a stand-alone WLAN SAR test is required. The summation of Main and WLAN is $(0.969 + 0.108) = 1.077 < 1.6$ mW/g. Therefore a simultaneous SAR evaluation is not required.

12. TEST CONFIGURATIONS

SAR Testing with IEEE 802.11 a/b/g Transmitters

Normal Network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

12.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers.

The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

12.2 Frequency Channel Configurations

802.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 80.211 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; Channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz § 15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11, 15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels.

These are referred to as the “default test channels”. 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

Mode	GHz	Channel	Turbo Channel	“Default Test Channels”		
				§15.247		UNII
				802.11b	802.11g	
802.11 b/g	2.412	1		✓	✗	
	2.437	6	6	✓	✗	
	2.462	11		✓	✗	
	5.18	36				✓
	5.20	40	42 (5.21 GHz)			*
	5.22	44				*
	5.24	48	50 (5.25 GHz)			✓
	5.26	52				✓
	5.28	56	58 (5.29 GHz)			*
	5.30	60				*
802.11a	5.32	64				✓
	5.500	100				*
	5.520	104				✓
	5.540	108				*
	5.560	112				*
	5.580	116				*
	5.600	120				*
	5.620	124				✓
	5.640	128				*
	5.660	132				*
	5.680	136				✓
	5.700	140				*
	5.745	149		✓		✓
	5.765	153	152 (5.76 GHz)		*	*
UNII or §15.247	5.785	157		✓		*
	5.805	161	160 (5.80 GHz)		*	✓
	5.825	165		✓		
	§15.247					

802.11 Test Channels per FCC Requirements

13. RF CONDUCTED POWER

Power measurements were performed using a base station simulator under digital average power

Average Output Power Measurement for FCC ID: WCKVER-01

Band	Channel	Voice	GPRS Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)
GSM 850	128	32.16	32.16	31.99	31.95	28.54
	190	32.07	32.08	31.91	31.84	28.63
	251	32.09	32.10	31.69	31.67	28.41
GSM 1900	512	29.16	29.17	29.10	29.09	25.18
	661	29.09	29.08	28.96	28.86	25.34
	810	29.14	29.09	29.07	28.97	25.42

13.1 GSM Conducted Output Powers

Band	Channel	EDGE Data			
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	26.67	26.62	26.61	26.42
	190	26.62	26.60	26.55	26.47
	251	26.50	26.46	26.41	26.36
GSM 1900	512	26.31	26.27	25.37	25.32
	661	25.47	25.42	25.37	25.33
	810	25.53	25.51	25.42	25.37

13.2 GSM EDGE Conducted Output Powers

Average Output Power Measurement for FCC ID: WCKVER-01

802.11b Mode		Rated	Measured Power
Frequency[MHz]	Channel No.	[Mbps]	(dBm)
2412	1	1	15.02
		2	15.02
		5.5	15.02
		11	15.02
2437	6	1	15.53
		2	15.53
		5.5	15.53
		11	15.53
2462	11	1	14.34
		2	14.34
		5.5	14.34
		11	14.34

13.3 IEEE 802.11b Average output power

Average Output Power Measurement for FCC ID: WCKVER-01

802.11g Mode		Rated	Measured Power
Frequency[MHz]	Channel No.	[Mbps]	(dBm)
2412	1	6	12.72
		9	12.72
		12	12.72
		18	12.72
		24	12.72
		36	12.72
		48	12.72
		54	12.72
2437	6	6	13.88
		9	13.88
		12	13.88
		18	13.88
		24	13.88
		36	13.88
		48	13.88
		54	13.88
2462	11	6	12.60
		9	12.60
		12	12.60
		18	12.60
		24	12.60
		36	12.60
		48	12.60
		54	12.60

13.4 IEEE 802.11g Average output power

14. MEASUREMENT RESULTS (Continued)

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					Brain 1.6 W/kg averaged over 1 gram			
MEASUREMENT RESULTS (Head SAR)								
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End				
836.6	190	GSM 835	32.07	32.03	Standard	Right Touch	Fixed	0.486
836.6	190	GSM 835	32.07	32.04	Standard	Right Tilt	Fixed	0.265
836.6	190	GSM 835	32.07	32.00	Standard	Left Touch	Fixed	0.541
836.6	190	GSM 835	32.07	32.02	Standard	Left Tilt	Fixed	0.299
1880.0	661	PCS 1900	29.09	29.07	Standard	Right Touch	Fixed	0.317
1880.0	661	PCS 1900	29.09	29.05	Standard	Right Tilt	Fixed	0.098
1880.0	661	PCS 1900	29.09	29.04	Standard	Left Touch	Fixed	0.288
1880.0	661	PCS 1900	29.09	29.08	Standard	Left Tilt	Fixed	0.122

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

14. MEASUREMENT RESULTS (Continued)

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					Muscle 1.6 W/kg averaged over 1 gram			
MEASUREMENT RESULTS (Body SAR)								
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End				
836.6	190	GPRS 835[4TX]	28.63	28.63	Standard	20mm [Front]	Fixed	0.560
836.6	190	GPRS 835[4TX]	28.63	28.63	Standard	20mm [Rear]	Fixed	0.726
836.6	190	GPRS 835[3TX]	31.84	31.82	Standard	20mm [Rear]	Fixed	0.969
836.6	190	GPRS 835[2TX]	31.91	31.89	Standard	20mm [Rear]	Fixed	0.668
836.6	190	GPRS 835[1TX]	32.08	32.05	Standard	20mm [Rear]	Fixed	0.660
824.2	128	GPRS 835[3TX]	31.95	31.92	Standard	20mm [Rear]	Fixed	0.726
848.8	251	GPRS 835[3TX]	31.67	31.64	Standard	20mm [Rear]	Fixed	0.904
1880.0	661	GPRS 1900[4TX]	25.34	25.32	Standard	20mm [Front]	Fixed	0.124
1880.0	661	GPRS 1900[4TX]	25.34	25.31	Standard	20mm [Rear]	Fixed	0.106
1880.0	661	GPRS 1900[3TX]	28.86	28.85	Standard	20mm [Front]	Fixed	0.213
1880.0	661	GPRS 1900[2TX]	28.96	28.93	Standard	20mm [Front]	Fixed	0.146
1880.0	661	GPRS 1900[1TX]	29.08	29.05	Standard	20mm [Front]	Fixed	0.073
1880.0	661	EDEG1900[4TX]	25.33	25.31	Standard	20mm [Front]	Fixed	0.105

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
6. GPRS Multi-slot Class (12) : 4 Tx slots tested



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

14. MEASUREMENT RESULTS

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg averaged over 1 gram			
MEASUREMENT RESULTS (Body SAR)									
Frequency		Modulation	Conducted Power (dBm)		Data Rate	Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End					
2437	06	IEEE 802.11 b	15.53	15.52	1 Mbps	Standard	20mm [Front]	Fixed	0.00996
2437	06	IEEE 802.11 b	15.53	15.50	1 Mbps	Standard	20mm [Rear]	Fixed	0.108
2412	01	IEEE 802.11 b	15.02	15.00	1 Mbps	Standard	20mm [Rear]	Fixed	0.039
2462	11	IEEE 802.11 b	14.34	14.31	1 Mbps	Standard	20mm [Rear]	Fixed	0.066

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

15. TEST EQUIPMENT

Equipment List and Calibration Lab No.2

Name of Equipment	Manufacturer	Model Type	Serial Number	Cal. Due date
Robot	Stäubli	RX90BL	507PA1	N/A
SAM Twin Phantom	SPEAG	V4.0	TP-1117	N/A
SAM Twin Phantom	SPEAG	V4.0	TP-1151	N/A
DAE	SPEAG	DAE4	534	02/04/11
E-Field Probe	SPEAG	ET3DV6	1729	01/27/11
Validation Dipole 835MHz	SPEAG	D835V2	471	01/19/11
Validation Dipole 1900MHz	SPEAG	D1900V2	5d017	07/20/11
Validation Dipole 2450MHz	SPEAG	D2450V2	836	02/08/11
S-Parameter Network Analyzer	Agilent	8753ES	MY4002948	06/22/10
Dielectric Probe Kit	Agilent	85070D	US01440173	N/A
Signal Generator	Agilent	E4421B	MY41000199	03/03/11
High Power RF Amplifier	EM Power	BBS3Q7ECK	1014	03/03/11
Dual Direction Coupler	Agilent	778D-012	50344	06/22/10
EPM-Series Power Meter	Agilent	E4419B	GB39290525	04/15/10
Power Sensor	Agilent	8481A	MY41092723	04/16/10
Power Sensor	Agilent	8481A	MY41092718	04/16/10
Attenuator	Agilent	8491A	59049	03/03/11
Low Pass Filter 1.5 GHz	Dymstec	LA-15N	–	N/A
Low Pass Filter 3.0 GHz	Dymstec	LA-30N	–	N/A
Thermometer/Hygrometer	SATO	SK-L200TH	8440587	06/26/11
Wireless Communication Test	Agilent	E5515C	GB4400522	03/03/11

Table 15.1 Test Equipment List and Calibration

NOTE:

The E-field probe was calibrated by SPEAG, by waveguide technique procedure. Dipole Validation measurement is performed by LG Electronics. before each test. The brain simulating material is calibrated by LG Electronics using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

16. REFERENCES

- [1] Product standard to demonstrate the compliance of mobile phone with the basic restriction related to human exposure electromagnetic(300MHz – 3GHz), CENELEC EN 50360, July 2001.
- [2] Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phone(300MHz – 3GHz), CENELEC EN 50361, July 2001.
- [3] Council Recommendations 1999/519/EC on the limitations of exposure of the general public to electromagnetic fields (300MHz – 3GHz) annex II
- [4] International Commission on Non-Ionising Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic field (up to 300 GHz). Health Physical 74, 494-522.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528 - 2003, Draft Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hoschschule Zürich, Dosimetric Evaluation of the Cellular Phone.

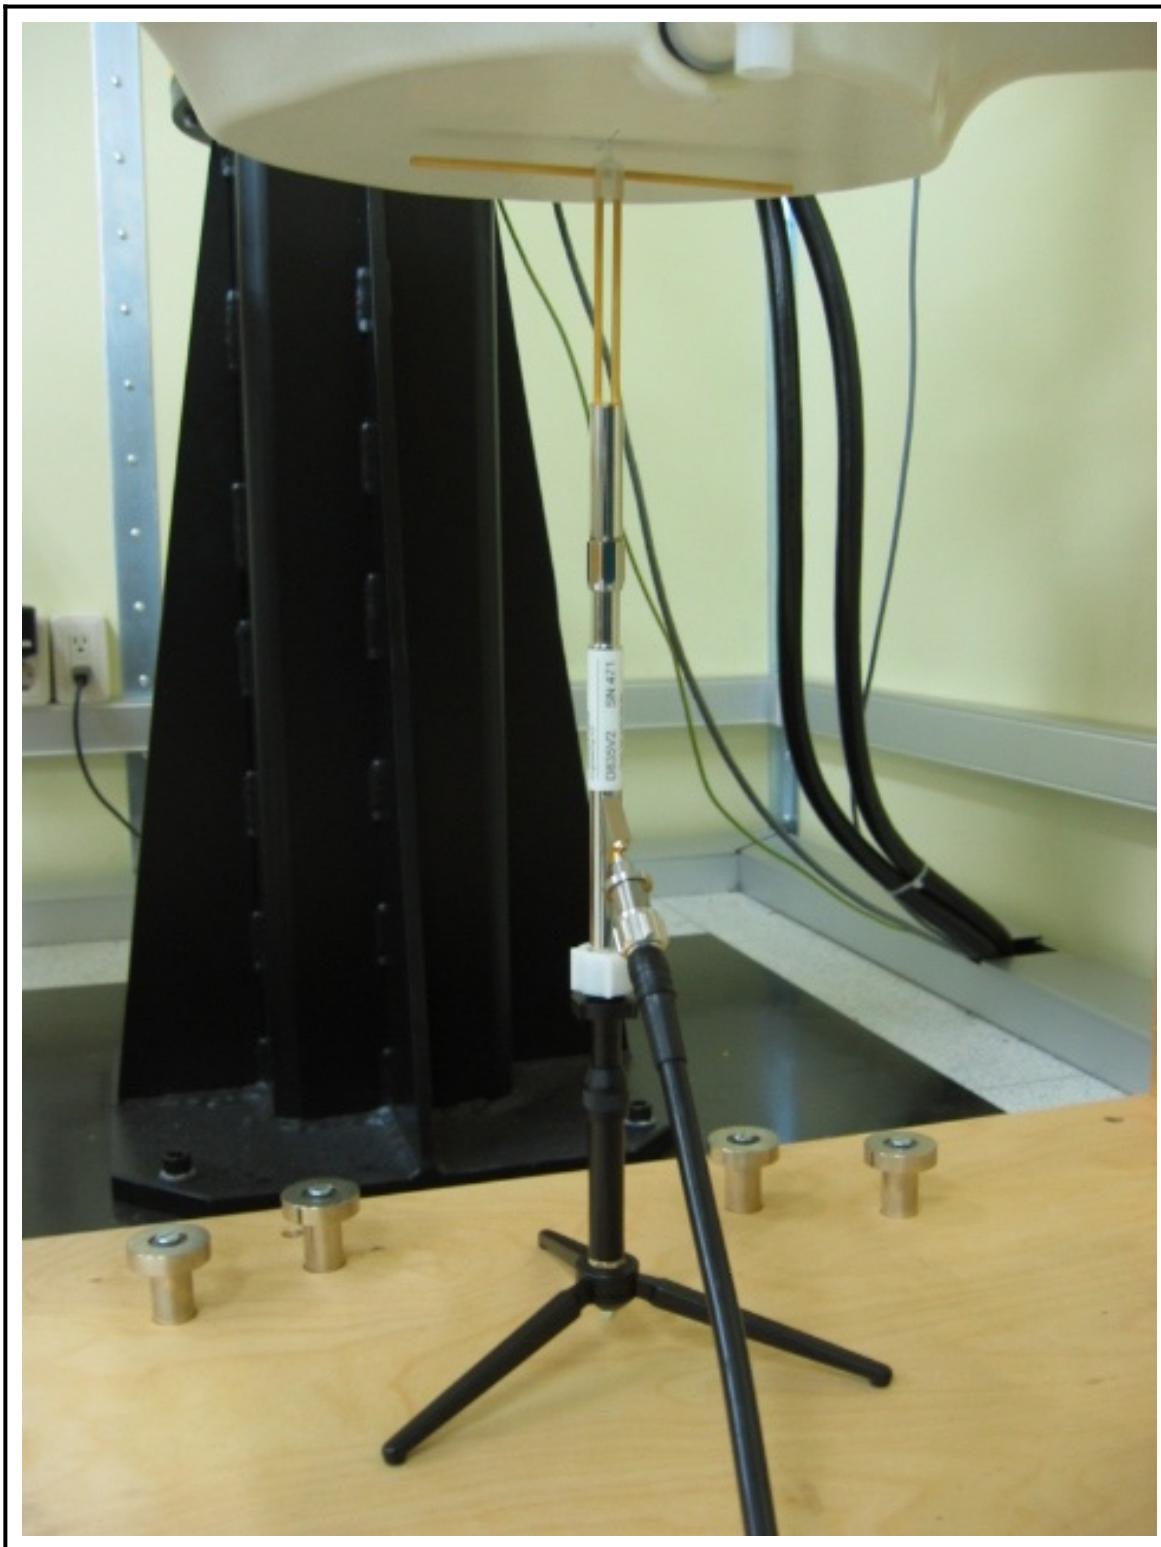
APPENDIX A: Validation Test Data

Figure 1 835 MHz Dipole Validation Test Setup



Figure 2 1900 MHz Dipole Validation Test Setup

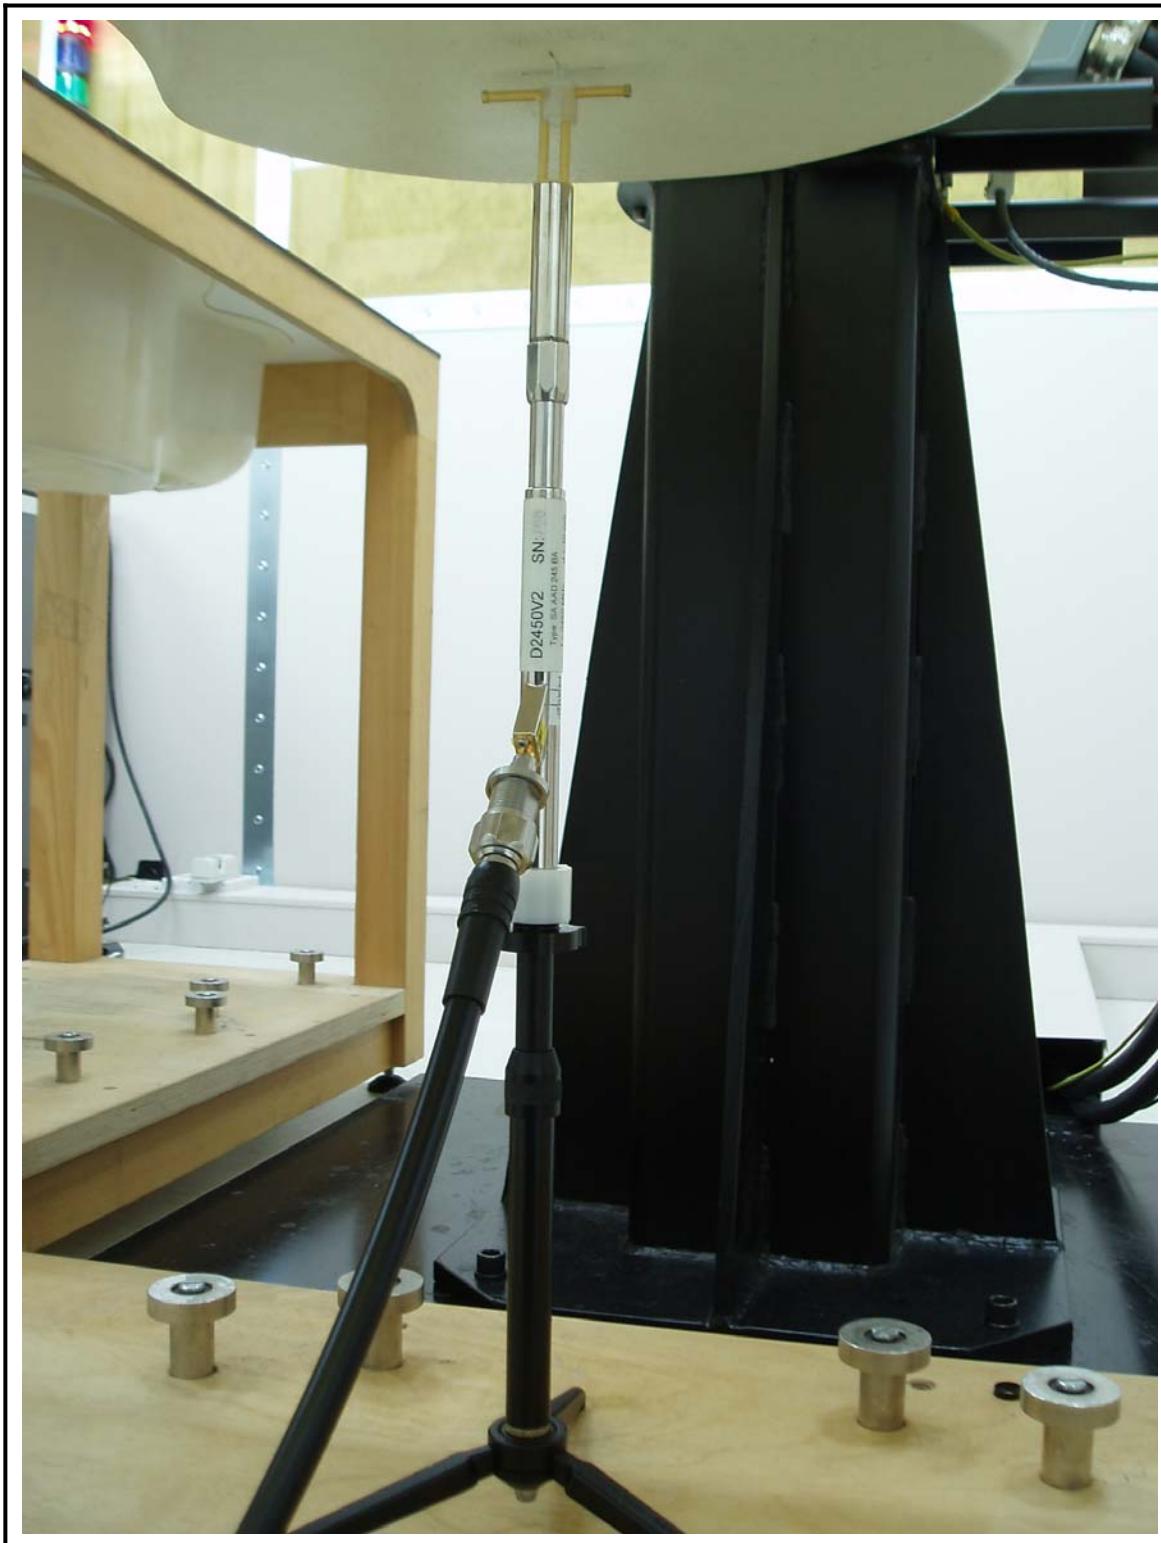


Figure 3 2450 MHz Dipole Validation Test Setup

LG Electronics Inc.

DUT: Dipole 835MHz; Type: D835V2; Serial: 471

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Head 835 MHz; ($\sigma = 0.922 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835 MHz Dipole Validation

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.57mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.8 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.38mW/g; SAR(10 g) = 1.57mW/g

Maximum value of SAR (measured) = 2.56mW/g

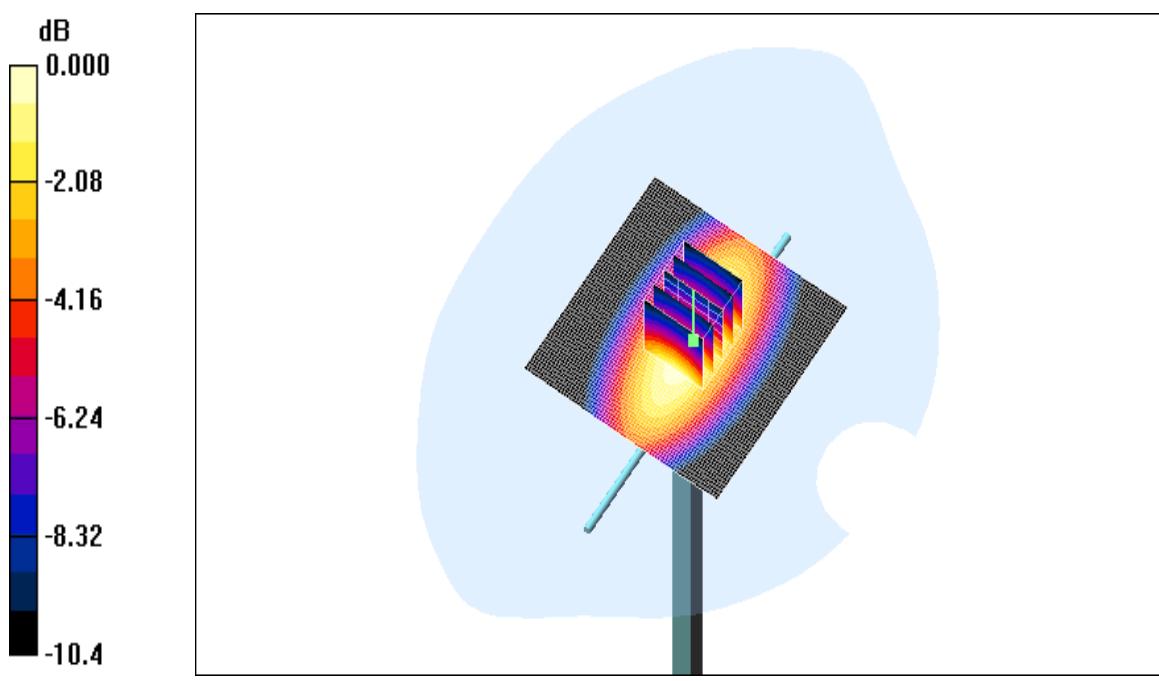

0 dB = 2.56mW/g

LG Electronics Inc.

DUT: Dipole 1900MHz; Type: D1900V2; Serial: 5d017

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 MHz; ($\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900 MHz Dipole Validation

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.8mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.9 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.85mW/g; SAR(10 g) = 5.29mW/g

Maximum value of SAR (measured) = 11.2mW/g

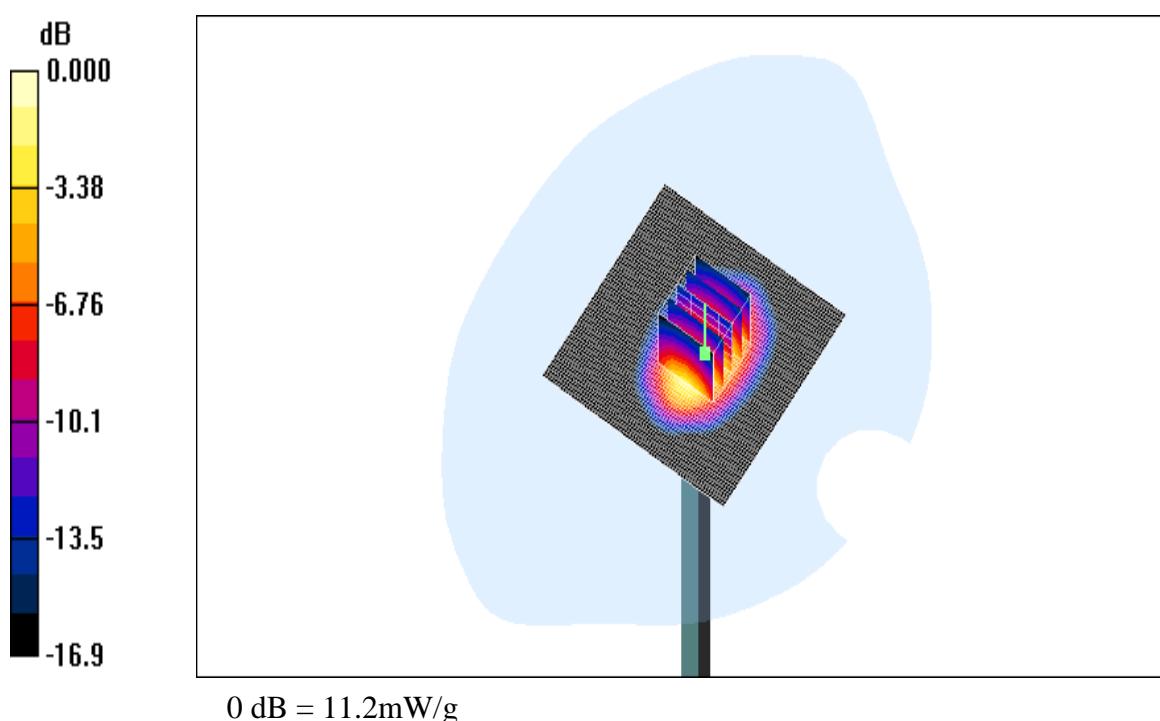

LG Electronics Inc.

DUT: Dipole 2450MHz; Type: D2450V2; Serial: 836

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Body 2450 MHz; ($\sigma = 2$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450 MHz Dipole Validation

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 14.7mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.9 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 12.4mW/g; SAR(10 g) = 5.64mW/g

Maximum value of SAR (measured) = 13.1mW/g

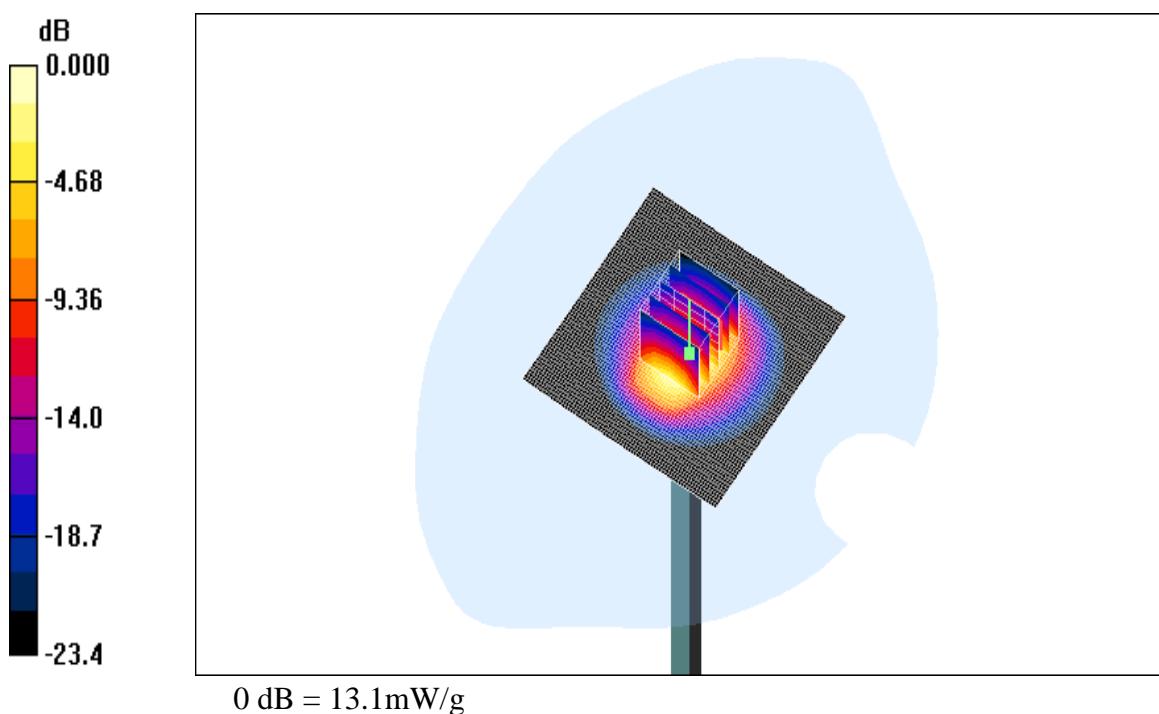

LG Electronics Inc.

DUT: Dipole 835MHz; Type: D835V2; Serial: 471

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Head 835 MHz; ($\sigma = 0.922 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835 MHz Dipole Validation

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.57mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.8 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.38mW/g; SAR(10 g) = 1.57mW/g

Maximum value of SAR (measured) = 2.56mW/g

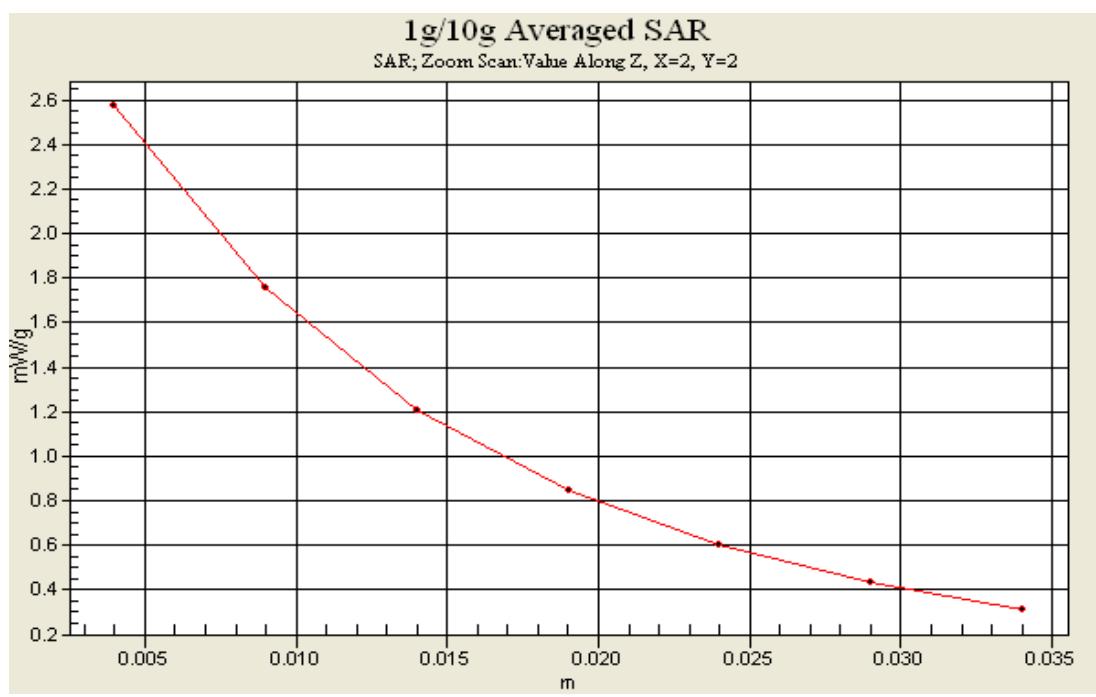

LG Electronics Inc.

DUT: Dipole 1900MHz; Type: D1900V2; Serial: 5d017

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 MHz; ($\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900 MHz Dipole Validation

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.8mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.9 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.85mW/g; SAR(10 g) = 5.29mW/g

Maximum value of SAR (measured) = 11.2mW/g

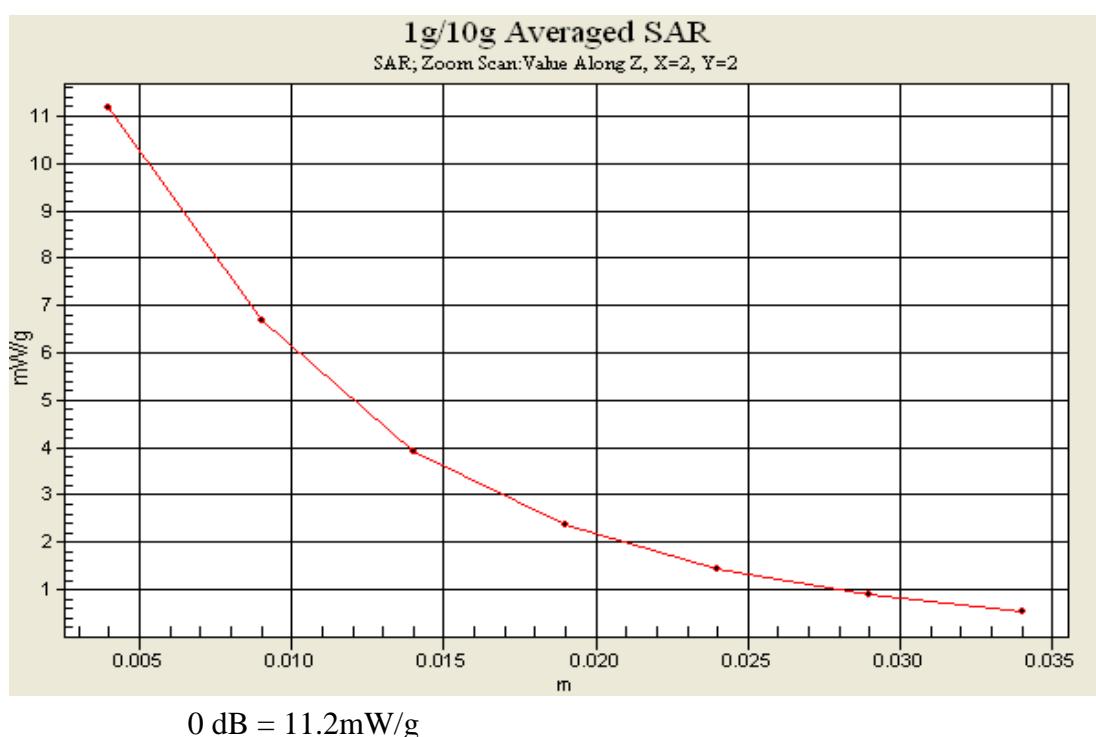

LG Electronics Inc.

DUT: Dipole 2450MHz; Type: D2450V2; Serial: 836

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Body 2450 MHz; ($\sigma = 2$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450 MHz Dipole Validation

Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 14.7mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.9 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 12.4mW/g; SAR(10 g) = 5.64mW/g

Maximum value of SAR (measured) = 13.1mW/g

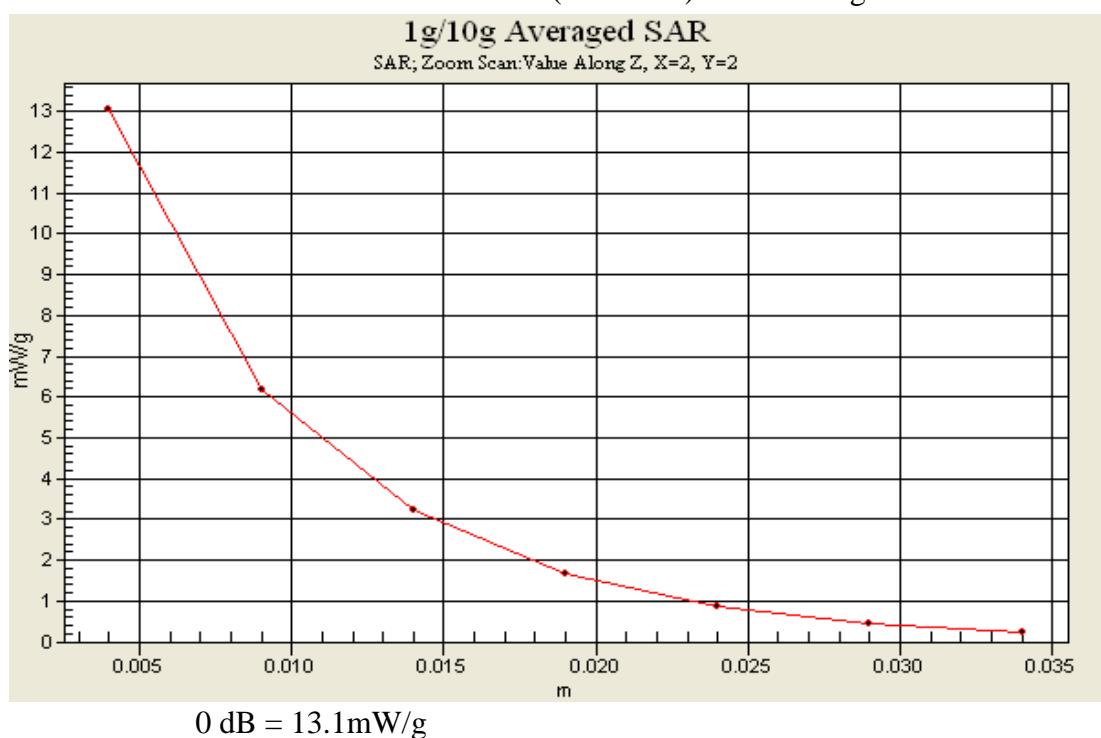

APPENDIX B: SAR Test Data

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 836.6 MHz; ($\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, Ch.190, Fixed Ant., Standard Battery

Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.518mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.84 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.486mW/g; SAR(10 g) = 0.374mW/g

Maximum value of SAR (measured) = 0.508mW/g

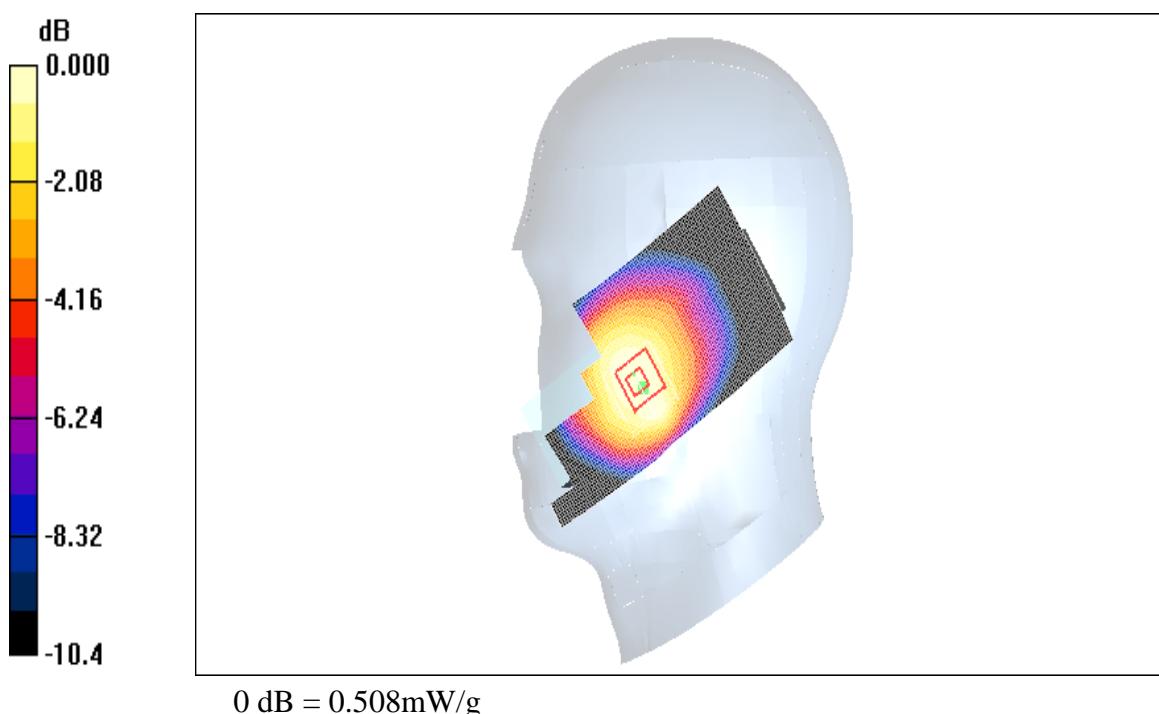

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 836.6 MHz; ($\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Tilt, Ch.190, Fixed Ant., Standard Battery

Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.265mW/g; SAR(10 g) = 0.201mW/g

Maximum value of SAR (measured) = 0.279mW/g

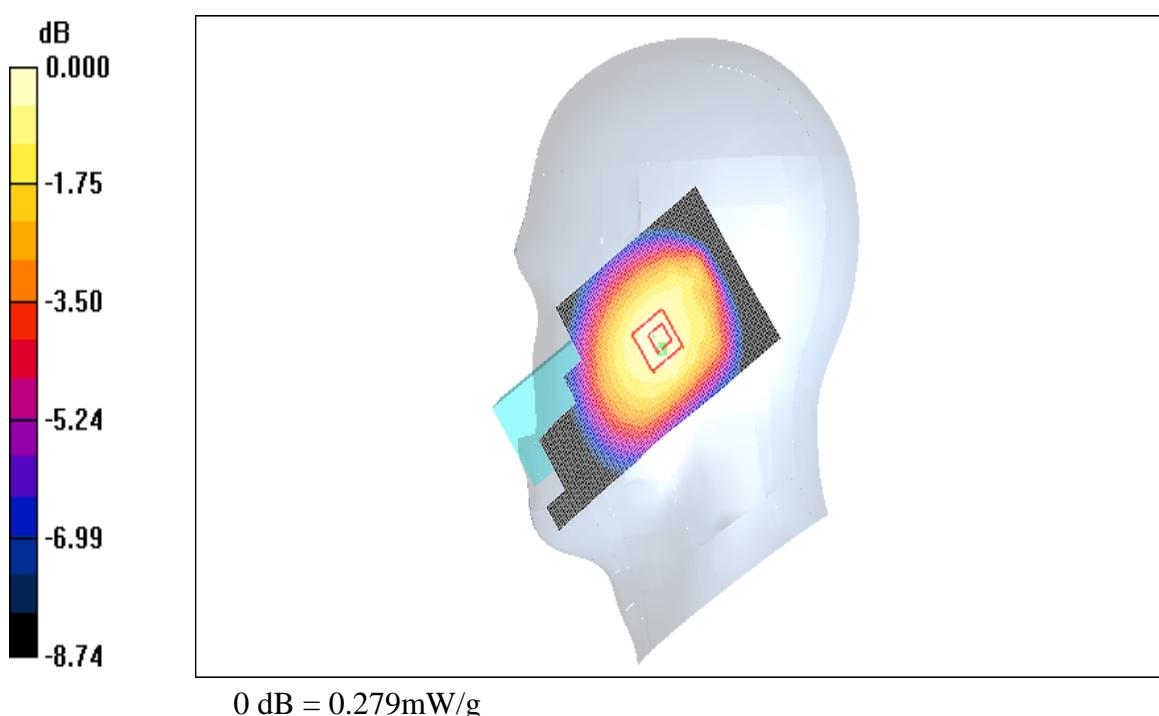

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 836.6 MHz; ($\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, Ch.190, Fixed Ant., Standard Battery

Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.590mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.89 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.852W/kg

SAR(1 g) = 0.541mW/g; SAR(10 g) = 0.362mW/g

Maximum value of SAR (measured) = 0.588mW/g

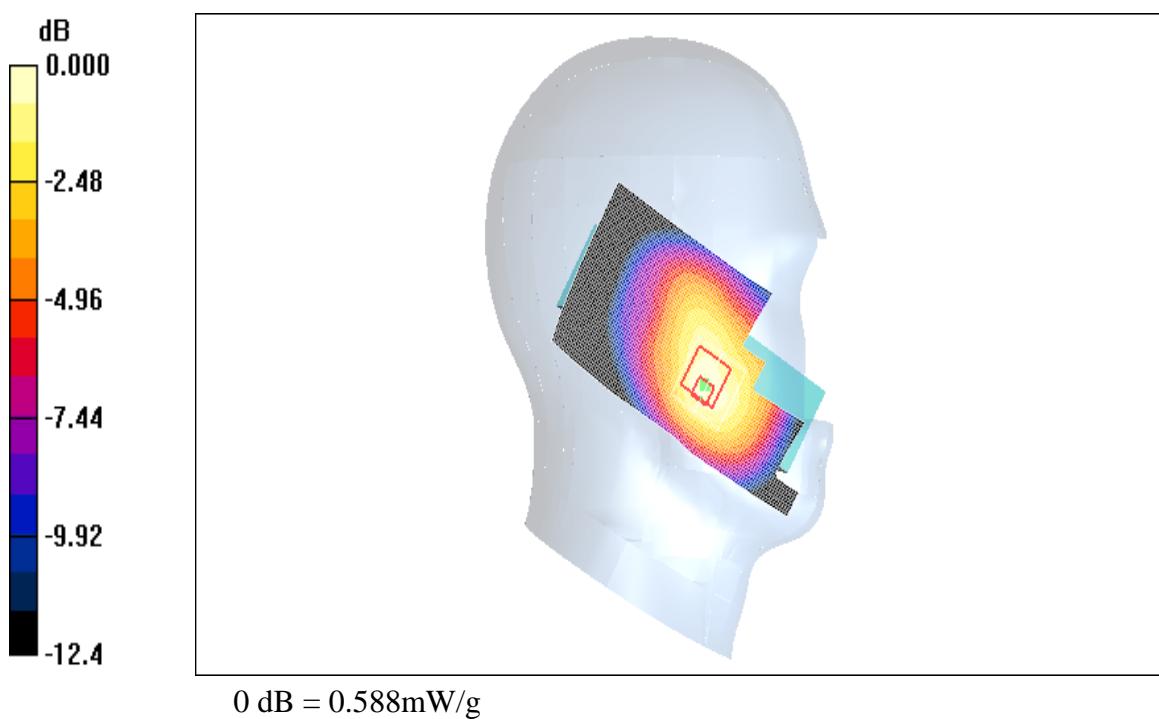

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 836.6 MHz; ($\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Tilt, Ch.190, Fixed Ant., Standard Battery

Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.328mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.299mW/g; SAR(10 g) = 0.227mW/g

Maximum value of SAR (measured) = 0.310mW/g

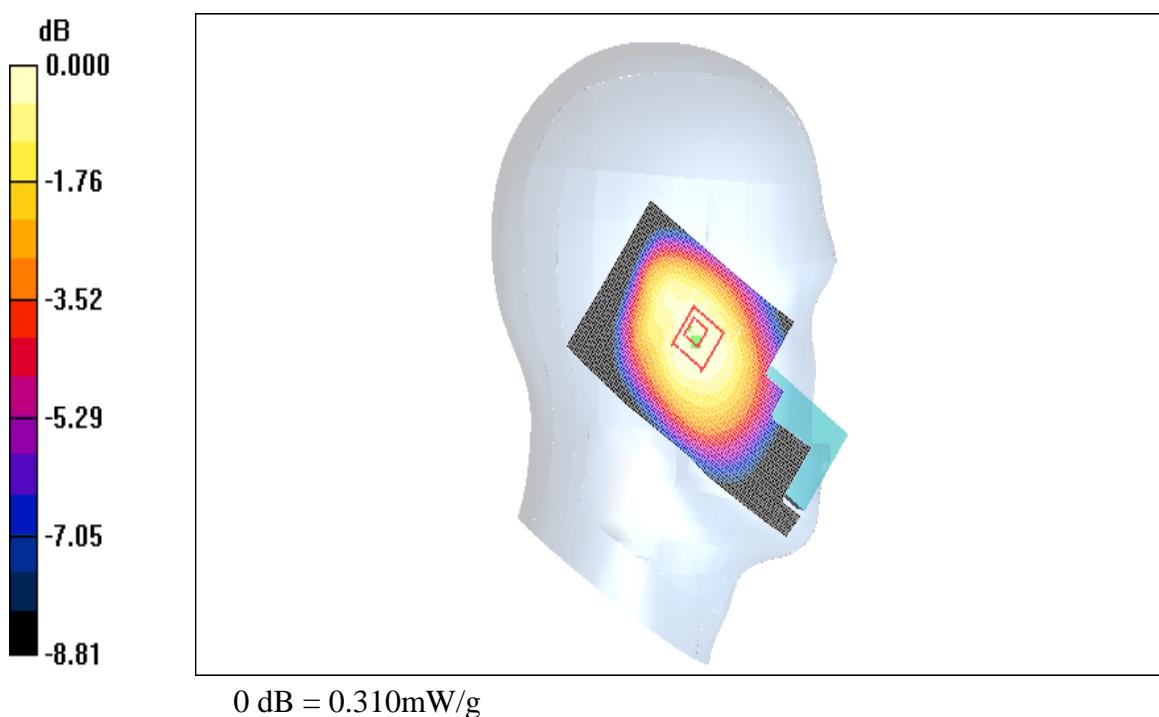

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1880 MHz; ($\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, Ch.661, Fixed Ant., Standard Battery

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.360mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.46 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.408W/kg

SAR(1 g) = 0.317mW/g; SAR(10 g) = 0.212mW/g

Maximum value of SAR (measured) = 0.335mW/g

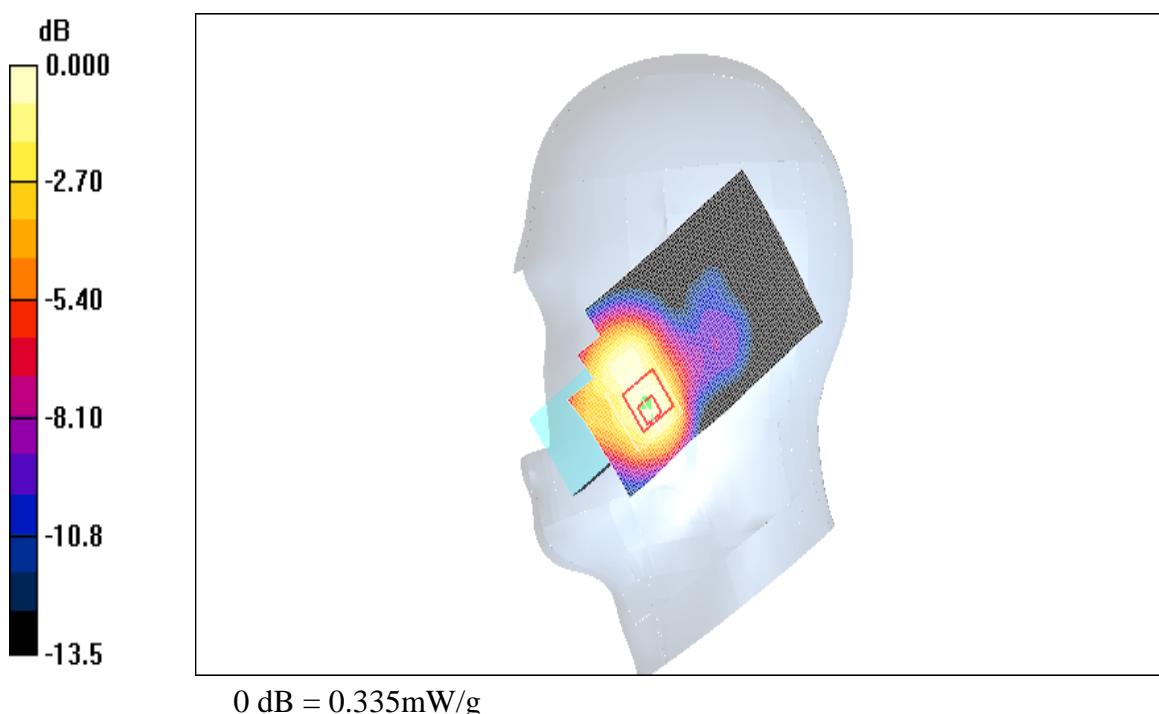

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1880 MHz; ($\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Tilt, Ch.661, Fixed Ant., Standard Battery

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.111mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.80 V/m; Power Drift = 0.181 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.098mW/g; SAR(10 g) = 0.064mW/g

Maximum value of SAR (measured) = 0.104mW/g

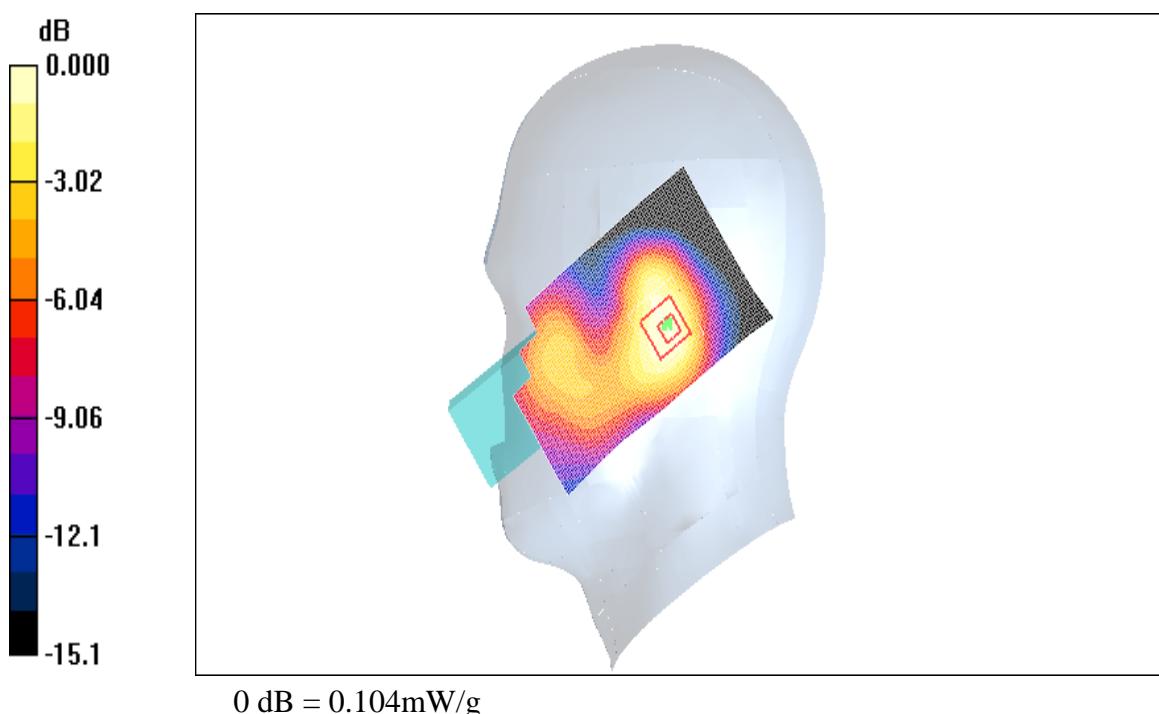

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1880 MHz; ($\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, Ch.661, Fixed Ant., Standard Battery

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.333mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.13V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.288mW/g; SAR(10 g) = 0.177mW/g

Maximum value of SAR (measured) = 0.310mW/g

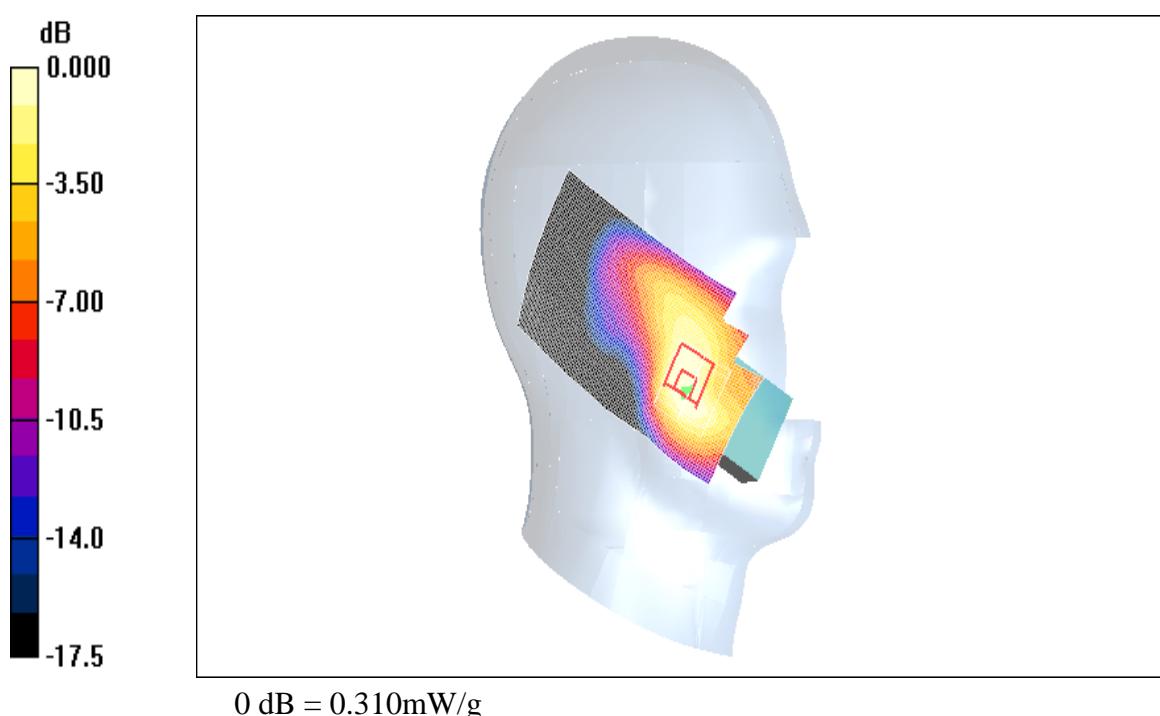

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1880 MHz; ($\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Tilt, Ch.661, Fixed Ant., Standard Battery

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.147mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.58 V/m; Power Drift = 0.266 dB

Peak SAR (extrapolated) = 0.165W/kg

SAR(1 g) = 0.122mW/g; SAR(10 g) = 0.077mW/g

Maximum value of SAR (measured) = 0.135mW/g

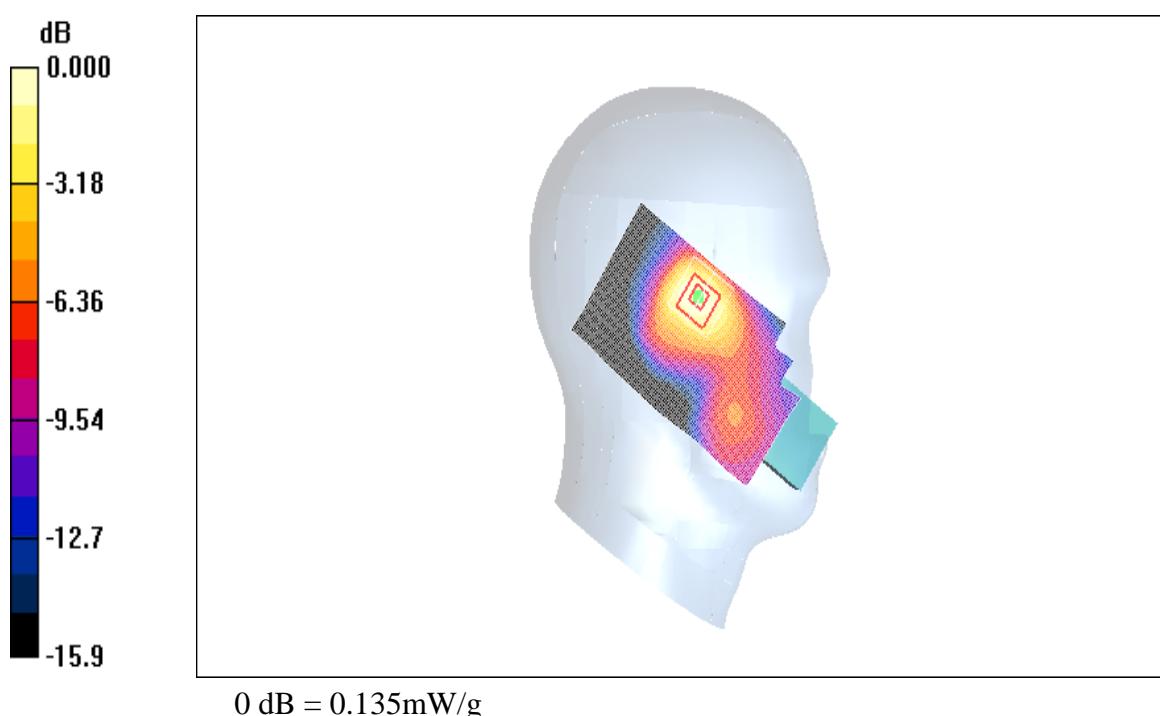

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: Body 836.6 MHz; ($\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.190, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.600mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.208 dB

Peak SAR (extrapolated) = 0.685W/kg

SAR(1 g) = 0.560mW/g; SAR(10 g) = 0.422mW/g

Maximum value of SAR (measured) = 0.585mW/g

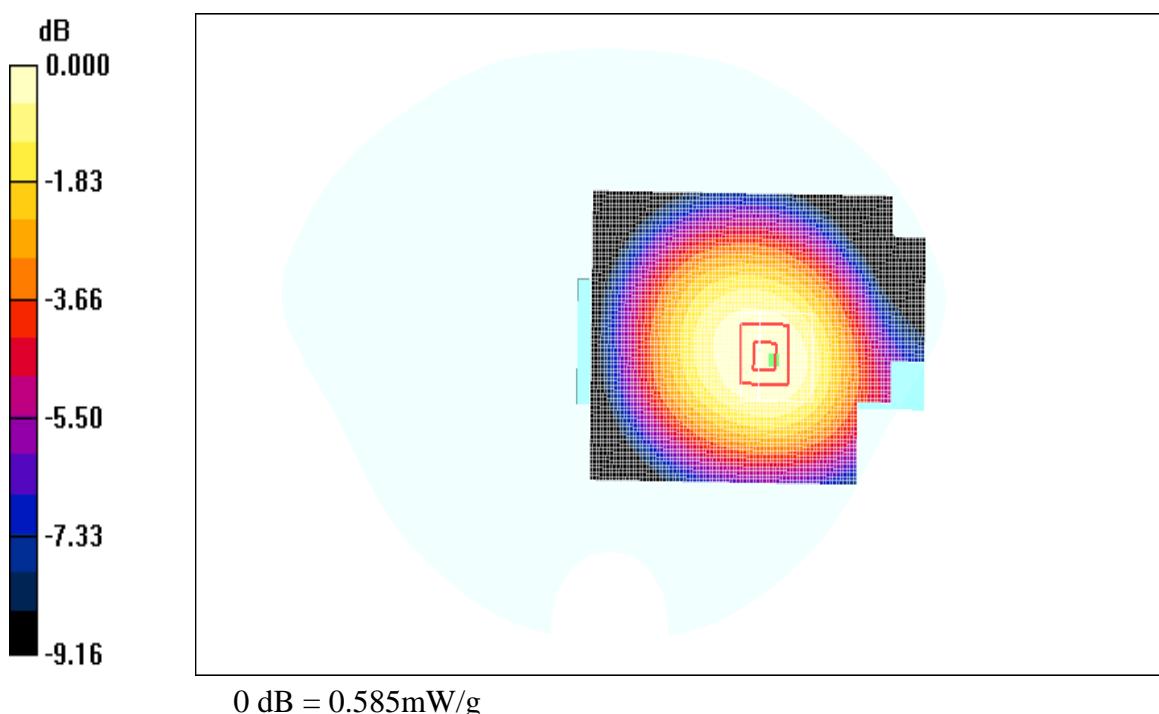

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: Body 836.6 MHz; ($\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.190, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.774mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.921W/kg

SAR(1 g) = 0.726mW/g; SAR(10 g) = 0.537mW/g

Maximum value of SAR (measured) = 0.769mW/g

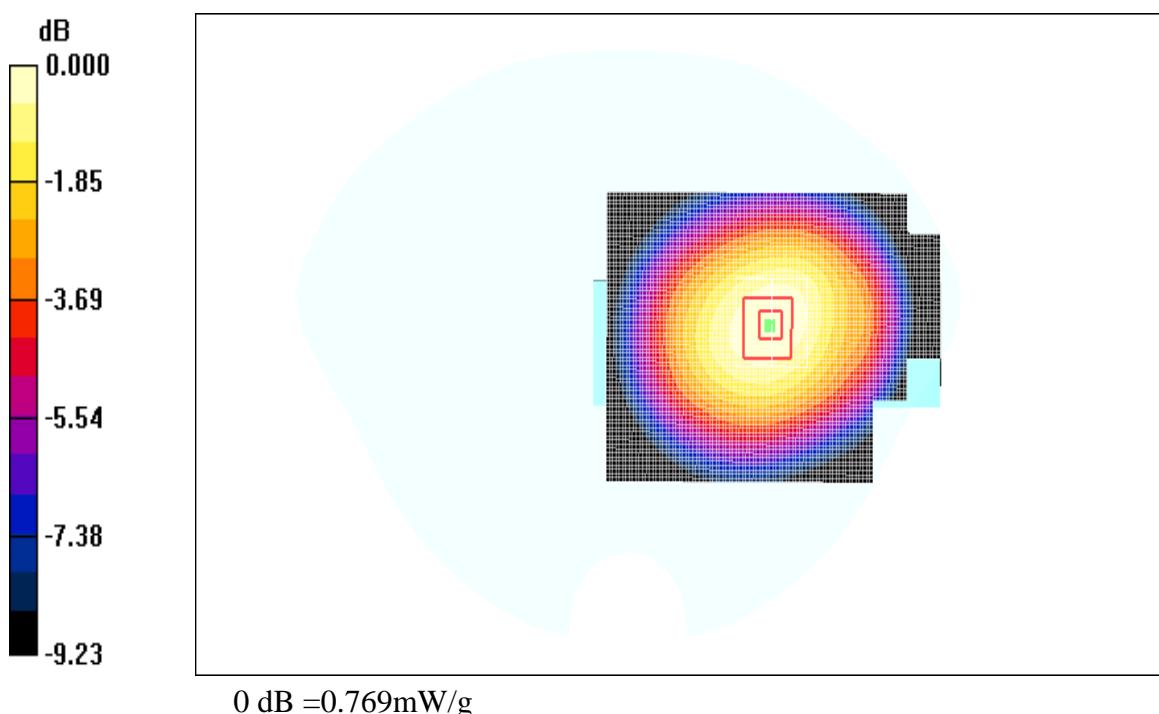

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium: Body 836.6 MHz; ($\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.190, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.969mW/g; SAR(10 g) = 0.719mW/g

Maximum value of SAR (measured) = 1.02mW/g

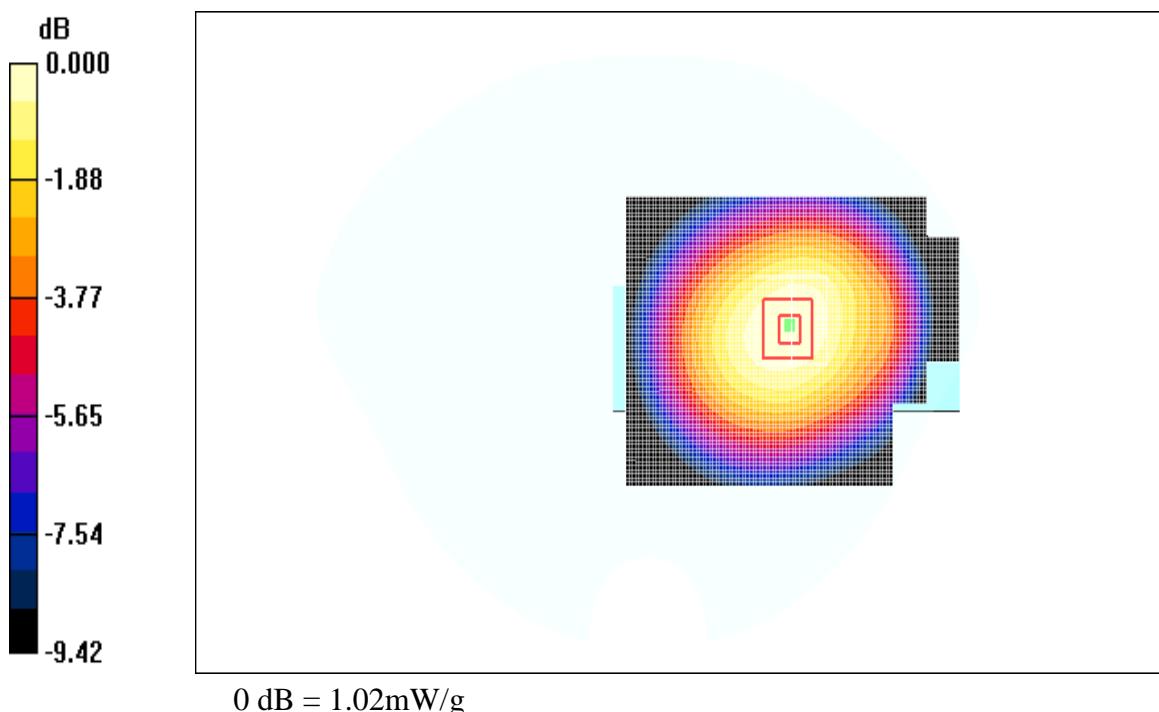

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: Body 836.6 MHz; ($\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.190, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.709mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.043dB

Peak SAR (extrapolated) = 0.844W/kg

SAR(1 g) = 0.668mW/g; SAR(10 g) = 0.495mW/g

Maximum value of SAR (measured) = 0.703mW/g

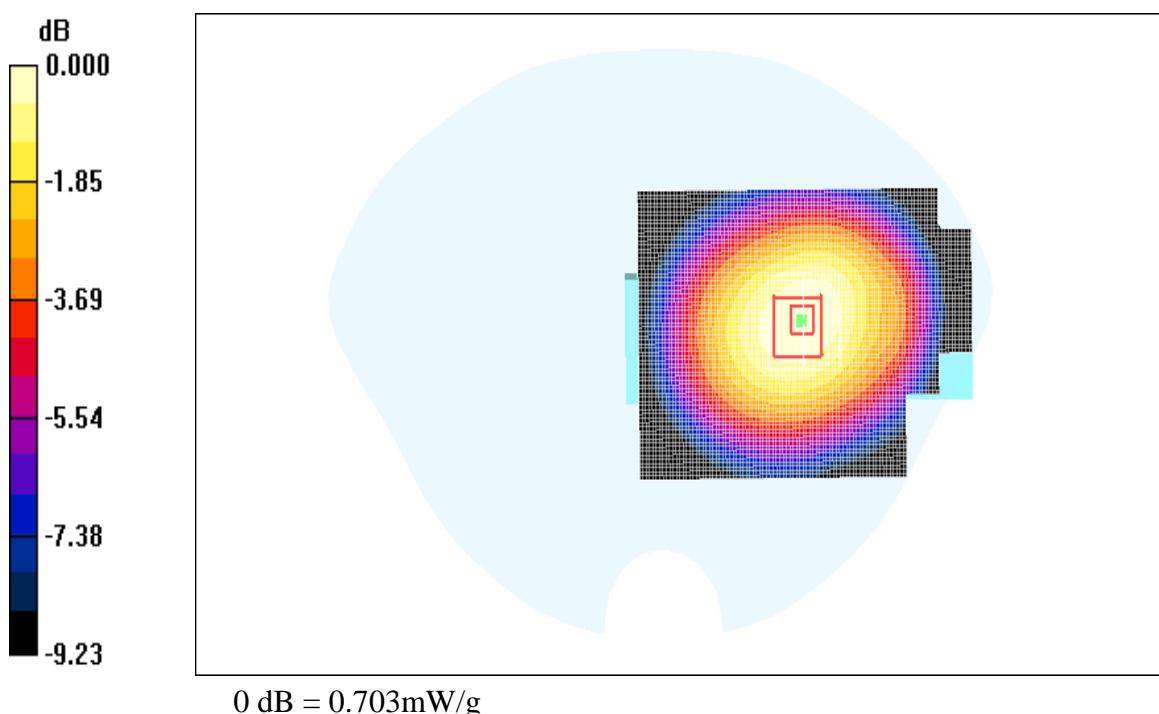

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Body 836.6 MHz; ($\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.190, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.703mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.201 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.660mW/g; SAR(10 g) = 0.472mW/g

Maximum value of SAR (measured) = 0.703mW/g

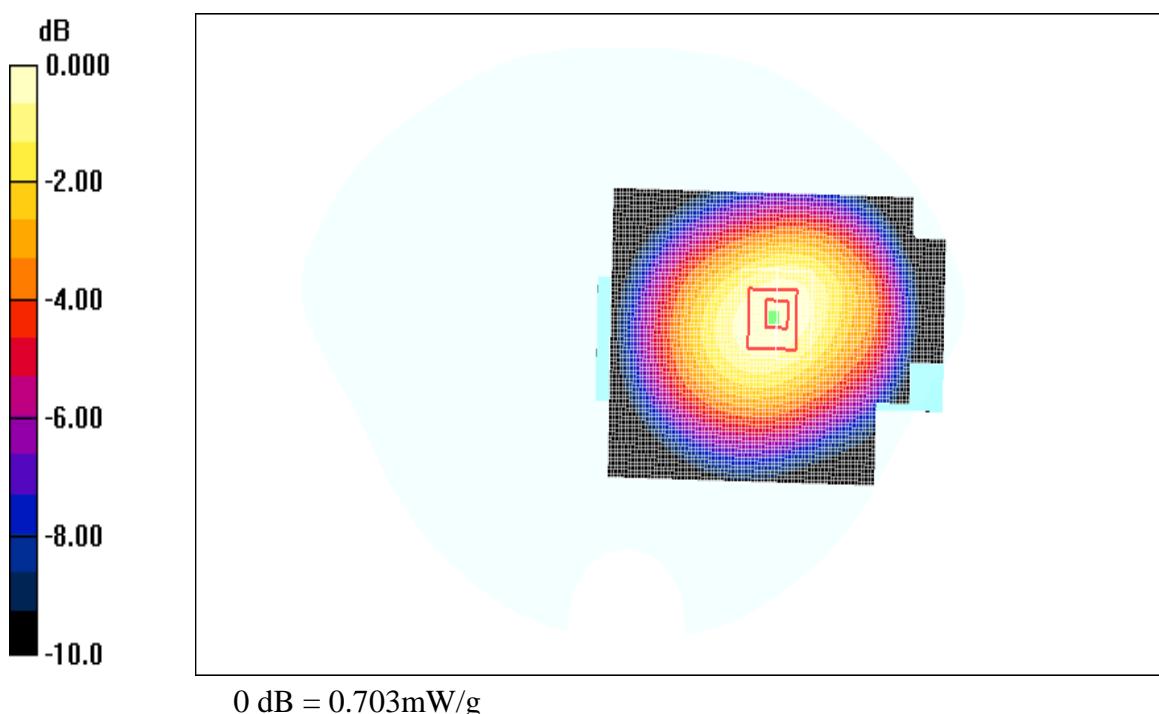

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.77

Medium: Body 824.2 MHz; ($\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 56.3$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.128, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.786mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.368dB

Peak SAR (extrapolated) = 0.921 W/kg

SAR(1 g) = 0.726mW/g; SAR(10 g) = 0.535mW/g

Maximum value of SAR (measured) = 0.771mW/g

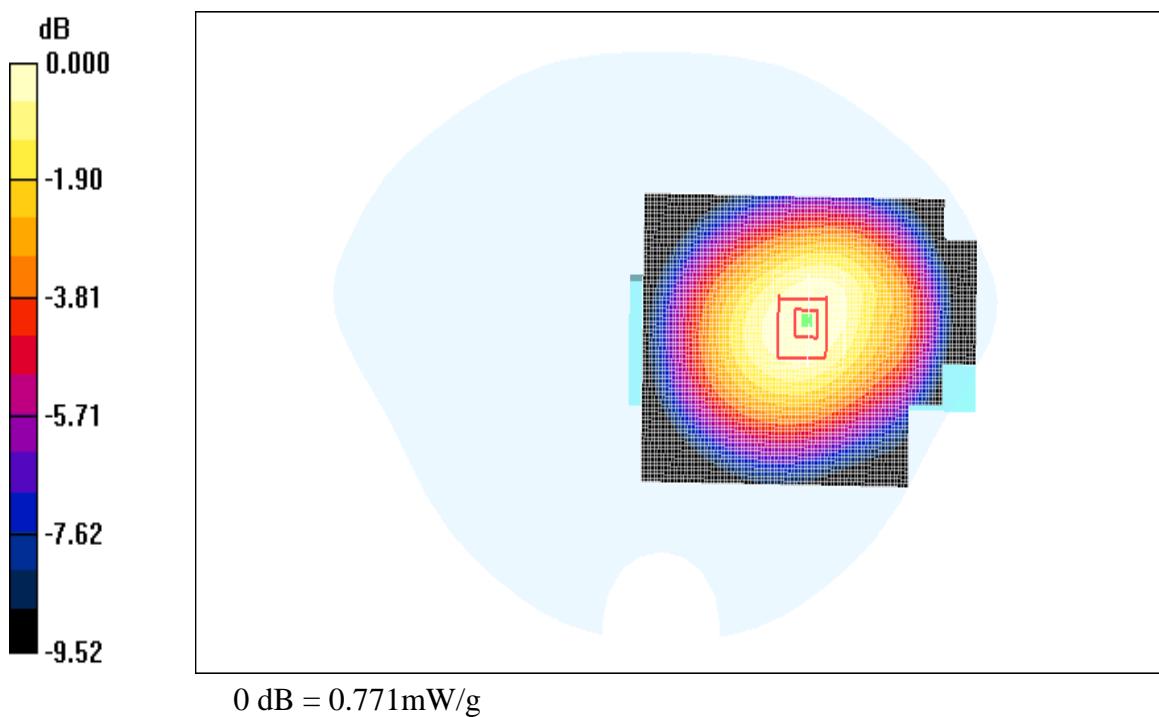

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium: Body 848.8 MHz; ($\sigma = 1\text{mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.251, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.978mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.904mW/g; SAR(10 g) = 0.664W/g

Maximum value of SAR (measured) = 0.952mW/g

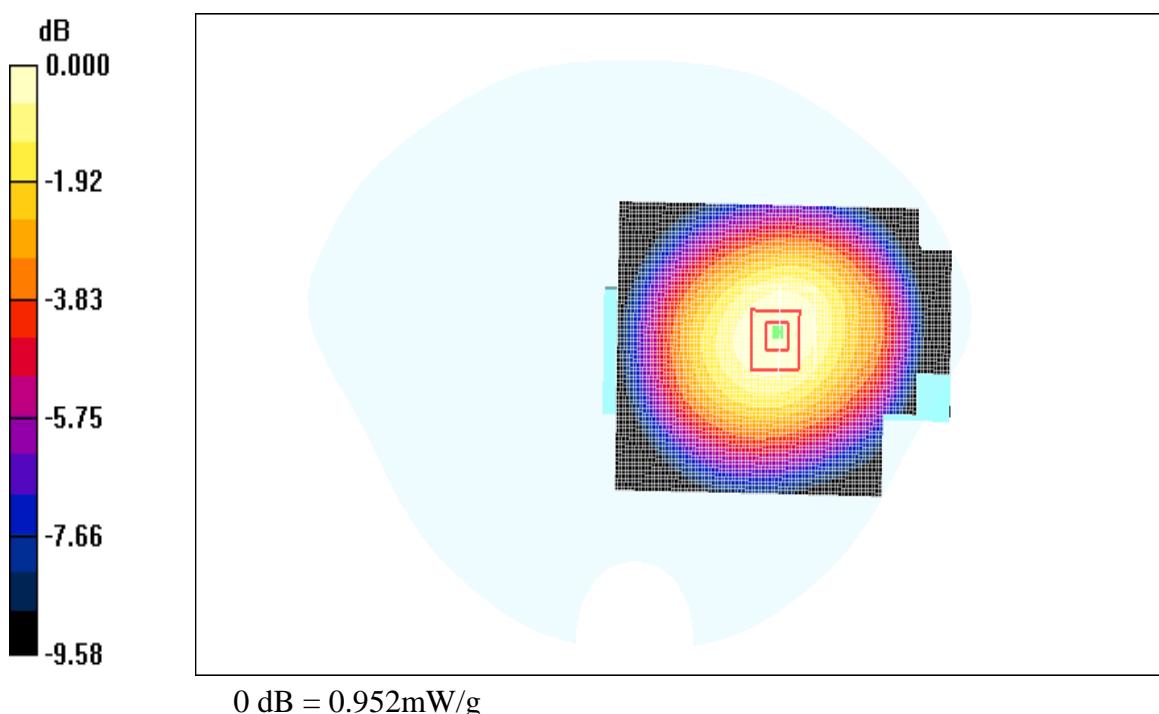

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.134mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.82 V/m; Power Drift = 0.252 dB

Peak SAR (extrapolated) = 0.170W/kg

SAR(1 g) = 0.124mW/g; SAR(10 g) = 0.081mW/g

Maximum value of SAR (measured) = 0.133mW/g

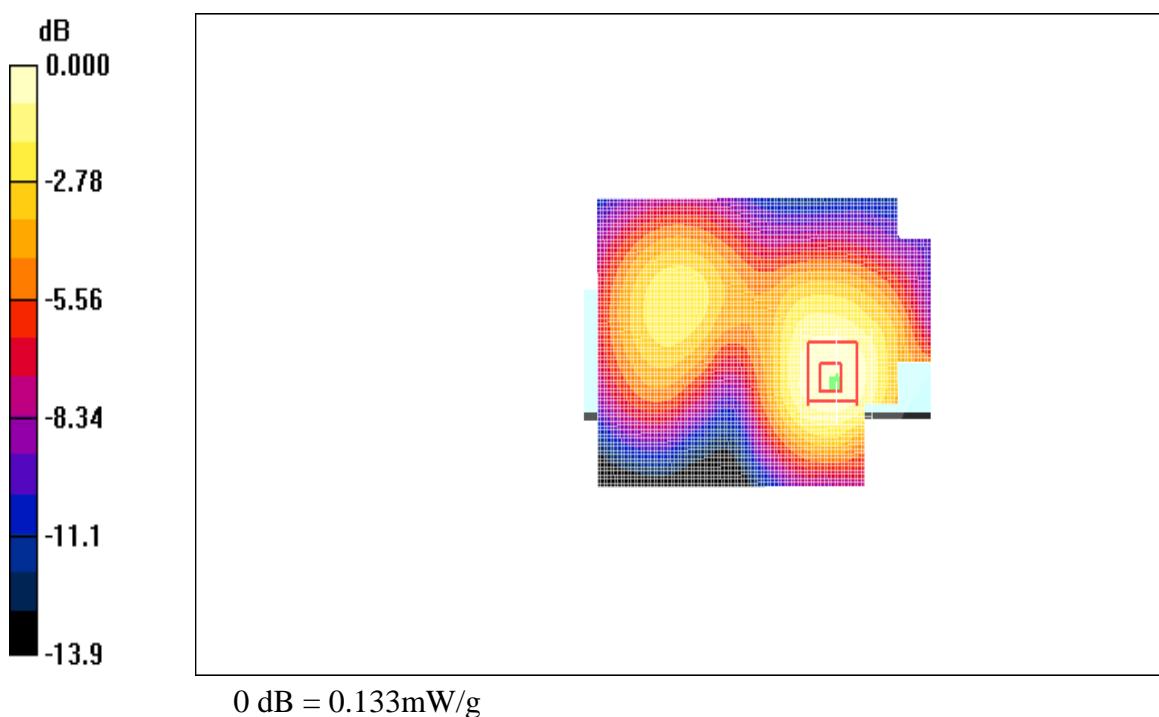

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.63 V/m; Power Drift = -0.233 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.106mW/g; SAR(10 g) = 0.071mW/g

Maximum value of SAR (measured) = 0.113mW/g

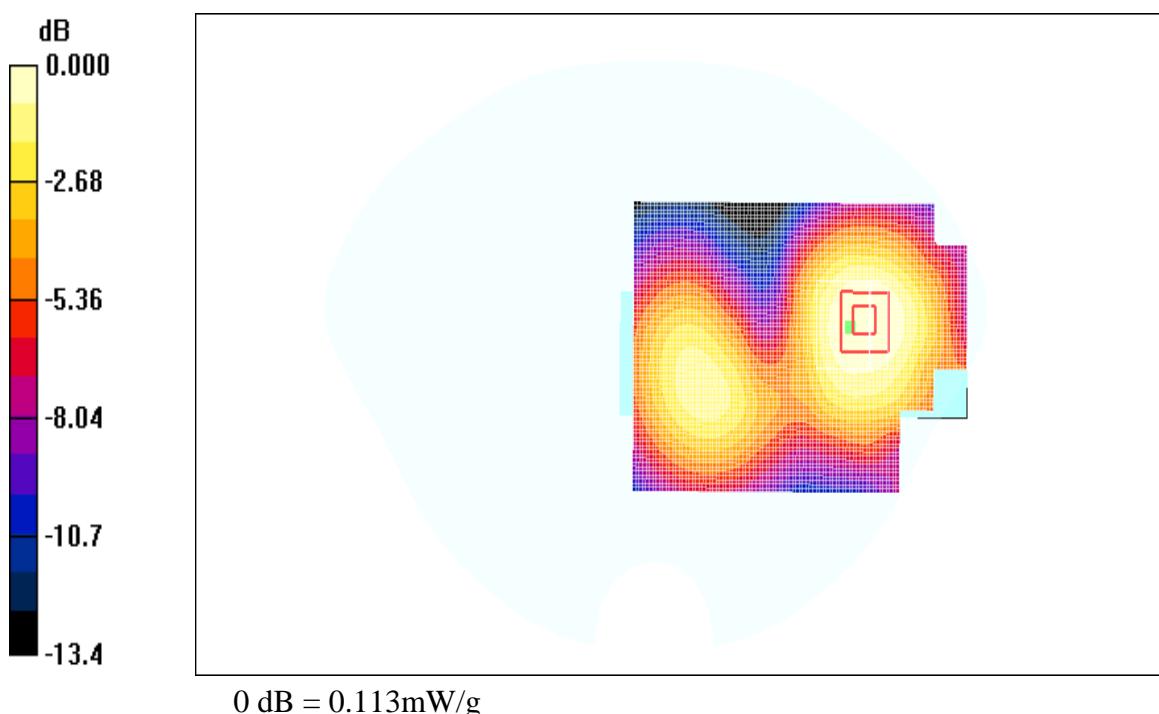

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.91 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.213mW/g; SAR(10 g) = 0.139mW/g

Maximum value of SAR (measured) = 0.230mW/g

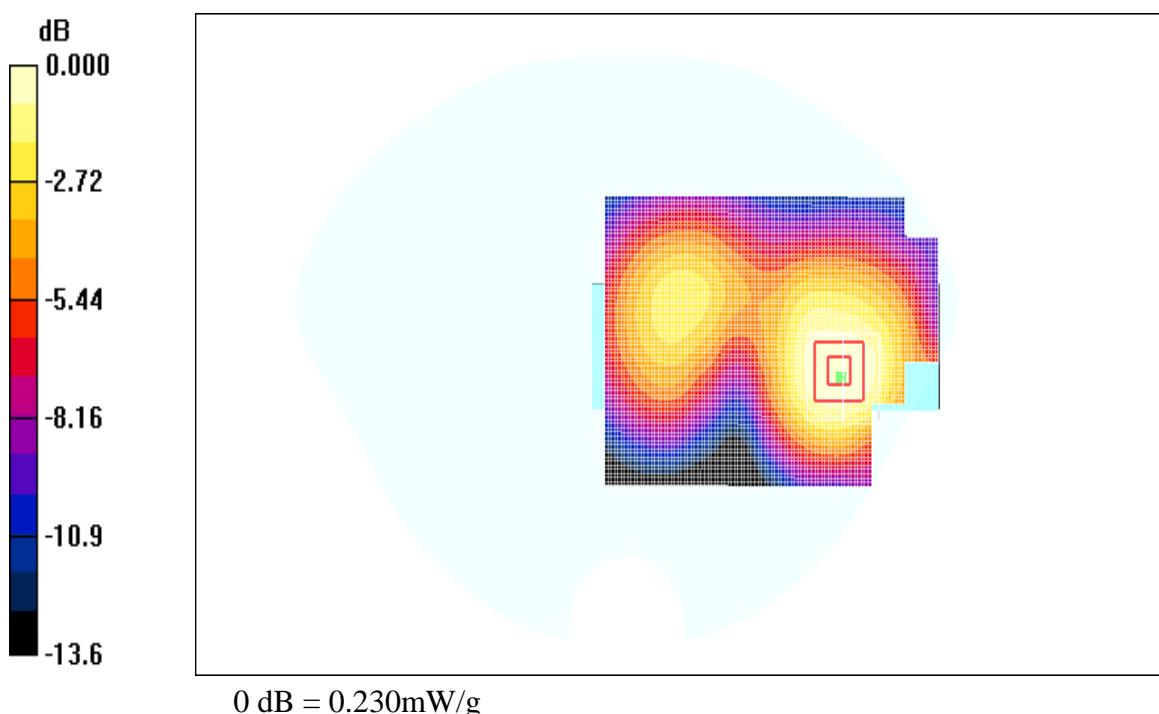

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.158mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.49 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.146mW/g; SAR(10 g) = 0.096mW/g

Maximum value of SAR (measured) = 0.157mW/g

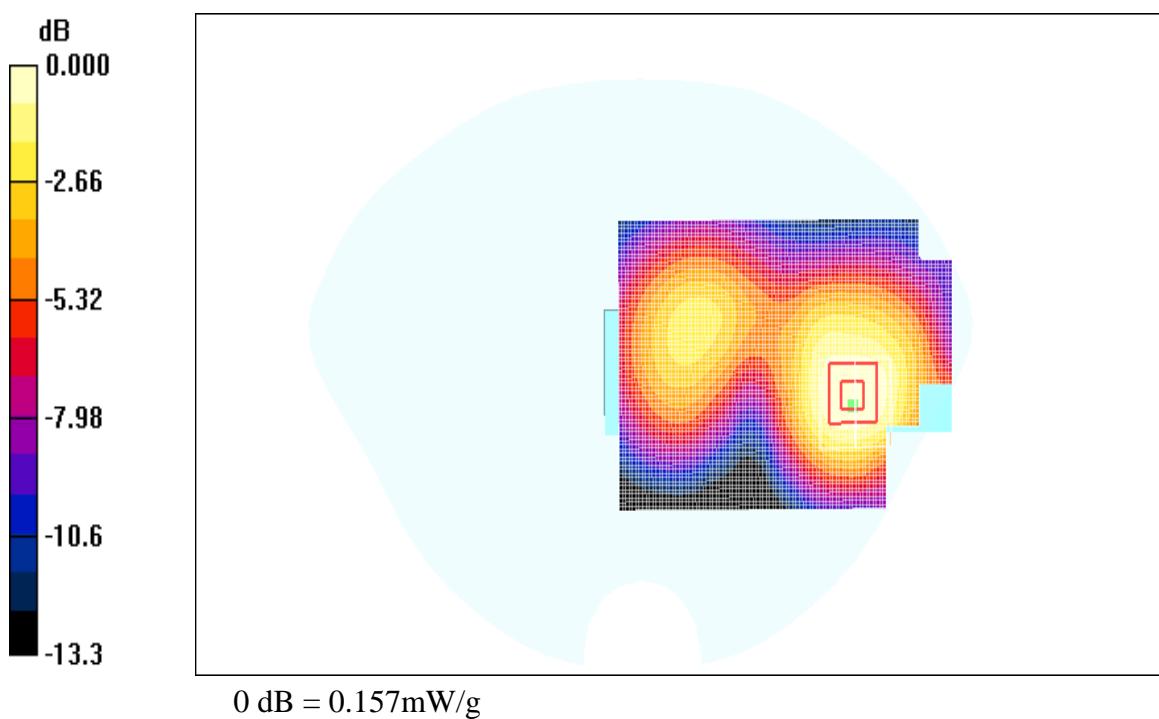

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.079mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.67V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.073mW/g; SAR(10 g) = 0.048mW/g

Maximum value of SAR (measured) = 0.078mW/g

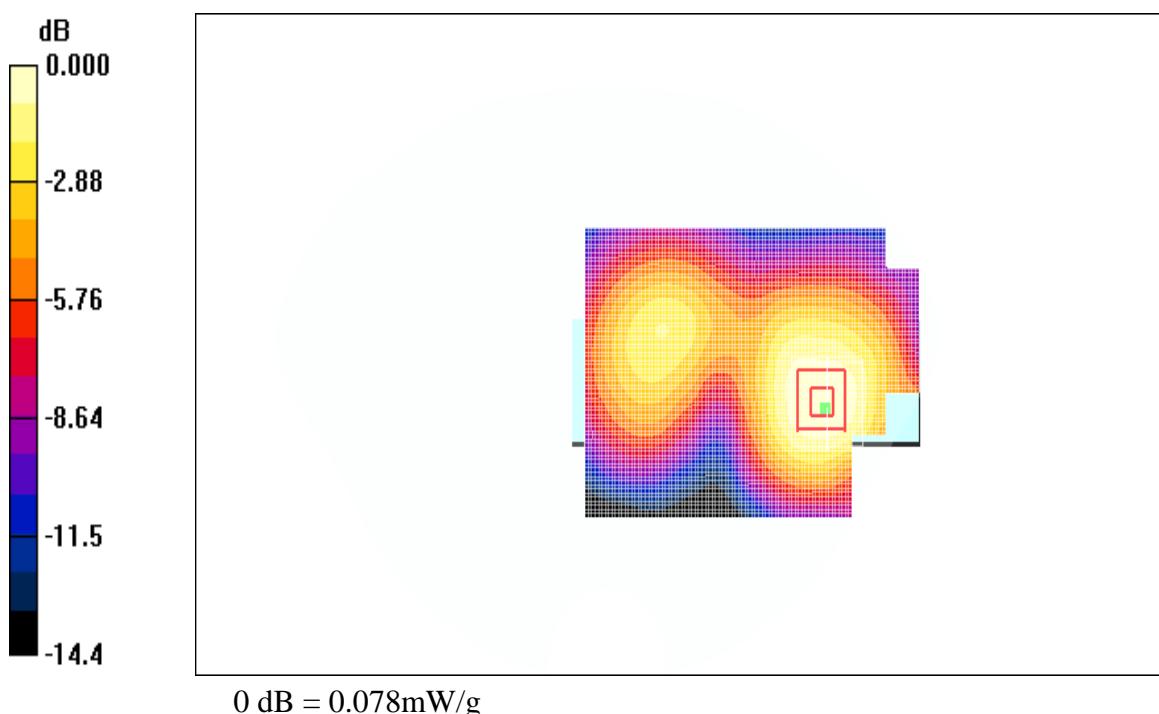

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: EGPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.113mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.140W/kg

SAR(1 g) = 0.105mW/g; SAR(10 g) = 0.070mW/g

Maximum value of SAR (measured) = 0.113mW/g

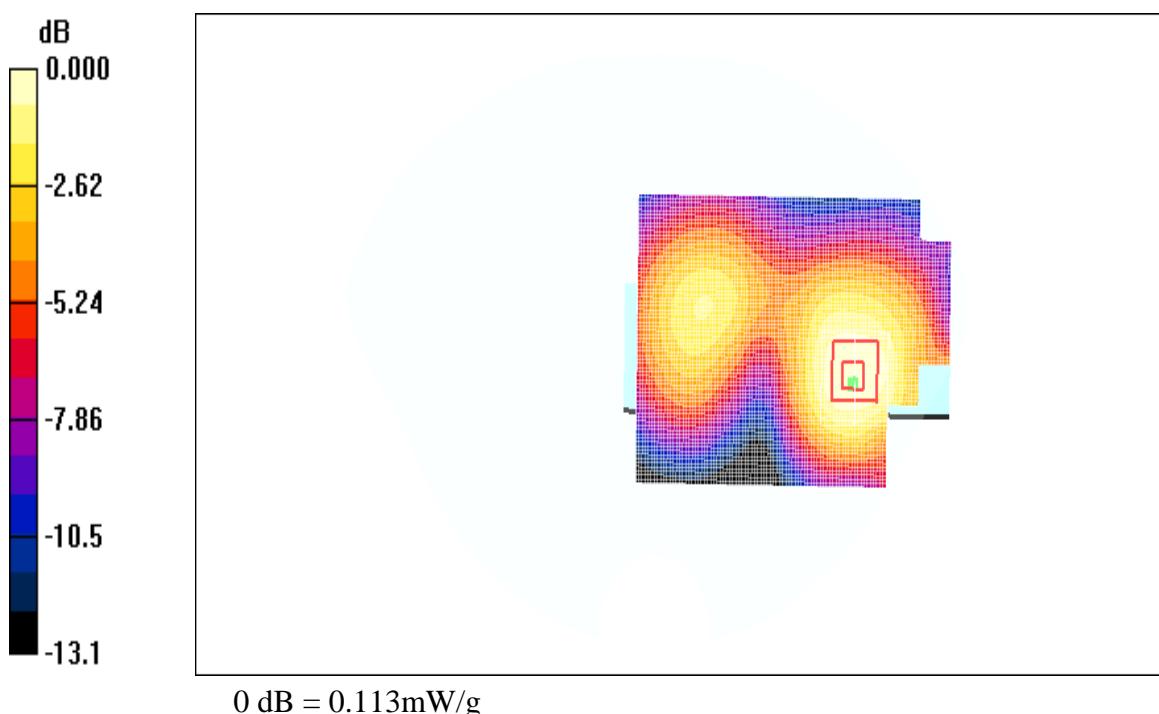

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2437 MHz; ($\sigma = 1.98 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.06, Front, 1Mbps, Fixed Ant., Standard Battery

Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.010mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.64 V/m; Power Drift = -0.319 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.00996mW/g; SAR(10 g) = 0.00282mW/g

Maximum value of SAR (measured) = 0.009mW/g

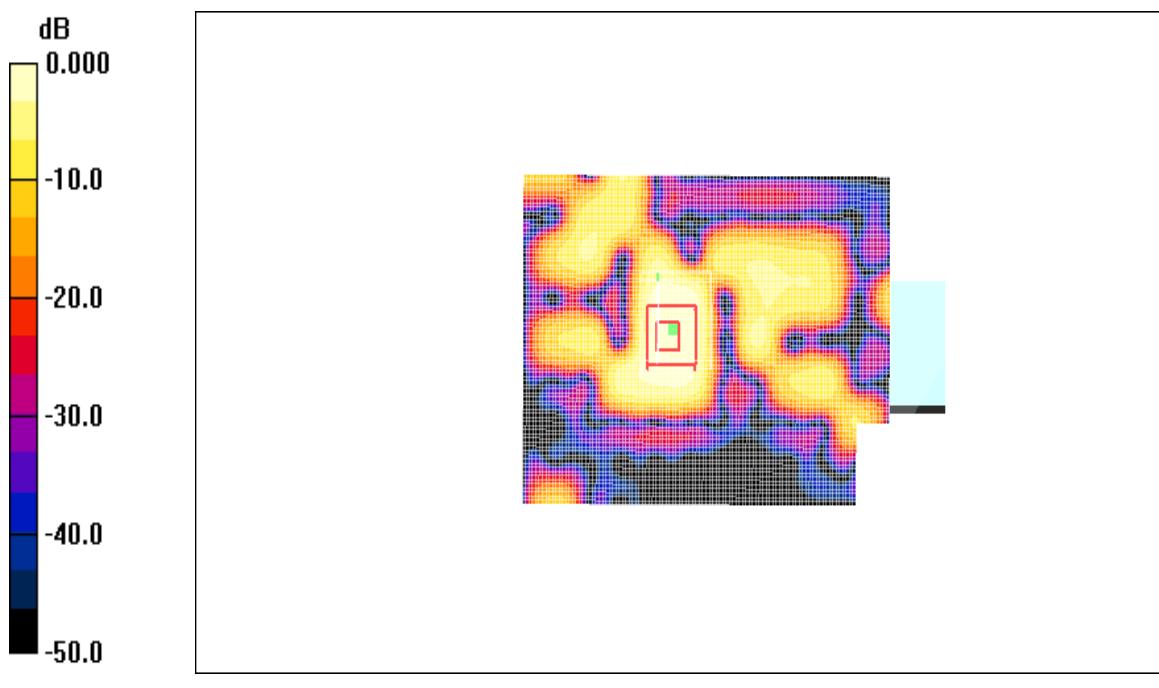

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2437 MHz; ($\sigma = 1.98 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.06, Rear, 1Mbps, Fixed Ant., Standard Battery

Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.117mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.27 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.108mW/g; SAR(10 g) = 0.055mW/g

Maximum value of SAR (measured) = 0.111mW/g

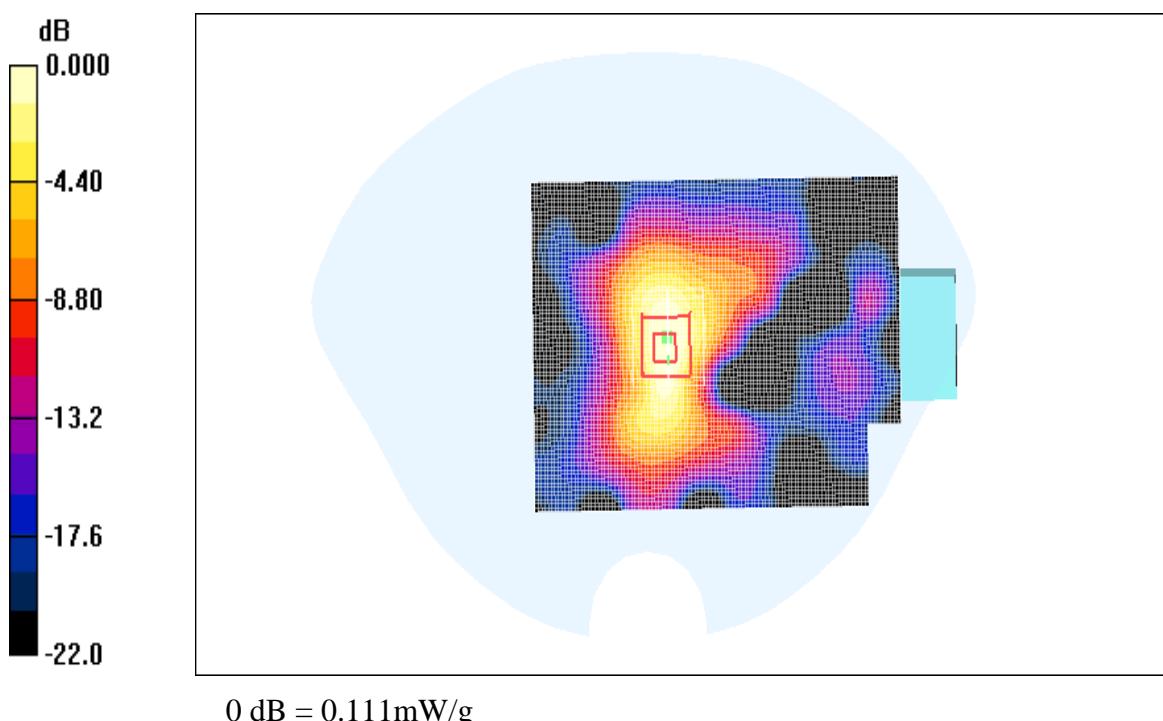

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: WLAN; Frequency: 2412MHz; Duty Cycle: 1:1
Medium: Muscle 2412 MHz; ($\sigma = 1.94\text{mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.01, Rear, 1Mbps, Fixed Ant., Standard Battery

Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.044mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.47 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 0.082 W/kg

SAR(1 g) = 0.039mW/g; SAR(10 g) = 0.020mW/g

Maximum value of SAR (measured) = 0.045mW/g

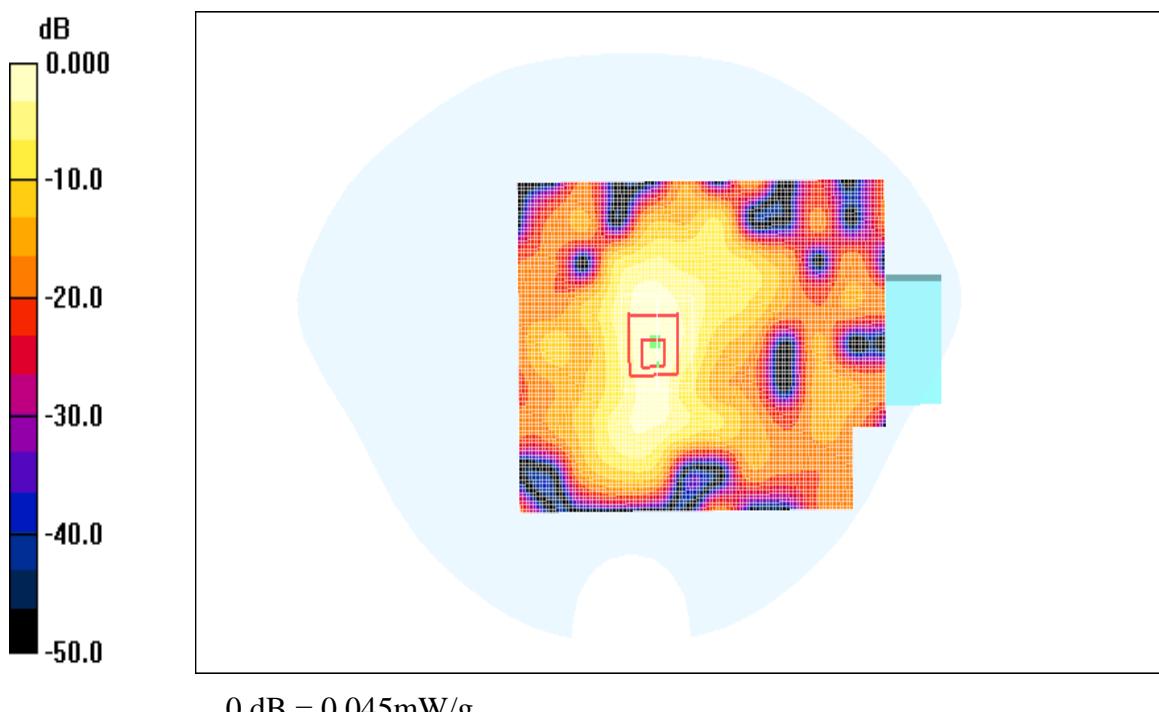

0 dB = 0.045mW/g

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2462 MHz; ($\sigma = 2.01 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.11, Rear, 1Mbps, Fixed Ant., Standard Battery

Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
.Maximum value of SAR (interpolated) = 0.070mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.23 V/m; Power Drift = -0.236 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.066mW/g; SAR(10 g) = 0.032mW/g

Maximum value of SAR (measured) = 0.066mW/g

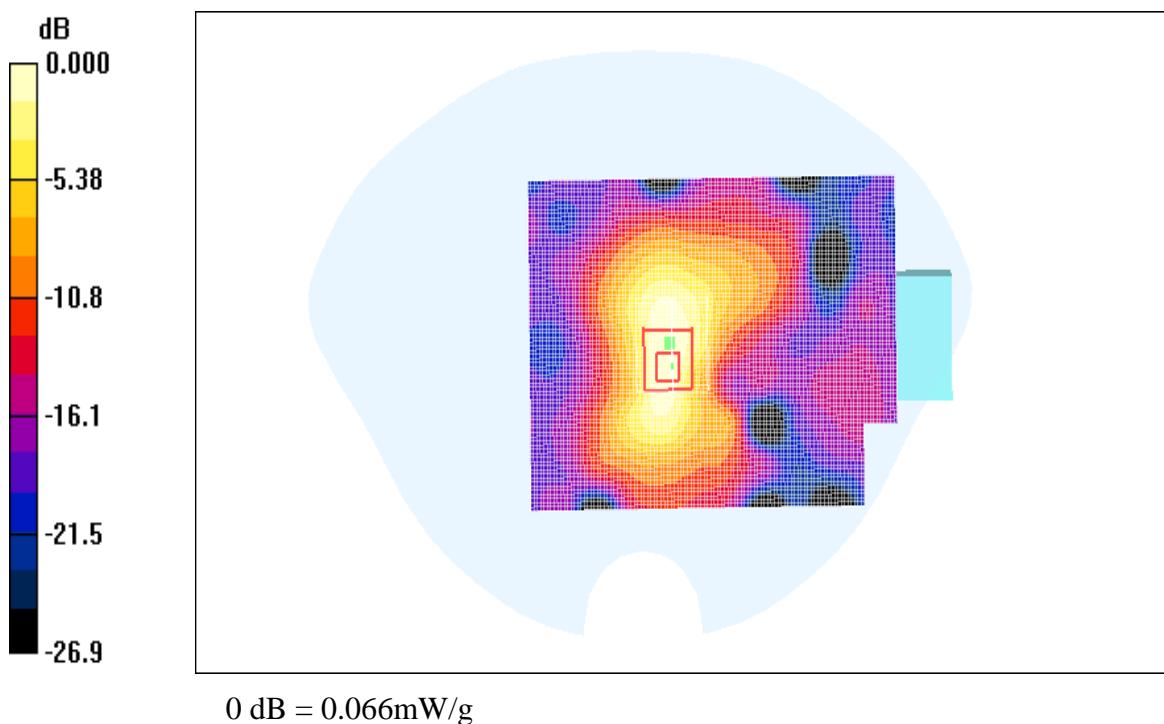

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 836.6 MHz; ($\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.22, 6.22, 6.22); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, Ch.190, Fixed Ant., Standard Battery

Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.590mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.89 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.852W/kg

SAR(1 g) = 0.541mW/g; SAR(10 g) = 0.362mW/g

Maximum value of SAR (measured) = 0.588mW/g

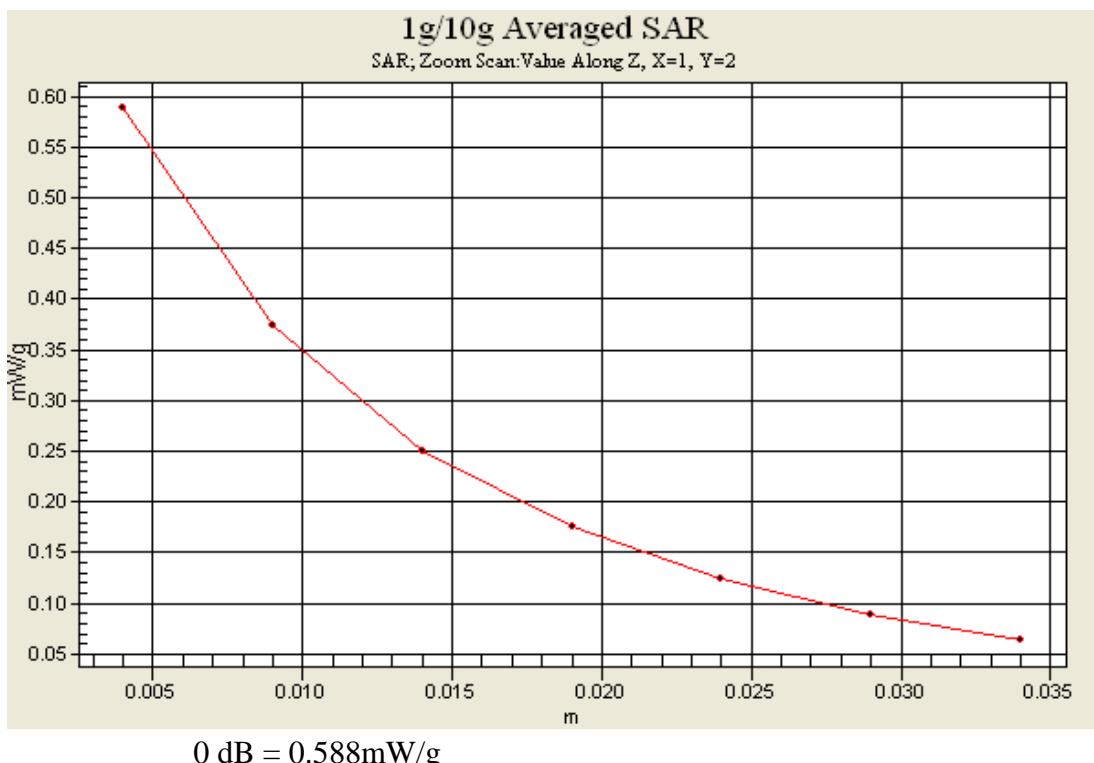

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1880 MHz; ($\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.97, 4.97, 4.97); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1117; Type: SAM; Serial: TP-1117

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, Ch.661, Fixed Ant., Standard Battery

Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.360mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.46 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.408W/kg

SAR(1 g) = 0.317mW/g; SAR(10 g) = 0.212mW/g

Maximum value of SAR (measured) = 0.335mW/g

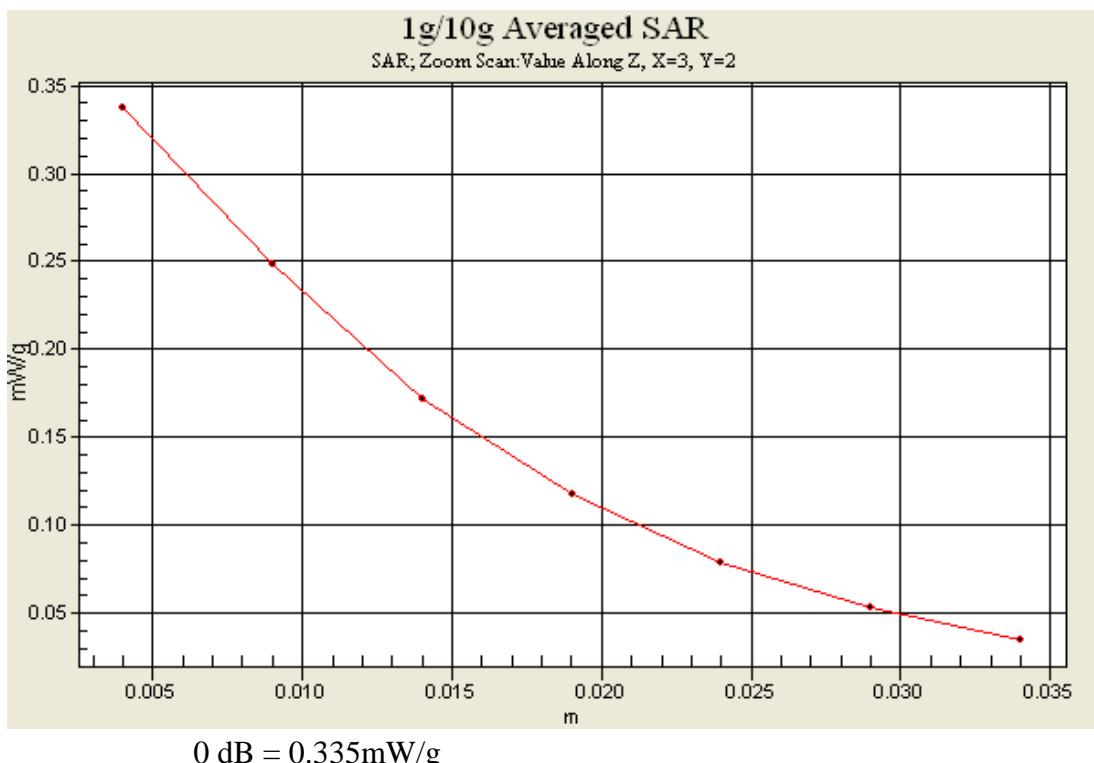

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium: Body 836.6 MHz; ($\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(6.05, 6.05, 6.05); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.190, Rear, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.969mW/g; SAR(10 g) = 0.719mW/g

Maximum value of SAR (measured) = 1.02mW/g

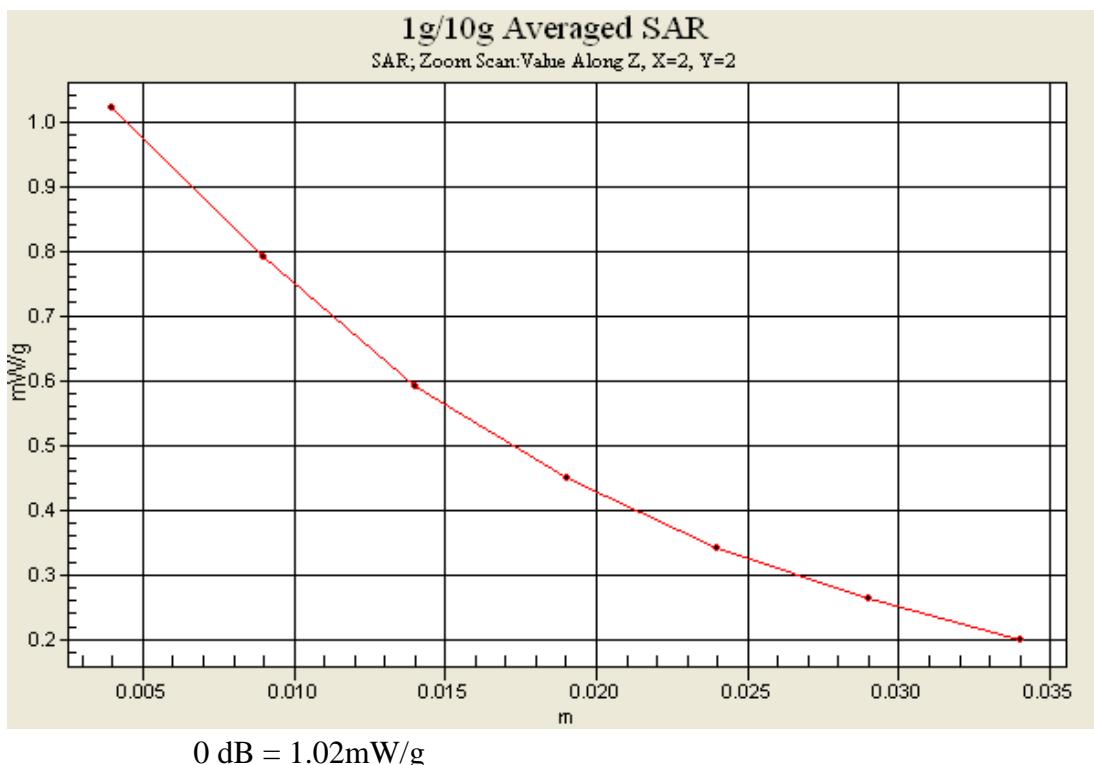

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium: Body 1880 MHz; ($\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Test Date: 03/30/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.48, 4.48, 4.48); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.661, Front, Fixed Ant., Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.91 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.213mW/g; SAR(10 g) = 0.139mW/g

Maximum value of SAR (measured) = 0.230mW/g

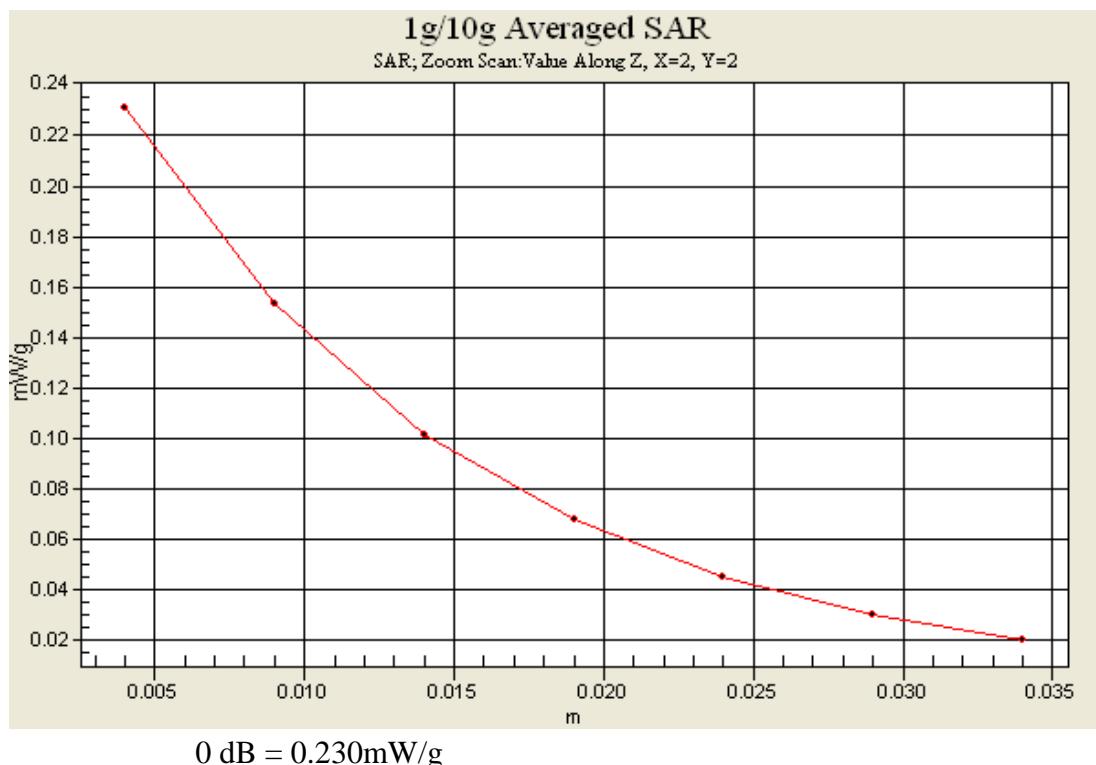

LG Electronics Inc.

DUT: VER-01; Type: Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN; Serial:#1

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2437 MHz; ($\sigma = 1.98 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section

Test Date: 03/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1729; ConvF(4.07, 4.07, 4.07); Calibrated: 2010-01-27

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2010-02-04

Phantom: SAM Twin Phantom TP-1151; Type: SAM; Serial: TP-1151

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch, Ch.06, Rear, 1Mbps, Fixed Ant., Standard Battery

Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.117mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.27 V/m; Power Drift = -0.048 dB



Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.108mW/g; SAR(10 g) = 0.055mW/g

Maximum value of SAR (measured) = 0.111mW/g

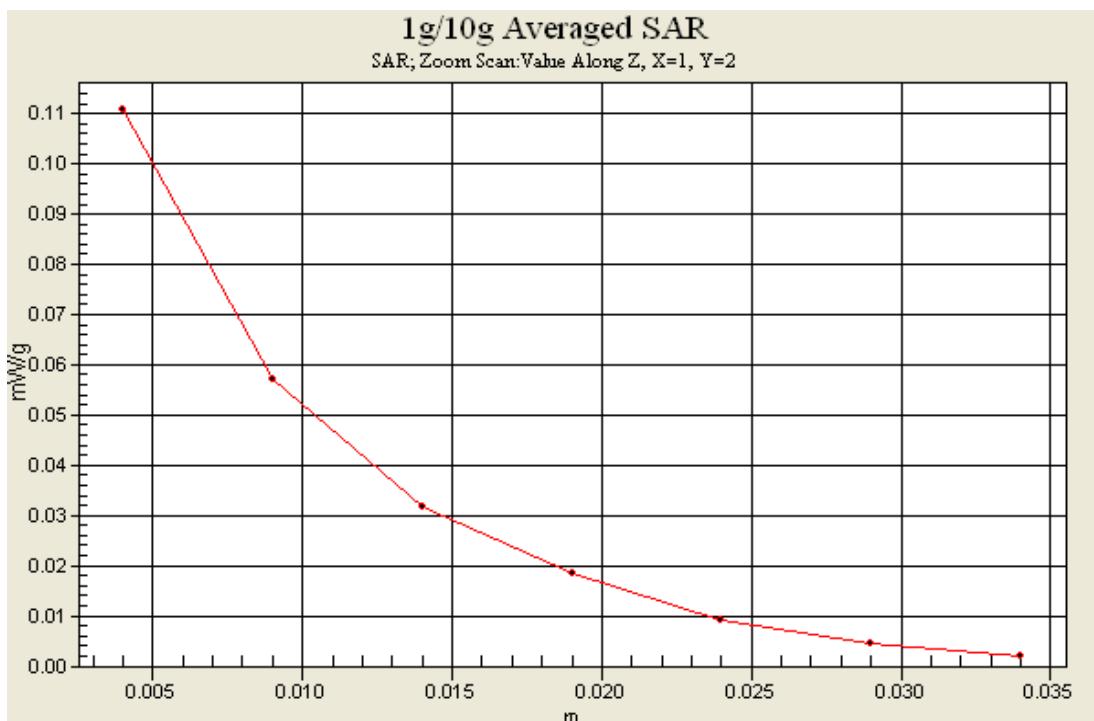

APPENDIX D: Calibration Certificates

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland		 	S Schweizerischer Kalibrierdienst C Service suisse d'étalonnage S Servizio svizzero di taratura S Swiss Calibration Service																																				
<small>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</small>		<small>Accreditation No.: SCS 108</small>																																					
Client	LG (Dymstec)	Certificate No: ET3-1729_Jan10																																					
CALIBRATION CERTIFICATE																																							
Object	ET3DV6 - SN:1729																																						
Calibration procedure(s)	QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25.v2 <small>Calibration procedure for dosimetric E-field probes</small>																																						
Calibration date:	January 27, 2010																																						
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498087</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>31-Mar-09 (No. 217-01026)</td> <td>Mar-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>31-Mar-09 (No. 217-01028)</td> <td>Mar-10</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>31-Mar-09 (No. 217-01027)</td> <td>Mar-10</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>30-Dec-09 (No. ES3-3013_Dec09)</td> <td>Dec-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 660</td> <td>29-Sep-09 (No. DAE4-660_Sep09)</td> <td>Sep-10</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10	Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10	Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10	Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10	Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10	Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10	Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10	DAE4	SN: 660	29-Sep-09 (No. DAE4-660_Sep09)	Sep-10
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																				
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10																																				
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10																																				
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10																																				
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10																																				
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10																																				
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10																																				
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10																																				
DAE4	SN: 660	29-Sep-09 (No. DAE4-660_Sep09)	Sep-10																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct10</td> </tr> </tbody> </table>				Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10																								
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																				
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11																																				
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10																																				
Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 																																				
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 																																				
Issued: January 27, 2010																																							
<small>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</small>																																							

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization 9	9 rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., 9 = 0 is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}*: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)x,y,z* = *NORM_{x,y,z} * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- Ax,y,z; Bx,y,z; Cx,y,z*; *VRx,y,z*: *A, B, C* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z} * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1729

January 27, 2010

Probe ET3DV6

SN:1729

Manufactured:	October 1, 2002
Last calibrated:	January 20, 2009
Recalibrated:	January 27, 2010

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ET3-1729_Jan10

Page 3 of 11

ET3DV6 SN:1729

January 27, 2010

DASY - Parameters of Probe: ET3DV6 SN:1729

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μ V/(V/m) ²) ^A	1.64	1.61	1.82	\pm 10.1%
DCP (mV) ^B	94.1	93.4	94.2	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X Y Z	0.00 0.00 0.00	0.00 0.00 0.00	1.00 1.00 1.00	300.0 300.0 300.0	\pm 1.5%

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6 SN:1729

January 27, 2010

DASY - Parameters of Probe: ET3DV6 SN:1729**Calibration Parameter Determined in Head Tissue Simulating Media**

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	41.9 ± 5%	0.89 ± 5%	6.22	6.22	6.22	0.48	2.20 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	5.27	5.27	5.27	0.51	2.80 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.97	4.97	4.97	0.64	2.38 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.42	4.42	4.42	0.99	1.68 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1729

January 27, 2010

DASY - Parameters of Probe: ET3DV6 SN:1729**Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
750	± 50 / ± 100	55.5 ± 5%	0.96 ± 5%	6.06	6.06	6.06	0.58	1.95 ± 11.0%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	6.05	6.05	6.05	0.51	2.17 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.71	4.71	4.71	0.66	3.04 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.48	4.48	4.48	0.94	2.39 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.07	4.07	4.07	0.99	1.38 ± 11.0%


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1729

January 27, 2010

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


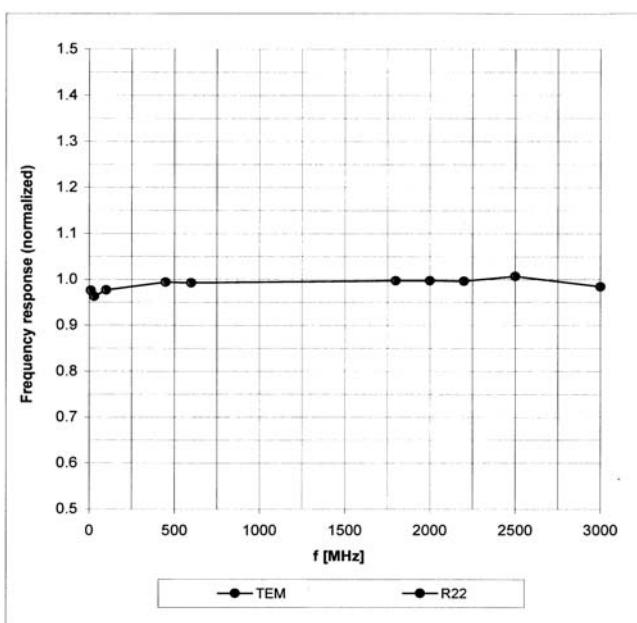
Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Certificate No: ET3-1729_Jan10

Page 7 of 11



ET3DV6 SN:1729

January 27, 2010

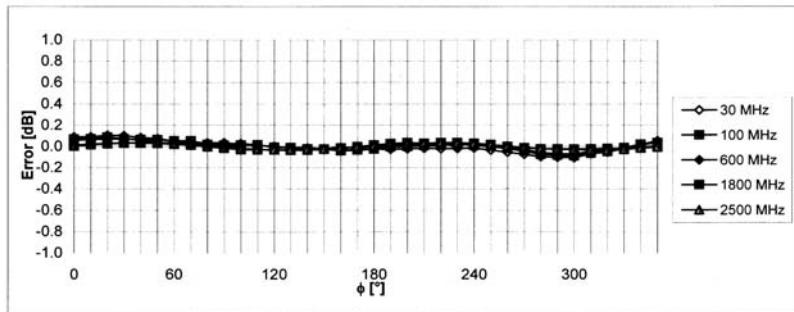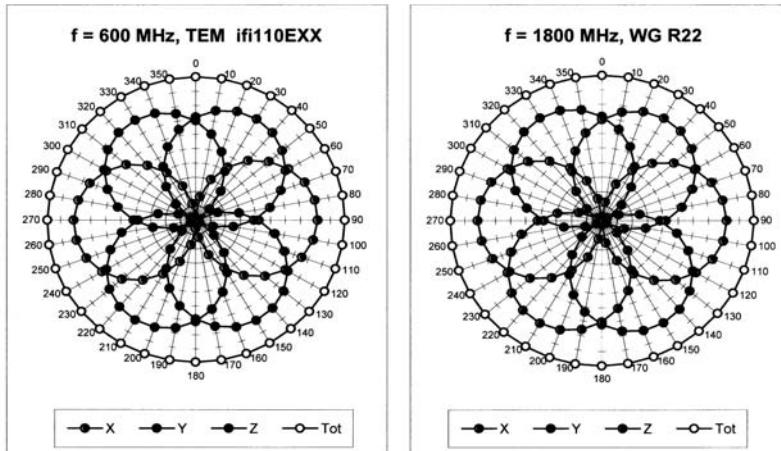Receiving Pattern (ϕ), $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ET3DV6 SN:1729


January 27, 2010

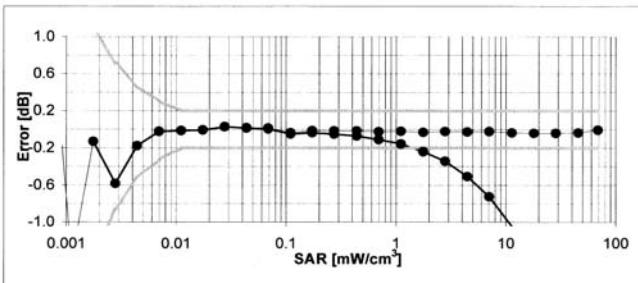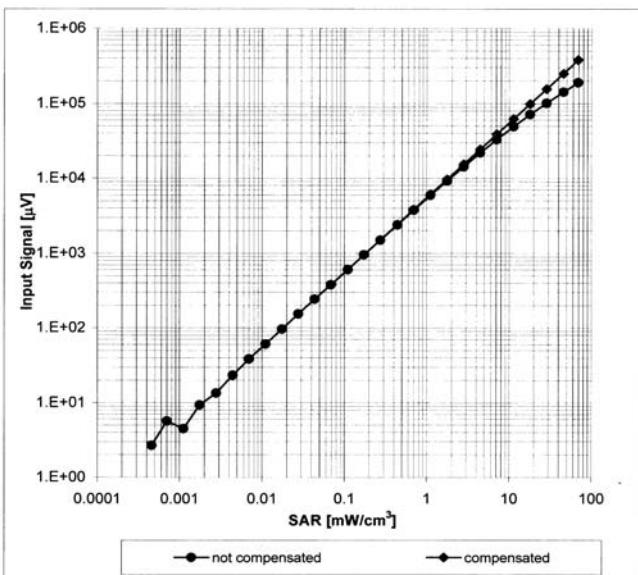Dynamic Range f(SAR_{head})
(Waveguide R22, f = 1800 MHz)Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)


ET3DV6 SN:1729

January 27, 2010

Conversion Factor Assessment

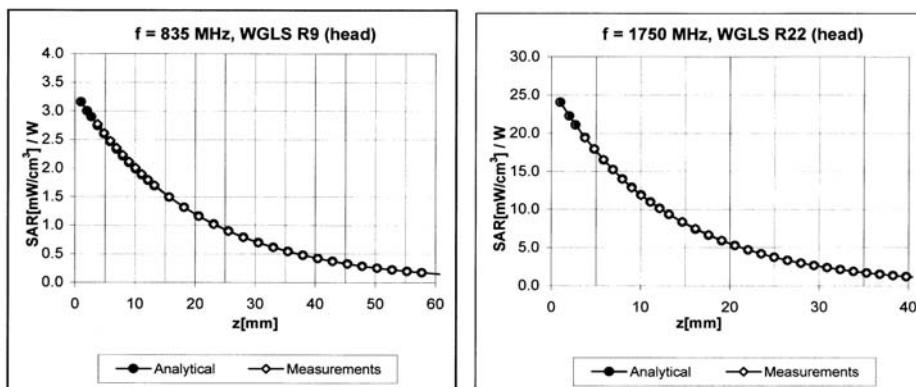

Deviation from Isotropy in HSL

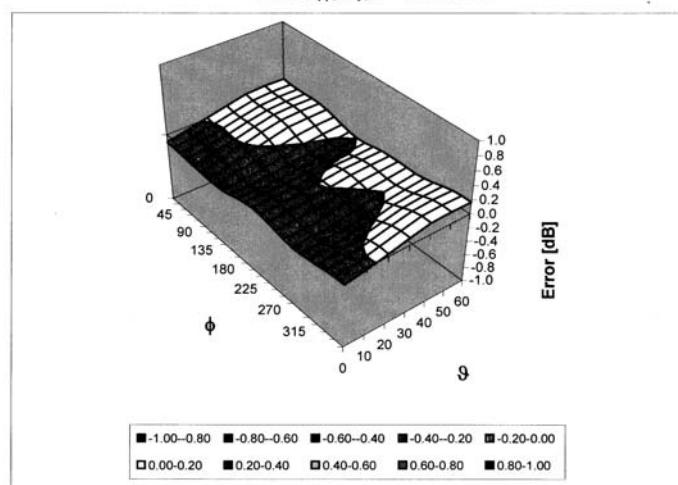Error (ϕ, θ), f = 900 MHzUncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

ET3DV6 SN:1729

January 27, 2010

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

Certificate No: ET3-1729_Jan10

Page 11 of 11

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **LG (Dymstec)**

Certificate No: **D835V2-471_Jan09**

CALIBRATION CERTIFICATE

Object	D835V2 - SN: 471
Calibration procedure(s)	QA CAL-05.v7 Calibration procedure for dipole validation kits
Calibration date:	January 19, 2009
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	01-Jul-08 (No. 217-00864)	Jul-09
Type-N mismatch combination	SN: 5047.2 / 06327	01-Jul-08 (No. 217-00867)	Jul-09
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	14-Mar-08 (No. DAE4-601_Mar08)	Mar-09

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 20, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D835V2-471_Jan09**

Page 1 of 6

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.3 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature during test	(21.5 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.44 mW / g
SAR normalized	normalized to 1W	9.76 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.66 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.61 mW / g
SAR normalized	normalized to 1W	6.44 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.39 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.7 Ω - 1.7 $j\Omega$
Return Loss	- 32.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 15, 2002

DASY5 Validation Report for Head TSL

Date/Time: 19.01.2009 11:07:17

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:471

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.97, 5.97, 5.97); Calibrated: 28.04.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 14.03.2008
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Pin=250mW; dip=15mm; dist=3.4mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 56.2 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.75 mW/g

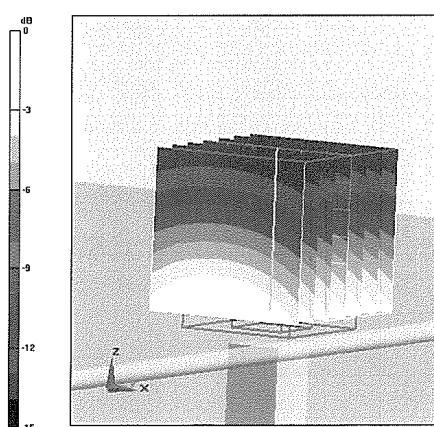


0 dB = 2.75mW/g

Certificate No: D835V2-471_Jan09

Page 5 of 6

Impedance Measurement Plot for Head TSL

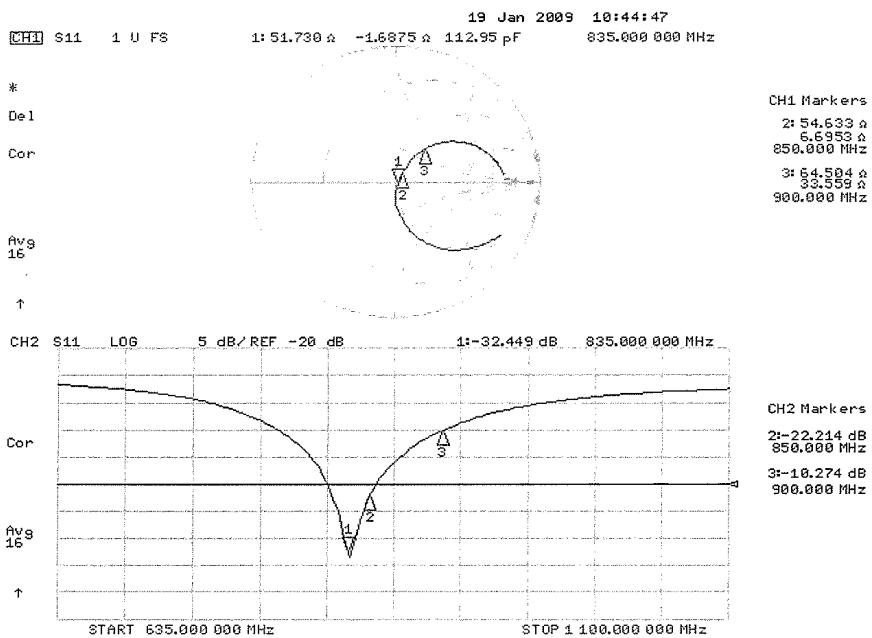

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **LG (Dymstec)**

Certificate No: **D1900V2-5d017_Jul09**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d017**

Calibration procedure(s) **QA CAL-05.v7**
 Calibration procedure for dipole validation kits

Calibration date: **July 20, 2009**


Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	30-Apr-09 (No. ES3-3025_Apr09)	Apr-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by: **Name: Claudio Leubler Function: Laboratory Technician** 

Approved by: **Name: Katja Pokovic Function: Technical Manager** 

Issued: July 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D1900V2-5d017_Jul09**

Page 1 of 6