

47 CFR PART 15 SUBPART C - BLUETOOTH

TEST REPORT

of

Mobile phone

Model Name:

P168C

Brand Name:

TCT

Report No .:

SZ08050125E03

FCC ID:

WEM0806P168CA0001

prepared for

Top Crown Technology Limited

Unit 1313 Room Hua Lian BUILDING No 2008 Shen Nan Zhong Lu Fu Tian District S.Z

repared by

Shenzhen Electronic Product Quality Testing Center

Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District Shenzhen, 518055 P. R. China

Tek +86 755 86130398 Fax: +86 755 86130














NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.



TABLE OF CONTENTS

1.	TEST CERTIFICATION4
2.	GENERAL INFORMATION5
2.1	EUT Description5
2.2	Test Standards and Results6
2.3	Facilities and Accreditations7
2.3.1	Facilities7
2.3.2	Test Environment Conditions
3.	47 CFR PART 15C REQUIREMENTS8
3.1	Number of Hopping Frequency8
3.1.1	Requirement8
3.1.2	Test Description8
3.1.3	Test Result8
3.2	Peak Output Power10
3.2.1	Requirement
3.2.2	Test Description
3.2.3	Test Result10
3.3	20dB Bandwidth
3.3.1	Definition
3.3.2	Test Description
3.3.3	Test Result13
3.4	Carried Frequency Separation16
3.4.1	Definition16
3.4.2	Test Description
3.4.3	Test Result16
3.5	Time of Occupancy (Dwell time)17
3.5.1	Requirement
3.5.2	Test Description
3.5.3	Test Result
3.6	Conducted Spurious Emissions20
3.6.1	Requirement20





3.6.2	Test Description	20
3.6.3	Test Result	20
3.7	Band Edge	24
3.7.1	Requirement	24
3.7.2	Test Description	24
3.7.3	Test Result	24
3.8	Conducted Emission	26
3.8.1	Requirement	26
3.8.2	Test Description	26
3.8.3	Test Result	27
3.9	Radiated Emission	29
3.9.1	Requirement	29
3.9.2	Test Description	29
3.9.3	Test Result	31





TEST CERTIFICATION 1.

Equipment under Test: Mobile phone

Brand Name: TCT Model Name: P168C

FCC ID: WEM0806P168CA0001

Applicant: Top Crown Technology Limited

Unit 1313 Room Hua Lian BUILDING No 2008 Shen Nan Zhong Lu Fu

Tian District S.Z.

Top Crown Technology Limited Manufacturer:

Unit 1313 Room Hua Lian BUILDING No 2008 Shen Nan Zhong Lu Fu

Tian District S.Z.

Test Standards: 47 CFR Part 15 Subpart C

Test Date(s): June 20, 2008 – June 26, 2008

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:

Lus Bias

Luo Biao

Reviewed by:

Wei Yanguan

Shu Luan

Approved by:

2008.6.28



2. GENERAL INFORMATION

2.1 EUT Description

EUT Type...... Mobile Phone

Model Name P168C

Serial No.....: (n.a., marked #1 by test site)

IMEI 135790246811220 Hardware Version YH718+ V1.3

Software Version: YH718-NONE-EN1 850-HW V1.3-SW V001

Modulation Type..... FHSS

Manufacturer: Top Crown Technology Limited

Power Supply:: Battery

Brand name: (n.a.)
Mode No.: P168
Capacitance: 1200mAh
Rated voltage: 3.7V
Charge limited: 4.2V

Manufacturer: SHENZHEN ZHIYIN ELECTRONIC CO., LTD

Accessory Equipment:..... AC Adapter (Charger for Battery)

Brand Name: (n.a.)
Model Name: C3013A01

Serial No.: (n.a. marked #1 by test site)
Rated Input: ~ 100V-240V, 50/60Hz, 120mA

Rated Output: = 4.2V, 300mA

Manufacturer: SHENZHEN BMT ELECTRONIC CO., LTD

Wire Length: 80cm

Note 1: The MS is a Dual-SIM-Card and Simultaneous-Dual-GSM Mobile phone, it contains Bluetooth Module operating at 2.4GHz ISM band; The frequencies allocated for the Bluetooth Module is F(MHz)=2402+1*n (0<=n<=78). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices
	(10-1-05 Edition)	

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result	Test date
1	15.247(a)	Number of Hopping Frequency	PASS	2008-6-25
2	15.247(b)	Peak Output Power	PASS	2008-6-25
3	15.247(a)	20dB Bandwidth	PASS	2008-6-25
4	15.247(a)	Carrier Frequency Separation	PASS	2008-6-25
5	15.247(a)	Time of Occupancy (Dwell time)	PASS	2008-6-25
6	15.247(c)	Conducted Spurious Emission	PASS	2008-6-25
7	15.247(c)	Band Edge	PASS	2008-6-25
8	15.207	Conducted Emission	PASS	2008-6-19
9	15.209	Radiated Emission	PASS	2008-6-19
	15.247(c)		_	



2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	86 - 106



3. 47 CFR PART 15C REQUIREMENTS


3.1 Number of Hopping Frequency

3.1.1 Requirement

According to FCC section 15.247(a)(1)(ii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

3.1.2 Test Description

A. Test Setup:



The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.
Service Simulator	Agilent	E5515C	GB43130131
Spectrum Analyzer	Agilent	E7405A	US44210471
Power Splitter	Weinschel	1506A	NW521
Attenuator 1	Resnet	20dB	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)

3.1.3 Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.




A. Test Verdict:

Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
2400 - 2483.5	79	75	Plot A.1/A.2	PASS

B. Test Plot:

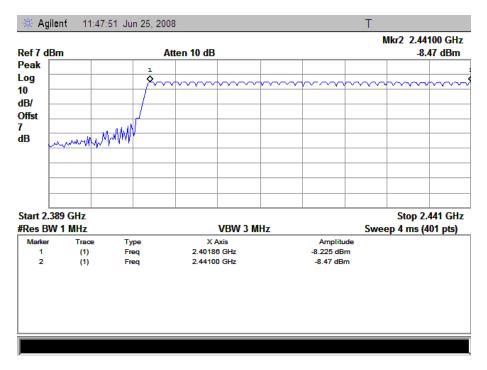

(Plot A.1: 2402MHz to 2441MHz)

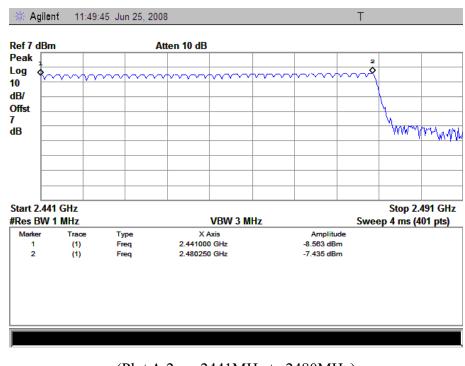

(Plot A.2: 2441MHz to 2480MHz)



3.2 Peak Output Power

3.2.1 Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.2.2 Test Description


See section 3.1.2 of this report.

3.2.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channal	Eraguanay (MHz)	Measu	red Output	Peak Power	Liı	mit	Verdict
Channel	nannel Frequency (MHz)		W	Refer to Plot	dBm	W	verdict
0	2402	-8.122	1.54E-04	Plot A			PASS
39	2441	-8.420	1.44E-04	Plot B	30	1	PASS
78	2480	-7.235	1.89E-04	Plot C			PASS







B. Test Plot:

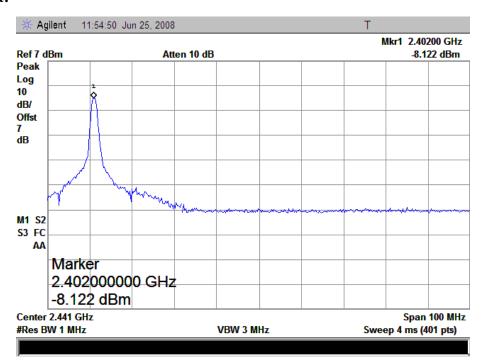


(Plot A: Channel = 2402)

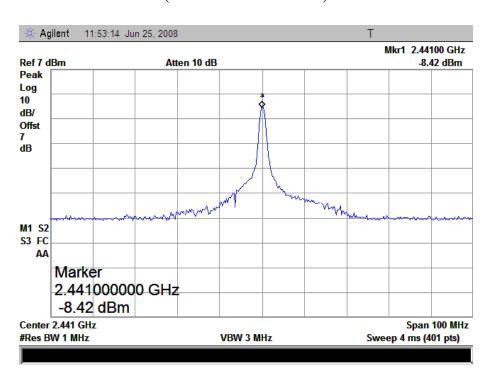

(Plot B: Channel = 2441)





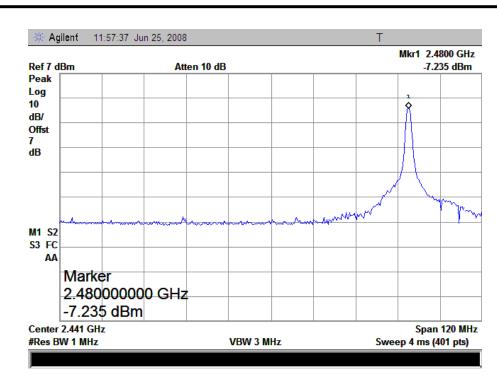

(Plot C: Channel = 2480)



3.3 20dB Bandwidth

3.3.1 Definition

The 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth (10*log1% = 20dB) taking the total RF output power.

3.3.2 Test Description

See section 3.1.2 of this report.

3.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

The maximum 20dB bandwidth measured is 1.02MHz according to the table below.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.05	Plot A
39	2441	1.05	Plot B
78	2480	1.05	Plot C

B. Test Plot:



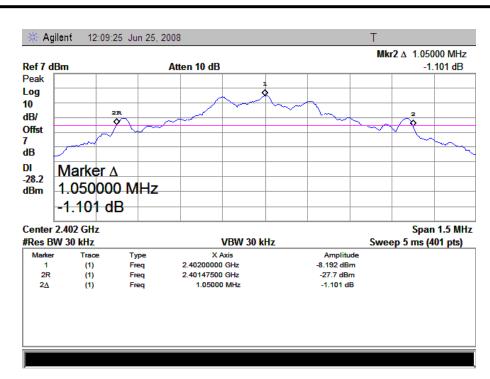


(Plot A: Channel = 2402)

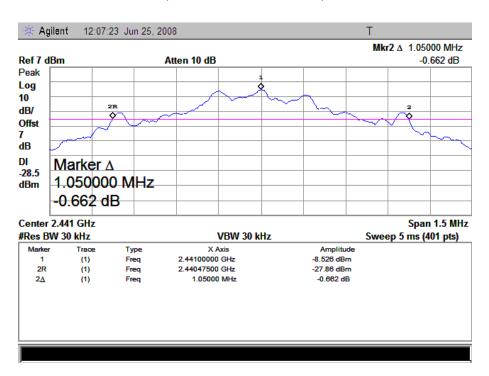

(Plot B: Channel = 2441)



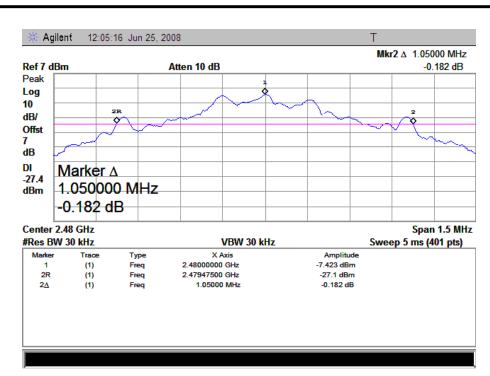

(Plot C: Channel = 2480)



3.4 Carried Frequency Separation

3.4.1 Definition

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.


3.4.2 Test Description

See section 3.1.2 of this report.

3.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel (1.05MHz, refer to section 3.3.3), whichever is greater. So, the verdict is PASS.

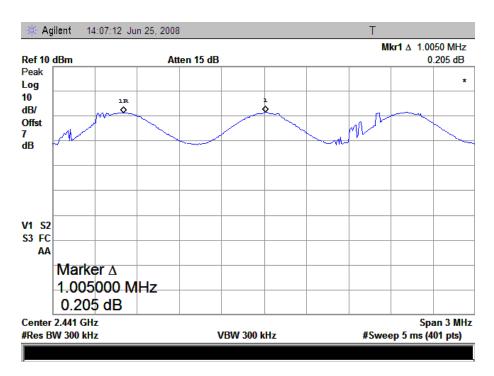

(Plot A: Carried Frequency Separation)



3.5 Time of Occupancy (Dwell time)

3.5.1 Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

```
{Total of Dwell} = {Pulse Time} * (1600 / 6) / {Number of Hopping Frequency} * {Period} 
{Period} = 0.4s * {Number of Hopping Frequency}
```

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

A. Test Verdict:

Channel	Frequency	Pu	ılse Time	Total of Dwell	Limit (mg)	Verdict
Channel	(MHz)	ms	Refer to Plot	(ms)	Limit (ms)	verdict
0	2402	2.958	Plot A	315.52		PASS
39	2441	2.958	Plot B	315.52	400	PASS
78	2480	2.958	Plot C	315.52		PASS


B. Test Plot:

Note: the following plots record the Pulse Time of the Module carrier.







(Plot A: Channel = 2402)

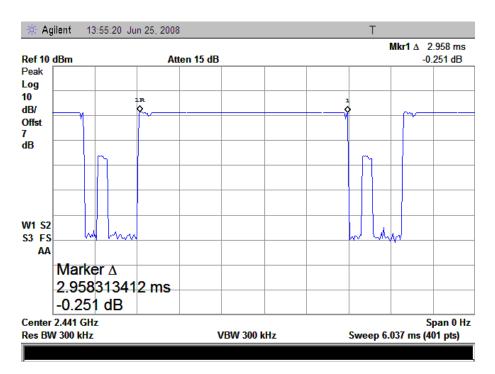

(Plot B: Channel = 2441)





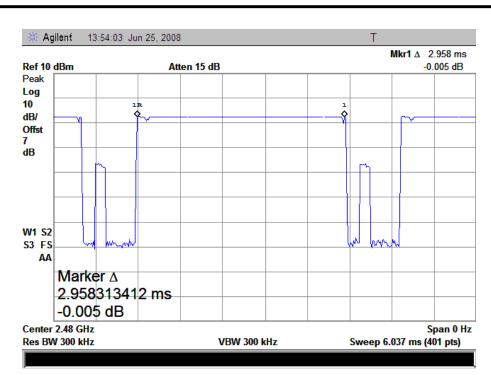

(Plot C: Channel = 2480)



3.6 Conducted Spurious Emissions

3.6.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2 Test Description

See section 3.1.2 of this report.

3.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

		Eraguanav	Measured Max.		Limi	t (dBm)	
	Channel	Frequency (MHz)	Out of Band	Out of Band Refer to Plot Carrier	Carrier	Calculated	Verdict
		(MITZ)	Emission (dBm)		Level	-20dBc Limit	
	0	2402	-53.68	Plot A.1/A.2	-8.23	-28.23	PASS
	39	2441	-52.93	Plot B.1/B.2	-8.48	-28.48	PASS
ĺ	78	2480	-53.98	Plot C.1/C.2	-7.41	-27.41	PASS


B. Test Plot:

Note: the power of the Module transmitting frequency should be ignored.



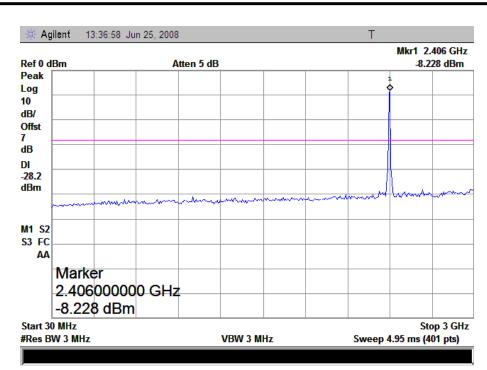


(Plot A.1: Channel = 0, 30MHz to 3GHz)

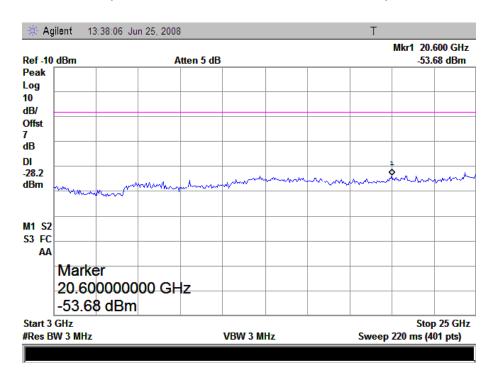


(Plot A.2: Channel = 0, 3GHz to 25GHz)



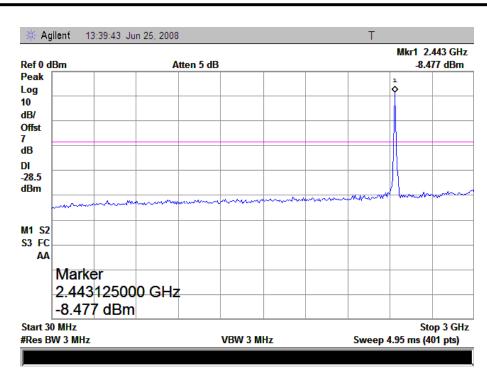


(Plot B.1: Channel = 39, 30MHz to 3GHz)

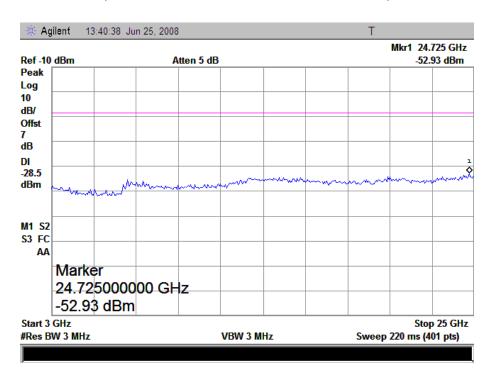


(Plot B.2: Channel = 39, 3GHz to 25GHz)



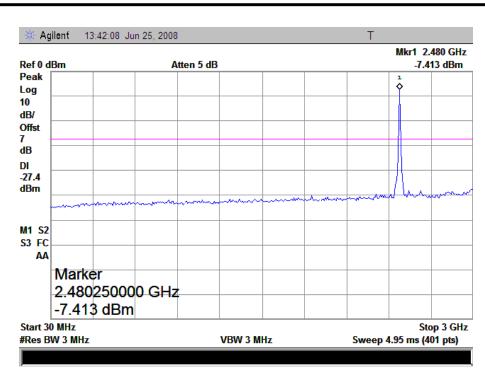

(Plot C.1: Channel = 78, 30MHz to 3GHz)

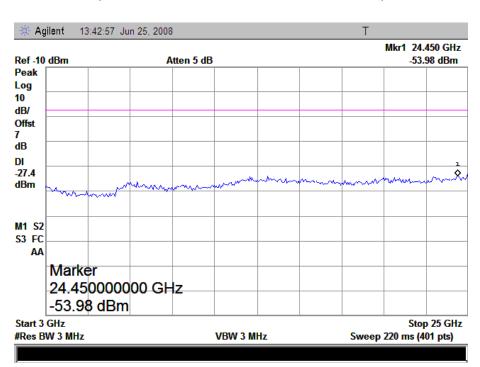

(Plot C.2: Channel = 78, 3GHz to 25GHz)



3.7 Band Edge

3.7.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.7.2 Test Description

See section 3.1.2 of this report.

3.7.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


Note: {Marker Delta} = {Carrier Level} - {Max. Band Edge Power}.

	Eraguanav	Max. Band Edge		Carrier	-20dBc	Marker	Refer	
Channel	Frequency	Power	@Frequency	Level	Limit	Delta		Verdict
	(MHz)	(dBm)	(MHz)	(dBm)	(dBm)	(dB)	to Plot	
0	2402	-43.30	2400.00	-8.23	-28.23	35.07	Plot A	PASS
78	2480	-44.25	2483.50	-7.40	-27.40	36.85	Plot B	PASS






B. Test Plot:

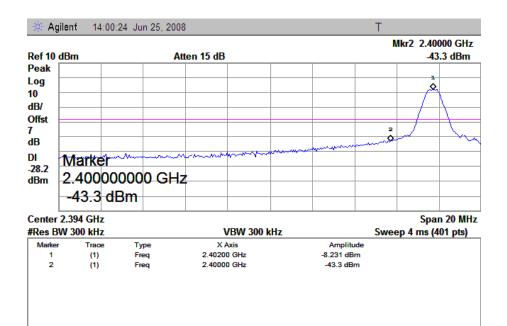

(Plot A: Channel = 0)

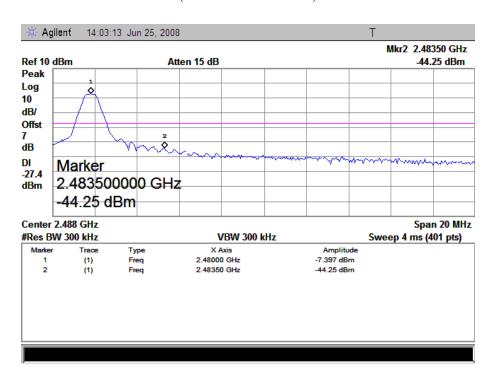

(Plot B: Channel = 78)



3.8 Conducted Emission

3.8.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a $50\mu H/50\Omega$ line impedance stabilization network (LISN).


Enaguanay nanga (MHz)	Conducted Limit (dBµV)				
Frequency range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 0.50MHz.

3.8.2 Test Description

A. Test Setup:

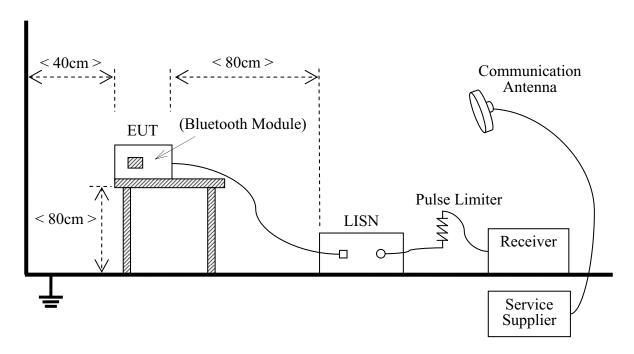

The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service



Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.
Receiver	Agilent	E7405A	US44210471
LISN	Schwarzbeck	NSLK 8127	812744
Service Supplier	R&S	CMU200	100448
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391

3.8.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


C. Test Verdict Recorded for Suspicious Points:

No.	@Frequency	Measured Emission Level (dBμV)			Limit (dBµV)		Verdict	
INO.	(MHz)	PK	QP	AV	Phase	QP	AV	verdict
1	0.186	35.9	28.9	22.6	L	64.2	54.2	PASS
2	0.610	44.4	42.2	31.0	L	56.0	46.0	PASS
3	3.130	47.4	37.2	22.0	L	56.0	46.0	PASS
4	3.871	52.4	39.8	22.0	L	56.0	46.0	PASS
5	29.855	53.9	40.2	22.0	L	60.0	50.0	PASS
6	(n.a.)	(n.a.)	(n.a.)	(n.a.)	L	(n.a.)	(n.a.)	(n.a.)
7	0.176	55.2	36.4	23.2	N	64.6	54.6	PASS
8	1.542	43.8	34.8	22.1	N	56.0	46.0	PASS
9	2.668	51.0	42.4	22.5	N	56.0	46.0	PASS
10	3.765	53.0	44.4	22.9	N	56.0	46.0	PASS
11	29.457	41.8	29.6	20.9	N	60.0	50.0	PASS








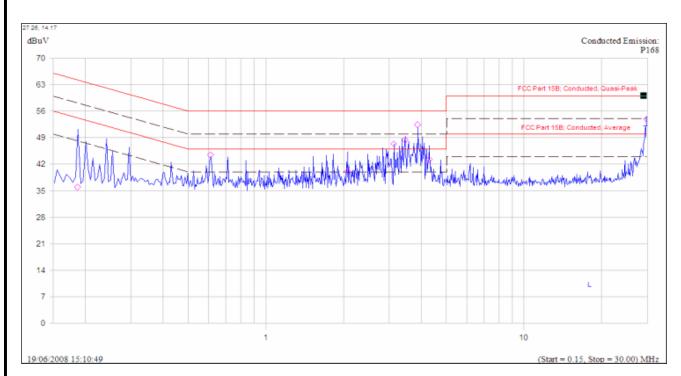

(Plot A: L Phase)

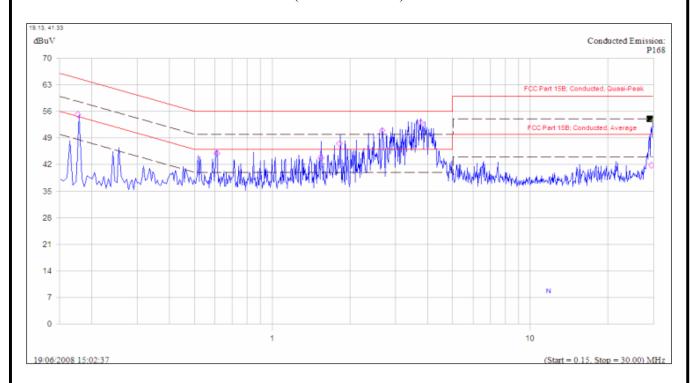

(Plot B: N Phase)



3.9 Radiated Emission

3.9.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

3.9.2 Test Description

A. Test Setup:





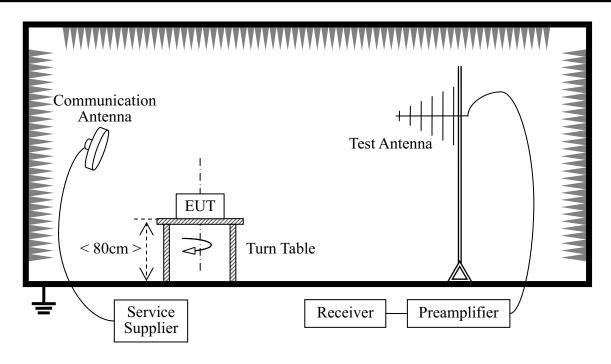

The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.
System Simulator	R&S	CMU200	100448
Receiver	Agilent	E7405A	US44210471
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384



3.9.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors.

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Engguenay (MII-z)	Fundamental Em	Antenna	
Chamiei	Frequency (MHz)	PK	AV	Polarization
0	2402	70.15	62.44	Horizontal
U	2402	77.32	71.25	Vertical
20	2441	69.85	61.26	Horizontal
39	2441	77.54	71.38	Vertical
78	2490	70.85	62.77	Horizontal
	2480	78.12	73.20	Vertical

Band Edge Emissions Fall in the Restricted Bands

The field strength of band edge emission falling in adjacent restricted bands (2310MHz - 2390MHz, and 2483.5MHz - 2500MHz) per FCC section 15.205(a) is calculated via the "Marker-Delta" method:

{Max. Band Edge Emission} = {Fundamental Emission} - {Marker Delta}

In the formula above, refer to section 3.7.3 for the {Marker Delta}. The calculation results in the table below show the compliance with the radiated emission limits specified in FCC section 15.209(a).

	Erag	Fundamental Emission		Max. Band Edge			Limit		
СН	Freq. (MHz)	dBμV/m	Detector	@Freq. (MHz)	Marker Delta (dB)	Emission (dBµV/m)	(dBµV/m)	Verdict	
0	2402	77.32	PK	2400.00	2400.00	35.07	42.25	74	PASS
0	2 4 02	71.25	AV	2400.00	33.07	36.18	54	PASS	
78	2480	78.12	PK	2484.00	26.95	41.27	74	PASS	
/8	2 4 80	73.20	AV	∠ 4 04.00	4.00 36.85	36.35	54	PASS	

The Radiated Emissions Fall in the Restricted Bands

Channel 1 1 1		Antenna Polarization	Max. Emission in the Restricted Bands (dBμV/m)		Limit (d	Verdict	
(MHZ	(IVIIIZ)	roiarization	PK	AV	PK	AV	
0	2402	Vertical			74	54	PASS
0	2402	Horizontal			74	54	PASS



Channel Frequency		Antenna Polarization	Max. Emission in the Restricted Bands (dBμV/m)		Limit (dBµV/m)		Verdict
	(MHz)	Polarization	PK	AV	PK	AV	
39	20 2441	Vertical			74	54	PASS
39 2441	Horizontal			74	54	PASS	
78	2480	Vertical			74	54	PASS
	2480	Horizontal			74	54	PASS

Also refer to following plots for the emissions falling in the restricted bands.

** END OF REPORT **