



NVLAP LAB CODE 200707-0



FCC PART 15.227

EMI MEASUREMENT AND TEST REPORT

For

NEWFEIMA TOYS CO., LTD.

Longtian Industrial Zone, West of Yutan Road, Guangyi Street, Chenghai District,
Shantou City, Guangdong, P.R. of China

FCC ID: WHI12345678

Report Type: Original Report	Product Type: R/C HELICOPTERS SERIES
Test Engineer: <u>Tim Zhang</u> <i>Tim Zhang</i>	
Report Number: <u>RSZ10012502</u>	
Report Date: <u>2010-02-08</u>	
Reviewed By: Merry Zhao <i>Merry Zhao</i> EMC Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “*” (Rev)

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC §15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD	7
FCC §15.209, §15.227(A) & §15.227 (B) – FIELD STRENGTH.....	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP.....	8
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST RESULTS SUMMARY	9
TEST DATA	10
FCC §15.227- DUTY CYCLE	14
LIMIT	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST PROCEDURE	14
TEST DATA	14
DECLARATION LETTER	18

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

*The NEWFEIMA TOYS CO., LTD.'s product, model number: A6809(FCC ID: WHI12345678) or the "EUT" as referred to in this report is a R/C HELICOPTERS SERIES The EUT is measured approximately: 18.0 cm L x 14.6 cm W x 6.0 cm H. rated input voltage: DC 1.5V AAA battery*4=6V.*

**All measurement and test data in this report was gathered from production sample serial number: 1001067 (Assigned by BACL, Shenzhen). The EUT was received on 2010-01-25.*

**Note: The series products, model A6809, 3001, M1, M2, F1, F2, E1068, E1168, S101, S102, L1, L2, 168, 268, 550, 551, 007, 008, Z1, Z2, 605, 606, 901, 902, K1, K2, T1, T2, 808, 818, 505, 515, 707, 717, we select A6809 to test, the all model have same circuit diagram, PCB, only model name has difference, which was explained in the attached Declaration Letter.*

Objective

This Type approval report is prepared on behalf of *NEWFEIMA TOYS CO., LTD.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, sec 15.203, 15.205, 15.209 and sec 15.227.

Related Submittal(s)/Grant(s)

No related submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect radiated and conducted emission measurement data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.


Special Accessories

The special Accessories were supplied by manufacturer.


Equipment Modifications

No modifications were made to the unit tested.

Configuration of Test Setup



Block Diagram of Test Setup

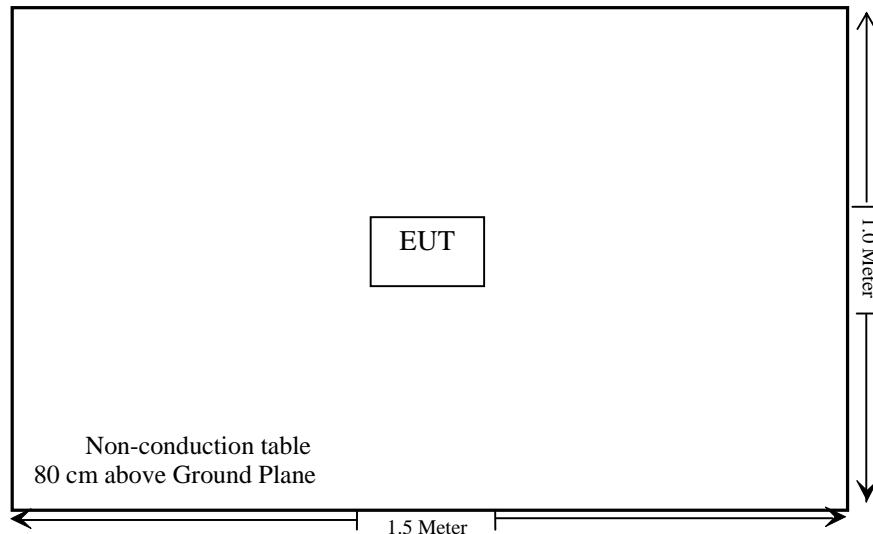

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna requirement	Compliant
§15.205	Restricted Band of operation	Compliant
§15.207	Conducted Emissions	N/A *
§15.209, §15.227(a), §15.227(b)	Field Strength	Compliant
§15.227	Duty Cycle	Compliant

Note: N/A* - EUT is battery operation only.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a temporary antenna with a connector, fulfill the requirement of this section, and please refer to the EUT photos.

Test Result: Compliant

FCC §15.209, §15.227(a) & §15.227 (b) – FIELD STRENGTH

Applicable Standard

According to §15.227 (a), the field strength if any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters.


(b), the field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (ShenZhen) is ± 4.0 dB.

EUT Setup

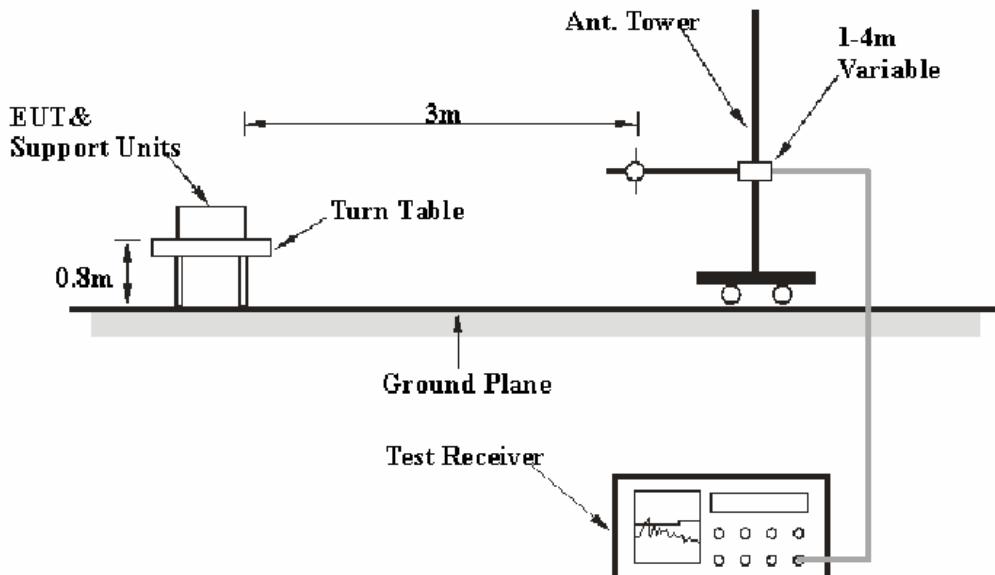

The radiated emission tests were performed in the chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15 Subpart C section 15.227 limits.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated from 27 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency	RB/W	VB/W	IF B/W
9 kHz-30 MHz	10 kHz	30 kHz	9 kHz
30 MHz-1 GHz	100 kHz	300 kHz	120 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2009-11-15	2010-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-07	2010-11-06
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2009-04-12	2010-04-11
EM Test	Loop Antenna	MS100	303298	2009-03-07	2010-03-07
ETS	Passive Loop Antenna	6512	00029604	2009-03-04	2010-03-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Cord. Amp.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Cord. Amp}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.227, with the worst margin reading of:

5.2 dB at 54.289750 MHz in the Vertical polarization.

Test Data

Environmental Conditions

Temperature:	25° C
Relative Humidity:	55%
ATM Pressure:	101.0kPa

Testing was performed by Tim Zhang on 2010-01-24.

Test Mode: Transmitting

Fundamental Measurement:

Indicated		Table Angle Deg.	Test Antenna		Correction Factor			Cord. Amp. (dB μ V/m)	FCC Part 15.227		
Freq. (MHz)	S.A. Reading (dB μ V)		Height (m)	Detector (PK/AV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dB μ V/m)	Margin (dB)	Remarks
27.145	78.85	153	1.0	PK	28.69	1.22	25.86	82.9	100	17.1	Fund.


Field Strength of Fundamental Emission (Average)					
Freq. (MHz)	Peak Measured @ 3m (dB μ V/m)	Duty Cycle Correction (dB)	Cord. Amp. (dB μ V/m)	FCC 15.227 Limit (dB μ V/m)	Result
27.145	82.9	-3.17	79.73	80	Compliant

Note: The above data is the worst case in the all polarity direction.

According to FCC Part 15.35, the limit on the radio frequency emissions as measured using instrumentation with peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Radiated Spurious Emission

Auto Test (FCC Part15.209)

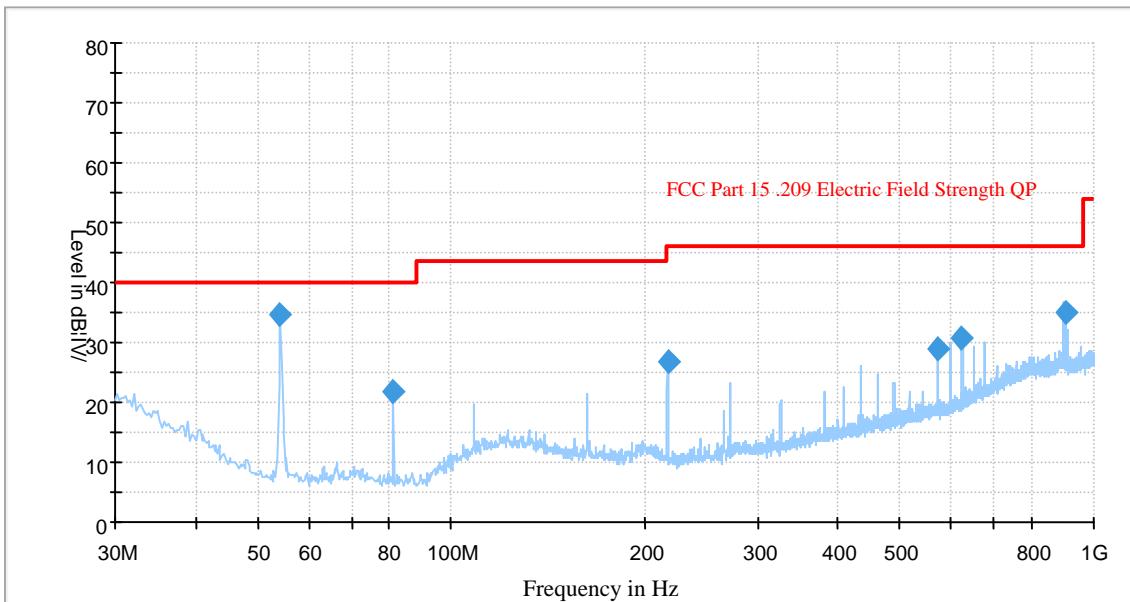


Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
54.289750	34.8	103.0	V	307.0	-19.4	40.0	5.2
904.743750	35.1	400.0	V	54.0	-0.5	46.0	10.9
624.346750	30.7	102.0	V	107.0	-7.4	46.0	15.3
217.178000	26.7	189.0	V	116.0	-16.2	43.5	16.8
570.055750	28.8	104.0	V	120.0	-9.0	46.0	17.2
81.434000	21.9	104.0	V	294.0	-20.2	40.0	18.1

Note: The above data is the worst case in the all polarity direction.


Out of Band Emission:

Indicated		Table Angle Degree	Antenna Height (m)	Detector (PK/AV)	Correction Factor			Corrected Amplitude (dB μ V/m)	Part 15.227 & 15.209	
Freq. (MHz)	S.A. Reading (dB μ V)				Antenna Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dB μ V/m)	Margin (dB)
26.96	19.85	360	1.0	PK	30.3	0.24	0	50.39	69.5	19.11
27.28	24.41	360	1.0	PK	30.3	0.24	0	54.95	69.5	14.55

Please refer to the plot hereinafter.

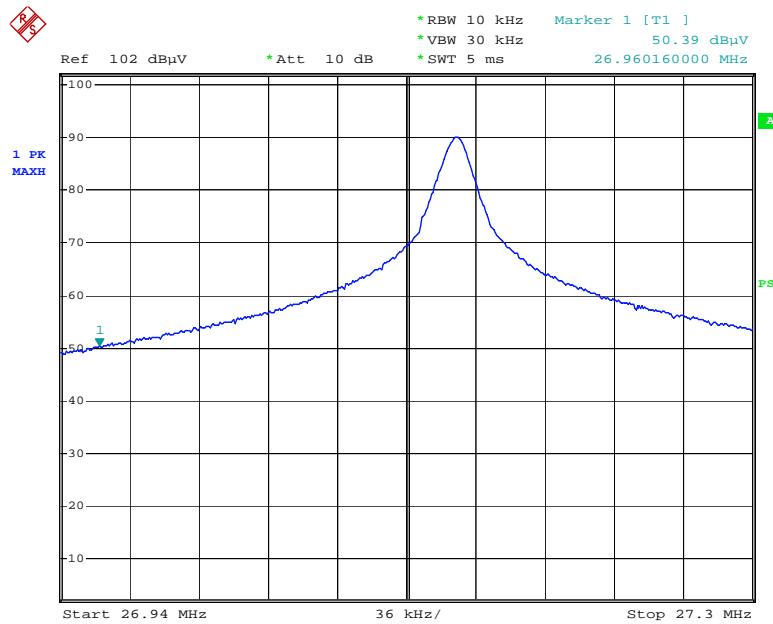

Date: 24.JAN.2010 03:02:01

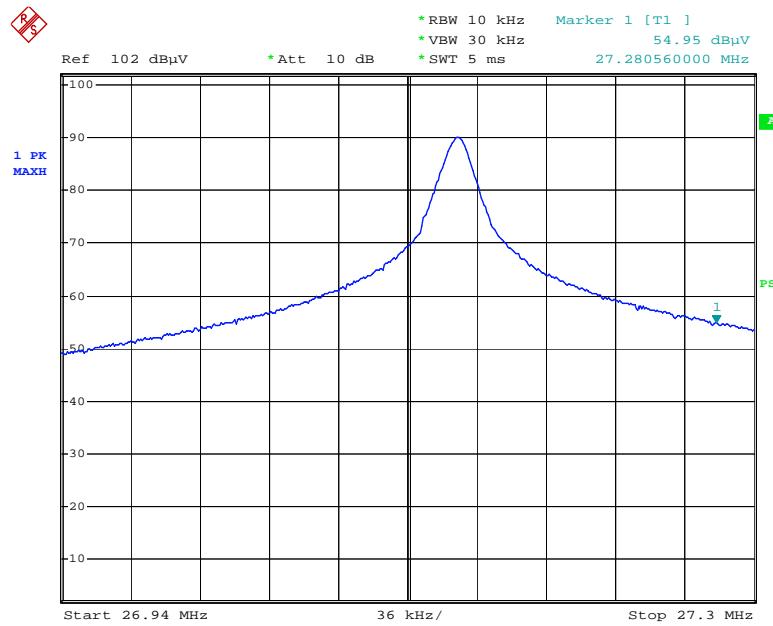

Date: 24.JAN.2010 03:03:12

FCC §15.227- DUTY CYCLE

Limit

Nil (No dedicated limit specified in the Rules).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer=operating frequency.
4. Set the spectrum analyzer as RBW, VBW =100 kHz, Span=0 Hz, Adjust Sweep=100 ms.
5. Repeat above procedures until all frequency measured were complete.


Test Data

Duty Cycle = $(14*0.66 \text{ ms} + 12*1.32 \text{ ms} + 1*5.4\text{ms} + 1*6.84\text{ms})/53.72 \text{ ms} *100\% = 69.42\%$


Duty Cycle Factor = $20 \lg (69.42\%) = -3.17 \text{ dB}$.

This factor will be applied to correct the final reading for the peak measurement.


Duty Cycle:

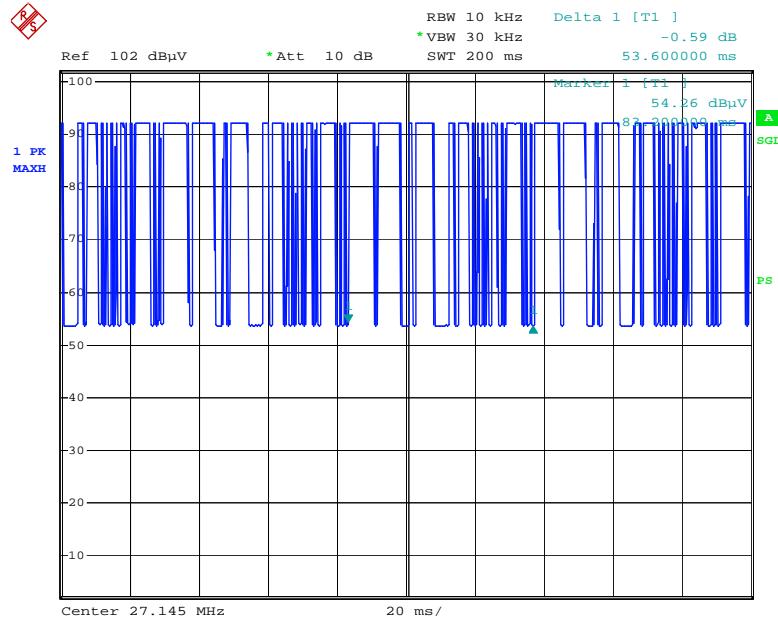


Date: 24.JAN.2010 02:35:34

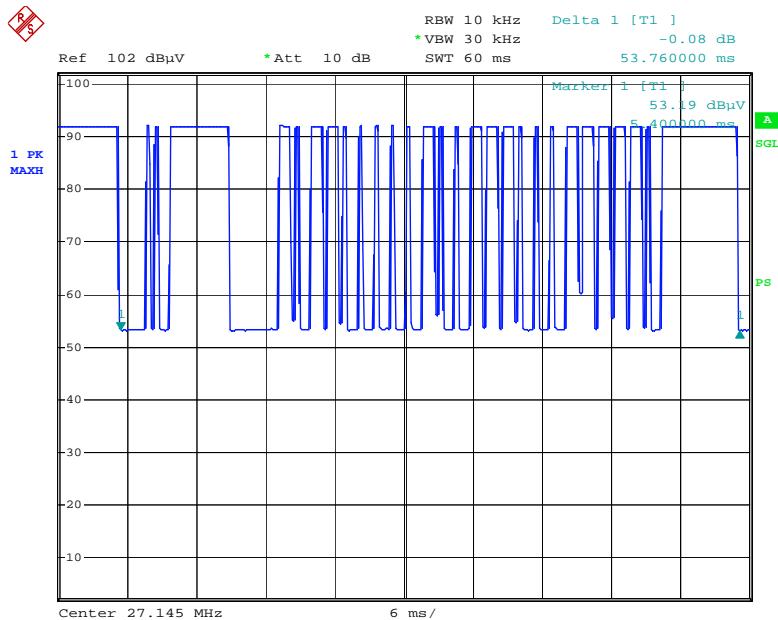


Date: 24.JAN.2010 02:57:17

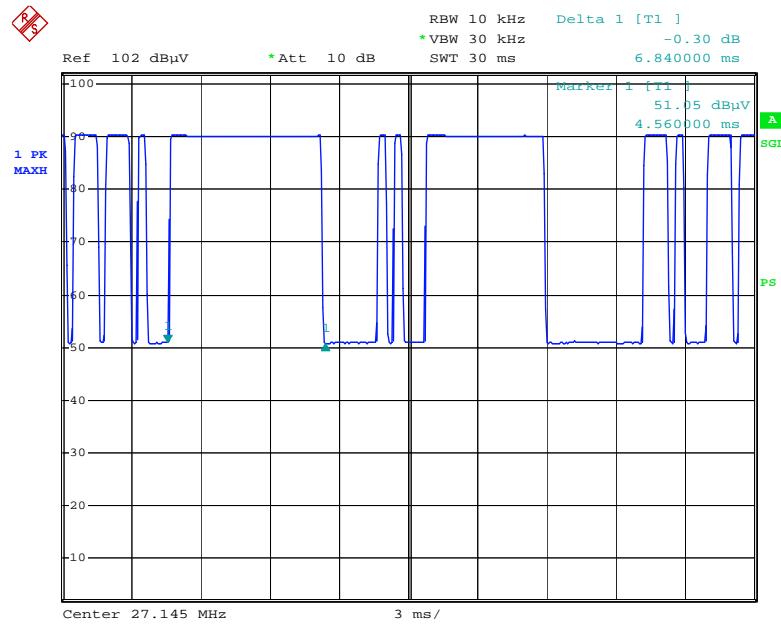


Date: 24.JAN.2010 02:48:28

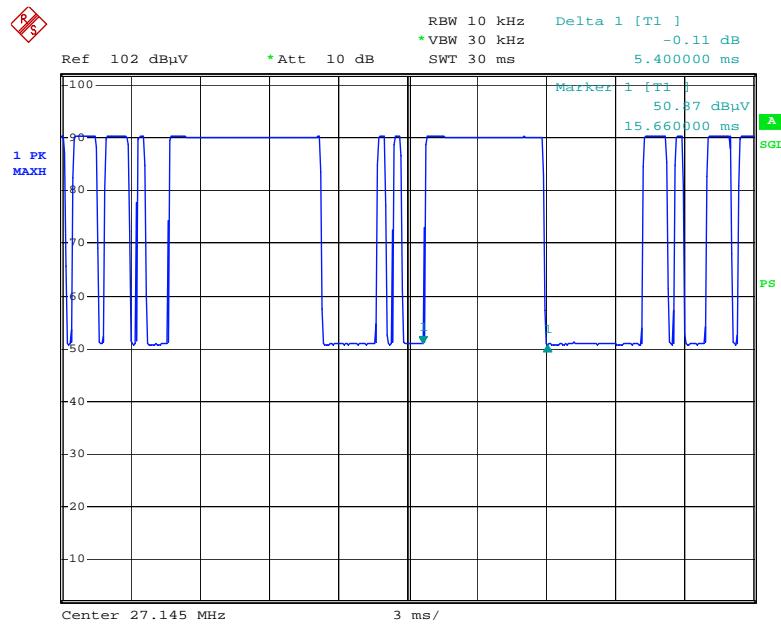

Date: 24.JAN.2010 02:49:11

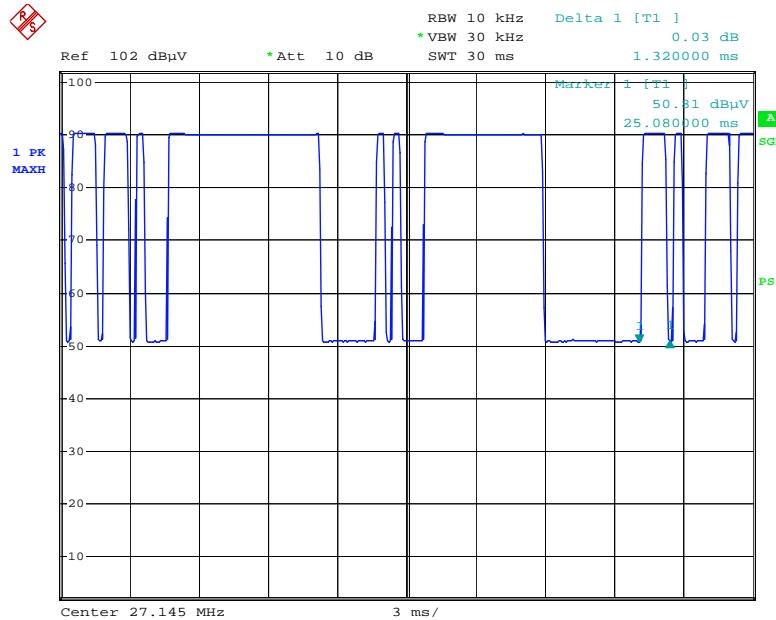

Date: 24.JAN.2010 02:50:10

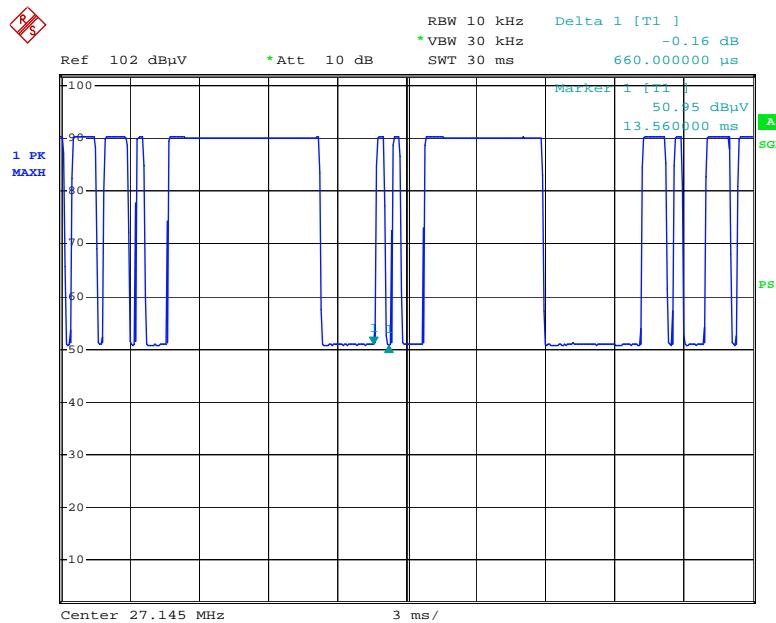

Date: 24.JAN.2010 02:47:37

DECALARATION LETTER**NEWFEIMA TOYS CO., LTD.**ADD: Longtian Industrial Area ,Yutan Road, Chenghai Zone,Shantou City, Guangdong P.R. China**DECLARATION OF IDENTICAL TO TYPE****Hereby we:****NEWFEIMA TOYS CO., LTD.**

(Name of manufacturer)

Basic application number:**R/C HELICOPTERS SERIES****Basic product name:****R/C HELICOPTERS SERIES****Basic model number:****A6809****Basic brand Name:****N/A****Basic applicant :****NEWFEIMA TOYS CO., LTD.****Declare the Circuit, PCB Layout, Electrical Parts and Figure are identical to the basic model, Except the outer:****Change/ Additional product name: **R/C HELICOPTERS SERIES******Change/ Additional model number: 3001, M1, M2, F1, F2, E1068, E1168, S101, S102, L1, L2, 168, 268, 550, 551, 007, 008, Z1, Z2, 605, 606, 901, 902, K1, K2, T1, T2, 808, 818, 505, 515, 707, 717;****Change/ Additional brand name: N/A****Change/ Additional Applicant : **NEWFEIMA TOYS CO., LTD.******Change/ Additional Manufacturer : **NEWFEIMA TOYS CO., LTD.****

Company Chop



Signature

DATE: 2010-2-3

******* *END OF REPORT *******