

# Regulatory WLAN Antenna Information (Template)

*English Language Required for Regulatory Review / Approval*

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.**

Platform information																																																											
Brand	ODM	****End product model name				Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)																																																				
	ECS	SG20QT2C				Convertible NB	195.65mm																																																				
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.																																																											
Antenna information																																																											
Vendor		Type		Antenna Part number (Main)			Antenna Part number (Aux)																																																				
SPEED		PIFA		F-0G-MA-6007-003-00			F-0G-MA-6007-004-00																																																				
Peak gain w/ cable loss (dBi)*																																																											
	<b>2.4GHz</b> 2400-2483.5 MHz	<b>5.2GHz</b> 5150-5250MHz	<b>5.3GHz</b> 5250-5350MHz	<b>5.6GHz</b> 5470-5725MHz	<b>5.8GHz</b> 5725-5850MHz	<b>6.2GHz</b> 5925-6425MHz	<b>6.5GHz</b> 6425-6525MHz	<b>6.7GHz</b> 6525-6875MHz	<b>7.0 GHz</b> 6875-7125MHz																																																		
<b>Main</b>	1.36 dBi	1.62 dBi	1.62 dBi	2.42 dBi	2.42 dBi																																																						
<b>Aux</b>	2.71 dBi	2.53 dBi	1.64 dBi	0.60 dBi	2.40 dBi																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="10"></td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table>																																																											

# Antenna Sample / Antenna Data

## Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S. Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	Required	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Optional	Optional	Optional	Optional
1E	Main & Aux antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
1E OR 1F, 1G, 1H						
1F	Main & Aux antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Main & Aux antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Main & Aux antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Optional	Required	Required	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Optional	Required	Optional
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Optional	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A
9	Antenna gain range should be equal or greater than -2 dBi. (2.4/5/6GHz: EU, 6GHz: FCC)	Required	Required	N/A	N/A	N/A

# Antenna Information

## Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E *Total Peak Gain W/ Cable loss (dBi)	1F Total Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: F-0G-MA-6007-003-00 Main Antenna	SPEED	PIFA	P/N: 13-130PXK9280 50 ohm Coaxial length: 43.3cm diameter: 1.13mm  diameter: I-PEX MHF4L 1.13mm	2400-2483.5	1.36	2.44	1.06	1.08
				5150-5250	1.62	3.13	1.41	1.51
				5250-5350	1.62	3.21	1.79	1.59
				5470-5725	2.42	4.18	1.22	1.76
				5725-5850	2.42	4.23	1.39	1.81
P/N: F-0G-MA-6007-004-00 Aux Antenna	SPEED	PIFA	P/N: 13-130PXK9281 50 ohm Coaxial length: 58.6cm diameter: 1.13mm  diameter: I-PEX MHF4L 1.13mm	2400-2483.5	2.71	4.17	1.66	1.46
				5150-5250	2.53	4.56	1.23	2.03
				5250-5350	1.64	3.79	1.08	2.15
				5470-5725	0.60	2.97	1.12	2.37
				5725-5850	2.40	4.86	1.06	2.46

- 3D Antenna Peak Gain required being test in system basis.


## Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of Main antenna here.

Main Antenna Dimensioned Drawing:

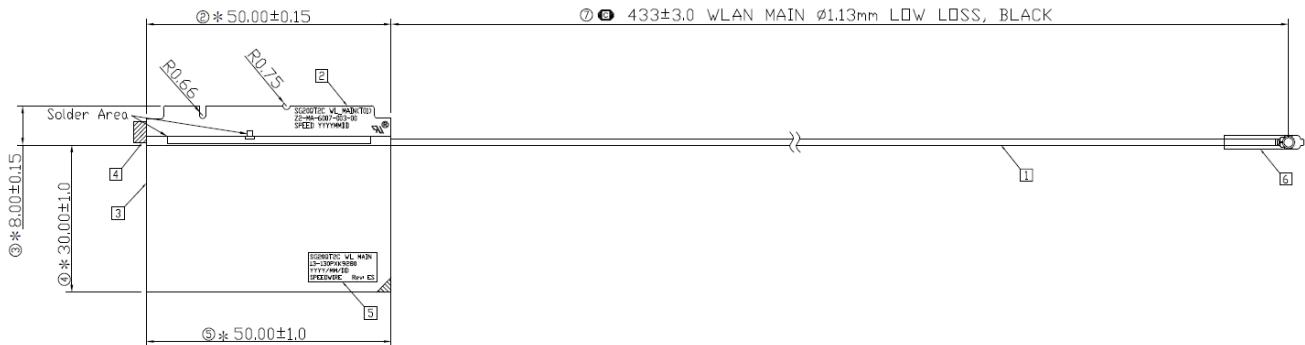

Main Antenna Photo (Front/Back):

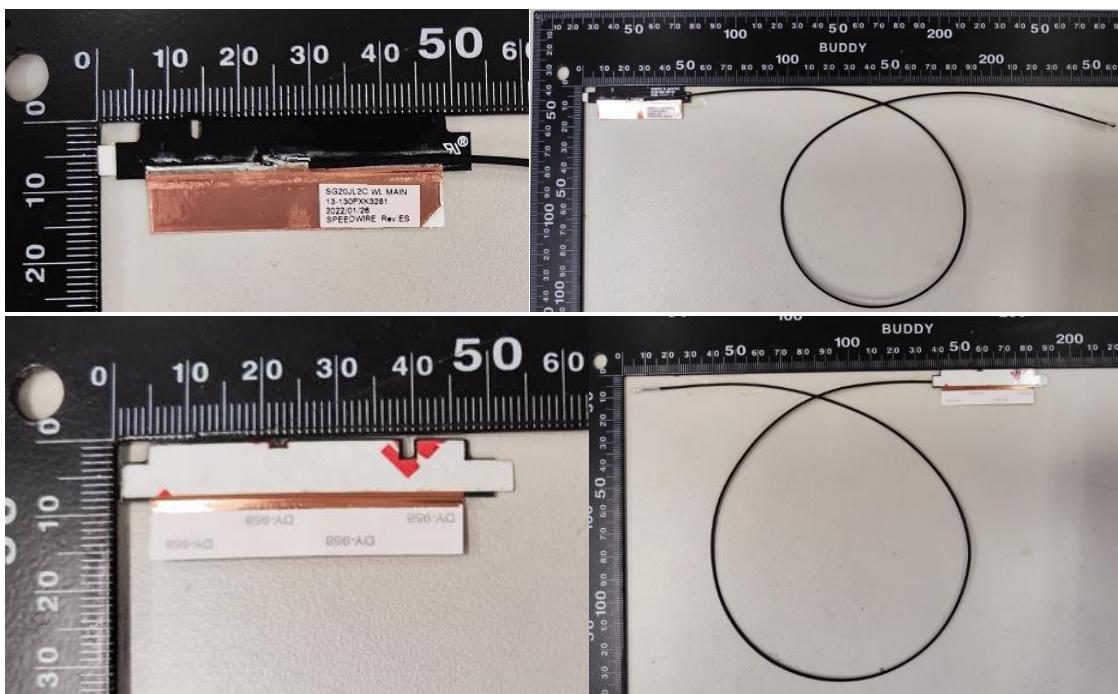


Antenna Manufacturer: SPEED

Antenna Part Number: F-0G-MA-6007-003-00 (Main), F-0G-MA-6007-004-00 (Aux)


**Note: antenna photo should include L type ruler**

Include a dimensioned photo and dimensioned drawing of Aux antenna here.

### Aux Antenna Dimensioned Drawing:

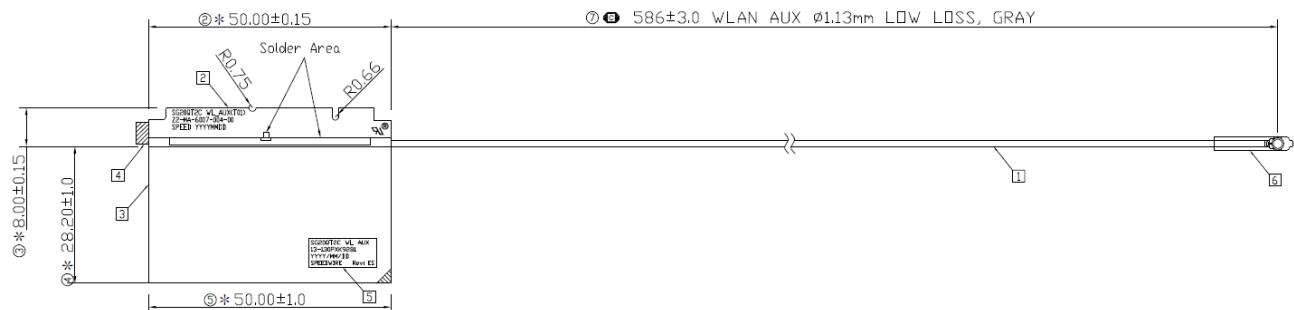

### Aux Antenna Photo (Front/Back):

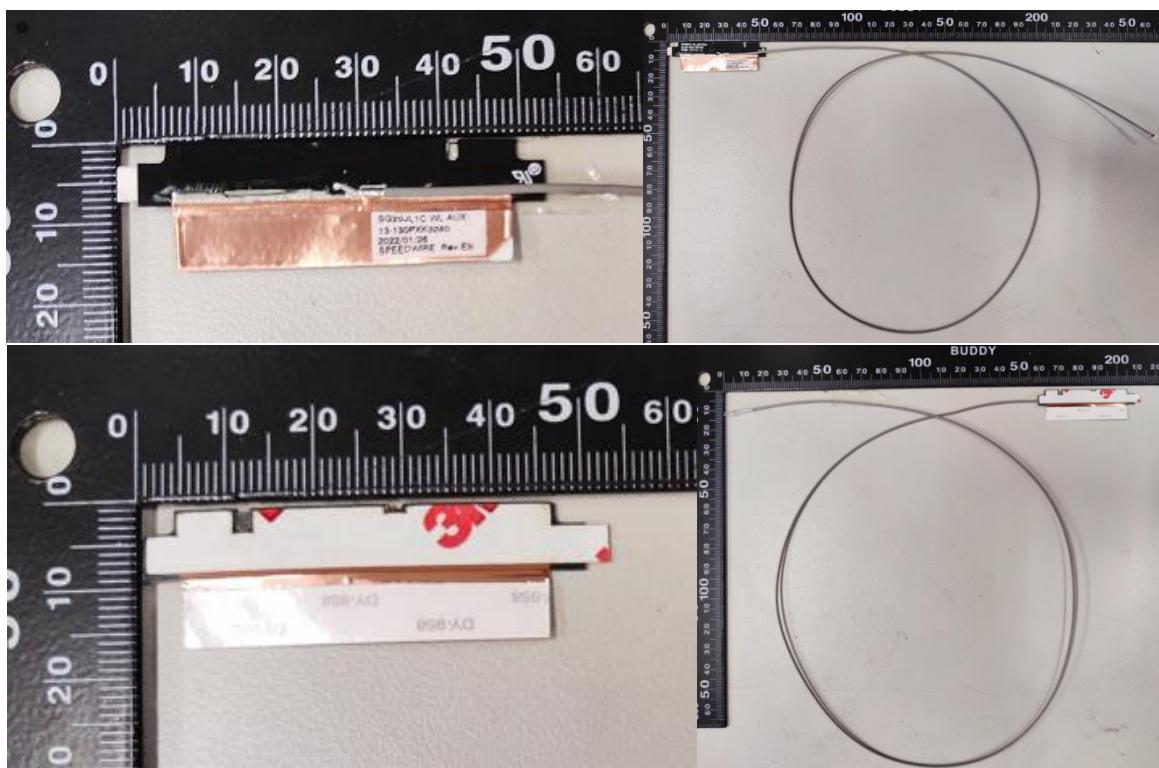

Antenna Manufacturer: SPEED

Antenna Part Number: F-0G-MA-6007-003-00 (Main), F-0G-MA-6007-004-00 (Aux)


**Note: antenna photo should include L type ruler**

## Section 3. Radiation characteristics of antenna loaded in Host Platform

### Main Antenna


#### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
2400-2483.5	2.44

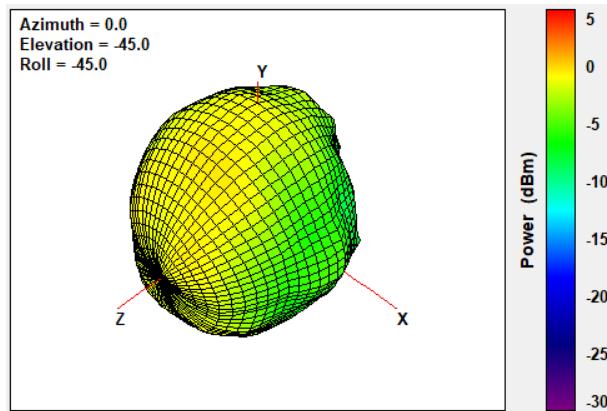


#### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5150-5250	3.13

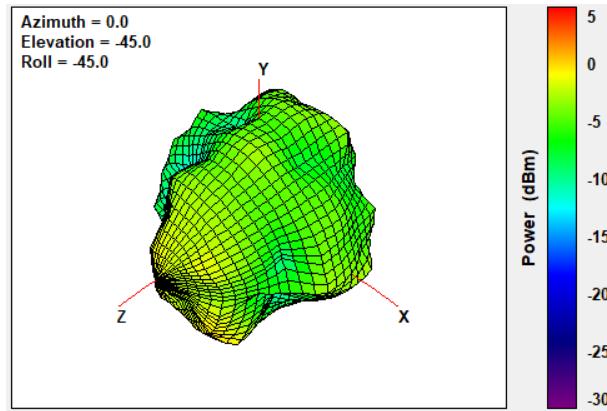


## Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5250-5350	3.21

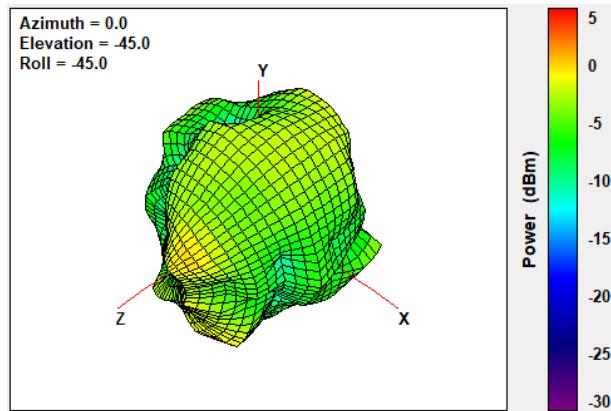


## Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5470-5725	4.18

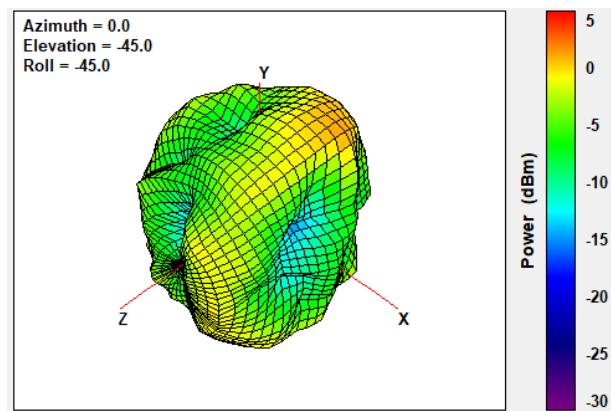

## Max Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5725-5850	4.23

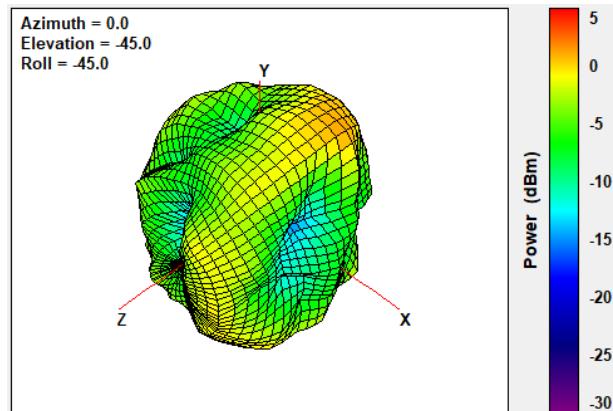

## Auxiliary Antenna


### Aux Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
2400-2483.5	4.17

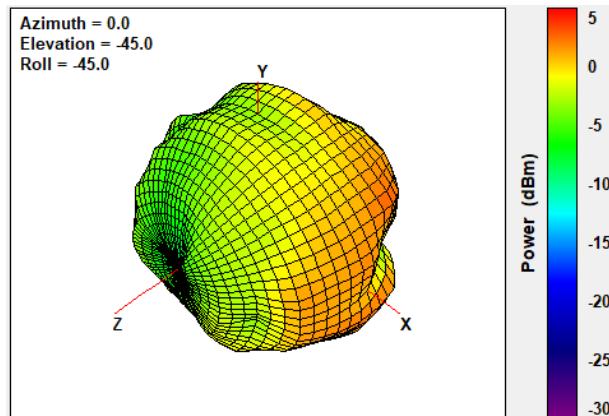


### Aux Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5150-5250	4.56

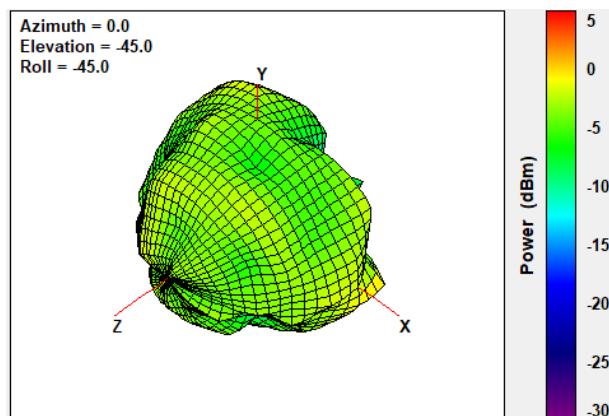


## Aux Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5250-5350	3.79

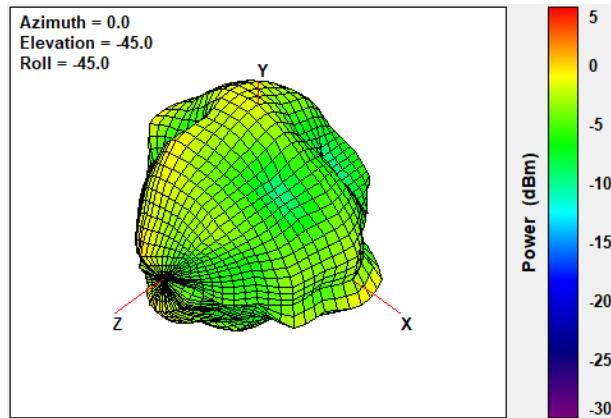


## Aux Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5470-5725	2.97

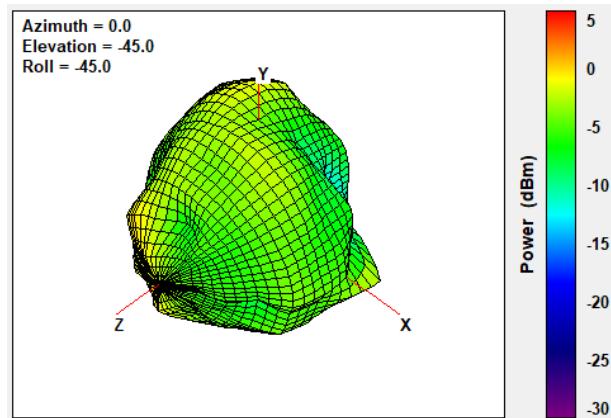

## Aux Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/o Cable Loss (dBi)
5725-5850	4.86

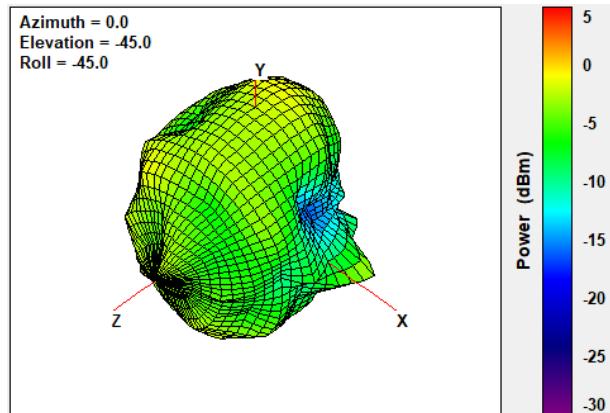

## Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

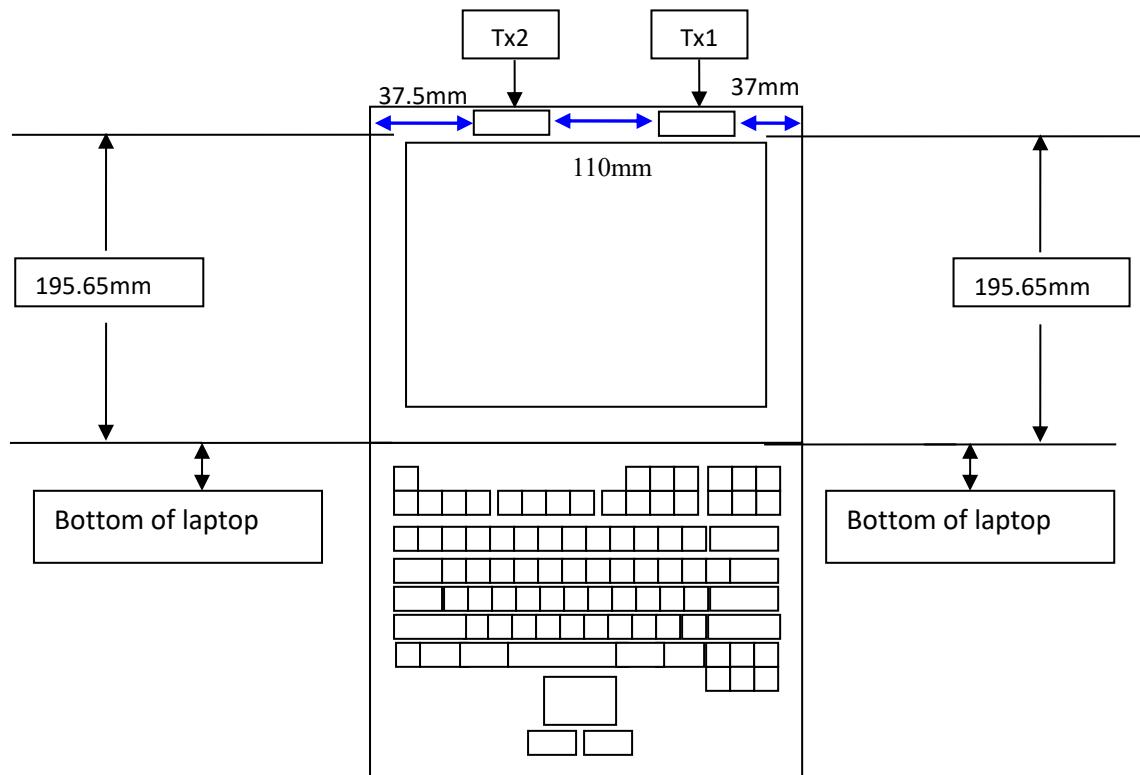

## Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

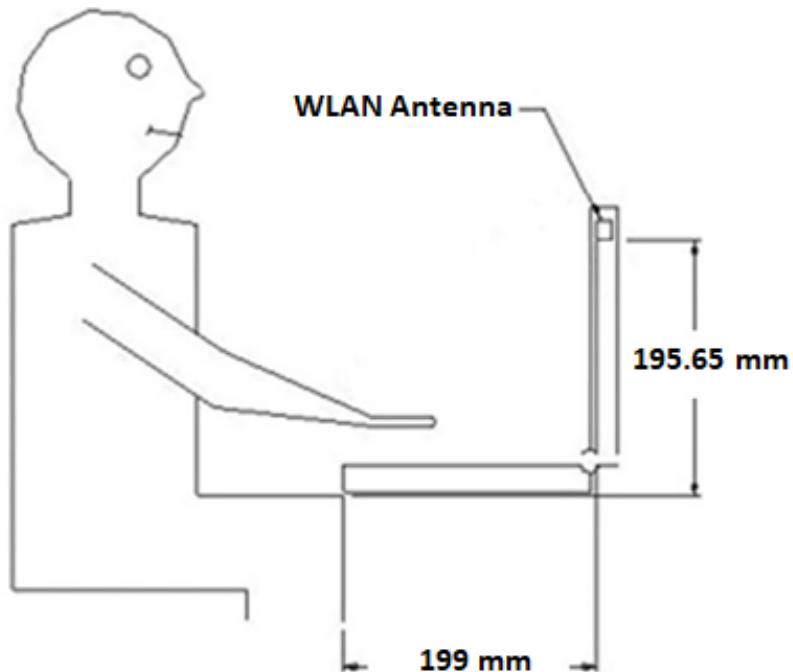

## Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

