



Certificate #4312.01

TEST REPORT

Product Name: GPON ONT
Trade Mark: SKYWORTH, STRONG, QVWI, ACL fiber
Model No.: SK-D7462v3
Add. Model No.: TEN03, GN630V, ACLF646
Report Number: 25071118980RFC-1
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: WNA-TEN03
Test Result: PASS
Date of Issue: September 26, 2025

Prepared for:

Shenzhen Skyworth Digital Technology Co., LTD.
14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District,
Shenzhen, China

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu
Team Leader

Approved by:

Kevin Liang
Assistant Manager

Date: September 26, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Version

Version No.	Date	Description
V1.0	September 26, 2025	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	14
4.6 SYSTEM TEST CONFIGURATION	14
4.7 DUTY CYCLE	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	34
5.1 REFERENCE DOCUMENTS FOR TESTING	34
5.2 ANTENNA REQUIREMENT	34
5.3 CONDUCTED OUTPUT POWER	35
5.4 6 DB BANDWIDTH	36
5.5 POWER SPECTRAL DENSITY	37
5.6 CONDUCTED OUT OF BAND EMISSION	38
5.7 RADIATED SPURIOUS EMISSIONS	39
5.8 BAND EDGE MEASUREMENTS (RADIATED)	50
5.9 CONDUCTED EMISSION	67
APPENDIX A RF TEST DATA	70
A.1 DTS BANDWIDTH	70
A.2 OCCUPIED CHANNEL BANDWIDTH	89
A.3 MAXIMUM POWER SPECTRAL DENSITY	108
A.4 BAND EDGE MEASUREMENTS	127
A.5 CONDUCTED SPURIOUS EMISSION	140
APPENDIX 1 PHOTOS OF TEST SETUP	178
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	178

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Shenzhen Skyworth Digital Technology Co., LTD.
Address of Applicant:	14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen Skyworth Digital Technology Co., LTD.
Address of Manufacturer:	14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	GPON ONT		
Model No.:	SK-D7462v3		
Add. Model No.:	TEN03, GN630V, ACLF646		
Trade Mark:	SKYWORTH, STRONG, QVWI, ACL fiber		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
	U-NII 5 GHz Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac/ax
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax
Software Version:	V1.0.0(Provided by the customer)		
Hardware Version:	V1.0(Provided by the customer)		
Sample Received Date:	July 10, 2024		
Sample Tested Date:	July 17, 2025 to August 29, 2025		
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.			

1.2.2 Description of Accessories

Adapter(1)	
Model No.:	AH-SDT120150U5xP (x=0-9, represent different customer and different output cord, not affecting safety)
Input:	100-240 V~50/60Hz 0.6 A
Output:	12.0 V $\equiv$ 1.5 A 18.0W
DC Cable:	1.5 Meter, Unshielded without ferrite

Adapter(2)	
Model No.:	YS-SKY120150U0xP (x=0-9, indicates marketing purpose ,no safety and EMC impact)
Input:	100-240 V~50/60Hz 0.6 A
Output:	12.0 V $\equiv$ 1.5 A
DC Cable:	1.5 Meter, Unshielded without ferrite

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz	
Frequency Range:	2412 MHz to 2462 MHz	
Support Standards:	IEEE 802.11b/g/n-HT20/n-HT40/ax-HE20/ax-HE40	
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM/OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)	
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20/HT40: Up to MCS15 IEEE 802.11ax-HE20/ HE40: Up to MCS11	
Number of Channels:	IEEE 802.11b/g/n-HT20/ax-HE20: 11 IEEE 802.11n-HT40/ax-HE40: 7	
Channel Separation:	5 MHz	
Antenna Type: (Provided by the customer)	Antenna 1	External Antenna
	Antenna 2	External Antenna
Antenna Gain: (Provided by the customer)	Antenna 1	5 dBi
	Antenna 2	5 dBi
Normal Test Voltage:	12 Vdc	

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20 IEEE 802.11ax-HE20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40 IEEE 802.11ax-HE40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	Lenovo	Lenovo B40-80	MP12NEQ6	UnionTrust
Notebook	Lenovo	TP00067A	PN-0FZDEU 16\02	UnionTrust
Telephone	PHILIPS	HCD9669(118)TSD	411101943928	UnionTrust
OLT	ZTE	ZXA10 C620	N/A	UnionTrust
USB flash disk	Kingston	DTSE9	N/A	UnionTrust

2) Support Cable

Description	Quantity	Cable Type	Length (m)	Supplied by
Ethernet Cable	1	Shielded without ferrite	1.5	UnionTrust
Ethernet Cable	1	Shielded without ferrite	1.5	UnionTrust
Ethernet Cable	1	Shielded without ferrite	3.0	UnionTrust
Fiber optic Cable	1	Unshielded without ferrite	3.0	UnionTrust
Antenna Cable	2	SMA	0.3	UnionTrust

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB
8	Radio frequency	± 6.5 x 10 ⁻⁸
9	Occupied Channel Bandwidth	± 1.86 %
10	RF output power, conducted	± 0.68 dB
11	Power Spectral Density	± 0.6 dB
12	Spurious emissions, conducted	± 2.7 dB
13	Time	± 0.19 %

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)(4)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS
Note: 1) N/A: In this whole report not applicable.			
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
☒	Spectrum Analyzer	R&S	FSV40-N	101653	28-Oct-2024	27-Oct-2025
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	28-Oct-2024	27-Oct-2025
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
☒	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
☒	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G590	21-Feb-2025	20-Feb-2026
☒	Double-Ridged Waveguide Horn Antenna	ETS-LINDGREN	3117-PA	00201541	29-Mar-2025	28-Mar-2026
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	28-Mar-2025	27-Mar-2026
☒	Double-Ridged Waveguide Horn Antenna	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
☒	Pre-amplifier	ETS-Lindgren	00118384	00202652	28-Oct-2024	27-Oct-2025
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESCI3	1166.5950.03	25-Oct-2024	24-Oct-2025
☒	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
☐	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	28-Mar-2025	27-Mar-2026
☒	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	25-Oct-2024	24-Oct-2025
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	25-Oct-2024	24-Oct-2025
☒	Test Software	Tonscend	JS1120-3 Test System	Software Version: V3.5.39(BT&WIFI)		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	12	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	24.7	58.9	99.2	S202507106455-ZJA01/3	Linson Xie
Conducted Peak Output Power	25.3	52.4	99.7	S202507106455-ZJA02/3	David Du
6dB Bandwidth					
Power Spectral Density					
Conducted Out of Band Emission	24.0	61.3	98.7	S202507106455-ZJA03/3	Leo Li
Radiated Spurious Emissions					
Band Edge Measurements (Radiated)					

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency (MHz)	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412-2462	Channel 1	Channel 6	Channel 11
IEEE 802.11g		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20				
IEEE 802.11ax-HE20				
Mode	Tx/Rx Frequency (MHz)	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11n-HT40	2422-2452	Channel 3	Channel 6	Channel 9
IEEE 802.11ax-HE40		2422 MHz	2437 MHz	2452 MHz

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11b IEEE 802.11g	1Tx/1Rx	1. Keep the EUT in continuously transmitting or receiving with modulation and data rates test single. 2. Keep the equipment in normal operation and achieve a certain throughput.
IEEE 802.11n-HT20 IEEE 802.11n-HT40 IEEE 802.11ax-HE20 IEEE 802.11ax-HE40	2Tx/2Rx	

Power Setting (Provided by the customer)						
Mode	Lowest(L)	Middle(M)	Highest(H)	Lowest(L)	Middle(M)	Highest(H)
	Ant 1			Ant 2		
IEEE 802.11b	15			15		
IEEE 802.11g	15			15		
IEEE 802.11n-HT20	15			15		
IEEE 802.11n-HT40	15			15		
IEEE 802.11ax-HE20 (SU)	15			15		
IEEE 802.11ax-HE40 (SU)	15			15		
IEEE 802.11ax only supports SU Mode.						

Test Software (Provided by the customer)
Test software name: QATool



4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS8
IEEE 802.11n-HT40	MCS8
IEEE 802.11ax-HE20	MCS0
IEEE 802.11ax-HE40	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

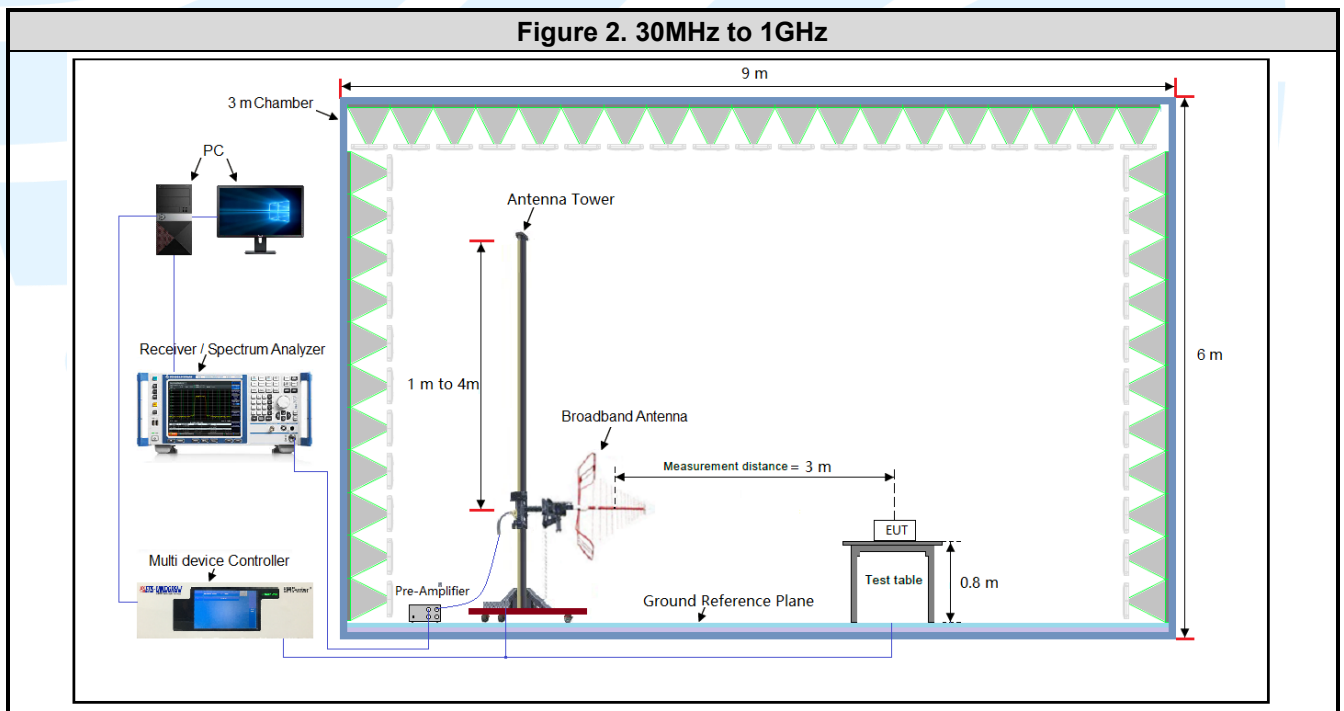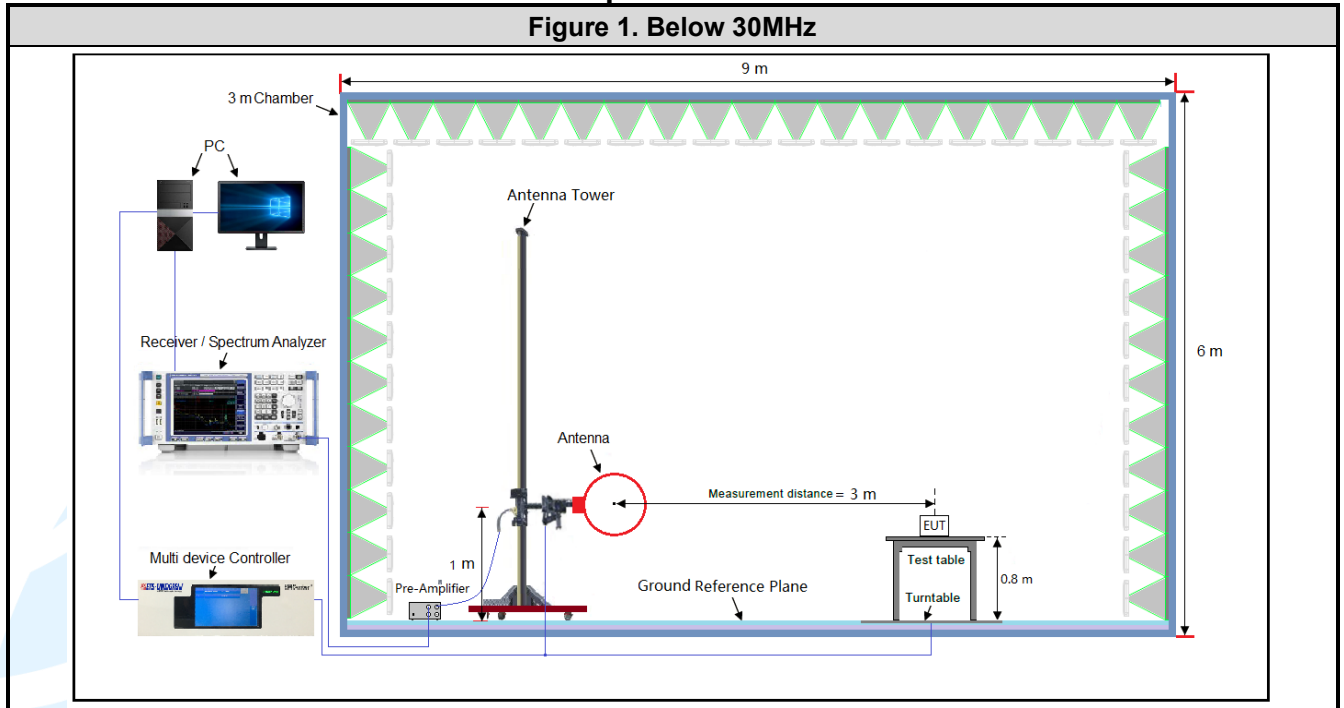


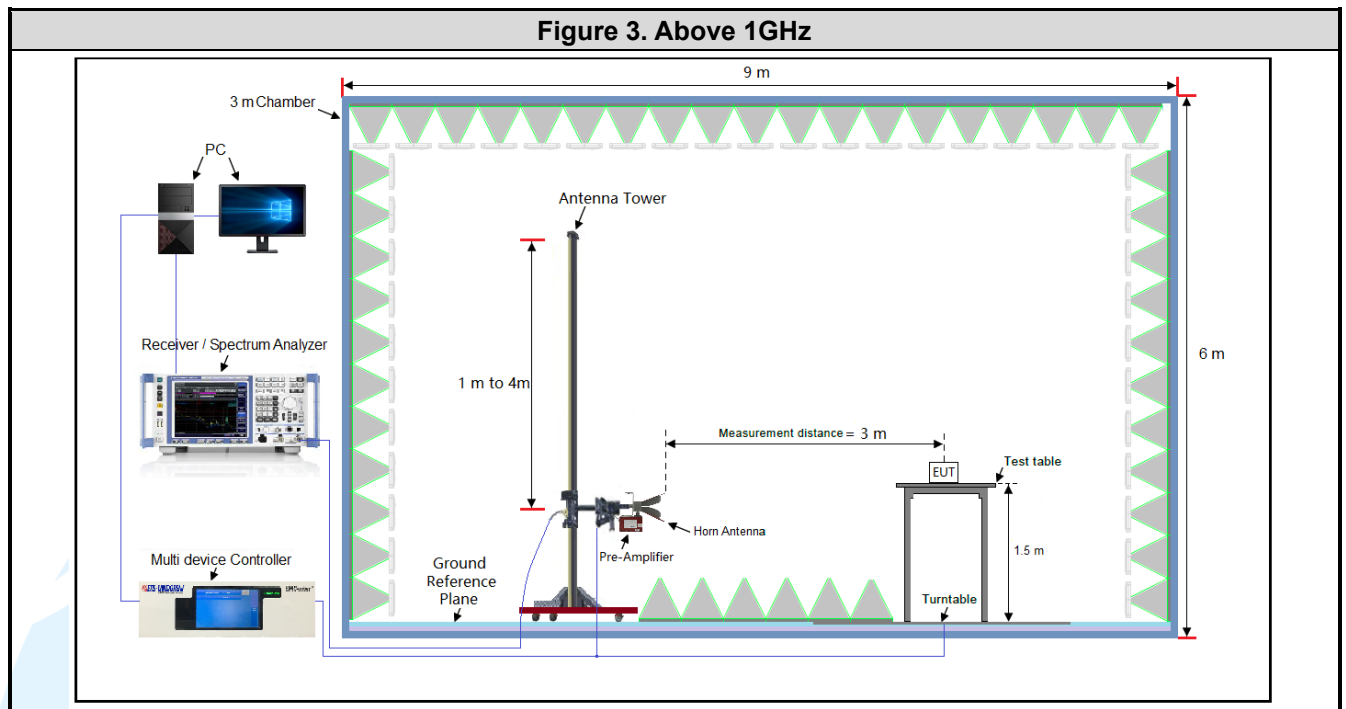

4.5.2 For Conducted Emissions test setup

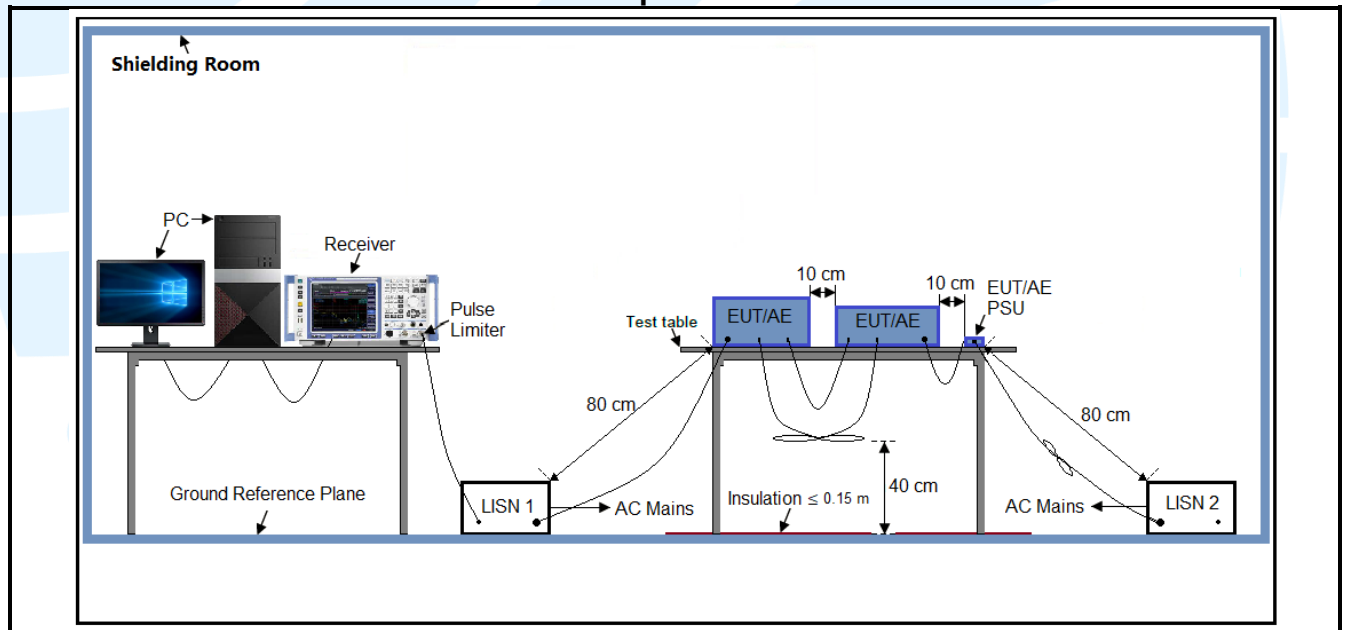

4.5.3 For Conducted RF test setup

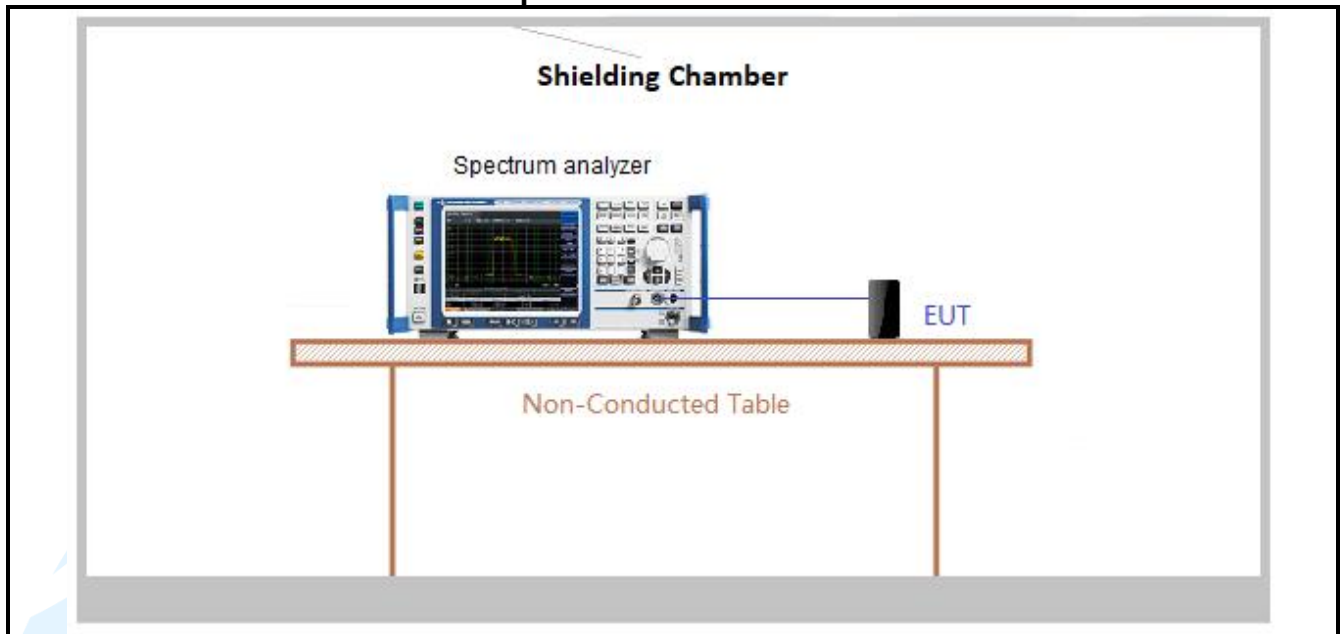

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	8.40	8.47	99.17	0.04
11B	Ant2	2412	8.40	8.47	99.17	0.04
11B	Ant1	2437	8.40	8.47	99.17	0.04
11B	Ant2	2437	8.40	8.47	99.17	0.04
11B	Ant1	2462	8.40	8.47	99.17	0.04
11B	Ant2	2462	8.40	8.47	99.17	0.04
11G	Ant1	2412	1.39	1.45	95.86	0.18
11G	Ant2	2412	1.39	1.45	95.86	0.18
11G	Ant1	2437	1.39	1.45	95.86	0.18
11G	Ant2	2437	1.39	1.45	95.86	0.18
11G	Ant1	2462	1.39	1.45	95.86	0.18
11G	Ant2	2462	1.39	1.45	95.86	0.18
11N20MIMO	Ant2	2412	0.67	0.73	91.78	0.37
11N20MIMO	Ant1	2412	0.68	0.74	91.89	0.37
11N20MIMO	Ant2	2437	0.68	0.74	91.89	0.37
11N20MIMO	Ant1	2437	0.68	0.74	91.89	0.37
11N20MIMO	Ant2	2462	0.67	0.73	91.78	0.37
11N20MIMO	Ant1	2462	0.68	0.74	91.89	0.37
11N40MIMO	Ant2	2422	0.35	0.40	87.50	0.58
11N40MIMO	Ant1	2422	0.34	0.40	85.00	0.71
11N40MIMO	Ant2	2437	0.35	0.41	85.37	0.69
11N40MIMO	Ant1	2437	0.35	0.41	85.37	0.69
11N40MIMO	Ant2	2452	0.34	0.40	85.00	0.71
11N40MIMO	Ant1	2452	0.35	0.40	87.50	0.58
11AX20MIMO	Ant1	2412	0.20	0.26	76.92	1.14
11AX20MIMO	Ant2	2412	0.20	0.26	76.92	1.14
11AX20MIMO	Ant1	2437	0.20	0.26	76.92	1.14
11AX20MIMO	Ant2	2437	0.20	0.26	76.92	1.14
11AX20MIMO	Ant1	2462	0.20	0.26	76.92	1.14
11AX20MIMO	Ant2	2462	0.21	0.27	77.78	1.09
11AX40MIMO	Ant1	2422	0.20	0.26	76.92	1.14
11AX40MIMO	Ant2	2422	0.20	0.26	76.92	1.14
11AX40MIMO	Ant1	2437	0.20	0.26	76.92	1.14
11AX40MIMO	Ant2	2437	0.20	0.26	76.92	1.14
11AX40MIMO	Ant1	2452	0.20	0.26	76.92	1.14
11AX40MIMO	Ant2	2452	0.20	0.26	76.92	1.14

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/\text{Duty cycle})$;

The test plots as follows

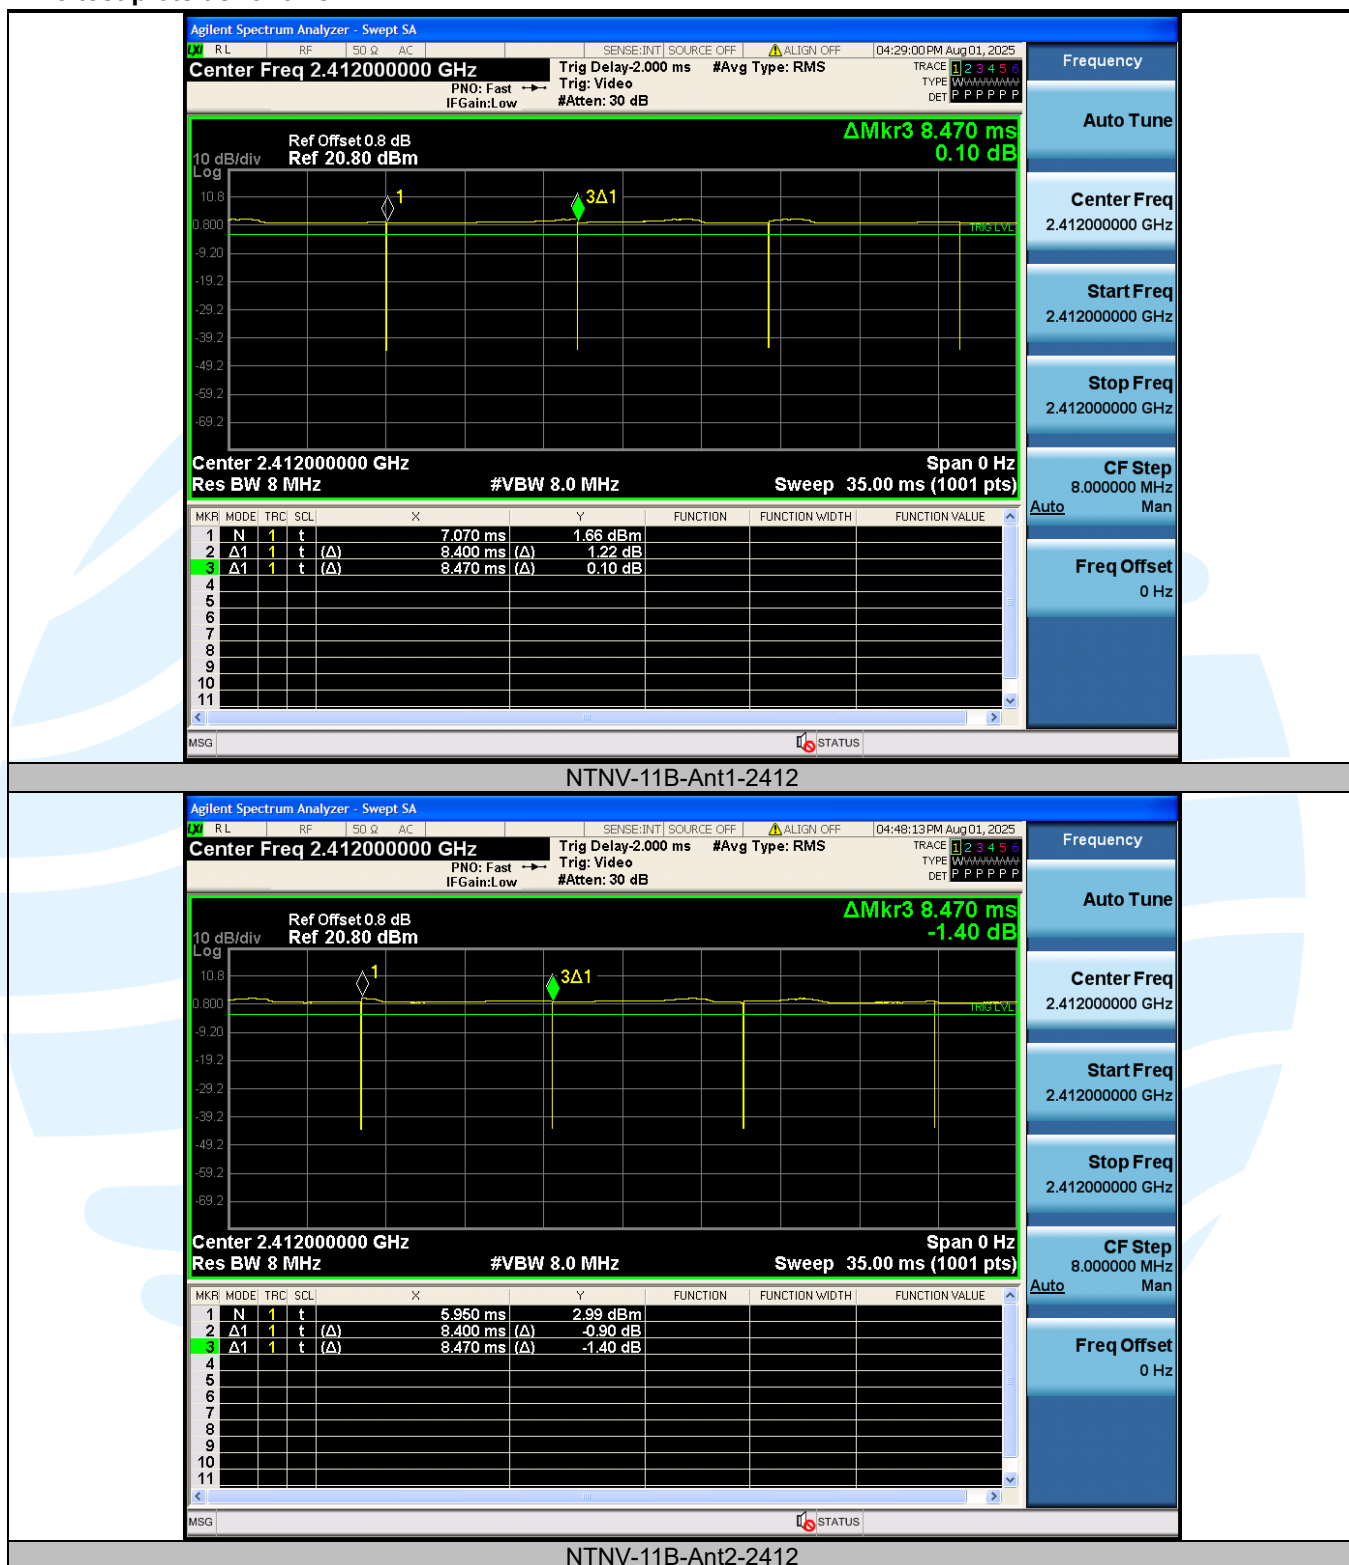

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

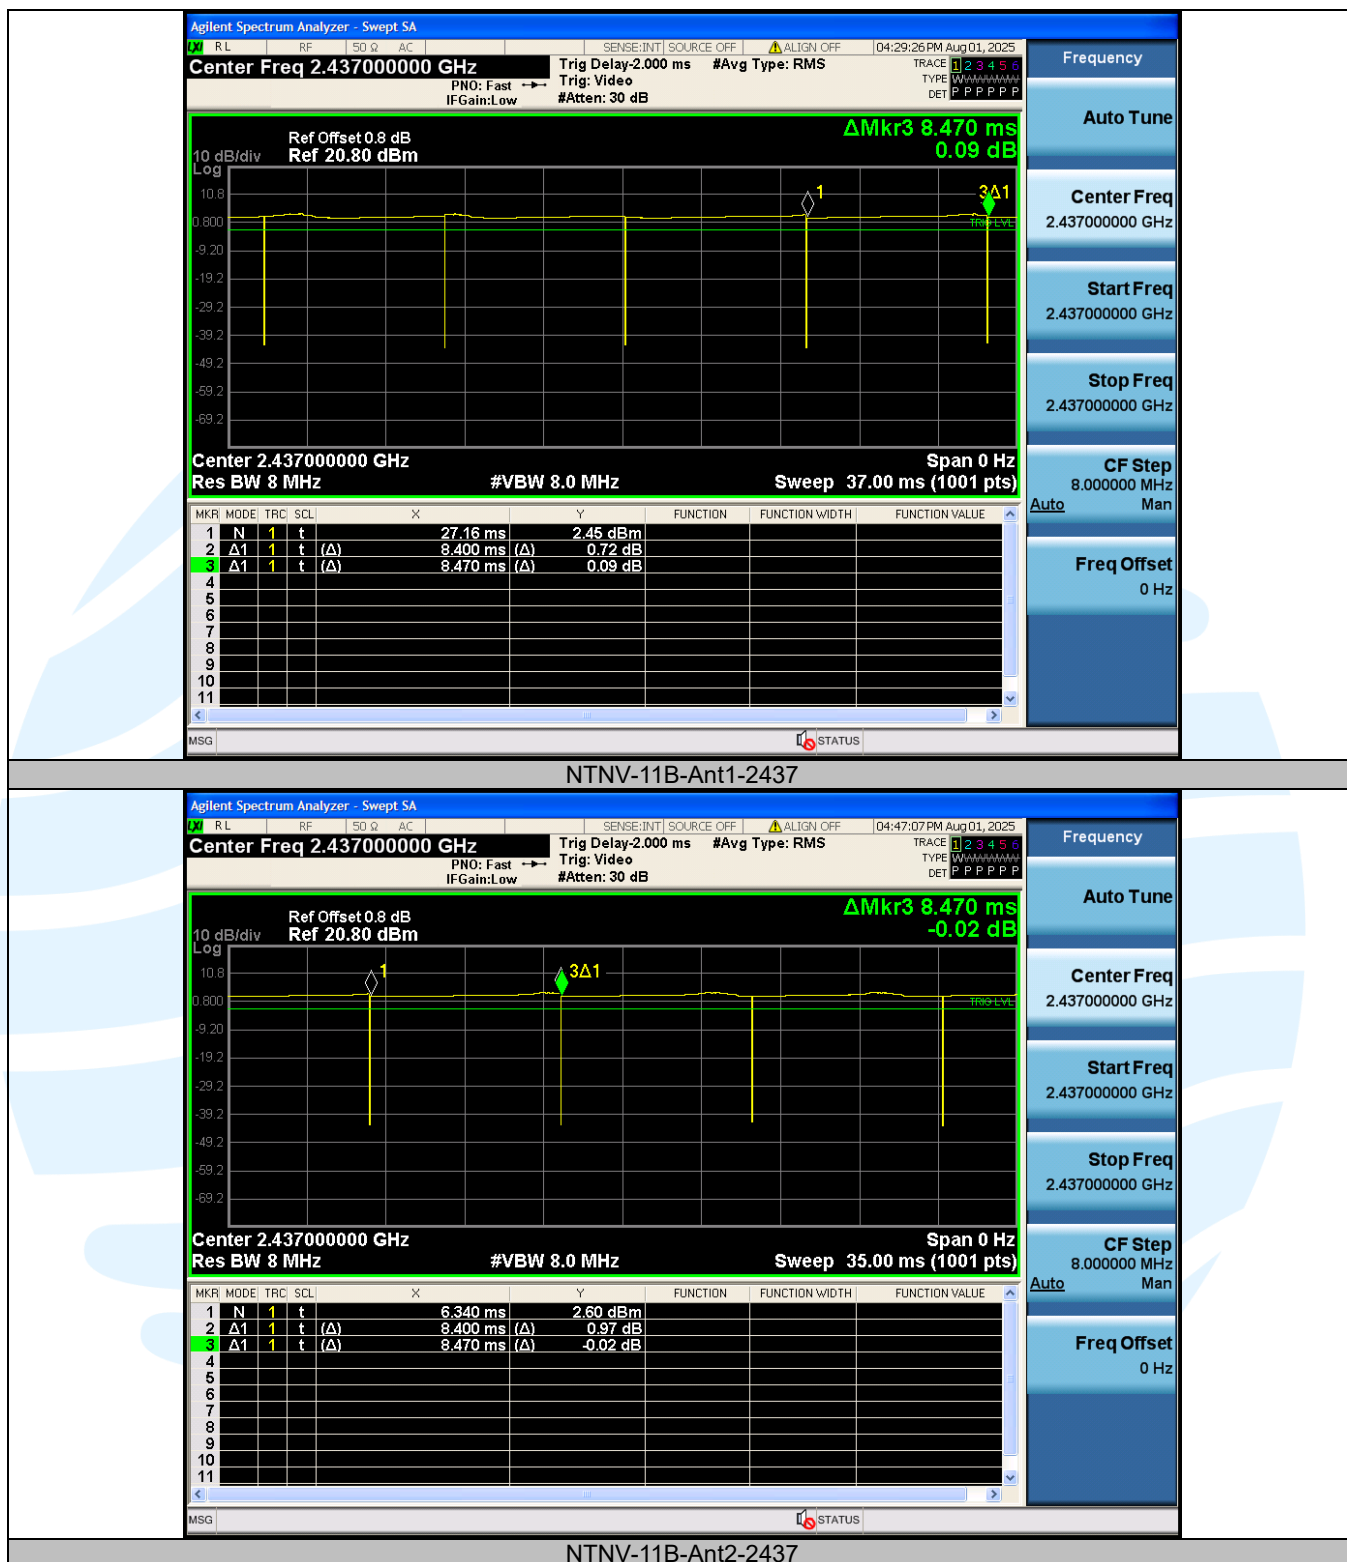**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

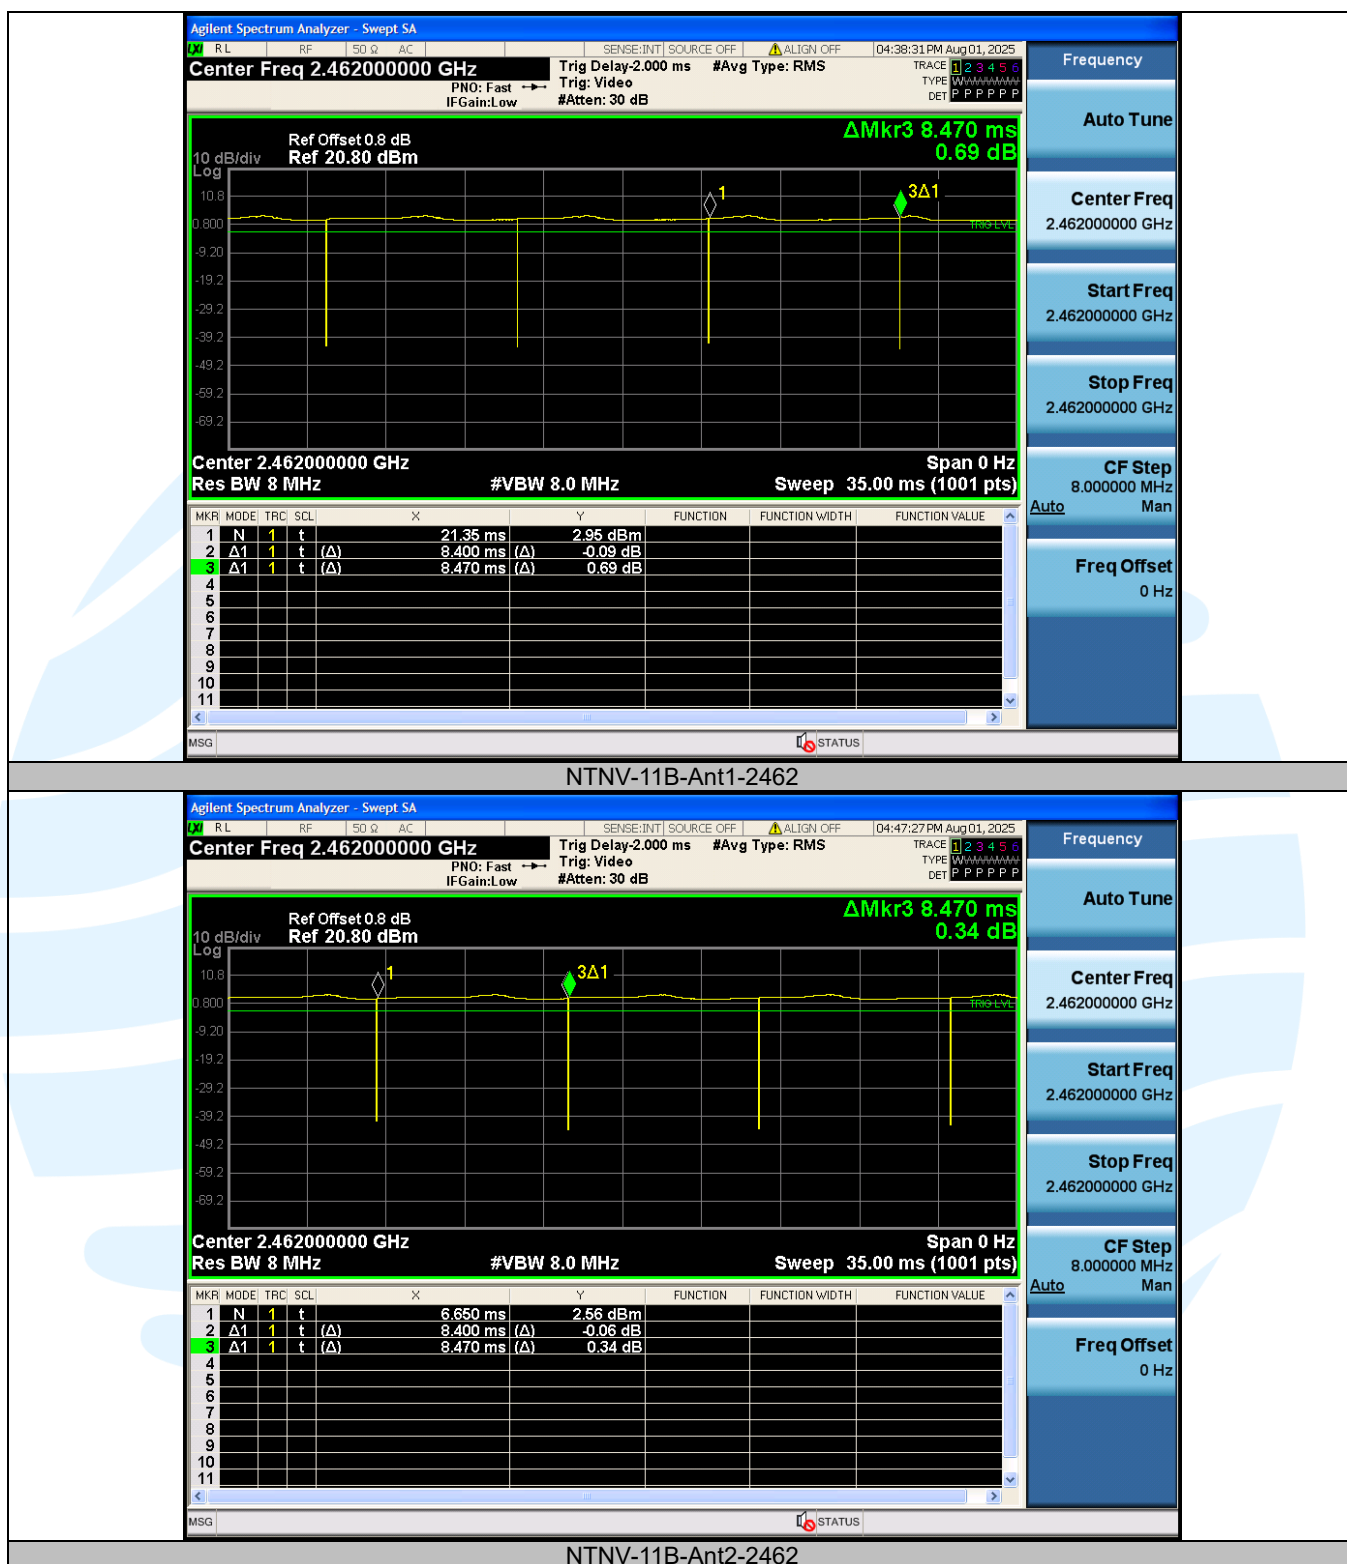**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

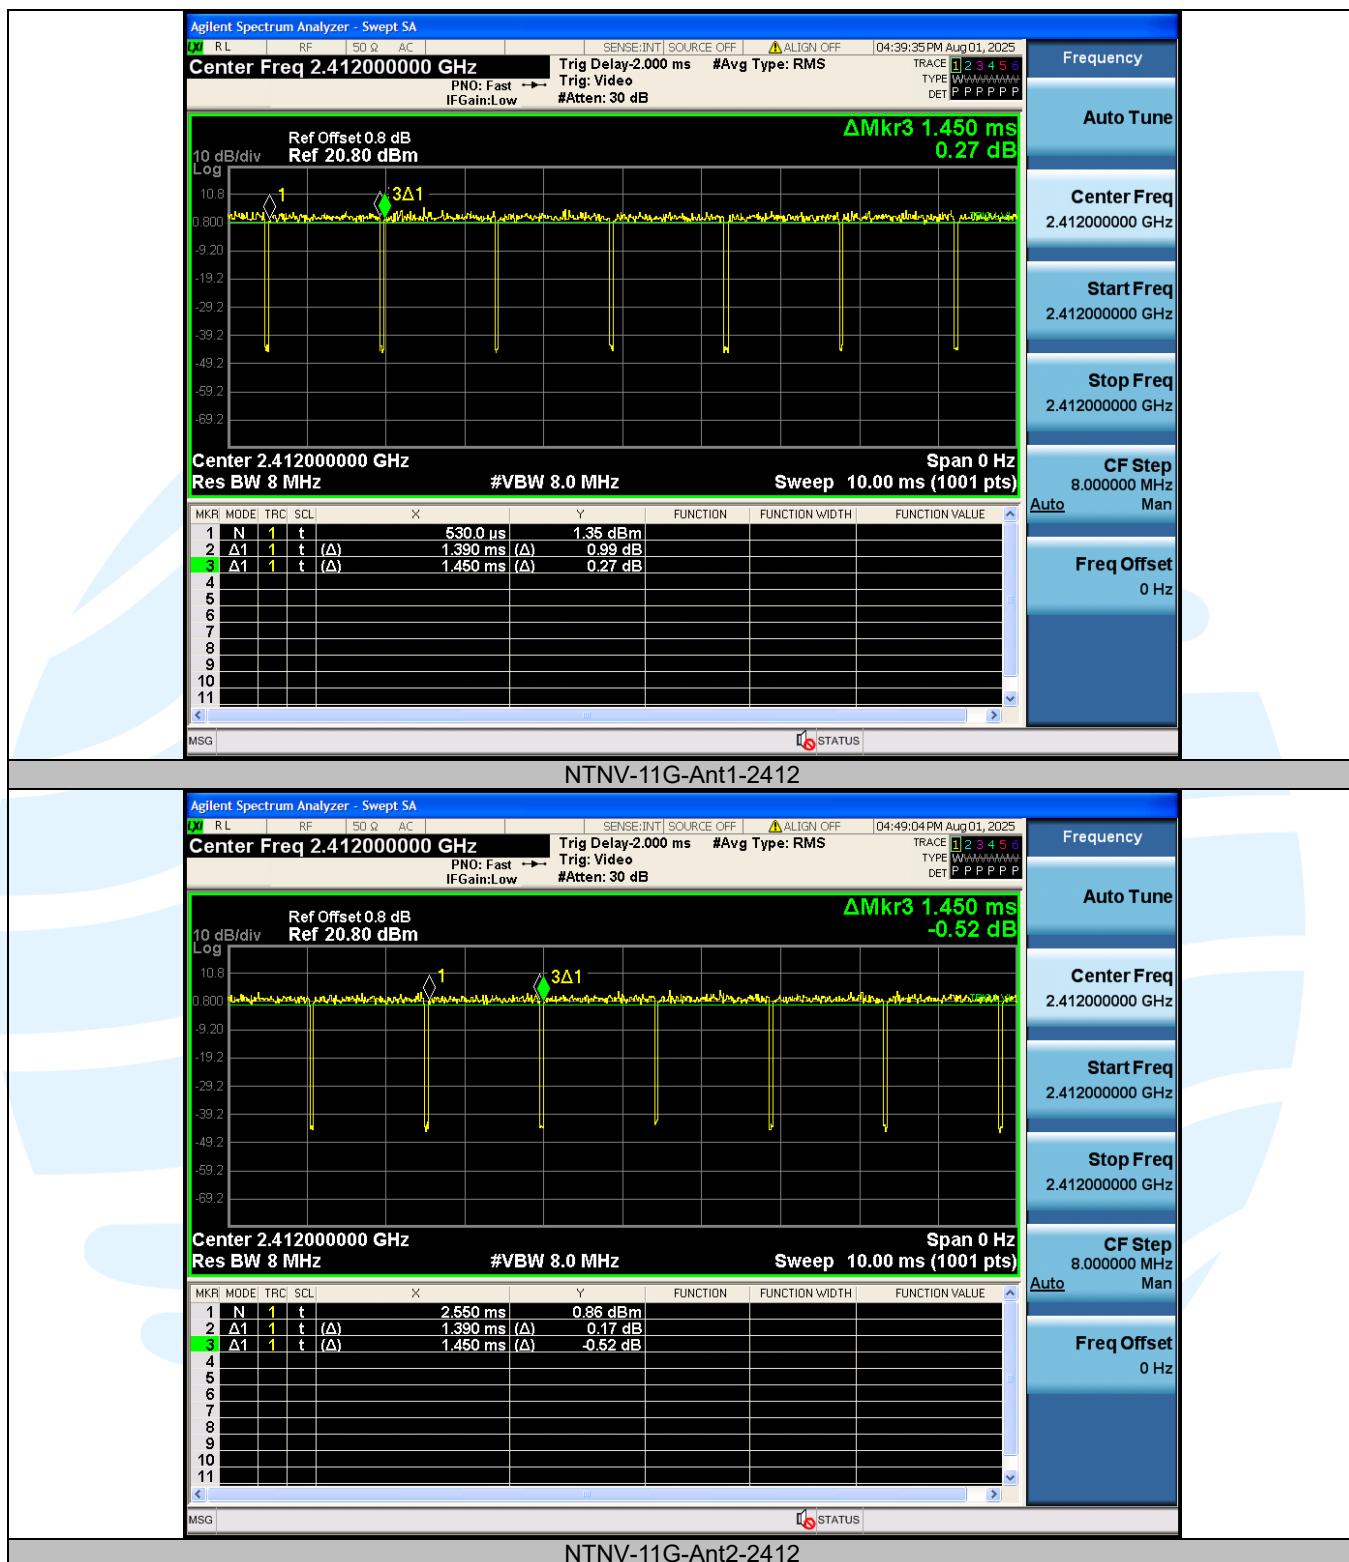**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

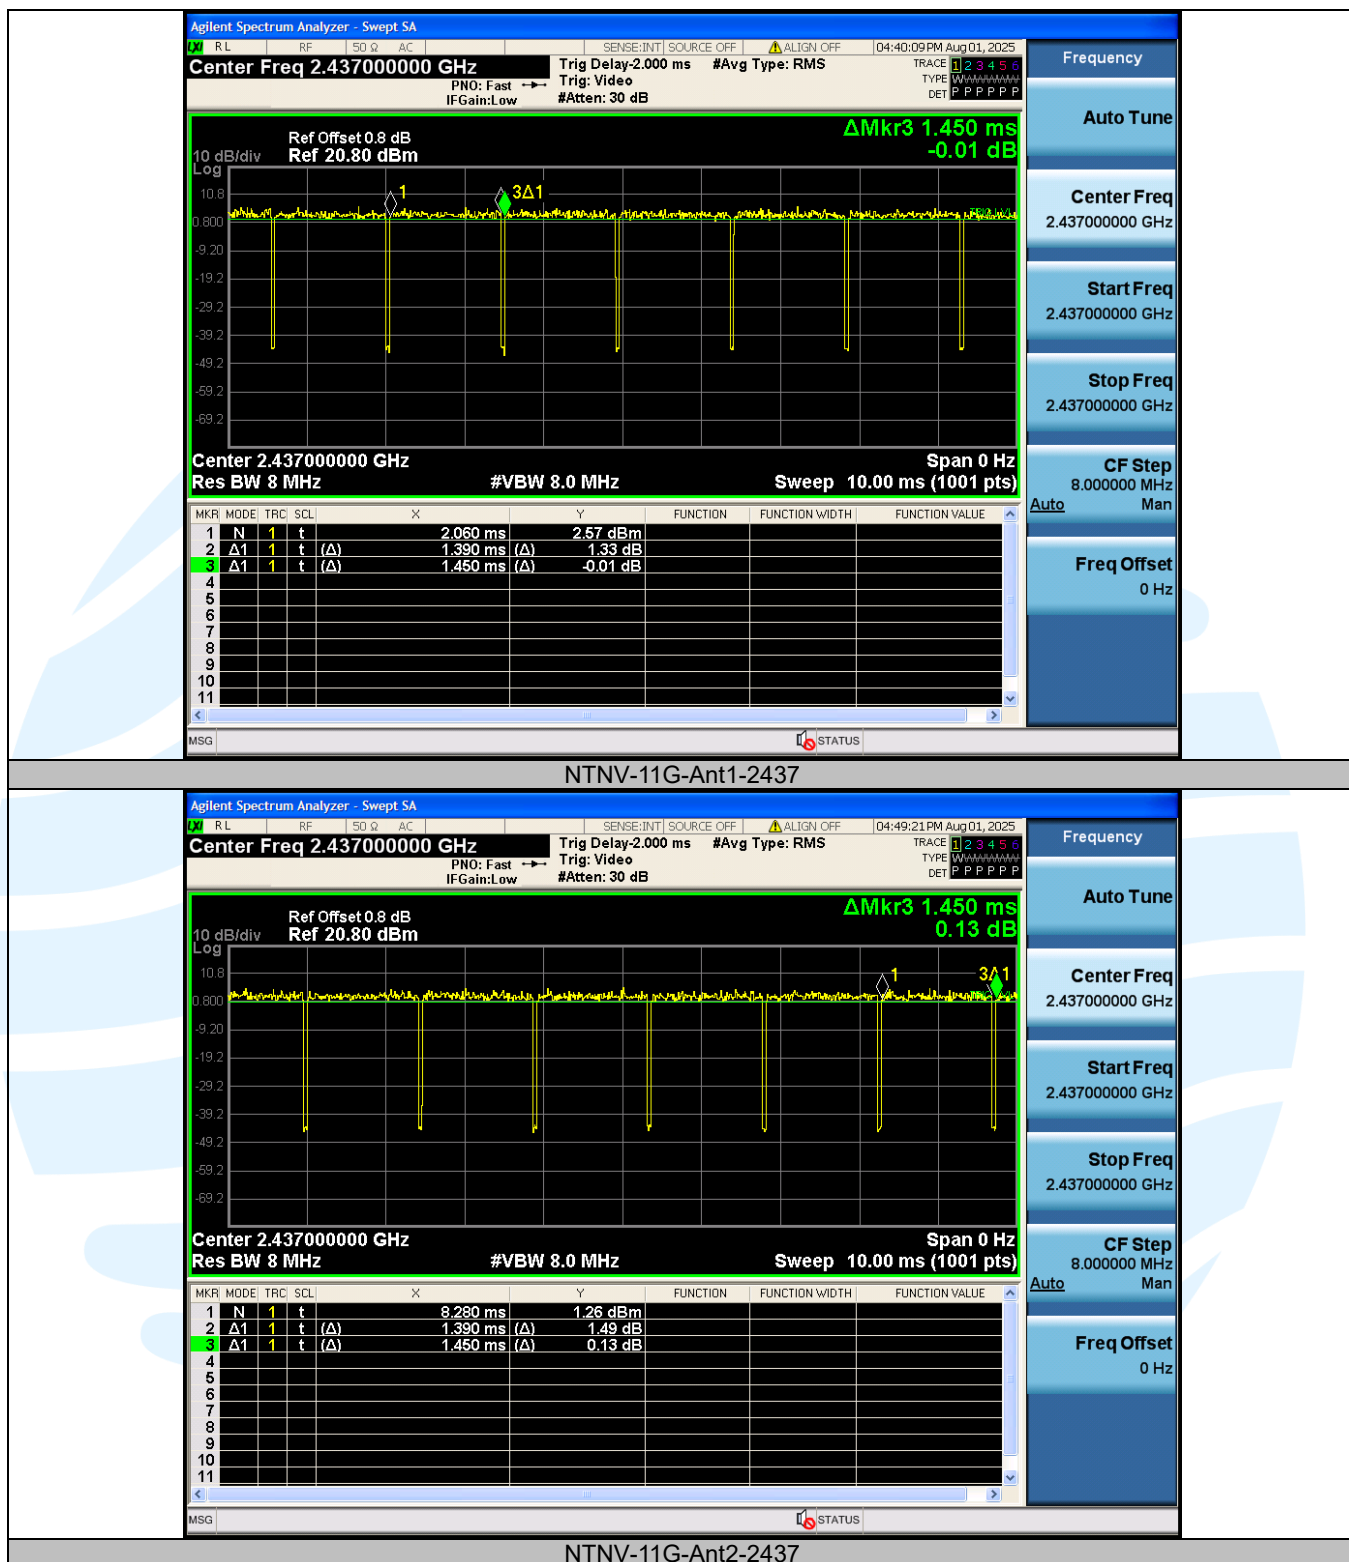**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

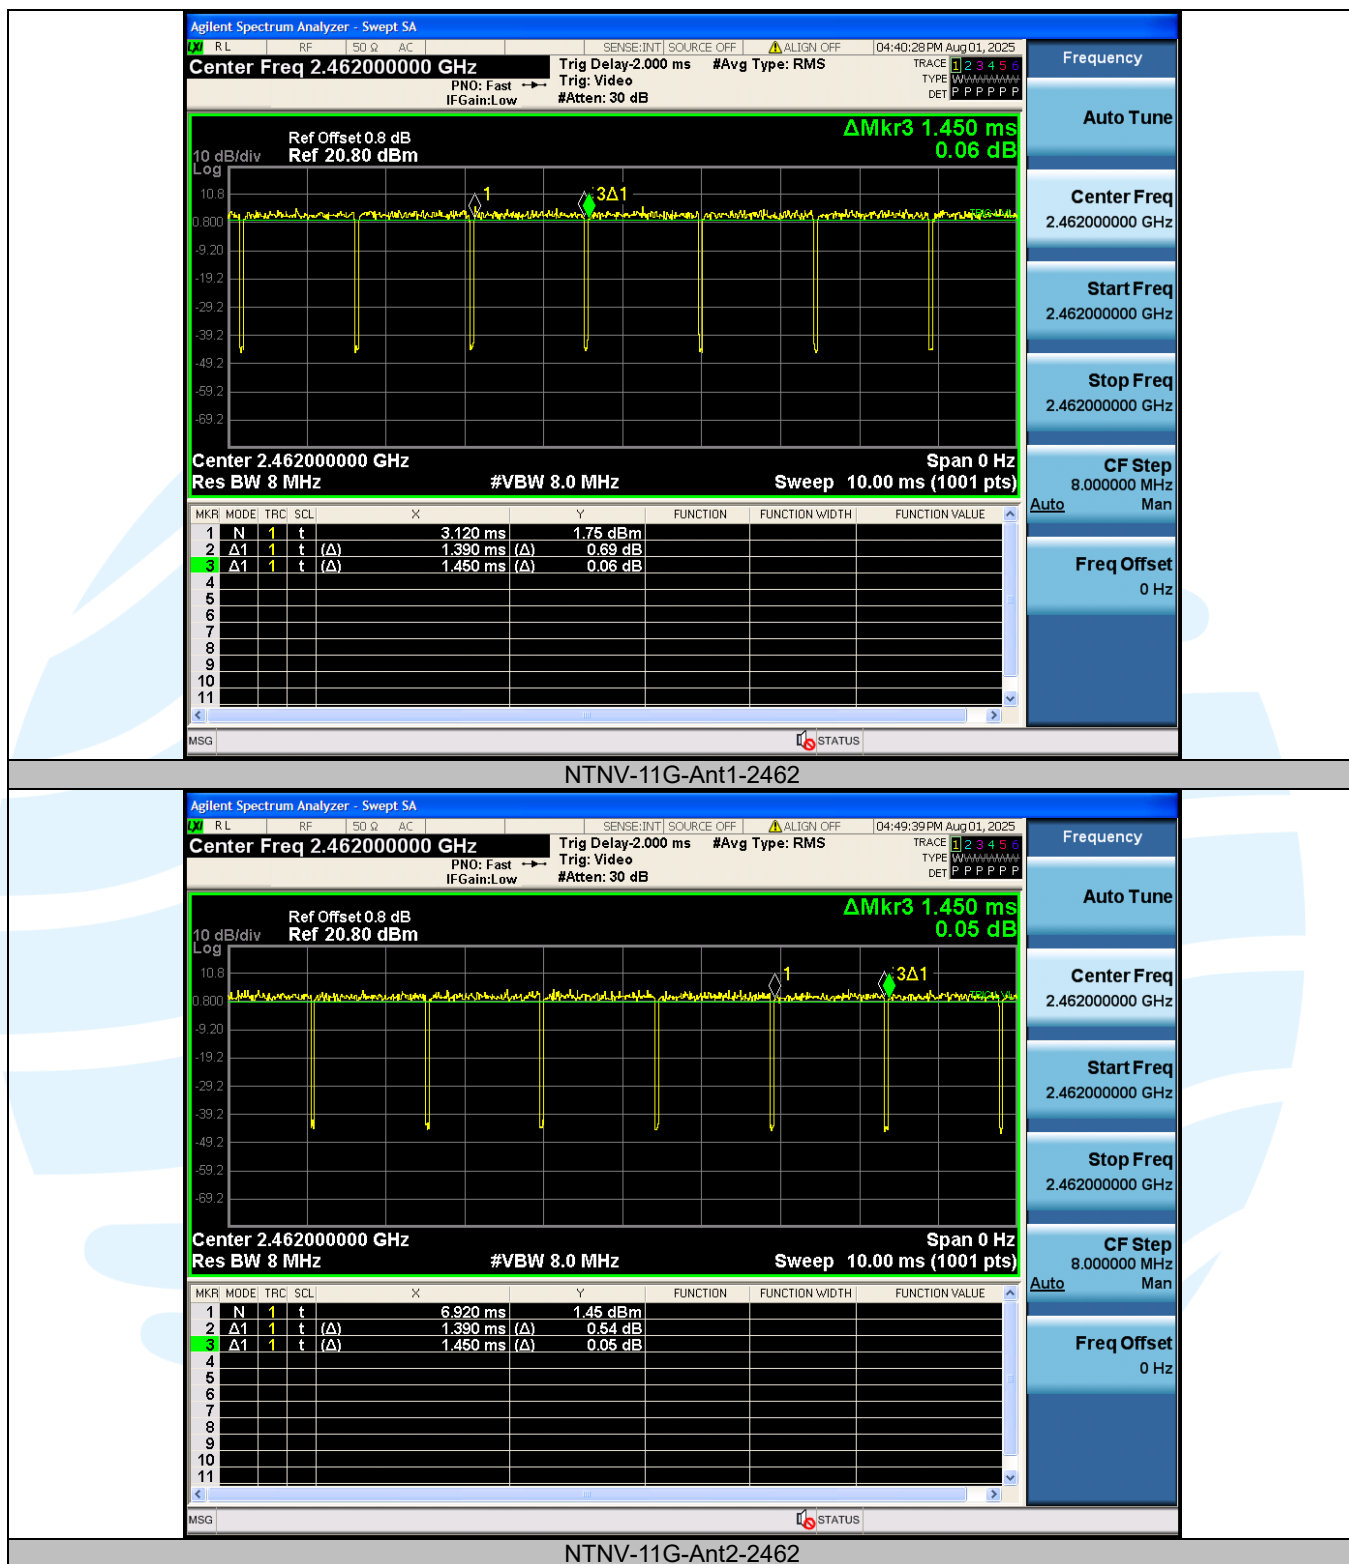

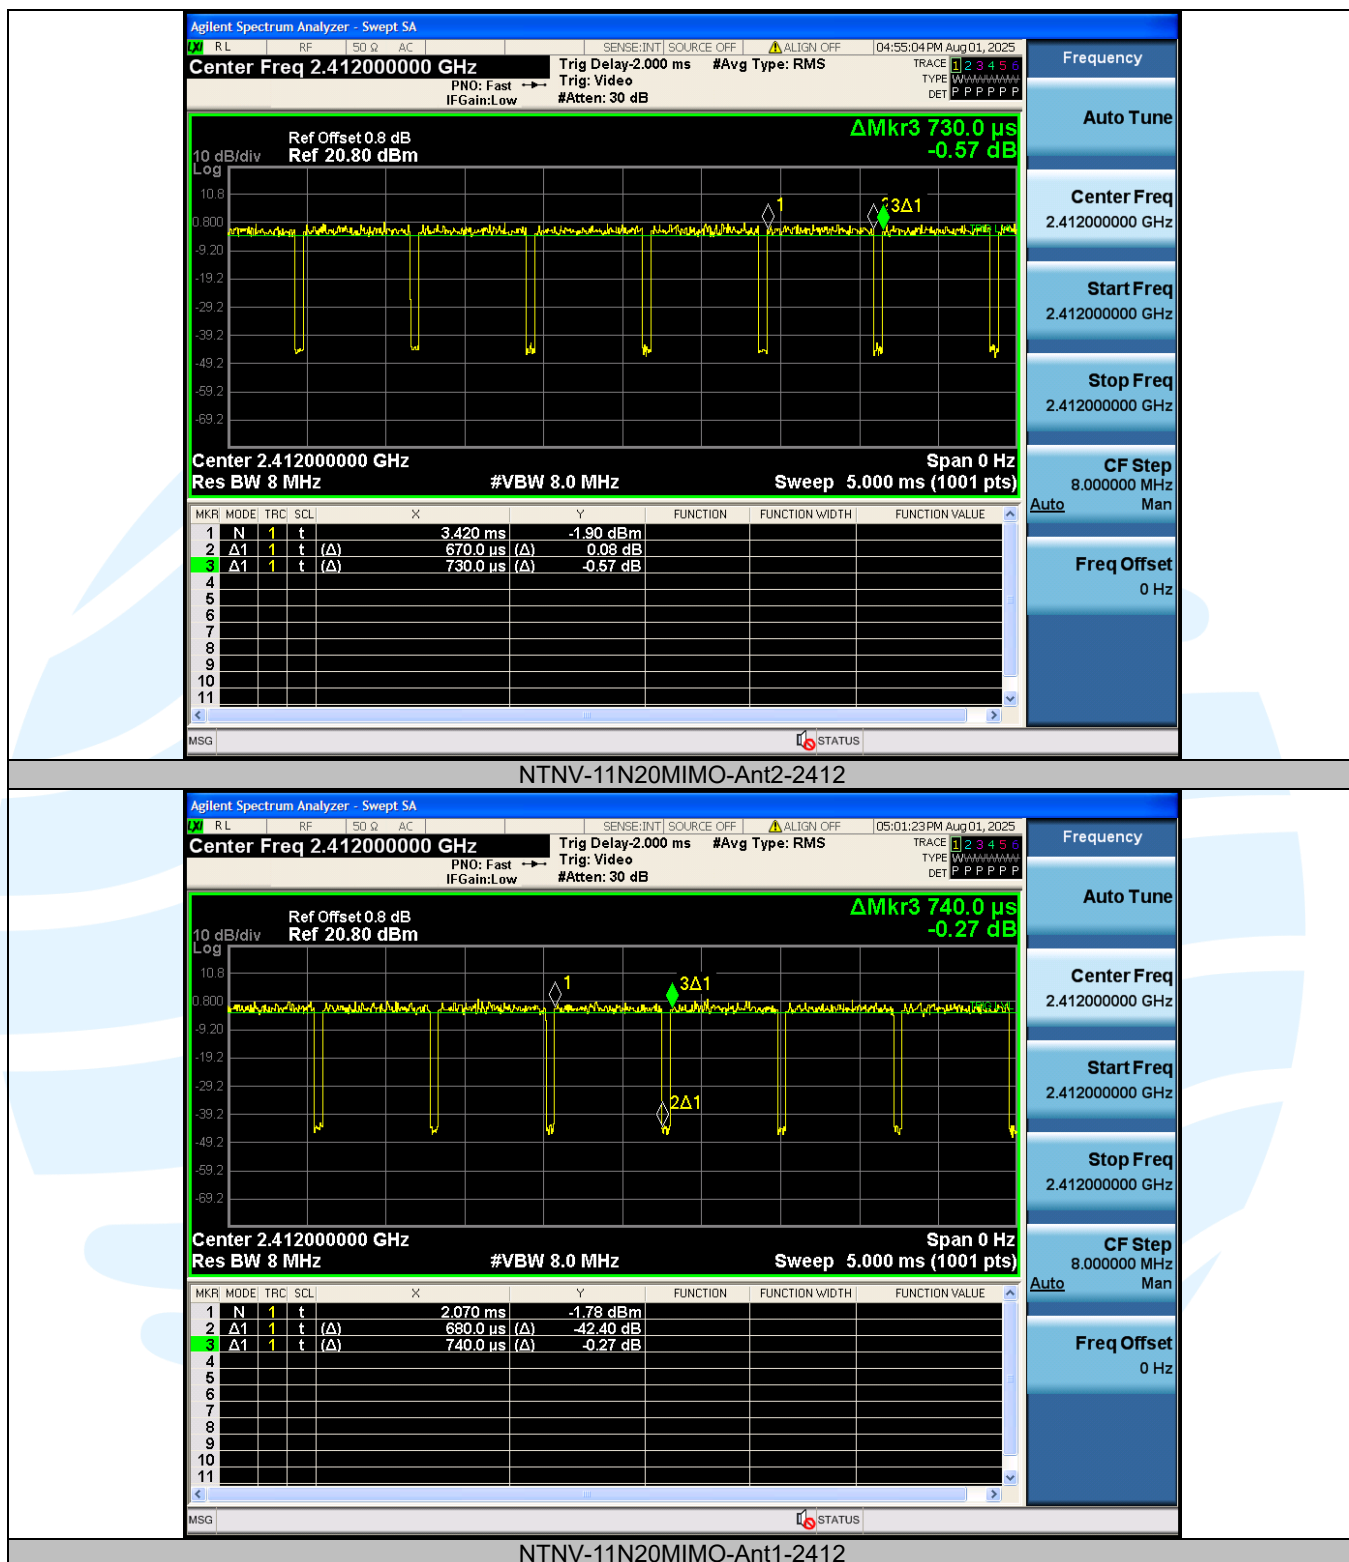

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

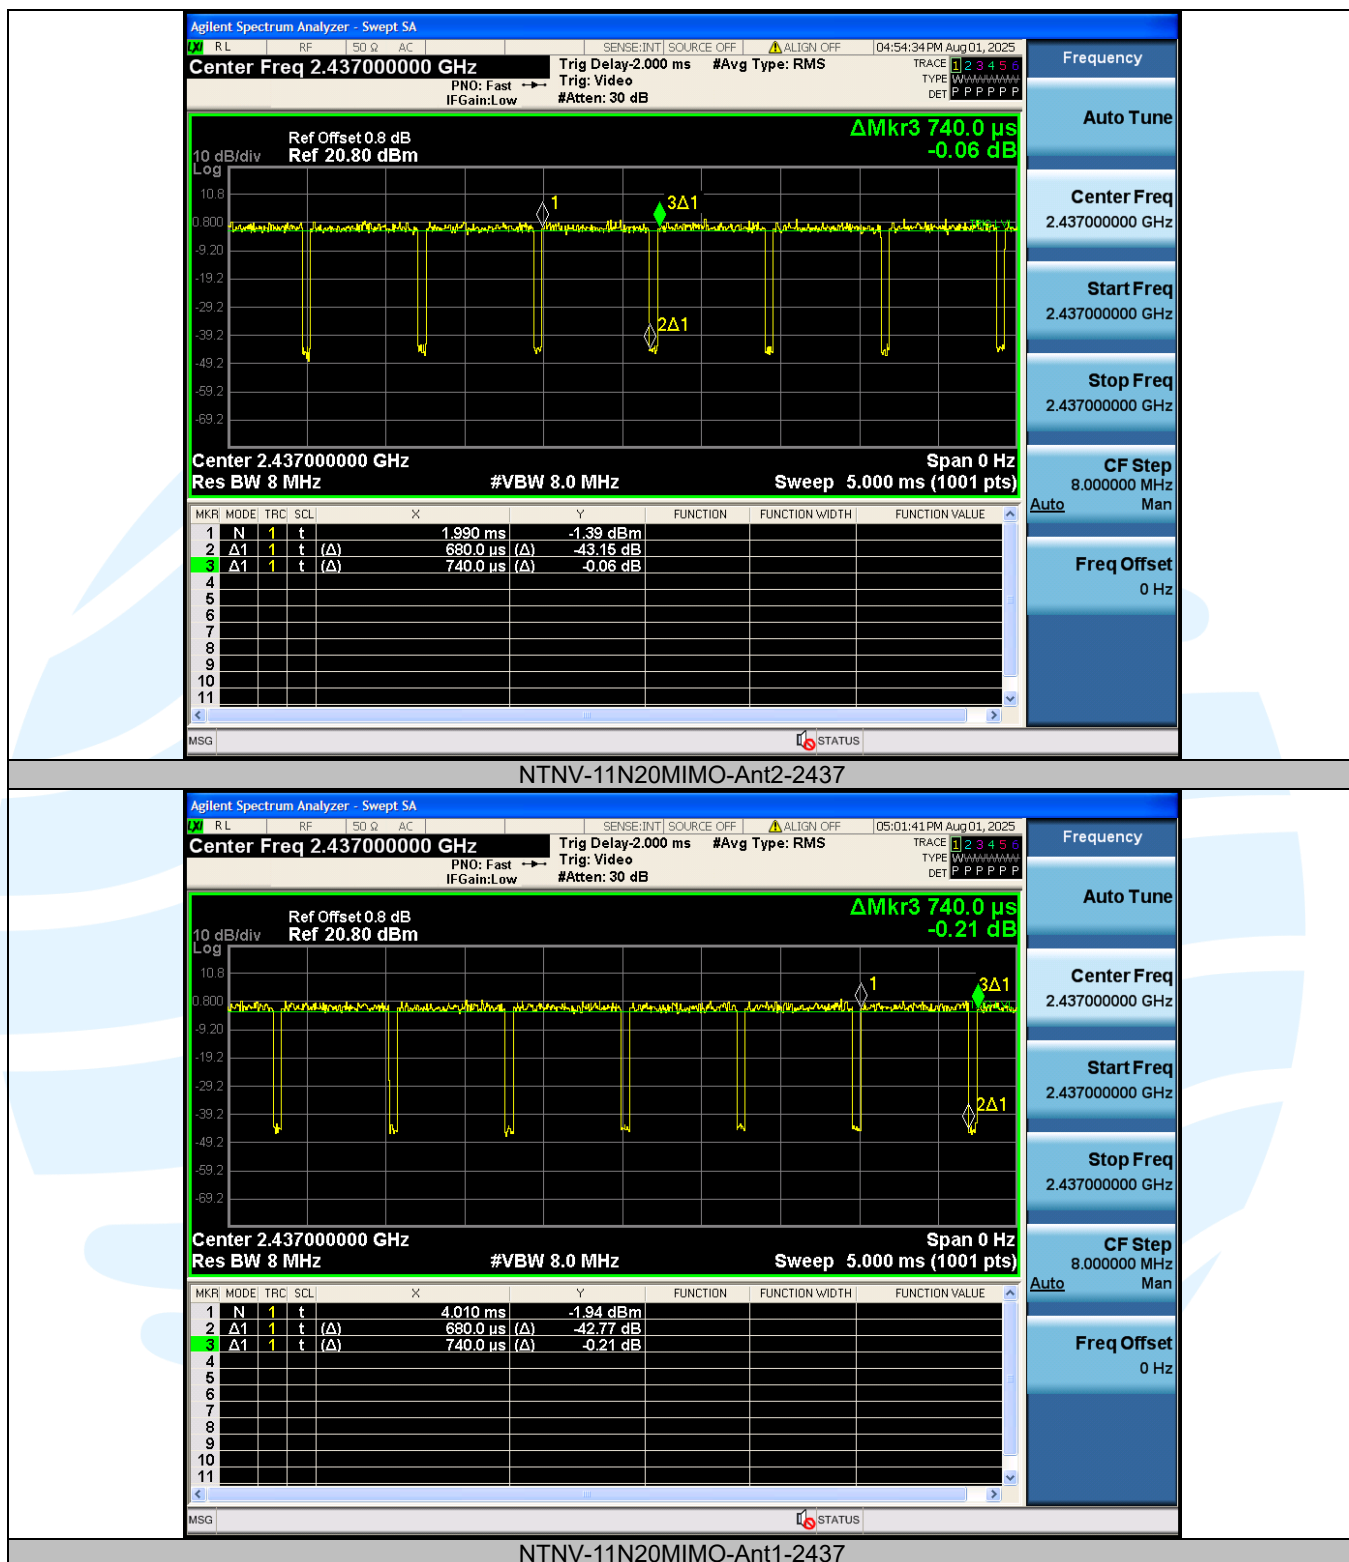

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

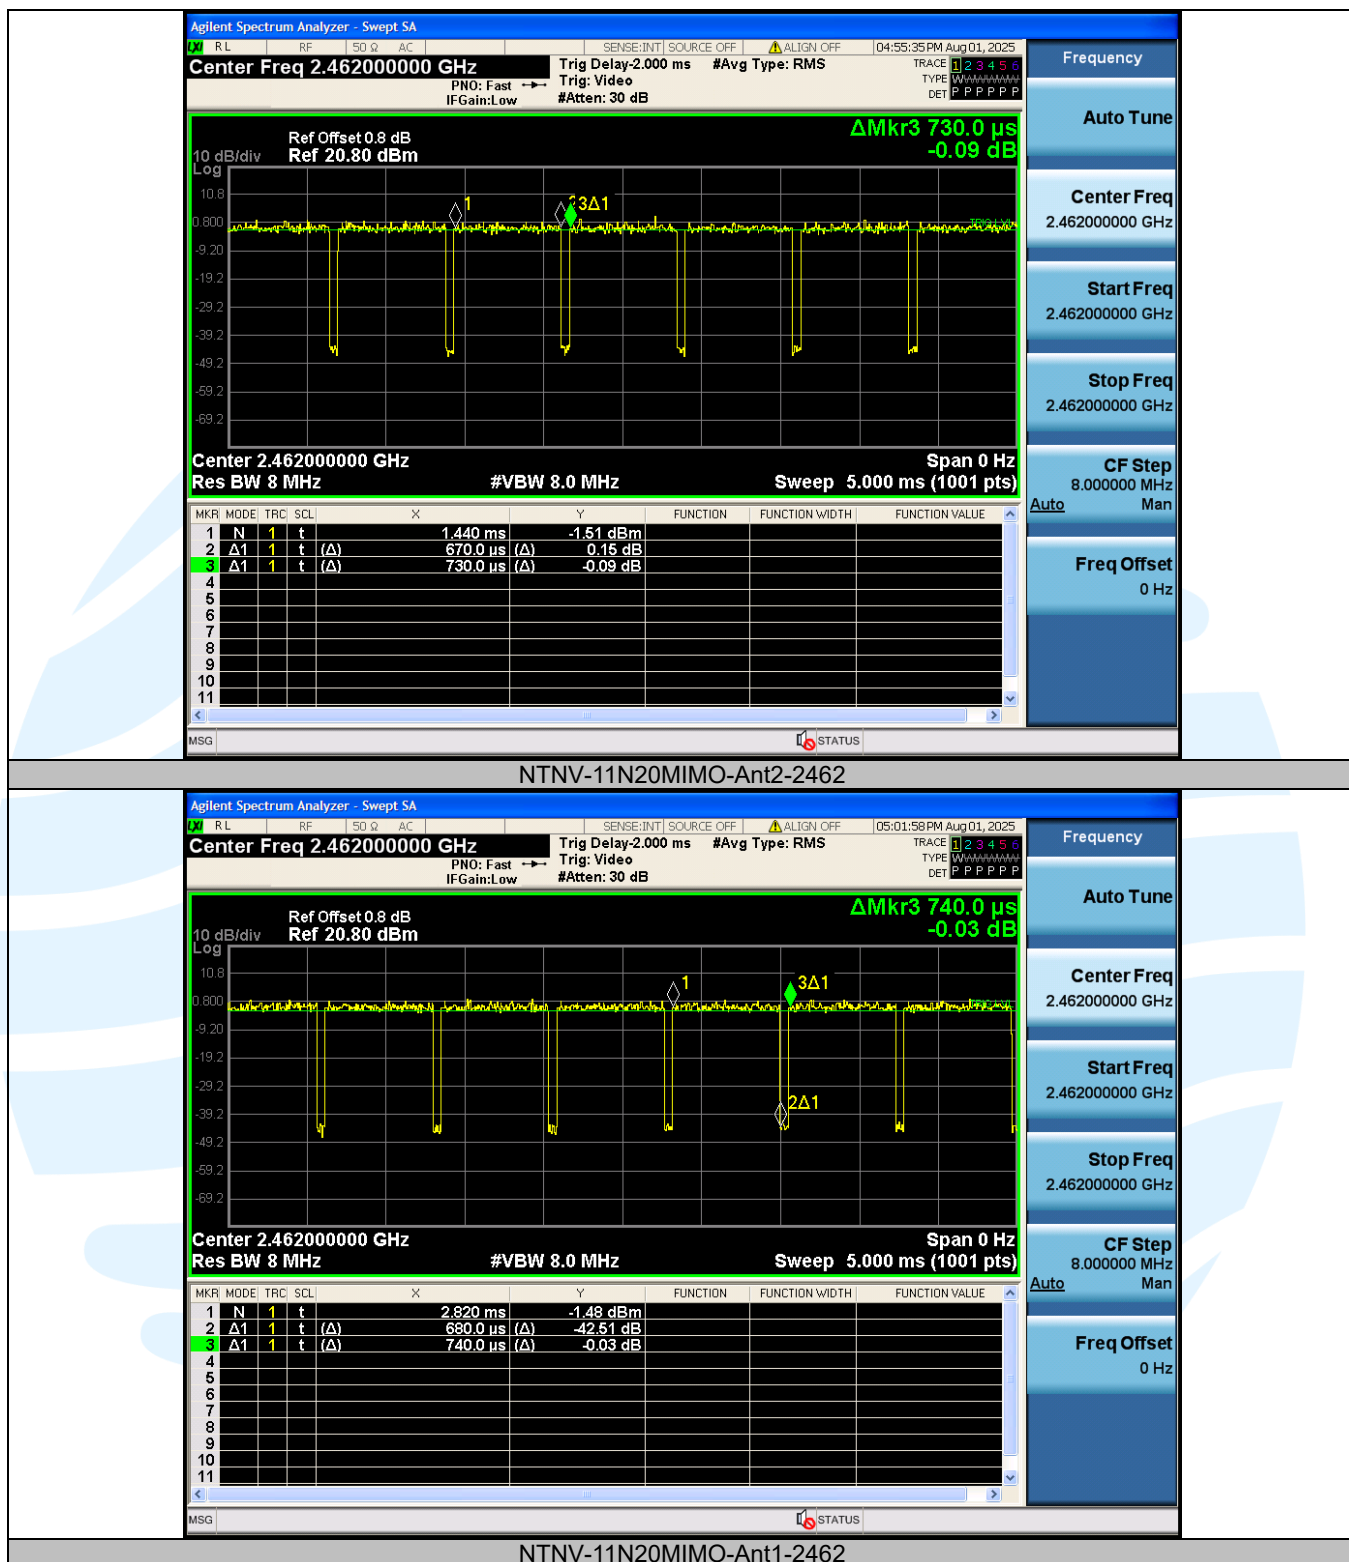

NTNV-11N20MIMO-Ant2-2462

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC

SENSE:INT SOURCE OFF ALIGN OFF

05:01:58 PM Aug 01, 2025

Center Freq 2.462000000 GHz

Trig Delay: 2.000 ms

#Avg Type: RMS

PNO: Fast

IFGain: Low

Trig: Video

#Atten: 30 dB

TRACE 1 2 3 4 5 6

TYPE W W W W W W W W

DET P P P P P P

Ref Offset 0.8 dB

Ref 20.80 dBm

Δ Mkr3 740.0 μ s

-0.03 dB

Center 2.462000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 5.000 ms (1001 pts)

Span 0 Hz

MSG STATUS

Frequency

Auto Tune

Center Freq 2.462000000 GHz

Start Freq 2.462000000 GHz


Stop Freq 2.462000000 GHz

CF Step 8.000000 MHz

Auto Man

Freq Offset 0 Hz

NTNV-11N20MIMO-Ant1-2462

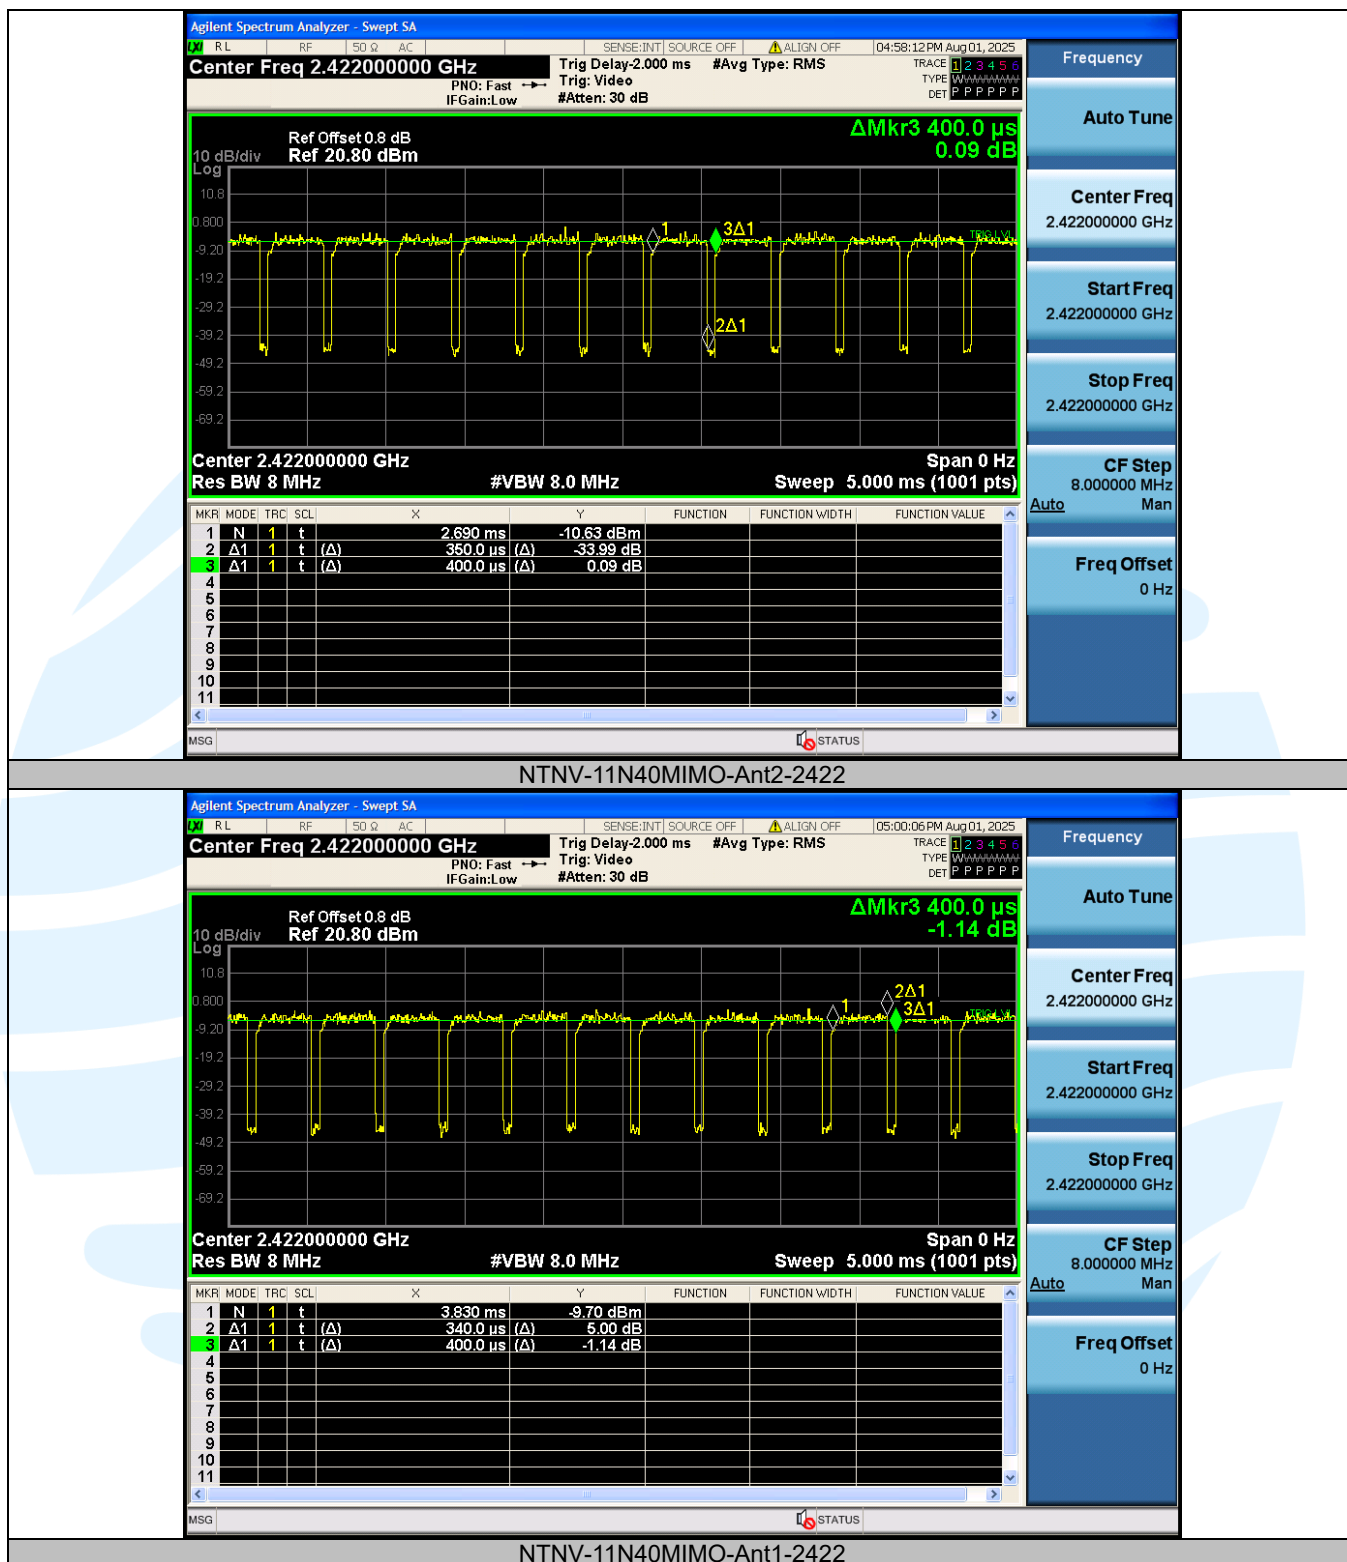**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

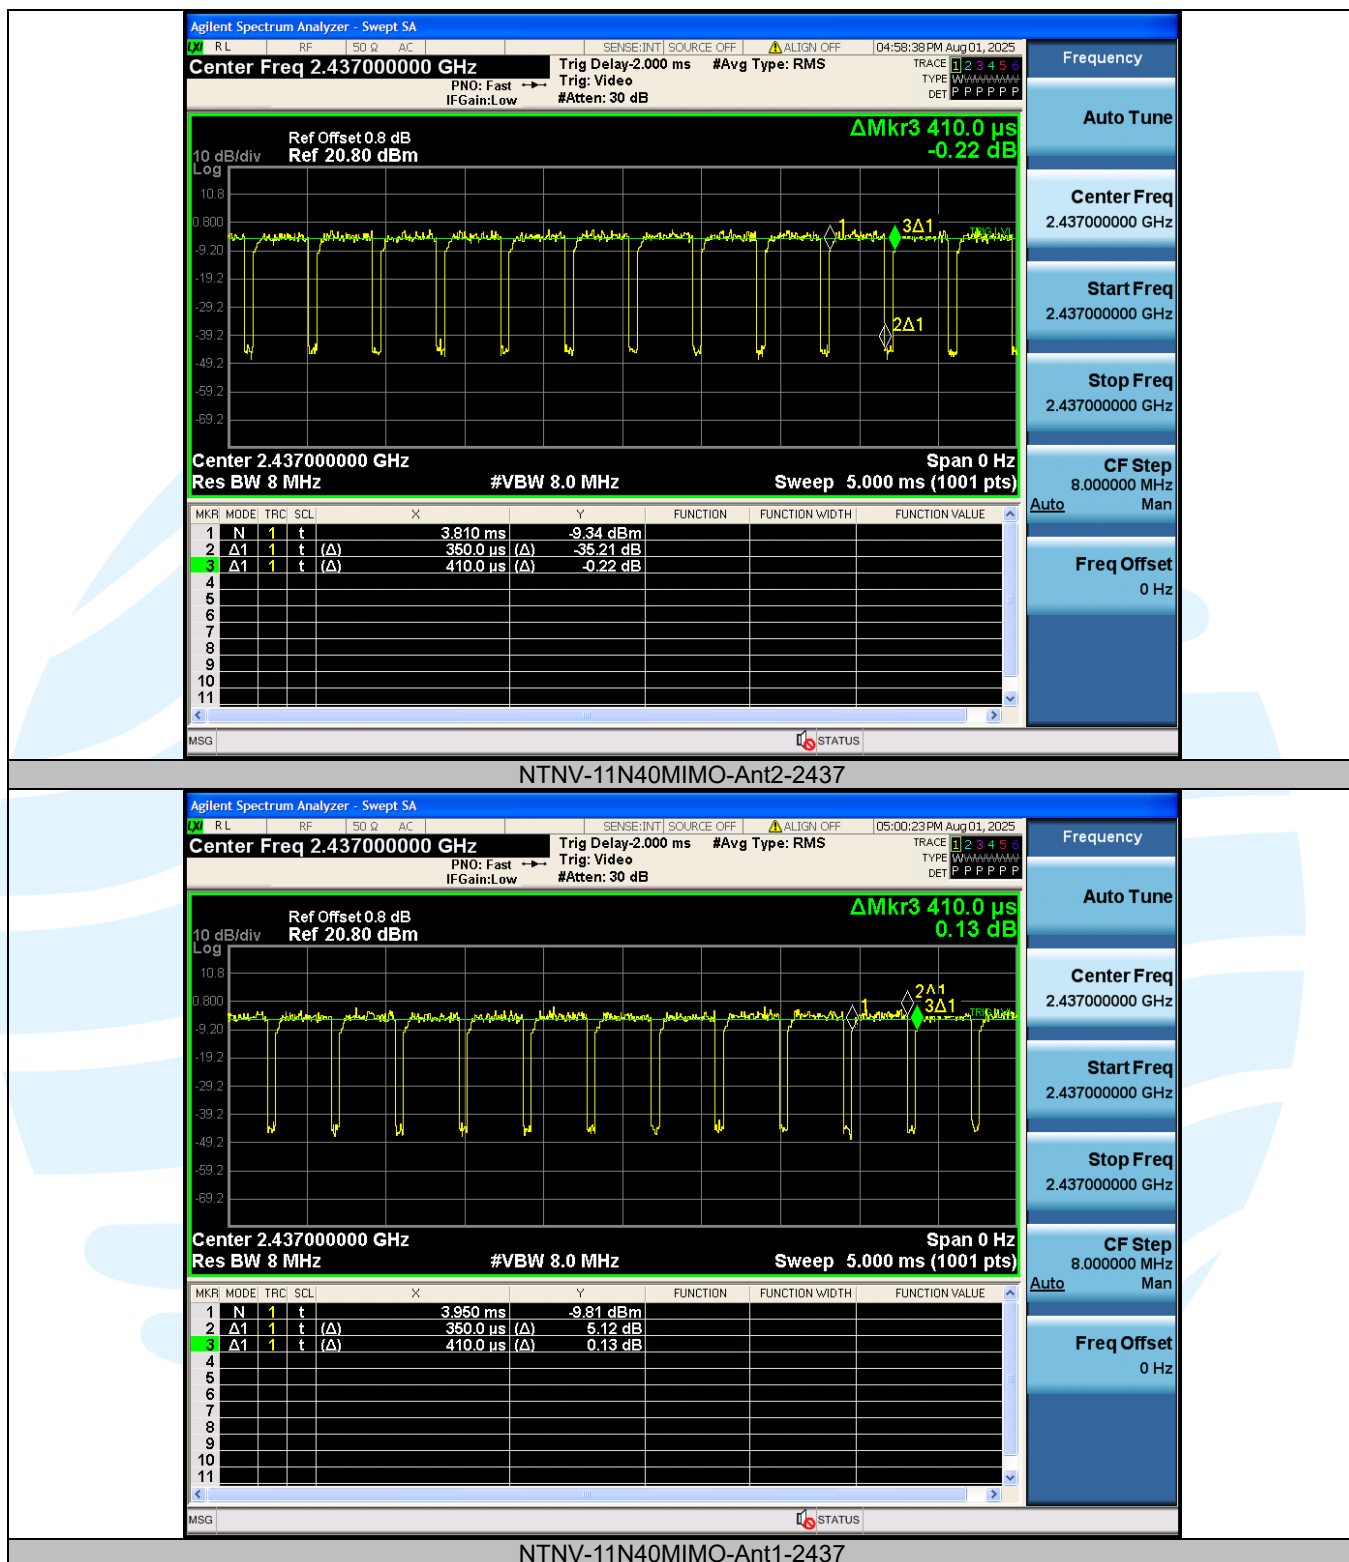

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

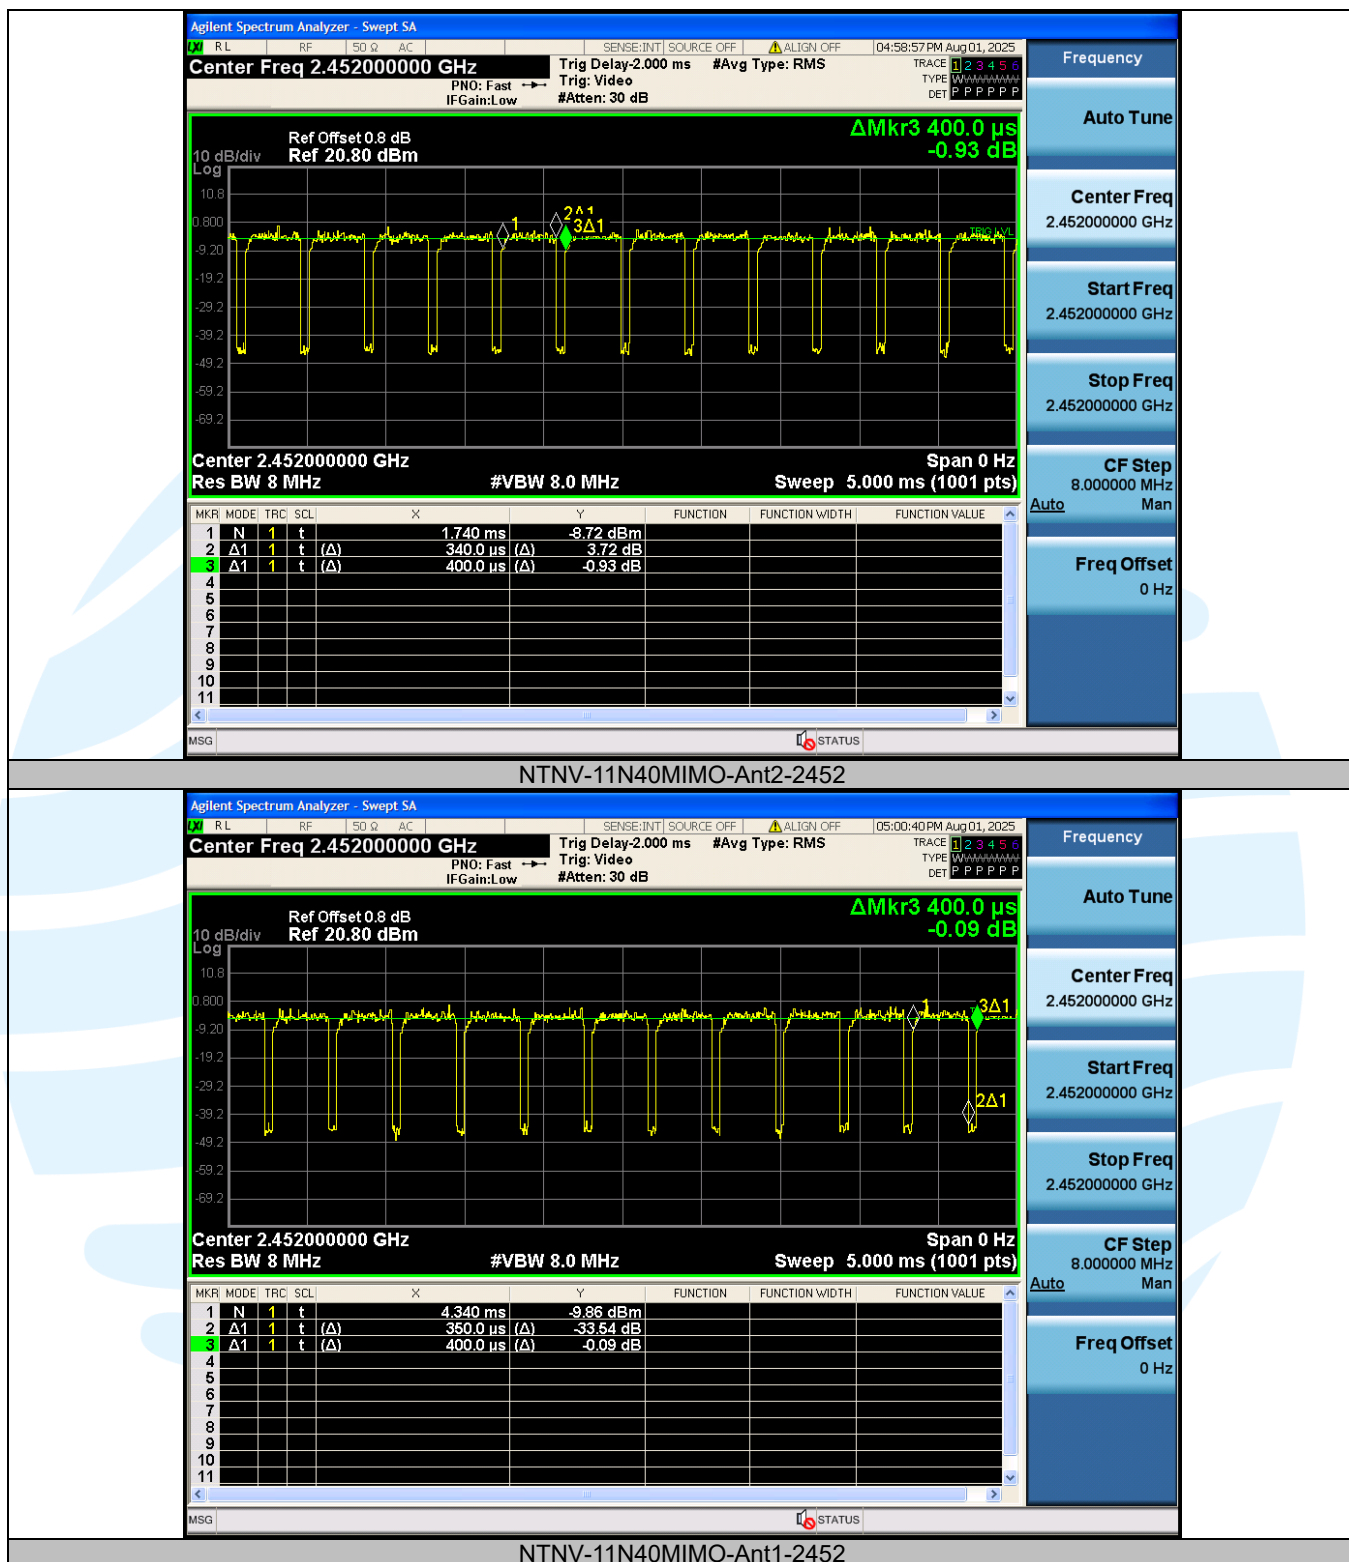

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

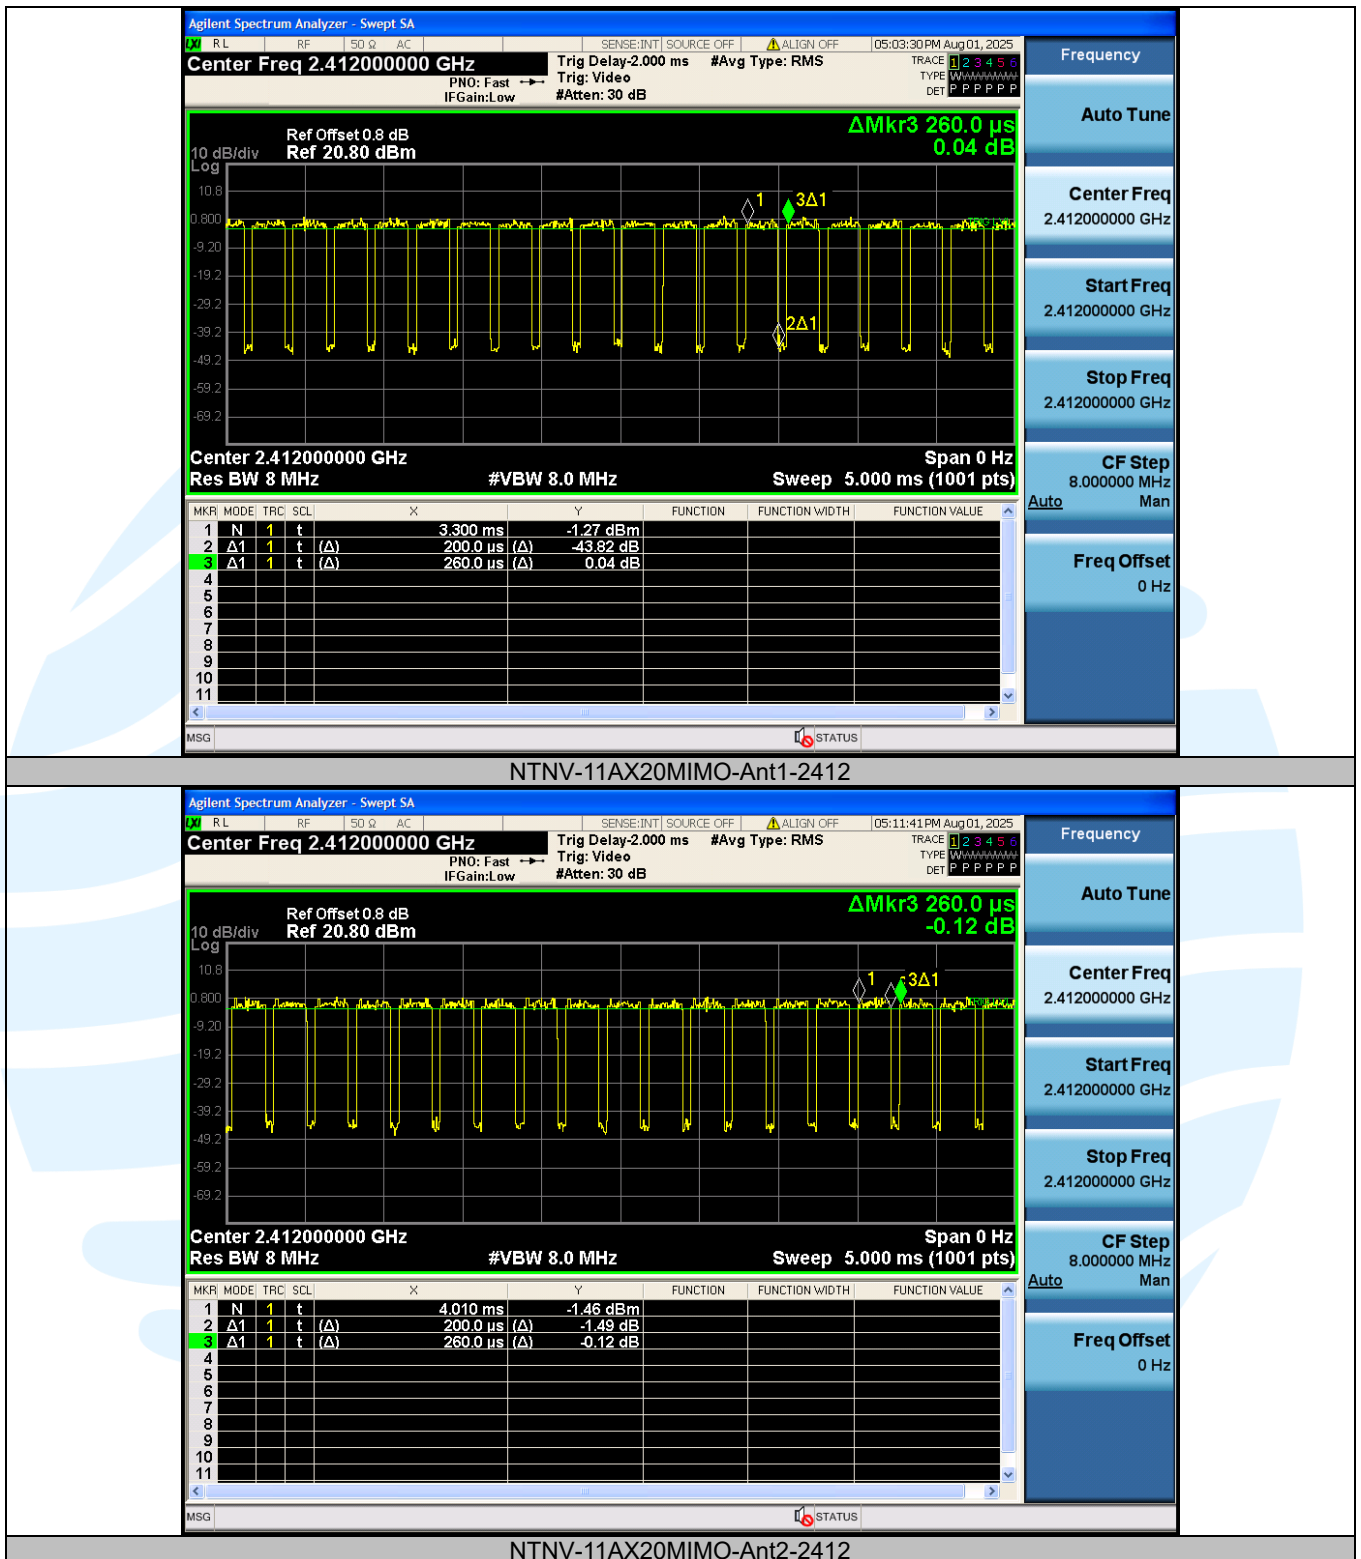

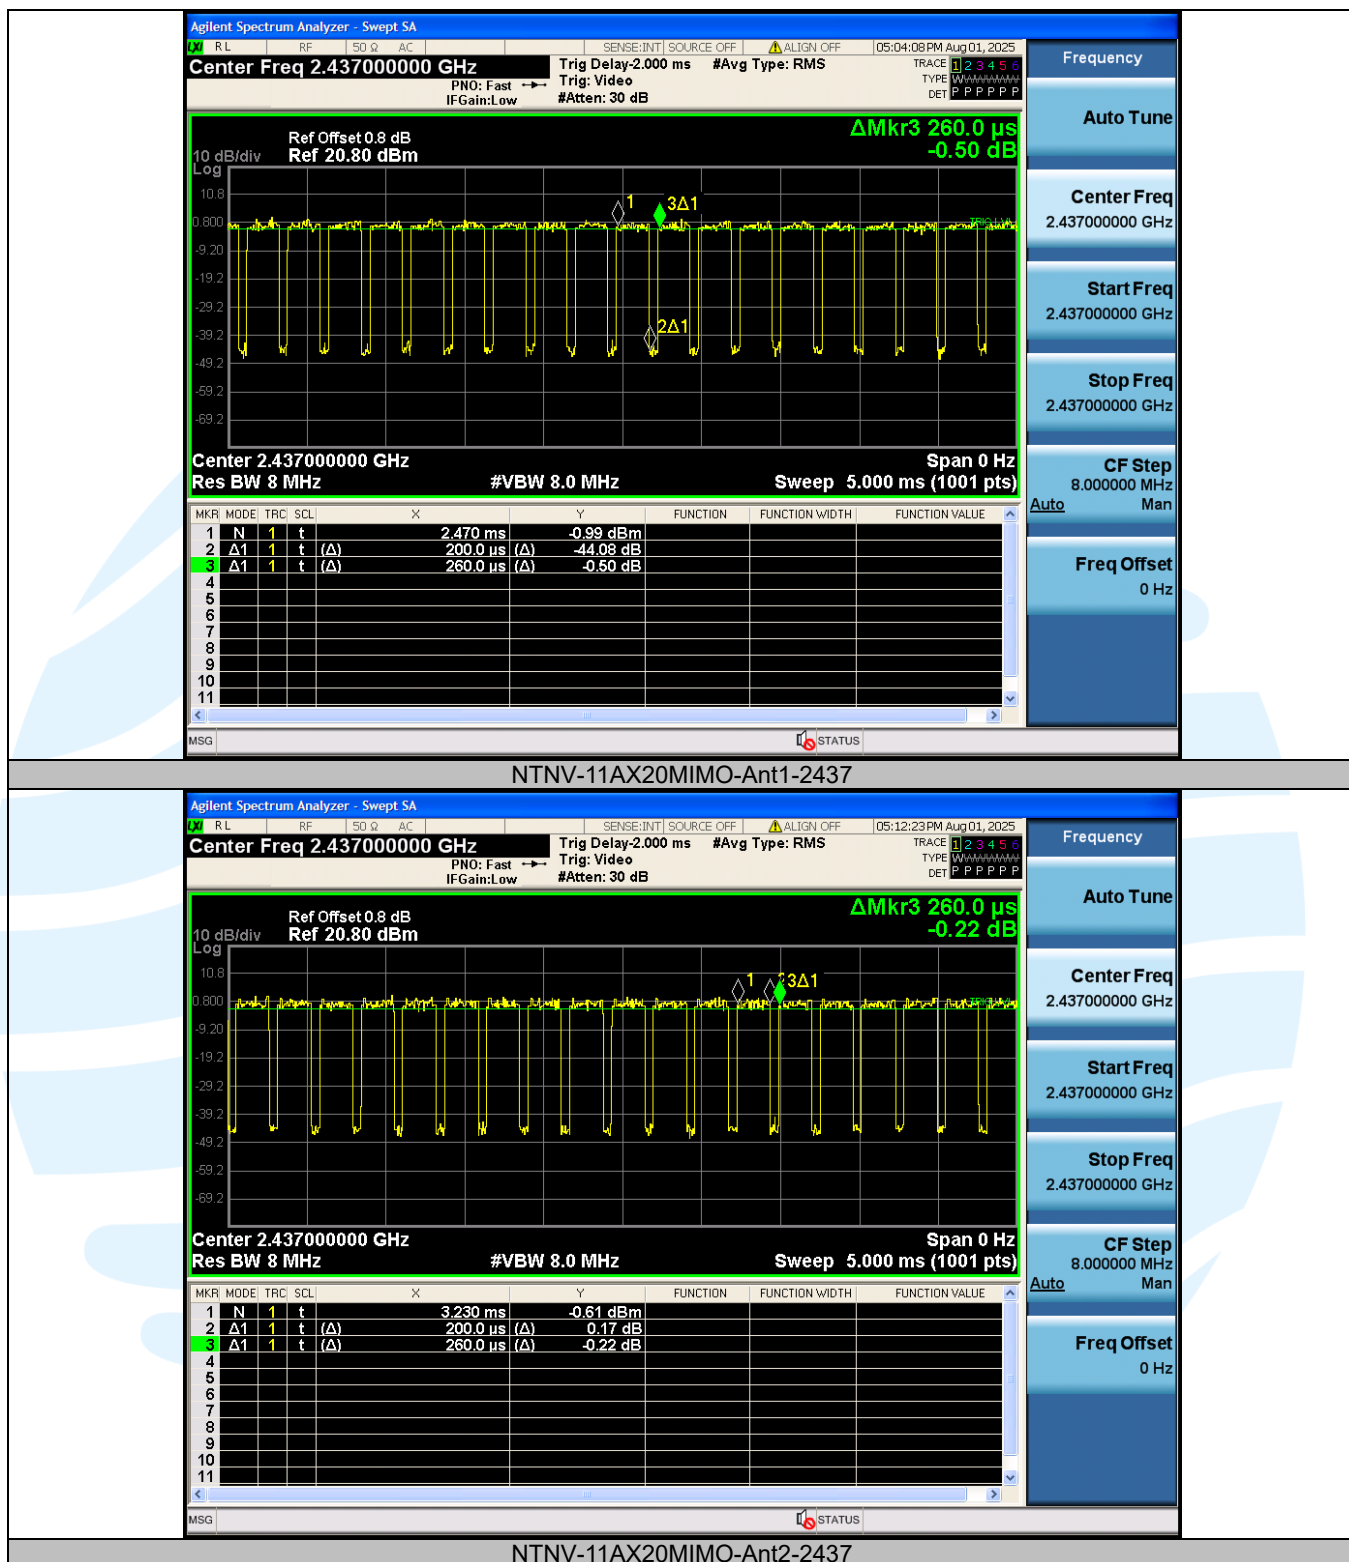

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

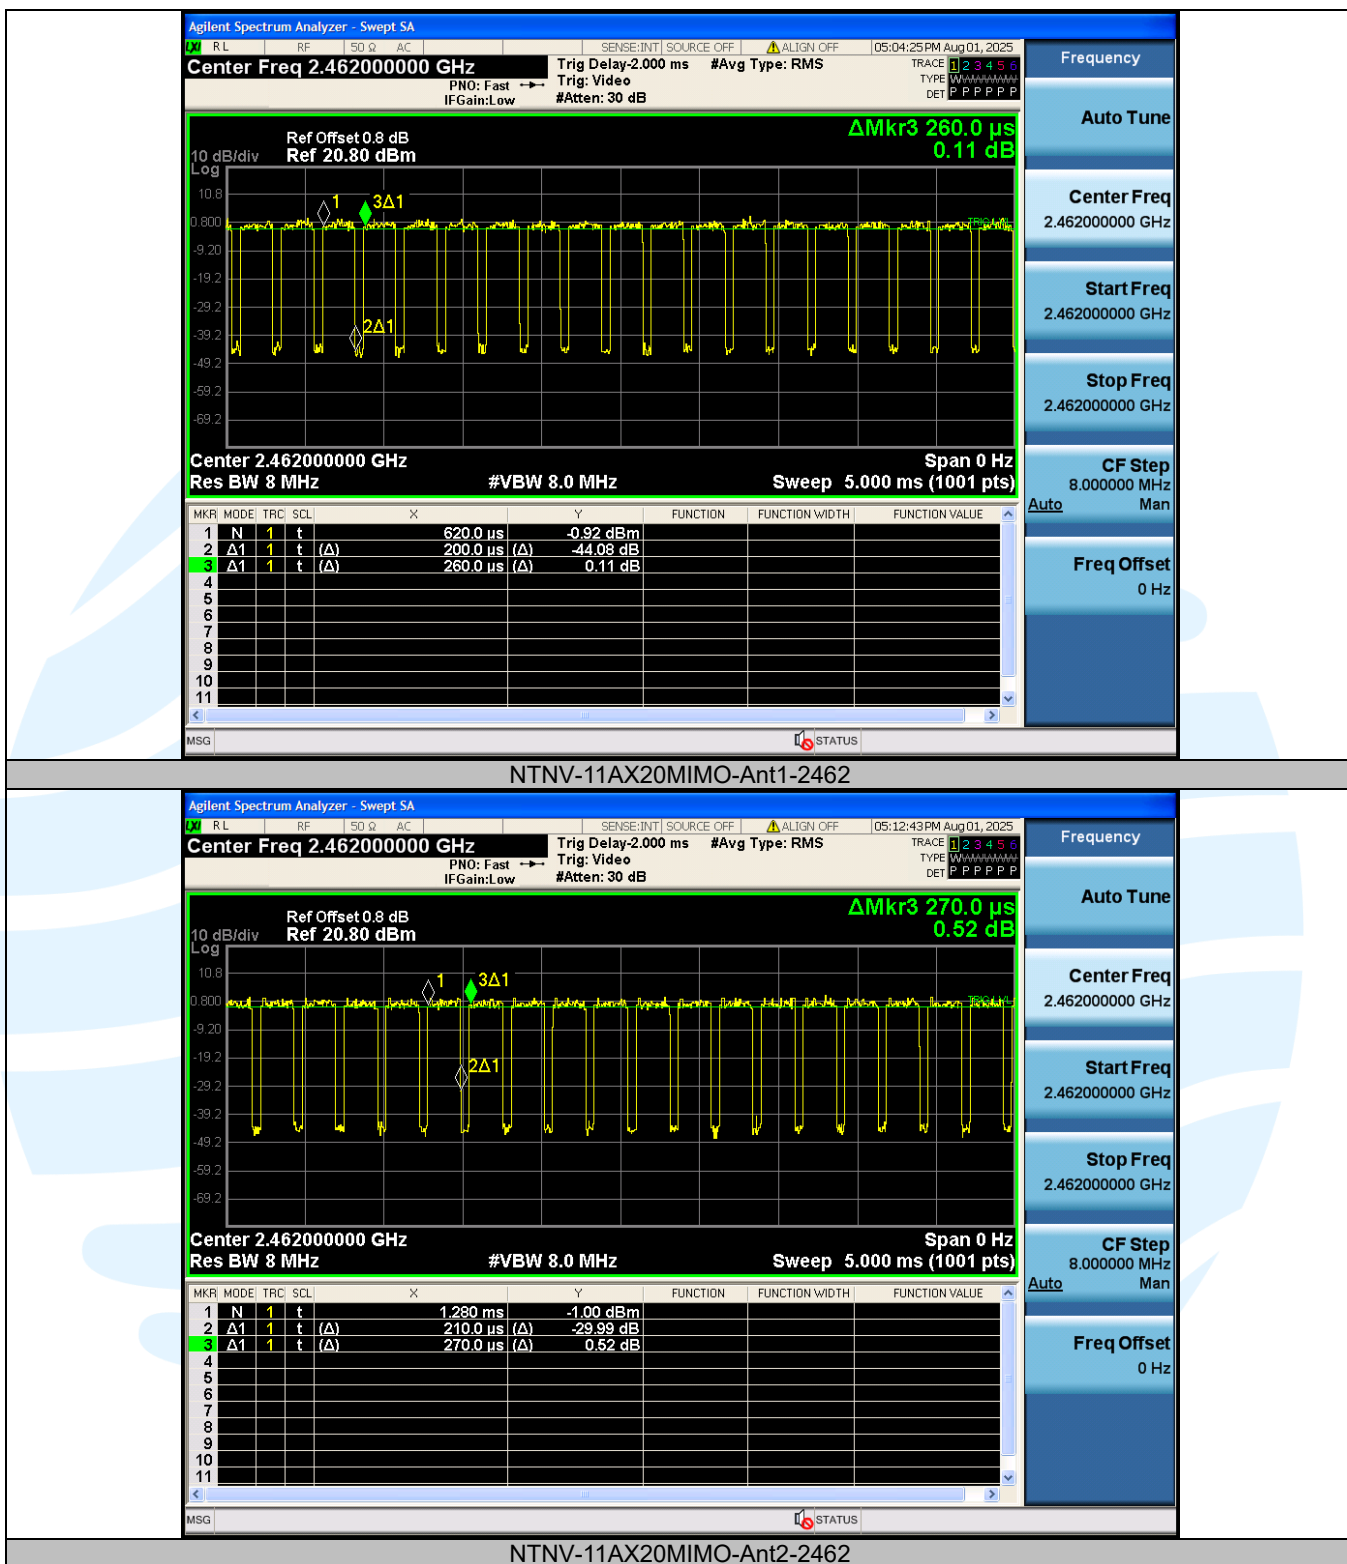

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

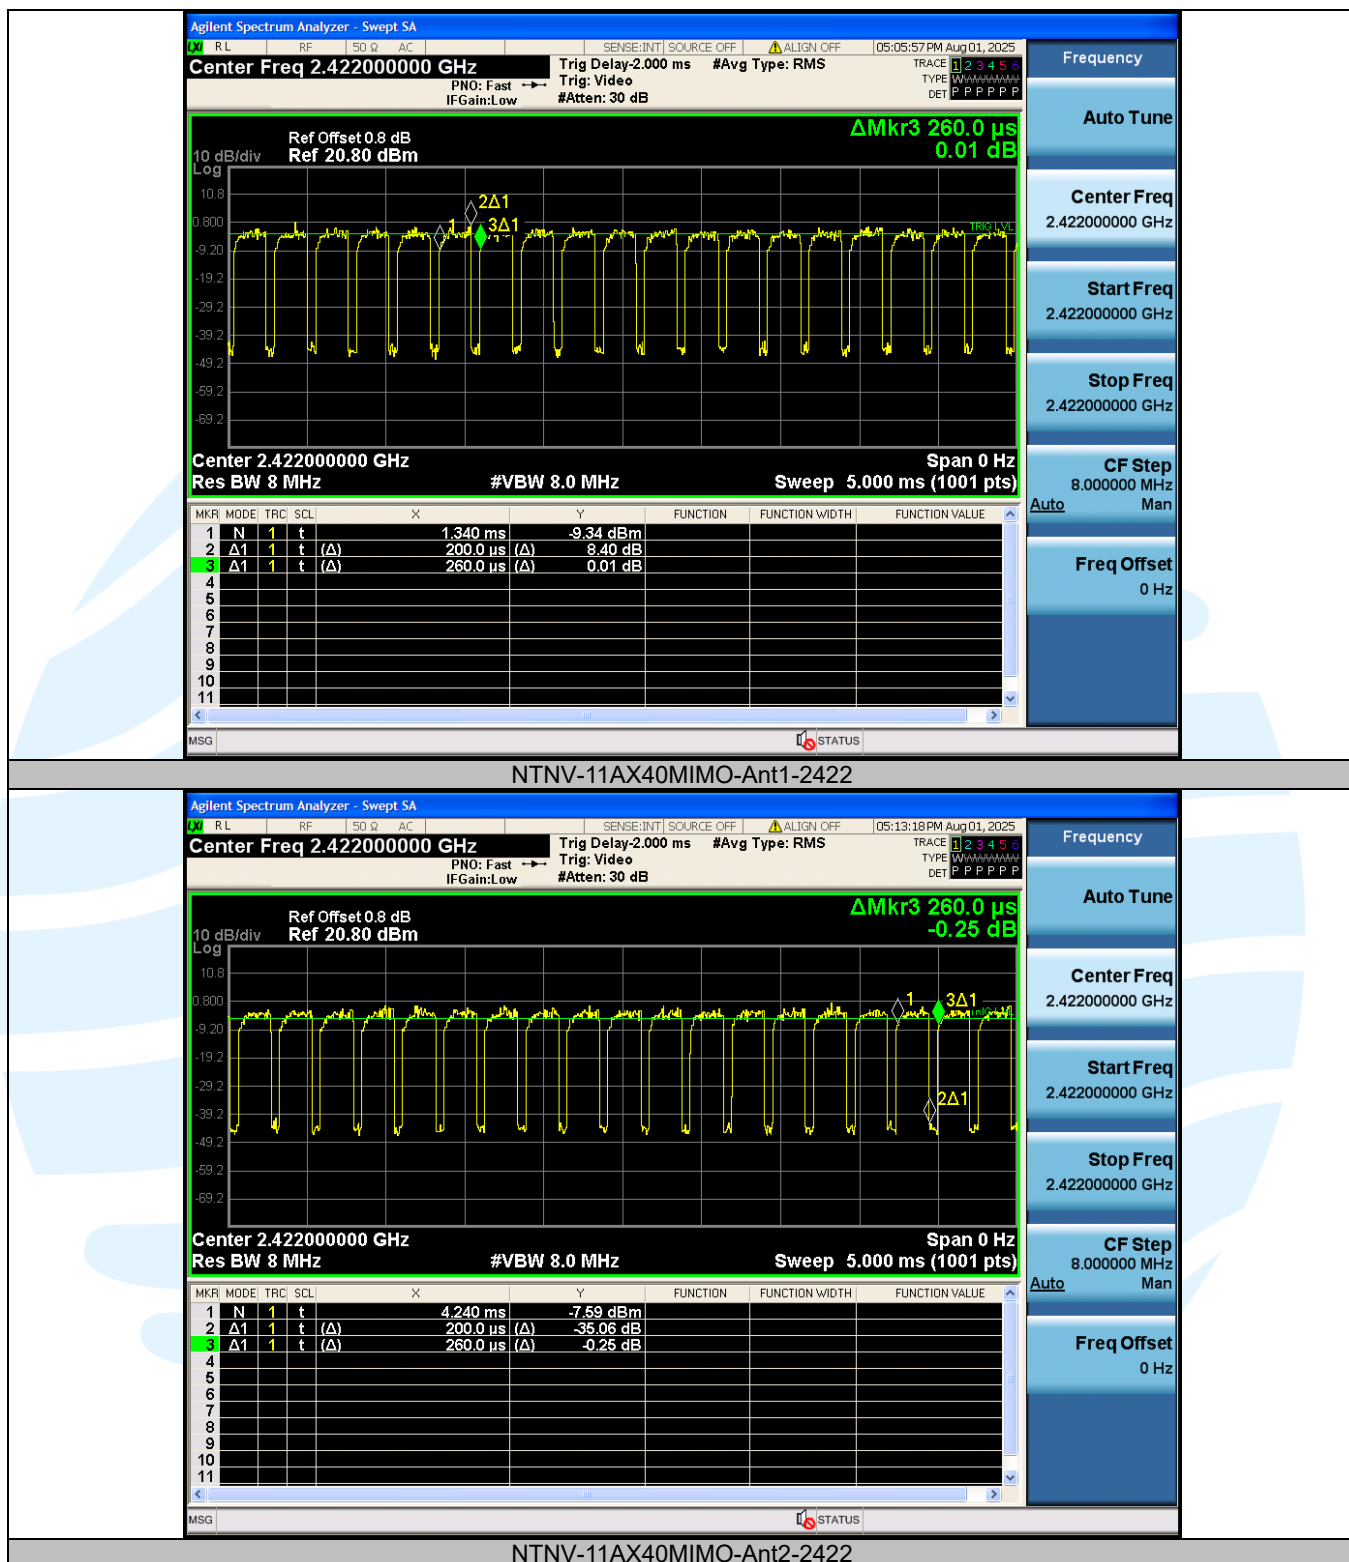

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

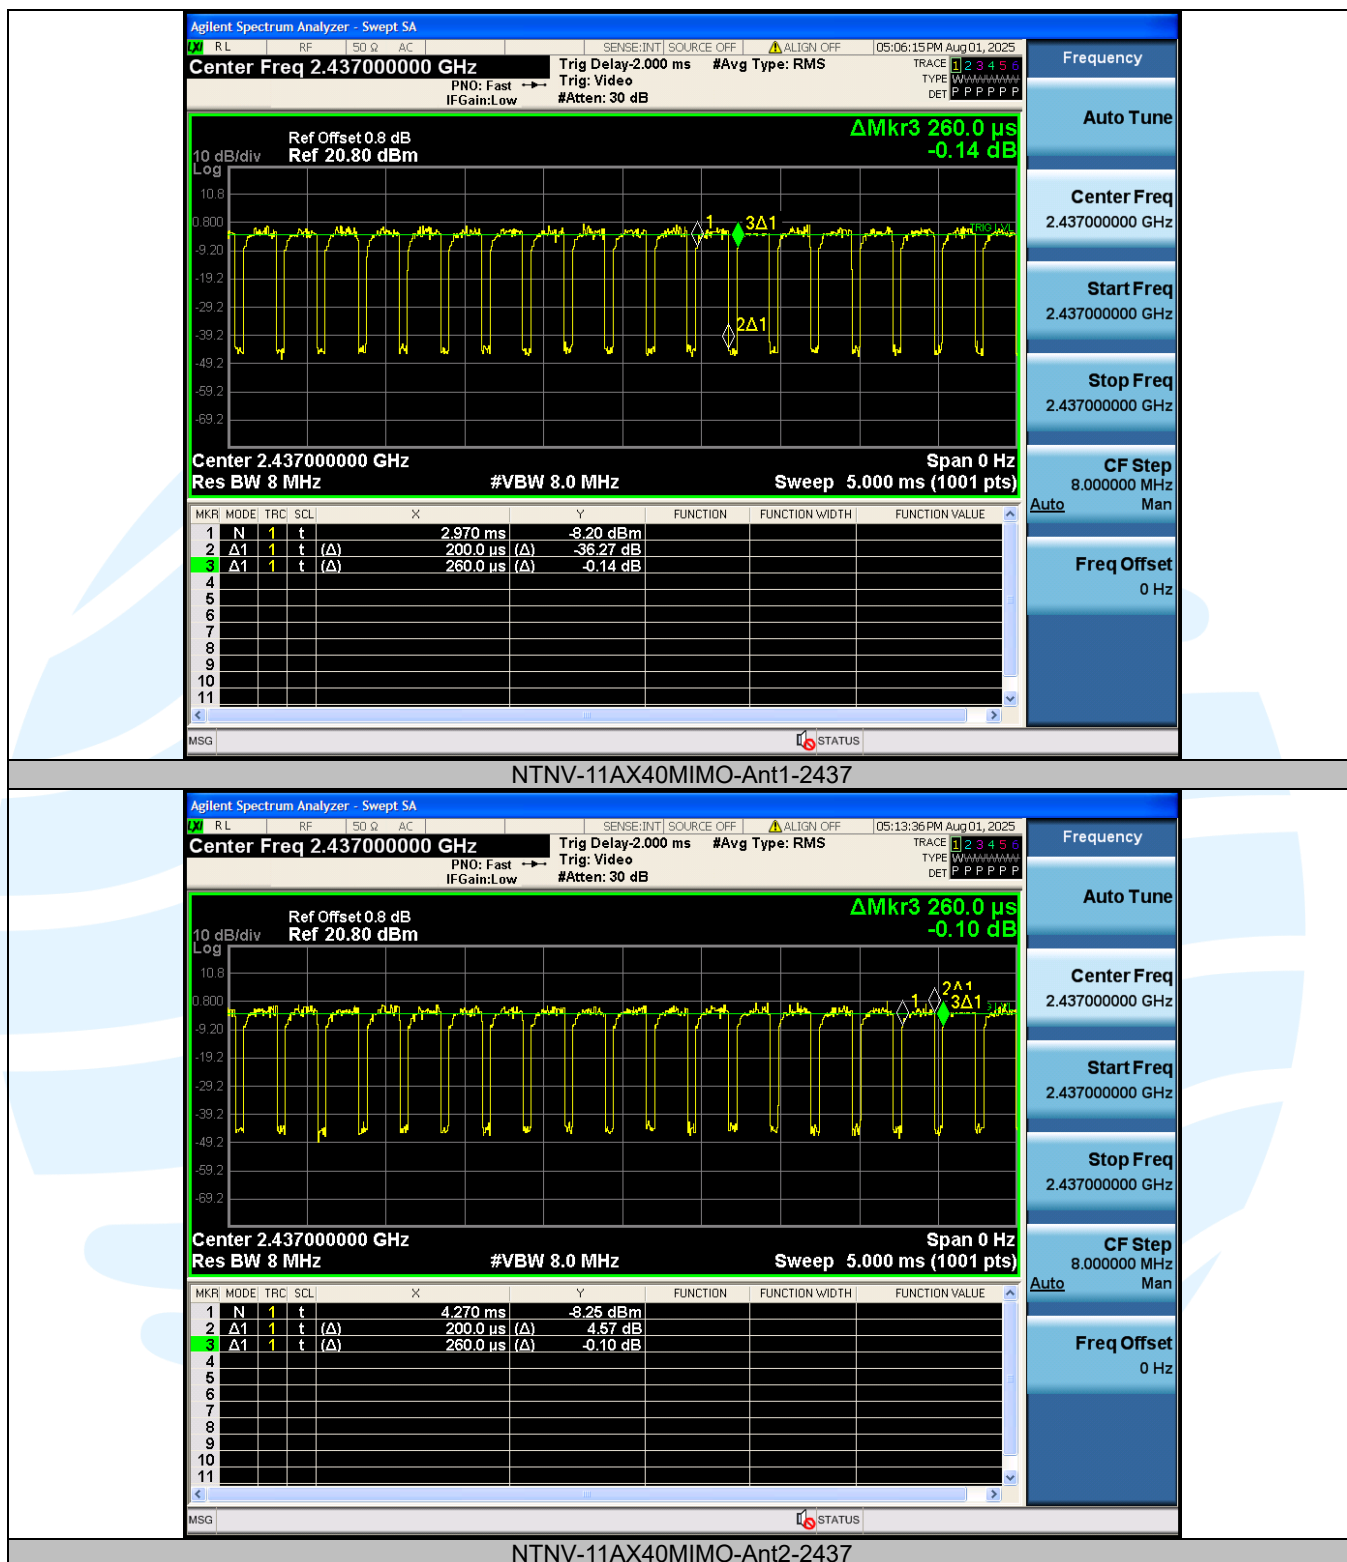**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

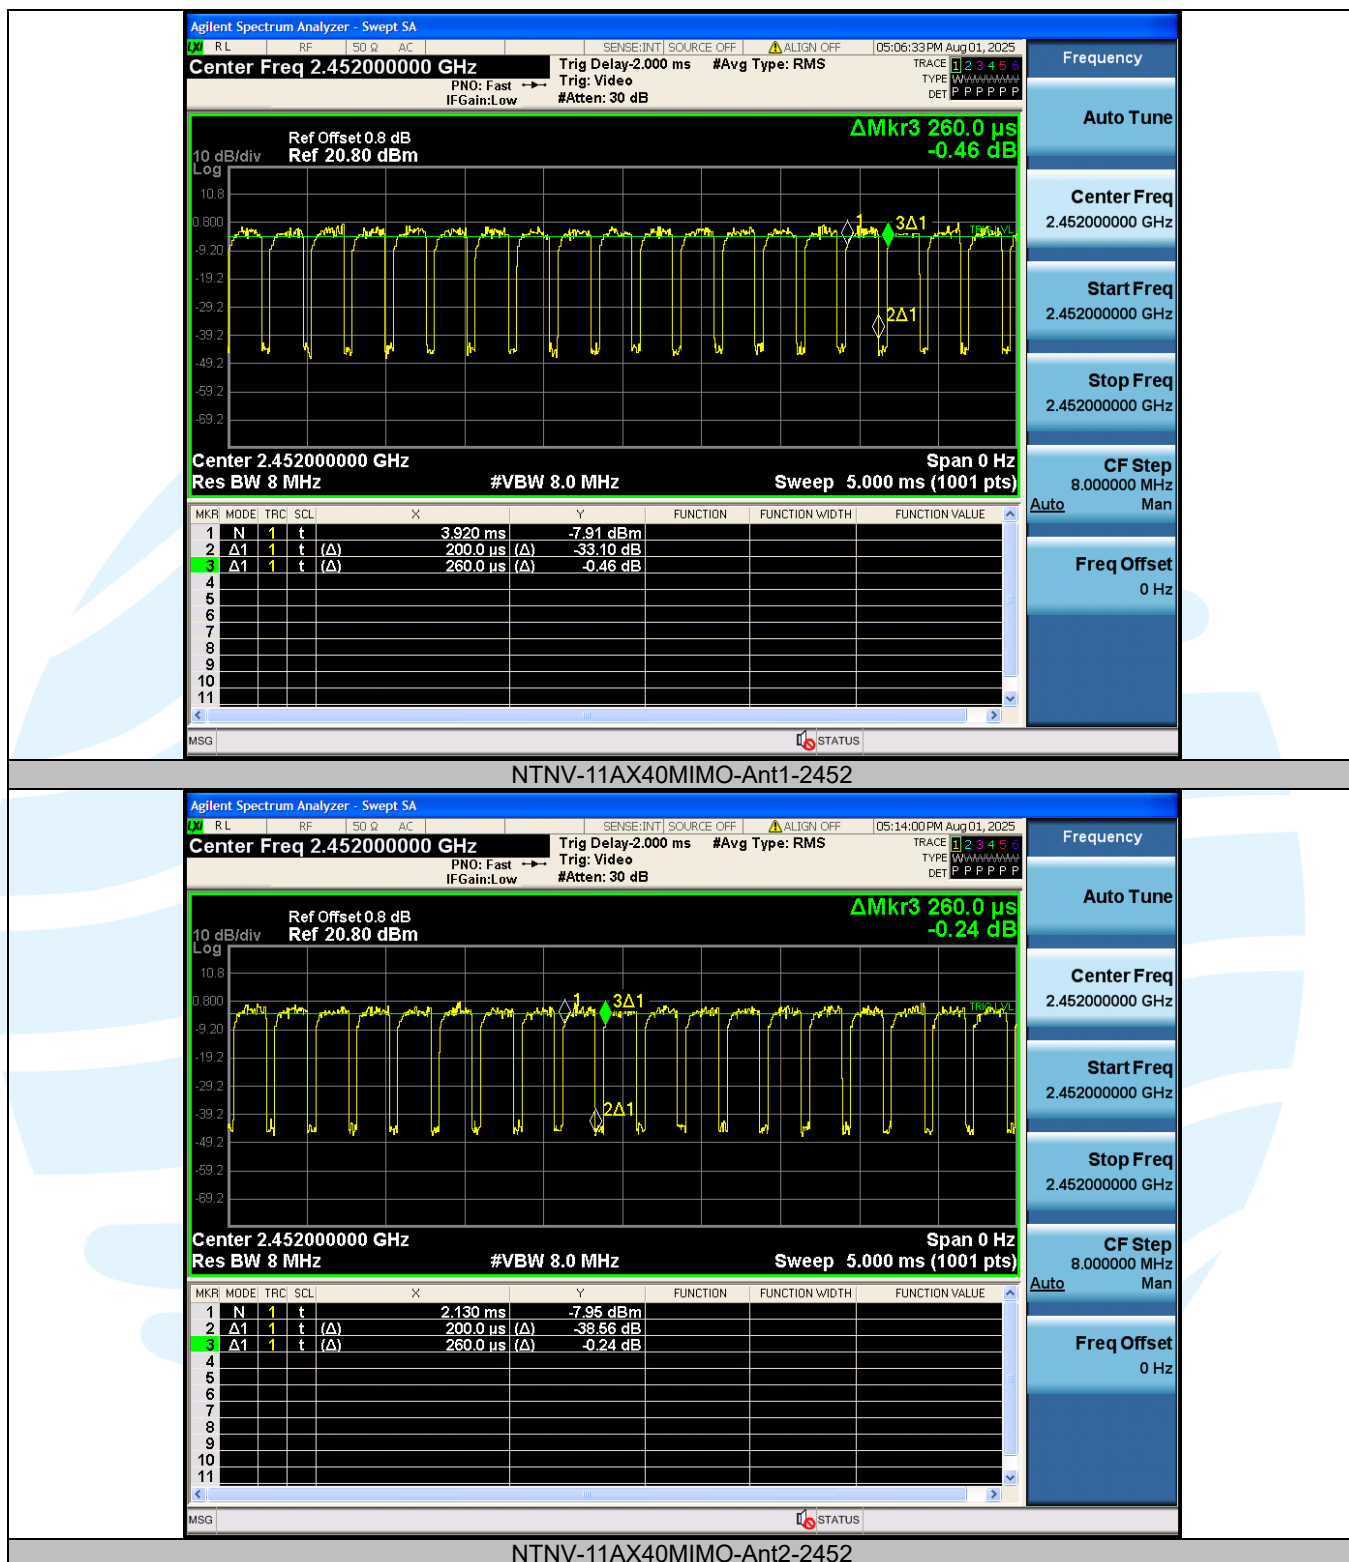

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Both antenna in the interior of the equipment and no consideration of replacement. The transmit signals are correlated with each other, the best case directional gain of the antenna is 8.01 dBi (See section 5.3).

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2013 Clause 11.9.1.3

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

Directional gain and the maximum output power limit.

Frequency (MHz)	Antenna Gain (dBi)		Directional gain (dBi)	Directional gain (dBi)	Limit	
	Ant .1	Ant .2	Power	PSD	Power (dBm)	PSD (dBm/3kHz)
2412 - 2462	5	5	8.01	8.01	27.99	5.99

Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows:
If transmit signals are correlated, then
Directional gain = $10 \log[(10^{G1}/20 + 10^{G2}/20 + \dots + 10^{GN}/20)^2 / NANT]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

Mode	Freq. (MHz)	RU&Index	Max. Peak Power (dBm)				Result
			Ant. 1	Ant. 2	Total	Limit	
IEEE 802.11b	2412	N/A	19.52	18.27	N/A	30.00	PASS
	2437	N/A	20.01	19.21	N/A	30.00	PASS
	2462	N/A	20.00	19.15	N/A	30.00	PASS
IEEE 802.11g	2412	N/A	18.51	17.29	N/A	30.00	PASS
	2437	N/A	18.25	18.9	N/A	30.00	PASS
	2462	N/A	18.24	18.92	N/A	30.00	PASS
IEEE 802.11n-HT20	2412	N/A	16.63	15.64	19.17	27.99	PASS
	2437	N/A	17.18	16.49	19.86		PASS
	2462	N/A	17.13	16.48	19.83		PASS
IEEE 802.11n-HT40	2422	N/A	15.63	14.33	18.04		PASS
	2437	N/A	16.05	15.38	18.74		PASS
	2452	N/A	15.93	15.35	18.66		PASS
IEEE 802.11ax-HE20	2412	SU	17.91	16.84	20.42		PASS
	2437	SU	18.38	17.72	21.07		PASS
	2462	SU	18.36	17.61	21.01		PASS
IEEE 802.11ax-HE40	2422	SU	17.30	16.17	19.78		PASS
	2437	SU	17.94	17.08	20.54		PASS
	2452	SU	17.86	17.04	20.48		PASS

Note:

1. Total (Chain 1+2) = $10 \log[(10^{Chain 1/10}) + (10^{Chain 2/10})]$

5.46 DB BANDWIDTH

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2013 Clause 11.8.1
Limit:	For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Set RBW = 100 kHz. b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW. c) Detector = Peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Please refer to Appendix A

5.5 POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

Test Method: ANSI C63.10-2013 Clause 11.10.2

Limit: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(d)

Test Method: ANSI C63.10-2013 Clause 11.11

Limit: In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2: Measurement Procedure OOB

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Clause 11.11 & Clause 11.12

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

- From 30 MHz to 1GHz test procedure as below:
 - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Above 1GHz test procedure as below:
 - Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - Test the EUT in the lowest channel, middle channel, the Highest channel

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Z axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:


Radiated Emission Test Data (9 kHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Radiated Emission Test Data (30 MHz ~ 1 GHz):


Worst-Case Configuration

Horizontal

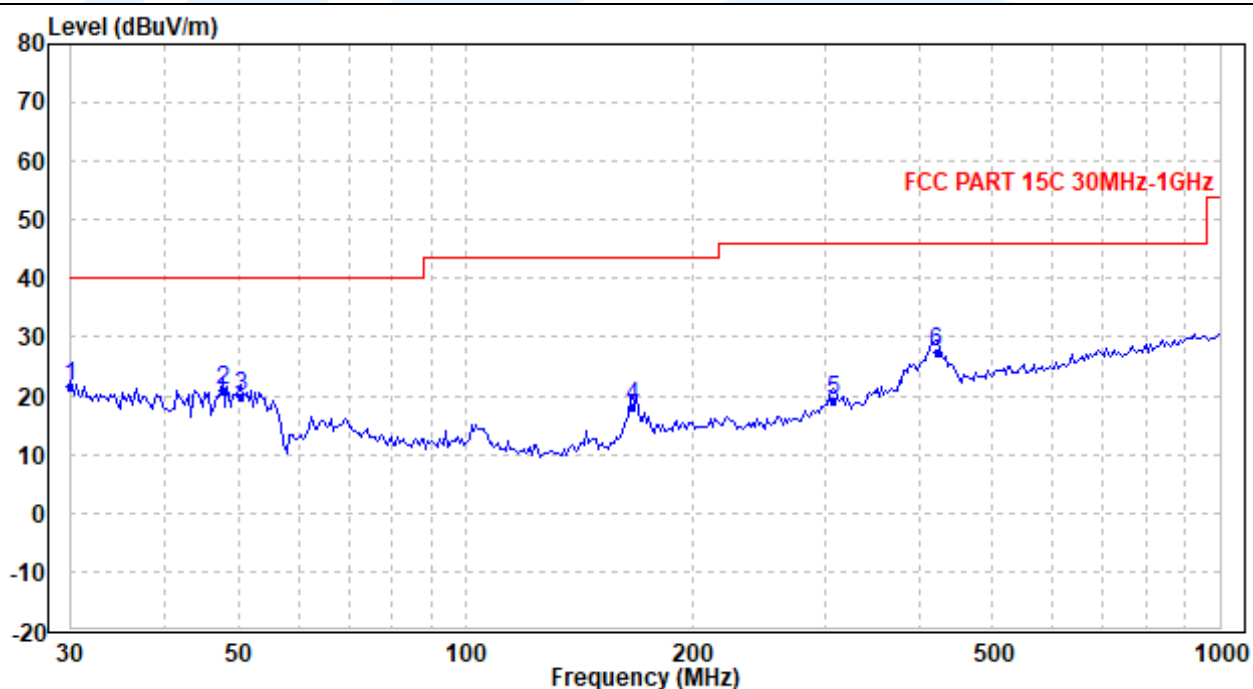

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.000	26.27	-4.53	21.74	40.00	-18.26	QP
2	47.703	34.49	-13.58	20.91	40.00	-19.09	QP
3	50.461	34.01	-14.19	19.82	40.00	-20.18	QP
4	166.639	30.93	-12.84	18.09	43.50	-25.41	QP
5	307.105	27.58	-8.41	19.17	46.00	-26.83	QP
6	421.329	31.35	-3.83	27.52	46.00	-18.48	QP

Vertical

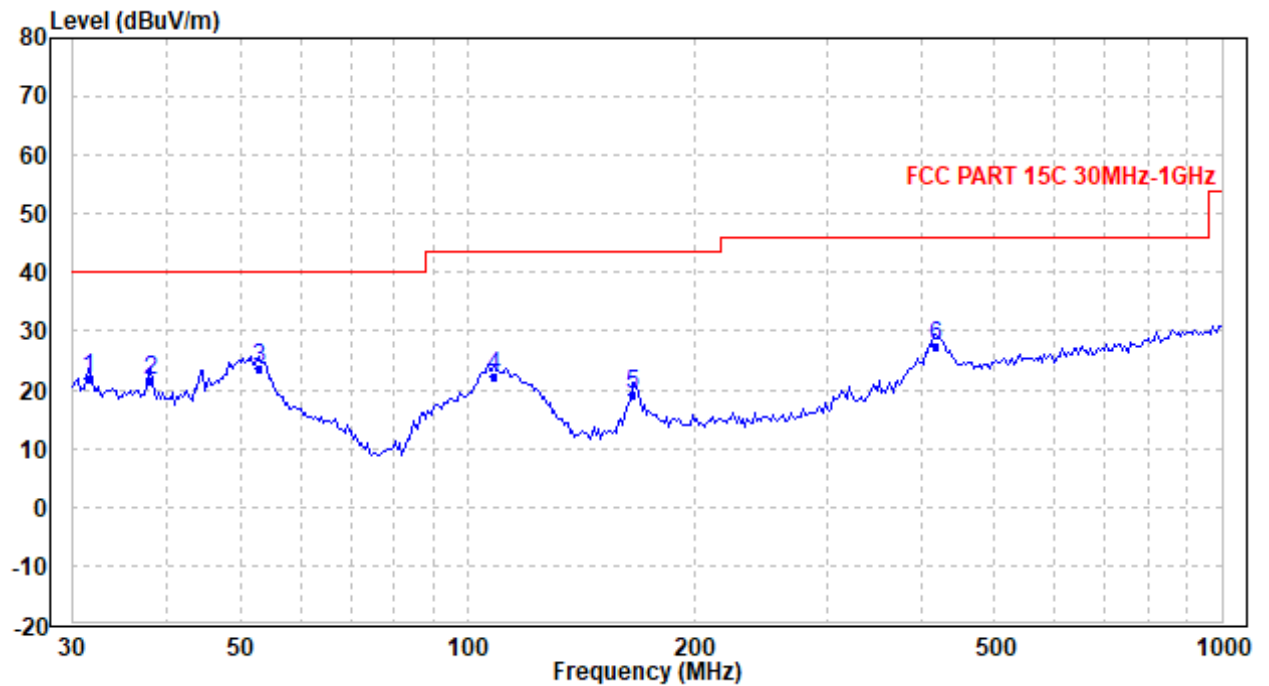

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.513	28.33	-6.54	21.79	40.00	-18.21	QP
2	38.096	29.46	-7.77	21.69	40.00	-18.31	QP
3	53.006	38.81	-15.18	23.63	40.00	-16.37	QP
4	108.546	37.77	-15.41	22.36	43.50	-21.14	QP
5	165.472	32.46	-13.11	19.35	43.50	-24.15	QP
6	418.378	31.34	-3.81	27.53	46.00	-18.47	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO Antenna 1 IEEE 802.11b Channel 1:								
1	4824	32.08	-2.07	30.01	54.00	-23.99	Average	Horizontal
2	4824	48.08	-2.07	46.01	74.00	-27.99	Peak	Horizontal
3	7236	34.54	1.30	35.84	54.00	-18.16	Average	Horizontal
4	7236	49.68	1.30	50.98	74.00	-23.02	Peak	Horizontal
5	4824	32.77	-2.07	30.70	54.00	-23.30	Average	Vertical
6	4824	50.66	-2.07	48.59	74.00	-25.41	Peak	Vertical
7	7236	33.86	1.30	35.16	54.00	-18.84	Average	Vertical
8	7236	45.78	1.30	47.08	74.00	-26.92	Peak	Vertical
SISO Antenna 1 IEEE 802.11b Channel 6:								
1	4874	34.00	-2.05	31.95	54.00	-22.05	Average	Horizontal
2	4874	46.67	-2.05	44.62	74.00	-29.38	Peak	Horizontal
3	7311	33.62	1.31	34.93	54.00	-19.07	Average	Horizontal
4	7311	44.81	1.31	46.12	74.00	-27.88	Peak	Horizontal
5	4874	37.38	-2.05	35.33	54.00	-18.67	Average	Vertical
6	4874	54.20	-2.05	52.15	74.00	-21.85	Peak	Vertical
7	7311	33.94	1.31	35.25	54.00	-18.75	Average	Vertical
8	7311	45.26	1.31	46.57	74.00	-27.43	Peak	Vertical
SISO Antenna 1 IEEE 802.11b Channel 11:								
1	4924	32.56	-2.03	30.53	54.00	-23.47	Average	Horizontal
2	4924	53.29	-2.03	51.26	74.00	-22.74	Peak	Horizontal
3	7386	32.77	1.31	34.08	54.00	-19.92	Average	Horizontal
4	7386	48.18	1.31	49.49	74.00	-24.51	Peak	Horizontal
5	4924	32.67	-2.03	30.64	54.00	-23.36	Average	Vertical
6	4924	54.29	-2.03	52.26	74.00	-21.74	Peak	Vertical
7	7386	33.16	1.31	34.47	54.00	-19.53	Average	Vertical
8	7386	51.47	1.31	52.78	74.00	-21.22	Peak	Vertical

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Antenna 1_ IEEE 802.11g_Channel 1:								
1	4824	32.19	-2.07	30.12	54.00	-23.88	Average	Horizontal
2	4824	42.91	-2.07	40.84	74.00	-33.16	Peak	Horizontal
3	7236	33.89	1.30	35.19	54.00	-18.81	Average	Horizontal
4	7236	43.96	1.30	45.26	74.00	-28.74	Peak	Horizontal
5	4824	32.47	-2.07	30.40	54.00	-23.60	Average	Vertical
6	4824	52.61	-2.07	50.54	74.00	-23.46	Peak	Vertical
7	7236	33.62	1.30	34.92	54.00	-19.08	Average	Vertical
8	7236	44.37	1.30	45.67	74.00	-28.33	Peak	Vertical
SISO_Antenna 1_ IEEE 802.11g_Channel 6:								
1	4874	34.59	-2.05	32.54	54.00	-21.46	Average	Horizontal
2	4874	46.95	-2.05	44.90	74.00	-29.10	Peak	Horizontal
3	7311	33.77	1.31	35.08	54.00	-18.92	Average	Horizontal
4	7311	44.66	1.31	45.97	74.00	-28.03	Peak	Horizontal
5	4874	42.69	-2.05	40.64	54.00	-13.36	Average	Vertical
6	4874	53.18	-2.05	51.13	74.00	-22.87	Peak	Vertical
7	7311	35.21	1.31	36.52	54.00	-17.48	Average	Vertical
8	7311	48.70	1.31	50.01	74.00	-23.99	Peak	Vertical
SISO_Antenna 1_ IEEE 802.11g_Channel 11:								
1	4924	32.73	-2.03	30.70	54.00	-23.30	Average	Horizontal
2	4924	42.89	-2.03	40.86	74.00	-33.14	Peak	Horizontal
3	7386	32.84	1.31	34.15	54.00	-19.85	Average	Horizontal
4	7386	43.74	1.31	45.05	74.00	-28.95	Peak	Horizontal
5	4924	32.83	-2.03	30.80	54.00	-23.20	Average	Vertical
6	4924	50.88	-2.03	48.85	74.00	-25.15	Peak	Vertical
7	7386	33.10	1.31	34.41	54.00	-19.59	Average	Vertical
8	7386	42.93	1.31	44.24	74.00	-29.76	Peak	Vertical

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO Antenna 2 IEEE 802.11b Channel 1:								
1	4824	32.22	-2.07	30.15	54.00	-23.85	Average	Horizontal
2	4824	44.17	-2.07	42.10	74.00	-31.90	Peak	Horizontal
3	7236	33.62	1.30	34.92	54.00	-19.08	Average	Horizontal
4	7236	45.22	1.30	46.52	74.00	-27.48	Peak	Horizontal
5	4824	37.72	-2.07	35.65	54.00	-18.35	Average	Vertical
6	4824	52.00	-2.07	49.93	74.00	-24.07	Peak	Vertical
7	7236	36.68	1.30	37.98	54.00	-16.02	Average	Vertical
8	7236	45.38	1.30	46.68	74.00	-27.32	Peak	Vertical
SISO Antenna 2 IEEE 802.11b Channel 6:								
1	4874	36.54	-2.05	34.49	54.00	-19.51	Average	Horizontal
2	4874	52.75	-2.05	50.70	74.00	-23.30	Peak	Horizontal
3	7311	33.77	1.31	35.08	54.00	-18.92	Average	Horizontal
4	7311	44.70	1.31	46.01	74.00	-27.99	Peak	Horizontal
5	4874	37.40	-2.05	35.35	54.00	-18.65	Average	Vertical
6	4874	53.52	-2.05	51.47	74.00	-22.53	Peak	Vertical
7	7311	34.03	1.31	35.34	54.00	-18.66	Average	Vertical
8	7311	44.99	1.31	46.30	74.00	-27.70	Peak	Vertical
SISO Antenna 2 IEEE 802.11b Channel 11:								
1	4924	35.24	-2.03	33.21	54.00	-20.79	Average	Horizontal
2	4924	50.22	-2.03	48.19	74.00	-25.81	Peak	Horizontal
3	7386	33.19	1.31	34.50	54.00	-19.50	Average	Horizontal
4	7386	44.69	1.31	46.00	74.00	-28.00	Peak	Horizontal
5	4924	36.65	-2.03	34.62	54.00	-19.38	Average	Vertical
6	4924	52.41	-2.03	50.38	74.00	-23.62	Peak	Vertical
7	7386	33.29	1.31	34.60	54.00	-19.40	Average	Vertical
8	7386	44.47	1.31	45.78	74.00	-28.22	Peak	Vertical

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO Antenna 2 IEEE 802.11g Channel 1:								
1	4824	38.77	-2.07	36.70	54.00	-17.30	Average	Horizontal
2	4824	52.85	-2.07	50.78	74.00	-23.22	Peak	Horizontal
3	7236	35.66	1.30	36.96	54.00	-17.04	Average	Horizontal
4	7236	48.17	1.30	49.47	74.00	-24.53	Peak	Horizontal
5	4824	50.23	-2.07	48.16	54.00	-5.84	Average	Vertical
6	4824	53.26	-2.07	51.19	74.00	-22.81	Peak	Vertical
7	7236	43.28	1.30	44.58	54.00	-9.42	Average	Vertical
8	7236	51.31	1.30	52.61	74.00	-21.39	Peak	Vertical
SISO Antenna 2 IEEE 802.11g Channel 6:								
1	4874	37.96	-2.05	35.91	54.00	-18.09	Average	Horizontal
2	4874	50.66	-2.05	48.61	74.00	-25.39	Peak	Horizontal
3	7311	33.80	1.31	35.11	54.00	-18.89	Average	Horizontal
4	7311	44.78	1.31	46.09	74.00	-27.91	Peak	Horizontal
5	4874	39.05	-2.05	37.00	54.00	-17.00	Average	Vertical
6	4874	52.65	-2.05	50.60	74.00	-23.40	Peak	Vertical
7	7311	34.00	1.31	35.31	54.00	-18.69	Average	Vertical
8	7311	44.82	1.31	46.13	74.00	-27.87	Peak	Vertical
SISO Antenna 2 IEEE 802.11g Channel 11:								
1	4924	36.90	-2.03	34.87	54.00	-19.13	Average	Horizontal
2	4924	49.78	-2.03	47.75	74.00	-26.25	Peak	Horizontal
3	7386	36.90	1.31	38.21	54.00	-15.79	Average	Horizontal
4	7386	48.47	1.31	49.78	74.00	-24.22	Peak	Horizontal
5	4924	36.70	-2.03	34.67	54.00	-19.33	Average	Vertical
6	4924	48.41	-2.03	46.38	74.00	-27.62	Peak	Vertical
7	7386	35.94	1.31	37.25	54.00	-16.75	Average	Vertical
8	7386	48.55	1.31	49.86	74.00	-24.14	Peak	Vertical

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 1+2_ IEEE 802.11n-HT20_Channel 1:								
1	4824	32.29	-2.07	30.22	54.00	-23.78	Average	Horizontal
2	4824	43.09	-2.07	41.02	74.00	-32.98	Peak	Horizontal
3	7236	33.92	1.30	35.22	54.00	-18.78	Average	Horizontal
4	7236	44.97	1.30	46.27	74.00	-27.73	Peak	Horizontal
5	4824	36.33	-2.07	34.26	54.00	-19.74	Average	Vertical
6	4824	53.76	-2.07	51.69	74.00	-22.31	Peak	Vertical
7	7236	34.01	1.30	35.31	54.00	-18.69	Average	Vertical
8	7236	45.87	1.30	47.17	74.00	-26.83	Peak	Vertical
MIMO_Antenna 1+2_ IEEE 802.11n-HT20_Channel 6:								
1	4874	34.64	-2.05	32.59	54.00	-21.41	Average	Horizontal
2	4874	45.41	-2.05	43.36	74.00	-30.64	Peak	Horizontal
3	7311	33.91	1.31	35.22	54.00	-18.78	Average	Horizontal
4	7311	44.14	1.31	45.45	74.00	-28.55	Peak	Horizontal
5	4874	42.60	-2.05	40.55	54.00	-13.45	Average	Vertical
6	4874	52.62	-2.05	50.57	74.00	-23.43	Peak	Vertical
7	7311	34.88	1.31	36.19	54.00	-17.81	Average	Vertical
8	7311	46.67	1.31	47.98	74.00	-26.02	Peak	Vertical
MIMO_Antenna 1+2_ IEEE 802.11n-HT20_Channel 11:								
1	4924	34.62	-2.03	32.59	54.00	-21.41	Average	Horizontal
2	4924	46.03	-2.03	44.00	74.00	-30.00	Peak	Horizontal
3	7386	33.03	1.31	34.34	54.00	-19.66	Average	Horizontal
4	7386	45.34	1.31	46.65	74.00	-27.35	Peak	Horizontal
5	4924	43.49	-2.03	41.46	54.00	-12.54	Average	Vertical
6	4924	54.59	-2.03	52.56	74.00	-21.44	Peak	Vertical
7	7386	36.24	1.31	37.55	54.00	-16.45	Average	Vertical
8	7386	49.28	1.31	50.59	74.00	-23.41	Peak	Vertical

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 1+2_ IEEE 802.11n-HT40_Channel 3:								
1	4844	32.46	-2.06	30.40	54.00	-23.60	Average	Horizontal
2	4844	42.95	-2.06	40.89	74.00	-33.11	Peak	Horizontal
3	7266	34.50	1.31	35.81	54.00	-18.19	Average	Horizontal
4	7266	46.44	1.31	47.75	74.00	-26.25	Peak	Horizontal
5	4844	44.70	-2.06	42.64	54.00	-11.36	Average	Vertical
6	4844	54.03	-2.06	51.97	74.00	-22.03	Peak	Vertical
7	7266	36.25	1.31	37.56	54.00	-16.44	Average	Vertical
8	7266	48.84	1.31	50.15	74.00	-23.85	Peak	Vertical
MIMO_Antenna 1+2_ IEEE 802.11n-HT40_Channel 6:								
1	4874	35.56	-2.05	33.51	54.00	-20.49	Average	Horizontal
2	4874	47.42	-2.05	45.37	74.00	-28.63	Peak	Horizontal
3	7311	34.09	1.31	35.40	54.00	-18.60	Average	Horizontal
4	7311	45.33	1.31	46.64	74.00	-27.36	Peak	Horizontal
5	4874	46.26	-2.05	44.21	54.00	-9.79	Average	Vertical
6	4874	53.97	-2.05	51.92	74.00	-22.08	Peak	Vertical
7	7311	37.22	1.31	38.53	54.00	-15.47	Average	Vertical
8	7311	50.21	1.31	51.52	74.00	-22.48	Peak	Vertical
MIMO_Antenna 1+2_ IEEE 802.11n-HT40_Channel 9:								
1	4904	32.91	-2.04	30.87	54.00	-23.13	Average	Horizontal
2	4904	44.06	-2.04	42.02	74.00	-31.98	Peak	Horizontal
3	7356	32.81	1.31	34.12	54.00	-19.88	Average	Horizontal
4	7356	45.36	1.31	46.67	74.00	-27.33	Peak	Horizontal
5	4904	35.76	-2.04	33.72	54.00	-20.28	Average	Vertical
6	4904	50.92	-2.04	48.88	74.00	-25.12	Peak	Vertical
7	7356	33.29	1.31	34.60	54.00	-19.40	Average	Vertical
8	7356	47.46	1.31	48.77	74.00	-25.23	Peak	Vertical

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 1+2_IEEE 802.11ax-HE20_Channel 1:								
1	4824	32.22	-2.07	30.15	54.00	-23.85	Average	Horizontal
2	4824	43.59	-2.07	41.52	74.00	-32.48	Peak	Horizontal
3	7236	34.03	1.30	35.33	54.00	-18.67	Average	Horizontal
4	7236	45.04	1.30	46.34	74.00	-27.66	Peak	Horizontal
5	4824	41.76	-2.07	39.69	54.00	-14.31	Average	Vertical
6	4824	54.32	-2.07	52.25	74.00	-21.75	Peak	Vertical
7	7236	34.12	1.30	35.42	54.00	-18.58	Average	Vertical
8	7236	47.84	1.30	49.14	74.00	-24.86	Peak	Vertical
MIMO_Antenna 1+2_IEEE 802.11ax-HE20_Channel 6:								
1	4824	32.22	-2.07	30.15	54.00	-23.85	Average	Horizontal
2	4874	49.06	-2.05	47.01	74.00	-26.99	Peak	Horizontal
3	7236	34.03	1.30	35.33	54.00	-18.67	Average	Horizontal
4	7311	44.66	1.31	45.97	74.00	-28.03	Peak	Horizontal
5	4874	43.49	-2.05	41.44	54.00	-12.56	Average	Vertical
6	4874	54.95	-2.05	52.90	74.00	-21.10	Peak	Vertical
7	7311	35.53	1.31	36.84	54.00	-17.16	Average	Vertical
8	7311	49.80	1.31	51.11	74.00	-22.89	Peak	Vertical
MIMO_Antenna 1+2_IEEE 802.11ax-HE20_Channel 11:								
1	4924	35.56	-2.03	33.53	54.00	-20.47	Average	Horizontal
2	4924	47.22	-2.03	45.19	74.00	-28.81	Peak	Horizontal
3	7386	33.00	1.31	34.31	54.00	-19.69	Average	Horizontal
4	7386	43.62	1.31	44.93	74.00	-29.07	Peak	Horizontal
5	4924	43.34	-2.03	41.31	54.00	-12.69	Average	Vertical
6	4924	53.61	-2.03	51.58	74.00	-22.42	Peak	Vertical
7	7386	36.57	1.31	37.88	54.00	-16.12	Average	Vertical
8	7386	50.36	1.31	51.67	74.00	-22.33	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 1+2_ IEEE 802.11ax-HE40_Channel 3:								
1	4844	35.24	-2.06	33.18	54.00	-20.82	Average	Horizontal
2	4844	47.18	-2.06	45.12	74.00	-28.88	Peak	Horizontal
3	7266	35.26	1.31	36.57	54.00	-17.43	Average	Horizontal
4	7266	46.04	1.31	47.35	74.00	-26.65	Peak	Horizontal
5	4844	46.01	-2.06	43.95	54.00	-10.05	Average	Vertical
6	4844	54.92	-2.06	52.86	74.00	-21.14	Peak	Vertical
7	7266	37.77	1.31	39.08	54.00	-14.92	Average	Vertical
8	7266	49.56	1.31	50.87	74.00	-23.13	Peak	Vertical
MIMO_Antenna 1+2_ IEEE 802.11ax-HE40_Channel 6:								
1	4874	37.36	-2.05	35.31	54.00	-18.69	Average	Horizontal
2	4874	47.79	-2.05	45.74	74.00	-28.26	Peak	Horizontal
3	7311	34.17	1.31	35.48	54.00	-18.52	Average	Horizontal
4	7311	47.35	1.31	48.66	74.00	-25.34	Peak	Horizontal
5	4874	46.20	-2.05	44.15	54.00	-9.85	Average	Vertical
6	4874	54.50	-2.05	52.45	74.00	-21.55	Peak	Vertical
7	7311	36.38	1.31	37.69	54.00	-16.31	Average	Vertical
8	7311	49.01	1.31	50.32	74.00	-23.68	Peak	Vertical
MIMO_Antenna 1+2_ IEEE 802.11ax-HE40_Channel 9:								
1	4904	36.64	-2.04	34.60	54.00	-19.40	Average	Horizontal
2	4904	47.99	-2.04	45.95	74.00	-28.05	Peak	Horizontal
3	7356	36.81	1.31	38.12	54.00	-15.88	Average	Horizontal
4	7356	47.70	1.31	49.01	74.00	-24.99	Peak	Horizontal
5	4904	39.51	-2.04	37.47	54.00	-16.53	Average	Vertical
6	4904	48.17	-2.04	46.13	74.00	-27.87	Peak	Vertical
7	7356	38.77	1.31	40.08	54.00	-13.92	Average	Vertical
8	7356	48.79	1.31	50.10	74.00	-23.90	Peak	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Limit – Result
4. The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Clause 11.13

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dBμV/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.7. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

SISO_Antenna 1_IEEE 802.11b

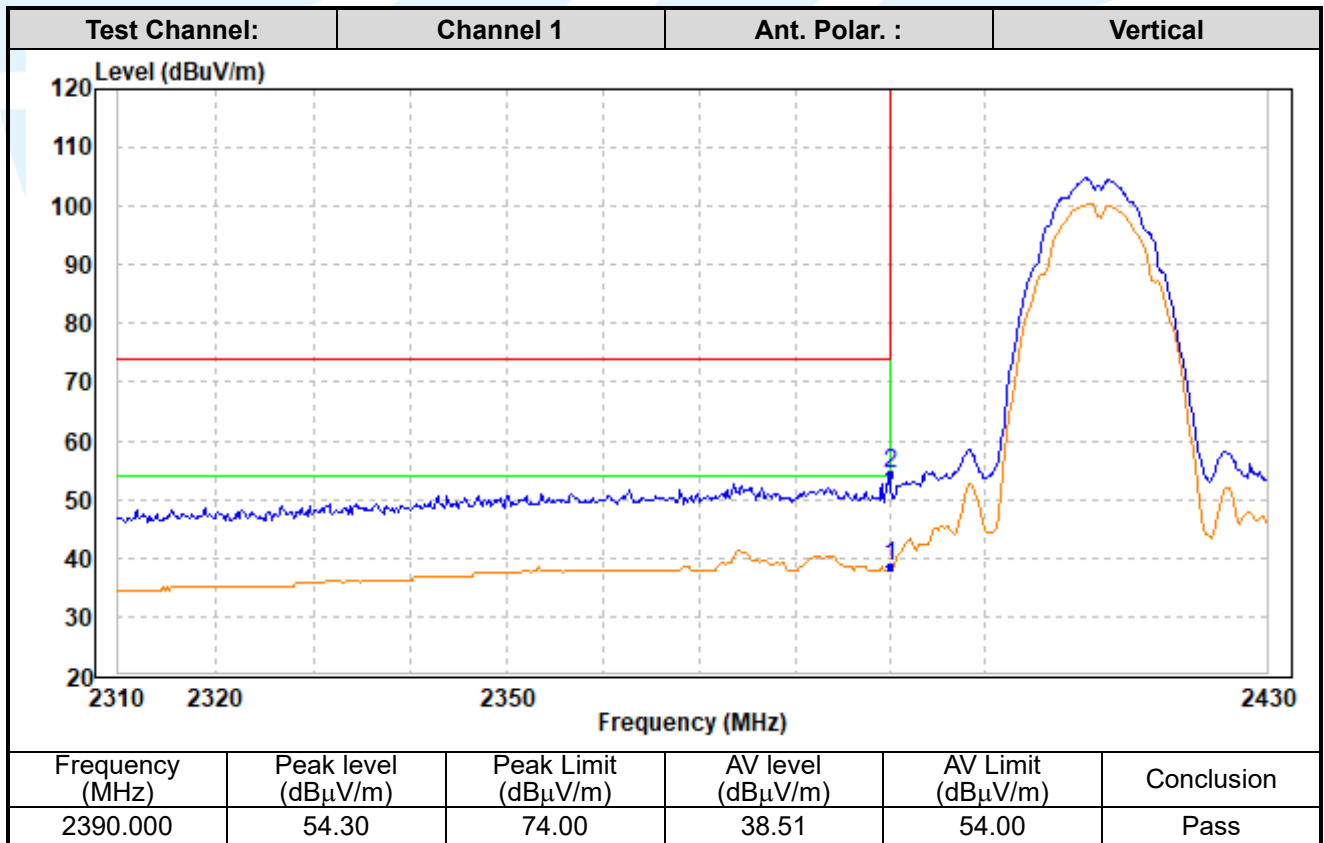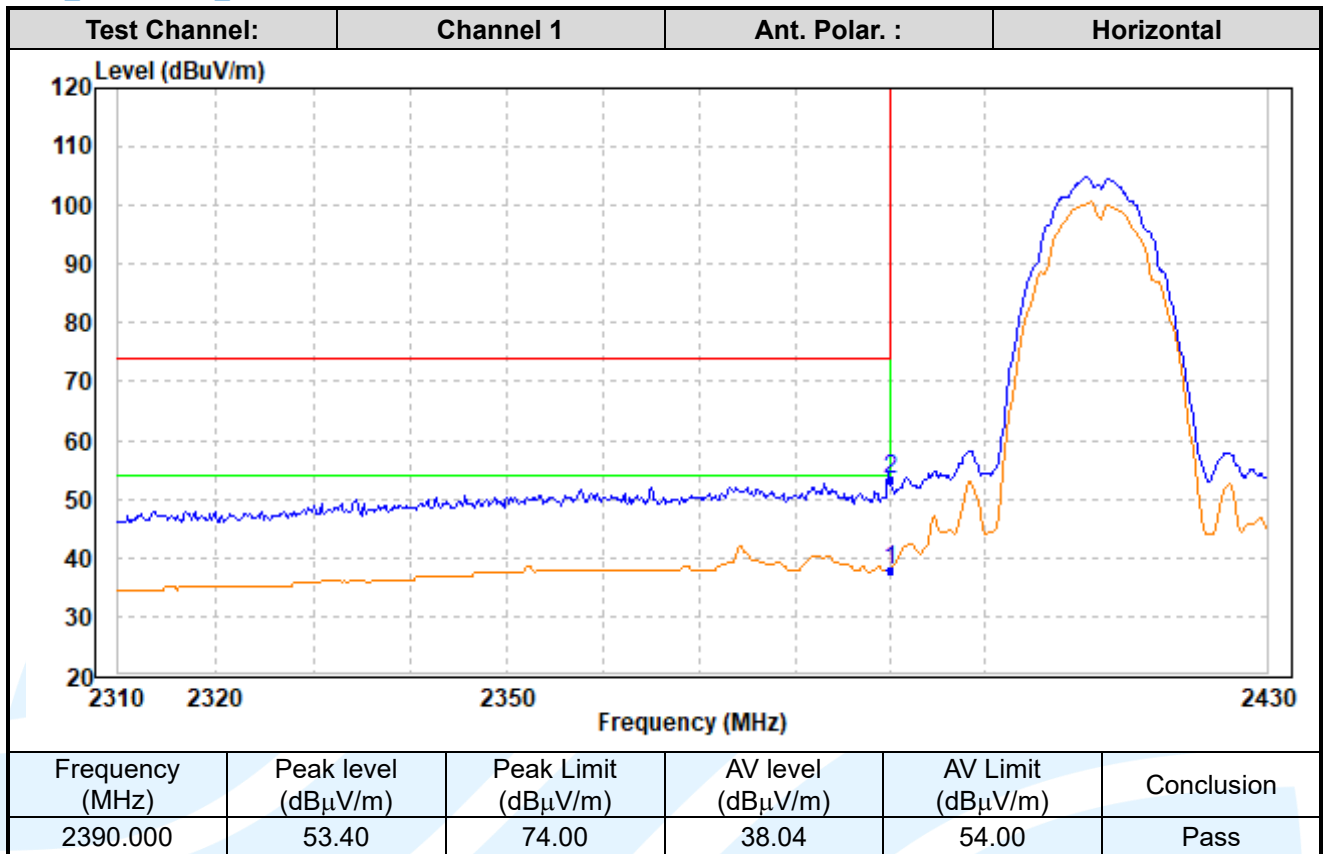

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

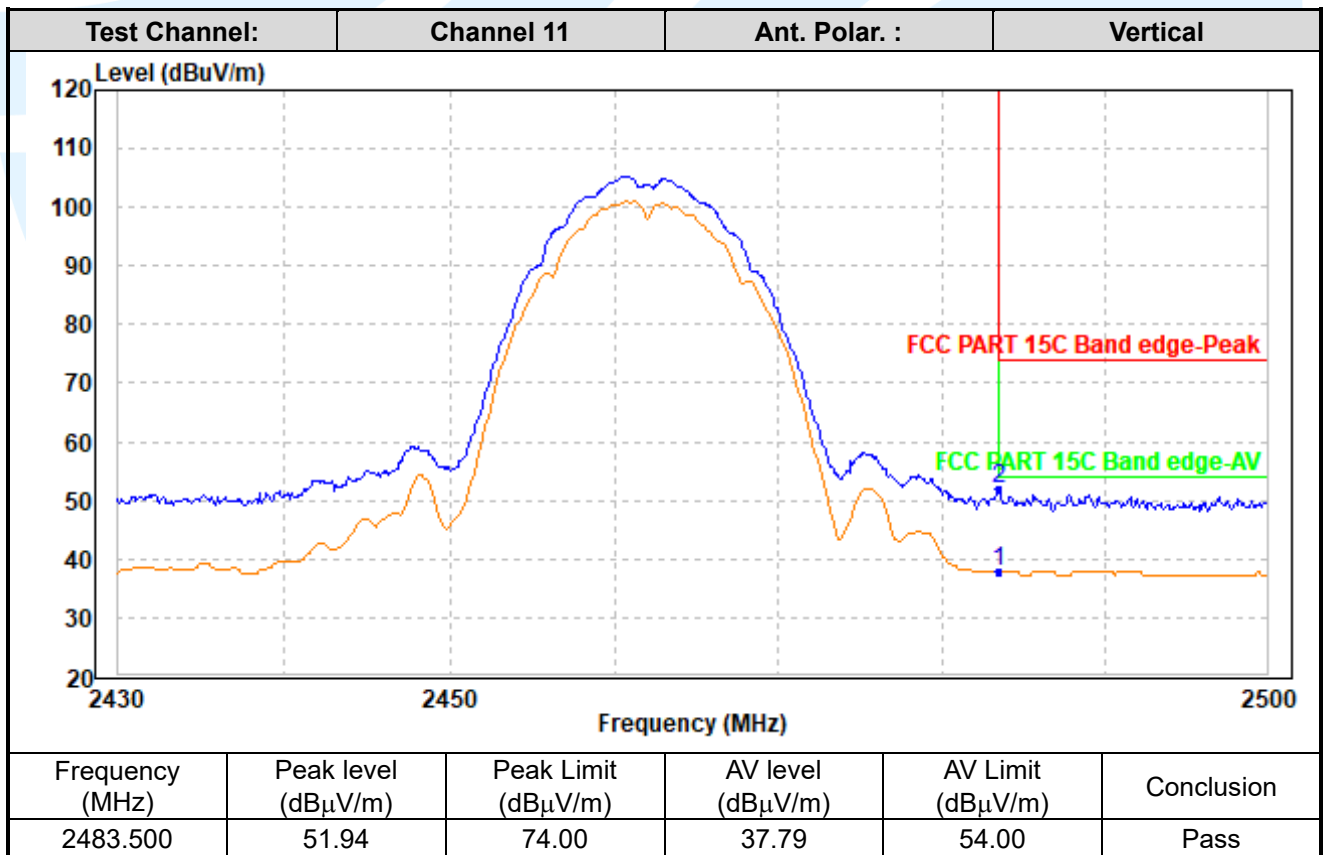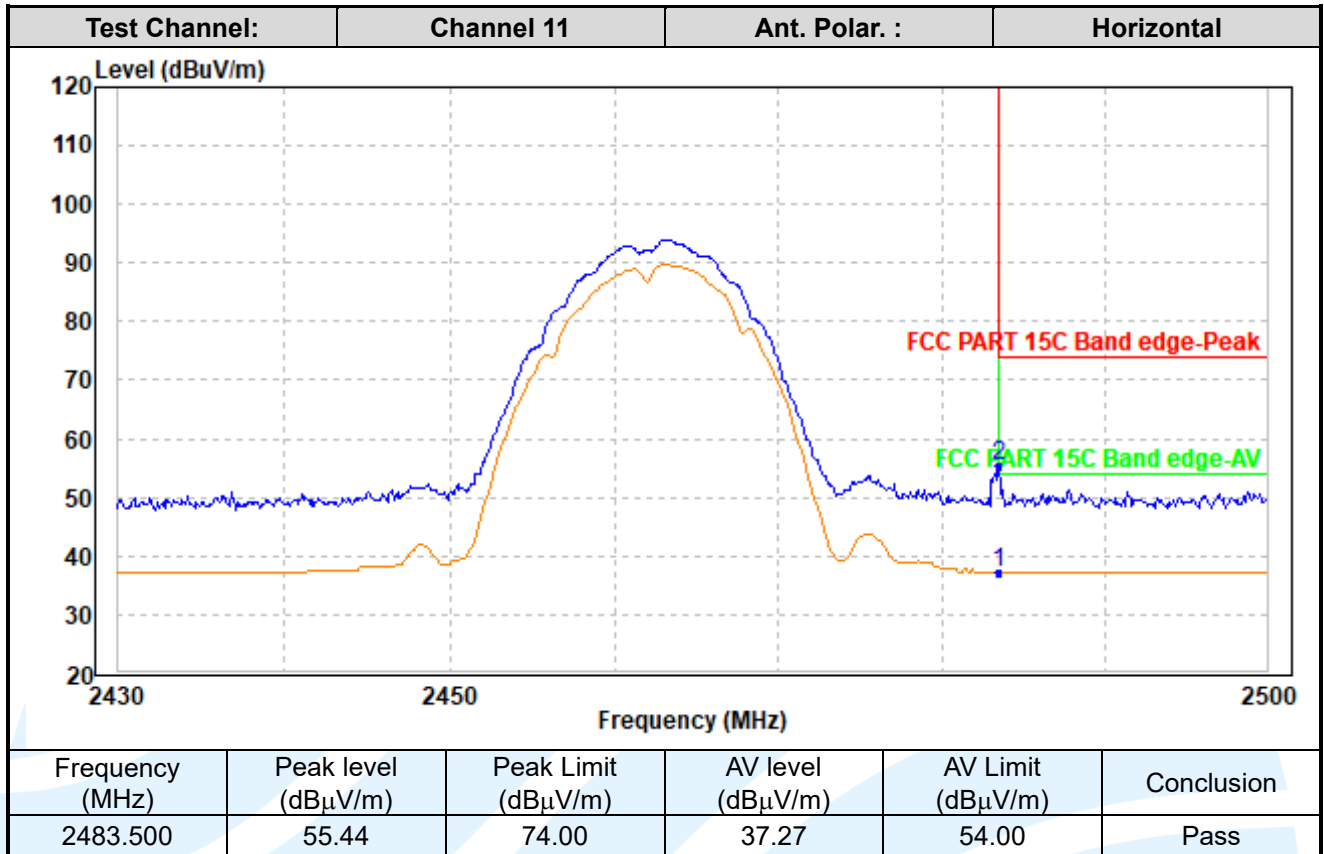

SISO_Antenna 2_ IEEE 802.11b

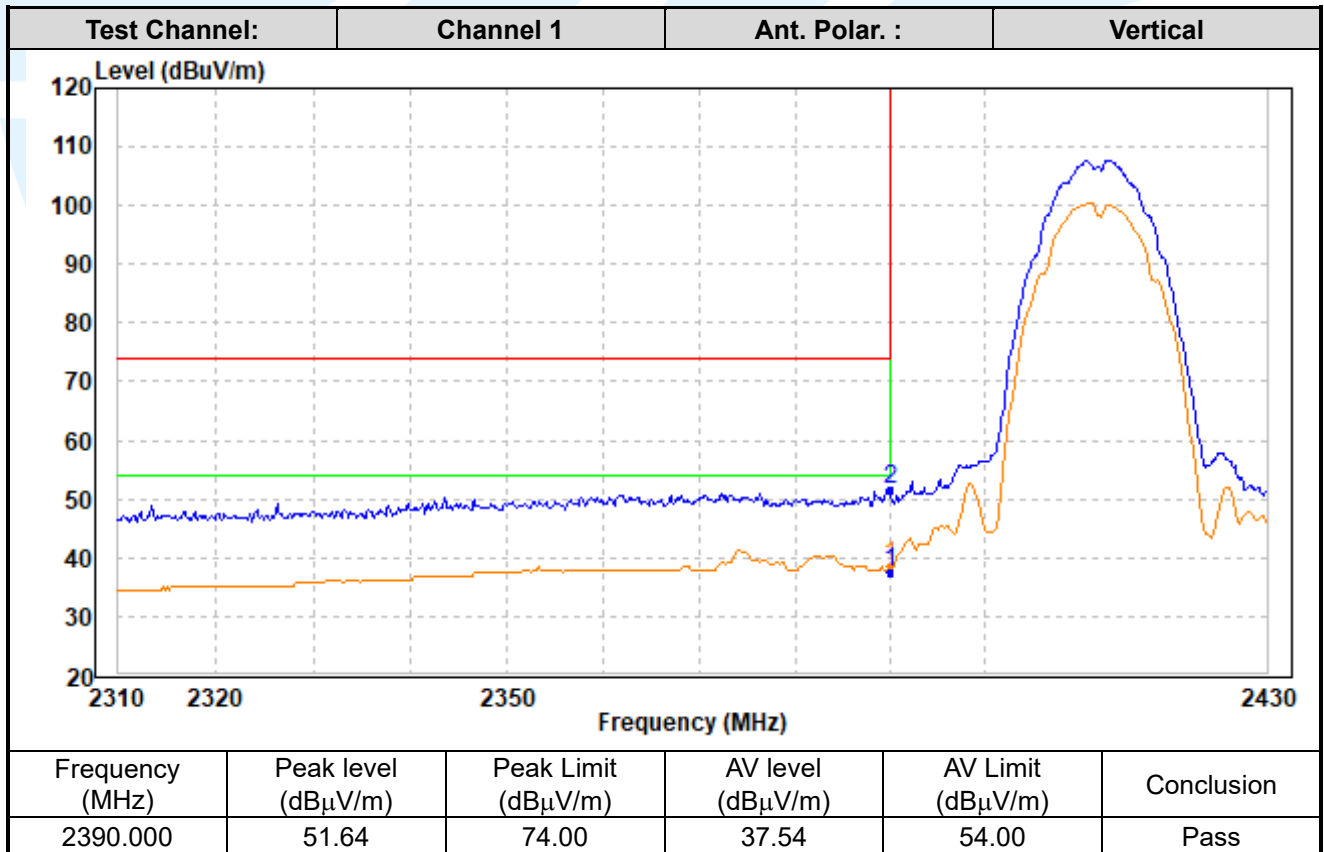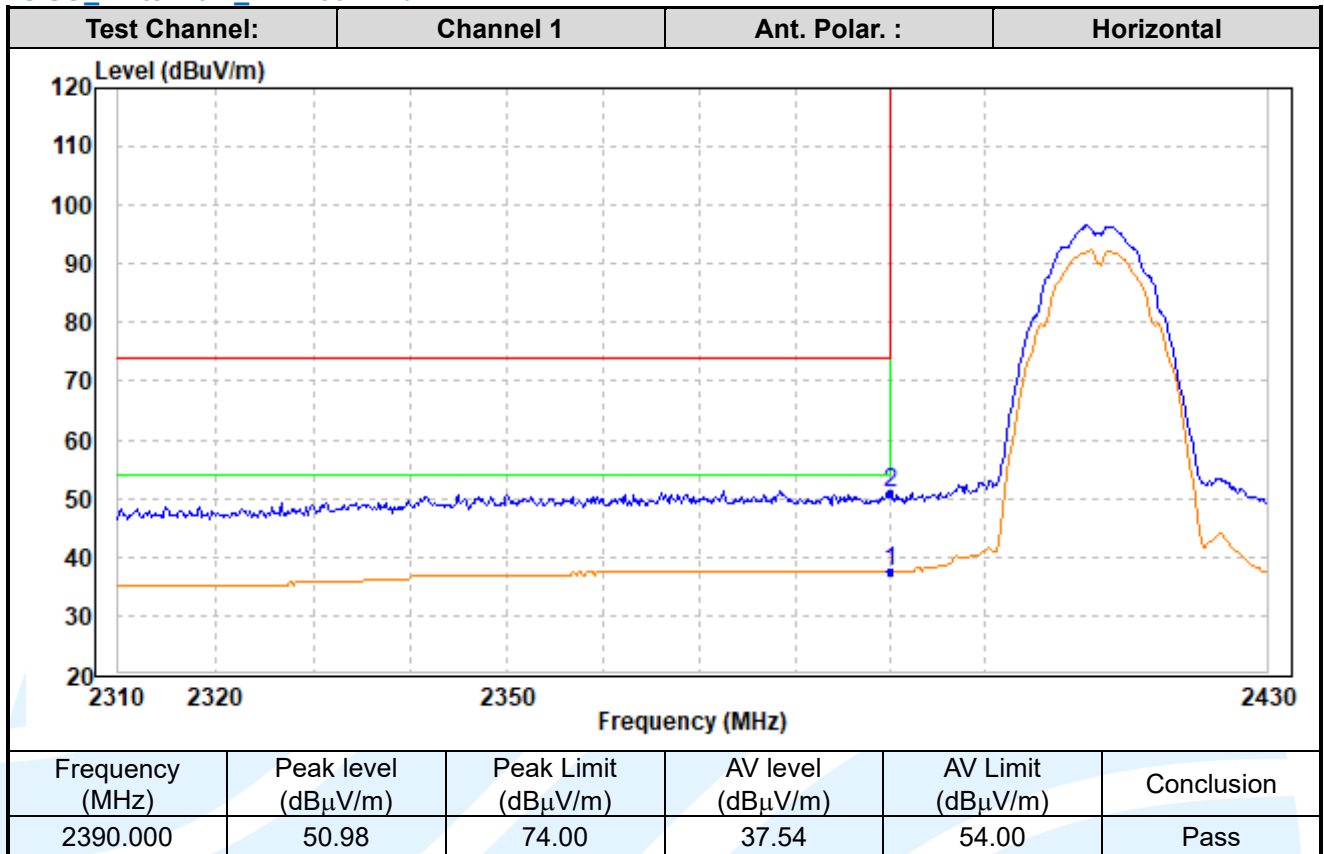

Shenzhen UnionTrust Quality and Technology Co., Ltd.



Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

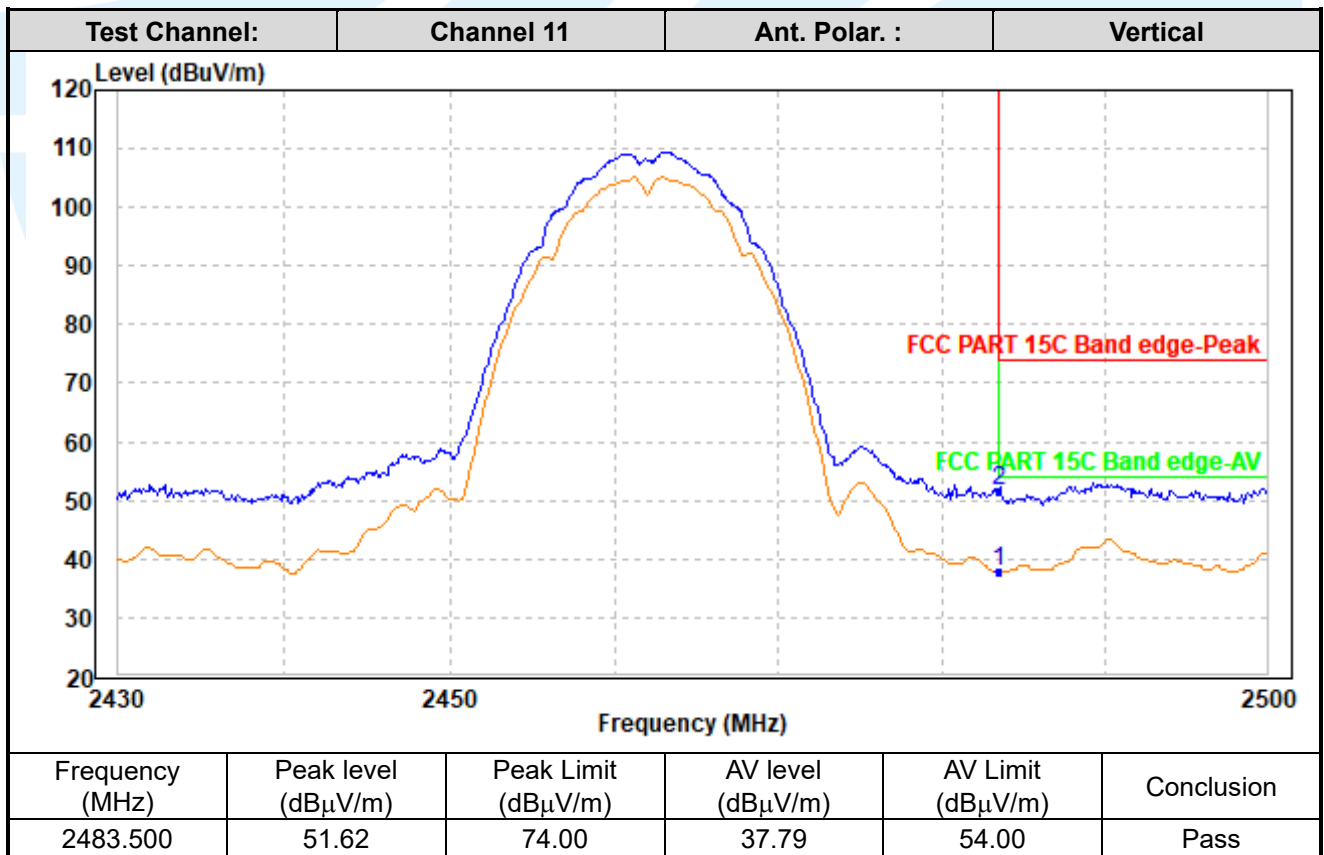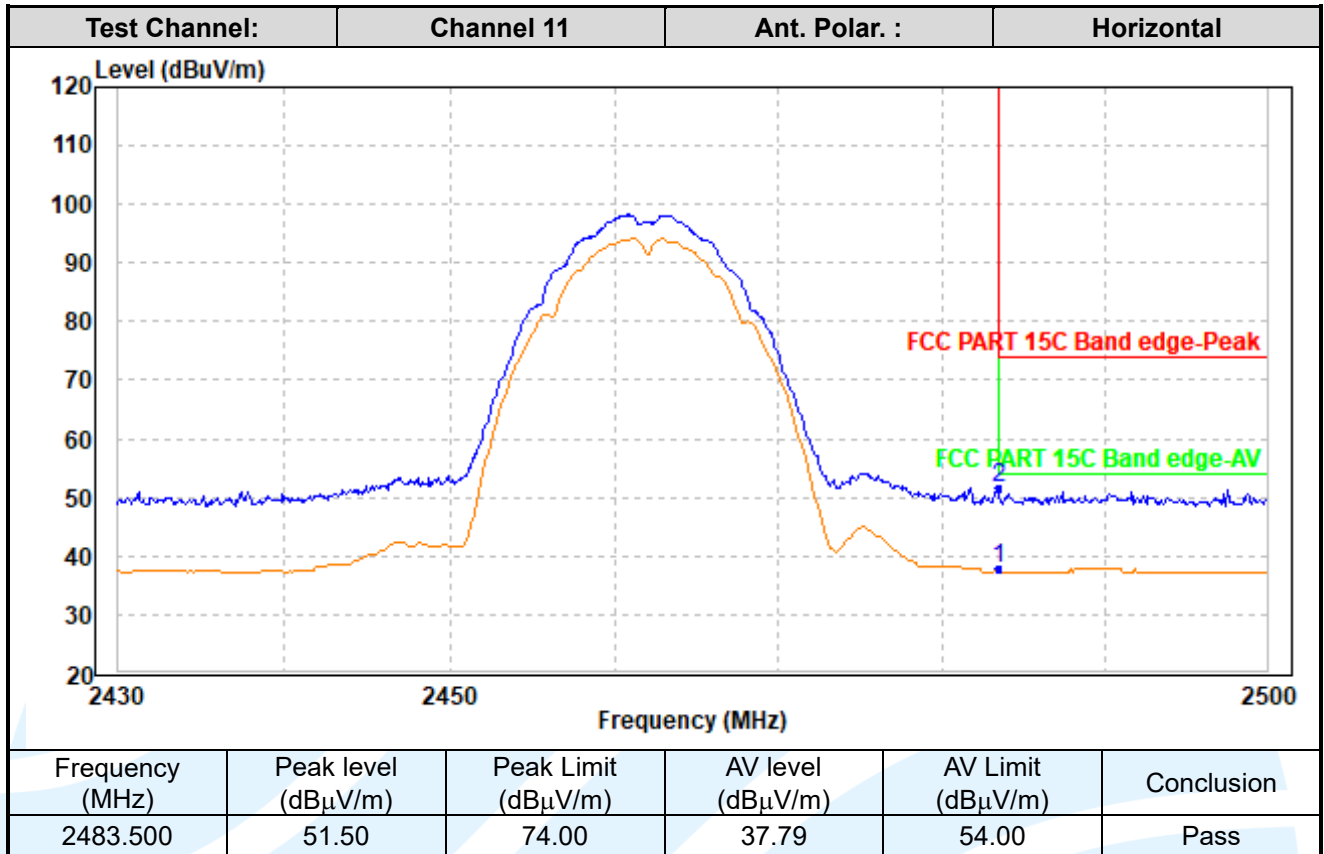

SISO_Antenna 1_ IEEE 802.11g

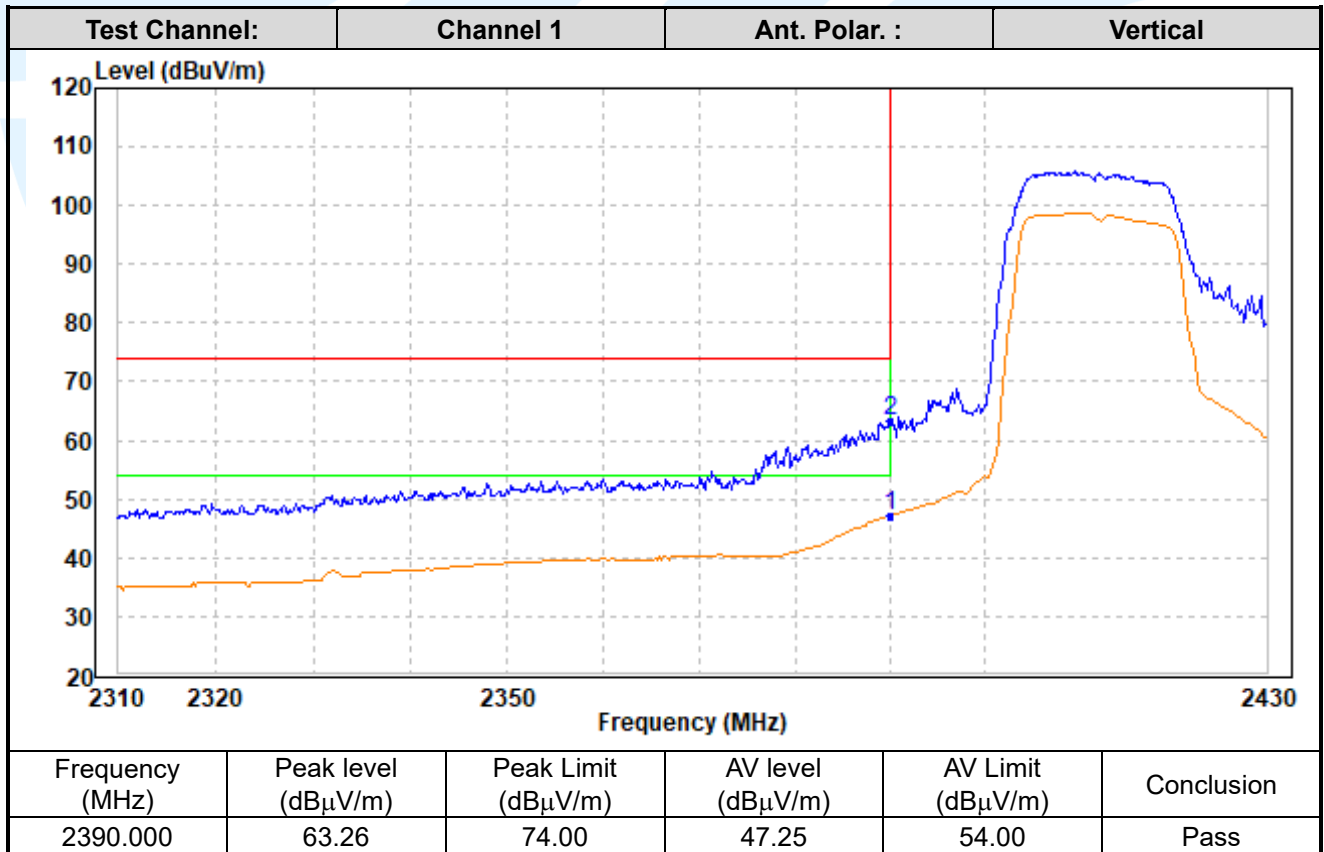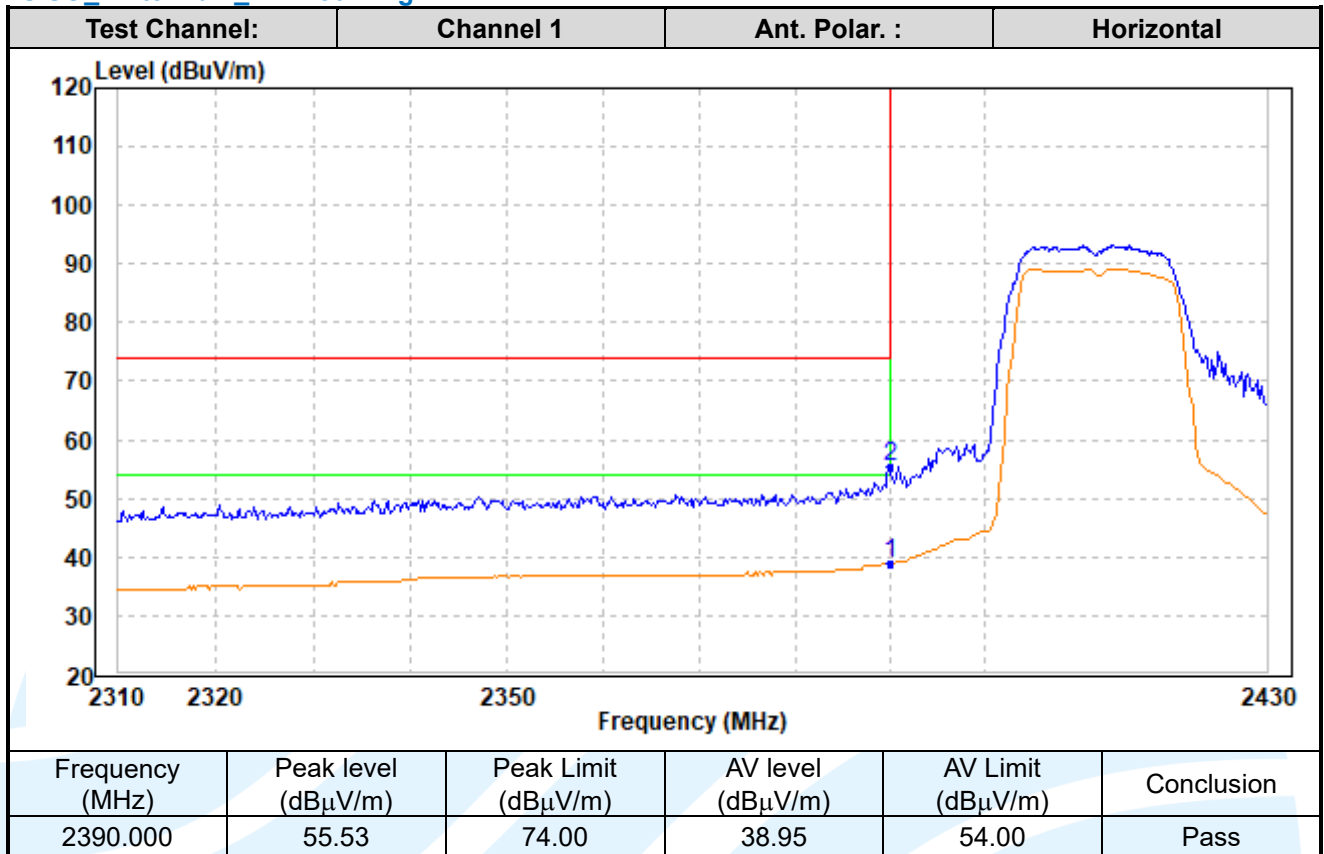

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

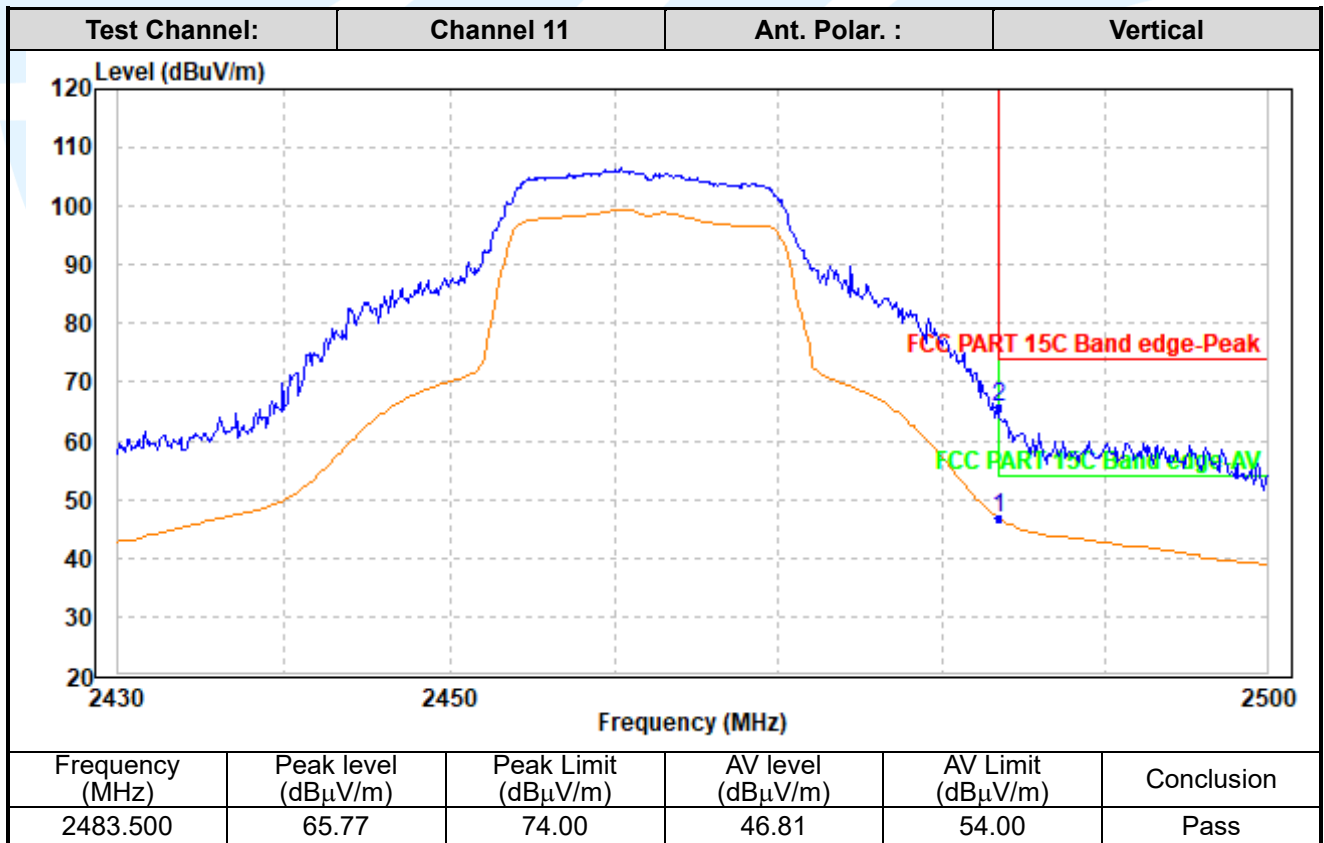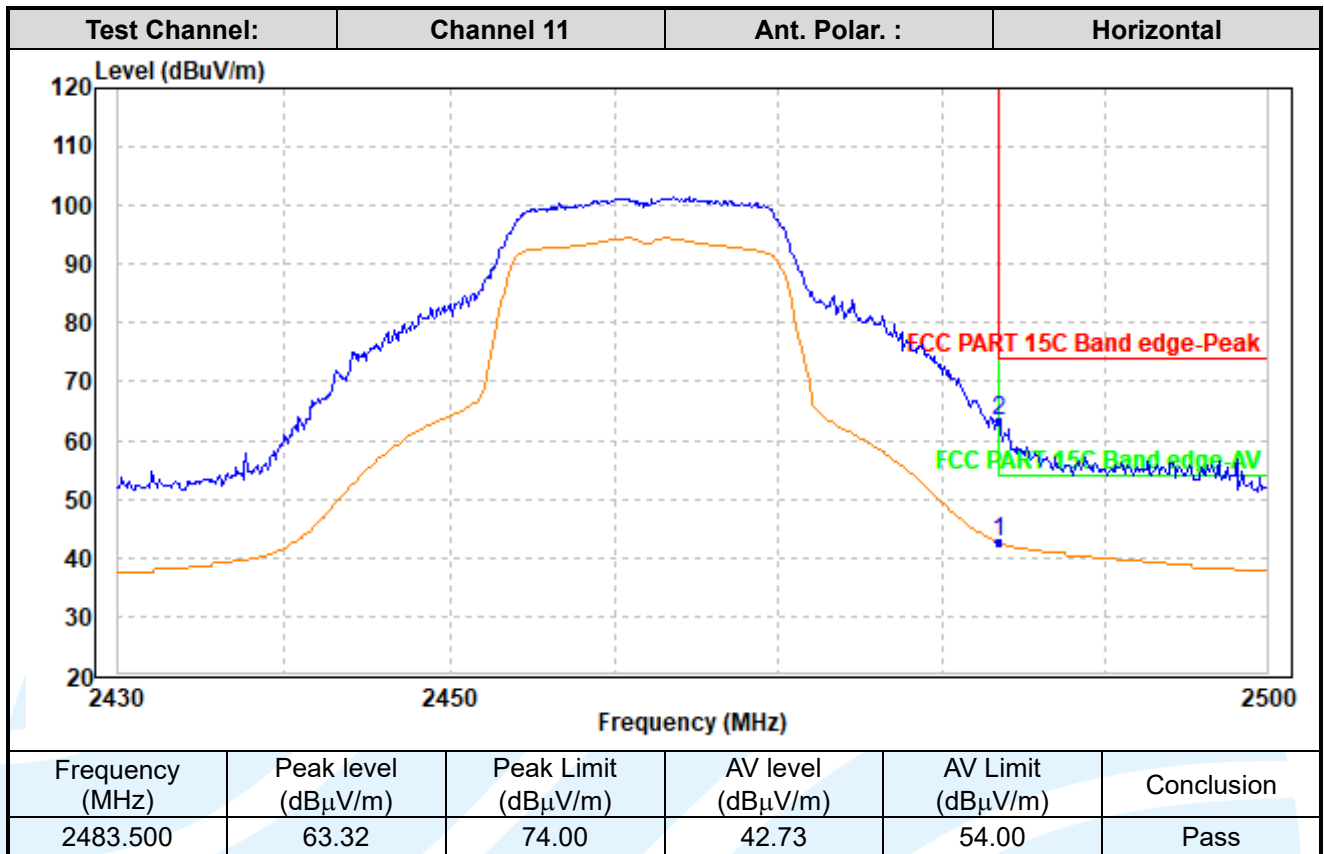

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

SISO_Antenna 2_ IEEE 802.11g

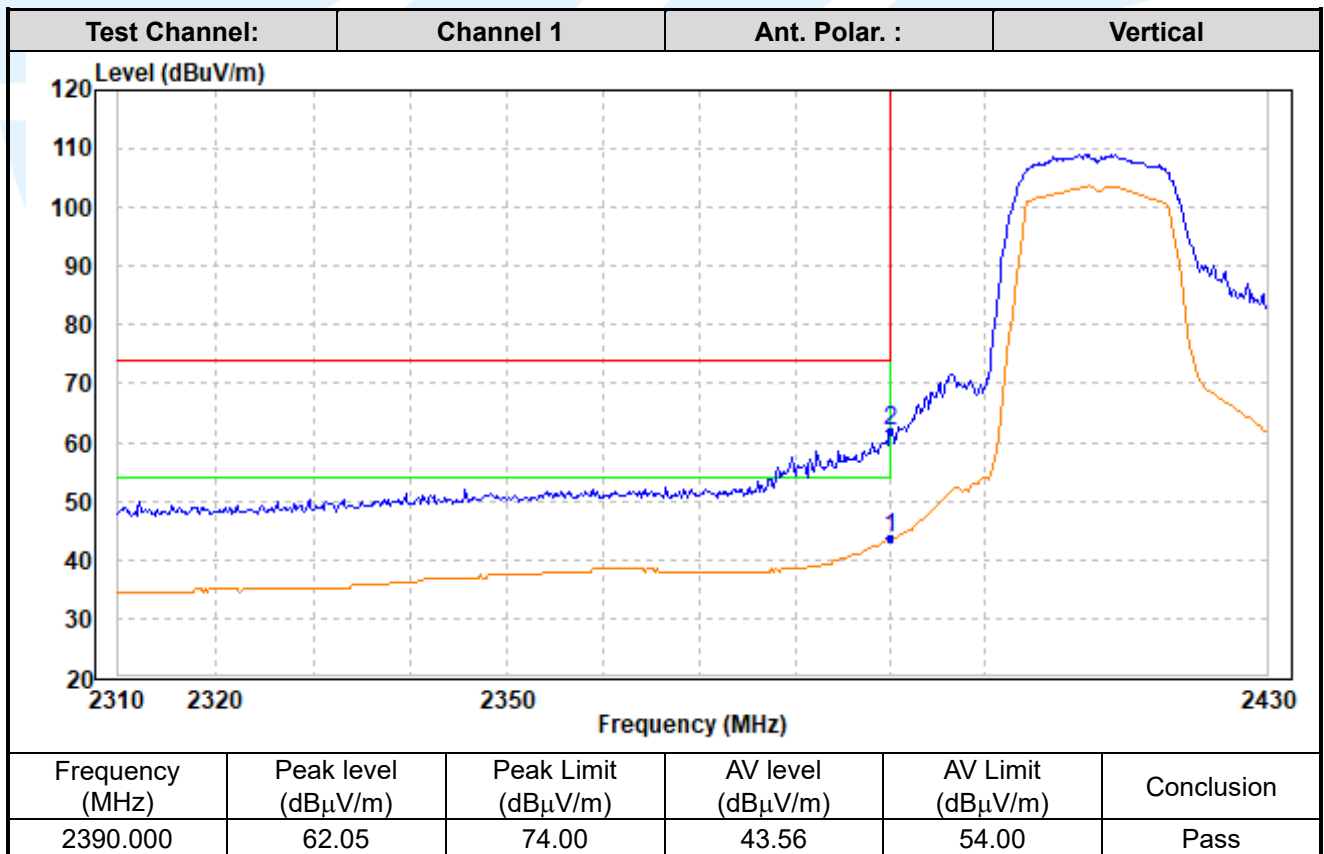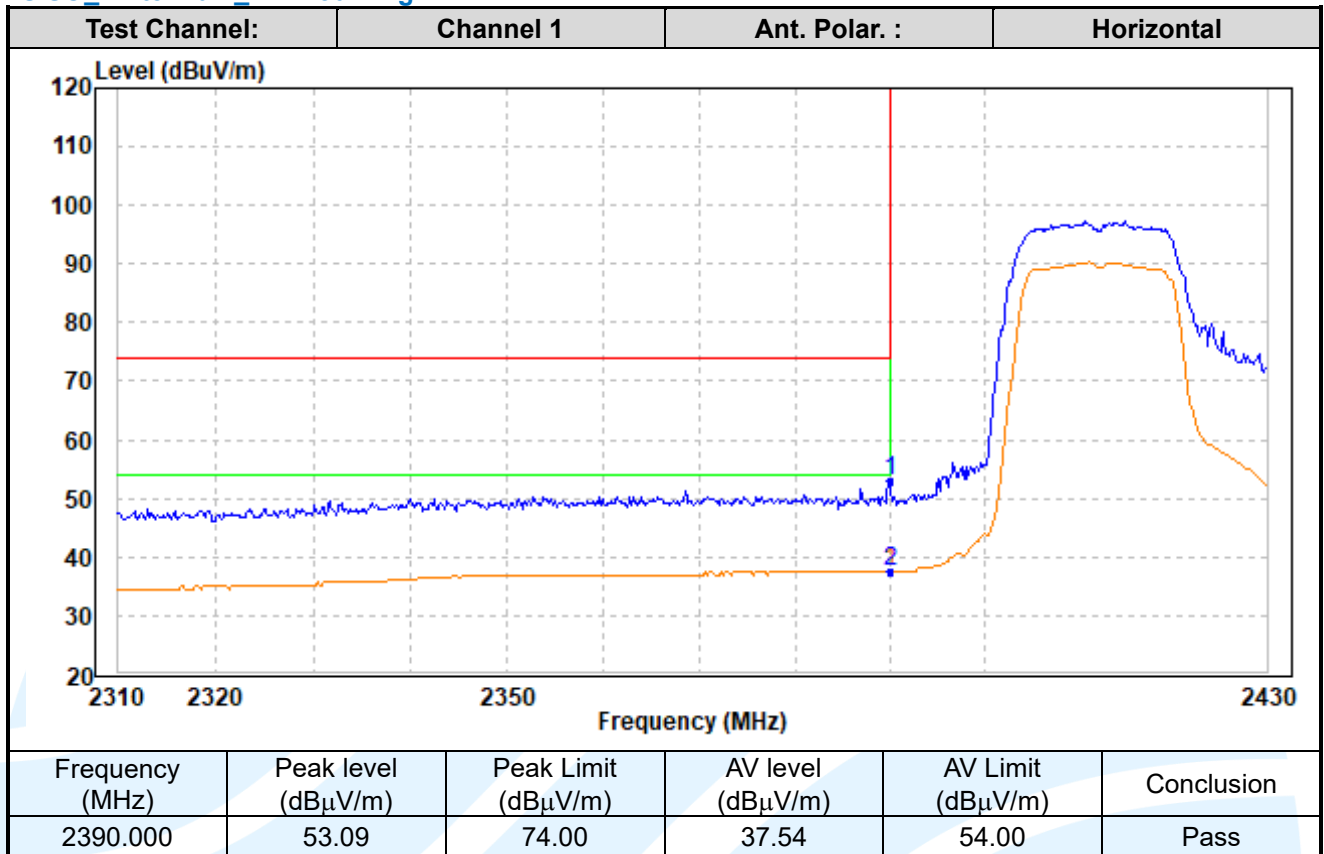

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

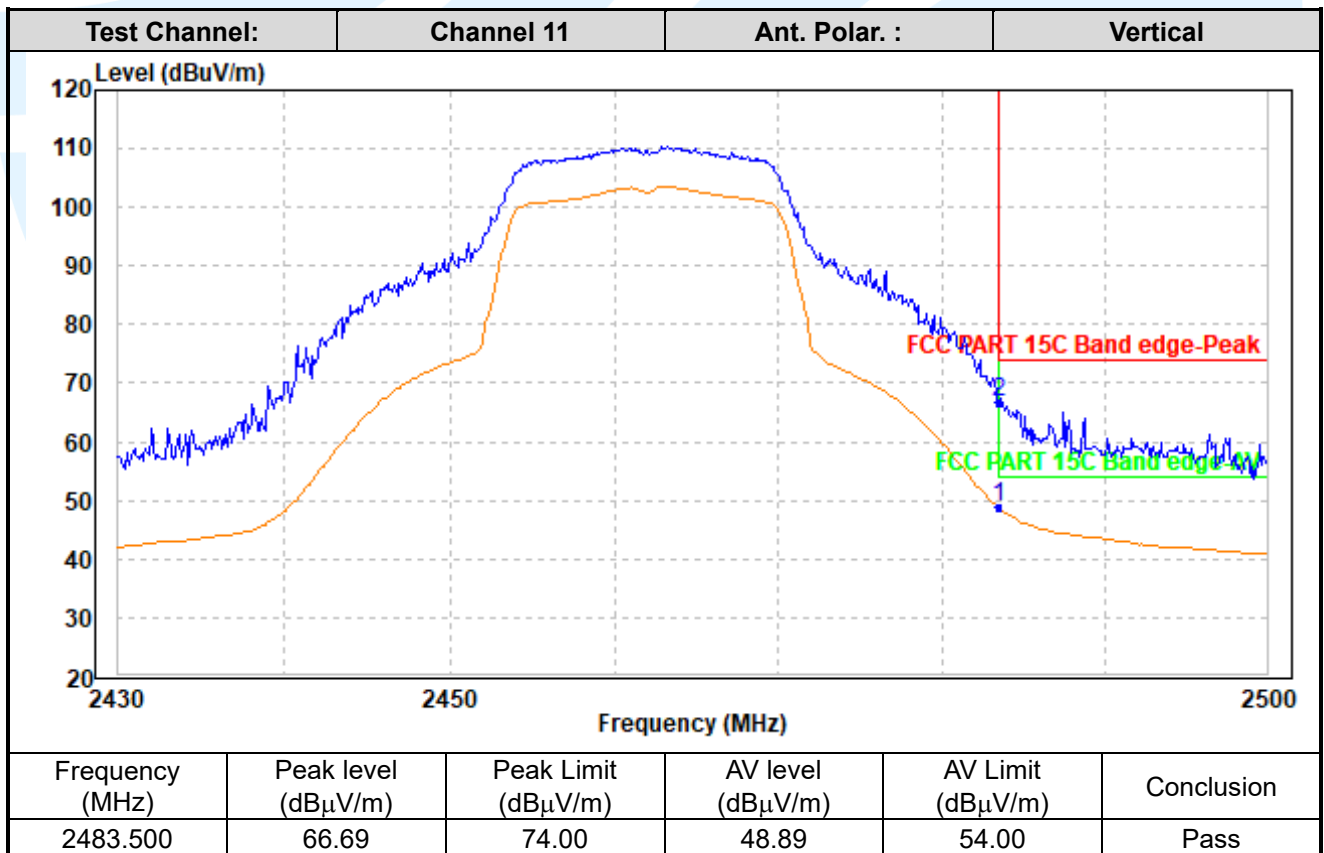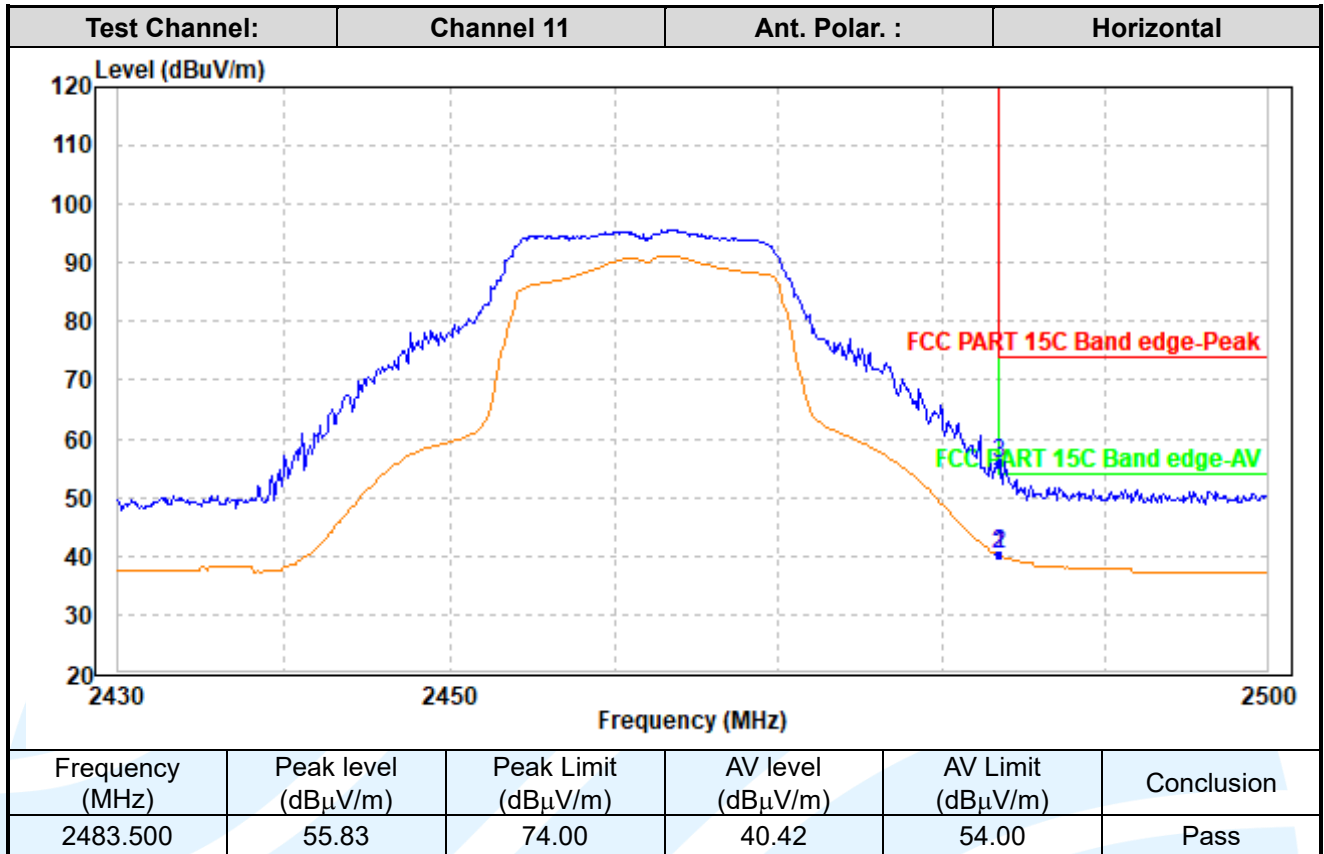

MIMO_ IEEE 802.11n-HT20

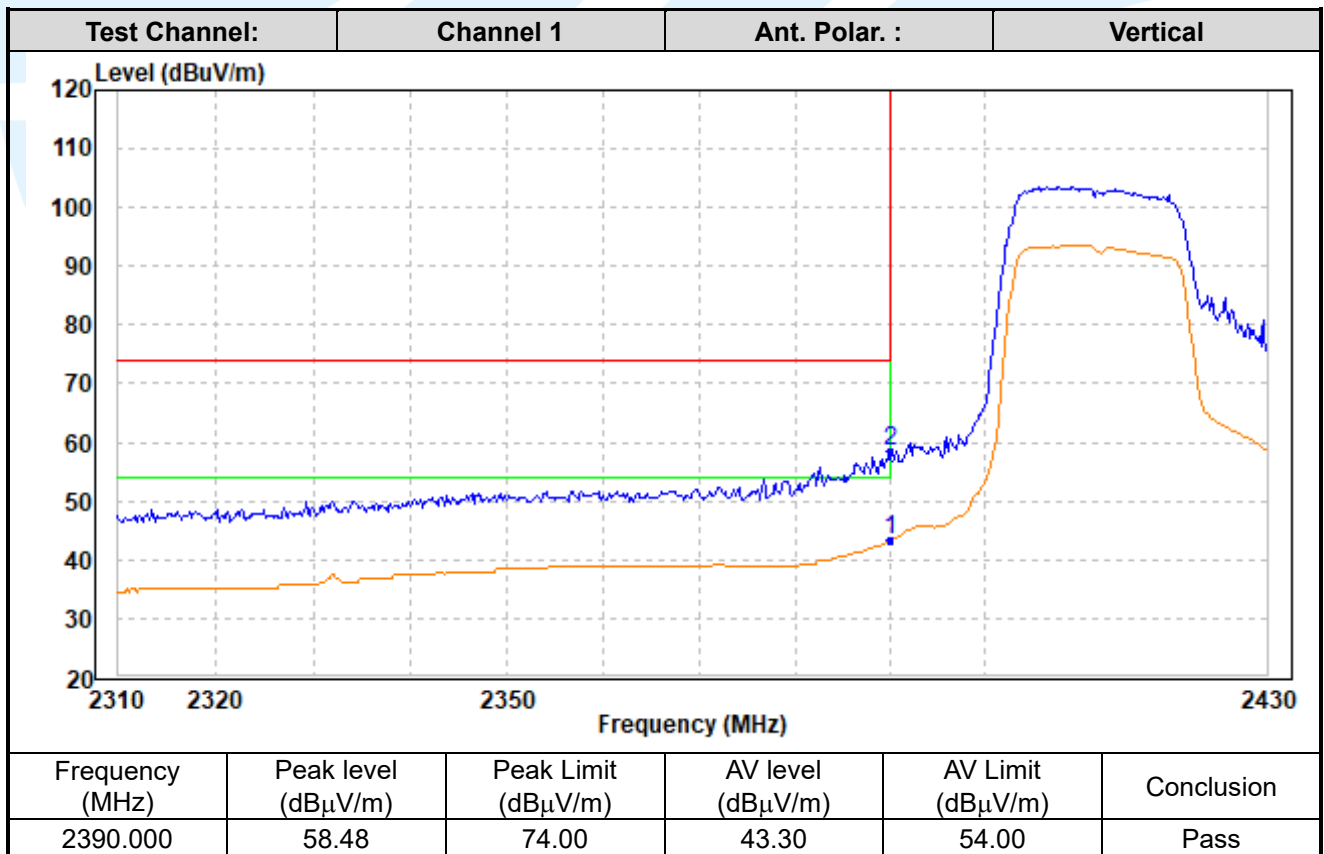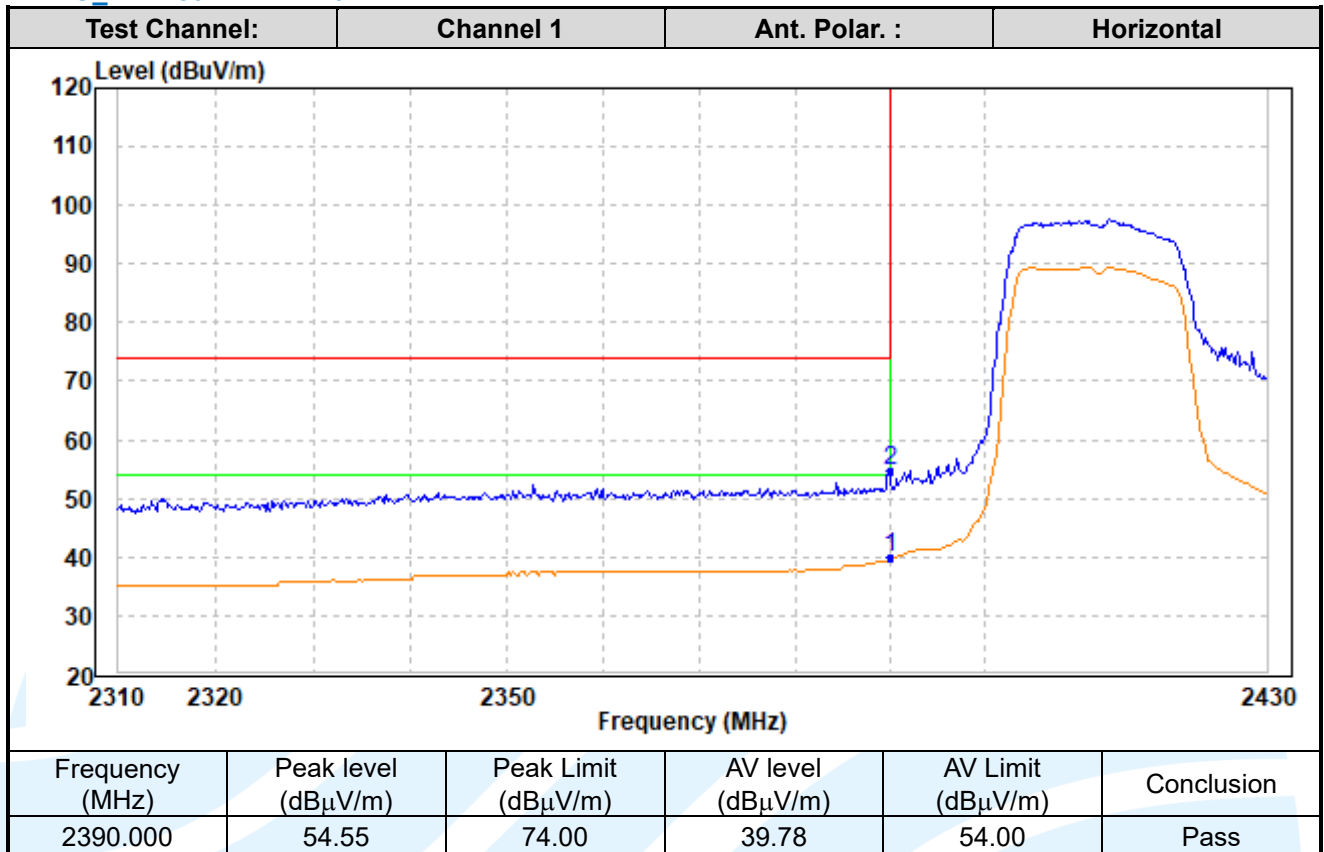
Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

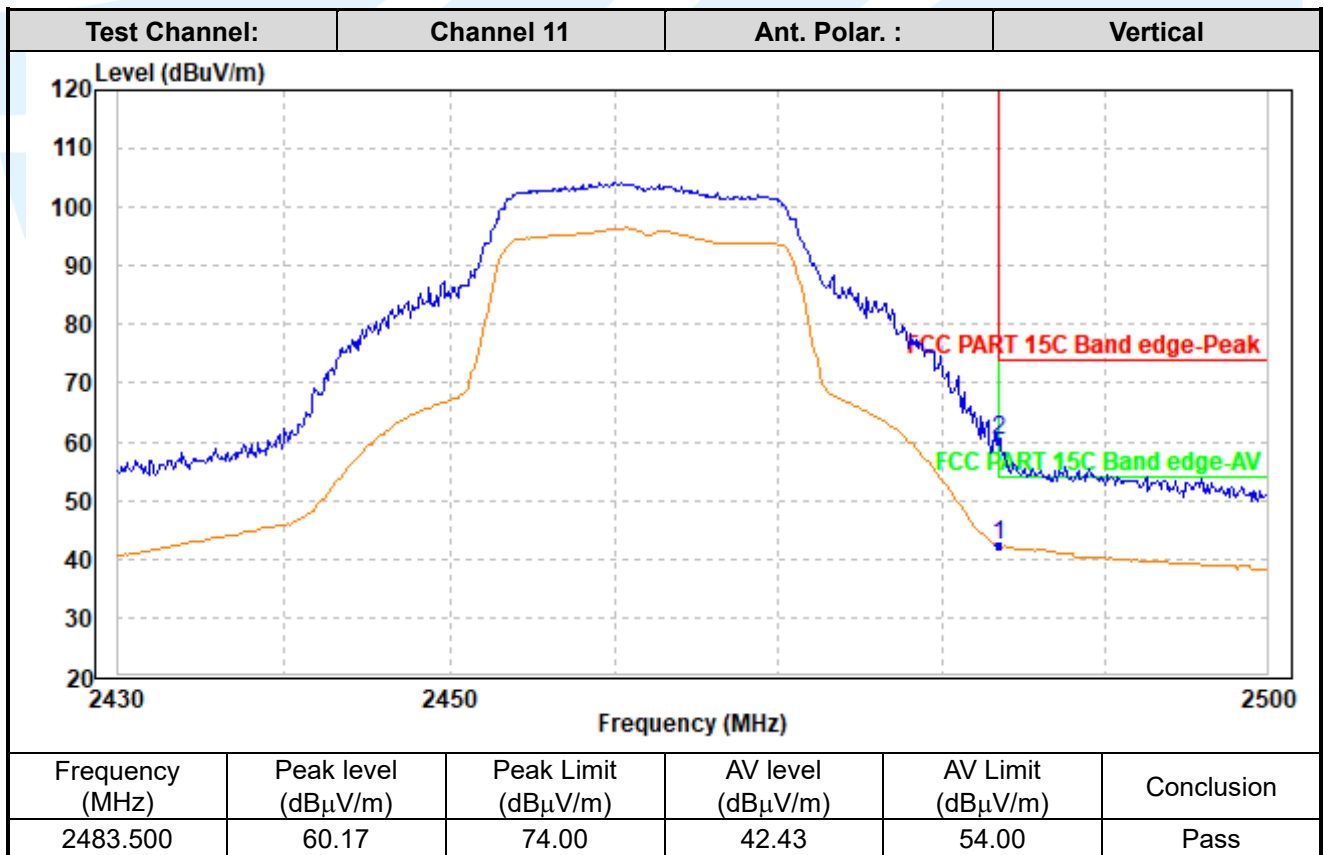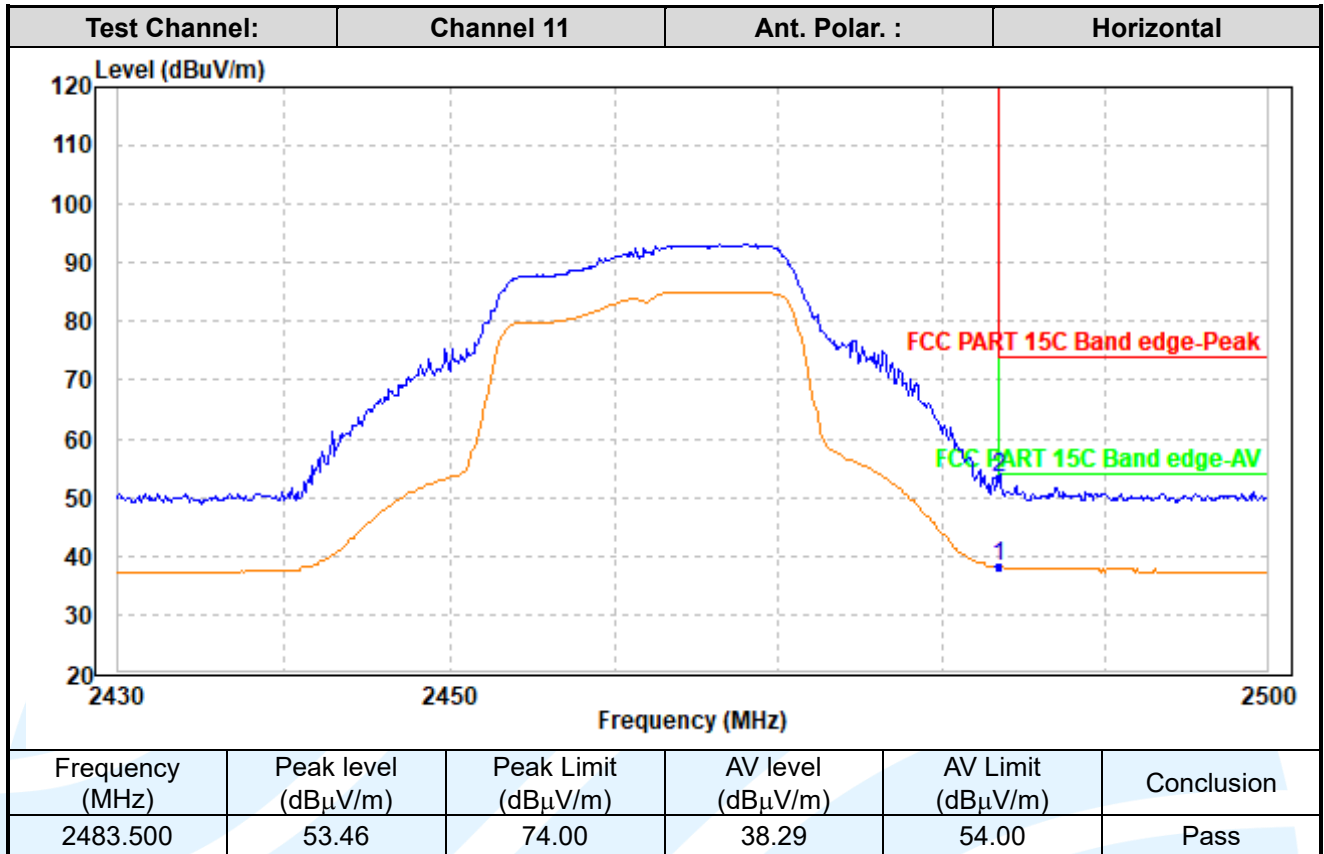

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

MIMO_ IEEE 802.11n-HT40

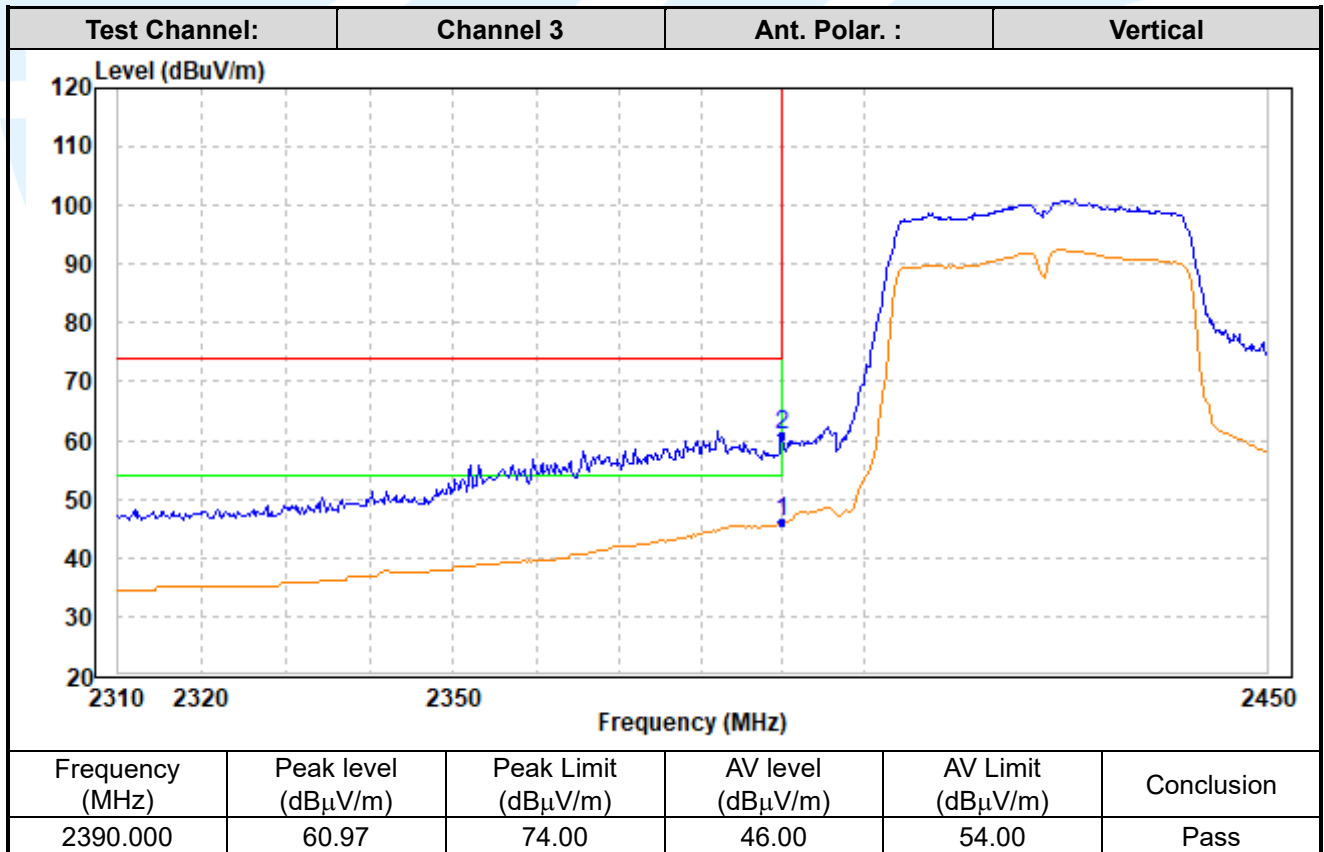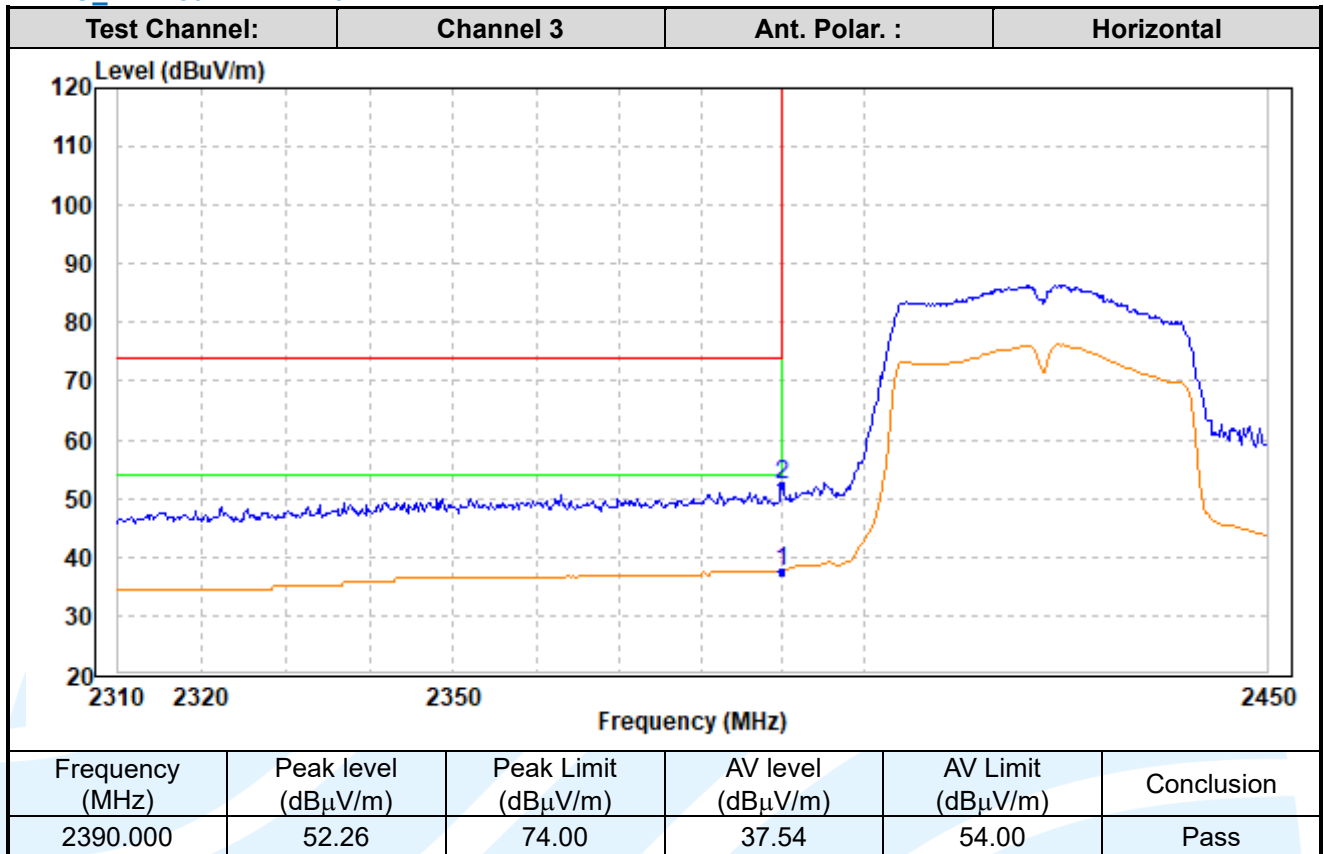
Shenzhen UnionTrust Quality and Technology Co., Ltd.



Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

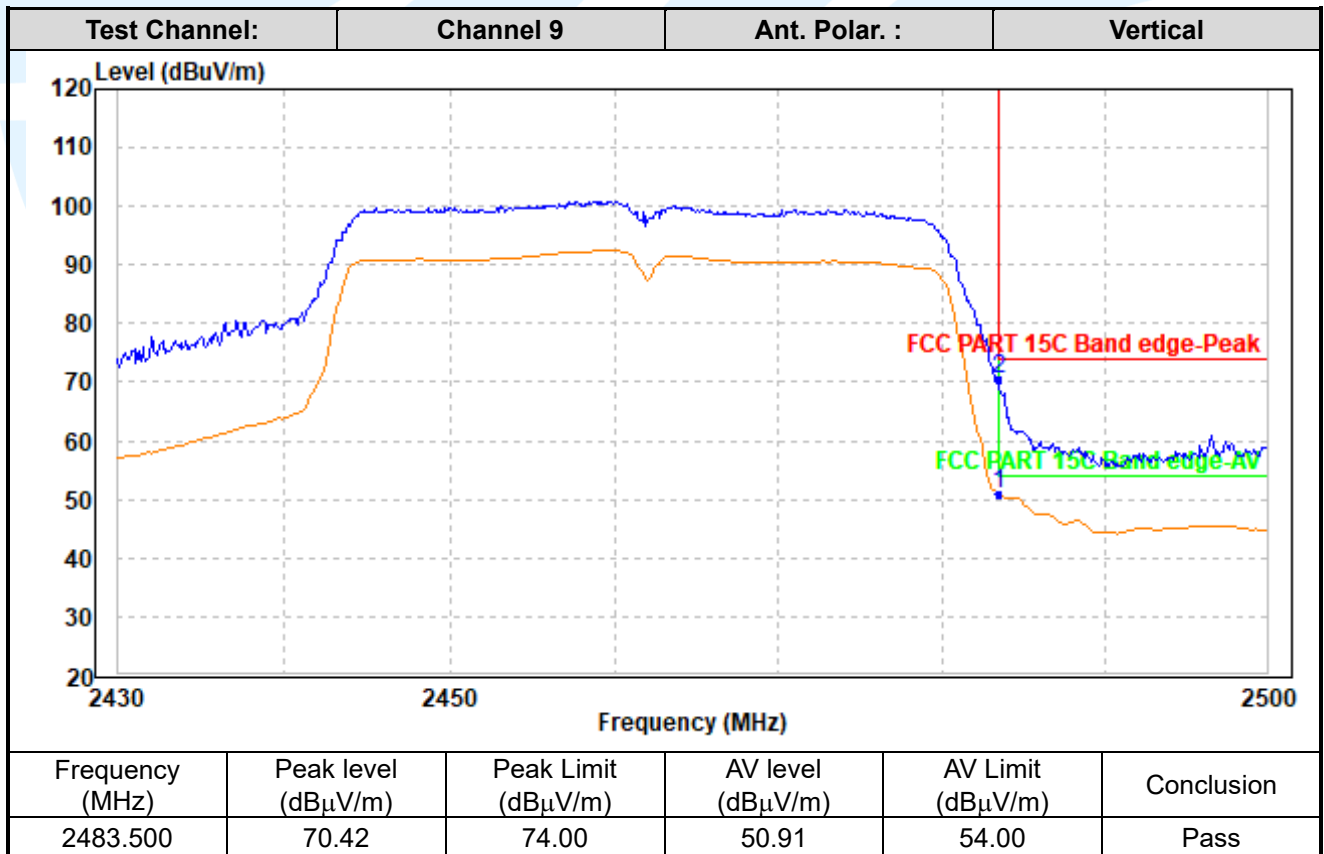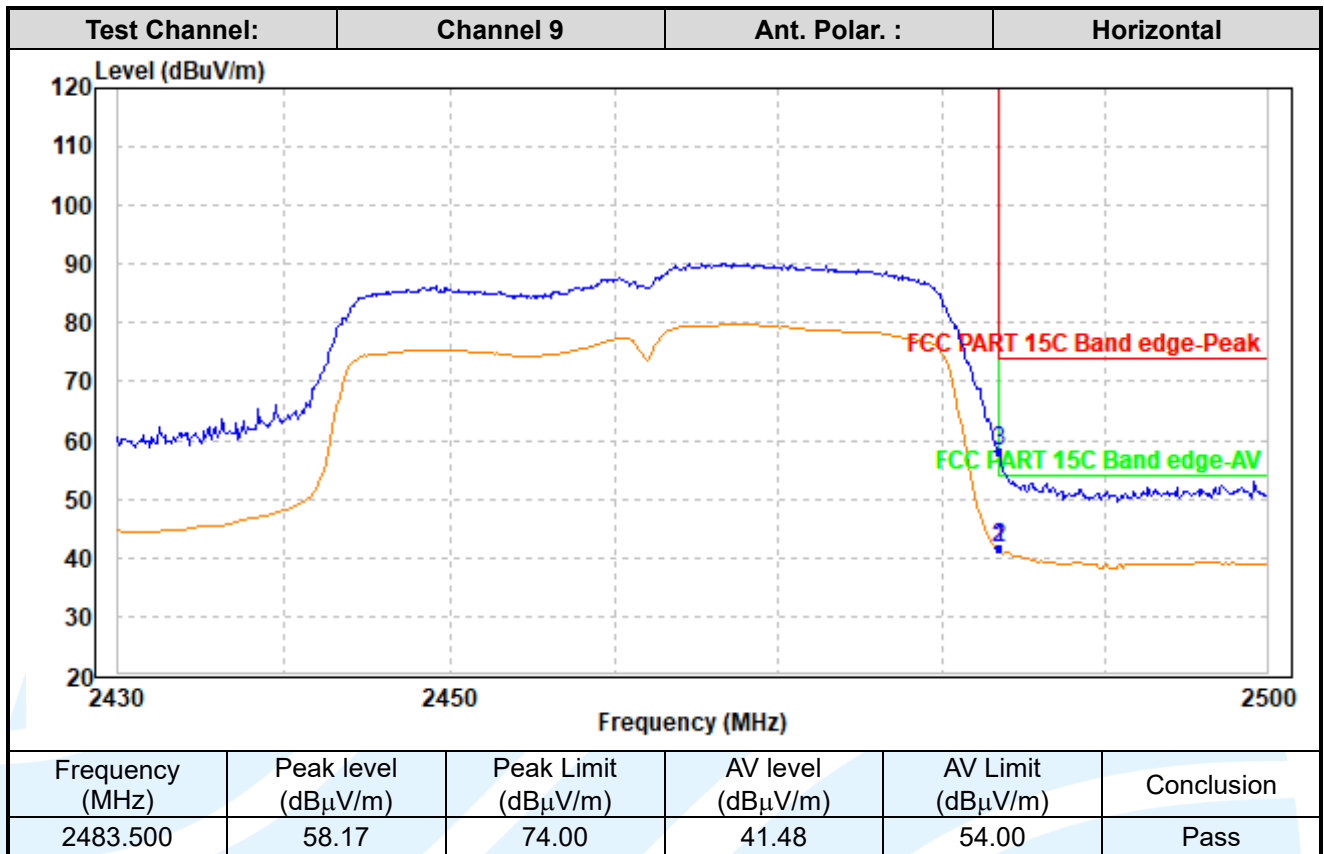

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

MIMO_ IEEE 802.11ax-HT20_SU

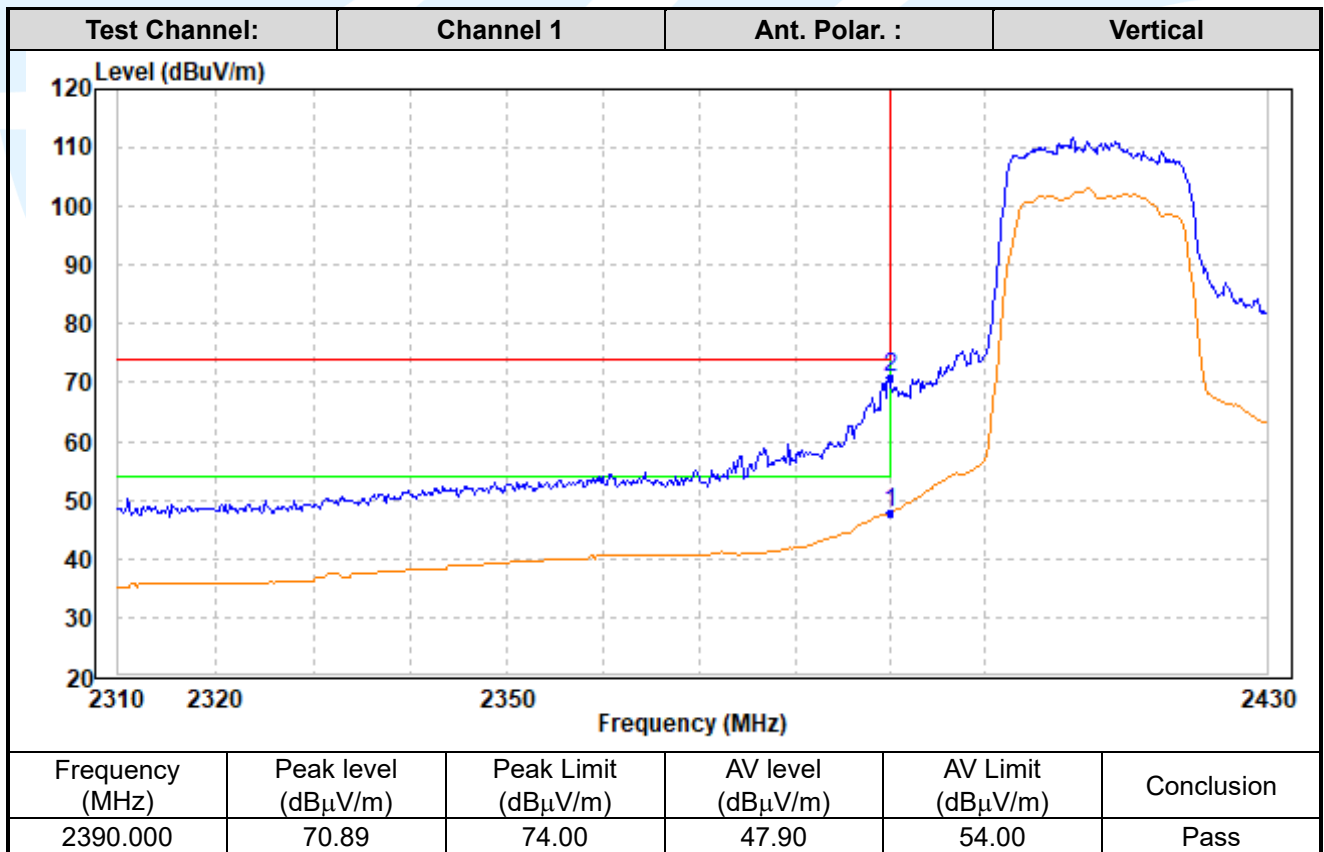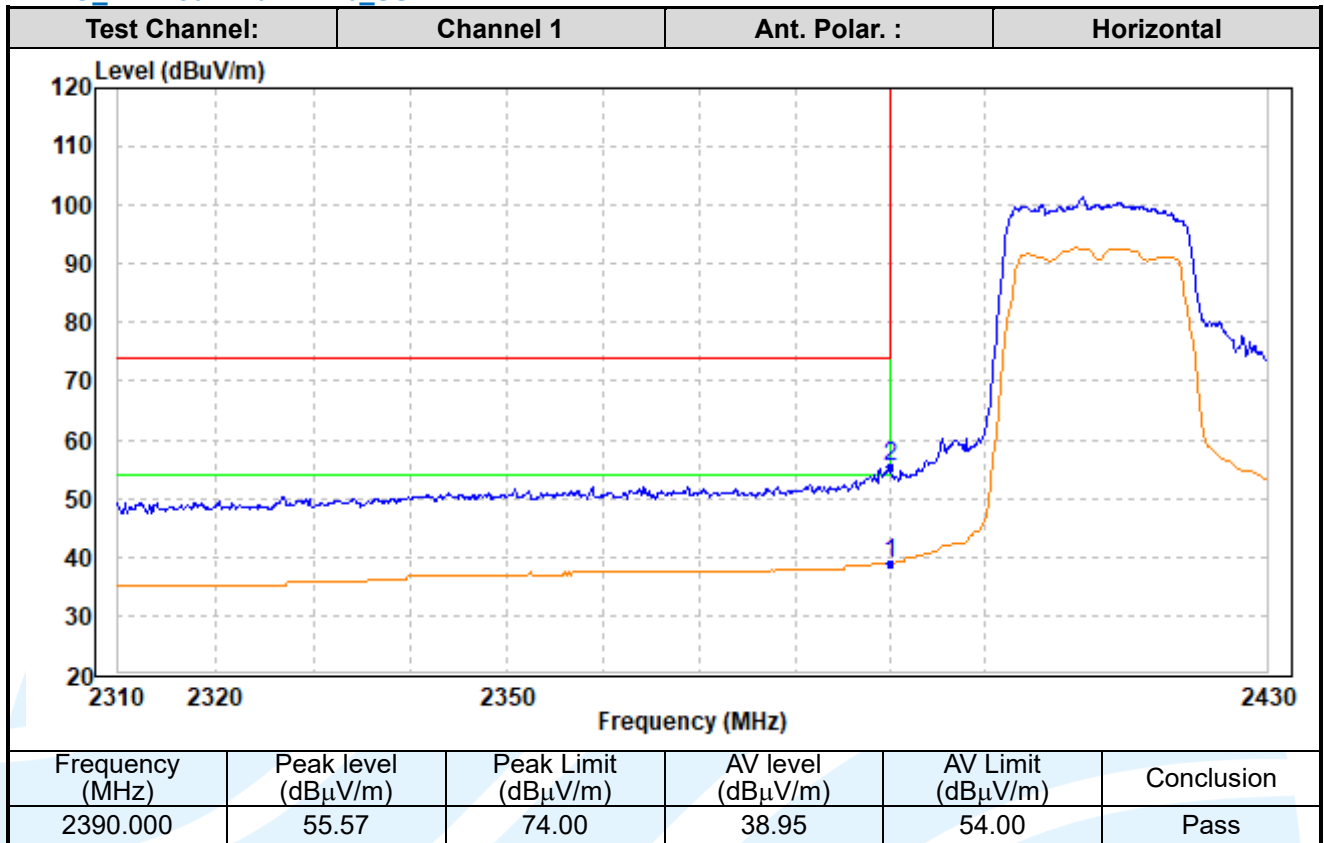
Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

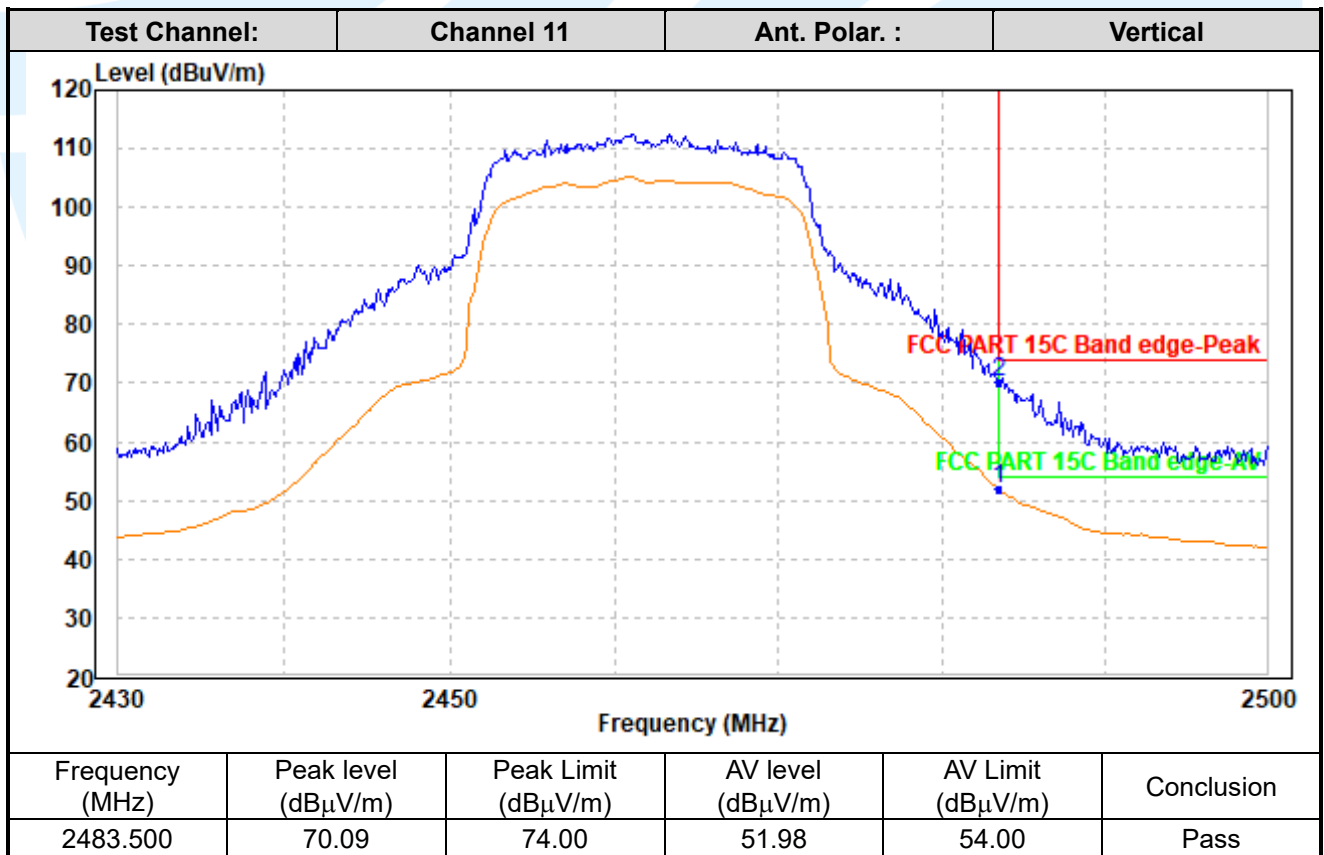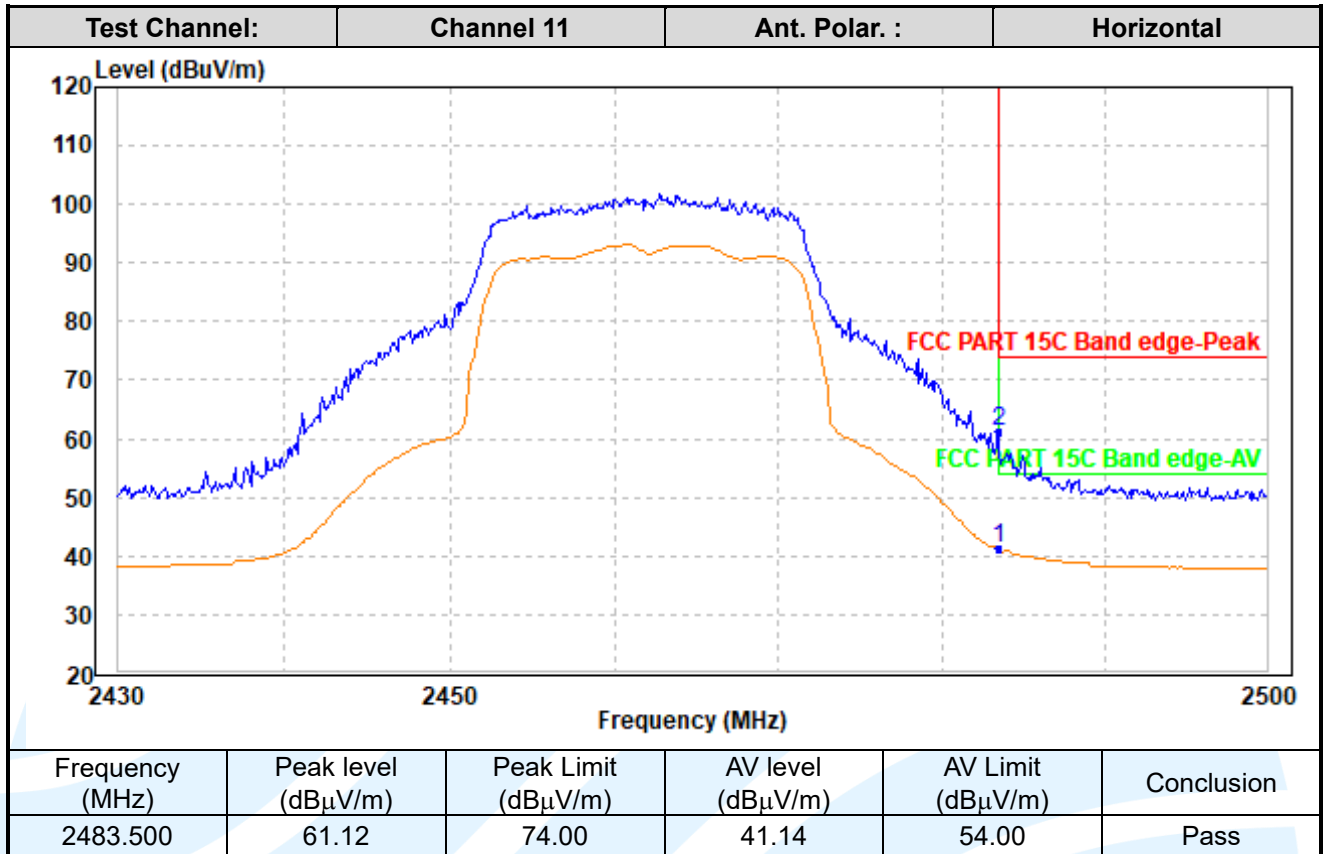

MIMO_ IEEE 802.11ax-HE40_SU

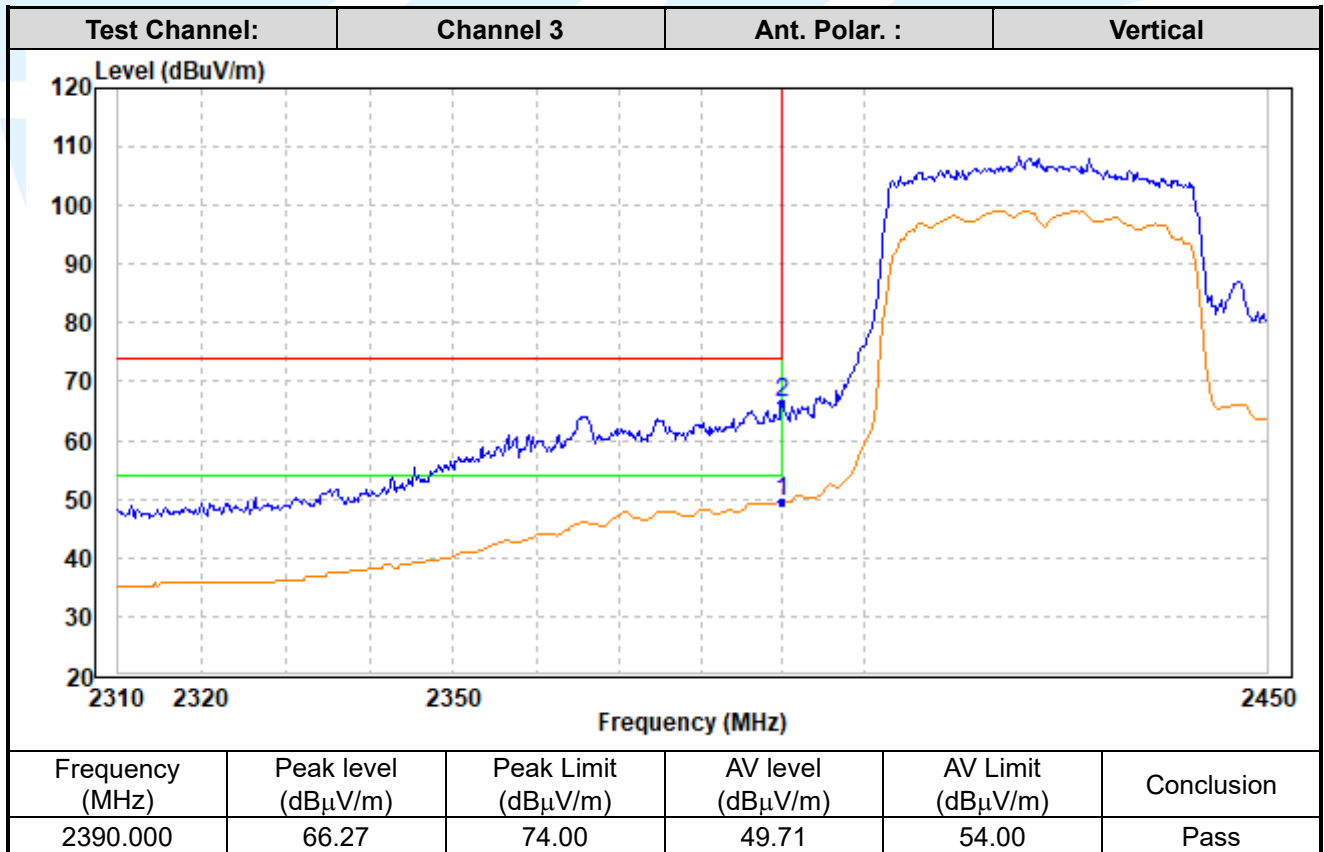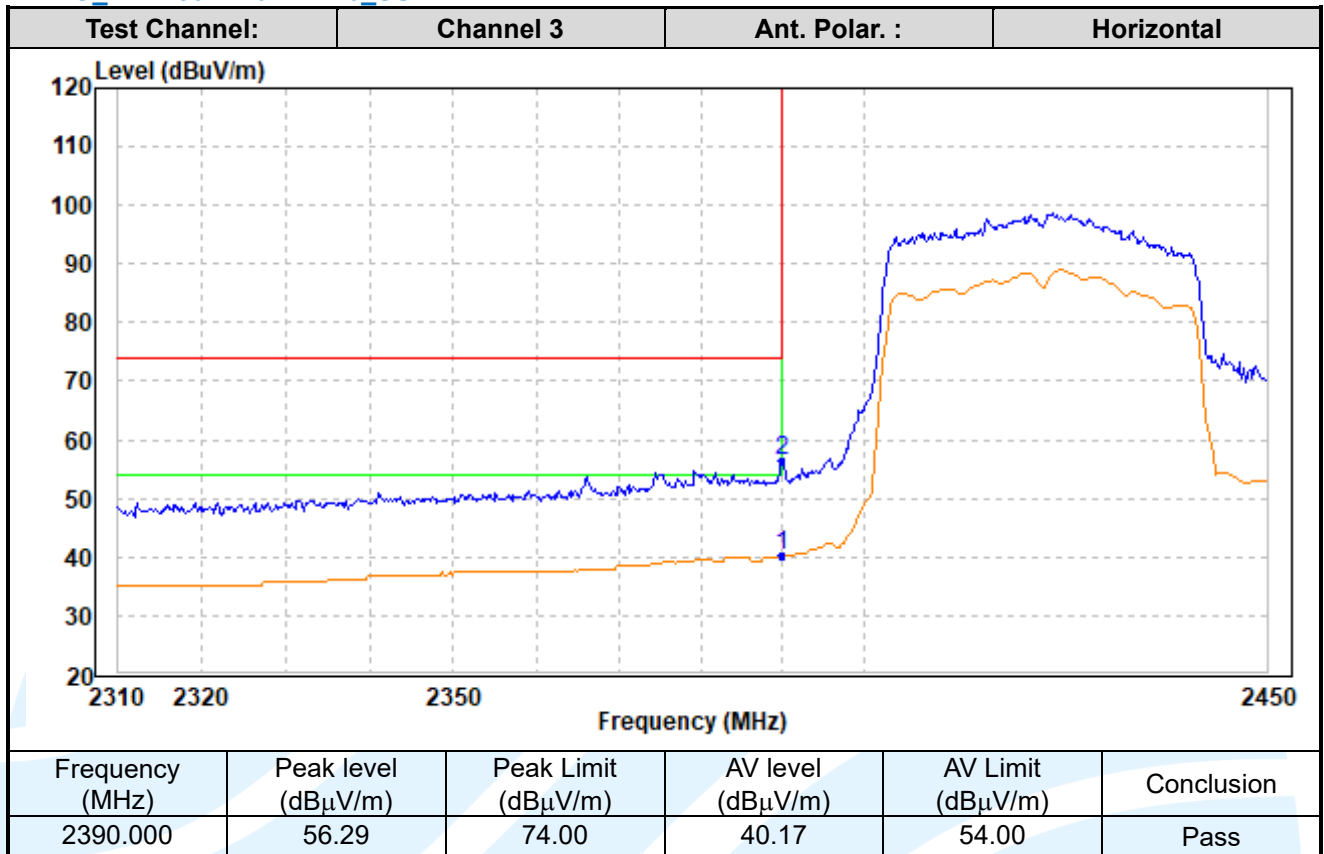
Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

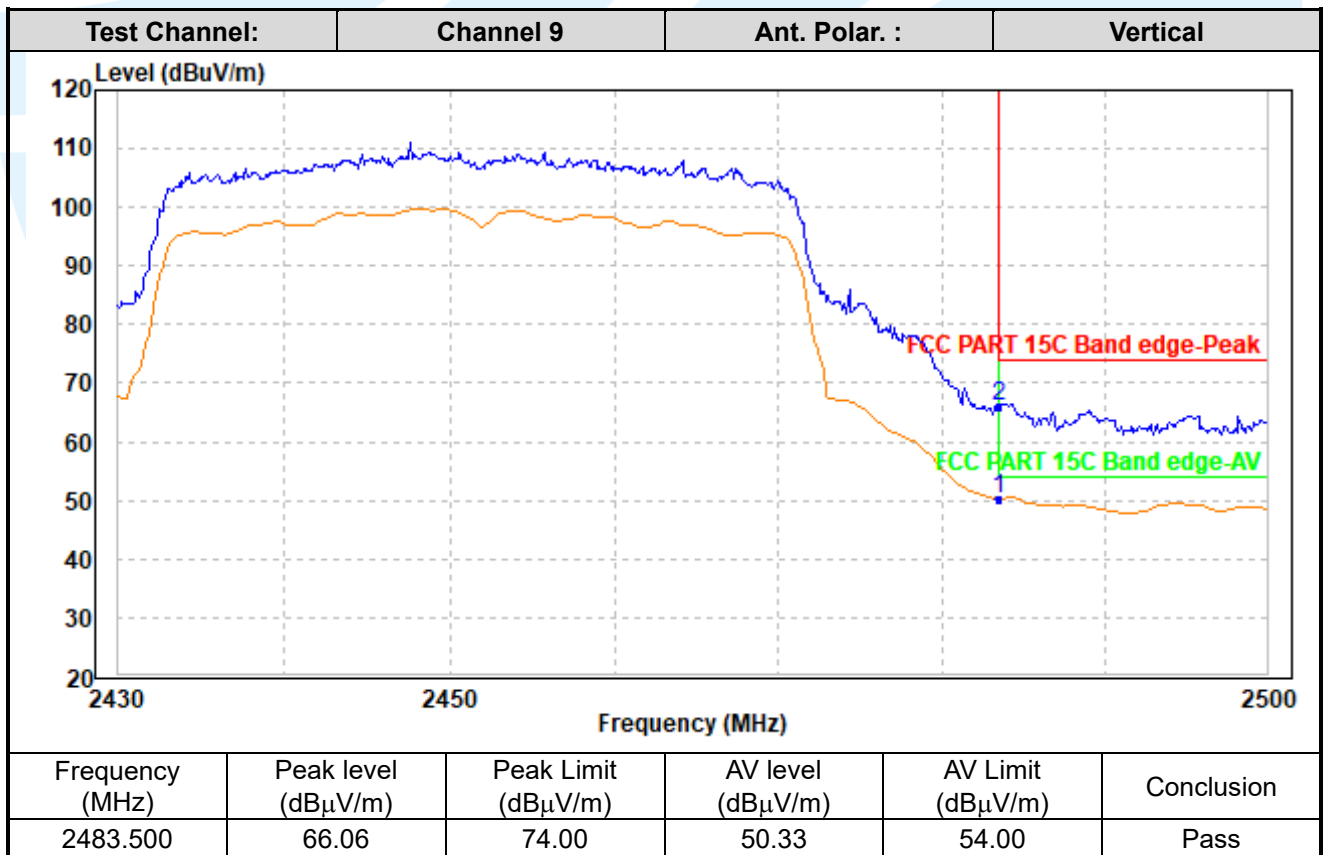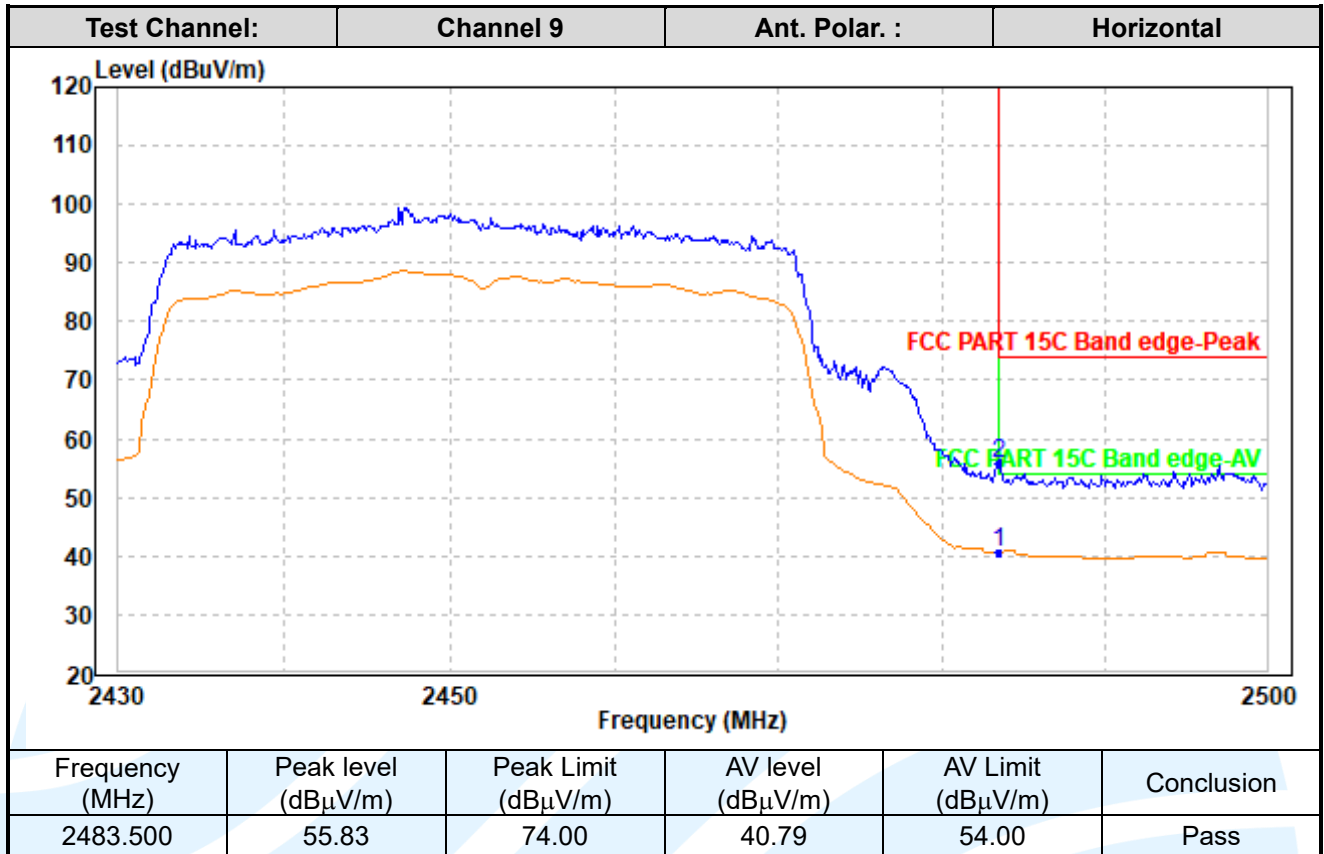

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:

Mode: WIFI Link

Live Line

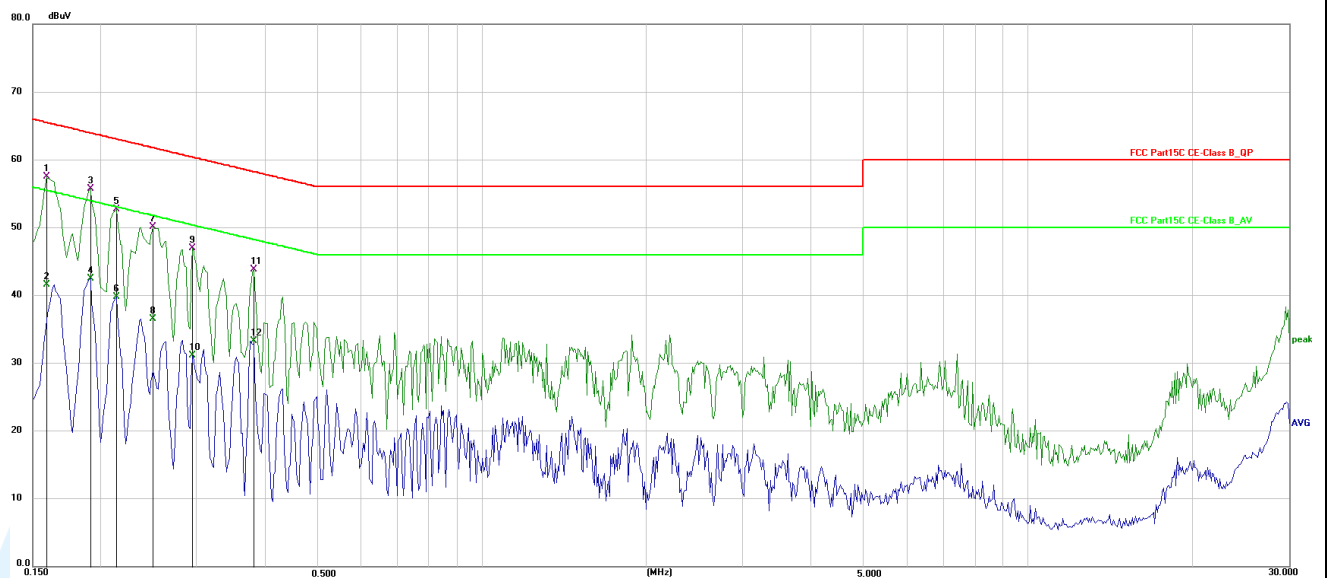

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1590	47.63	9.83	57.46	65.52	-8.06	QP
2	0.1590	31.70	9.83	41.53	55.52	-13.99	AVG
3	0.1905	45.86	9.80	55.66	64.01	-8.35	QP
4	0.1905	32.62	9.80	42.42	54.01	-11.59	AVG
5	0.2130	42.83	9.80	52.63	63.09	-10.46	QP
6	0.2130	29.97	9.80	39.77	53.09	-13.32	AVG
7	0.2490	40.32	9.76	50.08	61.79	-11.71	QP
8	0.2490	26.72	9.76	36.48	51.79	-15.31	AVG
9	0.2940	37.22	9.73	46.95	60.41	-13.46	QP
10	0.2940	21.36	9.73	31.09	50.41	-19.32	AVG
11	0.3795	34.00	9.78	43.78	58.29	-14.51	QP
12	0.3795	23.44	9.78	33.22	48.29	-15.07	AVG

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Neutral Line

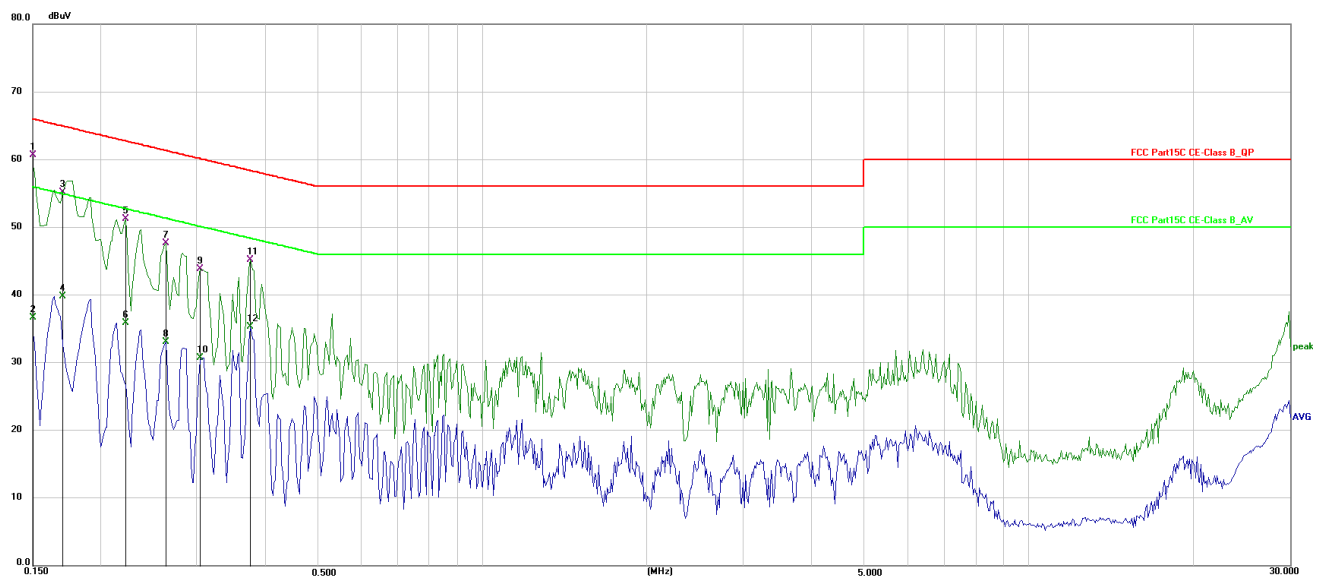

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	50.80	9.83	60.63	66.00	-5.37	QP
2	0.1500	26.80	9.83	36.63	56.00	-19.37	AVG
3	0.1703	45.40	9.80	55.20	64.95	-9.75	QP
4	0.1703	29.98	9.80	39.78	54.95	-15.17	AVG
5	0.2220	41.50	9.77	51.27	62.74	-11.47	QP
6	0.2220	26.12	9.77	35.89	52.74	-16.85	AVG
7	0.2625	37.88	9.78	47.66	61.35	-13.69	QP
8	0.2625	23.21	9.78	32.99	51.35	-18.36	AVG
9	0.3030	34.02	9.77	43.79	60.16	-16.37	QP
10	0.3030	20.96	9.77	30.73	50.16	-19.43	AVG
11	0.3750	35.37	9.77	45.14	58.39	-13.25	QP
12	0.3750	25.50	9.77	35.27	48.39	-13.12	AVG

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.2

APPENDIX A RF TEST DATA

A.1 DTS BANDWIDTH

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	7.607	0.5	PASS
11B	Ant2	2412	7.567	0.5	PASS
11B	Ant1	2437	8.076	0.5	PASS
11B	Ant2	2437	7.622	0.5	PASS
11B	Ant1	2462	7.557	0.5	PASS
11B	Ant2	2462	8.103	0.5	PASS
11G	Ant1	2412	15.87	0.5	PASS
11G	Ant2	2412	16.35	0.5	PASS
11G	Ant1	2437	16.06	0.5	PASS
11G	Ant2	2437	15.48	0.5	PASS
11G	Ant1	2462	16.36	0.5	PASS
11G	Ant2	2462	15.94	0.5	PASS
11N20MIMO	Ant1	2412	15.14	0.5	PASS
11N20MIMO	Ant2	2412	17.62	0.5	PASS
11N20MIMO	Ant1	2437	17.59	0.5	PASS
11N20MIMO	Ant2	2437	15.48	0.5	PASS
11N20MIMO	Ant1	2462	17.58	0.5	PASS
11N20MIMO	Ant2	2462	16.94	0.5	PASS
11N40MIMO	Ant1	2422	35.12	0.5	PASS
11N40MIMO	Ant2	2422	34.46	0.5	PASS
11N40MIMO	Ant1	2437	33.89	0.5	PASS
11N40MIMO	Ant2	2437	35.12	0.5	PASS
11N40MIMO	Ant1	2452	35.17	0.5	PASS
11N40MIMO	Ant2	2452	35.13	0.5	PASS
11AX20MIMO	Ant1	2412	16.31	0.5	PASS
11AX20MIMO	Ant2	2412	16.06	0.5	PASS
11AX20MIMO	Ant1	2437	16.96	0.5	PASS
11AX20MIMO	Ant2	2437	17.80	0.5	PASS
11AX20MIMO	Ant1	2462	17.75	0.5	PASS
11AX20MIMO	Ant2	2462	17.90	0.5	PASS
11AX40MIMO	Ant1	2422	35.16	0.5	PASS
11AX40MIMO	Ant2	2422	35.15	0.5	PASS
11AX40MIMO	Ant1	2437	35.17	0.5	PASS
11AX40MIMO	Ant2	2437	35.15	0.5	PASS
11AX40MIMO	Ant1	2452	35.15	0.5	PASS
11AX40MIMO	Ant2	2452	35.15	0.5	PASS

Test Graphs

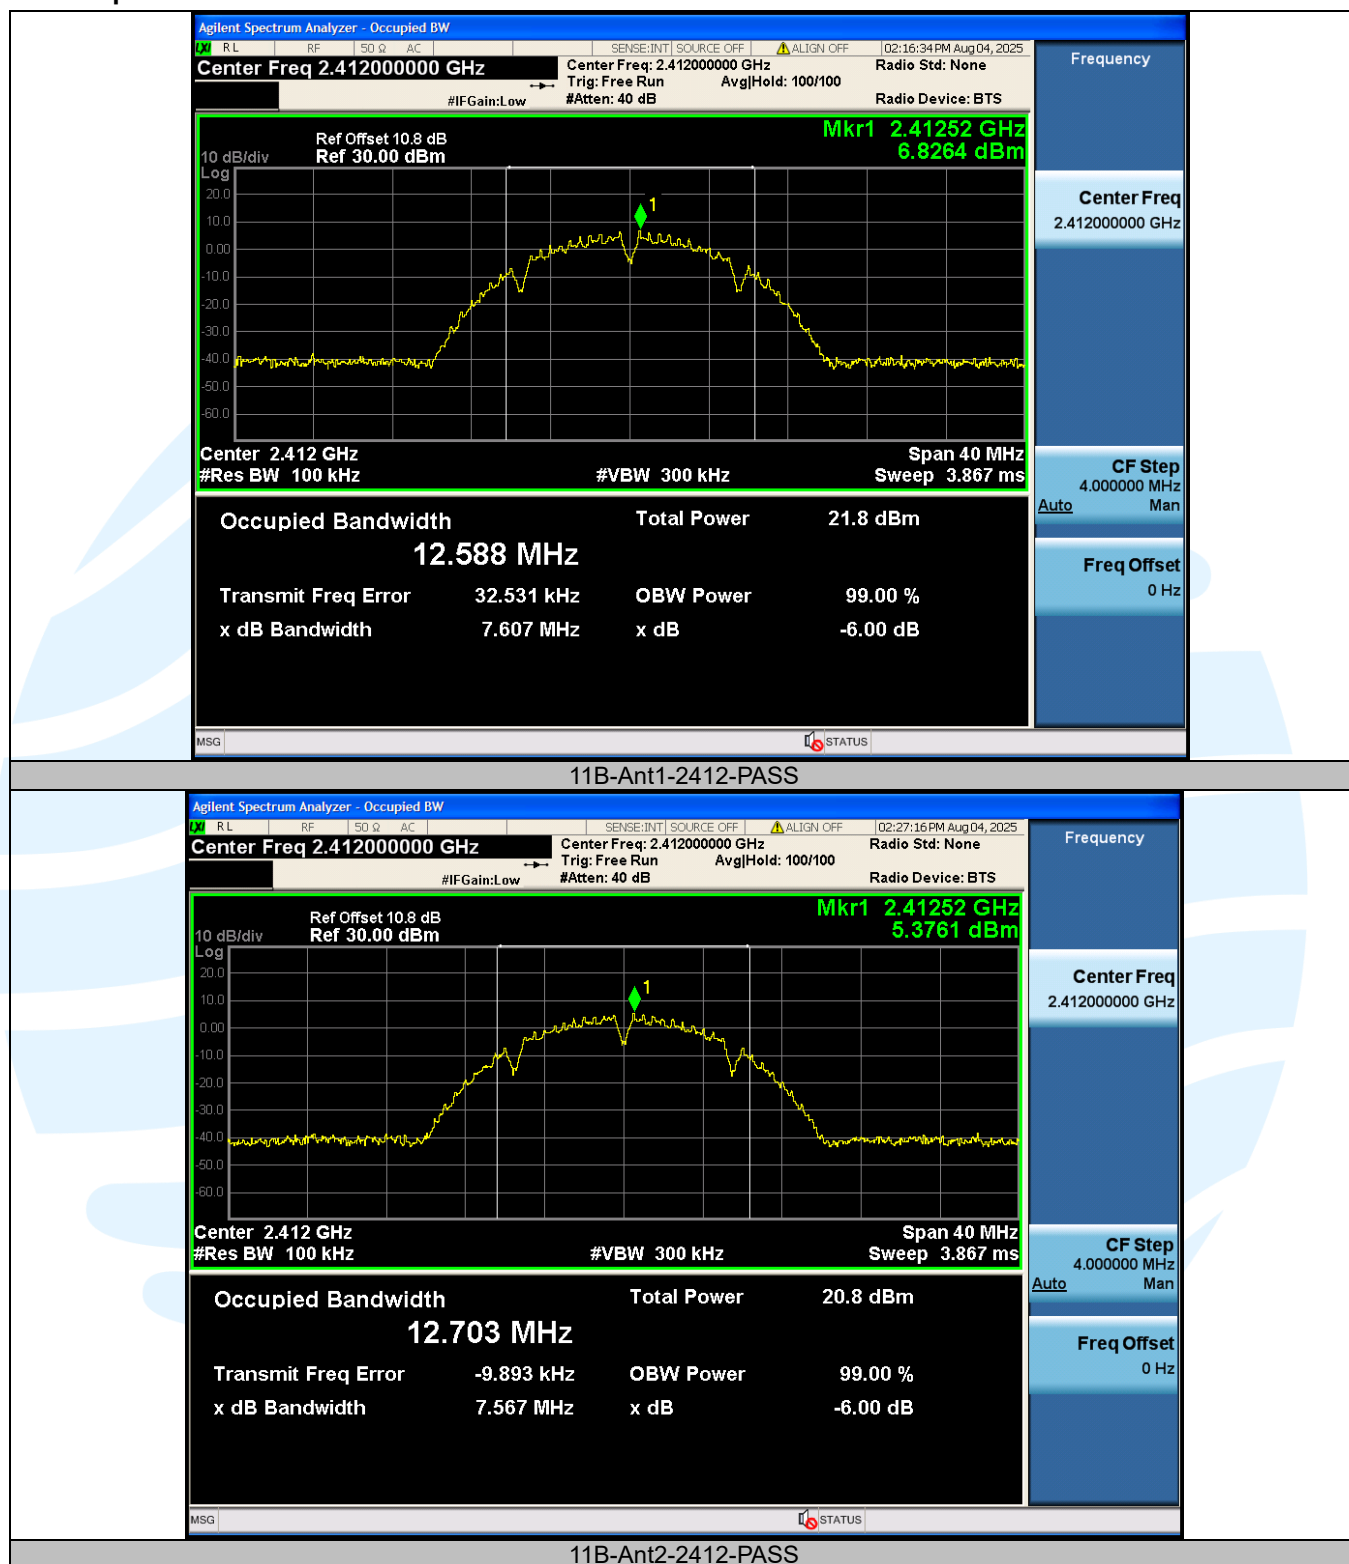

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

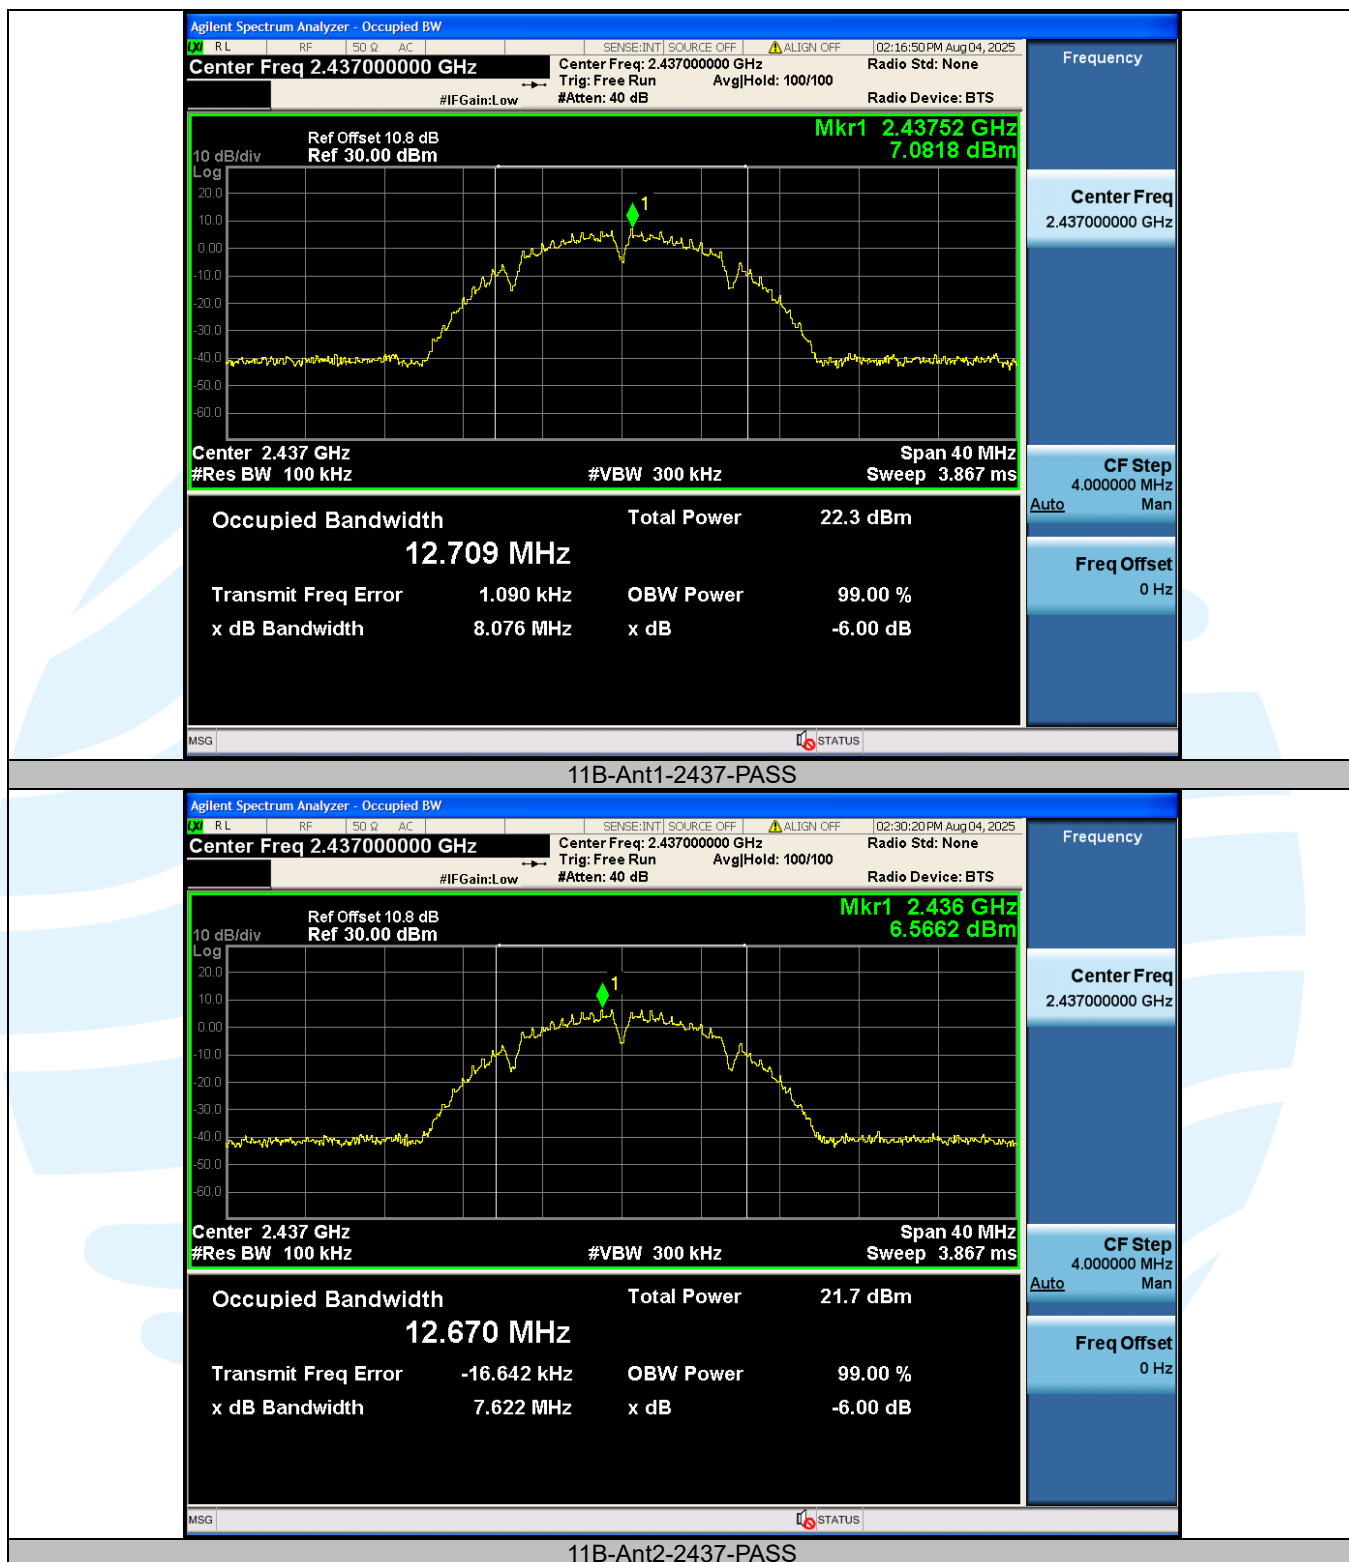**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.2

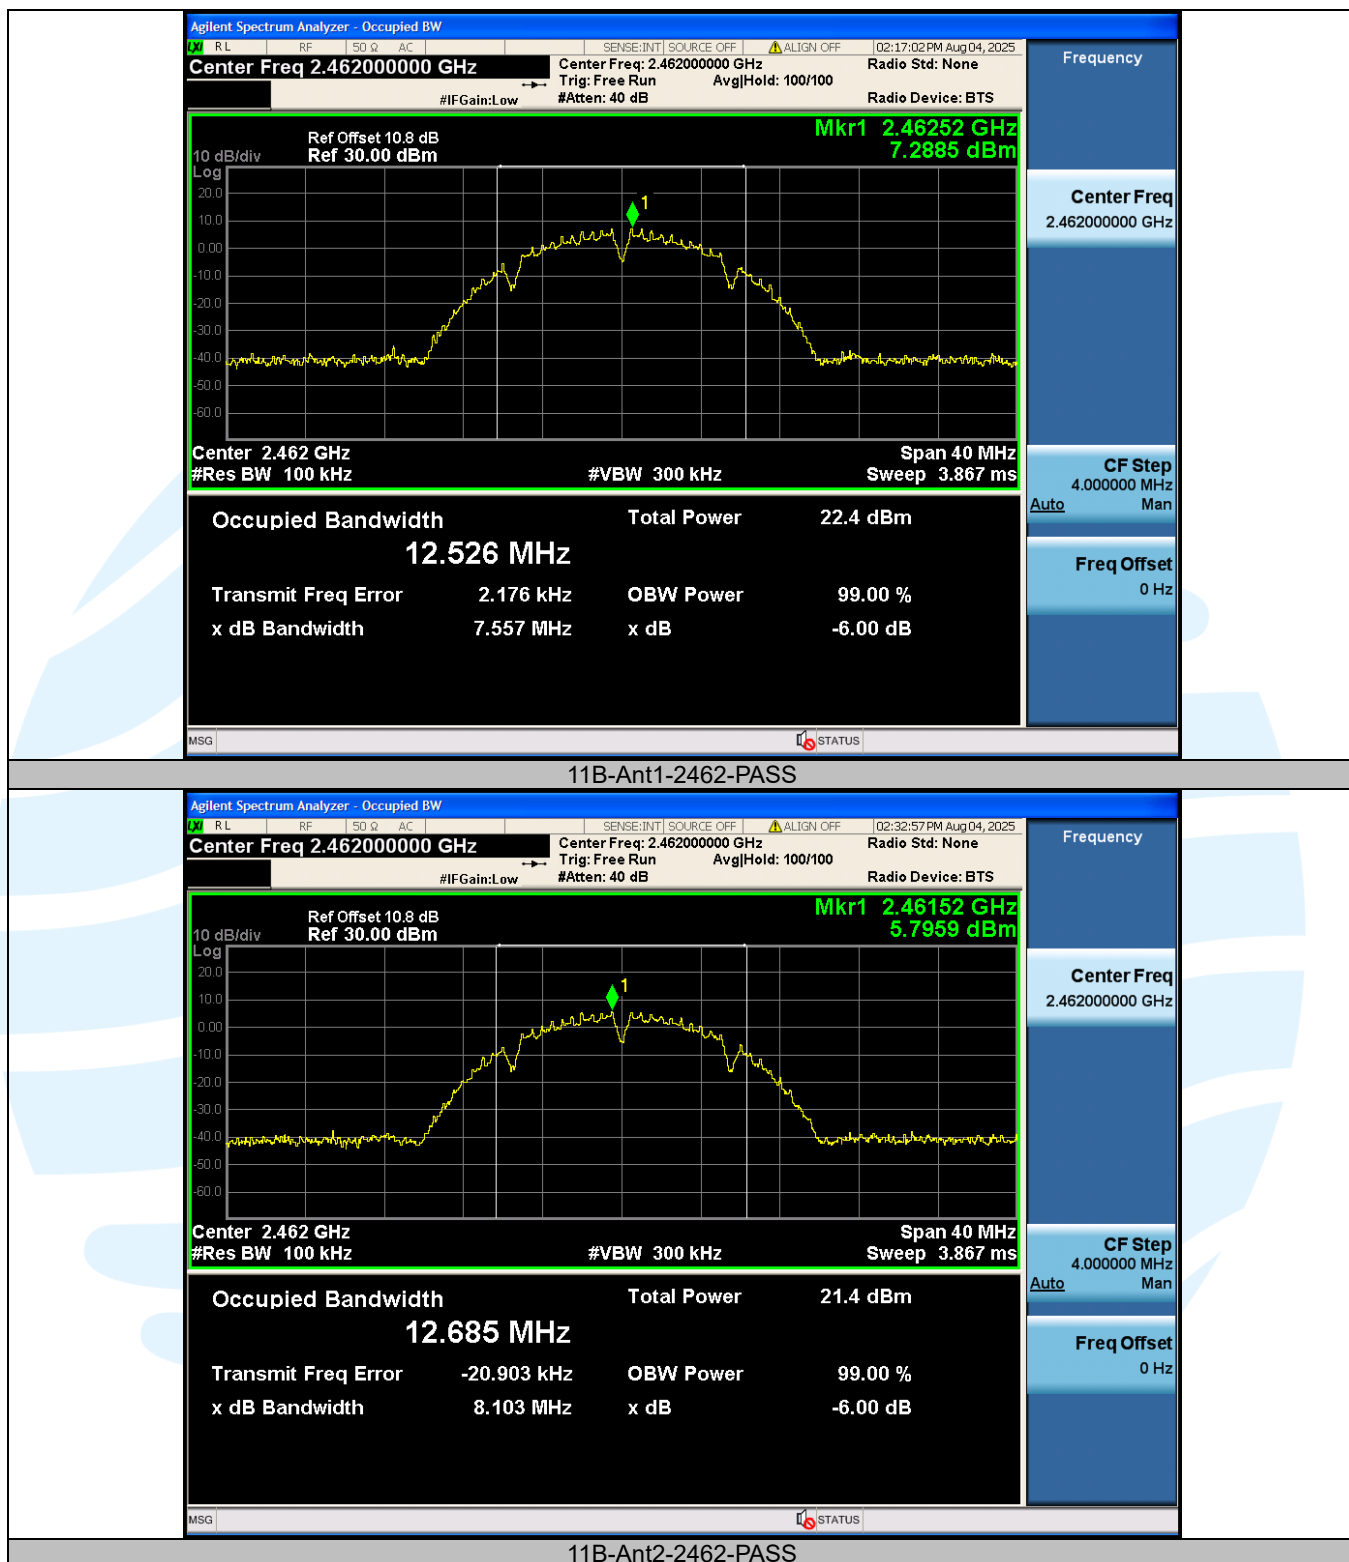

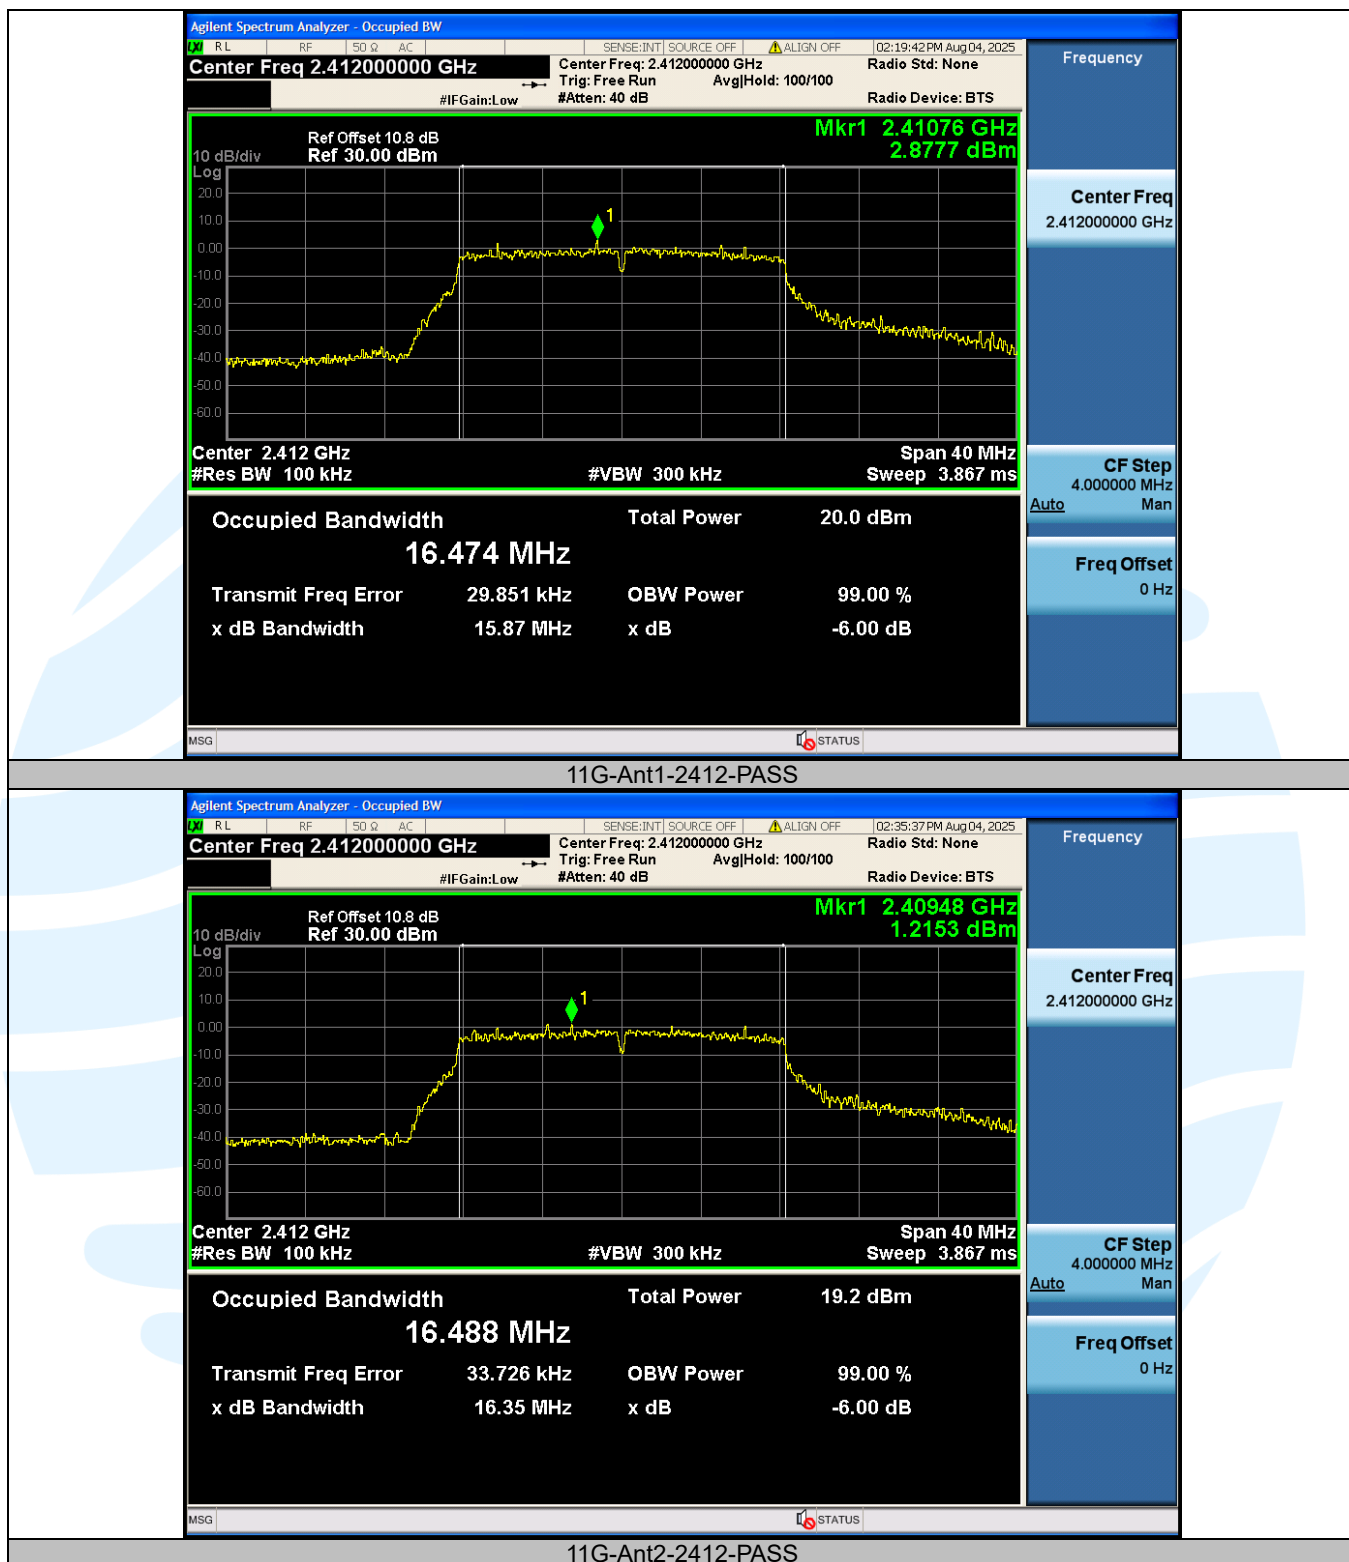

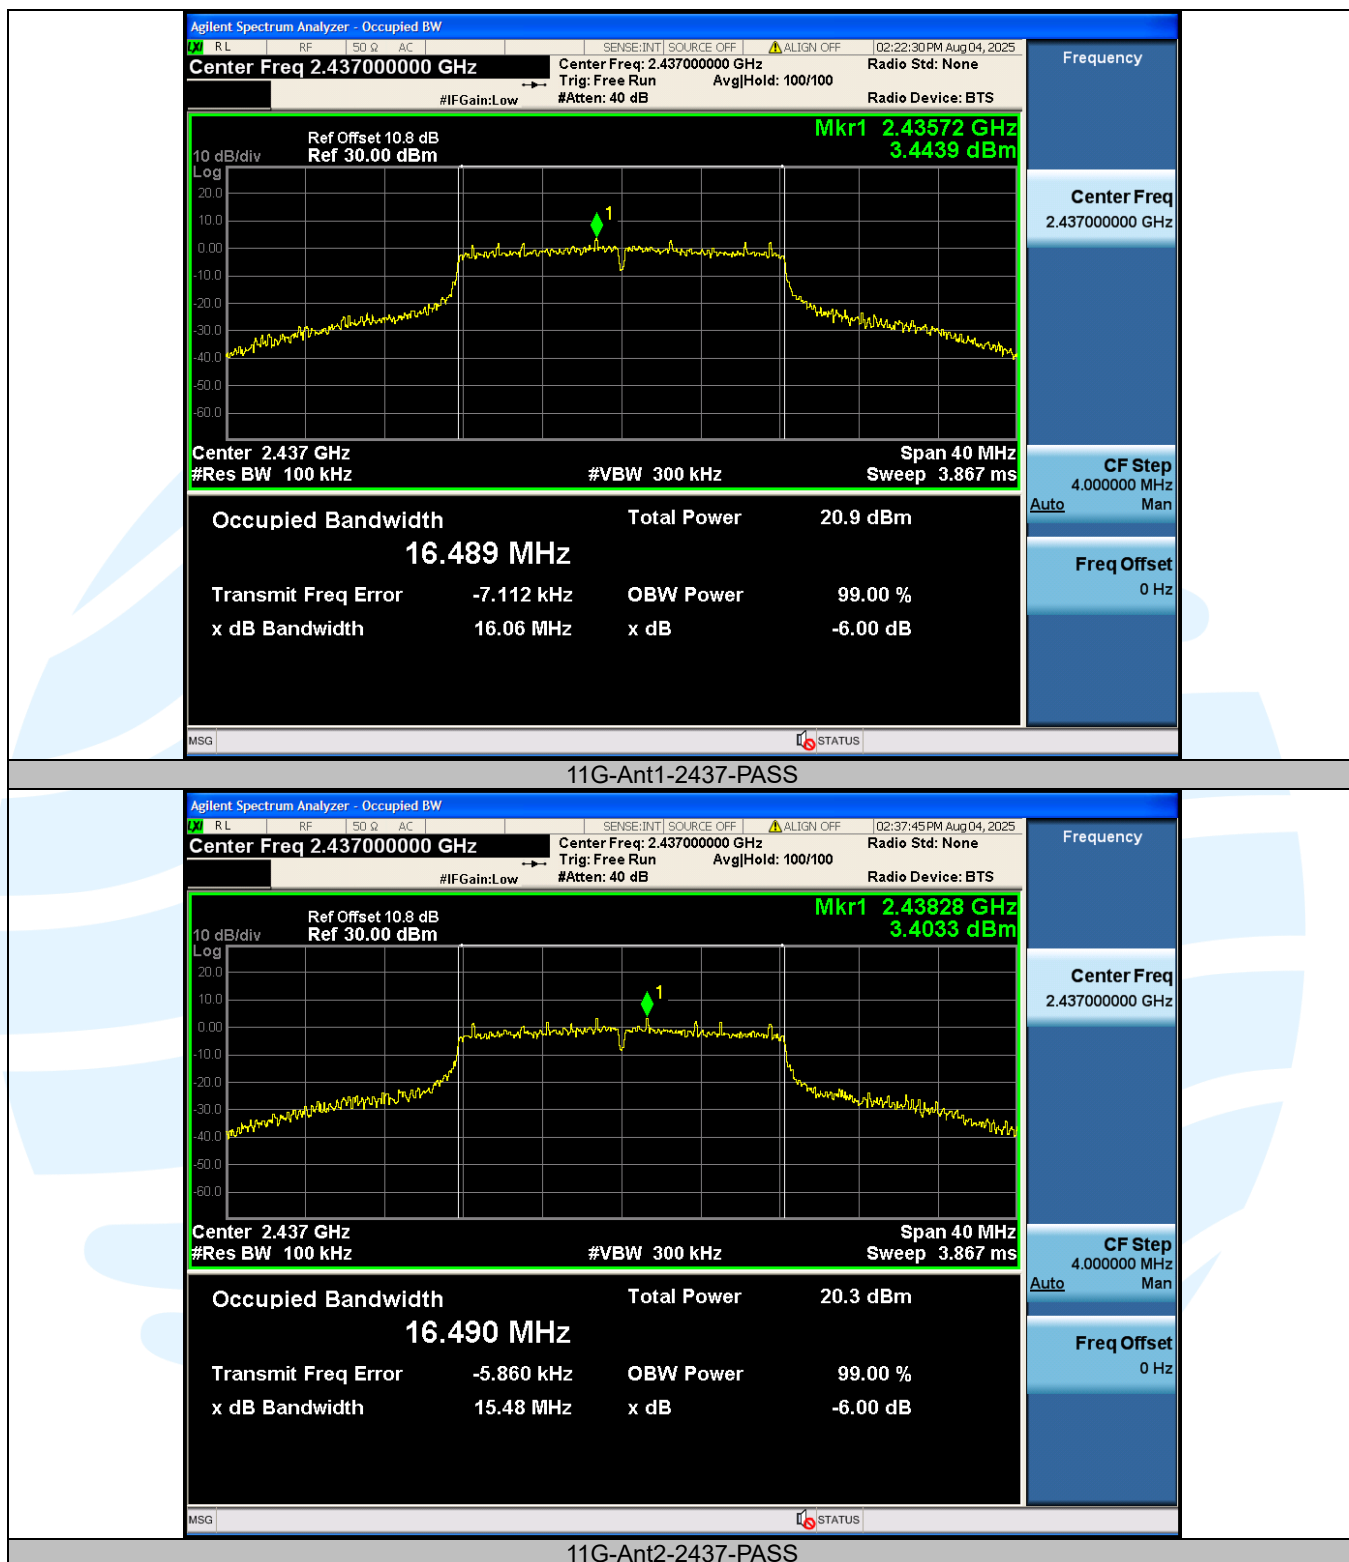

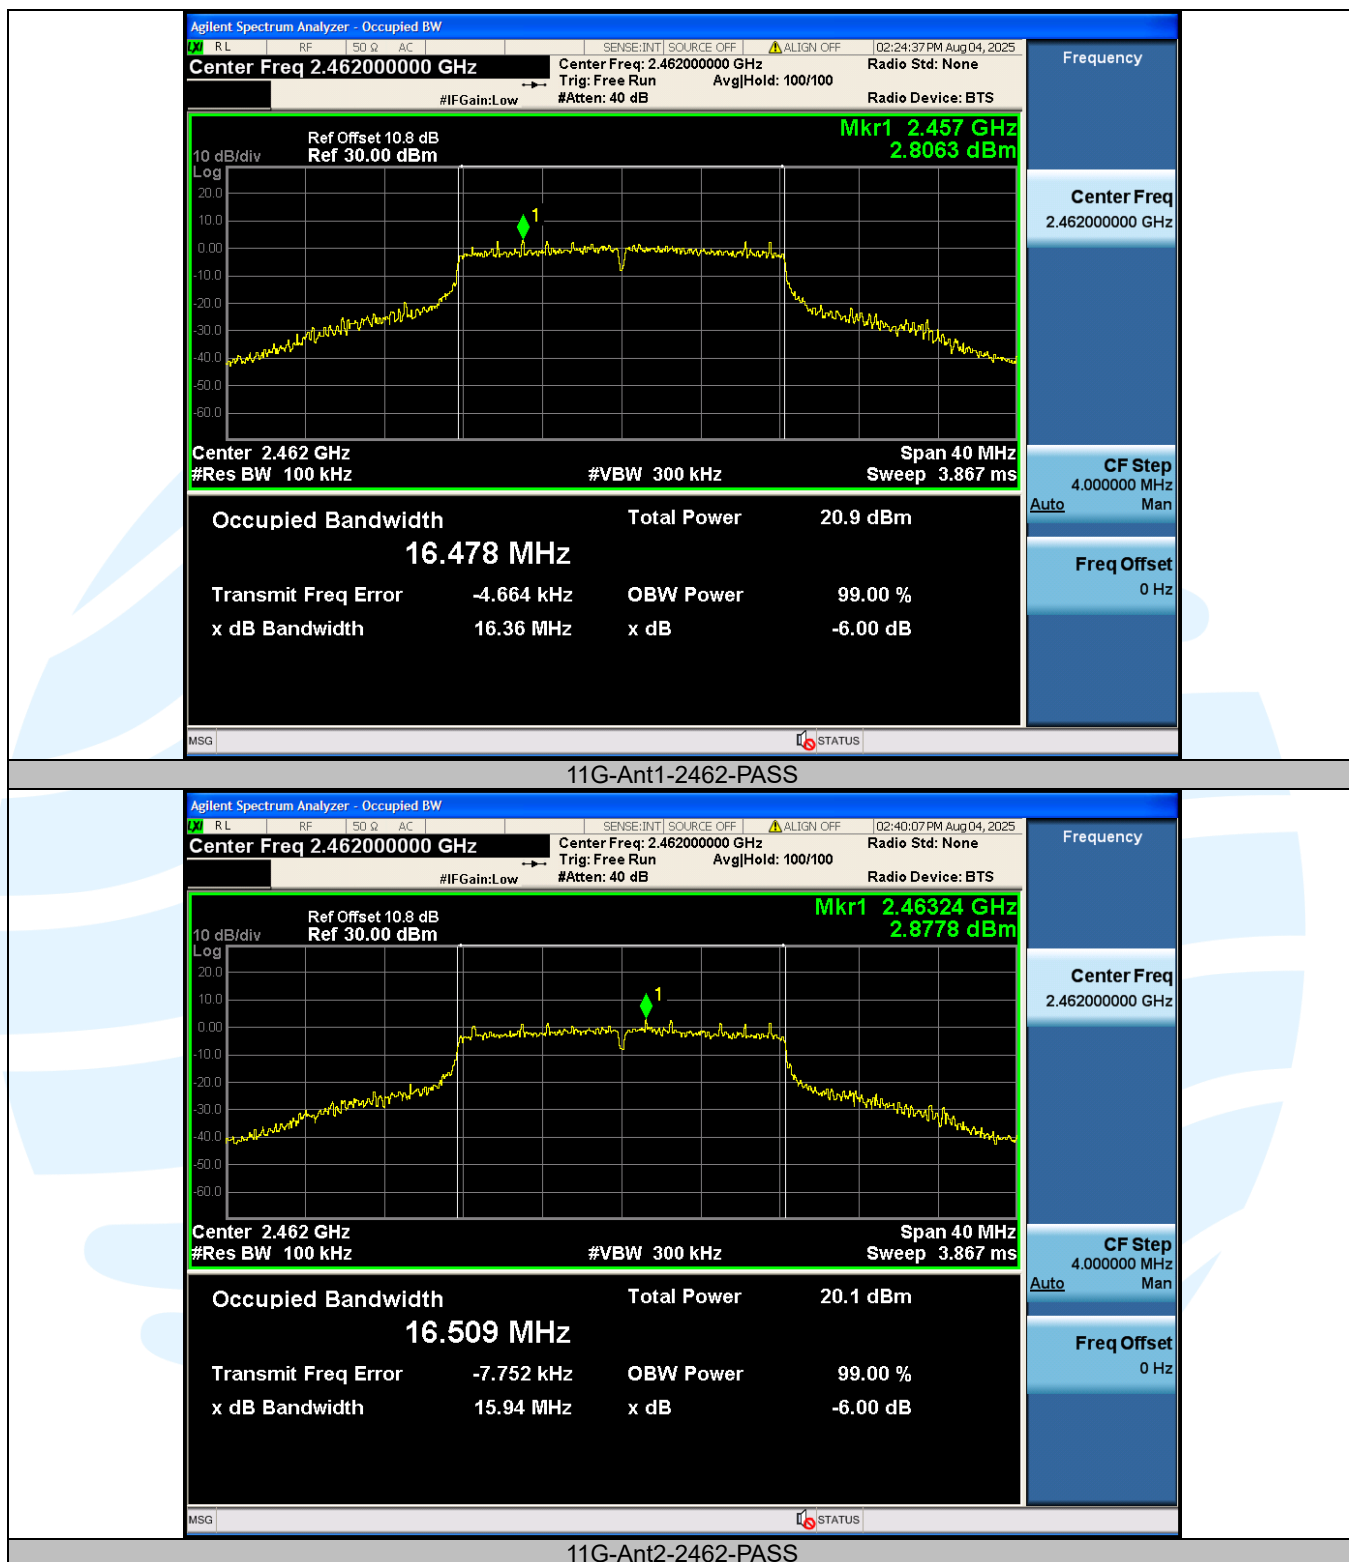

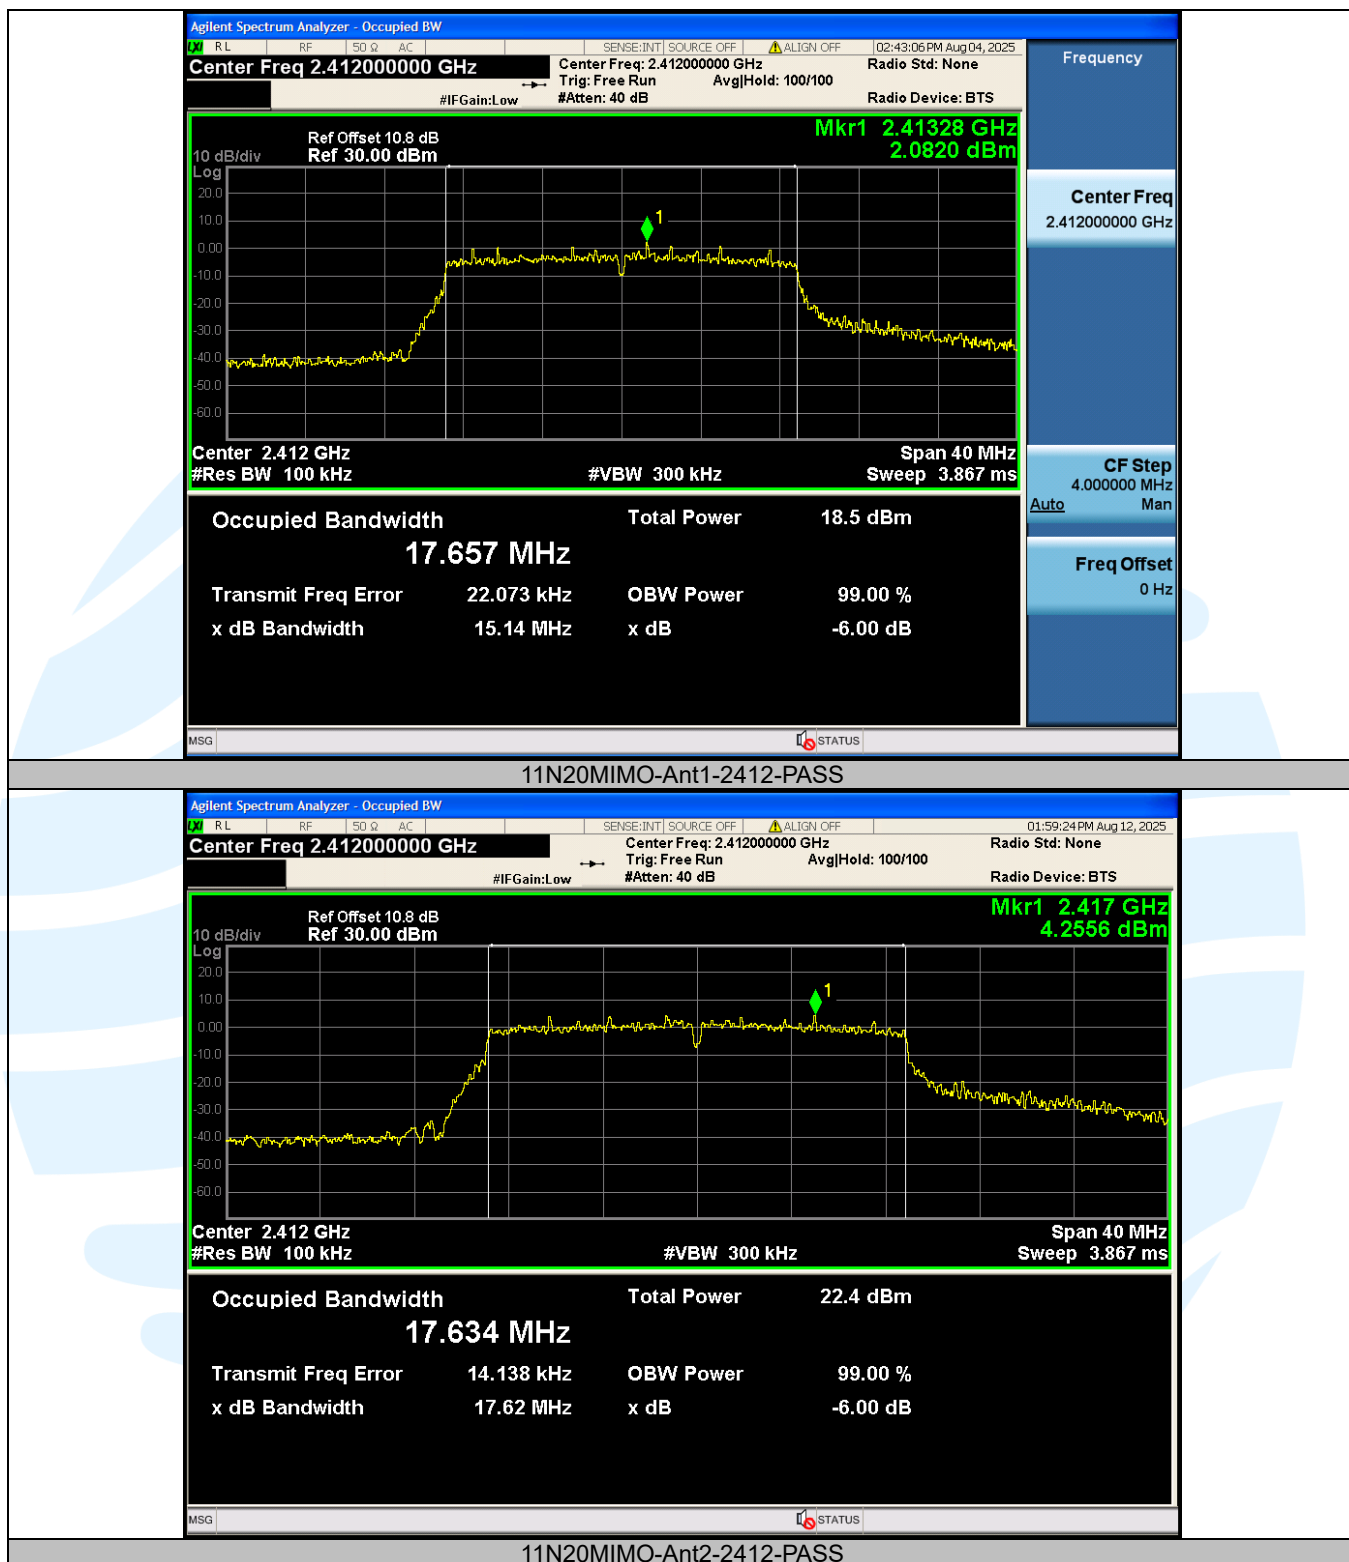**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

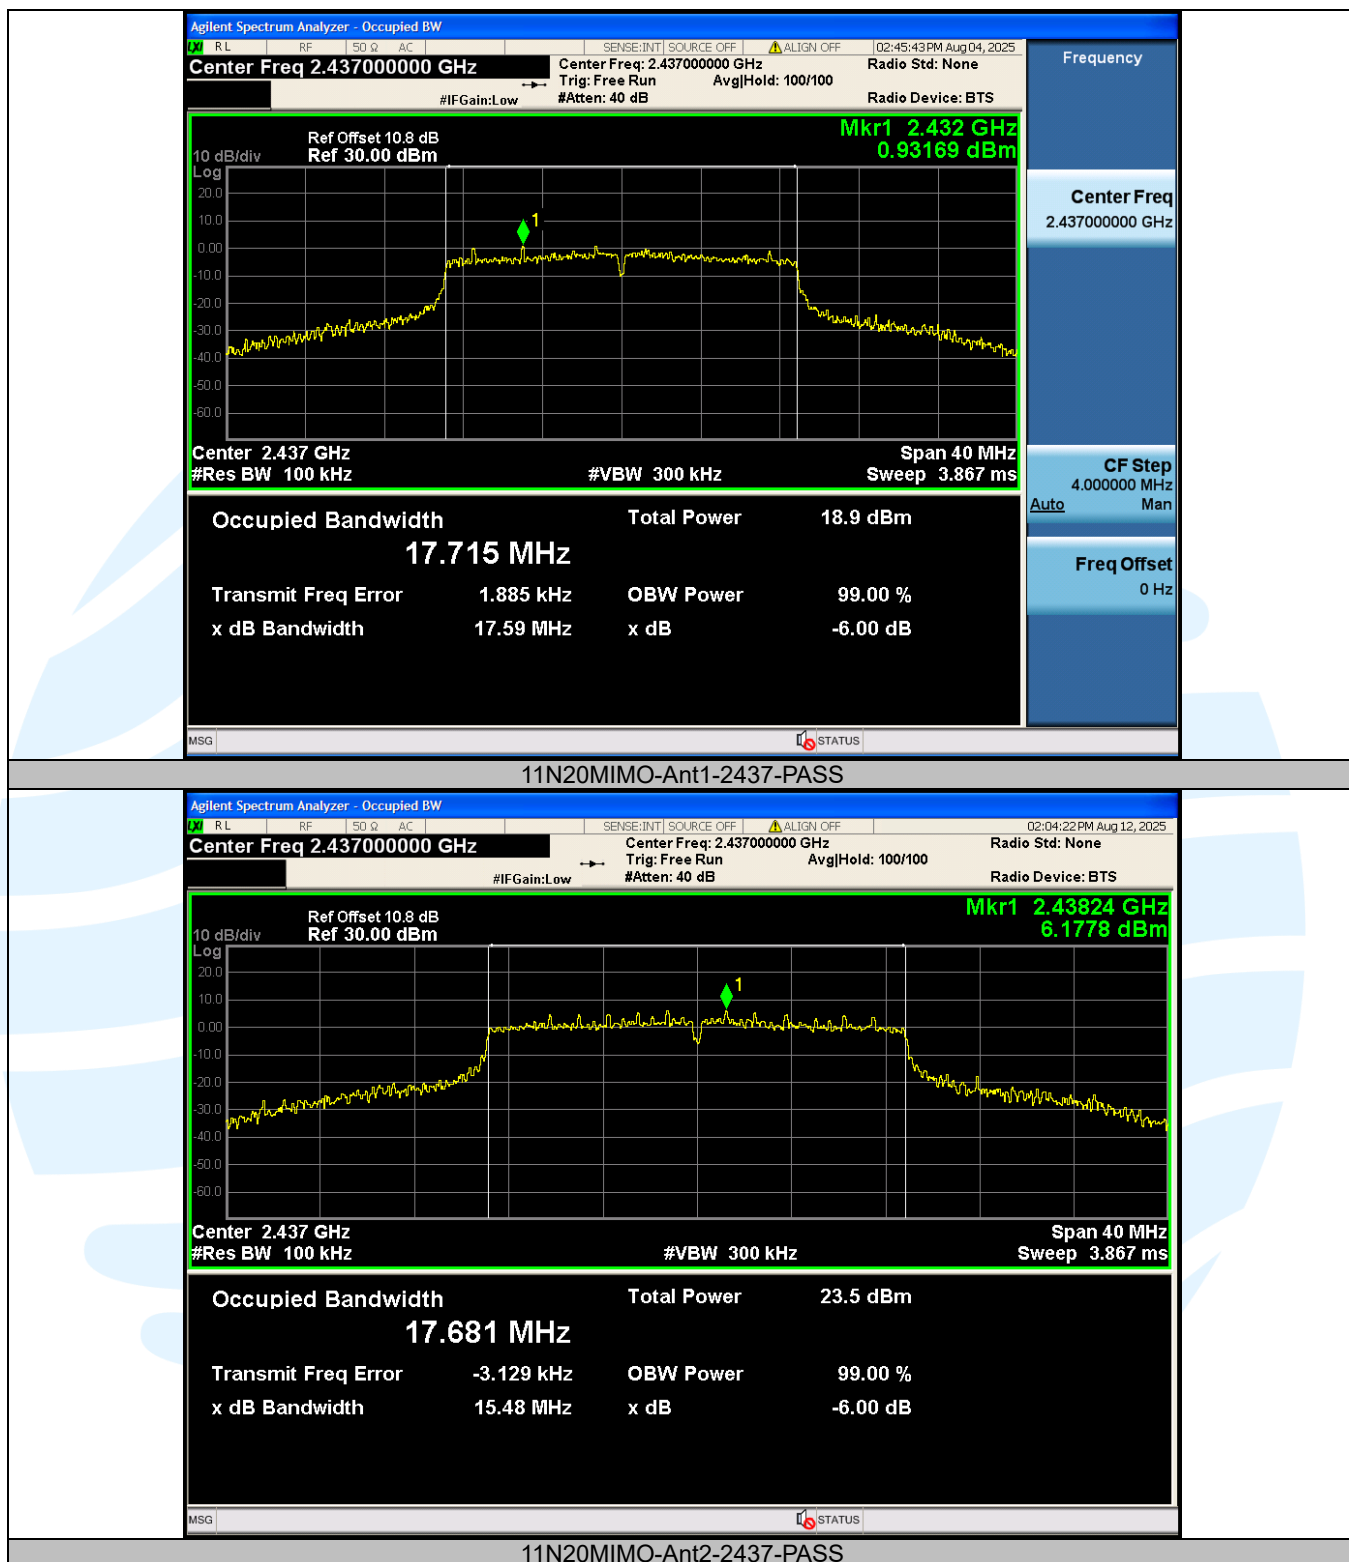

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

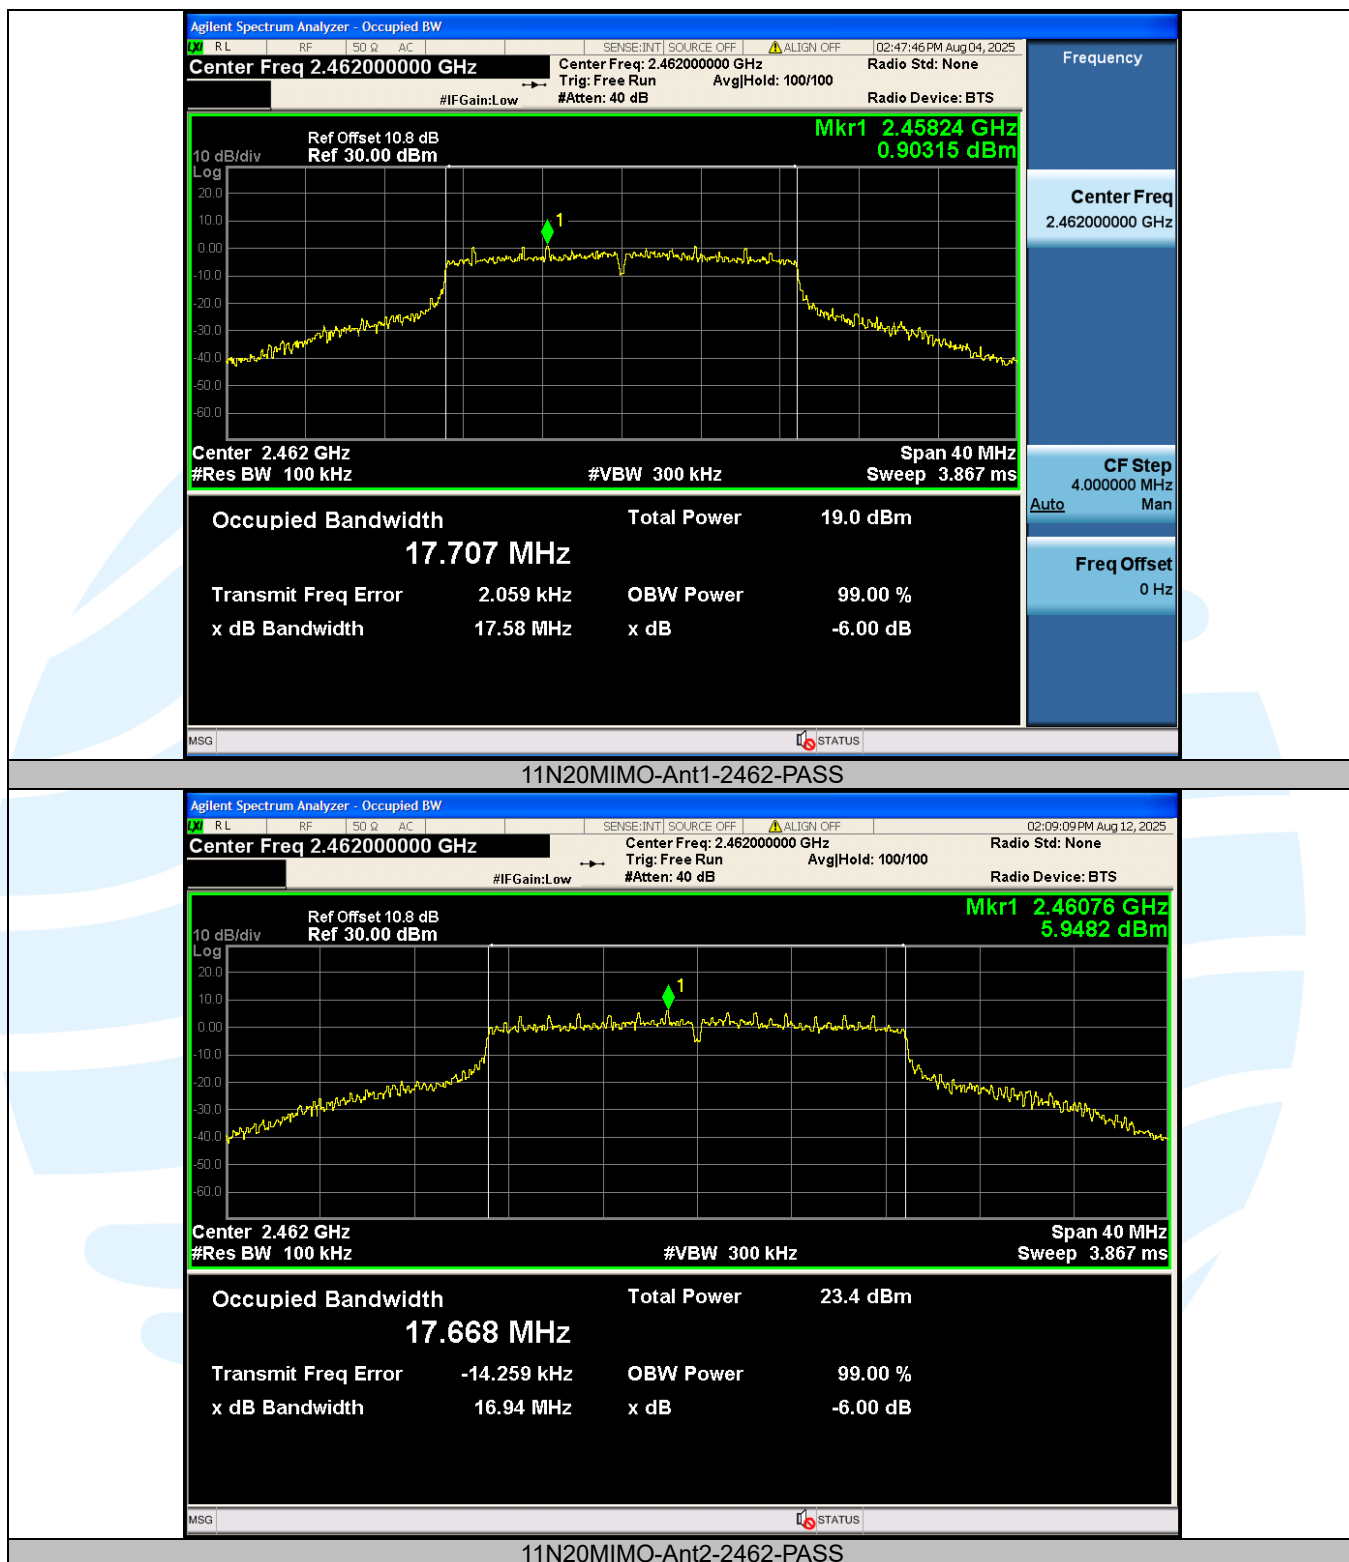

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

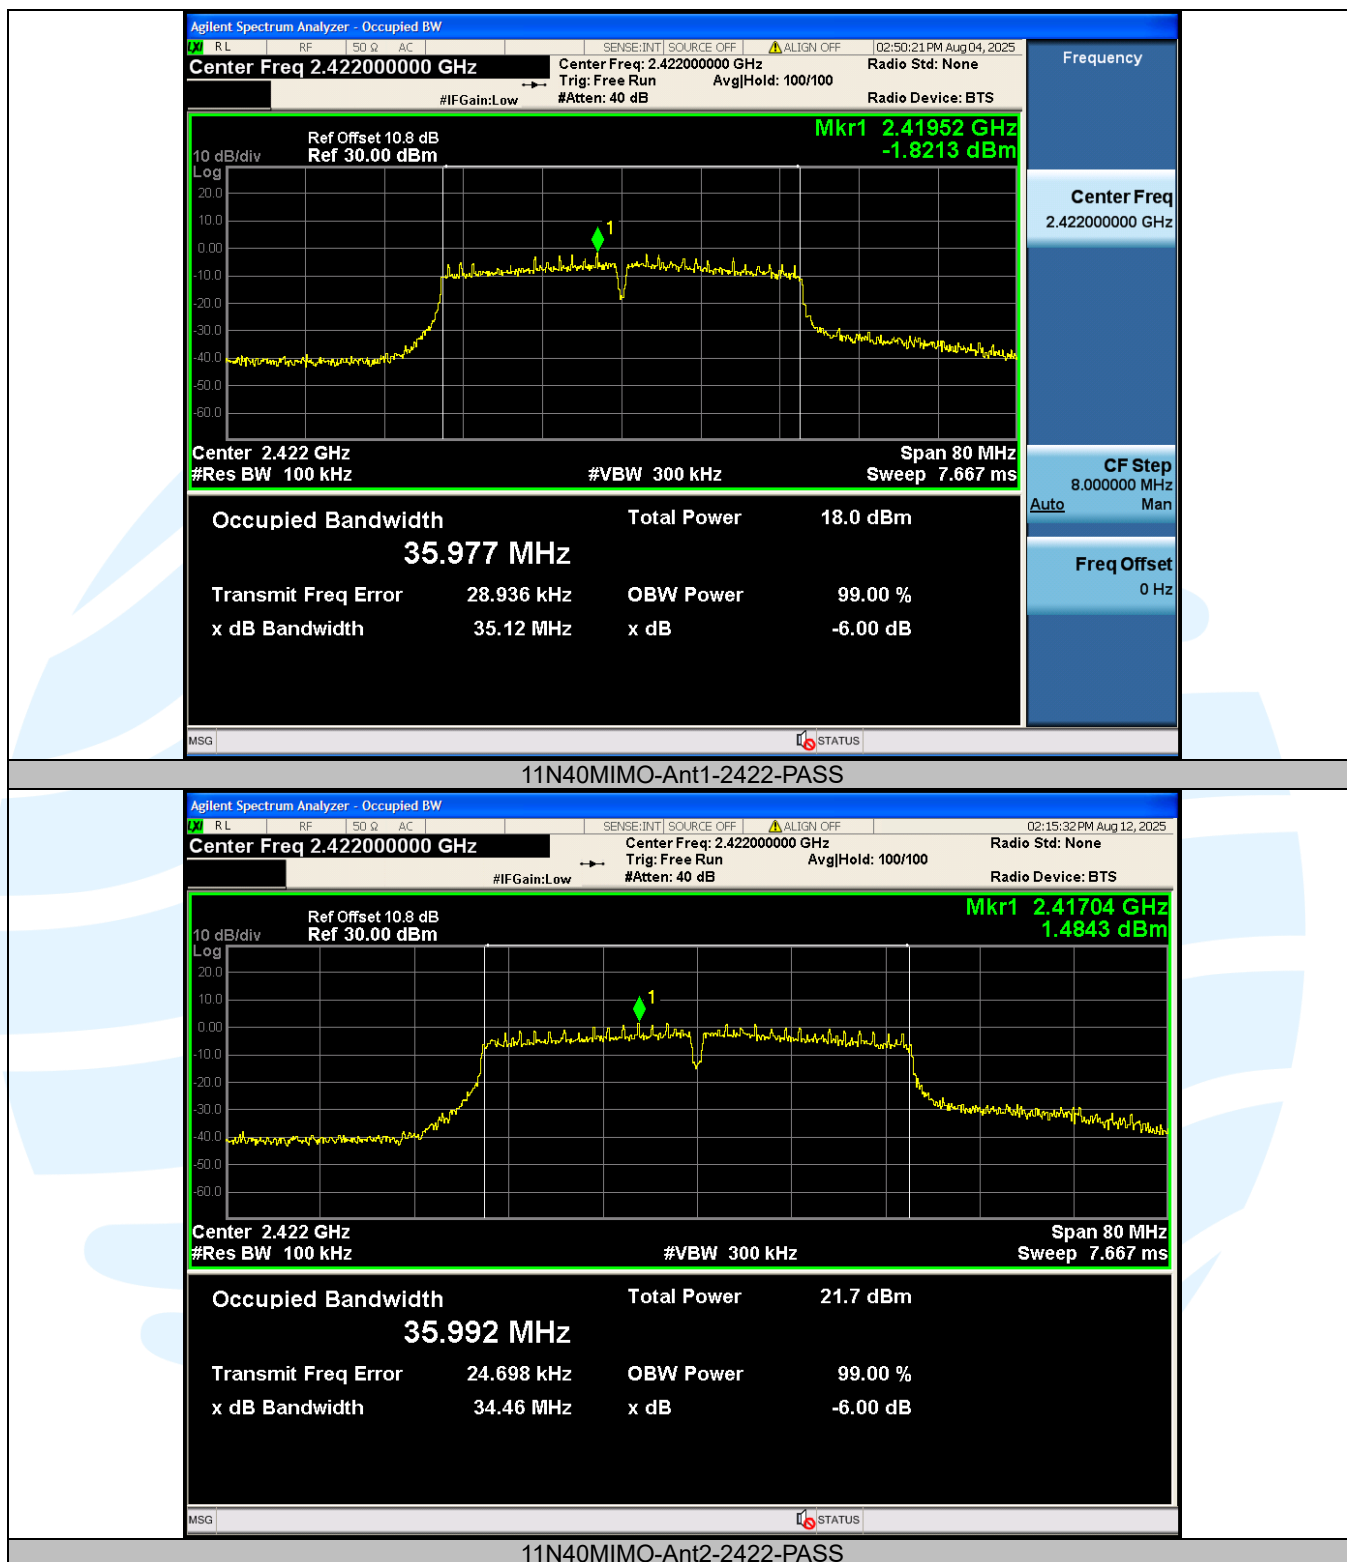**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

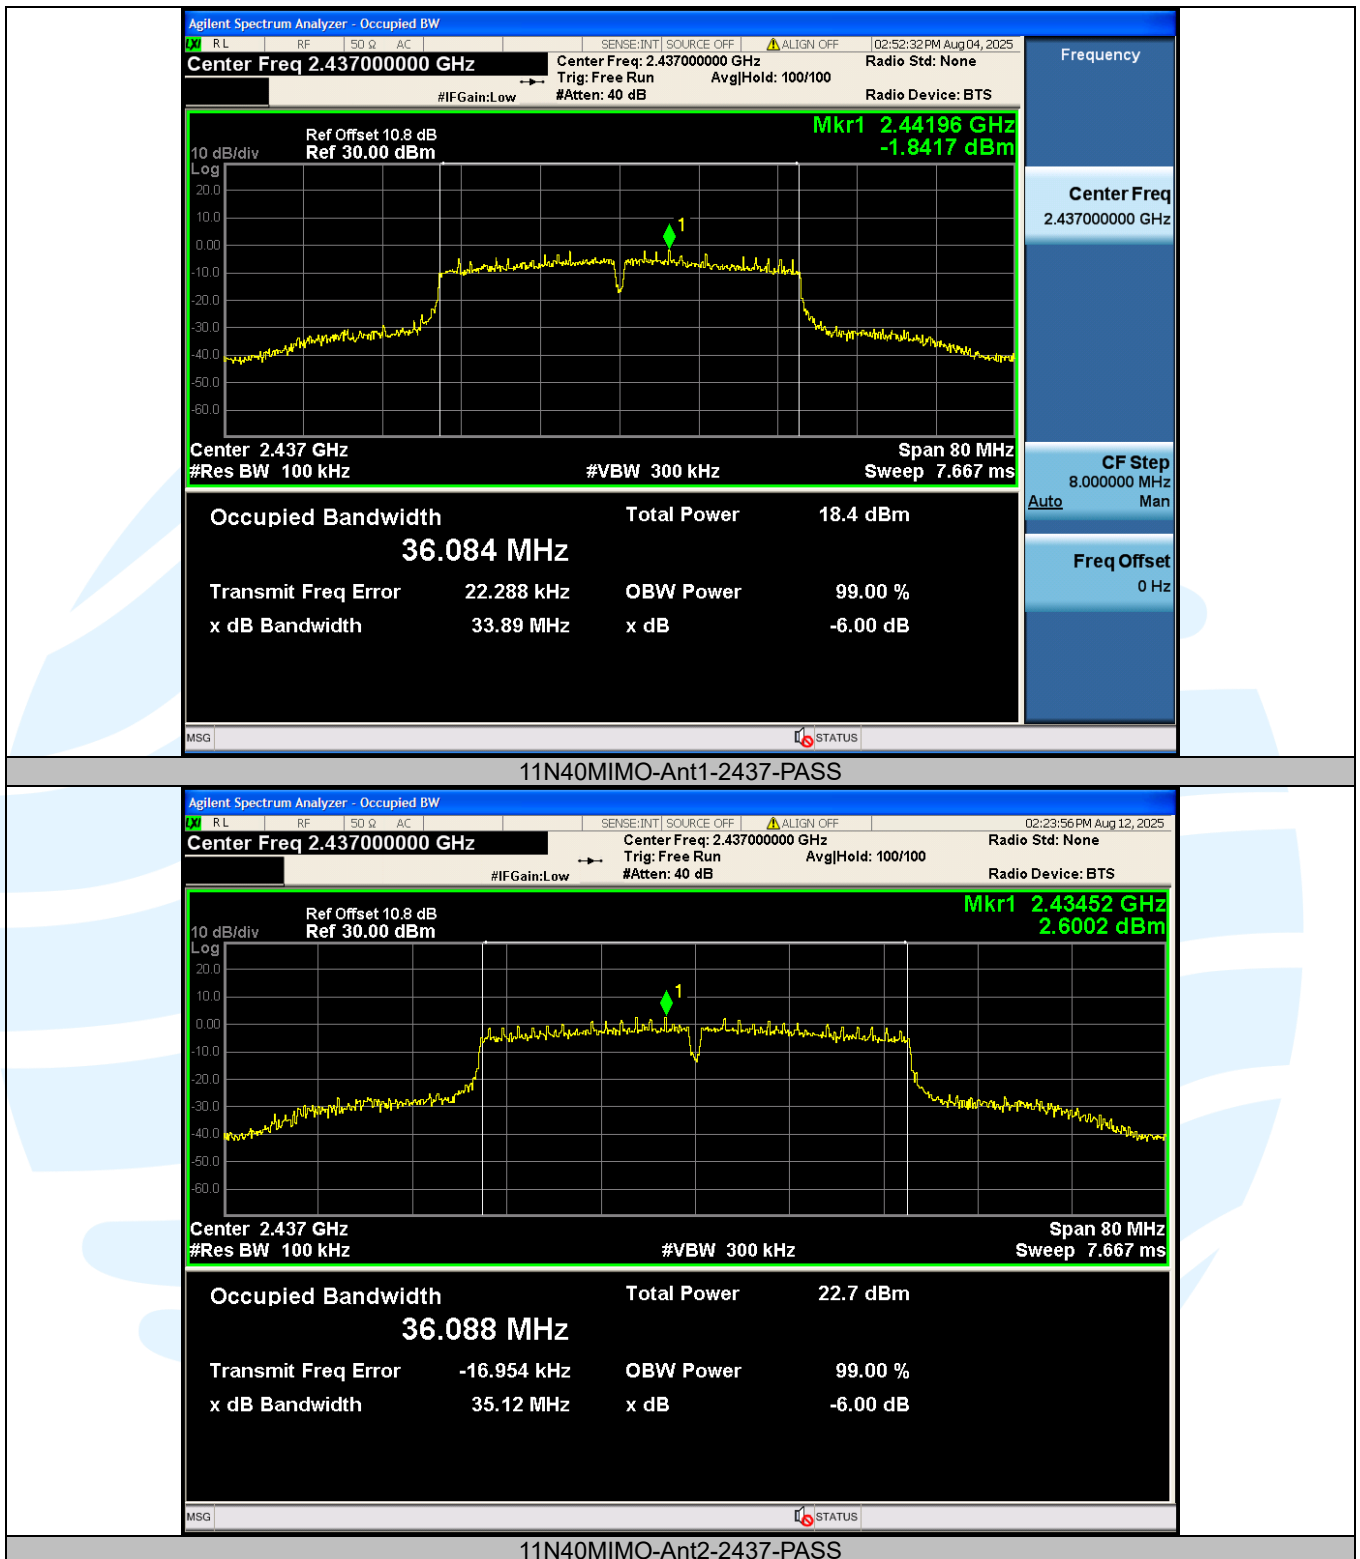**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

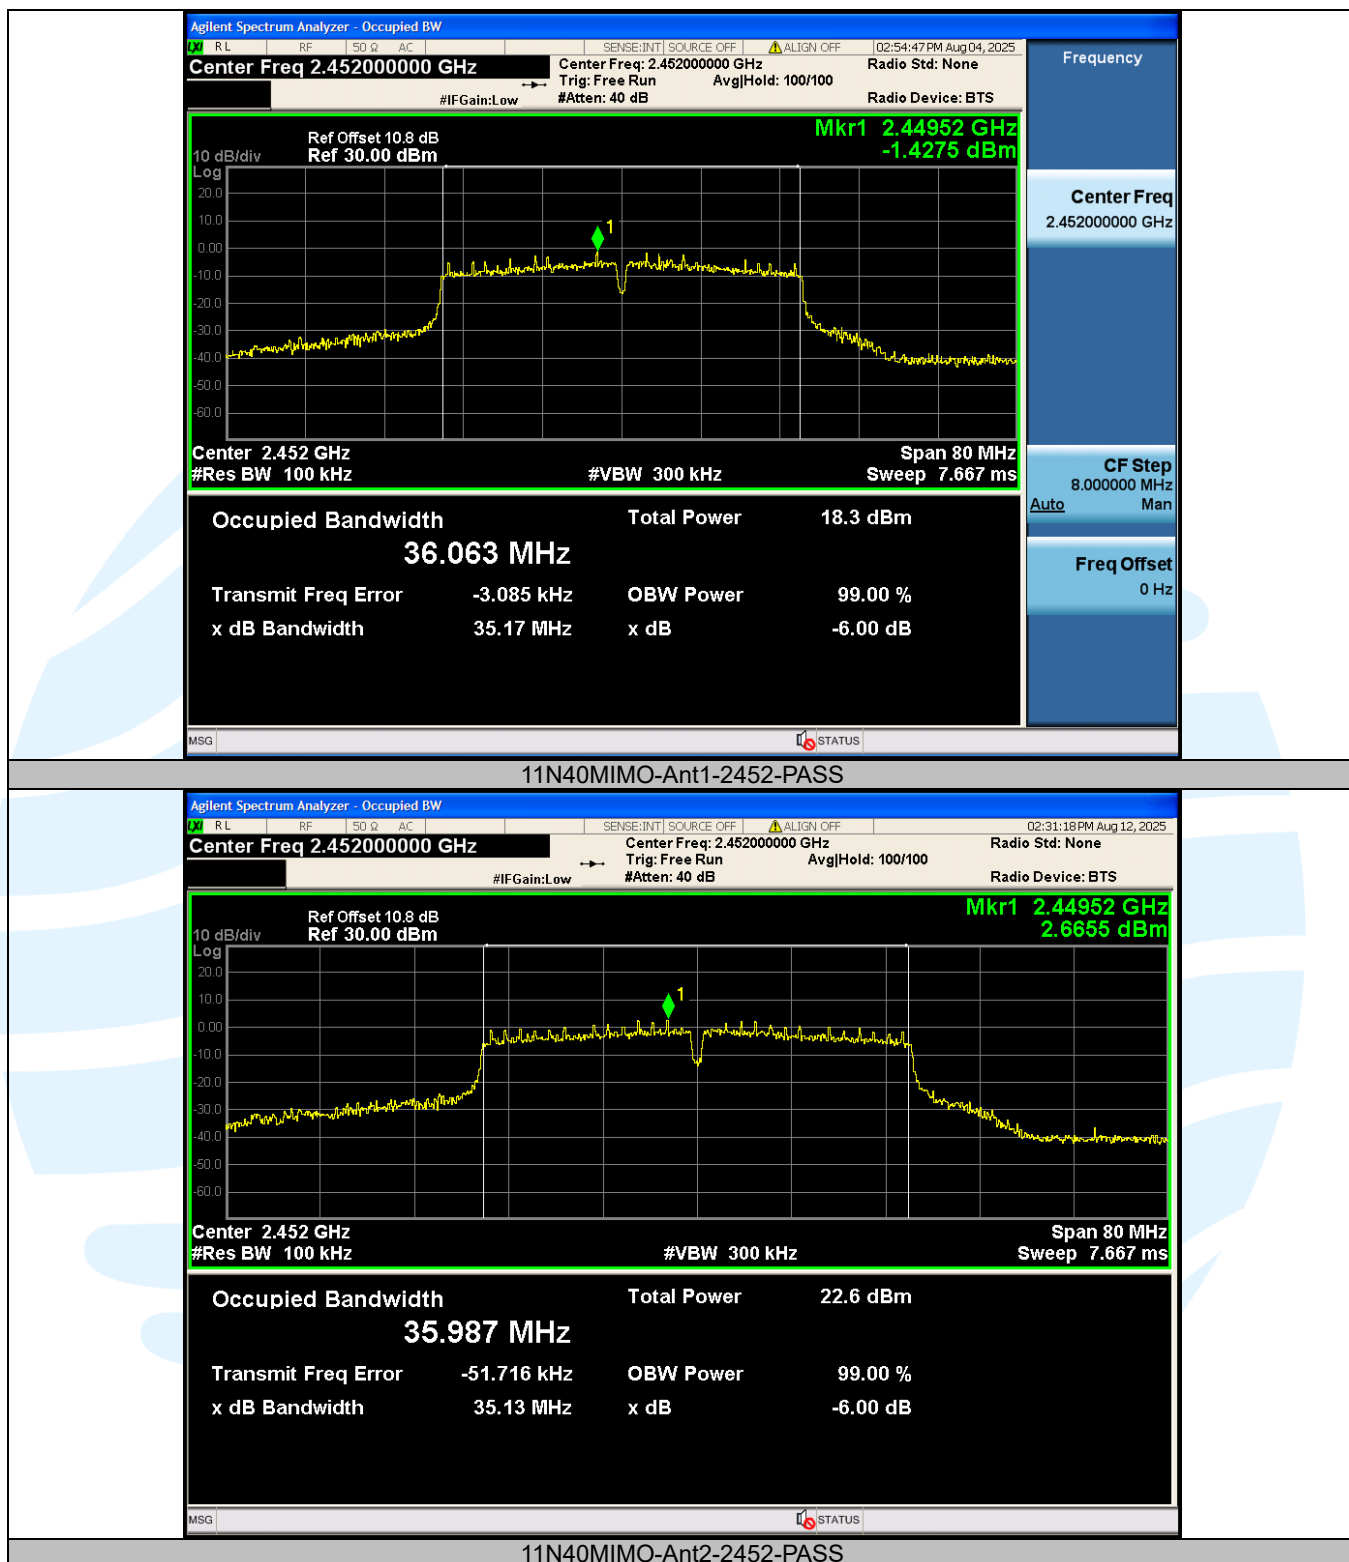

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

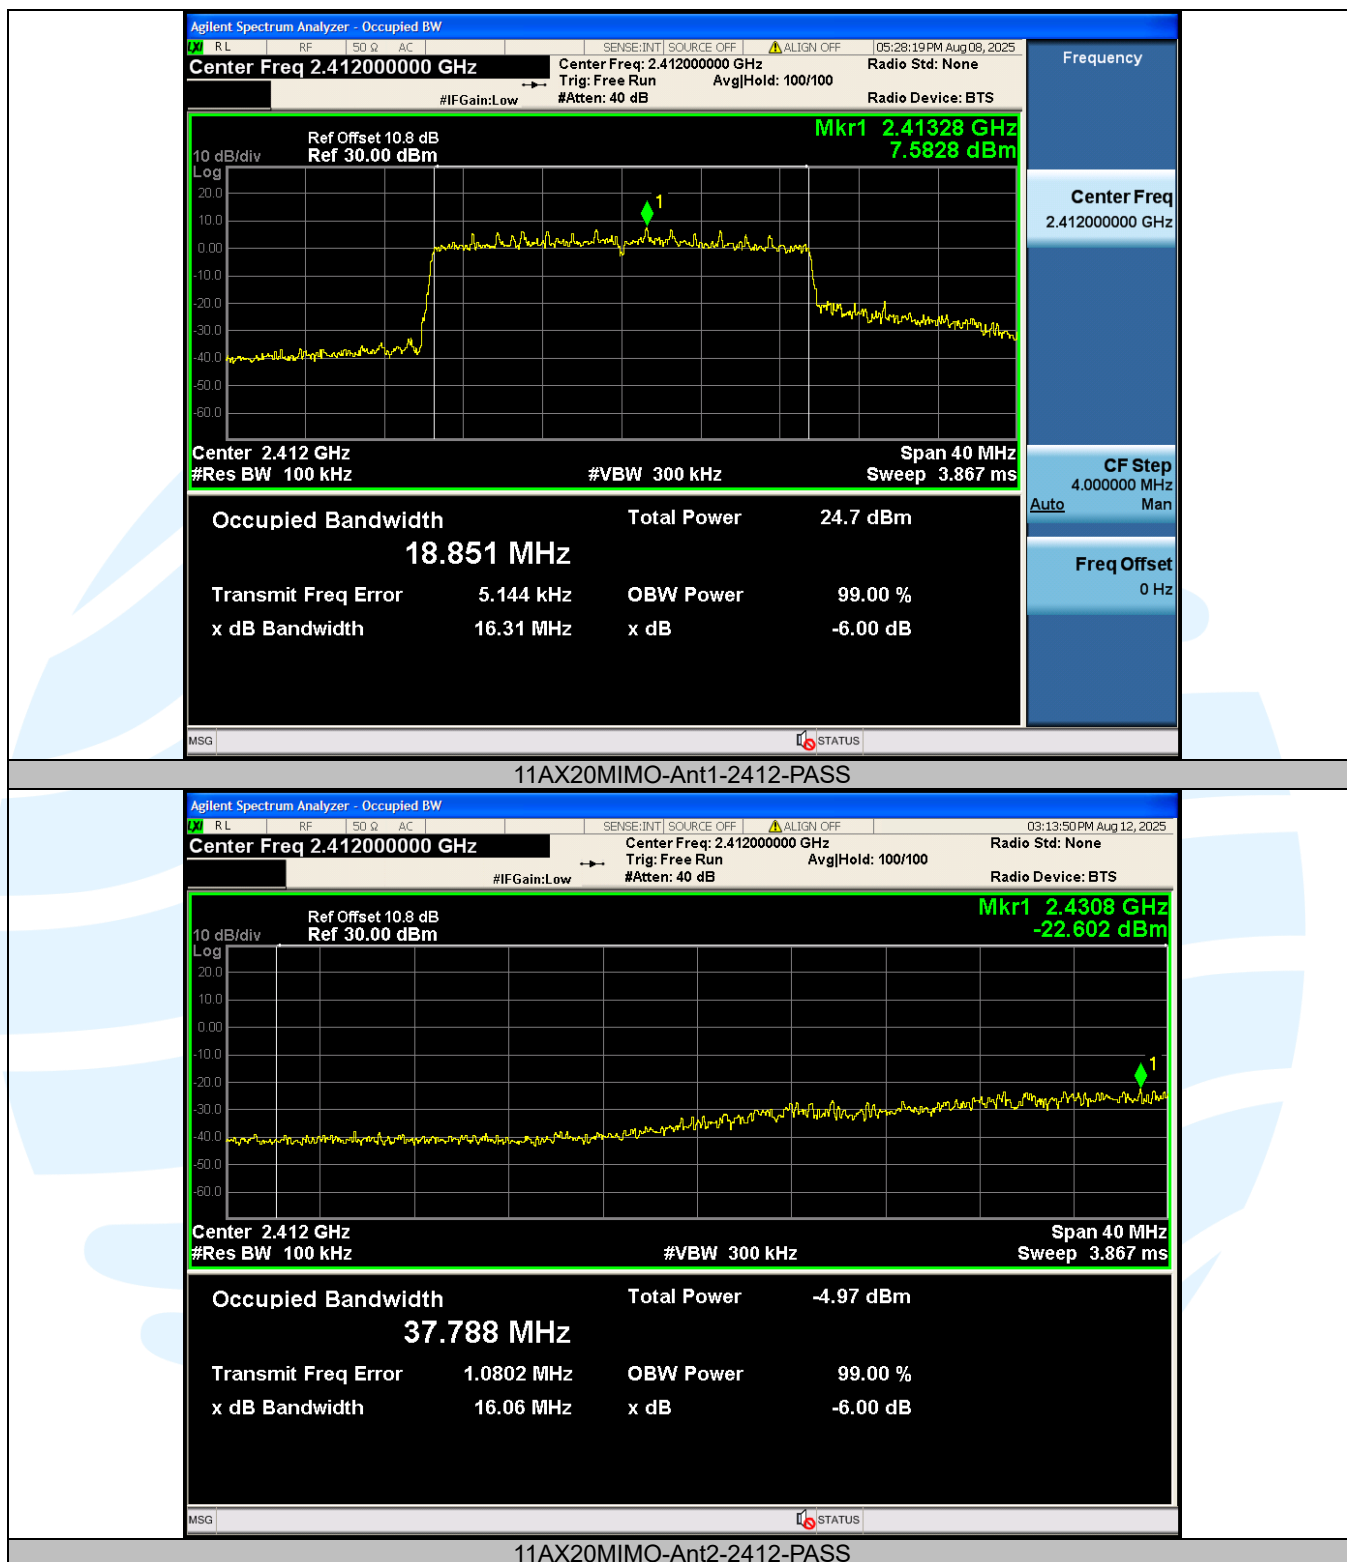**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

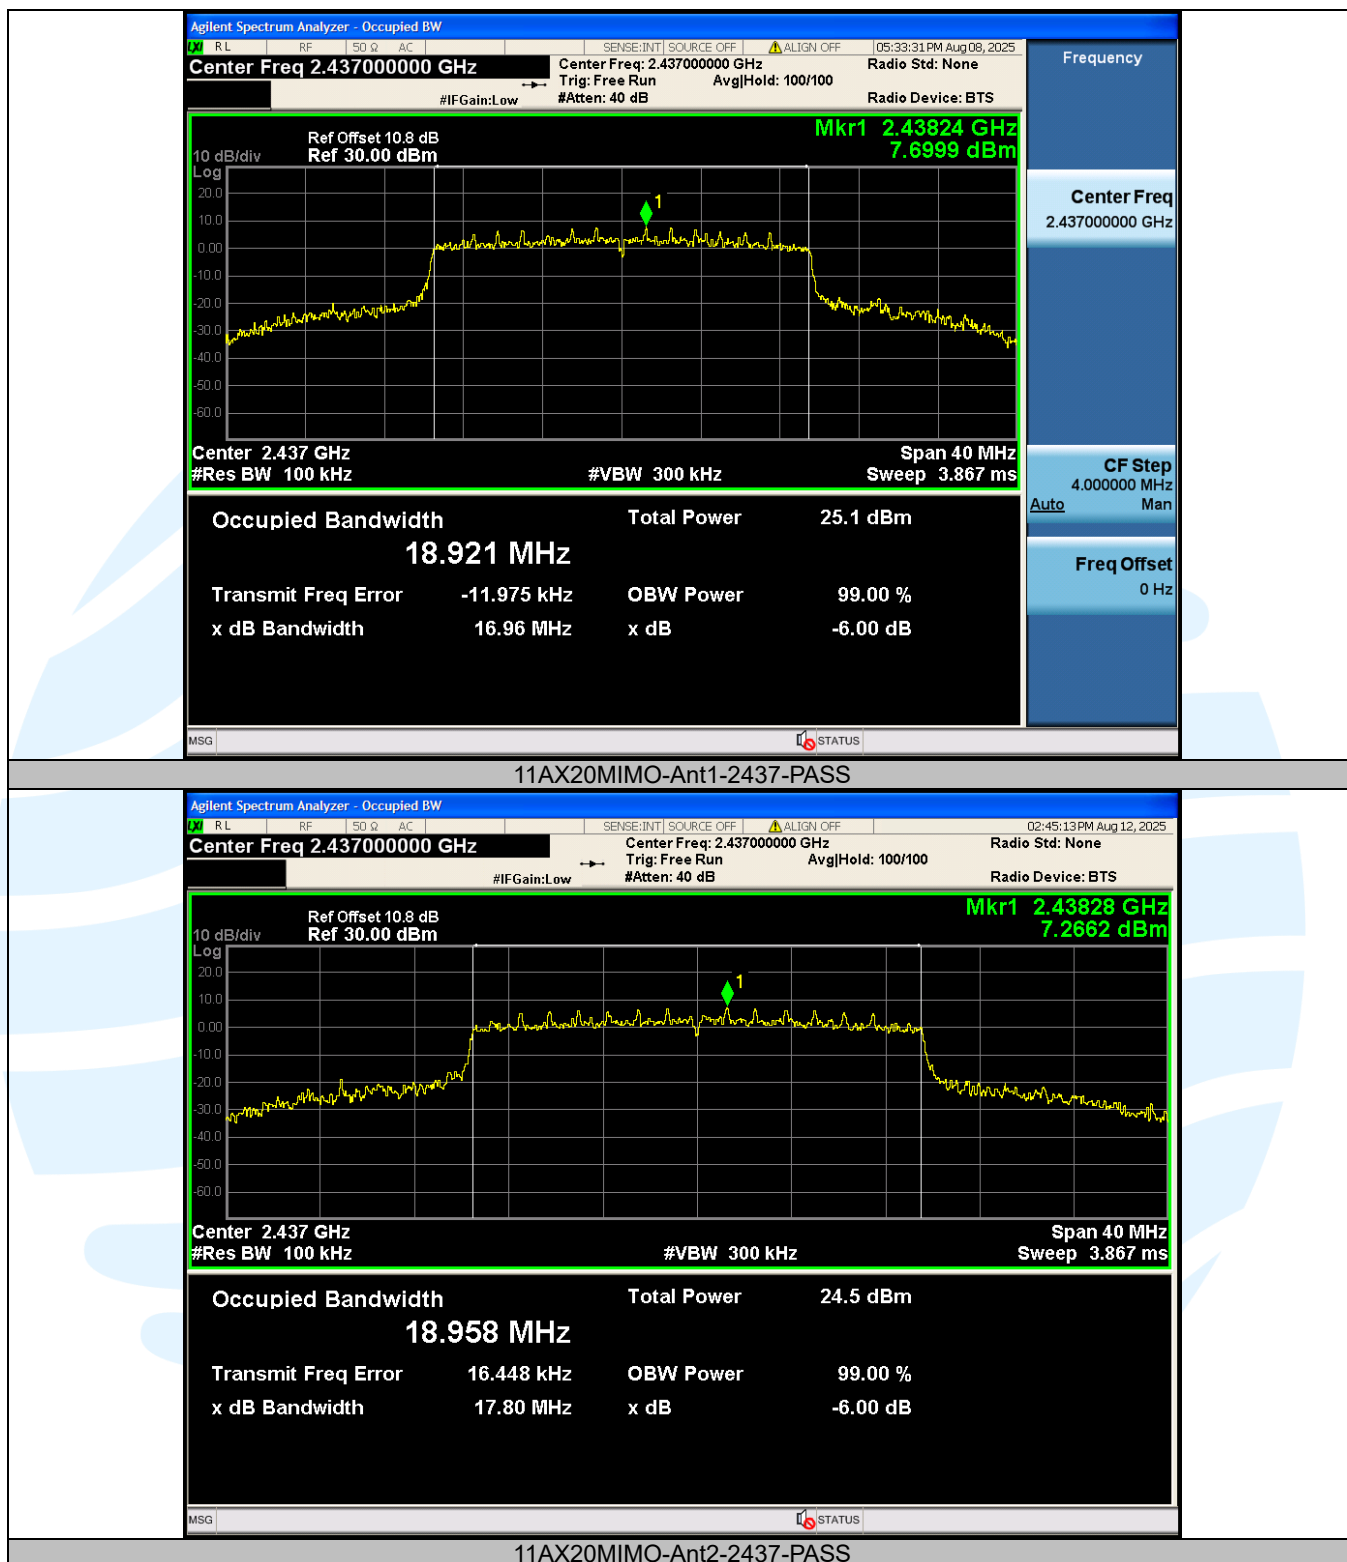**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

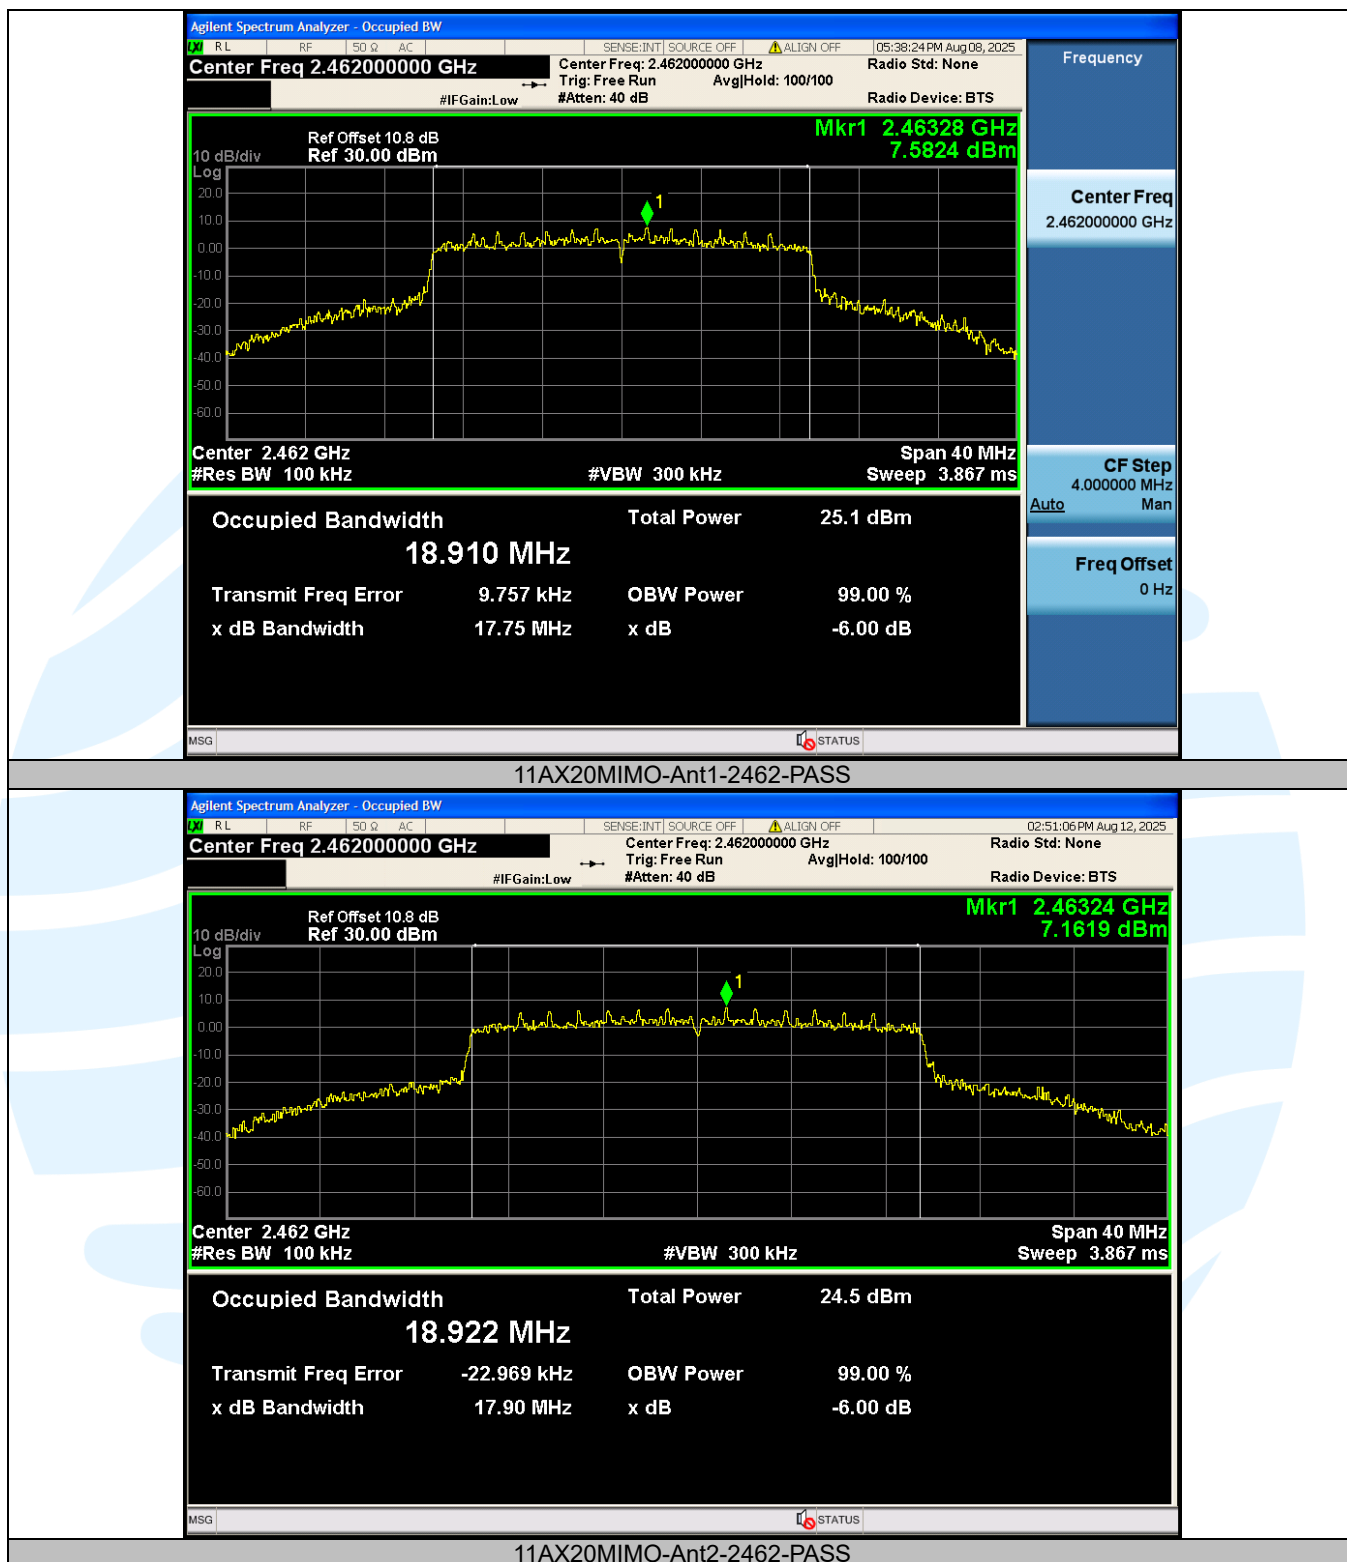**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

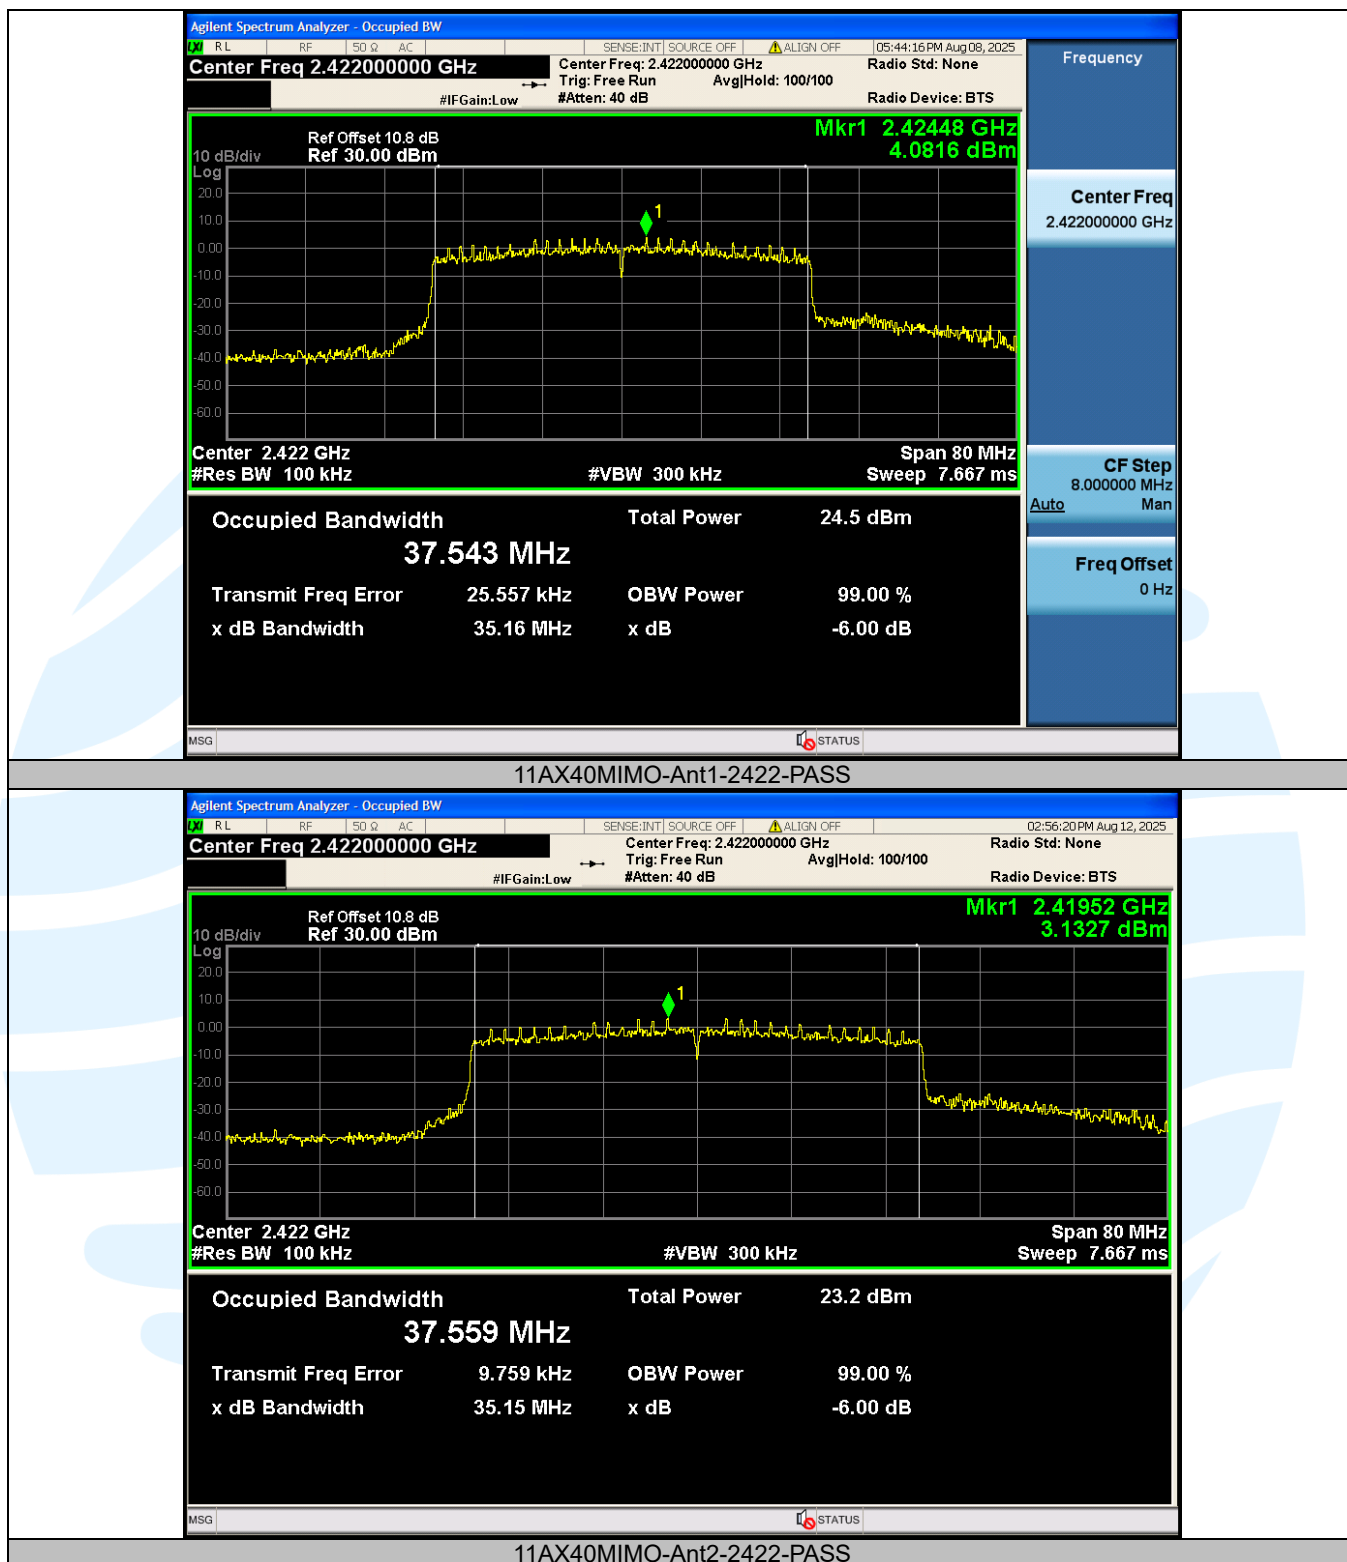**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoheng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

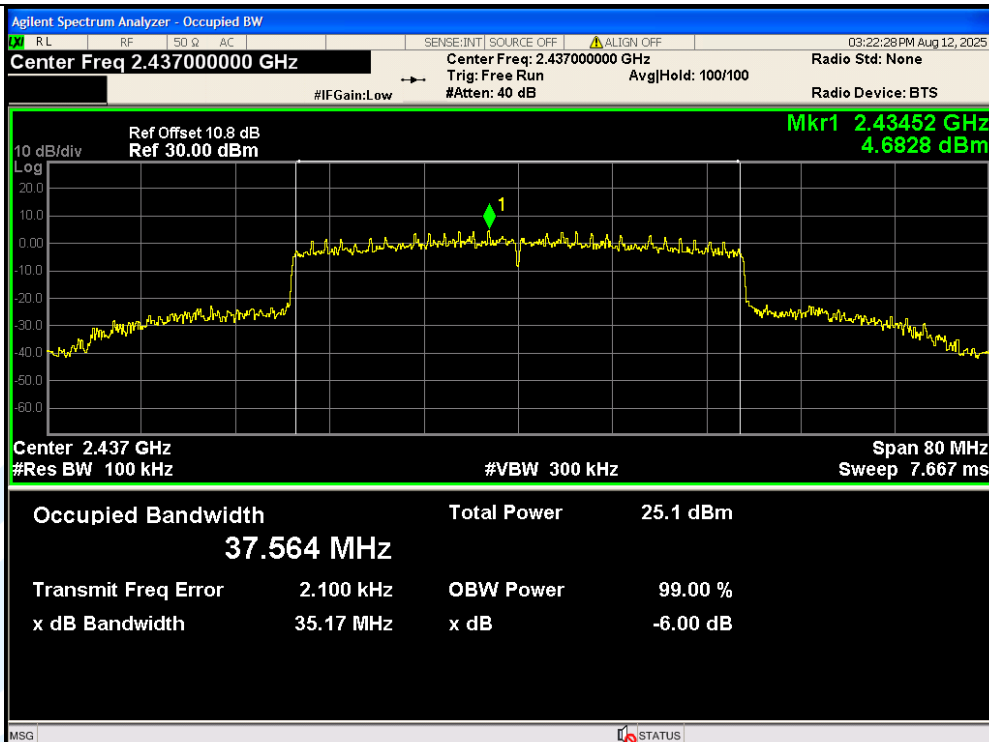

11AX40MIMO-Ant1-2437-PASS

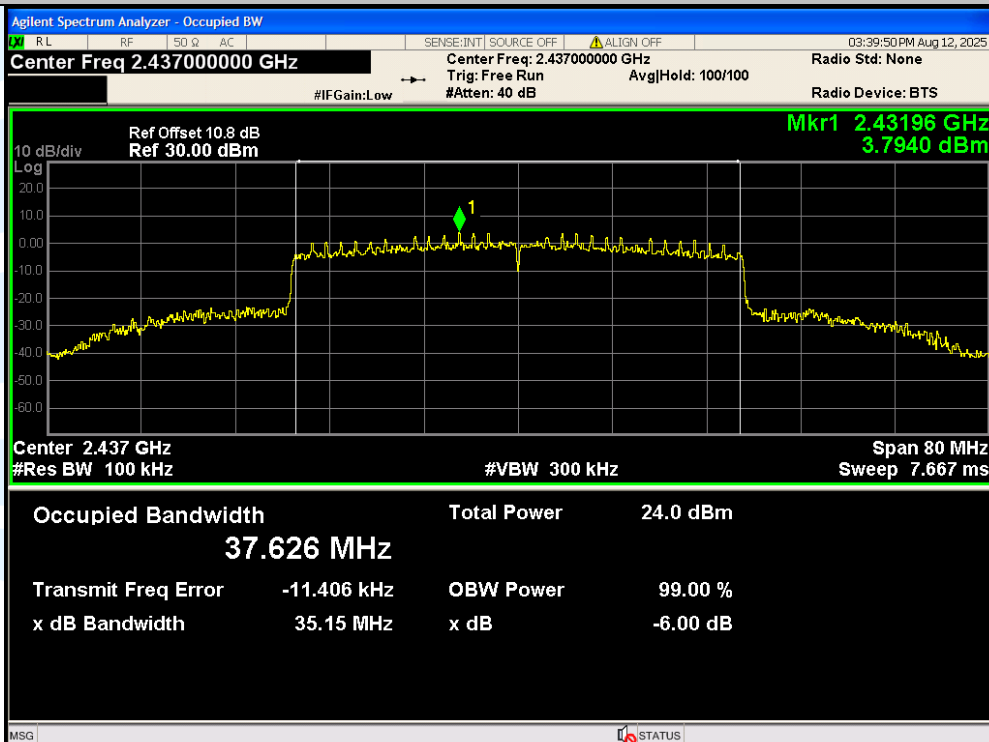

11AX40MIMO-Ant2-2437-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

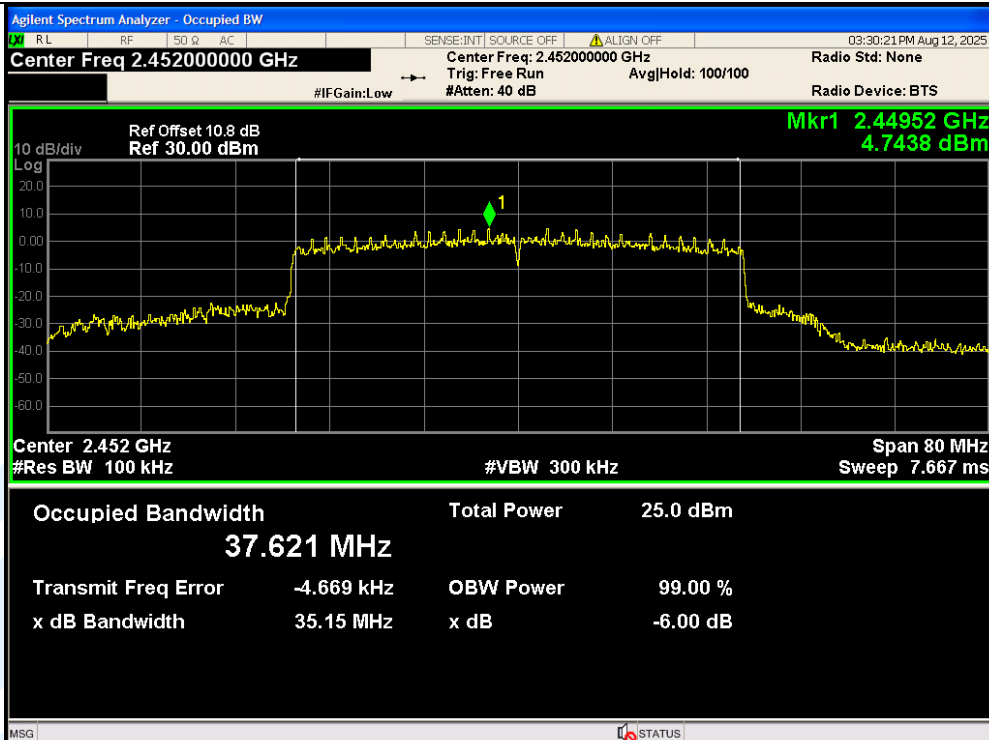

11AX40MIMO-Ant1-2452-PASS

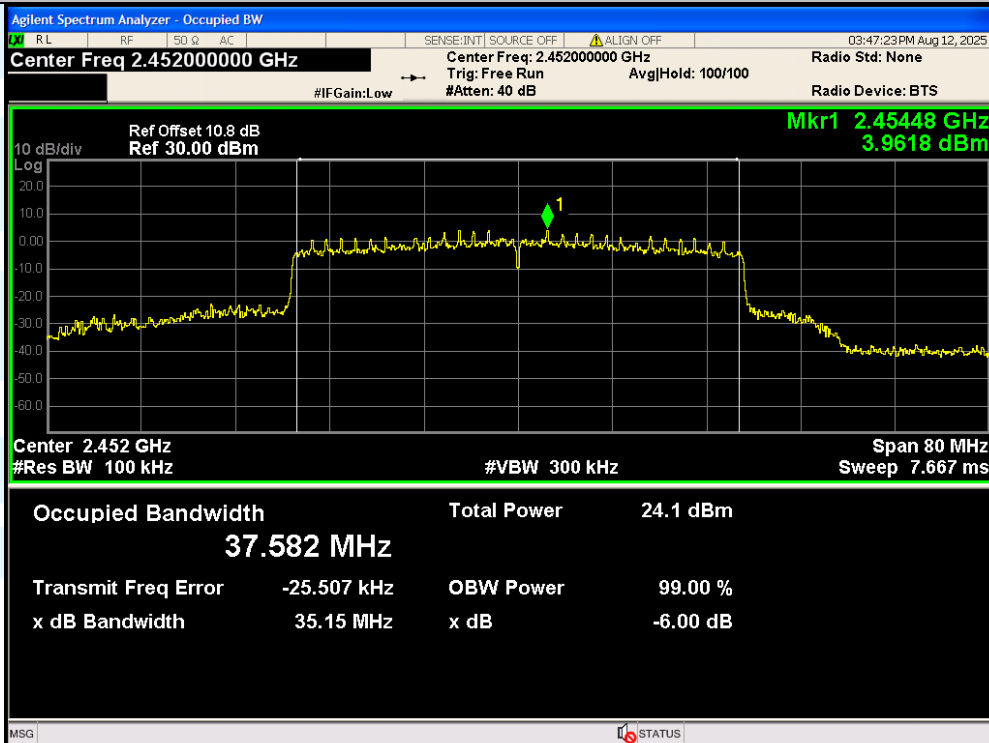

11AX40MIMO-Ant2-2452-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

A.2 OCCUPIED CHANNEL BANDWIDTH

Test Mode	Antenna	Channel Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	12.682	2405.7127	2418.3947	---	---
11B	Ant2	2412	12.835	2405.6132	2418.4482	---	---
11B	Ant1	2437	12.698	2430.6975	2443.3955	---	---
11B	Ant2	2437	12.794	2430.6311	2443.4251	---	---
11B	Ant1	2462	12.726	2455.6815	2468.4075	---	---
11B	Ant2	2462	12.785	2455.6313	2468.4163	---	---
11G	Ant1	2412	17.009	2403.5638	2420.5728	---	---
11G	Ant2	2412	17.209	2403.5302	2420.7392	---	---
11G	Ant1	2437	17.065	2428.5171	2445.5821	---	---
11G	Ant2	2437	17.114	2428.4886	2445.6026	---	---
11G	Ant1	2462	17.061	2453.5164	2470.5774	---	---
11G	Ant2	2462	17.070	2453.4768	2470.5468	---	---
11N20MIMO	Ant1	2412	18.057	2403.0120	2421.0690	---	---
11N20MIMO	Ant2	2412	17.938	2403.0949	2421.0329	---	---
11N20MIMO	Ant1	2437	18.180	2427.9600	2446.1400	---	---
11N20MIMO	Ant2	2437	18.041	2428.0188	2446.0598	---	---
11N20MIMO	Ant1	2462	18.193	2452.9498	2471.1428	---	---
11N20MIMO	Ant2	2462	17.999	2453.0180	2471.0170	---	---
11N40MIMO	Ant1	2422	36.286	2403.9929	2440.2789	---	---
11N40MIMO	Ant2	2422	36.297	2403.9497	2440.2467	---	---
11N40MIMO	Ant1	2437	36.390	2418.8712	2455.2612	---	---
11N40MIMO	Ant2	2437	36.348	2418.8727	2455.2207	---	---
11N40MIMO	Ant1	2452	36.386	2433.8795	2470.2655	---	---
11N40MIMO	Ant2	2452	36.413	2433.8068	2470.2198	---	---
11AX20MIMO	Ant1	2412	18.953	2402.5741	2421.5271	---	---
11AX20MIMO	Ant2	2412	18.952	2402.5470	2421.4990	---	---
11AX20MIMO	Ant1	2437	19.146	2427.4479	2446.5939	---	---
11AX20MIMO	Ant2	2437	19.168	2427.4296	2446.5976	---	---
11AX20MIMO	Ant1	2462	19.080	2452.4774	2471.5574	---	---
11AX20MIMO	Ant2	2462	19.030	2452.5213	2471.5513	---	---
11AX40MIMO	Ant1	2422	37.761	2403.2740	2441.0350	---	---
11AX40MIMO	Ant2	2422	37.710	2403.2704	2440.9804	---	---
11AX40MIMO	Ant1	2437	37.831	2418.1151	2455.9461	---	---
11AX40MIMO	Ant2	2437	37.718	2418.2111	2455.9291	---	---
11AX40MIMO	Ant1	2452	37.790	2433.1281	2470.9181	---	---
11AX40MIMO	Ant2	2452	37.906	2433.0931	2470.9991	---	---

Test Graphs

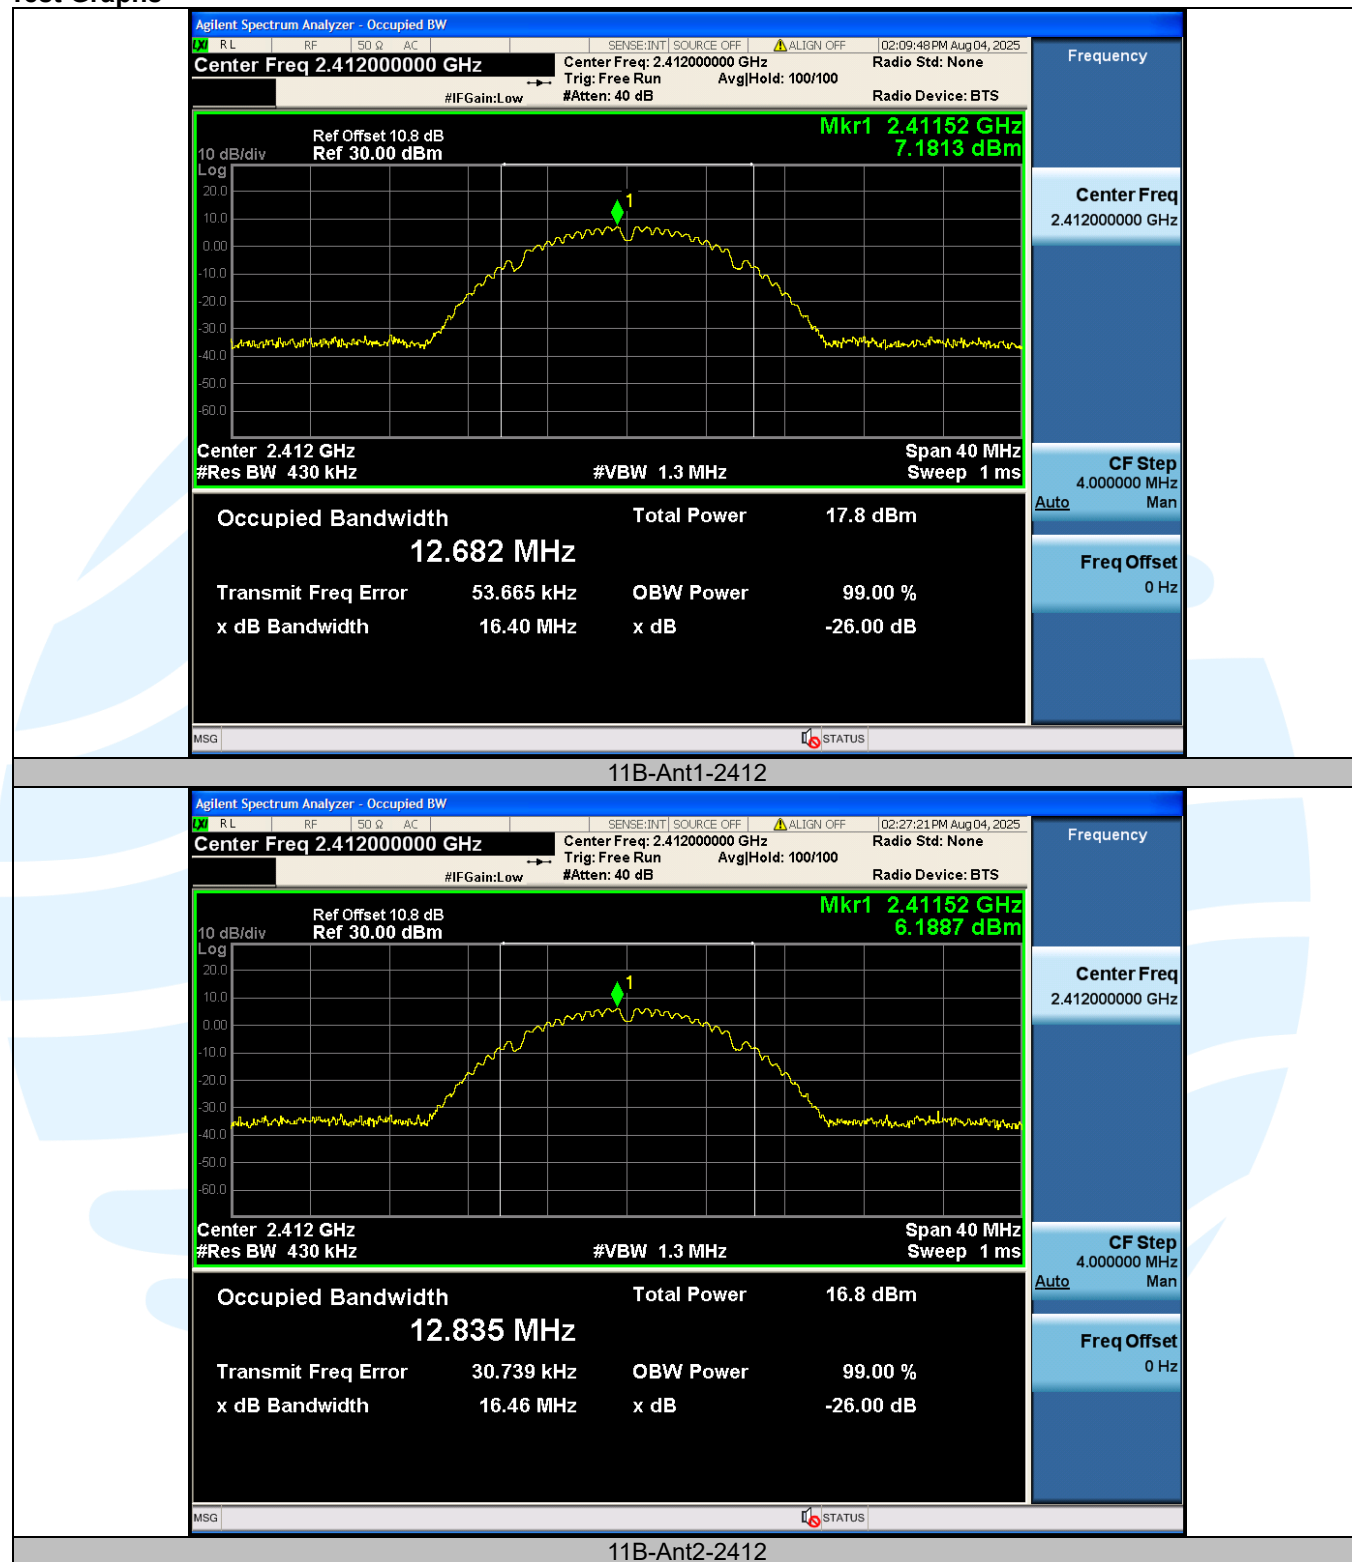

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2