
FCC Test Report

Report No.: AGC13R110901F1

FCC ID : WO3BT-323

PRODUCT DESIGNATION : Bluetooth Earbud

BRAND NAME : N/A

TEST MODEL : BT-323

CLIENT : Impextronic International Inc.

DATE OF ISSUE : Sep.02, 2011

STANDARD(S) : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

VERIFICATION OF COMPLIANCE

Applicant:	Impextronic International Inc.
Address	8F-1, No.85, Sec.1, ZhongXiao E. Road, Taipei, Taiwan
Manufacturer Name:	Impextronic International Inc.
Address:	8F-1, No.85, Sec.1, ZhongXiao E. Road, Taipei, Taiwan
Product Description:	Bluetooth Earbud
Brand Name:	N/A
Model Number:	BT-323
FCC ID	WO3BT-323
Report Number:	AGC13R110901F1
Date of Test:	Dec. 17, 2010 to Dec.22, 2010

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By:



Angela Li Sep.02, 2011

Reviewed By:



Forrest Lei Sep.02, 2011

Authorized By:



Solger Zhang Sep.02, 2011

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 TABLE OF CARRIER FREQUENCIES	4
1.3 RECEIVER INPUT BANDWIDTH AND BEHAVIOUR FOR REPEATED SINGLE	4
1.4 RELATED SUBMITTAL(S) / GRANT (S)	5
1.5 TEST METHODOLOGY	5
1.6 TEST FACILITY	5
1.7 SPECIAL ACCESSORIES	5
1.8 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION.....	7
2.1 CONFIGURATION OF TESTED SYSTEM	7
2.2 EQUIPMENT USED IN TESTED SYSTEM	7
3. SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES.....	8
5. CONDUCTION EMISSIONS.....	9
5.1 MEASUREMENT PROCEDURE:	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
5.3 MEASUREMENT EQUIPMENT USED:	9
5.4 LIMITS AND MEASUREMENT RESULT:	10
6. MAXIMUM OUTPUT POWER.....	13
6.1 MEASUREMENT PROCEDURE:	13
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
6.3 MEASUREMENT EQUIPMENT USED:	16
6.4 LIMITS AND MEASUREMENT RESULT:	17
7.20 DB BANDWIDTH	18
7.1 MEASUREMENT PROCEDURE	18
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	18
7.3 MEASUREMENT EQUIPMENT USED:	18
7.4 LIMITS AND MEASUREMENT RESULTS:	18
8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A)	28
8.1 MEASUREMENT PROCEDURE:	28
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
8.3 MEASUREMENT EQUIPMENT USED:	28
8.4 LIMITS AND MEASUREMENT RESULT:	28

9.OUT OF BAND EMISSION.....	29
9.1 MEASUREMENT PROCEDURE:	29
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	29
9.3 MEASUREMENT EQUIPMENT USED:.....	29
9.4 LIMITS AND MEASUREMENT RESULT:.....	29
10.NUMBER OF HOPPING FREQUENCY	68
10.1 MEASUREMENT PROCEDURE	68
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	68
10.3 MEASUREMENT EQUIPMENT USED.....	68
10.4 LIMITS AND MEASUREMENT RESULT:	68
11.TIME OF OCCUPANCY (DWELL TIME)	72
11.1 MEASUREMENT PROCEDURE	72
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	72
11.3 MEASUREMENT EQUIPMENT USED.....	72
11.4 LIMITS AND MEASUREMENT RESULT.....	72
12. FREQUENCY SEPARATION	75
12.1 MEASUREMENT PROCEDURE	81
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	81
12.3 MEASUREMENT EQUIPMENT USED.....	81
12.4 LIMITS AND MEASUREMENT RESULT.....	81
APPENDIX I.....	91
PHOTOGRAPHS OF THE EUT	91
PPENDIX II.....	95
PHOTOGRAPHS OF THE TEST SETUP	95

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a **Bluetooth Earbud**; It is short range, lower power. And it is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following:

Operation Frequency	2.402 GHz to 2.480GHz
Output Power	BT(1Mbps): 0.07dBm BT EDR(2Mbps): -2.21dBm BT EDR(3Mbps): -2.99dBm
Modulation	BT(1Mbps): GFSK BT EDR(2Mbps): II/4-DQPSK BT EDR(3Mbps): 8-DPSK
Number of channels	79
Antenna Designation	Integrated Antenna
Antenna Gain	0.33dBi
Power Supply	Internal Lion Composite Battery DC 3.7V by battery Charge from only PC

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

1.3 RECEIVER INPUT BANDWIDTH AND BEHAVIOUR FOR REPEATED SINGLE OR MULTIPLE PACKETS

The input bandwidth of the receiver is 1.3 MHz, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence.

Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislots packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: WO3BT-323** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.5 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.6 TEST FACILITY

All measurement facilities used to collect the measurement data are located at
Attestation of Global Compliance Co., Ltd.

1F, No.2 Building, Huafeng No.1 Technical,Industrial Park, Sanwei, Xixiang, Baoan District,,

Shenzhen, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.
FCC register No.: 259865

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

1.7 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

1.9 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06
01,51,03,55,05,04

1.10 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD_ADDRESS. The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP(24 bits), 4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permuations,additions,XOR-operations)are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF TESTED SYSTEM



2.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID
1	Bluetooth Earbud	N/A	BT-323	WO3BT-323

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207	Conduction Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Band Edges	Compliant
§15.247	Spurious Emission	Compliant
§15.247	Frequency Separation	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant

4. DESCRIPTION OF TEST MODES


1. The EUT has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
2. The EUT stays in continuous transmitting mode on the operation frequency being set.

5. CONDUCTION EMISSIONS

5.1 MEASUREMENT PROCEDURE:

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. The EUT received DC3.7V through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

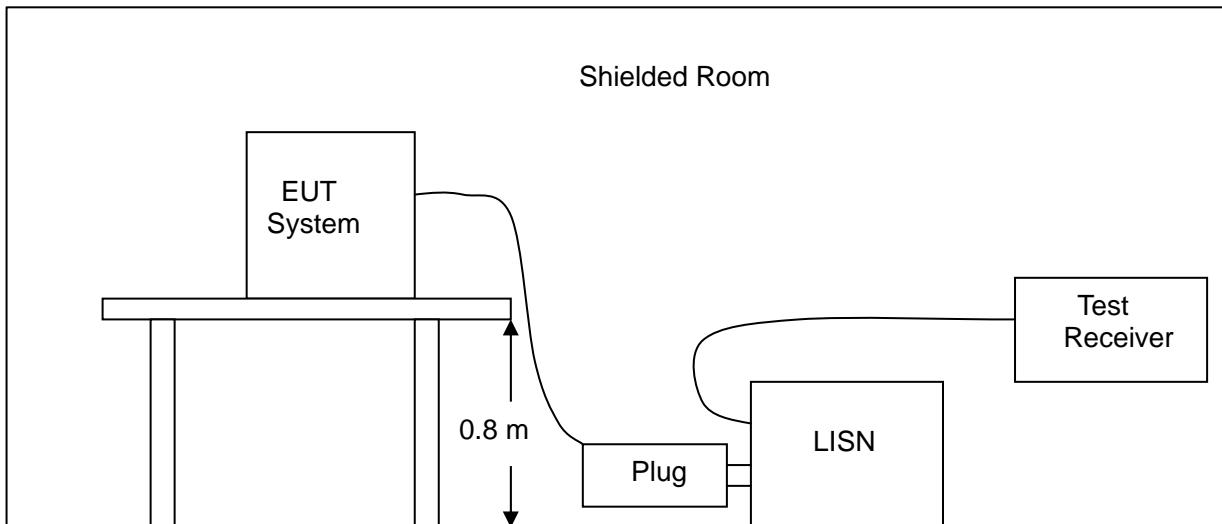

5.3 MEASUREMENT EQUIPMENT USED:

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2011
LISN	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2011
LISN	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2011
50 Ω Coaxial Switch	Anritsu	MP59B	M20531	05/29/2011

5.4 LIMITS AND MEASUREMENT RESULT:

LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

1**Note: 1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

MEASURING INSTRUMENT AND SETTING


The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	10dB
Start Frequency	0.15MHz
Stop Frequency	30MHz
6dB bandwidth	9KHz for QP
IF bandwidth	9KHz for AV

TEST RESULT AT CHARGE MODE:

Operation Mode: CHARGE(connected to PC) Test Date: Dec.20, 2010
Temperature: 25°C Tested by: Jekey Zhang
Humidity: 55 % RH Polarity: --


TEST RESULT OF LINE –L CONDUCTED EMISSION TEST

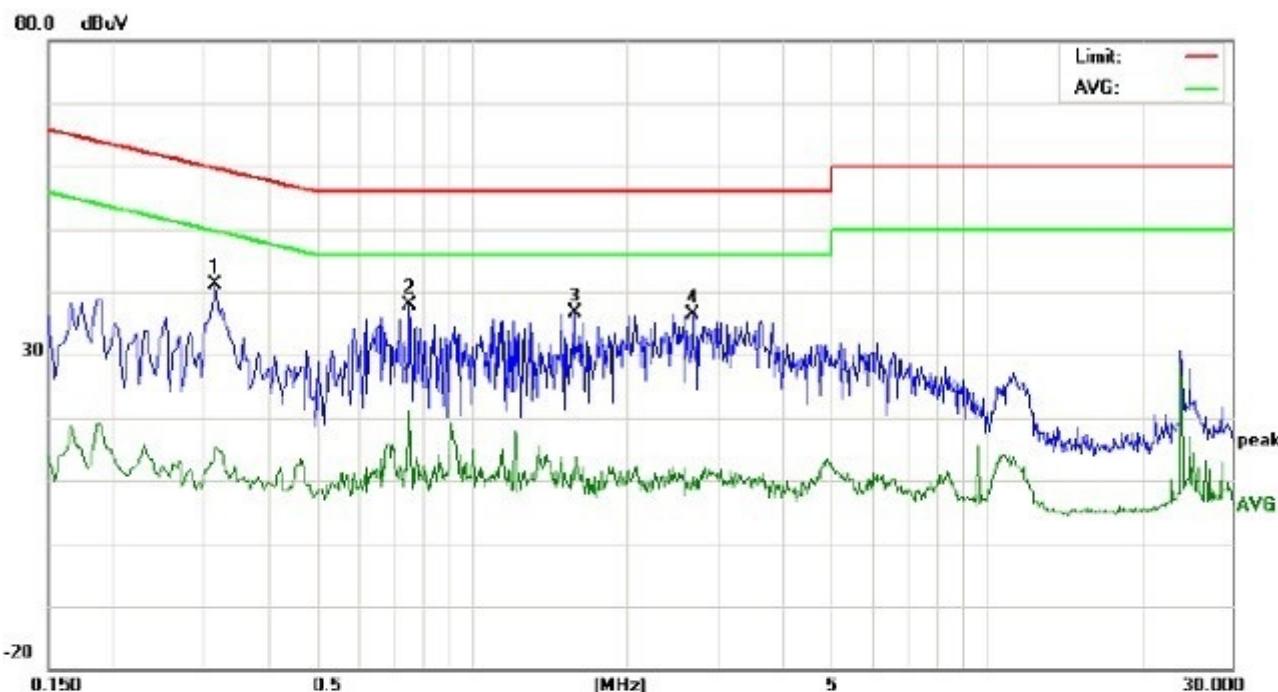

Site: Conduction Phase: **L1** Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
EUT: Bluetooth Earbud
M/N: BT-323
Mode:charge
Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3180	30.76		4.82	10.30	41.06		15.12	59.76	49.76	-18.70	-34.64	P	
2	0.7580	27.44		10.93	10.31	37.75		21.24	56.00	46.00	-18.25	-24.76	P	
3	1.5780	26.25		1.21	10.36	36.61		11.57	56.00	46.00	-19.39	-34.43	P	
4	2.6900	25.86		0.09	10.48	36.34		10.57	56.00	46.00	-19.66	-35.43	P	

TEST RESULT OF LINE -N CONDUCTED EMISSION TEST

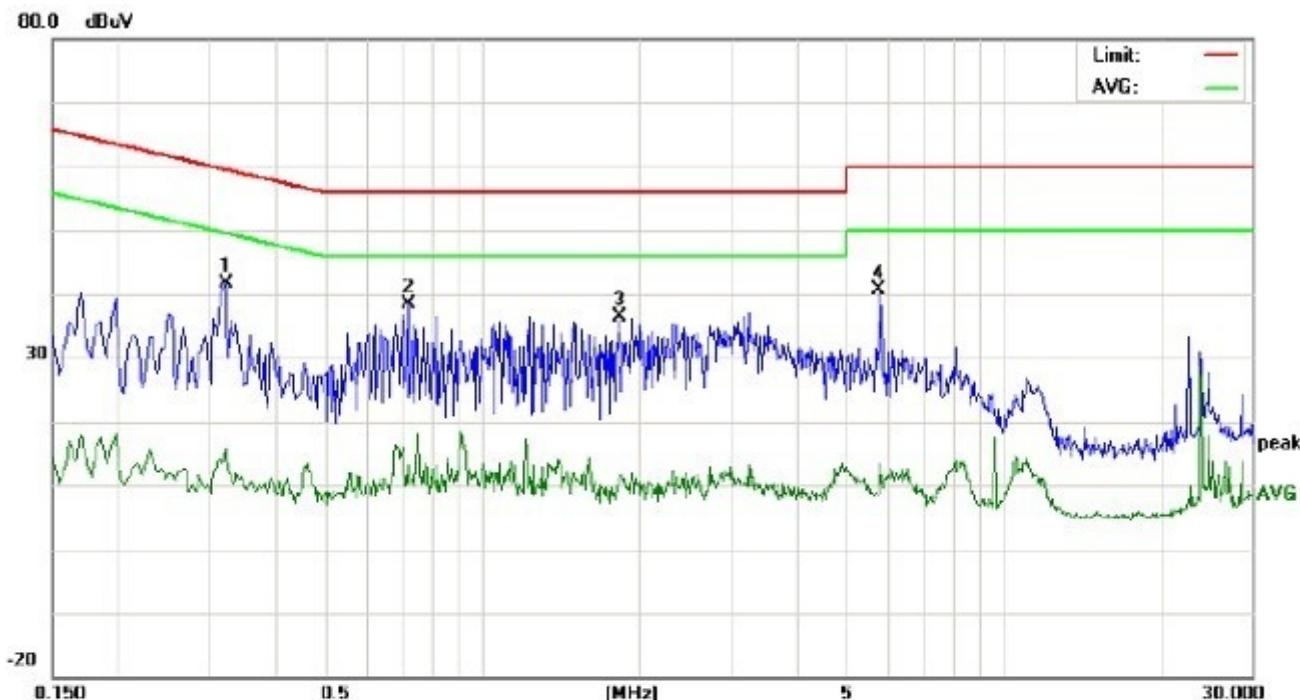

Site: Conduction Phase: *N* Temperature: 26
Limit: EN55022 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
EUT: Bluetooth Earbud
M/N: BT-323
Mode:charge
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.3220	31.42		5.47	10.30	41.72		15.77	59.65	49.65	-17.93	-33.88	P	
2	0.7220	28.06		2.69	10.33	38.39		13.02	56.00	46.00	-17.61	-32.98	P	
3	1.8300	26.06		0.39	10.27	36.33		10.66	56.00	46.00	-19.67	-35.34	P	
4	5.7819	30.43		3.00	10.27	40.70		13.27	60.00	50.00	-19.30	-36.73	P	

6. MAXIMUM OUTPUT POWER

6.1 MEASUREMENT PROCEDURE:

CONDUCTED METHOD


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set SPA Centre Frequency = Operation Frequency, RBW= 1 MHz,
VBW= 1 MHz.
5. Set SPA Trace 1 Max hold, then View.

RADIATED METHOD

According to ANSI C63.4:2003


6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

CONDUCTED METHOD

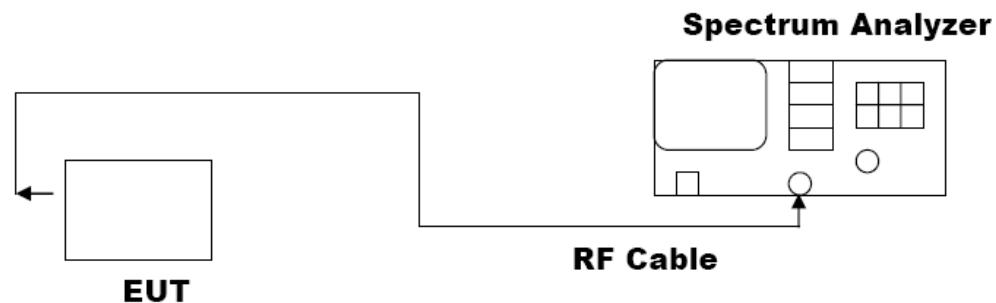


RADIATED EMISSION TEST SETUP


RADIATED MISSION TEST SETUP BELOW 30MHz

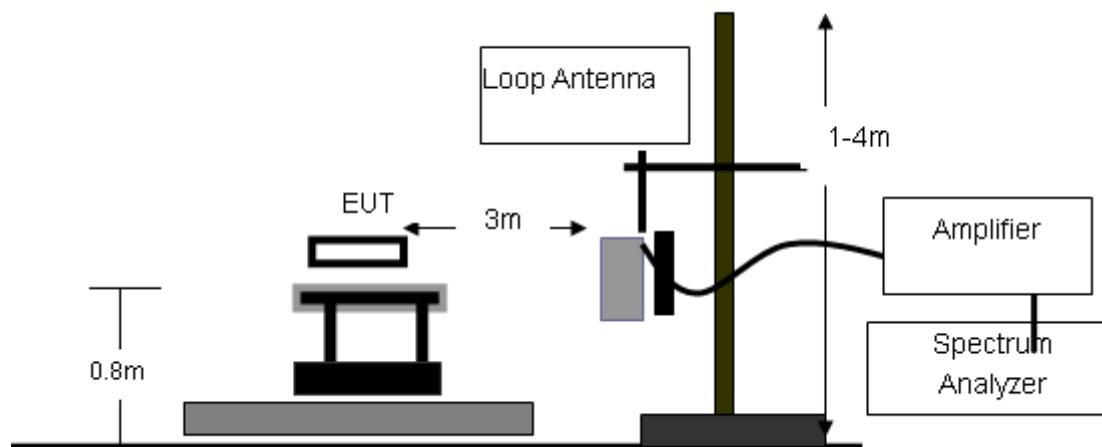

RADIATED MISSION TEST SETUP 30MHz-1000MHz

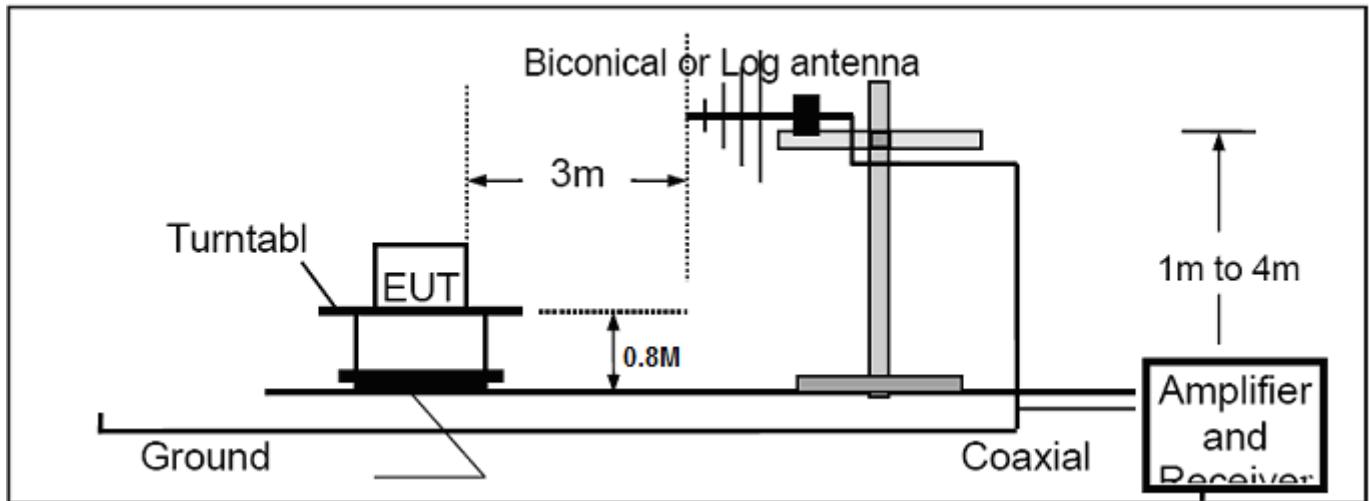



RADIATED MISSION TEST SETUP ABOVE 1000MHz

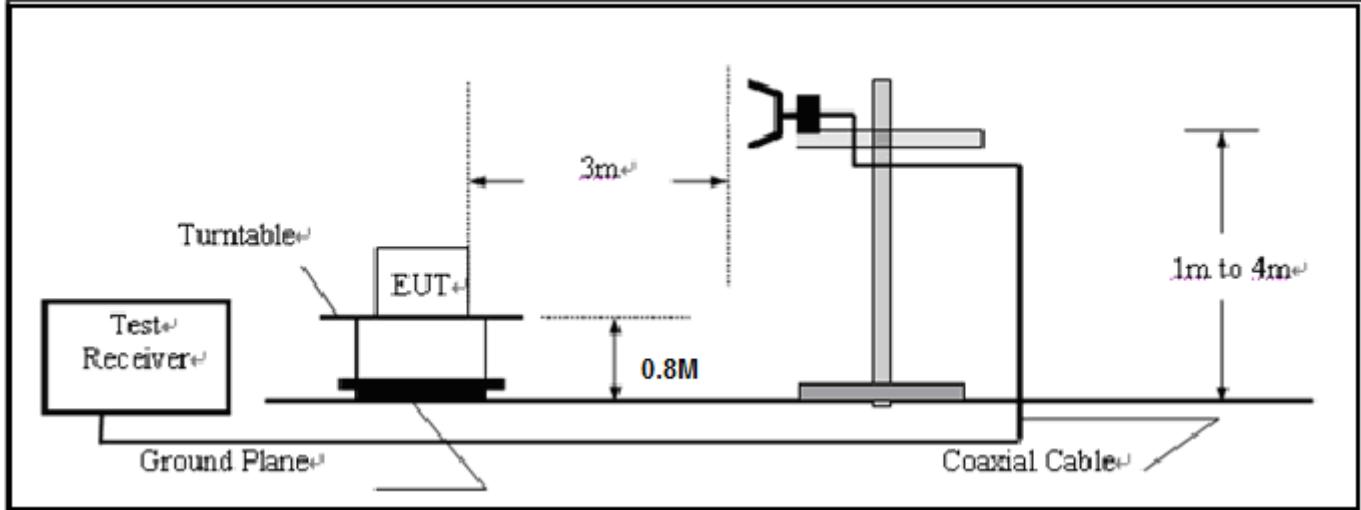



EIRP TEST SETUP

TEST SETUP BELOW 1GHZ

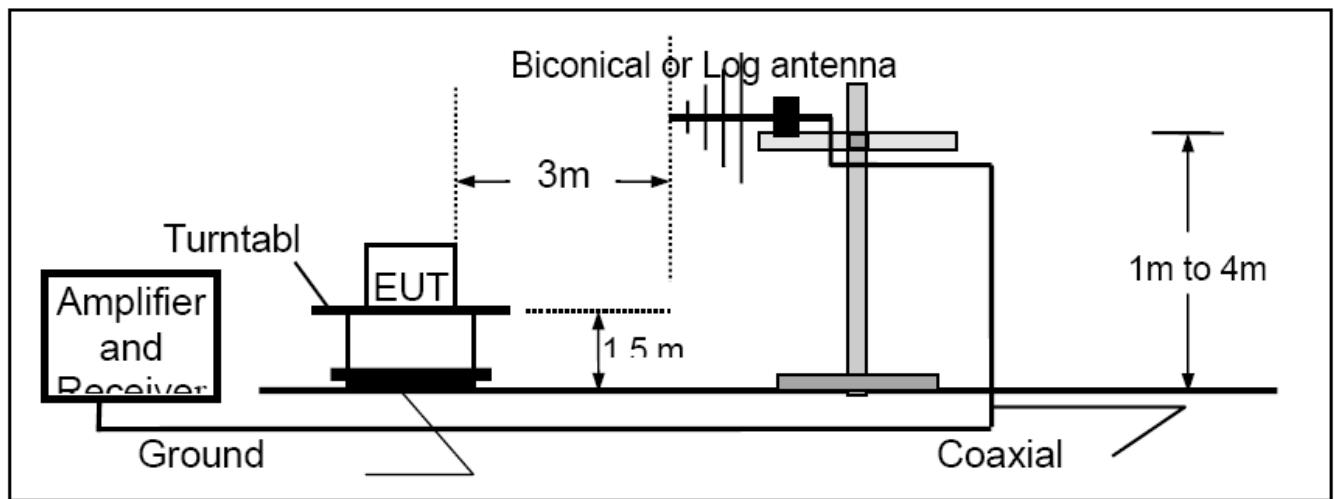

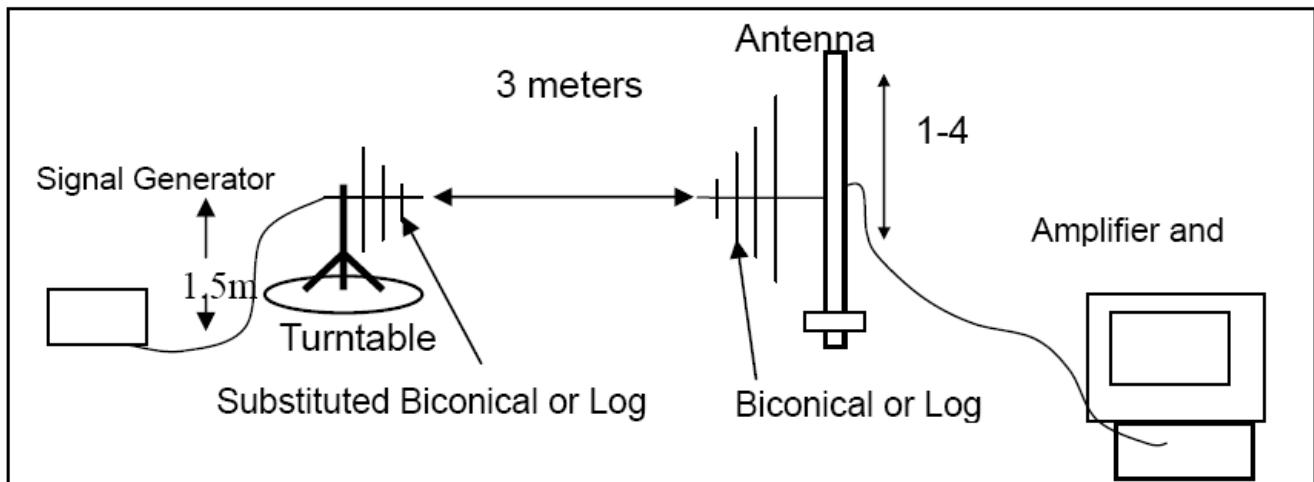

TEST SETUP ABOVE 1GHZ

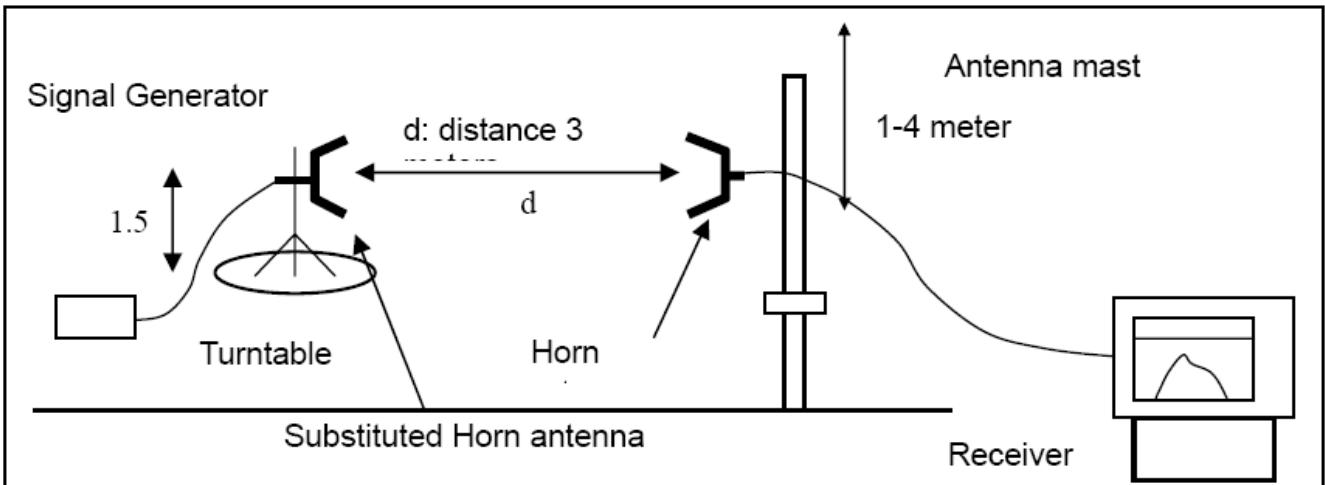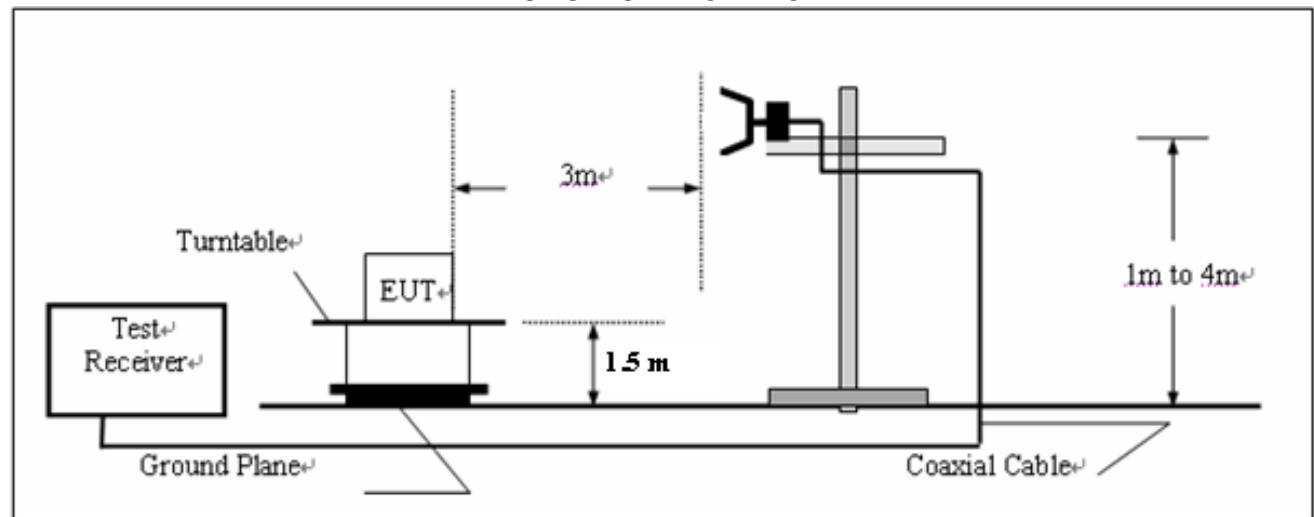

6.3 MEASUREMENT EQUIPMENT USED:

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSEM30	849720/019	05/29/2010	05/29/2011
Amplifier	H.P.	8449B	3008A00277	05/29/2010	05/29/2011
Horn Antenna	Sunol Sciences	DRH-118	A052604	05/29/2010	05/29/2011
Horn Antenna	A.H. Systems Inc.	SAS-574	--	05/29/2010	05/29/2011
EMI Test Receiver	Rohde & Schwarz	ESCI	100028	05/29/2010	05/29/2011
Amplifier	H.P.	HP8447E	1937A01046	05/29/2010	05/29/2011
Broadband Antenna	Sunol Sciences	JB1	A040904-2	05/29/2010	05/29/2011
LOOP ANTENNA	R&S	HM525	--	05/29/2010	05/29/2011

6.4 LIMITS AND MEASUREMENT RESULT:

Operation Mode: RF MODE

Test Date: Dec.20, 2010

Temperature: 25°C

Tested by: Jekey Zhang

Humidity: 55 % RH

GFSK: 1Mbps

Channel	Frequency (MHZ)	Reading (dBm)	Limit (dBm)	Result
0	2402	0.07	30	Pass
39	2441	0.02	30	Pass
78	2480	0.06	30	Pass

II/4-DQPSK: 2Mbps

Channel	Frequency (MHZ)	Reading (dBm)	Limit (dBm)	Result
0	2402	-3.02	30	Pass
39	2441	-2.31	30	Pass
78	2480	-2.21	30	Pass

8-DPSK: 3Mbps

Channel	Frequency (MHZ)	Reading (dBm)	Limit (dBm)	Result
0	2402	-3.98	30	Pass
39	2441	-3.54	30	Pass
78	2480	-2.99	30	Pass

7. 20 DB BANDWIDTH

7.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 6.2

7.3 MEASUREMENT EQUIPMENT USED:

The same as described in Section 6.3

7.4 LIMITS AND MEASUREMENT RESULTS:


Operation Mode:	RF MODE	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Jekey Zhang
Humidity:	55 % RH	Polarity:	--

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	20 dB Bandwidth(1Mbps)		Criteria
--	Bottom Channel	0.924	PASS
	Middle Channel	0.984	PASS
	Top Channel	0.932	PASS


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	20 dB Bandwidth(2Mbps)		Criteria
--	Bottom Channel	1.224	PASS
	Middle Channel	1.224	PASS
	Top Channel	1.224	PASS

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	20 dB Bandwidth(3Mbps)		Criteria
--	Bottom Channel	1.224	PASS
	Middle Channel	1.224	PASS
	Top Channel	1.224	PASS


TEST PLOT OF BANDWIDTH FOR BOTTOM CHANNEL (1Mpbs)

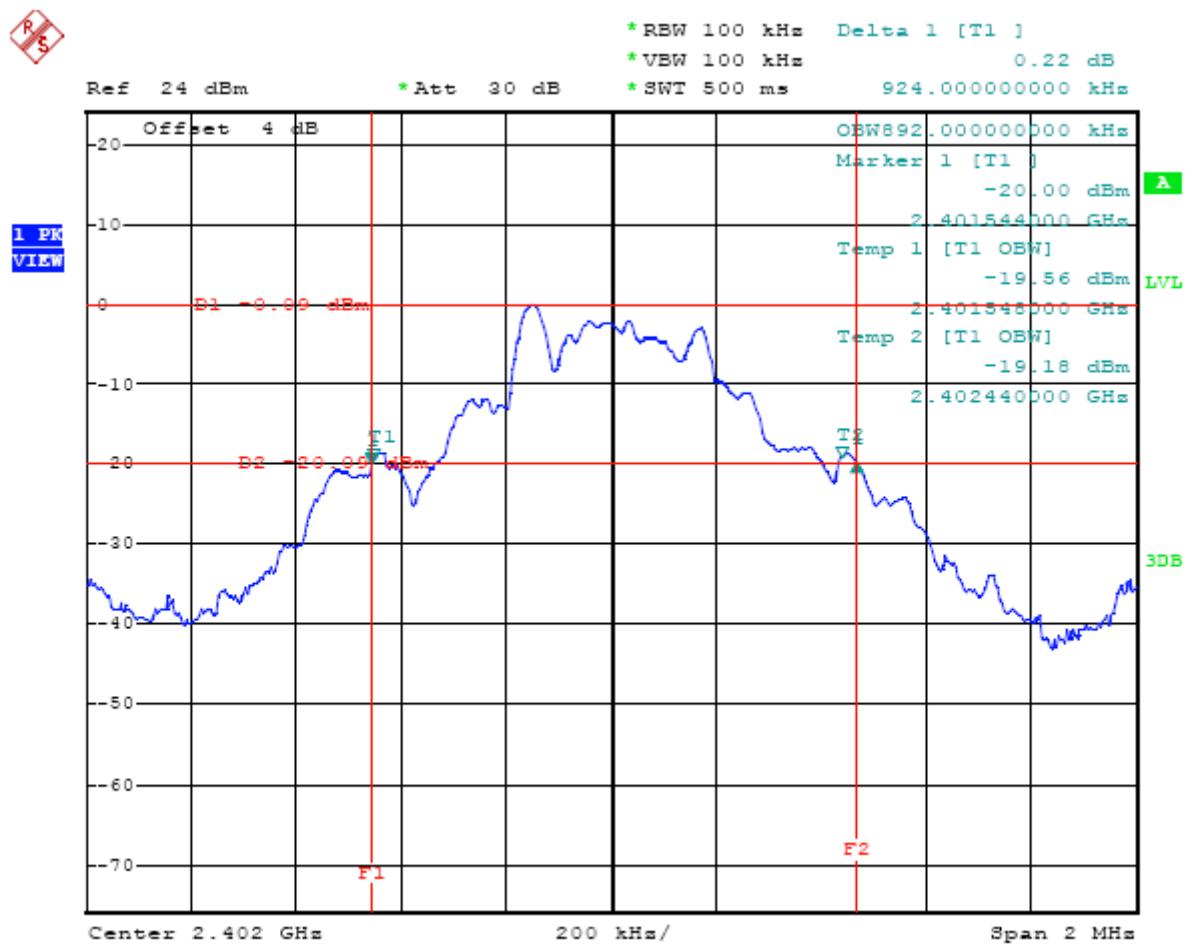


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL (1Mpbs)

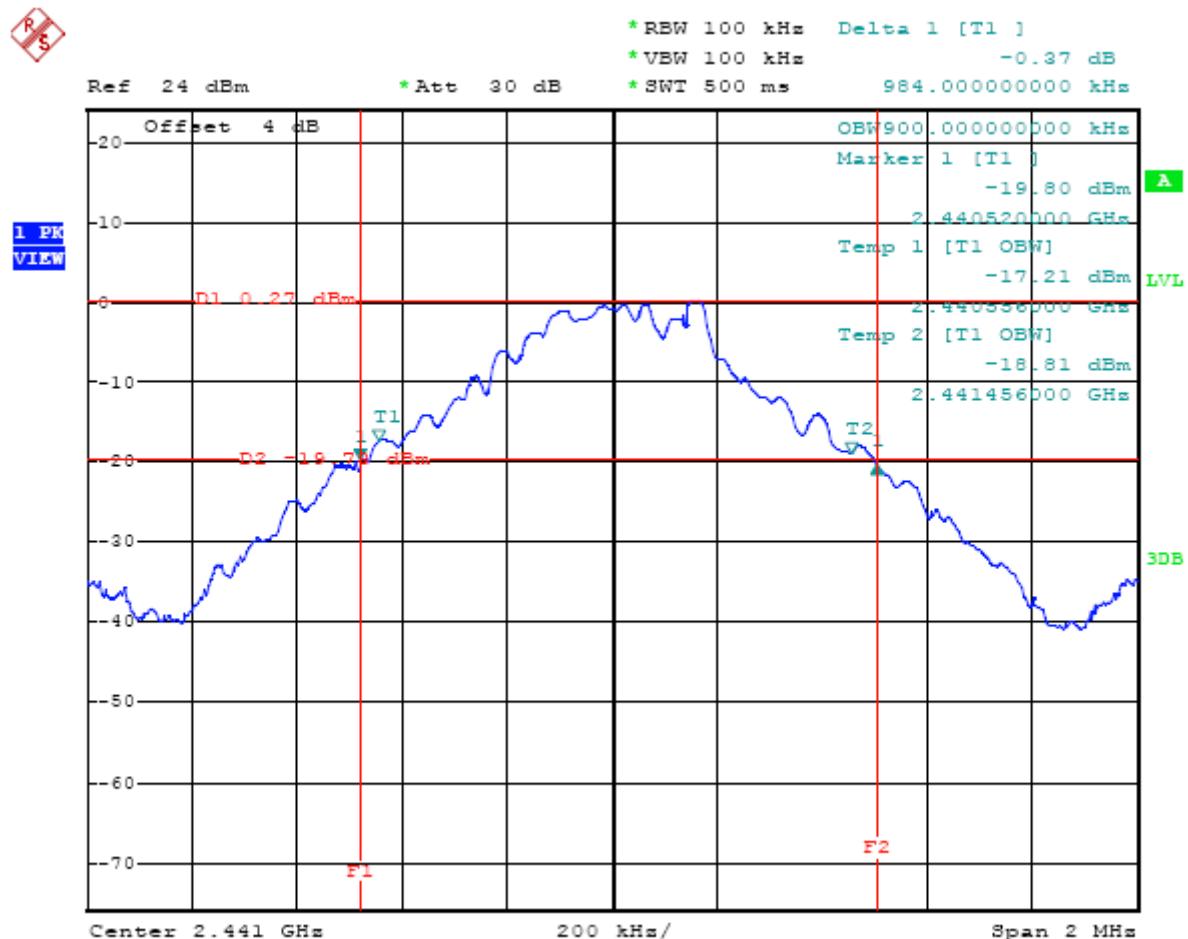


TEST PLOT OF BANDWIDTH FOR TOP CHANNEL (1Mpbs)

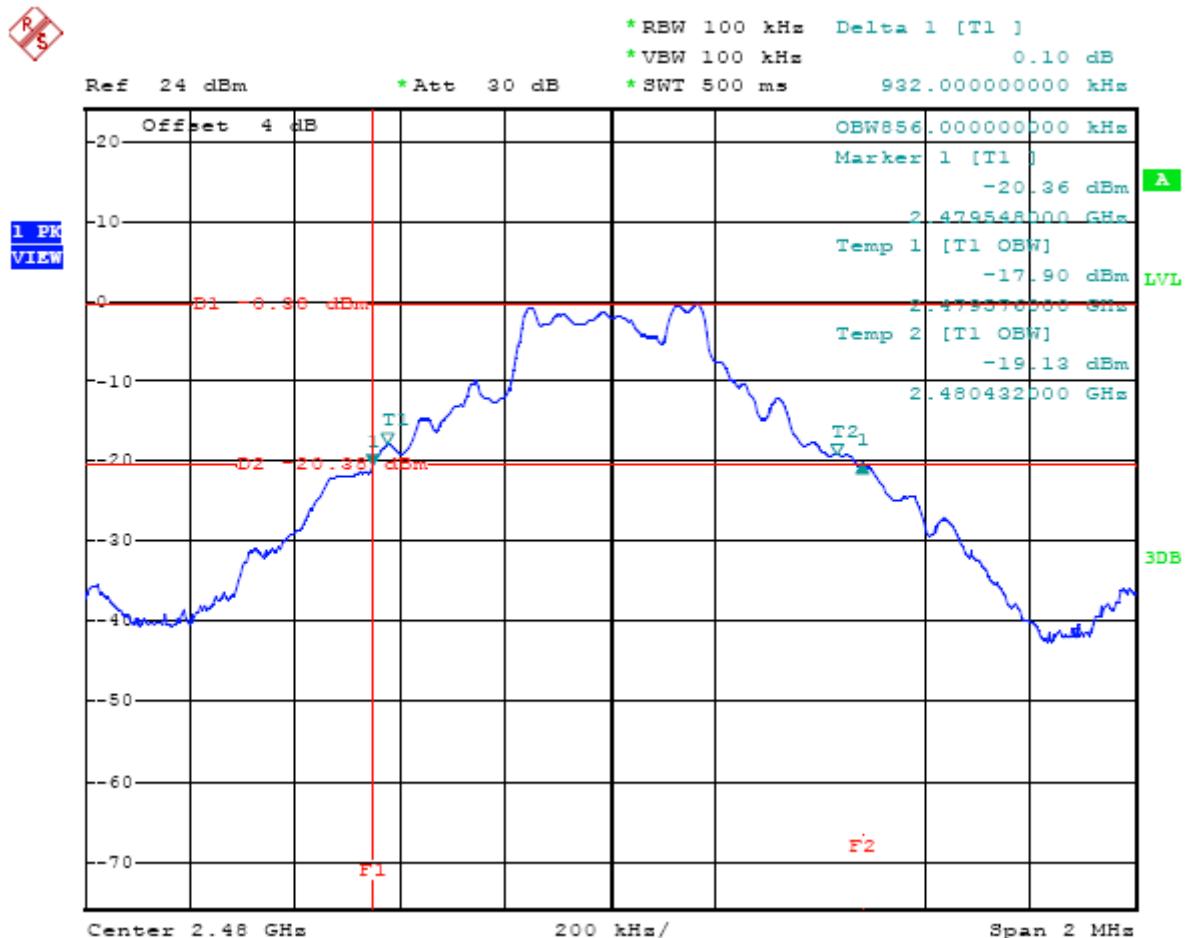


TEST PLOT OF BANDWIDTH FOR BOTTOM CHANNEL (2Mpbs)

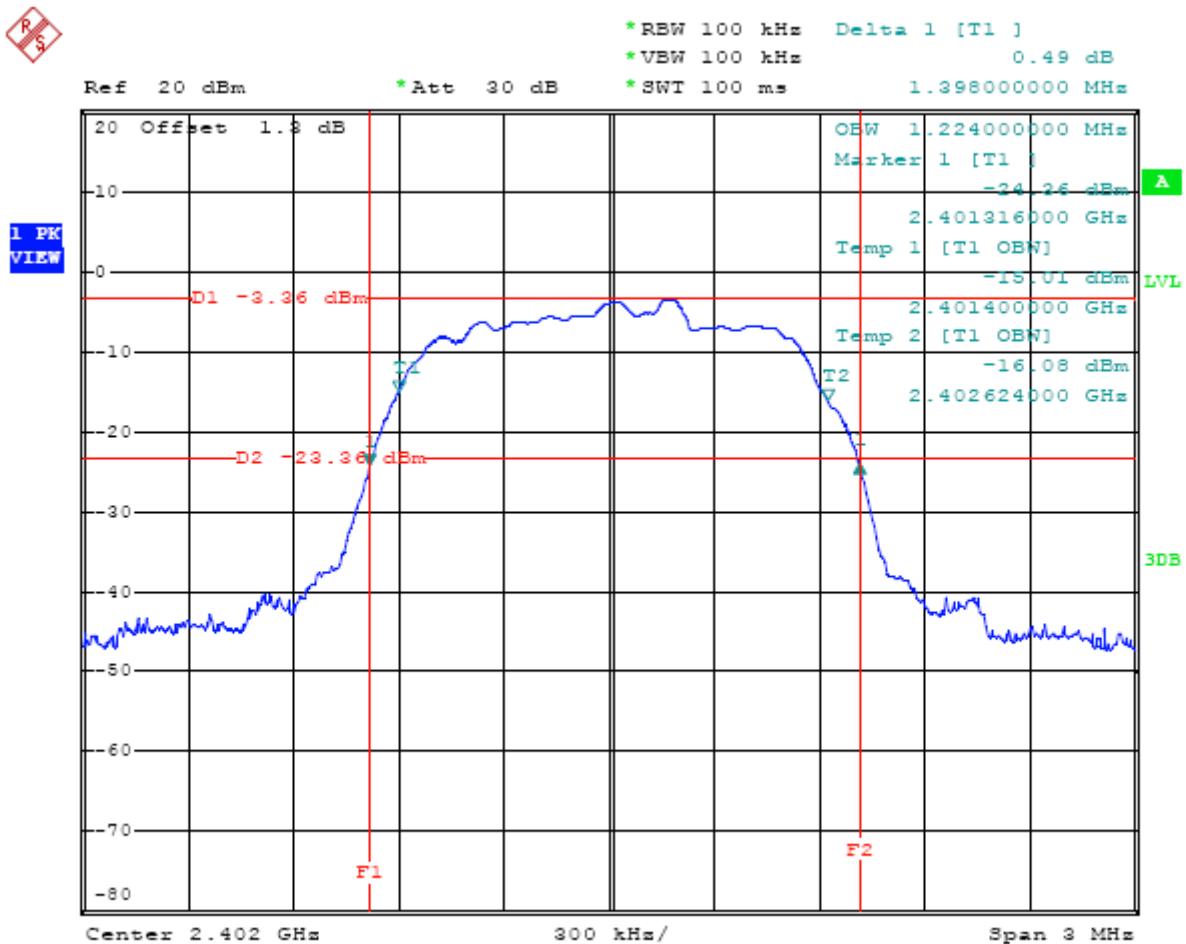


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL (2Mbps)

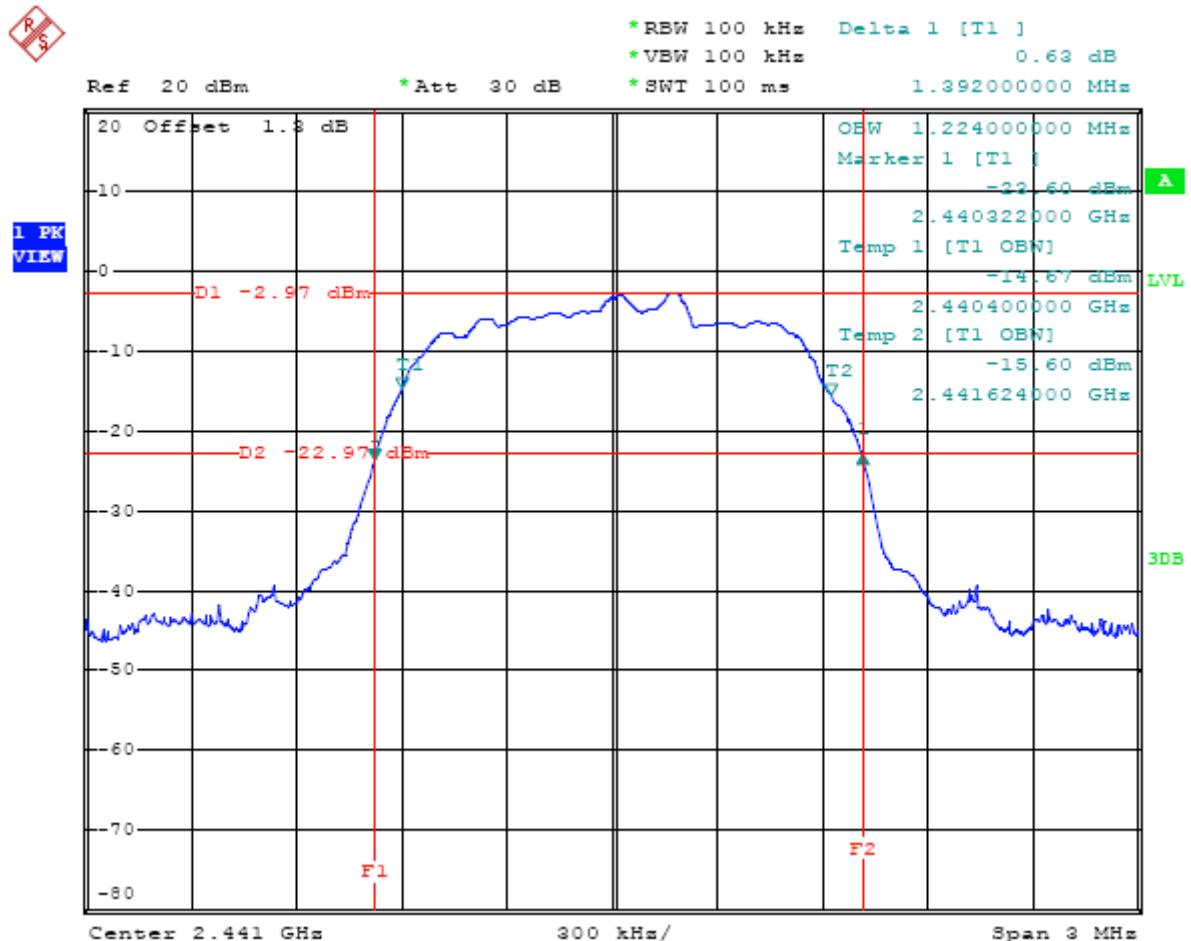


TEST PLOT OF BANDWIDTH FOR TOP CHANNEL (2Mpbs)

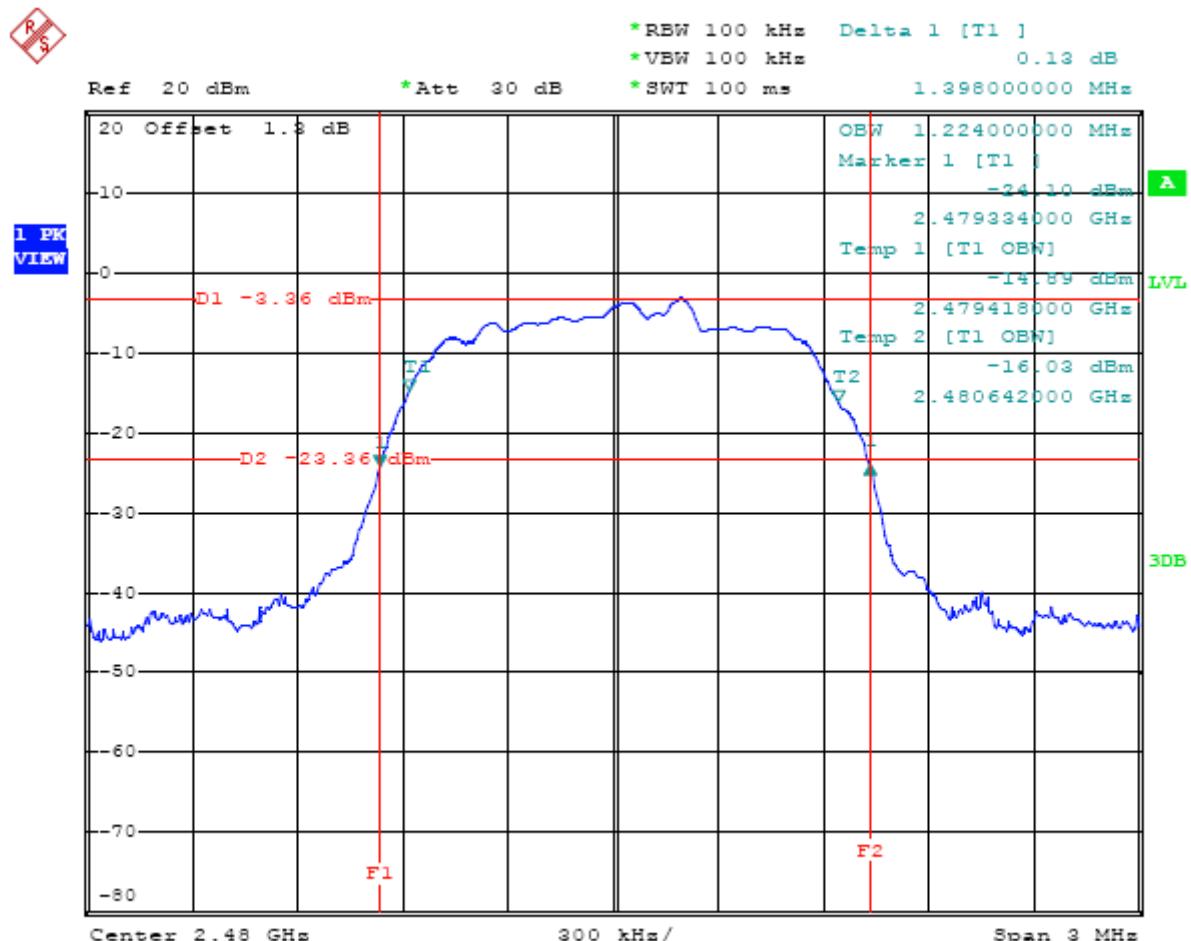


TEST PLOT OF BANDWIDTH FOR BOTTOM CHANNEL (3Mpbs)

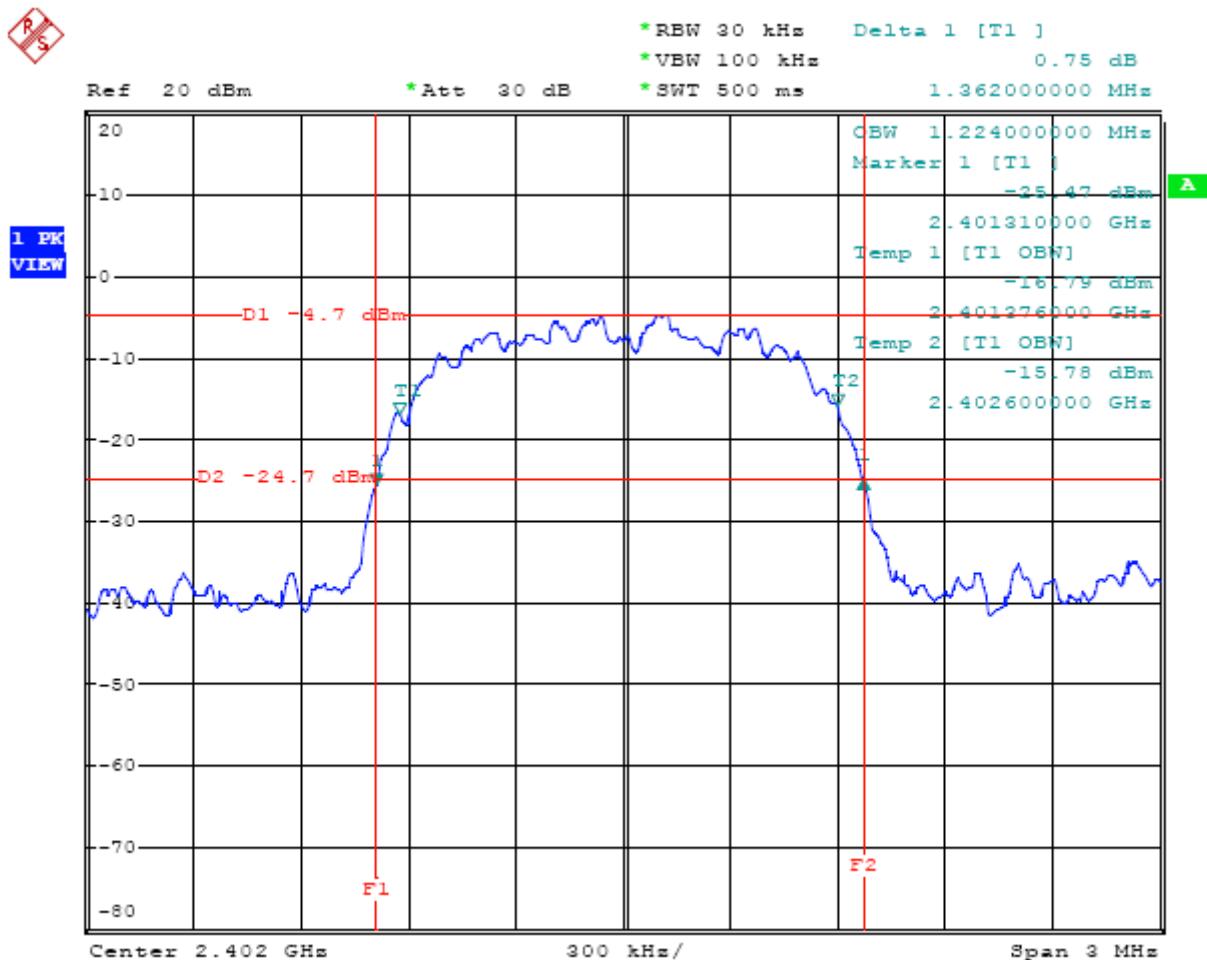

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL (3Mpbs)

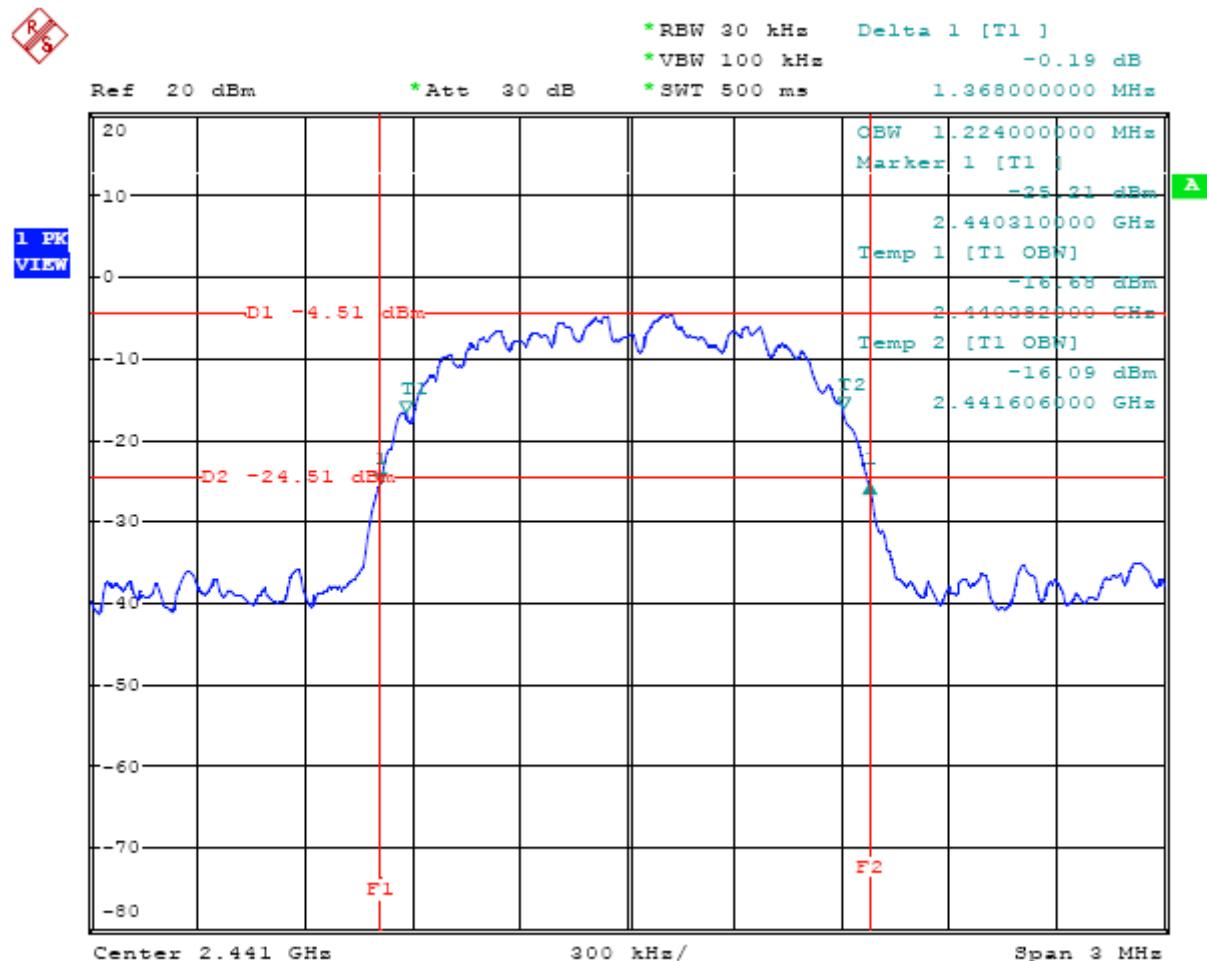

TEST PLOT OF BANDWIDTH FOR TOP CHANNEL (3Mpbs)

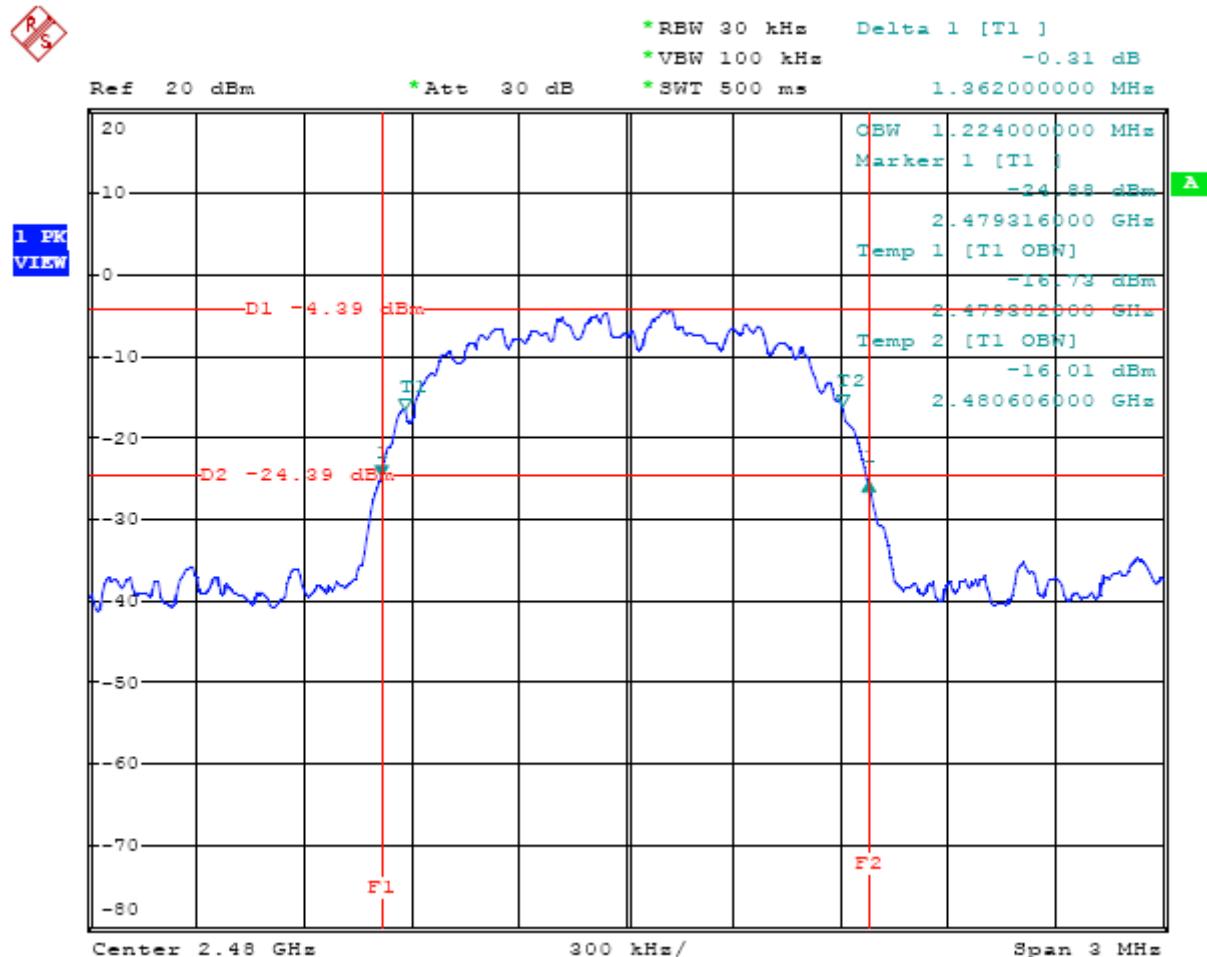


8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A)

8.1 MEASUREMENT PROCEDURE:

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz,
VBW= 10 KHz., Sweep time= Auto
- (5). Set SPA Trace 1 Max hold, then View.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

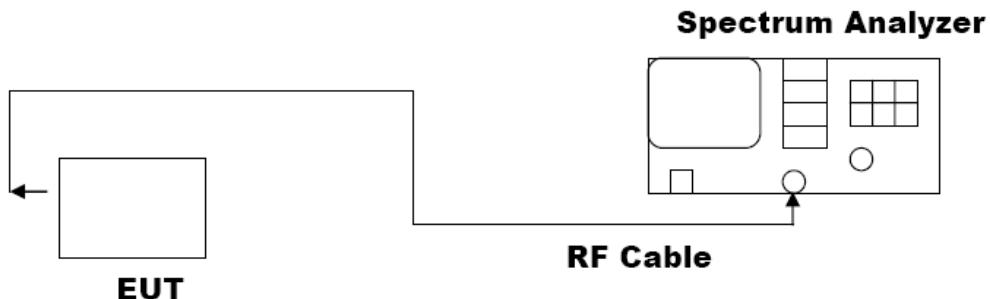

8.3 MEASUREMENT EQUIPMENT USED:

SHIELDING ROOM					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4440A	US41421290	04/16/2010	04/15/2011

8.4 LIMITS AND MEASUREMENT RESULT:

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)		Criteria
8 dBm / 3KHz	Bottom Channel	--	--
	Middle Channel	--	--
	Top Channel	--	--

9. OUT OF BAND EMISSION

9.1 MEASUREMENT PROCEDURE:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 6.2

1. Conducted test setup
2. Radiated Emission test Setup

9.3 MEASUREMENT EQUIPMENT USED:

The Same as described in section 6.3


9.4 LIMITS AND MEASUREMENT RESULT:

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS


Humidity:	55 % RH	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Test Method	Conducted		

BT (1Mbps)

TEST PLOT OF BAND ELDG FOR BOTTOM CHANNEL (2.402GHz)

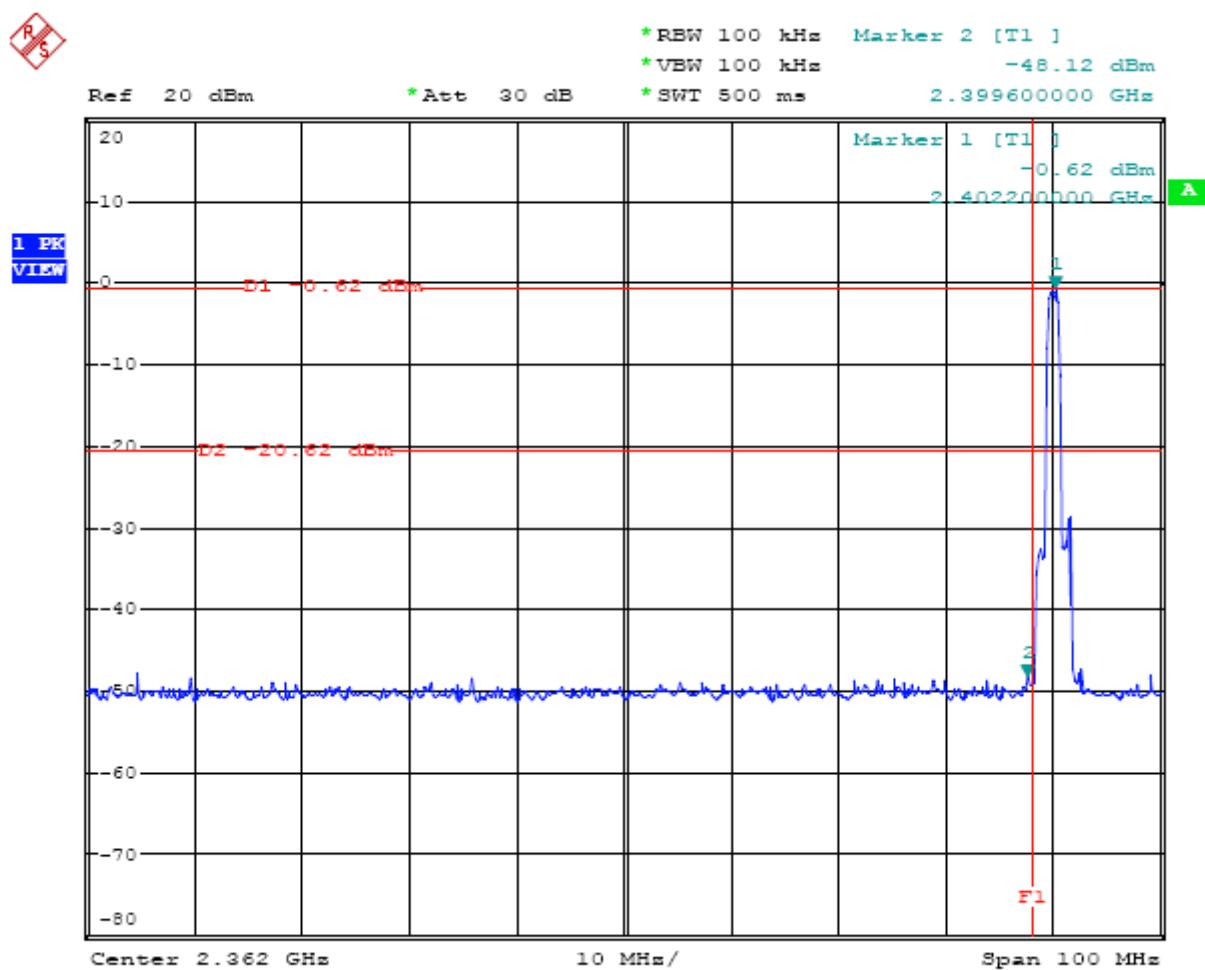


TEST PLOT OF BAND ELDG FOR TOP CHANNEL (2.480GHz)

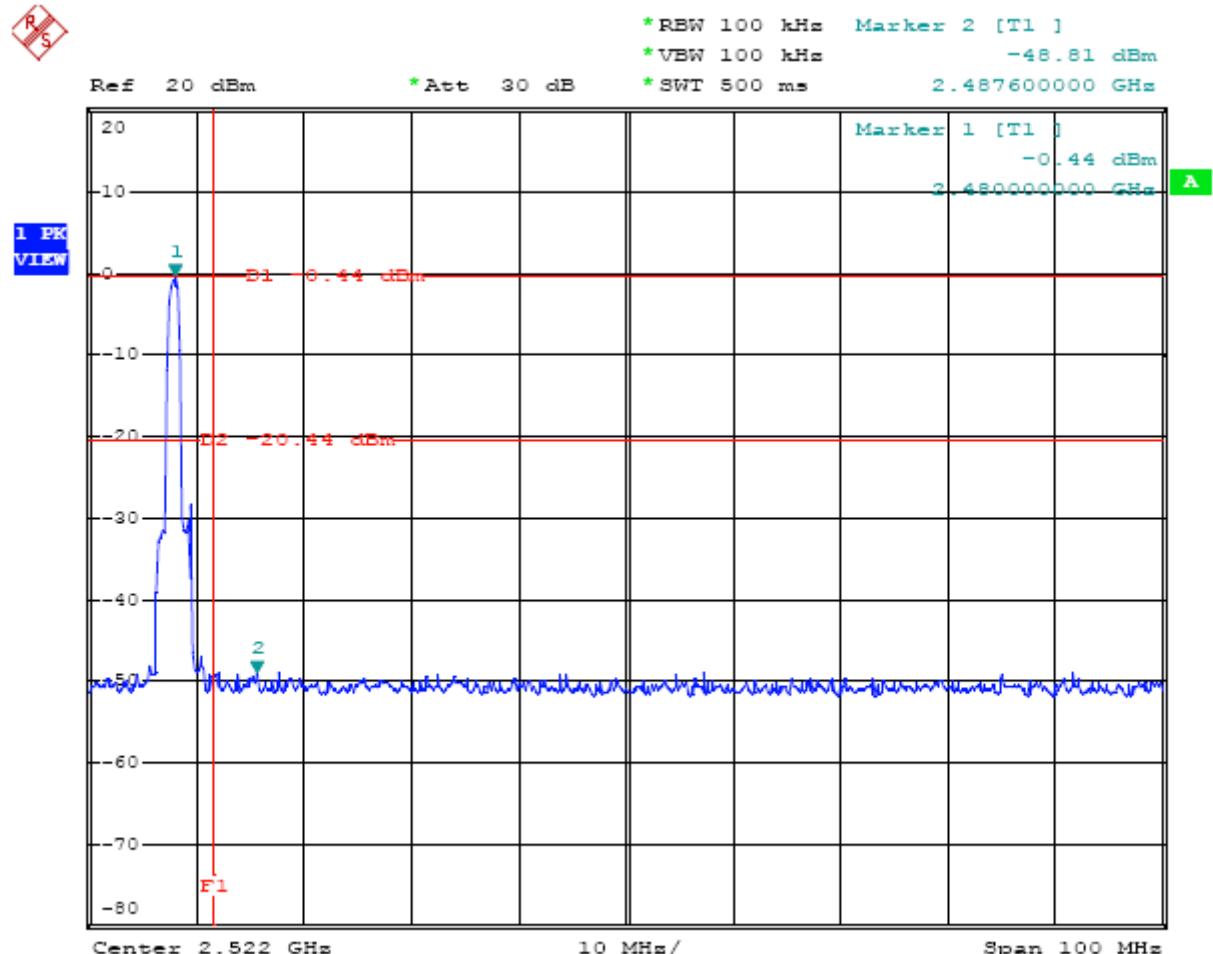


BT EDR (2Mbps)

TEST PLOT OF BAND ELDG FOR BOTTOM CHANNEL (2.402GHz)

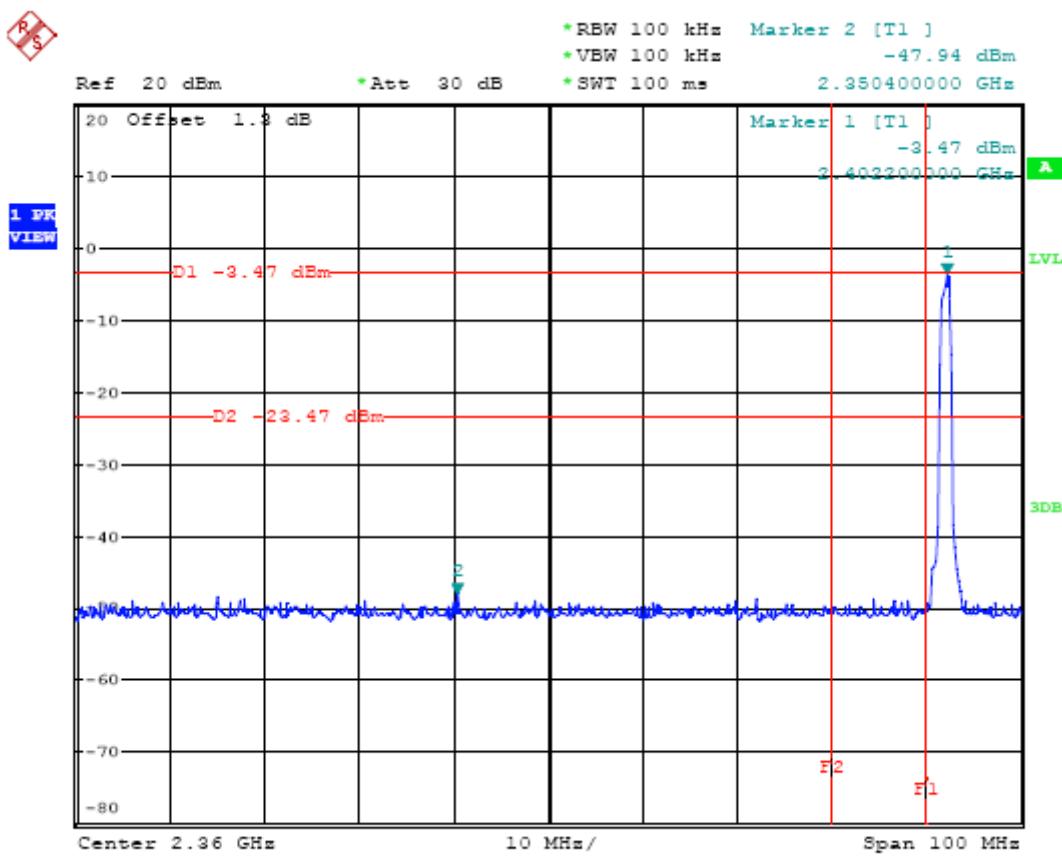


TEST PLOT OF BAND ELDG FOR TOP CHANNEL (2.480GHz)

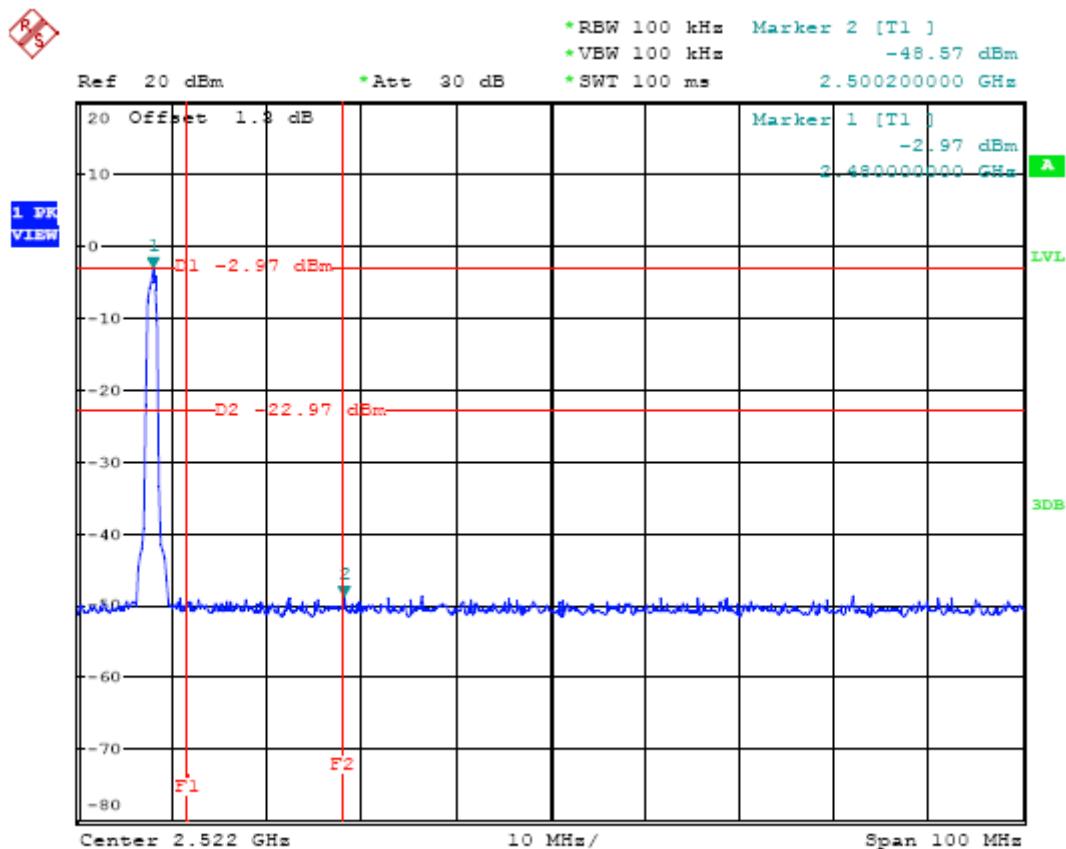


BT EDR (3Mbps)

TEST PLOT OF BAND ELDG FOR BOTTOM CHANNEL (2.402GHz)

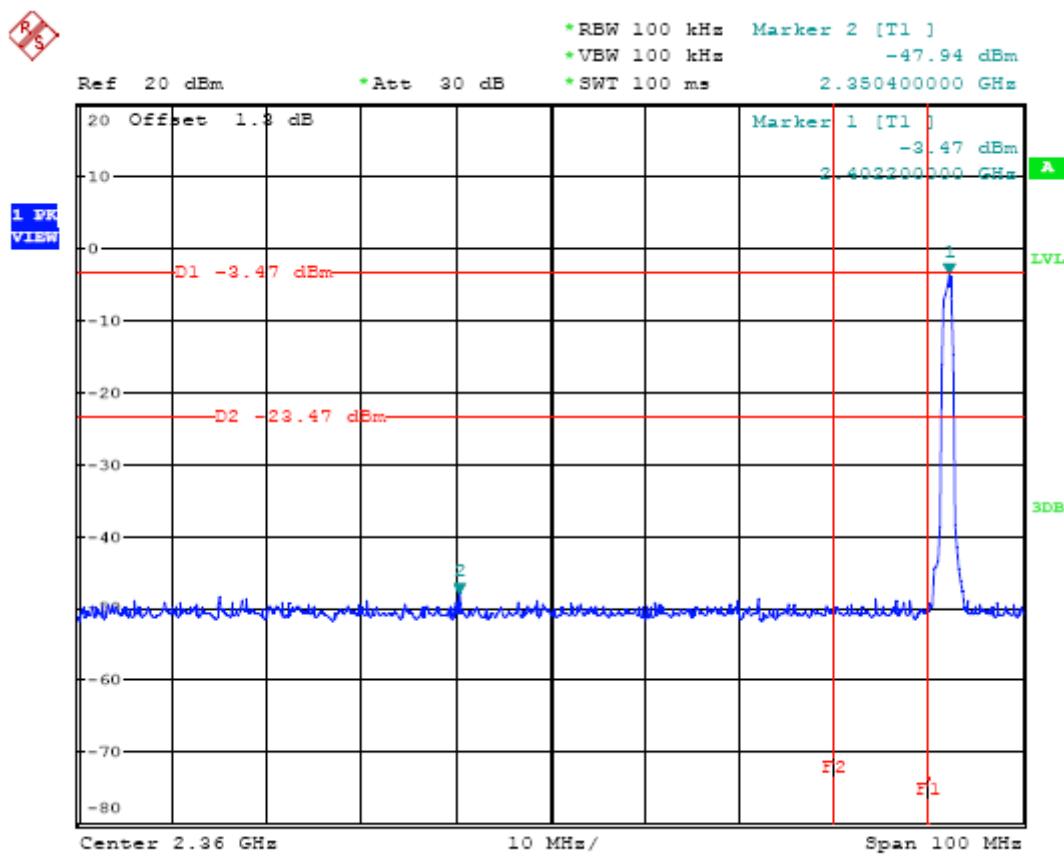

TEST PLOT OF BAND ELDG FOR TOP CHANNEL (2.480GHz)

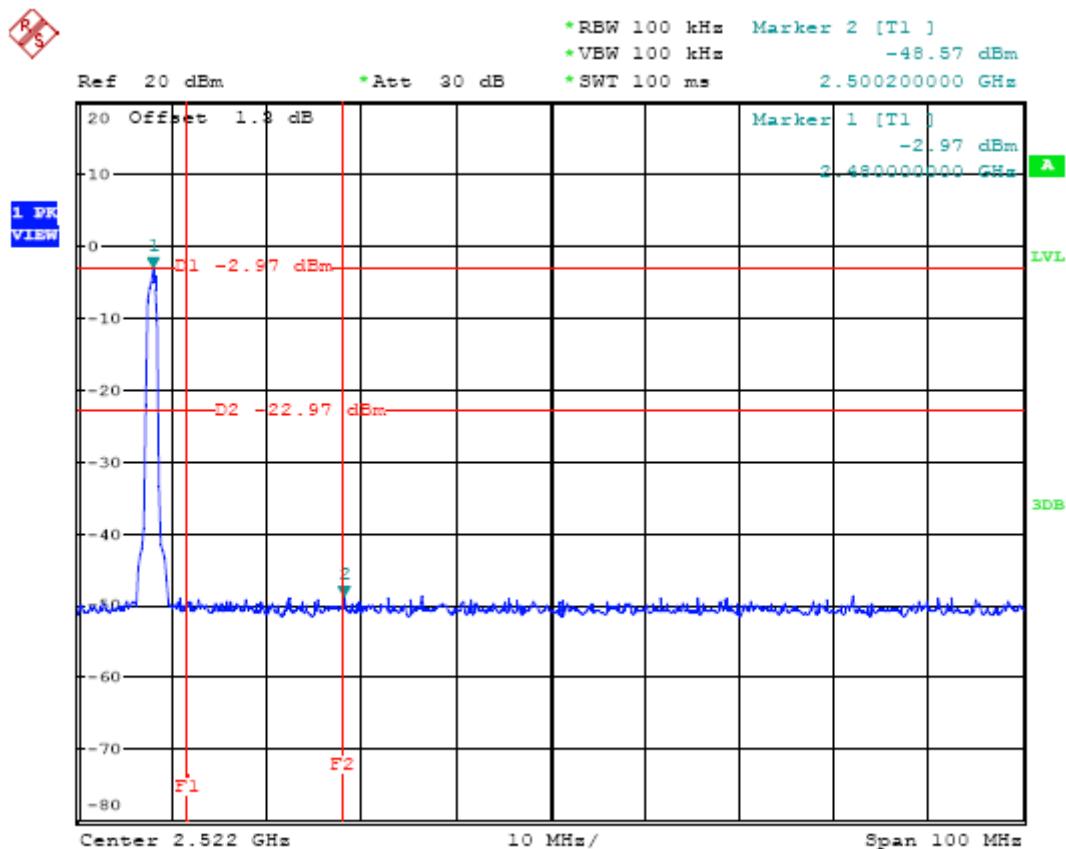

RADIATED EMISSION

MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start Frequency	1GHz
Stop Frequency	26.5GHz
RB/VB(Emission in restricted band)	1MHz/1MHz for Peak, 1MHz/10Hz for Average
RB/VB(Emission in non-restricted band)	1MHz/1MHz for Peak

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

TEST SET-UP

The Same as described in section 6.2

TEST RESULT OF RADIATED EMISSION TEST (9KHz ~30MHz)

Distance 3m Test Date: Dec.20, 2010
Temperature: 25°C Tested by: Jekey Zhang
Humidity: 55 % RH

Operation Mode: RF Mode

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
11.23	27.7	49.5	-21.8	PASS
13.24	29.4	49.5	-20.1	PASS
26.21	28.6	49.5	-20.9	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $20 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

TEST RESULT OF RADIATED EMISSION TEST (30MHZ-1GHZ)


Operation Mode:	CHARGE MODE(connect to Pc)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal:

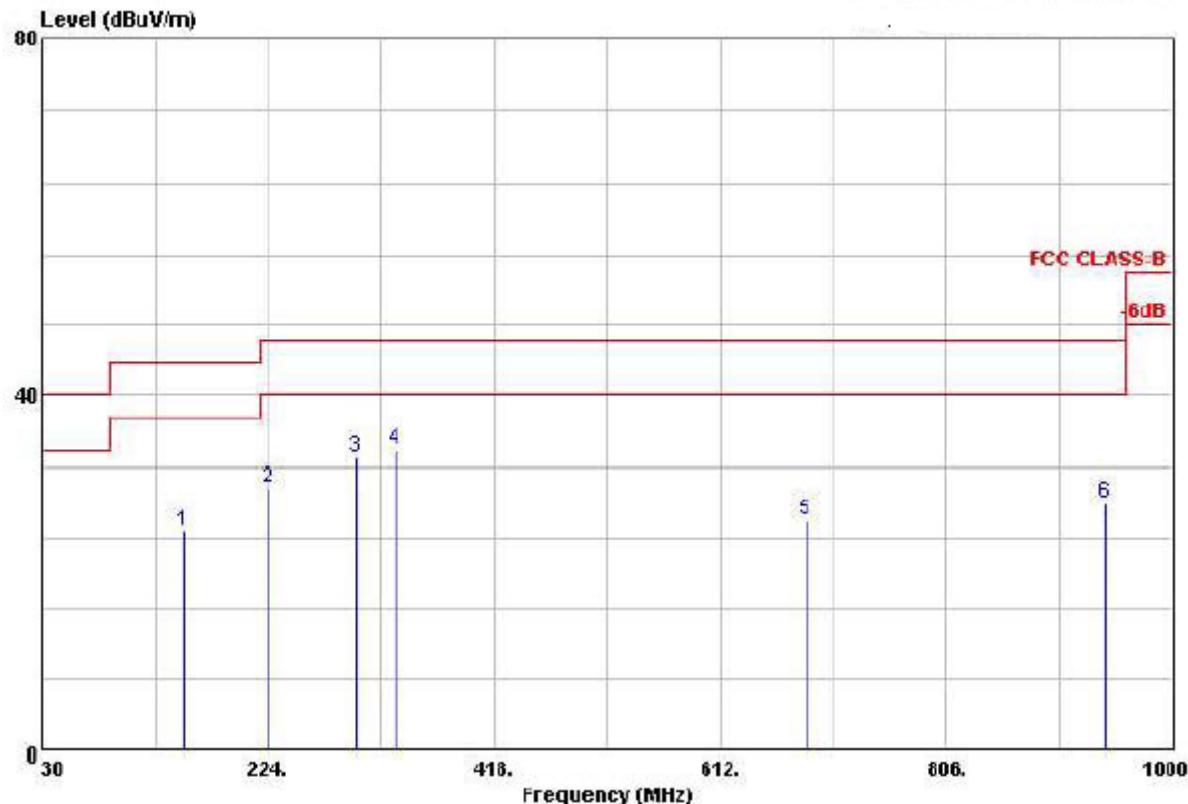

Freq	Level	Over Limit	Line	Read		Ant	Table	Pos	Pos	Remark	
				Antenna Factor	Cable Loss Factor						
MHz	dBuV/m			dB	dBuV/m	dBuV	dB/n	dB	dB	cm	deg
1	151.500	24.88	-18.62	43.50	40.60	10.61	1.66	27.99	---	---	Peak
2	224.940	29.73	-16.27	46.00	44.87	10.65	1.97	27.75	---	---	Peak
3	299.460	33.05	-12.95	46.00	46.10	12.31	2.24	27.60	---	---	Peak
4	322.900	33.89	-12.12	46.00	45.92	13.45	2.35	27.83	100	159	Peak
5	605.700	26.25	-19.75	46.00	31.77	20.11	3.49	29.10	---	---	Peak
6	949.300	20.07	-17.93	46.00	20.10	24.62	3.99	29.71	---	---	Peak


Vertical:

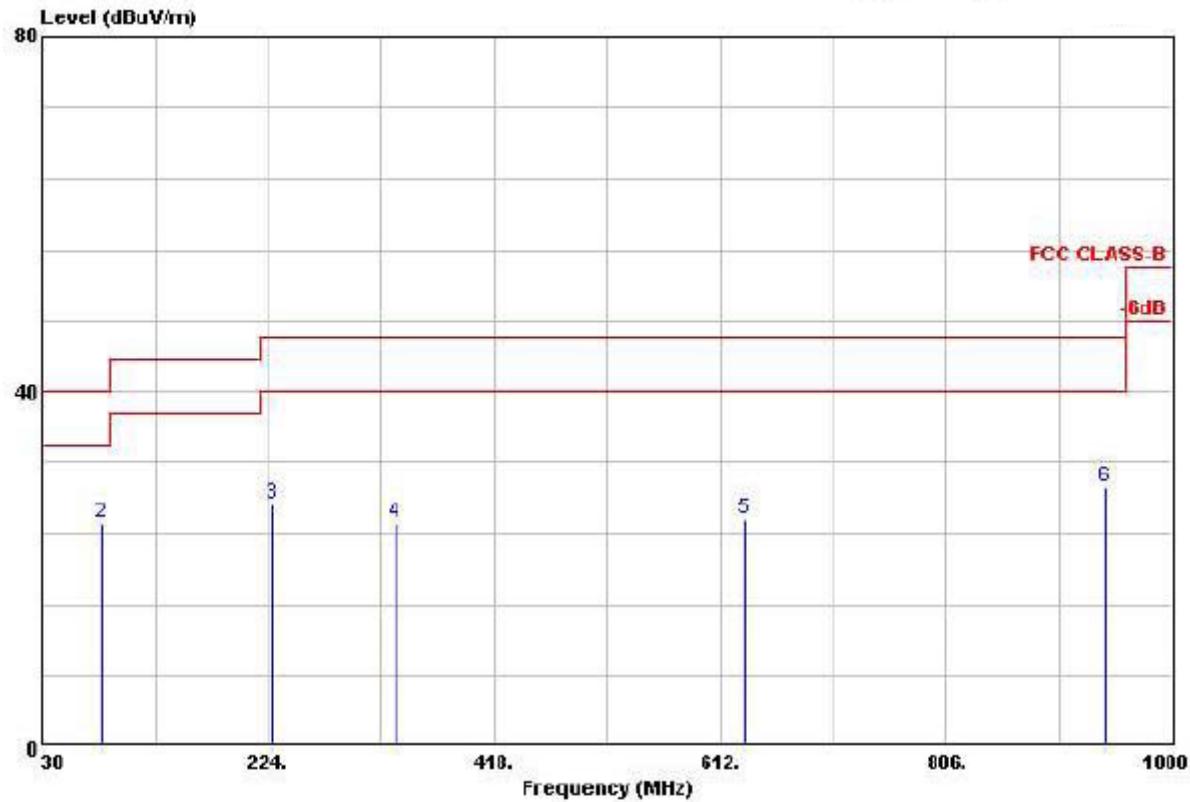

Freq	Level	Over Limit		Read		Ant	Table			
		Line	Limit	antenna	Cable			Pos	Pos	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	dB	dB	cm	deg	
1	30.000	23.35	-16.65	40.00	34.35	16.38	0.87	28.25	---	--- Peak
2	81.300	25.23	-14.77	40.00	45.09	7.10	1.28	28.24	100	315 Peak
3	228.450	27.20	-18.80	46.00	42.03	10.94	1.98	27.74	---	--- Peak
4	332.900	25.23	-20.77	46.00	37.27	13.45	2.35	27.83	---	--- Peak
5	632.500	25.65	-20.35	46.00	31.46	19.98	3.32	29.10	---	--- Peak
6	942.600	29.20	-16.80	46.00	29.34	24.60	3.98	28.71	---	--- Peak


Operation Mode:	BT MODE(1Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

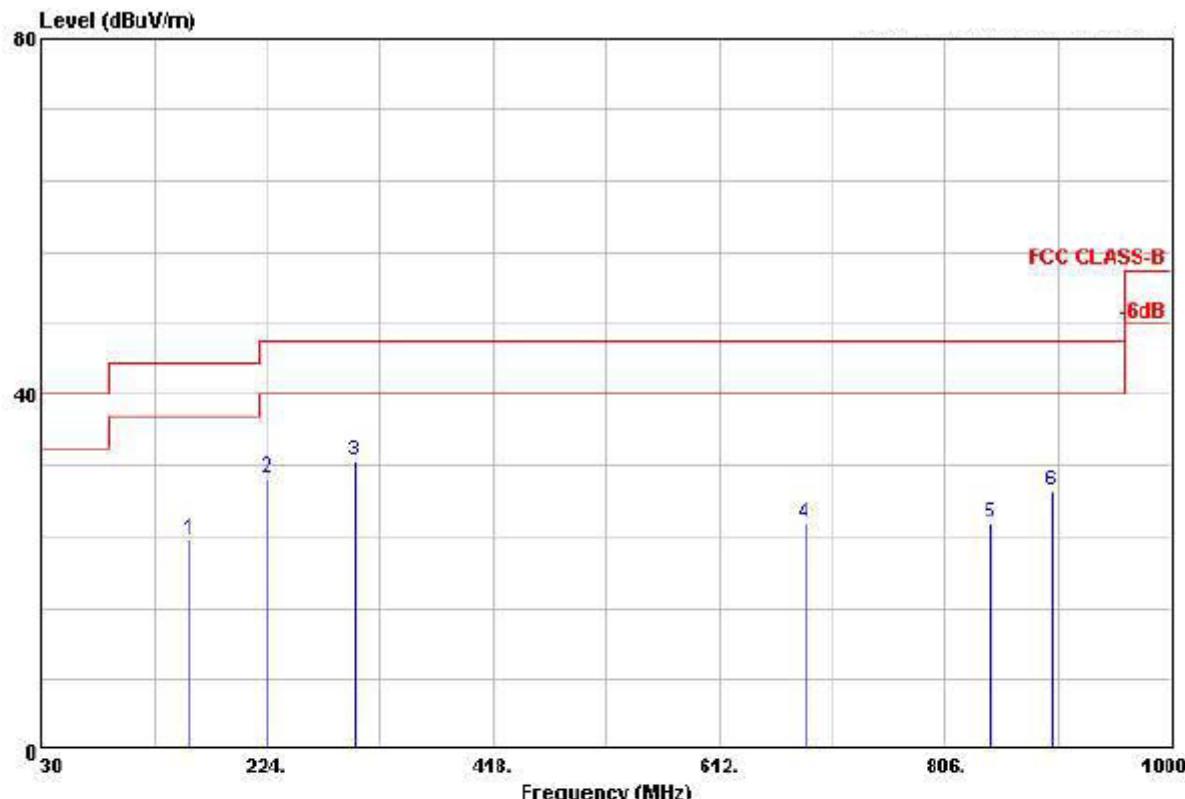

Freq	Level	Over Limit	Line Limit	Readintenna		Cable Loss	Preamp Factor	Ant Pos	Table Pos	Table Remark
				MHz	dBuV/n	dB	dBuV/n	dBuV	dB/n	
1	156.250	23.58	-19.92	43.50	40.35	9.51	1.66	27.97	---	--- Peak
2	224.940	30.55	-15.45	46.00	45.69	10.65	1.97	27.75	---	--- Peak
3	299.460	32.56	-13.44	46.00	45.61	12.31	2.24	27.60	100	157 Peak
4	605.700	25.49	-20.51	46.00	31.01	20.11	3.48	29.10	---	--- Peak
5	845.300	25.51	-20.49	46.00	29.00	21.52	3.84	28.85	---	--- Peak
6	897.800	29.15	-16.85	46.00	30.56	23.44	3.95	28.80	---	--- Peak


Vertical

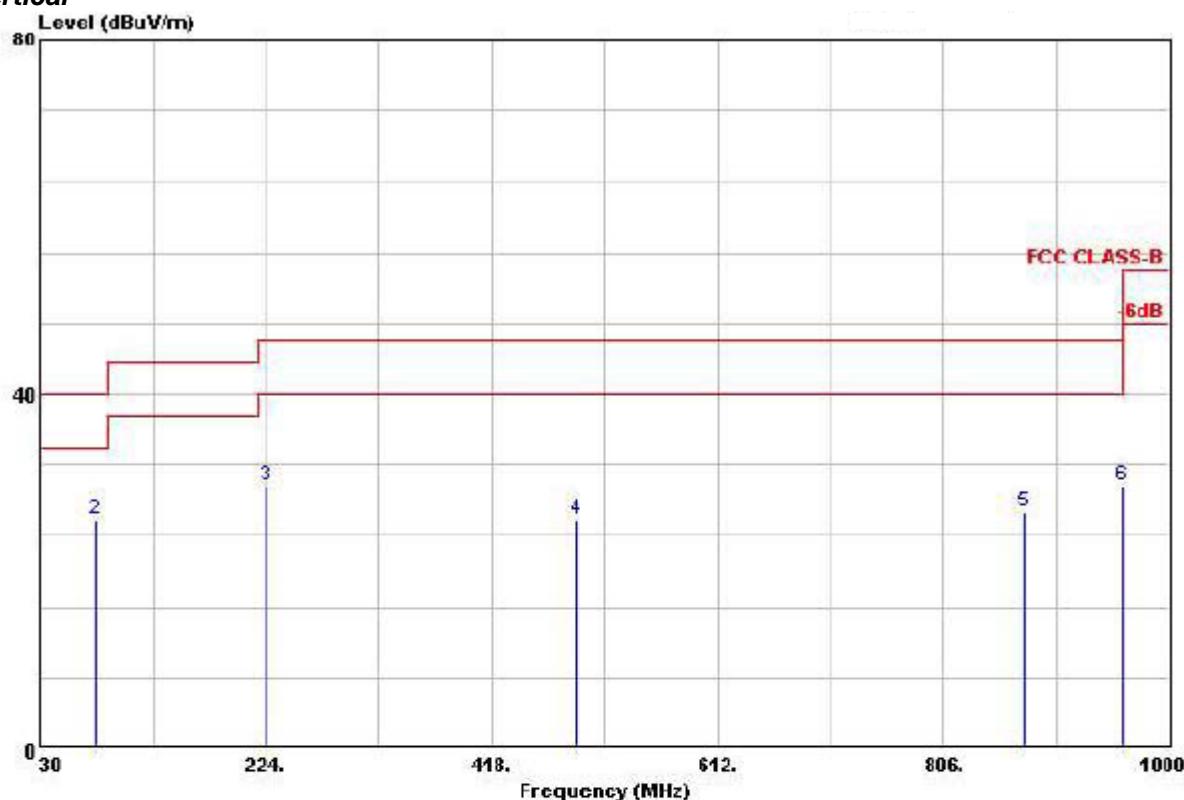

Freq	Level	Over Limit	Limit Line	Readintenna		Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	
1	30.000	22.92	-17.00	40.00	30.92	16.00	0.97	28.25	---	--- Peak
2	77.250	25.78	-14.22	40.00	46.11	6.67	1.25	28.25	100	241 Peak
3	225.210	29.54	-16.46	46.00	44.68	10.65	1.97	27.75	---	--- Peak
4	491.800	25.79	-20.21	46.00	35.13	16.81	2.79	28.94	---	--- Peak
5	875.400	26.65	-19.35	46.00	28.94	22.62	3.92	28.82	---	--- Peak
6	959.400	29.61	-16.39	46.00	29.29	25.01	3.99	28.68	---	--- Peak


Operation Mode:	BT EDR(2Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

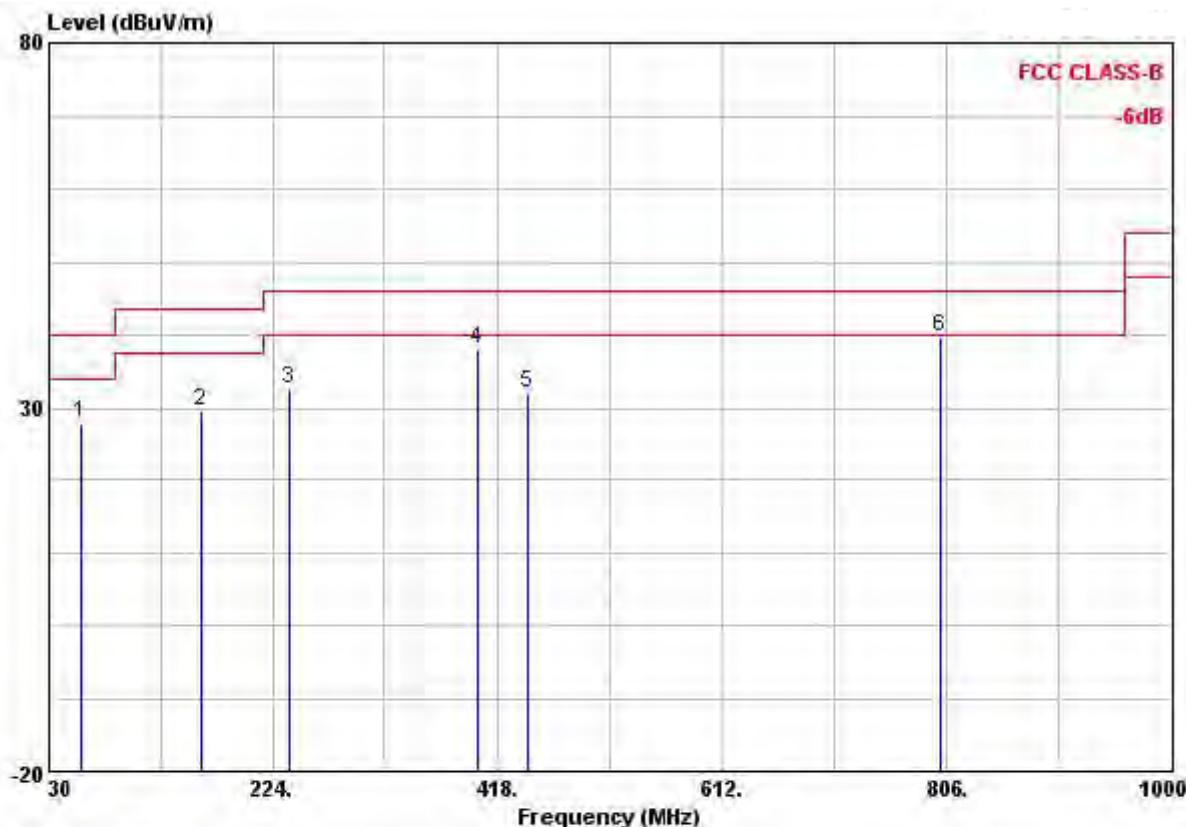

Freq MHz	Level dBuV/m	Over Limit dB	Limit dB	Line dBuV/m	Read dBuV	Antenna Factor	Cable Loss dB	Preamp Factor	Remark	Ant Pos	Table Pos
										cm	deg
1 59.100	28.04	-11.96	40.00	51.07	6.43	0.83	30.29	Peak	---	---	
2 160.950	29.48	-14.02	43.50	47.69	10.81	1.29	30.31	Peak	---	---	
3 237.580	32.57	-13.43	46.00	48.45	13.02	1.55	30.45	Peak	---	---	
4 400.540	38.06	-7.94	46.00	50.26	16.21	2.04	30.45	Peak	---	---	
5 444.190	31.99	-14.01	46.00	43.55	16.55	2.13	30.24	Peak	---	---	
6 800.180	39.71	-6.29	46.00	42.49	24.20	2.92	29.90	Peak	---	---	


Vertical

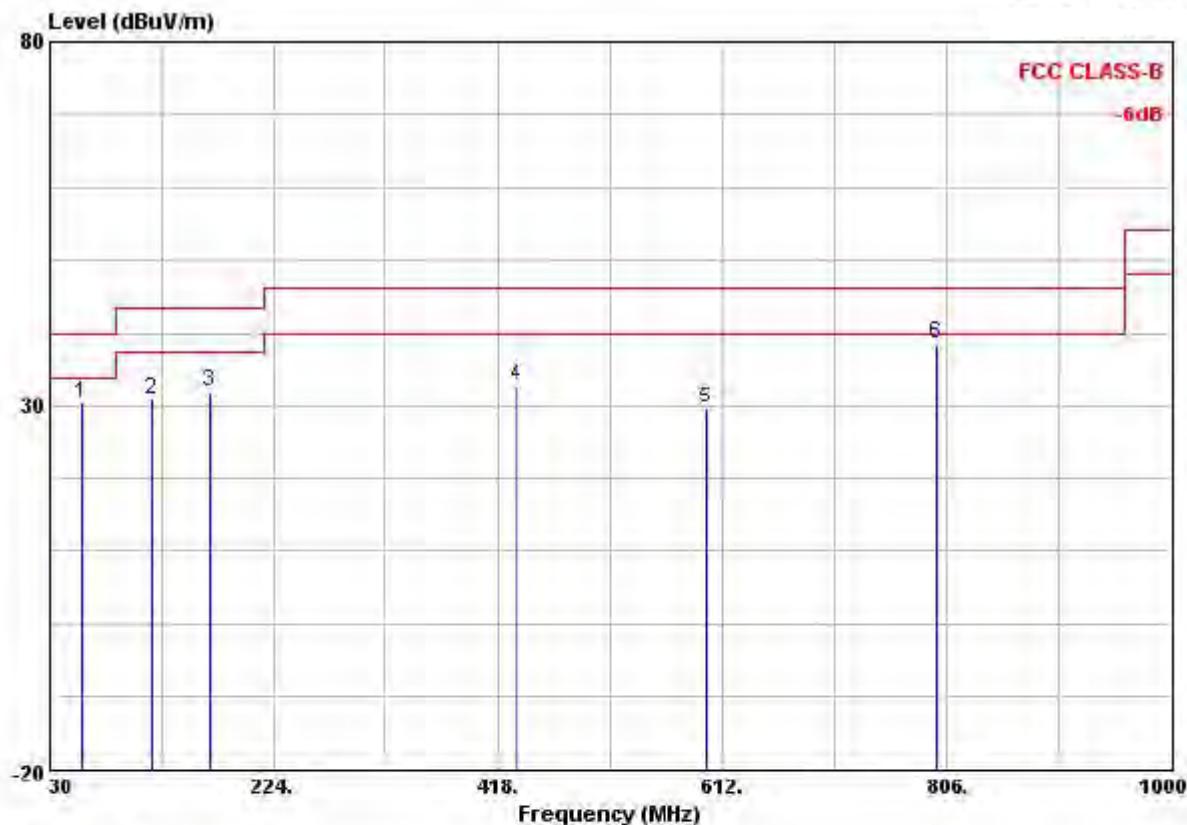

Freq	Level	Over Limit	Limit	Read/		Ant	Table		
				Line	Antenna			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 59.100	30.29	-9.71	40.00	53.32	6.43	0.83	30.29	Peak	---
2 118.270	30.92	-12.58	43.50	47.89	12.14	1.13	30.24	Peak	---
3 167.740	31.98	-11.52	43.50	50.10	10.85	1.32	30.29	Peak	---
4 435.460	32.77	-13.23	46.00	44.45	16.48	2.11	30.27	Peak	---
5 599.390	29.57	-16.43	46.00	35.16	22.05	2.43	30.07	Peak	---
6 796.300	38.66	-7.34	46.00	41.54	24.10	2.92	29.90	Peak	---


Operation Mode:	BT EDR(3Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

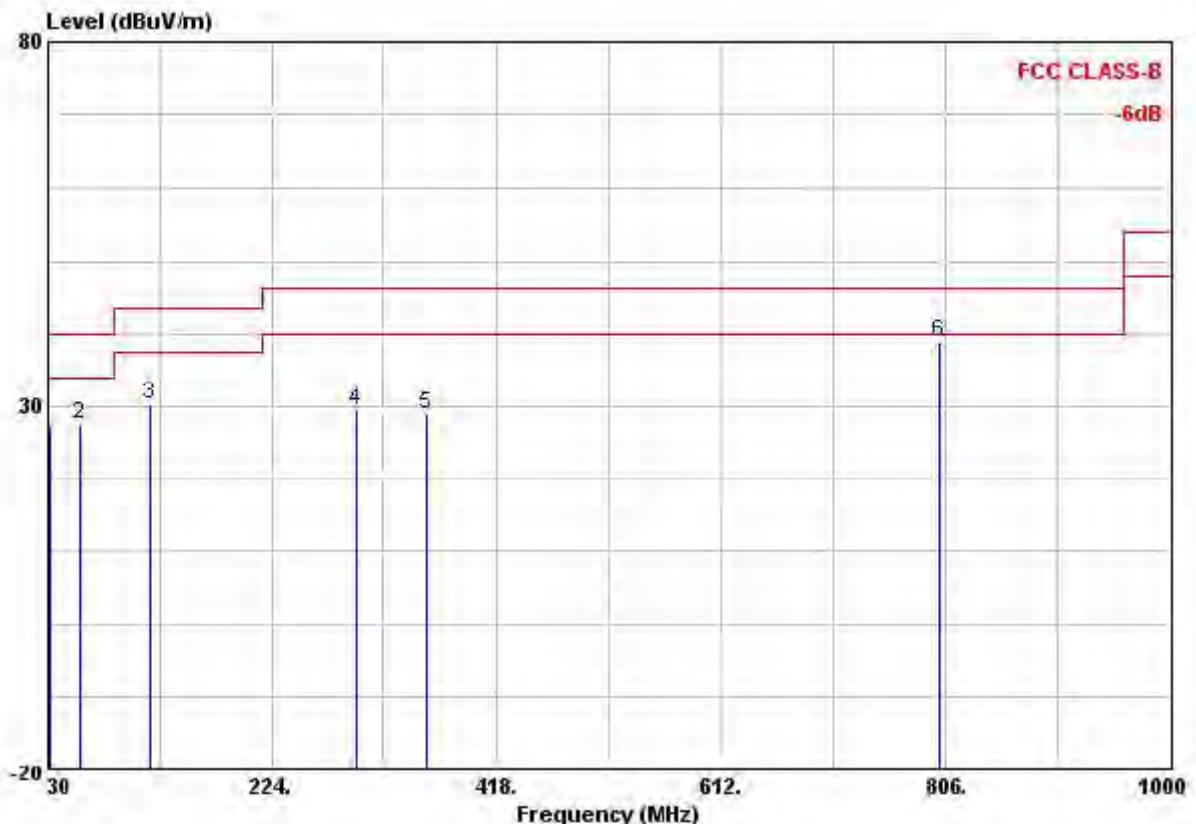

Freq	Level	Over Limit		Read	Antenna	Cable Preamp		Ant Pos	Table Pos
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	31.940	27.18	-12.82	40.00	39.29	17.50	0.63	30.24	Peak
2	59.100	27.34	-12.66	40.00	50.37	6.43	0.83	30.29	Peak
3	118.270	30.23	-13.27	43.50	47.20	12.14	1.13	30.24	Peak
4	296.750	29.43	-16.57	46.00	44.47	13.61	1.75	30.40	Peak
5	357.860	28.67	-17.33	46.00	42.04	15.11	1.88	30.36	Peak
6	800.180	38.85	-7.15	46.00	41.63	24.20	2.92	29.90	Peak

Vertical

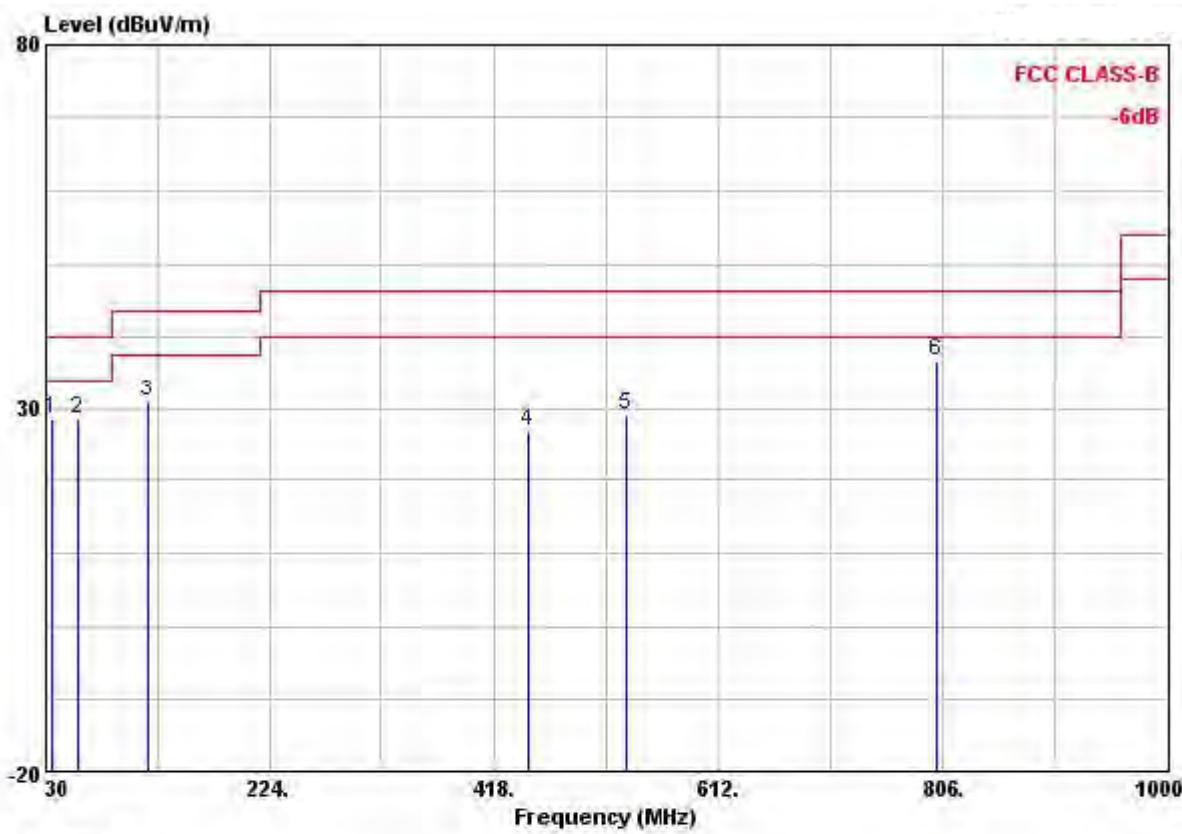

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 34.850	28.50	-11.50	40.00	41.81	16.30	0.66	30.27	Peak	---	---
2 59.100	28.62	-11.38	40.00	51.65	6.43	0.83	30.29	Peak	---	---
3 118.270	30.85	-12.65	43.50	47.82	12.14	1.13	30.24	Peak	---	---
4 448.070	26.89	-19.11	46.00	38.41	16.58	2.14	30.24	Peak	---	---
5 532.460	29.00	-17.00	46.00	38.24	18.63	2.31	30.18	Peak	---	---
6 @ 800.180	36.51	-9.49	46.00	39.29	24.20	2.92	29.90	Peak	---	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

TEST RESULT OF RADIATED EMISSION TEST (1GHZ-10TH HARMONIC)


Operation Mode:	channel 0(1Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

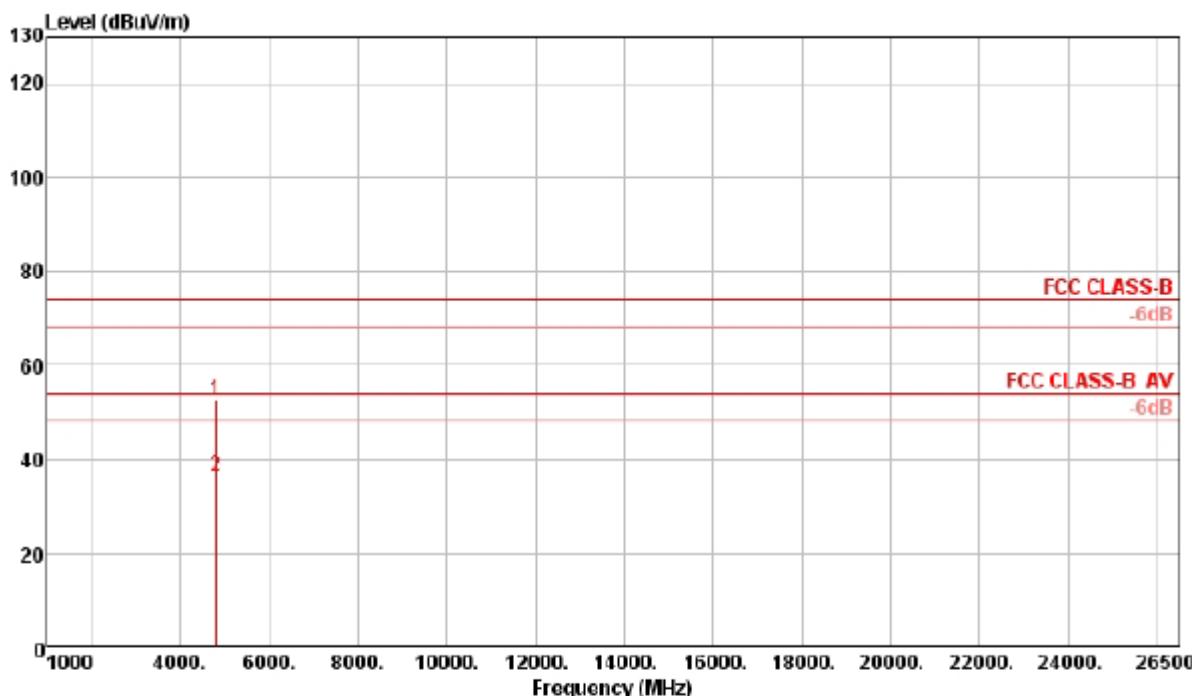

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamplifier	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1 p	4804.00	52.58	74.00	-21.42	50.64	3.96	33.02	35.04	113	197 Peak	HORIZONTAL
2 a	4804.04	36.21	54.00	-17.79	34.27	3.96	33.02	35.04	113	197 Average	HORIZONTAL


Vertical

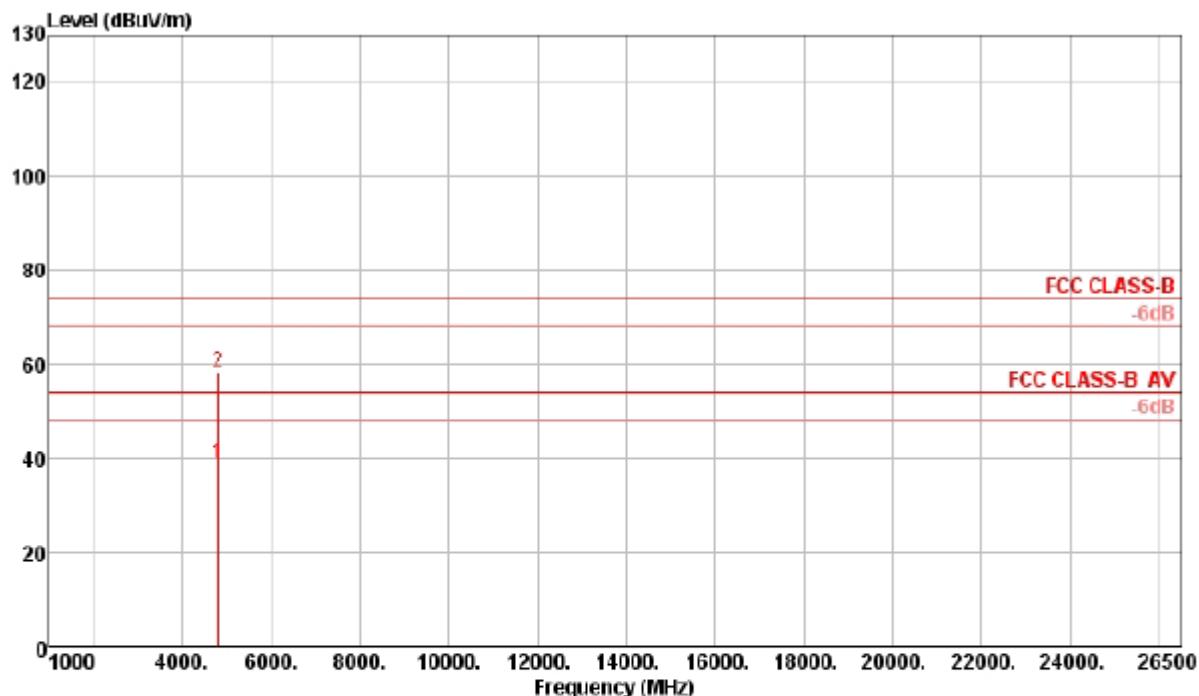

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4803.98	38.87	54.00	-15.13	36.93	3.96	33.02	35.04	83	153 Average	VERTICAL
2 p	4804.04	58.29	74.00	-15.71	56.35	3.96	33.02	35.04	83	153 Peak	VERTICAL


Operation Mode:	channel 39(1Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

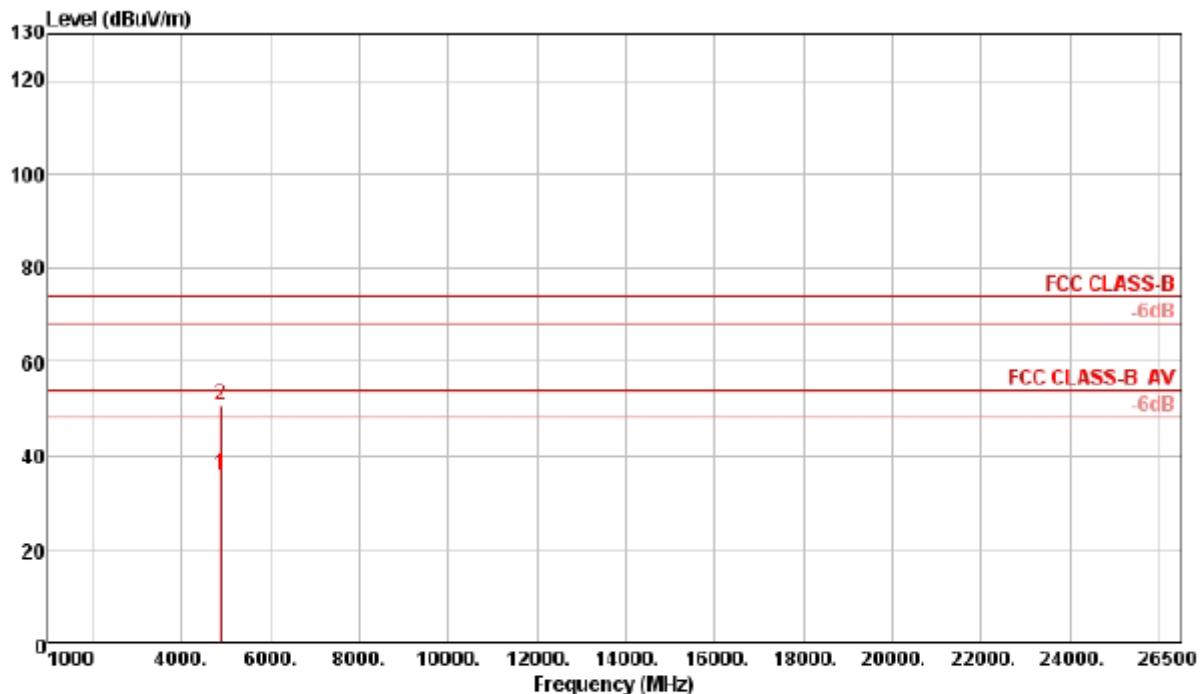

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
1 e	4882.05	35.79	54.00	-18.21	33.69	3.97	33.16	35.03	302	176 Average	HORIZONTAL
2 p	4882.23	50.58	74.00	-23.42	48.48	3.97	33.16	35.03	302	176 Peak	HORIZONTAL


Vertical

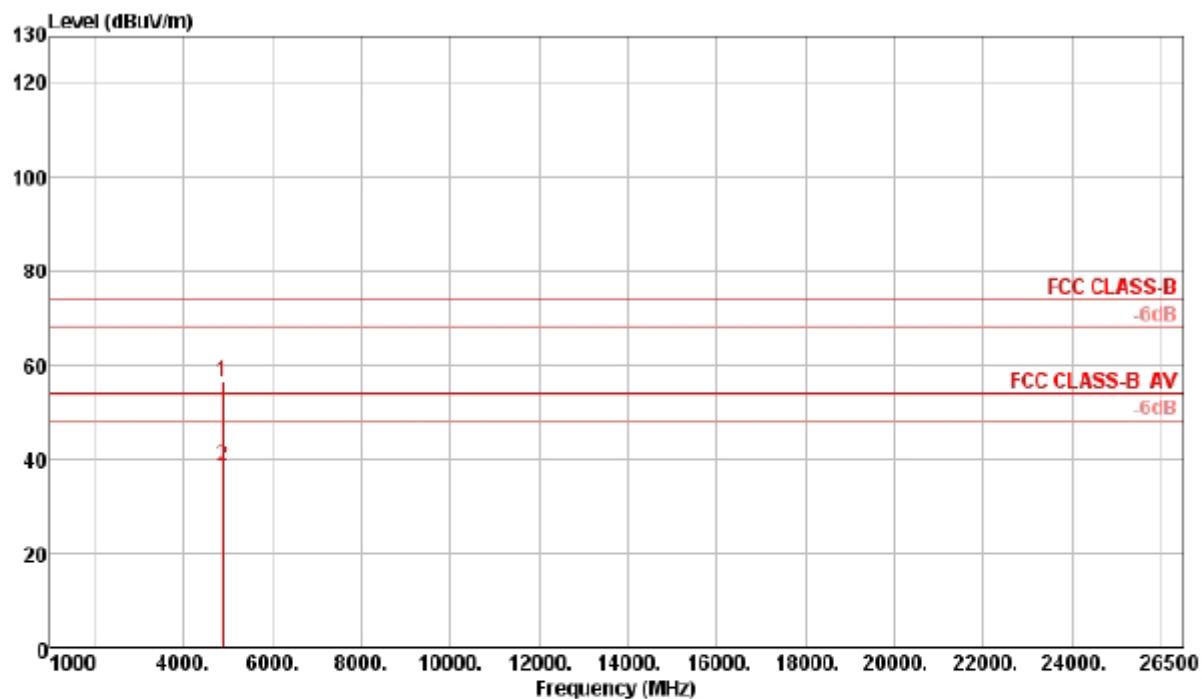

Freq MHz	Level dBuV/m	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
1 p 4881.96	56.49	74.00	-17.51	54.39	3.97	33.16	35.03	83	100 Peak	VERTICAL	
2 a 4882.01	38.31	54.00	-15.69	36.21	3.97	33.16	35.03	83	100 Average	VERTICAL	


Operation Mode:	channel 78(1Mpbs)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

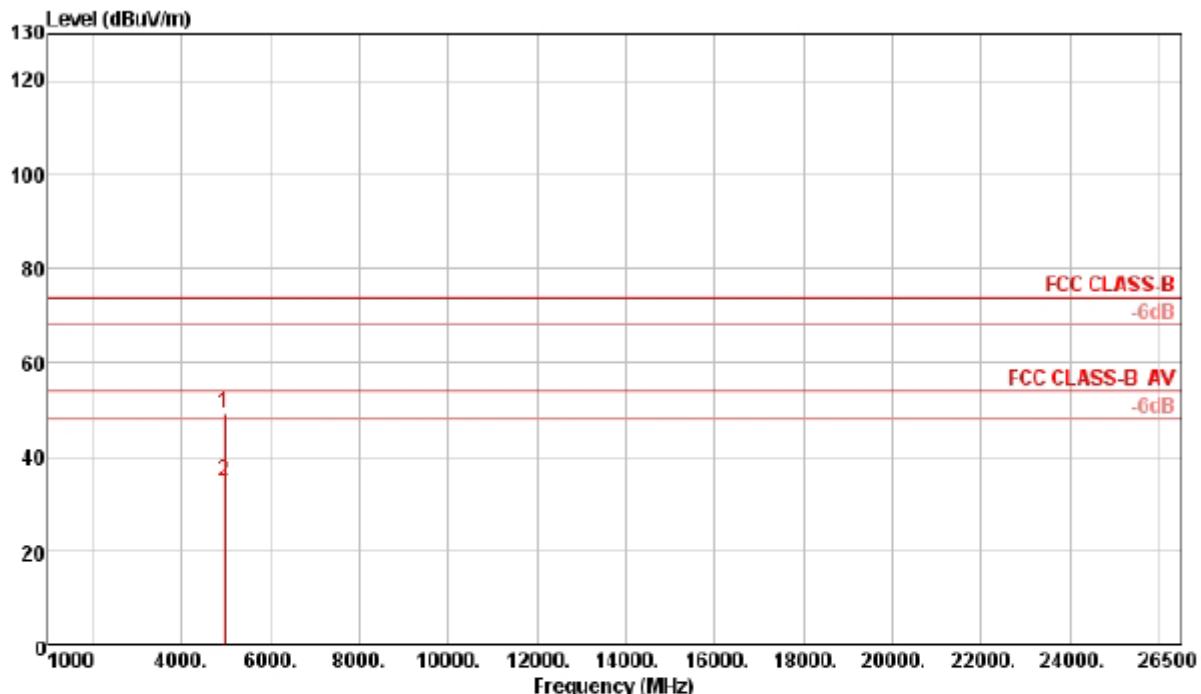

Freq	Limit		Over Line	Read Level	cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	Level	dBuV/m			dB	dBuV						
1 p	4959.74	49.31	74.00	-24.69	47.00	3.99	33.33	35.01	203	100	Peak	HORIZONTAL
2 a	4960.05	34.89	54.00	-19.11	32.58	3.99	33.33	35.01	203	100	Average	HORIZONTAL

Vertical

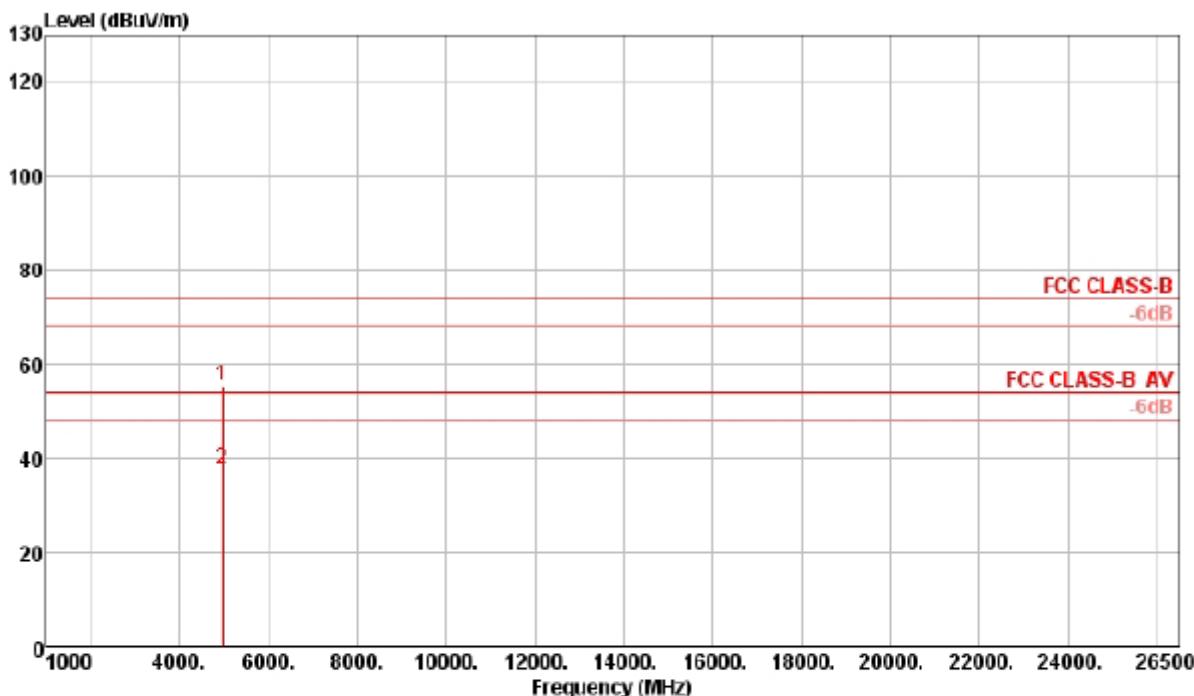

Freq MHz	Level dBuV/m	Limit Line dB	Over Limit dB	Read Level dBuV	Cable		Antenna Loss Factor	Preamp Factor	T/Pos deg	A/Pos cm	Remark	Pol/Phase
					Loss	Factor						
1 p	4959.93	55.40	74.00	-18.60	53.09	3.99	33.33	35.01	43	188	Peak	VERTICAL
2 a	4960.05	37.50	54.00	-16.50	35.19	3.99	33.33	35.01	43	188	Average	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Operation Mode:	channel 0(2Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

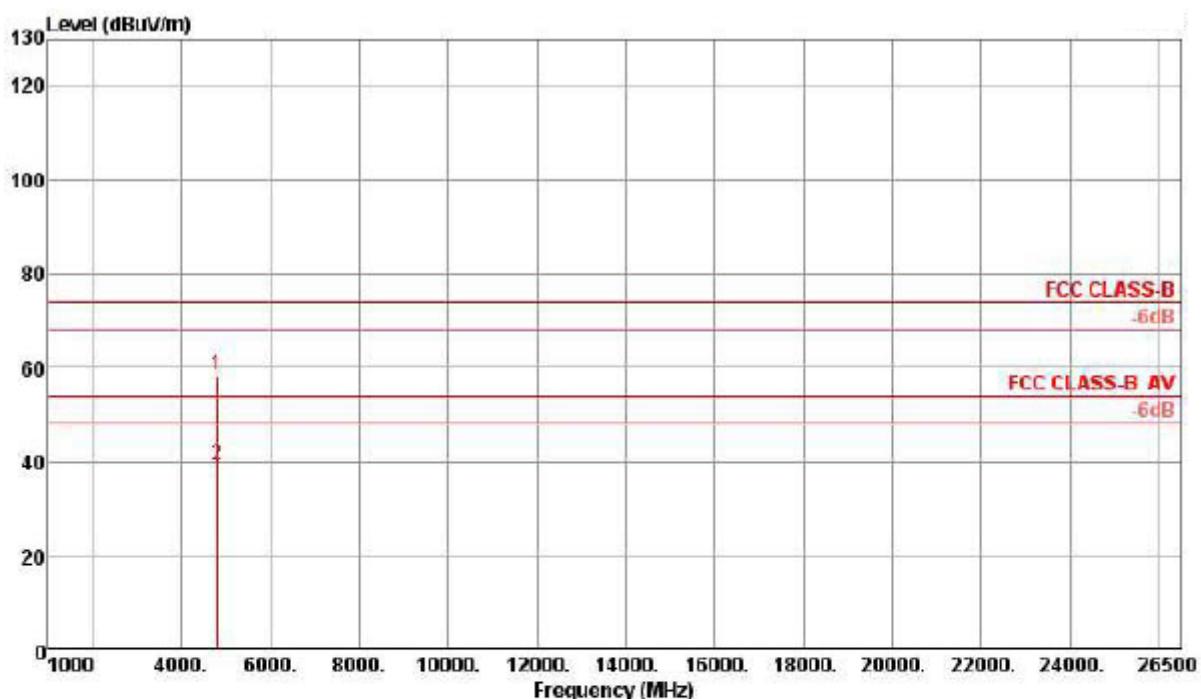

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	4804.00	58.13	74.00	-15.87	56.19	3.96	33.02	35.04	237	100 Peak	HORIZONTAL
2 a	4804.05	39.07	54.00	-14.93	37.13	3.96	33.02	35.04	237	100 Average	HORIZONTAL


Vertical

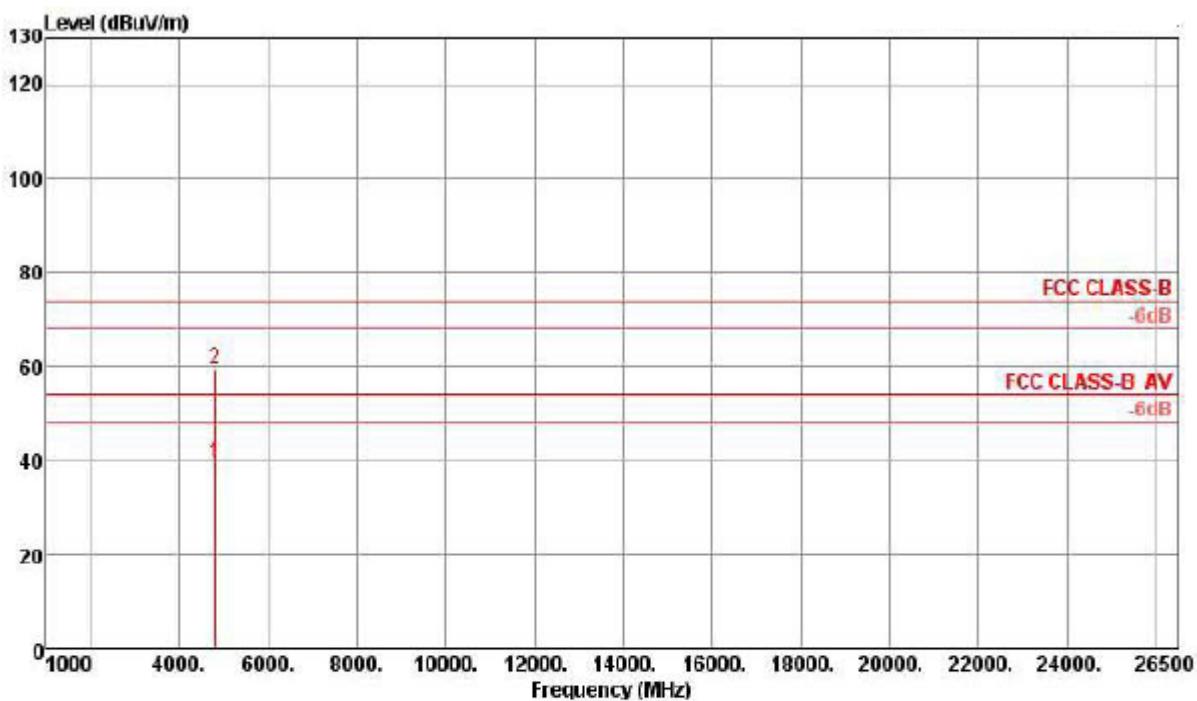

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4803.99	39.53	54.00	-14.47	37.59	3.96	33.02	35.04	261	172 Average	VERTICAL
2 p	4804.06	59.46	74.00	-14.54	57.52	3.96	33.02	35.04	261	172 Peak	VERTICAL


Operation Mode:	channel 39(2Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

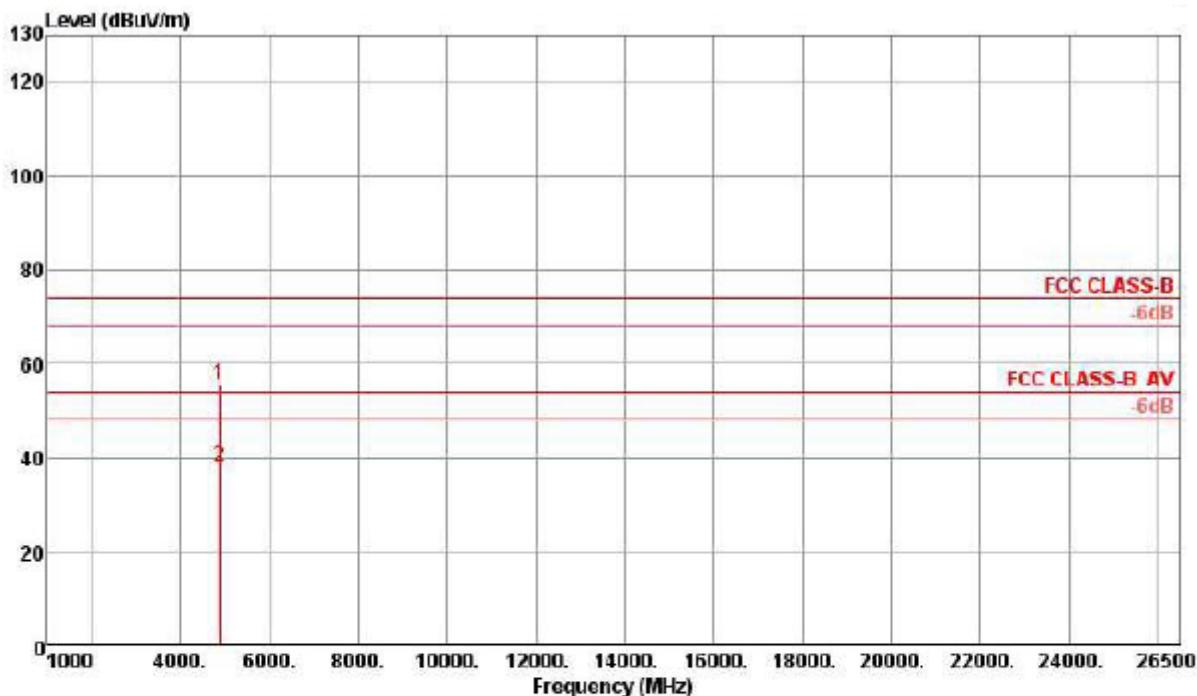

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			deg	cm		
1 p	4881.94	55.39	74.00	-18.61	53.29	3.97	33.16	35.03	47	100	Peak	HORIZONTAL	
2 a	4882.03	38.08	54.00	-15.92	35.98	3.97	33.16	35.03	47	100	Average	HORIZONTAL	


Vertical

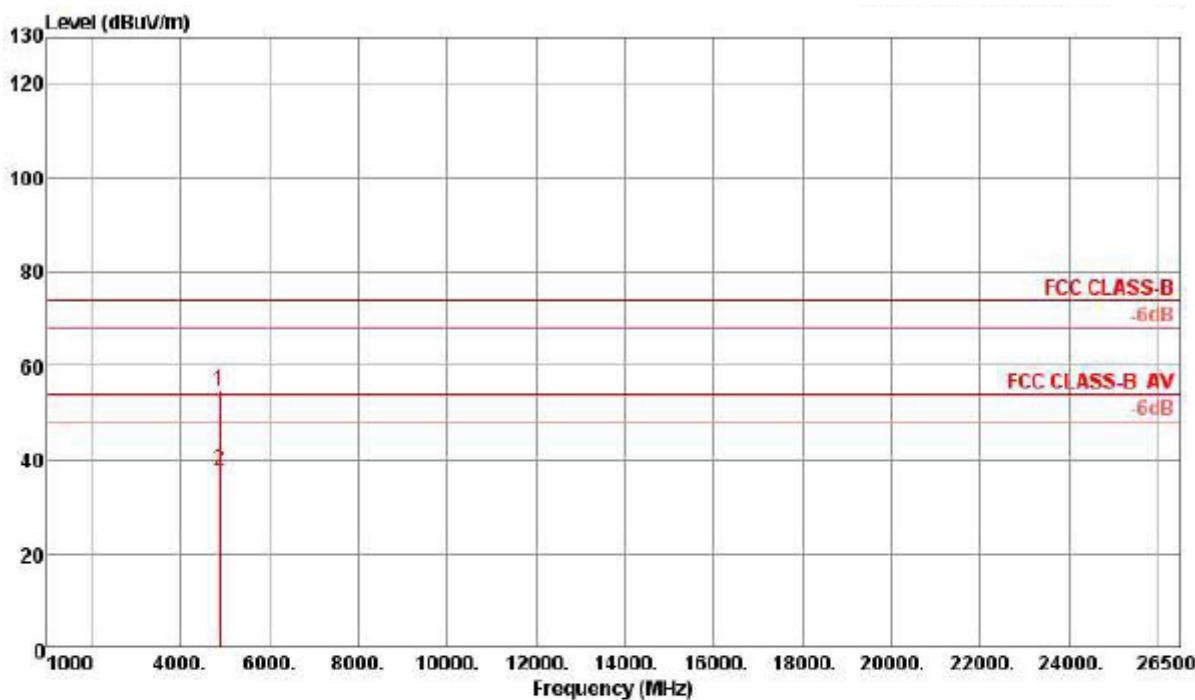

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
					Line	Limit	Level						
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	deg	cm			
1 p	4881.99	54.83	74.00	-19.17	52.73	3.97	33.16	35.03	342	129	Peak		VERTICAL
2 a	4882.03	37.59	54.00	-16.41	35.49	3.97	33.16	35.03	342	129	Average		VERTICAL


Operation Mode:	channel 78(2Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

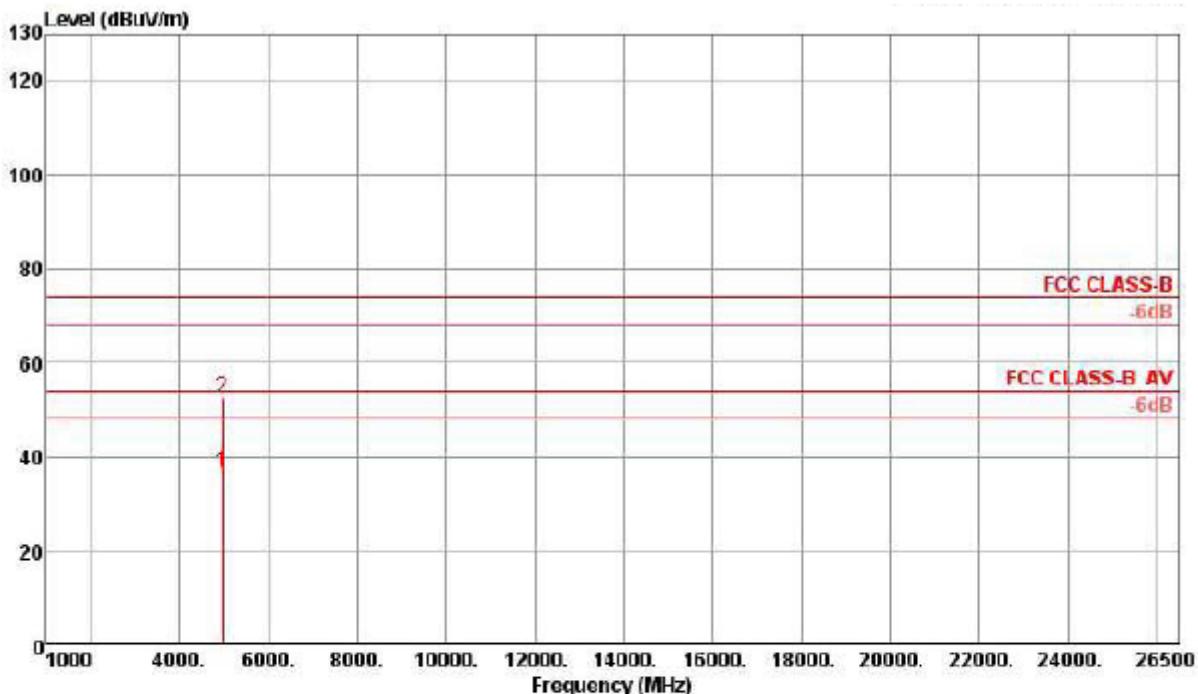

Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable			Antenna Loss dB	Preamp Factor dB	T/Pos deg	A/Pos cm	Remark	Pol/Phase
					Loss	Factor	Factor						
1 a	4960.01	36.47	54.00	-17.53	34.16	3.99	33.33	35.01	128	100	Average	HORIZONTAL	
2 p	4960.09	52.46	74.00	-21.54	50.15	3.99	33.33	35.01	128	100	Peak	HORIZONTAL	

Vertical

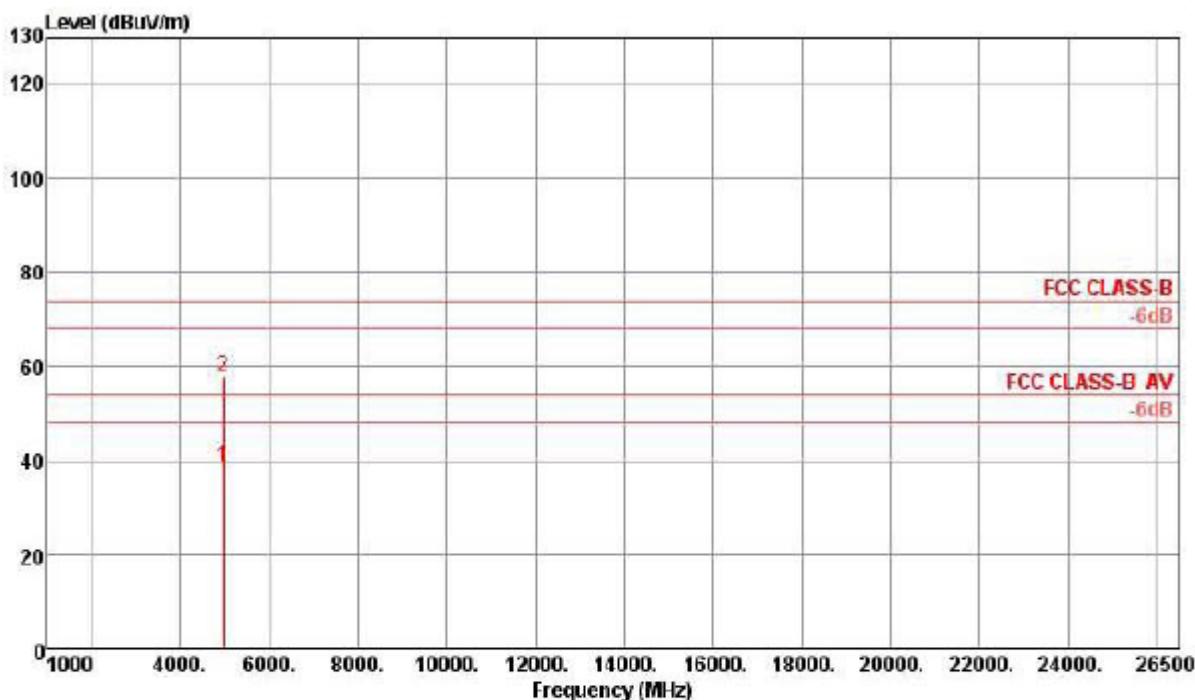

Freq MHz	Level dBuV/m	Limit dBuV/m	Over Limit	Read Level dB	Cable		Antenna Loss dB	Factor Factor	Preamp Factor dB	T/Pos deg	A/Pos cm	Remark	Pol/Phase
					Line	Limit							
1 a 4960.03	38.87	54.00	-15.13	36.56	3.99	33.33	35.01	6	113	Average	VERTICAL		
2 p 4960.18	58.08	74.00	-15.92	55.77	3.99	33.33	35.01	6	113	Peak	VERTICAL		

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Operation Mode:	channel 0(3Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

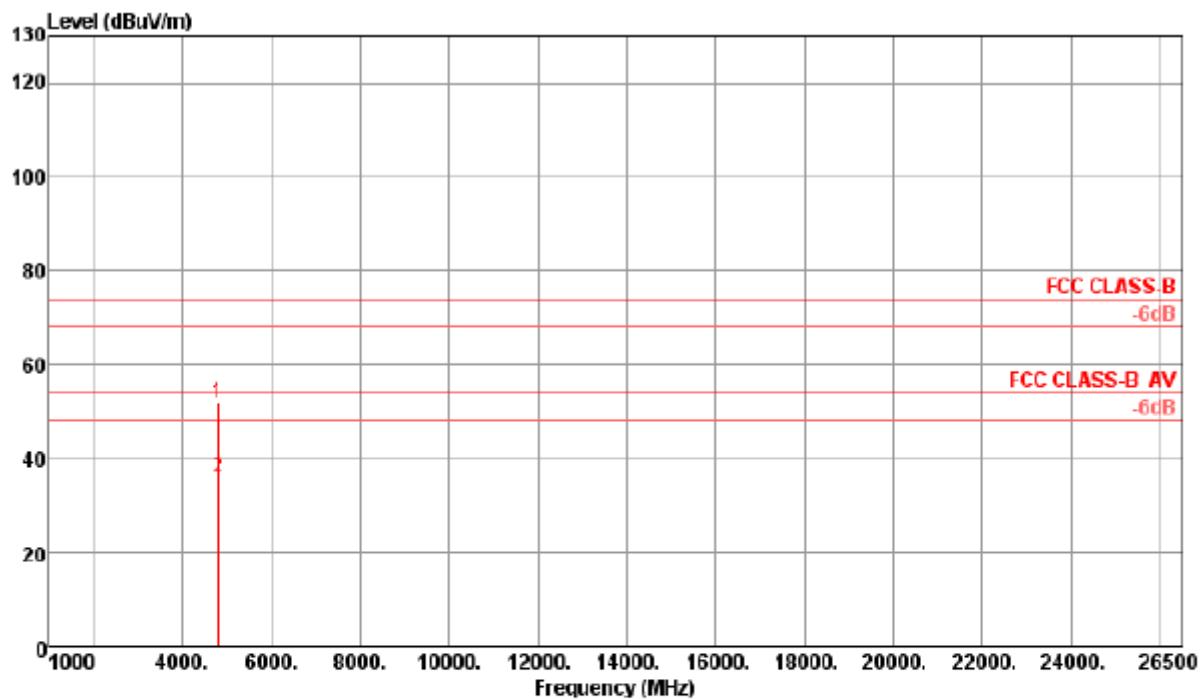

Freq MHz	Level dBuV/m	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
1 p	4803.97	51.87	74.00	-22.13	49.93	3.96	33.02	35.04	310	100 Peak	HORIZONTAL
2 a	4803.99	36.02	54.00	-17.98	34.08	3.96	33.02	35.04	310	100 Average	HORIZONTAL


Vertical

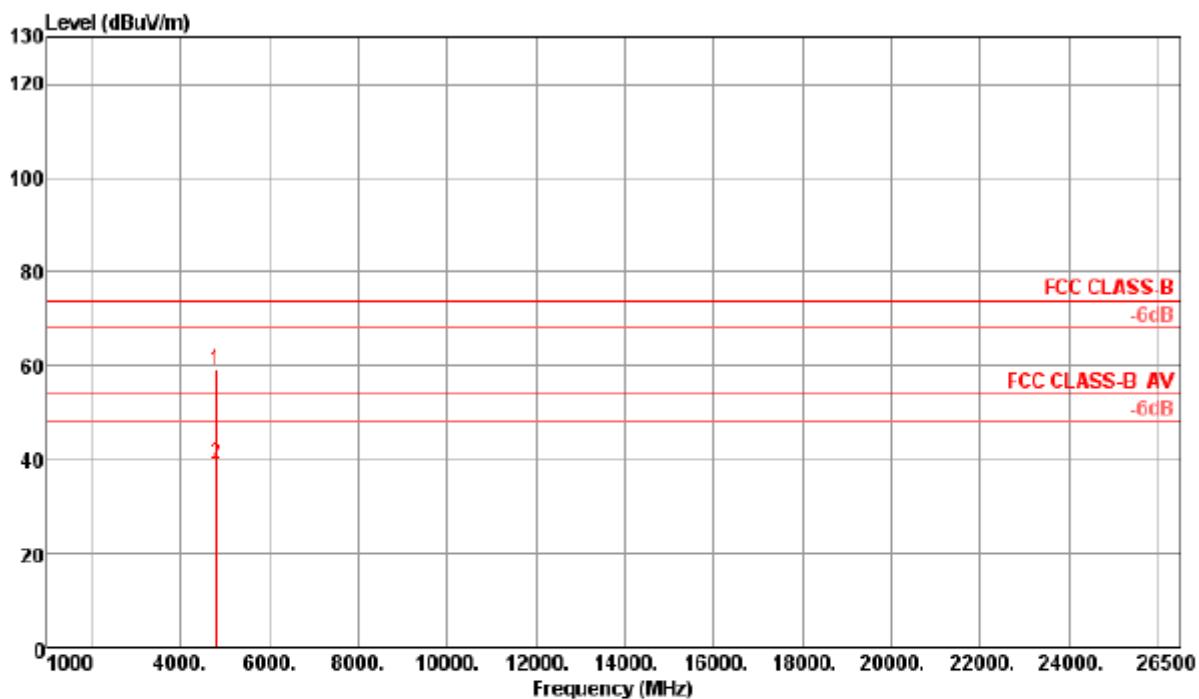

Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable\Antenna		Preamp Factor	T/Pos deg	A/Pos cm	Remark	Pol/Phase
					Loss	Factor					
1 p 4804.02	58.87	74.00	-15.13	56.93	3.96	33.02	35.04	279	112	Peak	VERTICAL
2 a 4804.09	39.26	54.00	-14.74	37.32	3.96	33.02	35.04	279	112	Average	VERTICAL


Operation Mode:	channel 39(3Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

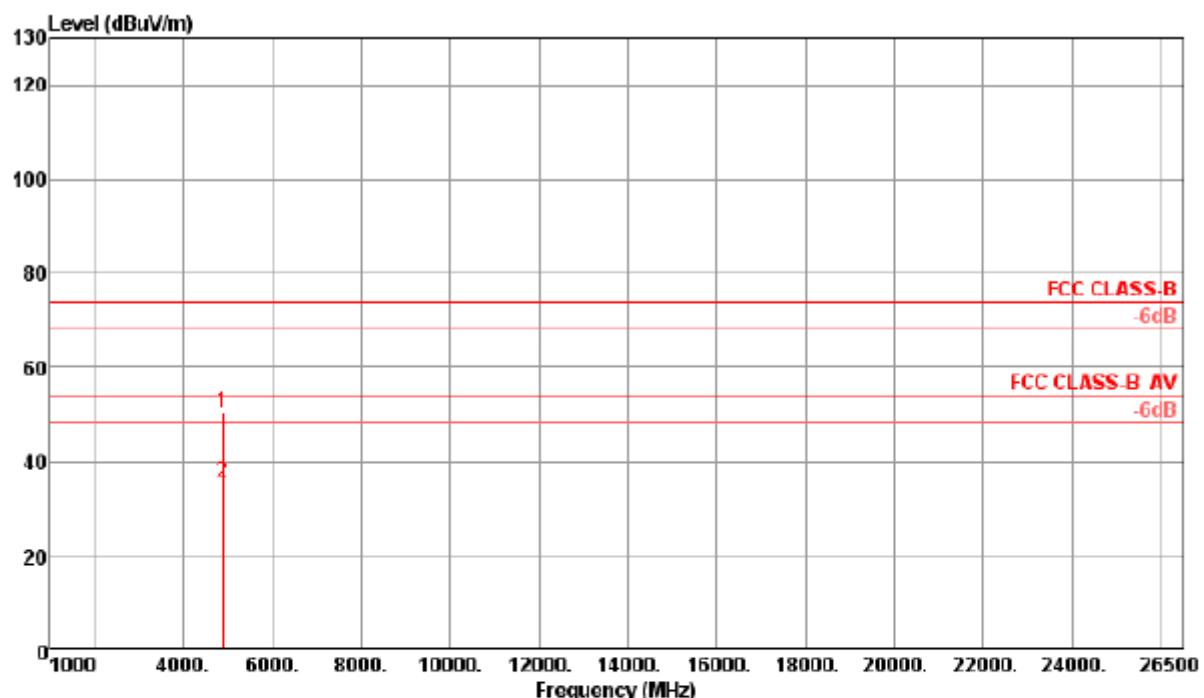

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	deg	cm	
1 p	4881.94	50.16	74.00	-23.84	48.06	3.97	33.16	35.03	304	100	Peak		HORIZONTAL
2 a	4882.05	35.56	54.00	-18.44	33.46	3.97	33.16	35.03	304	100	Average		HORIZONTAL


Vertical

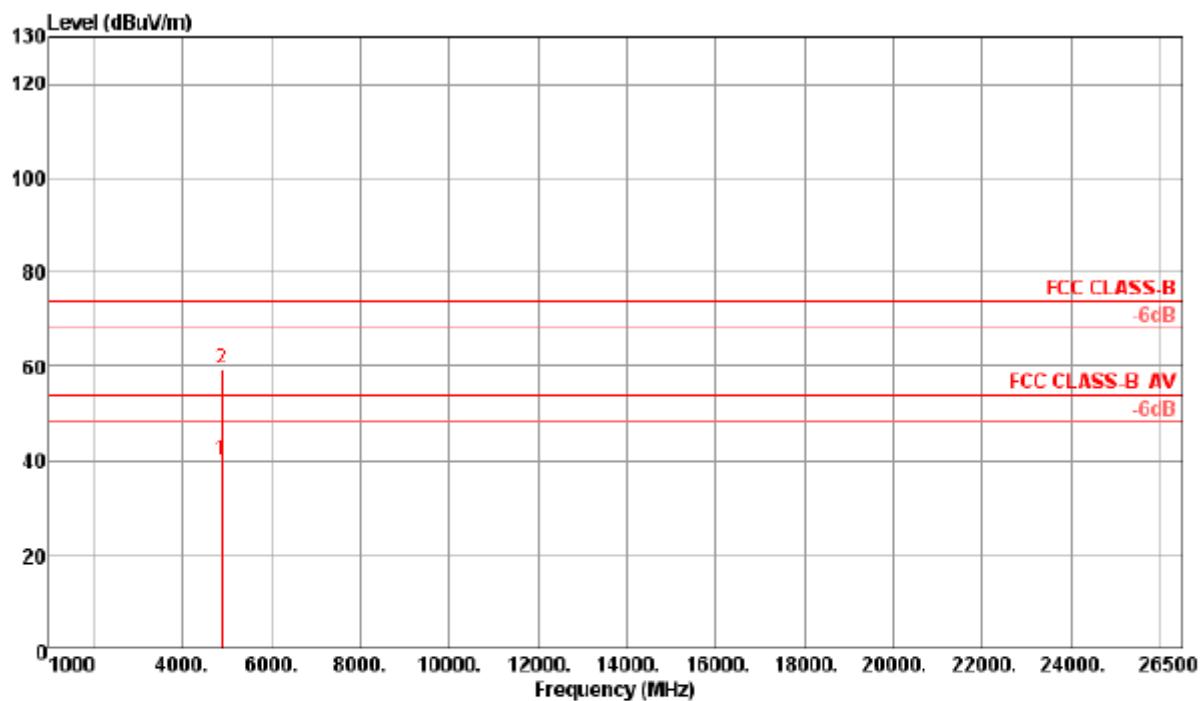

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4882.05	39.82	54.00	-14.18	37.72	3.97	33.16	35.03	83	100 Average	VERTICAL
2 p	4882.06	59.24	74.00	-14.76	57.14	3.97	33.16	35.03	83	100 Peak	VERTICAL


Operation Mode:	channel 78(3Mbps)	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Humidity:	55 % RH		

Horizontal

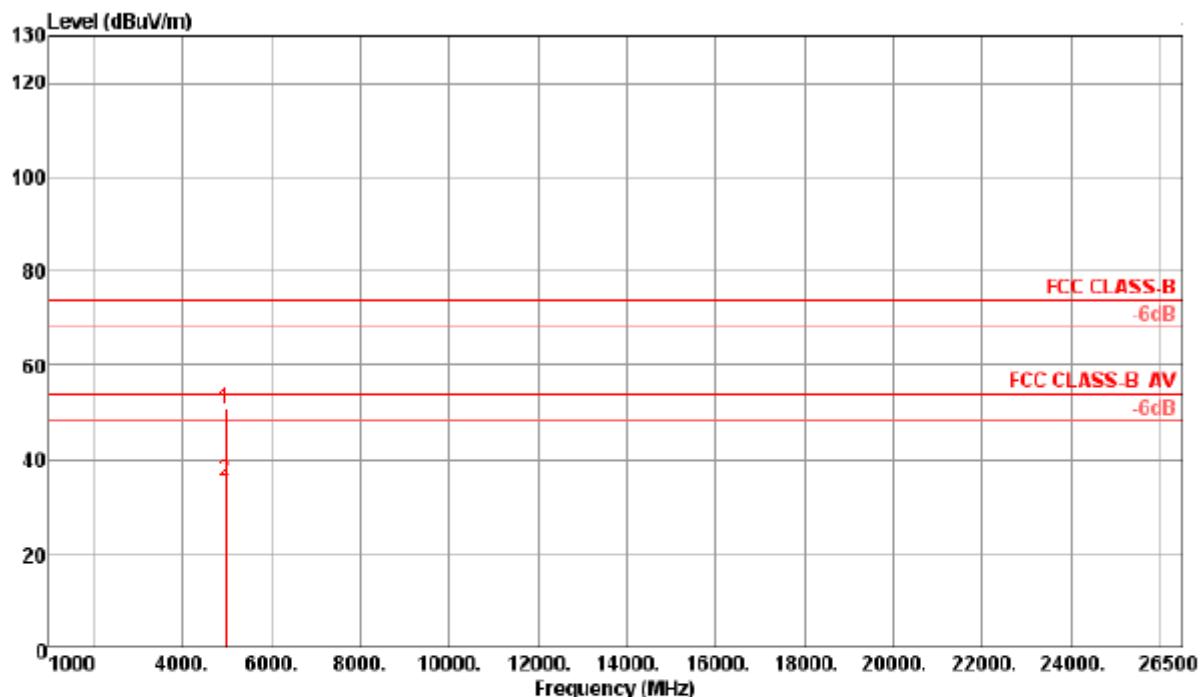

Freq MHz	Level dBuV/m	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol./Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
1 p 4960.04	50.59	74.00	-23.41	48.28	3.99	33.33	35.01	92	155	Peak	HORIZONTAL
2 a 4960.11	35.43	54.00	-18.57	33.12	3.99	33.33	35.01	92	155	Average	HORIZONTAL

Vertical

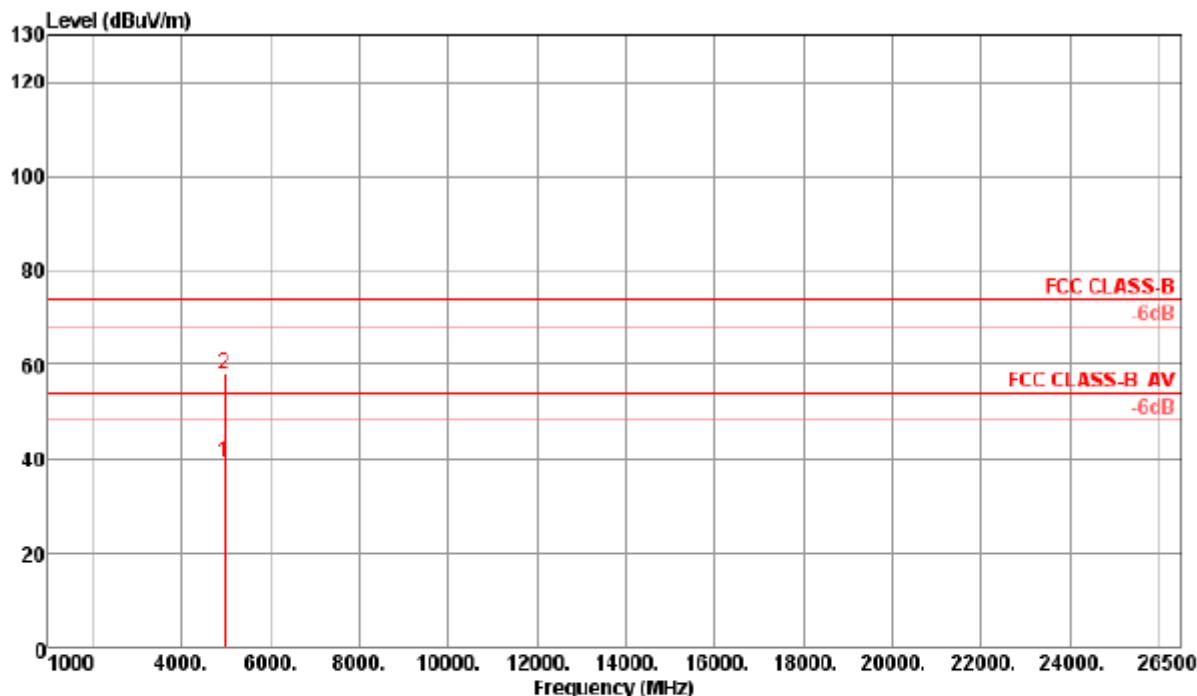

Freq	Level	Limit	Over	Read	Antenna			T/Pos	A/Pos	Remark	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4960.03	38.94	54.00	-15.06	36.63	3.99	33.33	35.01	83	100 Average	VERTICAL
2 p	4960.12	57.79	74.00	-16.21	55.48	3.99	33.33	35.01	83	100 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Humidity:	55 % RH	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Mary Liu
Test Method	Band Edge Emission		

Band Edge Emission for Bottom Channel (1Mbps)

Channel 0

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2390.00	44.20	54.00	-9.80	13.27	2.76	28.17	0.00	110	100	Average
2	2390.00	55.24	74.00	-18.76	24.31	2.76	28.17	0.00	110	100	Peak
3 p	2401.88	105.90	74.00			2.76	28.21	0.00	110	100	Peak
4 a	2402.24	65.84	54.00			2.76	28.21	0.00	110	100	Average

Band Edge Emission for Top Channel (1Mbps)

Channel 78

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	2479.88	104.50	74.00			2.81	28.37	0.00	334	100	Peak
2 a	2480.18	65.22	54.00			2.81	28.37	0.00	334	100	Average
3 !	2483.50	50.59	54.00	-3.41	19.41	2.81	28.37	0.00	334	100	Average
4	2483.50	67.17	74.00	-6.83	35.99	2.81	28.37	0.00	334	100	Peak

Band Edge Emission for Bottom Channel (2Mbps)

Channel 0

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.76	53.87	74.00	-20.13	22.94	2.76	28.17	0.00	187	106	Peak	VERTICAL
2	2390.00	43.61	54.00	-10.39	12.68	2.76	28.17	0.00	187	106	Average	VERTICAL
3 a	2402.12	64.43	54.00			2.76	28.21	0.00	187	106	Average	VERTICAL
4 p	2402.24	101.76	74.00			2.76	28.21	0.00	187	106	Peak	VERTICAL

Band Edge Emission for Top Channel (2Mbps)

Channel 78

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2479.89	100.77	74.00			2.81	28.37	0.00	274	101	Peak	VERTICAL
2 a	2480.13	63.49	54.00			2.81	28.37	0.00	274	101	Average	VERTICAL
3 !	2483.50	48.98	54.00	-5.02	17.80	2.81	28.37	0.00	274	101	Average	VERTICAL
4	2483.50	63.08	74.00	-10.92	31.90	2.81	28.37	0.00	274	101	Peak	VERTICAL

Band Edge Emission for Bottom Channel (3Mbps)

Channel 0

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	deg	cm		
1	2388.03	55.89	74.00	-18.11	24.96	2.76	28.17	0.00	330	100	Peak	VERTICAL	
2	2390.00	46.19	54.00	-7.81	15.26	2.76	28.17	0.00	330	100	Average	VERTICAL	
3 p	2402.14	107.28	74.00			2.76	28.21	0.00	330	100	Peak	VERTICAL	
4 a	2402.29	68.38	54.00			2.76	28.21	0.00	330	100	Average	VERTICAL	

Band Edge Emission for Top Channel (3Mbps)

Channel 78

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	deg	cm		
1 p	2480.05	97.50	74.00					2.81	28.37	0.00	291	100	Peak
2 a	2480.10	64.62	54.00					2.81	28.37	0.00	291	100	Average
3 !	2483.50	49.18	54.00	-4.82	18.00	2.81	28.37	0.00	291	100	Average	VERTICAL	
4	2483.50	59.94	74.00	-14.06	28.76	2.81	28.37	0.00	291	100	Peak	VERTICAL	

10. NUMBER OF HOPPING FREQUENCY

10.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz, span=20MHz
4. Set the Spectrum Analyzer as RBW = VBW = 100KHz

10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

1. Conducted Method.

10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 6.3


10.4 LIMITS AND MEASUREMENT RESULT:

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=15	79	PASS

Humidity:	55 % RH	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Jekey Zhang


BT (1Mbps)

NUMBER OF HOPPING CHANNEL PLOT ON CHANNEL 0~78

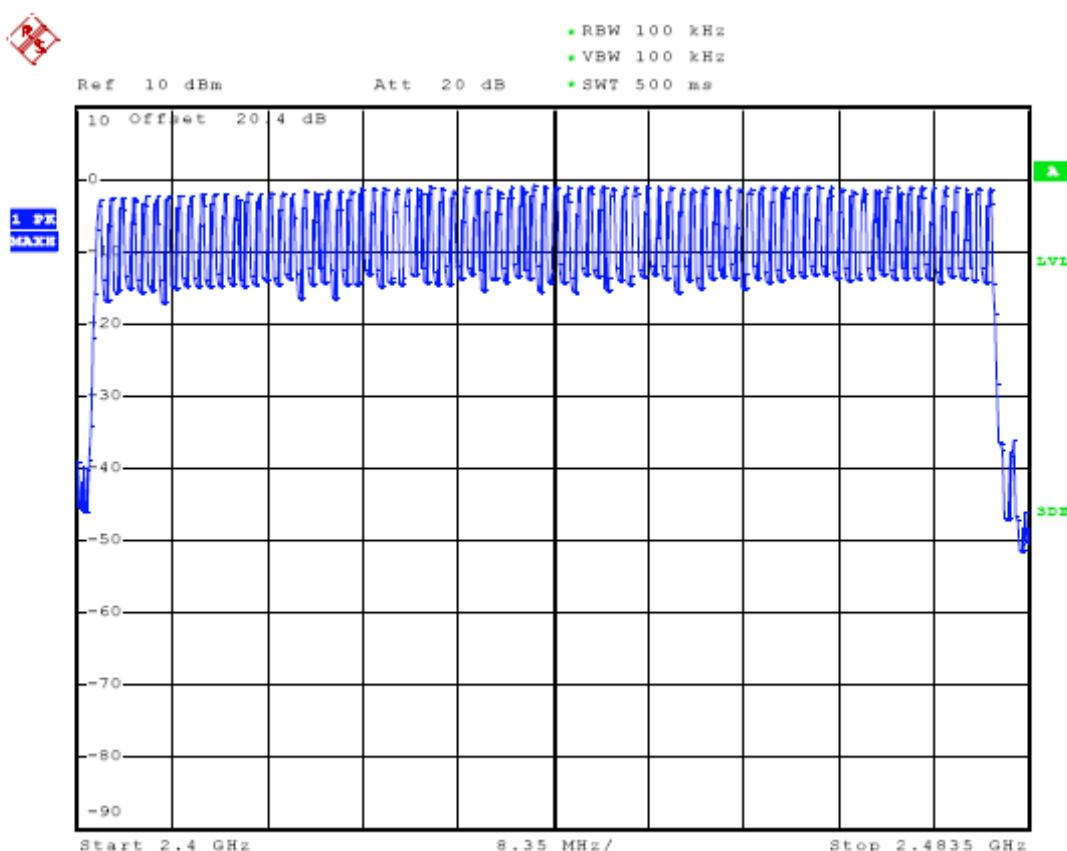


BT EDR (2Mbps)

NUMBER OF HOPPING CHANNEL PLOT ON CHANNEL 0~78

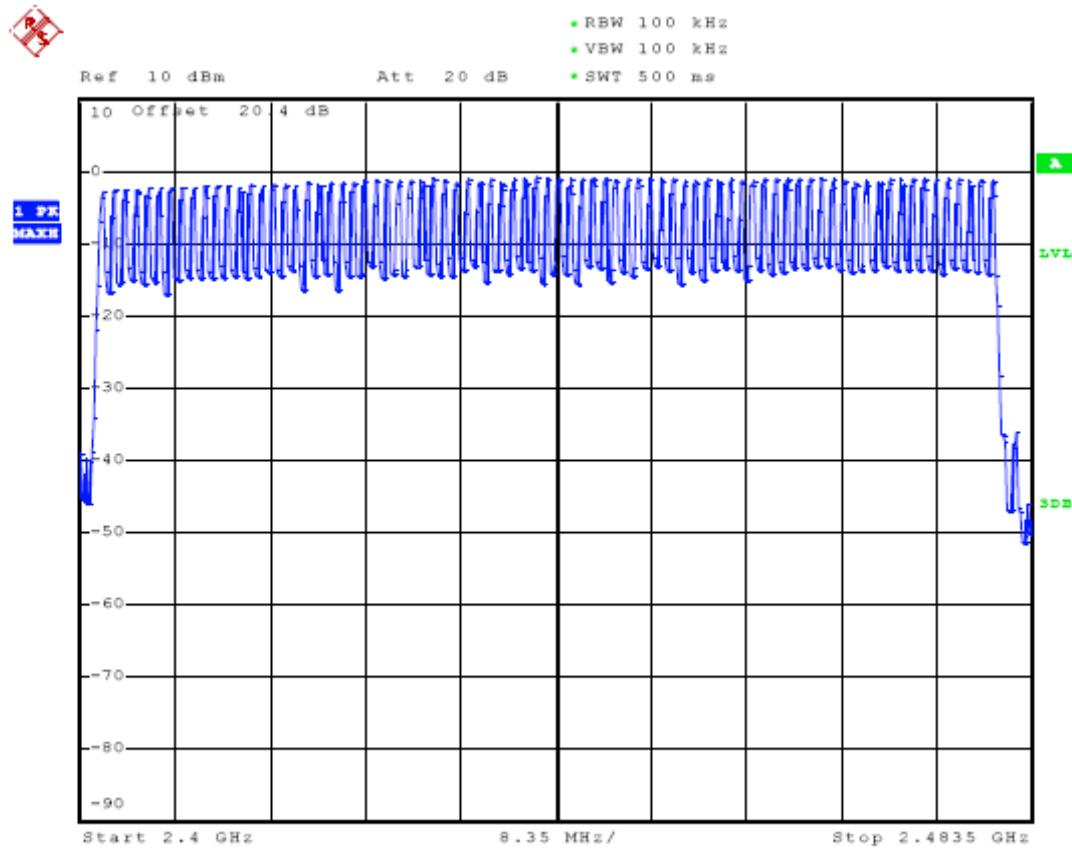

BT EDR (3Mbps)

NUMBER OF HOPPING CHANNEL PLOT ON CHANNEL 0~78

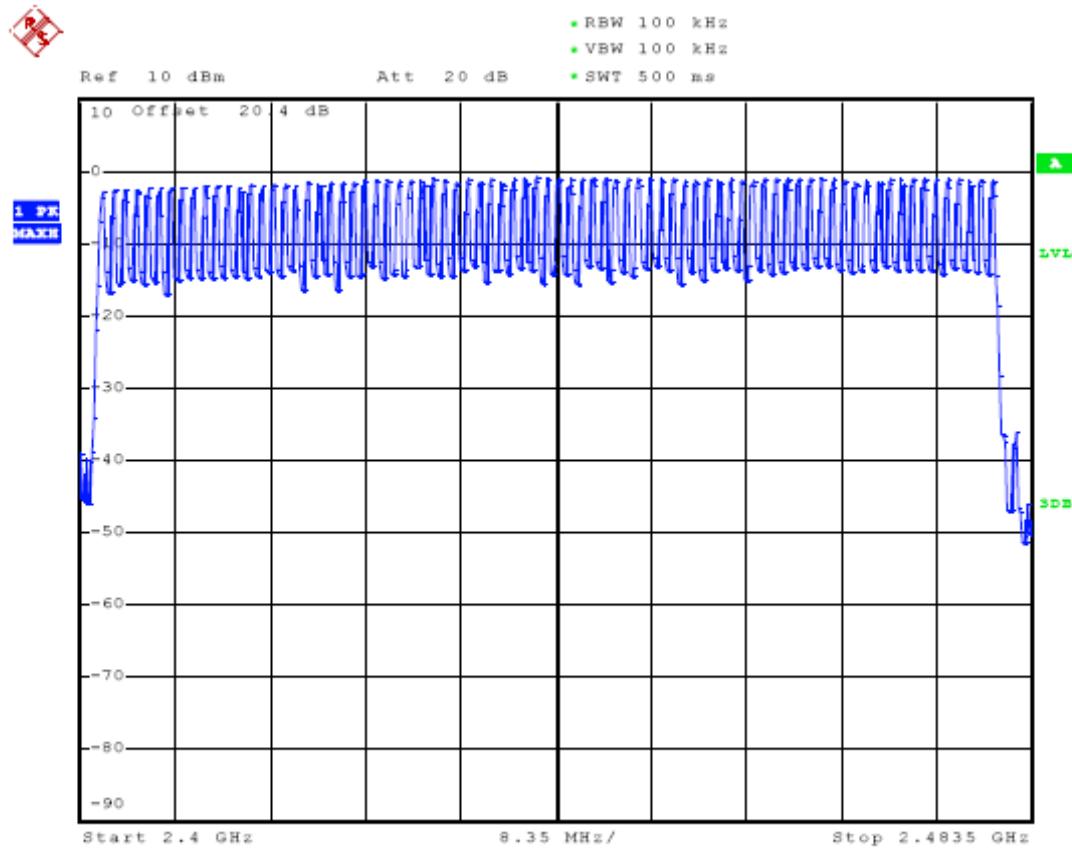

11. TIME OF OCCUPANCY (DWELL TIME)

11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Operating frequency
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

Conducted Method

11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

11.4 LIMITS AND MEASUREMENT RESULT

BOTTOM CHANNEL(1Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2402	410	131.2	400	Pass
DH3	2402	1670	267.2	400	Pass
DH5	2402	2920	311.5	400	Pass

MIDDLE CHANNEL(1Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2441	410	131.2	400	Pass
DH3	2441	1660	265.6	400	Pass
DH5	2441	2920	311.5	400	Pass

TOP CHANNEL(1Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2480	410	131.2	400	Pass
DH3	2480	1670	267.2	400	Pass
DH5	2480	2920	311.5	400	Pass

BOTTOM CHANNEL(2Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2402	410	131.2	400	Pass
DH3	2402	1670	267.2	400	Pass
DH5	2402	2920	311.5	400	Pass

MIDDLE CHANNEL(2Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2441	410	131.2	400	Pass
DH3	2441	1660	265.5	400	Pass
DH5	2441	2920	311.5	400	Pass

TOP CHANNEL(2Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2480	410	131.2	400	Pass
DH3	2480	1670	267.2	400	Pass
DH5	2480	2920	311.5	400	Pass

BOTTOM CHANNEL(3Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2402	370	118.40	400	Pass
DH3	2402	1600	256.00	400	Pass
DH5	2402	2875	306.66	400	Pass

MIDDLE CHANNEL(3Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2441	368.3	117.85	400	Pass
DH3	2441	1608	257.28	400	Pass
DH5	2441	2858	304.85	400	Pass

TOP CHANNEL(3Mbps)					
Mode	Frequency	Spectrum Reading	Test Result	Limit	Pass / Fail
	(MHz)	(uS)	(mS)	(mS)	
DH1	2480	368.3	117.85	400	Pass
DH3	2480	1617	258.72	400	Pass
DH5	2480	2867	305.81	400	Pass

A Period Time = $79*0.4=31.6$ S


DH1 Time Slot: Reading * (1600/2)*31.6/79

DH3 Time Slot: Reading * (1600/4)*31.6/79


DH5 Time Slot: Reading * (1600/6)*31.6/79

Humidity:	55 % RH	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Jekey Zhang
Configurations	DH1, DH3, DH5		


TEST PLOT DH1 MODE BOTTOM CHANNEL

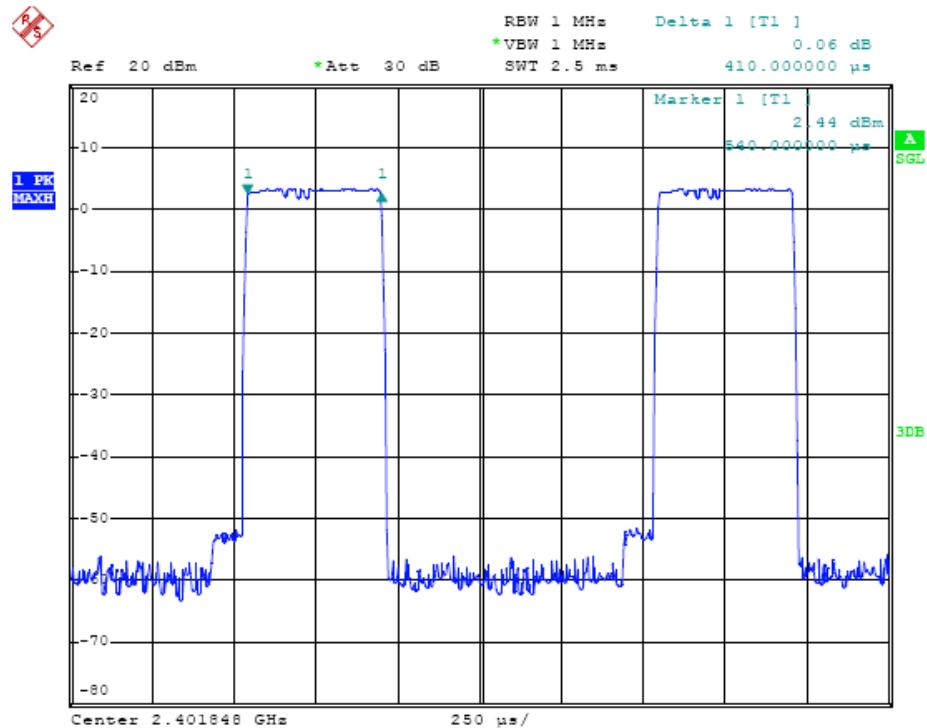


TEST PLOT DH3 MODE BOTTOM CHANNEL

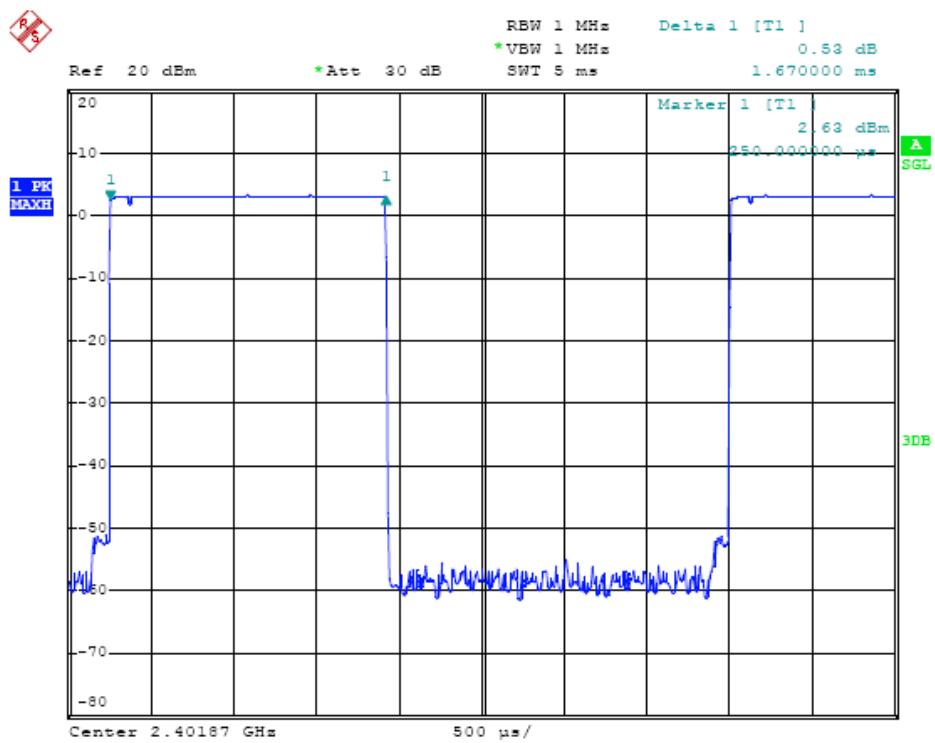


TEST PLOT DH5 MODE BOTTOM CHANNEL

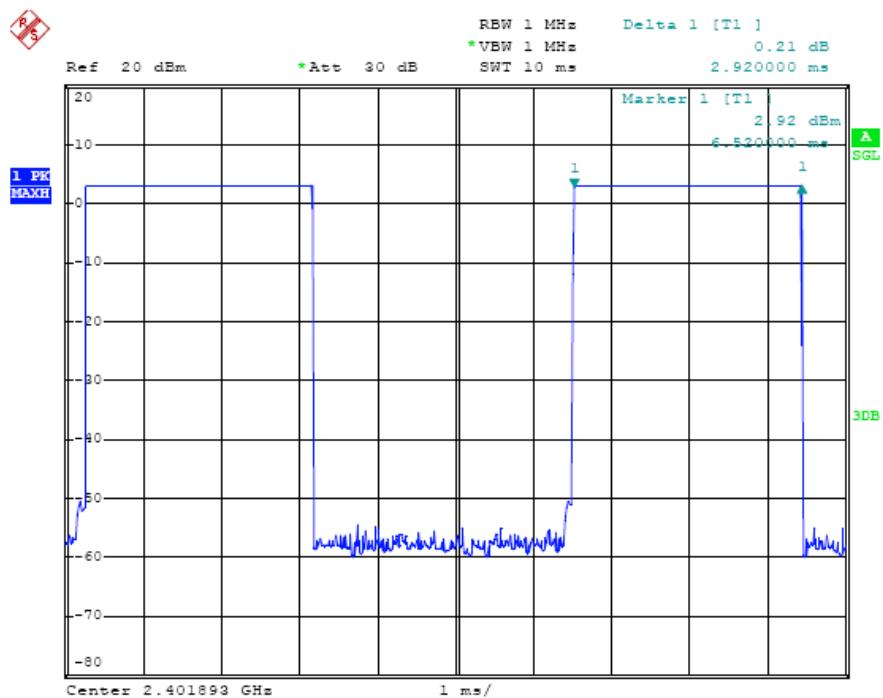


TEST PLOT DH1 MODE MIDDLE CHANNEL

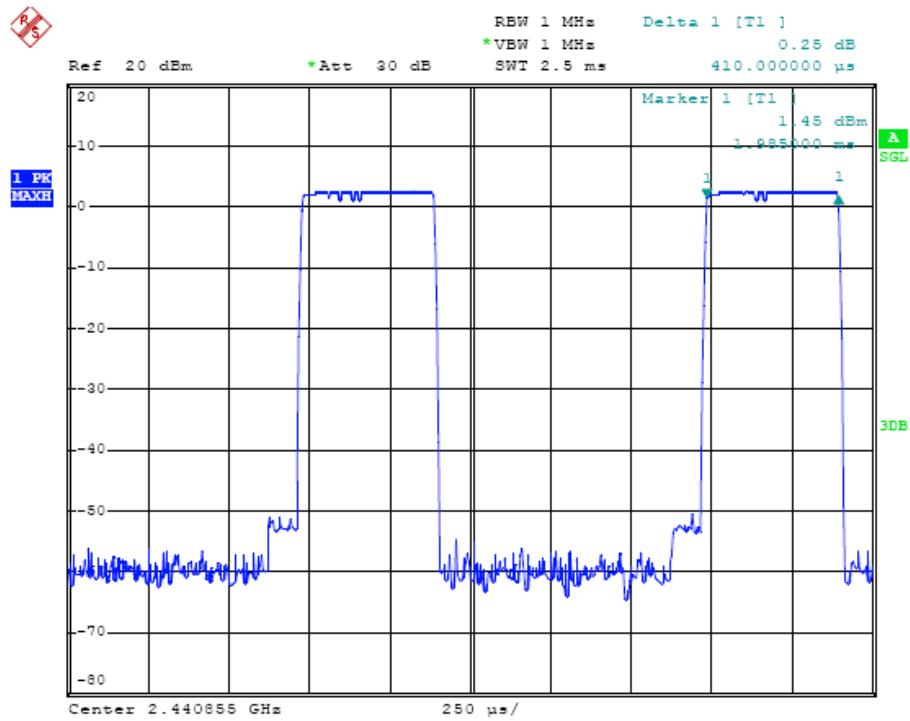


TEST PLOT DH3 MODE MIDDLE CHANNEL

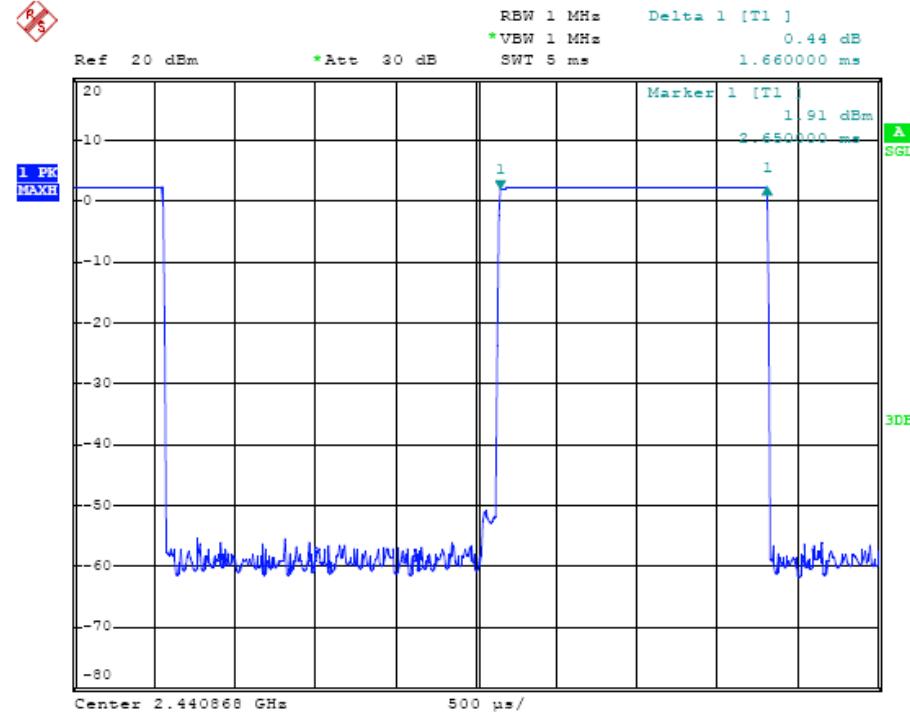


TEST PLOT DH5 MODE MIDDLE CHANNEL

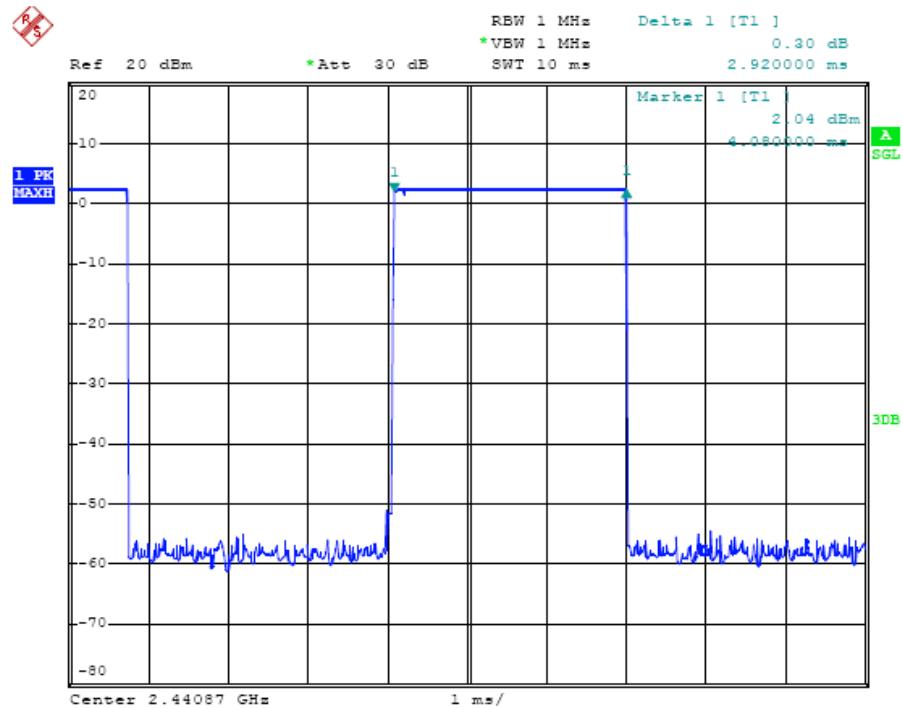


TEST PLOT DH1 MODE TOP CHANNEL

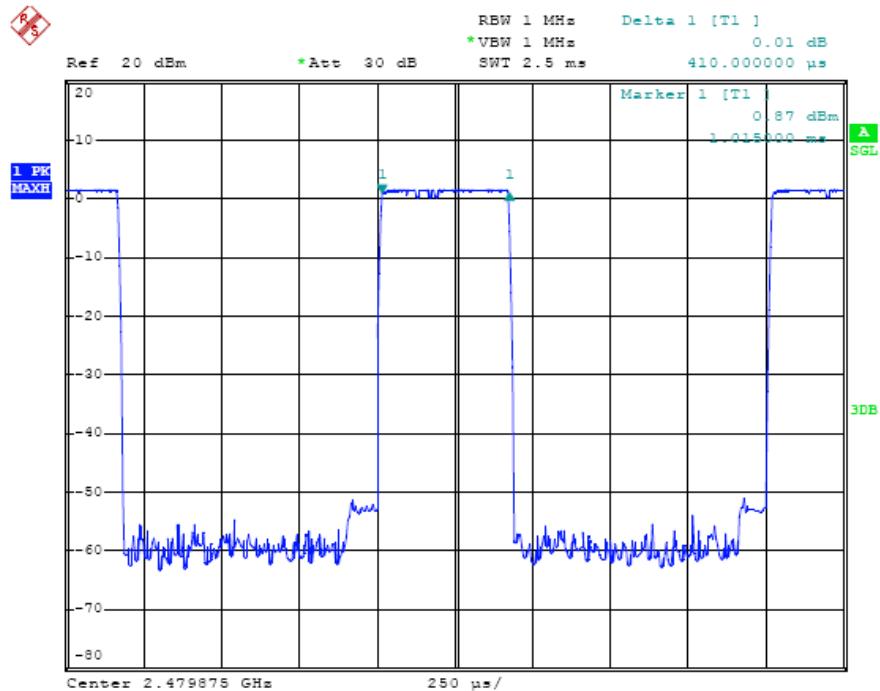

TEST PLOT DH3 MODE TOP CHANNEL

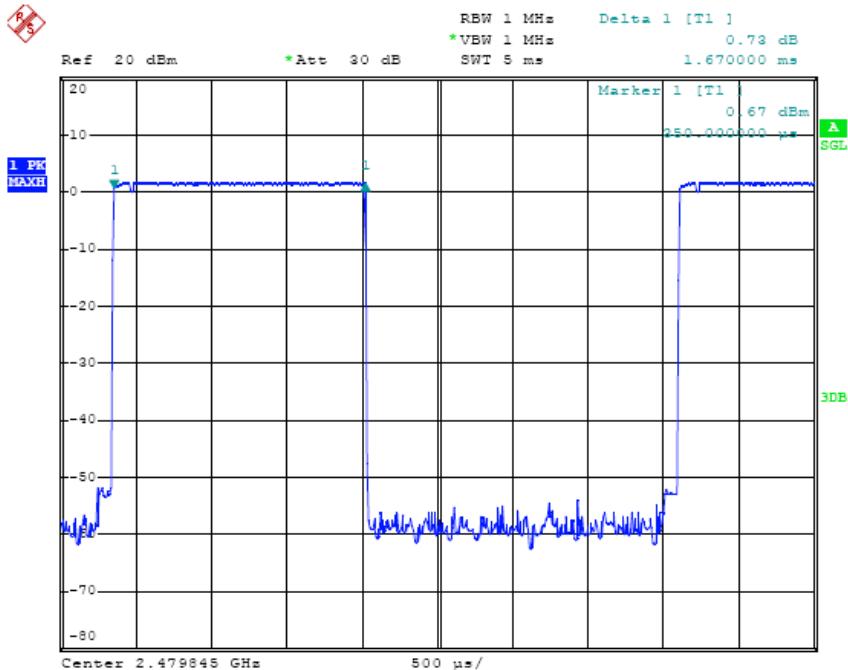

TEST PLOT DH5 MODE TOP CHANNEL

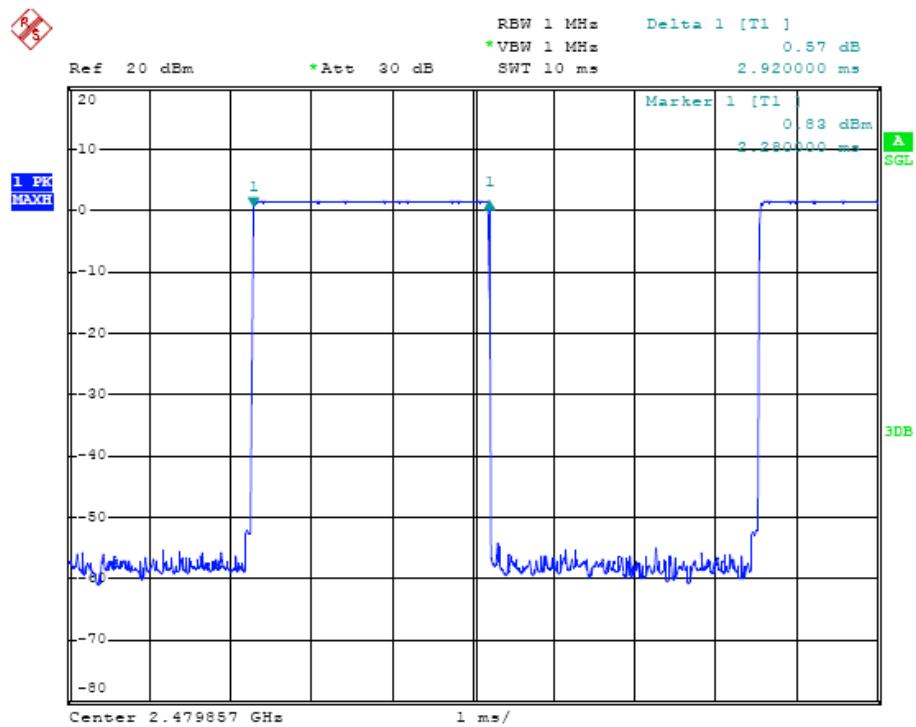

12. FREQUENCY SEPARATION

12.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Middle of Operating frequency
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 5 MHz,

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

12.4 LIMITS AND MEASUREMENT RESULT

CHANNEL(1Mbps)	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1004	>=25 KHz or 2/3 20 dB BW	Pass
CH39-CH40	1000		
CH77-CH78	1000		


CHANNEL(2Mbps)	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass
CH39-CH40	1004		
CH77-CH78	1000		

CHANNEL(3Mbps)	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass
CH39-CH40	1000		
CH77-CH78	1000		


Humidity:	55 % RH	Test Date:	Dec.20, 2010
Temperature:	25°C	Tested by:	Jekey Zhang
Configurations	Channel 0-1, channel39-40, channel78-79		

BT (1Mbps)


TEST PLOT FOR FREQUENCY SEPARATION –CHANNEL0-1(1Mbps)

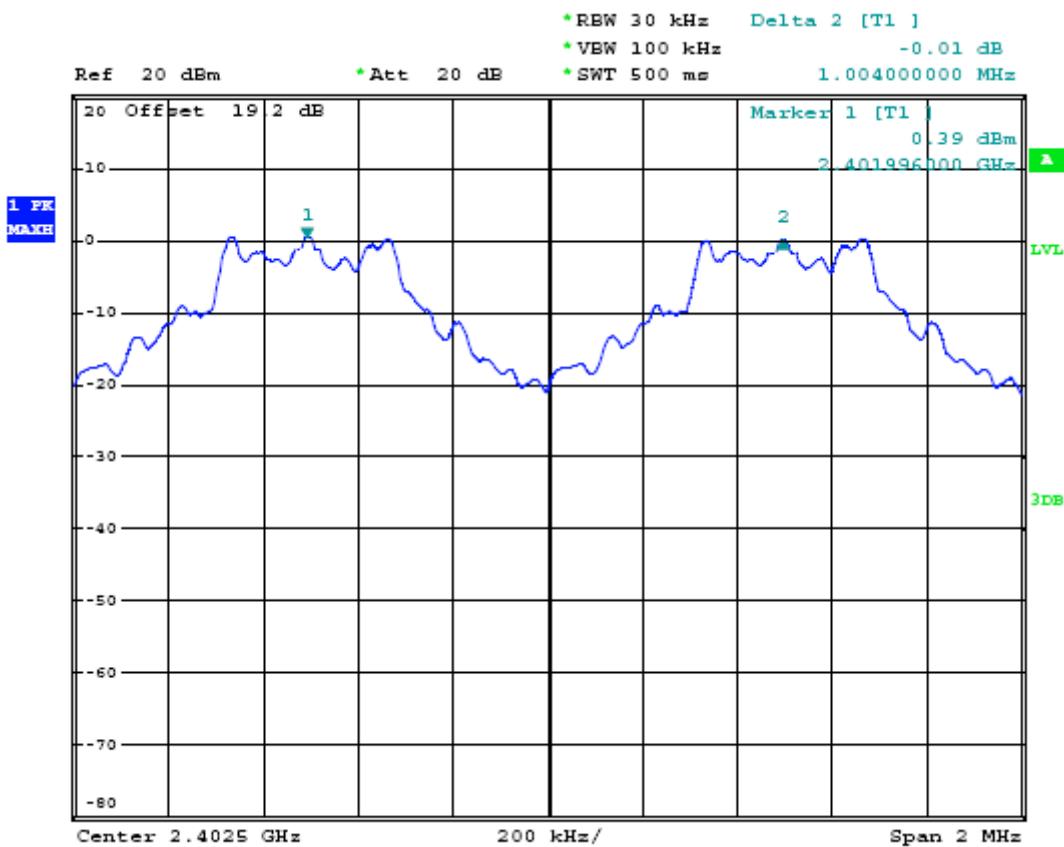

TEST PLOT FOR FREQUENCY SEPARATION -CHANNEL39-40(1Mbps)

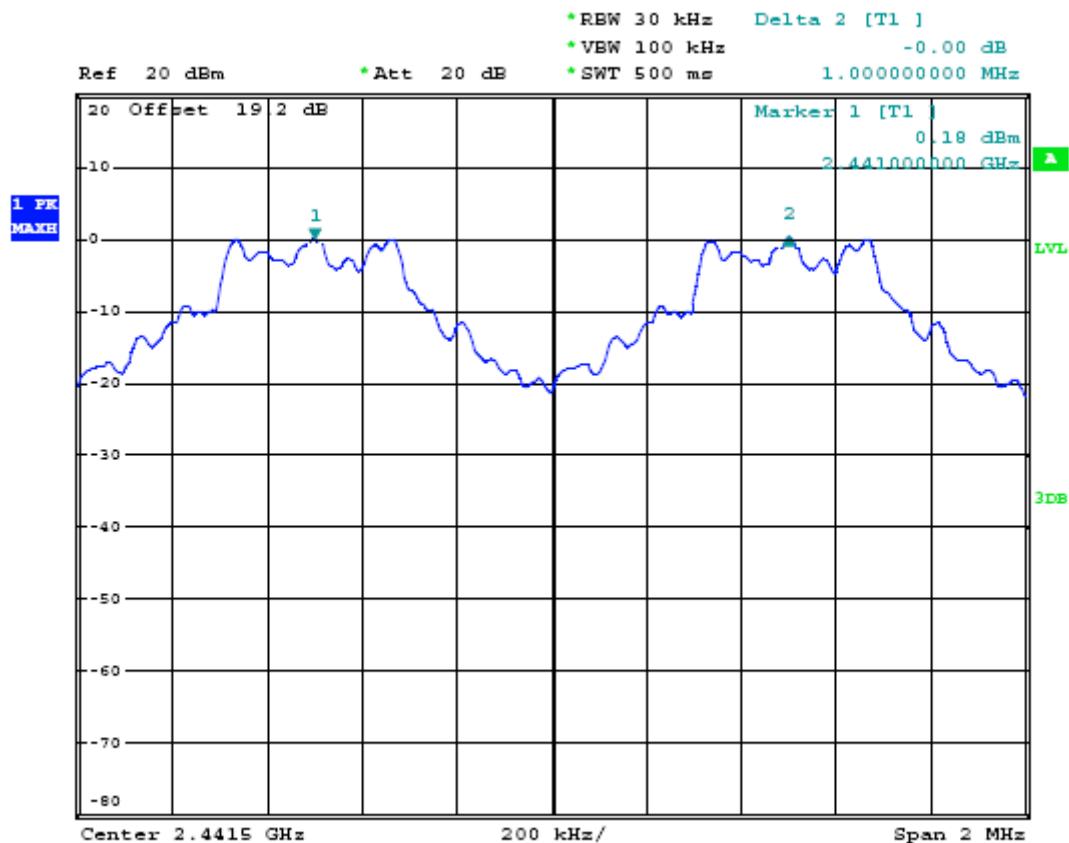


TEST PLOT FOR FREQUENCY SEPARATION -CHANNEL77-78(1Mbps)

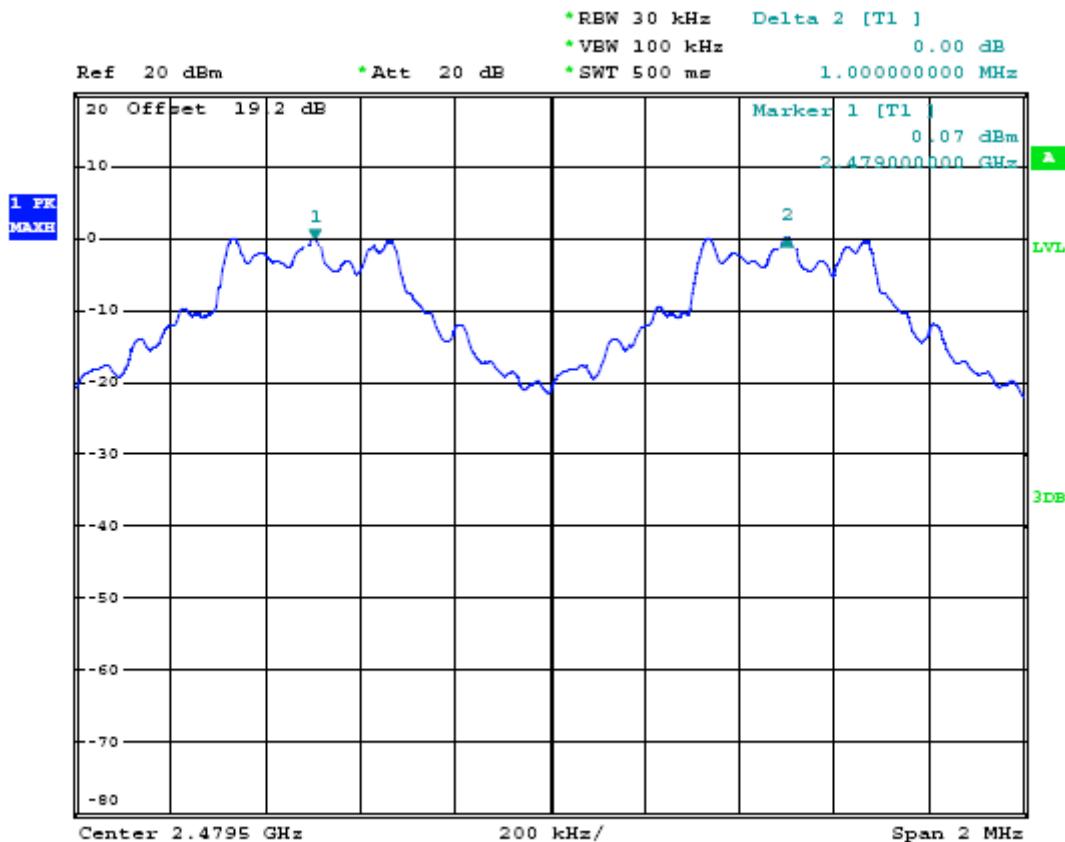


BT EDR (2Mbps)


TEST PLOT FOR FREQUENCY SEPARATION –CHANNEL0-1(2Mbps)

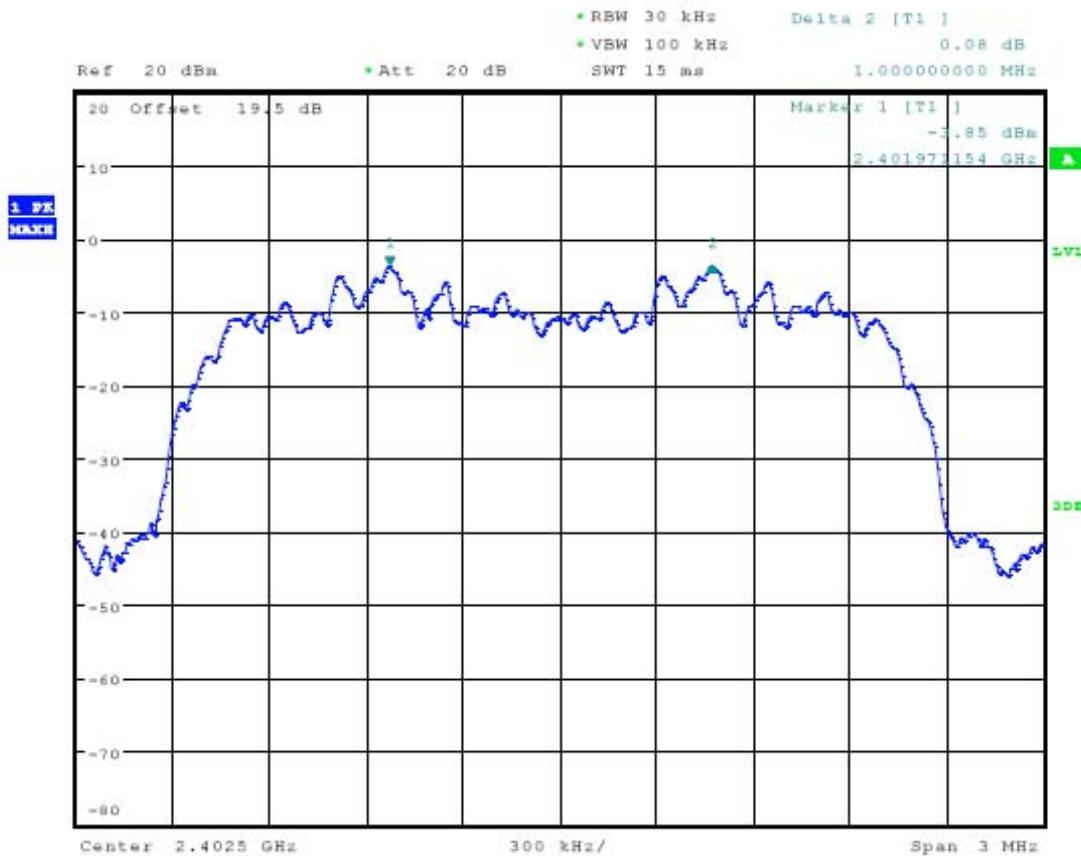

TEST PLOT FOR FREQUENCY SEPARATION -CHANNEL39-40(2Mbps)

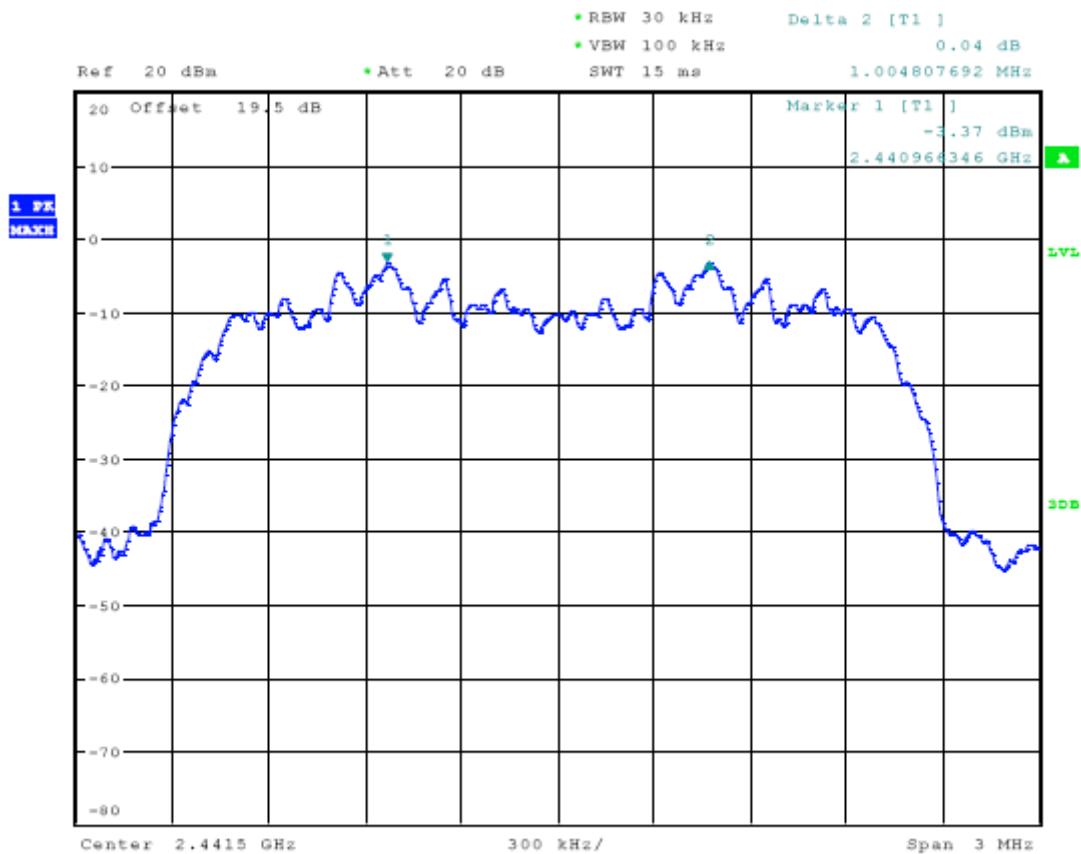


TEST PLOT FOR FREQUENCY SEPARATION -CHANNEL77-78(2Mbps)

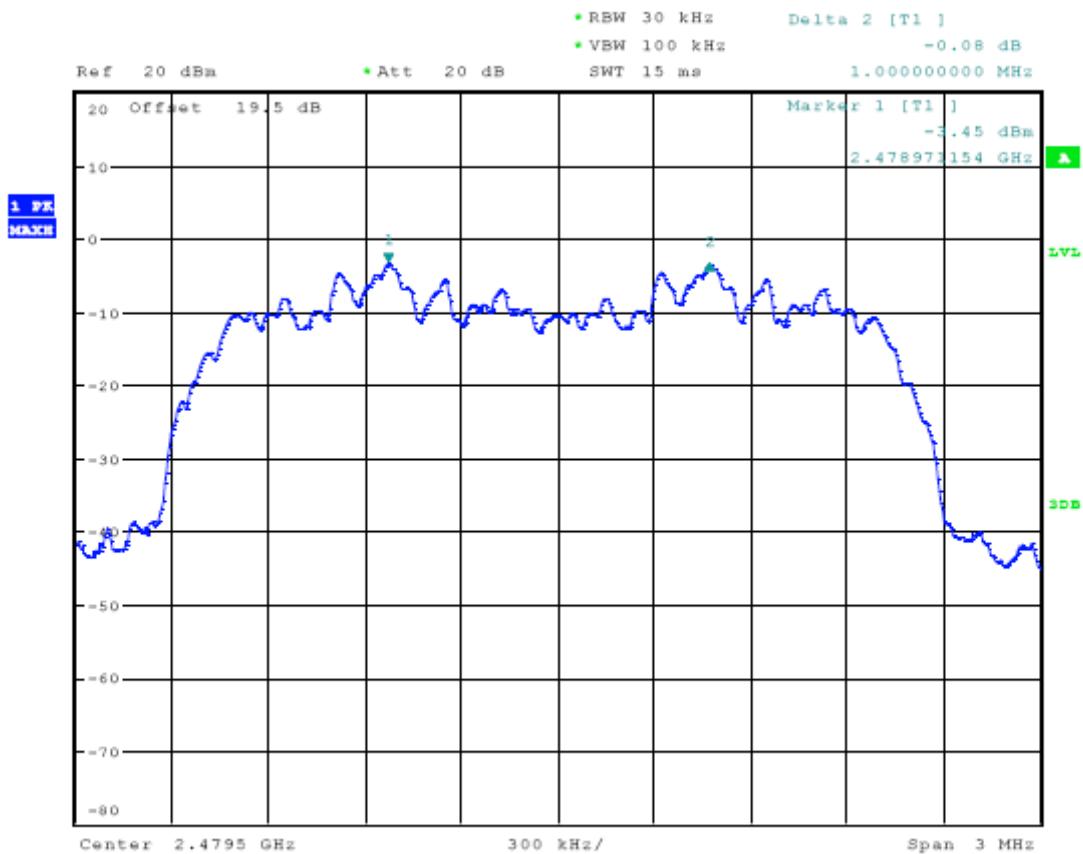


BT EDR (3Mbps)


TEST PLOT FOR FREQUENCY SEPARATION – CHANNEL 0-1(3Mbps)

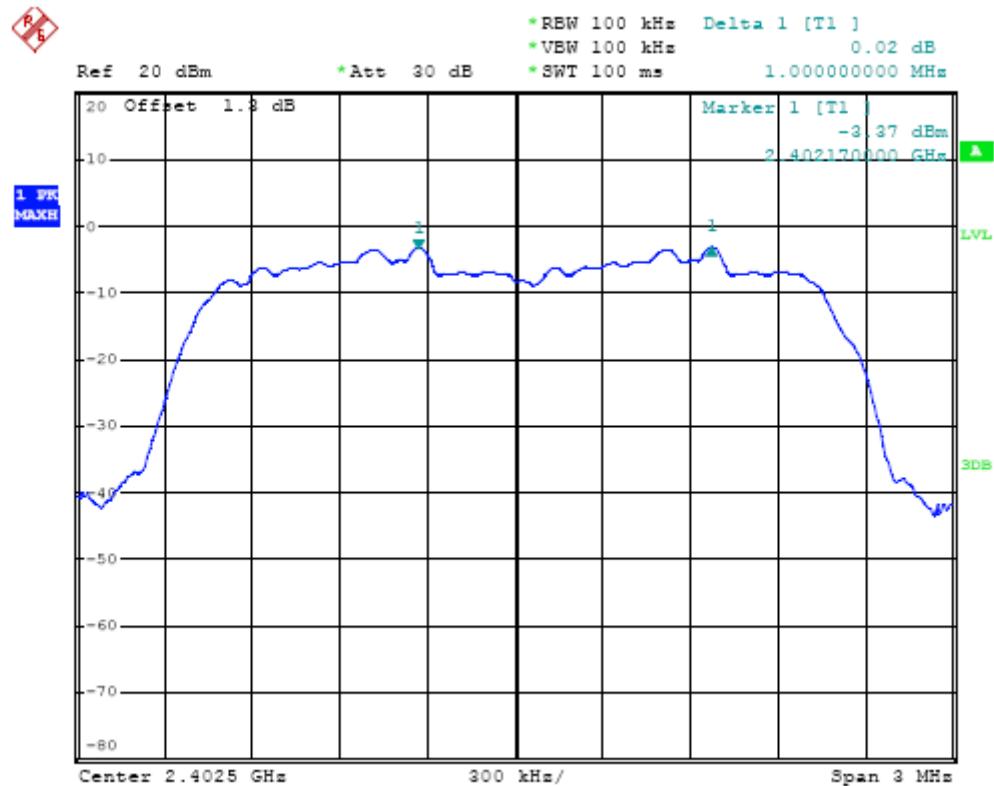

TEST PLOT FOR FREQUENCY SEPARATION -CHANNEL39-40(3Mbps)

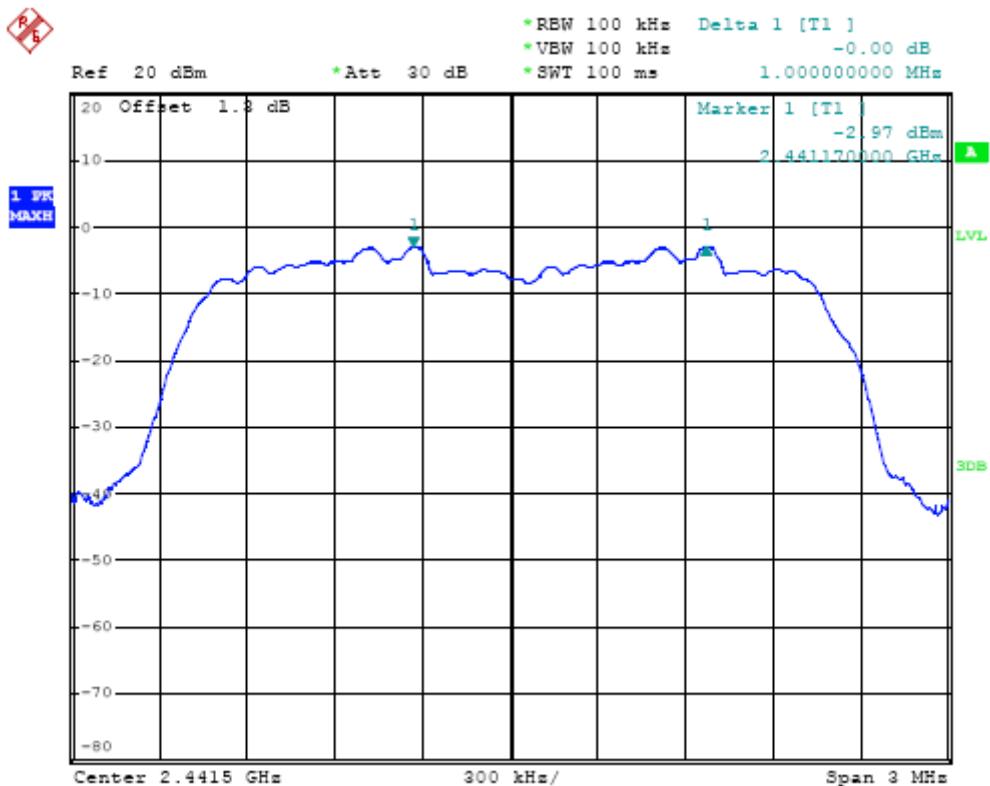

TEST PLOT FOR FREQUENCY SEPARATION -CHANNEL77-78(3Mbps)

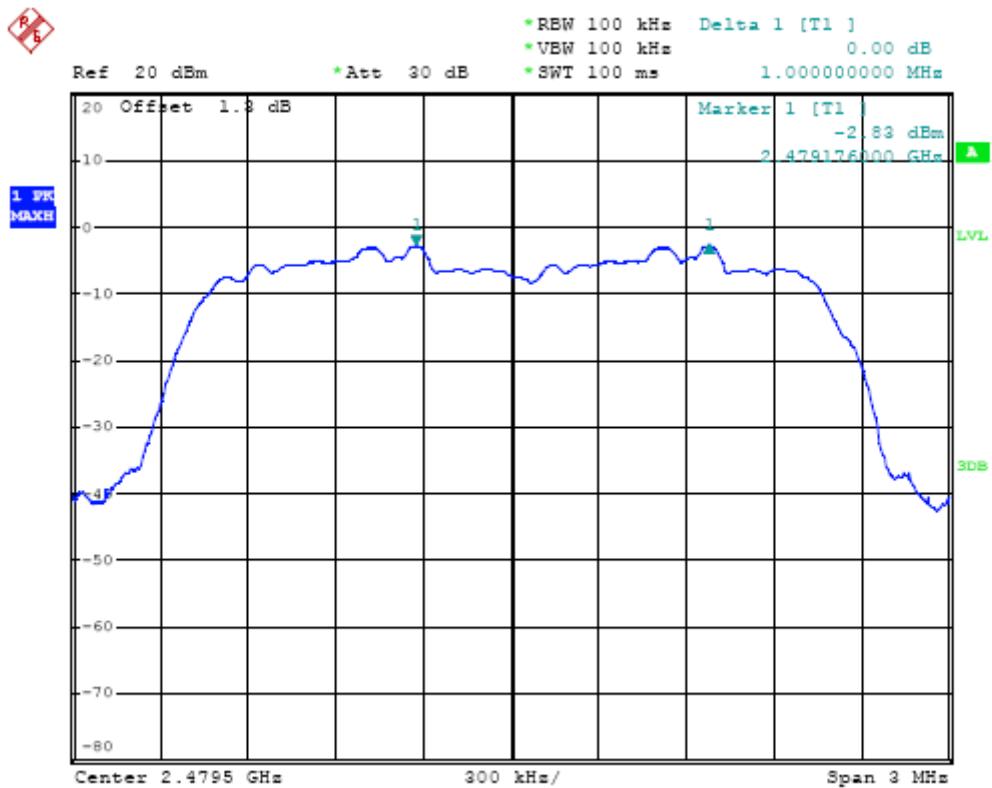

APPENDIX I
PHOTOGRAPHS OF THE EUT
TOP VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE




RIGHT VIEW OF SAMPLE




FRONT VIEW OF SAMPLE



INTERNAL PHOTO OF SAMPLE – 1

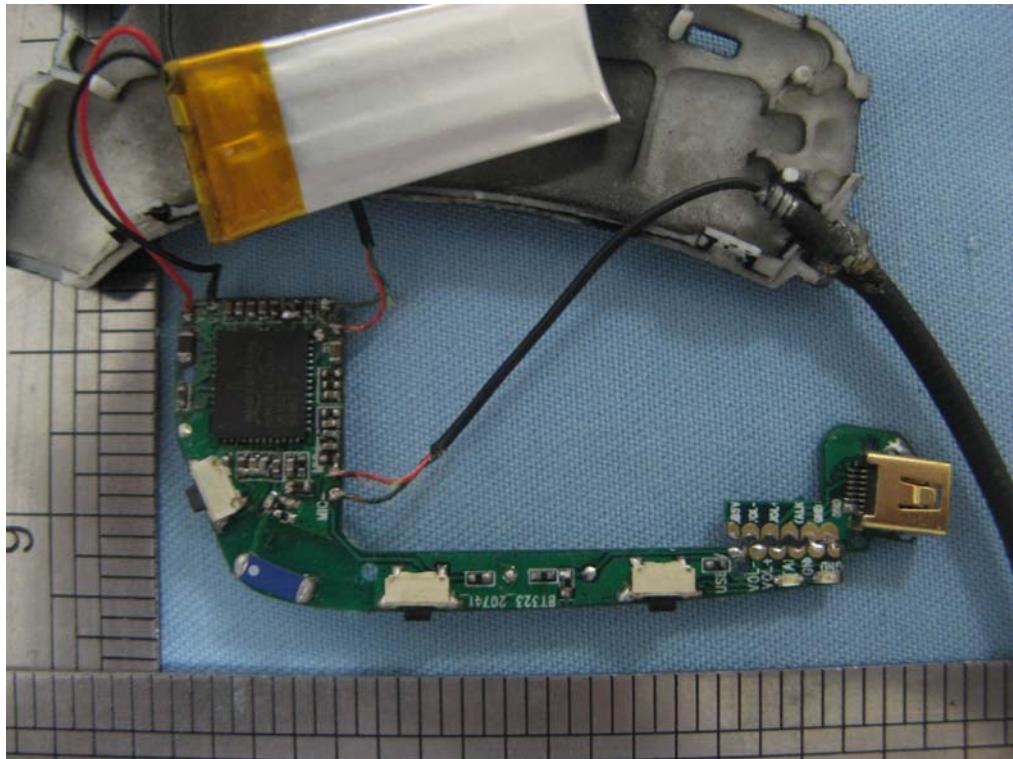


INTERNAL PHOTO OF SAMPLE – 2

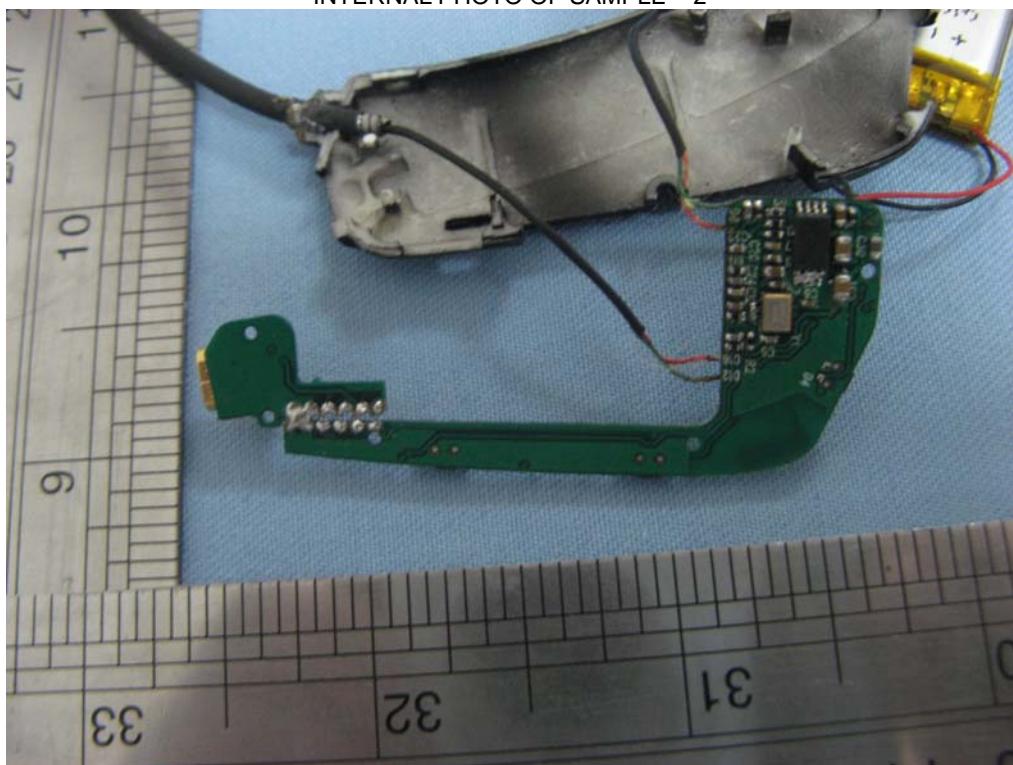

PPENDIX II
PHOTOGRAPHS OF THE TEST SETUP
CONDUCTED EMISSION TEST



RADIATED EMISSION TEST SETUP

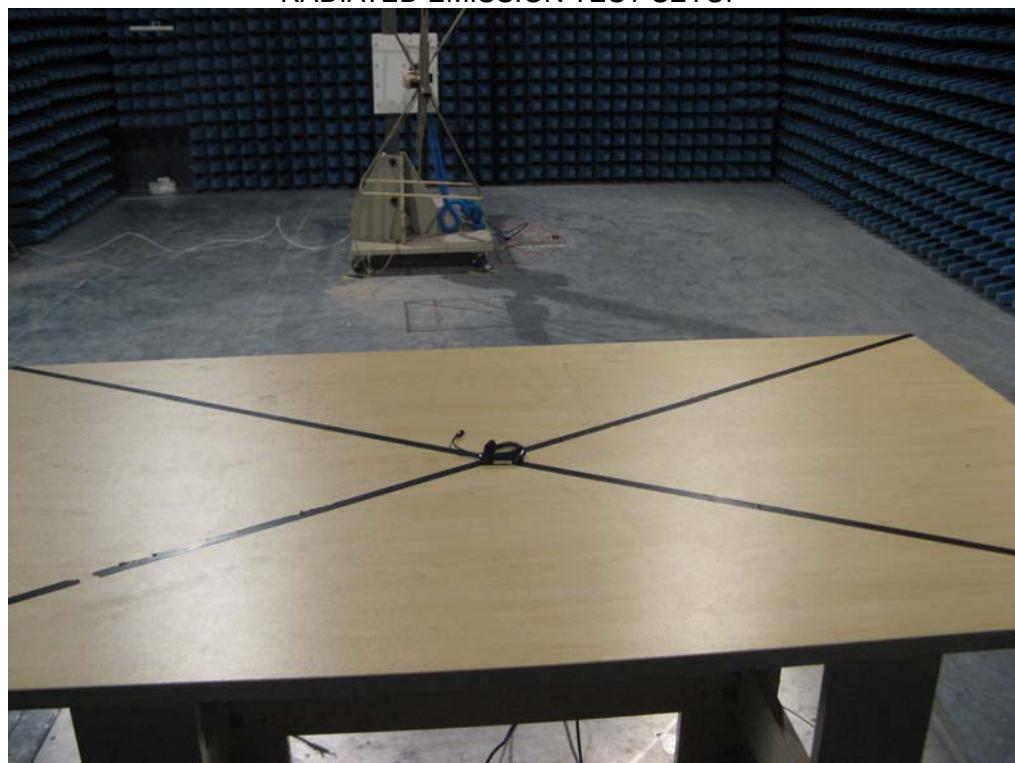

--- END OF REPORT ---