

TEST REPORT

Product : AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM
Trade mark : AUTEL
Model/Type reference : MaxiSys MS906 Pro, MaxiCOM MK906 Pro, MaxiCOM MK906S Pro
Serial Number : N/A
Report Number : EED32O80174503
FCC ID : WQ8-MS906PROV4
Date of Issue : Jun. 27, 2022
Test Standards : 47 CFR Part 15 Subpart E
Test result : PASS

Prepared for:

Autel Intelligent Technology Corp.,Ltd.
7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili,
Nanshan, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by: mark.chenReviewed by: Tom ChenApproved by: Mark Chen
Aaron MaDate of Issue: Jun. 27, 2022

Check No.:7923140222



2 Content

1 COVER PAGE	1
2 CONTENT	2
3 VERSION	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST CONFIGURATION	7
5.4 TEST ENVIRONMENT	7
5.5 DESCRIPTION OF SUPPORT UNITS	8
5.6 TEST LOCATION	8
5.7 DEVIATION FROM STANDARDS	8
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
6 EQUIPMENT LIST	9
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
7.1 ANTENNA REQUIREMENT	12
7.2 AC POWER LINE CONDUCTED EMISSIONS	13
7.3 MAXIMUM CONDUCTED OUTPUT POWER	17
7.4 6dB EMISSION BANDWIDTH	18
7.5 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	19
7.6 MAXIMUM POWER SPECTRAL DENSITY	20
7.7 FREQUENCY STABILITY	21
7.8 RADIATED EMISSION	22
7.9 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BANDS	33
8 APPENDIX A	54
PHOTOGRAPHS OF TEST SETUP	55
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	57

3 Version

Version No.	Date	Description
00	Jun. 27, 2022	Original

4 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	PASS
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
26dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
99% Occupied bandwidth	\	PASS
6dB emission bandwidth	47 CFR Part 15 Subpart E Section 15.407 (e)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS

Remark:
 Company Name and Address shown on Report, the sample(s) and sample Information were Provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.
 Model No.: MaxiSys MS906 Pro, MaxiCOM MK906 Pro, MaxiCOM MK906S Pro
 Only the model MaxiSys MS906 Pro was tested. Their electrical circuit design, layout, components used and internal wiring are identical, only the color and model names are different due to difference agent and marketing purposes.

5 General Information

5.1 Client Information

Applicant:	Autel Intelligent Technology Corp.,Ltd.
Address of Applicant:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen, China
Manufacturer:	Autel Intelligent Technology Corp.,Ltd.
Address of Manufacturer:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen, China
Factory:	Autel Intelligent Technology Corp., Ltd. Guangming Branch
Address of Factory:	7F&6F, East Wing, Building 2, and 6F of Electronical Building, Yanxiang Industrial Zone, Gaoxin Rd, Dongzhou Community of Guangming New District, Shenzhen

5.2 General Description of EUT

Product Name:	AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM	
Model No.:	MaxiSys MS906 Pro, MaxiCOM MK906 Pro, MaxiCOM MK906S Pro	
Test Model No.:	MaxiSys MS906 Pro	
Trade mark:	AUTEL	
Product Type:	Portable	
Test Software of EUT:	QRCT	
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(VHT20/VHT40/VHT80): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	
Operating Frequency	U-NII-1: 5180-5240MHz U-NII-3: 5745-5825MHz	
Operating Temperature:	0°C to +45°C	
Antenna Type:	PIFA antenna	
Antenna Gain:	Ant1:3.4dBi, Ant 2:4.6dBi	
Power Supply:	Adapter:	Model:GME36E-120300FDR Input:100-240V~50/60Hz 1.2A Output:12V---3.0A 36.0W
Test voltage:	AC 120V	
Sample Received Date:	Feb. 15, 2022	
Sample tested Date:	Feb. 15, 2022 to Mar. 22, 2022	

Operation Frequency each of channel

802.11a/802.11n/802.11ac (20MHz) Frequency/Channel Operations:

U-NII-1		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
-	-	165	5825

802.11n/802.11ac (40MHz) Frequency/Channel Operations:

U-NII-1		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

802.11ac (80MHz) Frequency/Channel Operations:

U-NII-1		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	155	5775

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

5.3 Test Configuration

EUT Test Software Settings:	
Software:	QRCT
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(VHT20)	MCS0
802.11ac(VHT40)	MCS0
802.11ac(VHT80)	MCS0

5.4 Test Environment

Operating Environment:		
Radiated Spurious Emissions:		
Temperature:	22~25.0 °C	
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
Conducted Emissions:		
Temperature:	22~25.0 °C	
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
RF Conducted:		
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
Temperature:	NT (Normal Temperature)	22~25.0 °C
	LT (Low Temperature)	0 °C
	HT (High Temperature)	45.0 °C
Working Voltage of the EUT:	NV (Normal Voltage)	120 V
	LV (Low Voltage)	100 V
	HV (High Voltage)	240V

5.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	DELL	Latitude 3490	FCC&CE	CTI

5.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

6 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-24-2021	12-23-2022
Signal Generator	Keysight	N5182B	MY53051549	12-24-2021	12-23-2022
Signal Generator	Agilent	N5181A	MY46240094	12-24-2021	12-23-2022
DC Power	Keysight	E3642A	MY56376072	12-24-2021	12-23-2022
Power unit	R&S	OSP120	101374	12-24-2021	12-23-2022
RF control unit	JS Tonscend	JS0806-2	158060006	12-24-2021	12-23-2022
Communication test set	R&S	CMW500	120765	08-04-2021	08-03-2022
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	12-24-2021	12-23-2022
Temperature/Humidity Indicator	biaozhi	HM10	1804186	06-24-2021	06-23-2022
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	2.6.77.0518	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-15-2021	04-14-2022
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-04-2021 03-01-2022	03-03-2022 02-28-2023
Barometer	changchun	DYM3	1188	---	---

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/24/2019	05/23/2022
Receiver	R&S	ESCI7	100938-003	10/14/2021	10/13/2022
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/23/2019	05/22/2022
Multi device Controller	maturo	NCD/070/10711112	---	---	---
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/15/2021	04/14/2024
Spectrum Analyzer	R&S	FSP40	100416	04/29/2021	04/28/2022
Microwave Preamplifier	Agilent	8449B	3008A02425	06/23/2021	06/22/2022


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-04-2021 03-01-2022	03-03-2022 02-28-2023
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-04-2021 02-23-2022	03-03-2022 02-22-2023
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-04-2021 02-23-2022	03-03-2022 02-22-2023
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	05-20-2021	05-19-2022
Preamplifier	EMCI	EMC001330	980563	04-15-2021	04-14-2022
Preamplifier	JS Tonscend	980380	EMC051845SE	12-24-2021	12-23-2022
Communication test set	R&S	CMW500	102898	12-24-2021	12-23-2022
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-16-2021	04-15-2022
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

7 Radio Technical Requirements Specification


7.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is Prohibited.	
EUT Antenna:	Please see Internal photos
The antenna is PIFA antenna. The best case gain of the antenna are ant1:3.4 dBi and ant2:4.6dBi.	

7.2 AC Power Line Conducted Emissions

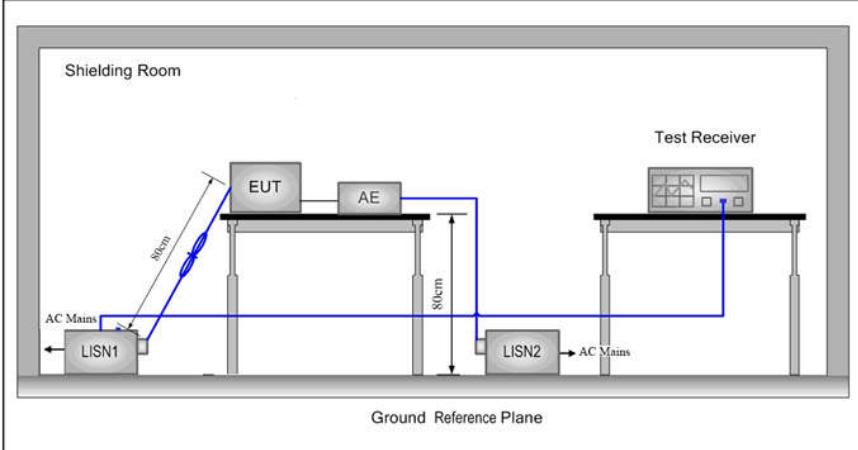
Test Requirement:	47 CFR Part 15C Section 15.207																	
Test Method:	ANSI C63.10: 2013																	
Test Frequency Range:	150kHz to 30MHz																	
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56*	56 to 46*																
0.5-5	56	46																
5-30	60	50																
	* Decreases with the logarithm of the frequency.																	
Test Setup:																		
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which Provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN Provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to 																	

	ANSI C63.10: 2013 on conducted measurement.
Test Mode:	All modes were tested, only the worst case lowest channel of 6Mbps for 802.11a was recorded in the report.
Test Results:	Pass

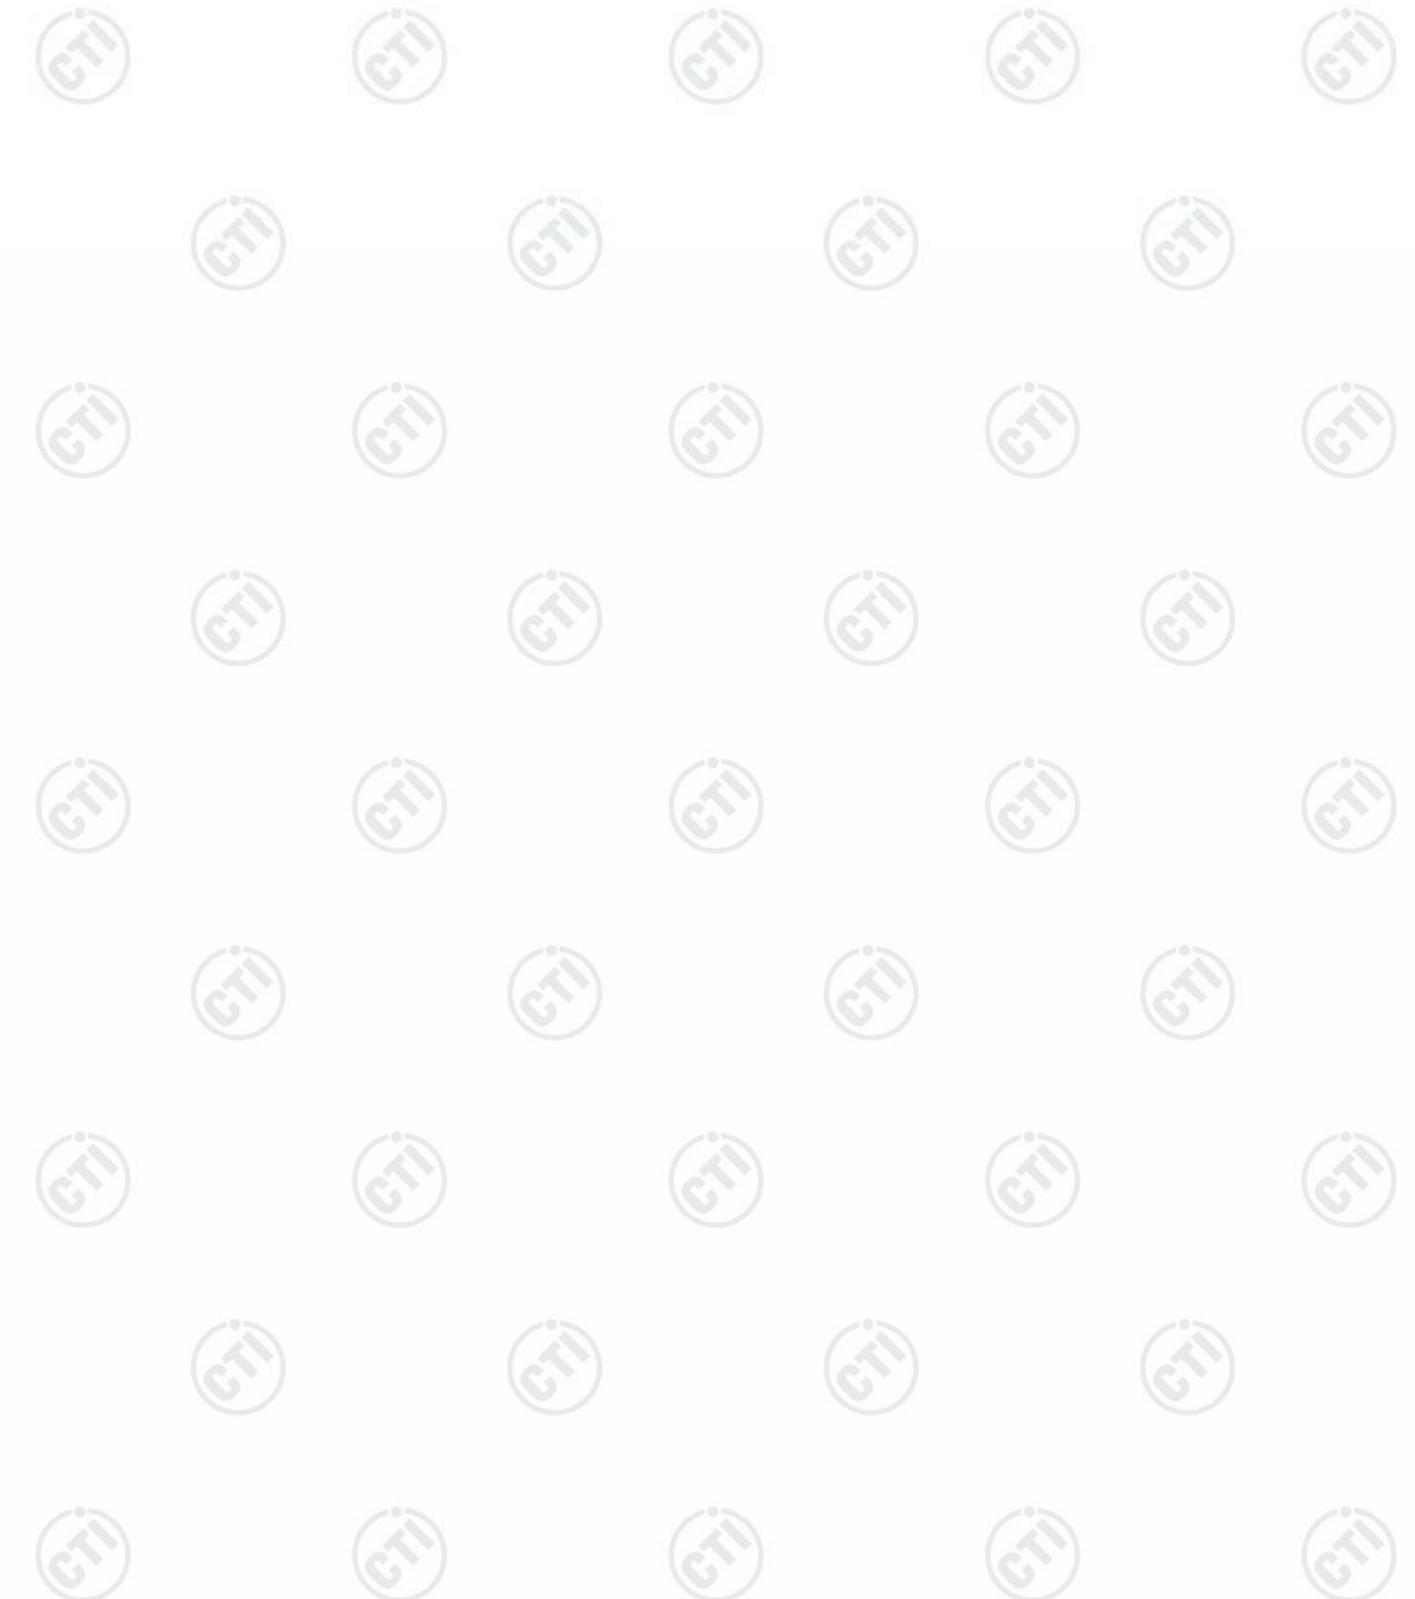

Measurement Data

Live line:

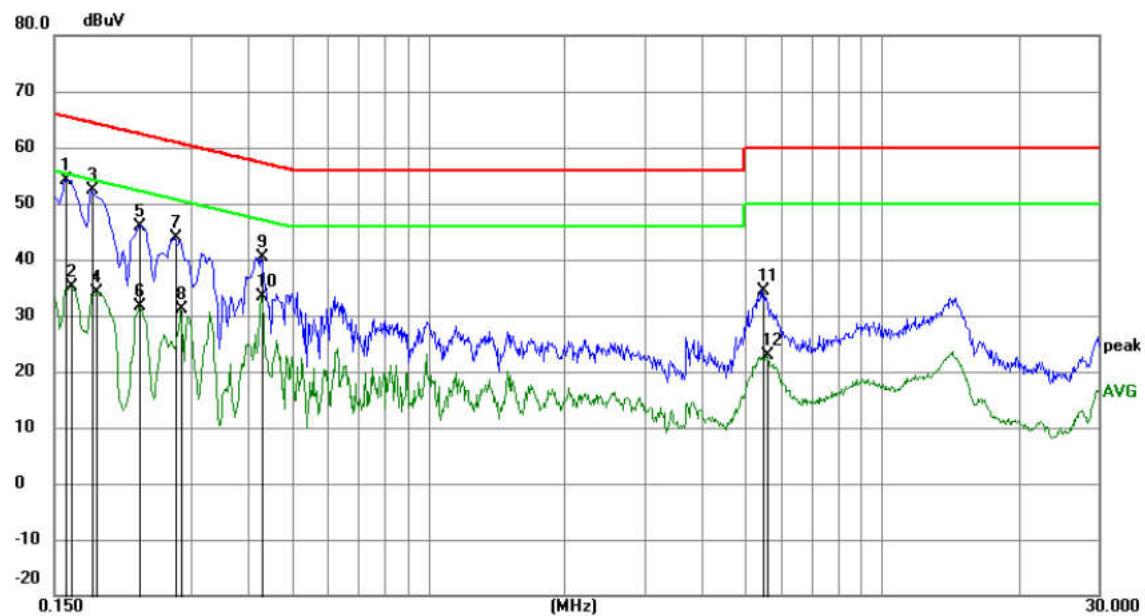


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1590	44.37	9.87	54.24	65.52	-11.28	QP	
2		0.1635	25.36	9.87	35.23	55.28	-20.05	AVG	
3		0.1815	42.62	9.87	52.49	64.42	-11.93	QP	
4		0.1860	24.26	9.87	34.13	54.21	-20.08	AVG	
5		0.2310	36.03	9.93	45.96	62.41	-16.45	QP	
6		0.2310	21.66	9.93	31.59	52.41	-20.82	AVG	
7		0.2760	33.78	10.02	43.80	60.94	-17.14	QP	
8		0.2850	20.97	10.04	31.01	50.67	-19.66	AVG	
9		0.4290	30.52	9.96	40.48	57.27	-16.79	QP	
10		0.4290	23.30	9.96	33.26	47.27	-14.01	AVG	
11		5.4645	24.60	9.78	34.38	60.00	-25.62	QP	
12		5.5680	13.03	9.78	22.81	50.00	-27.19	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

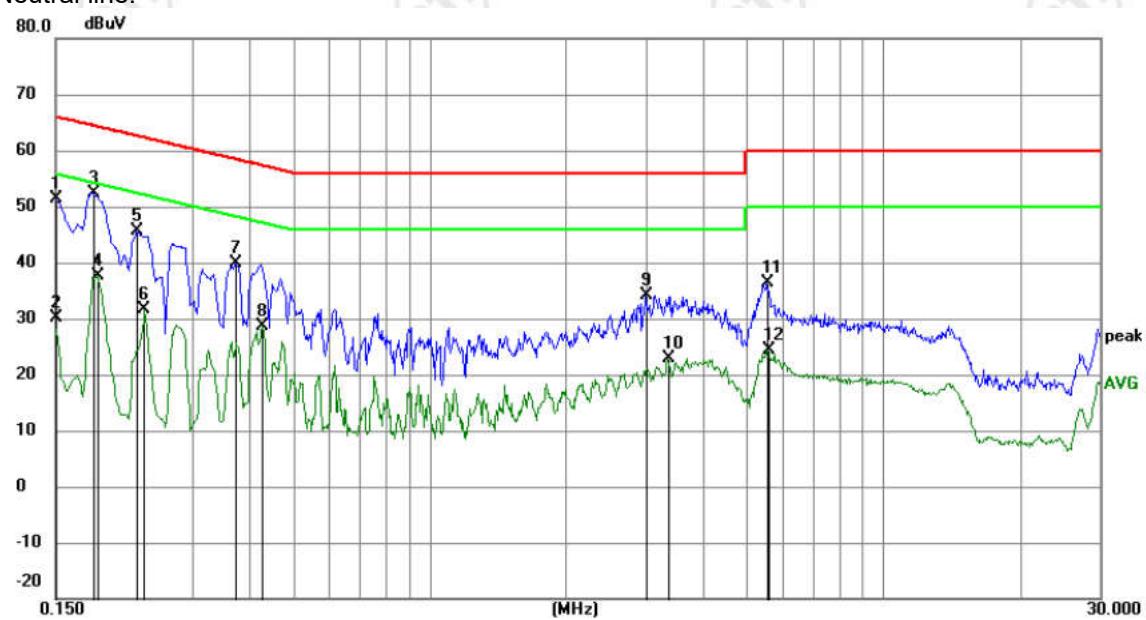


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Comment
		MHz	dBuV	dB	dBuV	dB	Detector	
1		0.1500	41.53	9.87	51.40	66.00	-14.60	QP
2		0.1500	20.16	9.87	30.03	56.00	-25.97	AVG
3	*	0.1815	42.54	9.87	52.41	64.42	-12.01	QP
4		0.1853	27.68	9.87	37.55	54.24	-16.69	AVG
5		0.2256	35.74	9.92	45.66	62.61	-16.95	QP
6		0.2353	21.74	9.94	31.68	52.26	-20.58	AVG
7		0.3731	29.82	10.00	39.82	58.43	-18.61	QP
8		0.4282	18.70	9.96	28.66	47.29	-18.63	AVG
9		2.9935	24.32	9.79	34.11	56.00	-21.89	QP
10		3.3458	13.13	9.79	22.92	46.00	-23.08	AVG
11		5.5347	26.62	9.78	36.40	60.00	-23.60	QP
12		5.5641	14.61	9.78	24.39	50.00	-25.61	AVG


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


7.3 Maximum Conducted Output Power

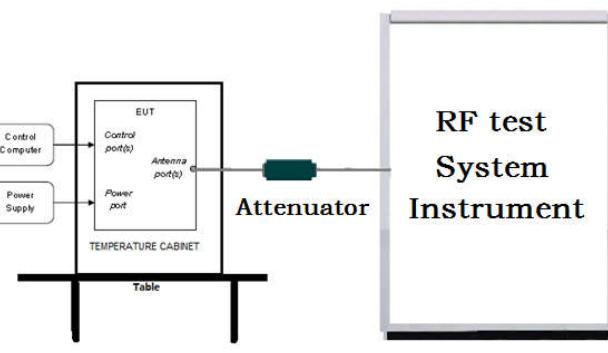Test Requirement:	47 CFR Part 15C Section 15.407 (a)												
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E												
Test Setup:													
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report. 												
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device </td> </tr> <tr> <td>5250-5350</td> <td>$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$</td> </tr> <tr> <td>5470-5725</td> <td>$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$</td> </tr> <tr> <td>5725-5850</td> <td>$\leq 1W(30dBm)$</td> </tr> <tr> <td>Remark:</td> <td> $* \text{ Where } B \text{ is the } 26dB \text{ emission bandwidth in MHz}$ The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. </td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	$\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device	5250-5350	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$	5470-5725	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$	5725-5850	$\leq 1W(30dBm)$	Remark:	$* \text{ Where } B \text{ is the } 26dB \text{ emission bandwidth in MHz}$ The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
Frequency band (MHz)	Limit												
5150-5250	$\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device												
5250-5350	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$												
5470-5725	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$												
5725-5850	$\leq 1W(30dBm)$												
Remark:	$* \text{ Where } B \text{ is the } 26dB \text{ emission bandwidth in MHz}$ The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.												
Test Mode:	Transmitting mode with modulation												
Test Results:	Refer to Appendix A												


7.4 6dB Emission Bandwidth

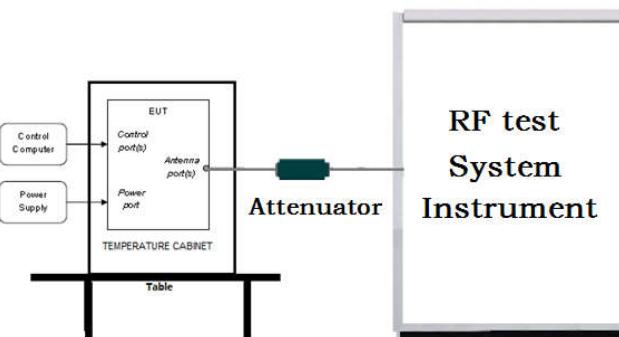Test Requirement:	47 CFR Part 15C Section 15.407 (e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Limit:	≥ 500 kHz
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A


7.5 26dB Emission Bandwidth and 99% Occupied Bandwidth

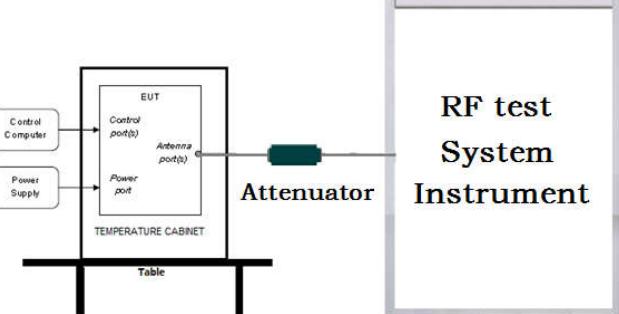Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Limit:	No restriction limits
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

7.6 Maximum Power Spectral Density

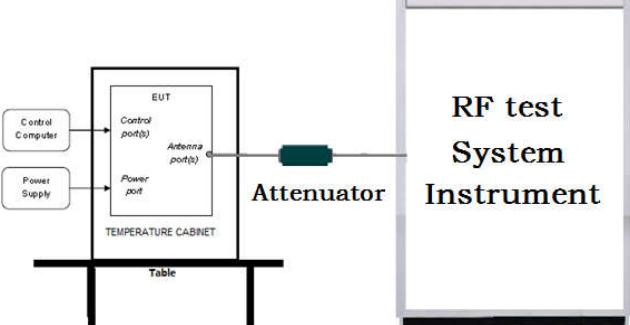Test Requirement:	47 CFR Part 15C Section 15.407 (a)												
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F												
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>												
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW \geq 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 												
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> \leq17dBm in 1MHz for master device \leq11dBm in 1MHz for client device </td> </tr> <tr> <td>5250-5350</td> <td>\leq11dBm in 1MHz for client device</td> </tr> <tr> <td>5470-5725</td> <td>\leq11dBm in 1MHz for client device</td> </tr> <tr> <td>5725-5850</td> <td>\leq30dBm in 500kHz</td> </tr> <tr> <td>Remark:</td> <td>The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	\leq 17dBm in 1MHz for master device \leq 11dBm in 1MHz for client device	5250-5350	\leq 11dBm in 1MHz for client device	5470-5725	\leq 11dBm in 1MHz for client device	5725-5850	\leq 30dBm in 500kHz	Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.
Frequency band (MHz)	Limit												
5150-5250	\leq 17dBm in 1MHz for master device \leq 11dBm in 1MHz for client device												
5250-5350	\leq 11dBm in 1MHz for client device												
5470-5725	\leq 11dBm in 1MHz for client device												
5725-5850	\leq 30dBm in 500kHz												
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.												
Test Mode:	Transmitting mode with modulation												
Test Results:	Refer to Appendix A												

7.7 Frequency Stability

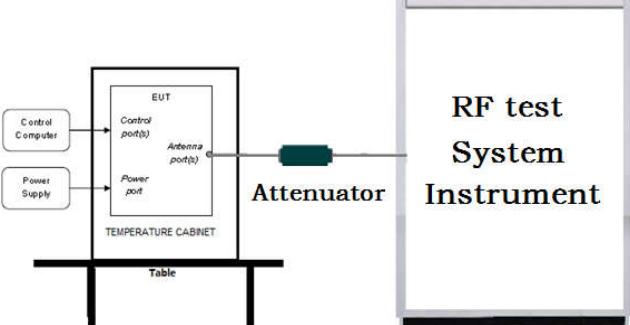Test Requirement:	47 CFR Part 15C Section 15.407 (g)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. 2. Turn the EUT on and couple its output to a spectrum analyzer. 3. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. 4. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. 5. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

7.8 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
	Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing				

	<p>an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p> <p>Note:</p> <p>(i) $EIRP = ((E^*d)^2) / 30$ where: • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts.</p> <p>(ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$</p> <p>(iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$</p>
Test Setup:	

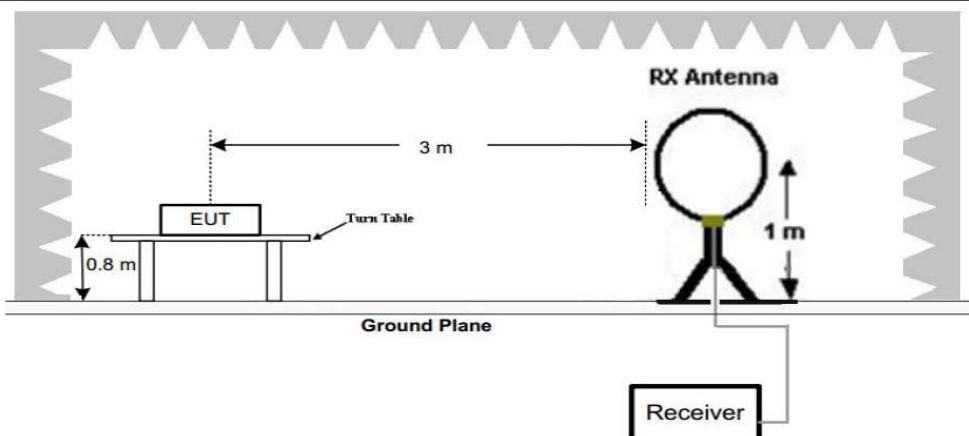


Figure 1. Below 30MHz

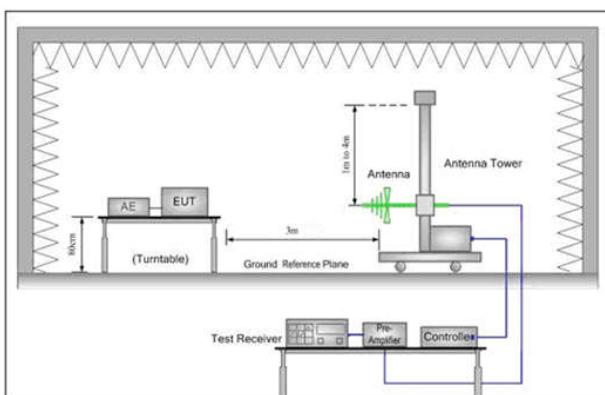


Figure 2. 30MHz to 1GHz

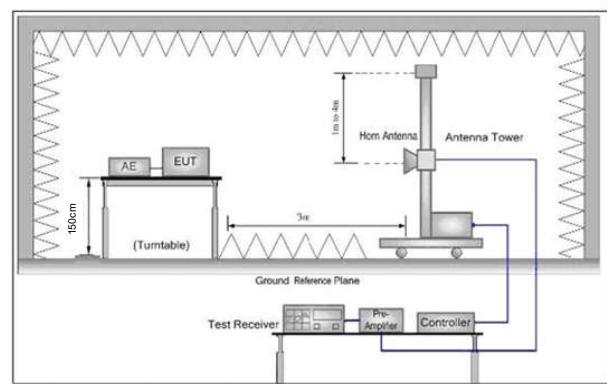


Figure 3. Above 1 GHz


Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p>
-----------------	--

	<p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel and the highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above Procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz


Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case MIMO for 802.11n20 was recorded in the report.

Test Graph

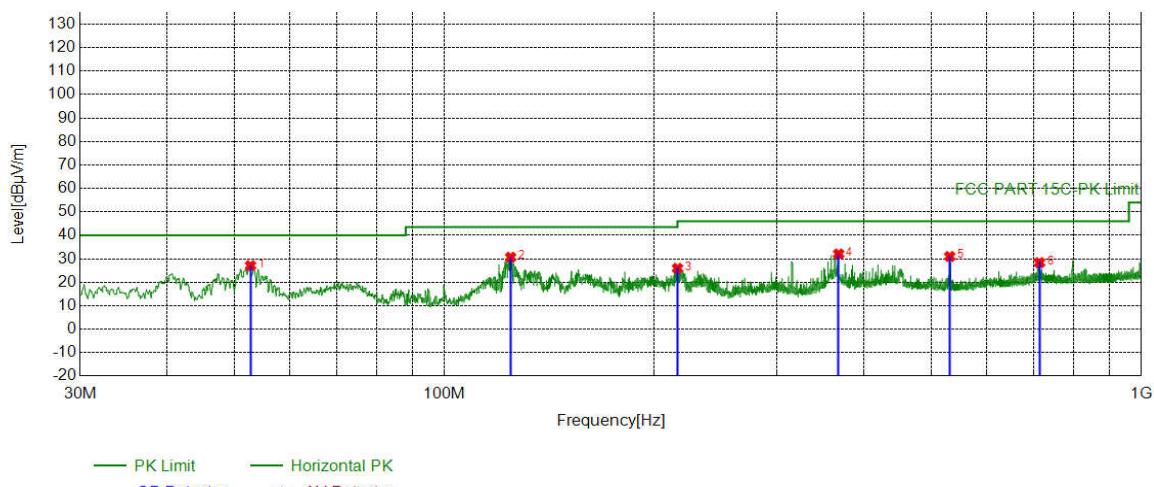

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	52.7003	-17.53	44.62	27.09	40.00	12.91	PASS	Horizontal	PK
2	124.4874	-20.75	51.43	30.68	43.50	12.82	PASS	Horizontal	PK
3	216.0646	-17.42	43.37	25.95	46.00	20.05	PASS	Horizontal	PK
4	367.9818	-13.59	45.65	32.06	46.00	13.94	PASS	Horizontal	PK
5	531.0551	-10.23	41.22	30.99	46.00	15.01	PASS	Horizontal	PK
6	714.5975	-7.54	35.91	28.37	46.00	17.63	PASS	Horizontal	PK

Test Graph

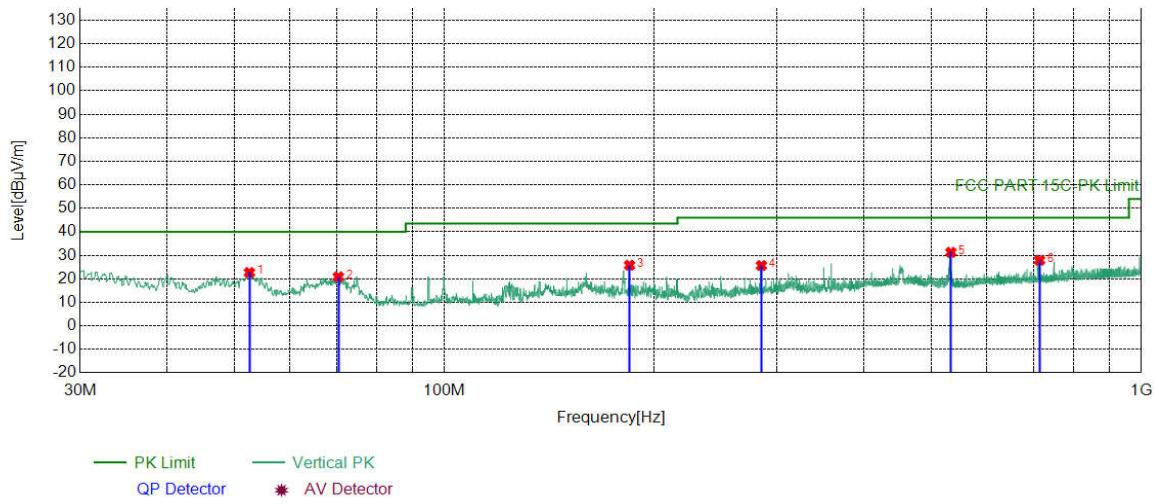

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	52.5063	-17.51	40.19	22.68	40.00	17.32	PASS	Vertical	PK
2	70.4530	-20.88	41.73	20.85	40.00	19.15	PASS	Vertical	PK
3	184.3424	-19.36	45.15	25.79	43.50	17.71	PASS	Vertical	PK
4	285.0385	-15.83	41.47	25.64	46.00	20.36	PASS	Vertical	PK
5	533.1893	-10.18	41.45	31.27	46.00	14.73	PASS	Vertical	PK
6	714.6945	-7.53	35.43	27.90	46.00	18.10	PASS	Vertical	PK

Transmitter Emission above 1GHz

Remark: During the test, the Radiates Emission above 1G was performed in all modes, only the worst case was recorded in the report.

MIMO:

Mode:			802.11 n(HT20) Transmitting				Channel:		5180 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1329.4829	1.24	41.53	42.77	68.20	25.43	Pass	H	PK
2	2128.7129	4.73	46.10	50.83	68.20	17.37	Pass	H	PK
3	3284.9285	7.33	39.21	46.54	68.20	21.66	Pass	H	PK
4	6906.5453	-11.97	62.81	50.84	68.20	17.36	Pass	H	PK
5	10219.8610	-6.88	53.49	46.61	68.20	21.59	Pass	H	PK
6	14400.3200	0.64	48.97	49.61	68.20	18.59	Pass	H	PK
7	1599.5600	2.45	43.67	46.12	68.20	22.08	Pass	V	PK
8	2123.2123	4.79	44.83	49.62	68.20	18.58	Pass	V	PK
9	3057.2057	6.70	40.49	47.19	68.20	21.01	Pass	V	PK
10	8518.9259	-10.57	56.81	46.24	68.20	21.96	Pass	V	PK
11	11235.3618	-6.02	53.53	47.51	68.20	20.69	Pass	V	PK
12	14444.0222	0.00	49.25	49.25	68.20	18.95	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting				Channel:		5200 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1281.0781	1.09	41.53	42.62	68.20	25.58	Pass	H	PK
2	2131.4631	4.70	47.87	52.57	68.20	15.63	Pass	H	PK
3	3290.9791	7.35	39.11	46.46	68.20	21.74	Pass	H	PK
4	6906.5453	-11.97	63.35	51.38	68.20	16.82	Pass	H	PK
5	11271.0136	-6.32	53.77	47.45	68.20	20.75	Pass	H	PK
6	14400.3200	0.64	49.49	50.13	68.20	18.07	Pass	H	PK
7	1432.3432	1.49	40.98	42.47	68.20	25.73	Pass	V	PK
8	2130.3630	4.71	46.86	51.57	68.20	16.63	Pass	V	PK
9	4250.2750	10.53	42.06	52.59	68.20	15.61	Pass	V	PK
10	6906.5453	-11.97	57.58	45.61	68.20	22.59	Pass	V	PK
11	8495.9248	-10.59	57.19	46.60	68.20	21.60	Pass	V	PK
12	13882.7941	-1.11	49.59	48.48	68.20	19.72	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting				Channel:		5240 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1104.5105	0.68	41.58	42.26	68.20	25.94	Pass	H	PK
2	2129.2629	4.72	46.87	51.59	68.20	16.61	Pass	H	PK
3	3165.5666	6.92	40.01	46.93	68.20	21.27	Pass	H	PK
4	6986.4743	-11.71	61.99	50.28	68.20	17.92	Pass	H	PK
5	9793.7647	-7.19	52.77	45.58	68.20	22.62	Pass	H	PK
6	14360.6430	0.21	50.08	50.29	68.20	17.91	Pass	H	PK
7	1282.7283	1.09	41.39	42.48	68.20	25.72	Pass	V	PK
8	2129.2629	4.72	46.07	50.79	68.20	17.41	Pass	V	PK
9	3397.6898	7.57	38.44	46.01	68.20	22.19	Pass	V	PK
10	8499.3750	-10.59	58.06	47.47	68.20	20.73	Pass	V	PK
11	12433.1467	-4.10	52.83	48.73	68.20	19.47	Pass	V	PK
12	14935.0968	-0.91	51.05	50.14	68.20	18.06	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting				Channel:		5745 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1255.7756	1.39	41.20	42.59	68.20	25.61	Pass	H	PK
2	2131.4631	5.23	44.91	50.14	68.20	18.06	Pass	H	PK
3	3415.8416	8.18	38.59	46.77	68.20	21.43	Pass	H	PK
4	6927.0618	-11.90	51.90	40.00	68.20	28.20	Pass	H	PK
5	10149.5766	-6.93	52.45	45.52	68.20	22.68	Pass	H	PK
6	13901.1267	-0.84	50.61	49.77	68.20	18.43	Pass	H	PK
7	1317.9318	1.67	41.09	42.76	68.20	25.44	Pass	V	PK
8	2123.2123	5.34	47.96	53.30	68.20	14.90	Pass	V	PK
9	3911.4411	9.78	38.40	48.18	68.20	20.02	Pass	V	PK
10	8500.3667	-10.59	57.49	46.90	68.20	21.30	Pass	V	PK
11	11934.4956	-5.23	53.52	48.29	68.20	19.91	Pass	V	PK
12	14983.7322	-0.95	51.83	50.88	68.20	17.32	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting				Channel:		5785 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1466.4466	1.89	40.87	42.76	68.20	25.44	Pass	H	PK
2	2125.9626	5.30	48.14	53.44	68.20	14.76	Pass	H	PK
3	3198.0198	7.82	39.73	47.55	68.20	20.65	Pass	H	PK
4	9639.7093	-7.43	53.40	45.97	68.20	22.23	Pass	H	PK
5	11127.1418	-6.23	54.30	48.07	68.20	20.13	Pass	H	PK
6	15945.1963	-0.03	51.58	51.55	68.20	16.65	Pass	H	PK
7	1147.9648	1.09	41.90	42.99	68.20	25.21	Pass	V	PK
8	2132.0132	5.23	44.67	49.90	68.20	18.30	Pass	V	PK
9	3166.6667	7.76	40.05	47.81	68.20	20.39	Pass	V	PK
10	8520.3014	-10.57	57.89	47.32	68.20	20.88	Pass	V	PK
11	12453.5636	-4.15	53.09	48.94	68.20	19.26	Pass	V	PK
12	15914.5276	0.08	51.98	52.06	68.20	16.14	Pass	V	PK

Mode:			802.11 n(HT20) Transmitting				Channel:		5825 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1333.3333	1.70	41.14	42.84	68.20	25.36	Pass	H	PK
2	2127.6128	5.28	46.46	51.74	68.20	16.46	Pass	H	PK
3	3196.3696	7.81	39.68	47.49	68.20	20.71	Pass	H	PK
4	7617.1078	-10.64	54.58	43.94	68.20	24.26	Pass	H	PK
5	11224.5150	-5.93	54.01	48.08	68.20	20.12	Pass	H	PK
6	14410.2273	0.49	49.70	50.19	68.20	18.01	Pass	H	PK
7	1316.2816	1.67	41.17	42.84	68.20	25.36	Pass	V	PK
8	2128.1628	5.28	47.09	52.37	68.20	15.83	Pass	V	PK
9	3208.4708	7.86	40.06	47.92	68.20	20.28	Pass	V	PK
10	8504.9670	-10.59	55.66	45.07	68.20	23.13	Pass	V	PK
11	11017.5012	-5.93	52.42	46.49	68.20	21.71	Pass	V	PK
12	13724.0149	-1.91	51.51	49.60	68.20	18.60	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting				Channel:		5190 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1283.2783	1.09	41.90	42.99	68.20	25.21	Pass	H	PK
2	2128.1628	4.73	50.20	54.93	68.20	13.27	Pass	H	PK
3	3084.1584	6.78	39.79	46.57	68.20	21.63	Pass	H	PK
4	6920.3460	-11.92	61.89	49.97	68.20	18.23	Pass	H	PK
5	10298.6399	-6.26	53.62	47.36	68.20	20.84	Pass	H	PK
6	14388.2444	0.51	49.14	49.65	68.20	18.55	Pass	H	PK
7	1581.4081	2.29	41.21	43.50	68.20	24.70	Pass	V	PK
8	2129.8130	4.72	46.61	51.33	68.20	16.87	Pass	V	PK
9	3396.5897	7.56	39.65	47.21	68.20	20.99	Pass	V	PK
10	8517.2009	-10.58	56.39	45.81	68.20	22.39	Pass	V	PK
11	12453.8477	-4.15	52.89	48.74	68.20	19.46	Pass	V	PK
12	14403.1952	0.59	49.71	50.30	68.20	17.90	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting				Channel:		5230 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1312.4312	1.19	41.06	42.25	68.20	25.95	Pass	H	PK
2	2131.4631	4.70	50.22	54.92	68.20	13.28	Pass	H	PK
3	3055.5556	6.70	40.05	46.75	68.20	21.45	Pass	H	PK
4	6973.2487	-11.76	63.01	51.25	68.20	16.95	Pass	H	PK
5	10302.6651	-6.25	52.47	46.22	68.20	21.98	Pass	H	PK
6	15892.5196	0.02	51.75	51.77	68.20	16.43	Pass	H	PK
7	1486.7987	1.56	40.84	42.40	68.20	25.80	Pass	V	PK
8	2123.7624	4.78	46.71	51.49	68.20	16.71	Pass	V	PK
9	3048.4048	6.68	40.80	47.48	68.20	20.72	Pass	V	PK
10	6973.2487	-11.76	58.30	46.54	68.20	21.66	Pass	V	PK
11	10380.8690	-6.27	52.69	46.42	68.20	21.78	Pass	V	PK
12	14391.6946	0.55	49.25	49.80	68.20	18.40	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting				Channel:		5755 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1366.8867	1.76	40.87	42.63	68.20	25.57	Pass	H	PK
2	2129.8130	5.25	45.45	50.70	68.20	17.50	Pass	H	PK
3	3497.2497	8.36	38.85	47.21	68.20	20.99	Pass	H	PK
4	7585.6724	-10.64	53.76	43.12	68.20	25.08	Pass	H	PK
5	11262.8509	-6.25	53.44	47.19	68.20	21.01	Pass	H	PK
6	13768.4846	-2.21	52.37	50.16	68.20	18.04	Pass	H	PK
7	1221.1221	1.20	41.70	42.90	68.20	25.30	Pass	V	PK
8	2125.9626	5.30	46.22	51.52	68.20	16.68	Pass	V	PK
9	3162.8163	7.76	39.39	47.15	68.20	21.05	Pass	V	PK
10	8506.5004	-10.58	57.04	46.46	68.20	21.74	Pass	V	PK
11	11936.0291	-5.22	53.88	48.66	68.20	19.54	Pass	V	PK
12	14387.2258	0.50	49.14	49.64	68.20	18.56	Pass	V	PK

Mode:			802.11 n(HT40) Transmitting				Channel:		5795 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1365.7866	1.76	41.60	43.36	68.20	24.84	Pass	H	PK
2	2125.4125	5.31	44.56	49.87	68.20	18.33	Pass	H	PK
3	3290.9791	8.27	39.02	47.29	68.20	20.91	Pass	H	PK
4	9158.2105	-8.11	53.19	45.08	68.20	23.12	Pass	H	PK
5	12451.2634	-4.14	52.51	48.37	68.20	19.83	Pass	H	PK
6	15907.6272	0.10	52.03	52.13	68.20	16.07	Pass	H	PK
7	1271.1771	1.48	41.92	43.40	68.20	24.80	Pass	V	PK
8	2130.9131	5.24	46.23	51.47	68.20	16.73	Pass	V	PK
9	3303.6304	8.31	41.21	49.52	68.20	18.68	Pass	V	PK
10	8528.7352	-10.57	56.75	46.18	68.20	22.02	Pass	V	PK
11	12458.9306	-4.16	53.42	49.26	68.20	18.94	Pass	V	PK
12	15889.2259	-0.03	52.26	52.23	68.20	15.97	Pass	V	PK

Mode:			802.11 ac(VHT80) Transmitting				Channel:		5210 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1256.8757	1.01	41.86	42.87	68.20	25.33	Pass	H	PK
2	2123.7624	4.78	47.56	52.34	68.20	15.86	Pass	H	PK
3	2932.8933	6.38	40.51	46.89	68.20	21.31	Pass	H	PK
4	6946.7973	-11.84	63.70	51.86	68.20	16.34	Pass	H	PK
5	11108.8554	-6.36	52.60	46.24	68.20	21.96	Pass	H	PK
6	14392.2696	0.56	50.07	50.63	68.20	17.57	Pass	H	PK
7	1282.1782	1.09	41.31	42.40	68.20	25.80	Pass	V	PK
8	2124.8625	4.77	45.25	50.02	68.20	18.18	Pass	V	PK
9	3289.8790	7.35	39.50	46.85	68.20	21.35	Pass	V	PK
10	8523.5262	-10.57	58.46	47.89	68.20	20.31	Pass	V	PK
11	12477.4239	-4.21	52.96	48.75	68.20	19.45	Pass	V	PK
12	13907.5204	-0.89	50.53	49.64	68.20	18.56	Pass	V	PK

Mode:			802.11 ac(VHT80) Transmitting				Channel:		5775 MHz
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1438.9439	1.86	41.13	42.99	68.20	25.21	Pass	H	PK
2	2130.3630	5.25	44.94	50.19	68.20	18.01	Pass	H	PK
3	3083.0583	7.56	40.10	47.66	68.20	20.54	Pass	H	PK
4	7487.5325	-11.31	54.57	43.26	68.20	24.94	Pass	H	PK
5	10999.8667	-5.82	53.10	47.28	68.20	20.92	Pass	H	PK
6	13887.3258	-1.03	50.51	49.48	68.20	18.72	Pass	H	PK
7	1407.5908	1.83	40.88	42.71	68.20	25.49	Pass	V	PK
8	2125.4125	5.31	44.20	49.51	68.20	18.69	Pass	V	PK
9	3905.3905	9.74	37.50	47.24	68.20	20.96	Pass	V	PK
10	8512.6342	-10.58	56.32	45.74	68.20	22.46	Pass	V	PK
11	11249.0499	-6.14	53.68	47.54	68.20	20.66	Pass	V	PK
12	13839.0226	-1.81	51.32	49.51	68.20	18.69	Pass	V	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

7.9 Radiated Emission which fall in the restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated				

	<p>emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p> <p>Note:</p> <p>(i) $EIRP = ((E^*d)^2) / 30$</p> <p>where:</p> <ul style="list-style-type: none"> • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts. <p>(ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$</p> <p>(iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$</p>
Test Setup:	

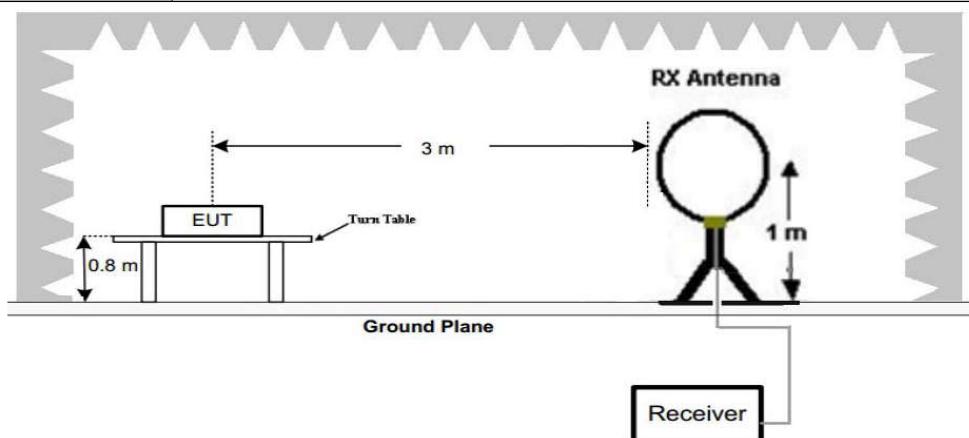


Figure 1. Below 30MHz

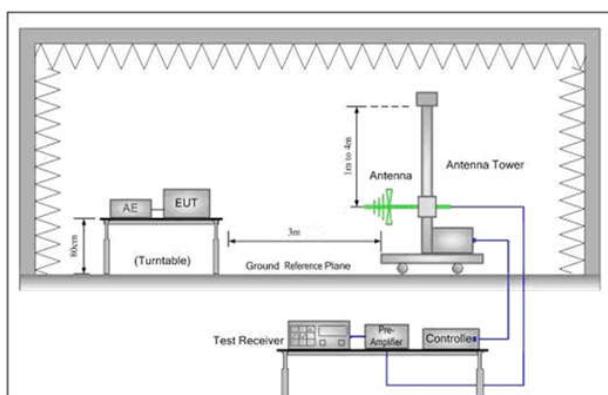


Figure 2. 30MHz to 1GHz

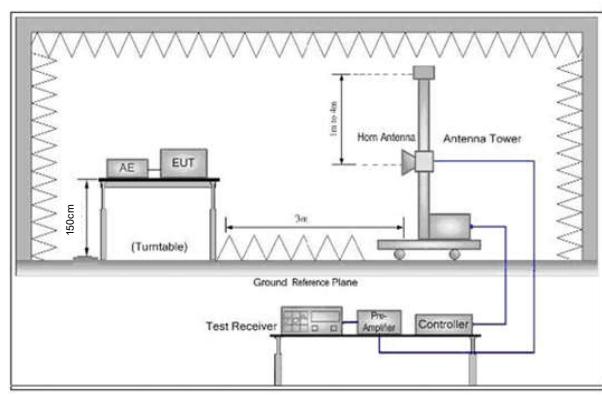


Figure 3. Above 1 GHz


Test Procedure:	<p>j. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p>
-----------------	--

	<p>Note: For the radiated emission test above 1GHz:</p> <p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>k. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>l. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>m. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>n. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>o. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>p. Test the EUT in the lowest channel, the Highest channel</p> <p>q. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>r. Repeat above Procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Test Data:

Remark: During the test, the restricted bands above 1G was performed in all modes, only the worst case recorded in the report.


Mode:	802.11 n(HT20) Transmitting	Channel:	5180 MHz
Remark:	MIMO		

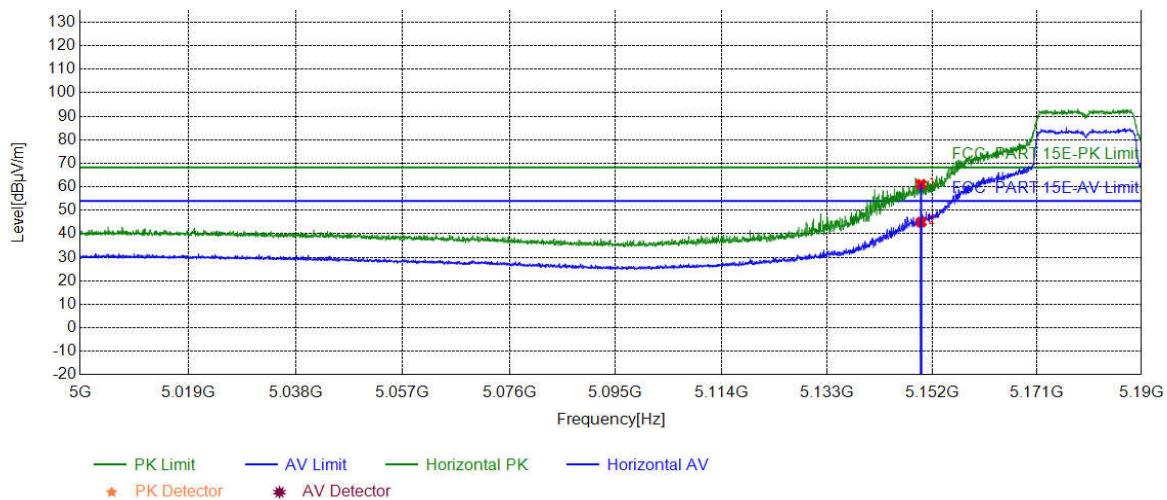Test Graph


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0000	-15.08	76.15	61.07	68.29	7.22	PASS	Horizontal	PK
2	5150.0000	-15.08	60.04	44.96	54.00	9.04	PASS	Horizontal	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	5180 MHz
Remark:	MIMO		

Test Graph

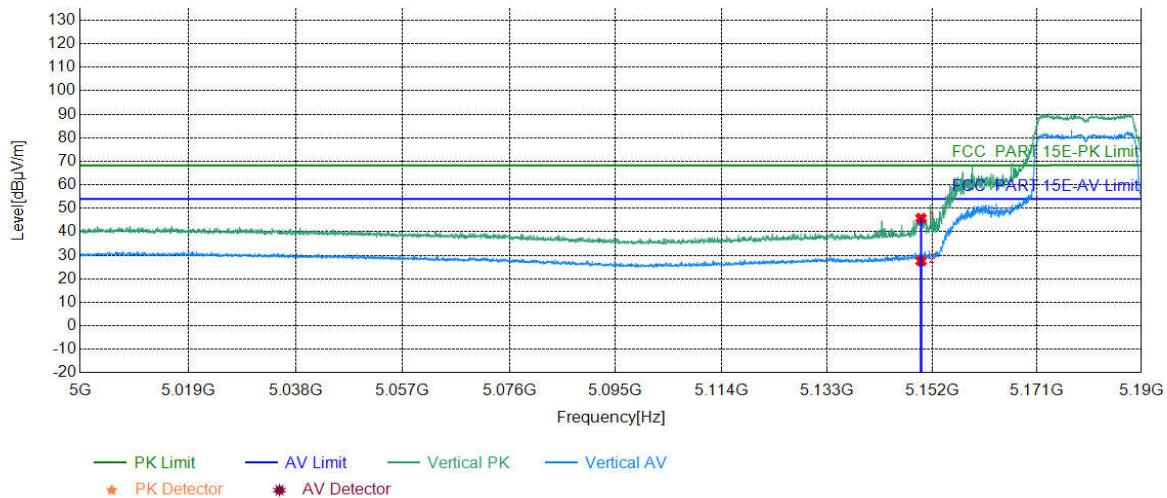


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0000	-15.08	60.84	45.76	68.29	22.53	PASS	Vertical	PK
2	5150.0000	-15.08	42.64	27.56	54.00	26.44	PASS	Vertical	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	5745 MHz
Remark:	MIMO		

Test Graph

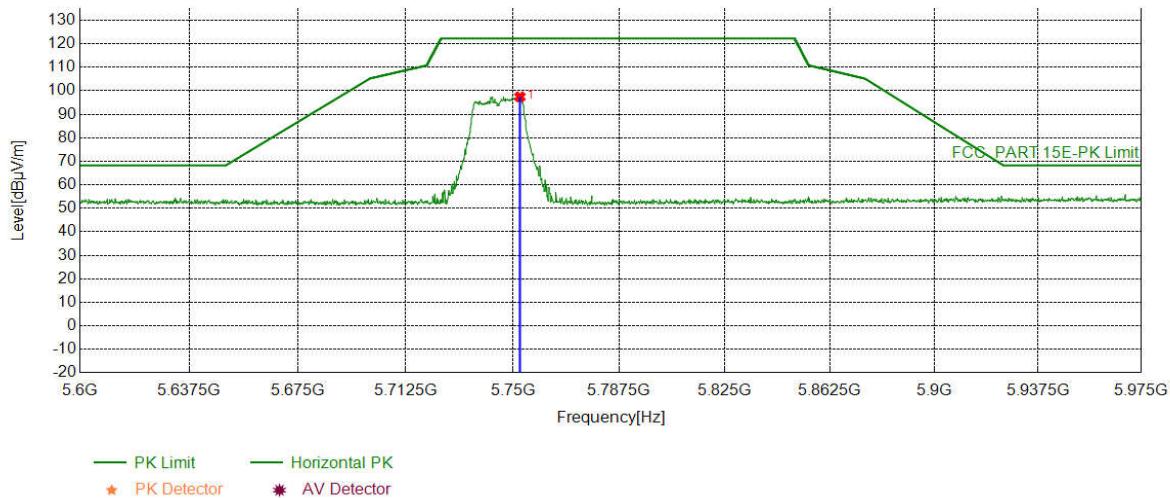


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5752.5138	13.86	83.57	97.43	122.20	24.77	PASS	Horizontal	PK

Mode:	802.11 n(HT20) Transmitting	Channel:	5745 MHz
Remark:	MIMO		

Test Graph

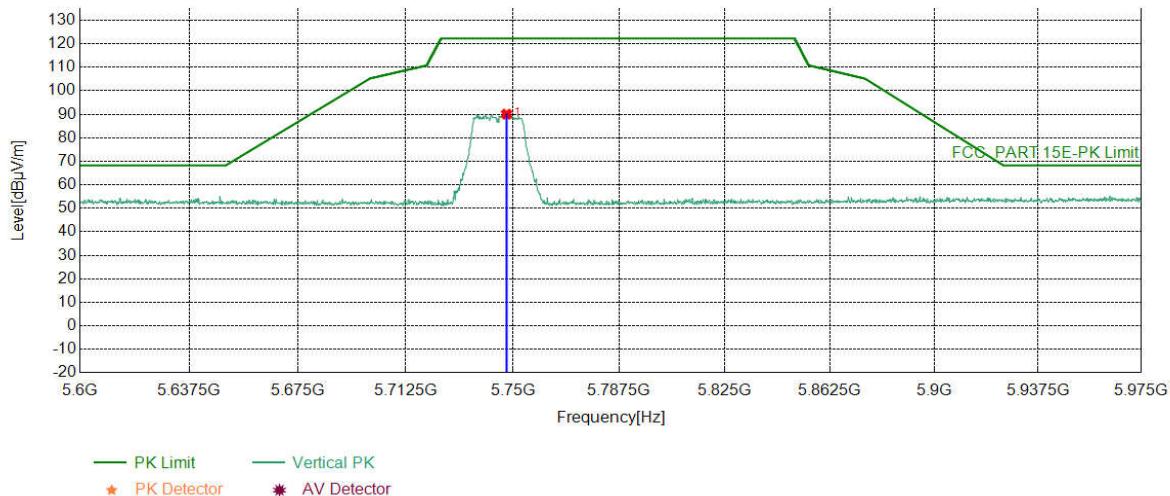


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5747.8239	13.85	76.19	90.04	122.20	32.16	PASS	Vertical	PK

Mode:	802.11 n(HT20) Transmitting	Channel:	5785 MHz
Remark:	MIMO		

Test Graph

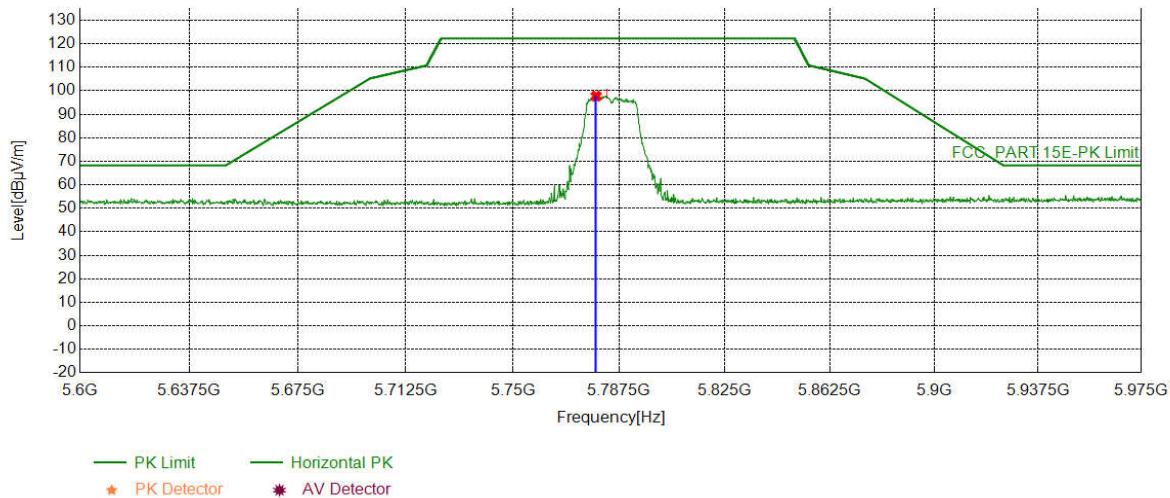


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5779.3397	13.90	83.81	97.71	122.20	24.49	PASS	Horizontal	PK

Mode:	802.11 n(HT20) Transmitting	Channel:	5785 MHz
Remark:	MIMO		


Test Graph

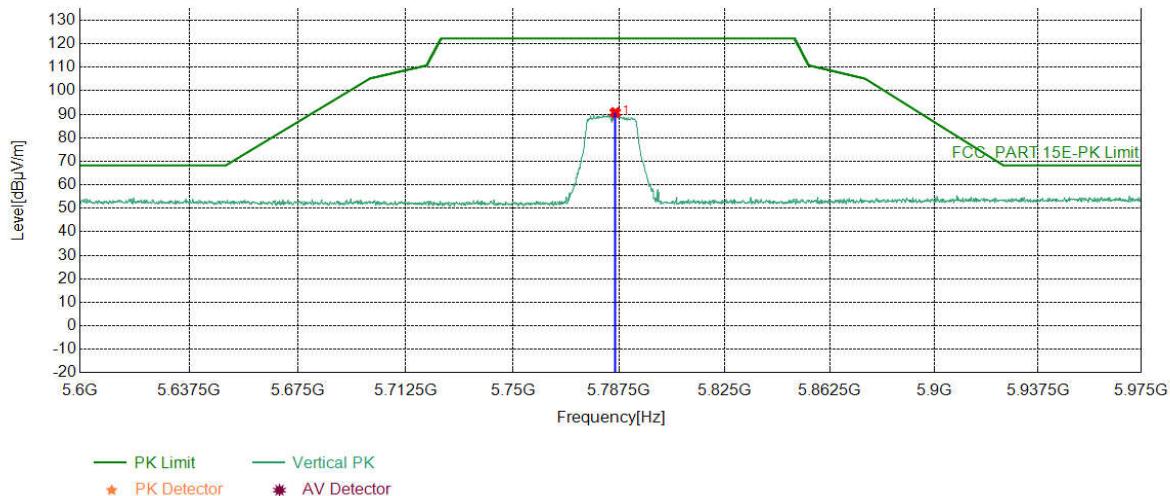

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5786.0930	13.92	76.75	90.67	122.20	31.53	PASS	Vertical	PK

Mode:	802.11 n(HT20) Transmitting	Channel:	5825 MHz
Remark:	MIMO		

Test Graph

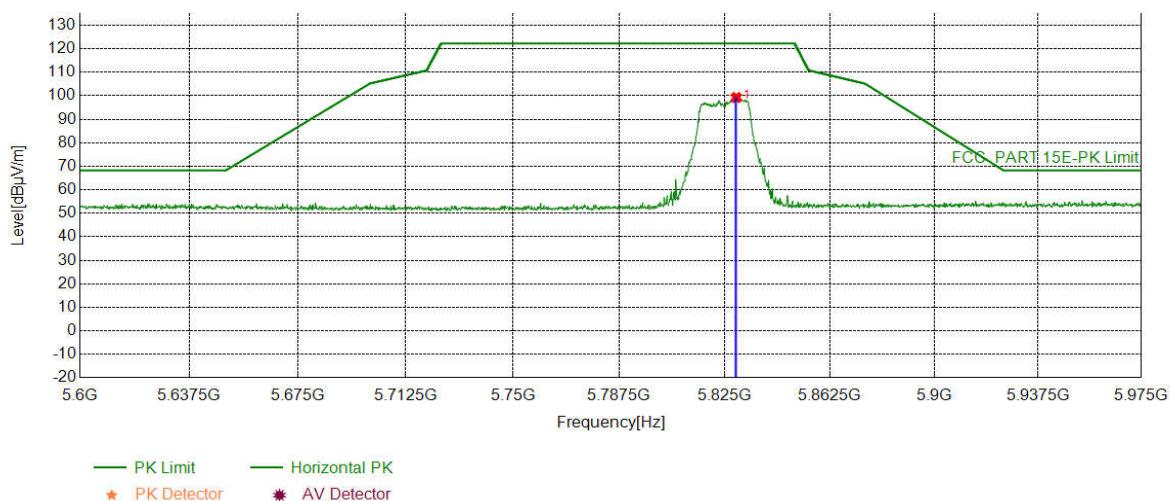


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5829.0520	14.05	85.20	99.25	122.20	22.95	PASS	Horizontal	PK

Mode:	802.11 n(HT20) Transmitting	Channel:	5825 MHz
Remark:	MIMO		

Test Graph

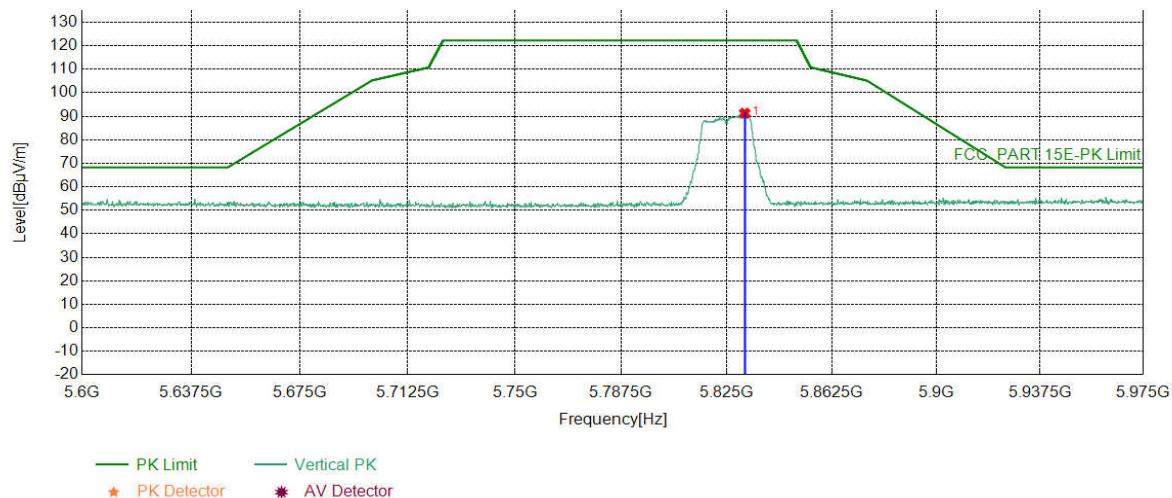


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5831.3032	14.06	77.24	91.30	122.20	30.90	PASS	Vertical	PK

Mode:	802.11 n(HT40) Transmitting	Channel:	5190 MHz
Remark:	MIMO		

Test Graph

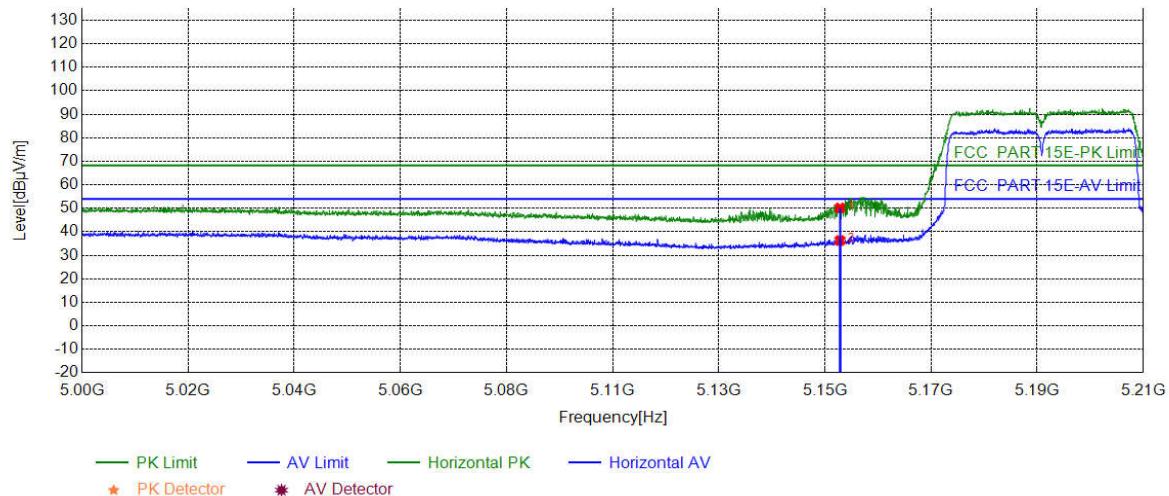


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0000	12.36	37.80	50.16	68.20	18.04	PASS	Horizontal	PK
2	5150.0000	12.36	23.94	36.30	54.00	17.70	PASS	Horizontal	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	5190 MHz
Remark:	MIMO		

Test Graph

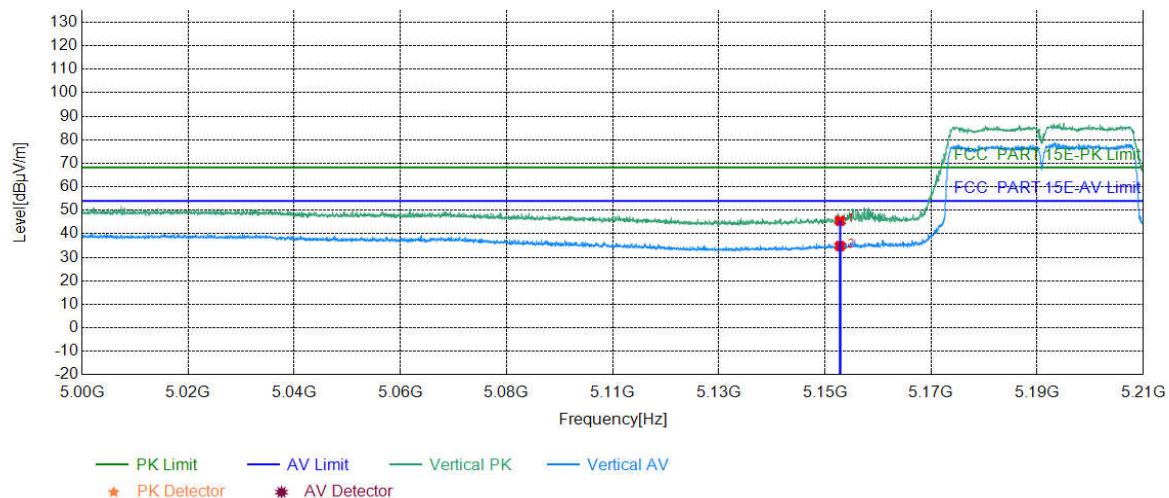


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0000	12.36	33.17	45.53	68.20	22.67	PASS	Vertical	PK
2	5150.0000	12.36	22.42	34.78	54.00	19.22	PASS	Vertical	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	5755 MHz
Remark:	MIMO		

Test Graph

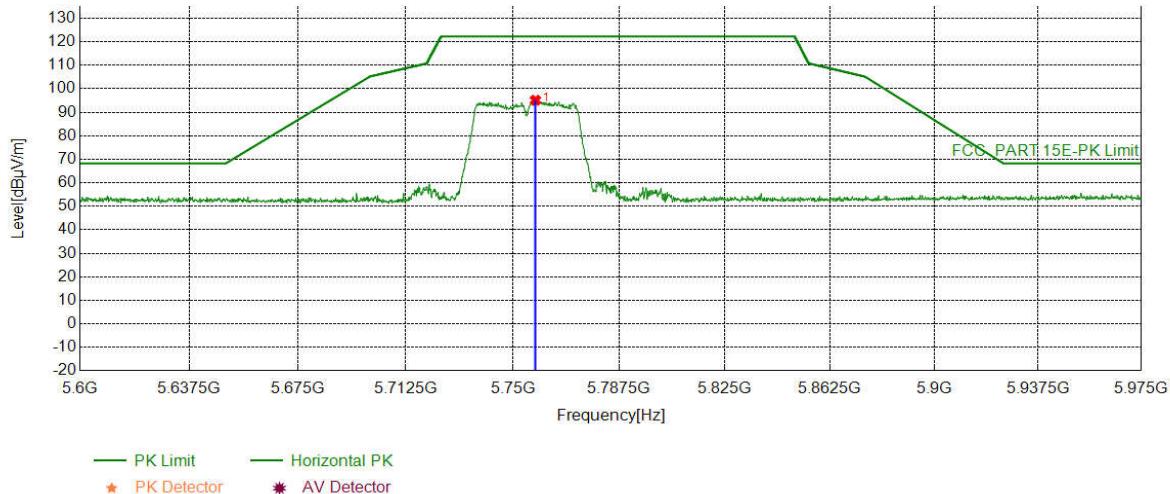


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5757.9540	13.87	81.25	95.12	122.20	27.08	PASS	Horizontal	PK

Mode:	802.11 n(HT40) Transmitting	Channel:	5755 MHz
Remark:	MIMO		

Test Graph

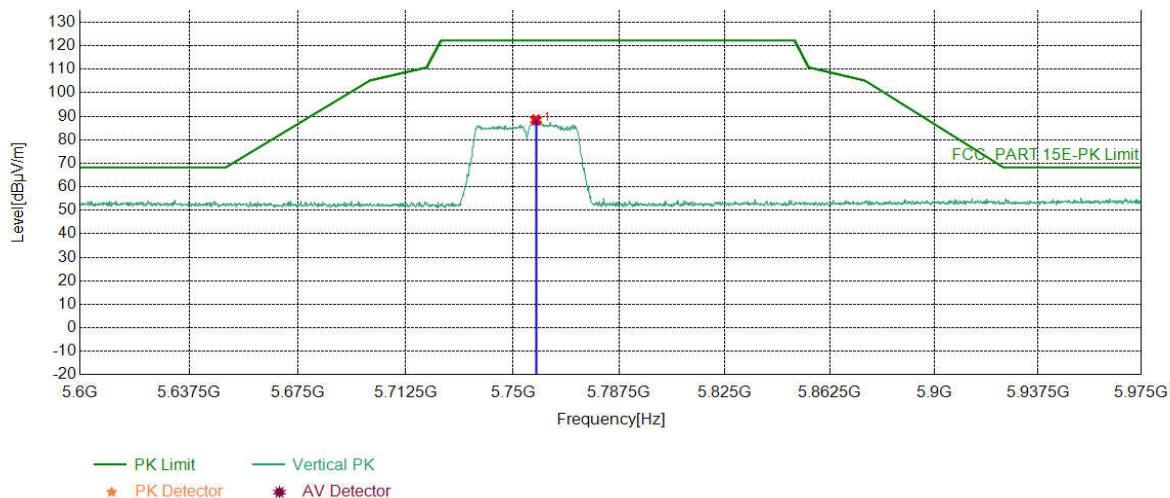


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5758.1416	13.87	74.58	88.45	122.20	33.75	PASS	Vertical	PK

Mode:	802.11 n(HT40) Transmitting	Channel:	5795 MHz
Remark:	MIMO		

Test Graph

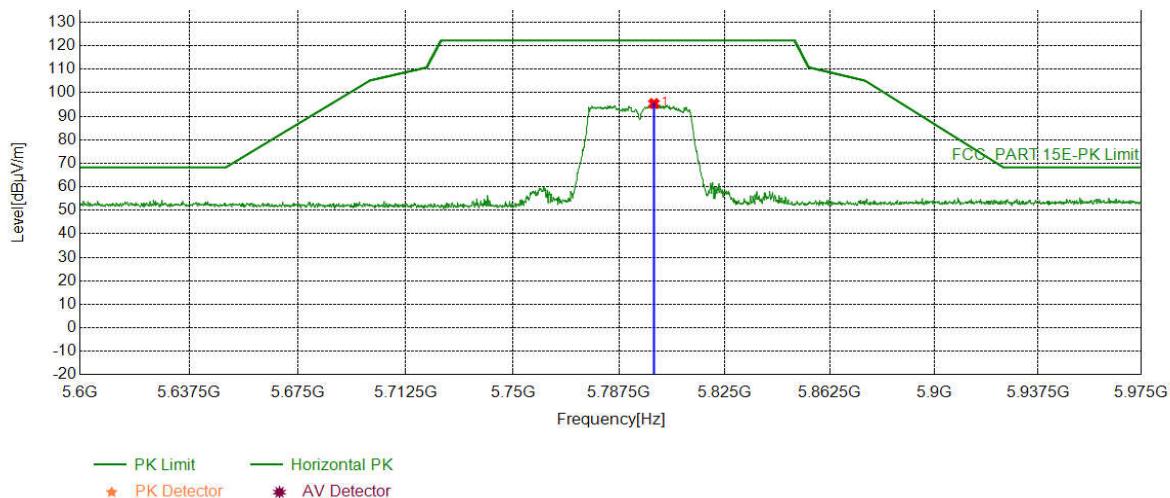


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5799.7874	13.94	81.48	95.42	122.20	26.78	PASS	Horizontal	PK

Mode:	802.11 n(HT40) Transmitting	Channel:	5795 MHz
Remark:	MIMO		

Test Graph

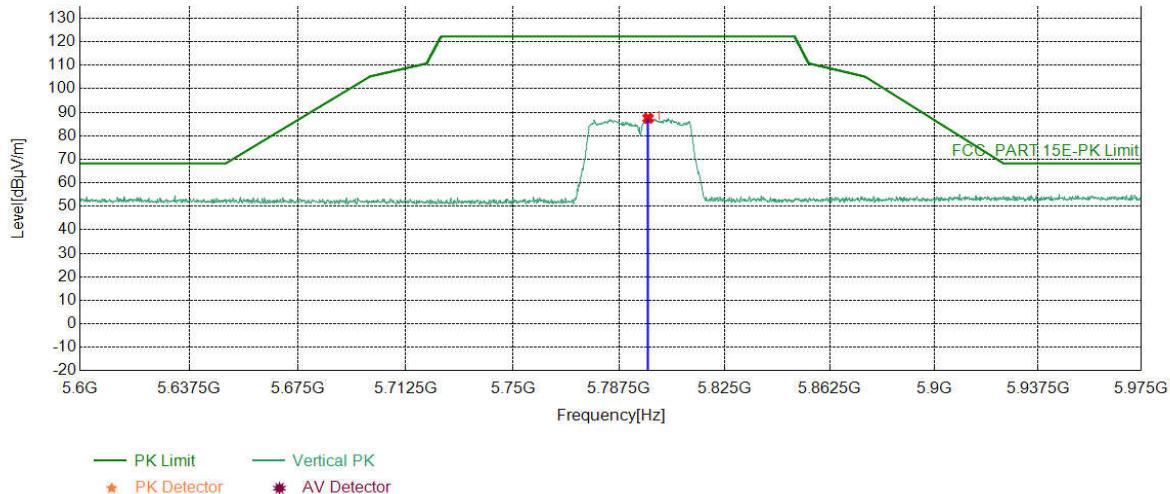


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5797.7239	13.94	73.50	87.44	122.20	34.76	PASS	Vertical	PK

Mode:	802.11 ac(VHT80) Transmitting	Channel:	5210 MHz
Remark:	MIMO		

Test Graph

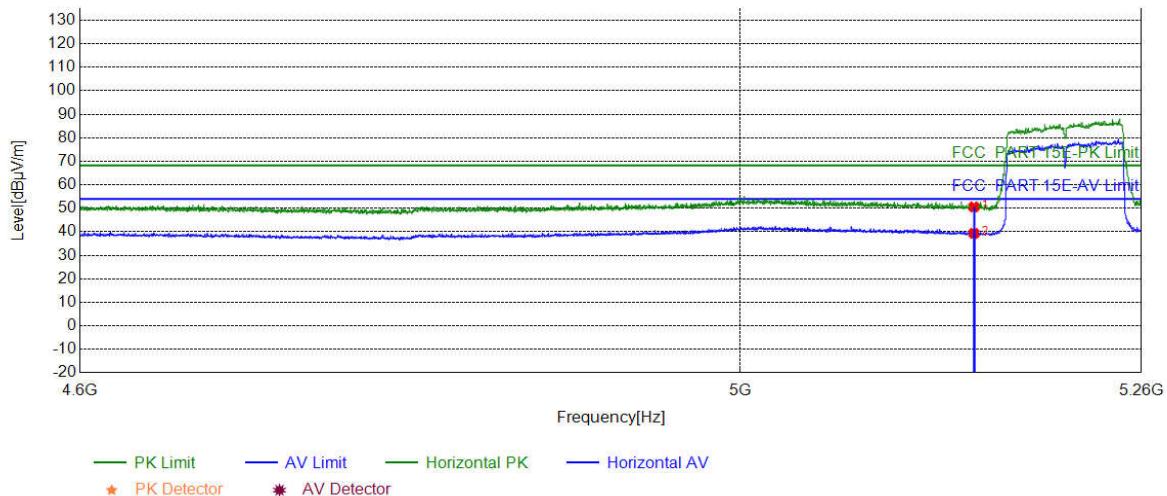


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0000	12.36	38.22	50.58	68.20	17.62	PASS	Horizontal	PK
2	5150.0000	12.36	26.98	39.34	54.00	14.66	PASS	Horizontal	AV

Mode:	802.11 ac(VHT80) Transmitting	Channel:	5210 MHz
Remark:	MIMO		


Test Graph

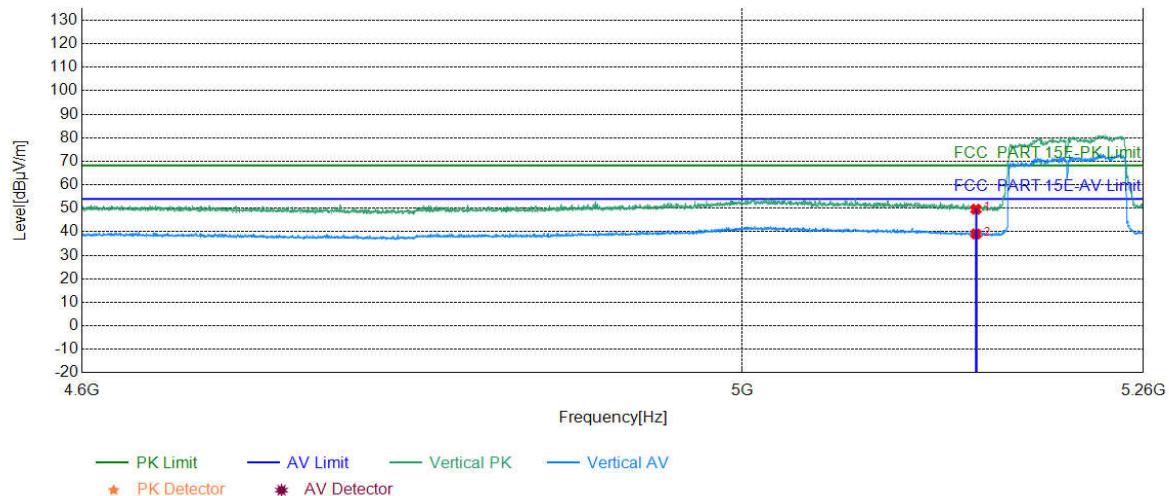

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0000	12.36	37.24	49.60	68.20	18.60	PASS	Vertical	PK
2	5150.0000	12.36	26.72	39.08	54.00	14.92	PASS	Vertical	AV

Mode:	802.11 ac(VHT80) Transmitting	Channel:	5775 MHz
Remark:	MIMO		

Test Graph

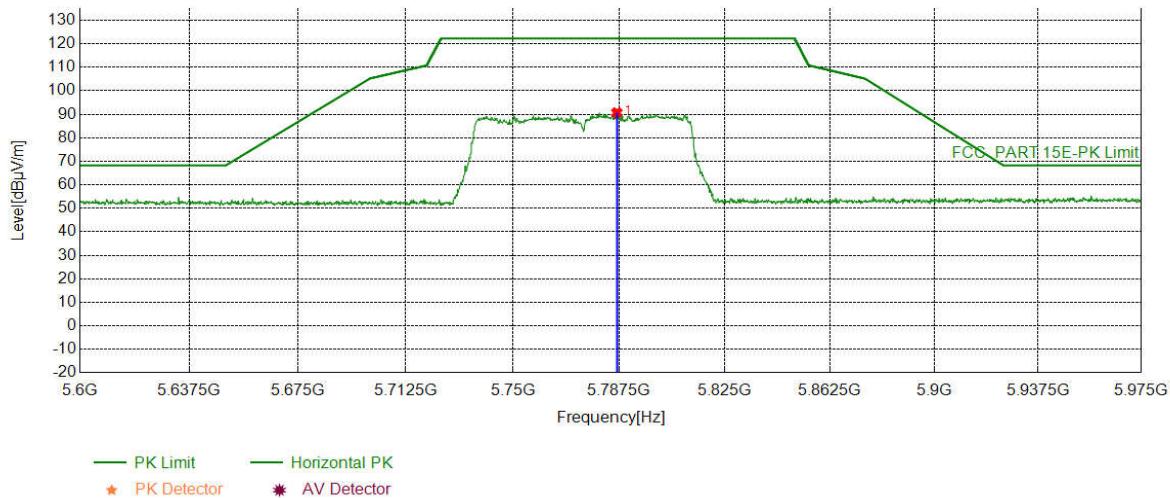


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5786.6558	13.92	76.76	90.68	122.20	31.52	PASS	Horizontal	PK

Mode:	802.11 ac(VHT80) Transmitting	Channel:	5775 MHz
Remark:	MIMO		

Test Graph

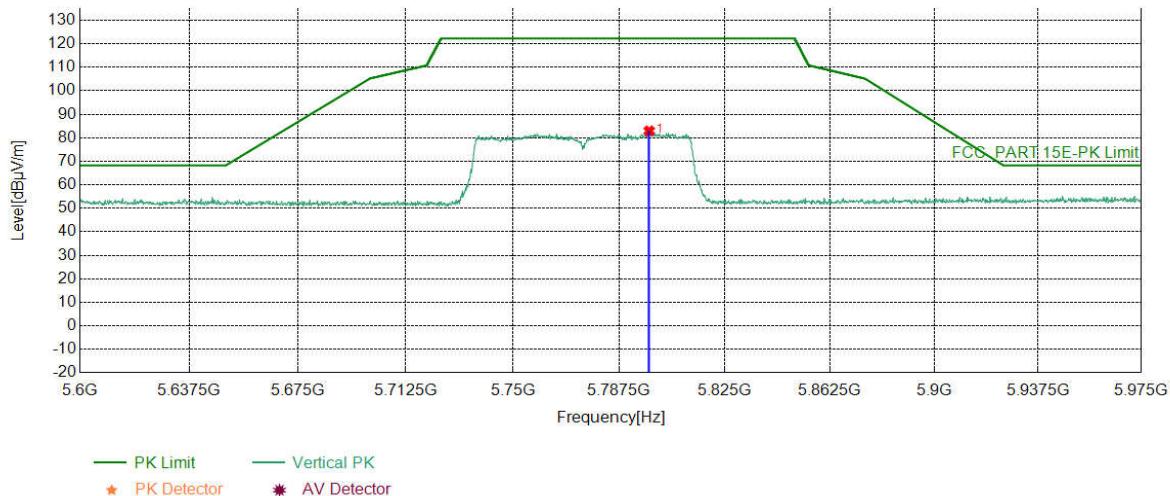

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5798.0991	13.94	68.97	82.91	122.20	39.29	PASS	Vertical	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 1GHz to 25GHz, the disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


8 Appendix A

Refer to Appendix: 5G WIFI of EED32O80174503

PHOTOGRAPHS OF TEST SETUP

Test model No.: MaxiSys MS906 Pro

**Radiated spurious emission Test Setup-1(Below 1GHz)****Radiated spurious emission Test Setup-2(Above 1GHz)**

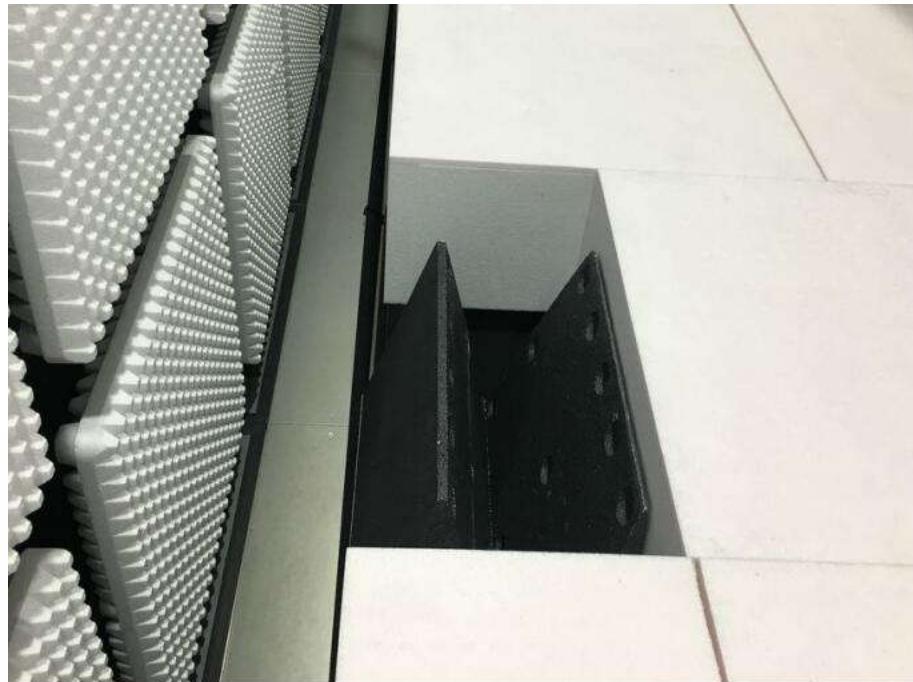

Radiated spurious emission Test Setup-3(Above 1GHz)
There are absorbing materials under the ground.



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32080174501 for EUT external and internal photos.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

*** End of Report ***