



东莞市一佳电子通讯科技有限公司

Dongguan YiJia Electronics Communication Technology Co.,Ltd.

规格承认书

SPECIFICATION FOR APPROVAL

日期 Date	2023/06/12
编号 File No	23061201
版本 Revision	1.0

客 户
CUSTOMER: 道通

客户料号
CUSTOMER NO: 501011476

品 名
PART NAME: RF Antenna

供方料号
SUPPLIER NO: YJI01.005.073.301A

送样日期Date: 送样数量Q “TY:

客户确认CUSTOMER APPROVED BY		
APPROVAL	CHIEF	SUPERVISOR

供方确认 SUPPLIER SIGNATURE		
APPROVAL	CHECK	DESIGN
 ChenGuoqiang	XieLi	ChenXingyi

YJ-RD-F04-A

add: 东莞市长安镇沙头社区木鱼路59号元富工业区 Tel:0769-82586086 Fax:0769-82586086







承认书项目表

NO	内 容 (Contents)	页 数 (Number of Page)	页 码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	天线规格 (Antenna Specification)	1	4
5	S参数测试 (S Parameter)	1	5
6	无源测试 (Passive Test)	2	6 ~ 7
7	天线匹配电路 (Antenna Matching Circuit)	1	8
8	方向图 (Radiation Pattern)	12	9 ~ 20
9	天线装配图 (Antenna Profile)	1	21
10	材质证明 (Material Certificate)	1	22
11	RoHS报告 (RoHS Test Report)	**	**
12	N/A	N/A	N/A
13	-	-	-

RoHS
Compatible

REV.	DESCRIPTION	DATE
A	首次发行	2023-06-01
B	添加管控正负公差	2023-06-09

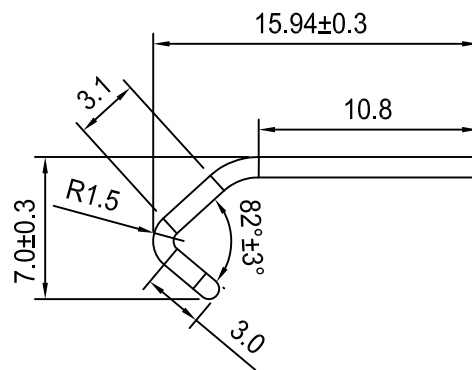

備註:

- 1.材质:碳钢镀镍线径Ø1.0mm。
- 2.尺寸:帶*為重點尺寸。
- 3.公差:未標注公差參照標準公差。



东莞市一佳电子通讯科技有限公司
Dongguan YiJia Electronics Communication Technology Co.,Ltd. Tel.:0769-85535057 Fax:0769-81664308

PART NAME: RF Antenna				
PART NO.: YJI01.005.073.301A			DATE: 2023-06-01	
APPROVED BY	CHECKED BY	DESIGNED BY		Tolerance
殷 涛	刘 涛	陈兴易	UNITS: mm	X.X ±0.2
			SCALE: 1/1	X.XX±0.15
			REVISION: A	X° ±3°



天线规格


Antenna Specification

Electrical Properties	
Frequency	2.4-2.5GHz
Impedance	50 Ohm Nominal
V.S.W.R	2.0 Max
Gain	0.3 dBi
Radiation	Omni-directional
Polarization	Linear
Physical Properties	
Connector	None
Cable Type	None
Cable Length	None
Cable Color	None
Operating Temp.	-40 ~ +85 °C
Storage Temp / Humidity	25±5°C / <70%




Antenna Performance Test

**Agilent
E5071B**


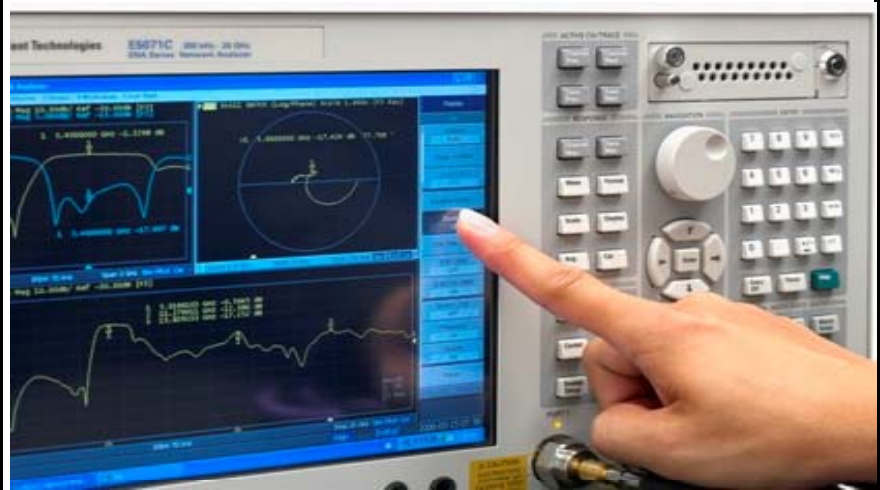


**S
Parameter
Test //
BT
Antenna**

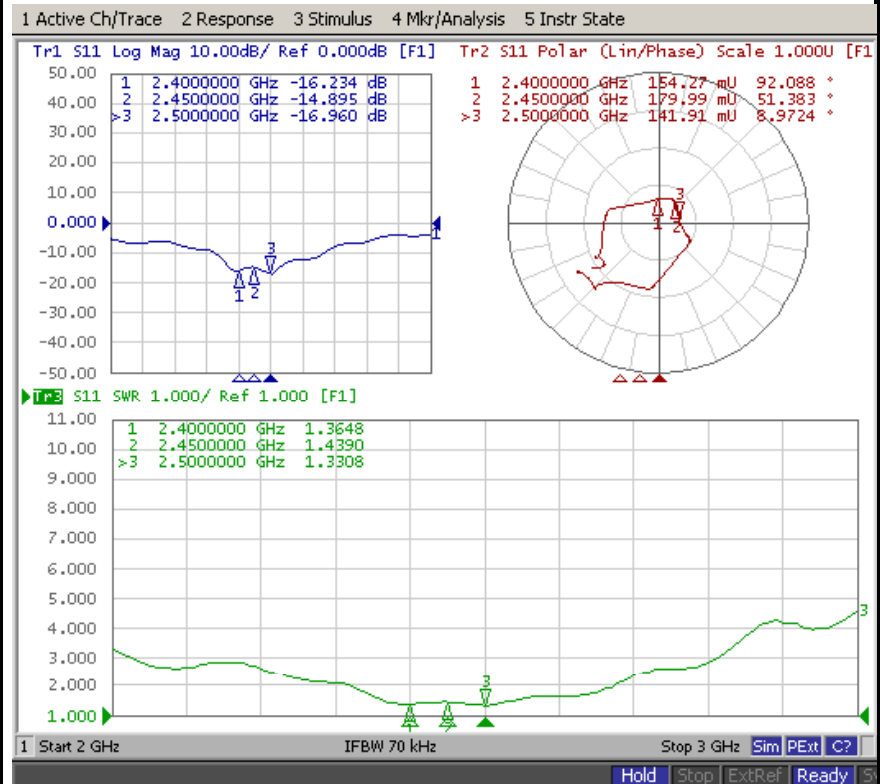



Antenna Passive Test

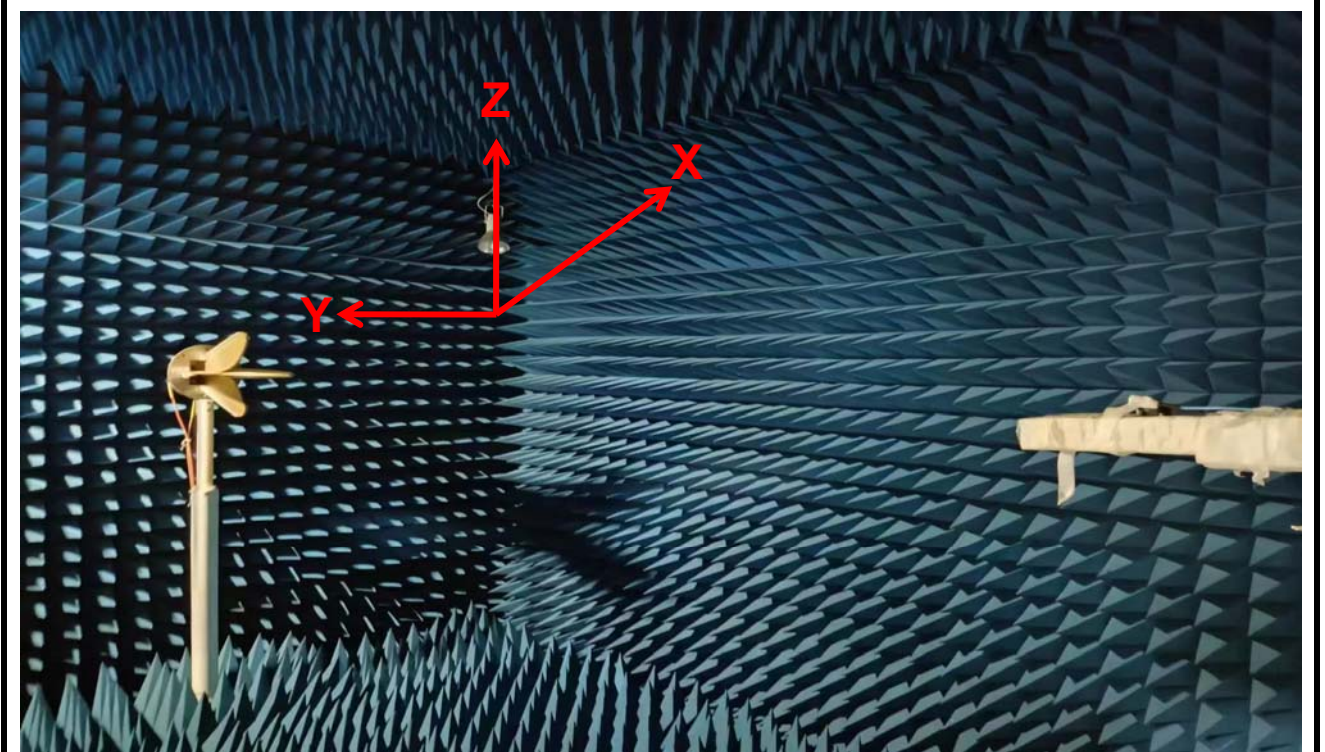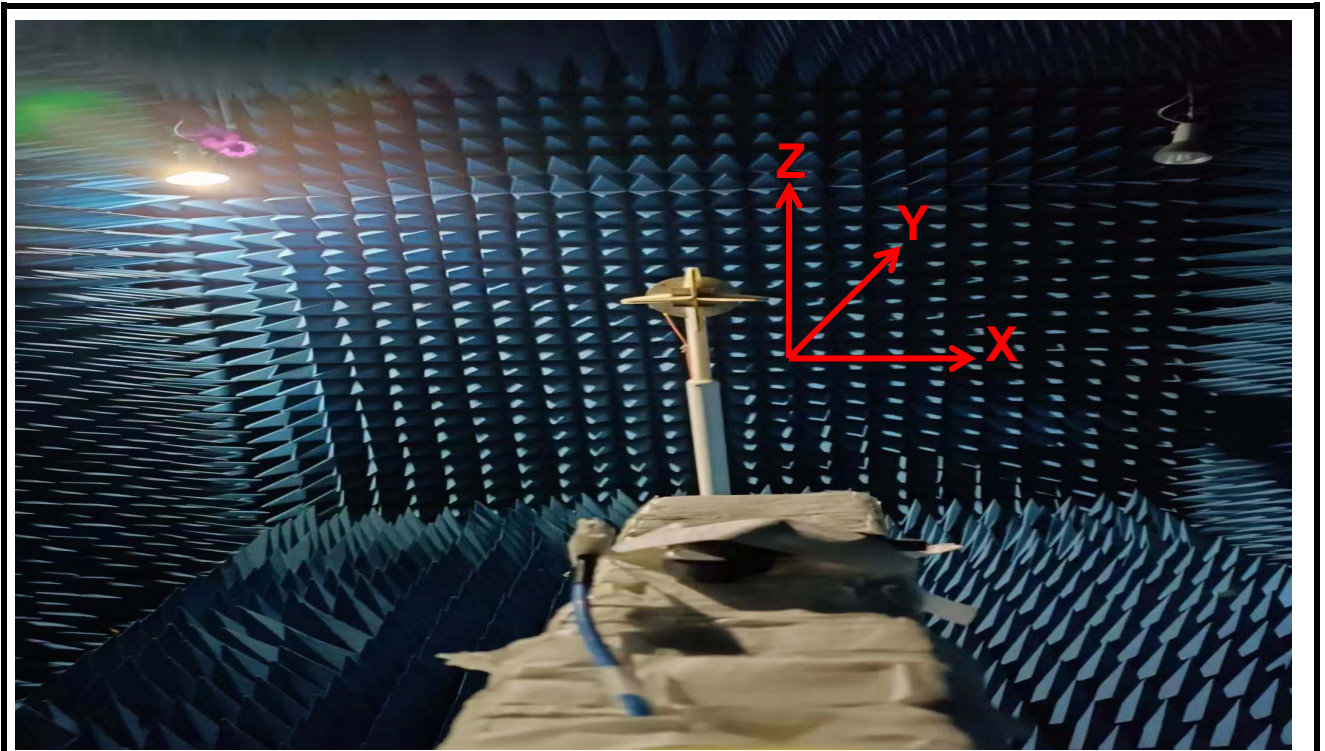

add: 东莞市长安镇沙头社区木鱼路59号元富工业区 Tel:0769-82586086 Fax:0769-82586086




Passive Test For BT Antenna			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	38.9	-4.1	0.2
2410	39.7	-4.0	0.2
2420	40.6	-3.9	0.2
2430	40.6	-3.9	0.0
2440	40.6	-3.9	-0.1
2450	42.3	-3.7	0.2
2460	42.2	-3.8	0.1
2470	42.5	-3.7	0.3
2480	41.1	-3.9	0.1
2490	40.2	-4.0	0.1
2500	40.4	-3.9	0.0



BT Antenna Matching Circuit


Antenna

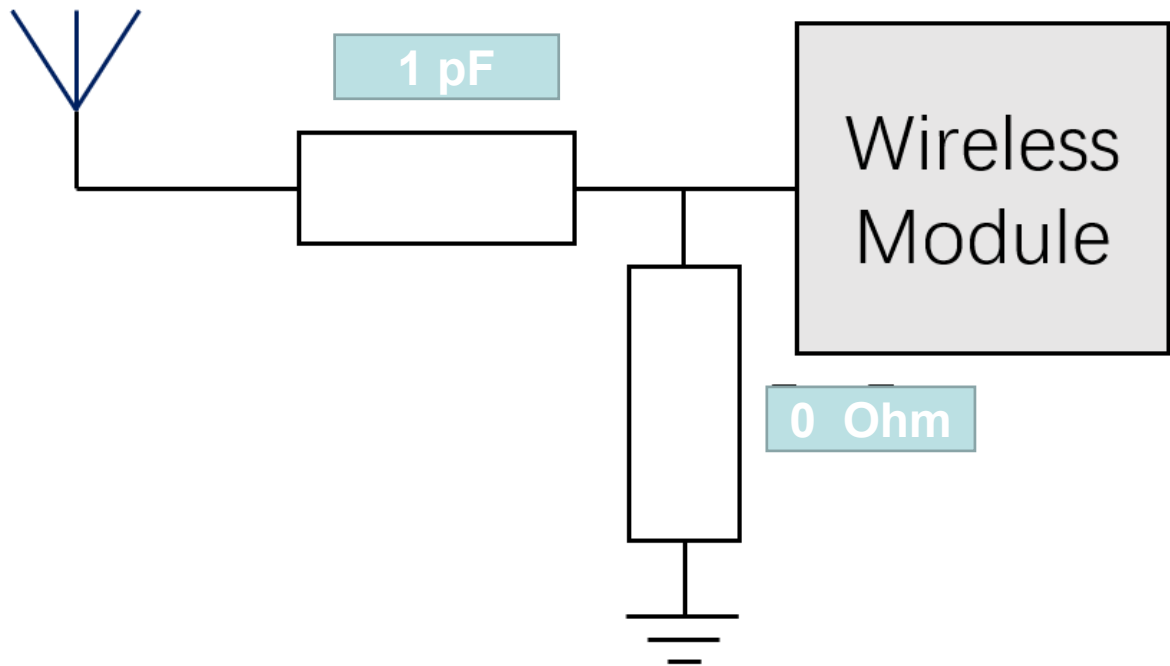



Radiation Pattern For BT Antenna


2400.000MHz

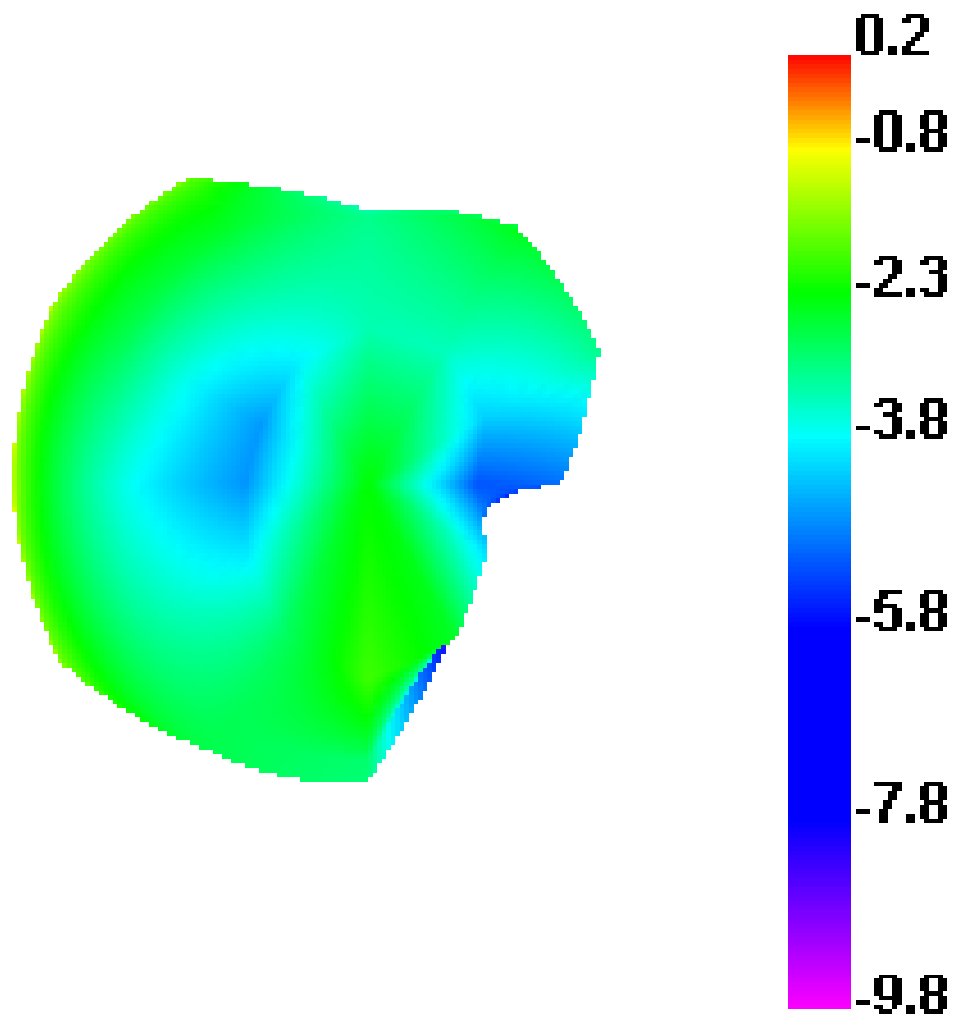



Radiation Pattern For BT Antenna


2400.000MHz H

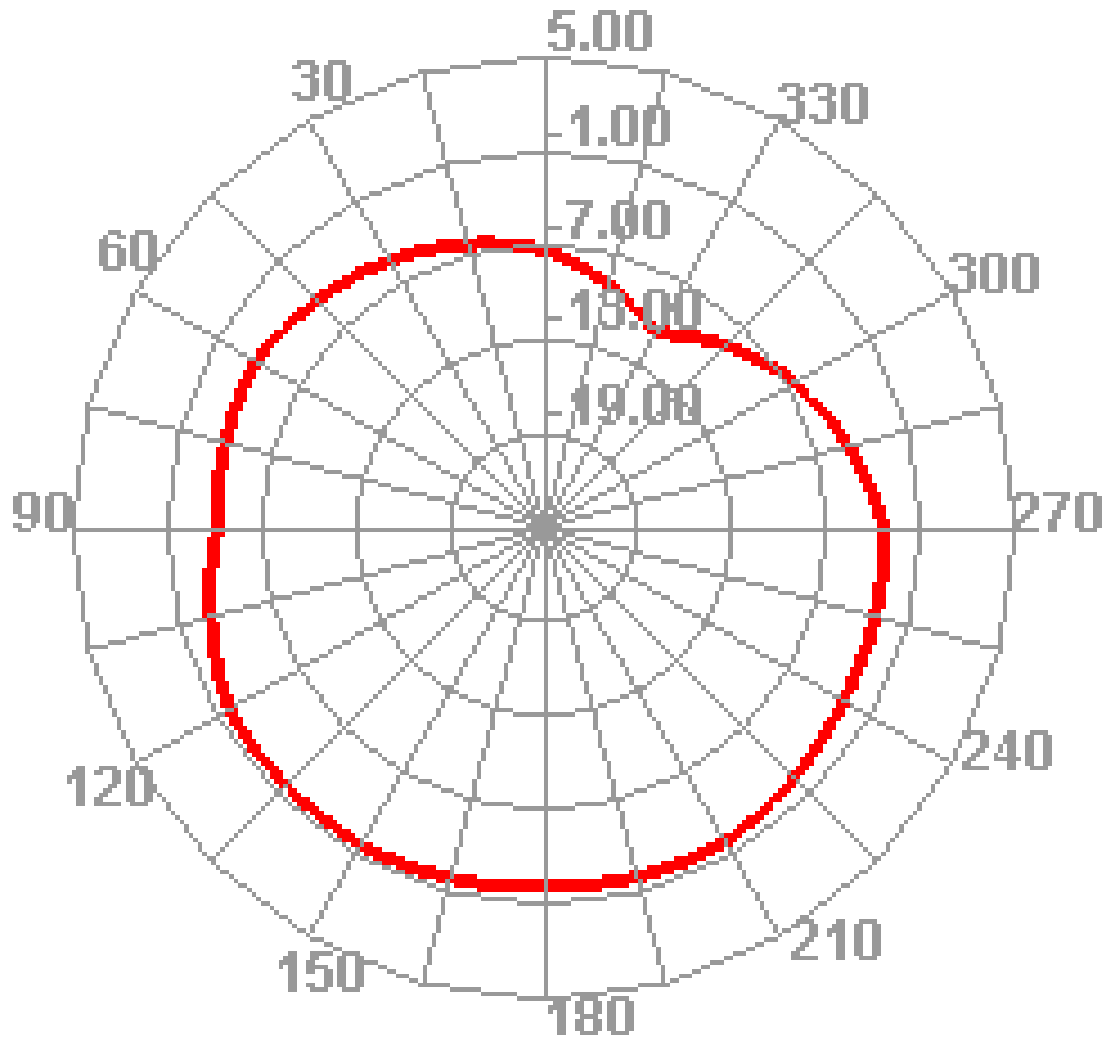



Radiation Pattern For BT Antenna


2400.000MHz E1

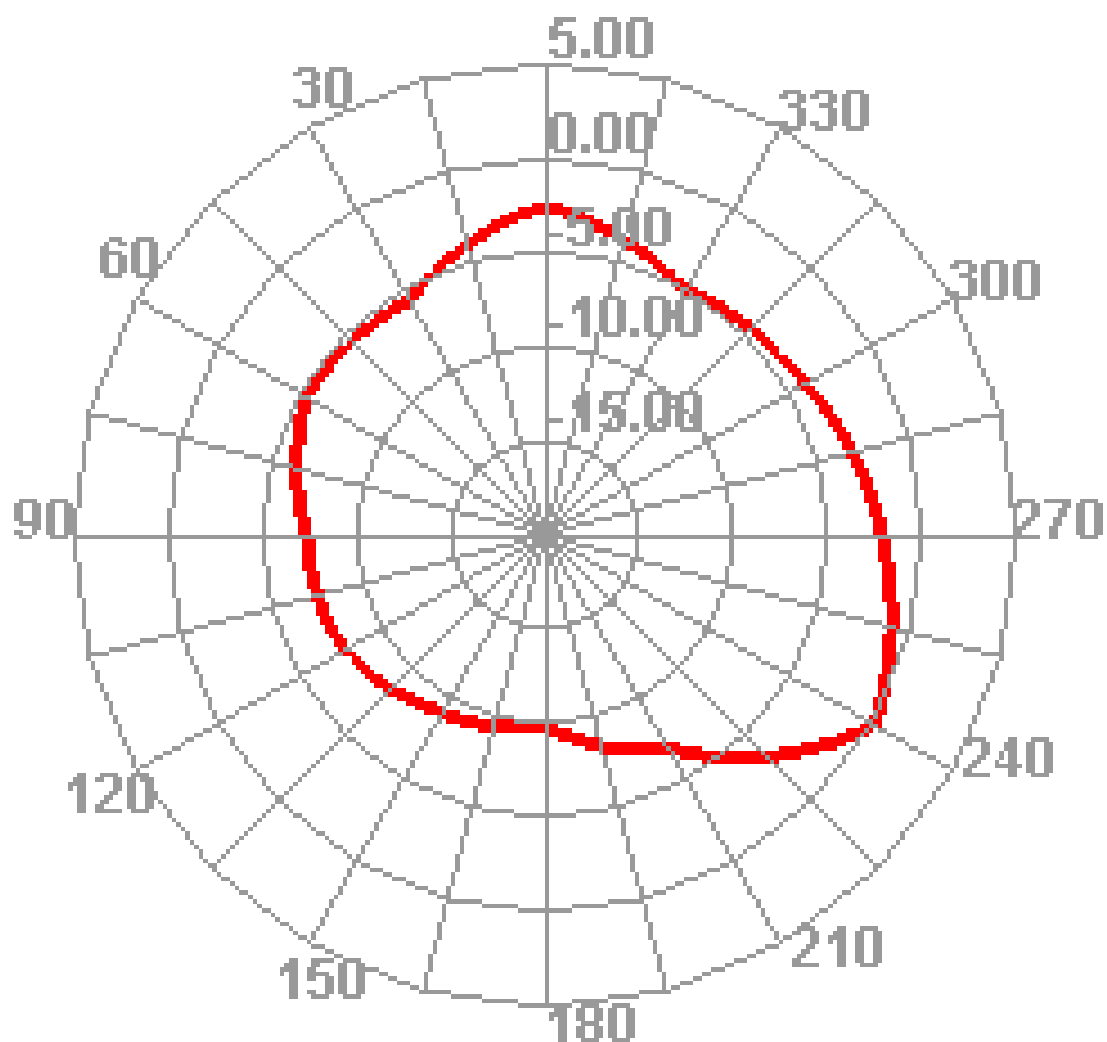



Radiation Pattern For BT Antenna


2400.000MHz E2

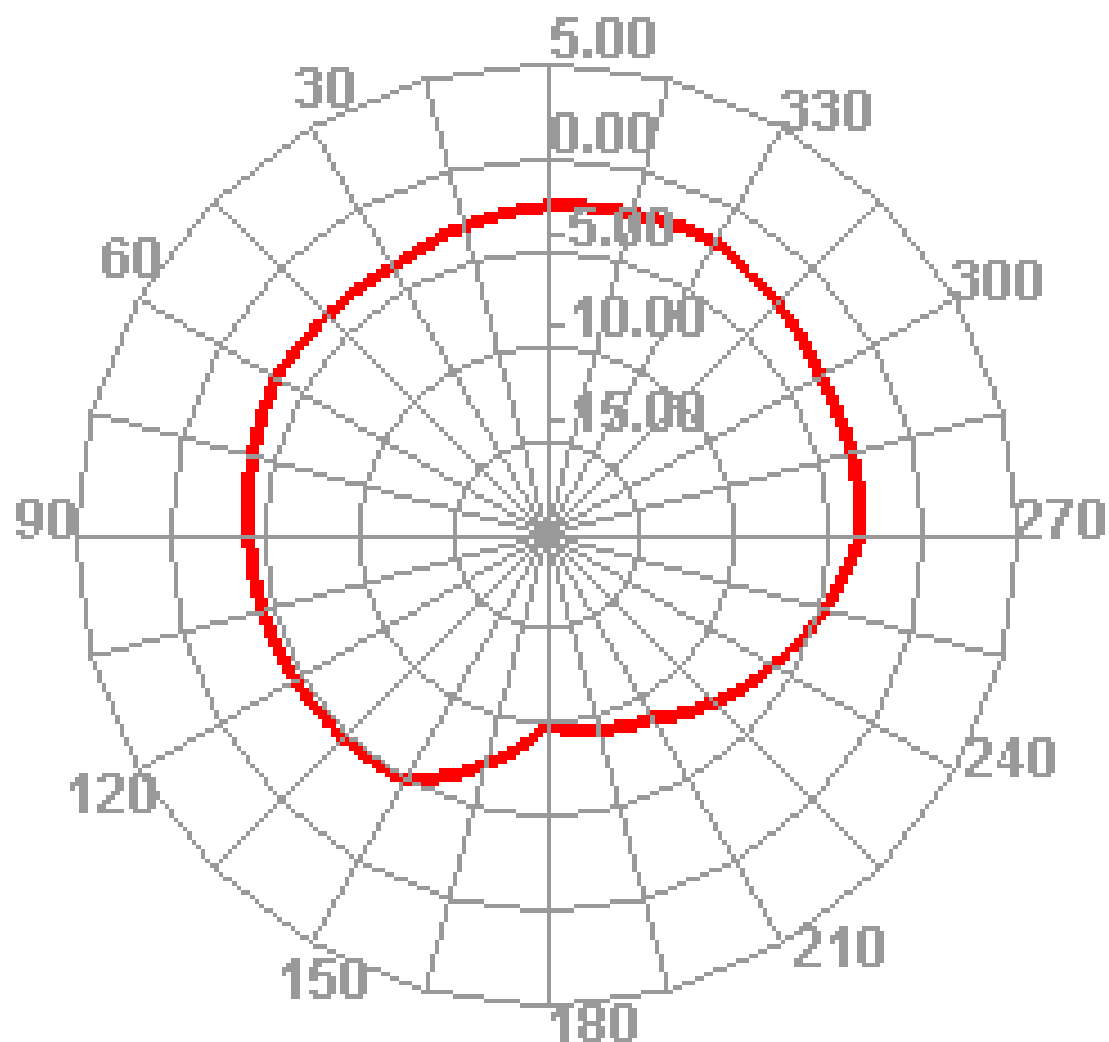



Radiation Pattern For BT Antenna


2450.000MHz

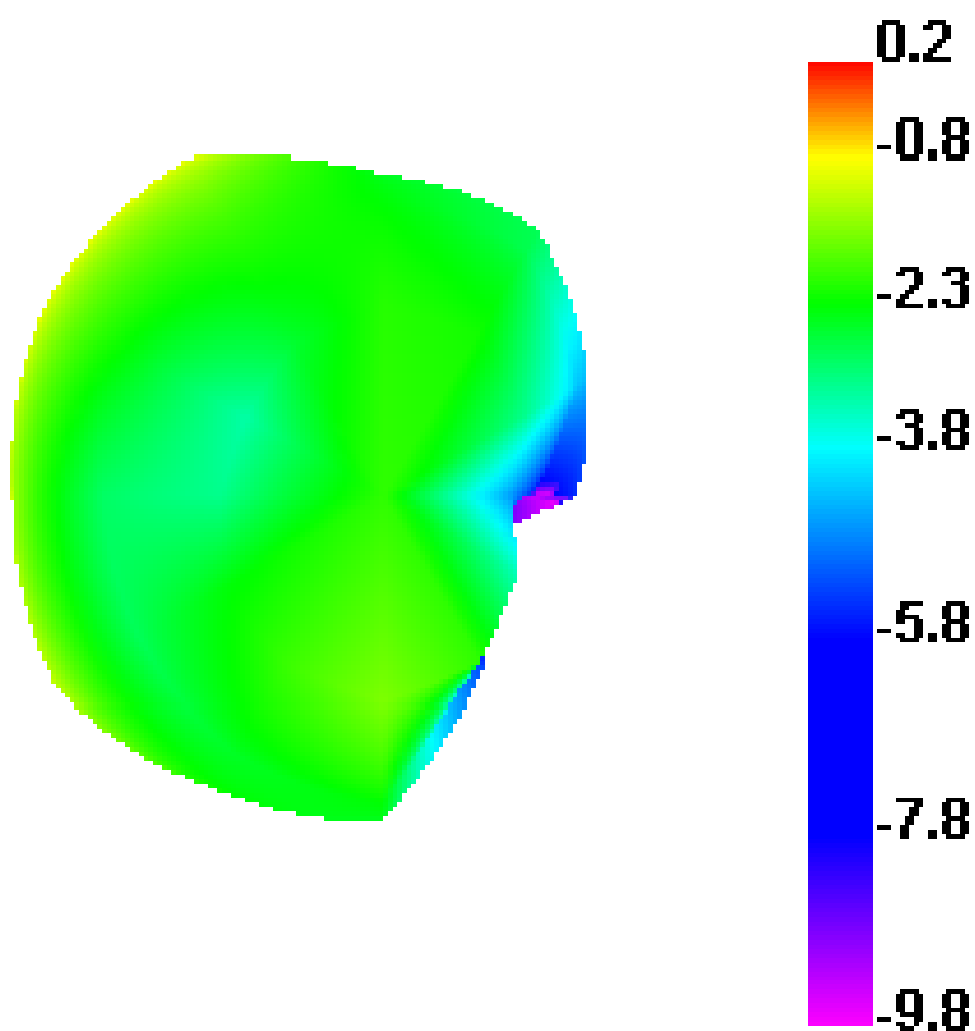



Radiation Pattern For BT Antenna


2450.000MHz H

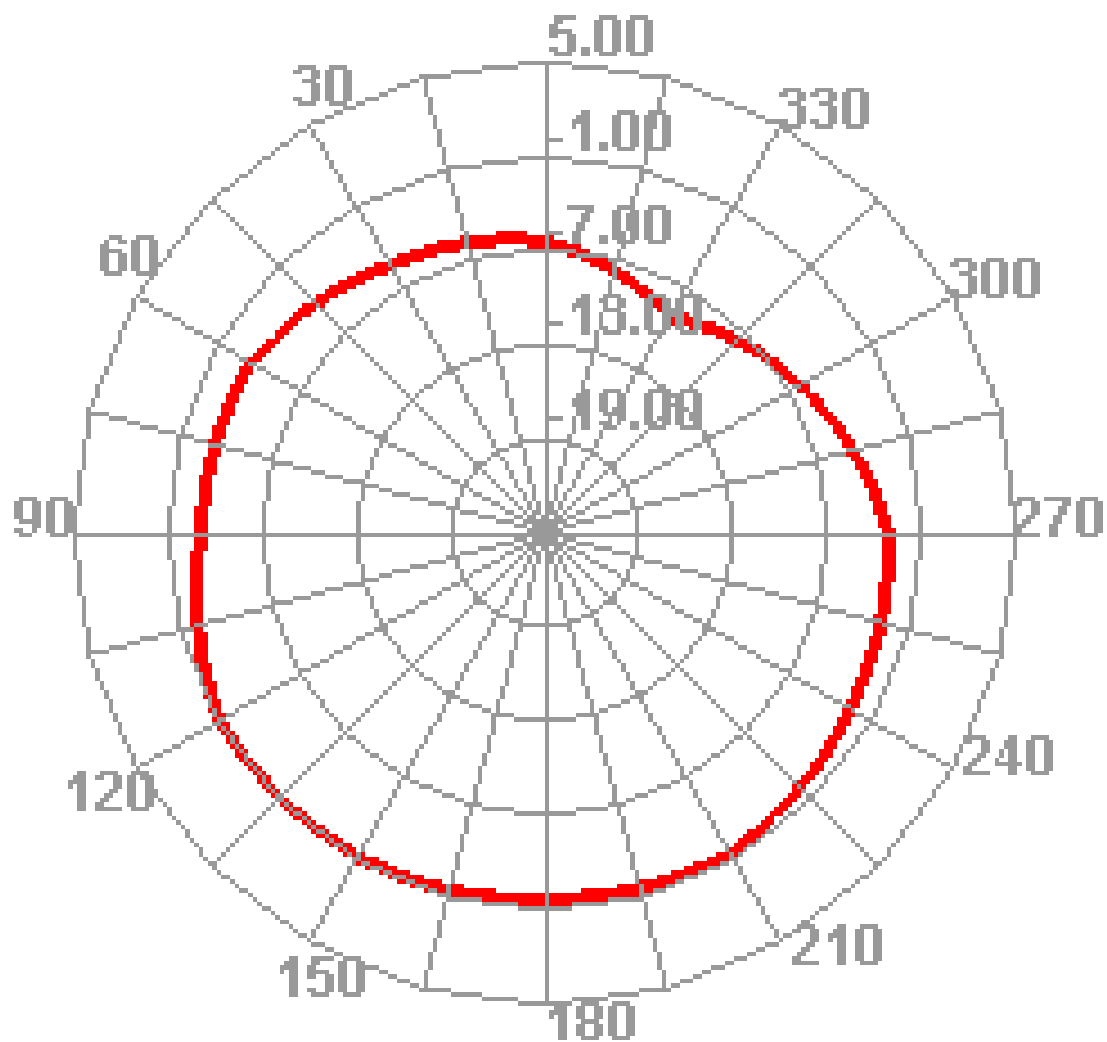



Radiation Pattern For BT Antenna


2450.000MHz E1

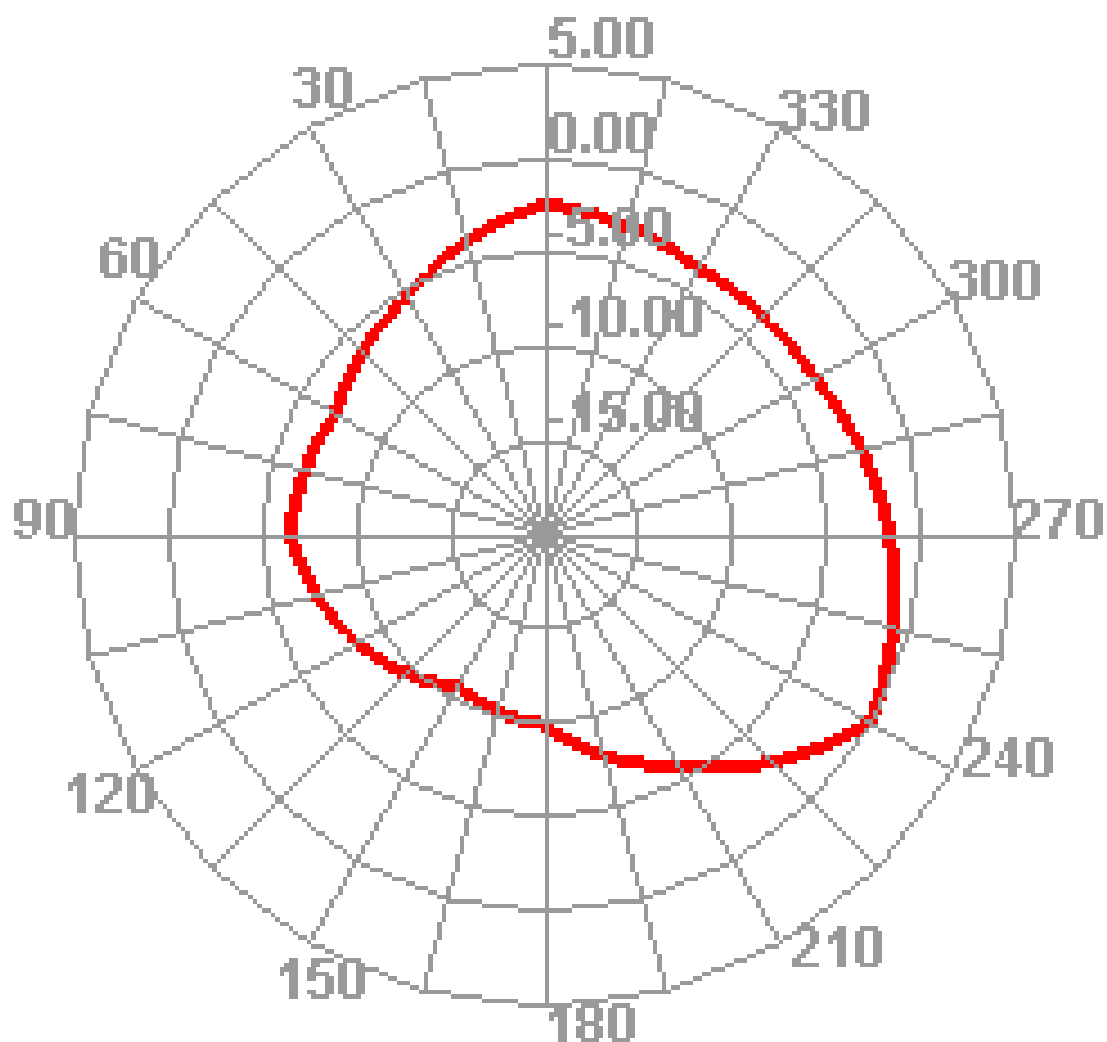



Radiation Pattern For BT Antenna


2450.000MHz E2

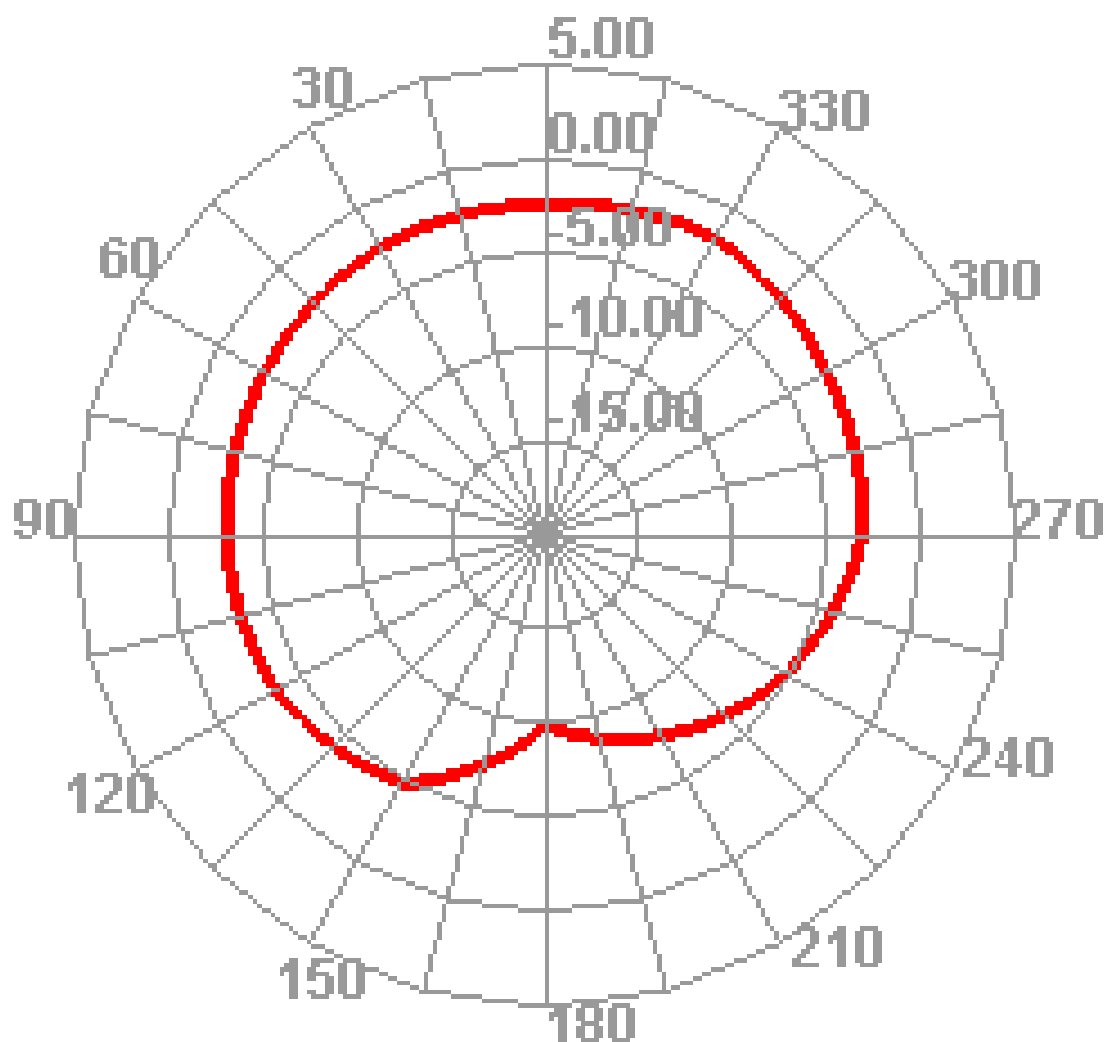



Radiation Pattern For BT Antenna


2500.000MHz

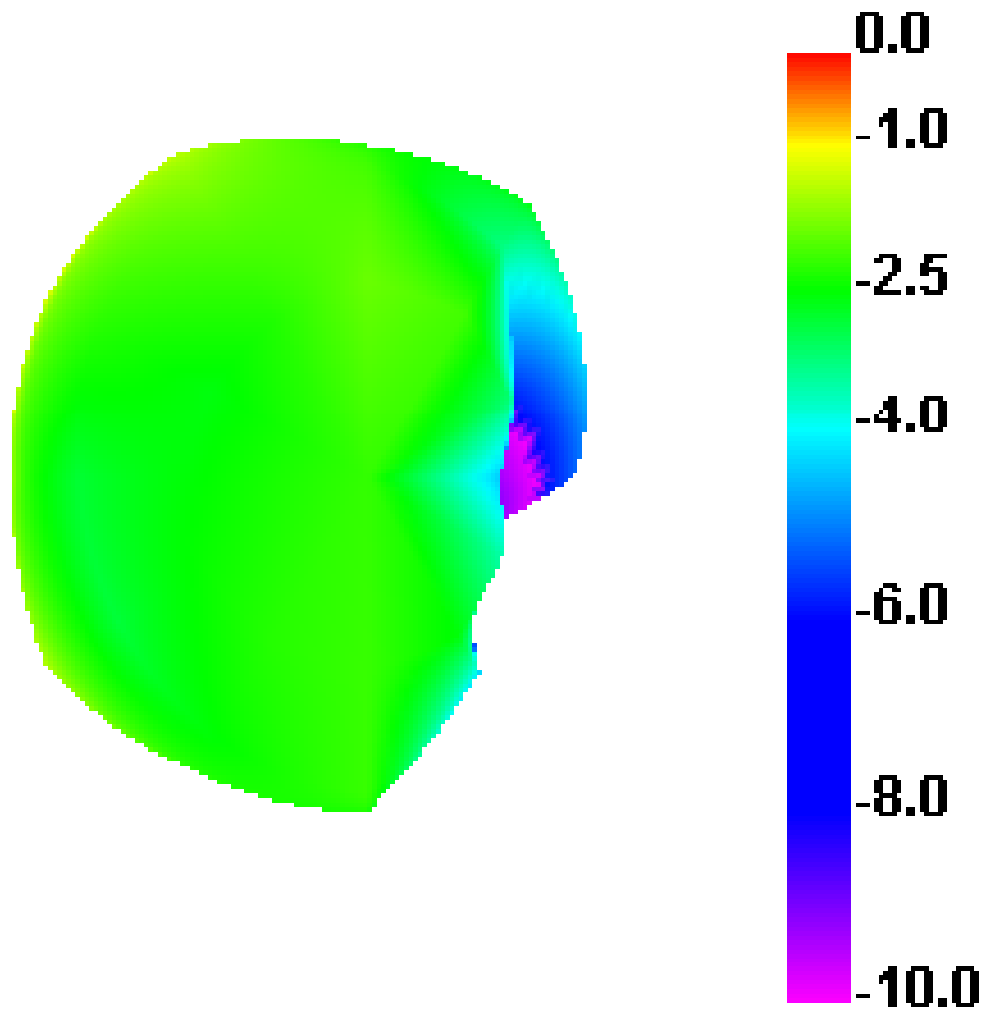



Radiation Pattern For BT Antenna


2500.000MHz H

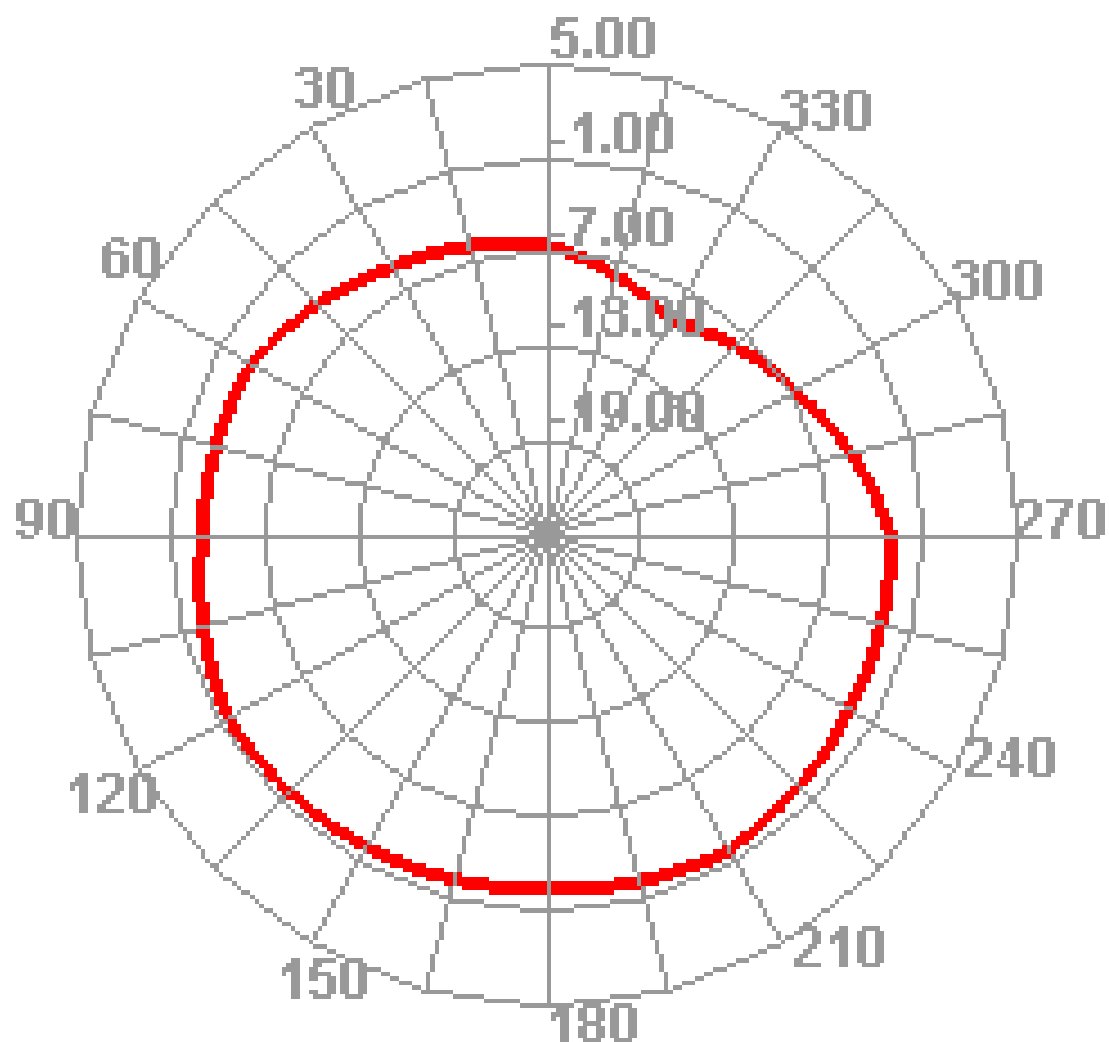



Radiation Pattern For BT Antenna


2500.000MHz E1

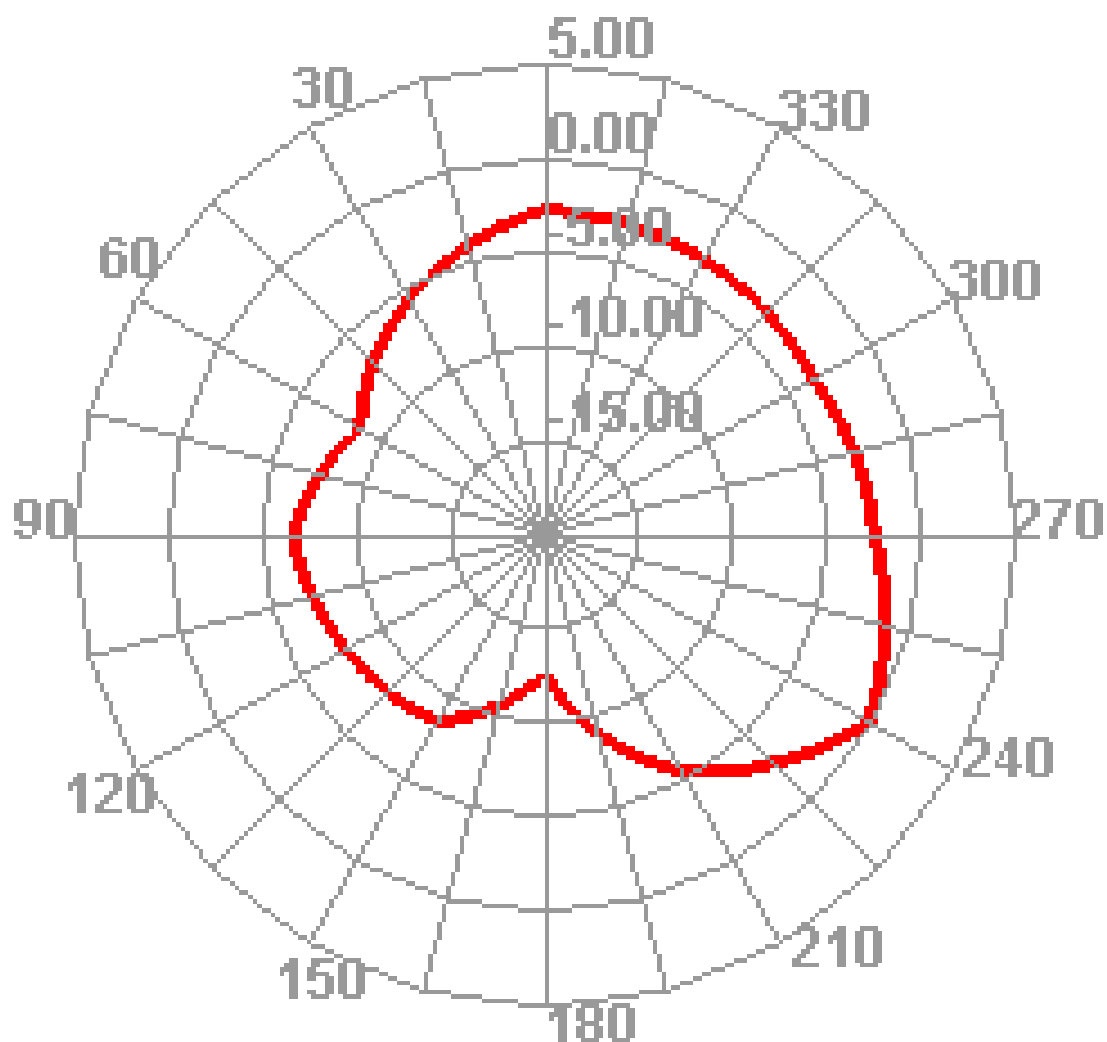



Radiation Pattern For BT Antenna

2500.000MHz E2

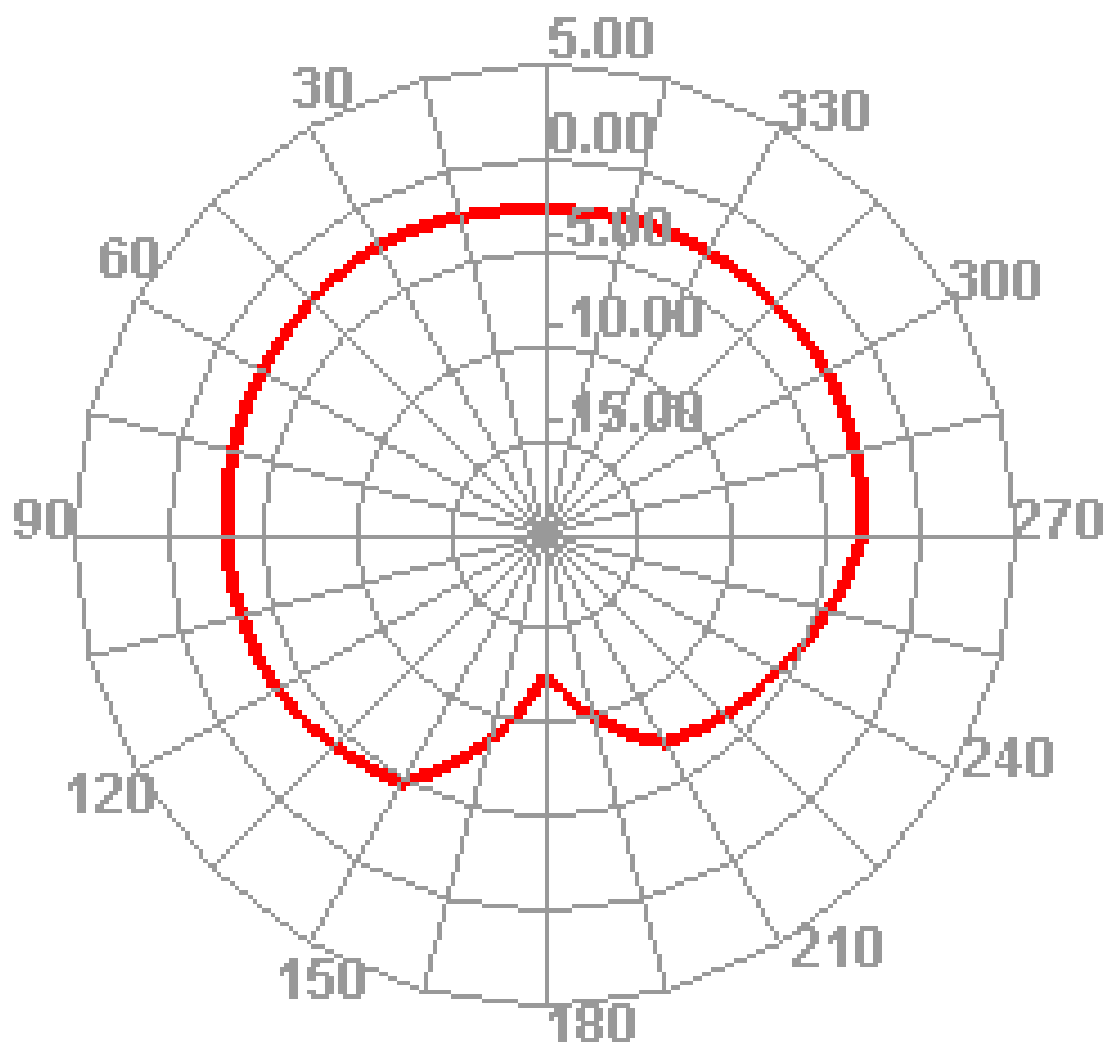



***BT
Antenna***



MSDS 物料安全资料

产品名称：镀镍高碳弹簧钢丝

公司名称：东莞市信宣金属材料有限公司

地 址：东莞市长安镇振安东路业盛金属材料广场

电 话：0769-85345468

1、物料成分：

C: 0.72%

Si: 0.15%

Mn: 0.5%

P: 0.011%

S: 0.004%

2、物理性质：

外观：银白色，光滑

熔点：1440℃

密度：7.93g/cm³

可溶性：不溶于水

3、可燃性：

不燃

4、反应性、稳定性：

稳定性：良好，不分解

危险的分解产物：无

避免接触物：强酸、强碱、强氧化剂、水

5、保护措施：

工作场所要防火、防雨

库房要防火、防雨

6、健康危险数据：

侵害人体主要途径：无

致癌化学物或隐性致癌物：无

7、搬运与储存时的注意事项：

搬运时要防止擦伤表面

存放于阴凉干燥处，远离火源和热源

8、NPA 危害评估：健康
