

CTC advanced
member of RWTÜV group



Bundesnetzagentur

BNetzA-CAB-02/21-102

TEST REPORT

Test report no.: 1-4085/17-02-04



DAkkS
Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Paragon AG Bexbach

Saarpfalz-Park 17
66450 Bexbach / GERMANY

Phone: -/-
Fax: -/-
Contact: Alexander Paulus
e-mail: Alexander.paulus@paragon.ag
Phone: +4968269309021

Manufacturer

Paragon AG

Schwalbenweg 29
33129 Delbrück / GERMANY

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 9

Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: **Electronic control unit**
Model name: **Carsharing Modul**
FCC ID: WRB015262577-1
IC: 22965-015262577
Frequency: 13.56 MHz
Technology tested: NFC / RFID
Antenna: Integrated loop antenna
Power supply: 12.0 V DC by battery
Temperature range: -40°C to +80°C



This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Marco Bertolino
Lab Manager
Radio Communications & EMC

Test performed:



Yves Olsommer
Testing Manager
Radio Communications & EMC

1 Table of contents

| | | |
|----------------|-------------------------------------------------------|-----------|
| 1 | Table of contents | 2 |
| 2 | General information | 3 |
| 2.1 | Notes and disclaimer | 3 |
| 2.2 | Application details | 3 |
| 2.3 | Test laboratories sub-contracted | 3 |
| 3 | Test standard/s and references | 4 |
| 4 | Test environment | 5 |
| 5 | Test item | 5 |
| 5.1 | General description | 5 |
| 5.2 | Additional information | 5 |
| 6 | Description of the test setup | 6 |
| 6.1 | Shielded semi anechoic chamber | 7 |
| 6.2 | Shielded fully anechoic chamber | 8 |
| 6.3 | RF measurements normal and extreme conditions | 9 |
| 7 | Sequence of testing | 10 |
| 7.1 | Sequence of testing radiated spurious 9 kHz to 30 MHz | 10 |
| 7.2 | Sequence of testing radiated spurious 30 MHz to 1 GHz | 11 |
| 8 | Measurement uncertainty | 12 |
| 9 | Summary of measurement results | 13 |
| 10 | Additional comments | 13 |
| 11 | Measurement results | 14 |
| 11.1 | Occupied bandwidth | 14 |
| 11.2 | Field strength of the fundamental | 16 |
| 11.3 | Field strength of the harmonics and spurious | 17 |
| 11.4 | Frequency error | 20 |
| 12 | Observations | 21 |
| Annex A | Glossary | 22 |
| Annex B | Document history | 23 |
| Annex C | Accreditation Certificate | 23 |

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

| | |
|------------------------------------|------------|
| Date of receipt of order: | 2017-07-13 |
| Date of receipt of test item: | 2017-10-12 |
| Start of test: | 2017-10-12 |
| End of test: | 2017-10-16 |
| Person(s) present during the test: | -/- |

2.3 Test laboratories sub-contracted

None

3 Test standard/s and references

| Test standard | Date | Description |
|-------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 15 | -/- | Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices |
| RSS - 210 Issue 9 | August 2016 | Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment |
| RSS - Gen Issue 4 | November 2014 | Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus |

| Guidance | Version | Description |
|------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4-2014 | -/- | American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | -/- | American national standard of procedures for compliance testing of unlicensed wireless devices |

4 Test environment

| | | |
|---------------------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Temperature | : T_{nom} T_{max} T_{min} | +25 °C during room temperature tests +80 °C during high temperature tests -40 °C during low temperature tests |
| Relative humidity content | : | 54 % |
| Barometric pressure | : | 1025 hpa |
| Power supply | : V_{nom} V_{max} V_{min} | 12.0 V DC by battery 18.0 V 6.0 V |

5 Test item

5.1 General description

| | | |
|----------------------------|-------|----------------------------------|
| Kind of test item | : | Electronic control unit |
| Type identification | : | Carsharing Modul |
| HMN | : | -/- |
| PMN | : | CARSHARING MODUL |
| HVIN | : | CARSHARING MODUL |
| FVIN | : | -/- |
| S/N serial number | : | -/- |
| HW hardware status | : | -/- |
| SW software status | : | -/- |
| Frequency band | : | 13.56 MHz |
| Type of radio transmission | : | Clean carrier; modulated carrier |
| Use of frequency spectrum | : | |
| Type of modulation | : | -/- |
| Number of channels | : | 1 |
| Antenna | : | Integrated loop antenna |
| Power supply | : | 12.0 V DC by battery |
| Temperature range | : | -40°C to +80°C |

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

1-4085/17-02-01_AnnexA

1-4085/17-02-01_AnnexB

1-4085/17-02-01_AnnexD

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

| | | | |
|-------|--------------------------------------------|-----|------------------------------------------------------|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vlkl! | Attention: extended calibration interval | | |
| NK! | Attention: not calibrated | *) | next calibration ordered / currently in progress |

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

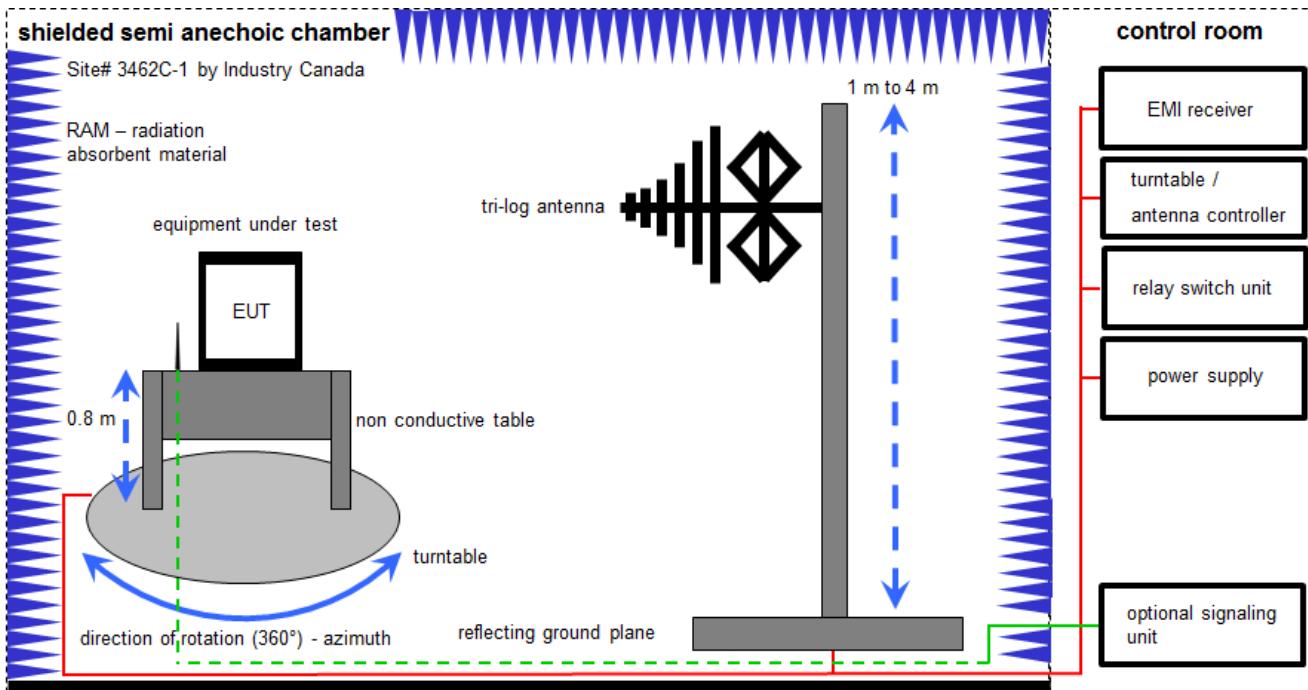

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|----------------------------------------------|------------------|---------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | Switch-Unit | 3488A | HP | 2719A14505 | 300000368 | ev | -/- | -/- |
| 2 | A | DC power supply, 60Vdc, 50A, 1200 W | 6032A | HP | 2920A04466 | 300000580 | ne | -/- | -/- |
| 3 | A | Meßkabine 1 | HF-Absorberhalle | MWB AG 300023 | -/- | 300000551 | ne | -/- | -/- |
| 4 | A | EMI Test Receiver | ESCI 3 | R&S | 100083 | 300003312 | k | 01.02.2017 | 31.01.2018 |
| 5 | A | Antenna Tower | Model 2175 | ETS-Lindgren | 64762 | 300003745 | izw | -/- | -/- |
| 6 | A | Positioning Controller | Model 2090 | ETS-Lindgren | 64672 | 300003746 | izw | -/- | -/- |
| 7 | A | Turntable Interface-Box | Model 105637 | ETS-Lindgren | 44583 | 300003747 | izw | -/- | -/- |
| 8 | A | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163 | Schwarzbeck | 295 | 300003787 | k | 25.04.2016 | 25.04.2018 |

6.2 Shielded fully anechoic chamber

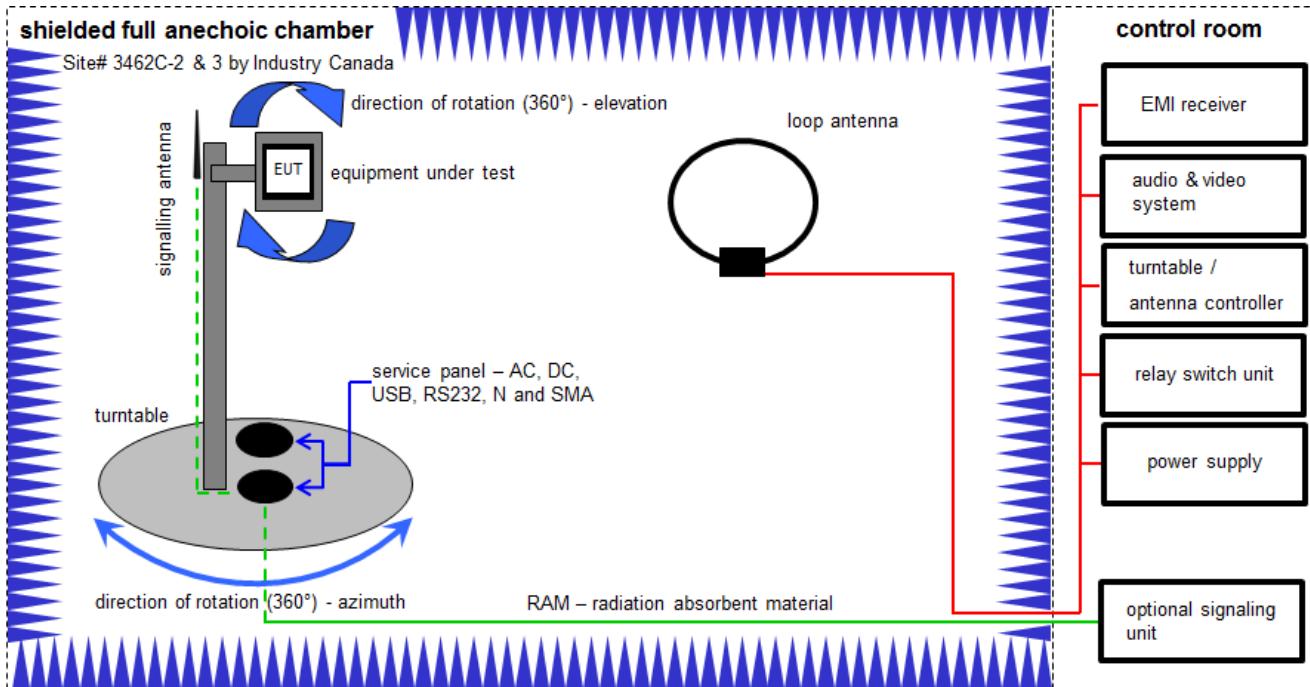

Measurement distance: tri-log antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

FS [dB μ V/m] = 40.0 [dB μ V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB μ V/m] (71.61 μ V/m)

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-------------------------------------|--------------------|----------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | DC power supply, 60Vdc, 50A, 1200 W | 6032A | HP | 2818A03450 | 300001040 | vlKI! | 20.01.2015 | 19.01.2018 |
| 2 | A | Anechoic chamber | FAC 3/5m | MWB / TDK | 87400/02 | 300000996 | ev | -/- | -/- |
| 3 | A | Switch / Control Unit | 3488A | HP | -/- | 300000199 | ne | -/- | -/- |
| 4 | A | EMI Test Receiver 20Hz- 26.5GHz | ESU26 | R&S | 100037 | 300003555 | k | 31.01.2017 | 30.01.2018 |
| 5 | A | 4U RF Switch Platform | L4491A | Agilent Technologies | MY50000037 | 300004509 | ne | -/- | -/- |
| 6 | A | NEXIO EMV-Software | BAT EMC V3.16.0.49 | EMCO | -/- | 300004682 | ne | -/- | -/- |
| 7 | A | PC | ExOne | F+W | -/- | 300004703 | ne | -/- | -/- |
| 8 | A | Active Loop Antenna 9 kHz to 30 MHz | 6502 | EMCO | 2210 | 300001015 | k | 07.07.2017 | 06.07.2019 |

6.3 RF measurements normal and extreme conditions

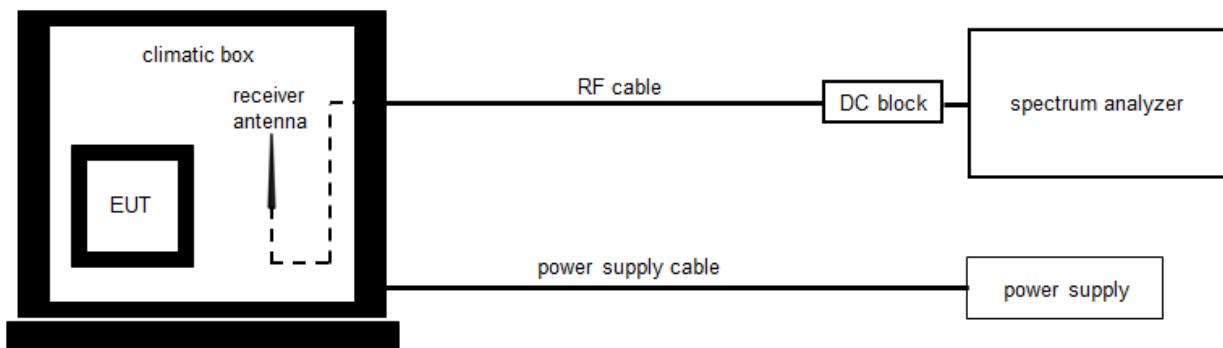

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:
 OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-------------------------------|---------|--------------------------|----------------|-----------|---------------------|------------------|------------------|
| 1 | A | Climatic Box | VT 4011 | Voetsch Industrietechnik | 58566230600010 | 300005363 | ev | 01.06.2017 | 31.05.2019 |
| 2 | A | Signal- and Spectrum Analyzer | FSW26 | R&S | 101455 | 300004528 | k | 25.01.2017 | 24.01.2018 |
| 3 | A | Power Supply 0-20V; 0-5A | 6632B | HP | US37478366 | 400000117 | vIKII | 25.01.2017 | 24.01.2019 |
| 4 | A | Loop Antenna | -/- | ZEG TS Steinfurt | -/- | 400001208 | ev | -/- | -/- |

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

^{*)}Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8 Measurement uncertainty

| Measurement uncertainty | |
|----------------------------------------------------|-------------|
| Test case | Uncertainty |
| Occupied bandwidth | ± used RBW |
| Field strength of the fundamental | ± 3 dB |
| Field strength of the harmonics and spurious | ± 3 dB |
| Receiver spurious emissions and cabinet radiations | ± 3 dB |
| Conducted limits | ± 2.6 dB |

9 Summary of measurement results

| | |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained |
| <input type="checkbox"/> | There were deviations from the technical specifications ascertained |
| <input type="checkbox"/> | This test report is only a partial test report. The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description | Verdict | Date | Remark |
|---------------|---------------------------------------------------|------------|------------|--------|
| RF-Testing | CFR Part 15 RSS 210 Issue 9 RSS Gen Issue 4 | See table! | 2017-11-09 | -/- |

| Test specification clause | Test case | Temperature conditions | Power source conditions | C | NC | NA | NP | Remark |
|---------------------------------|----------------------------------------------------|-----------------------------|-----------------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|-----------------|
| RSS Gen Issue 4 | Occupied bandwidth | Nominal | Nominal | | | | | -/- |
| § 15.225 (a) RSS 210 Issue 9 | Field strength of the fundamental | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| § 15.209 & § 15.225 (b-d) | Field strength of the harmonics and spurious | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| § 15.109 | Receiver spurious emissions and cabinet radiations | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.107 §15.207 | Conducted limits | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | Battery powered |
| § 15.225 (a) RSS 210 Issue 9 | Frequency tolerance | Normal & extreme conditions | Normal & extreme conditions | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |

Note:

C Compliant
 NC Not compliant
 NA Not applicable
 NP Not performed

10 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

11 Measurement results

11.1 Occupied bandwidth

Measurement:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.


| Measurement parameters | |
|--------------------------|-------------------------------------|
| Detector: | Peak |
| Resolution bandwidth: | 1 % – 5 % of the occupied bandwidth |
| Video bandwidth: | ≥ 3x RBW |
| Trace mode: | Max hold |
| Analyser function: | 99 % power function |
| Used equipment: | See chapter 6.3 A |
| Measurement uncertainty: | See chapter 8 |

Limit:

| IC |
|-----------------------------------------|
| for RSP-100 test report coversheet only |

Result:

| 99% emission bandwidth |
|------------------------|
| 1991 kHz |

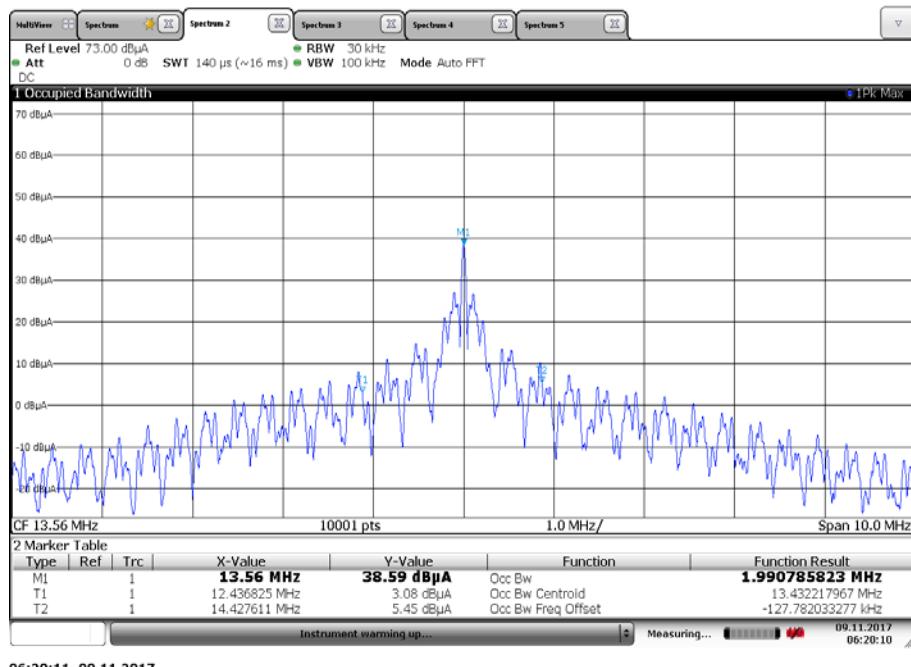Plot:**Plot 1: 99 % emission bandwidth**

11.2 Field strength of the fundamental

Measurement:

The maximum detected field strength for the carrier signal.

| Measurement parameters | |
|--------------------------|-------------------|
| Detector: | Peak (worst case) |
| Resolution bandwidth: | 120 kHz |
| Video bandwidth: | ≥ 3x RBW |
| Trace mode: | Max hold |
| Used equipment: | See chapter 6.2 A |
| Measurement uncertainty: | See chapter 8 |

Limit:

| FCC & IC | | |
|--------------------|--------------------------------|-----------------------------|
| Frequency (MHz) | Field strength (μ V/m) | Measurement distance (m) |
| 13.553 to 13.567 | 15,848 (84 dB μ V/m) | 30 |

Recalculation:

| According to ANSI C63.10 | | |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Frequency | Formula | Correction value |
| 13.56 MHz | $FS_{limit} = FS_{max} - 40 \log \left(\frac{d_{nearfield}}{d_{measure}} \right) - 20 \log \left(\frac{d_{limit}}{d_{nearfield}} \right)$ <p> FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m FS_{max} is the measured field strength, expressed in dBμV/m $d_{nearfield}$ is the $\lambda/2\pi$ distance $d_{measure}$ is the distance of the measurement point from EUT d_{limit} is the reference limit distance </p> | -21.4 from 3m to 30m |

Result:

| Field strength of the fundamental | | |
|------------------------------------------------|-------------------|-------------------|
| Frequency | 13.56 MHz | |
| Distance | @ 3 m | @ 30 m |
| Measured / calculated value (Peak detector) | 59.8 dB μ V/m | 38.4 dB μ V/m |

11.3 Field strength of the harmonics and spurious

Measurement:

The maximum detected field strength for the harmonics and spurious.

| Measurement parameters | |
|--------------------------|------------------------------------------------------------------------------------|
| Detector: | Quasi peak / average or peak (worst case – pre-scan) |
| Resolution bandwidth: | F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz |
| Video bandwidth: | F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz |
| Trace mode: | Max hold |
| Used equipment: | See chapter 6.1 A & 6.2 A |
| Measurement uncertainty: | See chapter 8 |



Limit:

| FCC & IC | | |
|-----------------|-------------------------------|--------------------------|
| Frequency (MHz) | Field strength (dB μ V/m) | Measurement distance (m) |
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30 | 30 (29.5 dB μ V/m) | 30 |
| 30 – 88 | 100 (40 dB μ V/m) | 3 |
| 88 – 216 | 150 (43.5 dB μ V/m) | 3 |
| 216 – 960 | 200 (46 dB μ V/m) | 3 |


Note: For a reduced measurement distance, please take a look at the limit line and the ANSI C63.10-2013 sub clause 6.4 radiated emissions from unlicensed wireless devices below 30 MHz.

Result:

| Detected emissions (9 kHz – 30 MHz) | | | |
|----------------------------------------------------------------------|----------|----------------------------|------------------------------------|
| Frequency (MHz) | Detector | Resolution bandwidth (kHz) | Detected value (dB μ V/m @ 3m) |
| All detected emissions are more than 20 dB below the spurious limit. | | | |

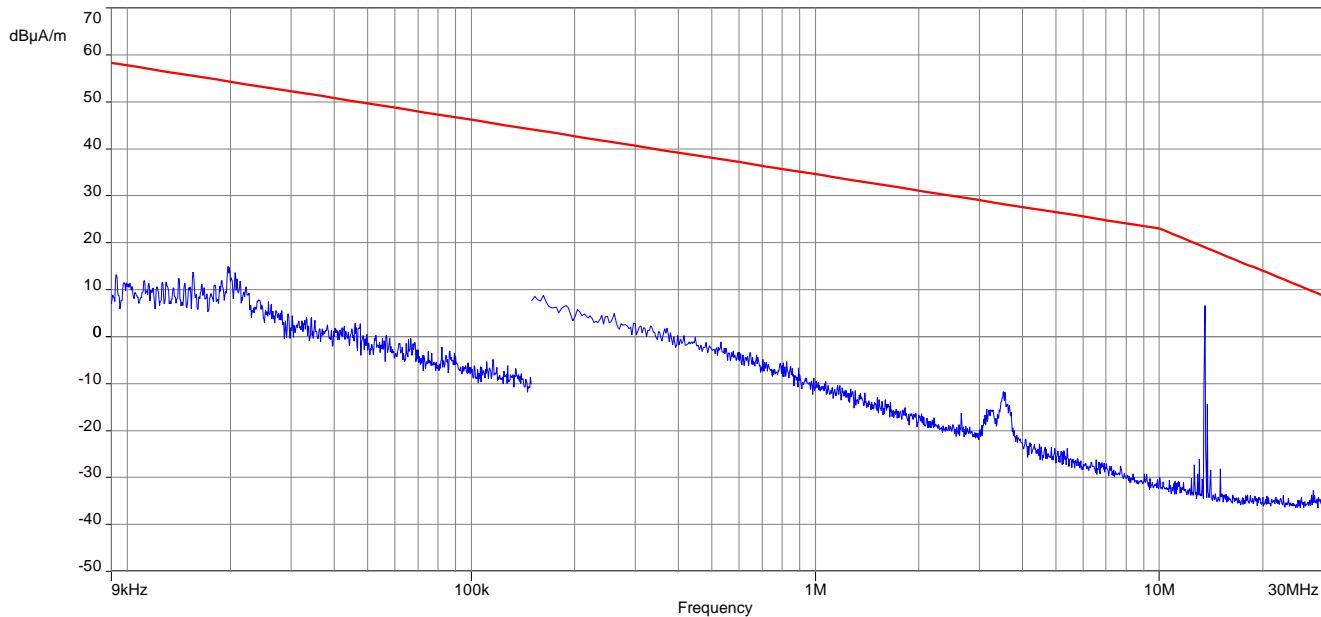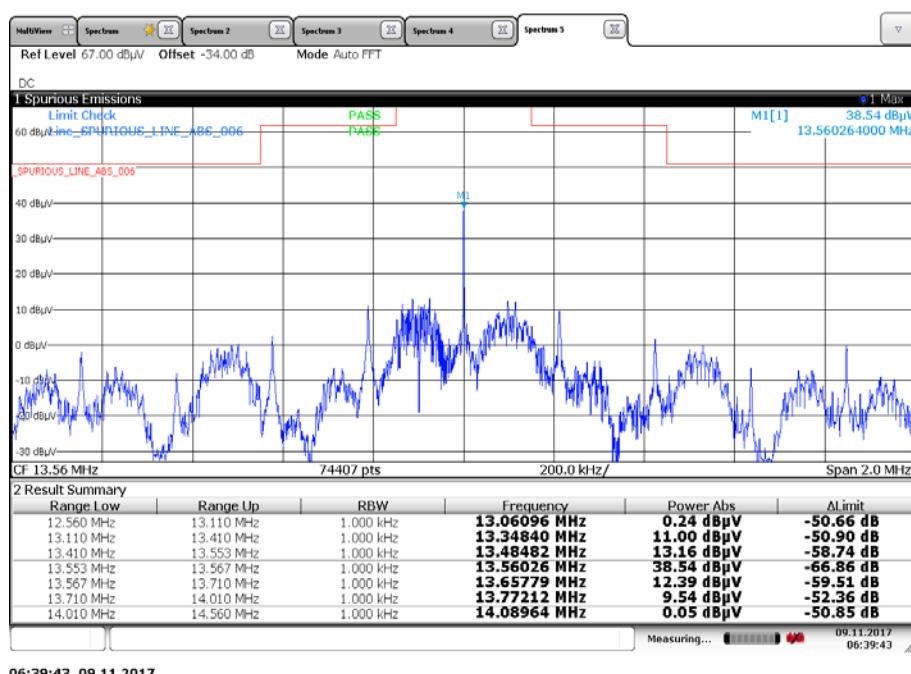Plots:**Plot 1:** 9 kHz – 30 MHz, magnetic emissions**Plot 2:** Spectrum mask (the limits are recalculated according to the ANSI C63.10-2013 sub clause 6.4)

Plot 3: 30 MHz – 1 GHz, vertical and horizontal polarisation

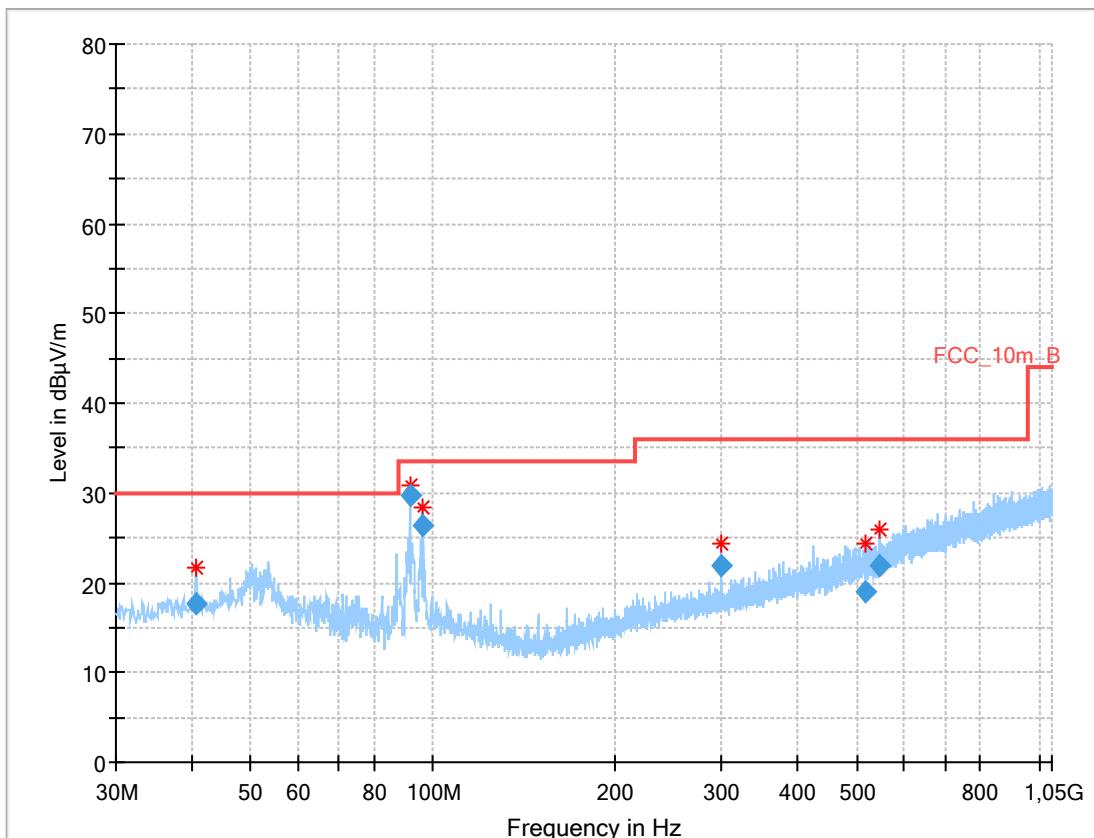

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 40.683 | 17.67 | 30.0 | 12.33 | 1000 | 120 | 170.0 | V | 184.0 | 13.3 |
| 91.719 | 29.61 | 33.5 | 3.89 | 1000 | 120 | 101.0 | V | 143.0 | 9.8 |
| 96.450 | 26.45 | 33.5 | 7.05 | 1000 | 120 | 98.0 | V | 195.0 | 11.2 |
| 298.776 | 22.01 | 36.0 | 13.99 | 1000 | 120 | 101.0 | V | 157.0 | 14.4 |
| 515.376 | 19.06 | 36.0 | 16.94 | 1000 | 120 | 170.0 | V | 0.0 | 18.9 |
| 544.006 | 21.80 | 36.0 | 14.20 | 1000 | 120 | 101.0 | V | 215.0 | 19.3 |

11.4 Frequency error

Measurement:

The maximum detected field strength for the spurious.

| Measurement parameters | |
|--------------------------|-------------------|
| Detector: | Peak detector |
| Resolution bandwidth: | 10 Hz / 100 Hz |
| Video bandwidth: | > RBW |
| Trace mode: | Max hold |
| Used equipment: | See chapter 6.3 A |
| Measurement uncertainty: | See chapter 8 |

Limit:

FCC & IC

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. (± 1.356 kHz)

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm)

Result: Temperature variation

| Frequency tolerance | | | |
|--------------------------|----------------------|-----------------------|--------------|
| Measured frequency (MHz) | Frequency error (Hz) | Conditions | Result |
| 13.560259 | 258 | -40 °C & 100% voltage | not required |
| 13.560357 | 357 | -20 °C & 100% voltage | compliant |
| 13.560366 | 366 | -10 °C & 100% voltage | compliant |
| 13.560353 | 353 | 0 °C & 100% voltage | compliant |
| 13.560323 | 323 | +10 °C & 100% voltage | compliant |
| 13.560290 | 290 | +20 °C & 100% voltage | compliant |
| 13.560242 | 242 | +30 °C & 100% voltage | compliant |
| 13.560200 | 199 | +40 °C & 100% voltage | compliant |
| 13.560189 | 188 | +50 °C & 100% voltage | compliant |
| 13.560204 | 201 | +80 °C & 100% voltage | not required |

Result: Voltage variation

| Frequency tolerance | | | |
|--------------------------|----------------------|-----------------------|-----------|
| Measured frequency (MHz) | Frequency error (Hz) | Conditions | Result |
| 13.560295 | 292 | +20 °C & 85% voltage | compliant |
| 13.560290 | 290 | +20 °C & 100% voltage | compliant |
| 13.560288 | 287 | +20 °C & 115% voltage | compliant |

12 Observations

No observations except those reported with the single test cases have been made.

Annex A Glossary

| | |
|------------------------|----------------------------------------------------|
| EUT | Equipment under test |
| DUT | Device under test |
| UUT | Unit under test |
| GUE | GNSS User Equipment |
| ETSI | European Telecommunications Standards Institute |
| EN | European Standard |
| FCC | Federal Communications Commission |
| FCC ID | Company Identifier at FCC |
| IC | Industry Canada |
| PMN | Product marketing name |
| HMN | Host marketing name |
| HVIN | Hardware version identification number |
| FVIN | Firmware version identification number |
| EMC | Electromagnetic Compatibility |
| HW | Hardware |
| SW | Software |
| Inv. No. | Inventory number |
| S/N or SN | Serial number |
| C | Compliant |
| NC | Not compliant |
| NA | Not applicable |
| NP | Not performed |
| PP | Positive peak |
| QP | Quasi peak |
| AVG | Average |
| OC | Operating channel |
| OCW | Operating channel bandwidth |
| OBW | Occupied bandwidth |
| OOB | Out of band |
| DFS | Dynamic frequency selection |
| CAC | Channel availability check |
| OP | Occupancy period |
| NOP | Non occupancy period |
| DC | Duty cycle |
| PER | Packet error rate |
| CW | Clean wave |
| MC | Modulated carrier |
| WLAN | Wireless local area network |
| RLAN | Radio local area network |
| DSSS | Dynamic sequence spread spectrum |
| OFDM | Orthogonal frequency division multiplexing |
| FHSS | Frequency hopping spread spectrum |
| GNSS | Global Navigation Satellite System |
| C/N₀ | Carrier to noise-density ratio, expressed in dB-Hz |

Annex B Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| -/- | Initial release | 2017-11-09 |

Annex C Accreditation Certificate

| first page | last page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Beliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV Unterzeichnerin der Multilateralen Abkommen von EA, ILAC und IAF zur gegenseitigen Anerkennung</p> <p>Akkreditierung </p> <p>Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:</p> <p>Funk Mobile Funk (GSM / DCS) + OTA Elektromagnetische Verträglichkeit (EMV) Produktsicherheit SAR / EMF Umwelt Smart Card Technology Bluetooth® Automotive Wi-Fi-Services Kanadische Anforderungen US-Anforderungen Akustik Near Field Communication (NFC)</p> <p>Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 25.11.2016 mit der Akkreditierungsnr. D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.</p> <p>Registrierungsnummer der Urkunde: D-PL-12076-01-01</p> <p>Frankfurt, 25.11.2016 Im Auftrag Dipl.-Ing. (FH) Kalf Egner Abteilungsleiter</p> <p>Seite hinzuende auf der Rückseite</p>  | <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Standort Berlin Spittelmarkt 10 10117 Berlin</p> <p>Standort Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Standort Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblatts durch die umsetzung genannte Konformitätsbewertungsstelle in unveränderter Form.</p> <p>Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.</p> <p>Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30).</p> <p>Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.</p> <p>Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p> |

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<http://www.dakks.de/as/ast/d/D-PL-12076-01-03.pdf>