Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client

Sporton-SZ (Auden)

Certificate No: EX3-3819_Nov15

CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3819

Calibration procedure(s)

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date:

November 27, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 01-Apr-15 (No. 217-02128) | Mar-16 |
| Power sensor E4412A | MY41498087 | 01-Apr-15 (No. 217-02128) | Mar-16 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 01-Apr-15 (No. 217-02129) | Mar-16 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 01-Apr-15 (No. 217-02132) | Mar-16 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 01-Apr-15 (No. 217-02133) | Mar-16 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-14 (No. ES3-3013_Dec14) | Dec-15 |
| DAE4 | SN: 660 | 14-Jan-15 (No. DAE4-660_Jan15) | Jan-16 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Name Function Signature
Calibrated by: Claudio Leubler Laboratory Technician

Approved by: Katja Pokovic Technical Manager

Issued: November 27, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL NORMx,y,z ConvF DCP tissue simulating liquid sensitivity in free space sensitivity in TSL / NORMx,y,z diode compression point

CF A. B, C, D crest factor (1/duty_cycle) of the RF signal modulation dependent linearization parameters

Polarization o

φ rotation around probe axis

Polarization 9

9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle

information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices
used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
 NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).

 NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.

DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.

 PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics

 Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.

 ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.

 Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.

 Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

 Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Probe EX3DV4

SN:3819

Manufactured: Calibrated:

September 2, 2011 November 27, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3819

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--------------------------|----------|----------|----------|-----------|
| Norm $(\mu V/(V/m)^2)^A$ | 0.47 | 0.41 | 0.47 | ± 10.1 % |
| DCP (mV) ^B | 102.2 | 99.5 | 104.2 | |

Modulation Calibration Parameters

| UID | Communication System Name | | Α | В | С | D | VR | Unc ^E |
|-----|---------------------------|---|-----|-------|-----|------|-------|------------------|
| | | | dB | dB√μV | | dB | mV | (k=2) |
| 0 | CW | Х | 0.0 | 0.0 | 1.0 | 0.00 | 175.0 | ±3.3 % |
| | | Υ | 0.0 | 0.0 | 1.0 | | 171.6 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 156.0 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[^] The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

November 27, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3819

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|---------------------------------------|----------------------|---------|---------|---------|--------------------|----------------------------|--------------|
| 750 | 41.9 | 0.89 | 9.91 | 9.91 | 9.91 | 0.44 | 0.87 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.41 | 9.41 | 9.41 | 0.18 | 1.77 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.23 | 9.23 | 9.23 | 0.23 | 1.46 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.12 | 8.12 | 8.12 | 0.36 | 0.84 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 7.79 | 7.79 | 7.79 | 0.44 | 0.80 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 7.75 | 7.75 | 7.75 | 0.34 | 0.80 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 6.93 | 6.93 | 6.93 | 0.29 | 1.04 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 6.82 | 6.82 | 6.82 | 0.30 | 1.07 | ± 12.0 % |
| 5250 | 35.9 | 4.71 | 4.99 | 4.99 | 4.99 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.28 | 4.28 | 4.28 | 0.50 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 4.40 | 4.40 | 4.40 | 0.50 | 1.80 | ± 13.1 % |

 $^{^{\}rm C}$ Frequency validity above 300 MHz of \pm 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to \pm 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is \pm 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to \pm 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to \pm 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to \pm 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3819

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|---------------------------------------|----------------------|---------|---------|---------|--------------------|----------------------------|--------------|
| A Francisco F | | 44,54 | | | 1 1 1 1 | | | |
| 750 | 55.5 | 0.96 | 9.69 | 9.69 | 9.69 | 0.20 | 1.46 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.47 | 9.47 | 9.47 | 0.23 | 1.27 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 7.71 | 7.71 | 7.71 | 0.38 | 0.88 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.39 | 7.39 | 7.39 | 0.39 | 0.88 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.08 | 7.08 | 7.08 | 0.43 | 0.80 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 6.79 | 6.79 | 6.79 | 0.31 | 0.98 | ± 12.0 % |
| 5250 | 48.9 | 5.36 | 4.20 | 4.20 | 4.20 | 0.50 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 3.67 | 3.67 | 3.67 | 0.60 | 1.90 | ± 13.1 % |
| 5750 | 48.3 | 5.94 | 3.73 | 3.73 | 3.73 | 0.60 | 1.90 | ± 13.1 % |

^C Frequency validity above 300 MHz of \pm 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to \pm 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is \pm 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to \pm 110 MHz.


F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to \pm 10% if liquid compensation formula is applied to

^F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to \pm 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to \pm 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Galpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

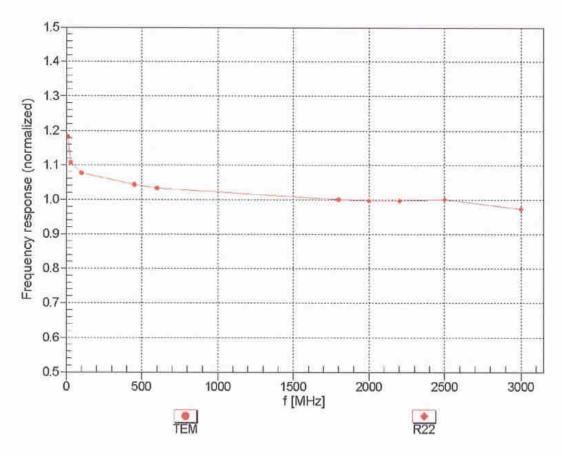



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

f=600 MHz,TEM

f=1800 MHz,R22







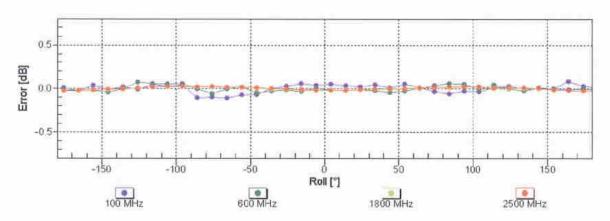

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

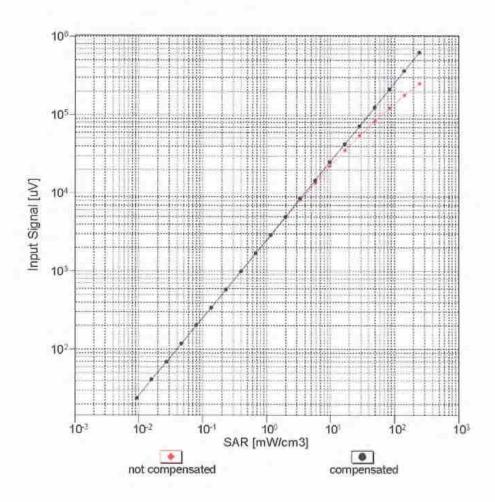

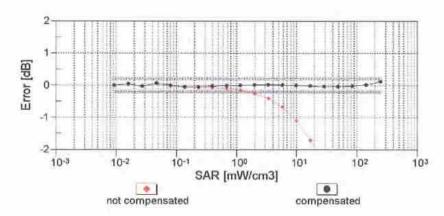



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

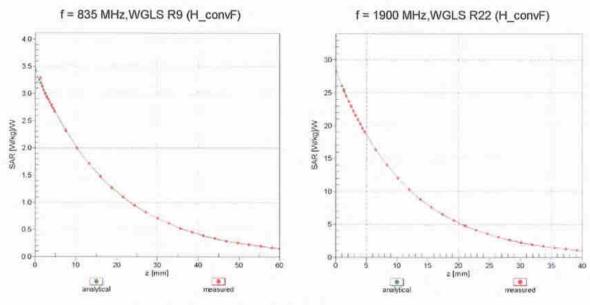

Deviation from Isotropy in Liquid Error (φ, θ), f = 900 MHz

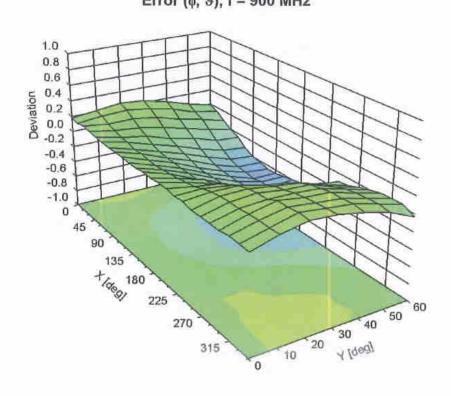



DASY/EASY - Parameters of Probe: EX3DV4 - SN:3819

Other Probe Parameters

| Sensor Arrangement | | | | Triangular |
|---|------------|--------------|---------|------------|
| Connector Angle (°) | | | | 114.1 |
| Mechanical Surface Detection Mode | | | | enabled |
| Optical Surface Detection Mode | | | | disabled |
| Probe Overall Length | | | | 337 mm |
| Probe Body Diameter | * - | | 1 1 1 1 | 10 mm |
| Tip Length | | | | 9 mm |
| Tip Diameter | | 7- 1 | | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | | | | 1 mm |
| Probe Tip to Sensor Y Calibration Point | | | | 1 mm |
| Probe Tip to Sensor Z Calibration Point | | | | 1 mm |
| Recommended Measurement Distance from | om Surface | | | 1.4 mm |

Appendix E. Photographs of EUT

Please refer to Sporton report number EP312203-05 which is issued separately.

SPORTON INTERNATIONAL (SHENZHEN) INC.TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Page E1 of E1

FCC ID: WS5DORO626

Issued Date : Nov. 03, 2016 Form version. : 160427

Report No. : FA312203-05

Appendix F. Product Equality Declaration

Report No. : FA312203-05

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

CK TELECOM LTD.

Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China. Tel: +86-755-26739100; Fax: +86-755-26739500

Date: November 3, 2016

Product Equality Declaration

We, CK TELECOM LTD., declare on our sole responsibility for the product of Doro PhoneEasy 626 HC 1031 as below:

- 1. Add two USB cable "HYD-CK-0851" and "HT-SJX-16042501"
- 2. Add adapter"A8-501000"
- 3. Change Speaker, USB connector, Speaker audio PA IC
- 4. Change the MIC to: SOM4013SL-G422-RC-HF
- **5.** Change the SIM connector to: SM012-15112A6C
- **6.** Change the CAMERA to: VFGC0982-A1
- 7. Change the LCD to: QFG12832-111-PFDNN-R/ SBT240-040
- **8.** Change SW from SHUTTLE-S13A_DORO626_L3EN_111_140224 to SHUTTLE-S13A_DORO626_L3EN_307_160913

Except listings above, the others are all the same as previous version.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,

lixin

Contact Person: Xin Li

Applicant: CK TELECOM LTD.

Tel: +86-755-26739100 Fax: +86-755-26739500

E-Mail: xin.li@ck-telecom.com