



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

---

## FCC PART 90 AND IC RSS-119, RSS-GEN TEST REPORT

APPLICANT	TELTRONIC, S.A.U Polígono Malpica Calle F Parceia 12 ZARAGOZA 50057 Spain
FCC ID	WT7PTRNKTBSR75800
IC CERTIFICATION	IC: 8624A-PTRKT800
MODEL NUMBER	BSR75 806-870 MHz
PRODUCT DESCRIPTION	UHF RADIO
DATE SAMPLE RECEIVED	7/17/2009
DATE TESTED	7/27/2009
TESTED BY	Nam Nguyen
APPROVED BY	Mario de Aranzeta
TIMCO REPORT NO.	1631AUT9TestReport.pdf
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01



## TABLE OF CONTENTS

ATTESTATIONS .....	3
TEST ENVIRONMENT AND TEST SETUP .....	4
EMC EQUIPMENT LIST .....	5
TEST PROCEDURES .....	6
RF POWER OUTPUT .....	9
MODULATION CHARACTERISTICS .....	10
AUDIO FREQUENCY RESPONSE .....	11
OCCUPIED BANDWIDTH .....	12
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) .....	14
FIELD STRENGTH OF SPURIOUS EMISSIONS .....	15
RECEIVER RADIATED SPURIOUS EMISSIONS .....	17
FREQUENCY STABILITY .....	19



## ATTESTATIONS

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

### Authorized Signatory Name:

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date:** August 5, 2009

**DUT SPECIFICATION**

DUT Description	UHF RADIO
FCC ID	WT7 PTRNKTBSR75800
IC Certification	IC: 8624A-PTRKT800
Model Number	BSR75 806-875 MHz
Serial Number	N/A
Operating Frequency	851.1 – 868.9 MHz
Test Frequencies	(851.10 – 860.00 – 868.90) MHz
Type of Emission	Digital
Modulation	$\pi/4$ -DQPSK
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input checked="" type="checkbox"/> DC Power 24V
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable

**TEST ENVIRONMENT AND TEST SETUP**

Test Facility	All tests were conducted by Timco Engineering Inc. located at 849 NW State Road 45, Newberry, FL 32669 USA
Laboratory Test Condition	Temperature: 26°C Relative humidity: 50%.
Deviation from the standards	No deviation
Modification to the DUT	No modification was made.
Test Exercise (software etc.)	The DUT was placed in continuous transmitting mode of operation.
System Setup	Stand alone device.

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 4 of 19

**EMC EQUIPMENT LIST**

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/07	12/7/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 12/7/07	12/7/09
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 12/8/07	12/8/09
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 12/8/07	12/8/09
Antenna: Biconical	Electro-Metrics	BIA-25	1171	CAL 4/29/09	4/29/11
Antenna: Double-Ridged Horn	Electro-Metrics	RGA-180	2319	CAL 12/29/08	12/29/10
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 7/16/09	7/16/11

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 5 of 19


## TEST PROCEDURES

### Power Line Conducted Interference

The procedure used was ANSI 63.4-2003 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.


### RF Power Output

The RF power output was measured at the antenna feed point using a peak power meter. A 50-ohm, resistive wattmeter was connected to the RF output connector. With a nominal battery voltage or supply voltage, and the transmitter properly adjusted the RF output measures:

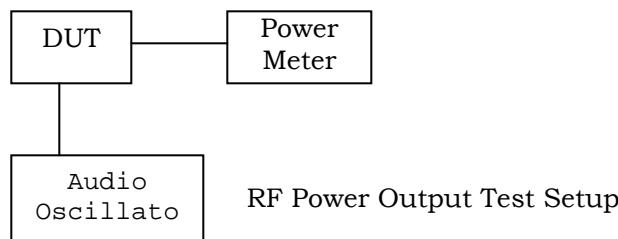

### Spurious Emissions at Antenna Terminals (Conducted)

The carrier was modulated 100%. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz. The measurements were made in accordance with standard ANSI/TIA-603-C: 2004

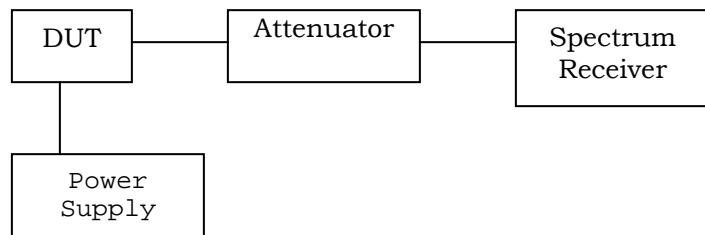

### Radiation Interference

The test procedure used was ANSI/TIA-603-C: 2004 and ANSI C63.4-2003 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

## Modulation Characteristic

### Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

### Audio Low Pass Filter

The audio low pass filter for voice-modulated equipment was measured in accordance with ANSI/TIA 603-C: 2004. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

### Audio Input versus modulation


The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

## Frequency Stability

The frequency stability was measured per ANSI/TIA 603-C: 2004.

## Field Strength of Spurious Emissions

The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method.

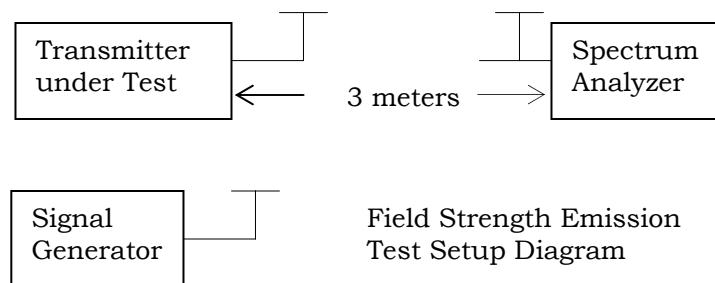


## Transient Frequency Behavior

The test procedure was ANSI/TIA 603-C: 2004 Para 2.2.19.

- Using the variable attenuator. The transmitter level was set to 40 dB below the test receivers maximum input level,
- Then the transmitter was turned off.
- With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
- Reduce the attenuation between the transmitter and the RF detector by 30 dB.
- With the levels set as above the transient frequency behavior was observed & recorded.

Transient Frequency Response Test setup

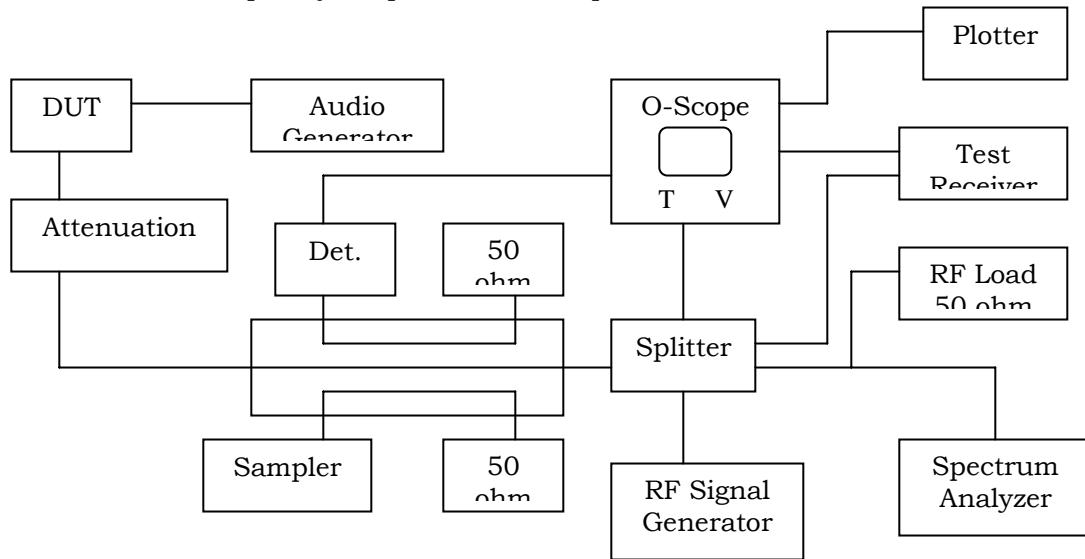



## RF POWER OUTPUT

**Rule Part No.:** FCC Part 2.1046(a), IC RSS-119 4.1 and 5.4, RSS-GEN 4.8

**Test Requirements:** FCC Part 2.1046(a), IC RSS-119 4.1 and 5.4, RSS-GEN 4.8

### Test Data:

OUTPUT POWER: HIGH – 75.0 Watts

### Part 2.1033 (C)(8) DC Input into the final amplifier

FOR POWER SETTING INPUT POWER: (24V)(15.0A) = 360.0 Watts



## MODULATION CHARACTERISTICS

**Rule Parts No.:** Pt 2.1033(c)(4), Pt 90.209, IC RSS-119 5.5, Pt 90.207

**Requirements:** Pt 2.1033(c)(4), Pt 90.209, IC RSS-119 5.5, Pt 90.207

### Test Data:

Type of Emission: 20K0D7W, 20K0D7E, and 20K0D7D

$$\begin{aligned}B_n &= 2M + 2DK \\M &= B/2 = 19200/2 \\D &= 400 \\K &= 1 \\B_n &= 2(19200) + 2(400) = 20k\end{aligned}$$

### Audio Input Versus Modulation Plot

N/A

### Audio Frequency Response Plot


N/A

## AUDIO FREQUENCY RESPONSE

**Rule Part No.:** Pt 2.1047(a)(b)

**Test Requirements:** Pt 2.1047(a)(b)

**Test Data:**

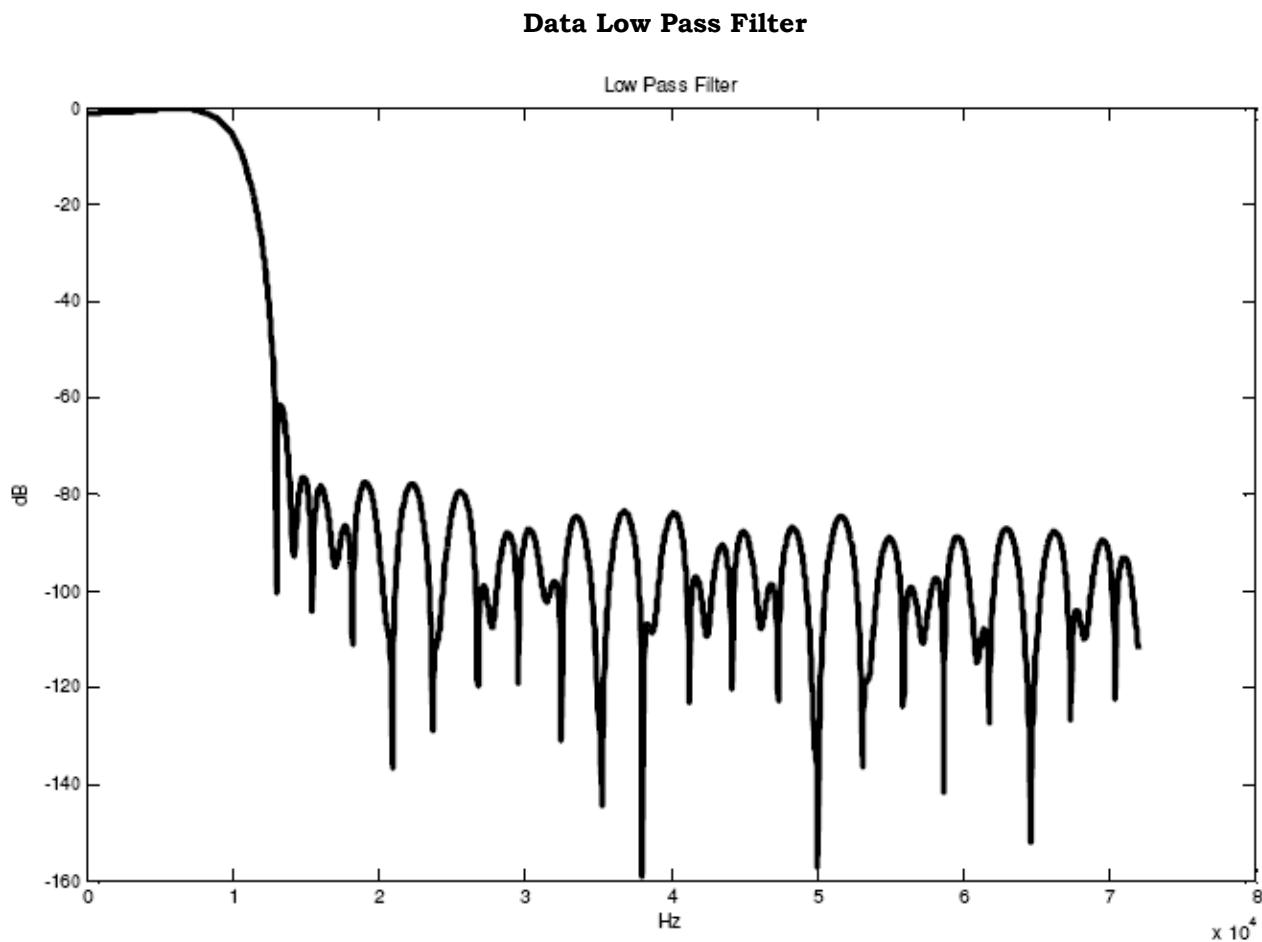

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 11 of 19

## OCCUPIED BANDWIDTH

**Rule Part No.:** Pt 2.1049(c), RSS-GEN 4.6, ANSI/TIA-603-C: 2004 para 2.2.11.

### Requirements:

#### FCC Part 90.210(b) RSS-119 4.2 25kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least  $43 + 10\log(P)$  dB.

#### Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10 kHz: At least  $83 \log(fd/5)$  dB; (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least  $29 \log(fd/2/11)$  dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least  $43 + 10 \log(Po)$  dB.

#### Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27 \log(fd - 2.88)$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least  $50 + 10\log(P)$  dB or 70 dB, whichever is the lesser attenuation.

#### Part 90.210(e) Emission Mask E – 6.25 kHz channel BW equipment

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67 \log(fd - 3.0)$  dB or  $55 + 10 \log(P)$  or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10\log(P)$  dB or 65 dB, whichever is the lesser attenuation.

**Test Data:** See the plots below

**NOTES:**

TELTRONIC, S.A.U - FCC ID: WTPTRUNK25RF806  
OCCUPIED BANDWIDTH PLOT


**FCC 90.210 Mask B**

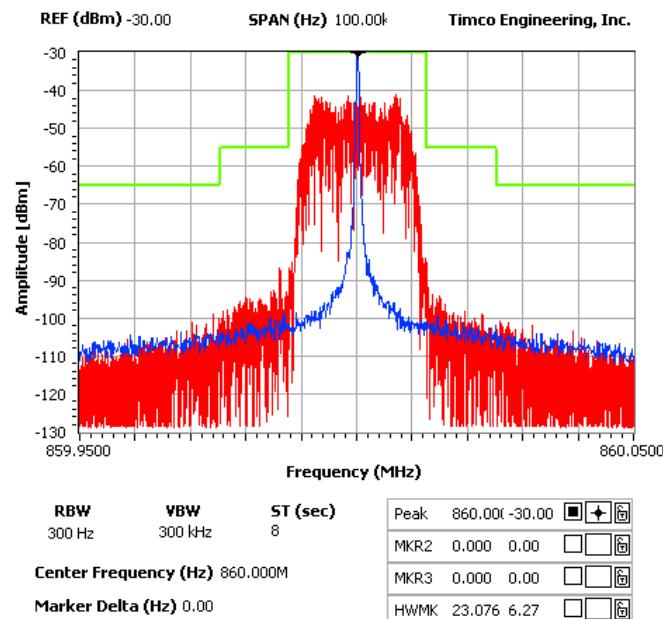

**NOTES:**

TELTRONIC, S.A.U - FCC ID: WTPTRUNK25RF806  
OCCUPIED BANDWIDTH PLOT

RSS 119 MASK C

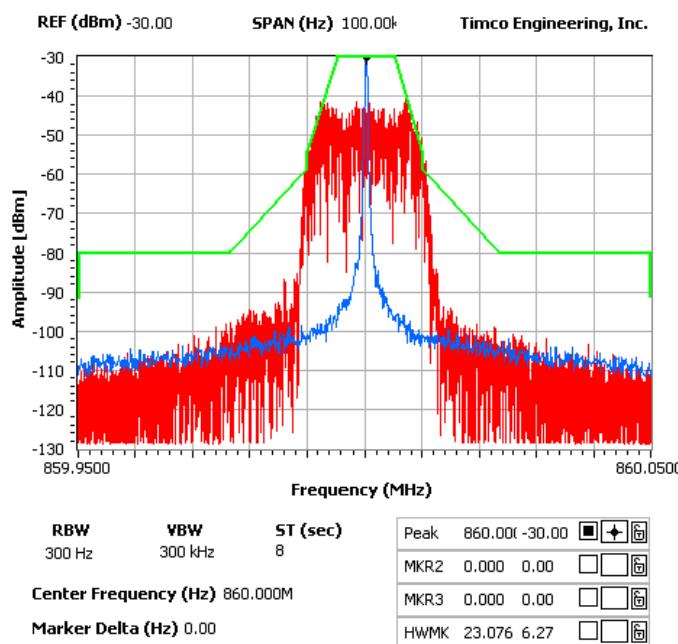

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 13 of 19

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

**Rule Part No.:** FCC Part 2.1051(a), RSS-GEN 7.1.4

**Requirements:** 25kHz Channel Spacing  
 $43 + 10\log(p) = 43 + 10\log(75.0) = 61.75 \text{ dBc}$

**Test Data:**

TF	EF	dB below carrier
851.10	1702.20	81.9
	2553.30	88.8
	3404.40	84.1
	4255.50	89.9
	5106.60	89.3
	5957.70	NE
	6808.80	NE
	7659.90	NE
	8511.00	NE

TF	EF	dB below carrier
860.00	1720.00	84.72
	2580.00	89.92
	3440.00	89.24
	4300.00	90.29
	5160.00	89.49
	6020.00	NE
	6880.00	NE
	7740.00	NE
	8600.00	NE

TF	EF	dB below carrier
868.90	1737.80	84.9
	2606.70	116.7
	3475.60	89.4
	4344.50	89.1
	5213.40	88.5
	6082.30	NE
	6951.20	NE
	7820.10	NE
	8689.00	NE

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 14 of 19

## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rule Parts. No.:** FCC Part 2.1053, RSS-GEN 4.9

**Requirements:** 25kHz Channel Spacing:  
 $43 + 10\log(p) = 43 + 10\log(75.0) = 61.75 \text{ dBc}$

**Test Data:**

TF	EF	Ant Polarity V/H	dB below carrier
851.10	1702.20	V	85.06
	2553.30	V	81.89
	3404.40	H	77.83
	4255.50	H	86.11
	5106.60	V	89.34
	5957.70	V	82.97
	6808.80	V	90.68
	7659.90	H	92.31
	8511.00	H	95.23

TF	EF	Ant Polarity V/H	dB below carrier
860.00	1720.00	V	86.25
	2580.00	V	78.27
	3440.00	H	71.41
	4300.00	V	91.74
	5160.00	H	88.37
	6020.00	V	86.12
	6880.00	V	96.92
	7740.00	V	89.97
	8600.00	H	96.15

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 15 of 19

TF	EF	Ant Polarity V/H	dB below carrier
868.90	1737.80	V	85.95
	2606.70	V	80.05
	3475.60	H	80.29
	4344.50	V	91.87
	5213.40	V	82.81
	6082.30	V	89.08
	6951.20	V	96.86
	7820.10	H	91.44
	8689.00	V	95.96

**RECEIVER RADIATED SPURIOUS EMISSIONS**
**Rule Parts. No.:** FCC Part 15.109, RSS-GEN 4.10, 6

<b>Requirements:</b>	30-88 MHz	40.0 dB $\mu$ V/m measured at 3 meters
	88-216 MHz	43.5 dB $\mu$ V/m
	216-960 MHz	46.0 dB $\mu$ V/m
	ABOVE 960 MHz	54.0 dB $\mu$ V/m

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Margin dB
851.1	220	15.8	V	0.94	11.2	27.94	18.06
851.1	220	20.5	H	0.94	11.5	32.94	13.06
851.1	250	20.9	H	1	12.5	34.4	11.6
851.1	432	17	V	1.23	16.14	34.37	11.63
851.1	453.6	14.2	V	1.25	16.71	32.16	13.84
851.1	664	14.7	H	1.66	20.46	36.82	9.18
851.1	665.2	10.6	V	1.67	20.36	32.63	13.37
851.1	732	14.6	H	1.76	21.3	37.66	8.34
851.1	733	11.8	V	1.77	20.73	34.3	11.7
851.1	816	13.9	V	1.91	21.22	37.03	8.97
851.1	816	15.8	H	1.91	21.82	39.53	6.47
851.1	861.6	12.4	V	1.93	22.4	36.73	9.27
851.1	861.6	13.4	H	1.93	22.83	38.16	7.84
851.1	967.4	10.6	V	2.05	22.8	35.45	10.55
851.1	967.4	11.2	H	2.05	23.67	36.92	9.08
851.1	806.1	4.8	H	1.9	21.66	28.36	17.64
851.1	806.1	5.4	V	1.9	21.06	28.36	17.64
851.1	1,612.20	7.4	V	2.59	28.72	38.71	15.29
851.1	1,612.20	8	H	2.59	28.72	39.31	14.69
851.1	2,418.30	6	V	3.19	32.29	41.48	12.52
851.1	2,418.30	6.7	H	3.19	32.29	42.18	11.82

[Continued]

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 17 of 19



Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Margin dB
860	815	3.5	H	1.91	21.8	27.21	18.79
860	815	4.6	V	1.91	21.2	27.71	18.29
860	1,630.00	7.9	V	2.6	28.83	39.33	14.67
860	1,630.00	8.6	H	2.6	28.83	40.03	13.97
860	2,445.00	6.4	V	3.21	32.36	41.97	12.03
860	2,445.00	7.1	H	3.21	32.36	42.67	11.33
868.9	823.9	3.8	H	1.91	21.98	27.69	18.31
868.9	823.9	4.8	V	1.91	21.34	28.05	17.95
868.9	1,647.80	7.3	V	2.62	28.95	38.87	15.13
868.9	1,647.80	7.6	H	2.62	28.95	39.17	14.83
868.9	2,471.70	6.5	V	3.23	32.43	42.16	11.84
868.9	2,471.70	7.1	H	3.23	32.43	42.76	11.24

Applicant: TELTRONIC, S.A.U

FCC ID: WT7PTRNKTBSR75800, IC: 8624A-PTRKT800

Report: T\TELTRONIC S.A.U\1631AUT9\1631AUT9TestReport.doc Page 18 of 19

## FREQUENCY STABILITY

**Rule Parts. No.:** FCC Part 2.1055, Part 90.213, RSS-119 5.3, RSS-GEN 7.2.4

**Requirements:** Temperature range requirements: -30 to +50° C.  
 Voltage Variation +, -15%  
 ±1.5 PPM

### Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		860.000114
Temperature (°C)	Frequency (MHz)	Frequency Stability (PPM)
-30	860.000086	-0.03
-20	860.000091	-0.03
-10	860.000094	-0.02
0	860.000098	-0.02
+10	860.000101	-0.02
+20	860.000147	0.04
+30	860.000097	-0.02
+40	860.000093	-0.02
+50	860.000092	-0.03

Assigned Frequency (Ref. Frequency) (MHz)		
% Battery (%)	Frequency (MHz)	Frequency Stability (PPM)
-15%	860.000095	-0.02
	860.000114	0
+15%	860.000126	0.01