



A D T

FCC TEST REPORT

REPORT NO.: RF971013H05

MODEL NO.: BikerCom-CB

RECEIVED: Oct. 13, 2008

TESTED: Oct. 28 to Nov. 14, 2008

ISSUED: Aug. 21, 2009

APPLICANT: Open Road Solutions, Inc.

ADDRESS: No. 88-13, Shueili Rd, Hsinchu City 30059,
Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB LOCATION: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307,
Taiwan, R.O.C.

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	8
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5	DESCRIPTION OF SUPPORT UNITS.....	12
3.6	CONFIGURATION OF SYSTEM UNDER TEST.....	13
4	TEST PROCEDURES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	15
4.1.2	TEST INSTRUMENTS.....	15
4.1.3	TEST PROCEDURES	16
4.1.4	TEST SETUP	16
4.1.5	EUT OPERATING CONDITIONS.....	17
4.1.6	TEST RESULTS (MODE 1)	18
4.1.7	TEST RESULTS (MODE 2)	20
4.2	NUMBER OF HOPPING FREQUENCY USED	22
4.2.1	LIMIT OF HOPPING FREQUENCY USED.....	22
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	TEST RESULTS	23
4.3	DWELL TIME ON EACH CHANNEL	25
4.3.1	LIMIT OF DWELL TIME USED	25
4.3.2	TEST INSTRUMENTS.....	25
4.3.3	TEST PROCEDURES	26
4.3.4	DEVIATION FROM TEST STANDARD	26
4.3.5	TEST SETUP	26
4.3.6	TEST RESULTS	27
4.4	CHANNEL BANDWIDTH	31
4.4.1	TEST INSTRUMENTS.....	31
4.4.2	TEST PROCEDURE.....	32
4.4.3	DEVIATION FROM TEST STANDARD	32
4.4.4	TEST SETUP	32
4.4.5	EUT OPERATING CONDITION	32
4.4.6	TEST RESULTS	33
4.5	HOPPING CHANNEL SEPARATION	35
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION.....	35
4.5.2	TEST INSTRUMENTS.....	35
4.5.3	TEST PROCEDURES	36
4.5.4	DEVIATION FROM TEST STANDARD	36



A D T

4.5.5	TEST SETUP	36
4.5.6	TEST RESULTS	37
4.6	MAXIMUM PEAK OUTPUT POWER	39
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	39
4.6.2	INSTRUMENTS	39
4.6.3	TEST PROCEDURES	40
4.6.4	DEVIATION FROM TEST STANDARD	40
4.6.5	TEST SETUP	41
4.6.6	EUT OPERATING CONDITION	41
4.6.7	TEST RESULTS	42
4.7	RADIATED EMISSION MEASUREMENT	44
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	44
4.7.2	TEST INSTRUMENTS	45
4.7.3	TEST PROCEDURES	46
4.7.4	DEVIATION FROM TEST STANDARD	46
4.7.5	TEST SETUP	47
4.7.6	TEST RESULTS (MODE 1)	48
4.7.7	TEST RESULTS (MODE 2)	54
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT	56
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	56
4.8.2	TEST INSTRUMENTS	56
4.8.3	TEST PROCEDURE	56
4.8.4	DEVIATION FROM TEST STANDARD	56
4.8.5	EUT OPERATING CONDITION	56
4.8.6	TEST RESULTS	57
4.9	ANTENNA REQUIREMENT	59
4.9.1	STANDARD APPLICABLE	59
4.9.2	ANTENNA CONNECTED CONSTRUCTION	59
5	INFORMATION ON THE TESTING LABORATORIES	60
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	61



A D T

1 CERTIFICATION

PRODUCT : BIKERCOM
BRAND NAME : Open Road
MODEL NO. : BikerCom-CB
APPLICANT : Open Road Solutions, Inc.
TESTED DATE : Oct. 28 to Nov. 14, 2008
TEST SAMPLE : R&D SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: BikerCom-CB) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Claire Kuan* , **DATE:** *Aug 21, 2009*
(Claire Kuan, Specialist)

**TECHNICAL
ACCEPTANCE :** *Hank Chung* , **DATE:** *Aug 21, 2009*
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : *May Chen* , **DATE:** *Aug 21, 2009*
(May Chen, Deputy Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -22.12dB at 0.150MHz
15.247(a)(1) (I)-(ii)	Number of Hopping Frequency Used Spec.: At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1) (ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1) (I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Report reference
15.247(b)	Maximum Peak Output Power Spec.: max. 1W	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.60dB at 702.00MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz ~18GHz)	2.49 dB
Radiated emissions (18GHz ~20GHz)	2.48 dB



A D T

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	BIKERCOM
MODEL NO.	BikerCom-CB
FCC ID	WTU28658913744672
POWER SUPPLY	DC 12V from host equipment
MODULATION TYPE	GFSK
RADIO TECHNOLOGY	FHSS
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	1.377 mW
ANTENNA TYPE	Chip antenna without connector (Antenna Gain : 2dBi)
DATA CABLE	NA
I/O PORT	PTT port x 1 Radio port x 1 AUX1 port x 1 AUX2 port x 1 Audio port x 1
ASSOCIATED DEVICES	Bluetooth module x 4 (Brand: BluePacket, Model: MM310 Class 2)

NOTE:

1. The EUT have inside four Bluetooth transceiver at most and four groups can transmission at the simultaneously.
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

NOTE:

1. Below 1 GHz, the channel 0, 39, and 78 were pre-tested in chamber. The channel 0, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 0, 39, and 78 were tested individually.



A D T

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
Mode 1	√	√	√	√	Normal (*1)
Mode 2	√	√	√		Co-located(*2)

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

*1: The four RF modules are identical, the final mode was selected one from all of modules base on investigation.

*2: This product has different combination during simultaneously transmission; the worst case is four modules transmitting simultaneously base on investigation.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0	FHSS	GFSK

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
Mode 1	0 to 78	0	FHSS	GFSK
Mode 2	0 to 78	78	FHSS	GFSK

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
Mode 1	0 to 78	0, 39, 78	FHSS	GFSK
Mode 2	0 to 78	78	FHSS	GFSK



A D T

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0, 78	FHSS	GFSK

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0, 39, 78	FHSS	GFSK



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a BIKERCOM. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	iPod	Apple	A1137	5K7170JBUPR	FCC DoC
2	DC Power Supply	GOOD WILL INSTRUMENT CO., LTD.	GPC-3030D	7700087	NA
3	BIKERCOM	Open Road	BikerCom-HH	NA	NA
4	BIKERCOM	Open Road	BikerCom-HH	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1 m shielded cable, terminated with USB connector, w/o core.
2	NA
3	NA
4	NA

3.6 CONFIGURATION OF SYSTEM UNDER TEST


For conducted test:

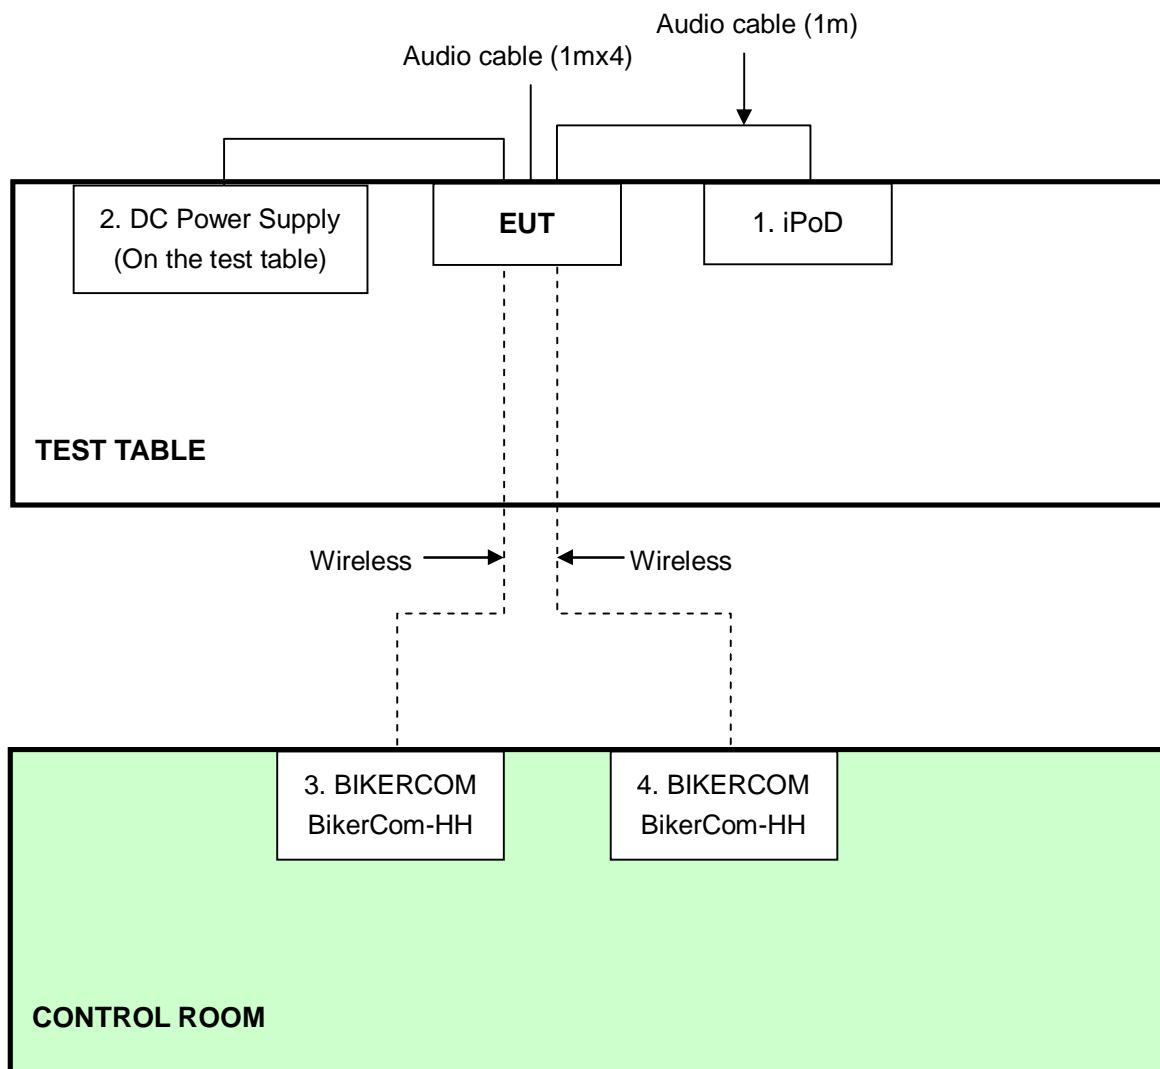



A D T

For other test mode:

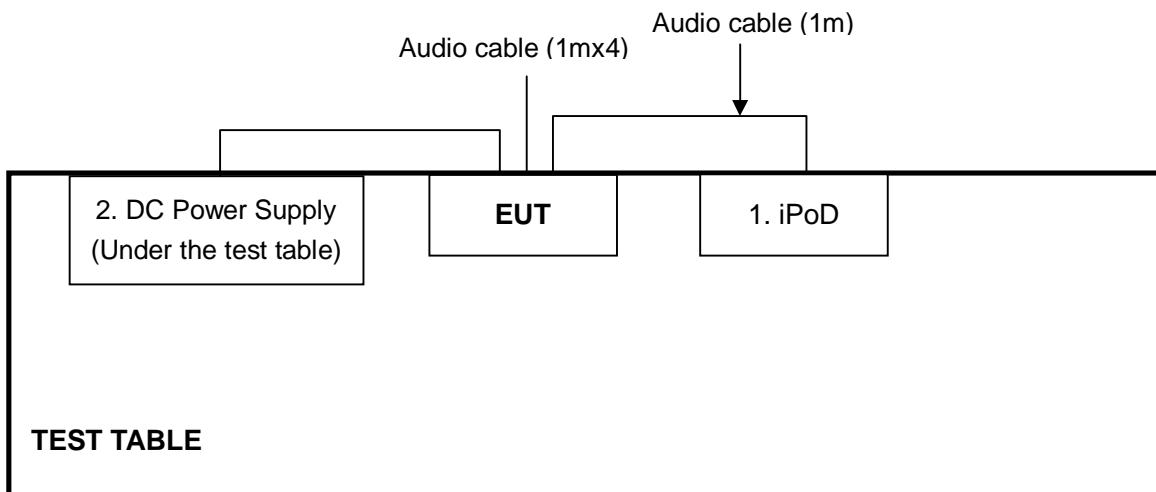



A D T

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Feb. 29, 2008	Feb. 28, 2009
Line-Impedance Stabilization Network (for EUT)	ENV-216	100071	Nov. 27, 2007	Nov. 26, 2008
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	July 24, 2008	July 23, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.6. exe	NA	NA	NA


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

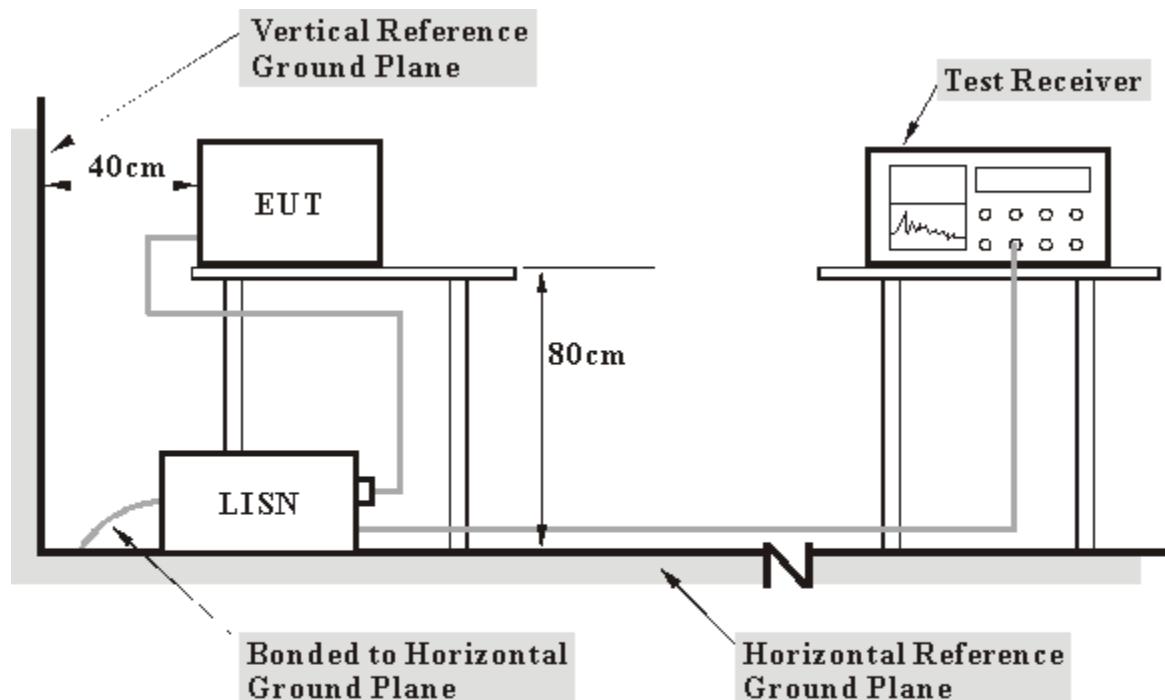

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.5 EUT OPERATING CONDITIONS

- a. Placed the EUT on testing table.
- b. Support unit 3 (BIKERCOM / BikerCom-HH) and support unit 4 (BIKERCOM / BikerCom-HH) communicated to each other via EUT.
- c. EUT reads and writes messages from Support unit 1 (iPod) and send audio messages on Support unit 3~4 (BIKERCOM / BikerCom -HH).



A D T

4.1.6 TEST RESULTS (MODE 1)

INPUT POWER	120Vac, 60 Hz	6DB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 69%RH, 970 hPa	PHASE	Line (L)
TESTED BY	Phoenix Huang		

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	9.67	33.17	-	42.84	-	66.00	56.00	-23.16	-
2	0.195	9.70	27.21	-	36.91	-	63.80	53.80	-26.90	-
3	1.246	9.68	21.15	-	30.83	-	56.00	46.00	-25.17	-
4	1.477	9.69	18.84	-	28.53	-	56.00	46.00	-27.47	-
5	13.574	9.89	13.17	-	23.06	-	60.00	50.00	-36.94	-
6	20.289	9.96	15.03	-	24.99	-	60.00	50.00	-35.01	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

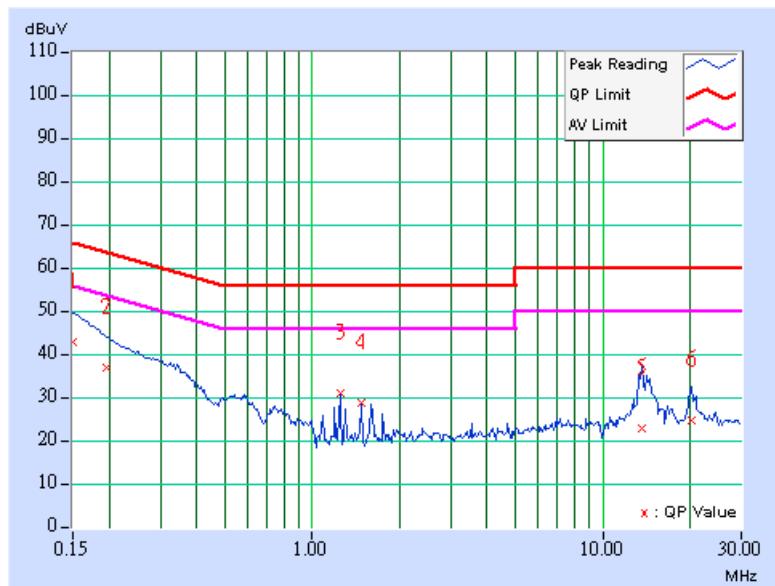


INPUT POWER	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 69%RH, 970 hPa	PHASE	Neutral (N)
TESTED BY	Phoenix Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	9.67	34.15	-	43.82	-	66.00	56.00	-22.18	-
2	0.243	9.75	28.82	-	38.57	-	62.01	52.01	-23.44	-
3	0.341	9.87	24.43	-	34.30	-	59.17	49.17	-24.87	-
4	0.486	9.90	13.96	-	23.86	-	56.24	46.24	-32.38	-
5	0.923	9.70	5.03	-	14.73	-	56.00	46.00	-41.27	-
6	13.645	9.94	19.34	-	29.28	-	60.00	50.00	-30.72	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

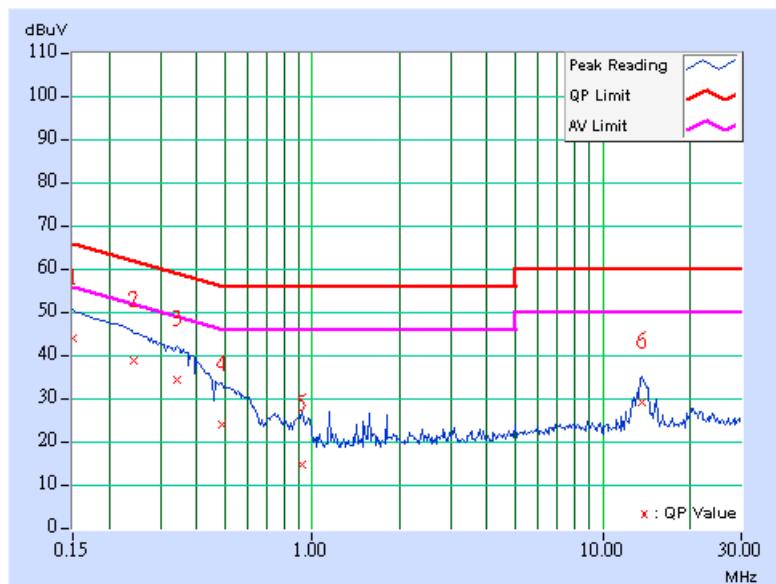


4.1.7 TEST RESULTS (MODE 2)

INPUT POWER	120Vac, 60 Hz	6DB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 69%RH, 970 hPa	PHASE	Line (L)
TESTED BY	Phoenix Huang		

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	9.67	33.32	-	42.99	-	65.98	55.98	-22.99	-
2	0.197	9.70	28.02	-	37.72	-	63.76	53.76	-26.04	-
3	1.246	9.68	21.75	-	31.43	-	56.00	46.00	-24.57	-
4	1.601	9.70	18.92	-	28.62	-	56.00	46.00	-27.38	-
5	13.574	9.89	15.27	-	25.16	-	60.00	50.00	-34.84	-
6	20.290	9.96	16.21	-	26.17	-	60.00	50.00	-33.83	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

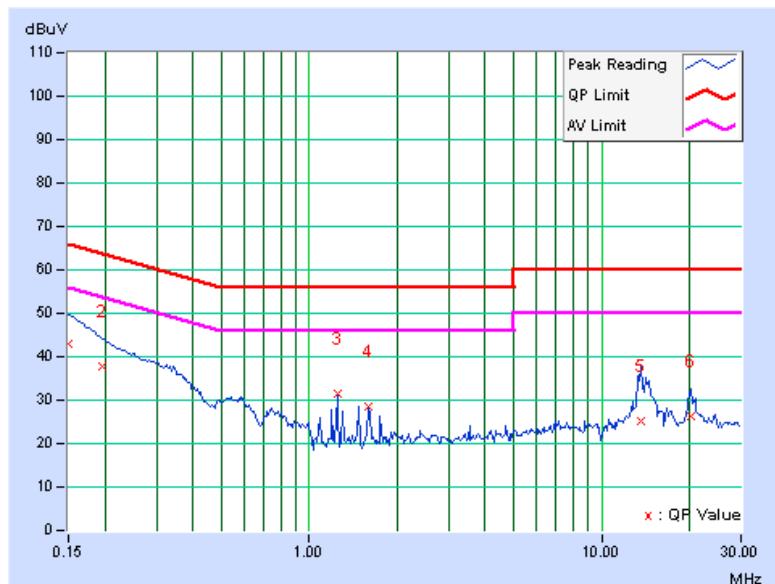


INPUT POWER	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 69%RH, 970 hPa	PHASE	Neutral (N)
TESTED BY	Phoenix Huang		

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.150	9.67	34.21	-	43.88	-	66.00	56.00	-22.12	-
2	0.242	9.75	28.94	-	38.69	-	62.01	52.01	-23.32	-
3	0.342	9.87	24.71	-	34.58	-	59.15	49.15	-24.57	-
4	0.486	9.90	14.12	-	24.02	-	56.24	46.24	-32.21	-
5	1.152	9.68	14.21	-	23.89	-	56.00	46.00	-32.11	-
6	13.644	9.94	19.96	-	29.90	-	60.00	50.00	-30.10	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

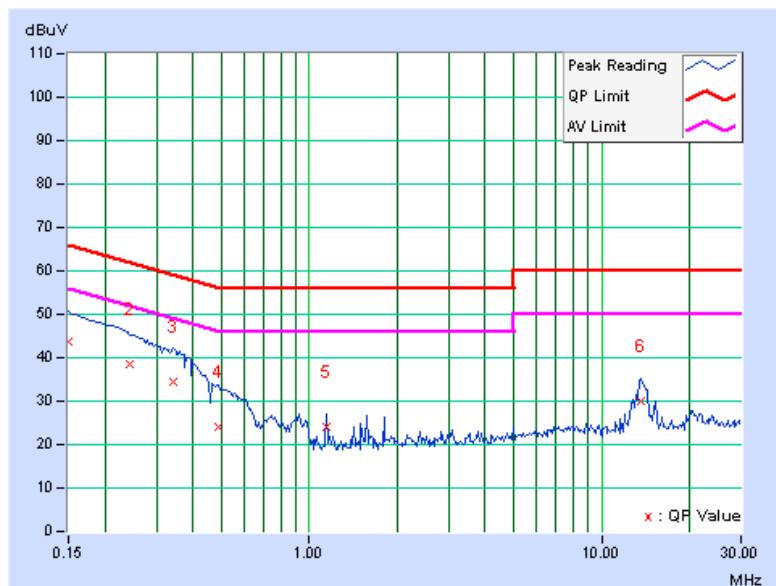



4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.


4.2.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.2.5 TEST SETUP


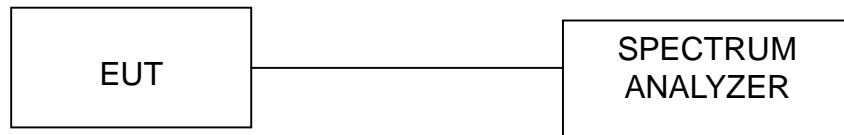


4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T

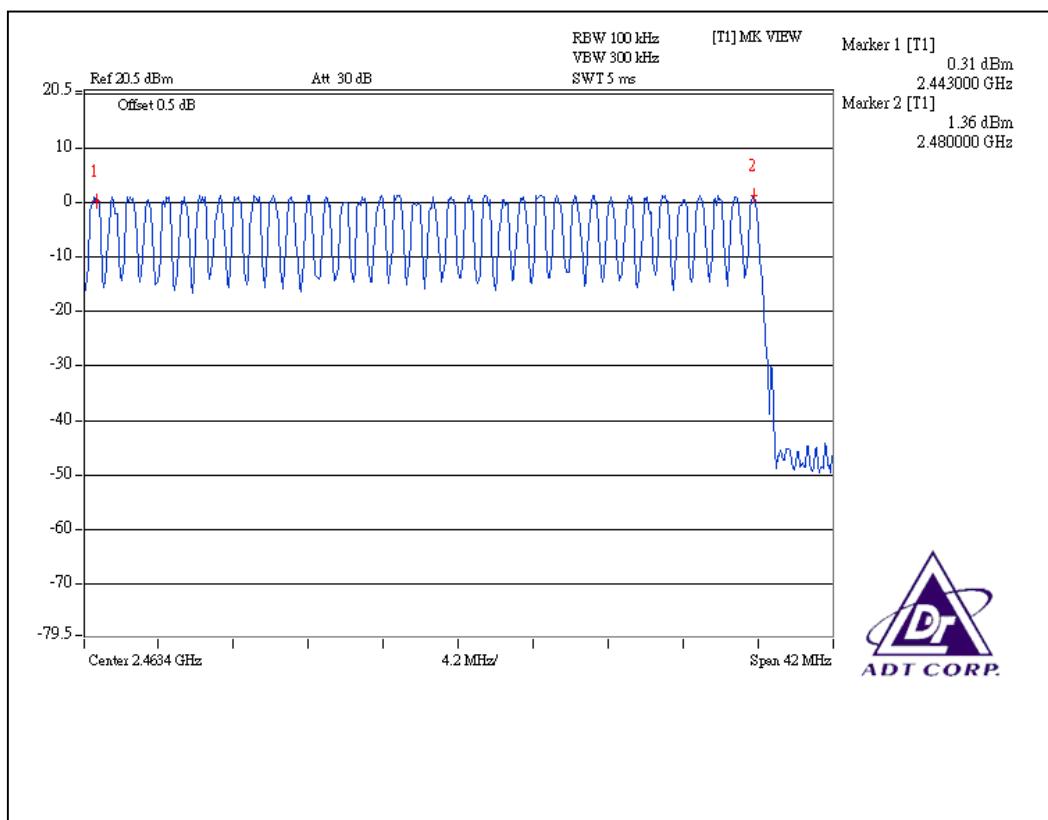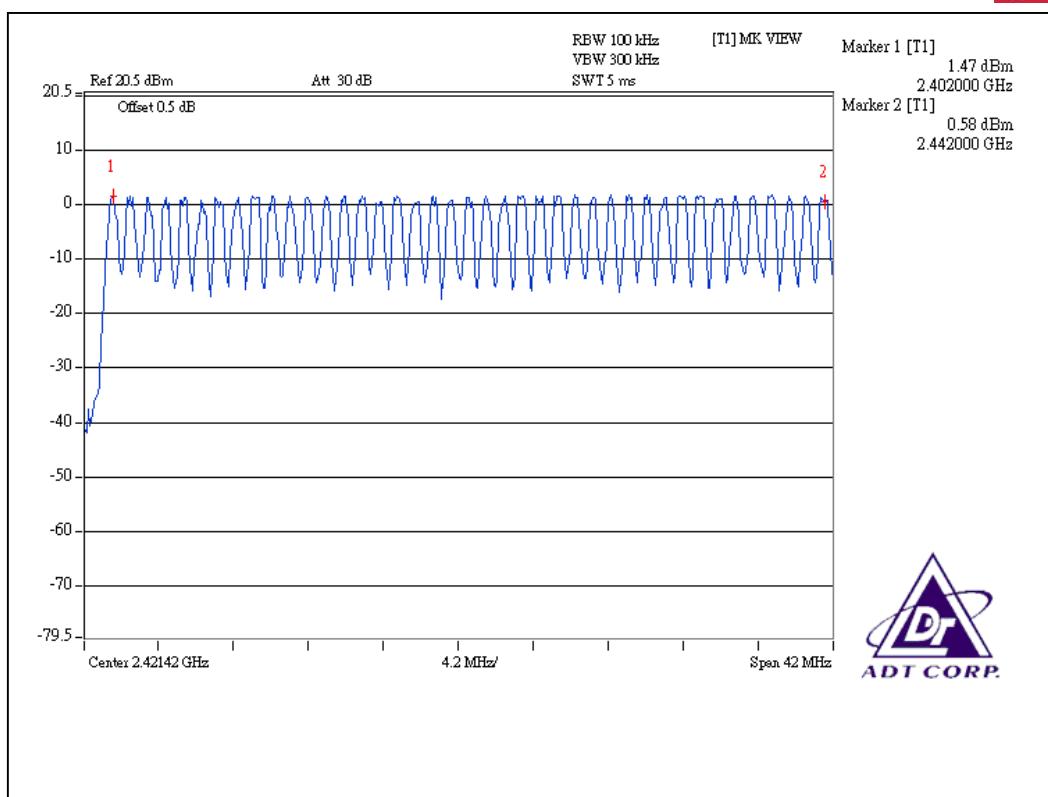



4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



A D T


4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

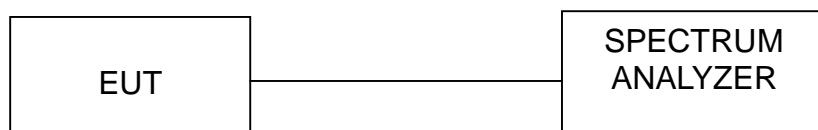



4.3.6 TEST RESULTS



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.00516	0.1631	400
DH3	25 (times / 5 sec) *6.32=158.00 times	0.01752	0.2768	400
DH5	16 (times / 5 sec) *6.32=101.12 times	0.00303	0.3064	400

Test plots of the transmitting time slot are shown on next three pages.



A D T



DH1

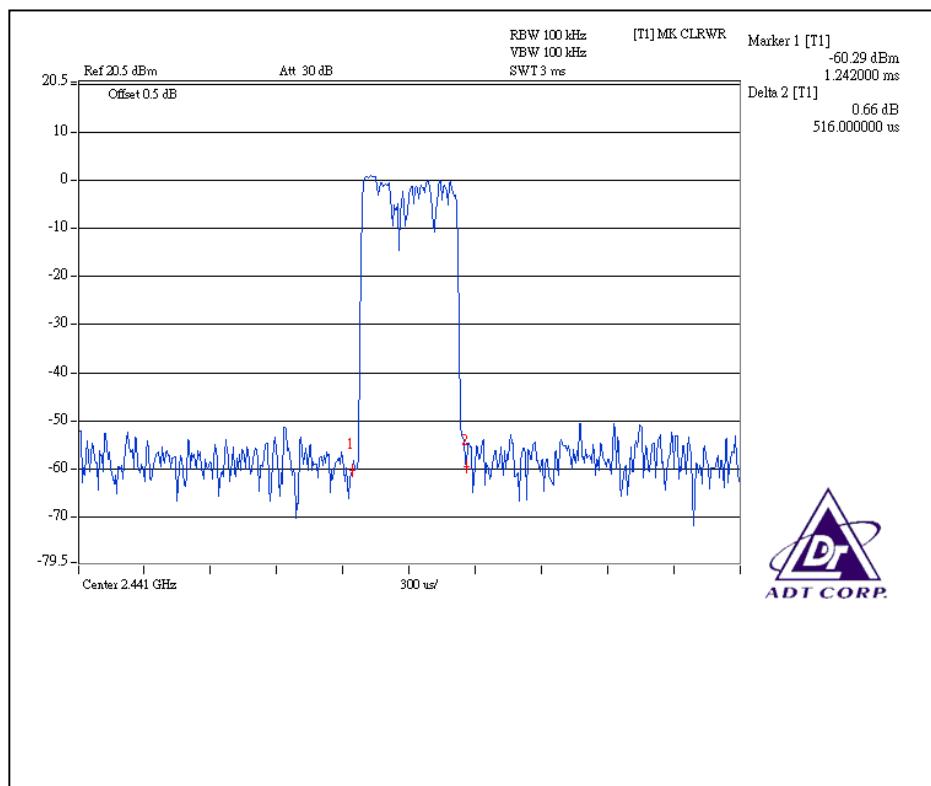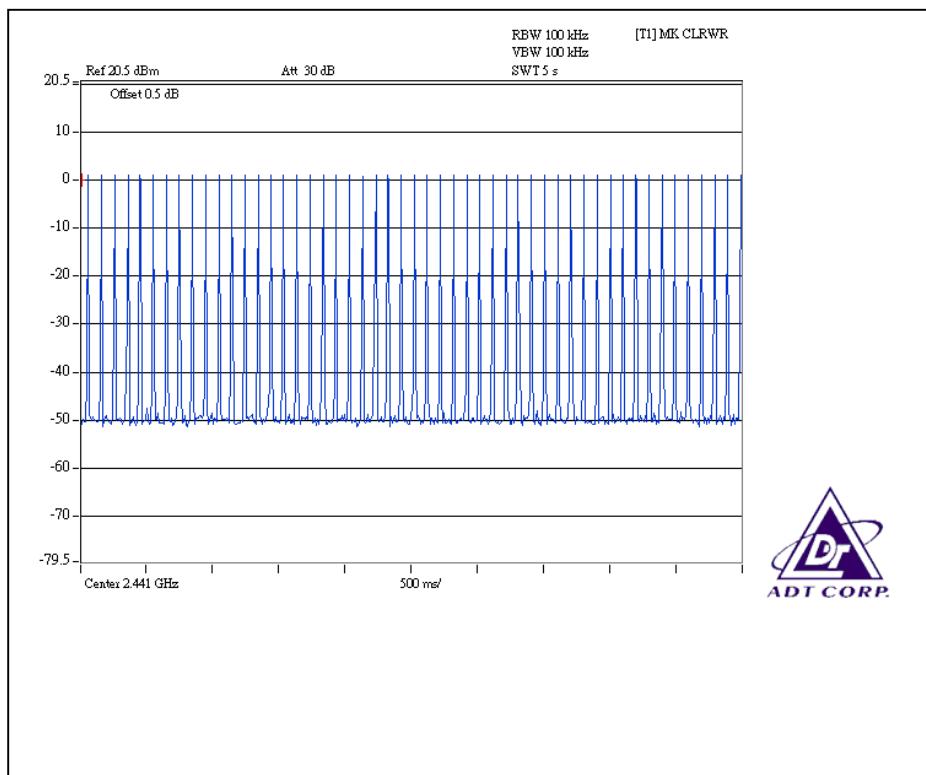



A D T



DH3

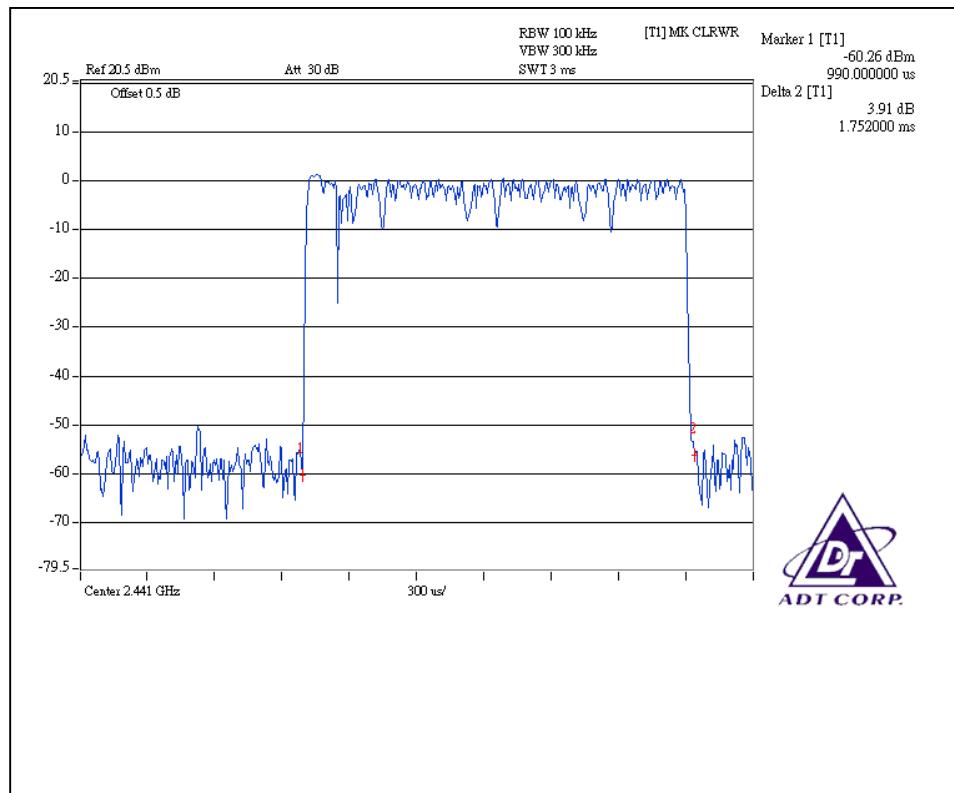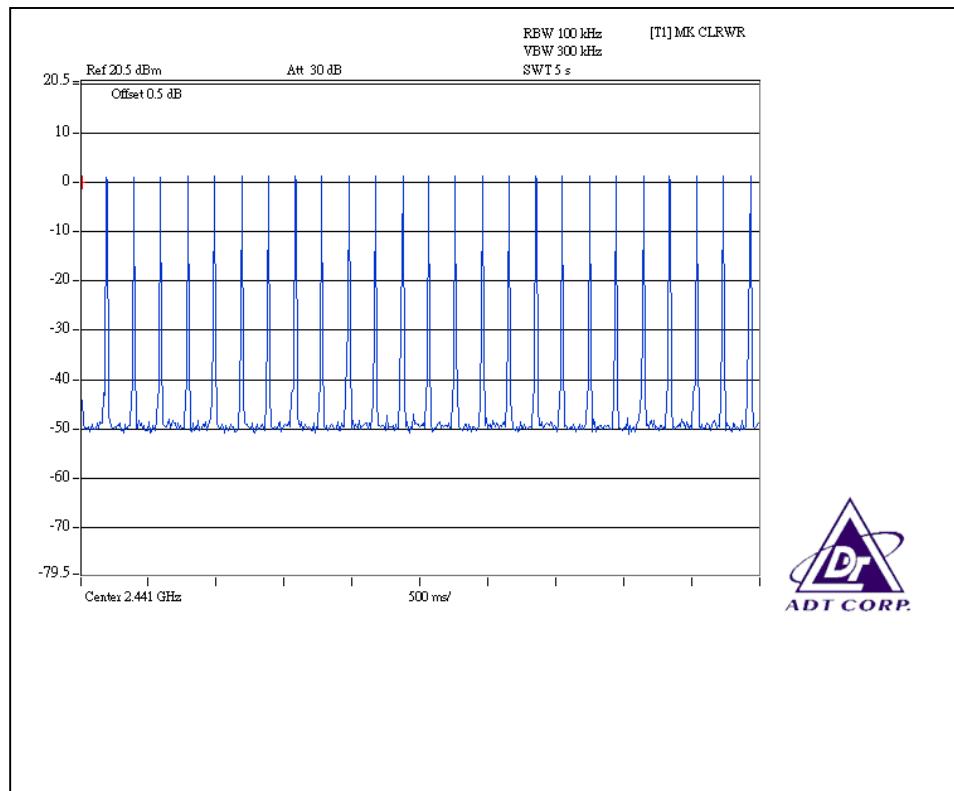



A D T

DH5

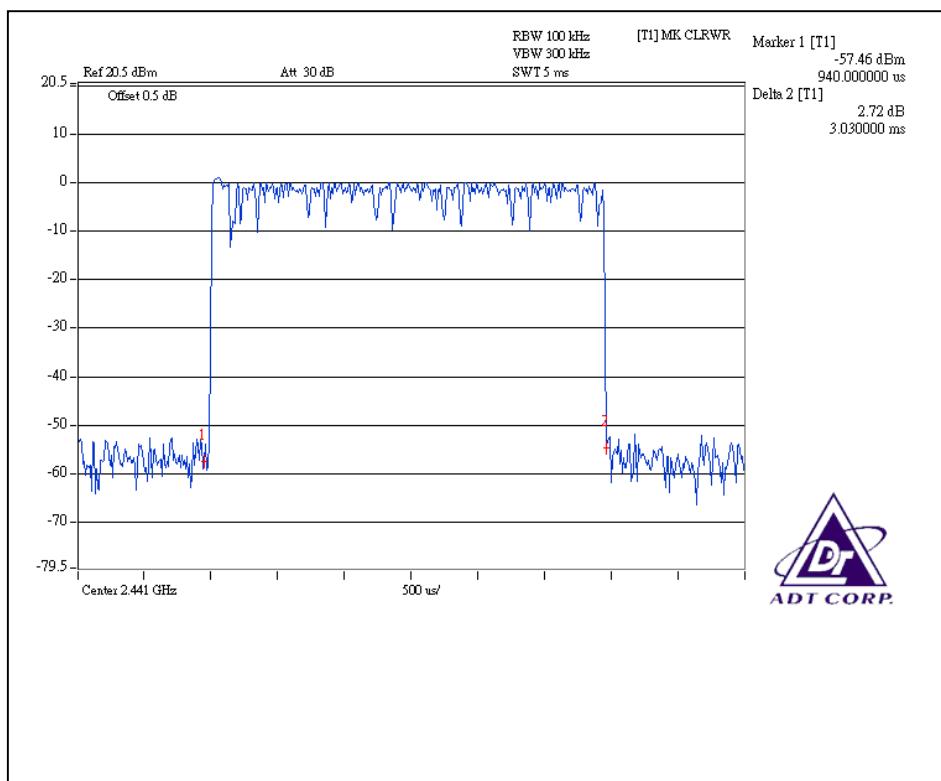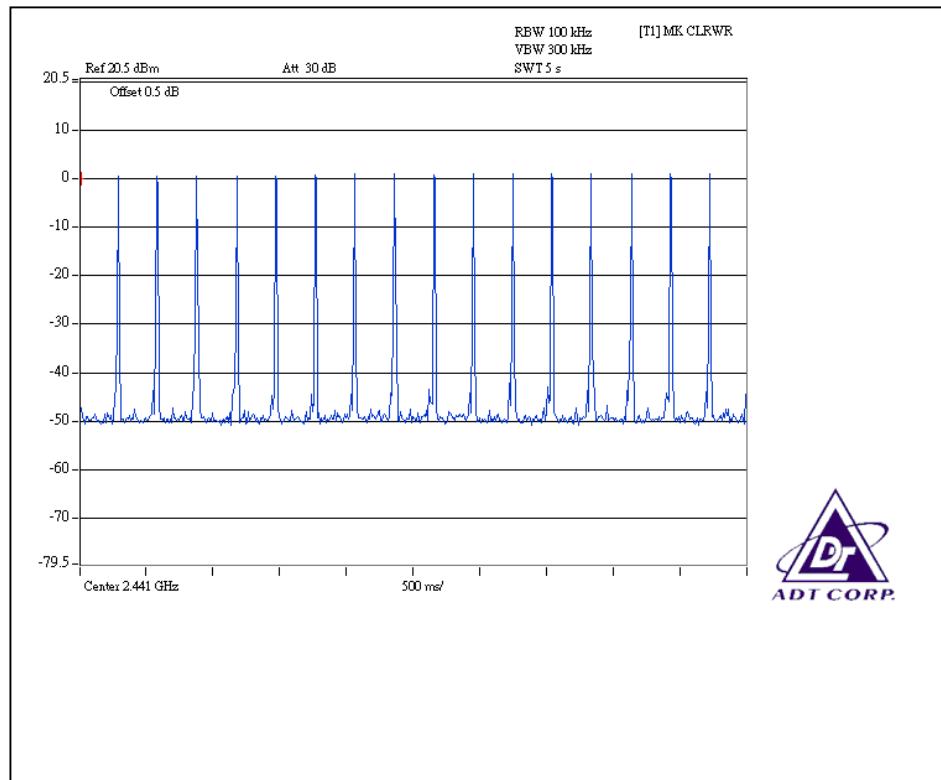



A D T

4.4 CHANNEL BANDWIDTH

4.4.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP

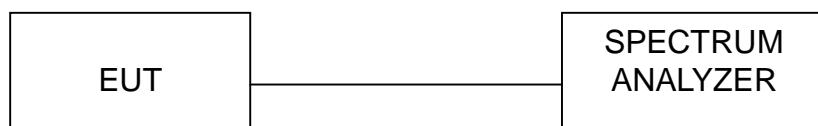

4.4.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.4.6 TEST RESULTS

MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959 hPa	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)
0	2402	831
39	2441	828
78	2480	834


Channel 0

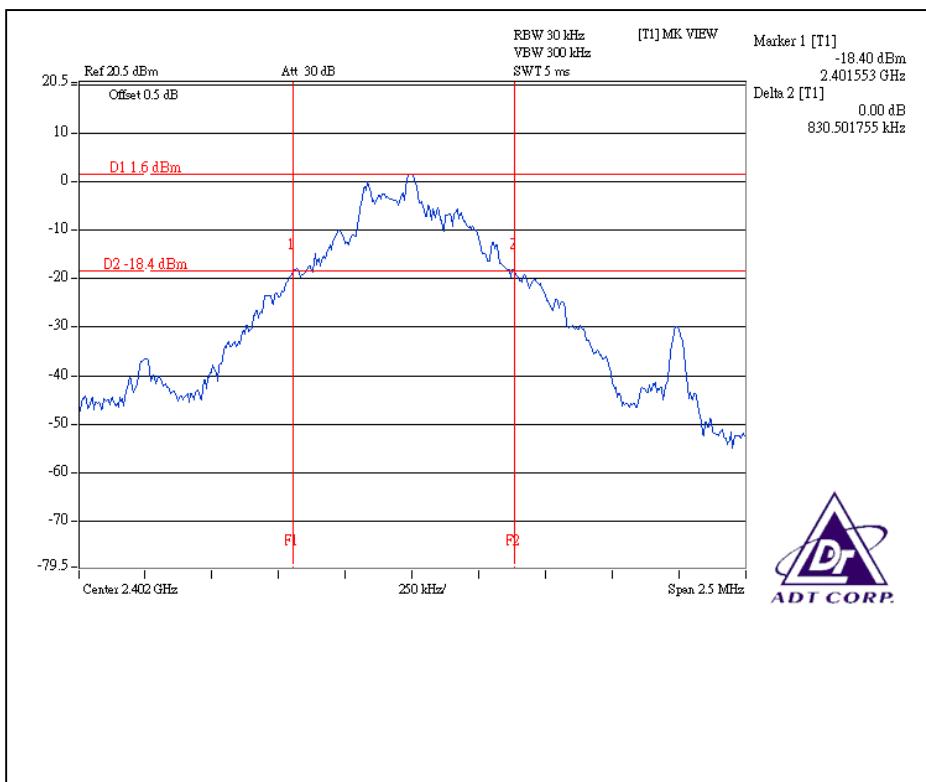




A D T

Channel 39

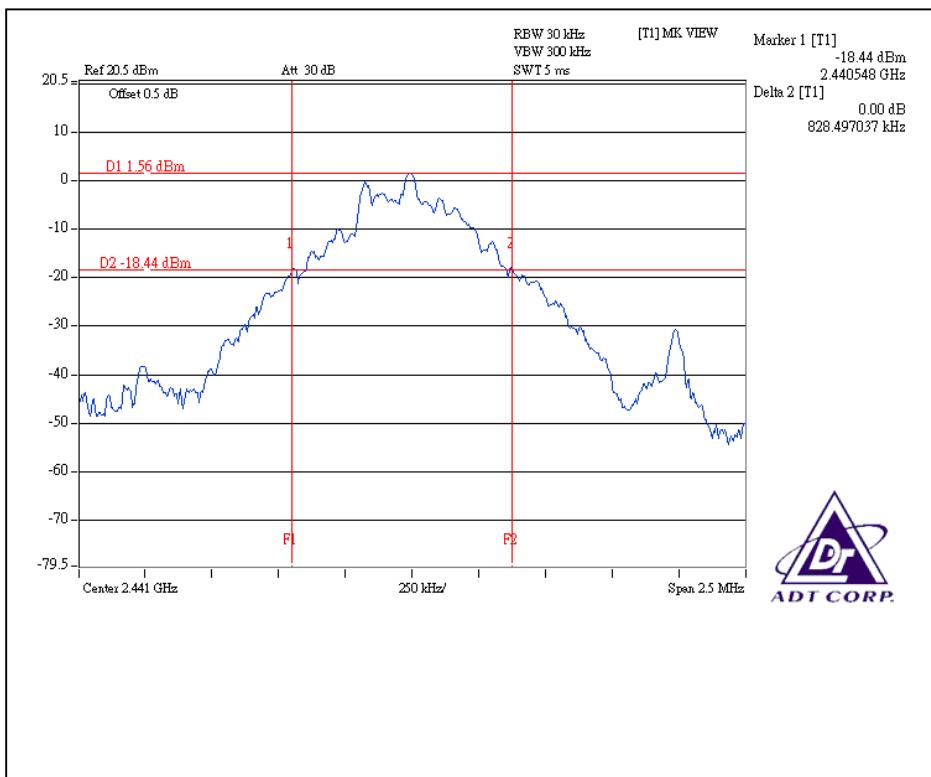

Channel 78

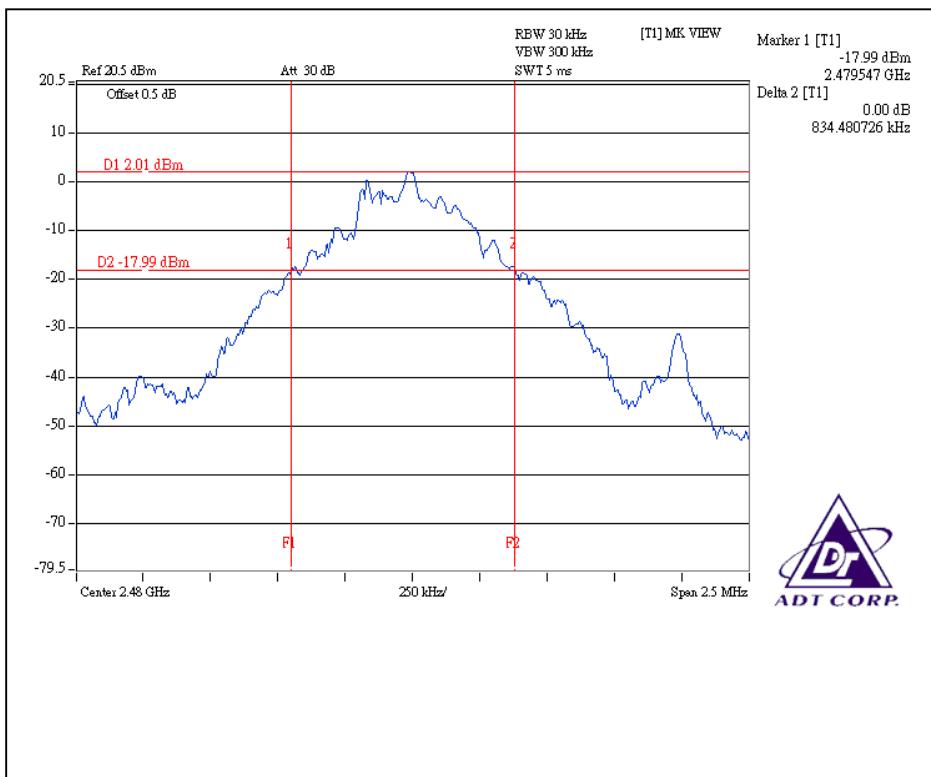



A D T

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or 20dB hopping channel bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



A D T


4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

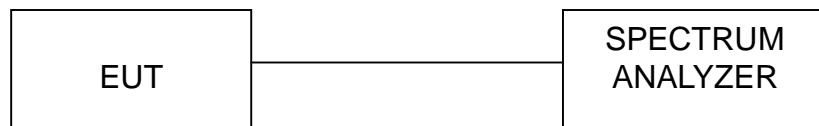




A D T

4.5.6 TEST RESULTS

MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 970 hPa	TESTED BY	Rex Huang

Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1.006MHz	554	PASS
39	2441	1.004MHz	552	PASS
78	2480	1.001MHz	556	PASS


Channel 0

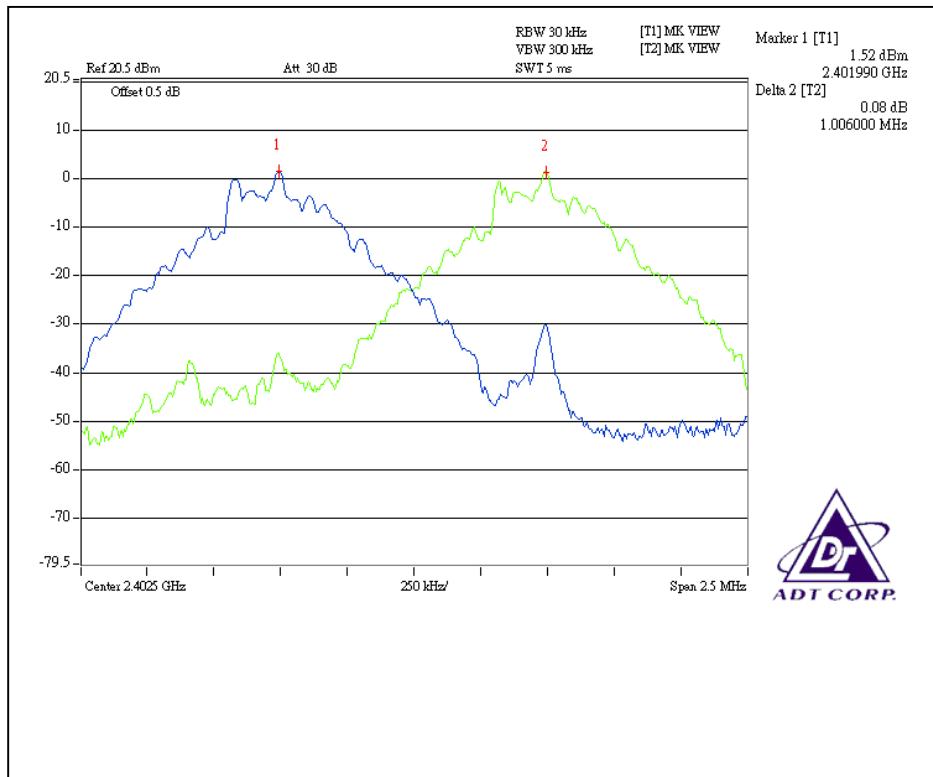




A D T

Channel 39

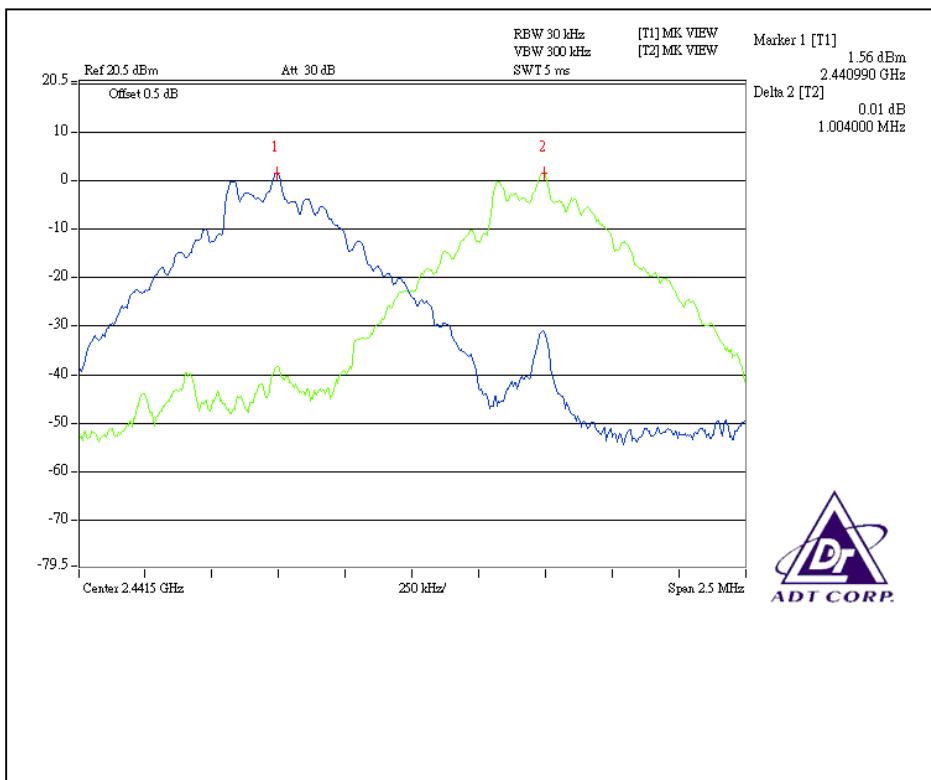

Channel 78

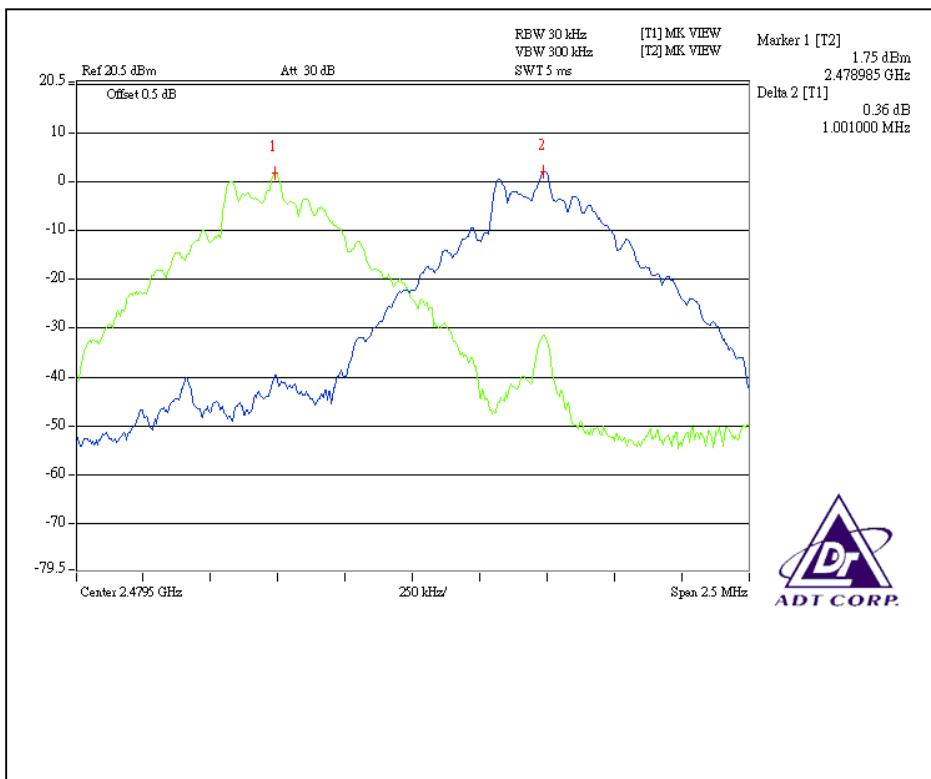



A D T

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 1W.

4.6.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



A D T

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.


4.6.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.6.5 TEST SETUP

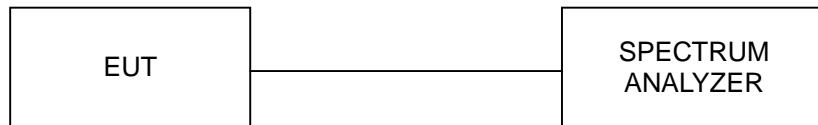

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.6.7 TEST RESULTS

MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 970 hPa	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	1.242	0.94	30	PASS
39	2441	1.216	0.85	30	PASS
78	2480	1.377	1.39	30	PASS


Channel 0

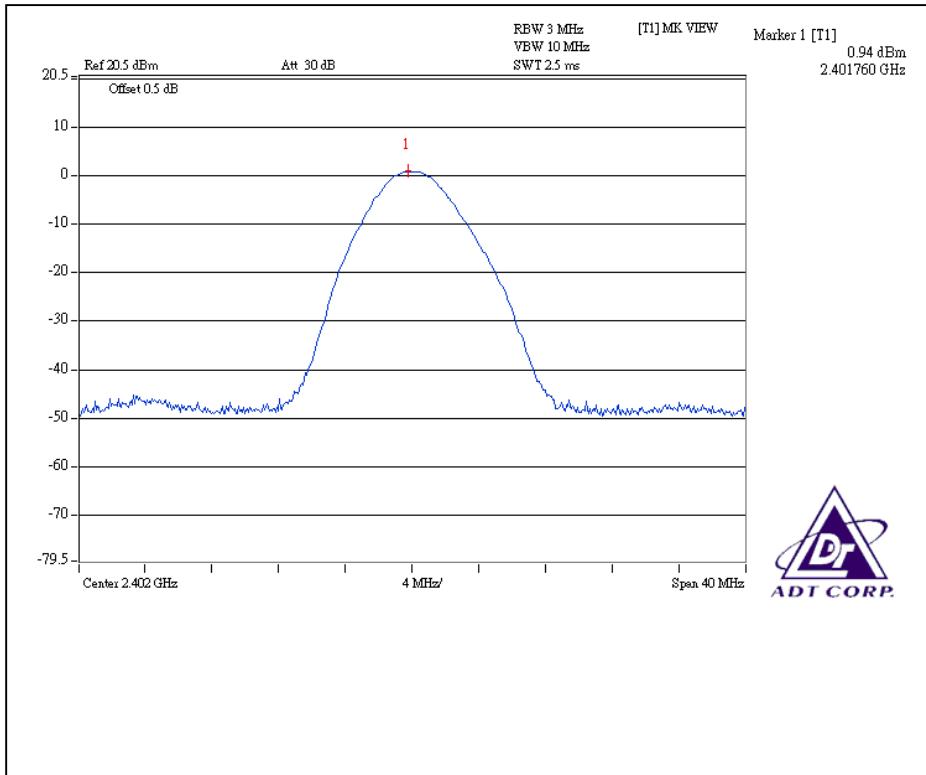




A D T

Channel 39

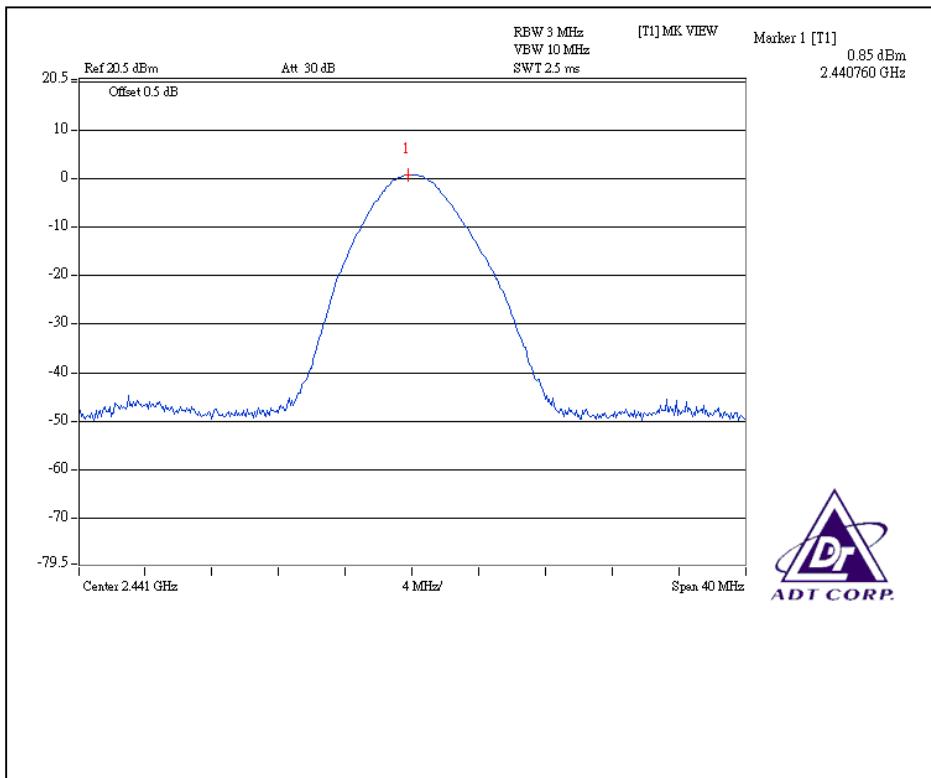

Channel 78

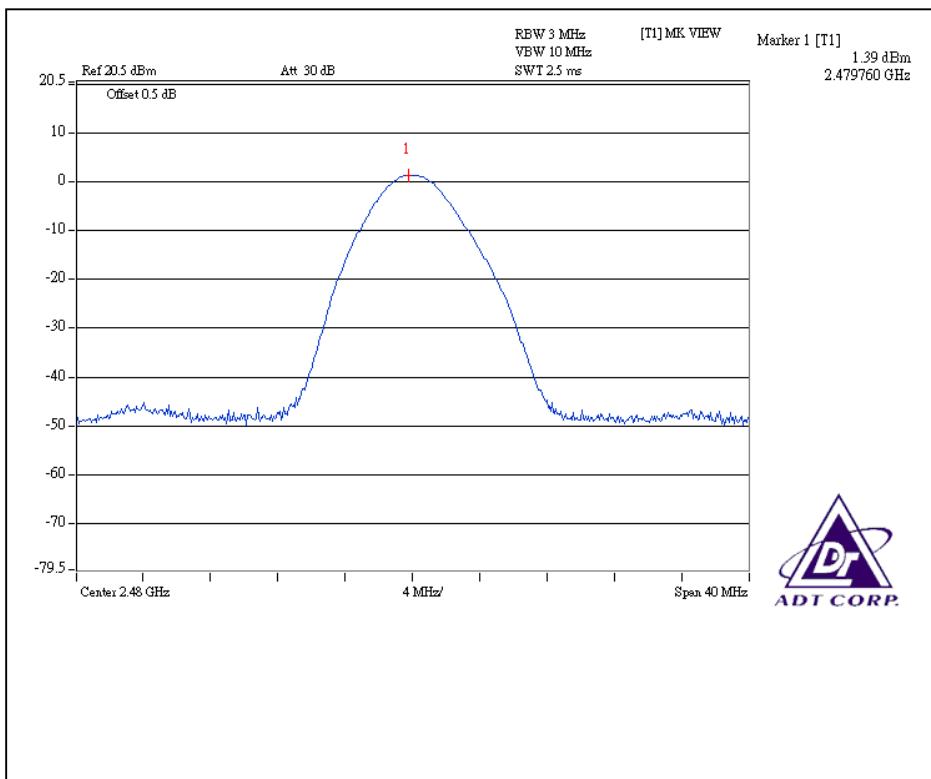



A D T

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 16, 2008	July 15, 2009
HP Pre_Amplifier	8449B	3008A01922	Sep. 25, 2008	Sep. 24, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	April 01, 2008	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2007	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 28, 2008	Jan. 27, 2009
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	SF102	22054-2	Dec. 07, 2007	Dec. 06, 2008
RF Cable	8DFB	STCCAB-30M -1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 7450G-3.



A D T

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

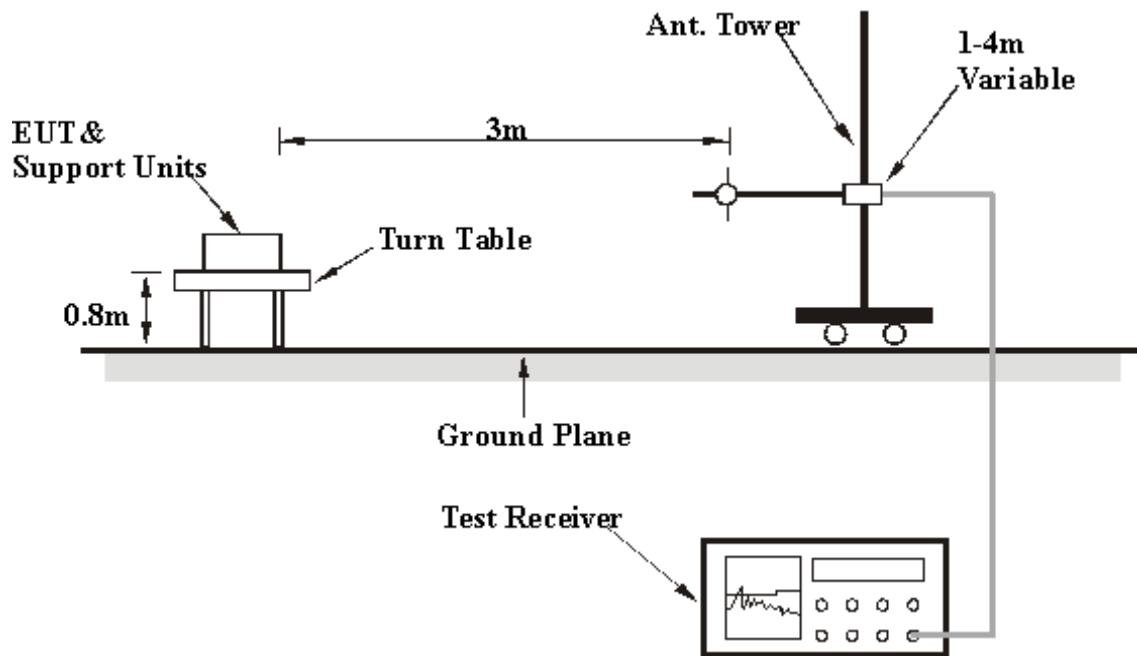

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.7.6 TEST RESULTS (MODE 1)

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 0		FREQUENCY RANGE Below 1000MHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Quasi-Peak
ENVIRONMENTAL CONDITIONS		26deg. C, 64%RH 970hPa		TESTED BY Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	210.00	29.15 QP	43.50	-14.35	1.09 H	20	15.68	13.47
2	570.00	35.40 QP	46.00	-10.60	1.30 H	110	11.18	24.22
3	582.00	36.37 QP	46.00	-9.63	1.17 H	108	11.93	24.44
4	606.00	34.81 QP	46.00	-11.19	1.17 H	98	9.90	24.91
5	666.00	37.50 QP	46.00	-8.50	1.29 H	19	11.23	26.27
6	690.00	40.91 QP	46.00	-5.09	1.29 H	19	14.10	26.81
7	701.99	41.00 QP	46.00	-5.00	1.13 H	18	13.90	27.10
8	725.99	40.23 QP	46.00	-5.77	1.09 H	149	12.45	27.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	210.00	25.23 QP	43.50	-18.27	1.65 V	24	11.76	13.47
2	546.01	37.26 QP	46.00	-8.74	1.01 V	30	13.50	23.76
3	558.00	36.03 QP	46.00	-9.97	1.00 V	210	12.03	24.00
4	618.00	37.85 QP	46.00	-8.15	1.01 V	290	12.67	25.18
5	630.00	35.45 QP	46.00	-10.55	1.00 V	133	10.00	25.45
6	666.00	37.22 QP	46.00	-8.78	1.00 V	203	10.95	26.27
7	690.00	40.41 QP	46.00	-5.59	1.00 V	165	13.60	26.81
8	702.01	39.75 QP	46.00	-6.25	1.00 V	108	12.65	27.10
9	726.00	40.94 QP	46.00	-5.06	1.00 V	89	13.16	27.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

Above 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	
1	2390.00	54.56 PK	74.00	-19.44	1.65 H	183	24.50	30.06
2	2390.00	24.56 AV	54.00	-29.44	1.65 H	183	-5.50	30.06
3	*2402.00	93.80 PK			1.35 H	183	63.69	30.11
4	*2402.00	63.80 AV			1.35 H	183	33.69	30.11
5	4804.00	51.87 PK	74.00	-22.13	1.11 H	265	16.44	35.43
6	4804.00	21.87 AV	54.00	-32.13	1.11 H	265	-13.56	35.43
7	7206.00	52.50 PK	74.00	-21.50	1.19 H	274	10.72	41.78
8	7206.00	22.20 AV	54.00	-31.80	1.19 H	274	-19.58	41.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	
1	2390.00	53.62 PK	74.00	-20.38	1.41 V	79	23.56	30.06
2	2390.00	23.62 AV	54.00	-30.38	1.41 V	79	-6.44	30.06
3	*2402.00	92.56 PK			1.00 V	86	62.45	30.11
4	*2402.00	62.56 AV			1.00 V	86	32.45	30.11
5	4804.00	54.64 PK	74.00	-19.36	1.11 V	167	19.21	35.43
6	4804.00	24.64 AV	54.00	-29.36	1.11 V	167	-10.79	35.43
7	7206.00	49.83 PK	74.00	-24.17	1.20 V	70	8.05	41.78
8	7206.00	19.83 AV	54.00	-34.17	1.20 V	70	-21.95	41.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 64%RH 970hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.72 PK			1.69 H	170	65.46	30.26
2	*2441.00	65.72 AV			1.69 H	170	35.46	30.26
3	4882.00	52.69 PK	74.00	-21.31	1.09 H	248	17.13	35.56
4	4882.00	22.69 AV	54.00	-31.31	1.09 H	248	-12.87	35.56
5	7323.00	51.48 PK	74.00	-22.52	1.00 H	2	9.41	42.07
6	7323.00	21.48 AV	54.00	-32.52	1.00 H	2	-20.59	42.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.87 PK			1.07 V	100	62.61	30.26
2	*2441.00	62.87 AV			1.07 V	100	32.61	30.26
3	4882.00	55.09 PK	74.00	-18.91	1.28 V	173	19.53	35.56
4	48800	25.09 AV	54.00	-28.91	1.28 V	173	-10.47	35.56
5	7323.00	48.62 PK	74.00	-25.38	1.18 V	2	6.55	42.07
6	7323.00	18.62 AV	54.00	-35.38	1.18 V	2	-23.45	42.07

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 78		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 64%RH 970hPa		TESTED BY Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.40 PK			1.74 H	142	65.99	30.41
2	*2480.00	66.40 AV			1.74 H	142	35.99	30.41
3	2483.50	59.06 PK	74.00	-14.94	1.74 H	142	28.63	30.43
4	2483.50	29.06 AV	54.00	-24.94	1.74 H	142	-1.37	30.43
5	4960.00	51.72 PK	74.00	-22.28	1.07 H	270	16.03	35.69
6	4960.00	21.72 AV	54.00	-32.28	1.07 H	270	-13.97	35.69
7	7440.00	52.50 PK	74.00	-21.50	1.23 H	64	10.13	42.37
8	7440.00	22.50 AV	54.00	-31.50	1.23 H	64	-19.87	42.37
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.00 PK			1.78 V	107	62.59	30.41
2	*2480.00	63.00 AV			1.78 V	107	32.59	30.41
3	2483.50	56.95 PK	74.00	-17.05	1.78 V	107	26.52	30.43
4	2483.50	26.95 AV	54.00	-27.05	1.78 V	107	-3.48	30.43
5	4960.00	55.99 PK	74.00	-18.01	1.09 V	180	20.30	35.69
6	4960.00	25.99 AV	54.00	-28.01	1.09 V	180	-9.70	35.69
7	7440.00	49.65 PK	74.00	-24.35	1.20 V	98	7.28	42.37
8	7440.00	19.65 AV	54.00	-34.35	1.20 V	98	-22.72	42.37


REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.




A D T

RESTRICTED BANDEDGE (CH0, HORIZONTAL)

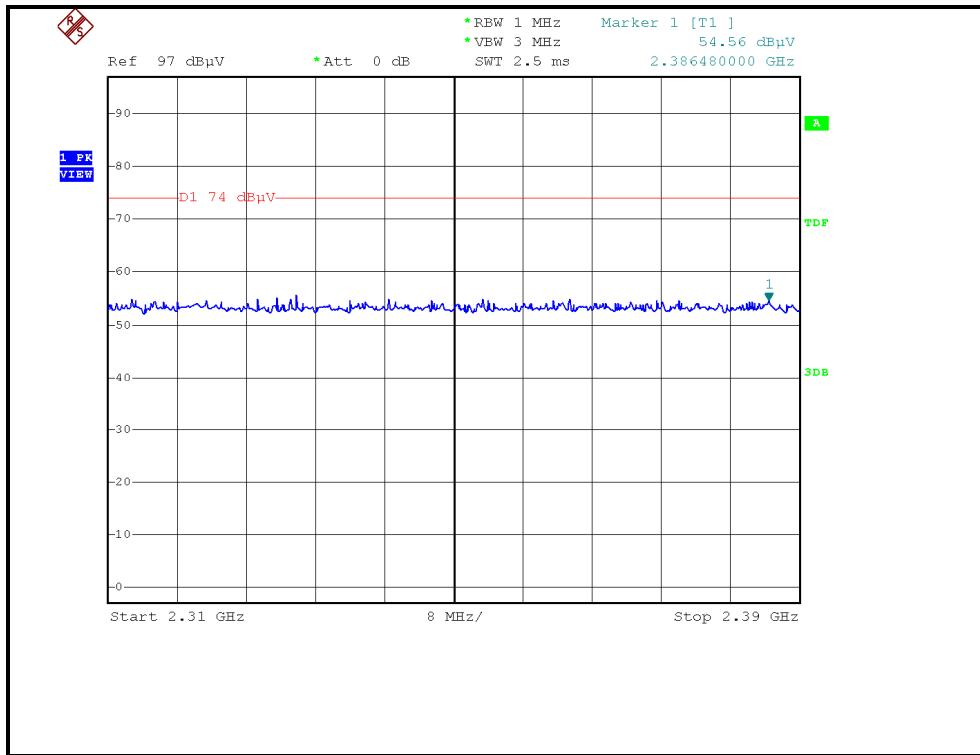


RESTRICTED BANDEDGE (CH0, VERTICAL)

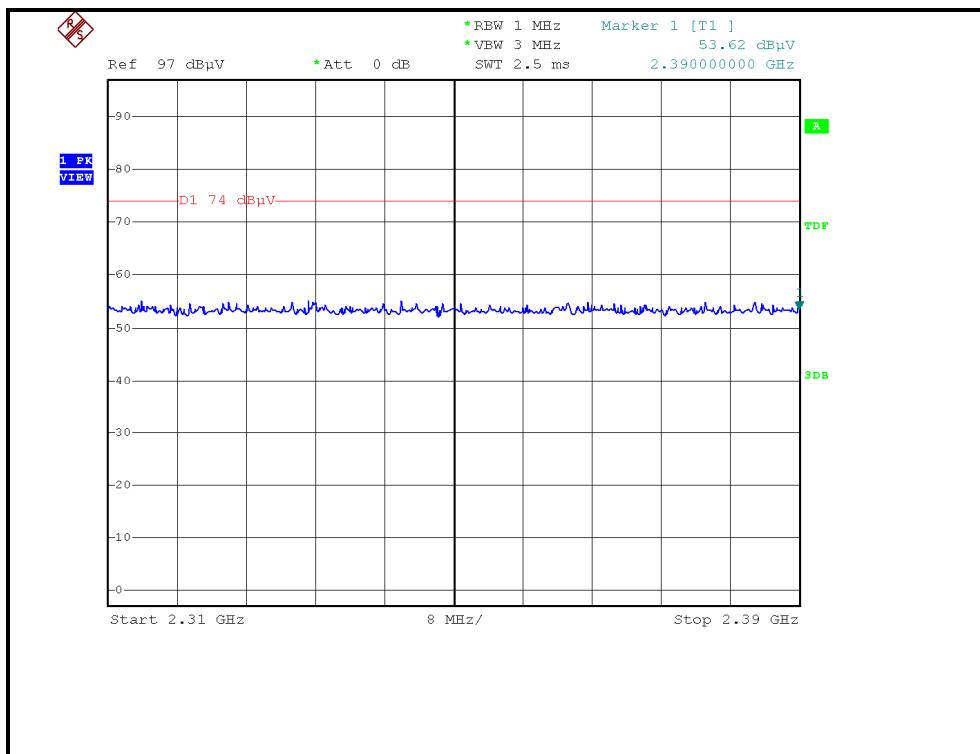




A D T

RESTRICTED BANDEDGE (CH78, HORIZONTAL)

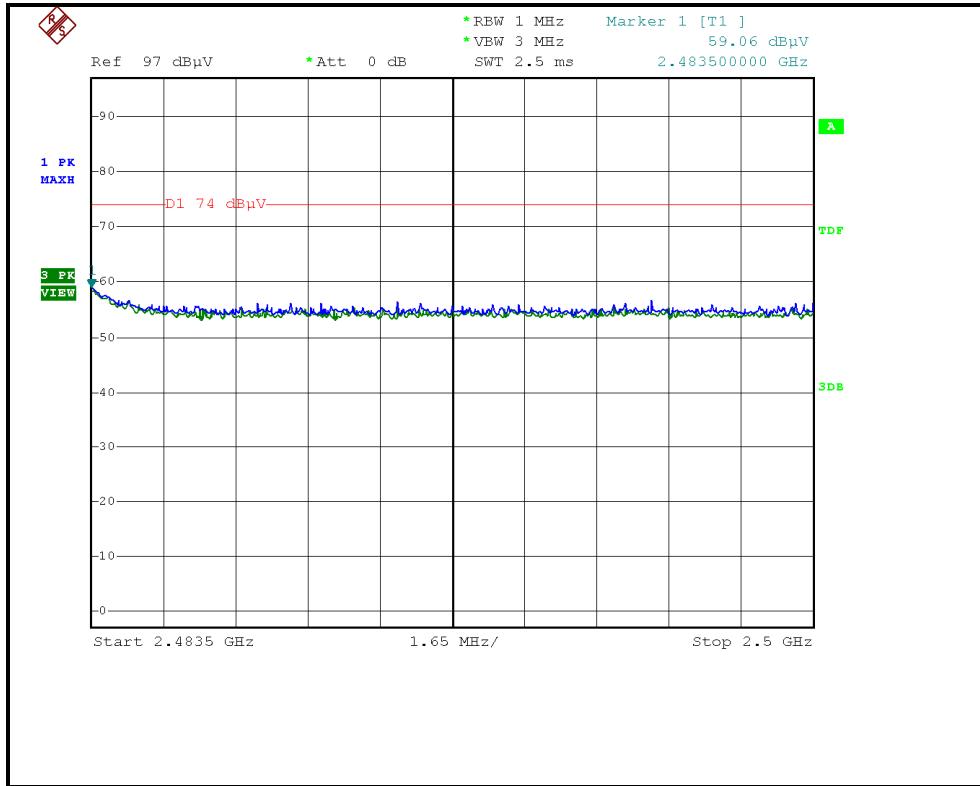

RESTRICTED BANDEDGE (CH78, VERTICAL)

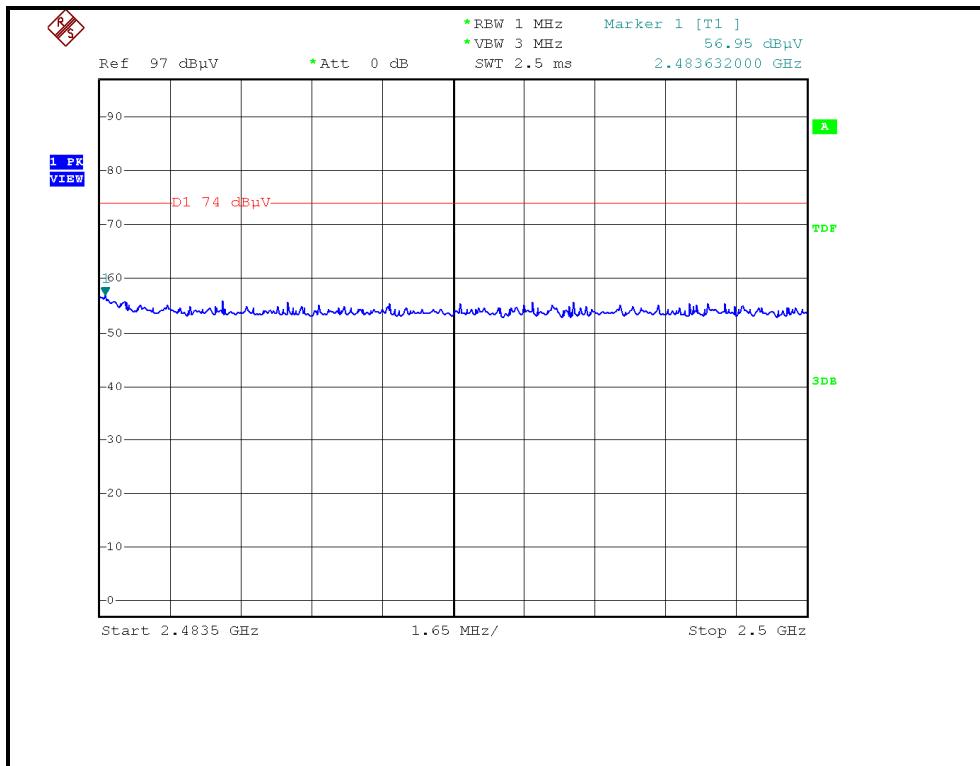



4.7.7 TEST RESULTS (MODE 2)

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 0		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		26deg. C, 64%RH 970hPa		TESTED BY
				Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	210.00	27.32 QP	43.50	-16.18	1.42 H	148	13.85	13.47
2	546.00	36.17 QP	46.00	-9.83	1.43 H	244	12.41	23.76
3	558.00	37.95 QP	46.00	-8.05	1.40 H	246	13.95	24.00
4	594.00	39.45 QP	46.00	-6.55	1.30 H	242	14.79	24.66
5	630.00	38.45 QP	46.00	-7.55	1.38 H	286	13.00	25.45
6	666.00	39.33 QP	46.00	-6.67	1.34 H	137	13.06	26.27
7	702.00	42.40 QP	46.00	-3.60	1.15 H	114	15.30	27.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	210.00	29.93 QP	43.50	-13.57	1.00 V	214	16.46	13.47
2	546.00	37.73 QP	46.00	-8.27	1.00 V	257	13.97	23.76
3	558.00	39.70 QP	46.00	-6.30	1.00 V	254	15.70	24.00
4	594.00	40.66 QP	46.00	-5.34	1.00 V	252	16.00	24.66
5	630.00	39.31 QP	46.00	-6.69	1.00 V	165	13.86	25.45
6	666.00	40.31 QP	46.00	-5.69	1.00 V	156	14.04	26.27
7	702.00	41.87 QP	46.00	-4.13	1.00 V	211	14.77	27.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

Above 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 78		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 64%RH 970hPa		TESTED BY Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	55.30 PK	74.00	-18.70	1.68 H	233	19.61	35.69
2	4960.00	25.30 AV	54.00	-28.70	1.68 H	233	-10.39	35.69
3	7440.00	56.20 PK	74.00	-17.80	1.27 H	3	13.83	42.37
4	7440.00	26.20 AV	54.00	-27.80	1.27 H	3	-16.17	42.37
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	60.80 PK	74.00	-13.20	1.17 V	178	25.11	35.69
2	4960.00	30.80 AV	54.00	-23.20	1.17 V	178	-4.89	35.69
3	7440.00	56.10 PK	74.00	-17.90	1.38 V	176	13.73	42.37
4	7440.00	26.10 AV	54.00	-27.90	1.38 V	176	-16.27	42.37

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW a of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation



4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

Emissions radiated outside of the specified frequency bands, please refer pages from 47 to 50 for met the requirement of the general radiated emission limits in § 15.209.



CH0

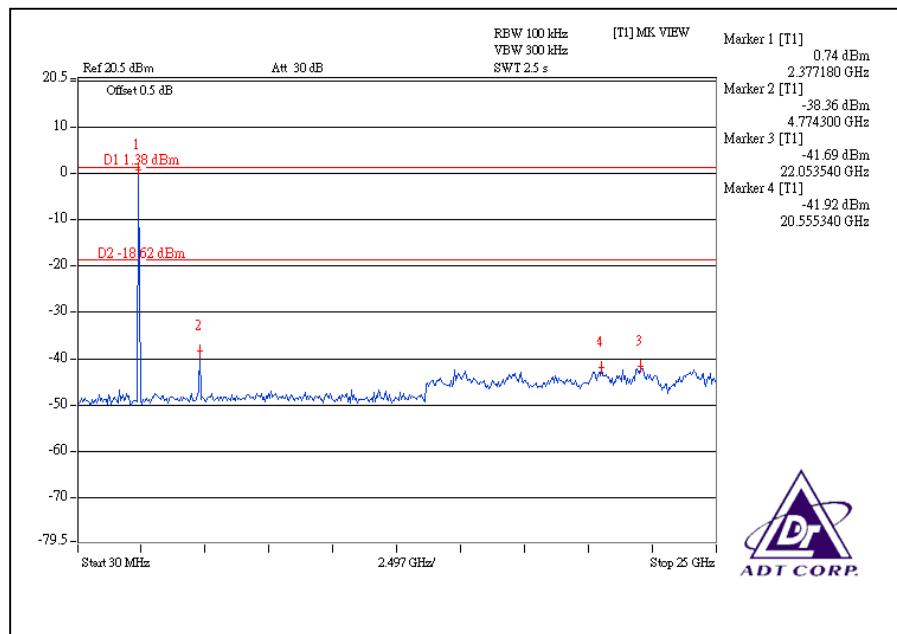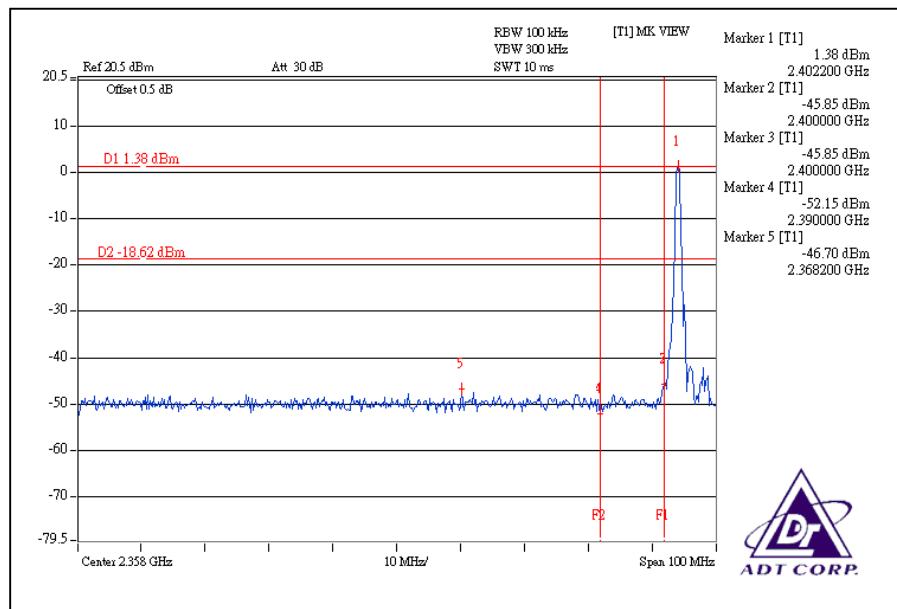



A D T

CH78

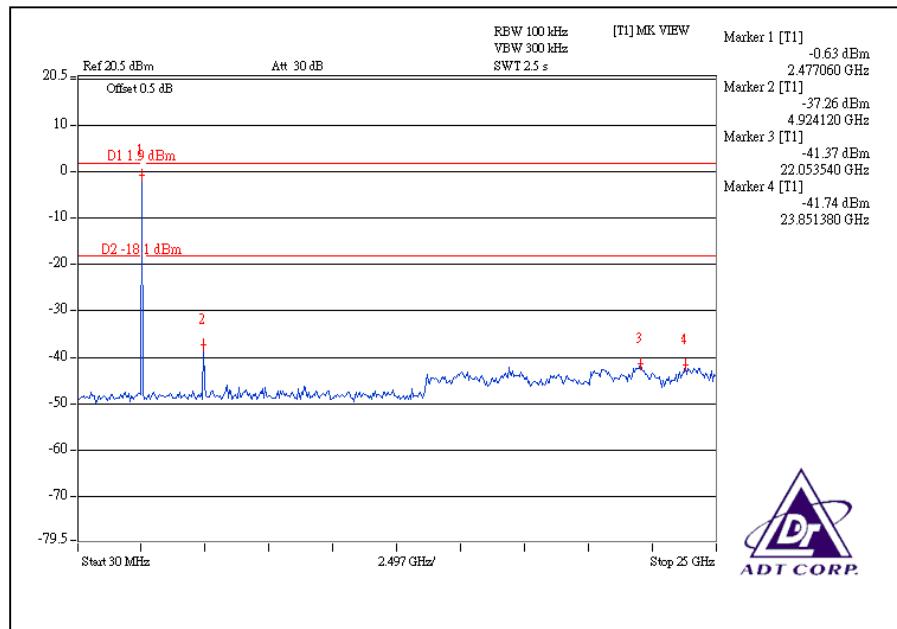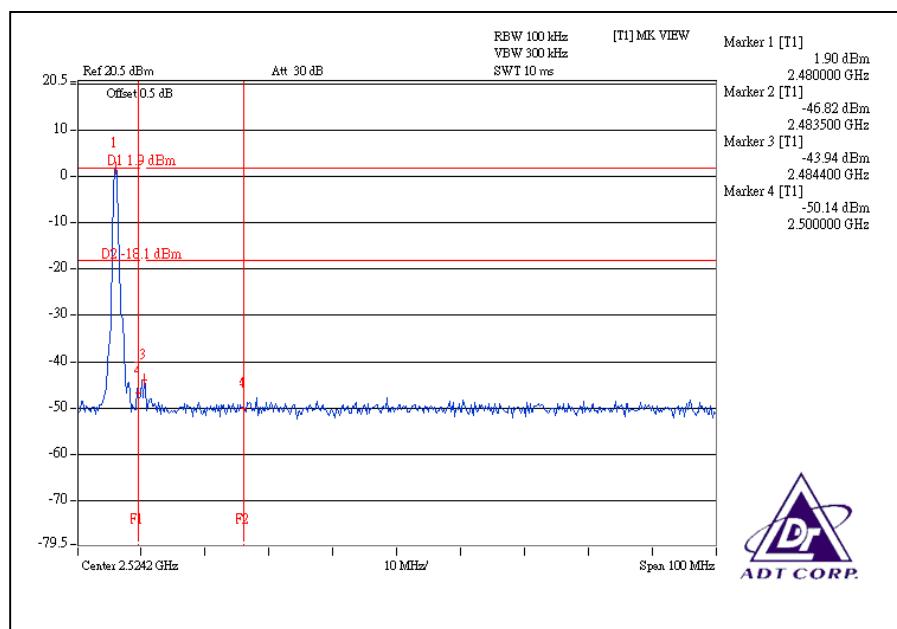



A D T

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Chip antenna without connector. The maximum Gain of the antenna is 2dBi.



A D T

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---