



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Mobile Hotspot
BRAND NAME : Sonim
MODEL NAME : H700B
FCC ID : WYPH700B
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(D), 27(O),
27(Q), 90(R)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Apr. 18, 2025 ~ May 20, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software	6
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	9
2.4 Frequency List of Low/Middle/High Channels	10
3 RADIATED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Radiated Test	15
3.4 Radiated Spurious Emission	16
4 LIST OF MEASURING EQUIPMENT	18
5 MEASUREMENT UNCERTAINTY	19
APPENDIX A. TEST RESULTS OF RADIATED TEST	
APPENDIX B. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG480204V	Rev. 01	Initial issue of report	May 27, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(h) §27.53(g) §27.53(l)(2) §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission (5G NR n5) (5G NR n2) (5G NR n66) (5G NR n12) (5G NR n77) (5G NR n14)	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 8.45 dB at 9221.60 MHz
	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission (5G NR n30)	$< 70 + 10\log_{10}(P[\text{Watts}])$		
	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (5G NR n77)	-13dBm/MHz		

Remark: The conducted test items of inter band CA were cover by 5G NR single carrier due to the CA power is reduced according to 3GPP MPR.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego, CA92121, USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego, CA92121, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Hotspot
Brand Name	Sonim
Model Name	H700B
FCC ID	WYPH700B
IMEI Code	Radiation: 351393280007273
HW Version	V3.0
SW Version	H70.0-01-22.3.0-10.25.00
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz			
	5G NR n5 : 824 MHz ~ 849 MHz			
	5G NR n12 : 699 MHz ~ 716 MHz			
	5G NR n14: 788 MHz ~ 798 MHz			
	5G NR n30 : 824 MHz ~ 849 MHz			
	5G NR n66 : 1710 MHz ~ 1780 MHz			
	5G NR n77: 3450 MHz ~ 3550 MHz(27Q); 3700 MHz ~ 3980 MHz(27O)			
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz			
	5G NR n5 : 869 MHz ~ 894 MHz			
	5G NR n12: 729 MHz ~ 746 MHz			
	5G NR n14: 758 MHz ~ 768 MHz			
	5G NR n30 : 2350 MHz ~ 2360 MHz			
	5G NR n66 : 2110 MHz~ 2200 MHz			
	5G NR n77: 3450 MHz ~ 3550 MHz(27Q); 3700 MHz ~ 3980 MHz(27O)			
SCS	15kHz for FDD bands, 30kHz for TDD bands			
Uplink CA Bands	n12A-n30A	n2A-n12A	n12A-n66A	n30A-n66A
	n66A-n30A	n14A-n30A	n5A-n30A	n30A-n5A
	n14A-n66A	n5A-n66A	n66A-n5A	n2A-n14A
	n12A-n77A	n2A-n30A	n14A-n77A	n30A-n2A
	n2A-n5A	n5A-n77A	n5A-n2A	n2A-n66A
	n66A-n77A	n66A-n2A	n2A-n77A	n30A-n77A
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM			
	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM			



Note:

1. The device supports two types of WWAN antennas: Internal Antenna and External Antenna, they share the same RF test port, and the two antennas cannot work at the same time. For RSE, only the test results of the worse External Antenna are shown.
2. For all uplink inter-band CA combinations, only the worst combinations were tested and recorded in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(D), 27(O), 27(Q), 90(R)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	5G NR	Bandwidth (MHz)														Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H	
Radiated Spurious Emission	n12A-n30A	Worst Case																				v			
	n12A-n66A	Worst Case																				v			
	n14A-n30A	Worst Case																				v			
	n14A-n66A	Worst Case																				v			
	n2A-n14A	Worst Case																				v			
	n2A-n30A	Worst Case																				v			
	n2A-n5A	Worst Case																				v			
	n2A-n66A	Worst Case																				v			
	n2A-n12A	Worst Case																				v			
	n30A-n66A	Worst Case																				v			
	n5A-n30A	Worst Case																				v			
	n5A-n66A	Worst Case																				v			
	n12A-n77A	Worst Case																				v			
	n14A-n77A	Worst Case																				v			
	n5A-n77A	Worst Case																				v			
	n66A-n77A	Worst Case																				v			
	n2A-n77A	Worst Case																				v			
n30A-n77A	Worst Case																				v				
Note	1. The mark "v " means that this configuration is chosen for testing																								
	2. The mark "- " means that this bandwidth is not supported.																								
	3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																								
	4. For band n77, only the worst result of Part 270 is tested and recorded in the report.																								

2.2 Connection Diagram of Test System

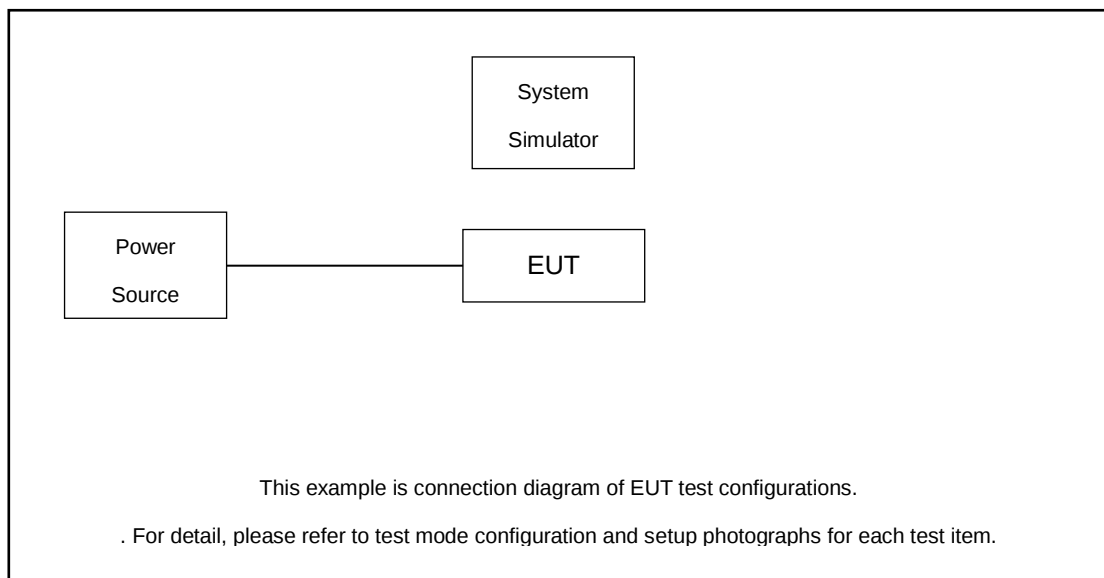

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
3.	External Antenna	N/A	N/A	N/A	N/A	N/A



2.4 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376000	378000
	Frequency	1870	1880	1890
35	Channel	373500	376000	378500
	Frequency	1867.5	1880	1892.5
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
35	Channel	345500	349000	352500
	Frequency	1727.5	1745	1762.5
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5

5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5



5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	462000	-
	Frequency	-	2310	-
5	Channel	461500	462000	462500
	Frequency	2307.5	2310	2312.5

5G n77 Channel and Frequency List for 270				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G n77 Channel and Frequency List for 27Q				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

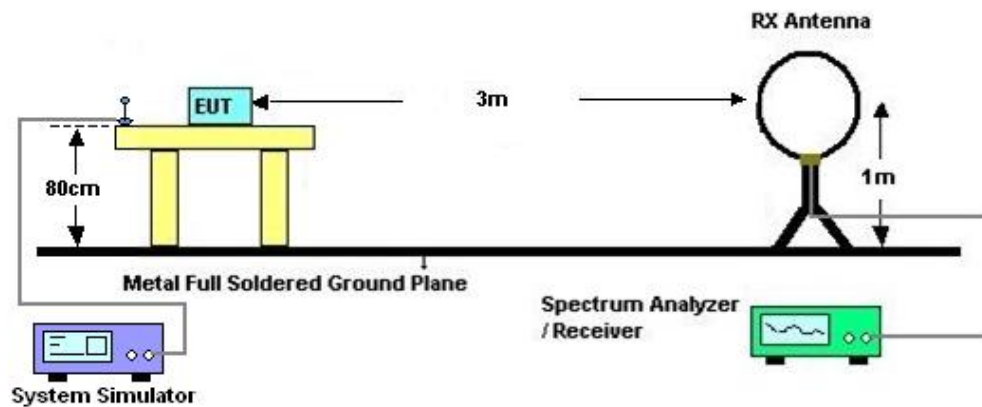

3.2.2 For radiated test from 30MHz to 1GHz

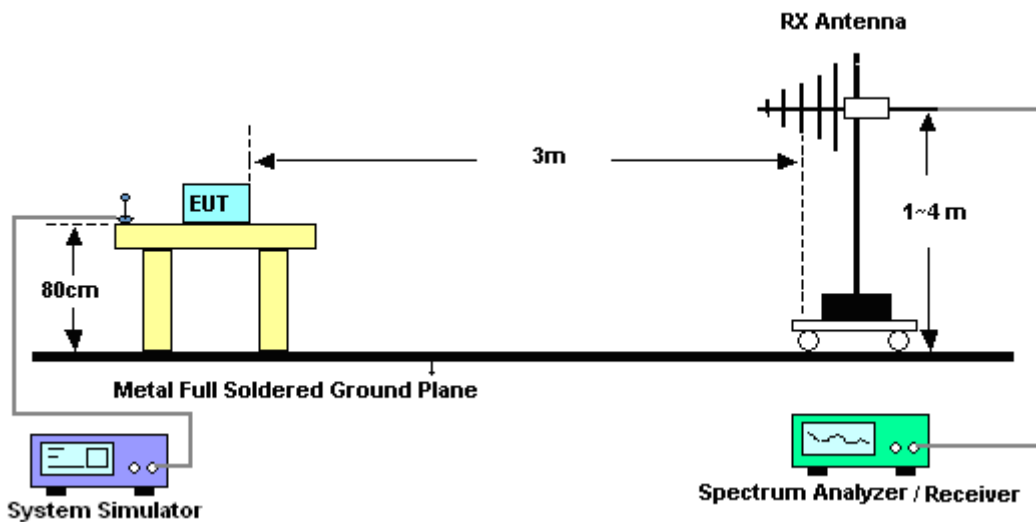

3.2.3 For radiated test above 1GHz

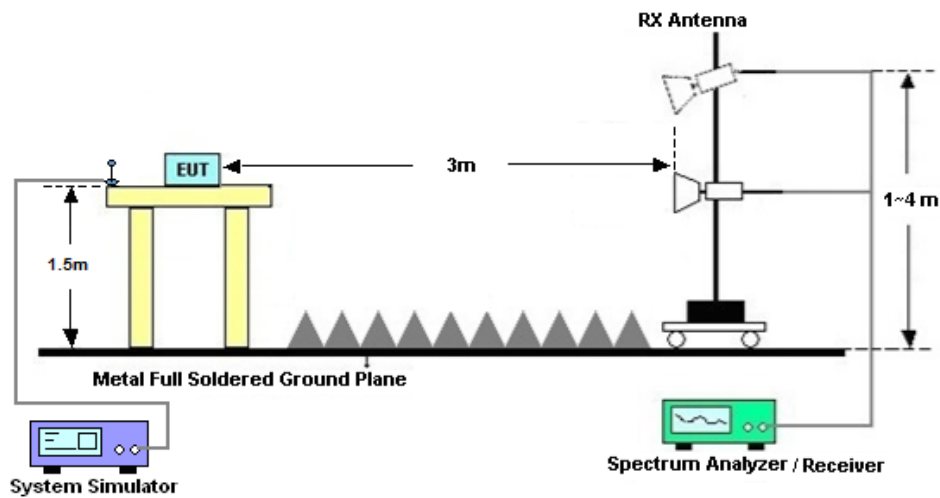

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.



3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n14:

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

For 5G NR n30:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

5G NR n77 (Part 27Q):

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP\ (dBm) = S.G.\ Power - Tx\ Cable\ Loss + Tx\ Antenna\ Gain$
11. $ERP\ (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 18, 2025~ May 20, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 18, 2025~ May 20, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Apr. 18, 2025~ May 20, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Apr. 18, 2025~ May 20, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 18, 2025~ May 20, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	Apr. 18, 2025~ May 20, 2025	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Apr. 18, 2025~ May 20, 2025	Dec. 24, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Apr. 18, 2025~ May 20, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Apr. 18, 2025~ May 20, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 18, 2025~ May 20, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 18, 2025~ May 20, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	HuaCong Liang	Temperature :	22~25°C
		Relative Humidity :	48~52%

Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test and record in the report.

ULCA_n12A- n30A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n12 BW 15MHz Middle 1RB0,QPSK	1401	-63.29	-13	-50.29	-74.01	-66.54	4.00	9.40	H
	2101	-63.19	-13	-50.19	-76.22	-66.76	4.88	10.60	H
	2802	-61.71	-13	-48.71	-77.69	-66.64	5.52	12.60	H
	1401	-63.67	-13	-50.67	-73.95	-66.92	4.00	9.40	V
	2101	-62.73	-13	-49.73	-75.71	-66.30	4.88	10.60	V
	2802	-60.64	-13	-47.64	-76.81	-65.57	5.52	12.60	V
NR n30 BW 10MHz Middle 1RB0,QPSK	4610.80	-62.41	-40	-22.41	-61.77	-68.66	6.45	12.70	H
	6916.20	-59.76	-40	-19.76	-64.15	-63.16	8.40	11.80	H
	9221.60	-53.37	-40	-13.37	-64.98	-55.72	9.65	12.00	H
	4610.80	-62.05	-40	-22.05	-61.79	-68.30	6.45	12.70	V
	6916.20	-57.03	-40	-17.03	-61.9	-60.43	8.40	11.80	V
	9221.60	-51.54	-40	-11.54	-62.33	-53.89	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_n12A- n66A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n12 BW 15MHz Middle 1RB0,QPSK	1401	-62.98	-13	-49.98	-73.70	-66.23	4.00	9.40	H
	2101	-63.51	-13	-50.51	-76.54	-67.08	4.88	10.60	H
	2802	-61.81	-13	-48.81	-77.79	-66.74	5.52	12.60	H
	1401	-63.74	-13	-50.74	-74.02	-66.99	4.00	9.40	V
	2101	-63.30	-13	-50.30	-76.28	-66.87	4.88	10.60	V
	2802	-61.04	-13	-48.04	-77.21	-65.97	5.52	12.60	V
NR n66 BW 40MHz Middle 1RB0,QPSK	3452	-62.06	-13	-49.06	-78.83	-68.91	5.65	12.50	H
	5178	-60.56	-13	-47.56	-82.35	-66.23	7.13	12.80	H
	6904	-56.84	-13	-43.84	-82.40	-60.24	8.40	11.80	H
	3452	-61.73	-13	-48.73	-78.54	-68.58	5.65	12.50	V
	5178	-60.47	-13	-47.47	-82.55	-66.14	7.13	12.80	V
	6904	-56.19	-13	-43.19	-82.23	-59.59	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n14A- n30A / Ant4+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n14 BW 10MHz Middle 1RB0,QPSK	1576.8	-58.53	-42.15	-16.38	-68.46	-61.78	4.00	9.40	H
	2365.2	-62.45	-13	-49.45	-77.18	-66.02	4.88	10.60	H
	3153.6	-63.84	-13	-50.84	-58.97	-68.77	5.52	12.60	H
	1576.8	-59.85	-42.15	-17.70	-69.91	-63.10	4.00	9.40	V
	2365.2	-62.15	-13	-49.15	-76.87	-65.72	4.88	10.60	V
	3153.6	-64.18	-13	-51.18	-59.31	-69.11	5.52	12.60	V
NR n30 BW 10MHz Middle 1RB0,QPSK	4610.80	-62.85	-40	-22.85	-62.21	-69.10	6.45	12.70	H
	6916.20	-58.37	-40	-18.37	-62.76	-61.77	8.40	11.80	H
	9221.60	-53.45	-40	-13.45	-65.06	-55.80	9.65	12.00	H
	4610.80	-62.03	-40	-22.03	-61.77	-68.28	6.45	12.70	V
	6916.20	-54.46	-40	-14.46	-59.33	-57.86	8.40	11.80	V
	9221.60	-48.45	-40	-8.45	-59.24	-50.80	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n14A- n66A / Ant4+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n14 BW 10MHz Middle 1RB0,QPSK	1576.8	-61.64	-42.15	-19.49	-71.57	-64.89	4.00	9.40	H
	2365.2	-62.59	-13	-49.59	-77.32	-66.16	4.88	10.60	H
	3153.6	-60.85	-13	-47.85	-78.18	-65.78	5.52	12.60	H
	1576.8	-62.54	-42.15	-20.39	-72.60	-65.79	4.00	9.40	V
	2365.2	-62.60	-13	-49.60	-77.32	-66.17	4.88	10.60	V
	3153.6	-60.96	-13	-47.96	-78.29	-65.89	5.52	12.60	V
NR n66 BW 40MHz Middle 1RB0,QPSK	3452	-61.67	-13	-48.67	-78.44	-68.52	5.65	12.50	H
	5178	-60.00	-13	-47.00	-81.79	-65.67	7.13	12.80	H
	6904	-55.72	-13	-42.72	-81.28	-59.12	8.40	11.80	H
	3452	-61.47	-13	-48.47	-78.28	-68.32	5.65	12.50	V
	5178	-59.66	-13	-46.66	-81.74	-65.33	7.13	12.80	V
	6904	-55.69	-13	-42.69	-81.73	-59.09	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n2A- n14A / Ant1+4									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n2 BW 40MHz Middle 1RB0,QPSK	3722	-61.27	-13	-48.27	-79.79	-68.02	5.85	12.60	H
	5583	-58.86	-13	-45.86	-81.22	-64.66	7.30	13.10	H
	7444	-54.09	-13	-41.09	-81.08	-57.24	8.35	11.50	H
	3722	-60.76	-13	-47.76	-79.19	-67.51	5.85	12.60	V
	5583	-55.13	-13	-42.13	-77.68	-60.93	7.30	13.10	V
	7444	-53.07	-13	-40.07	-80.07	-56.22	8.35	11.50	V
NR n14 BW 10MHz Middle 1RB0,QPSK	1576.8	-64.86	-42.15	-22.71	-74.79	-68.11	4.00	9.40	H
	2365.2	-62.08	-13	-49.08	-76.81	-65.65	4.88	10.60	H
	3153.6	-60.58	-13	-47.58	-77.91	-65.51	5.52	12.60	H
	1576.8	-64.94	-42.15	-22.79	-75.00	-68.19	4.00	9.40	V
	2365.2	-62.24	-13	-49.24	-76.96	-65.81	4.88	10.60	V
	3153.6	-60.72	-13	-47.72	-78.05	-65.65	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n2A- n30A / Ant0+1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n2 BW 40MHz Middle 1RB0,QPSK	3722	-65.88	-13	-52.88	-62.07	-72.63	5.85	12.60	H
	5583	-63.23	-13	-50.23	-63.17	-69.03	7.30	13.10	H
	7444	-60.24	-13	-47.24	-66.12	-63.39	8.35	11.50	H
	3722	-66.07	-13	-53.07	-62.17	-72.82	5.85	12.60	V
	5583	-63.26	-13	-50.26	-63.39	-69.06	7.30	13.10	V
	7444	-60.22	-13	-47.22	-66.11	-63.37	8.35	11.50	V
NR n30 BW 10MHz Middle 1RB0,QPSK	4610.80	-63.07	-40	-23.07	-62.43	-69.32	6.45	12.70	H
	6916.20	-61.00	-40	-21.00	-65.39	-64.40	8.40	11.80	H
	9221.60	-55.61	-40	-15.61	-67.22	-57.96	9.65	12.00	H
	4610.80	-62.78	-40	-22.78	-62.52	-69.03	6.45	12.70	V
	6916.20	-59.93	-40	-19.93	-64.8	-63.33	8.40	11.80	V
	9221.60	-56.14	-40	-16.14	-66.93	-58.49	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n2A- n5A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n2 BW 40MHz Middle 1RB0,QPSK	3722	-61.89	-13	-48.89	-80.41	-68.64	5.85	12.60	H
	5583	-59.60	-13	-46.60	-81.96	-65.40	7.30	13.10	H
	7444	-54.92	-13	-41.92	-81.91	-58.07	8.35	11.50	H
	3722	-61.44	-13	-48.44	-79.87	-68.19	5.85	12.60	V
	5583	-59.56	-13	-46.56	-82.11	-65.36	7.30	13.10	V
	7444	-54.53	-13	-41.53	-81.53	-57.68	8.35	11.50	V
NR n5 BW 20MHz Middle 1RB0,QPSK	1655	-65.11	-13	-52.11	-75.04	-68.36	4.00	9.40	H
	2482.5	-62.73	-13	-49.73	-77.22	-66.30	4.88	10.60	H
	3310	-62.46	-13	-49.46	-78.79	-67.39	5.52	12.60	H
	1655	-65.93	-13	-52.93	-75.46	-69.18	4.00	9.40	V
	2482.5	-63.06	-13	-50.06	-77.52	-66.63	4.88	10.60	V
	3310	-62.61	-13	-49.61	-78.72	-67.54	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n2A- n66A / Ant0+1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n2 BW 40MHz Middle 1RB0,QPSK	3722	-61.82	-13	-48.82	-80.34	-68.57	5.85	12.60	H
	5583	-59.94	-13	-46.94	-82.30	-65.74	7.30	13.10	H
	7444	-54.78	-13	-41.78	-81.77	-57.93	8.35	11.50	H
	3722	-61.68	-13	-48.68	-80.11	-68.43	5.85	12.60	V
	5583	-59.75	-13	-46.75	-82.3	-65.55	7.30	13.10	V
	7444	-54.95	-13	-41.95	-81.95	-58.10	8.35	11.50	V
NR n66 BW 40MHz Middle 1RB0,QPSK	3452	-58.17	-13	-45.17	-74.94	-65.02	5.65	12.50	H
	5178	-60.90	-13	-47.90	-82.69	-66.57	7.13	12.80	H
	6904	-56.53	-13	-43.53	-82.09	-59.93	8.40	11.80	H
	3452	-62.21	-13	-49.21	-79.02	-69.06	5.65	12.50	V
	5178	-60.65	-13	-47.65	-82.73	-66.32	7.13	12.80	V
	6904	-56.05	-13	-43.05	-82.09	-59.45	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n2A- n12A / Ant1+0									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n2 BW 40MHz Middle 1RB0,QPSK	3722	-61.70	-13	-48.70	-80.22	-68.45	5.85	12.60	H
	5583	-59.90	-13	-46.90	-82.26	-65.70	7.30	13.10	H
	7444	-55.05	-13	-42.05	-82.04	-58.20	8.35	11.50	H
	3722	-62.04	-13	-49.04	-80.47	-68.79	5.85	12.60	V
	5583	-59.42	-13	-46.42	-81.97	-65.22	7.30	13.10	V
	7444	-54.88	-13	-41.88	-81.88	-58.03	8.35	11.50	V
NR n12 BW 15MHz Middle 1RB0,QPSK	1401	-64.35	-13	-51.35	-75.07	-67.60	4.00	9.40	H
	2101	-63.56	-13	-50.56	-76.59	-67.13	4.88	10.60	H
	2802	-61.49	-13	-48.49	-77.47	-66.42	5.52	12.60	H
	1401	-64.82	-13	-51.82	-75.10	-68.07	4.00	9.40	V
	2101	-63.47	-13	-50.47	-76.45	-67.04	4.88	10.60	V
	2802	-61.65	-13	-48.65	-77.82	-66.58	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n30A- n66A / Ant0+1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n30 BW 10MHz Middle 1RB0,QPSK	4610.80	-63.38	-40	-23.38	-62.74	-69.63	6.45	12.70	H
	6916.20	-61.56	-40	-21.56	-65.95	-64.96	8.40	11.80	H
	9221.60	-55.62	-40	-15.62	-67.23	-57.97	9.65	12.00	H
	4610.80	-61.44	-40	-21.44	-61.18	-67.69	6.45	12.70	V
	6916.20	-60.60	-40	-20.60	-65.47	-64.00	8.40	11.80	V
	9221.60	-56.57	-40	-16.57	-67.36	-58.92	9.65	12.00	V
NR n66 BW 40MHz Middle 1RB0,QPSK	3452	-65.57	-13	-52.57	-60.14	-72.42	5.65	12.50	H
	5178	-65.38	-13	-52.38	-64.87	-71.05	7.13	12.80	H
	6904	-61.57	-13	-48.57	-65.83	-64.97	8.40	11.80	H
	3452	-65.69	-13	-52.69	-60.3	-72.54	5.65	12.50	V
	5178	-64.83	-13	-51.83	-64.61	-70.50	7.13	12.80	V
	6904	-60.60	-13	-47.60	-65.34	-64.00	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n5A- n30A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 BW 20MHz Middle 1RB0,QPSK	1655	-64.78	-13	-51.78	-74.71	-68.03	4.00	9.40	H
	2482.5	-62.85	-13	-49.85	-77.34	-66.42	4.88	10.60	H
	3310	-65.73	-13	-52.73	-59.86	-70.66	5.52	12.60	H
	1655	-65.63	-13	-52.63	-75.16	-68.88	4.00	9.40	V
	2482.5	-62.49	-13	-49.49	-76.95	-66.06	4.88	10.60	V
	3310	-66.33	-13	-53.33	-60.24	-71.26	5.52	12.60	V
NR n30 BW 10MHz Middle 1RB0,QPSK	4610.80	-63.46	-40	-23.46	-62.82	-69.71	6.45	12.70	H
	6916.20	-61.32	-40	-21.32	-65.71	-64.72	8.40	11.80	H
	9221.60	-55.44	-40	-15.44	-67.05	-57.79	9.65	12.00	H
	4610.80	-63.11	-40	-23.11	-62.85	-69.36	6.45	12.70	V
	6916.20	-61.02	-40	-21.02	-65.89	-64.42	8.40	11.80	V
	9221.60	-56.54	-40	-16.54	-67.33	-58.89	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n5A- n66A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 BW 40MHz Middle 1RB0,QPSK	1655	-61.52	-13	-48.52	-71.45	-64.77	4.00	9.40	H
	2482.5	-62.40	-13	-49.40	-76.89	-65.97	4.88	10.60	H
	3310	-62.28	-13	-49.28	-78.61	-67.21	5.52	12.60	H
	1655	-62.60	-13	-49.60	-72.13	-65.85	4.00	9.40	V
	2482.5	-62.37	-13	-49.37	-76.83	-65.94	4.88	10.60	V
	3310	-62.55	-13	-49.55	-78.66	-67.48	5.52	12.60	V
NR n66 BW 40MHz Middle 1RB0,QPSK	3452	-61.93	-13	-48.93	-78.70	-68.78	5.65	12.50	H
	5178	-60.93	-13	-47.93	-82.72	-66.60	7.13	12.80	H
	6904	-56.79	-13	-43.79	-82.35	-60.19	8.40	11.80	H
	3452	-61.89	-13	-48.89	-78.7	-68.74	5.65	12.50	V
	5178	-60.67	-13	-47.67	-82.75	-66.34	7.13	12.80	V
	6904	-56.37	-13	-43.37	-82.41	-59.77	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n12A- n77A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n12 BW 15MHz Middle 1RB0,QPSK	1401	-64.02	-13	-51.02	-74.74	-67.27	4.00	9.40	H
	2101	-64.18	-13	-51.18	-77.21	-67.75	4.88	10.60	H
	2802	-62.21	-13	-49.21	-78.19	-67.14	5.52	12.60	H
	1401	-65.00	-13	-52.00	-75.28	-68.25	4.00	9.40	V
	2101	-64.01	-13	-51.01	-76.99	-67.58	4.88	10.60	V
	2802	-62.11	-13	-49.11	-78.28	-67.04	5.52	12.60	V
NR n77 BW 100MHz Middle 1RB0,QPSK	7584.00	-56.58	-13	-43.58	-62.21	-59.88	8.30	11.60	H
	11376.00	-54.07	-13	-41.07	-68.18	-55.59	10.48	12.00	H
	15168.00	-50.98	-13	-37.98	-68.11	-52.68	11.80	13.50	H
	7584.00	-54.99	-13	-41.99	-60.58	-58.29	8.30	11.60	V
	11376.00	-54.62	-13	-41.62	-68.46	-56.14	10.48	12.00	V
	15168.00	-51.43	-13	-38.43	-67.91	-53.13	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n14A- n77A / Ant4+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n14 BW 10MHz Middle 1RB0,QPSK	1576.8	-65.36	-42.15	-23.21	-75.29	-68.61	4.00	9.40	H
	2365.2	-62.65	-13	-49.65	-77.38	-66.22	4.88	10.60	H
	3153.6	-60.59	-13	-47.59	-77.92	-65.52	5.52	12.60	H
	1576.8	-65.33	-42.15	-23.18	-75.39	-68.58	4.00	9.40	V
	2365.2	-62.68	-13	-49.68	-77.40	-66.25	4.88	10.60	V
	3153.6	-60.38	-13	-47.38	-77.71	-65.31	5.52	12.60	V
NR n77 BW 100MHz Middle 1RB0,QPSK	7584.00	-55.31	-13	-42.31	-60.94	-58.61	8.30	11.60	H
	11376.00	-53.83	-13	-40.83	-67.94	-55.35	10.48	12.00	H
	15168.00	-51.46	-13	-38.46	-68.59	-53.16	11.80	13.50	H
	7584.00	-52.65	-13	-39.65	-58.24	-55.95	8.30	11.60	V
	11376.00	-53.96	-13	-40.96	-67.8	-55.48	10.48	12.00	V
	15168.00	-47.89	-13	-34.89	-64.37	-49.59	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n5A- n77A / Ant0+1									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 BW 20MHz Middle 1RB0,QPSK	1655	-60.99	-13	-47.99	-70.92	-64.24	4.00	9.40	H
	2482.5	-63.09	-13	-50.09	-77.58	-66.66	4.88	10.60	H
	3310	-62.05	-13	-49.05	-78.38	-66.98	5.52	12.60	H
	1655	-63.19	-13	-50.19	-72.72	-66.44	4.00	9.40	V
	2482.5	-62.99	-13	-49.99	-77.45	-66.56	4.88	10.60	V
	3310	-62.20	-13	-49.20	-78.31	-67.13	5.52	12.60	V
NR n77 BW 100MHz Middle 1RB0,QPSK	7584.00	-59.10	-13	-46.10	-64.73	-62.40	8.30	11.60	H
	11376.00	-54.41	-13	-41.41	-68.52	-55.93	10.48	12.00	H
	15168.00	-50.84	-13	-37.84	-67.97	-52.54	11.80	13.50	H
	7584.00	-56.01	-13	-43.01	-61.6	-59.31	8.30	11.60	V
	11376.00	-54.73	-13	-41.73	-68.57	-56.25	10.48	12.00	V
	15168.00	-47.92	-13	-34.92	-64.40	-49.62	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n66A- n77A / Ant0+1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n66 BW 40MHz Middle 1RB0,QPSK	3452	-61.28	-13	-48.28	-78.05	-68.13	5.65	12.50	H
	5178	-59.80	-13	-46.80	-81.59	-65.47	7.13	12.80	H
	6904	-60.59	-13	-47.59	-64.85	-63.99	8.40	11.80	H
	3452	-61.62	-13	-48.62	-78.43	-68.47	5.65	12.50	V
	5178	-59.49	-13	-46.49	-81.57	-65.16	7.13	12.80	V
	6904	-60.24	-13	-47.24	-64.98	-63.64	8.40	11.80	V
NR n77 BW 100MHz Middle 1RB0,QPSK	7584.00	-53.69	-13	-40.69	-59.32	-56.99	8.30	11.60	H
	11376.00	-54.10	-13	-41.10	-68.21	-55.62	10.48	12.00	H
	15168.00	-51.57	-13	-38.57	-68.70	-53.27	11.80	13.50	H
	7584.00	-51.76	-13	-38.76	-57.35	-55.06	8.30	11.60	V
	11376.00	-54.52	-13	-41.52	-68.36	-56.04	10.48	12.00	V
	15168.00	-47.55	-13	-34.55	-64.03	-49.25	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_ n2A- n77A / Ant0+1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n2 BW 40MHz Middle 1RB0,QPSK	3722	-65.69	-13	-52.69	-61.88	-72.54	5.65	12.50	H
	5583	-62.95	-13	-49.95	-62.89	-68.62	7.13	12.80	H
	7444	-59.78	-13	-46.78	-65.66	-63.18	8.40	11.80	H
	3722	-65.95	-13	-52.95	-62.05	-72.80	5.65	12.50	V
	5583	-62.83	-13	-49.83	-62.96	-68.50	7.13	12.80	V
	7444	-59.84	-13	-46.84	-65.73	-63.24	8.40	11.80	V
NR n77 BW 100MHz Middle 1RB0,QPSK	7584.00	-59.59	-13	-46.59	-65.22	-62.89	8.30	11.60	H
	11376.00	-54.64	-13	-41.64	-68.75	-56.16	10.48	12.00	H
	15168.00	-51.83	-13	-38.83	-68.96	-53.53	11.80	13.50	H
	7584.00	-57.73	-13	-44.73	-63.32	-61.03	8.30	11.60	V
	11376.00	-54.79	-13	-41.79	-68.63	-56.31	10.48	12.00	V
	15168.00	-52.35	-13	-39.35	-68.83	-54.05	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_ n30A- n77A / Ant0+1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n30 BW 10MHz Middle 1RB0,QPSK	4610.80	-62.93	-40	-22.93	-62.29	-69.18	6.45	12.70	H
	6916.20	-60.25	-40	-20.25	-64.64	-63.65	8.40	11.80	H
	9221.60	-56.18	-40	-16.18	-67.79	-58.53	9.65	12.00	H
	4610.80	-62.55	-40	-22.55	-62.29	-68.80	6.45	12.70	V
	6916.20	-60.19	-40	-20.19	-65.06	-63.59	8.40	11.80	V
	9221.60	-57.03	-40	-17.03	-67.82	-59.38	9.65	12.00	V
NR n77 BW 100MHz Middle 1RB0,QPSK	7584.00	-59.63	-13	-46.63	-62.29	-62.93	8.30	11.60	H
	11376.00	-53.97	-13	-40.97	-64.64	-55.49	10.48	12.00	H
	15168.00	-50.87	-13	-37.87	-67.79	-52.57	11.80	13.50	H
	7584.00	-59.60	-13	-46.60	-62.29	-62.90	8.30	11.60	V
	11376.00	-54.67	-13	-41.67	-65.06	-56.19	10.48	12.00	V
	15168.00	-52.58	-13	-39.58	-67.82	-54.28	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.