



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : 5G Feature Phone
BRAND NAME : Sonim
MODEL NAME : X320(S1303),X320(S1403),X320(S1301),X320(S1401),
X320(S1302),X320(S1402),X320(S1304),X320(S1404),
X320(S1305),X320(S1405),X320(S1310),X320(S1410)
FCC ID : WYPS13030
STANDARD : 47 CFR Part 22, 24, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 18, 2024 ~ Aug. 16, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	15
3.1 Measuring Instruments	15
3.2 Test Setup	15
3.3 Test Result of Conducted Test	15
3.4 Conducted Output Power and ERP/EIRP	16
3.5 Peak-to-Average Ratio	17
3.6 Occupied Bandwidth	18
3.7 Conducted Band Edge	19
3.8 Conducted Spurious Emission	21
3.9 Frequency Stability	22
4 RADIATED TEST ITEMS	23
4.1 Measuring Instruments	23
4.2 Test Setup	23
4.3 Test Result of Radiated Test	24
4.4 Radiated Spurious Emission	25
5 LIST OF MEASURING EQUIPMENT	26
6 MEASUREMENT UNCERTAINTY	27
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG462605I	Rev. 01	Initial issue of report	Sep. 14, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§24.232(c)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	§24.232(d) §27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (5G NR n5,) (5G NR n2, n25) (5G NR n66)	< $43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (5G NR n5,) (5G NR n2, n25) (5G NR n66,)	< $43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (5G NR n5,) (5G NR n2, n25) (5G NR n66)	< $43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 9.67 dB at 10861.50 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Feature Phone
Brand Name	Sonim
Model Name	X320(S1303),X320(S1403),X320(S1301),X320(S1401),X320(S1302), X320(S1402),X320(S1304),X320(S1404),X320(S1305),X320(S1405), X320(S1310),X320(S1410)
FCC ID	WYPS13030
IMEI Code	Conducted : 016562000004862/016562000009549 Radiation : 016562000018276/016562000025875
HW Version	V1.0
SW Version	X32.0-01-14.0-19.01.00
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n66 : 2110 MHz~ 2200 MHz
Bandwidth	n2 : 5MHz / 10MHz / 15MHz / 20MHz n5 : 5MHz / 10MHz / 15MHz / 20MHz n25, n66: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz
SCS	15kHz
Antenna Gain	<Ant. 1>: n2: -1.5 dBi n5: -1.3 dBi n25: -1.5 dBi

	n66: -2.3 dBi <Ant. 4>: n2: -0.6 dBi n25: -0.6 dBi n66: -1.5 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP of ANT 1 for n5, and ANT 4 for n2/n25/n66 are shown in the report.
2. The device supports two PAs for 5G NR n2/n25/n66 (main PA for SA mode and other PA for NSA mode), the maximum power of other PA is higher than the main PA, therefore, we chose higher power PA to calculate the EIRP and show in the report.
3. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
4. 5G NR n2/n5/n25/n66 support SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.2070	4M49G7D	0.1726	4M50W7D
10	1855.0 ~ 1905.0	0.2084	9M29G7D	0.1690	9M31W7D
15	1857.5 ~ 1902.5	0.2099	14M1G7D	0.1706	14M1W7D
20	1860.0 ~ 1900.0	0.2168	19M0G7D	0.1811	19M0W7D

5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.1340	4M47G7D	0.1054	4M49W7D
10	829.0 ~ 844.0	0.1306	9M28G7D	0.1047	9M29W7D
15	831.5 ~ 841.5	0.1309	14M1G7D	0.1074	14M1W7D
20	834.0 ~ 839.0	0.1355	18M9G7D	0.1175	18M9W7D



5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.2193	4M49G7D	0.1762	4M50W7D
10	1855.0 ~ 1910.0	0.2168	9M29G7D	0.1803	9M31W7D
15	1857.5 ~ 1907.5	0.2223	14M1G7D	0.1795	14M1W7D
20	1860.0 ~ 1905.0	0.2193	19M0G7D	0.1884	19M0W7D
25	1862.5 ~ 1902.5	0.2218	23M8G7D	0.1762	23M8W7D
30	1865.0 ~ 1900.0	0.2163	28M6G7D	0.1871	28M6W7D
35	1867.5 ~ 1897.5	0.2163	33M6G7D	0.1837	33M6W7D
40	1870.0 ~ 1895.0	0.2275	38M6G7D	0.1897	38M6W7D

5G NR n66		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.1888	4M48G7D	0.1479	4M48W7D
10	1715.0 ~ 1775.0	0.1879	9M31G7D	0.1626	9M30W7D
15	1717.5 ~ 1772.5	0.1897	14M1G7D	0.1476	14M1W7D
20	1720.0 ~ 1770.0	0.1892	19M0G7D	0.1472	19M0W7D
25	1722.5 ~ 1767.5	0.1718	23M8G7D	0.1459	23M8W7D
30	1725.0 ~ 1765.0	0.1888	28M6G7D	0.1607	28M6G7D
35	1727.5 ~ 1762.5	0.1888	33M6G7D	0.1549	33M6G7D
40	1730.0 ~ 1760.0	0.1901	38M6G7D	0.1574	38M6W7D

Note:

- 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
- All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)														Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v		-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n25	v	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n66	v	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n5				v		-	-	-	-	-	-	-	-	v	v					v		v		
	n25				v					-	-	-	-	-	v	v					v		v		
	n66				v					-	-	-	-	-	v	v					v		v		
26dB and 99% Bandwidth	n5	v	v	v	v		-	-	-	-	-	-	-	-		v	v	v	v		v		v		
	n25	v	v	v	v	v	v	v	v	-	-	-	-	-		v	v	v	v		v		v		
	n66	v	v	v	v	v	v	v	v	-	-	-	-	-		v	v	v	v		v		v		
Conducted Band Edge	n5	v	v		v		-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n25	v			v				v	-	-	-	-	-	v	v				v	v	v		v	
	n66	v			v				v	-	-	-	-	-	v	v				v	v	v		v	
Conducted Spurious Emission	n5	v	v		v		-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n25	v			v				v	-	-	-	-	-	v	v				v		v	v	v	
	n66	v			v				v	-	-	-	-	-	v	v				v		v	v	v	
Frequency Stability	n5				v		-	-	-	-	-	-	-	-		v					v		v		
	n25				v					-	-	-	-	-		v					v		v		
	n66				v					-	-	-	-	-		v					v		v		



E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n5	Worst Case																			v	v	v	
	n25	Worst Case																			v	v	v	
	n66	Worst Case																			v	v	v	
Note	1.	The mark “v “ means that this configuration is chosen for testing																						
	2.	The mark “-“ means that this bandwidth is not supported.																						
	3.	The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported																						
	4.	Frequency Stability : Normal Voltage = 3.85V ; Low Voltage =3.6V. ; High Voltage =4.4V																						

2.2 Connection Diagram of Test System

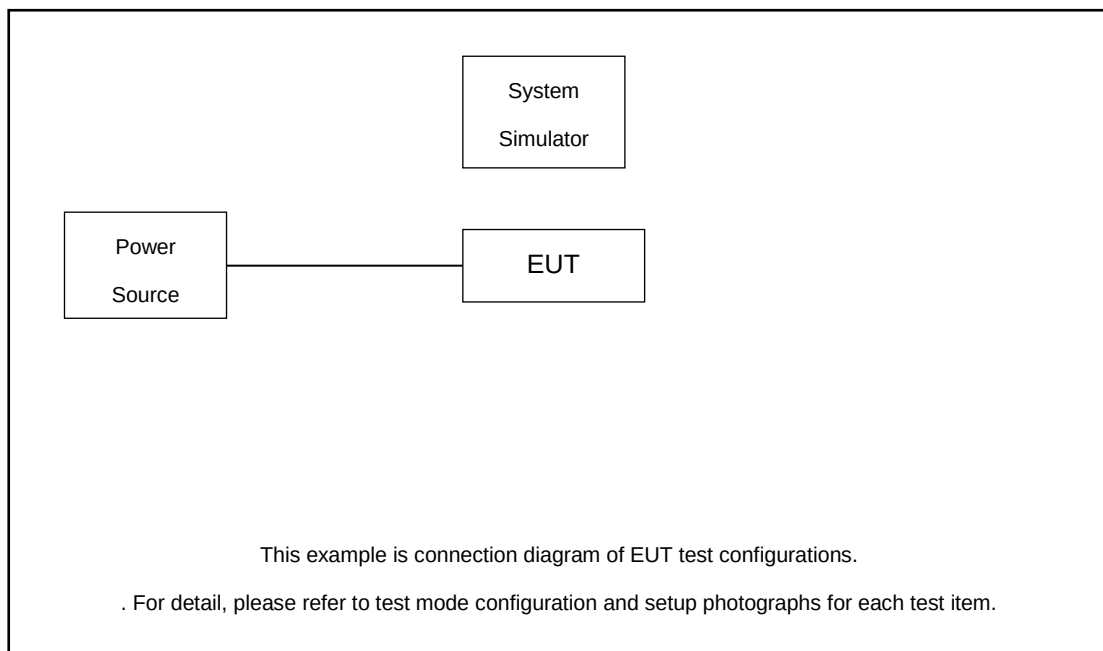

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 7.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5



5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel	-	167300	-
	Frequency	-	836.5	-
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	390000	392500	395000
	Frequency	1870	1882.5	1895
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
30	Channel	389000	392500	396000
	Frequency	1865	1882.5	1900
25	Channel	388500	392500	396500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
35	Channel	345500	349000	352500
	Frequency	1727.5	1745	1762.5
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

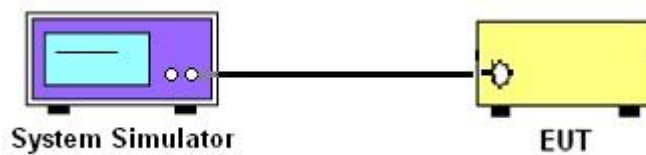

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

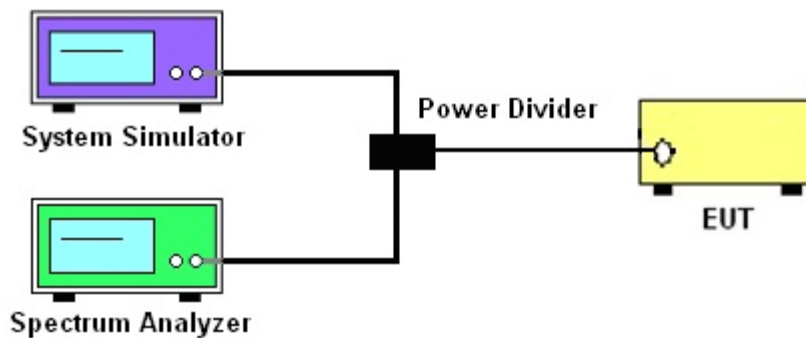

3.2.3 Frequency Stability

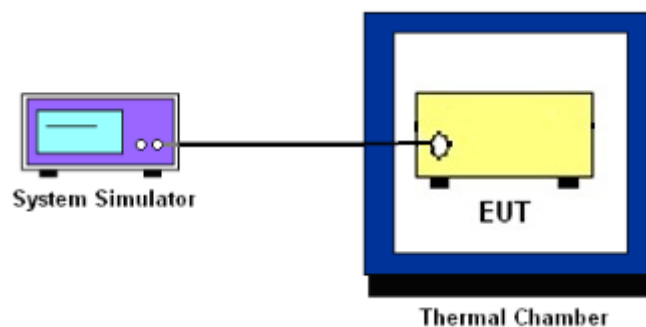

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

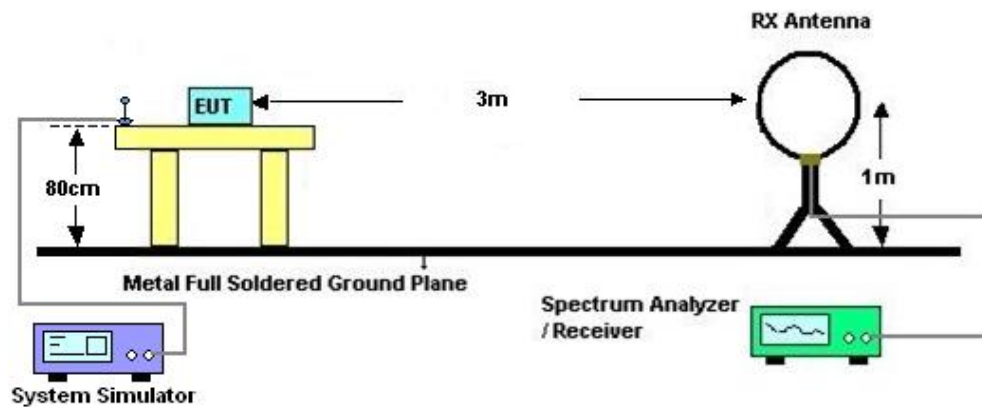

4.2.2 For radiated test from 30MHz to 1GHz

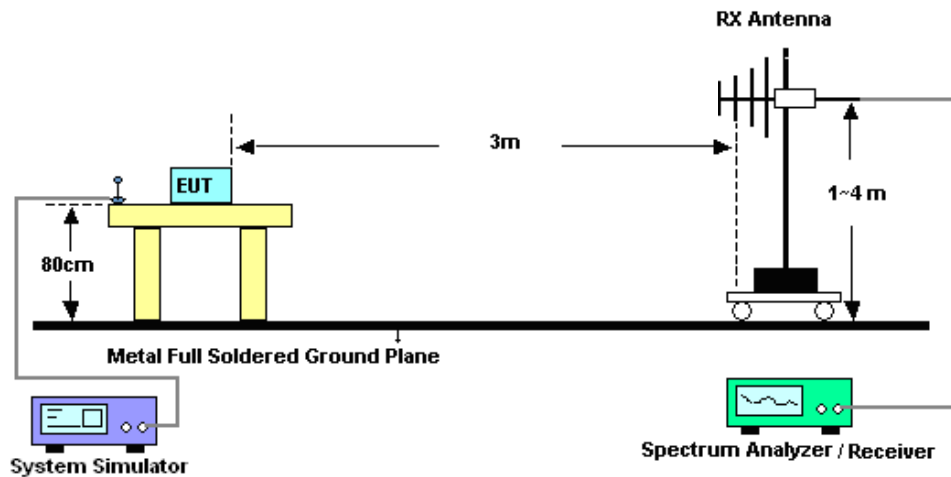

4.2.3 For radiated test above 1GHz

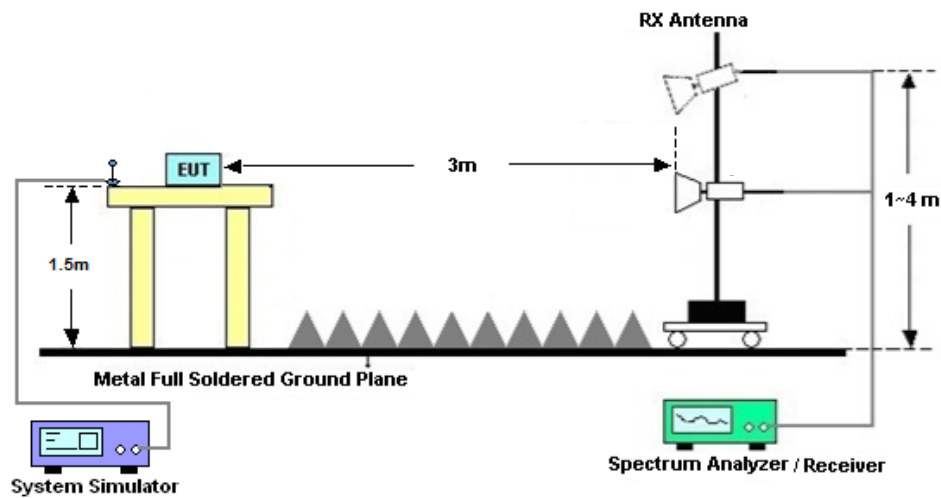

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jul. 18, 2024~ Jul. 26, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Jul. 18, 2024~ Jul. 26, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Jul. 18, 2024~ Jul. 26, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Jul. 18, 2024~ Jul. 26, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Aug. 15, 2024~ Aug. 16, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Aug. 15, 2024~ Aug. 16, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Aug. 15, 2024~ Aug. 16, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Aug. 15, 2024~ Aug. 16, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Aug. 15, 2024~ Aug. 16, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Aug. 15, 2024~ Aug. 16, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Aug. 15, 2024~ Aug. 16, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Aug. 15, 2024~ Aug. 16, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Aug. 15, 2024~ Aug. 16, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Aug. 15, 2024~ Aug. 16, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 15, 2024~ Aug. 16, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 15, 2024~ Aug. 16, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%



FR1 N2-SCS 15k-ANT 1 (Main PA)

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-1.5dB

\NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP(W)
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.47	21.97	0.1574
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.65	21.15	0.1303
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	23.47	21.97	0.1574
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.64	21.14	0.1300
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.69	22.19	0.1656
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.77	21.27	0.1340
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.6	22.1	0.1622
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.58	21.08	0.1282
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	23.45	21.95	0.1567
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.61	21.11	0.1291
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	23.7	22.2	0.1660
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.76	21.26	0.1337
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.61	22.11	0.1626
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.72	21.22	0.1324
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	23.51	22.01	0.1589
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.63	21.13	0.1297
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.55	22.05	0.1603
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.75	21.25	0.1334
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	50@25	23.57	22.07	0.1611
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	23.35	21.85	0.1531
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@104	23.3	21.8	0.1514
2	15	20	372000	1860	DFT-s-OFDM QPSK	50@25	23.54	22.04	0.1600
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.5	22	0.1585
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@104	23.5	22	0.1585
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	50@25	22.54	21.04	0.1271
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.6	21.1	0.1288
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@104	22.58	21.08	0.1282
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	50@25	21.1	19.6	0.0912
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@1	21.08	19.58	0.0908
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@104	21.04	19.54	0.0899
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	50@25	18.97	17.47	0.0558
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@1	18.77	17.27	0.0533
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@104	18.71	17.21	0.0526
2	15	20	372000	1860	CP-OFDM QPSK	53@26	22.11	20.61	0.1151
2	15	20	372000	1860	CP-OFDM QPSK	1@1	22	20.5	0.1122
2	15	20	372000	1860	CP-OFDM QPSK	1@104	21.58	20.08	0.1019
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	50@25	23.56	22.06	0.1607
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.26	21.76	0.1500
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@104	23.43	21.93	0.1560
2	15	20	376000	1880	DFT-s-OFDM QPSK	50@25	23.58	22.08	0.1614
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	23.41	21.91	0.1552



2	15	20	376000	1880	DFT-s-OFDM QPSK	1@104	23.51	22.01	0.1589
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	50@25	22.49	20.99	0.1256
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.56	21.06	0.1276
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@104	22.69	21.19	0.1315
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	50@25	21.04	19.54	0.0899
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@1	21.02	19.52	0.0895
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@104	21.24	19.74	0.0942
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	50@25	18.94	17.44	0.0555
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@1	18.7	17.2	0.0525
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@104	18.81	17.31	0.0538
2	15	20	376000	1880	CP-OFDM QPSK	53@26	22.03	20.53	0.1130
2	15	20	376000	1880	CP-OFDM QPSK	1@1	21.62	20.12	0.1028
2	15	20	376000	1880	CP-OFDM QPSK	1@104	21.72	20.22	0.1052
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	50@25	23.61	22.11	0.1626
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	23.48	21.98	0.1578
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@104	23.56	22.06	0.1607
2	15	20	380000	1900	DFT-s-OFDM QPSK	50@25	23.69	22.19	0.1656
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	23.72	22.22	0.1667
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@104	23.56	22.06	0.1607
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	50@25	22.7	21.2	0.1318
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.76	21.26	0.1337
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@104	22.77	21.27	0.1340
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	50@25	21.16	19.66	0.0925
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@1	21.17	19.67	0.0927
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@104	21.3	19.8	0.0955
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	50@25	19.1	17.6	0.0575
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@1	18.89	17.39	0.0548
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@104	18.87	17.37	0.0546
2	15	20	380000	1900	CP-OFDM QPSK	53@26	22.18	20.68	0.1169
2	15	20	380000	1900	CP-OFDM QPSK	1@1	21.73	20.23	0.1054
2	15	20	380000	1900	CP-OFDM QPSK	1@104	21.83	20.33	0.1079



FR1 N2-SCS 15k-ANT 4 (Other PA)

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-0.6dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.69	23.09	0.2037
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.71	22.11	0.1626
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	23.73	23.13	0.2056
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.97	22.37	0.1726
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.76	23.16	0.2070
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.86	22.26	0.1683
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.68	23.08	0.2032
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.74	22.14	0.1637
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	23.7	23.1	0.2042
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.88	22.28	0.1690
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	23.79	23.19	0.2084
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.87	22.27	0.1687
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.82	23.22	0.2099
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.83	22.23	0.1671
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	23.72	23.12	0.2051
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.92	22.32	0.1706
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.78	23.18	0.2080
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.82	22.22	0.1667
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	50@25	23.84	23.24	0.2109
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	23.67	23.07	0.2028
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@104	23.76	23.16	0.2070
2	15	20	372000	1860	DFT-s-OFDM QPSK	50@25	23.83	23.23	0.2104
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.8	23.2	0.2089
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@104	23.82	23.22	0.2099
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	50@25	22.95	22.35	0.1718
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.76	22.16	0.1644
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@104	22.81	22.21	0.1663
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	50@25	21.46	20.86	0.1219
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@1	21.24	20.64	0.1159
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@104	21.39	20.79	0.1199
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	50@25	19.34	18.74	0.0748
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@1	18.88	18.28	0.0673
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@104	18.97	18.37	0.0687
2	15	20	372000	1860	CP-OFDM QPSK	53@26	22.45	21.85	0.1531
2	15	20	372000	1860	CP-OFDM QPSK	1@1	22.4	21.8	0.1514
2	15	20	372000	1860	CP-OFDM QPSK	1@104	22.44	21.84	0.1528
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	50@25	23.91	23.31	0.2143
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.75	23.15	0.2065
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@104	23.81	23.21	0.2094
2	15	20	376000	1880	DFT-s-OFDM QPSK	50@25	23.96	23.36	0.2168
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	23.85	23.25	0.2113
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@104	23.92	23.32	0.2148



2	15	20	376000	1880	DFT-s-OFDM 16 QAM	50@25	22.99	22.39	0.1734
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.18	22.58	0.1811
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@104	22.85	22.25	0.1679
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	50@25	21.48	20.88	0.1225
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@1	21.43	20.83	0.1211
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@104	21.48	20.88	0.1225
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	50@25	19.41	18.81	0.0760
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@1	18.97	18.37	0.0687
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@104	19.01	18.41	0.0693
2	15	20	376000	1880	CP-OFDM QPSK	53@26	22.53	21.93	0.1560
2	15	20	376000	1880	CP-OFDM QPSK	1@1	22.38	21.78	0.1507
2	15	20	376000	1880	CP-OFDM QPSK	1@104	22.41	21.81	0.1517
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	50@25	23.83	23.23	0.2104
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	23.79	23.19	0.2084
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@104	23.76	23.16	0.2070
2	15	20	380000	1900	DFT-s-OFDM QPSK	50@25	23.84	23.24	0.2109
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	23.77	23.17	0.2075
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@104	23.8	23.2	0.2089
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	50@25	22.98	22.38	0.1730
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	23.1	22.5	0.1778
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@104	22.81	22.21	0.1663
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	50@25	21.48	20.88	0.1225
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@1	21.36	20.76	0.1191
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@104	21.83	21.23	0.1327
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	50@25	19.38	18.78	0.0755
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@1	19.1	18.5	0.0708
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@104	19.03	18.43	0.0697
2	15	20	380000	1900	CP-OFDM QPSK	53@26	22.48	21.88	0.1542
2	15	20	380000	1900	CP-OFDM QPSK	1@1	22.47	21.87	0.1538
2	15	20	380000	1900	CP-OFDM QPSK	1@104	22.42	21.82	0.1521



Software Version: 23.06.1602

FR1 N5-SCS 15k-ANT 1

Transmitter Conducted Output Power And ERP, $(G_T - L_C) = -1.3\text{dB}$

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	24.72	21.27	0.1340
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	23.68	20.23	0.1054
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	24.58	21.13	0.1297
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.48	20.03	0.1007
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	24.27	20.82	0.1208
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	23.31	19.86	0.0968
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	24.61	21.16	0.1306
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	23.65	20.2	0.1047
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	24.42	20.97	0.1250
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.51	20.06	0.1014
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	24.39	20.94	0.1242
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	23.38	19.93	0.0984
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	24.62	21.17	0.1309
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	23.76	20.31	0.1074
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	24.5	21.05	0.1274
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.67	20.22	0.1052
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	24.5	21.05	0.1274
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	23.61	20.16	0.1038
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	24.69	21.24	0.1330
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	24.68	21.23	0.1327
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	24.39	20.94	0.1242
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	24.71	21.26	0.1337
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	24.72	21.27	0.1340
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	24.44	20.99	0.1256
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	23.87	20.42	0.1102
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	24.01	20.56	0.1138
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	23.72	20.27	0.1064
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	22.38	18.93	0.0782
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	22.39	18.94	0.0783
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	22.33	18.88	0.0773
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	20.28	16.83	0.0482
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	20.1	16.65	0.0462
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	19.93	16.48	0.0445
5	15	20	166800	834	CP-OFDM QPSK	53@26	23.33	19.88	0.0973



5	15	20	166800	834	CP-OFDM QPSK	1@1	23.41	19.96	0.0991
5	15	20	166800	834	CP-OFDM QPSK	1@104	23.1	19.65	0.0923
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	24.51	21.06	0.1276
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	24.77	21.32	0.1355
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	24.37	20.92	0.1236
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	24.56	21.11	0.1291
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	24.76	21.31	0.1352
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	24.73	21.28	0.1343
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	23.54	20.09	0.1021
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.15	20.7	0.1175
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	23.64	20.19	0.1045
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	22.06	18.61	0.0726
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	22.73	19.28	0.0847
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	22.2	18.75	0.0750
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	19.99	16.54	0.0451
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	20.23	16.78	0.0476
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	19.77	16.32	0.0429
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	23.03	19.58	0.0908
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	23.56	20.11	0.1026
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	22.66	19.21	0.0834
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	24.65	21.2	0.1318
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	24.66	21.21	0.1321
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	24.14	20.69	0.1172
5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	24.71	21.26	0.1337
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	24.65	21.2	0.1318
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	24.2	20.75	0.1189
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	23.85	20.4	0.1096
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	23.63	20.18	0.1042
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	23.54	20.09	0.1021
5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	22.35	18.9	0.0776
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	22.57	19.12	0.0817
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	21.61	18.16	0.0655
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	20.25	16.8	0.0479
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	20.01	16.56	0.0453
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	19.59	16.14	0.0411
5	15	20	167800	839	CP-OFDM QPSK	53@26	23.3	19.85	0.0966
5	15	20	167800	839	CP-OFDM QPSK	1@1	23.35	19.9	0.0977
5	15	20	167800	839	CP-OFDM QPSK	1@104	22.83	19.38	0.0867



Frequency Stability


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0043	PASS	NV
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0054	PASS	LV
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0030	PASS	HV
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0066	PASS	-30℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0056	PASS	-20℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0036	PASS	-10℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0036	PASS	0℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0066	PASS	10℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0043	PASS	20℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0025	PASS	30℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0060	PASS	40℃
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0065	PASS	50℃



Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	4.06	13	PASS
5	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	5.14	13	PASS

N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

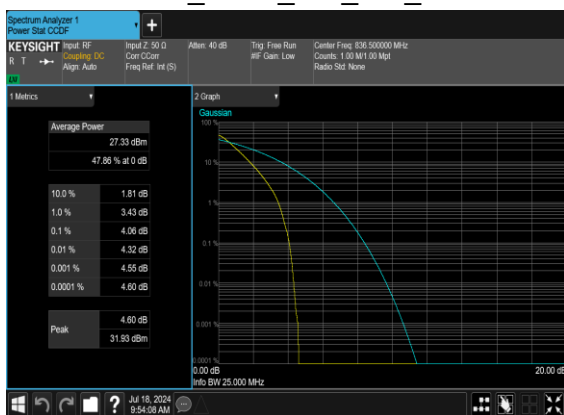

N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH






Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
5	15	5	167300	836.5	CP-OFDM QPSK	25@0	4.473	5.147
5	15	5	167300	836.5	CP-OFDM 16 QAM	25@0	4.4918	5.068
5	15	5	167300	836.5	CP-OFDM 64 QAM	25@0	4.4665	4.932
5	15	5	167300	836.5	CP-OFDM 256 QAM	25@0	4.4825	5.079
5	15	10	167300	836.5	CP-OFDM QPSK	52@0	9.275	10.02
5	15	10	167300	836.5	CP-OFDM 16 QAM	52@0	9.2861	10.01
5	15	10	167300	836.5	CP-OFDM 64 QAM	52@0	9.2687	9.947
5	15	10	167300	836.5	CP-OFDM 256 QAM	52@0	9.2743	10.04
5	15	15	167300	836.5	CP-OFDM QPSK	79@0	14.101	14.84
5	15	15	167300	836.5	CP-OFDM 16 QAM	79@0	14.11	14.92
5	15	15	167300	836.5	CP-OFDM 64 QAM	79@0	14.091	14.89
5	15	15	167300	836.5	CP-OFDM 256 QAM	79@0	14.115	14.89
5	15	20	167300	836.5	CP-OFDM QPSK	106@0	18.879	19.84
5	15	20	167300	836.5	CP-OFDM 16 QAM	106@0	18.909	19.88
5	15	20	167300	836.5	CP-OFDM 64 QAM	106@0	18.868	19.86
5	15	20	167300	836.5	CP-OFDM 256 QAM	106@0	18.895	19.99




N5(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

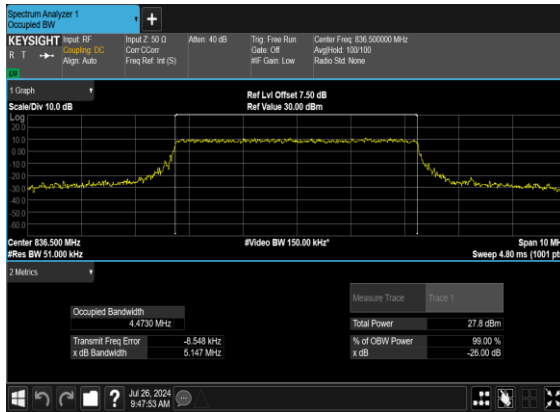


N5(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

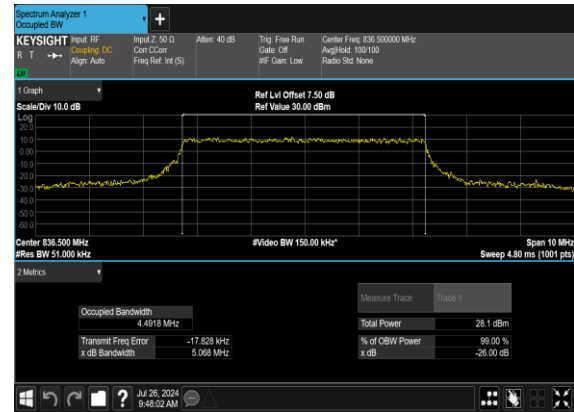

N5(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

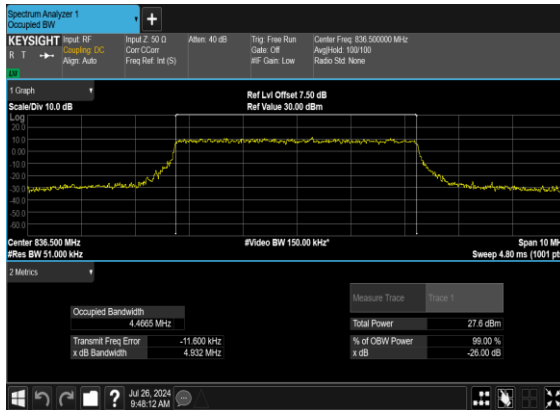


N5(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

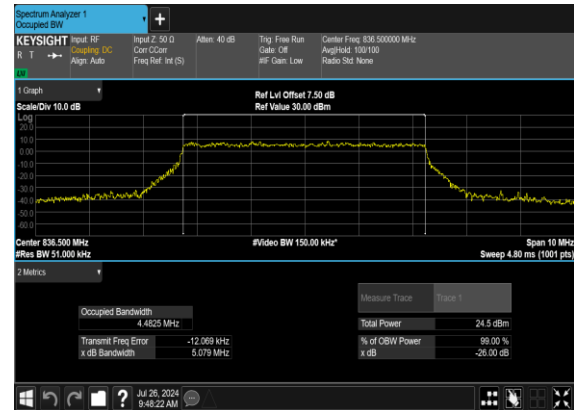





N5(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

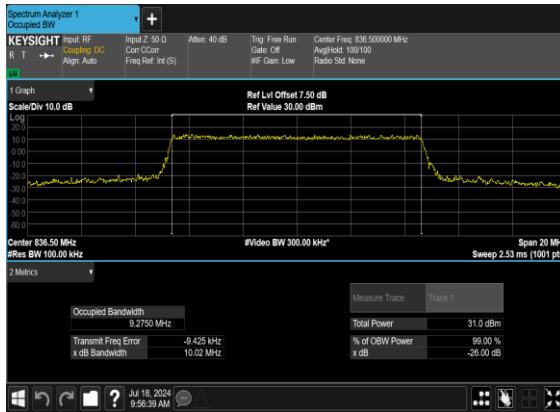


N5(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

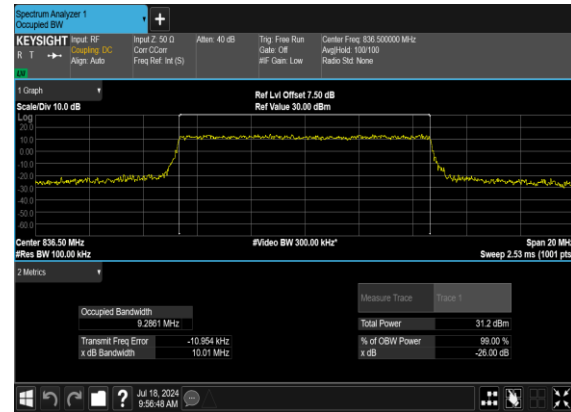

N5(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

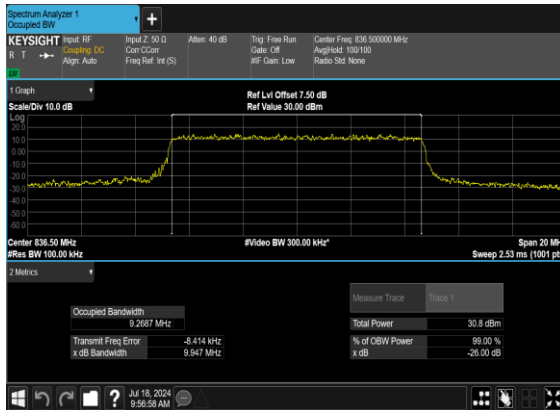


N5(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

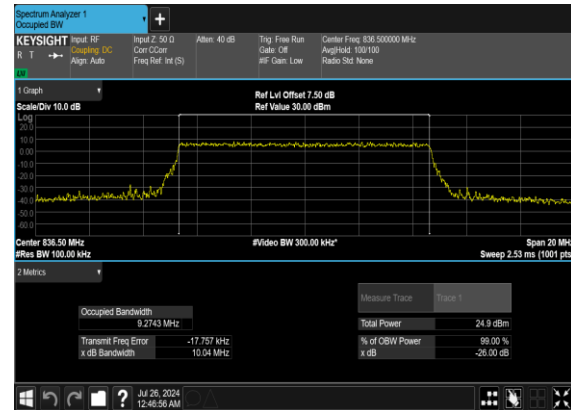





N5(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

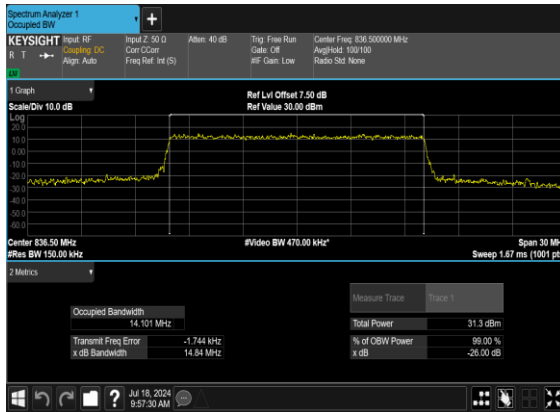


N5(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

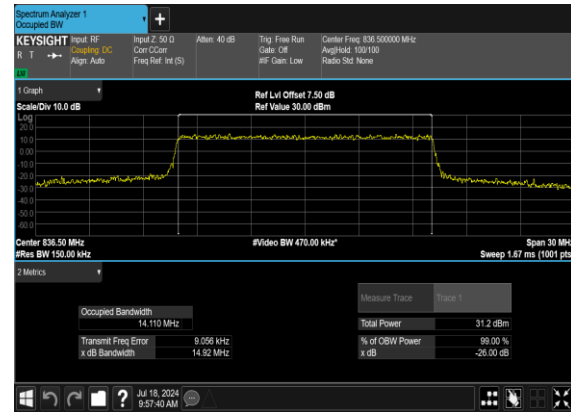

N5(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

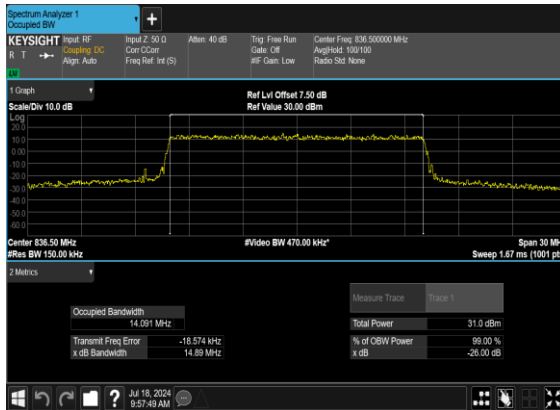


N5(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

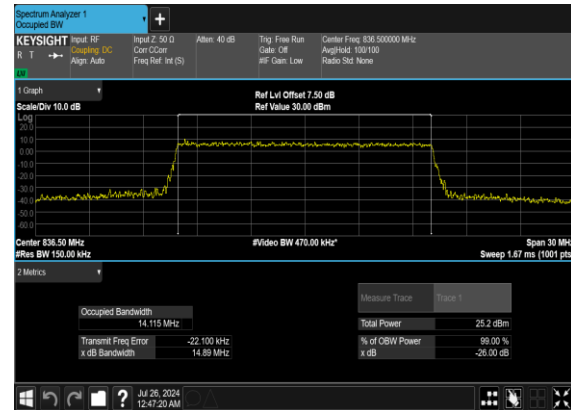





N5(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

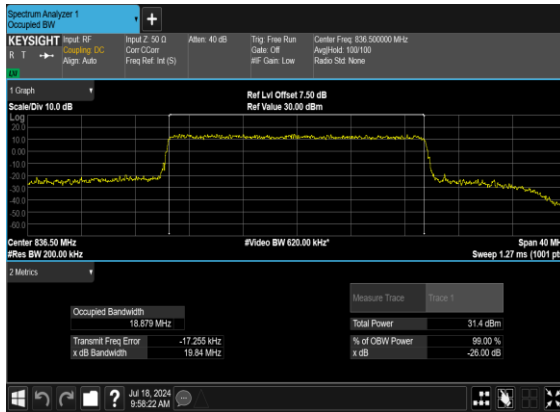


N5(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

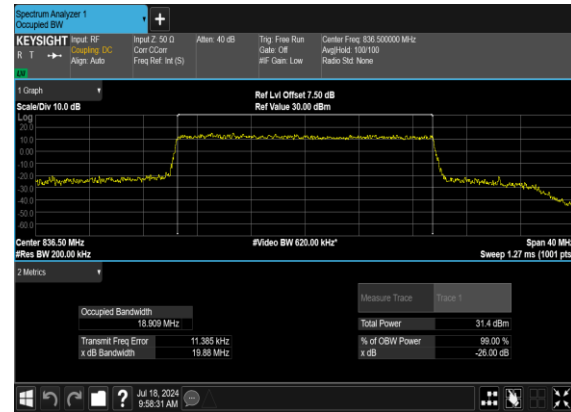

N5(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

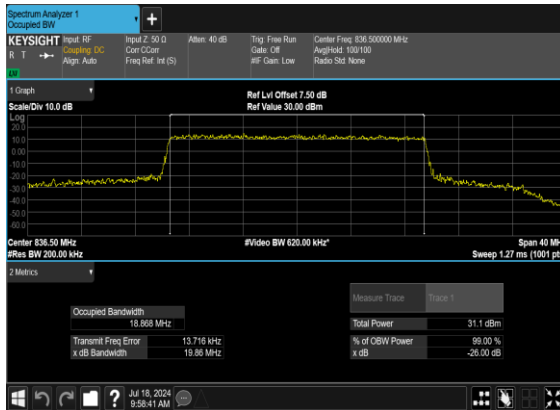

N5(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

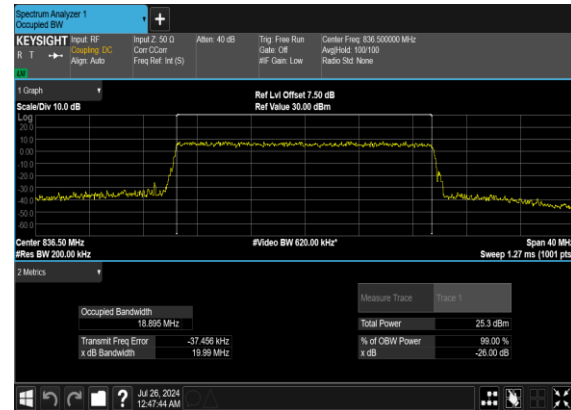



Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	165300	826.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	165300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	169300	846.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	169300	846.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	165800	829.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	165800	829.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	165800	829.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	165800	829.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS




5	15	10	168800	844.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	168800	844.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	168800	844.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	168800	844.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	166800	834.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	166800	834.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	166800	834.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	166800	834.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	167800	839.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	167800	839.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	167800	839.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	167800	839.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

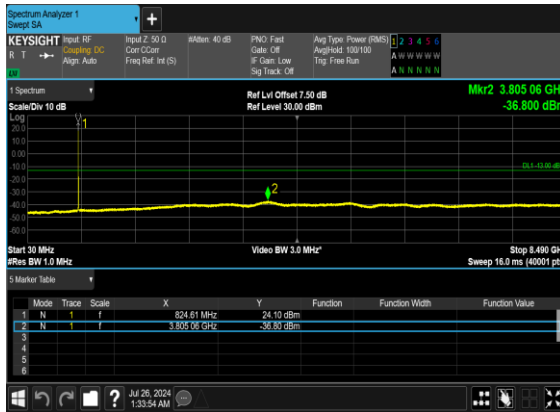


N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

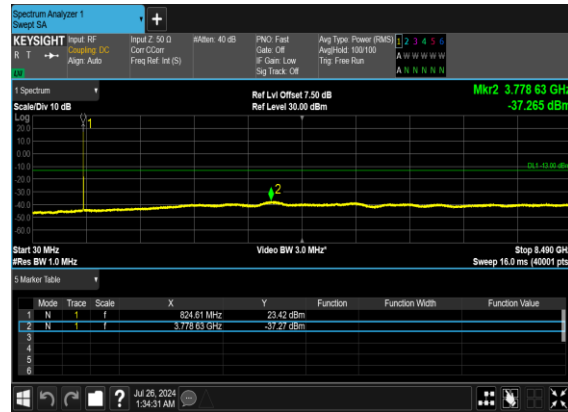

N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

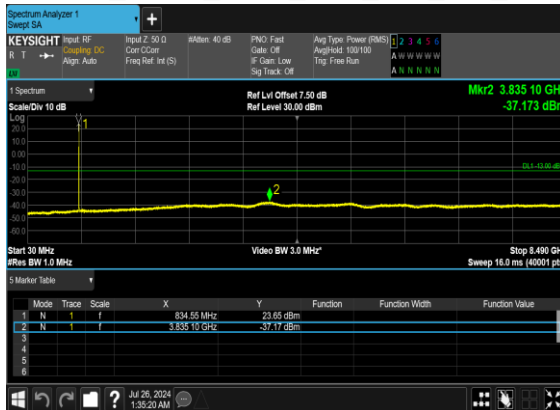


N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

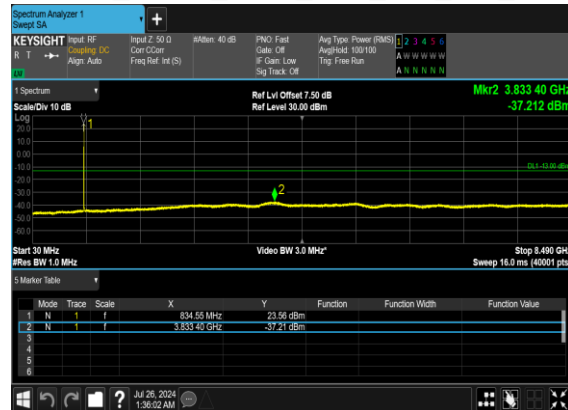





N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

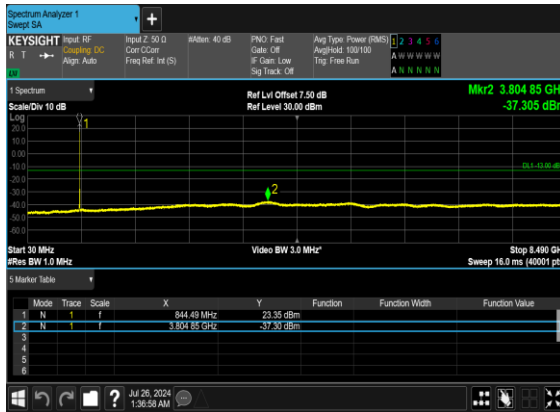


N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

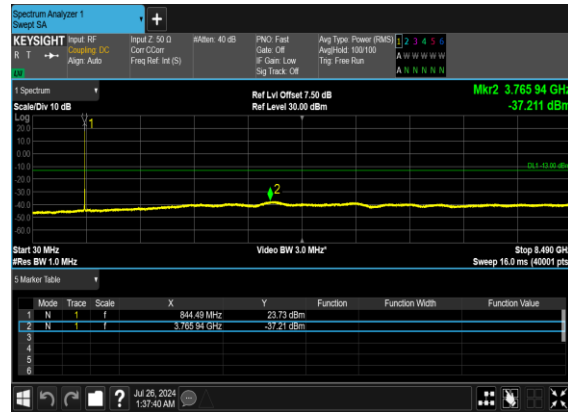

N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

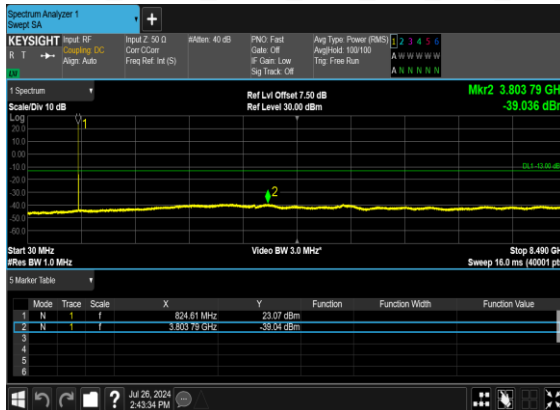


N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

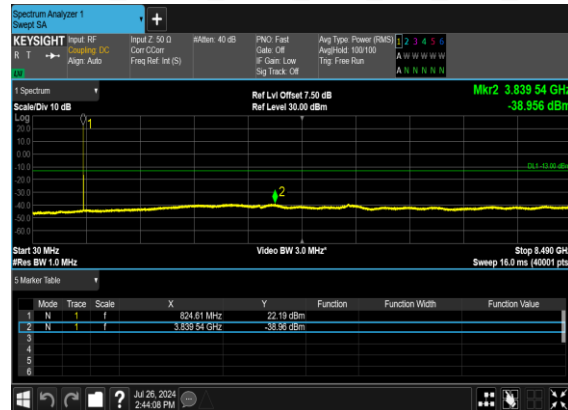





N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

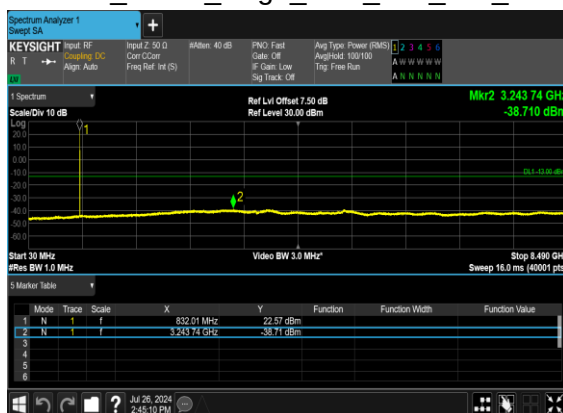


N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

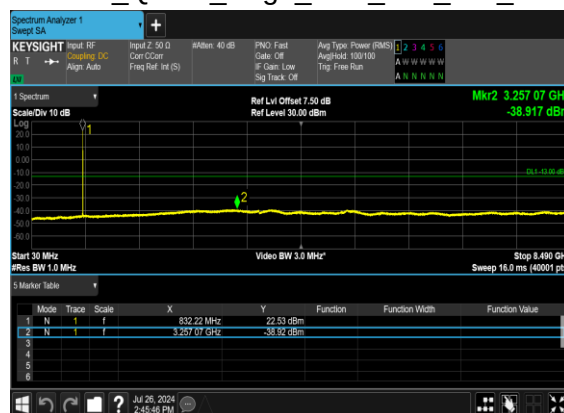

N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

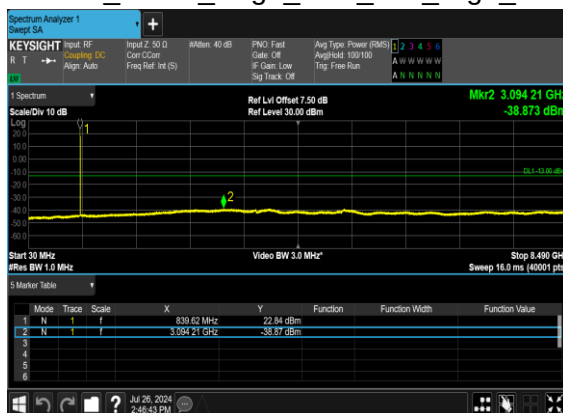


N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

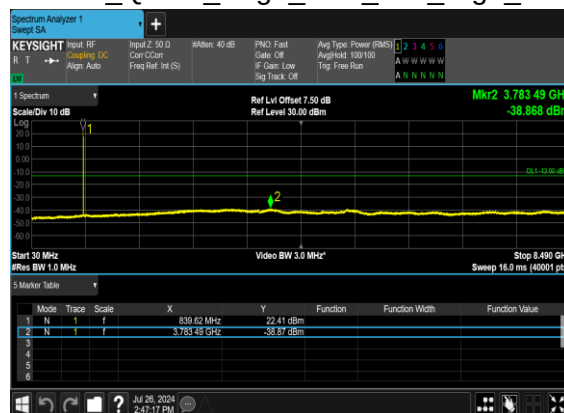





N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

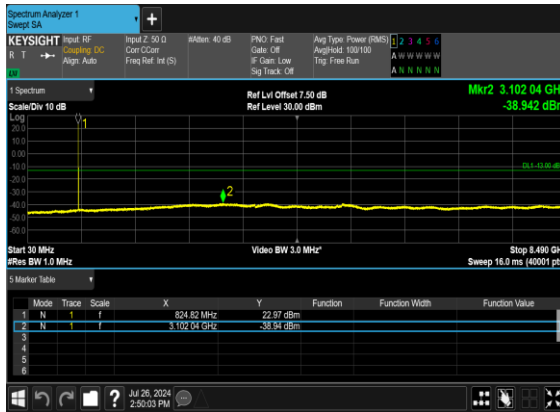


N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

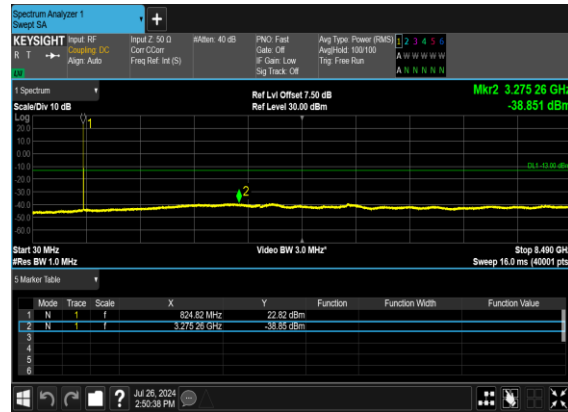

N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

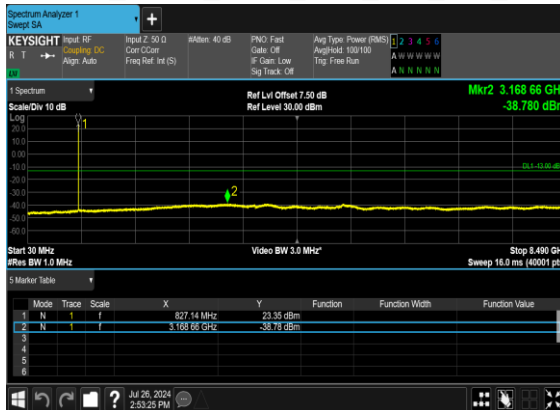


N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

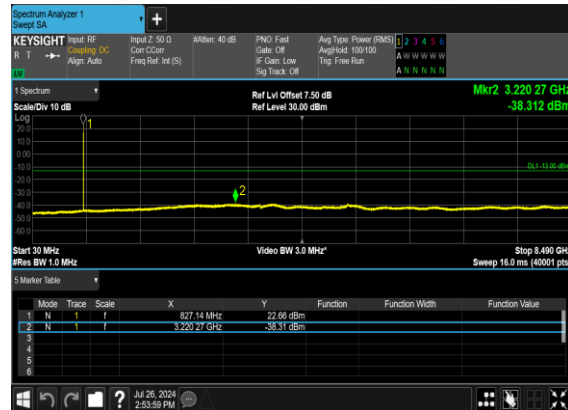



N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

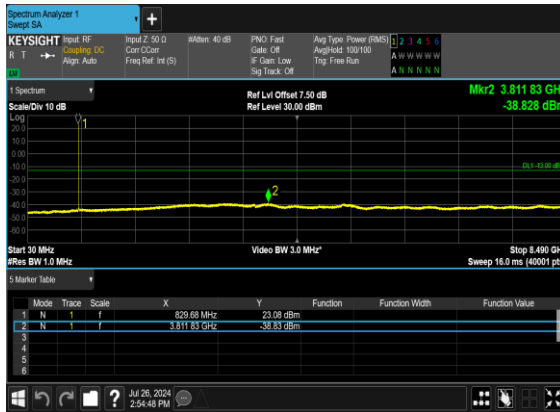

N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH








Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	165300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	165300	826.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	165300	826.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	5	169300	846.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
5	15	5	169300	846.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	169300	846.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	10	165800	829.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	165800	829.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	165800	829.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
5	15	10	165800	829.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
5	15	10	168800	844.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
5	15	10	168800	844.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
5	15	10	168800	844.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
5	15	10	168800	844.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
5	15	20	166800	834.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	166800	834.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	166800	834.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
5	15	20	166800	834.0	DFT-s-OFDM QPSK	100@0	see graph	PASS



5	15	20	167800	839.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
5	15	20	167800	839.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
5	15	20	167800	839.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
5	15	20	167800	839.0	DFT-s-OFDM QPSK	100@0	see graph	PASS

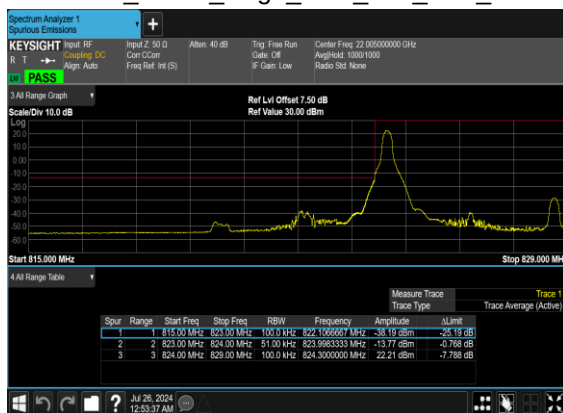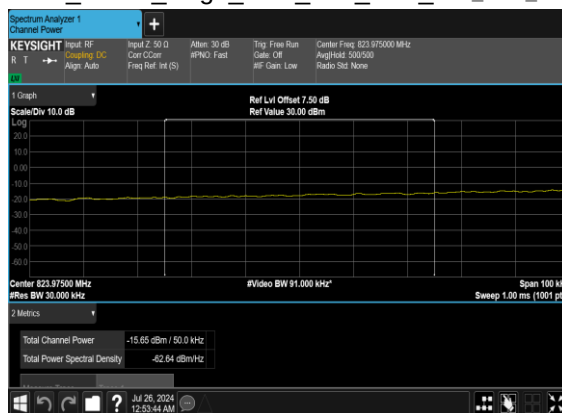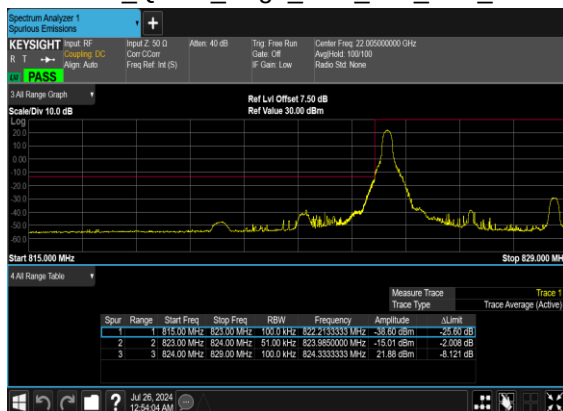
N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH_CHP_PASSN5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

N5(5M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

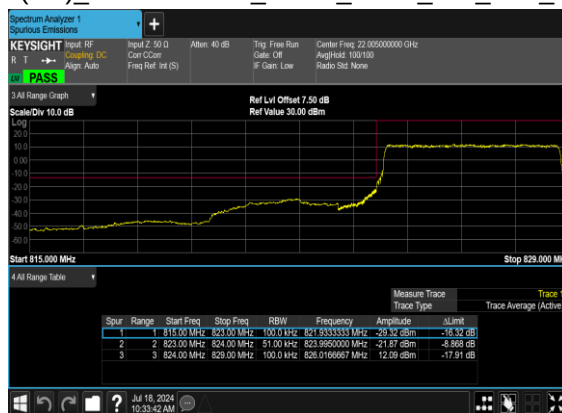





N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

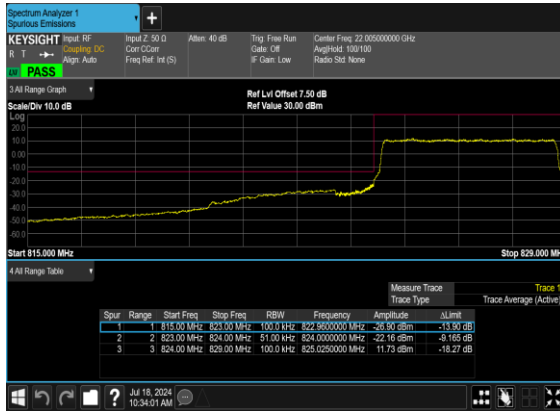

N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

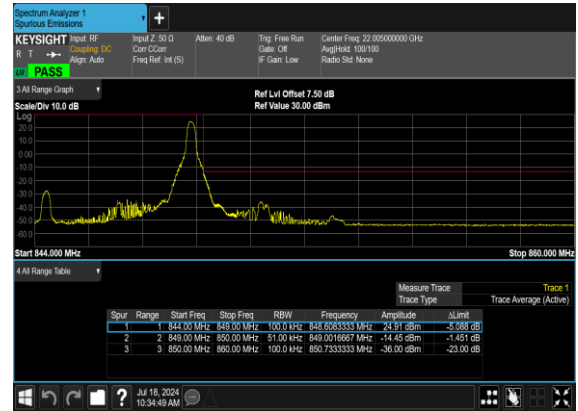

N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

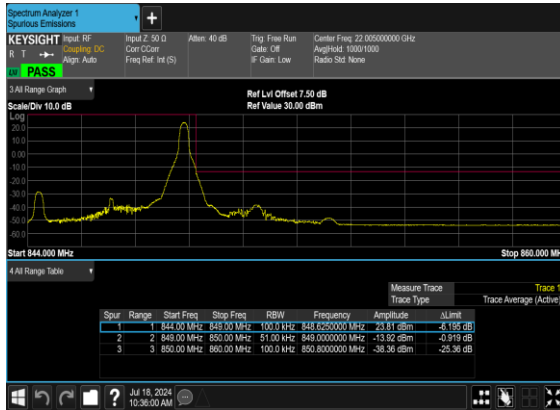


N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH_CHP_PASS







N5(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

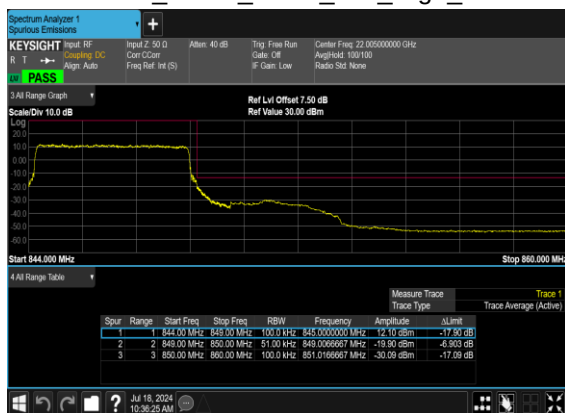


N5(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

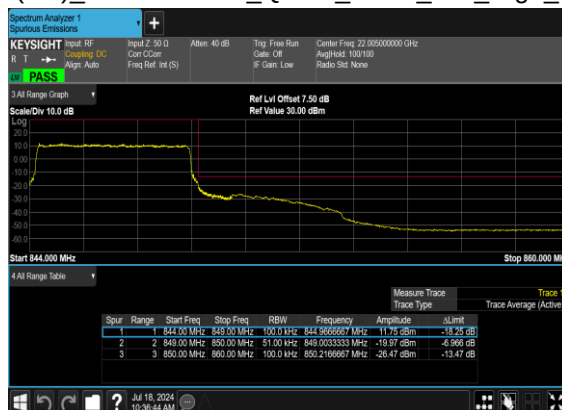

N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

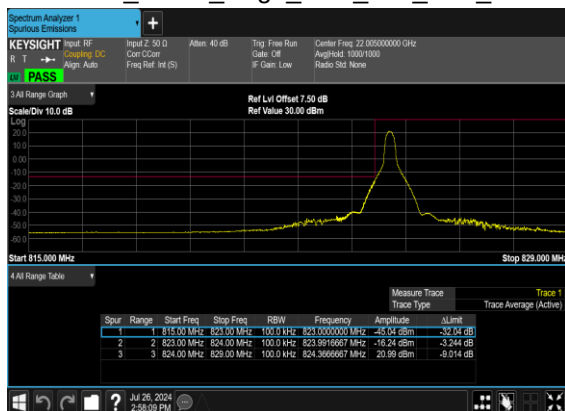


N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

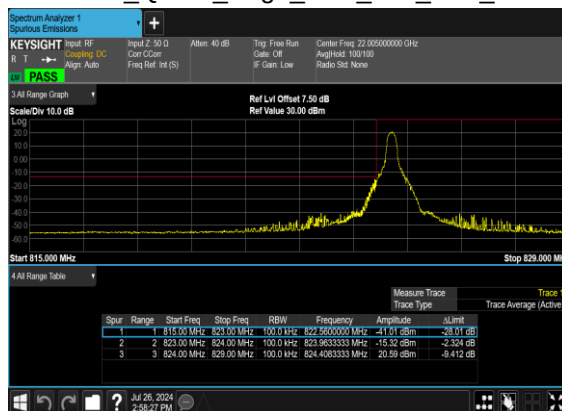





N5(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

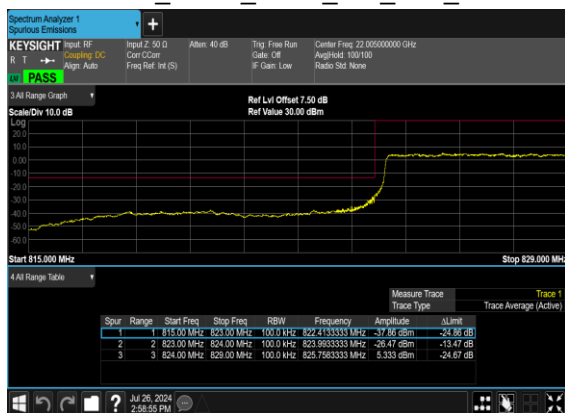


N5(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

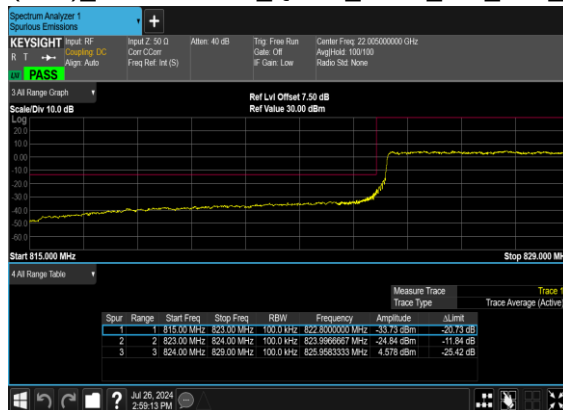

N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

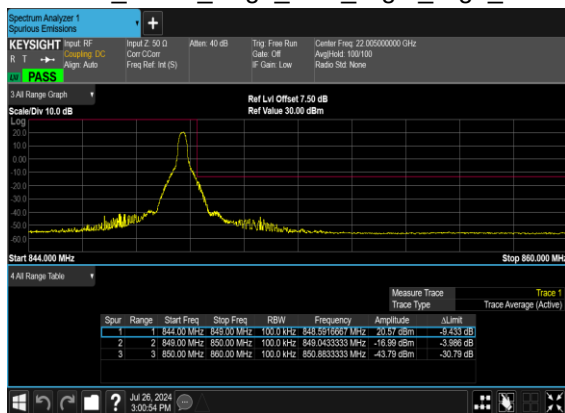


N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

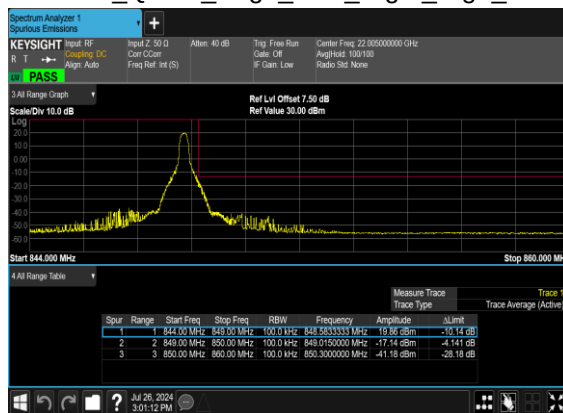




N5(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

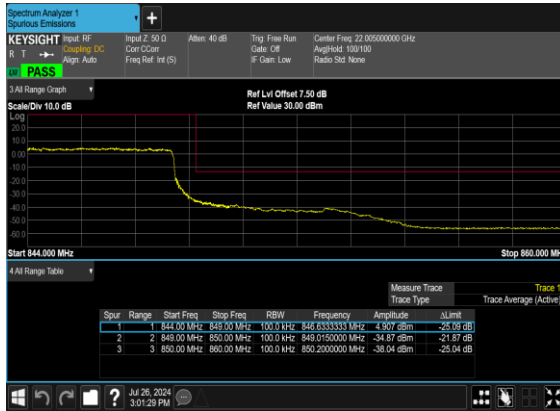


N5(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH



N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

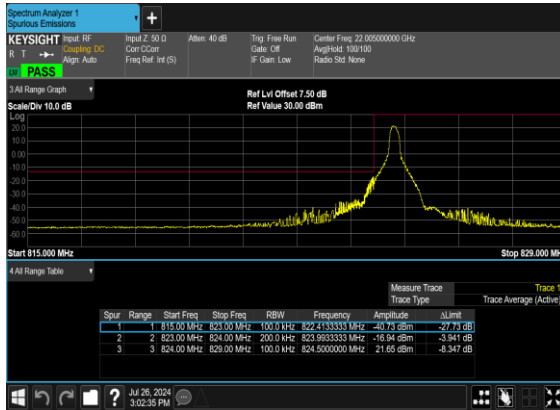


N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

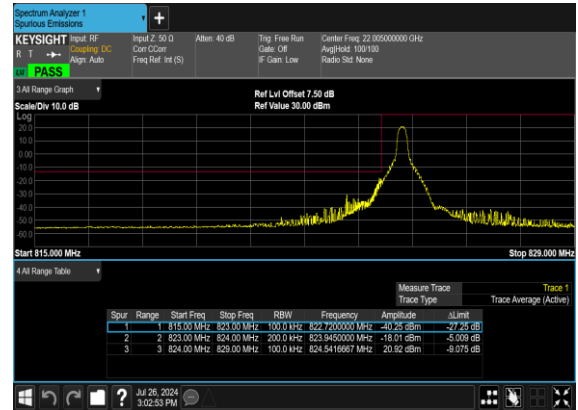





N5(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

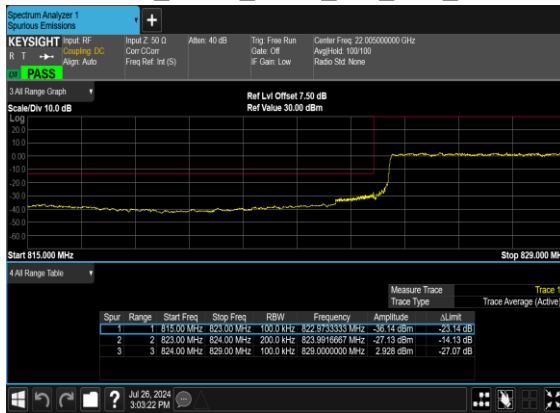


N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

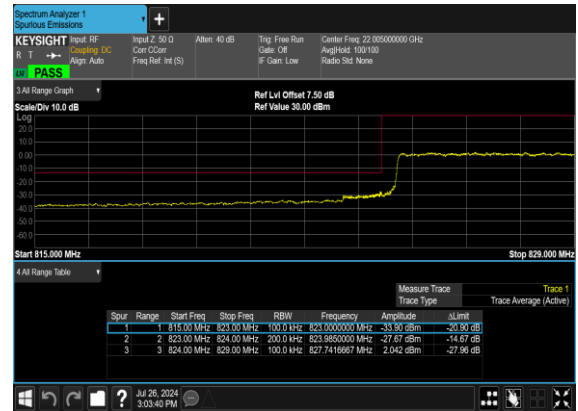

N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

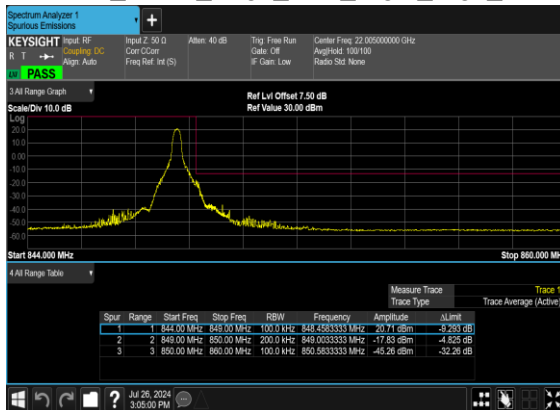


N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

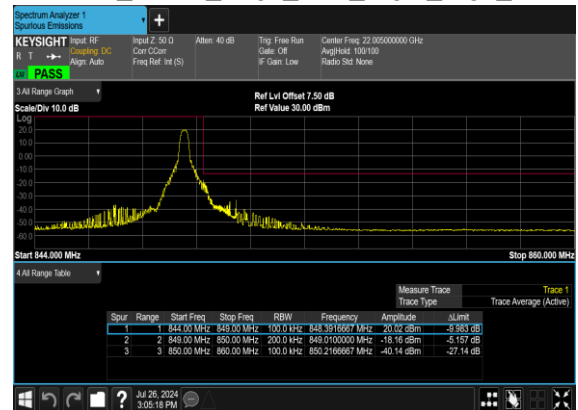




N5(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

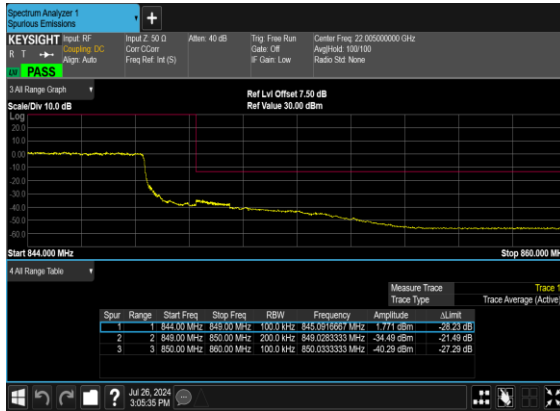

N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

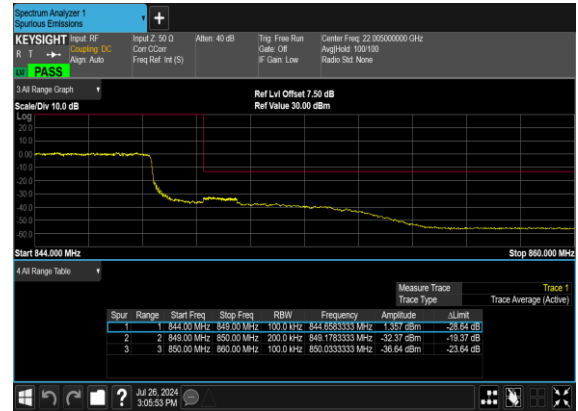



Software Version: 23.06.1602

FR1 N25-SCS 15k-ANT1(Main PA)

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-1.5dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
25	15	5	370500	1882.5	DFT-s-OFDM QPSK	1@1	23.78	22.28	0.1690
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.73	21.23	0.1327
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.76	22.26	0.1683
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.89	21.39	0.1377
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	23.77	22.27	0.1687
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	22.86	21.36	0.1368
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.58	22.08	0.1614
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.67	21.17	0.1309
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.66	22.16	0.1644
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.77	21.27	0.1340
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	23.69	22.19	0.1656
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	22.79	21.29	0.1346
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.57	22.07	0.1611
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.8	21.3	0.1349
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.82	22.32	0.1706
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.85	21.35	0.1365
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.8	22.3	0.1698
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.91	21.41	0.1384
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.57	22.07	0.1611
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.7	21.2	0.1318
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.74	22.24	0.1675
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.89	21.39	0.1377
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	23.79	22.29	0.1694
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.93	21.43	0.1390
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	23.53	22.03	0.1596
25	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	22.75	21.25	0.1334
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.73	22.23	0.1671
25	15	25	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.88	21.38	0.1374
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.77	22.27	0.1687
25	15	25	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.94	21.44	0.1393
25	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	23.7	22.2	0.1660
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	22.81	21.31	0.1352
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.7	22.2	0.1660



25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.85	21.35	0.1365
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@1	23.71	22.21	0.1663
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.95	21.45	0.1396
25	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	23.65	22.15	0.1641
25	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	22.93	21.43	0.1390
25	15	35	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.87	22.37	0.1726
25	15	35	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.09	21.59	0.1442
25	15	35	379500	1897.5	DFT-s-OFDM QPSK	1@1	23.97	22.47	0.1766
25	15	35	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	23.07	21.57	0.1435
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	23.27	21.77	0.1503
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	23.62	22.12	0.1629
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	23.81	22.31	0.1702
25	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	23.88	22.38	0.1730
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	23.88	22.38	0.1730
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	24.15	22.65	0.1841
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	22.97	21.47	0.1403
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	22.76	21.26	0.1337
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	23.1	21.6	0.1445
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	21.39	19.89	0.0975
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	21.33	19.83	0.0962
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	21.61	20.11	0.1026
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	19.26	17.76	0.0597
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	19.07	17.57	0.0571
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	19.27	17.77	0.0598
25	15	40	374000	1870	CP-OFDM QPSK	108@54	22.42	20.92	0.1236
25	15	40	374000	1870	CP-OFDM QPSK	1@1	22.17	20.67	0.1167
25	15	40	374000	1870	CP-OFDM QPSK	1@214	22.02	20.52	0.1127
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	108@54	22.92	21.42	0.1387
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.66	22.16	0.1644
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@214	23.82	22.32	0.1706
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	108@54	23.87	22.37	0.1726
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.87	22.37	0.1726
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@214	23.97	22.47	0.1766
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	108@54	22.89	21.39	0.1377
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.8	21.3	0.1349
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@214	23.07	21.57	0.1435
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	108@54	21.38	19.88	0.0973
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	21.42	19.92	0.0982
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@214	21.57	20.07	0.1016
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	108@54	19.32	17.82	0.0605
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	18.98	17.48	0.0560



25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@214	19.3	17.8	0.0603
25	15	40	376500	1882.5	CP-OFDM QPSK	108@54	22.36	20.86	0.1219
25	15	40	376500	1882.5	CP-OFDM QPSK	1@1	22.22	20.72	0.1180
25	15	40	376500	1882.5	CP-OFDM QPSK	1@214	22.1	20.6	0.1148
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	108@54	23.84	22.34	0.1714
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@1	23.89	22.39	0.1734
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@214	23.79	22.29	0.1694
25	15	40	379000	1895	DFT-s-OFDM QPSK	108@54	23.84	22.34	0.1714
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@1	23.84	22.34	0.1714
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@214	24.22	22.72	0.1871
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	108@54	22.8	21.3	0.1349
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@1	22.81	21.31	0.1352
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@214	23.12	21.62	0.1452
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	108@54	21.36	19.86	0.0968
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@1	21.32	19.82	0.0959
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@214	21.52	20.02	0.1005
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	108@54	19.23	17.73	0.0593
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@1	18.9	17.4	0.0550
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@214	19.3	17.8	0.0603
25	15	40	379000	1895	CP-OFDM QPSK	108@54	22.29	20.79	0.1199
25	15	40	379000	1895	CP-OFDM QPSK	1@1	22.28	20.78	0.1197
25	15	40	379000	1895	CP-OFDM QPSK	1@214	22.53	21.03	0.1268



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0067	PASS	NV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0046	PASS	LV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0036	PASS	HV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0040	PASS	-30℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0022	PASS	-20℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0021	PASS	-10℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0065	PASS	0℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0061	PASS	10℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0067	PASS	20℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0044	PASS	30℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0027	PASS	40℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0061	PASS	50℃




Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	3.95	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	5.02	13	PASS

N25(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N25(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

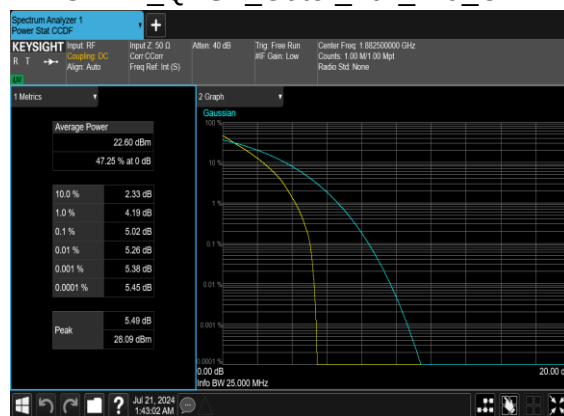



Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4851	5.214
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.5023	5.17
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.4656	5.017
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.485	5.036
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.2855	10.1
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.3075	10.08
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.2806	9.872
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.2983	9.989
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.109	14.78
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.109	14.88
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.131	15.07
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.1	14.96
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.932	20.96
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.932	19.69
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.978	19.89
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	18.972	20.02
25	15	25	376500	1882.5	CP-OFDM QPSK	133@0	23.742	24.92
25	15	25	376500	1882.5	CP-OFDM 16 QAM	133@0	23.791	24.93
25	15	25	376500	1882.5	CP-OFDM 64 QAM	133@0	23.777	24.68
25	15	25	376500	1882.5	CP-OFDM 256 QAM	133@0	23.787	24.77
25	15	30	376500	1882.5	CP-OFDM QPSK	160@0	28.578	29.65
25	15	30	376500	1882.5	CP-OFDM 16 QAM	160@0	28.581	29.78




25	15	30	376500	1882.5	CP-OFDM 64 QAM	160@0	28.6	29.75
25	15	30	376500	1882.5	CP-OFDM 256 QAM	160@0	28.558	29.85
25	15	35	376500	1882.5	CP-OFDM QPSK	188@0	33.556	34.9
25	15	35	376500	1882.5	CP-OFDM 16 QAM	188@0	33.505	34.77
25	15	35	376500	1882.5	CP-OFDM 64 QAM	188@0	33.591	34.86
25	15	35	376500	1882.5	CP-OFDM 256 QAM	188@0	33.524	34.77
25	15	40	376500	1882.5	CP-OFDM QPSK	216@0	38.61	39.99
25	15	40	376500	1882.5	CP-OFDM 16 QAM	216@0	38.517	40.14
25	15	40	376500	1882.5	CP-OFDM 64 QAM	216@0	38.591	39.94
25	15	40	376500	1882.5	CP-OFDM 256 QAM	216@0	38.485	40.54




N25(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

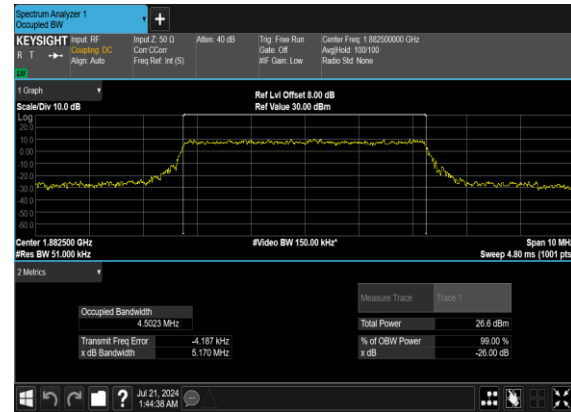

N25(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

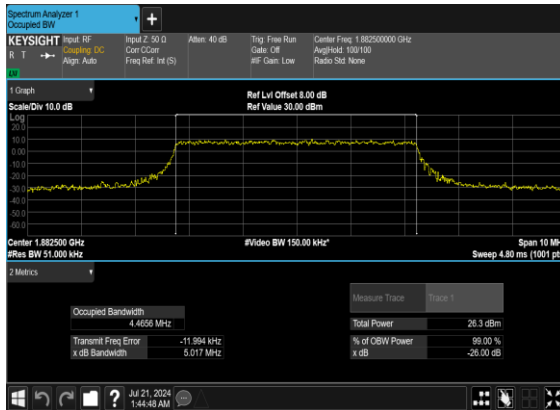


N25(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

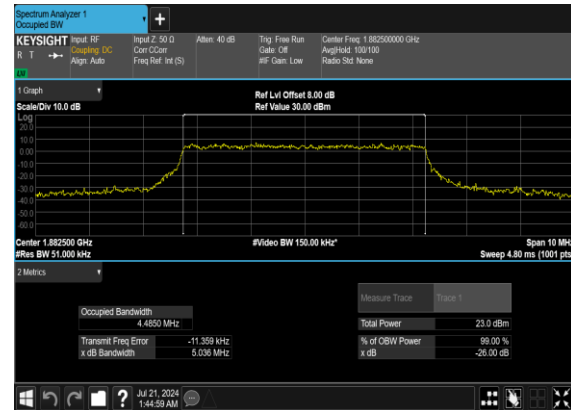





N25(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

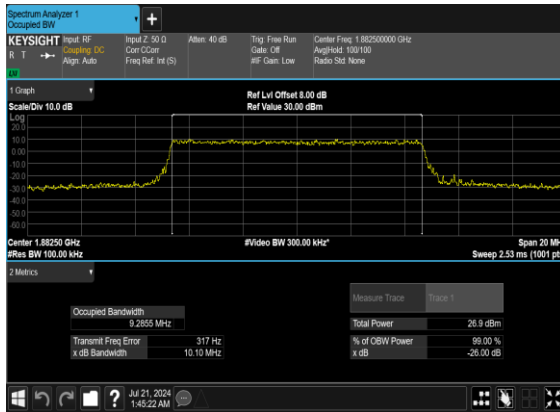


N25(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

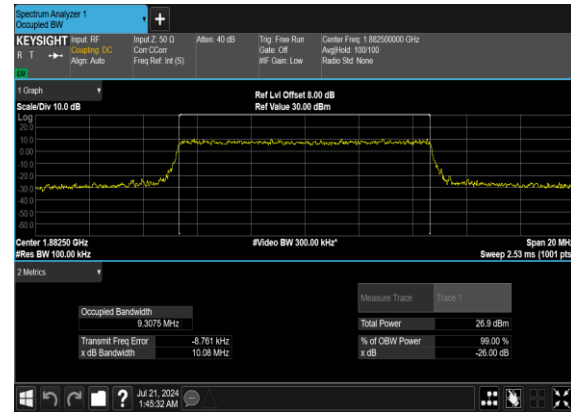

N25(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

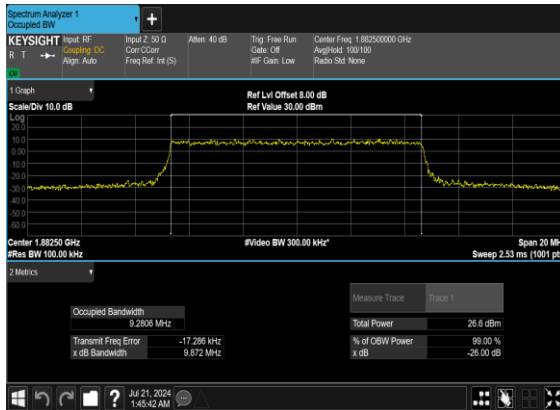


N25(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

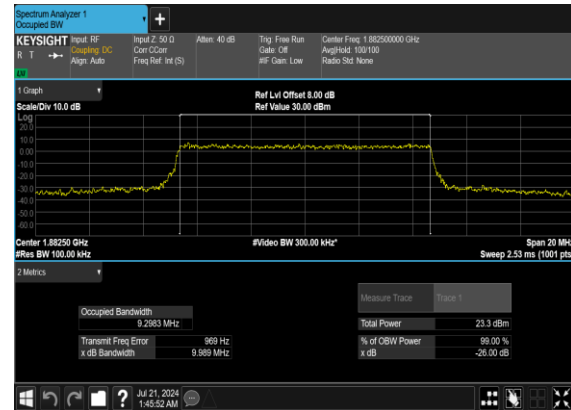





N25(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

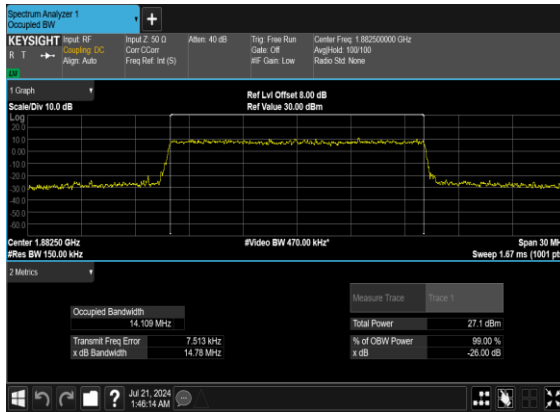


N25(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

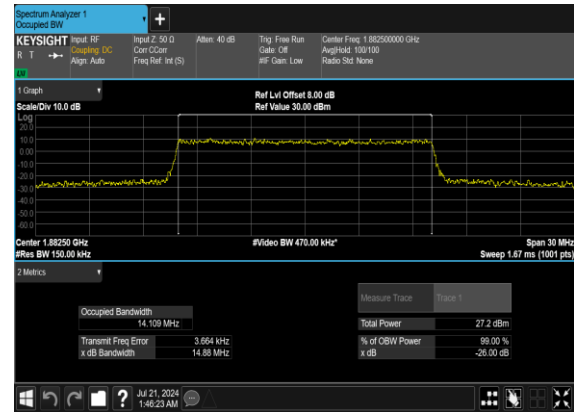

N25(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

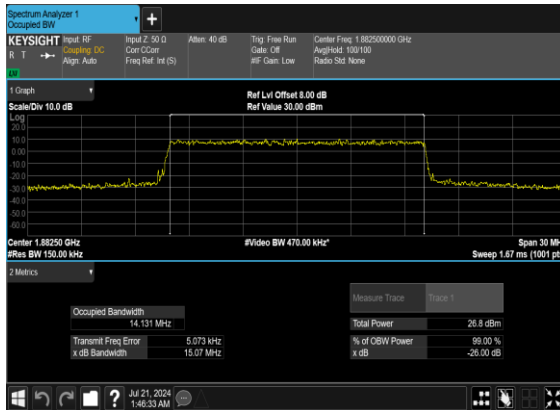


N25(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

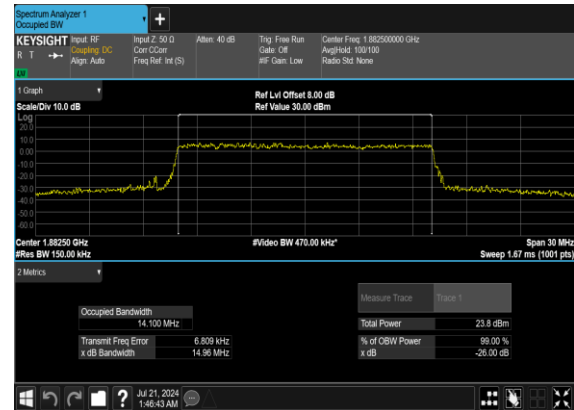





N25(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

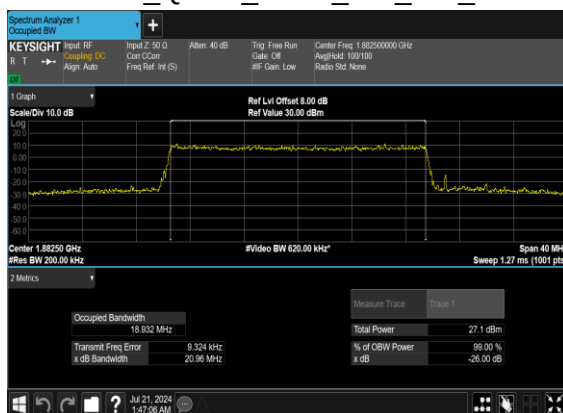

N25(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

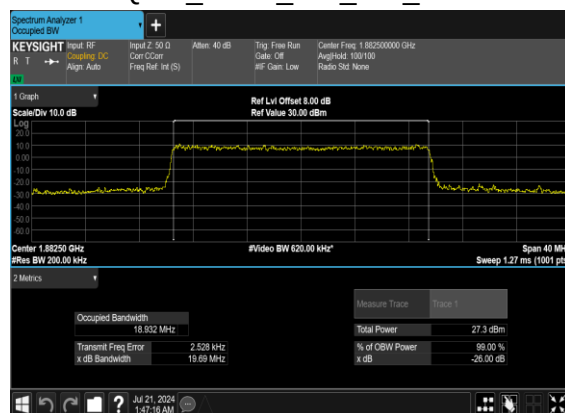

N25(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

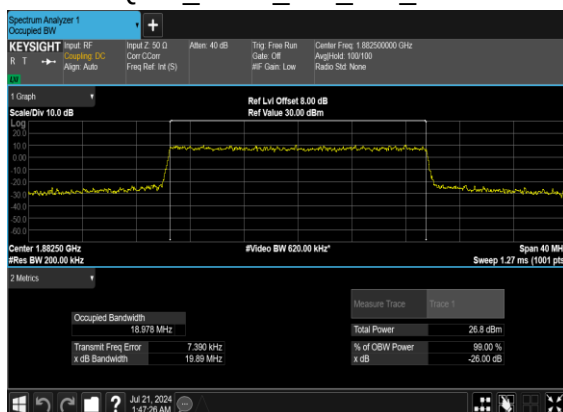

N25(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

