

FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Smartphone
BRAND NAME : Sonim
MODEL NAME : X802
FCC ID : WYPS3111
STANDARD : 47 CFR Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Nov. 15, 2024 ~ Jan. 24, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Maximum EIRP Power and Emission Designator	6
1.7 Testing Site	6
1.8 Test Software.....	7
1.9 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels	10
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power Measurement	13
3.5 Peak-to-Average Ratio	14
3.6 EIRP	15
3.7 Occupied Bandwidth.....	16
3.8 Conducted Band Edge Measurement	17
3.9 Conducted Spurious Emission Measurement	18
3.10 Frequency Stability Measurement.....	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission Measurement	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4O2403H	Rev. 01	Initial issue of report	May 22, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	-
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 29.45 dB at 13879.600 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200, San Diego,CA92121,USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200, San Diego,CA92121,USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	Sonim
Model Name	X802
FCC ID	WYPS3111
HW Version	V1.0
SW Version	X80.0-01-14.0-42.18.00
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	LTE Band 42: 3450 MHz ~ 3550 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	<Ant.3> : LTE Band 42: 24.01 dBm LTE Band 42C: 24.14 dBm
Antenna Gain	<Ant.3> : -2.01 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

LTE Band 42		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	3452.5 ~ 3547.5	0.1574	4M48G7D	0.1230	4M49W7D
10	3455 ~ 3545	0.1563	8M99G7D	0.1262	9M05W7D
15	3457.5 ~ 3542.5	0.1556	13M5G7D	0.1245	13M4W7D
20	3460 ~ 3540	0.1585	17M9G7D	0.1268	17M8W7D

LTE Band 42 CA		QPSK		16QAM/64QAM/256QAM	
BW (MHz)		Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20MHz+20MHz		0.1633	37M8G7D	0.1216	37M5W7D
20MHz+15MHz		0.1578	32M9G7D	0.1205	32M8W7D
15MHz+20MHz		0.1600	32M9G7D	0.1194	33M1W7D
20MHz+10MHz		0.1600	28M2G7D	0.1197	28M1W7D
10MHz+20MHz		0.1589	28M1G7D	0.1208	27M8W7D
20MHz+5MHz		0.1592	23M3G7D	0.1197	23M2W7D
5MHz+20MHz		0.1592	23M5G7D	0.1183	23M2W7D

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test case in section 4.4 of this report.

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y Plane)

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
Peak-to-Average Ratio	LTE Band 42	20M	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
E.I.R.P	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM	Full RB	M
Conducted Band Edge	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	L, H
Conducted Spurious Emission	LTE Band 42	5M, 10M, 15M, 20M	QPSK	1RB	L, M, H
Frequency Stability	LTE Band 42	5M	QPSK	1RB	M
Radiated Spurious Emission	LTE Band 42	Worst case from maximum power			L, M, H

Note: The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Test Items	Band	Bandwidth (MHz)							Modulation				RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	42C_CA	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	42C_CA	v	v	v	v	v	v	v	v	v	v				v		v	
Conducted Band Edge	42C_CA	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	42C_CA	v	v	v	v	v	v	v	v				v			v	v	v
E.I.R.P.	42C_CA	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Frequency Stability	42C_CA	v							v						v		v	
Radiated Spurious Emission	42C_CA	Worst Case														v	v	v
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																	

2.2 Connection Diagram of Test System

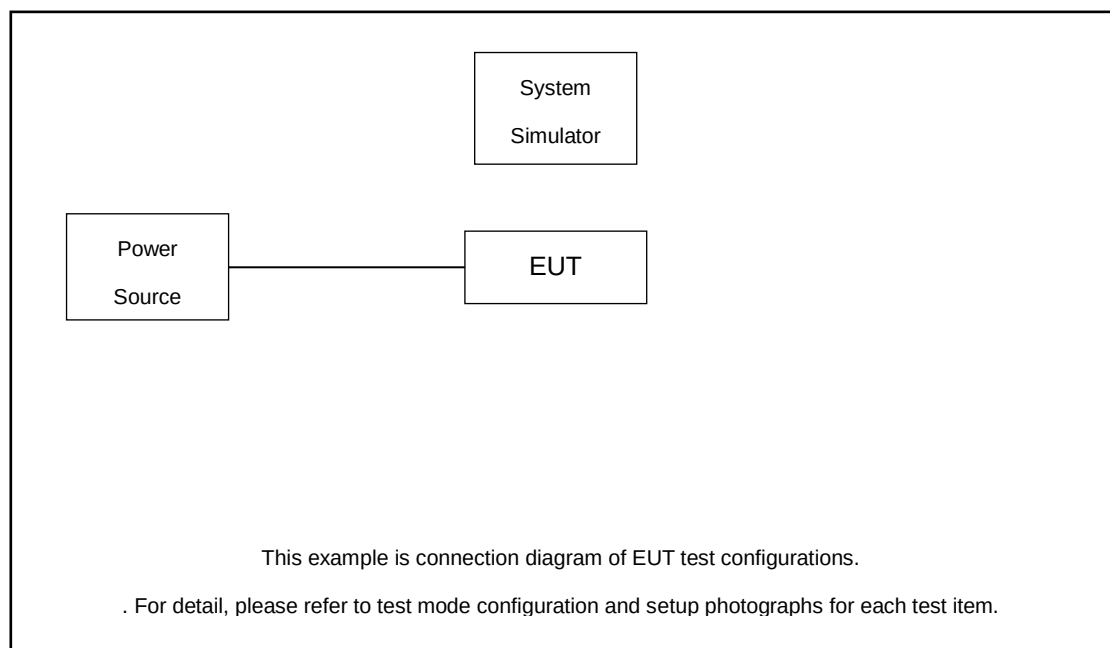

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.5 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 6.5 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 42 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	42190	42590	42990
	Frequency	3460	3500	3540
15	Channel	42165	42590	43015
	Frequency	3457.5	3500	3542.5
10	Channel	42140	42590	43040
	Frequency	3455	3500	3545
5	Channel	42115	42590	43065
	Frequency	3452.5	3500	3547.5

LTE Band 42C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	42190	42590	42792
		Frequency	3460	3500	3520.2
	SCC	Channel	42388	42788	42990
		Frequency	3479.8	3519.8	3540
20 + 15	PCC	Channel	42190	42590	42844
		Frequency	3460	3500	3525.4
	SCC	Channel	42361	42761	43015
		Frequency	3477.1	3517.1	3542.5
15 + 20	PCC	Channel	42165	42590	42819
		Frequency	3457.5	3500	3522.9
	SCC	Channel	42336	42761	42990
		Frequency	3474.6	3517.1	3540
20 + 10	PCC	Channel	42190	42590	42896
		Frequency	3460	3500	3530.6
	SCC	Channel	42334	42734	43040
		Frequency	3474.4	3514.4	3545
10 + 20	PCC	Channel	42140	42590	42846
		Frequency	3455	3500	3525.6
	SCC	Channel	42284	42734	42990
		Frequency	3469.4	3514.4	3540
20 + 5	PCC	Channel	42190	42590	42948
		Frequency	3460	3500	3535.8
	SCC	Channel	42307	42707	43065
		Frequency	3471.7	3511.7	3547.5
5 + 20	PCC	Channel	42115	42590	42873
		Frequency	3452.5	3500	3528.3
	SCC	Channel	42232	42707	42990
		Frequency	3464.2	3511.7	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

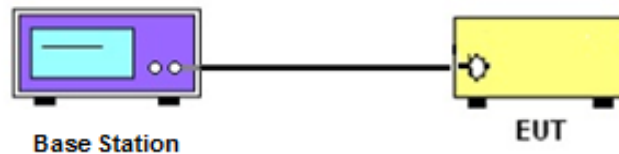

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

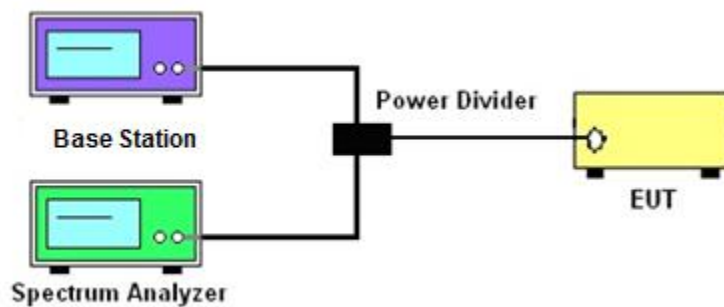

3.2.3 Frequency Stability

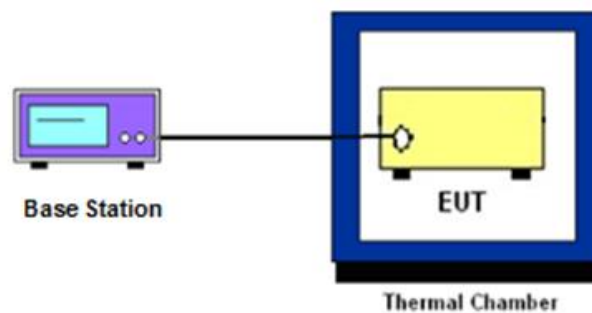

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

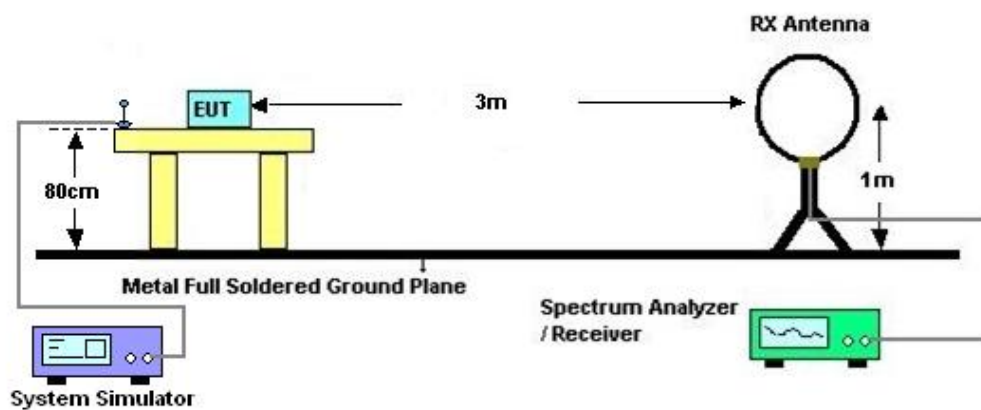

4.2.2 For radiated test from 30MHz to 1GHz

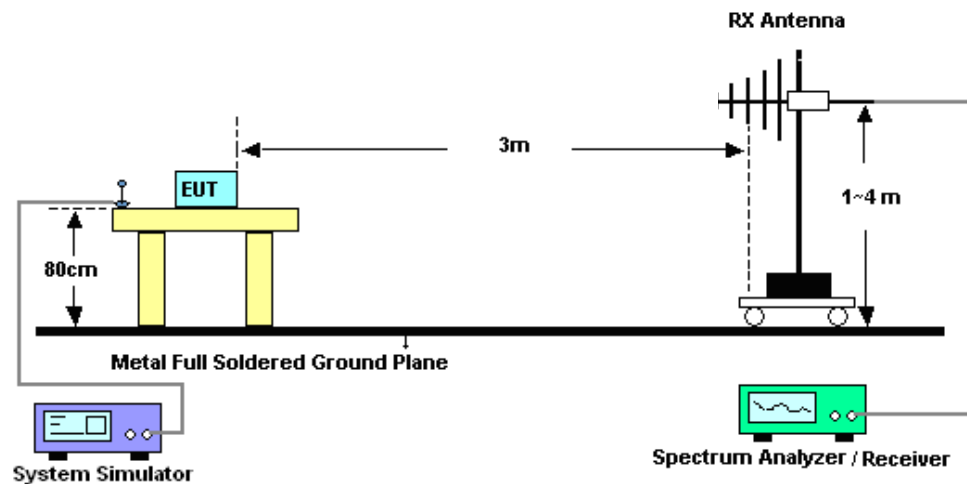

4.2.3 For radiated test above 1GHz

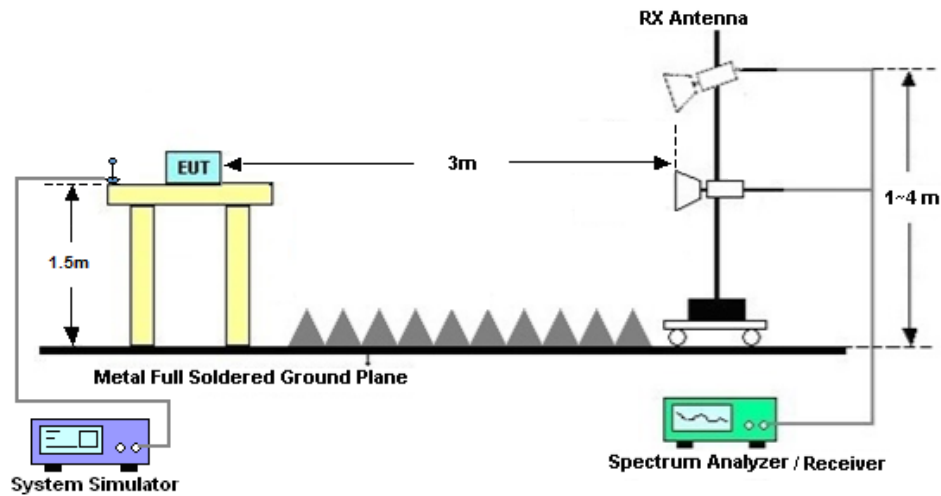

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 15, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 15, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 15, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Jan. 24, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jan. 24, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Jan. 24, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Jan. 24, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Jan. 24, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Jan. 24, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz-3GHz	Dec. 25, 2024	Jan. 24, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jan. 24, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jan. 24, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Jan. 24, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 24, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 24, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.90 dB
Frequency Stability	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02 dB
--	---------

----- THE END -----

Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

LTE Band 42 <Ant.3>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)	EIRP(W)	EIRP(W)
Channel				42190	42590	42990	42190	42590	42990
Frequency (MHz)				3460	3500	3540	3460	3500	3540
20	QPSK	1	0	23.96	24.01	23.76	0.1567	0.1585	0.1496
20	QPSK	1	49	23.97	23.94	23.77	0.1570	0.1560	0.1500
20	QPSK	1	99	23.78	23.88	23.69	0.1503	0.1538	0.1472
20	QPSK	50	0	22.85	22.87	22.86	0.1213	0.1219	0.1216
20	QPSK	50	24	22.83	22.68	22.81	0.1208	0.1167	0.1202
20	QPSK	50	50	22.85	22.84	22.80	0.1213	0.1211	0.1199
20	QPSK	100	0	22.74	22.86	22.71	0.1183	0.1216	0.1175
20	16QAM	1	0	23.04	22.93	22.98	0.1268	0.1236	0.1250
20	16QAM	1	49	23.03	22.94	22.86	0.1265	0.1239	0.1216
20	16QAM	1	99	22.82	23.03	22.94	0.1205	0.1265	0.1239
20	16QAM	50	0	21.86	21.77	21.92	0.0966	0.0946	0.0979
20	16QAM	50	24	21.78	21.77	21.88	0.0948	0.0946	0.0971
20	16QAM	50	50	21.78	21.90	21.87	0.0948	0.0975	0.0968
20	16QAM	100	0	21.81	21.86	21.86	0.0955	0.0966	0.0966
20	64QAM	1	0	21.75	21.93	21.86	0.0942	0.0982	0.0966
20	64QAM	1	49	21.78	21.83	21.95	0.0948	0.0959	0.0986
20	64QAM	1	99	21.75	21.93	21.75	0.0942	0.0982	0.0942
20	64QAM	50	0	20.88	20.87	20.88	0.0771	0.0769	0.0771
20	64QAM	50	24	20.83	20.79	20.81	0.0762	0.0755	0.0759
20	64QAM	50	50	20.77	20.73	20.67	0.0752	0.0745	0.0735
20	64QAM	100	0	20.69	20.89	20.71	0.0738	0.0773	0.0741
20	256QAM	1	0	18.86	18.79	18.79	0.0484	0.0476	0.0476
20	256QAM	1	49	18.90	18.96	18.89	0.0489	0.0495	0.0488
20	256QAM	1	99	18.92	18.96	18.76	0.0491	0.0495	0.0473
20	256QAM	50	0	18.91	18.96	18.90	0.0490	0.0495	0.0489
20	256QAM	50	24	18.78	18.78	18.97	0.0475	0.0475	0.0497
20	256QAM	50	50	18.85	18.77	18.83	0.0483	0.0474	0.0481
20	256QAM	100	0	18.93	18.88	18.83	0.0492	0.0486	0.0481
Channel				42165	42590	43015	42165	42590	43015
Frequency (MHz)				3457.5	3500	3542.5	3457.5	3500	3542.5



15	QPSK	1	0	23.88	23.93	23.65	0.1538	0.1556	0.1459
15	QPSK	1	37	23.87	23.82	23.68	0.1535	0.1517	0.1469
15	QPSK	1	74	23.60	23.89	23.52	0.1442	0.1542	0.1416
15	QPSK	36	0	22.83	22.71	22.66	0.1208	0.1175	0.1161
15	QPSK	36	20	22.62	22.49	22.63	0.1151	0.1117	0.1153
15	QPSK	36	39	22.82	22.70	22.76	0.1205	0.1172	0.1189
15	QPSK	75	0	22.60	22.67	22.57	0.1146	0.1164	0.1138
15	16QAM	1	0	22.86	22.78	22.79	0.1216	0.1194	0.1197
15	16QAM	1	37	22.87	22.96	22.88	0.1219	0.1245	0.1222
15	16QAM	1	74	22.80	22.91	22.83	0.1199	0.1230	0.1208
15	16QAM	36	0	21.83	21.58	21.89	0.0959	0.0906	0.0973
15	16QAM	36	20	21.56	21.65	21.75	0.0902	0.0920	0.0942
15	16QAM	36	39	21.74	21.74	21.72	0.0940	0.0940	0.0935
15	16QAM	75	0	21.66	21.85	21.80	0.0923	0.0964	0.0953
15	64QAM	1	0	21.63	21.86	21.86	0.0916	0.0966	0.0966
15	64QAM	1	37	21.64	21.64	21.91	0.0918	0.0918	0.0977
15	64QAM	1	74	21.71	21.89	21.60	0.0933	0.0973	0.0910
15	64QAM	36	0	20.83	20.68	20.82	0.0762	0.0736	0.0760
15	64QAM	36	20	20.85	20.71	20.73	0.0766	0.0741	0.0745
15	64QAM	36	39	20.68	20.55	20.62	0.0736	0.0714	0.0726
15	64QAM	75	0	20.69	20.71	20.62	0.0738	0.0741	0.0726
15	256QAM	1	0	18.80	18.80	18.64	0.0478	0.0478	0.0460
15	256QAM	1	37	18.70	18.77	18.71	0.0467	0.0474	0.0468
15	256QAM	1	74	18.83	18.82	18.55	0.0481	0.0480	0.0451
15	256QAM	36	0	18.93	18.81	18.74	0.0492	0.0479	0.0471
15	256QAM	36	20	18.68	18.62	18.96	0.0465	0.0458	0.0495
15	256QAM	36	39	18.73	18.65	18.67	0.0470	0.0461	0.0463
15	256QAM	75	0	18.81	18.70	18.78	0.0479	0.0467	0.0475
Channel				42140	42590	43040	42140	42590	43040
Frequency (MHz)				3455	3500	3545	3455	3500	3545
10	QPSK	1	0	23.74	23.95	23.55	0.1489	0.1563	0.1426
10	QPSK	1	25	23.94	23.84	23.65	0.1560	0.1524	0.1459
10	QPSK	1	49	23.57	23.81	23.47	0.1432	0.1514	0.1400
10	QPSK	25	0	22.68	22.78	22.75	0.1167	0.1194	0.1186
10	QPSK	25	12	22.81	22.53	22.74	0.1202	0.1127	0.1183
10	QPSK	25	25	22.79	22.63	22.65	0.1197	0.1153	0.1159
10	QPSK	50	0	22.65	22.79	22.49	0.1159	0.1197	0.1117
10	16QAM	1	0	23.02	22.76	23.00	0.1262	0.1189	0.1256
10	16QAM	1	25	22.86	22.79	22.87	0.1216	0.1197	0.1219
10	16QAM	1	49	22.67	22.97	22.95	0.1164	0.1247	0.1242
10	16QAM	25	0	21.66	21.63	21.72	0.0923	0.0916	0.0935
10	16QAM	25	12	21.61	21.55	21.90	0.0912	0.0899	0.0975
10	16QAM	25	25	21.62	21.73	21.71	0.0914	0.0938	0.0933
10	16QAM	50	0	21.79	21.86	21.74	0.0951	0.0966	0.0940



10	64QAM	1	0	21.63	21.73	21.68	0.0916	0.0938	0.0927
10	64QAM	1	25	21.60	21.63	21.80	0.0910	0.0916	0.0953
10	64QAM	1	49	21.55	21.94	21.66	0.0899	0.0984	0.0923
10	64QAM	25	0	20.82	20.79	20.70	0.0760	0.0755	0.0740
10	64QAM	25	12	20.73	20.78	20.72	0.0745	0.0753	0.0743
10	64QAM	25	25	20.59	20.63	20.64	0.0721	0.0728	0.0729
10	64QAM	50	0	20.51	20.70	20.68	0.0708	0.0740	0.0736
10	256QAM	1	0	18.74	18.72	18.58	0.0471	0.0469	0.0454
10	256QAM	1	25	18.69	18.92	18.71	0.0466	0.0491	0.0468
10	256QAM	1	49	18.93	18.80	18.69	0.0492	0.0478	0.0466
10	256QAM	25	0	18.73	18.75	18.85	0.0470	0.0472	0.0483
10	256QAM	25	12	18.56	18.62	18.92	0.0452	0.0458	0.0491
10	256QAM	25	25	18.65	18.65	18.70	0.0461	0.0461	0.0467
10	256QAM	50	0	18.77	18.77	18.84	0.0474	0.0474	0.0482
Channel				42115	42590	43065	42115	42590	43065
Frequency (MHz)				3452.5	3500	3547.5	3452.5	3500	3547.5
5	QPSK	1	0	23.83	23.98	23.54	0.1521	0.1574	0.1422
5	QPSK	1	12	23.94	23.81	23.56	0.1560	0.1514	0.1429
5	QPSK	1	24	23.56	23.80	23.48	0.1429	0.1510	0.1403
5	QPSK	12	0	22.68	22.79	22.75	0.1167	0.1197	0.1186
5	QPSK	12	7	22.62	22.47	22.67	0.1151	0.1112	0.1164
5	QPSK	12	13	22.81	22.75	22.70	0.1202	0.1186	0.1172
5	QPSK	25	0	22.73	22.78	22.51	0.1180	0.1194	0.1122
5	16QAM	1	0	22.84	22.73	22.90	0.1211	0.1180	0.1227
5	16QAM	1	12	22.91	22.80	22.83	0.1230	0.1199	0.1208
5	16QAM	1	24	22.82	22.81	22.75	0.1205	0.1202	0.1186
5	16QAM	12	0	21.71	21.66	21.74	0.0933	0.0923	0.0940
5	16QAM	12	7	21.77	21.58	21.78	0.0946	0.0906	0.0948
5	16QAM	12	13	21.64	21.80	21.72	0.0918	0.0953	0.0935
5	16QAM	25	0	21.67	21.83	21.83	0.0925	0.0959	0.0959
5	64QAM	1	0	21.58	21.78	21.87	0.0906	0.0948	0.0968
5	64QAM	1	12	21.77	21.69	21.84	0.0946	0.0929	0.0962
5	64QAM	1	24	21.66	21.88	21.69	0.0923	0.0971	0.0929
5	64QAM	12	0	20.81	20.77	20.71	0.0759	0.0752	0.0741
5	64QAM	12	7	20.72	20.76	20.77	0.0743	0.0750	0.0752
5	64QAM	12	13	20.73	20.55	20.49	0.0745	0.0714	0.0705
5	64QAM	25	0	20.54	20.79	20.64	0.0713	0.0755	0.0729
5	256QAM	1	0	18.70	18.79	18.70	0.0467	0.0476	0.0467
5	256QAM	1	12	18.69	18.91	18.74	0.0466	0.0490	0.0471
5	256QAM	1	24	18.84	18.84	18.65	0.0482	0.0482	0.0461
5	256QAM	12	0	18.74	18.79	18.90	0.0471	0.0476	0.0489
5	256QAM	12	7	18.67	18.68	18.97	0.0463	0.0465	0.0497
5	256QAM	12	13	18.67	18.73	18.76	0.0463	0.0470	0.0473
5	256QAM	25	0	18.79	18.73	18.80	0.0476	0.0470	0.0478



LTE Band 42C <Ant.3>

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.94	0.1560
L	QPSK	1	0	1	Max	23.93	0.1556
L	QPSK	100	0	100	0	23.79	0.1507
M	QPSK	1	Max	1	0	24.14	0.1633
M	QPSK	1	0	1	Max	23.84	0.1524
M	QPSK	100	0	100	0	23.75	0.1493
H	QPSK	1	Max	1	0	24.00	0.1581
H	QPSK	1	0	1	Max	23.69	0.1472
H	QPSK	100	0	100	0	23.75	0.1493
L	16QAM	1	Max	1	0	22.73	0.1180
L	16QAM	1	0	1	Max	22.69	0.1169
L	16QAM	100	0	100	0	22.78	0.1194
M	16QAM	1	Max	1	0	22.60	0.1146
M	16QAM	1	0	1	Max	22.70	0.1172
M	16QAM	100	0	100	0	22.73	0.1180
H	16QAM	1	Max	1	0	22.86	0.1216
H	16QAM	1	0	1	Max	22.63	0.1153
H	16QAM	100	0	100	0	22.78	0.1194
L	64QAM	1	Max	1	0	21.73	0.0938
L	64QAM	1	0	1	Max	21.88	0.0971
L	64QAM	100	0	100	0	21.95	0.0986
M	64QAM	1	Max	1	0	21.77	0.0946
M	64QAM	1	0	1	Max	21.80	0.0953
M	64QAM	100	0	100	0	21.79	0.0951
H	64QAM	1	Max	1	0	21.70	0.0931
H	64QAM	1	0	1	Max	21.71	0.0933
H	64QAM	100	0	100	0	21.66	0.0923
L	256QAM	1	Max	1	0	18.69	0.0466
L	256QAM	1	0	1	Max	18.83	0.0481
L	256QAM	100	0	100	0	18.65	0.0461
M	256QAM	1	Max	1	0	18.72	0.0469
M	256QAM	1	0	1	Max	18.58	0.0454
M	256QAM	100	0	100	0	18.57	0.0453
H	256QAM	1	Max	1	0	18.74	0.0471
H	256QAM	1	0	1	Max	18.56	0.0452
H	256QAM	100	0	100	0	18.65	0.0461
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		

L	QPSK	1	Max	1	0	23.91	0.1549
L	QPSK	1	0	1	Max	23.89	0.1542
L	QPSK	100	0	100	0	23.70	0.1476
M	QPSK	1	Max	1	0	23.99	0.1578
L	QPSK	1	0	1	Max	23.71	0.1479
L	QPSK	100	0	100	0	23.67	0.1466
H	QPSK	1	Max	1	0	23.91	0.1549
L	QPSK	1	0	1	Max	23.63	0.1452
L	QPSK	100	0	100	0	23.62	0.1449
L	16QAM	1	Max	1	0	22.64	0.1156
L	16QAM	1	0	1	Max	22.59	0.1143
L	16QAM	100	0	100	0	22.68	0.1167
H	16QAM	1	Max	1	0	22.52	0.1125
L	16QAM	1	0	1	Max	22.59	0.1143
L	16QAM	100	0	100	0	22.71	0.1175
H	16QAM	1	Max	1	0	22.82	0.1205
L	16QAM	1	0	1	Max	22.56	0.1135
L	16QAM	100	0	100	0	22.73	0.1180
L	64QAM	1	Max	1	0	21.66	0.0923
L	64QAM	1	0	1	Max	21.83	0.0959
L	64QAM	100	0	100	0	21.91	0.0977
M	64QAM	1	Max	1	0	21.71	0.0933
L	64QAM	1	0	1	Max	21.68	0.0927
L	64QAM	100	0	100	0	21.73	0.0938
H	64QAM	1	Max	1	0	21.66	0.0923
L	64QAM	1	0	1	Max	21.62	0.0914
L	64QAM	100	0	100	0	21.57	0.0904
L	256QAM	1	Max	1	0	18.60	0.0456
L	256QAM	1	0	1	Max	18.80	0.0478
L	256QAM	100	0	100	0	18.60	0.0456
M	256QAM	1	Max	1	0	18.66	0.0462
L	256QAM	1	0	1	Max	18.58	0.0454
L	256QAM	100	0	100	0	18.57	0.0453
H	256QAM	1	Max	1	0	18.80	0.0478
L	256QAM	1	0	1	Max	18.61	0.0457
L	256QAM	100	0	100	0	18.66	0.0462
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.92	0.1552
L	QPSK	1	0	1	Max	23.81	0.1514
L	QPSK	75	0	100	0	23.77	0.1500
M	QPSK	1	Max	1	0	24.05	0.1600
L	QPSK	1	0	1	Max	23.79	0.1507



L	QPSK	75	0	100	0	23.65	0.1459
H	QPSK	1	Max	1	0	23.98	0.1574
L	QPSK	1	0	1	Max	23.58	0.1435
L	QPSK	75	0	100	0	23.66	0.1462
L	16QAM	1	Max	1	0	22.67	0.1164
L	16QAM	1	0	1	Max	22.60	0.1146
L	16QAM	75	0	100	0	22.73	0.1180
H	16QAM	1	Max	1	0	22.54	0.1130
L	16QAM	1	0	1	Max	22.65	0.1159
L	16QAM	75	0	100	0	22.67	0.1164
H	16QAM	1	Max	1	0	22.78	0.1194
L	16QAM	1	0	1	Max	22.53	0.1127
L	16QAM	75	0	100	0	22.72	0.1178
L	64QAM	1	Max	1	0	21.62	0.0914
L	64QAM	1	0	1	Max	21.81	0.0955
L	64QAM	75	0	100	0	21.86	0.0966
M	64QAM	1	Max	1	0	21.65	0.0920
L	64QAM	1	0	1	Max	21.73	0.0938
L	64QAM	75	0	100	0	21.73	0.0938
H	64QAM	1	Max	1	0	21.63	0.0916
L	64QAM	1	0	1	Max	21.58	0.0906
L	64QAM	75	0	100	0	21.55	0.0899
L	256QAM	1	Max	1	0	18.63	0.0459
L	256QAM	1	0	1	Max	18.80	0.0478
L	256QAM	75	0	100	0	18.62	0.0458
M	256QAM	1	Max	1	0	18.58	0.0454
L	256QAM	1	0	1	Max	18.53	0.0449
L	256QAM	75	0	100	0	18.56	0.0452
H	256QAM	1	Max	1	0	18.73	0.0470
L	256QAM	1	0	1	Max	18.52	0.0448
L	256QAM	75	0	100	0	18.61	0.0457

Combination 20MHz+10MHz (100RB+50RB)

Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.89	0.1542
L	QPSK	1	0	1	Max	23.82	0.1517
L	QPSK	100	0	100	0	23.68	0.1469
M	QPSK	1	Max	1	0	24.05	0.1600
L	QPSK	1	0	1	Max	23.81	0.1514
L	QPSK	100	0	100	0	23.62	0.1449
H	QPSK	1	Max	1	0	23.87	0.1535
L	QPSK	1	0	1	Max	23.60	0.1442
L	QPSK	100	0	100	0	23.63	0.1452
L	16QAM	1	Max	1	0	22.61	0.1148

L	16QAM	1	0	1	Max	22.59	0.1143
L	16QAM	100	0	100	0	22.70	0.1172
H	16QAM	1	Max	1	0	22.52	0.1125
L	16QAM	1	0	1	Max	22.66	0.1161
L	16QAM	100	0	100	0	22.62	0.1151
H	16QAM	1	Max	1	0	22.79	0.1197
L	16QAM	1	0	1	Max	22.59	0.1143
L	16QAM	100	0	100	0	22.71	0.1175
L	64QAM	1	Max	1	0	21.61	0.0912
L	64QAM	1	0	1	Max	21.85	0.0964
L	64QAM	100	0	100	0	21.86	0.0966
M	64QAM	1	Max	1	0	21.71	0.0933
L	64QAM	1	0	1	Max	21.77	0.0946
L	64QAM	100	0	100	0	21.73	0.0938
H	64QAM	1	Max	1	0	21.66	0.0923
L	64QAM	1	0	1	Max	21.67	0.0925
L	64QAM	100	0	100	0	21.62	0.0914
L	256QAM	1	Max	1	0	18.56	0.0452
L	256QAM	1	0	1	Max	18.71	0.0468
L	256QAM	100	0	100	0	18.59	0.0455
M	256QAM	1	Max	1	0	18.62	0.0458
L	256QAM	1	0	1	Max	18.53	0.0449
L	256QAM	100	0	100	0	18.62	0.0458
H	256QAM	1	Max	1	0	18.81	0.0479
L	256QAM	1	0	1	Max	18.52	0.0448
L	256QAM	100	0	100	0	18.62	0.0458
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.90	0.1545
L	QPSK	1	0	1	Max	23.81	0.1514
L	QPSK	100	0	100	0	23.68	0.1469
M	QPSK	1	Max	1	0	24.02	0.1589
L	QPSK	1	0	1	Max	23.72	0.1483
L	QPSK	100	0	100	0	23.66	0.1462
H	QPSK	1	Max	1	0	23.90	0.1545
L	QPSK	1	0	1	Max	23.56	0.1429
L	QPSK	100	0	100	0	23.63	0.1452
L	16QAM	1	Max	1	0	22.68	0.1167
L	16QAM	1	0	1	Max	22.56	0.1135
L	16QAM	100	0	100	0	22.74	0.1183
H	16QAM	1	Max	1	0	22.55	0.1132
L	16QAM	1	0	1	Max	22.66	0.1161
L	16QAM	100	0	100	0	22.69	0.1169



H	16QAM	1	Max	1	0	22.83	0.1208
L	16QAM	1	0	1	Max	22.59	0.1143
L	16QAM	100	0	100	0	22.75	0.1186
L	64QAM	1	Max	1	0	21.64	0.0918
L	64QAM	1	0	1	Max	21.79	0.0951
L	64QAM	100	0	100	0	21.84	0.0962
M	64QAM	1	Max	1	0	21.71	0.0933
L	64QAM	1	0	1	Max	21.69	0.0929
L	64QAM	100	0	100	0	21.74	0.0940
H	64QAM	1	Max	1	0	21.65	0.0920
L	64QAM	1	0	1	Max	21.68	0.0927
L	64QAM	100	0	100	0	21.54	0.0897
L	256QAM	1	Max	1	0	18.58	0.0454
L	256QAM	1	0	1	Max	18.76	0.0473
L	256QAM	100	0	100	0	18.51	0.0447
M	256QAM	1	Max	1	0	18.62	0.0458
L	256QAM	1	0	1	Max	18.53	0.0449
L	256QAM	100	0	100	0	18.67	0.0463
H	256QAM	1	Max	1	0	18.74	0.0471
L	256QAM	1	0	1	Max	18.60	0.0456
L	256QAM	100	0	100	0	18.61	0.0457
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.85	0.1528
L	QPSK	1	0	1	Max	23.88	0.1538
L	QPSK	100	0	100	0	23.76	0.1496
M	QPSK	1	Max	1	0	24.03	0.1592
L	QPSK	1	0	1	Max	23.74	0.1489
L	QPSK	100	0	100	0	23.64	0.1455
H	QPSK	1	Max	1	0	23.91	0.1549
L	QPSK	1	0	1	Max	23.63	0.1452
L	QPSK	100	0	100	0	23.67	0.1466
L	16QAM	1	Max	1	0	22.61	0.1148
L	16QAM	1	0	1	Max	22.57	0.1138
L	16QAM	100	0	100	0	22.75	0.1186
H	16QAM	1	Max	1	0	22.54	0.1130
L	16QAM	1	0	1	Max	22.57	0.1138
L	16QAM	100	0	100	0	22.66	0.1161
H	16QAM	1	Max	1	0	22.79	0.1197
L	16QAM	1	0	1	Max	22.59	0.1143
L	16QAM	100	0	100	0	22.74	0.1183
L	64QAM	1	Max	1	0	21.69	0.0929
L	64QAM	1	0	1	Max	21.74	0.0940


L	64QAM	100	0	100	0	21.89	0.0973
M	64QAM	1	Max	1	0	21.67	0.0925
L	64QAM	1	0	1	Max	21.73	0.0938
L	64QAM	100	0	100	0	21.67	0.0925
H	64QAM	1	Max	1	0	21.64	0.0918
L	64QAM	1	0	1	Max	21.63	0.0916
L	64QAM	100	0	100	0	21.61	0.0912
L	256QAM	1	Max	1	0	18.58	0.0454
L	256QAM	1	0	1	Max	18.71	0.0468
L	256QAM	100	0	100	0	18.54	0.0450
M	256QAM	1	Max	1	0	18.67	0.0463
L	256QAM	1	0	1	Max	18.53	0.0449
L	256QAM	100	0	100	0	18.64	0.0460
H	256QAM	1	Max	1	0	18.72	0.0469
L	256QAM	1	0	1	Max	18.59	0.0455
L	256QAM	100	0	100	0	18.63	0.0459
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.88	0.1538
L	QPSK	1	0	1	Max	23.84	0.1524
L	QPSK	25	0	100	0	23.68	0.1469
M	QPSK	1	Max	1	0	24.03	0.1592
L	QPSK	1	0	1	Max	23.79	0.1507
L	QPSK	25	0	100	0	23.66	0.1462
H	QPSK	1	Max	1	0	23.97	0.1570
L	QPSK	1	0	1	Max	23.67	0.1466
L	QPSK	25	0	100	0	23.67	0.1466
L	16QAM	1	Max	1	0	22.64	0.1156
L	16QAM	1	0	1	Max	22.65	0.1159
L	16QAM	25	0	100	0	22.69	0.1169
H	16QAM	1	Max	1	0	22.53	0.1127
L	16QAM	1	0	1	Max	22.68	0.1167
L	16QAM	25	0	100	0	22.63	0.1153
H	16QAM	1	Max	1	0	22.74	0.1183
L	16QAM	1	0	1	Max	22.56	0.1135
L	16QAM	25	0	100	0	22.72	0.1178
L	64QAM	1	Max	1	0	21.59	0.0908
L	64QAM	1	0	1	Max	21.78	0.0948
L	64QAM	25	0	100	0	21.87	0.0968
M	64QAM	1	Max	1	0	21.72	0.0935
L	64QAM	1	0	1	Max	21.75	0.0942
L	64QAM	25	0	100	0	21.70	0.0931
H	64QAM	1	Max	1	0	21.62	0.0914

L	64QAM	1	0	1	Max	21.59	0.0908
L	64QAM	25	0	100	0	21.58	0.0906
L	256QAM	1	Max	1	0	18.63	0.0459
L	256QAM	1	0	1	Max	18.78	0.0475
L	256QAM	25	0	100	0	18.56	0.0452
M	256QAM	1	Max	1	0	18.61	0.0457
L	256QAM	1	0	1	Max	18.62	0.0458
L	256QAM	25	0	100	0	18.59	0.0455
H	256QAM	1	Max	1	0	18.76	0.0473
L	256QAM	1	0	1	Max	18.55	0.0451
L	256QAM	25	0	100	0	18.63	0.0459

LTE Band 42


Peak-to-Average Ratio

Mode	LTE Band 42 / 20MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB				Result
Middle CH	4.96	6.00	6.32	6.64	PASS

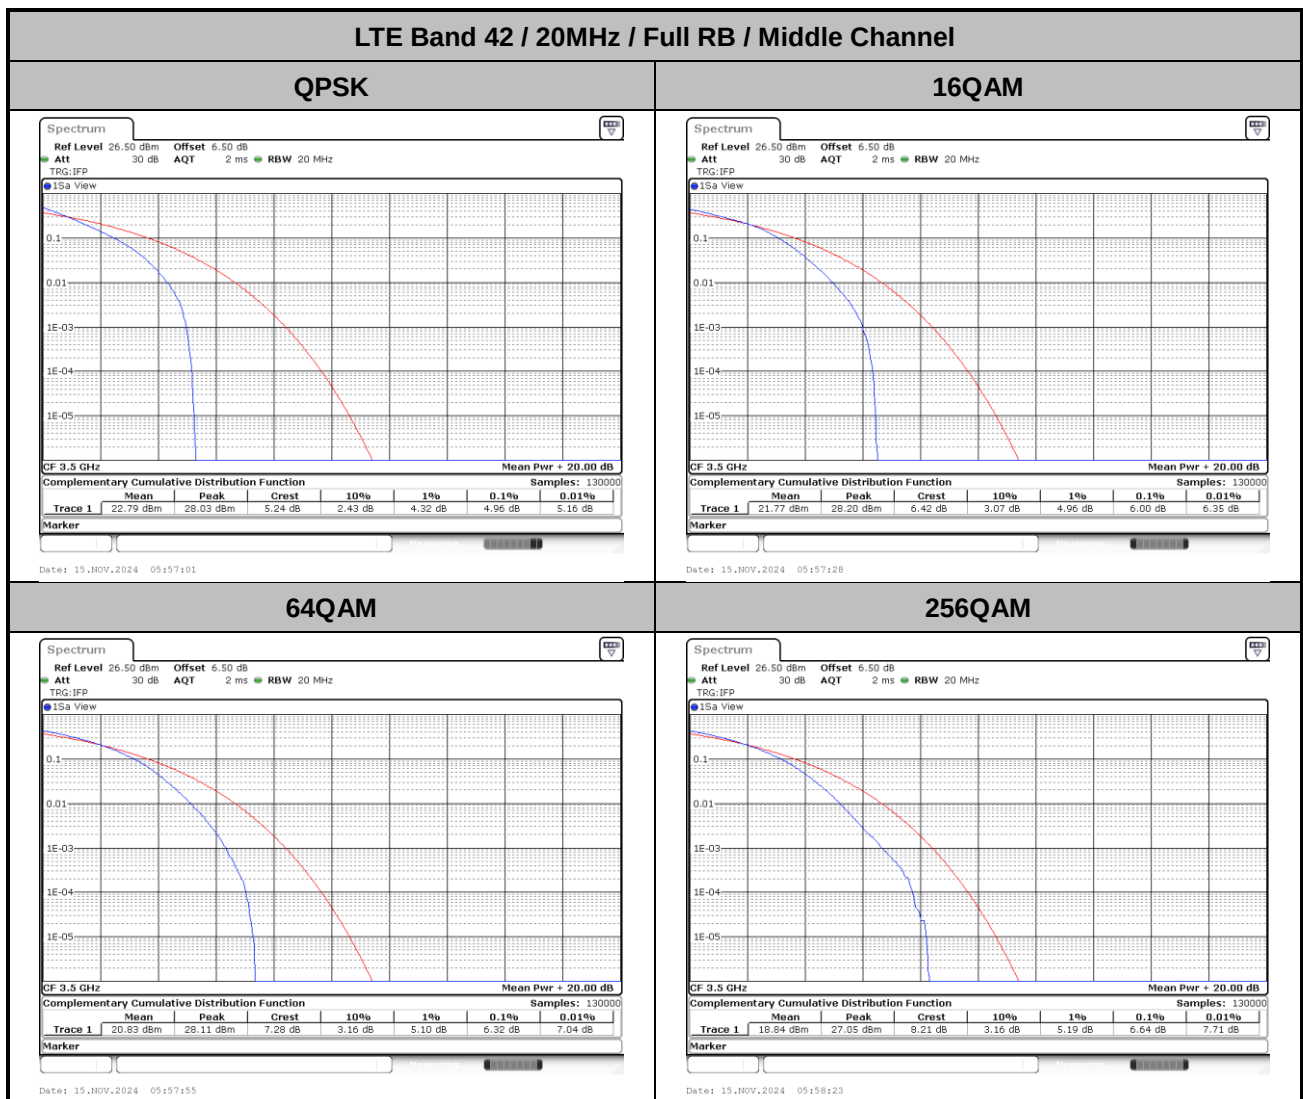


26dB Bandwidth

Mode	LTE Band 42 : 26dB BW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.99	5.00	10.17	9.97	14.78	14.36	18.66	19.18

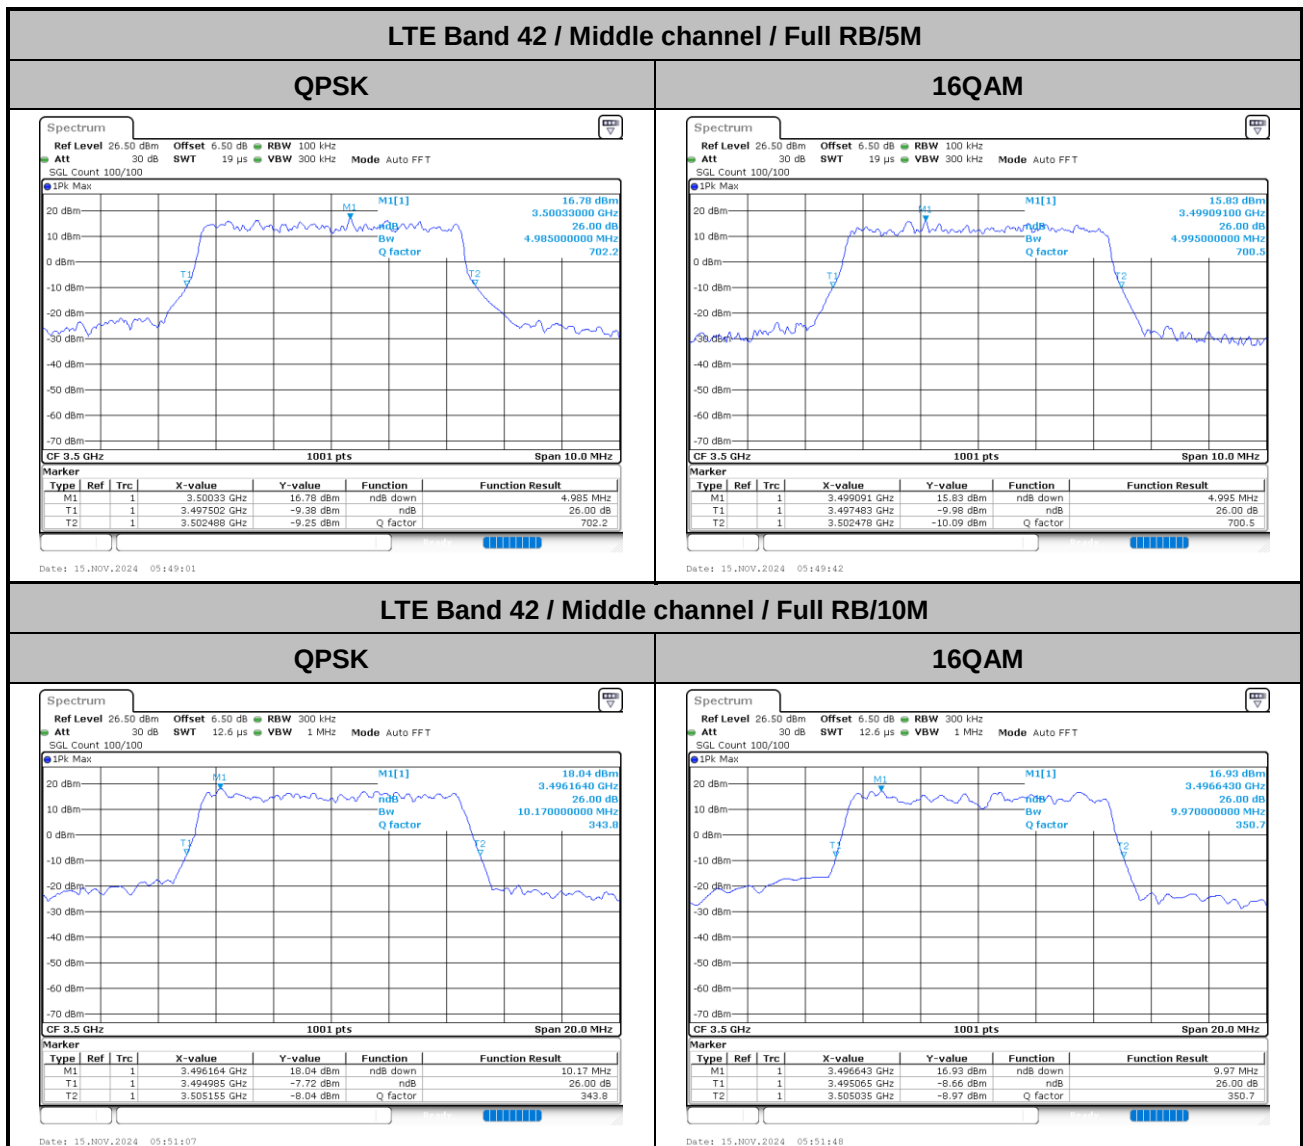


LTE Band 42 / Middle channel / Full RB/15M

QPSK

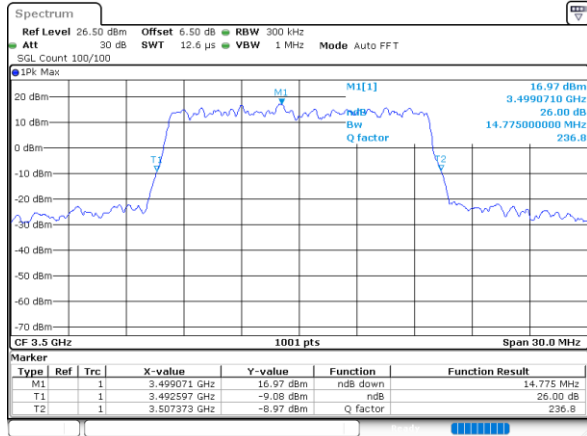


16QAM

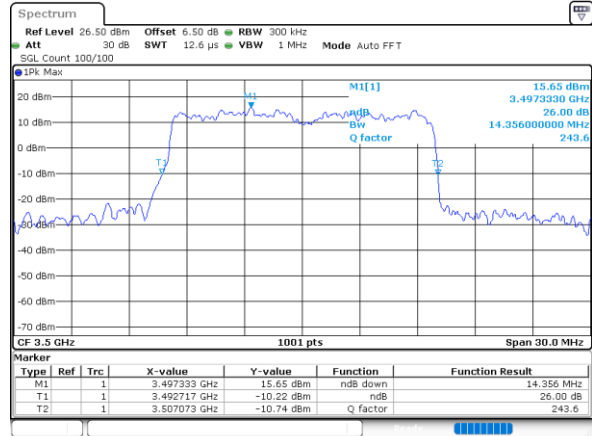


LTE Band 42 / Middle channel / Full RB/20M

QPSK

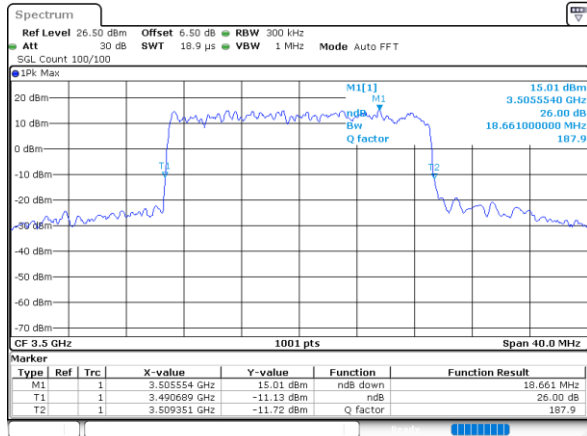


16QAM

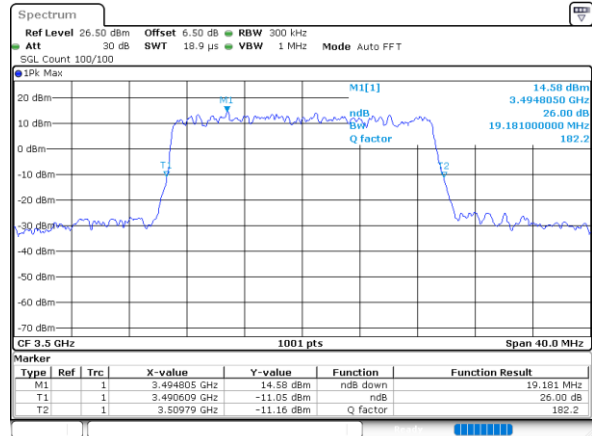

Occupied Bandwidth


Mode	LTE Band 42 : 99%OBW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.48	4.49	8.99	9.05	13.46	13.40	17.94	17.82

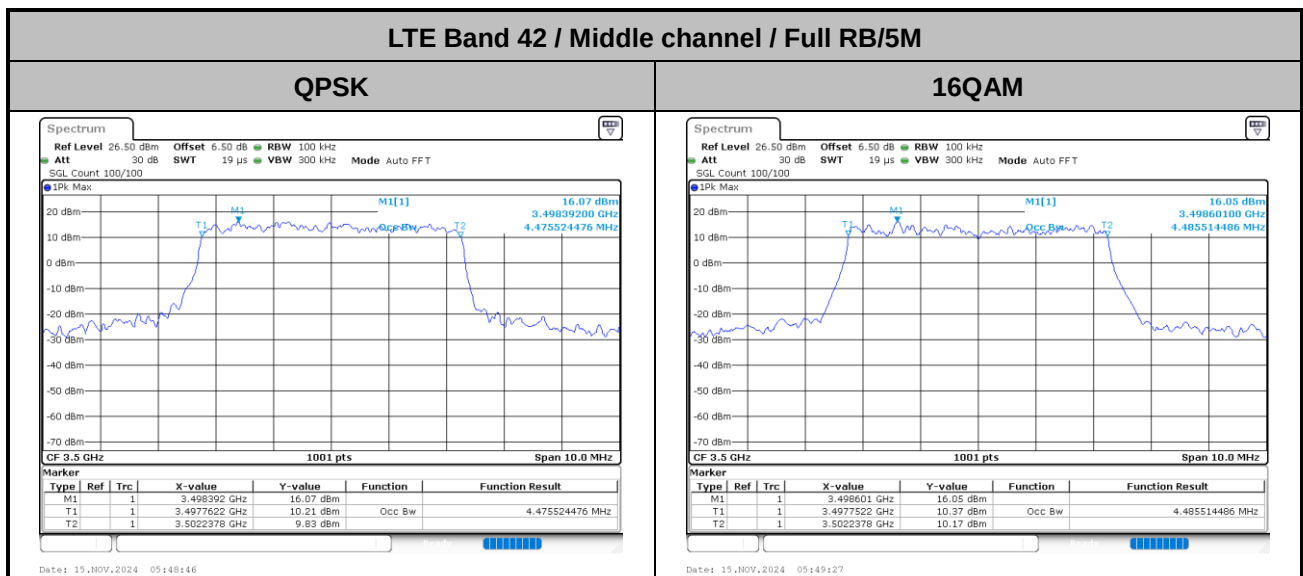




LTE Band 42 / Middle channel / Full RB/10M

QPSK

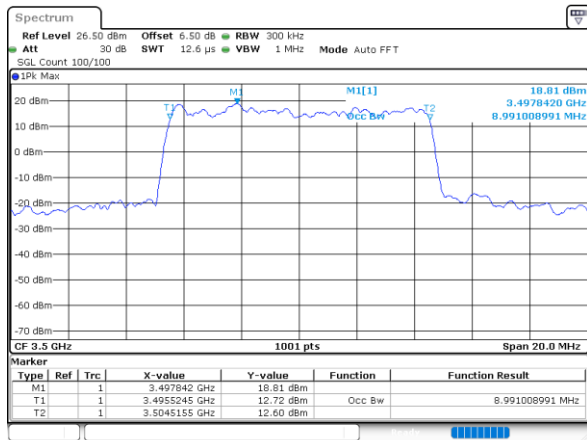


16QAM

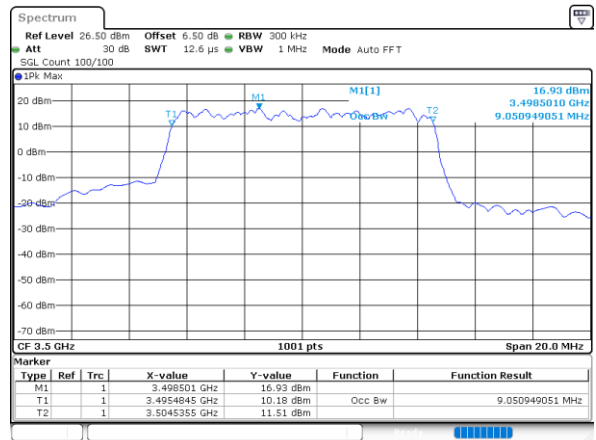


LTE Band 42 / Middle channel / Full RB/15M

QPSK

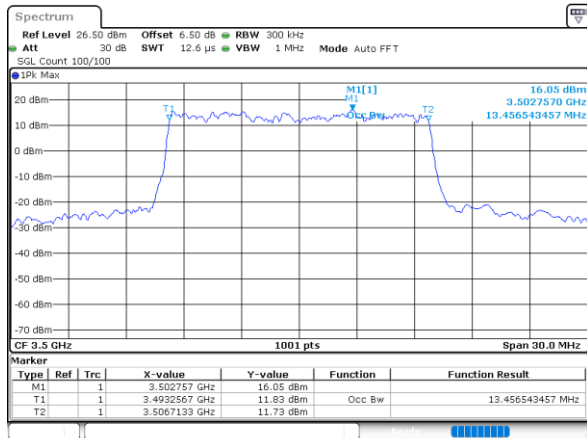


16QAM

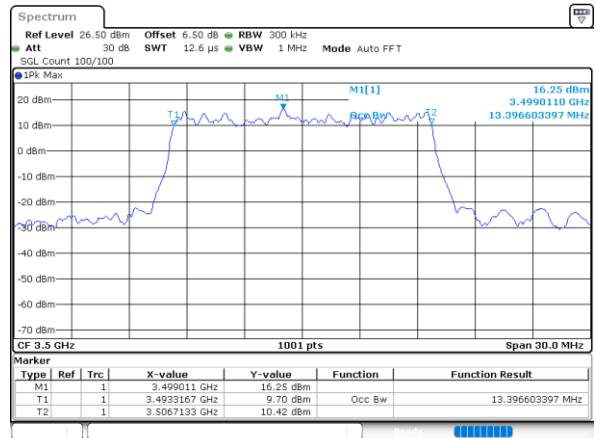


LTE Band 42 / Middle channel / Full RB/20M

QPSK

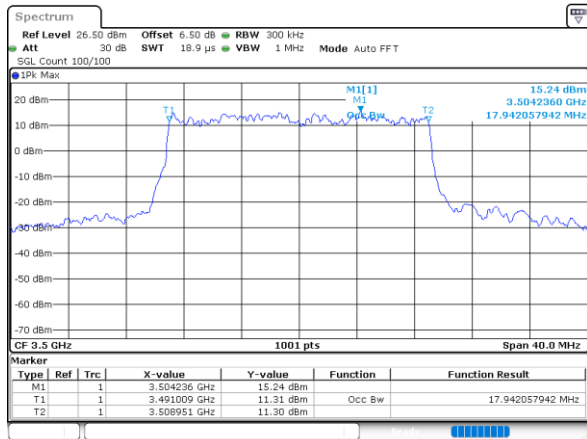

16QAM

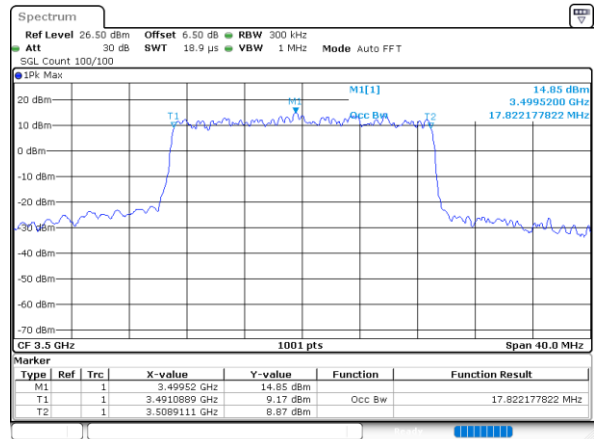





Conducted Band Edge

LTE Band 42 / 5MHz

QPSK



Lowest Channel / 1RB0

Highest Channel / 1RBmax

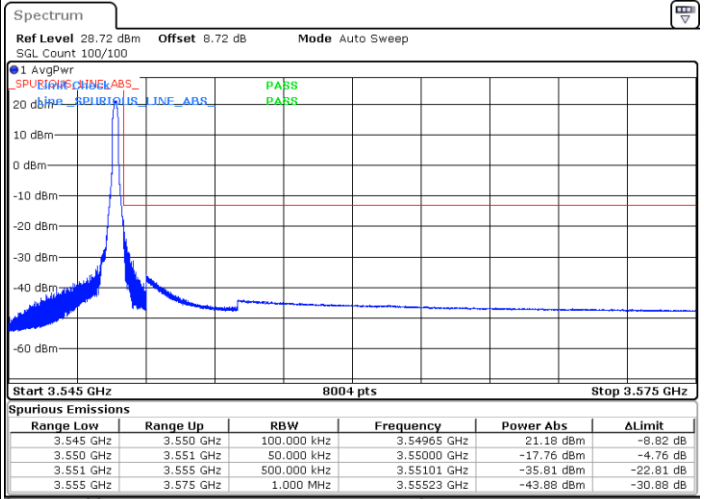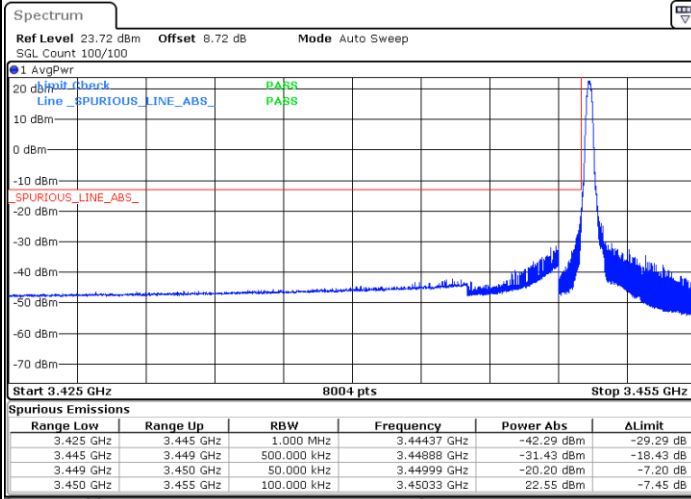

Lowest Channel / FullRB

Highest Channel / FullRB

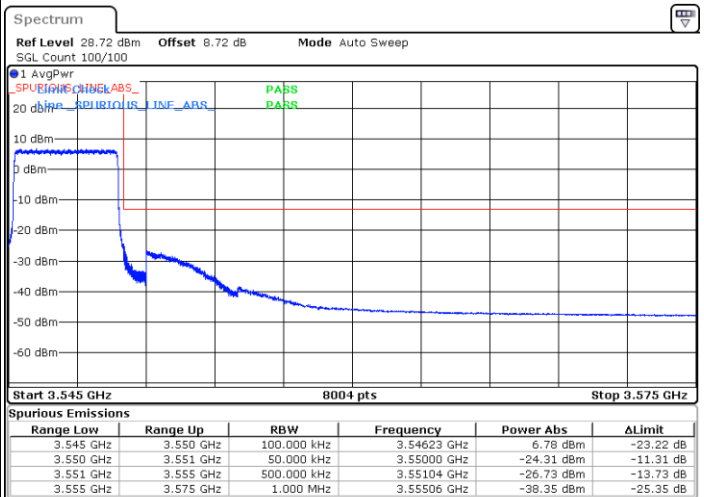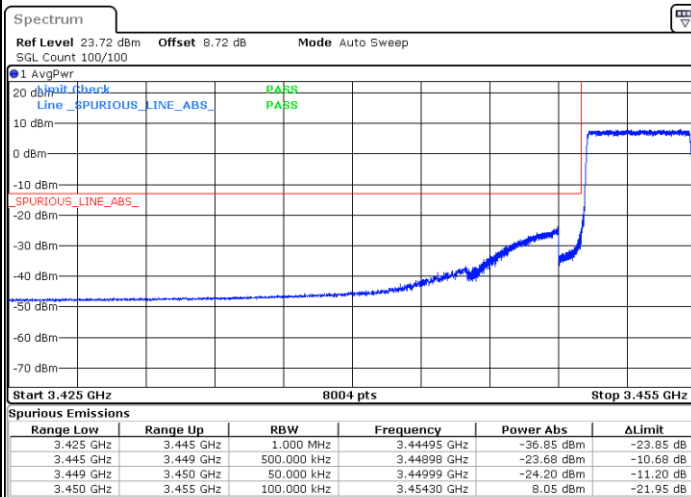





LTE Band 42 / 5MHz

16QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

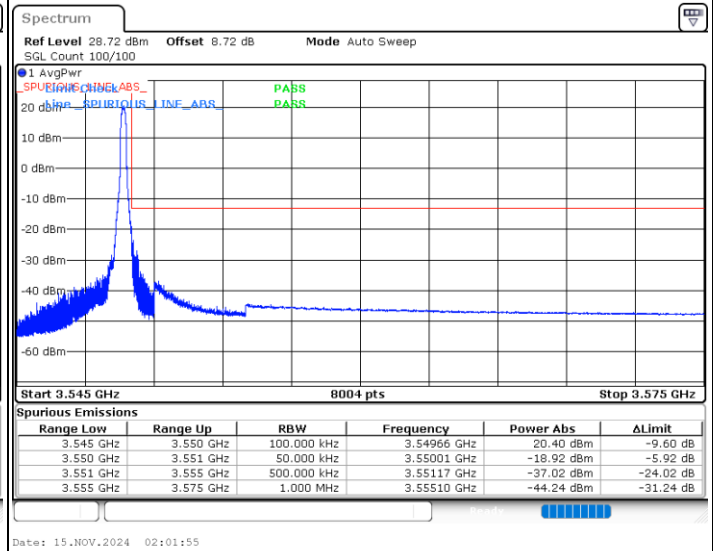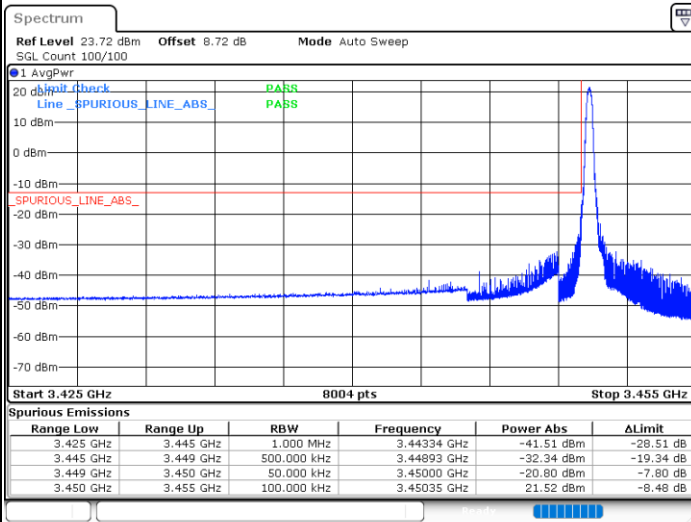

Lowest Channel / FullRB

Highest Channel / FullRB

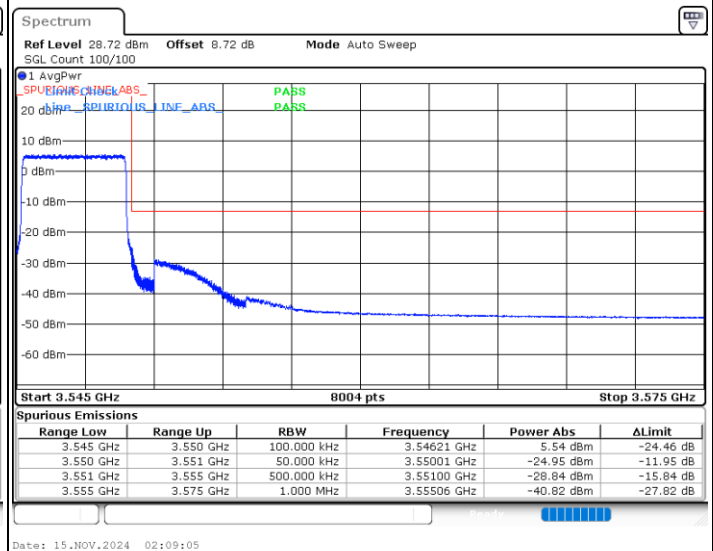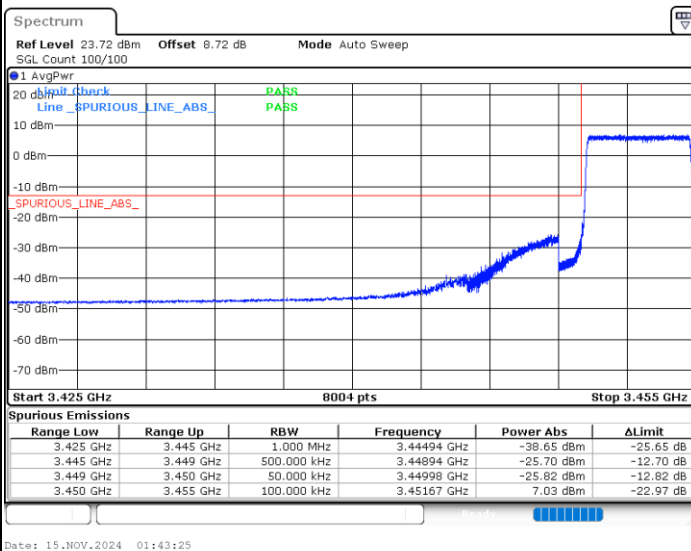




LTE Band 42 / 5MHz


64QAM

Lowest Channel / 1RB0

Highest Channel / 1RBmax

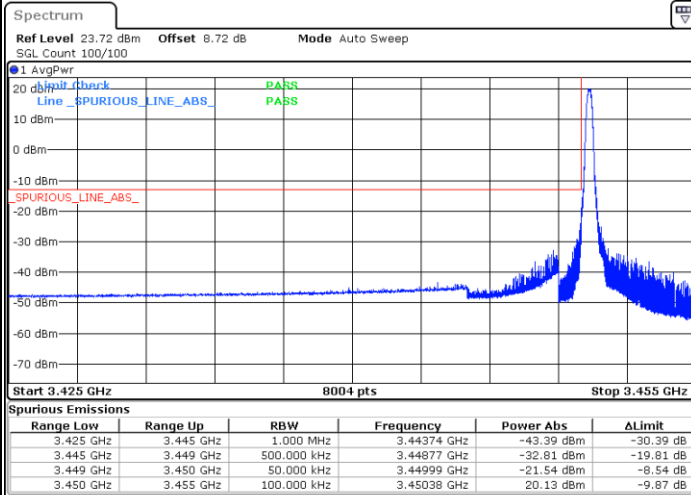


Date: 15.NOV.2024 01:52:23

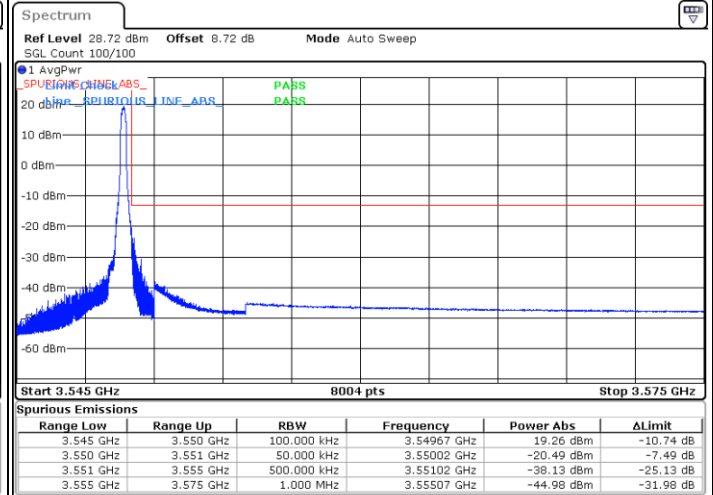


Date: 15.NOV.2024 02:03:41

Lowest Channel / FullRB

Highest Channel / FullRB

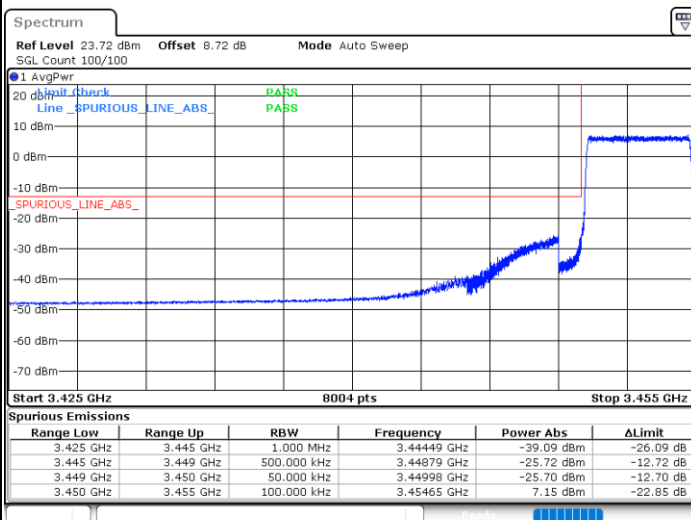

Date: 15.NOV.2024 01:45:12

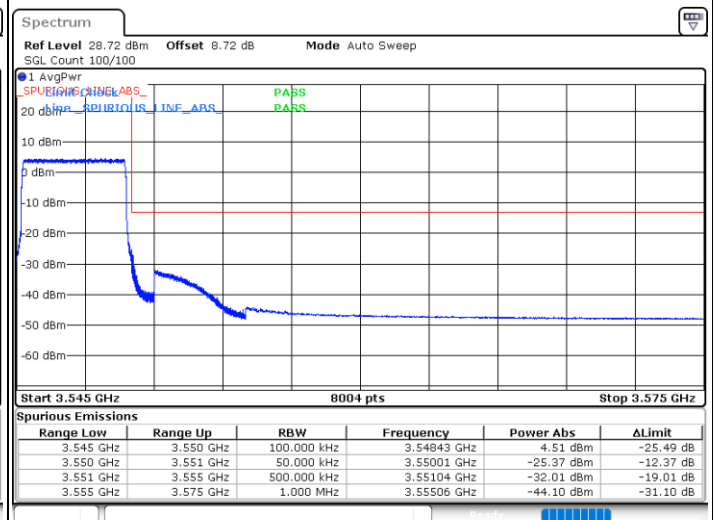

Date: 15.NOV.2024 02:10:51




LTE Band 42 / 5MHz


256QAM

Lowest Channel / 1RB0

Highest Channel / 1RBmax

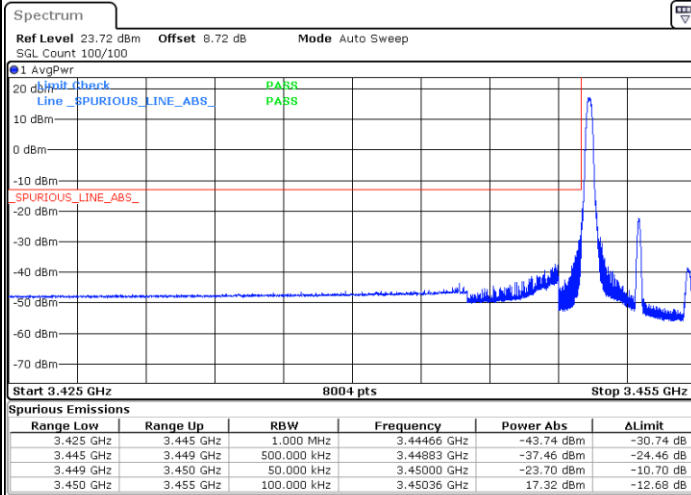


Date: 15.NOV.2024 01:54:09

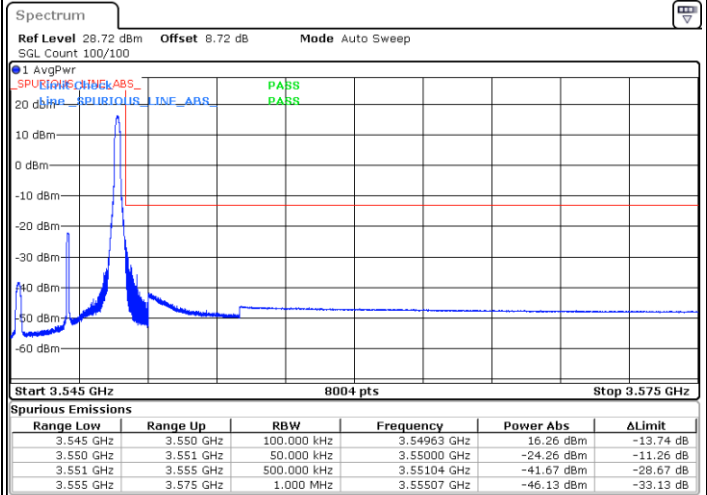


Date: 15.NOV.2024 02:05:28

Lowest Channel / FullRB

Highest Channel / FullRB

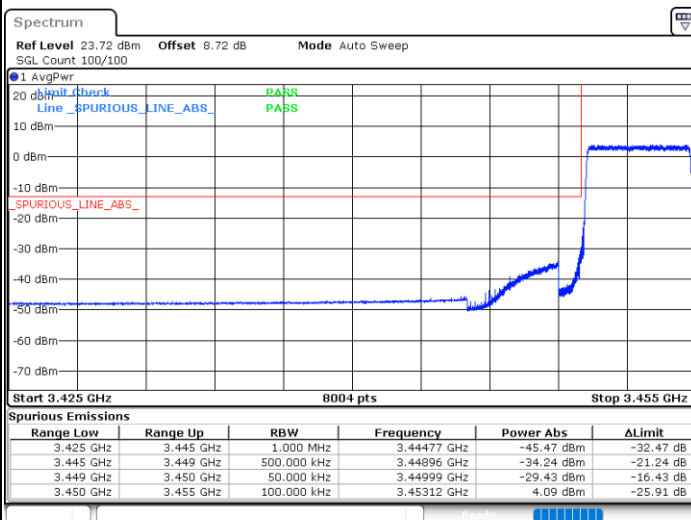

Date: 15.NOV.2024 01:46:59

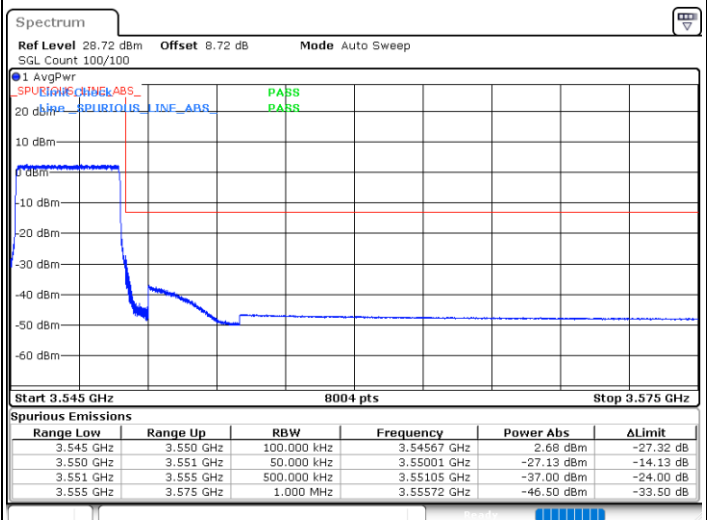

Date: 15.NOV.2024 02:12:37





LTE Band 42 / 10MHz

QPSK


Lowest Channel / 1RB0

Highest Channel / 1RBmax

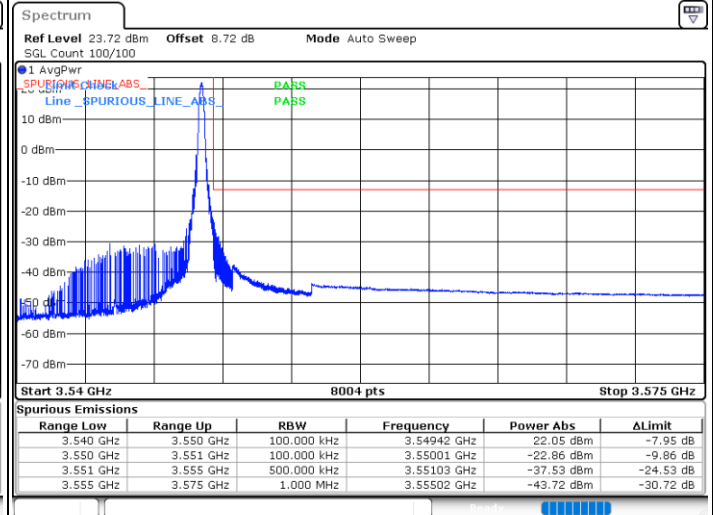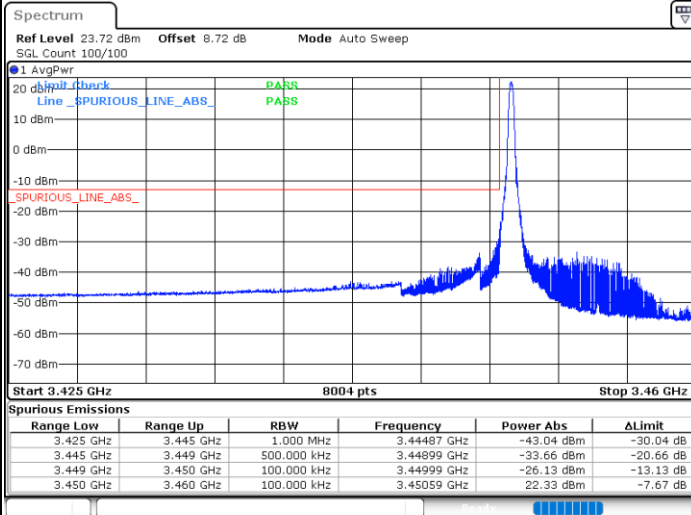

Lowest Channel / FullRB

Highest Channel / FullRB

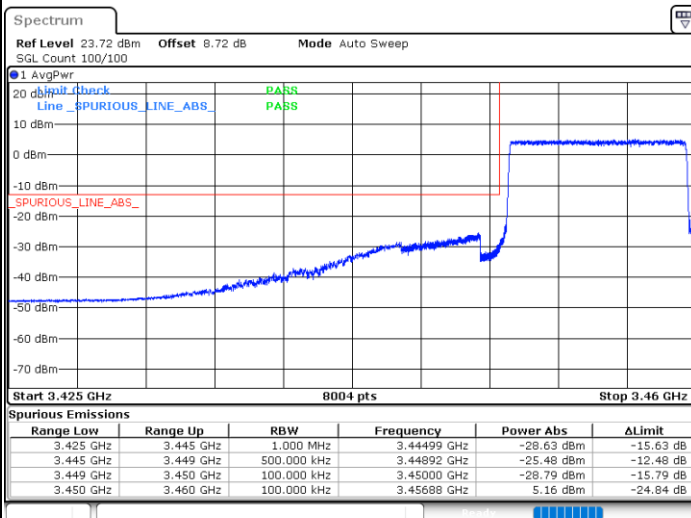





LTE Band 42 / 10MHz

16QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

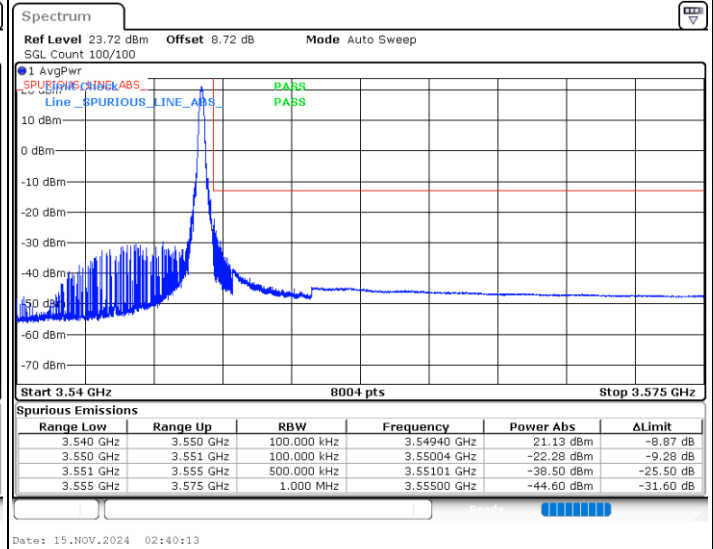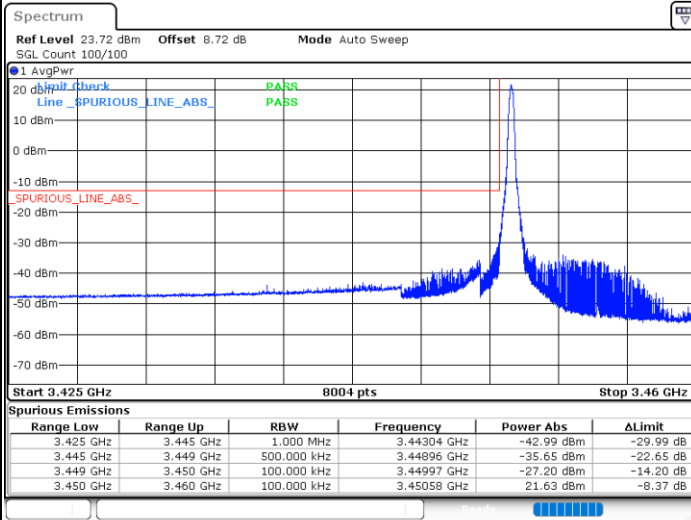

Lowest Channel / FullRB

Highest Channel / FullRB

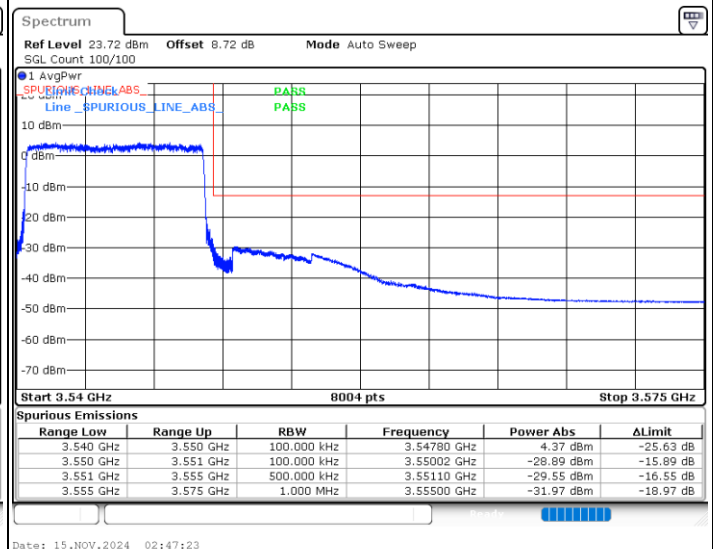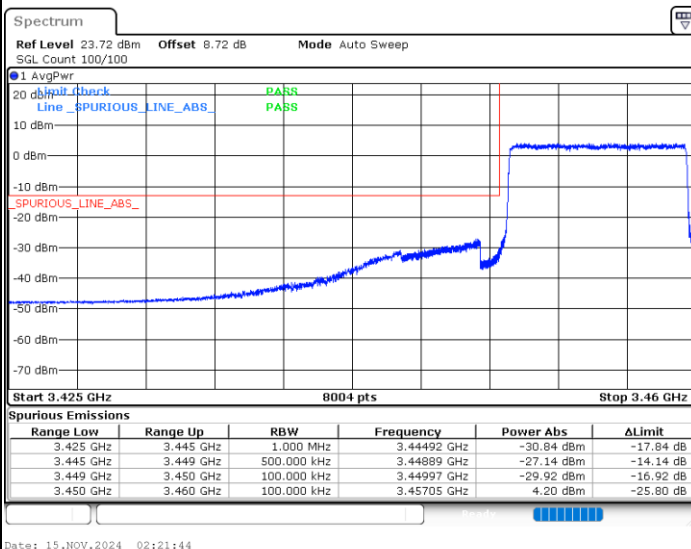





LTE Band 42 / 10MHz

64QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

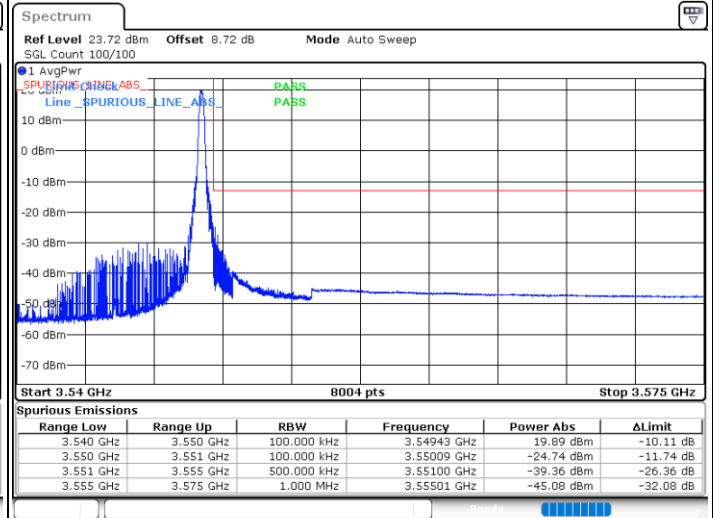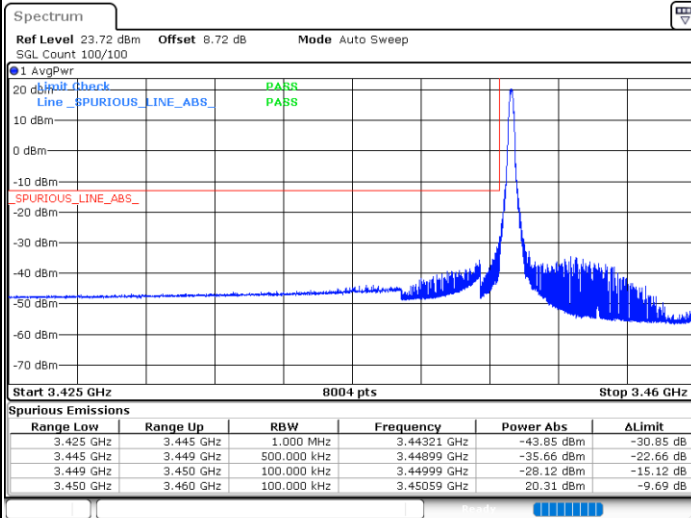

Lowest Channel / FullRB

Highest Channel / FullRB

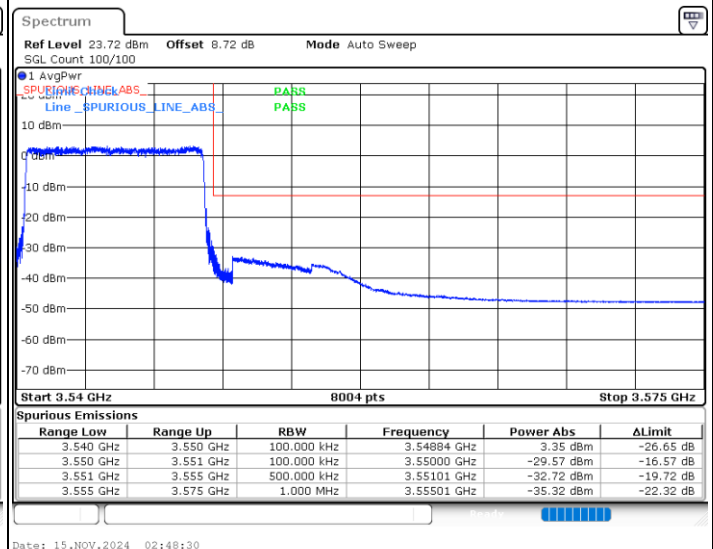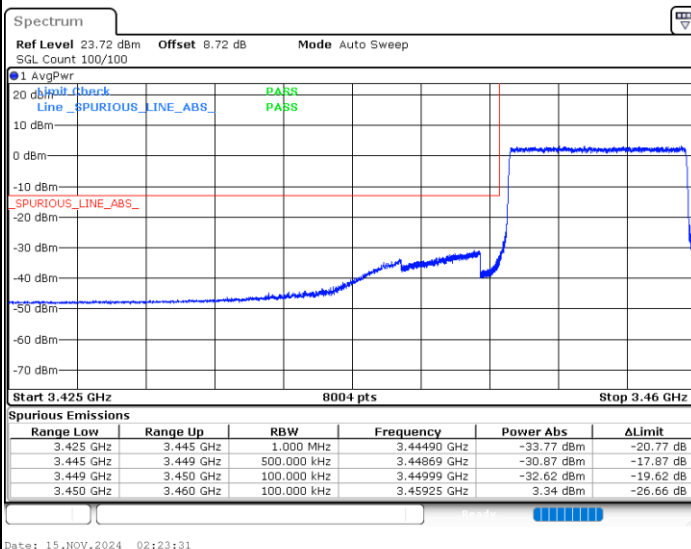





LTE Band 42 / 10MHz

256QAM


Lowest Channel / 1RB0

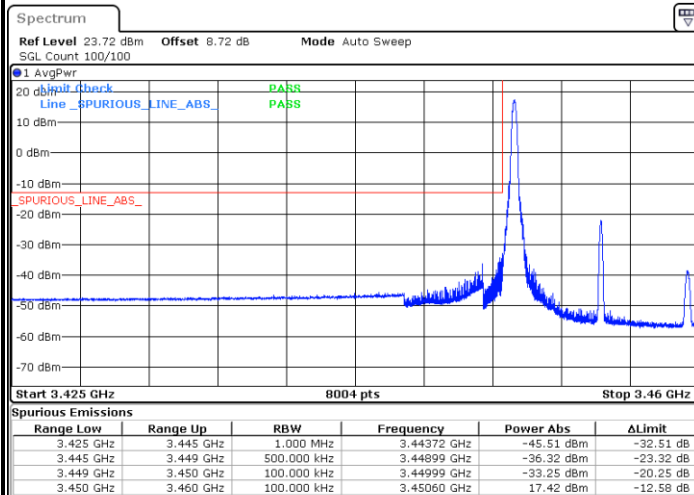


Highest Channel / 1RBmax

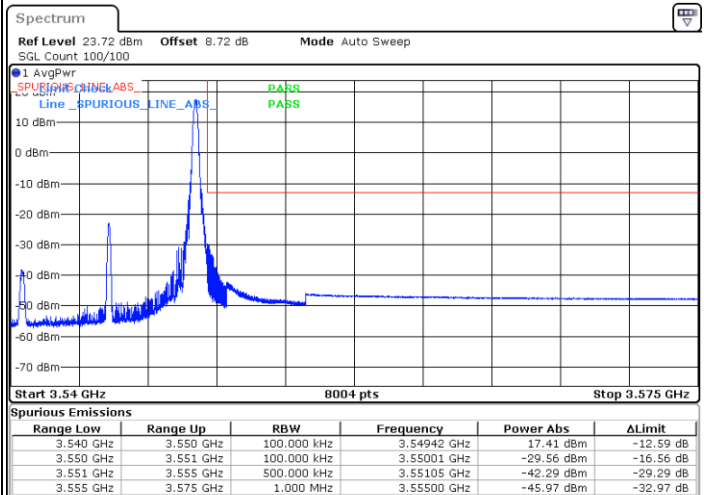

Lowest Channel / FullRB

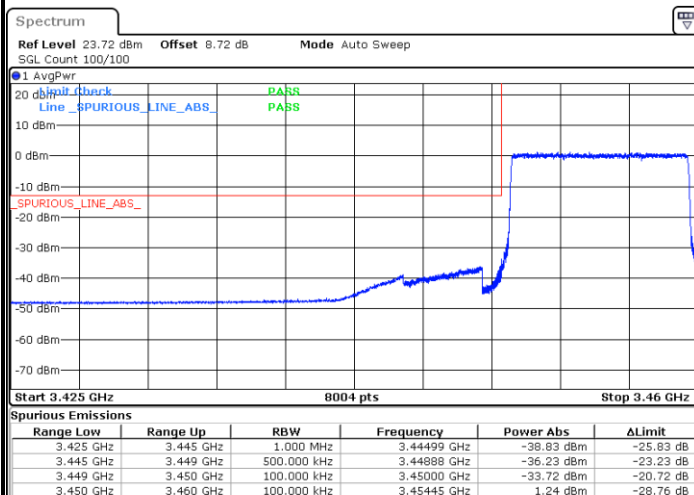

Highest Channel / FullRB

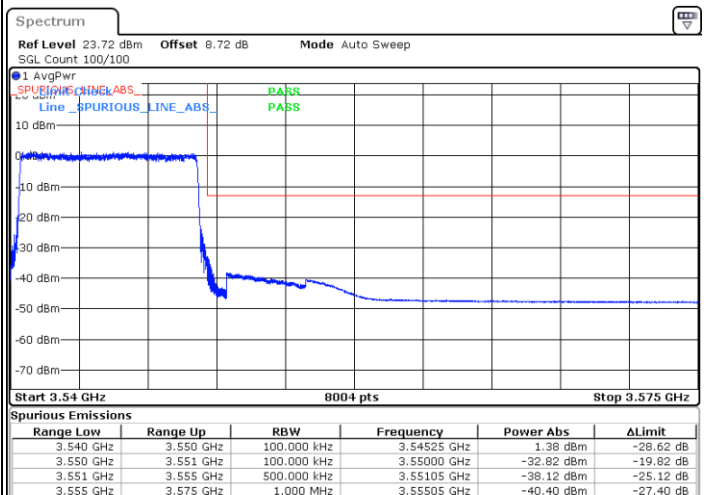





LTE Band 42 / 15MHz

QPSK


Lowest Channel / 1RB0

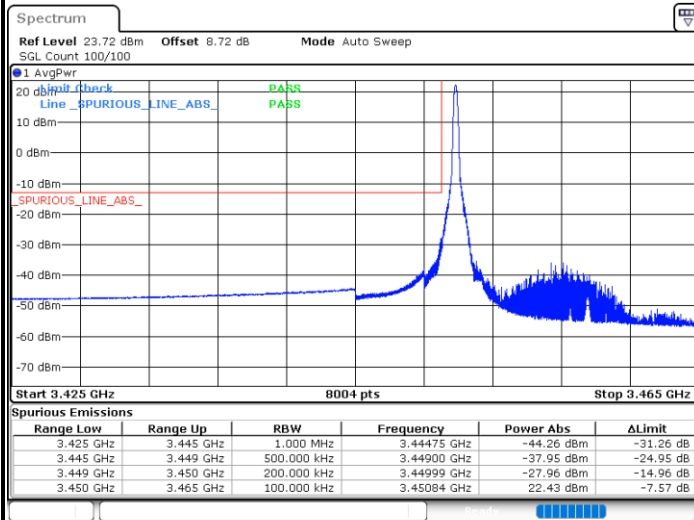


Highest Channel / 1RBmax

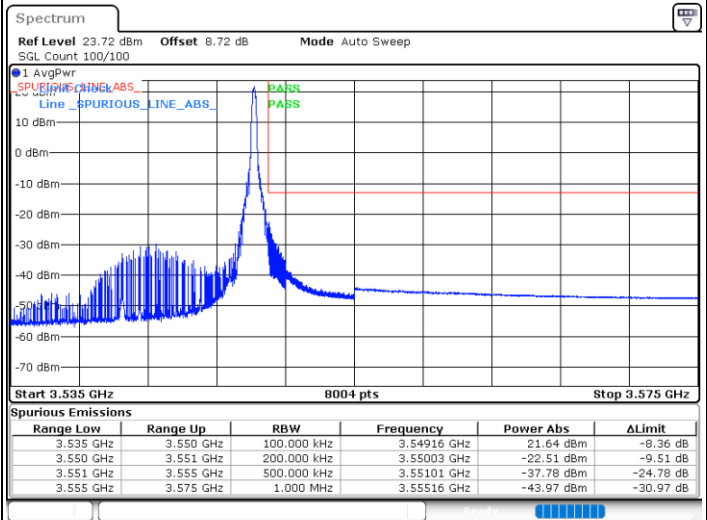

Lowest Channel / FullRB

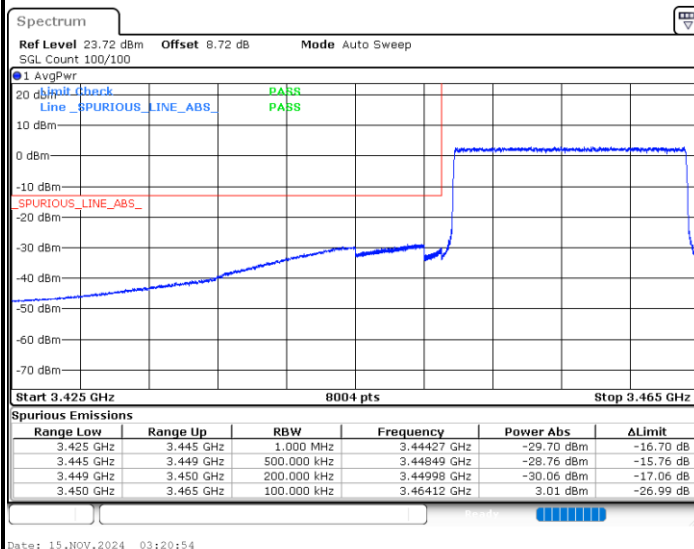

Highest Channel / FullRB

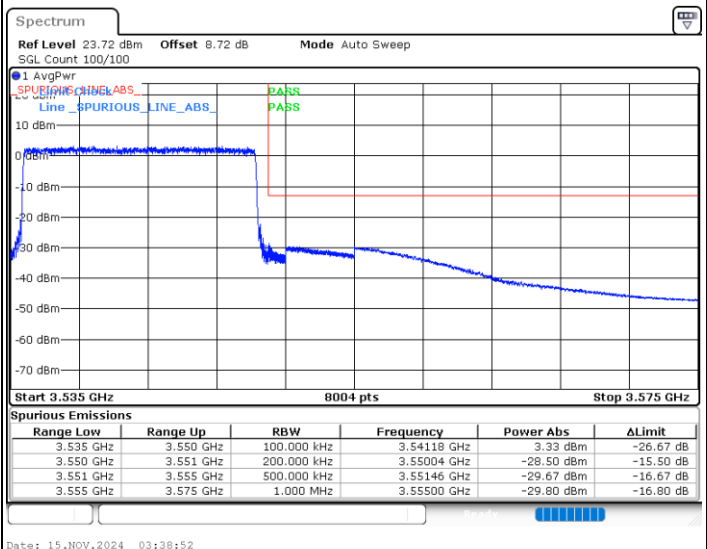





LTE Band 42 / 15MHz

16QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

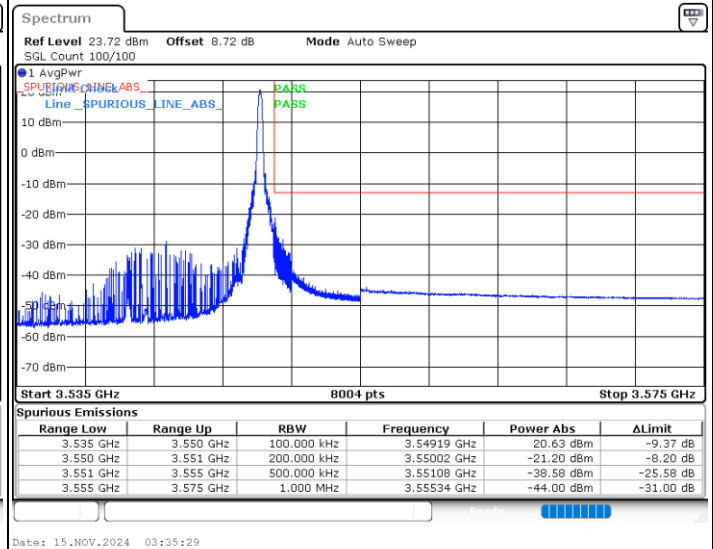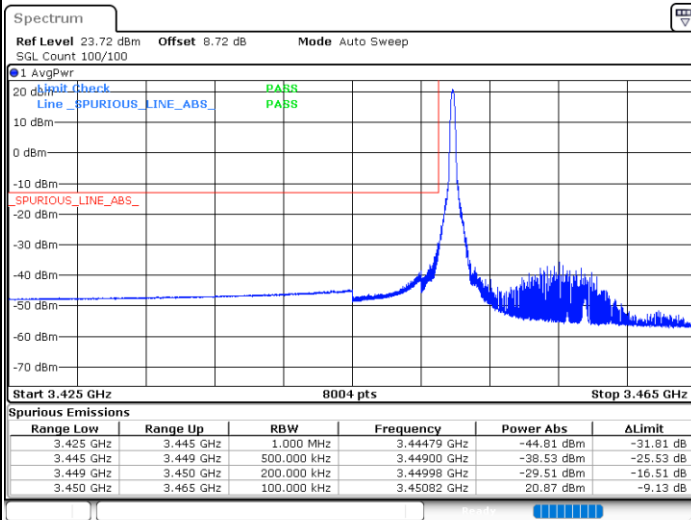

Lowest Channel / FullRB

Highest Channel / FullRB

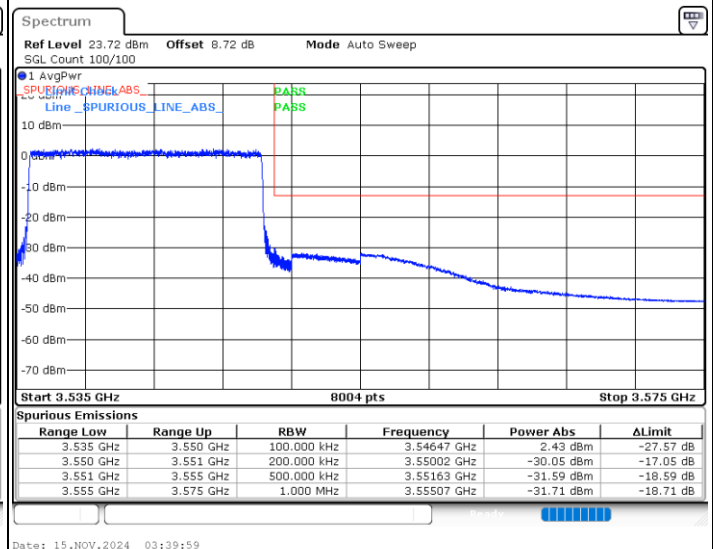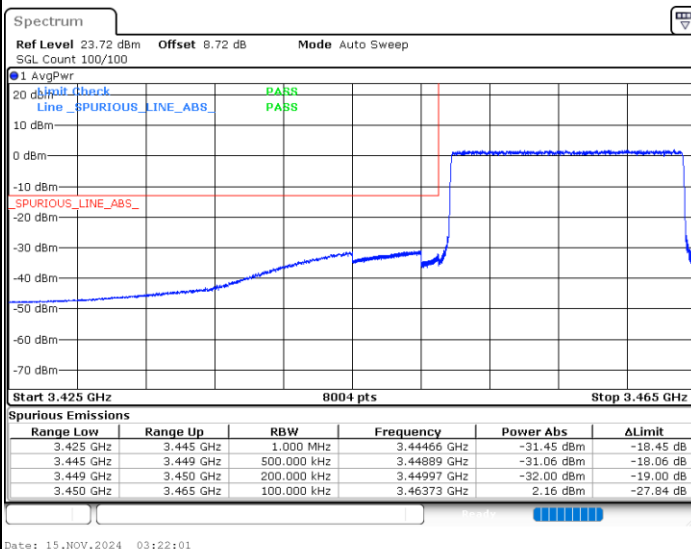





LTE Band 42 / 15MHz

64QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

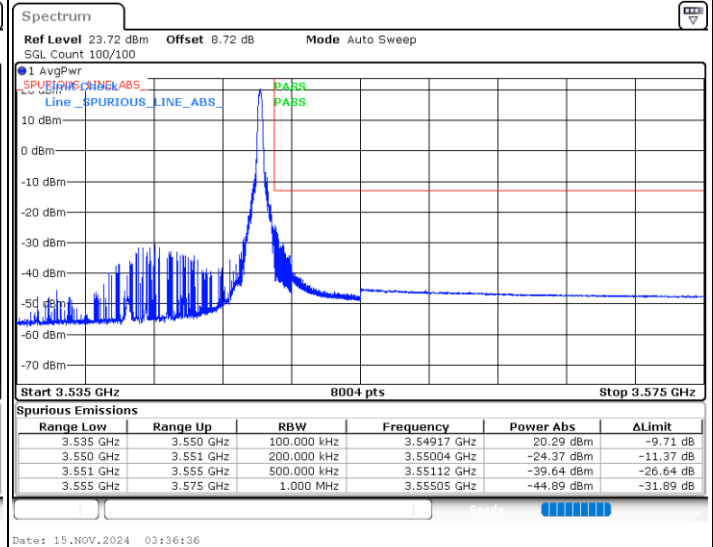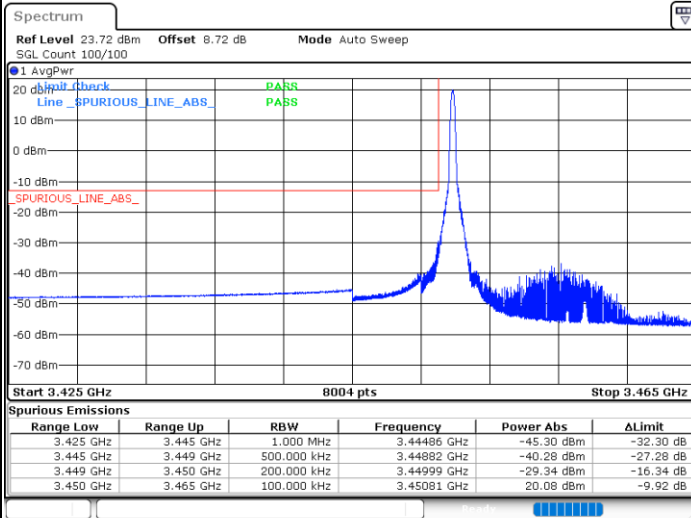

Lowest Channel / FullRB

Highest Channel / FullRB

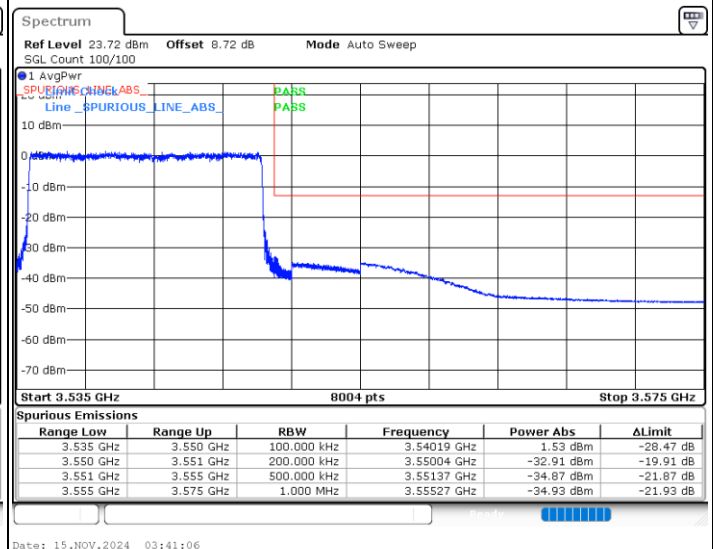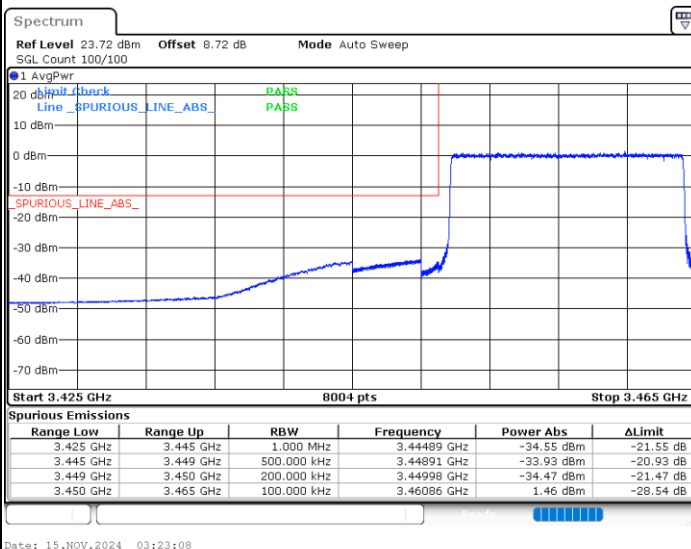





LTE Band 42 / 15MHz

256QAM


Lowest Channel / 1RB0

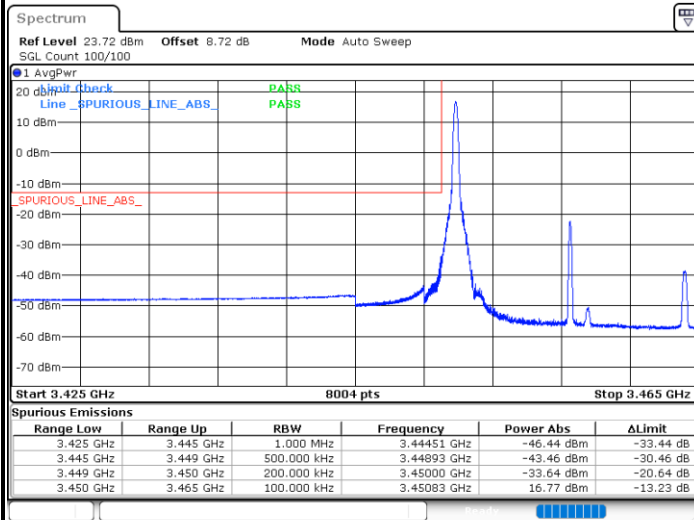


Highest Channel / 1RBmax

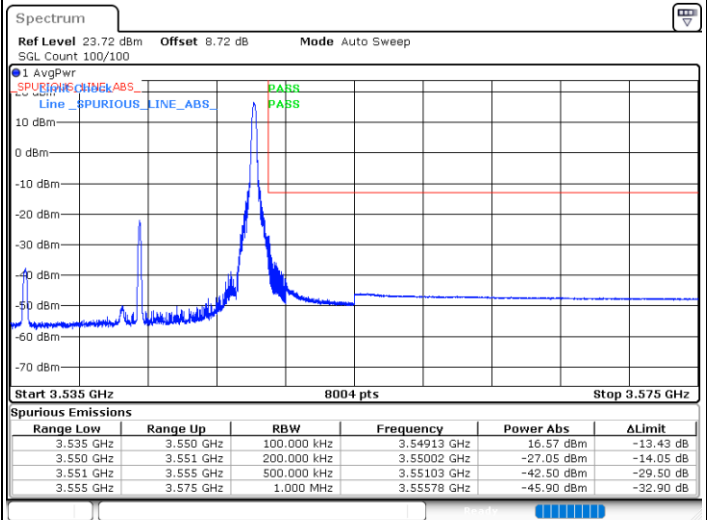

Lowest Channel / FullRB

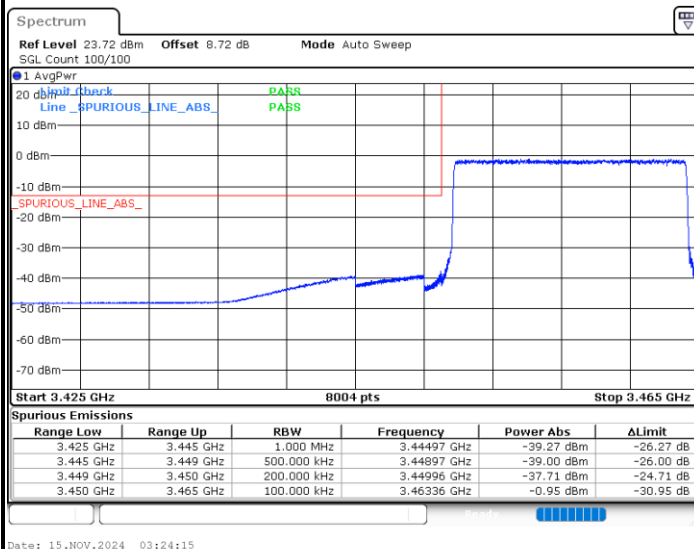

Highest Channel / FullRB

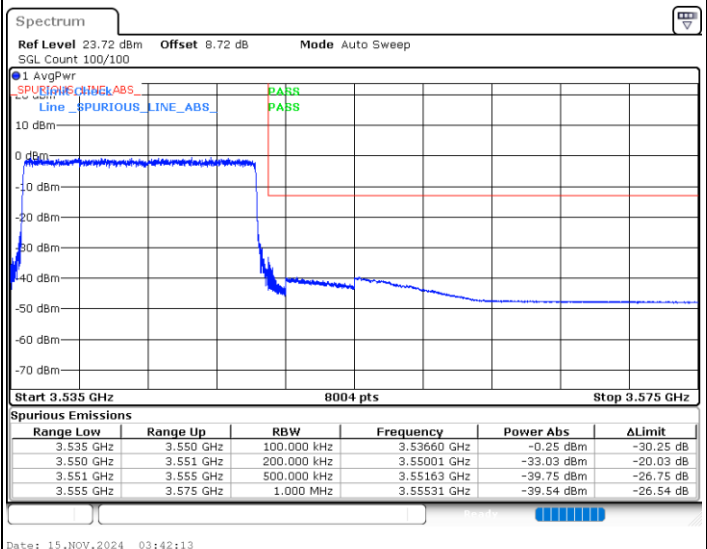





LTE Band 42 / 20MHz

QPSK


Lowest Channel / 1RB0

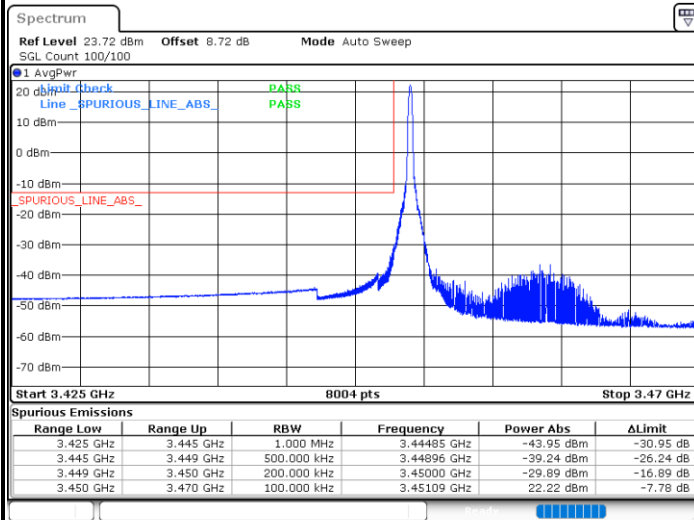


Highest Channel / 1RBmax

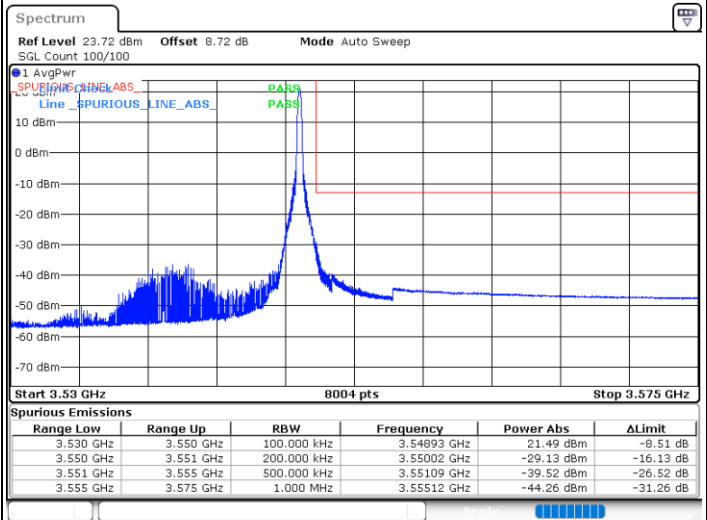

Lowest Channel / FullRB

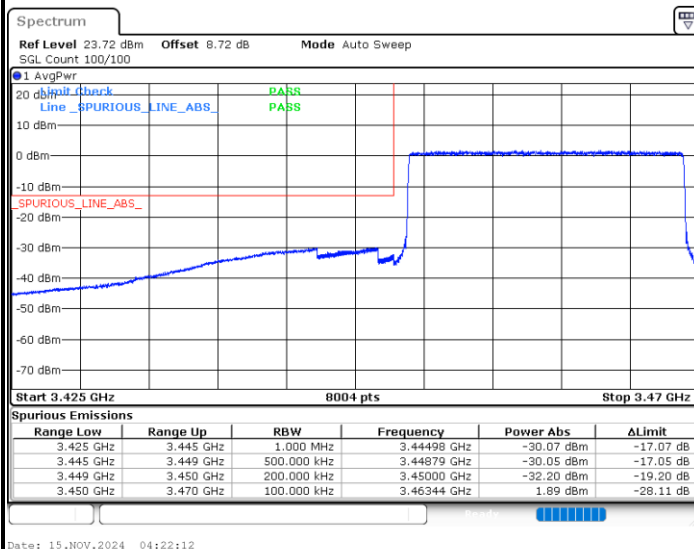

Highest Channel / FullRB

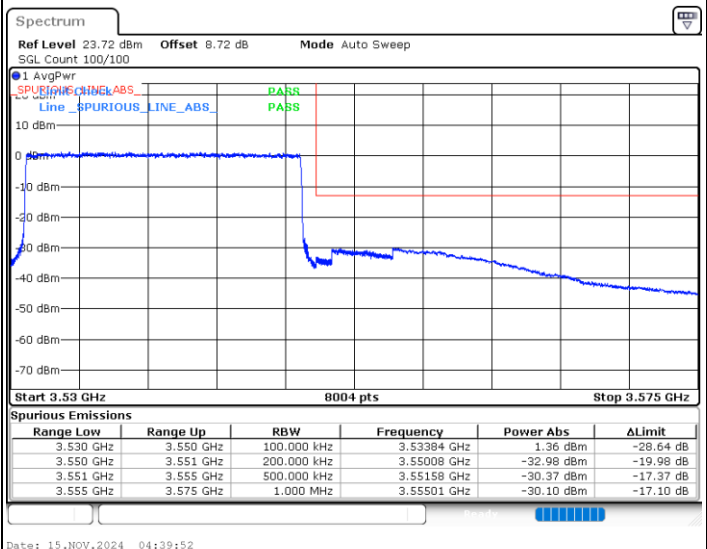





LTE Band 42 / 20MHz

16QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

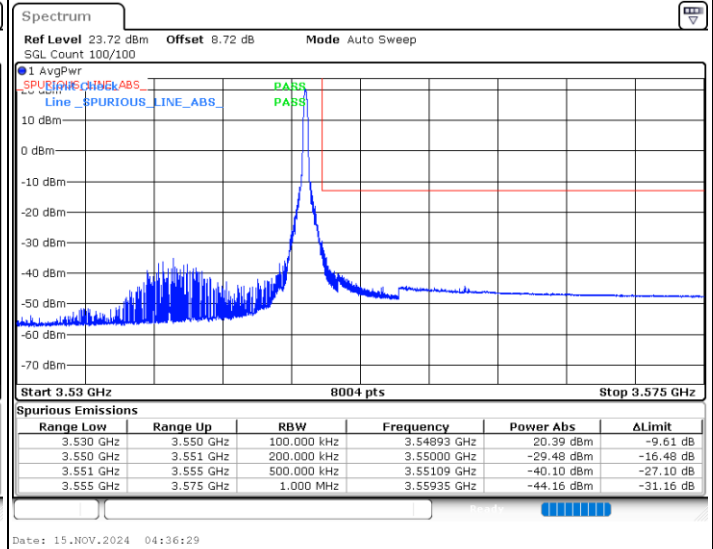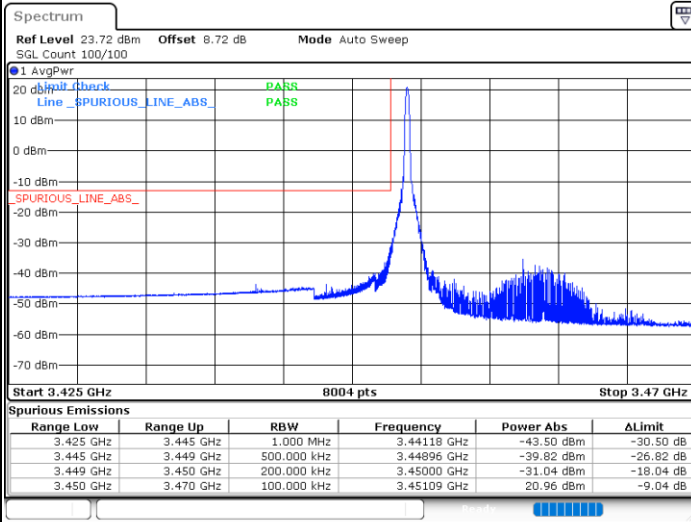

Lowest Channel / FullRB

Highest Channel / FullRB

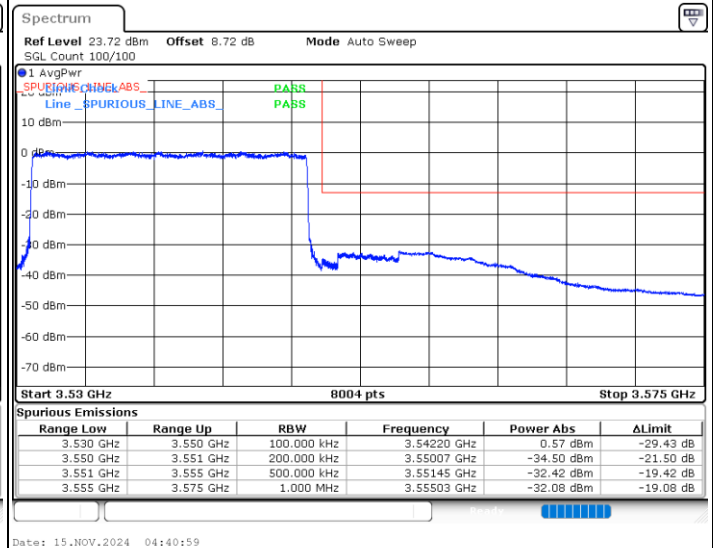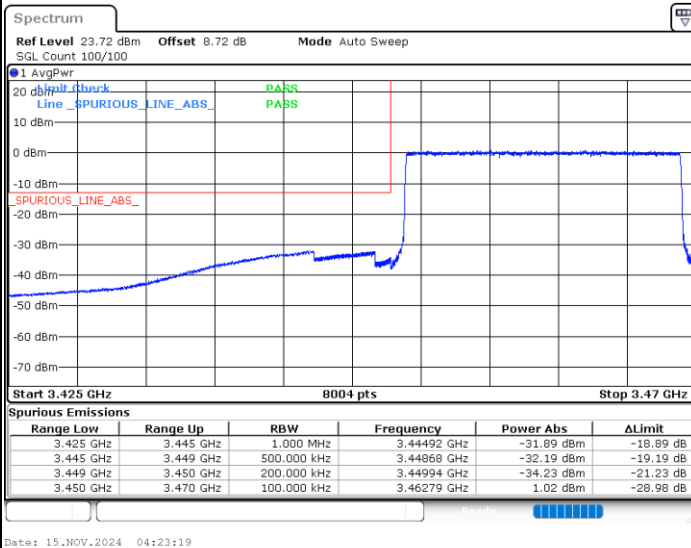




LTE Band 42 / 20MHz


64QAM

Lowest Channel / 1RB0

Highest Channel / 1RBmax

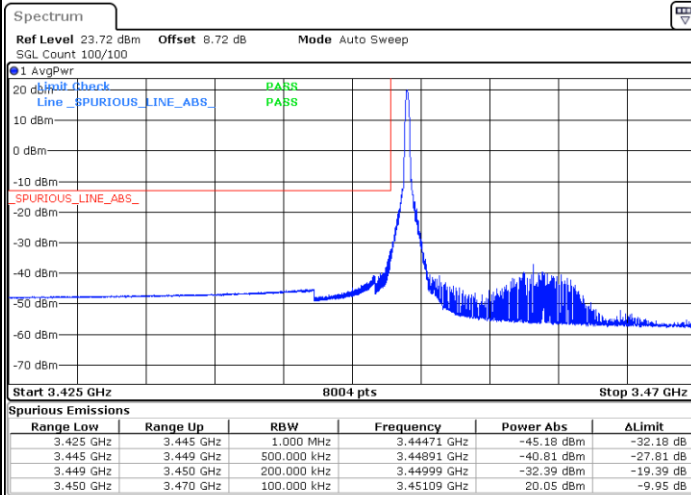


Date: 15.NOV.2024 04:28:56

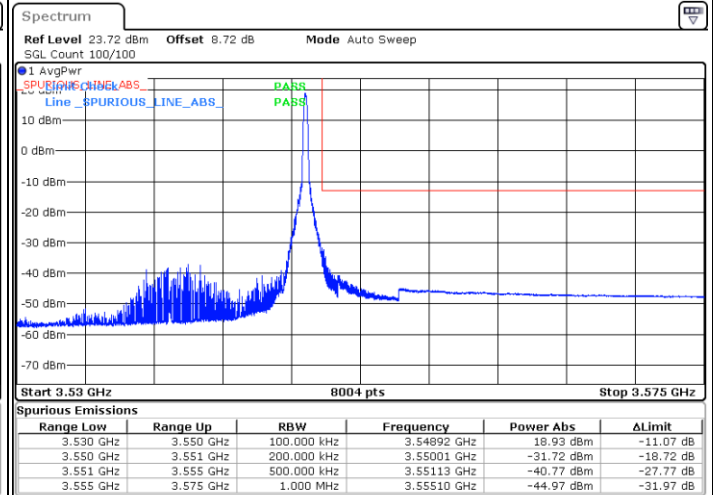


Date: 15.NOV.2024 04:37:36

Lowest Channel / FullRB

Highest Channel / FullRB

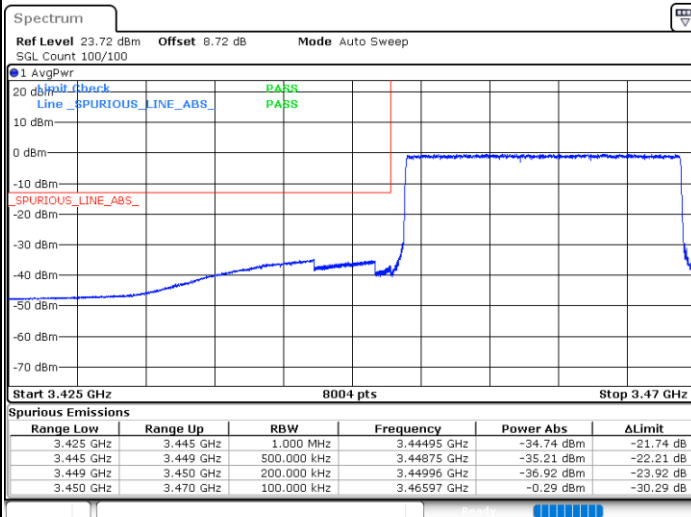

Date: 15.NOV.2024 04:24:26

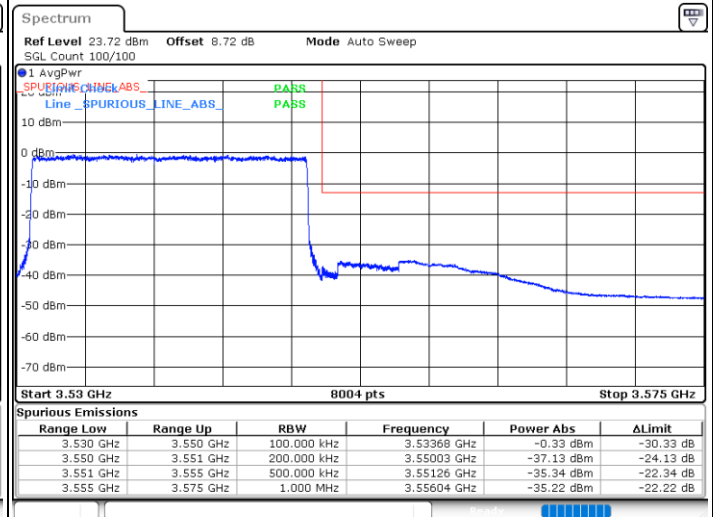


Date: 15.NOV.2024 04:42:06




LTE Band 42 / 20MHz

256QAM


Lowest Channel / 1RB0

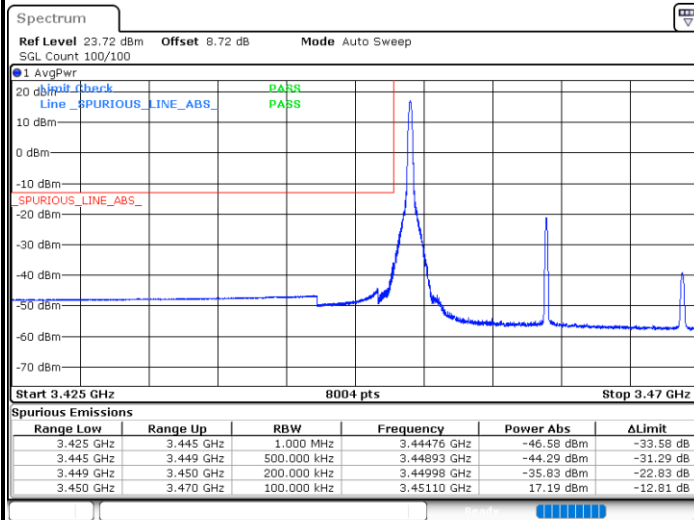


Highest Channel / 1RBmax

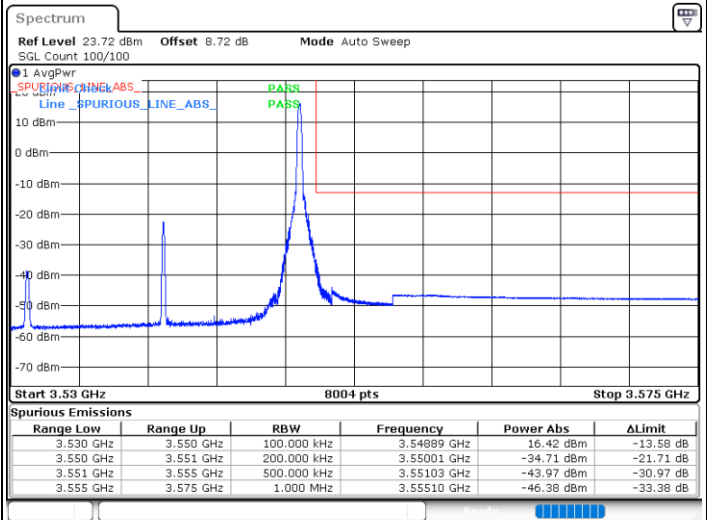

Lowest Channel / FullRB

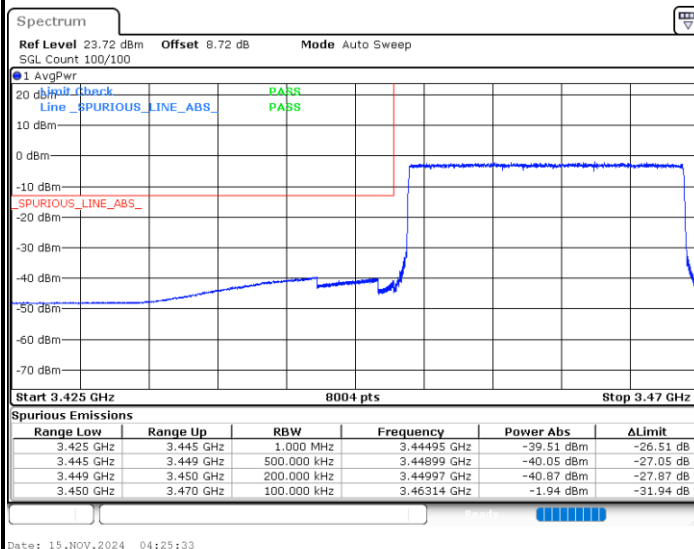

Highest Channel / FullRB

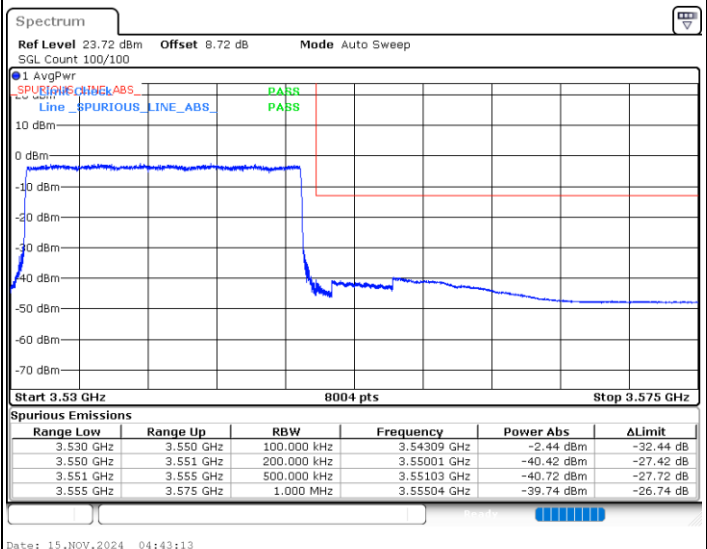




Conducted Spurious Emission

LTE Band 42/ 5MHz

QPSK / 1RB0


Lowest Channel

Middle Channel

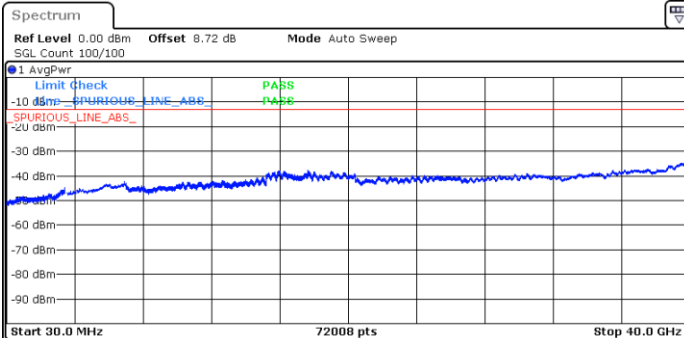

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	973.35165 MHz	-48.30 dBm	-35.30 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.42409 GHz	-44.88 dBm	-31.88 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.90249 GHz	-42.12 dBm	-29.12 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.99569 GHz	-43.71 dBm	-30.71 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99513 GHz	-41.67 dBm	-28.67 dB
14.000 GHz	18.000 GHz	1.000 MHz	17.65874 GHz	-37.84 dBm	-24.84 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.00653 GHz	-38.12 dBm	-25.12 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89980 GHz	-33.60 dBm	-20.60 dB


Date: 15.NOV.2024 04:54:39

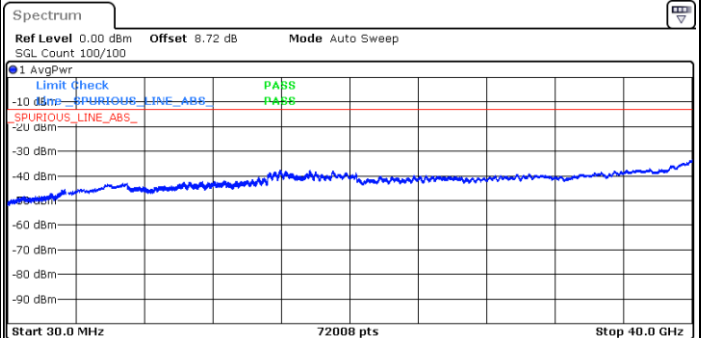

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	976.25874 MHz	-48.25 dBm	-35.25 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.35924 GHz	-45.50 dBm	-32.50 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.99487 GHz	-42.81 dBm	-29.81 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97169 GHz	-43.82 dBm	-30.82 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.98338 GHz	-41.91 dBm	-28.91 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.93943 GHz	-37.76 dBm	-24.76 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.04140 GHz	-38.07 dBm	-25.07 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.99513 GHz	-33.58 dBm	-20.58 dB

Date: 15.NOV.2024 04:56:05

Highest Channel

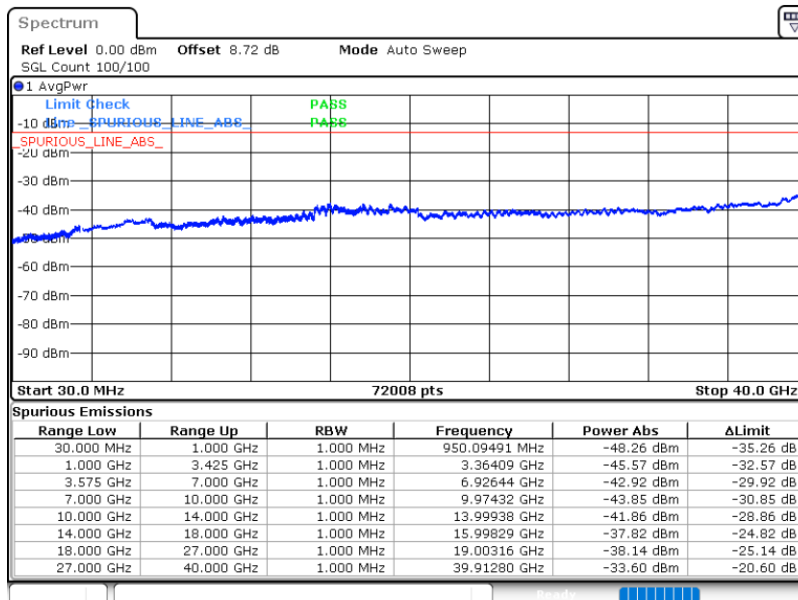

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	950.09491 MHz	-48.26 dBm	-35.26 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.36409 GHz	-45.57 dBm	-32.57 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.92644 GHz	-42.92 dBm	-29.92 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97432 GHz	-43.85 dBm	-30.85 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99938 GHz	-41.86 dBm	-28.86 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.99829 GHz	-37.82 dBm	-24.82 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.00316 GHz	-38.14 dBm	-25.14 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.91280 GHz	-33.60 dBm	-20.60 dB

Date: 15.NOV.2024 04:57:31