



RF TEST REPORT



Report No.: 16020754-FCC-R1

Supersede Report No.: N/A

Applicant	Shanghai Smarfid Security Equipment Co.,Ltd	
Product Name	Slender Series 13.56 MHz Reader	
Main Model	MW322-8K	
Serial Model	MX322-8K、MC322-8K、MW322-8N、MX322-8N、MC322-8N	
Test Standard	FCC Part 15.225: 2015, ANSI C63.10: 2013	
Test Date	July 11 to July 13, 2016	
Issue Date	July 14, 2016	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
 Louise Tu Test Engineer		 Miro Bao Checked By
<p>This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

SIEMIC (Nanjing-China) Laboratories
2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16020754-FCC-R1
Page	3 of 37

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSIONS VOLTAGE.....	9
6.3 FUNDAMENTAL FIELD STRENGTH TEST RESULT	13
6.4 RADIATED SPURIOUS EMISSIONS.....	15
6.5 FREQUENCY STABILITY	20
6.6 20DB OCCUPIED BANDWIDTH.....	22
ANNEX A. TEST INSTRUMENT	24
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	25
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	33
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	36
ANNEX E. DECLARATION OF SIMILARITY	37

Test Report No.	16020754-FCC-R1
Page	5 of 37

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16020754-FCC-R1	NONE	Original	July 14, 2016

2. Customer information

Applicant Name	Shanghai Smarfid Security Equipment Co.,Ltd
Applicant Address	Room 301,4th Bldg., No.4 TongLi Road, SongJiang District,Shanghai 201615,China
Manufacturer Name	Shanghai Smarfid Security Equipment Co.,Ltd
Manufacturer Address	Room 301,4th Bldg., No.4 TongLi Road, SongJiang District,Shanghai 201615,China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

4. Equipment Under Test (EUT) Information

Description of EUT: Slender Series 13.56 MHz Reader

Main Model: MW322-8K

Serial Model: MX322-8K, MC322-8K, MW322-8N, MX322-8N, MC322-8N

Date EUT received: July 07, 2016

Test Date(s): July 11 to July 13, 2016

Antenna Gain: 13.56MHz: 6 dBi

Type of Modulation: ASK

RF Operating Frequency (ies): 13.56MHz

Number of Channels: 1 CH

Input Power: DC 12V

Trade Name : N/A

FCC ID: X3A-MG3221356M

Note: the difference between these models please refer to ANNEX E. DECLARATION OF SIMILARITY.

5. Test Summary

The product was tested in accordance with the following specifications.
 All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conducted Emissions Voltage	Compliance
§15.225(a)	Fundamental Field Strength	Compliance
§15.225(b)	Fundamental Field Strength	Compliance
§15.225(c)	Fundamental Field Strength	Compliance
§15.225(d),15.209	Radiated Emissions	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	Occupied Bandwidth	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna is permanently attached to the device which meets the requirement.


Result: Compliance.

6.2 Conducted Emissions Voltage

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	July 11, 2016
Tested By :	Louise Tu

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dB μ V)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

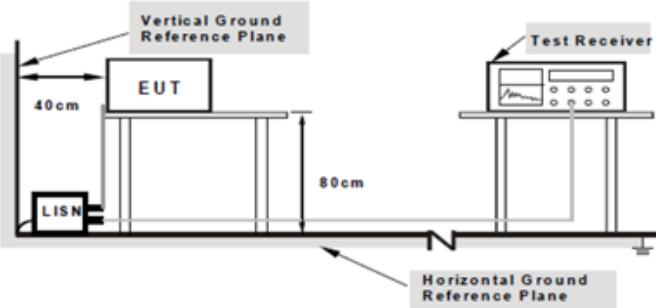Spec	Item	Requirement	Applicable
47CFR§15.20 7, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>		
Procedure	<ul style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. All other supporting equipment were powered separately from another main supply. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Report No.	16020754-FCC-R1
Page	10 of 37

Test Data Yes N/A

Test Plot Yes (See below) N/A

Data sample

Frequency (MHz)	Quasi-Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
xxx	56.21	66.00	-9.79	39.20	56.00	-16.80	12.22

Frequency (MHz) = Emission frequency in MHz

Quasi-Peak/Average (dB μ V)=Receiver Reading(dB μ V)+ Factor(dB)

Limit(dB μ V)=Limit stated in standard


Factor (dB)= cable loss+ Insertion loss of LISN+ Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Calculation Formula:

Margin (dB)=Quasi Peak / Average (dB μ V) – limit (dB μ V)

Test Mode:

Transmitting Mode

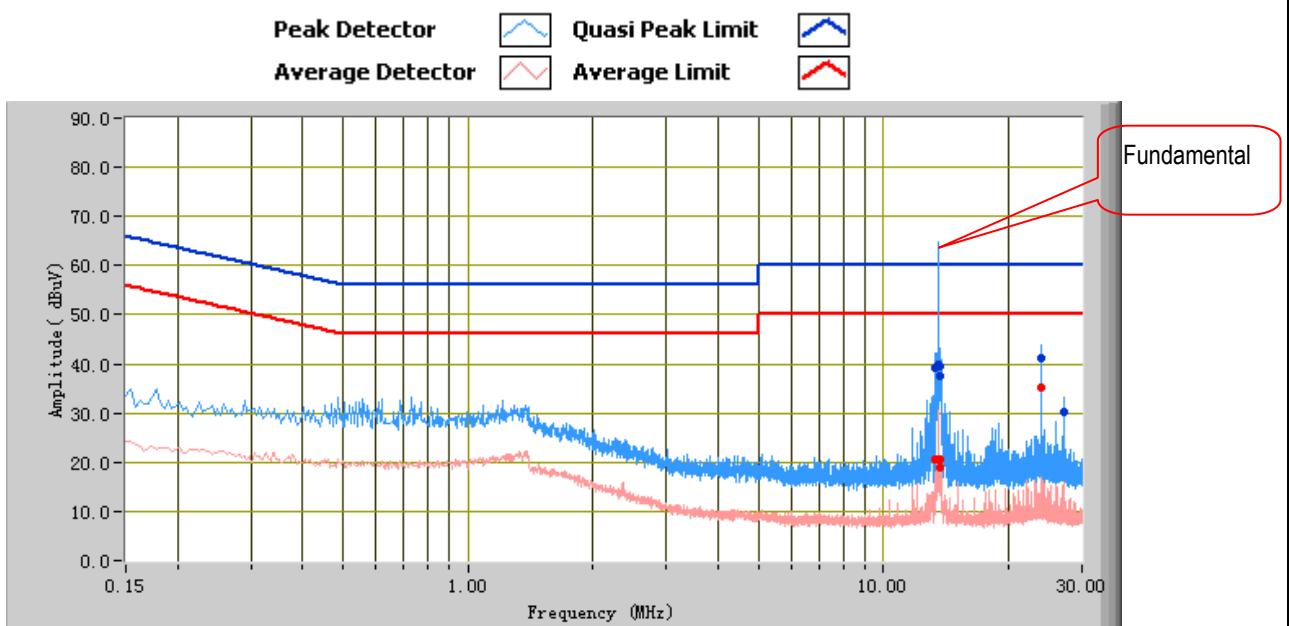


Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
24.01	41.02	60.00	-18.98	35.06	50.00	-14.94	11.67
13.49	39.80	60.00	-20.20	20.64	50.00	-29.36	11.32
13.63	39.67	60.00	-20.33	20.60	50.00	-29.40	11.33
13.35	39.18	60.00	-20.82	20.43	50.00	-29.57	11.31
13.70	37.40	60.00	-22.60	18.80	50.00	-31.20	11.33
27.12	30.37	60.00	-29.63	30.07	50.00	-19.93	11.77

Test Mode:

Transmitting Mode

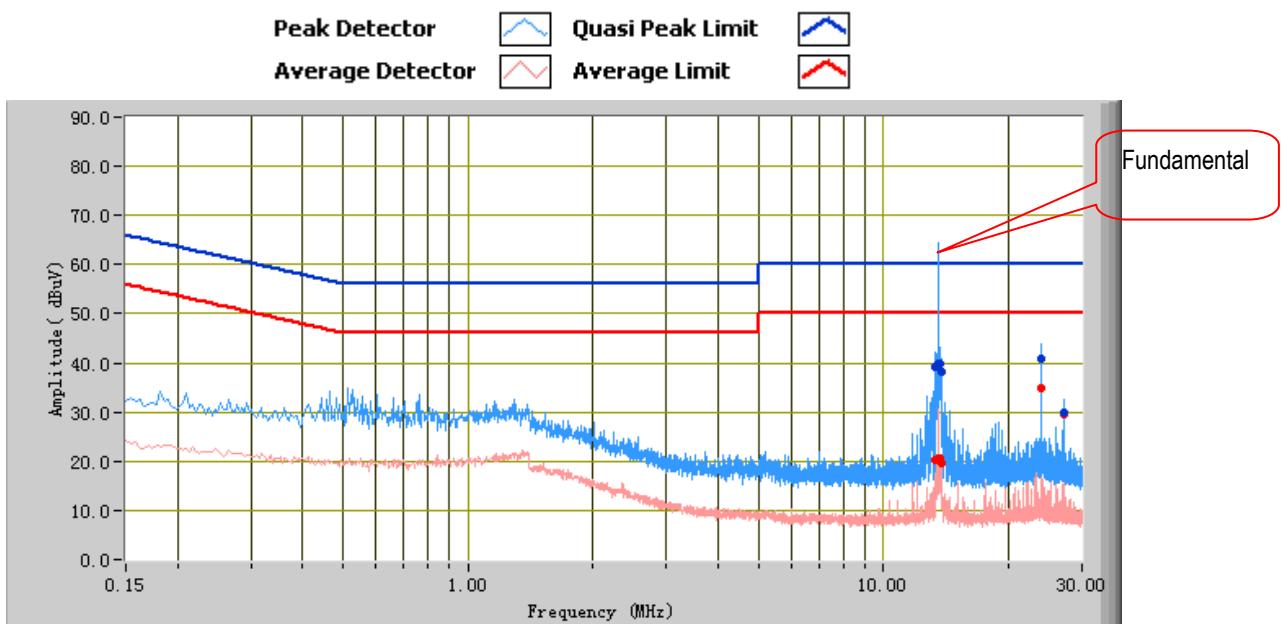

Test Data


Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
24.01	40.80	60.00	-19.20	34.76	50.00	-15.24	11.70
13.49	39.82	60.00	-20.18	20.70	50.00	-29.30	11.32
13.63	39.71	60.00	-20.29	20.62	50.00	-29.38	11.33
13.35	39.22	60.00	-20.78	20.42	50.00	-29.58	11.32
13.77	38.13	60.00	-21.87	19.55	50.00	-30.45	11.34
27.12	29.96	60.00	-30.04	29.62	50.00	-20.38	11.80

6.3 Fundamental Field Strength Test Result

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	July 12, 2016
Tested By :	Louise Tu



Requirement(s):

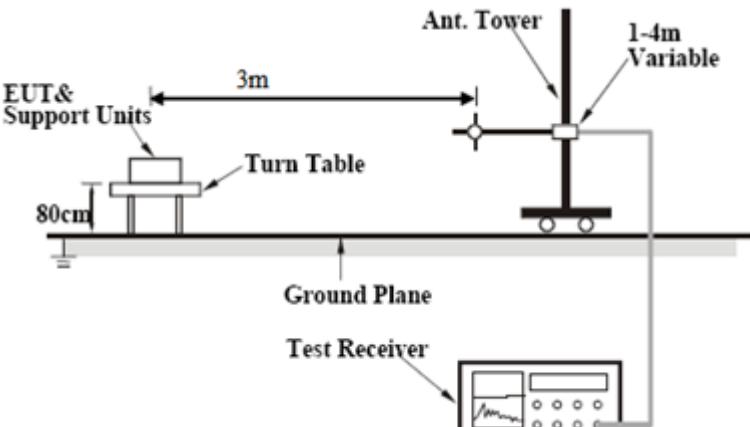Spec	Item	Requirement	Applicable
§15.225(a) §15.225(b) §15.225(c)	a)	The field strength of any emissions within the band 13.553 –13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.	<input checked="" type="checkbox"/>
	b)	The bands 13.410 –13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.	<input type="checkbox"/>
	c)	The bands 13.110 –13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.	<input type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An 'EUT & Support Units' is mounted on a 'Turn Table' which is positioned 80cm above a 'Ground Plane'. A vertical 'Ant. Tower' is connected to the turn table, with a '1-4m Variable' antenna height adjustment mechanism. A 'Test Receiver' is connected to the tower and is shown displaying a waveform.</p>		
Test Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A

Test Plots


Fundamental Field Strength Measurement Result:

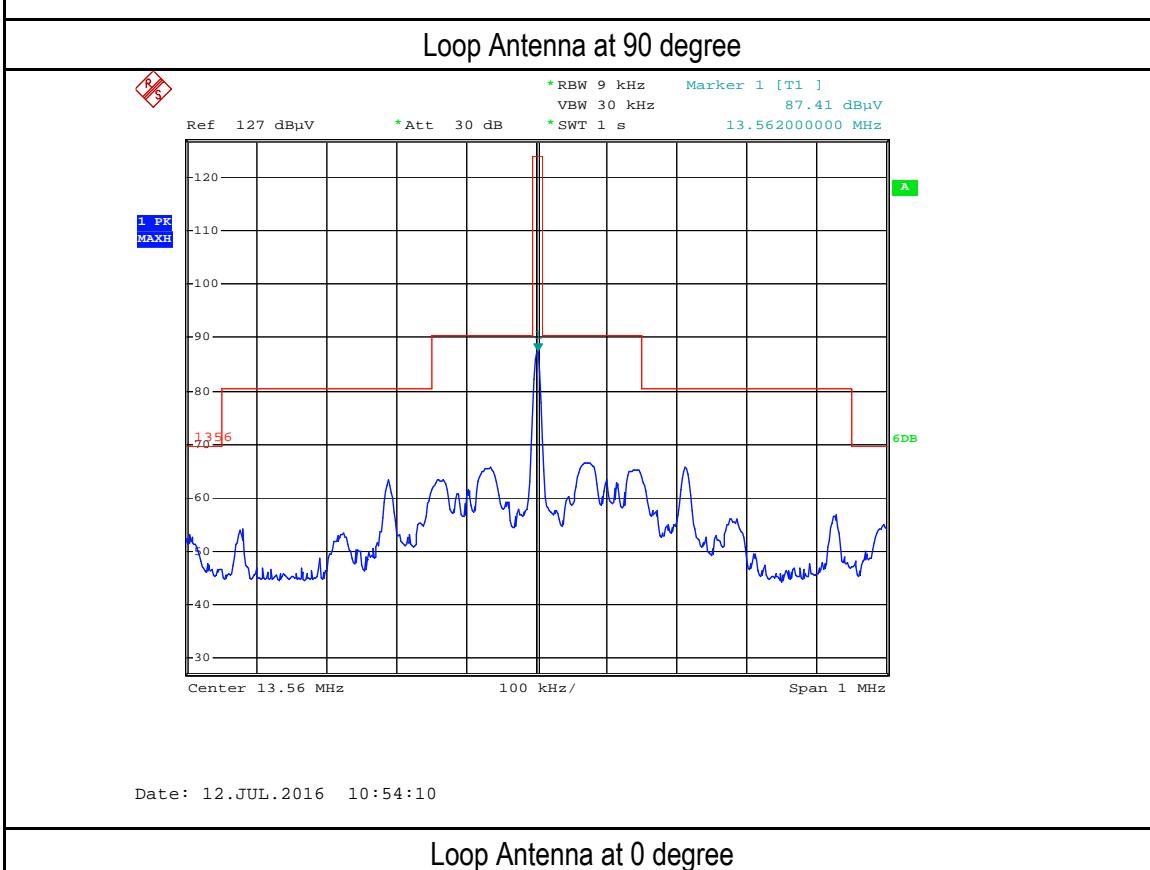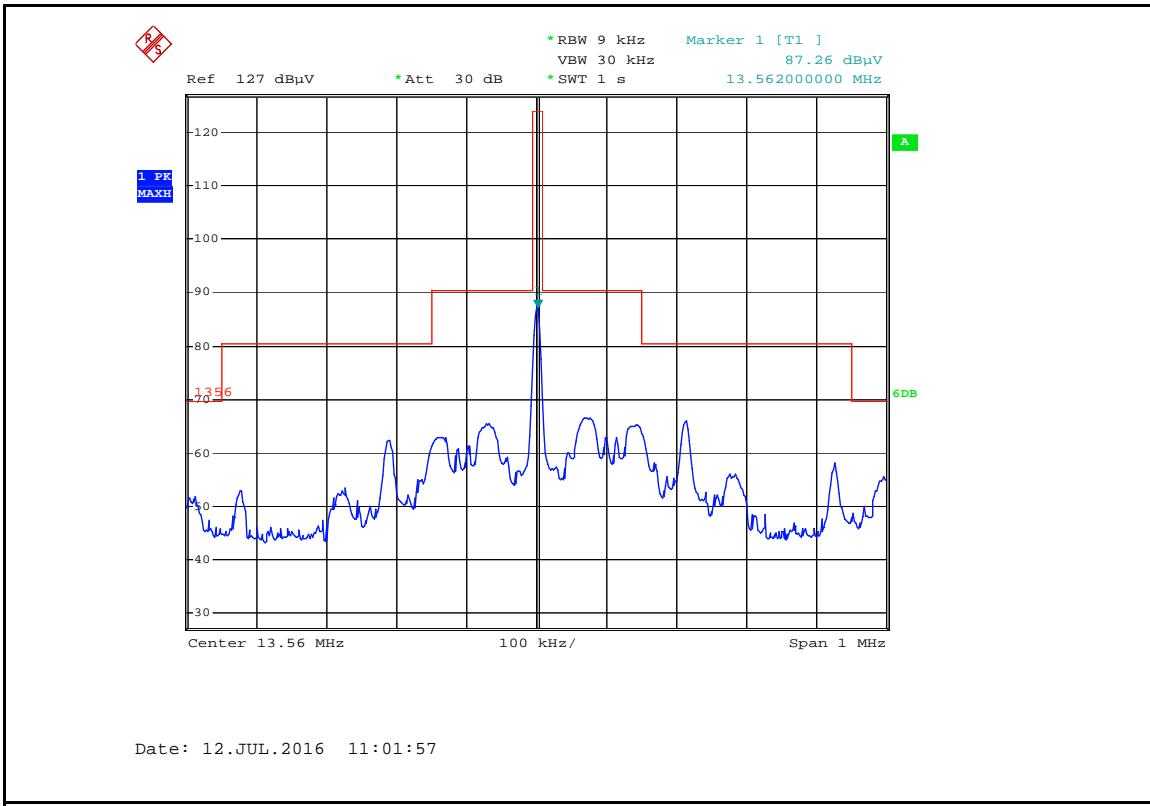

6.4 Radiated Spurious Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	July 13, 2016
Tested By :	Louise Tu

Requirement(s):

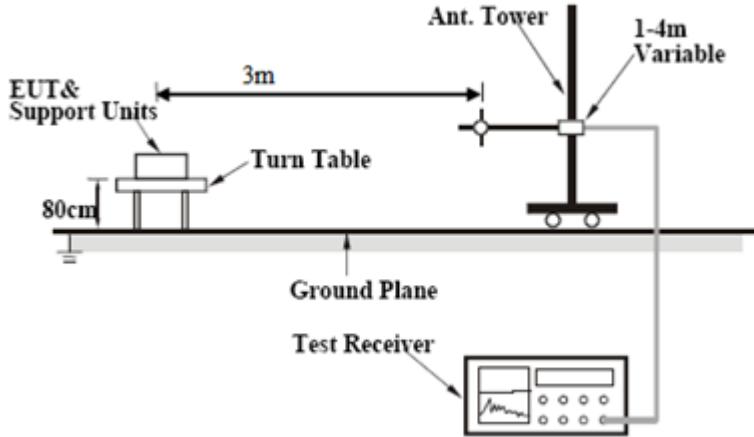Spec	Item	Requirement	Applicable																								
§15.225(d) , 15.209	a)	<p>The field strength of any emissions appearing outside of the 3.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.</p> <table border="1"> <thead> <tr> <th>Fundamental frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-246</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>	Fundamental frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-246	150**	3	216-960	200**	3	Above 960	500	3	<input checked="" type="checkbox"/>
Fundamental frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																									
0.009-0.490	2400/F(kHz)	300																									
0.490-1.705	24000/F(kHz)	30																									
1.705-30.0	30	30																									
30-88	100**	3																									
88-246	150**	3																									
216-960	200**	3																									
Above 960	500	3																									
Test Setup	 <p>The diagram illustrates the test setup for radiated spurious emissions. It shows a 'Turn Table' with an 'EUT & Support Units' mounted on it, positioned 80cm from the 'Ground Plane'. A 'Test Receiver' is connected to a '1-4m Variable' antenna, which is mounted on a 'Ant. Tower' and is 3m away from the EUT. The entire setup is on a 'Ground Plane'.</p>																										
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 																										
Remark																											
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail																										

Test Report No.	16020754-FCC-R1
Page	16 of 37

Test Data Yes N/A

Test Plot Yes (See below) N/A

Data sample

Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)
xxx	32.23	181.00	H	350.00	-38.23	40.00	-7.77

Frequency (MHz) = Emission frequency in MHz

Quasi-Peak (dB μ V/m) = Receiver Reading(dB μ V/m) + Factor(dB)

Azimuth=Position of turn table

Polarity=Polarity of Receiver antenna

Height(cm)= Height of Receiver antenna

Factor (dB)=Antenna factor + cable loss- antenna gain

Limit (dB μ V/m)=Limit stated in standard

Calculation Formula:

Margin (dB)=Quasi Peak (dB μ V/m) – limit (dB μ V/m)

Test Mode:

Transmitting

Loop Antenna at 0 degree:

@ 3M

Frequency (MHz)	Peak (Corrected) (dB μ V/m)	Factor (dB)	Height (cm)	Azimuth (deg)	Limits @ 3m (dB μ V/m)	Margin (dB)
0.702	61.38	56.3	110	180	70.68	-9.30
19.28	58.07	36.2	109	177	69.54	-11.47
13.49	57.49	38.6	100	0	90.47	-32.98


Loop Antenna at 90 degree:

@ 3M

Frequency (MHz)	Peak (Corrected) (dB μ V/m)	Factor (dB)	Height (cm)	Azimuth (deg)	Limits @ 3m (dB μ V/m)	Margin (dB)
0.698	62.31	56.5	122	189	70.68	-8.37
13.64	60.35	38.1	100	179	90.47	-30.12
18.86	57.16	36.9	133	177	69.54	-12.38

Test Mode: Transmitting Mode

Below 1GHz

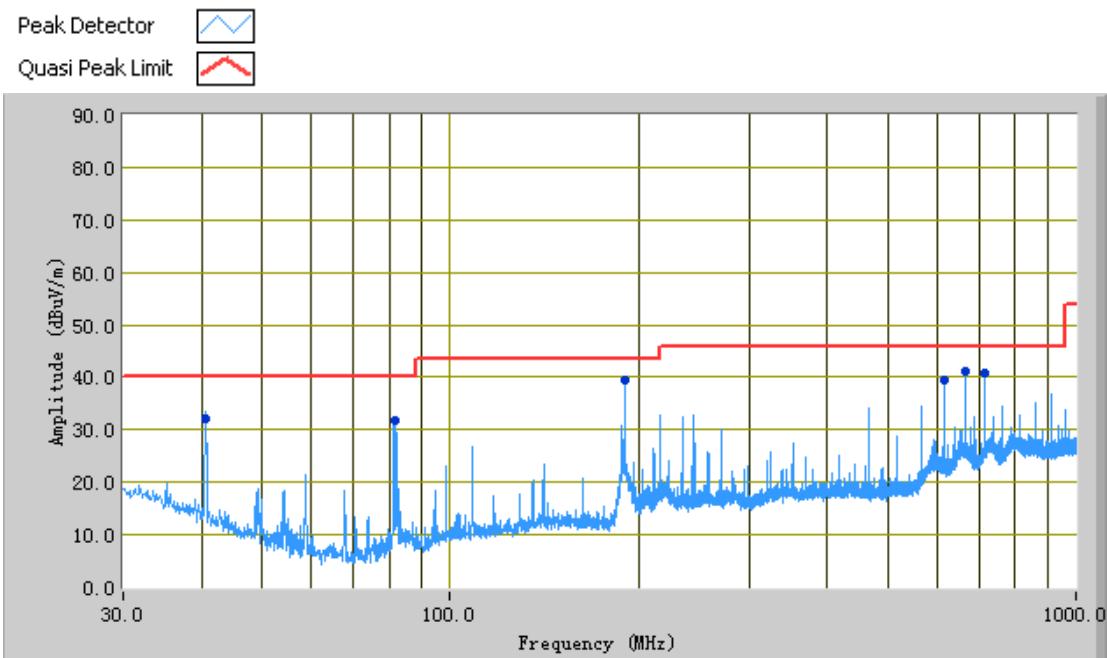


Test Data

Vertical Polarity Plot at 3m

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
665.04	41.24	80.00	V	103.00	-20.70	46.00	-4.76
189.86	39.32	286.00	V	102.00	-31.87	43.50	-4.18
714.16	40.76	102.00	V	102.00	-19.55	46.00	-5.24
615.69	39.64	258.00	V	115.00	-22.45	46.00	-6.36
40.68	32.07	311.00	V	101.00	-29.62	40.00	-7.93
665.04	41.24	80.00	V	103.00	-20.70	46.00	-4.76

Test Mode:	Transmitting Mode
------------	-------------------

Below 1GHz

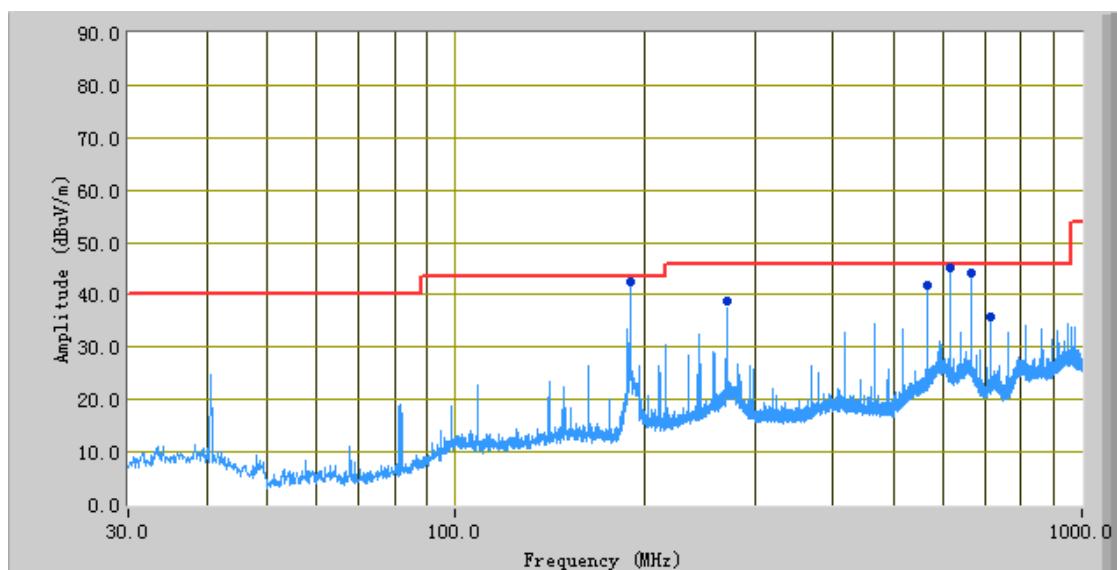

Horizontal Polarity Plot at 3m


Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
189.86	42.53	280.00	H	189.00	-31.52	43.50	-0.97
615.54	45.12	282.00	H	171.00	-20.76	46.00	-0.88
566.30	41.96	262.00	H	172.00	-23.10	46.00	-4.04
664.80	44.13	239.00	H	144.00	-21.43	46.00	-1.87
271.22	38.79	274.00	H	123.00	-28.83	46.00	-7.21
714.04	35.87	186.00	H	218.00	-22.90	46.00	-10.13

Note: The highest frequency of the internal sources of the EUT is less than 108MHz, so the measurement shall only be made up to 1GHz.

6.5 Frequency Stability

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	July 12, 2016
Tested By :	Louise Tu

Requirement(s):

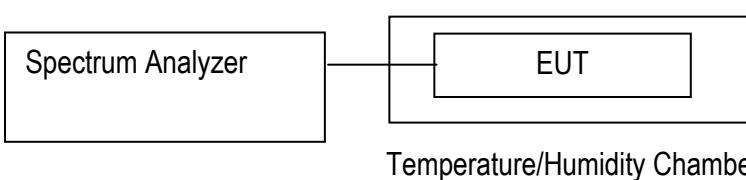Spec	Item	Requirement	Applicable
§15.225(e)	a)	The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage.	<input checked="" type="checkbox"/>
	b)	The frequency of the transmitter was measured at 85% and at 115% of the rated power supply voltage at 20°C environmental temperature.	<input checked="" type="checkbox"/>
Test Setup	 Spectrum Analyzer ————— EUT ————— Temperature/Humidity Chamber		
Test Procedure	<ol style="list-style-type: none"> 1> Place the de-energized EUT in an environmental temperature test chamber. Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. An antenna should be connected to the antenna output connector of the EUT if possible. Use of a dummy load could affect the output frequency of the EUT. If the EUT is equipped with or uses an adjustable-length antenna, it should be fully extended. 2> Turn the EUT on, and couple its output to a frequency counter or other frequency-measuring device of sufficient accuracy, considering the frequency tolerance with which the EUT shall comply. 3> Turn the EUT off, and place it inside an environmental chamber set to the highest temperature specified by the procuring or regulatory agency. For devices that are normally operated continuously, the EUT may be energized while inside the test chamber. For devices that have oscillator heaters, energize only the heater circuit while the EUT is inside the chamber. 4> Allow sufficient time (approximately 30 minutes) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and measure the EUT operating frequency at startup, and two, five, and ten minutes after startup. Four measurements in total are made. 5> If 13.1.1 requires measurements on only one operating frequency, proceed to step f); otherwise, successively tune the EUT to each of the additional operating frequencies specified in 13.1.1 and repeat step d). 6> Repeat step d) and step e) with the temperature chamber set to the lowest temperature specified by the procuring or regulatory agency. Be sure to allow the environmental chamber temperature to stabilize before performing these measurements. 		

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes N/A

Carrier Frequency: 13.56MHz at -20°C to +50°C, DC12V

Temperature (°C)	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
50	13.56104	1040	< 0.01	Pass
40	13.56105	1050	< 0.01	Pass
30	13.56103	1030	< 0.01	Pass
20			Reference	
10	13.56105	1050	< 0.01	Pass
0	13.56105	1050	< 0.01	Pass
-10	13.56104	1040	< 0.01	Pass
-20	13.56104	1040	< 0.01	Pass

Carrier Frequency: 13.56MHz at 20°C at DC12V

Measured Voltage ±15% of nominal	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
10.2	13.5612250	1225	<0.01	Pass
13.8	13.5610875	1087.5	<0.01	Pass

6.6 20dB Occupied Bandwidth

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	July 12, 2016
Tested By :	Louise Tu

Requirement(s):

Spec	Item	Requirement	Applicable
§15.215(c)	a)	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.	<input checked="" type="checkbox"/>
Test Setup		<div style="display: flex; justify-content: space-around; border: 1px solid black; padding: 5px;"> <div style="text-align: center;">Spectrum Analyzer</div> <div style="text-align: center;">EUT</div> </div>	
Test Procedure		<p><u>20dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> - Set RBW = 300 Hz. - Set the video bandwidth (VBW) $\geq 3' RBW$. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. <p>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.</p>	
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A

20dB Bandwidth measurement result

Frequency (MHz)	20dB BW (kHz)	Frequency range (MHz) F Low	Frequency range (MHz) F High	Test Result
13.561175	0.7975	13.56083	13.5616275	PASS

Test Plots

20dB Bandwidth measurement result

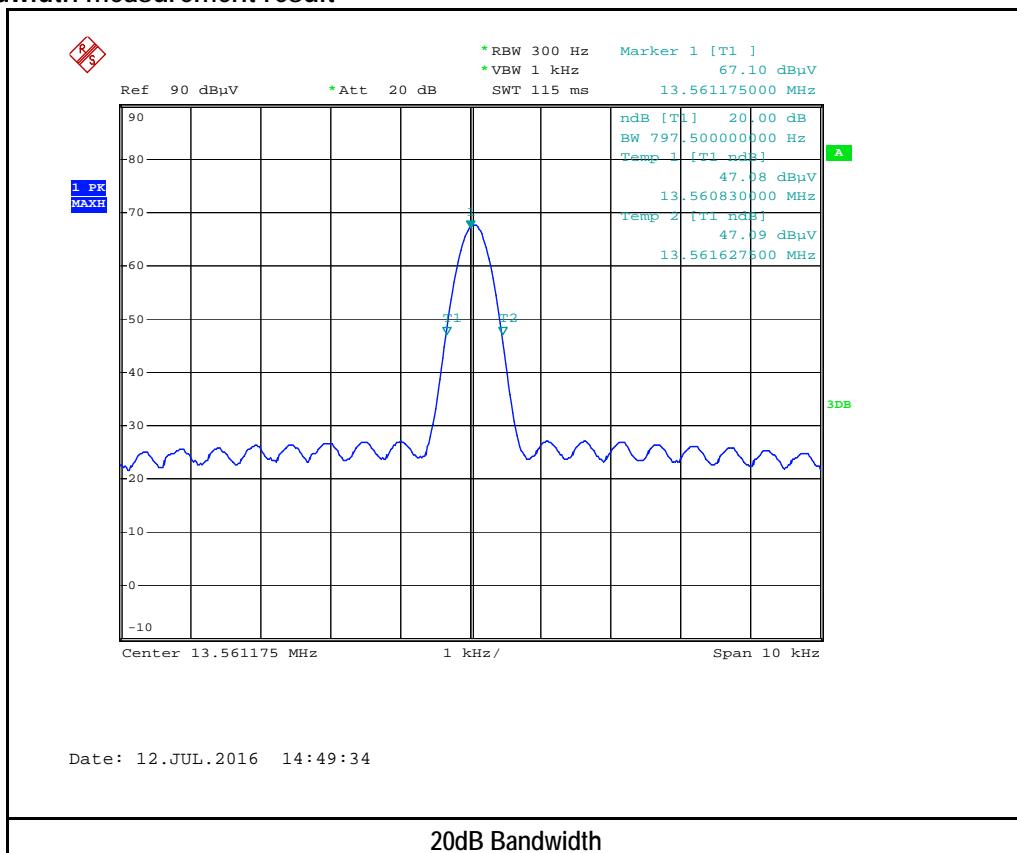


Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	02/02/2016	02/01/2017	<input checked="" type="checkbox"/>
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	1007H	N/A	01/07/2016	01/06/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2015	10/31/2016	<input checked="" type="checkbox"/>
EMCO Passive Loop Antenna	6509	9909-1469	10/09/2015	10/08/2016	<input checked="" type="checkbox"/>
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2015	10/26/2016	<input checked="" type="checkbox"/>
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451709	10/27/2015	10/26/2016	N/A

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph EUT External Photo

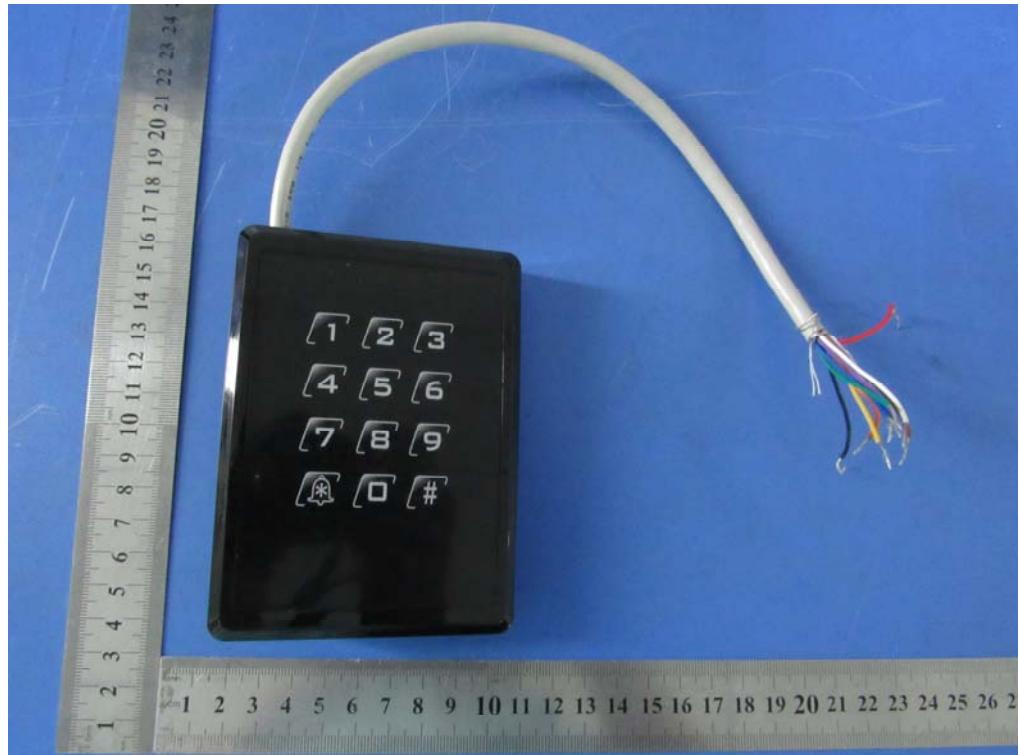

Front View of EUT

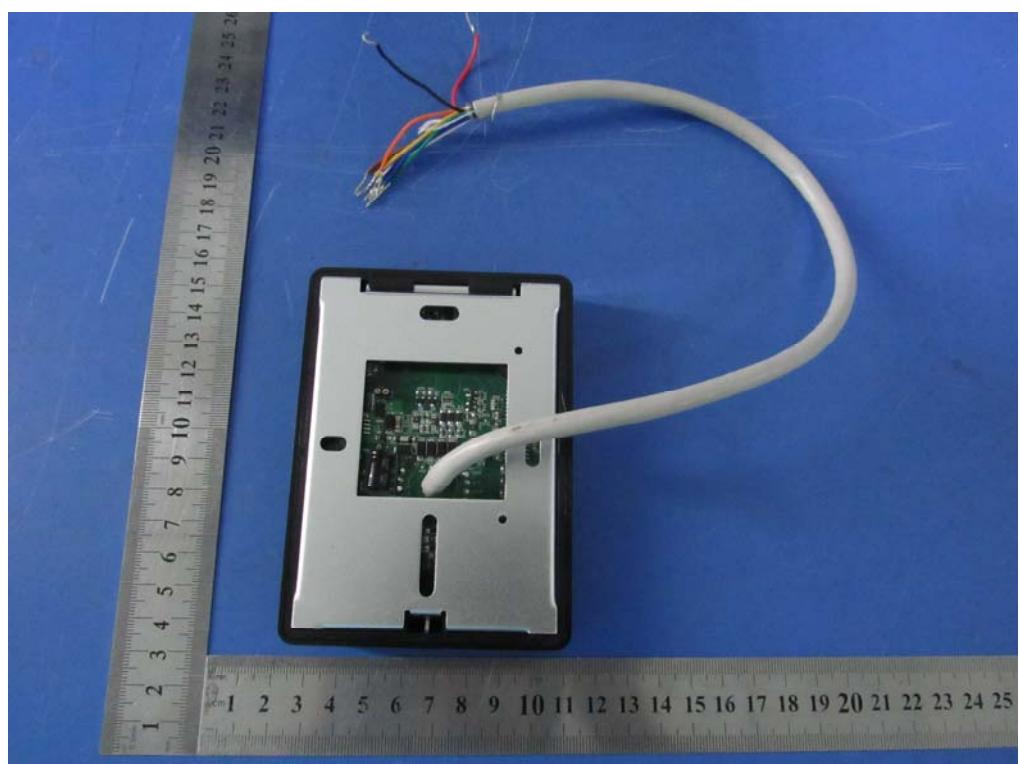


Rear View of EUT



Top View of EUT



Bottom View of EUT

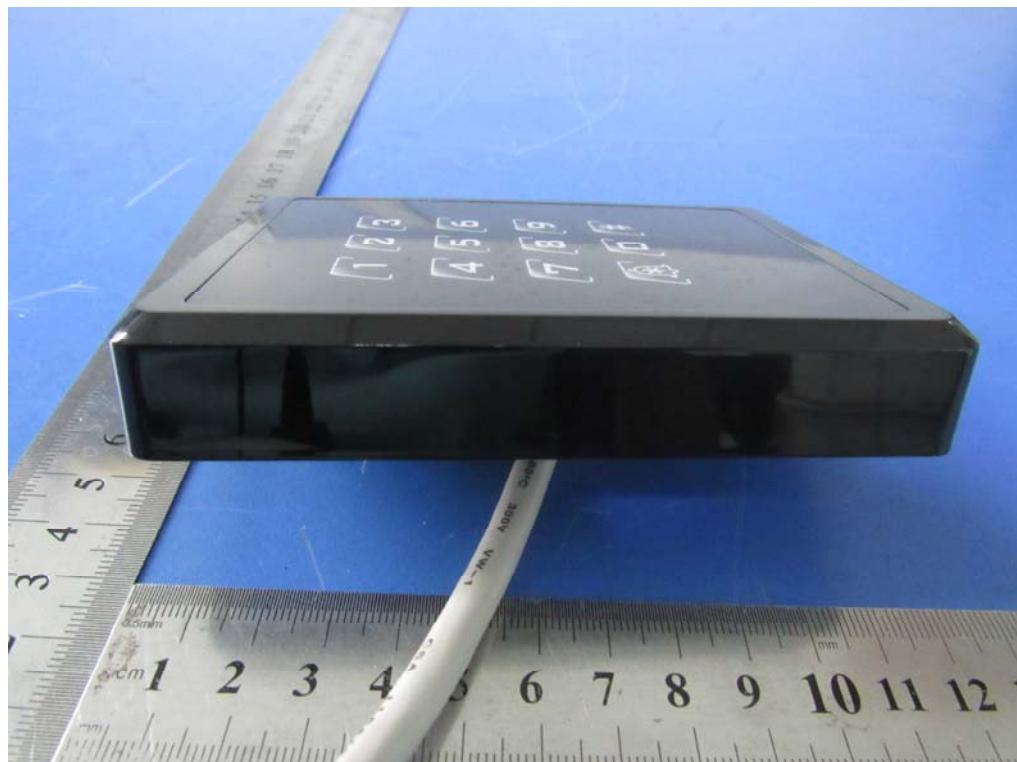

Left View of EUT




Right View of EUT


Annex B.ii. Photograph EUT Internal Photo




Uncover- Front View 1

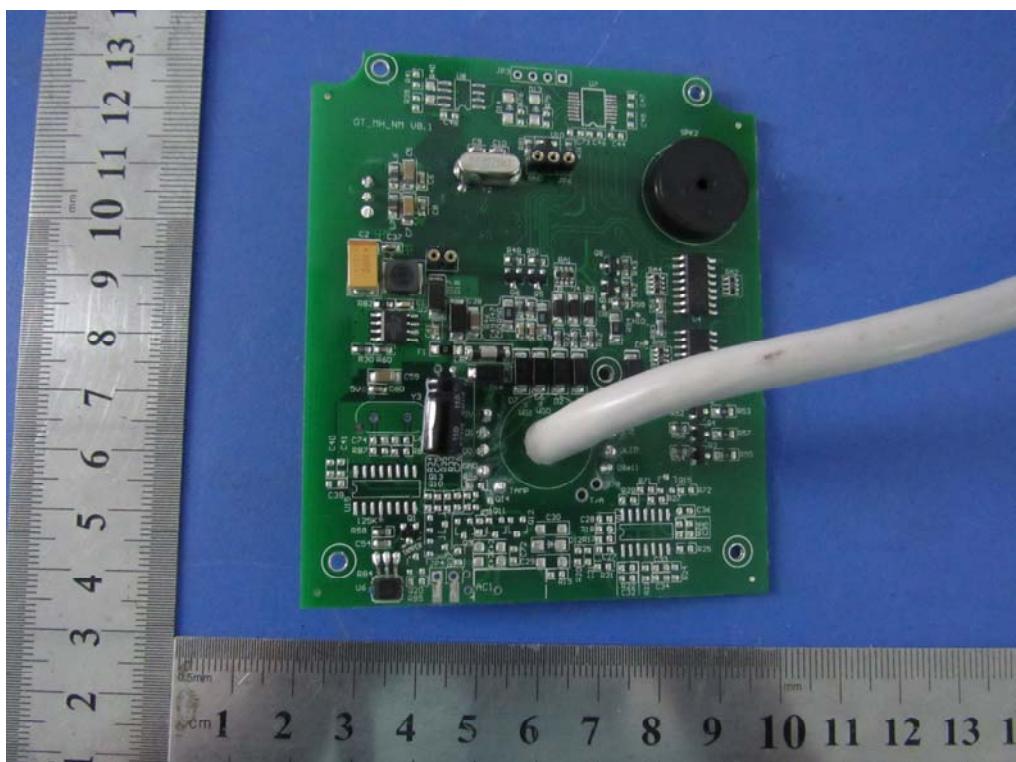

EUT PCBA 1- Front View

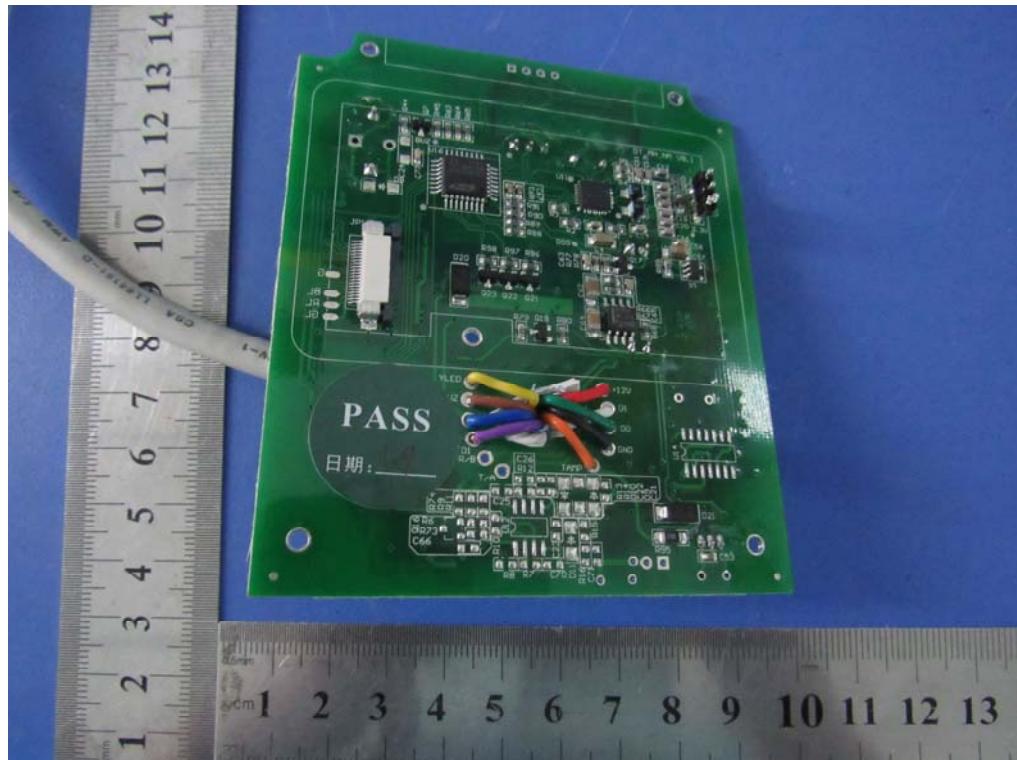


EUT PCB 1– Rear View

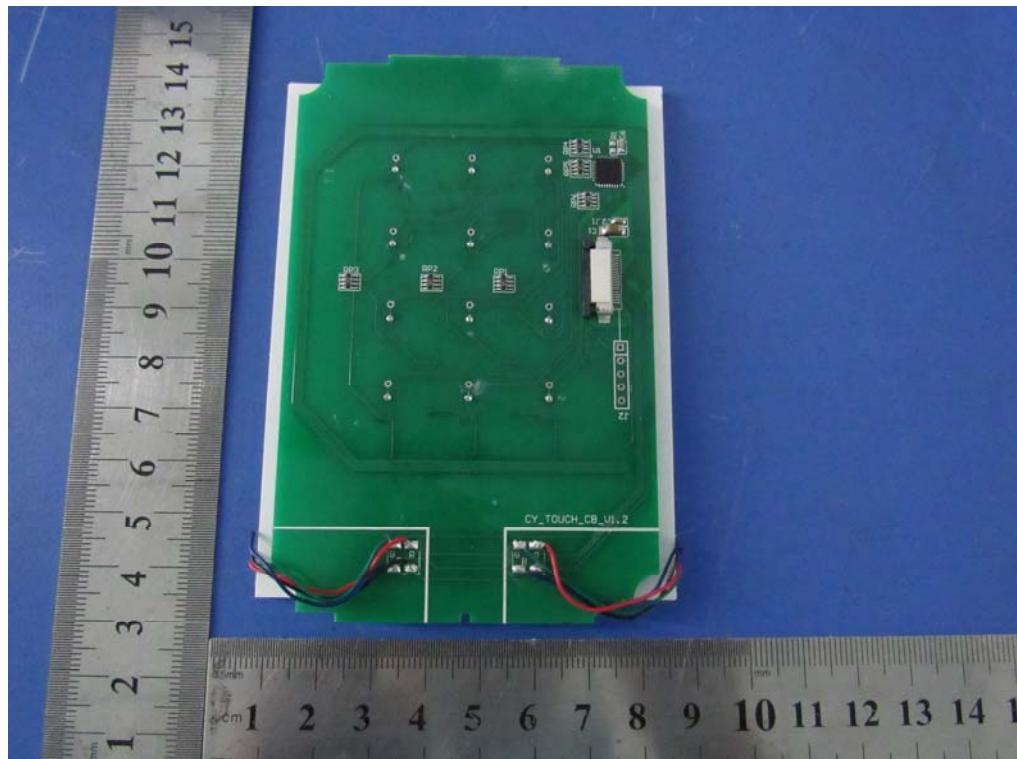


EUT PCBA 2– Front View

Test Report No.	16020754-FCC-R1
Page	30 of 37

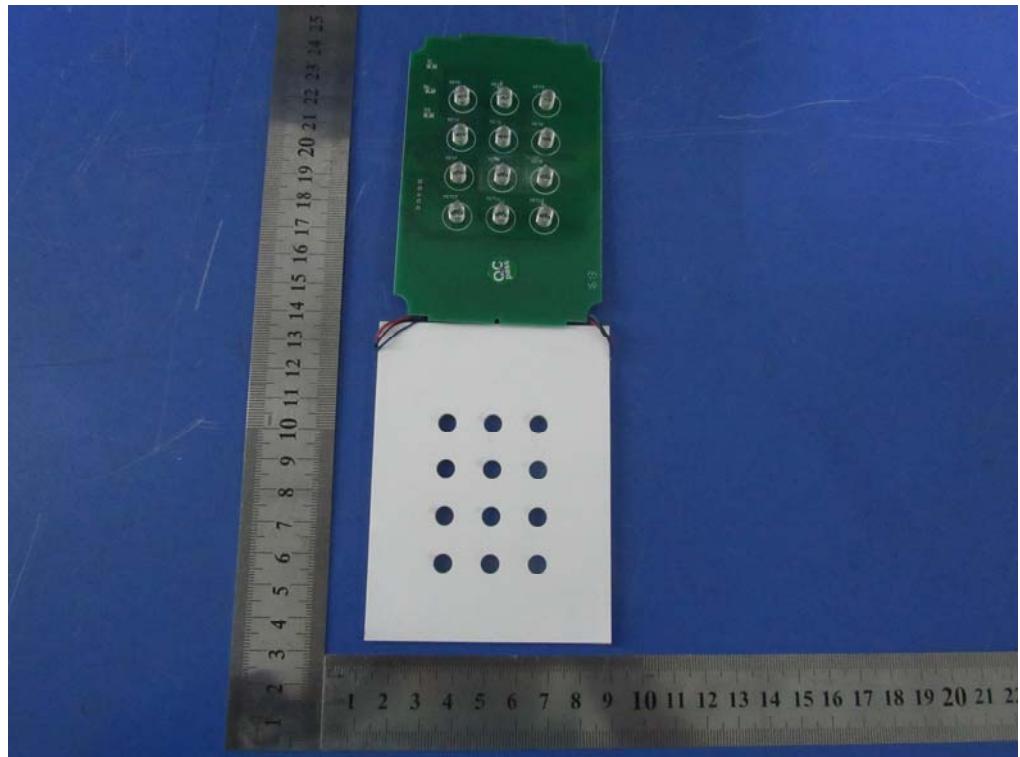

EUT PCBA 2– Rear View

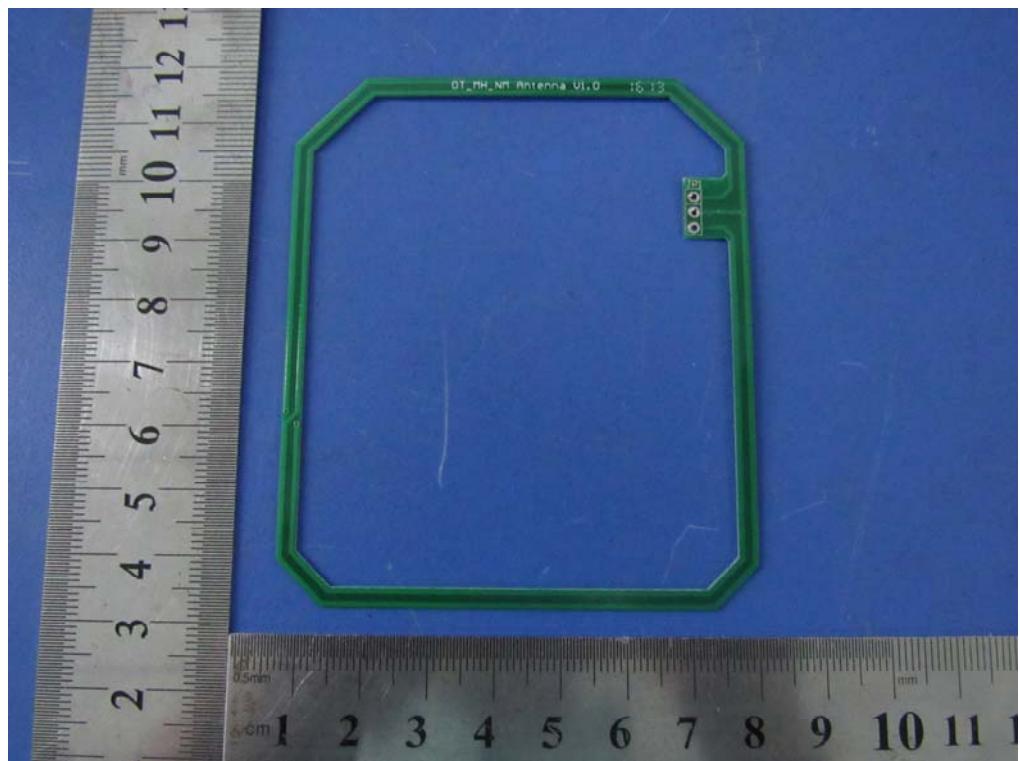

Antenna – Front View(13.56MHz)


Annex B.iii. Photograph Test Setup Photo




Conducted Emissions Setup Front View



Conducted Emissions Setup Side View

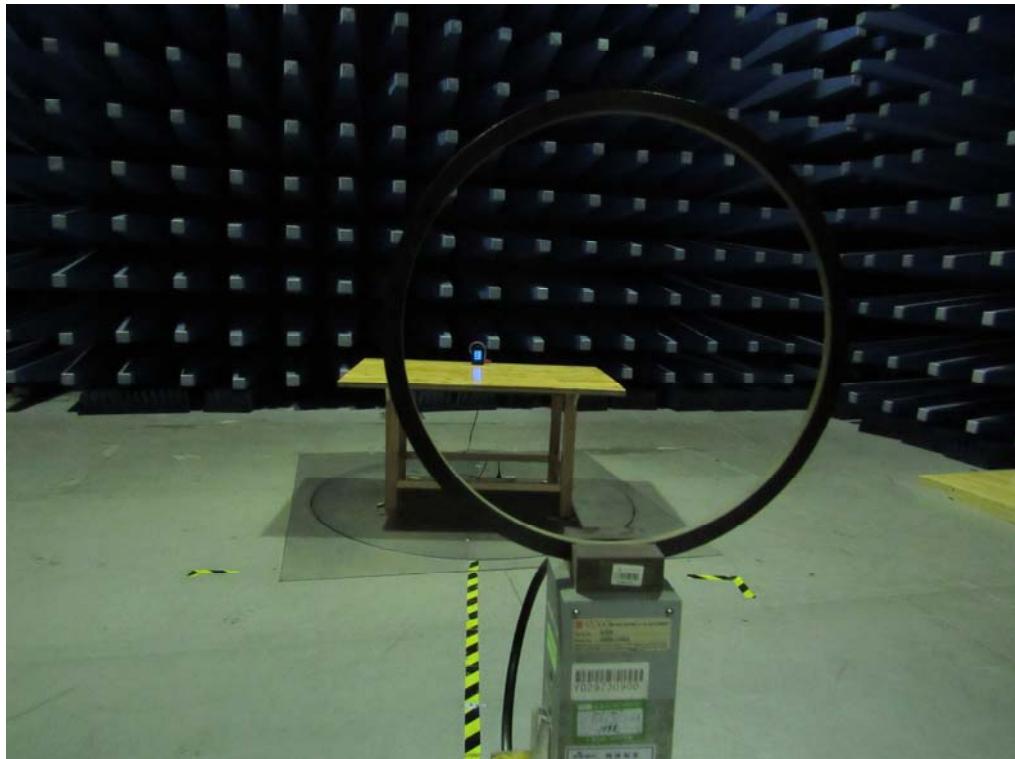


Front View of Radiated Emissions Test Setup below 30MHz

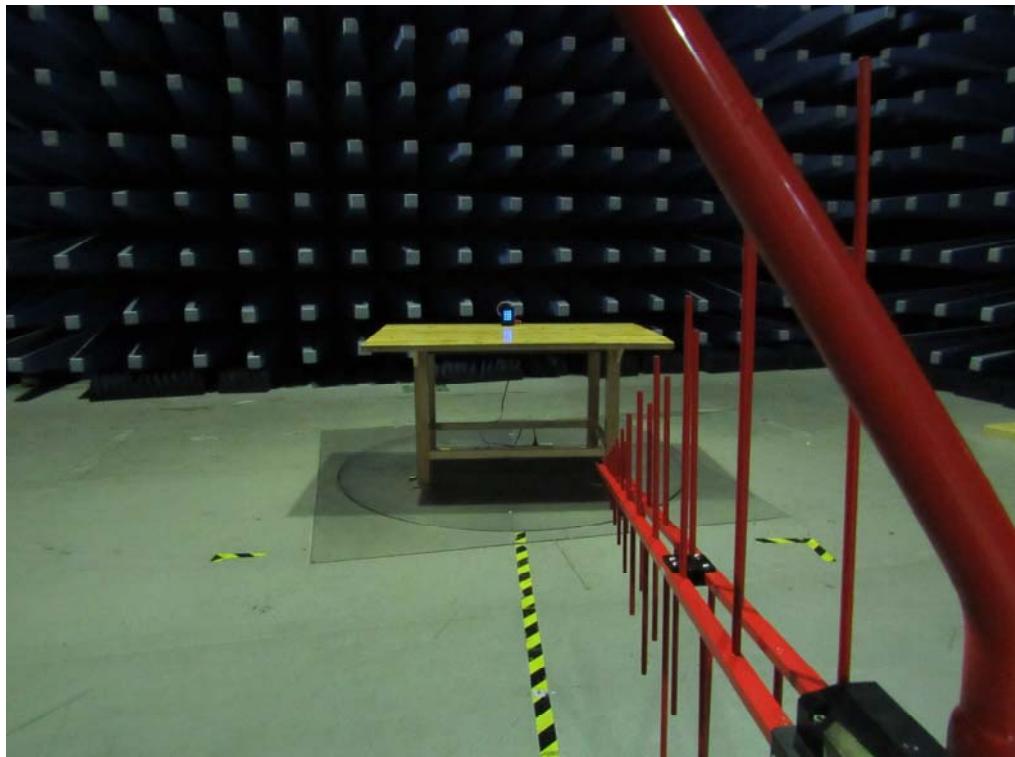


Front View of Radiated Emissions Test Setup (30MHz-1GHz)

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.i. TEST SET UP BLOCK

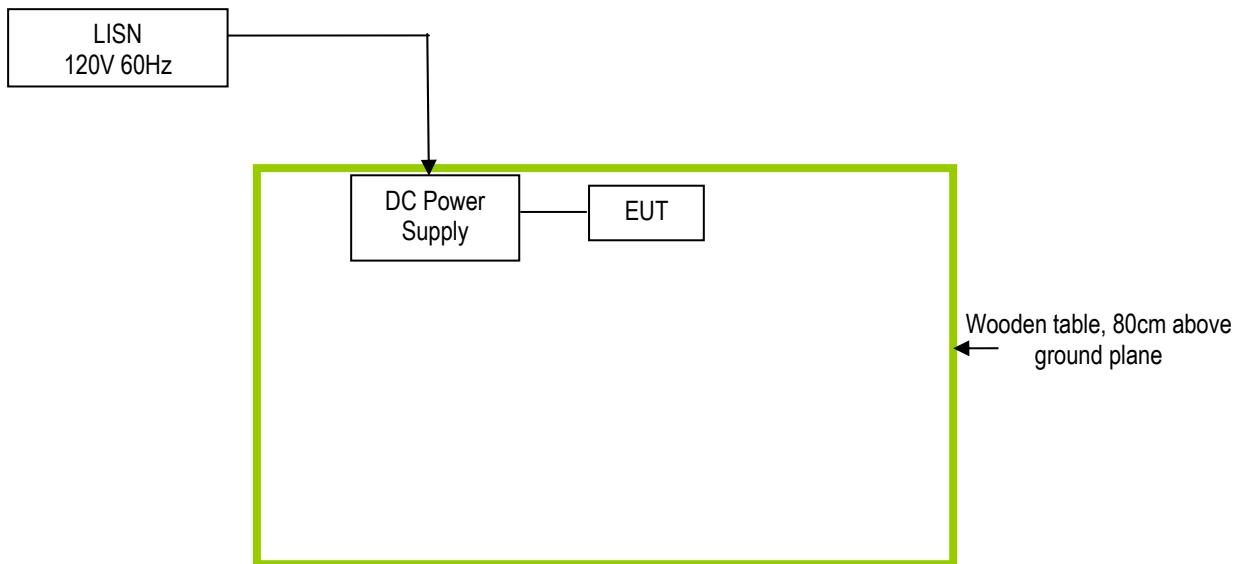

Block Configuration Diagram for Radiated Emissions

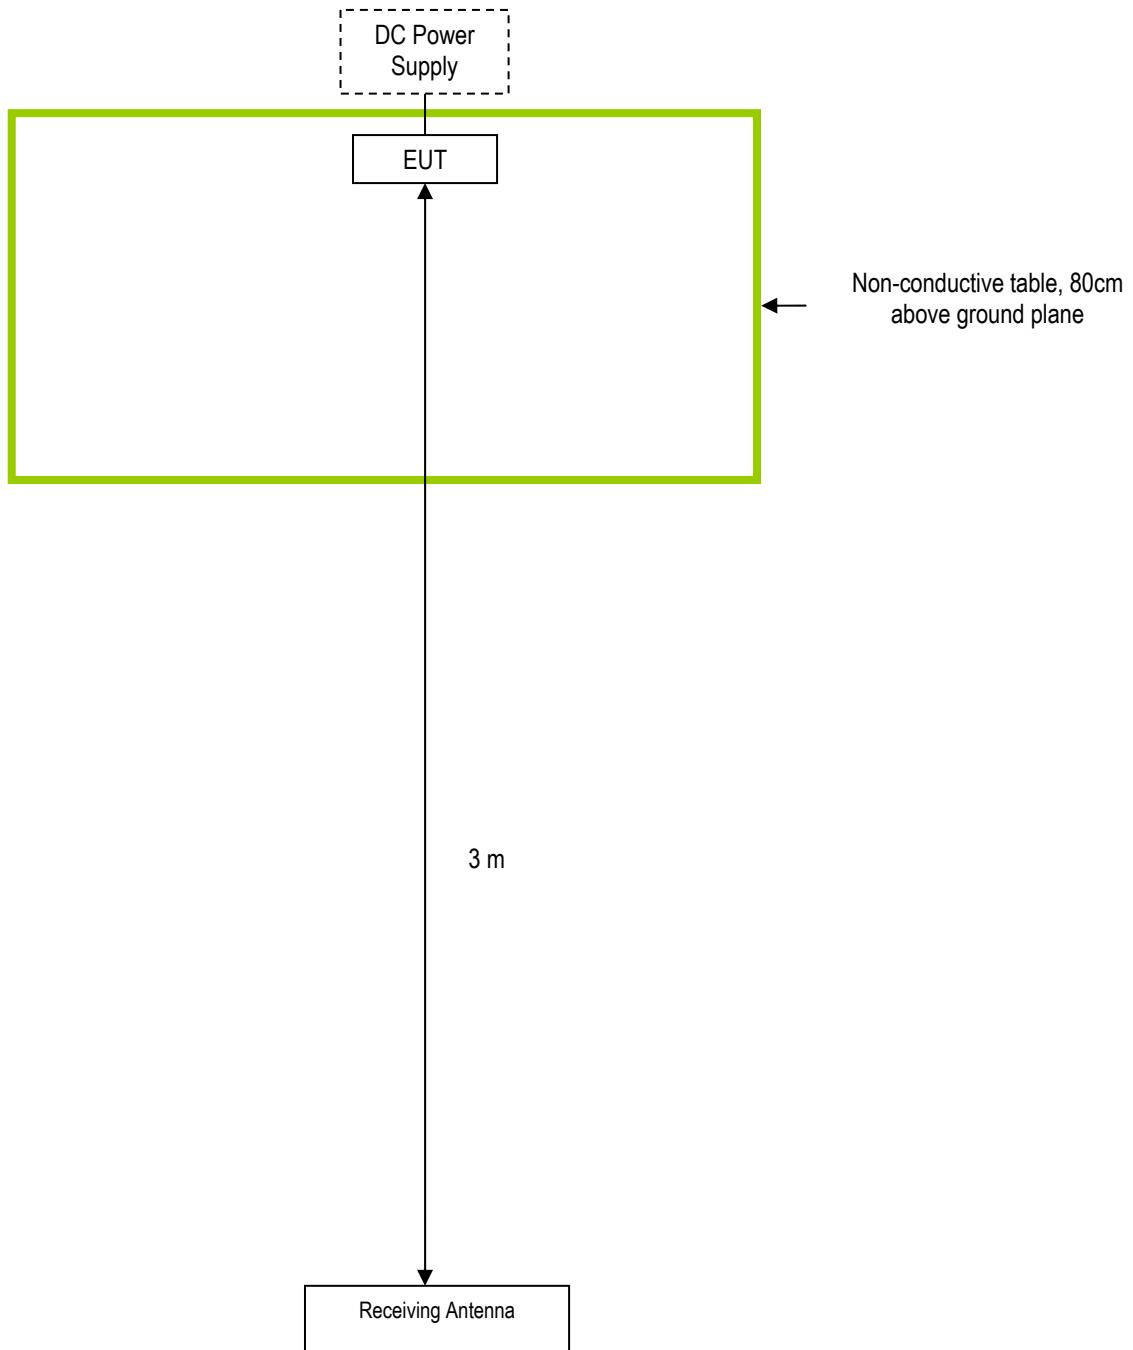

Test Report No.	16020754-FCC-R1
Page	35 of 37

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
BK PRECISION	DC Power Supply	1786B	10/27/2015	10/26/2016

Test Report No.	16020754-FCC-R1
Page	36 of 37

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

SMARFID

Shanghai Smarfid Security Equipment Co., Ltd.
Add: Room 301, 4th Bldg., No.4 TongLi Road, SongJiang District, Shanghai 201615,
China
Tel: (86-21) 54260103, 54260132 ext.215 Fax: (86-21) 54260132 ext.222

To: SIEMIC INC

Declaration letter

Dear :

For our business issue and marketing requirement, we would like to list different models numbers on the FCC certificates and reports, as following:

Model No: MW322-8K

MX322-8K, MC322-8K, MW322-8N, MX322-8N, MC322-8N

The six models have the same Circuits, components and color.


The difference of these models are have different model name, but others differences as follows:

MW322-8K, MX322-8K, MC322-8K has buttons but MW322-8N, MC322-8N, MC322-8N has no buttons.

The card they can read is different,

Thank you!

Signature:



Printed name/title: Songling Dai