

FCC CERTIFICATION  
On Behalf of  
Success Compu China Ltd.

Wireless Mouse

Model No.: BL-M1061, BL-M1167, BL-M1168, BL-M1178, BL-M1118, BL-M1099, BL-M1088

FCC ID: X95BL-MTX

Prepared for : Success Compu China Ltd.  
Address : 1st Building, Shuidou Laowei Village, Yousong, Longhua  
Town, Bao'an District, Shenzhen City, Guangdong  
Province, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20100478  
Date of Test : March 23-24, 2010  
Date of Report : March 26, 2010

## TABLE OF CONTENTS

| Description   | Page      |
|---|-----------|
| <b>Test Report Certification</b>  |           |
| <b>1. GENERAL INFORMATION .....</b>   | <b>4</b>  |
| 1.1. Description of Device (EUT).....   | 4         |
| 1.2. Description of Test Facility .....                                       | 5         |
| 1.3. Measurement Uncertainty.....   | 5         |
| <b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>                           | <b>6</b>  |
| <b>3. SUMMARY OF TEST RESULTS.....</b>  | <b>7</b>  |
| <b>4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A) 8</b> | <b>8</b>  |
| 4.1. Block Diagram of Test Setup.....   | 8         |
| 4.2. The Emission Limit .....   | 9         |
| 4.3. Configuration of EUT on Measurement .....                                | 9         |
| 4.4. Operating Condition of EUT .....   | 9         |
| 4.5. Test Procedure .....   | 10        |
| 4.6. The Field Strength of Radiation Emission Measurement Results .....       | 11        |
| <b>5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D) .....</b>              | <b>14</b> |
| 5.1. Block Diagram of Test Setup.....   | 14        |
| 5.2. The Emission Limit For Section 15.249(d) .....                           | 15        |
| 5.3. EUT Configuration on Measurement .....                                   | 15        |
| 5.4. Operating Condition of EUT .....   | 15        |
| 5.5. Test Procedure .....   | 16        |
| 5.6. The Emission Measurement Result .....                                    | 17        |
| <b>6. BAND EDGES .....</b>  | <b>20</b> |
| 6.1. The Requirement .....  | 20        |
| 6.2. EUT Configuration on Measurement .....                                   | 20        |
| 6.3. Operating Condition of EUT .....   | 20        |
| 6.4. Test Procedure .....   | 20        |
| 6.5. The Measurement Result .....   | 21        |
| <b>7. ANTENNA REQUIREMENT.....</b>  | <b>23</b> |
| 7.1. The Requirement .....  | 23        |
| 7.2. Antenna Construction .....   | 23        |

APPENDIX I ( TEST CURVES) (22 pages)

## Test Report Certification

### Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.249  
ANSI C63.4: 2003**

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : March 23-24, 2010

Prepared by :

sky 2 Lang

(Engineer)

Approved & Authorized Signer :

Seaweed

(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Wireless Mouse

Model Number : BL-M1061, BL-M1167, BL-M1168, BL-M1178, BL-M1118, BL-M1099, BL-M1088  
(Note: The model names are different only for the model number. Therefore only model BL-M1061 is tested.)

Power Supply : 1.5V DC (“AAA” battery 1×)

Operate Frequency : 2403-2479MHz

Applicant : Success Compu China Ltd.  
Address : 1st Building, Shuidou Laowei Village, Yousong, Longhua Town, Bao'an District, Shenzhen City, Guangdong Province, China

Manufacturer : Success Compu China Ltd.  
Address : 1st Building, Shuidou Laowei Village, Yousong, Longhua Town, Bao'an District, Shenzhen City, Guangdong Province, China

Date of sample received : March 15, 2010

Date of Test : March 23-24, 2010

## 1.2.Description of Test Facility

EMC Lab

: Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories

The Certificate Registration Number is L3193

Name of Firm

: ACCURATE TECHNOLOGY CO. LTD

Site Location

: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

## 1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2  
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2  
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2  
(Above 1GHz)

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

| Kind of equipment | Manufacturer  | Type               | S/N        | Calibrated until |
|-------------------|---------------|--------------------|------------|------------------|
| EMI Test Receiver | Rohde&Schwarz | ESCS30             | 100307     | Jan. 9, 2011     |
| EMI Test Receiver | Rohde&Schwarz | ESPI3              | 101526/003 | Jan. 9, 2011     |
| Spectrum Analyzer | Agilent       | E7405A             | MY45115511 | Jan. 9, 2011     |
| Pre-Amplifier     | Rohde&Schwarz | CBLU118354<br>0-01 | 3791       | Jan. 9, 2011     |
| Loop Antenna      | Schwarzbeck   | FMZB1516           | 1516131    | Jan. 9, 2011     |
| Bilog Antenna     | Schwarzbeck   | VULB9163           | 9163-323   | Jan. 9, 2011     |
| Horn Antenna      | Schwarzbeck   | BBHA9120D          | 9120D-655  | Jan. 9, 2011     |
| Horn Antenna      | Schwarzbeck   | BBHA9170           | 9170-359   | Jan. 9, 2011     |
| LISN              | Rohde&Schwarz | ESH3-Z5            | 100305     | Jan. 9, 2011     |
| LISN              | Schwarzbeck   | NSLK8126           | 8126431    | Jan. 9, 2011     |

### 3. SUMMARY OF TEST RESULTS

| FCC Rules         | Description of Test                         | Result    |
|-------------------|---|-----------|
| Section 15.207    | Conducted Emission                          | N/A       |
| Section 15.249(a) | Fundamental and Harmonics Radiated Emission | Compliant |
| Section 15.249(d) | Spurious Radiated Emission                  | Compliant |
| Section 15.249(d) | Band Edge                                   | Compliant |
| Section 15.203    | Antenna Requirement                         | Compliant |

Remark: "N/A" means "Not applicable".

## 4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A)


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Mouse)

#### 4.1.2. Semi-Anechoic Chamber Test Setup Diagram

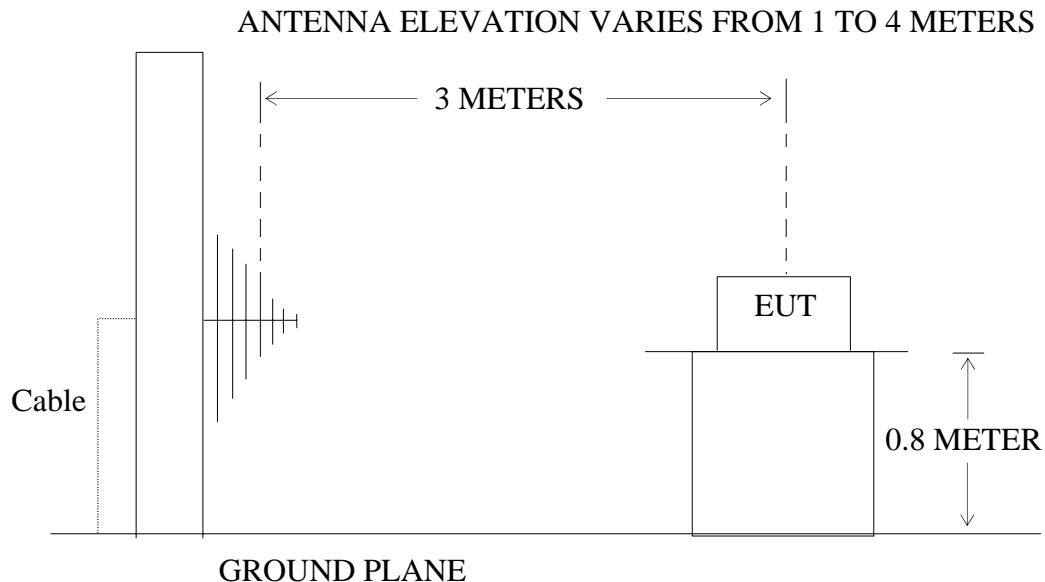

## 4.2.The Emission Limit

4.2.1.For intentional radiators, According to section 15.249(a), Operation within the frequency band of 2.4 to 2.4835GHz, The fundamental field strength shall not exceed 94 dB $\mu$ V/m and the harmonics shall not exceed 54 dB $\mu$ V/m.

| Fundamental Frequency | Field Strength of Fundamental (millivolts/meter) | Field Strength of harmonics (microvolts/meter) |
|-----------------------|--|--|
| 902-928MHz            | 50   | 500  |
| 2400-2483.5MHz        | 50   | 500  |
| 5725-5875MHz          | 50   | 500  |
| 24.0-24.25GHz         | 250  | 2500   |

4.2.2.According to section 15.249(e), as shown in section 15.35(b), the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 4.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. Wireless Mouse (EUT)

Model Number : BL-M1061  
 Serial Number : N/A  
 Manufacturer : Success Compu China Ltd.

## 4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2403-2479MHz. We are select 2403MHz, 2441MHz, 2479MHz TX frequency to transmit.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 1MHz.

## 4.6.The Field Strength of Radiation Emission Measurement Results PASS.

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 23, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2403MHz     | Test Engineer: | Joe                        |

### Fundamental Radiated Emissions

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |        | Factor(dB)<br>Corr. | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |      | Margin(dB) |        | Polarization |
|--------------------|-----------------------|--------|---------------------|----------------------|-------|---------------------|------|------------|--------|--------------|
|                    | AV                    | PEAK   |                     | AV                   | PEAK  | AV                  | PEAK | AV         | PEAK   |              |
| 2403.074           | 97.32                 | 99.99  | -7.45               | 89.87                | 92.54 | 94                  | 114  | -4.13      | -21.46 | Vertical     |
| 2403.074           | 98.03                 | 100.68 | -7.45               | 90.58                | 93.23 | 94                  | 114  | -3.42      | -20.77 | Horizontal   |

### Harmonics Radiated Emissions

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |       | Factor(dB)<br>Corr. | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |      | Margin(dB) |        | Polarization |
|--------------------|-----------------------|-------|---------------------|----------------------|-------|---------------------|------|------------|--------|--------------|
|                    | AV                    | PEAK  |                     | AV                   | PEAK  | AV                  | PEAK | AV         | PEAK   |              |
| 4806.146           | 51.21                 | 53.90 | -0.28               | 50.93                | 53.62 | 54                  | 74   | -3.07      | -20.38 | Vertical     |
| 7209.194           | 43.50                 | 46.16 | 2.98                | 46.48                | 49.14 | 54                  | 74   | -7.52      | -24.86 | Vertical     |
| 4806.146           | 50.89                 | 53.55 | -0.28               | 50.61                | 53.27 | 54                  | 74   | -3.39      | -20.73 | Horizontal   |
| 7209.194           | 45.00                 | 47.68 | 2.98                | 47.98                | 50.66 | 54                  | 74   | -6.02      | -23.34 | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 23, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2441MHz     | Test Engineer: | Joe                        |

### Fundamental Radiated Emissions

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |       | Factor(dB) | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |     | Margin(dB) |        | Polarization |
|--------------------|-----------------------|-------|------------|----------------------|-------|---------------------|-----|------------|--------|--------------|
|                    | AV                    | PEAK  |            | Corr.                | AV    | PEAK                | AV  | PEAK       | AV     |              |
| 2441.080           | 95.56                 | 98.20 | -7.35      | 88.21                | 90.85 | 94                  | 114 | -5.79      | -23.15 | Vertical     |
| 2441.080           | 96.06                 | 98.71 | -7.35      | 88.71                | 91.36 | 94                  | 114 | -5.29      | -22.64 | Horizontal   |

### Harmonics Radiated Emissions

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |       | Factor(dB) | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |    | Margin(dB) |        | Polarization |
|--------------------|-----------------------|-------|------------|----------------------|-------|---------------------|----|------------|--------|--------------|
|                    | AV                    | PEAK  |            | Corr.                | AV    | PEAK                | AV | PEAK       | AV     |              |
| 4882.150           | 50.77                 | 53.42 | 0.14       | 50.91                | 53.56 | 54                  | 74 | -3.09      | -20.44 | Vertical     |
| 7323.210           | 43.41                 | 46.06 | 3.24       | 46.65                | 49.30 | 54                  | 74 | -7.35      | -24.70 | Vertical     |
| 4882.150           | 50.67                 | 53.32 | 0.14       | 50.81                | 53.46 | 54                  | 74 | -3.19      | -20.54 | Horizontal   |
| 7323.210           | 43.76                 | 46.43 | 3.24       | 47.00                | 49.67 | 54                  | 74 | -7.00      | -24.33 | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 23, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2479MHz     | Test Engineer: | Joe                        |

### Fundamental Radiated Emissions

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |        | Factor(dB) | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |     | Margin(dB) |        | Polarization |
|--------------------|-----------------------|--------|------------|----------------------|-------|---------------------|-----|------------|--------|--------------|
|                    | AV                    | PEAK   |            | Corr.                | AV    | PEAK                | AV  | PEAK       | AV     |              |
| 2479.076           | 96.87                 | 99.51  | -7.37      | 89.50                | 92.14 | 94                  | 114 | -4.50      | -21.86 | Vertical     |
| 2479.076           | 97.39                 | 100.04 | -7.37      | 90.02                | 92.67 | 94                  | 114 | -3.98      | -21.33 | Horizontal   |

### Harmonics Radiated Emissions

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |       | Factor(dB) | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |    | Margin(dB) |        | Polarization |
|--------------------|-----------------------|-------|------------|----------------------|-------|---------------------|----|------------|--------|--------------|
|                    | AV                    | PEAK  |            | Corr.                | AV    | PEAK                | AV | PEAK       | AV     |              |
| 4958.156           | 50.43                 | 53.09 | 0.51       | 50.94                | 53.60 | 54                  | 74 | -3.06      | -20.40 | Vertical     |
| 7437.218           | 44.26                 | 46.91 | 3.67       | 47.93                | 50.58 | 54                  | 74 | -6.07      | -23.42 | Vertical     |
| 4958.156           | 50.74                 | 53.42 | 0.51       | 51.25                | 53.93 | 54                  | 74 | -2.75      | -20.07 | Horizontal   |
| 7437.218           | 44.46                 | 47.12 | 3.67       | 48.13                | 50.79 | 54                  | 74 | -5.87      | -23.21 | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

## 5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D)


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Mouse)

#### 5.1.2. Semi-Anechoic Chamber Test Setup Diagram

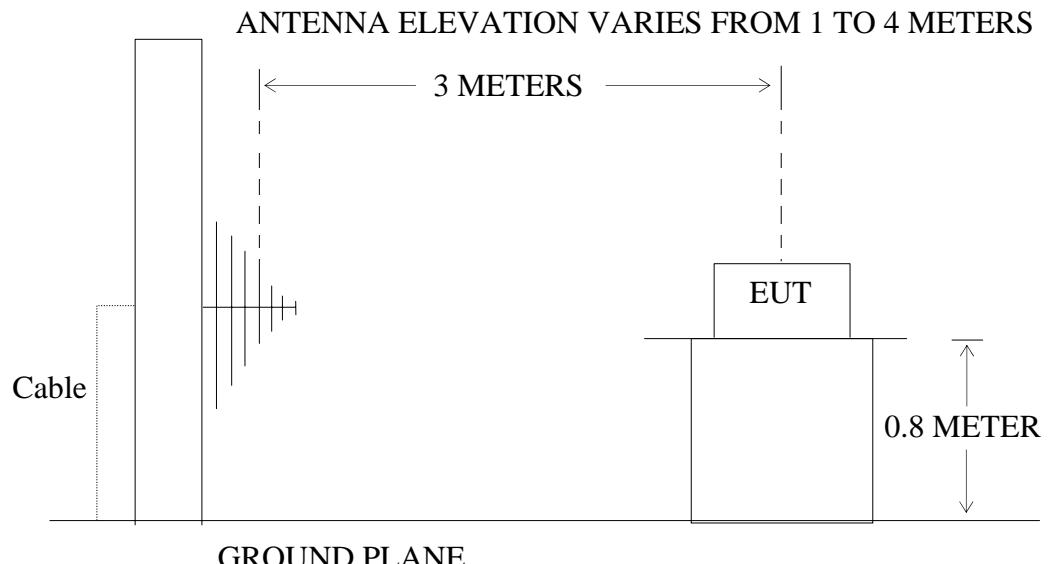

(EUT: Wireless Mouse)

## 5.2.The Emission Limit For Section 15.249(d)

5.2.1.Emission radiated outside of the specified frequency bands, except for harmonics, shall be comply with the general radiated emission limits in Section 15.209.

### Radiation Emission Measurement Limits According to Section 15.209

| Frequency<br>(MHz) | Limit   |   |  |
|--------------------|---|---|--|
|                    | Field Strength of<br>Quasi-peak Value<br>(microvolts/m) | Field Strength of<br>Quasi-peak Value<br>(dB $\mu$ V/m) | The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. |
| 30 - 88            | 100   | 40  |  |
| 88 - 216           | 150   | 43.5  |  |
| 216 - 960          | 200   | 46  |  |
| Above 960          | 500   | 54  |  |

## 5.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.3.1. Wireless Mouse (EUT)

Model Number : BL-M1061  
 Serial Number : N/A  
 Manufacturer : Success Compu China Ltd.

## 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2403-2479MHz. We are select 2403MHz, 2441MHz, 2479MHz TX frequency to transmit.

## 5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

## 5.6.The Emission Measurement Result

**PASS.**

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 23, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC (“AAA” battery 1×) |
| Test Mode:    | TX 2403MHz     | Test Engineer: | Joe                        |

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V/m) | Factor(dB)<br>Corr. | Result | Limit | Margin<br>(dB) | Polarization |
|--------------------|---------------------------|---------------------|--------|-------|----------------|--------------|
|                    |                           |                     | QP     | QP    | QP             |              |
| -                  | -                         | -                   | -      | -     | -              | Vertical     |
| -                  | -                         | -                   | -      | -     | -              | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 23, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2441MHz     | Test Engineer: | Joe                        |

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V/m) | Factor(dB)<br>Corr. | Result         | Limit          | Margin | Polarization |
|--------------------|---------------------------|---------------------|----------------|----------------|--------|--------------|
|                    |                           |                     | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |              |
| -                  | -                         | -                   | -              | -              | -      | Vertical     |
| -                  | -                         | -                   | -              | -              | -      | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 23, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2479MHz     | Test Engineer: | Joe                        |

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V/m) | Factor(dB)<br>Corr. | Result         | Limit          | Margin | Polarization |
|--------------------|---------------------------|---------------------|----------------|----------------|--------|--------------|
|                    |                           |                     | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |              |
| -                  | -                         | -                   | -              | -              | -      | Vertical     |
| -                  | -                         | -                   | -              | -              | -      | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

## 6. BAND EDGES

### 6.1. The Requirement

6.1.1. Band Edge from 2400MHz to 2483.5MHz. Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

### 6.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.2.1. Wireless Mouse (EUT)

|               |   |                          |
|---------------|---|--------------------------|
| Model Number  | : | BL-M1061                 |
| Serial Number | : | N/A                      |
| Manufacturer  | : | Success Compu China Ltd. |

### 6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 4.1.

6.3.2. Turn on the power of all equipment.

6.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2403-2479MHz. We are select 2403MHz, 2479MHz TX frequency to transmit.

### 6.4. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:  
RBW=1MHz, VBW=1MHz

## 6.5.The Measurement Result

**Pass.**

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 24, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2403MHz     | Test Engineer: | Joe                        |

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |       | Factor(dB)<br>Corr. | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |      | Margin(dB) |        | Polarization |
|--------------------|-----------------------|-------|---------------------|----------------------|-------|---------------------|------|------------|--------|--------------|
|                    | AV                    | PEAK  |                     | AV                   | PEAK  | AV                  | PEAK | AV         | PEAK   |              |
| 2400.000           | 45.57                 | 47.81 | -7.46               | 38.11                | 40.35 | 54                  | 74   | -15.89     | -33.65 | Vertical     |
| 2400.000           | 47.67                 | 50.33 | -7.46               | 40.21                | 42.87 | 54                  | 74   | -13.79     | -31.13 | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

|               |                |                |                            |
|---------------|----------------|----------------|----------------------------|
| Date of Test: | March 24, 2010 | Temperature:   | 25°C                       |
| EUT:          | Wireless Mouse | Humidity:      | 50%                        |
| Model No.:    | BL-M1061       | Power Supply:  | 1.5V DC ("AAA" battery 1×) |
| Test Mode:    | TX 2479MHz     | Test Engineer: | Joe                        |

| Frequency<br>(MHz) | Reading(dB $\mu$ V/m) |       | Factor(dB)<br>Corr. | Result(dB $\mu$ V/m) |       | Limit(dB $\mu$ V/m) |      | Margin(dB) |        | Polarization |
|--------------------|-----------------------|-------|---------------------|----------------------|-------|---------------------|------|------------|--------|--------------|
|                    | AV                    | PEAK  |                     | AV                   | PEAK  | AV                  | PEAK | AV         | PEAK   |              |
| 2483.500           | 45.64                 | 48.37 | -7.37               | 38.27                | 41.00 | 54                  | 74   | -15.73     | -33.00 | Vertical     |
| 2483.500           | 45.68                 | 48.33 | -7.37               | 38.31                | 40.96 | 54                  | 74   | -15.69     | -33.04 | Horizontal   |

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.


## 7. ANTENNA REQUIREMENT

### 7.1. The Requirement

7.1.1. According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2. Antenna Construction

The antenna is PCB Layout antenna, no consideration of replacement.

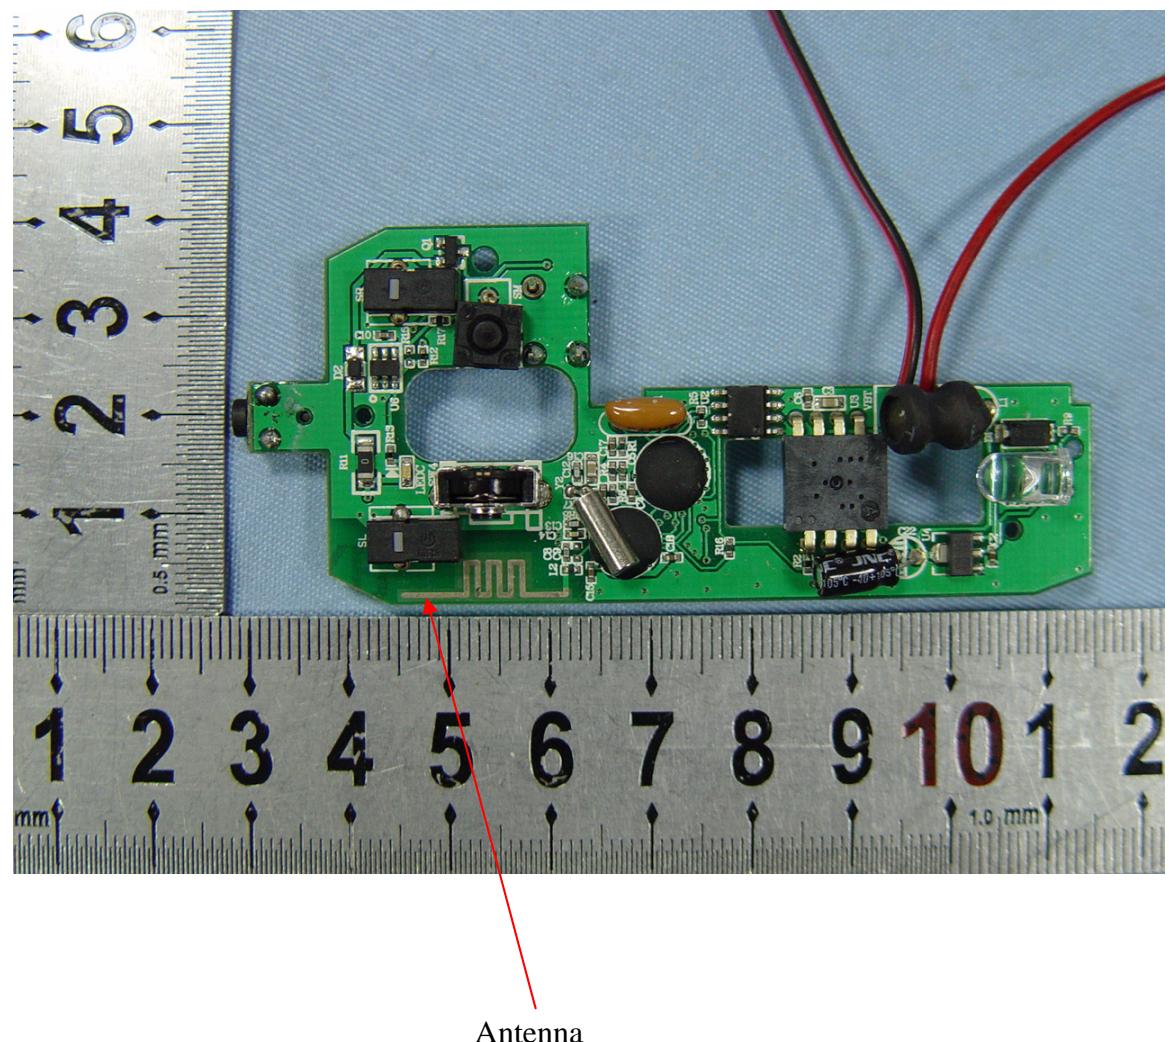

## APPENDIX I (Test Curves)



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4324                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp.( C)/Hum.(%) 25 C / 50 %          | Time: 09:06:07           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2403MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

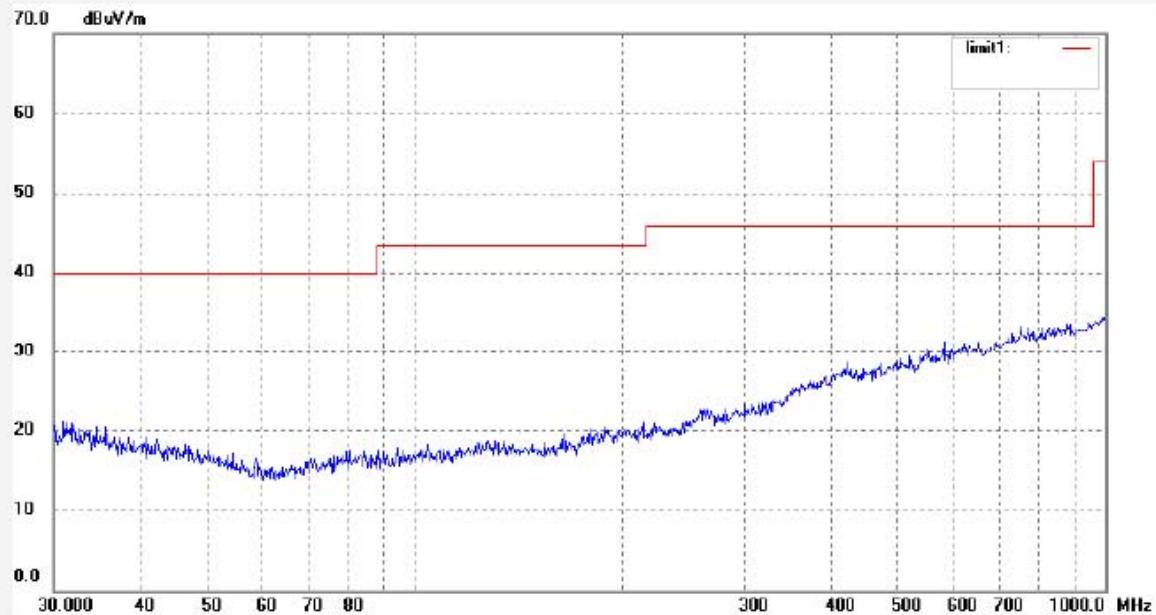

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4325  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2403MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 09:10:00  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

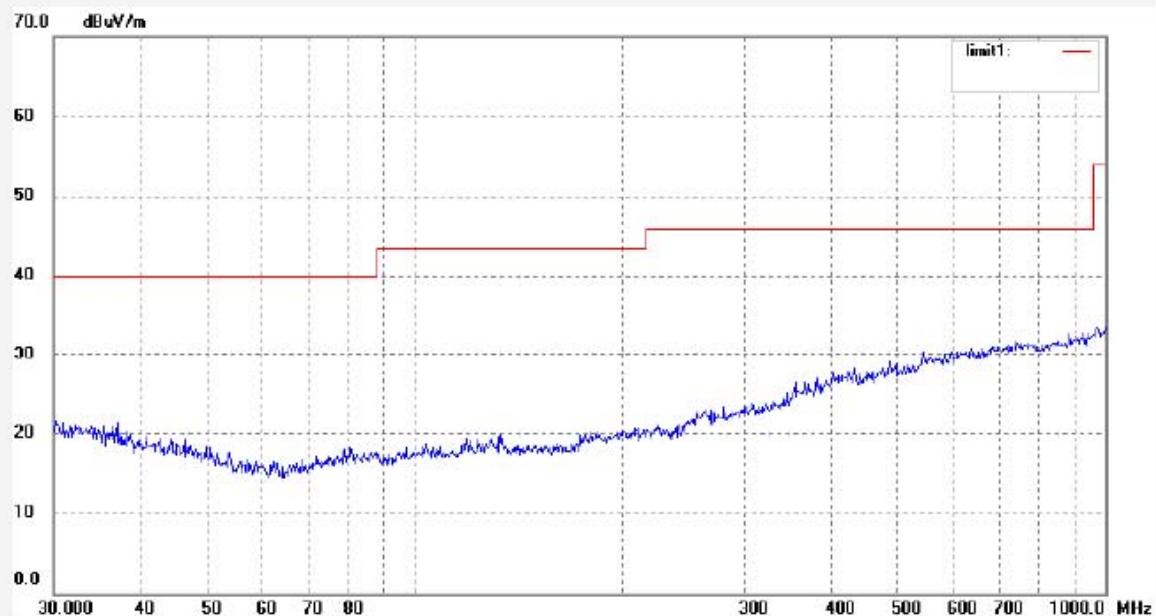

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4331                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp. ( C)/Hum.(%) 25 C / 50 %         | Time: 09:40:40           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2403MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

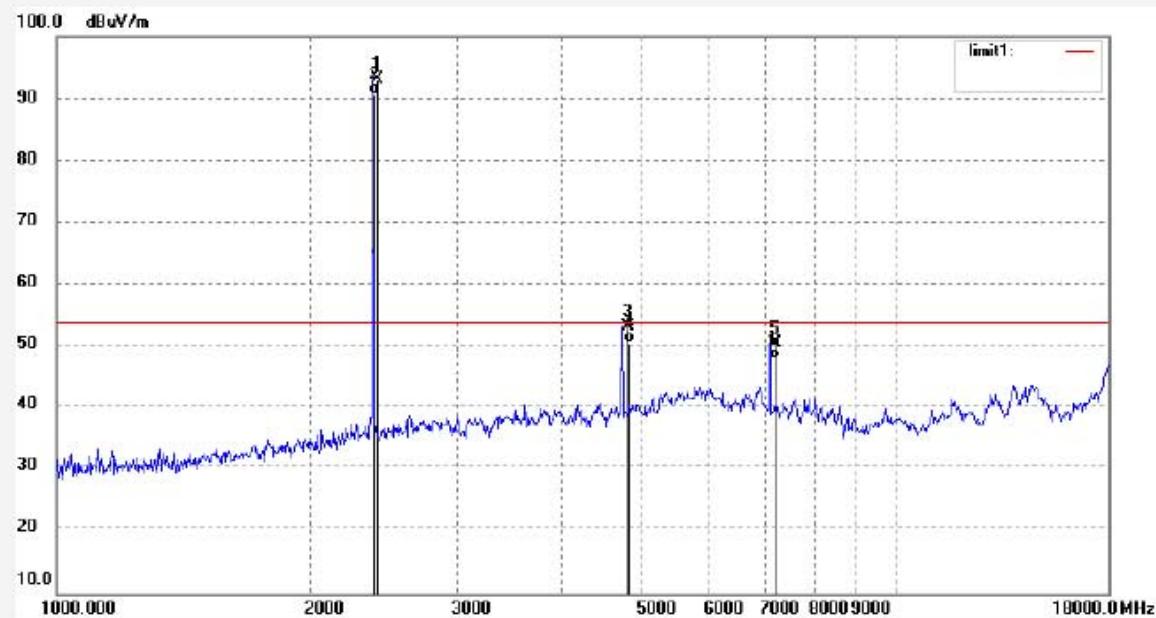

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2403.074    | 100.68           | -7.45       | 93.23           | 114.00         | -20.77      | peak     |             |               |        |
| 2   | 2403.074    | 98.03            | -7.45       | 90.58           | 94.00          | -3.42       | AVG      |             |               |        |
| 3   | 4806.146    | 53.55            | -0.28       | 53.27           | 74.00          | -20.73      | peak     |             |               |        |
| 4   | 4806.146    | 50.89            | -0.28       | 50.61           | 54.00          | -3.39       | AVG      |             |               |        |
| 5   | 7209.194    | 47.68            | 2.98        | 50.66           | 74.00          | -23.34      | peak     |             |               |        |
| 6   | 7209.194    | 45.00            | 2.98        | 47.98           | 54.00          | -6.02       | AVG      |             |               |        |


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4330  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2403MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 09:36:20  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

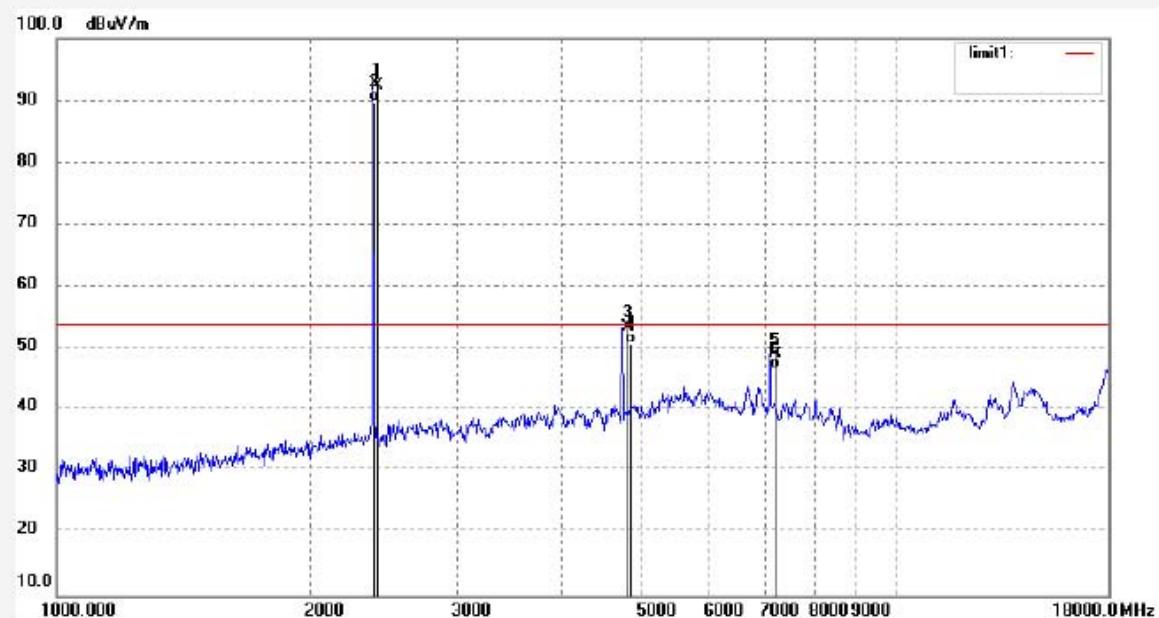

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2403.074    | 99.99            | -7.45       | 92.54           | 114.00         | -21.46      | peak     |             |               |        |
| 2   | 2403.074    | 97.32            | -7.45       | 89.87           | 94.00          | -4.13       | AVG      |             |               |        |
| 3   | 4806.146    | 53.90            | -0.28       | 53.62           | 74.00          | -20.38      | peak     |             |               |        |
| 4   | 4806.146    | 51.21            | -0.28       | 50.93           | 54.00          | -3.07       | AVG      |             |               |        |
| 5   | 7209.194    | 46.16            | 2.98        | 49.14           | 74.00          | -24.86      | peak     |             |               |        |
| 6   | 7209.194    | 43.50            | 2.98        | 46.48           | 54.00          | -7.52       | AVG      |             |               |        |



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4337                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp.( C)/Hum.(%) 25 C / 50 %          | Time: 10:11:25           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2403MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

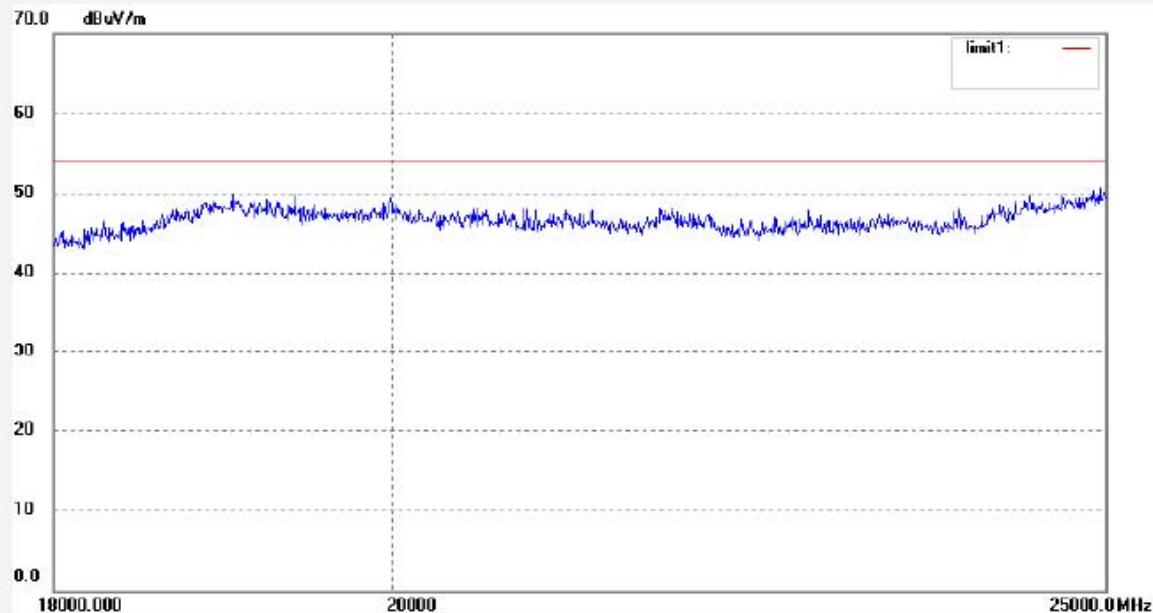

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4336  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2403MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 10:07:21  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

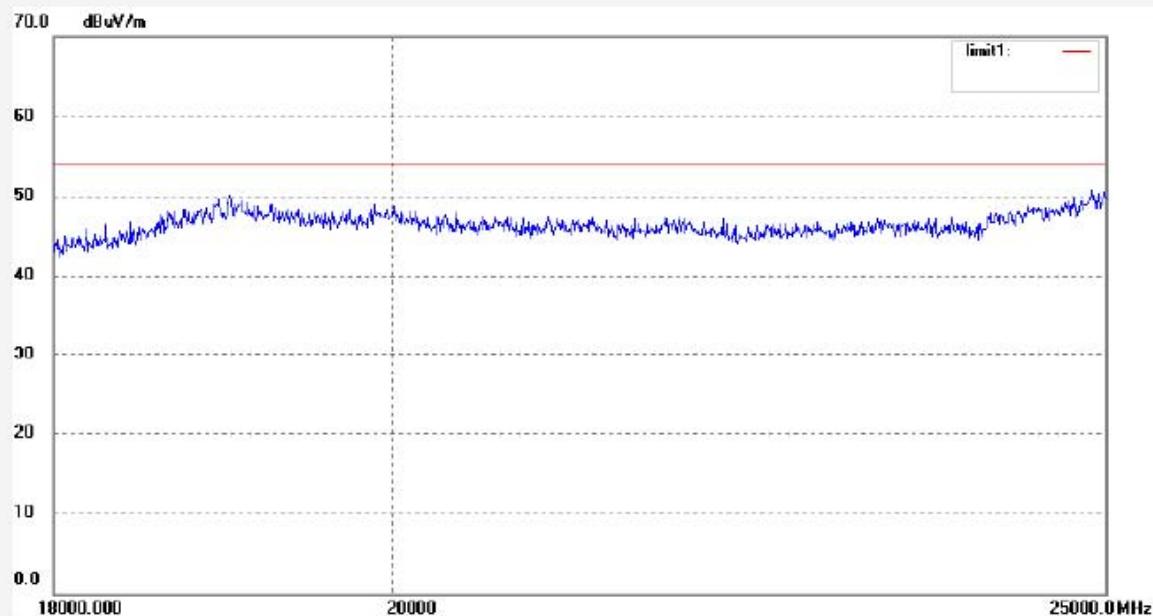

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4327                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp.( C)/Hum.(%) 25 C / 50 %          | Time: 09:18:21           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2441MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

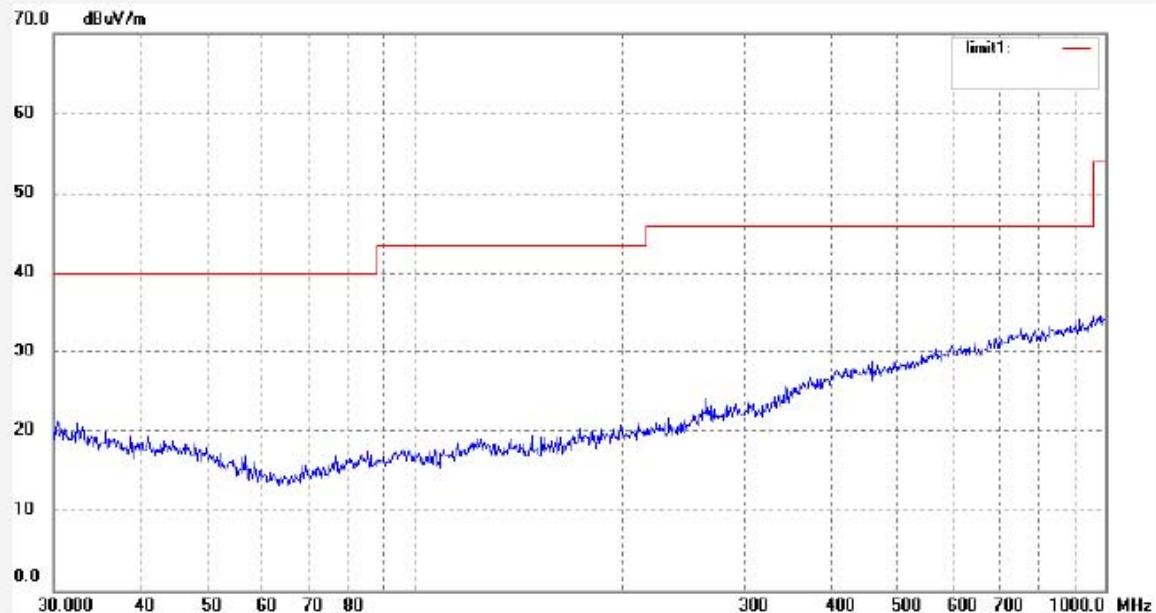

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4326  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2441MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 09:14:29  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

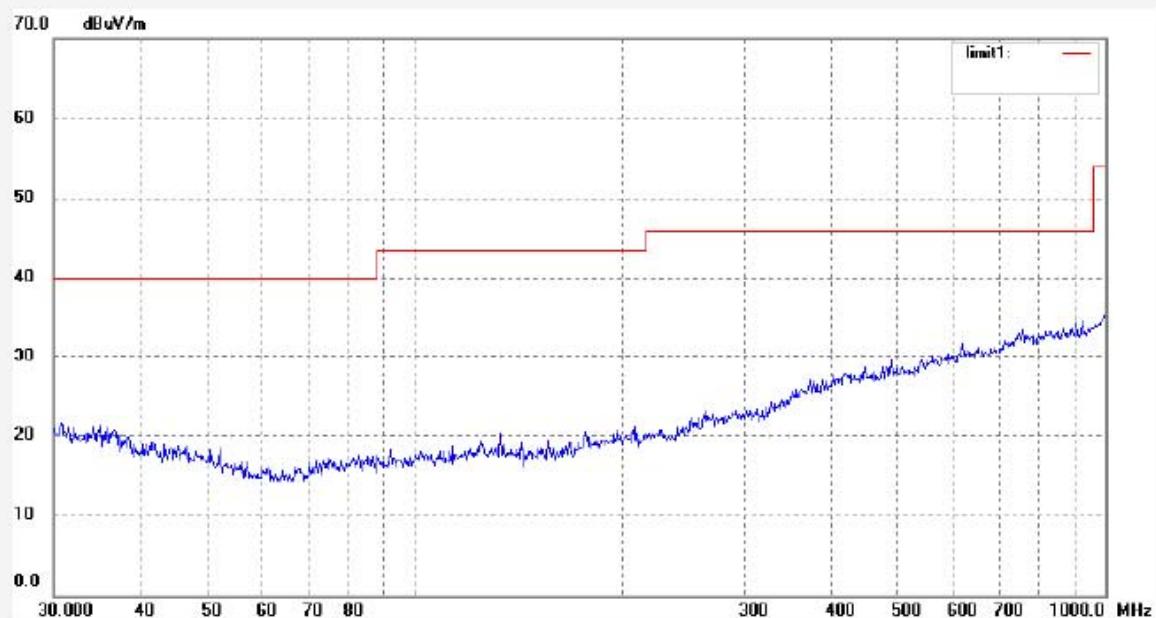

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                      |                         |  |            |
|----------------------|-------------------------|--|------------|
| Job No.:             | RTTE #4332              | Polarization:                          | Horizontal |
| Standard:            | FCC Class B 3M Radiated | Power Source:                          | DC 1.5V    |
| Test item:           | Radiation Test          | Date:                                  | 2010/03/23 |
| Temp. ( C )/Hum. (%) | 25 C / 50 %             | Time:                                  | 09:45:07   |
| EUT:                 | Wireless Mouse          | Engineer Signature:                    | Joe        |
| Mode:                | TX 2441MHz              | Distance:                              | 3m         |
| Model:               | BL-M1061                | Manufacturer: Success Compu China Ltd. |            |

Note: Sample No.:100526 Report No.:ATE20100478

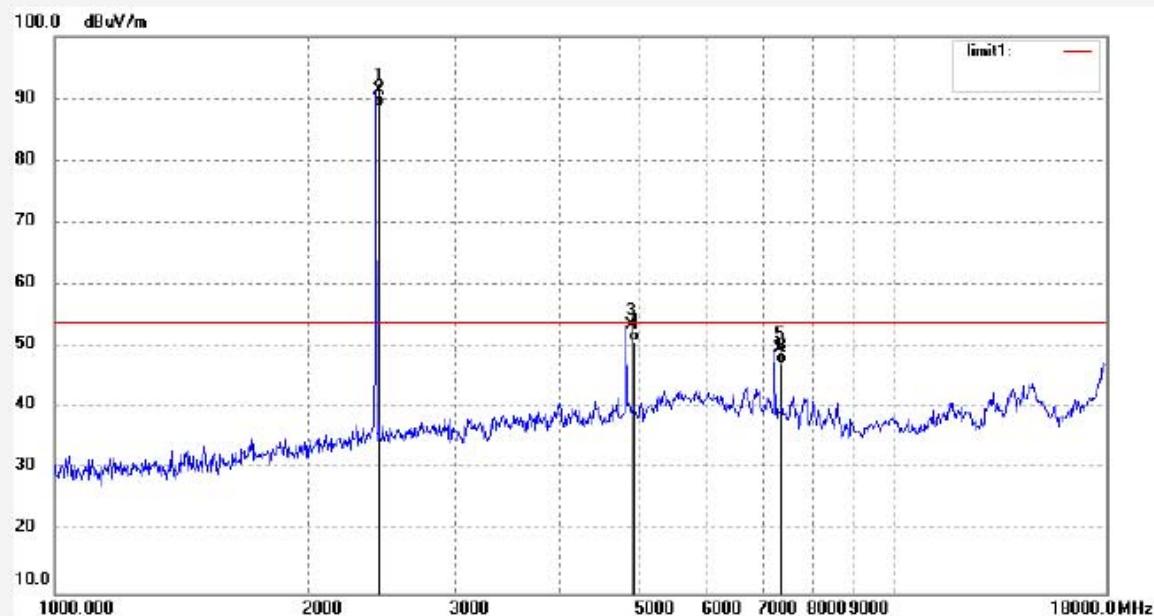

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2441.080    | 98.71            | -7.35       | 91.36           | 114.00         | -22.64      | peak     |             |               |        |
| 2   | 2441.080    | 96.06            | -7.35       | 88.71           | 94.00          | -5.29       | AVG      |             |               |        |
| 3   | 4882.150    | 53.32            | 0.14        | 53.46           | 74.00          | -20.54      | peak     |             |               |        |
| 4   | 4882.150    | 50.67            | 0.14        | 50.81           | 54.00          | -3.19       | AVG      |             |               |        |
| 5   | 7323.210    | 46.43            | 3.24        | 49.67           | 74.00          | -24.33      | peak     |             |               |        |
| 6   | 7323.210    | 43.76            | 3.24        | 47.00           | 54.00          | -7.00       | AVG      |             |               |        |


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4333  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp. ( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2441MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 09:49:38  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

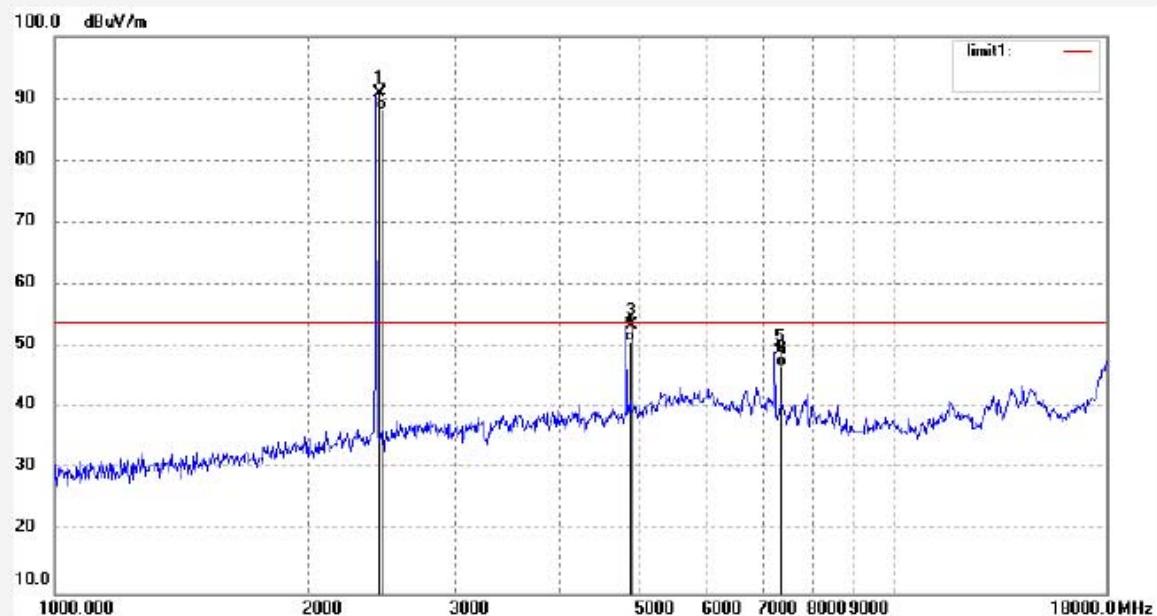

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2441.080    | 98.20            | -7.35       | 90.85           | 114.00         | -23.15      | peak     |             |               |        |
| 2   | 2441.080    | 95.56            | -7.35       | 88.21           | 94.00          | -5.79       | AVG      |             |               |        |
| 3   | 4882.150    | 53.42            | 0.14        | 53.56           | 74.00          | -20.44      | peak     |             |               |        |
| 4   | 4882.150    | 50.77            | 0.14        | 50.91           | 54.00          | -3.09       | AVG      |             |               |        |
| 5   | 7323.210    | 46.06            | 3.24        | 49.30           | 74.00          | -24.70      | peak     |             |               |        |
| 6   | 7323.210    | 43.41            | 3.24        | 46.65           | 54.00          | -7.35       | AVG      |             |               |        |



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4338                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp.( C)/Hum.(%) 25 C / 50 %          | Time: 10:15:46           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2441MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

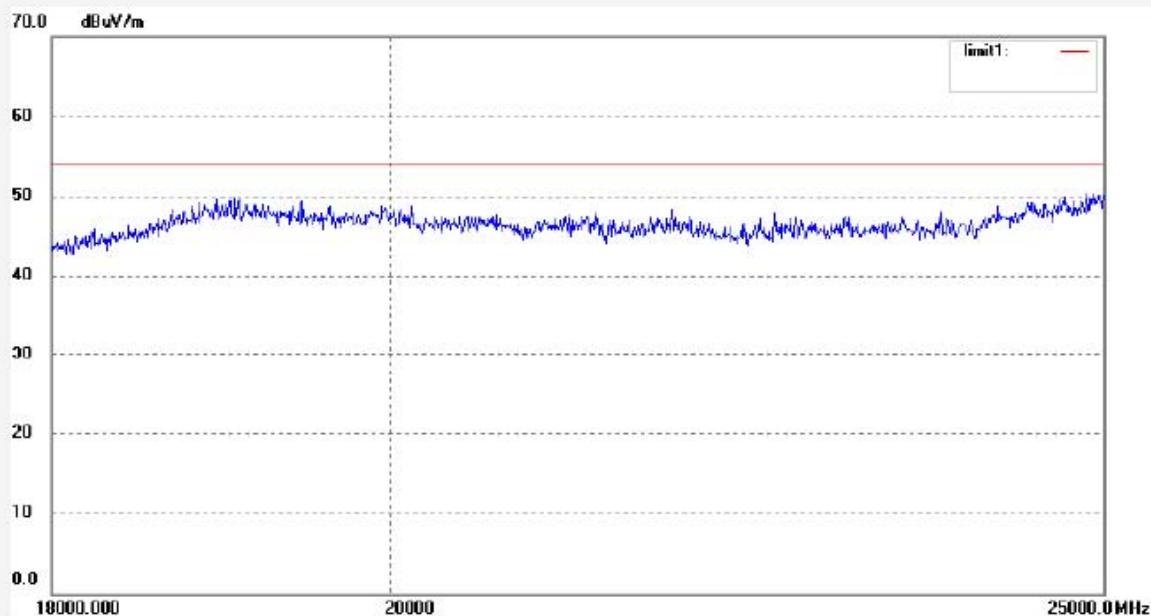

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4339  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2441MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 10:19:44  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

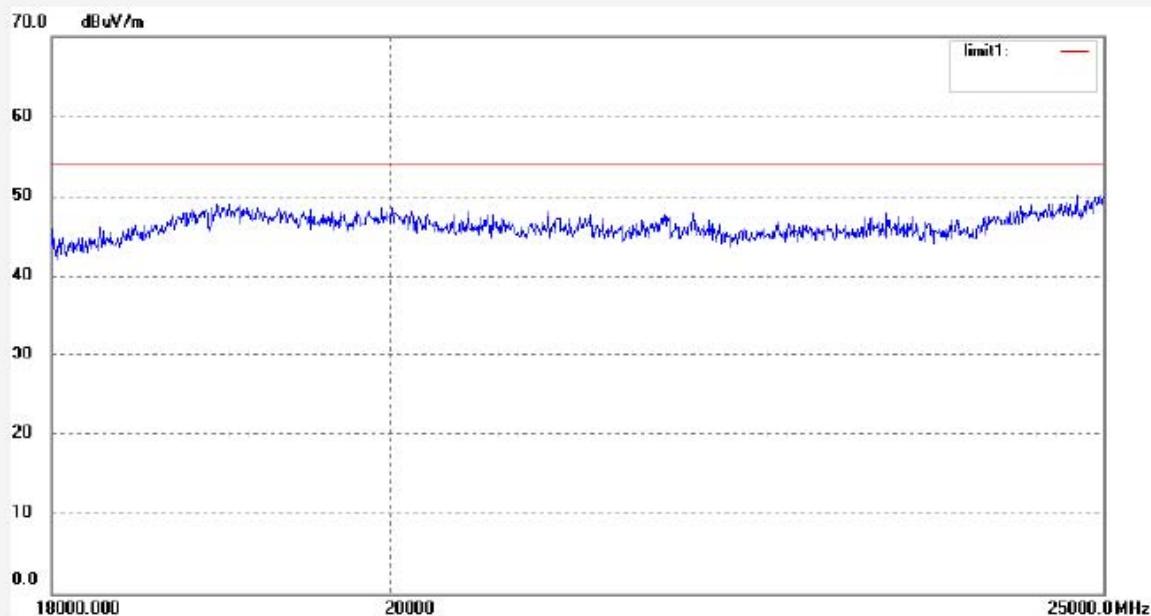

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4328                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp.( C)/Hum.(%) 25 C / 50 %          | Time: 09:22:47           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2479MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

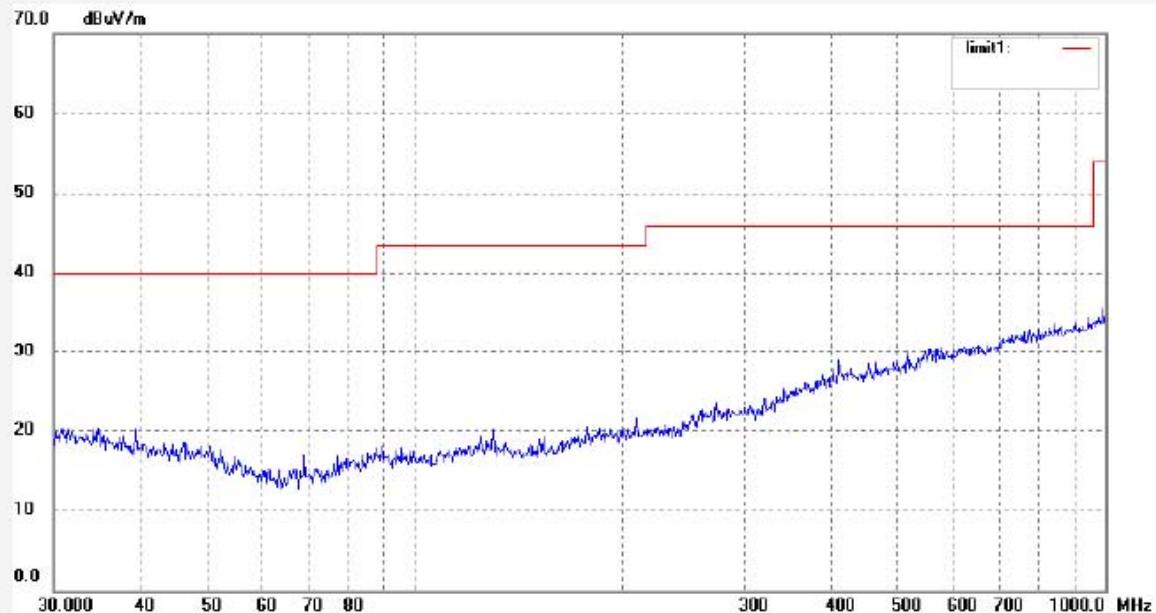

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4329  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2479MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 09:26:36  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

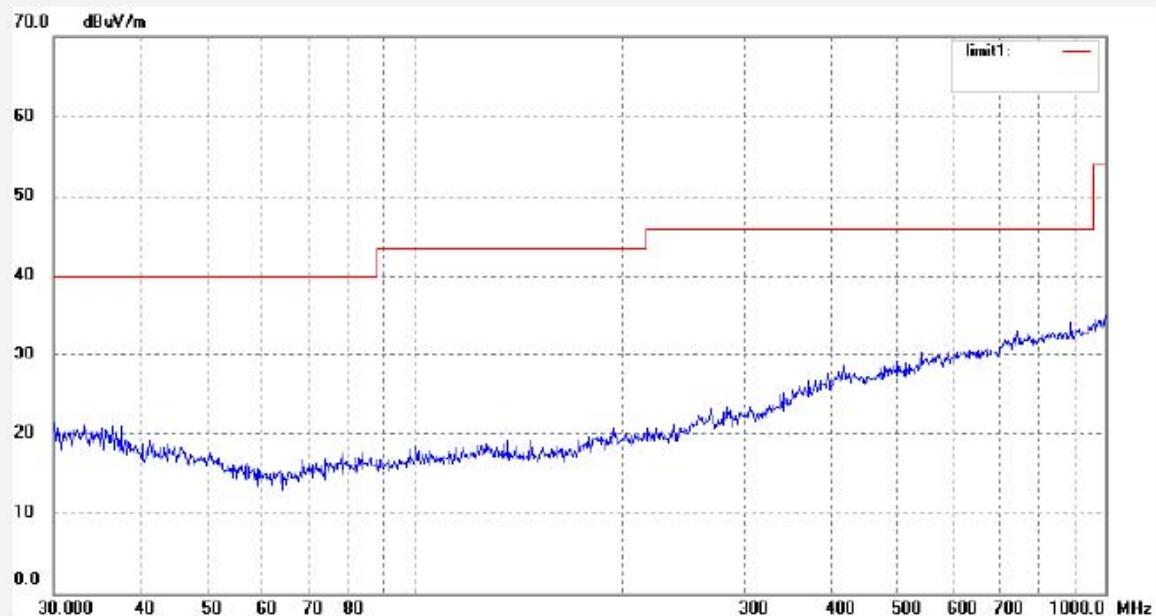

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|  |                          |
|--|--------------------------|
| Job No.: RTTE #4335                    | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated      | Power Source: DC 1.5V    |
| Test item: Radiation Test              | Date: 2010/03/23         |
| Temp. ( C)/Hum.(%) 25 C / 50 %         | Time: 09:58:34           |
| EUT: Wireless Mouse                    | Engineer Signature: Joe  |
| Mode: TX 2479MHz                       | Distance: 3m             |
| Model: BL-M1061                        |                          |
| Manufacturer: Success Compu China Ltd. |                          |

Note: Sample No.:100526 Report No.:ATE20100478

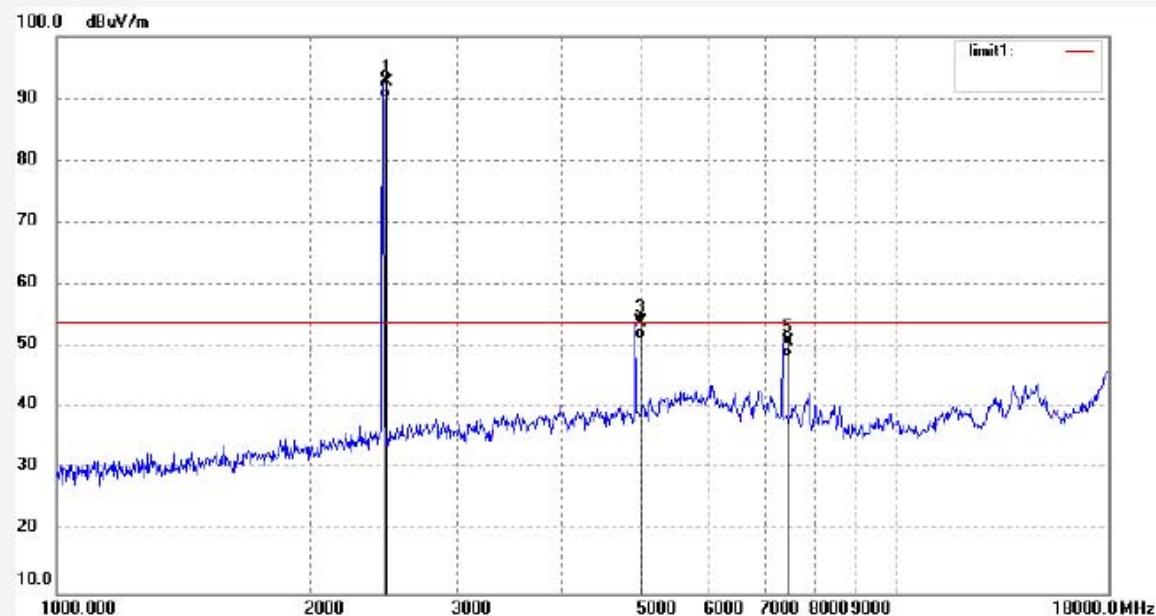

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2479.076    | 100.04           | -7.37       | 92.67           | 114.00         | -21.33      | peak     |             |               |        |
| 2   | 2479.076    | 97.39            | -7.37       | 90.02           | 94.00          | -3.98       | AVG      |             |               |        |
| 3   | 4958.156    | 53.42            | 0.51        | 53.93           | 74.00          | -20.07      | peak     |             |               |        |
| 4   | 4958.156    | 50.74            | 0.51        | 51.25           | 54.00          | -2.75       | AVG      |             |               |        |
| 5   | 7437.218    | 47.12            | 3.67        | 50.79           | 74.00          | -23.21      | peak     |             |               |        |
| 6   | 7437.218    | 44.46            | 3.67        | 48.13           | 54.00          | -5.87       | AVG      |             |               |        |


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4334  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp. ( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2479MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 09:54:17  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

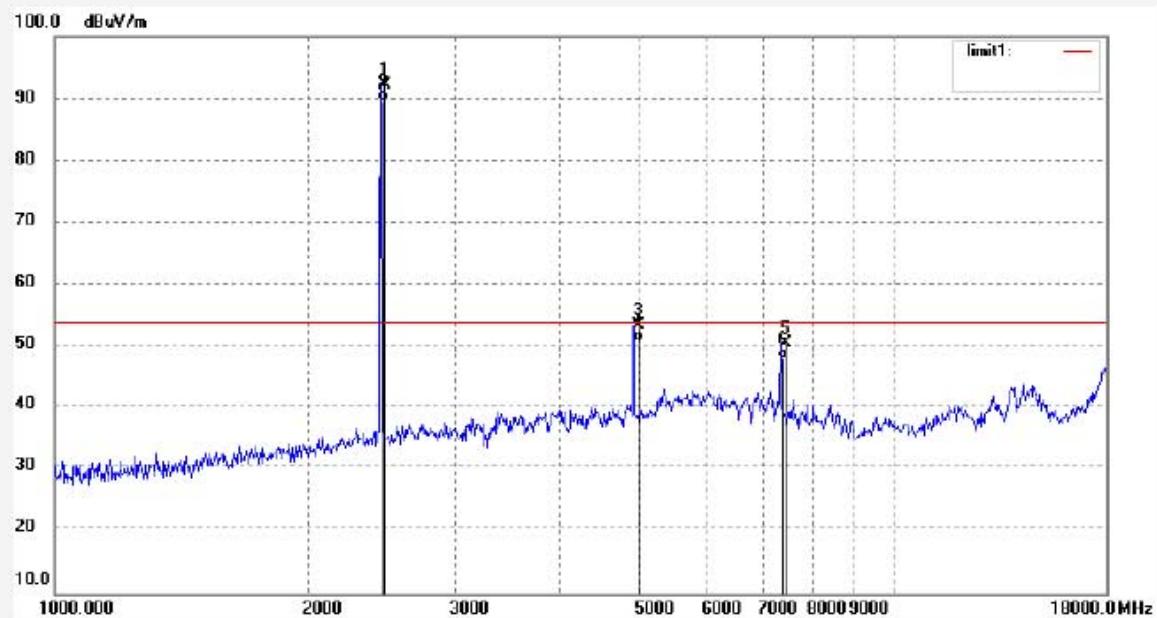

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2479.076    | 99.51            | -7.37       | 92.14           | 114.00         | -21.86      | peak     |             |               |        |
| 2   | 2479.076    | 96.87            | -7.37       | 89.50           | 94.00          | -4.50       | AVG      |             |               |        |
| 3   | 4958.156    | 53.09            | 0.51        | 53.60           | 74.00          | -20.40      | peak     |             |               |        |
| 4   | 4958.156    | 50.43            | 0.51        | 50.94           | 54.00          | -3.06       | AVG      |             |               |        |
| 5   | 7437.218    | 46.91            | 3.67        | 50.58           | 74.00          | -23.42      | peak     |             |               |        |
| 6   | 7437.218    | 44.26            | 3.67        | 47.93           | 54.00          | -6.07       | AVG      |             |               |        |



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                     |                         |  |            |
|---------------------|-------------------------|--|------------|
| Job No.:            | RTTE #4341              | Polarization:                          | Horizontal |
| Standard:           | FCC Class B 3M Radiated | Power Source:                          | DC 1.5V    |
| Test item:          | Radiation Test          | Date:                                  | 2010/03/23 |
| Temp. ( C )/Hum.(%) | 25 C / 50 %             | Time:                                  | 10:28:53   |
| EUT:                | Wireless Mouse          | Engineer Signature:                    | Joe        |
| Mode:               | TX 2479MHz              | Distance:                              | 3m         |
| Model:              | BL-M1061                | Manufacturer: Success Compu China Ltd. |            |

Note: Sample No.:100526 Report No.:ATE20100478

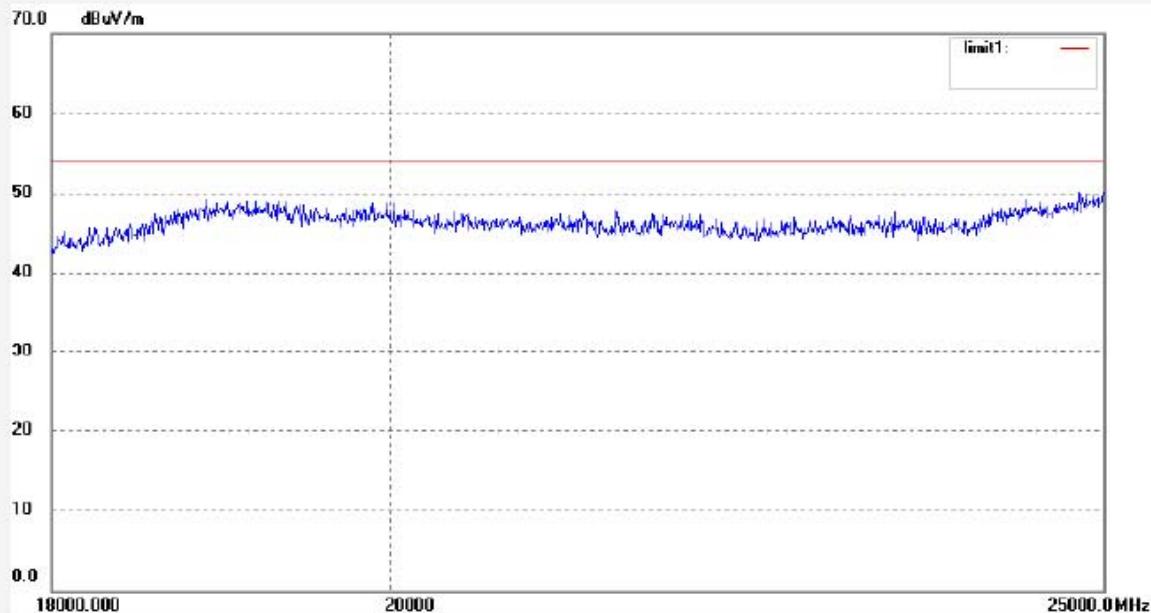

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4340  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2479MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/23  
 Time: 10:24:56  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

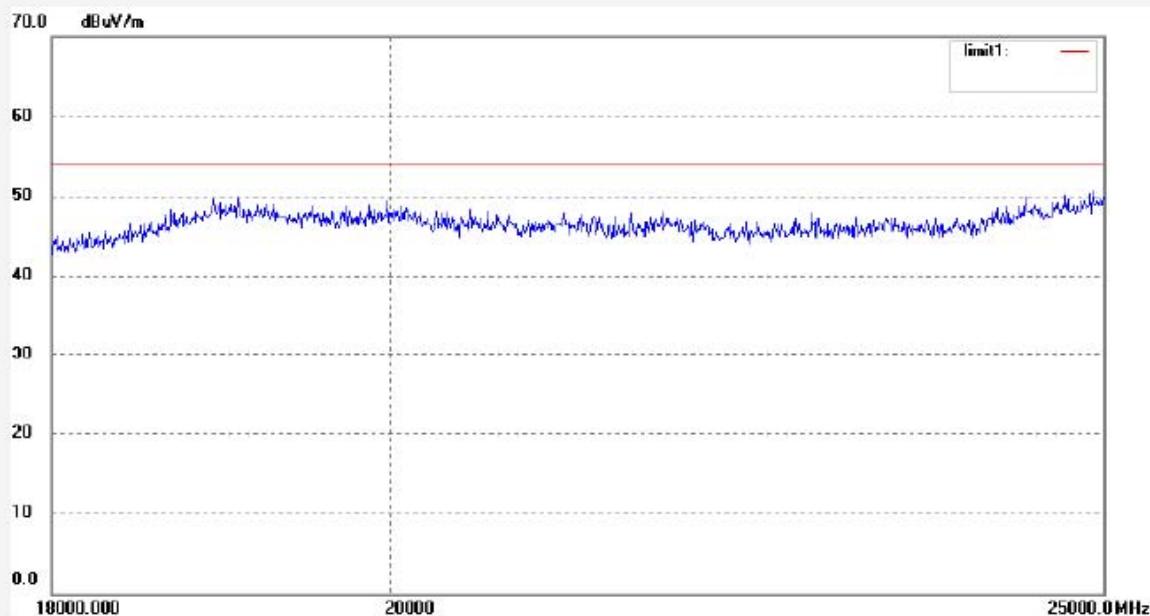

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4367  
 Standard: FCC Part 15 PEAK 2.4G  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2403MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Horizontal  
 Power Source: DC 1.5V  
 Date: 2010/03/24  
 Time: 10:48:11  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

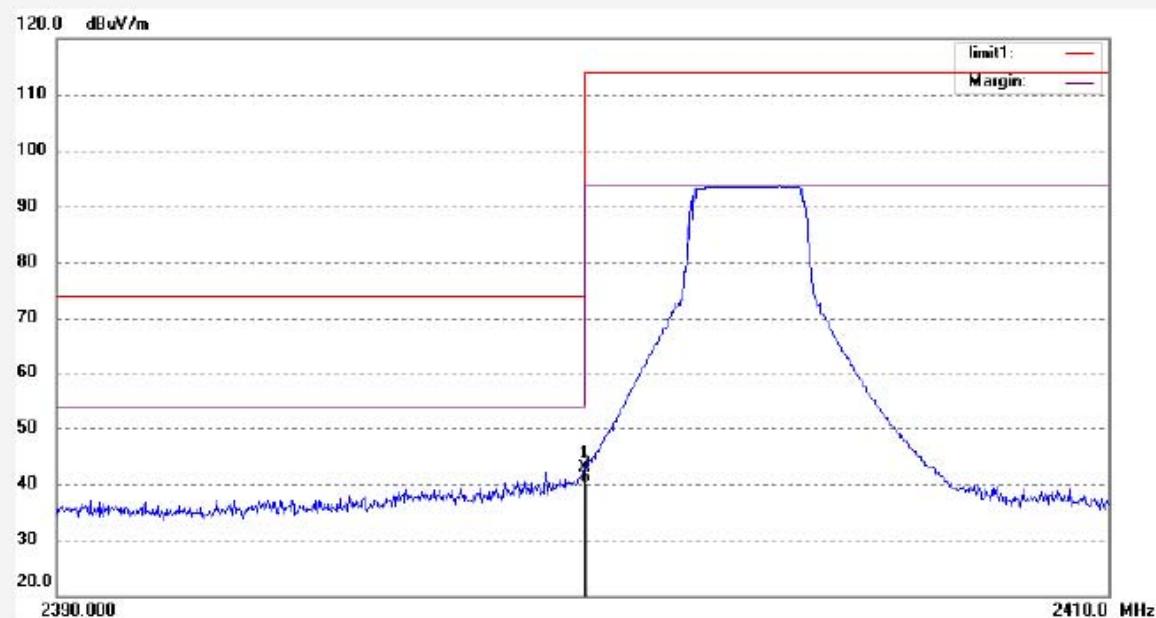

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2400.000    | 50.33            | -7.46       | 42.87           | 74.00          | -31.13      | peak     |             |               |        |
| 2   | 2400.000    | 47.67            | -7.46       | 40.21           | 54.00          | -13.79      | AVG      |             |               |        |


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #4366

Polarization: Vertical

Standard: FCC Part 15 PEAK 2.4G

Power Source: DC 1.5V

Test item: Radiation Test

Date: 2010/03/24

Temp. ( C)/Hum.(%) 25 C / 50 %

Time: 10:44:27

EUT: Wireless Mouse

Engineer Signature: Joe


Mode: TX 2403MHz

Distance: 3m

Model: BL-M1061

Manufacturer: Success Compu China Ltd.

Note: Sample No.:100526 Report No.:ATE20100478

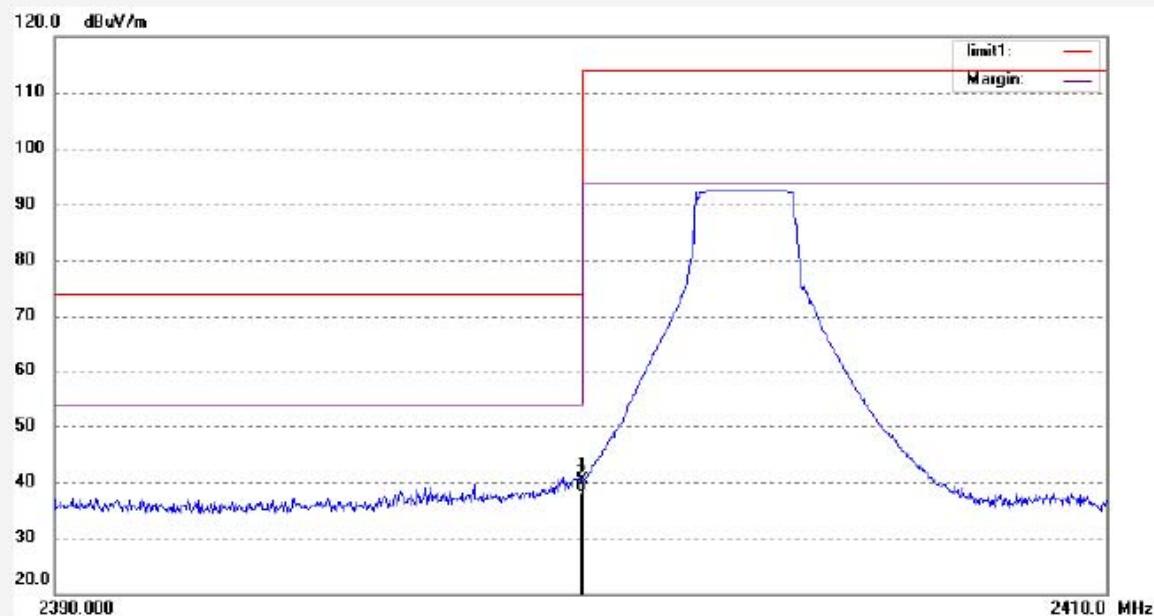

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2400.000    | 47.81            | -7.46       | 40.35           | 74.00          | -33.65      | peak     |             |               |        |
| 2   | 2400.000    | 45.57            | -7.46       | 38.11           | 54.00          | -15.89      | AVG      |             |               |        |


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4368  
 Standard: FCC Part 15 PEAK 2.4G  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2479MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Horizontal  
 Power Source: DC 1.5V  
 Date: 2010/03/24  
 Time: 10:52:45  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

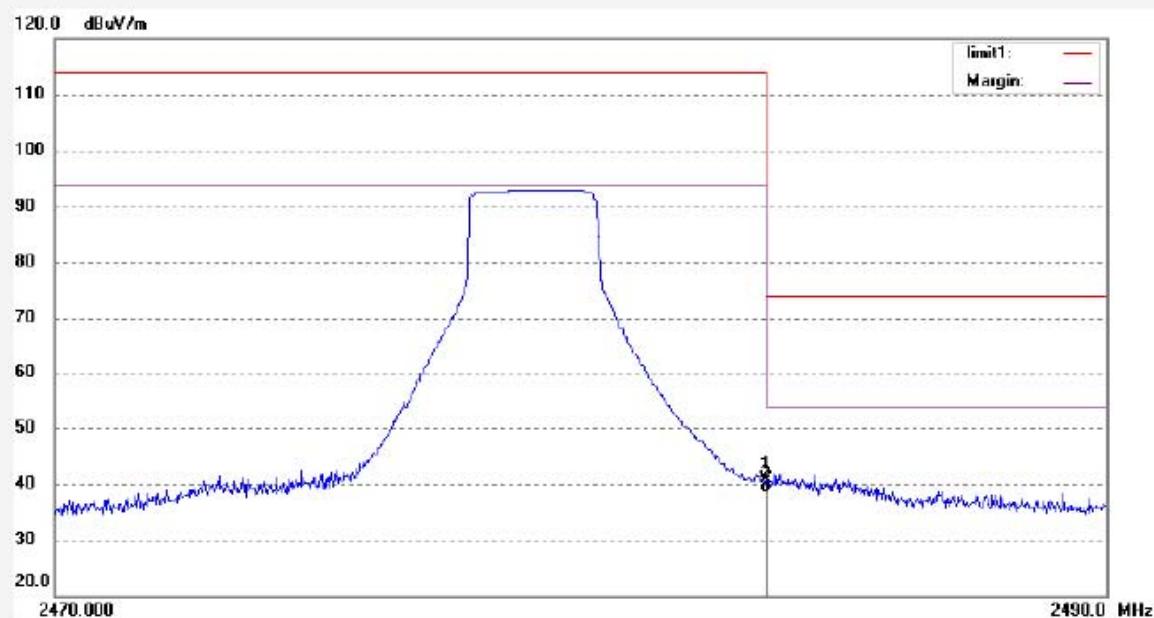

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2483.500    | 48.33            | -7.37       | 40.96           | 74.00          | -33.04      | peak     |             |               |        |
| 2   | 2483.500    | 45.68            | -7.37       | 38.31           | 54.00          | -15.69      | AVG      |             |               |        |


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #4369  
 Standard: FCC Part 15 PEAK 2.4G  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 50 %  
 EUT: Wireless Mouse  
 Mode: TX 2479MHz  
 Model: BL-M1061  
 Manufacturer: Success Compu China Ltd.

Polarization: Vertical  
 Power Source: DC 1.5V  
 Date: 2010/03/24  
 Time: 10:56:34  
 Engineer Signature: Joe  
 Distance: 3m

Note: Sample No.:100526 Report No.:ATE20100478

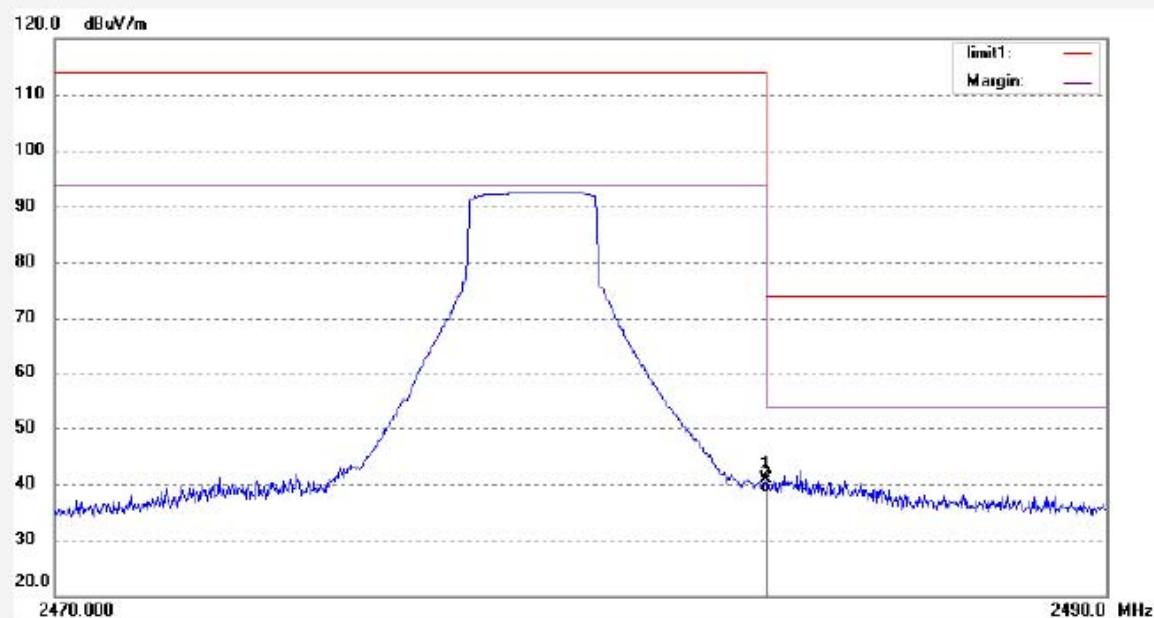

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2483.500    | 48.37            | -7.37       | 41.00           | 74.00          | -33.00      | peak     |             |               |        |
| 2   | 2483.500    | 45.64            | -7.37       | 38.27           | 54.00          | -15.73      | AVG      |             |               |        |