



FCC PART 15.247 TEST REPORT

For

AudioCodes Ltd.

1 Hayarden Street, Airport City, Lod, Israel 70151

FCC ID: XAKC450DB

Report Type: Original Report	Product Type: IP Phone C450HD
Report Number: RSZ200623012-00B	
Report Date: 2020-07-28	
Reviewed By: RF Engineer	Jacob Kong
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(.....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST DATA	22
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35

TEST DATA	35
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(e) - POWER SPECTRAL DENSITY	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
APPENDIX Wi-Fi.....	38
APPENDIXA: DTS BANDWIDTH	38
APPENDIXC: MAXIMUM CONDUCTED OUTPUT POWER (AV)	43
APPENDIXC: MAXIMUM CONDUCTED OUTPUT POWER(PK)	43
APPENDIXD: MAXIMUM POWER SPECTRAL DENSITY	44
APPENDIXE: BAND EDGE MEASUREMENTS	49
APPENDIXG: DUTYCYCLE	52
APPENDIX BLE.....	55
APPENDIXA: DTS BANDWIDTH	55
APPENDIXC: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	57
APPENDIXD: MAXIMUM POWER SPECTRAL DENSITY	58
APPENDIXE: BAND EDGE MEASUREMENTS	60
APPENDIXG: DUTYCYCLE	61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	IP Phone C450HD
Tested Model	C450HD
Frequency Range	Bluetooth LE: 2402~2480MHz Wi-Fi: 2412~2472MHz
Maximum Conducted Peak Output Power	Bluetooth LE: -1.24dBm Wi-Fi: 15.14dBm(802.11b), 13.98dBm(802.11g), 13.79dBm(802.11n-HT20), 12.53dBm(802.11n-HT40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification	2.5 dBi
Voltage Range	DC12V from adapter or DC 48V from POE
Date of Test	2020-07-02 to 2020-07-20
Sample serial number	RSZ200623012-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-06-23
Sample/EUT Status	Good condition
Adapter information	Model:KSAS0121200100D5 Input: 100-240V~ 50/60Hz 0.4A Output: DC 12V, 1.0A

Objective

This report is prepared on behalf of *AudioCodes Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.407 NII submissions with FCC ID: XAKC450DB.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	2457
4	2437	9	2462
5	2442	/	/

EUT was tested with Channel 1, 5 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“SecureCRT” software was use.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11b	1 Mbps	39	39	39
802.11g	6 Mbps	38	38	38
802.11n-HT20	MCS0	38	38	38
802.11n-HT40	MCS0	38	38	38
BLE	/	20	20	20

Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-212	A37209315081183
HP	Laptop	Compaq CQ45	5CG33407QL
SAGEM	Router	SAGEM F@STTM 2604 White	SE20546325821
TECLAST	USB disk(*2)	8GB	8GB
Dora	Handset	Dora	Dora
GOSPELL	POE	G0720-480-050	200200013


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded Un-detachable AC Cable	1.2	LISN	Socket
Un-shielding Un-detachable DC Cable	1.0	EUT	Adapter
Un-shielded detachable RJ45 Cable	8.0	EUT	Laptop
Un-shielded detachable RJ45 Cable	8.0	EUT	Router
Un-shielded detachable RJ9 Cable	0.5	EUT	Handset
Un-shielded detachable signal Cable	8.0	EUT	Terminated
Un-shielded detachable RJ45 Cable	8.0	POE	EUT
Un-shielded detachable RJ45 Cable	8.0	POE	Laptop
Un-shielded detachable RJ45 Cable	1.0	POE	EUT


Block Diagram of Test Setup

For conducted emission:

Adapter:

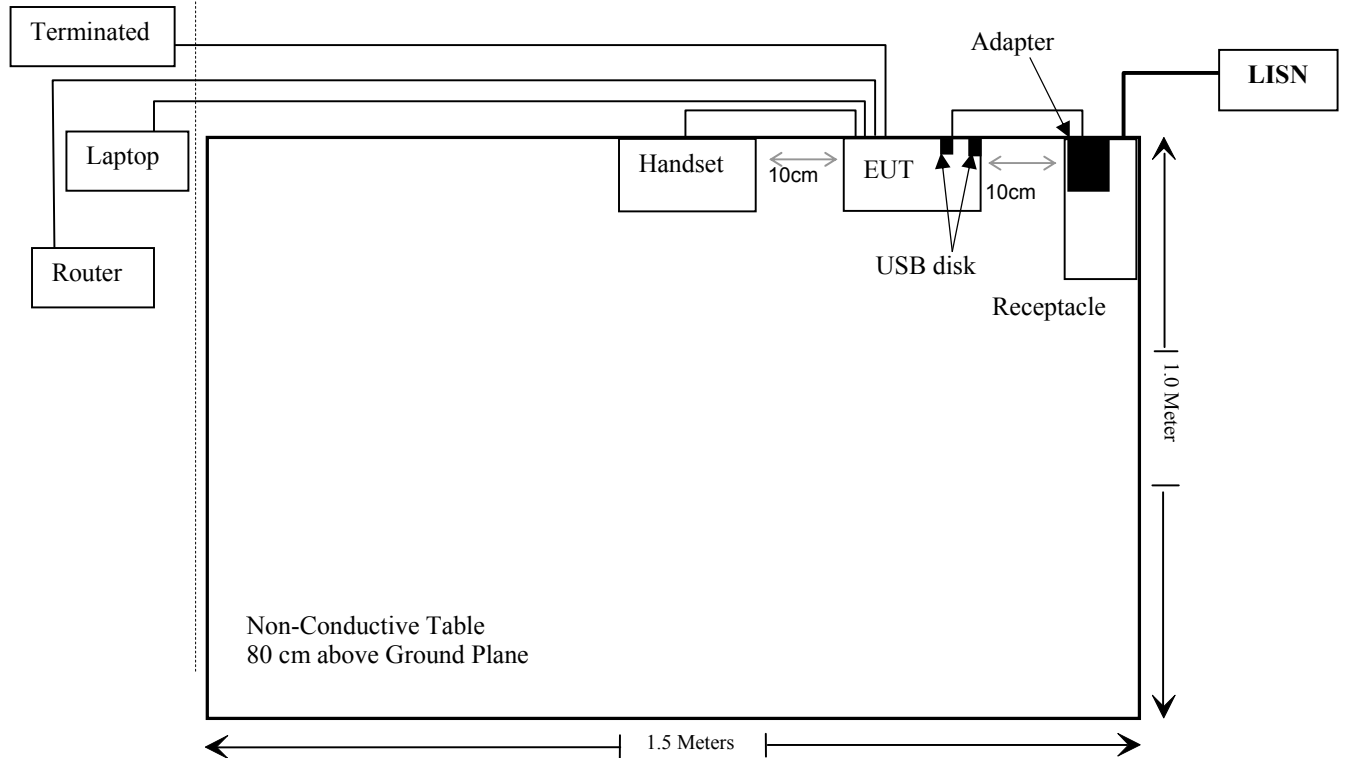

POE:

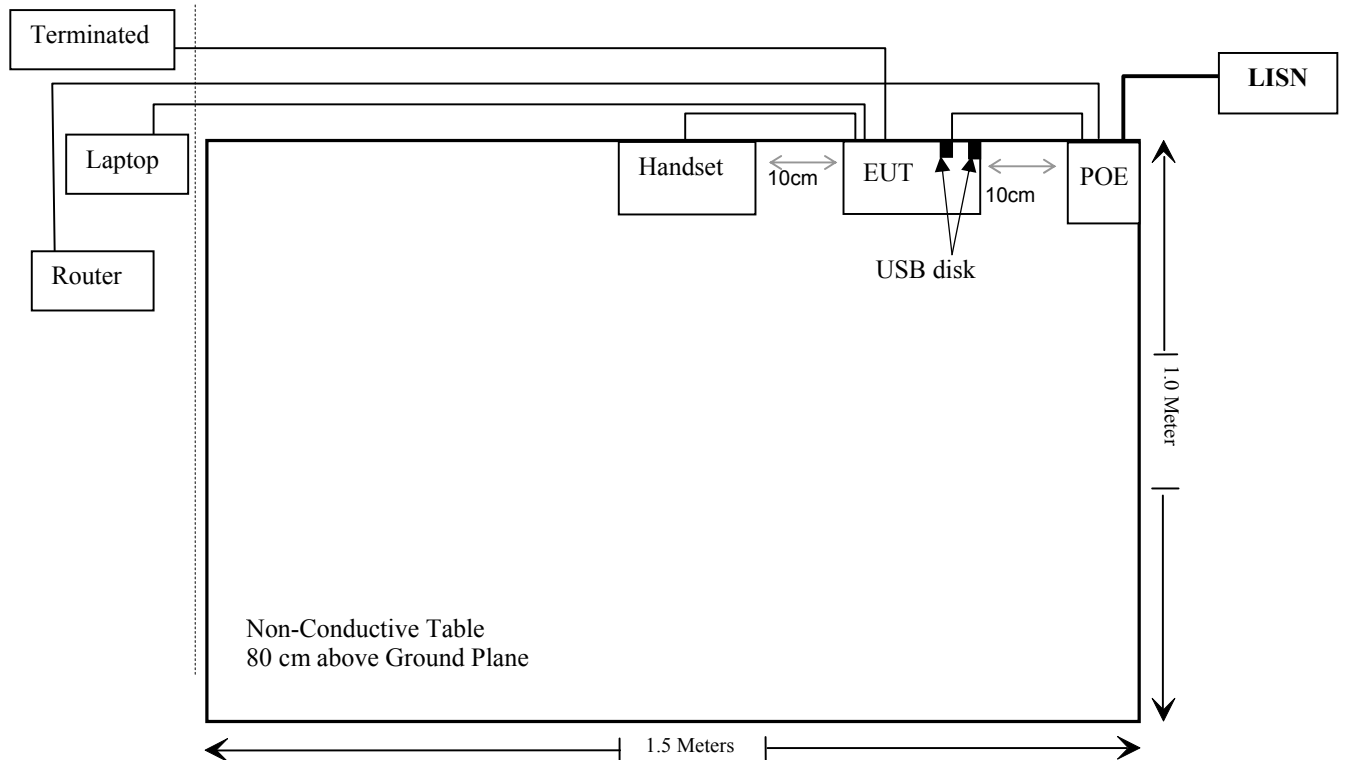

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2019/7/9	2020/7/8
Rohde & Schwarz	LISN	ENV216	101613	2020/1/22	2021/1/21
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknow	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2019/7/9	2020/7/8
Sonoma instrument	Pre-amplifier	310 N	186238	2020/4/20	2021/4/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknow	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknow	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019/7/22	2020/7/21
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulated Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknow	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/4/20	2021/4/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2017/12/6	2020/12/5
RF Conducted Test					
Tonscend Corporation	RF control Unit	JS0806-2	19D8060154	2020/7/09	2021/7/8
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2019/7/22	2020/7/21
Unknow	RF Cable	Unknow	2301 276	2019/11/29	2020/11/28

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	2.5	1.78	-1	0.8	20	0.00003	1
2412-2472	2.5	1.78	15.5	35.5	20	0.013	1

Note: The 2.4G Wi-Fi can't transmit with the 5G Wi-Fi at the same time, but 2.4G Wi-Fi can transmit with BT/BLE simultaneously.

For the simultaneously consideration:

The worst case is 2.4G Wi-Fi with BT, refer to the DSS report, the power density is 0.003mW/cm² for BT

The ratio= $MPE_{BT}/Limit_{BT} + MPE_{2.4G\ Wi-Fi}/Limit_{2.4G\ Wi-Fi} = 0.003/1 + 0.013/1 = 0.016 < 1.0$

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two internal antenna arrangement, one for 2.4G Wi-Fi, another for BLE, which was permanently attached and both the antenna gain is 2.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-07-06 and 2020-07-07.


EUT operation mode: Transmitting (worst case at 802.11b mode, high channel)

Power by adapter:

AC 120V/60 Hz, Line

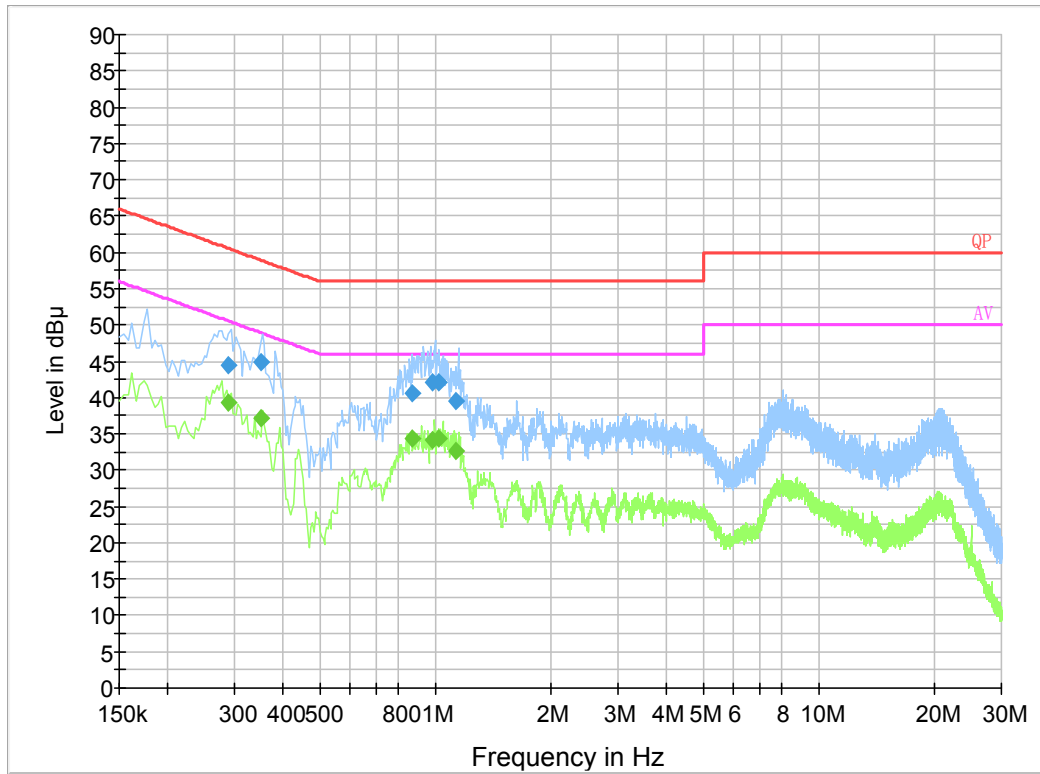


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.289500	44.4	19.7	60.5	16.1	QP
0.352690	44.9	19.9	58.9	14.0	QP
0.868950	40.7	19.8	56.0	15.3	QP
0.986970	42.1	19.9	56.0	13.9	QP
1.026610	42.1	19.9	56.0	13.9	QP
1.136750	39.6	19.8	56.0	16.4	QP
0.289500	39.2	19.7	50.5	11.3	Ave.
0.352690	37.2	19.9	48.9	11.7	Ave.
0.868950	34.4	19.8	46.0	11.6	Ave.
0.986970	34.3	19.9	46.0	11.7	Ave.
1.026610	34.3	19.9	46.0	11.7	Ave.
1.136750	32.7	19.8	46.0	13.3	Ave.

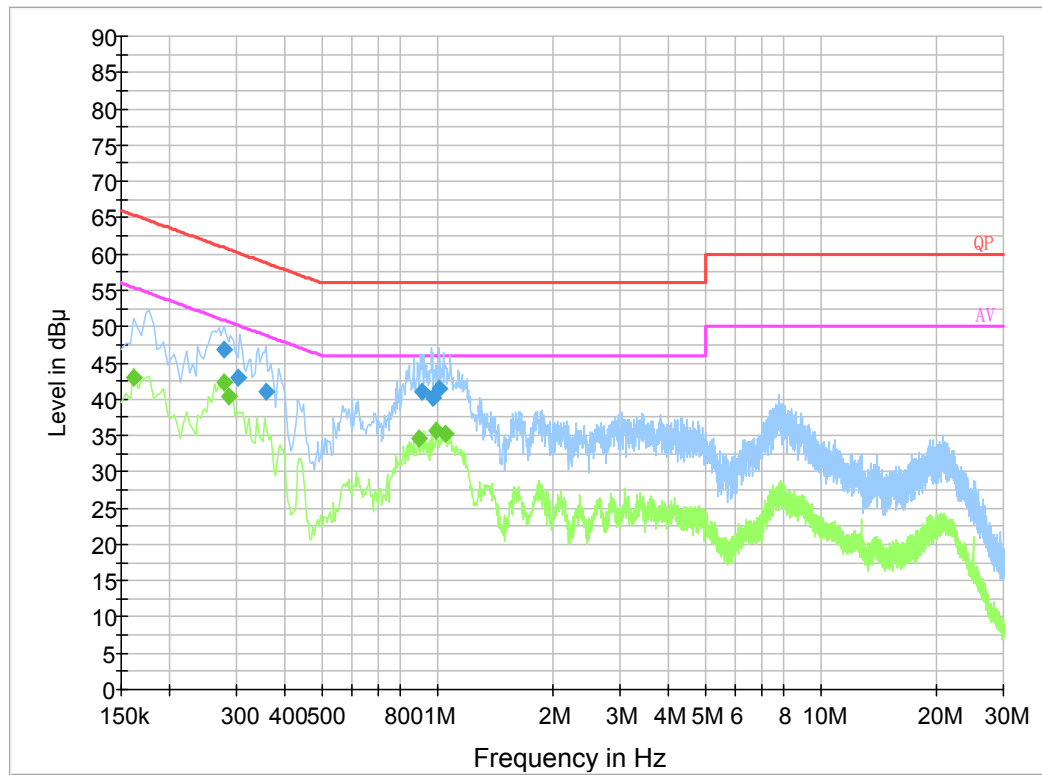AC 120V/60 Hz, Neutral


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.277500	46.9	19.7	60.9	14.0	QP
0.301410	42.9	19.7	60.2	17.3	QP
0.356630	41.1	19.9	58.8	17.7	QP
0.916410	40.9	19.7	56.0	15.1	QP
0.979510	40.2	19.8	56.0	15.8	QP
1.010790	41.5	19.8	56.0	14.5	QP
0.162000	43.0	19.8	55.4	12.4	Ave.
0.278000	42.3	19.7	50.9	8.6	Ave.
0.286000	40.4	19.7	50.6	10.2	Ave.
0.894000	34.5	19.7	46.0	11.5	Ave.
0.998000	35.7	19.8	46.0	10.3	Ave.
1.050000	35.2	19.8	46.0	10.8	Ave.

Power by POE:

AC 120V/60 Hz, Line

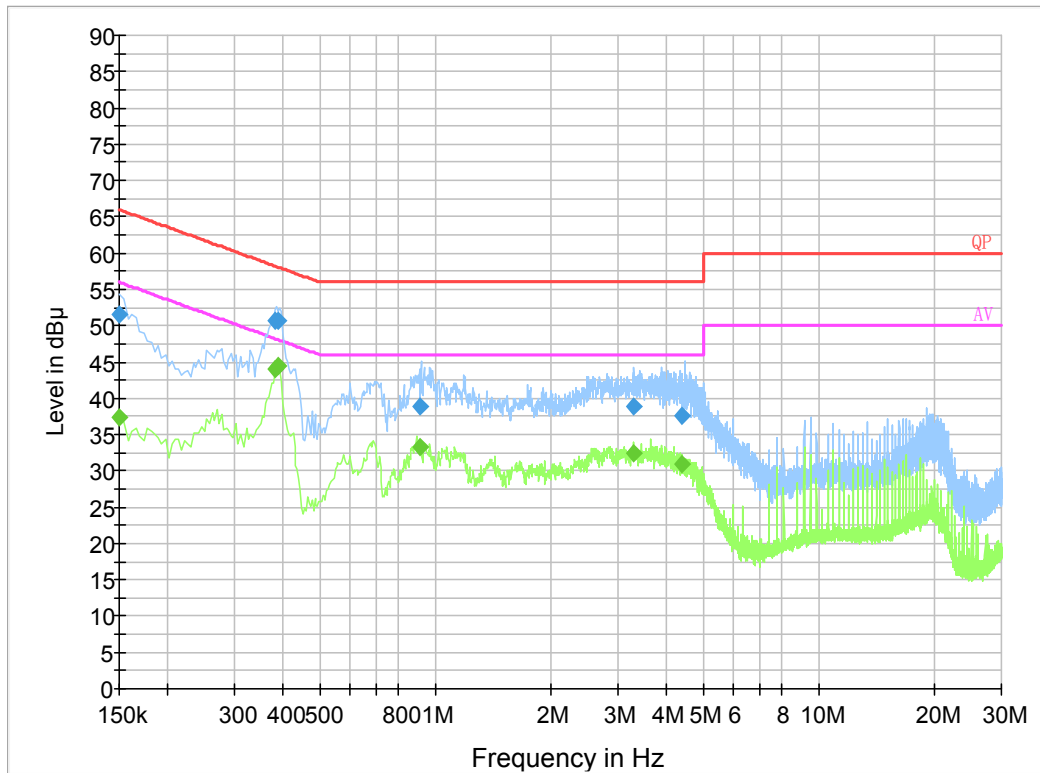

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	51.5	19.8	66.0	14.5	QP
0.384210	50.6	19.9	58.2	7.6	QP
0.388090	50.7	19.9	58.1	7.4	QP
0.912230	38.9	19.8	56.0	17.1	QP
3.288410	38.9	19.9	56.0	17.1	QP
4.422650	37.6	19.9	56.0	18.4	QP
0.150000	37.5	19.8	56.0	18.5	Ave.
0.384210	44.1	19.9	48.2	4.1	Ave.
0.388090	44.4	19.9	48.1	3.7	Ave.
0.912230	33.4	19.8	46.0	12.6	Ave.
3.288410	32.5	19.9	46.0	13.5	Ave.
4.422650	31.0	19.9	46.0	15.0	Ave.

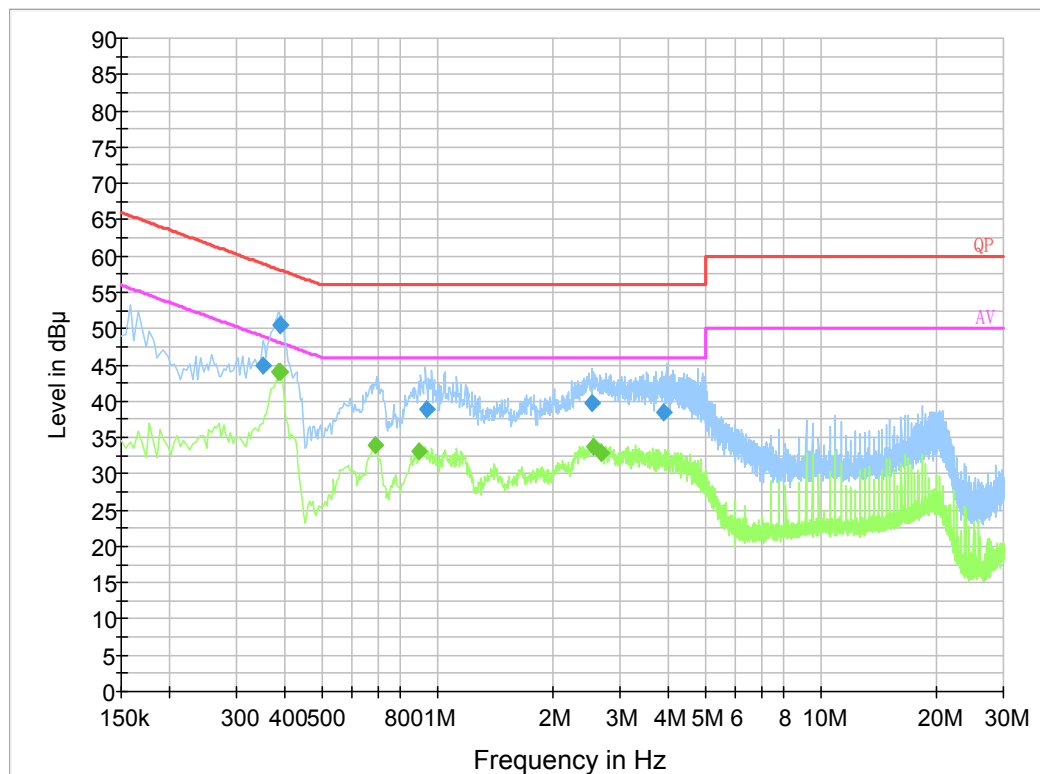AC 120V/60 Hz, Neutral



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.352750	45.0	19.9	58.9	13.9	QP
0.388090	50.5	19.8	58.1	7.6	QP
0.388210	50.5	19.8	58.1	7.6	QP
0.935990	38.9	19.8	56.0	17.1	QP
2.544050	39.6	19.8	56.0	16.4	QP
3.906570	38.5	19.9	56.0	17.5	QP
0.386000	44.1	19.8	48.1	4.0	Ave.
0.390000	44.0	19.8	48.1	4.1	Ave.
0.690000	34.0	19.8	46.0	12.0	Ave.
0.898000	33.1	19.7	46.0	12.9	Ave.
2.554000	33.7	19.8	46.0	12.3	Ave.
2.678000	32.9	19.8	46.0	13.1	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

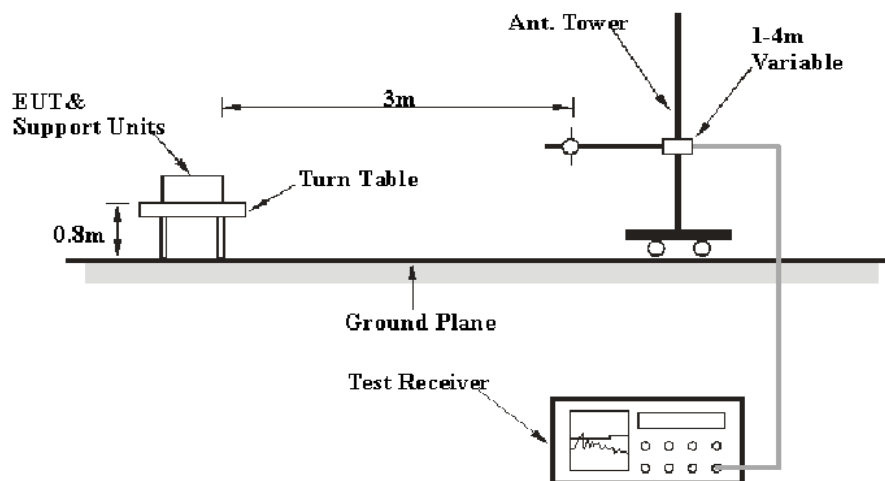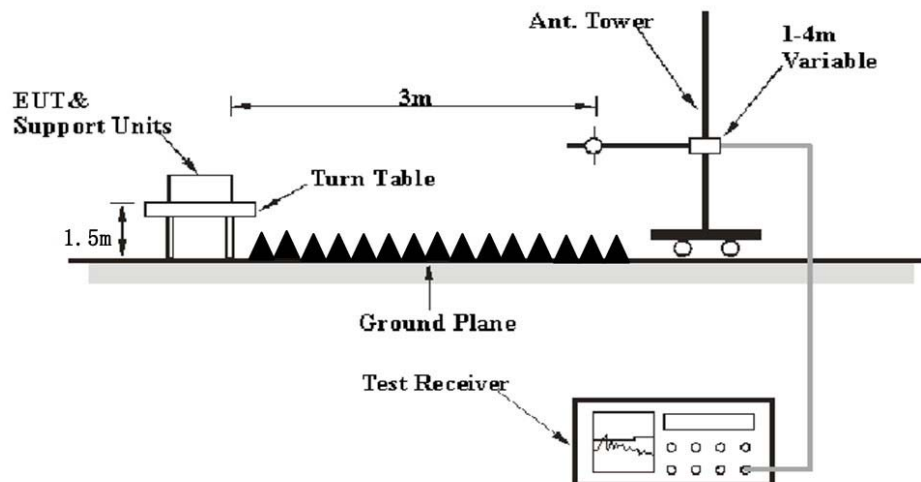EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	28 °C
Relative Humidity:	58 %
ATM Pressure:	101.0 kPa

The testing was performed by Charlie Cha on 2020-07-06 for below 1GHz and by Leven Gan on 2020-07-02 for above 1GHz.

EUT operation mode: Transmitting


30 MHz~1 GHz: (worst case at 802.11b mode, high channel)

Power by adapter:

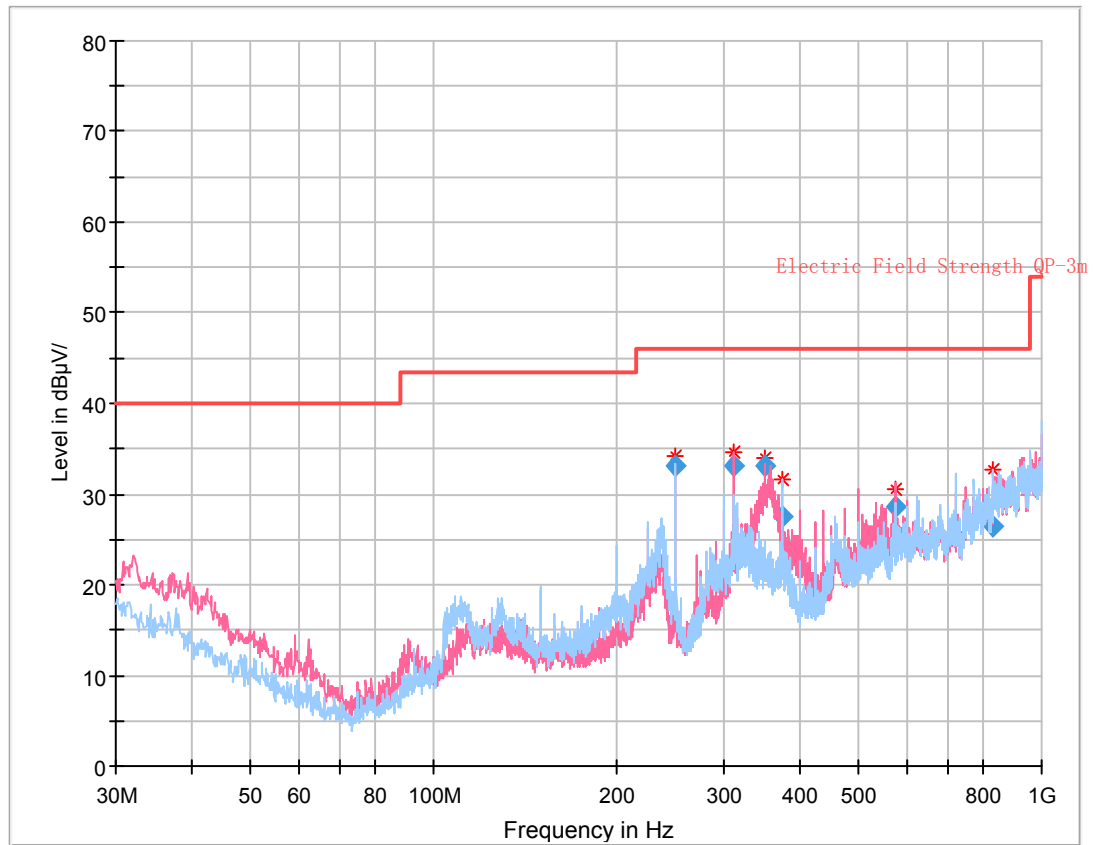

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
249.985750	33.07	101.0	H	309.0	-14.1	46.00	12.93
312.493375	33.07	182.0	V	153.0	-10.7	46.00	12.93
350.007500	33.10	132.0	V	319.0	-10.8	46.00	12.90
374.990125	27.42	103.0	H	323.0	-10.6	46.00	18.58
575.006000	28.70	104.0	V	223.0	-2.9	46.00	17.30
834.130000	26.49	341.0	H	180.0	2.7	46.00	19.51

Power by POE:

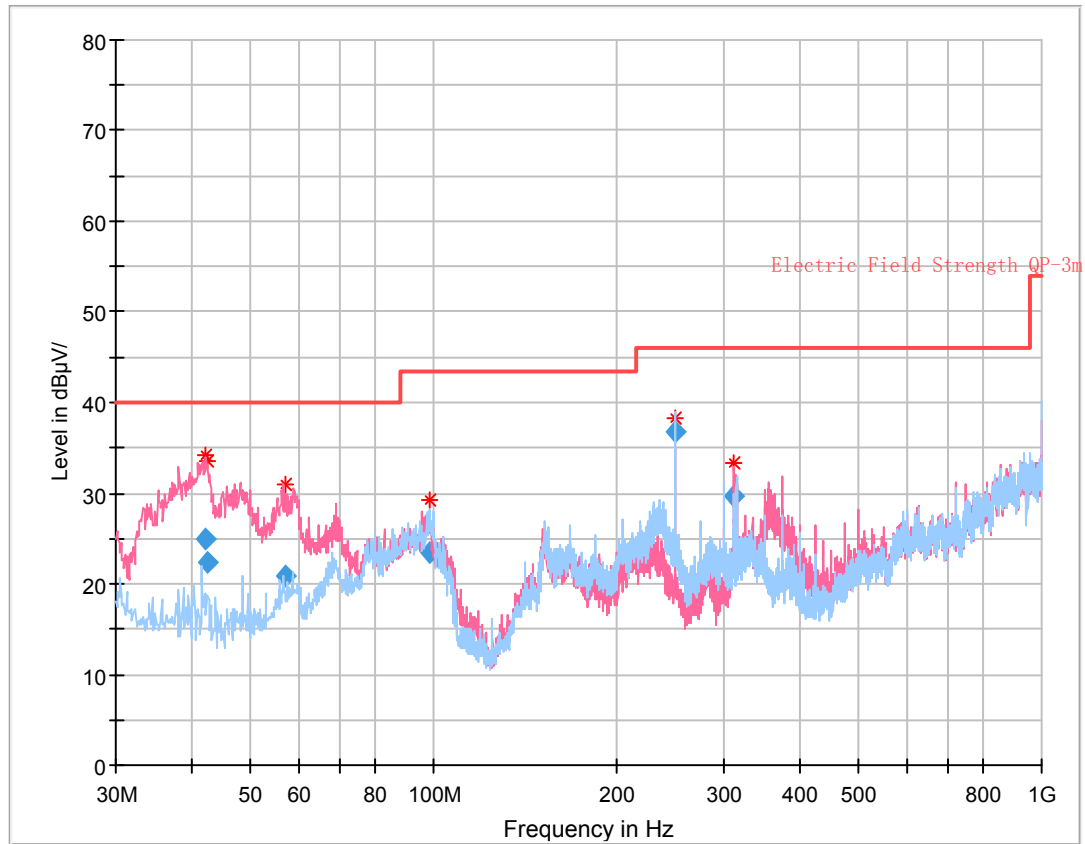

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
42.017500	24.99	238.0	V	303.0	-15.2	40.00	15.01
42.581625	22.40	111.0	V	152.0	-15.6	40.00	17.60
57.094250	20.91	284.0	V	38.0	-20.0	40.00	19.09
98.341250	23.52	152.0	H	271.0	-17.5	43.50	19.98
249.997000	36.77	126.0	H	90.0	-14.1	46.00	9.23
312.523750	29.61	169.0	V	155.0	-10.7	46.00	16.39

1 GHz-25 GHz (Wi-Fi):**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.61	29.21	PK	297	1.4	H	31.87	61.08	74	12.92
2389.61	13.70	Ave.	297	1.4	H	31.87	45.57	54	8.43
2484.21	28.41	PK	263	1.1	H	32.13	60.54	74	13.46
2484.21	13.56	Ave.	263	1.1	H	32.13	45.69	54	8.31
4824.00	46.60	PK	5	1.4	H	6.28	52.88	74	21.12
4824.00	40.80	Ave.	5	1.4	H	6.28	47.08	54	6.92
Middle Channel (2442MHz)									
4884.00	45.89	PK	358	1.8	H	6.76	52.65	74	21.35
4884.00	39.12	Ave.	358	1.8	H	6.76	45.88	54	8.12
High Channel (2472 MHz)									
2388.64	28.24	PK	99	1.6	H	31.87	60.11	74	13.89
2388.64	13.58	Ave.	99	1.6	H	31.87	45.45	54	8.55
2483.65	31.61	PK	286	2.3	H	32.13	63.74	74	10.26
2483.65	15.26	Ave.	286	2.3	H	32.13	47.39	54	6.61
4944.00	45.81	PK	274	1.4	H	6.76	52.57	74	21.43
4944.00	38.74	Ave.	274	1.4	H	6.76	45.50	54	8.50

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.11	28.66	PK	134	1.4	H	31.87	60.53	74	13.47
2389.11	13.73	Ave.	134	1.4	H	31.87	45.60	54	8.40
2484.39	28.11	PK	225	2.0	H	32.13	60.24	74	13.76
2484.39	13.58	Ave.	225	2.0	H	32.13	45.71	54	8.29
4824.00	43.74	PK	151	1.3	H	6.28	50.02	74	23.98
4824.00	29.05	Ave.	151	1.3	H	6.28	35.33	54	18.67
Middle Channel (2442MHz)									
4884.00	43.24	PK	180	1.4	H	6.76	50.00	74	24.00
4884.00	28.73	Ave.	180	1.4	H	6.76	35.49	54	18.51
High Channel (2472 MHz)									
2388.61	28.33	PK	346	2.2	H	31.87	60.20	74	13.80
2388.61	13.75	Ave.	346	2.2	H	31.87	45.62	54	8.38
2483.56	37.78	PK	214	1.2	H	32.13	69.91	74	4.09
2483.56	16.42	Ave.	214	1.2	H	32.13	48.55	54	5.45
4944.00	42.93	PK	23	1.7	H	6.76	49.69	74	24.31
4944.00	28.30	Ave.	23	1.7	H	6.76	35.06	54	18.94

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.94	32.97	PK	122	1.7	H	31.87	64.84	74	9.16
2389.94	17.26	Ave.	122	1.7	H	31.87	49.13	54	4.87
2484.57	28.04	PK	153	1.4	H	32.13	60.17	74	13.83
2484.57	13.55	Ave.	153	1.4	H	32.13	45.68	54	8.32
4824.00	43.10	PK	296	2.0	H	6.28	49.38	74	24.62
4824.00	28.95	Ave.	296	2.0	H	6.28	35.23	54	18.77
Middle Channel (2442MHz)									
4884.00	42.84	PK	88	2.2	H	6.76	49.60	74	24.40
4884.00	28.66	Ave.	88	2.2	H	6.76	35.42	54	18.58
High Channel (2472 MHz)									
2389.41	28.20	PK	78	1.0	H	31.87	60.07	74	13.93
2389.41	13.62	Ave.	78	1.0	H	31.87	45.49	54	8.51
2483.53	38.44	PK	57	1.7	H	32.13	70.57	74	3.43
2483.53	16.77	Ave.	57	1.7	H	32.13	48.90	54	5.10
4944.00	42.52	PK	281	1.7	H	6.76	49.28	74	24.72
4944.00	28.45	Ave.	281	1.7	H	6.76	35.21	54	18.79

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2422 MHz)									
2389.31	31.80	PK	45	1.4	H	31.87	63.67	74	10.33
2389.31	16.24	Ave.	45	1.4	H	31.87	48.11	54	5.89
2484.33	28.51	PK	248	1.1	H	32.13	60.64	74	13.36
2484.33	13.67	Ave.	248	1.1	H	32.13	45.80	54	8.20
4844.00	42.81	PK	186	1.5	H	6.28	49.09	74	24.91
4844.00	28.56	Ave.	186	1.5	H	6.28	34.84	54	19.17
Middle Channel (2442MHz)									
4884.00	42.75	PK	304	1.9	H	6.76	49.51	74	24.49
4884.00	28.46	Ave.	304	1.9	H	6.76	35.22	54	18.78
High Channel (2462 MHz)									
2388.44	28.46	PK	124	2.3	H	31.87	60.33	74	13.67
2388.44	14.01	Ave.	124	2.3	H	31.87	45.88	54	8.12
2483.51	35.88	PK	350	1.8	H	32.13	68.01	74	5.99
2483.51	17.47	Ave.	350	1.8	H	32.13	49.60	54	4.40
4924.00	42.19	PK	21	2.0	H	6.76	48.95	74	25.05
4924.00	28.17	Ave.	21	2.0	H	6.76	34.93	54	19.07

1 GHz-25 GHz (BLE):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2388.78	28.33	PK	183	1.4	H	31.87	60.20	74	13.80
2388.78	14.17	Ave.	183	1.4	H	31.87	46.04	54	7.96
2484.41	28.04	PK	206	2.3	H	32.13	60.17	74	13.83
2484.41	14.11	Ave.	206	2.3	H	32.13	46.24	54	7.76
4804.00	43.87	PK	336	1.8	H	6.28	50.15	74	23.85
4804.00	29.74	Ave.	336	1.8	H	6.28	36.02	54	17.98
Middle Channel (2440 MHz)									
4880.00	43.72	PK	303	1.7	H	6.76	50.48	74	23.52
4880.00	29.51	Ave.	303	1.7	H	6.76	36.27	54	17.73
High Channel (2480 MHz)									
2389.14	27.90	PK	147	2.4	H	31.87	59.77	74	14.23
2389.14	14.10	Ave.	147	2.4	H	31.87	45.97	54	8.03
2484.56	28.24	PK	298	1.5	H	32.13	60.37	74	13.63
2484.56	14.14	Ave.	298	1.5	H	32.13	46.27	54	7.73
4960.00	43.61	PK	246	2.4	H	6.80	50.41	74	23.59
4960.00	29.68	Ave.	246	2.4	H	6.80	36.48	54	17.52

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

Pre-scan with Wi-Fi low channel in 802.11b mode
Horizontal

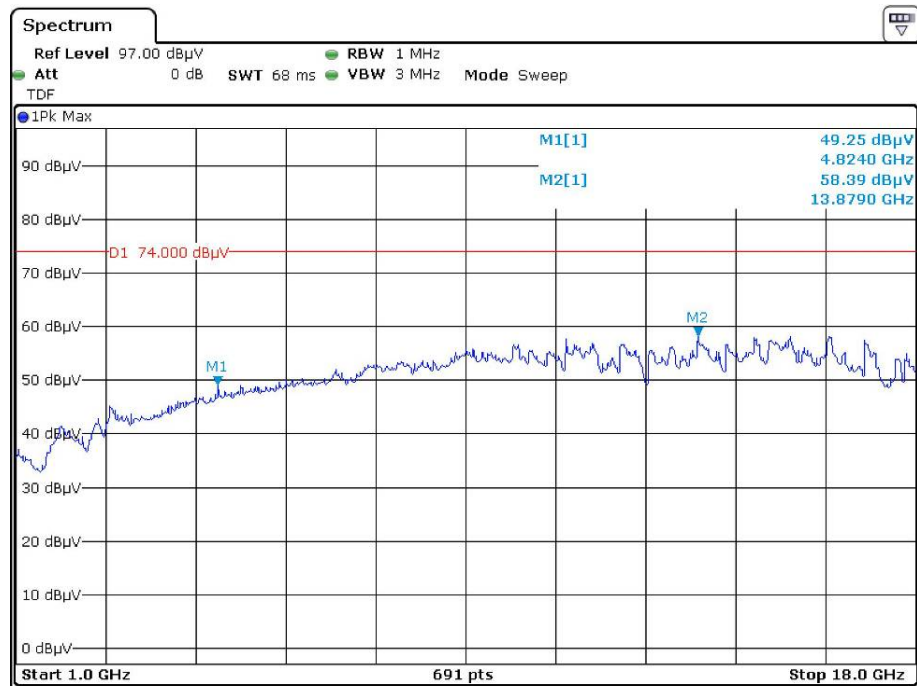


Date: 2.JUL.2020 17:16:17

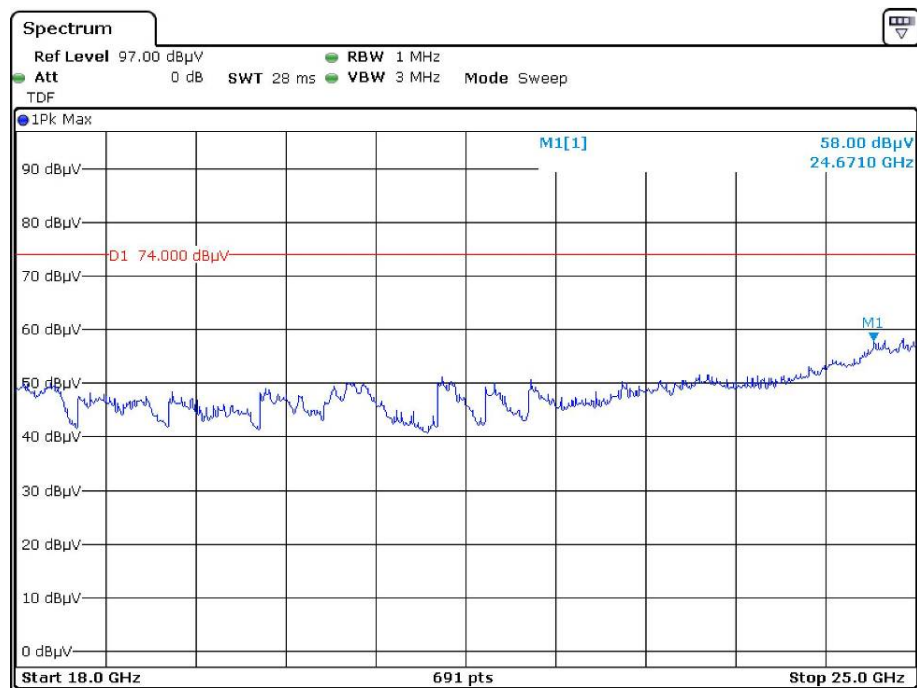


Date: 2.JUL.2020 17:34:00

Vertical

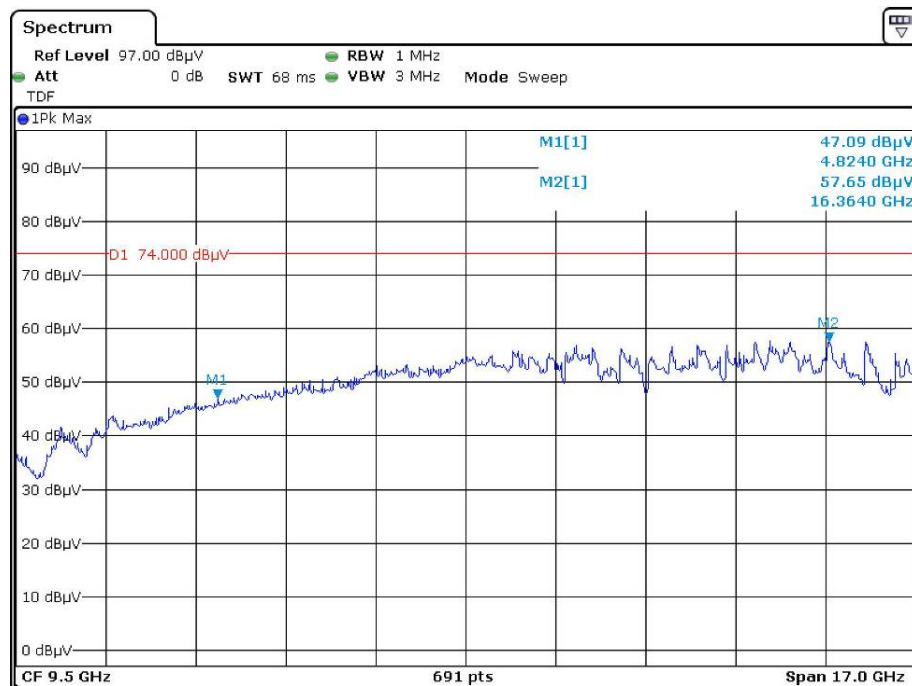


Date: 2.JUL.2020 17:29:25

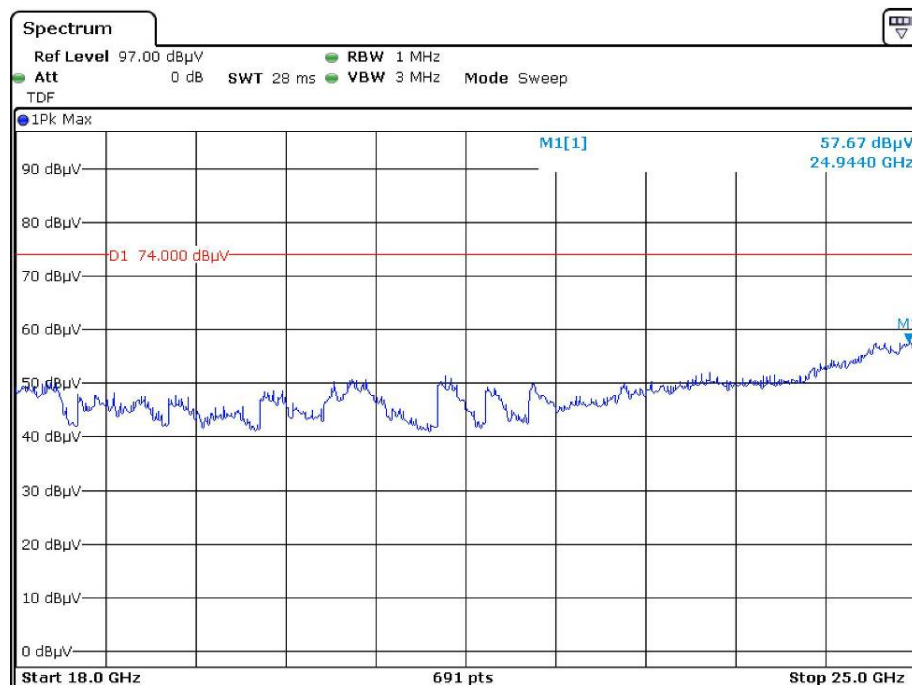


Date: 2.JUL.2020 18:15:14

Pre-scan for Average Horizontal

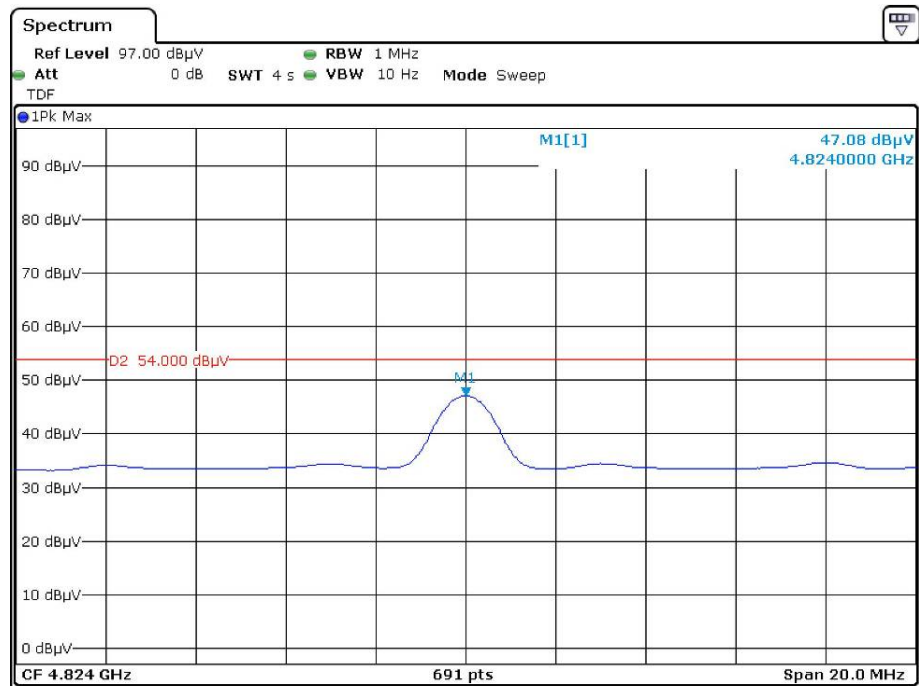


Date: 2.JUL.2020 17:24:32

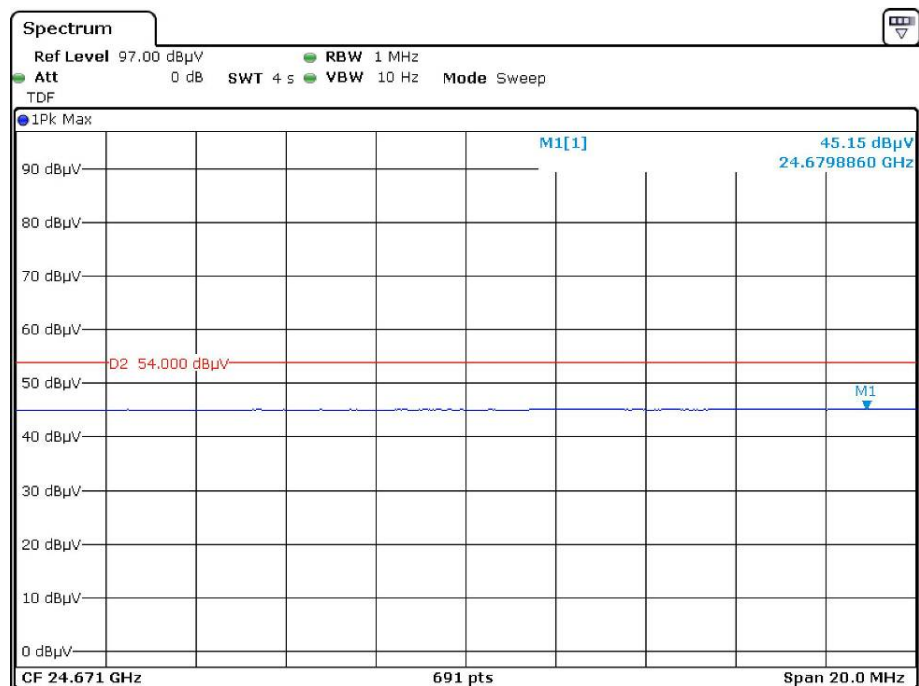


Date: 2.JUL.2020 18:11:46

Vertical

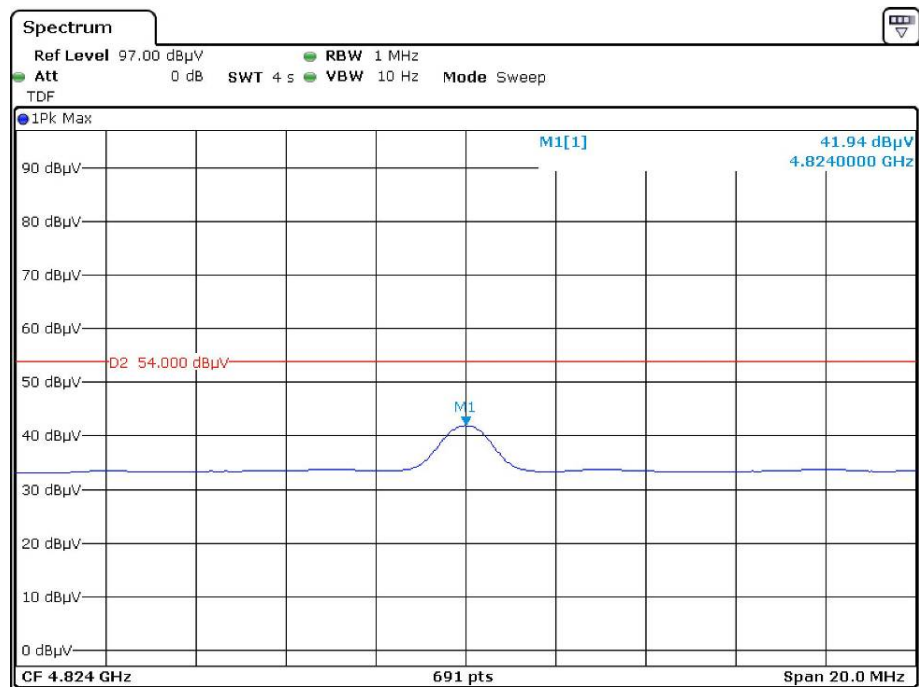

Date: 2.JUL.2020 17:33:10

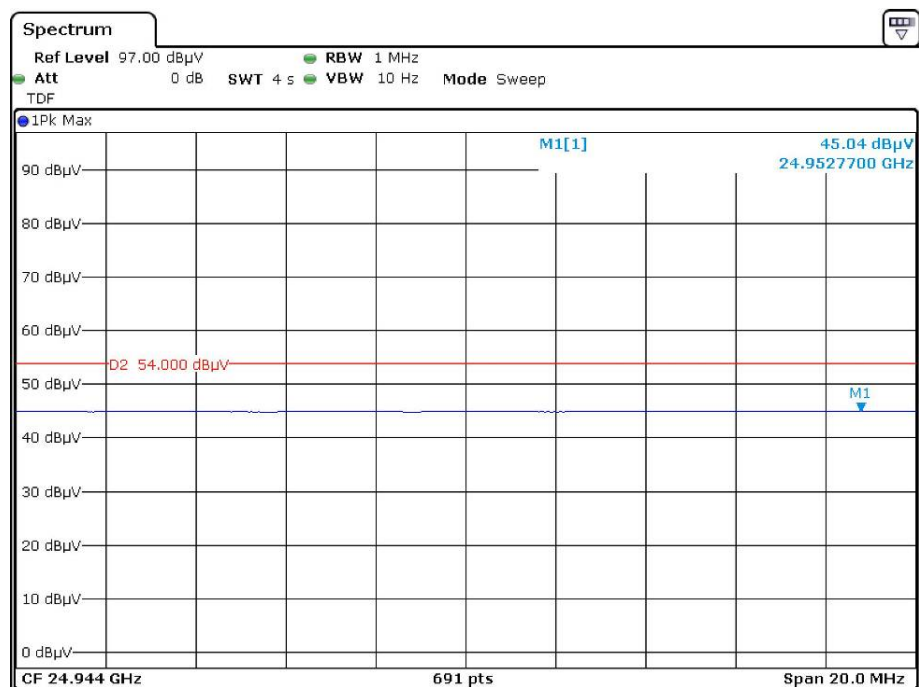


Date: 2.JUL.2020 18:18:42

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-20.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-20.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-20.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-20.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

APPENDIX Wi-Fi**AppendixA: DTS Bandwidth
Test Result**


TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.160	0.5	PASS
		2442	10.160	0.5	PASS
		2472	10.160	0.5	PASS
11G	Ant1	2412	16.400	0.5	PASS
		2442	16.400	0.5	PASS
		2472	16.400	0.5	PASS
11N20SISO	Ant1	2412	17.160	0.5	PASS
		2442	17.360	0.5	PASS
		2472	16.960	0.5	PASS
11N40SISO	Ant1	2422	35.840	0.5	PASS
		2442	35.840	0.5	PASS
		2462	35.840	0.5	PASS

Test Graphs


11B_Ant1_2412

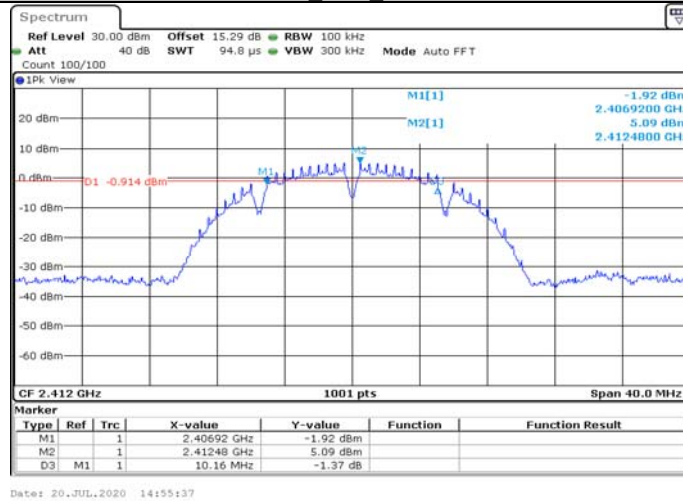


11B_Ant1_2442

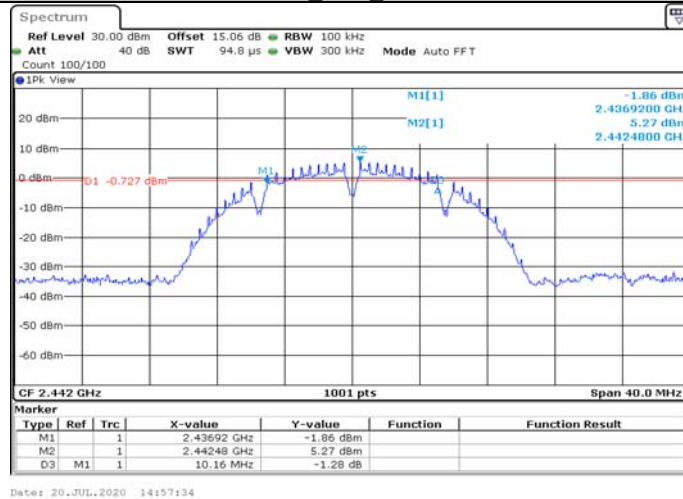

11B_Ant1_2472

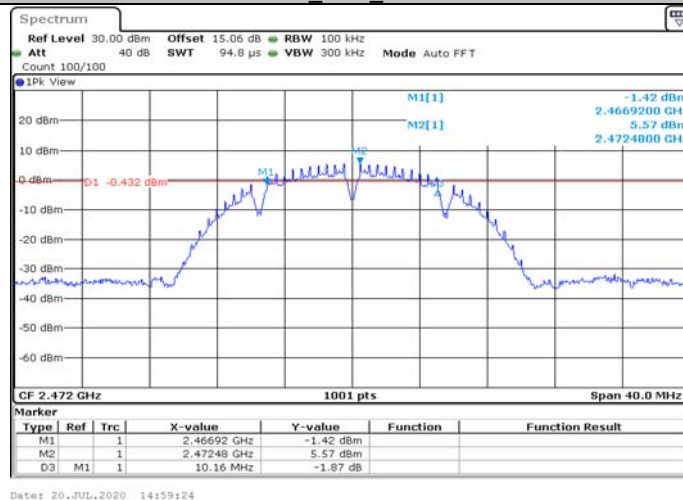


11G_Ant1_2412

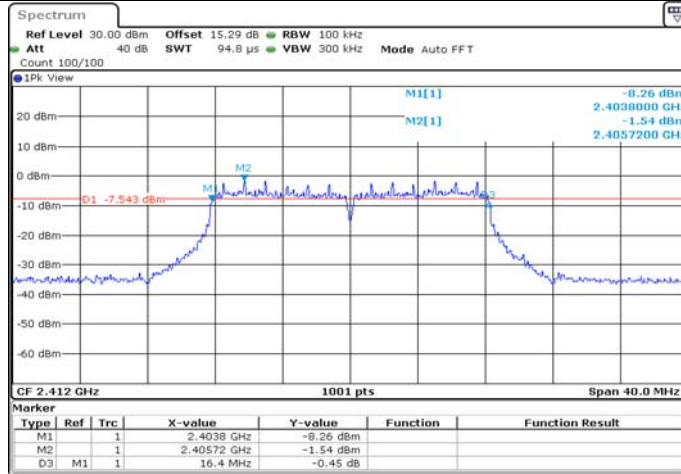


Date: 20.JUL.2020 15:06:37

11G_Ant1_2442

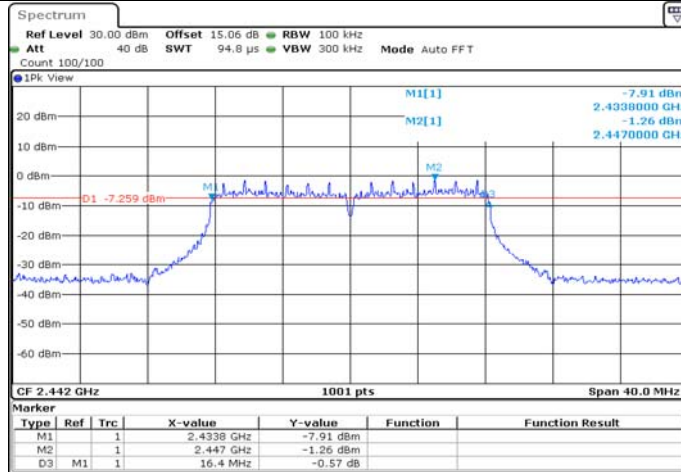



Date: 20.JUL.2020 15:09:03

11G_Ant1_2472

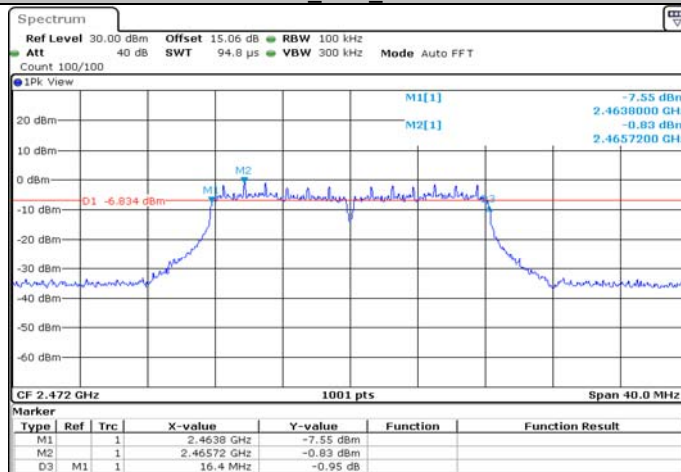

Date: 20.JUL.2020 15:11:40

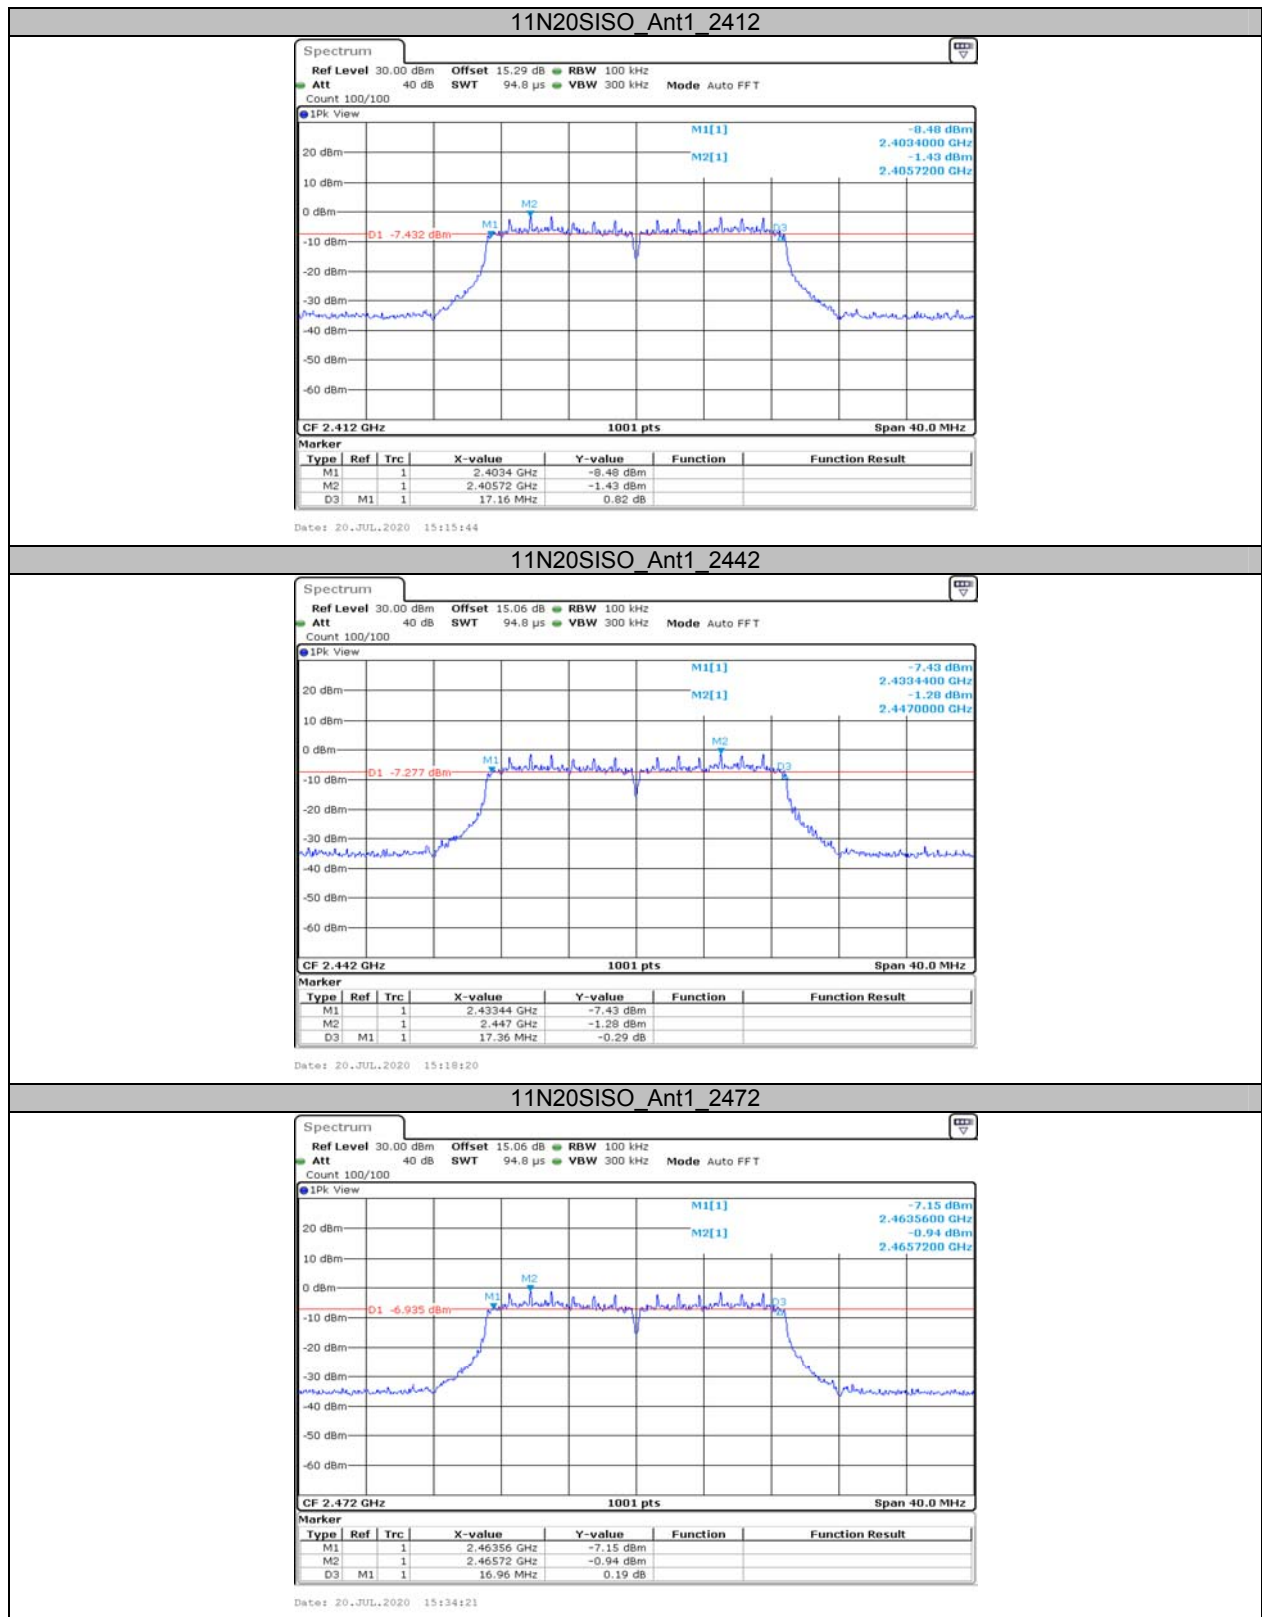

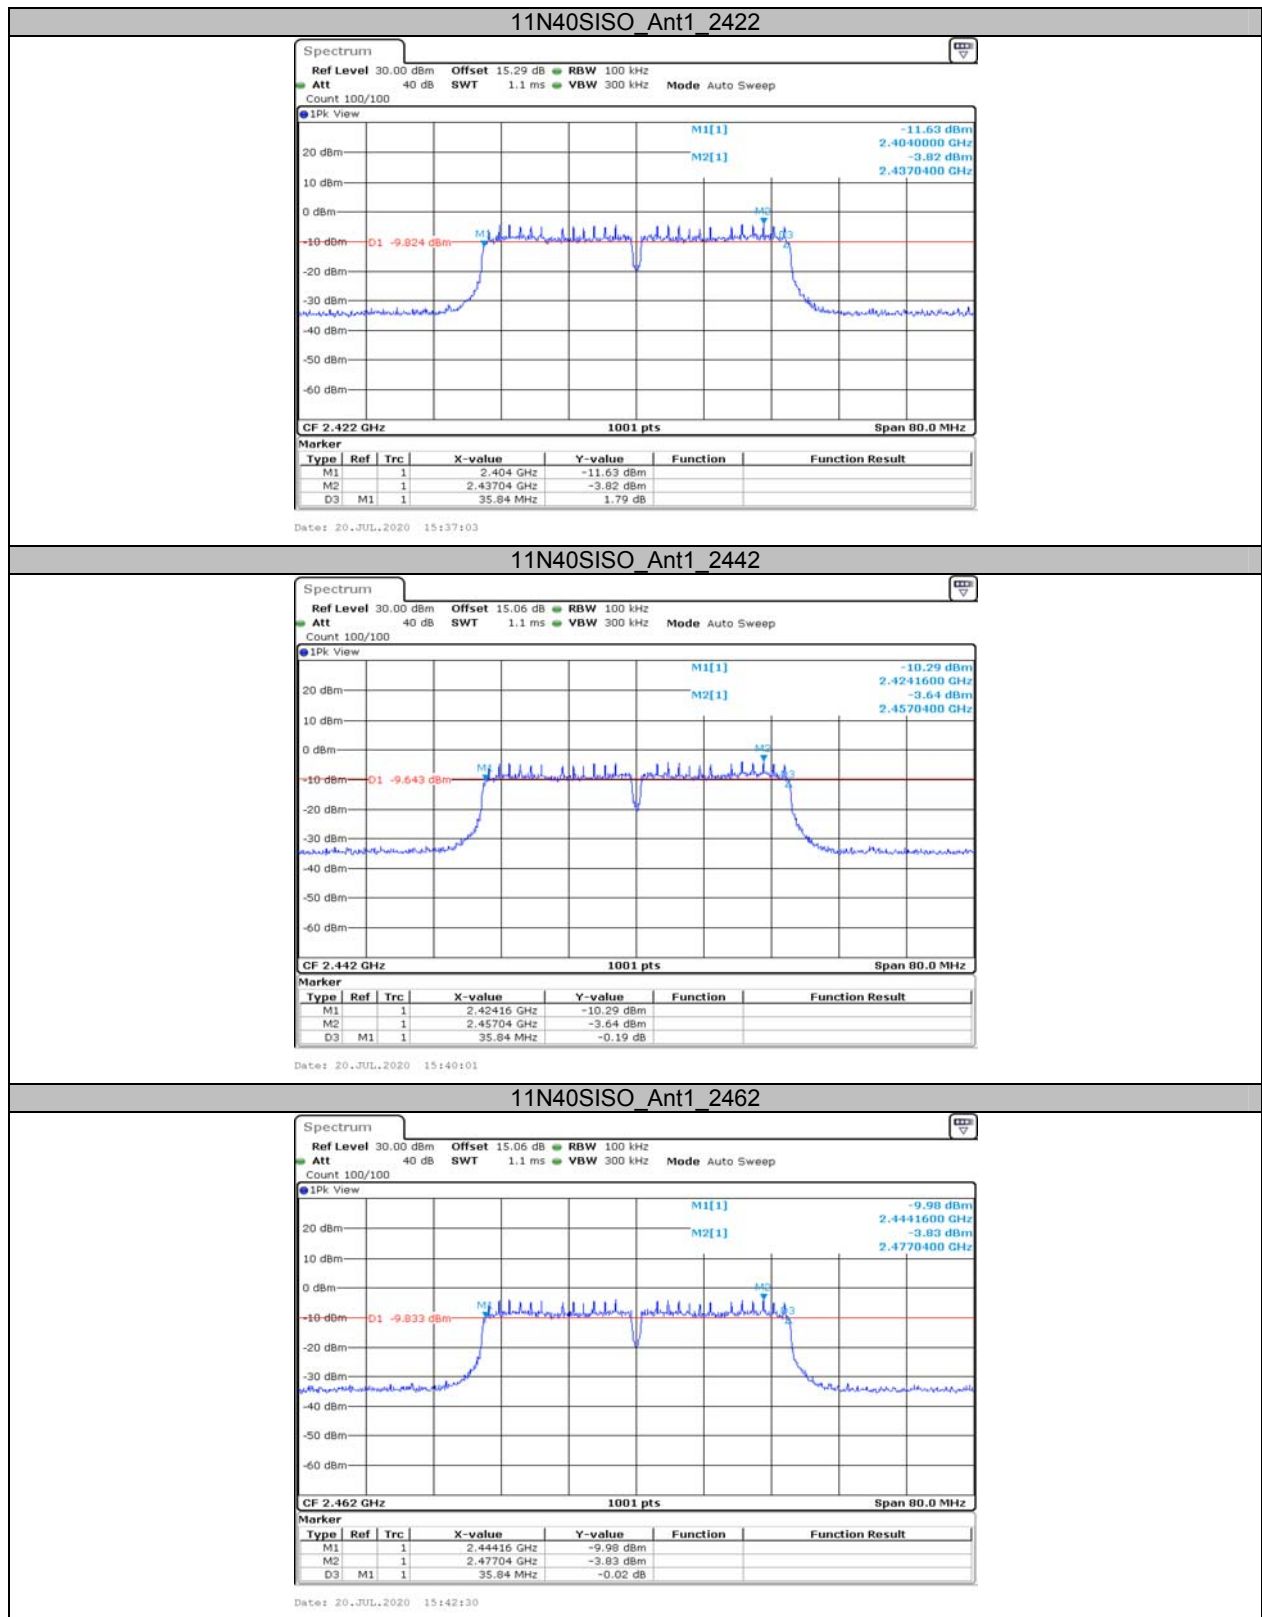

AppendixC: Maximum conducted output power (AV)**Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	13.42	<=30	PASS
		2442	13.71	<=30	PASS
		2472	13.81	<=30	PASS
11G	Ant1	2412	8.22	<=30	PASS
		2442	9.14	<=30	PASS
		2472	9.11	<=30	PASS
11N20SISO	Ant1	2412	8.42	<=30	PASS
		2442	8.92	<=30	PASS
		2472	9.07	<=30	PASS
11N40SISO	Ant1	2422	8.92	<=30	PASS
		2442	8.99	<=30	PASS
		2462	9.22	<=30	PASS


AppendixC: Maximum conducted output power(PK)**Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	14.77	<=30	PASS
		2442	15.13	<=30	PASS
		2472	15.14	<=30	PASS
11G	Ant1	2412	13.58	<=30	PASS
		2442	13.51	<=30	PASS
		2472	13.98	<=30	PASS
11N20SISO	Ant1	2412	13.41	<=30	PASS
		2442	13.79	<=30	PASS
		2472	13.40	<=30	PASS
11N40SISO	Ant1	2422	12.43	<=30	PASS
		2442	12.53	<=30	PASS
		2462	12.38	<=30	PASS


**AppendixD: Maximum power spectral density
Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-8.87	<=8	PASS
		2442	-8.25	<=8	PASS
		2472	-7.64	<=8	PASS
11G	Ant1	2412	-16.1	<=8	PASS
		2442	-14.79	<=8	PASS
		2472	-13.41	<=8	PASS
11N20SISO	Ant1	2412	-15.92	<=8	PASS
		2442	-16.09	<=8	PASS
		2472	-14.99	<=8	PASS
11N40SISO	Ant1	2422	-19.19	<=8	PASS
		2442	-18.76	<=8	PASS
		2462	-16.6	<=8	PASS


Test Graphs

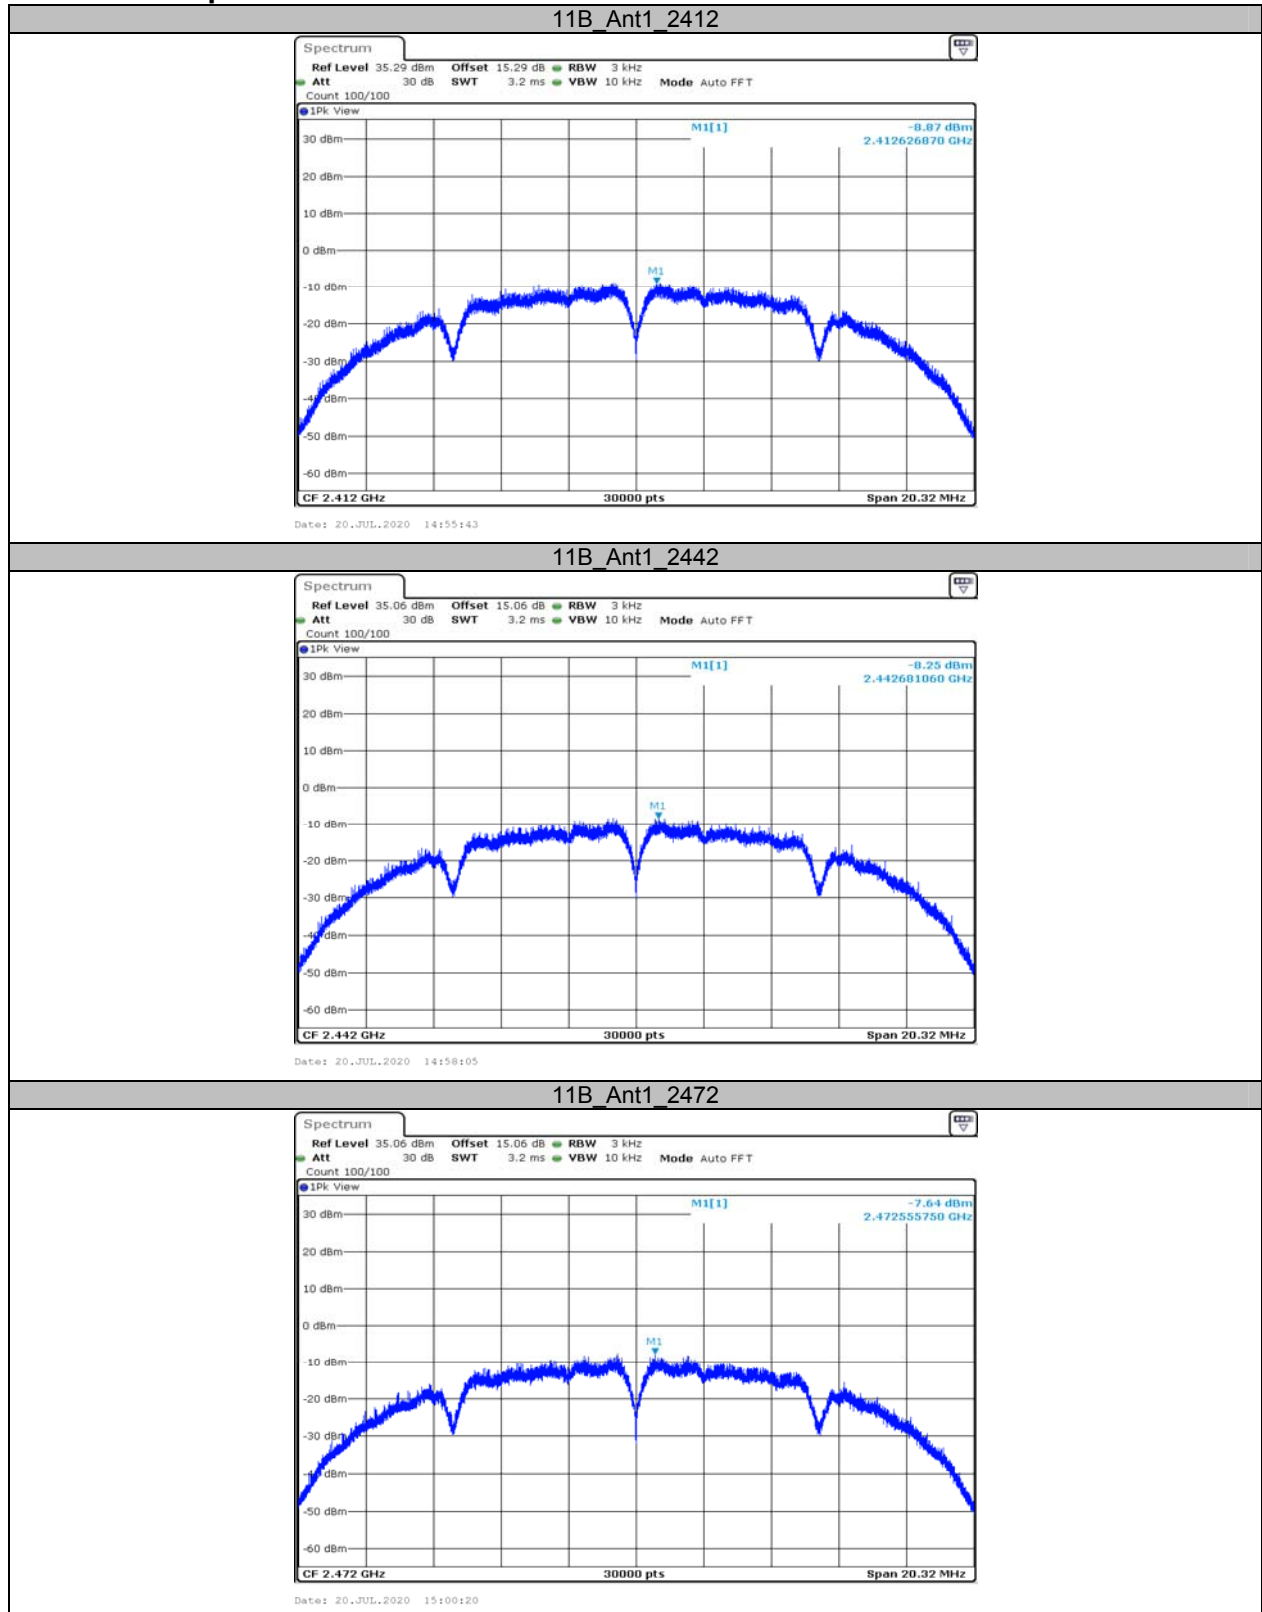


11G_Ant1_2412

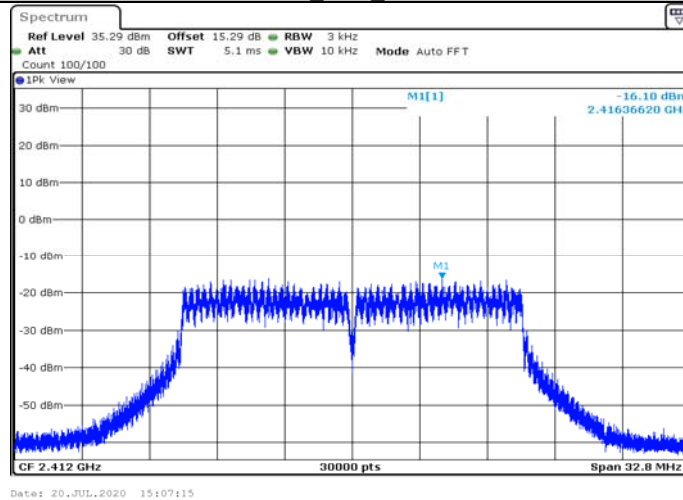



11G_Ant1_2442

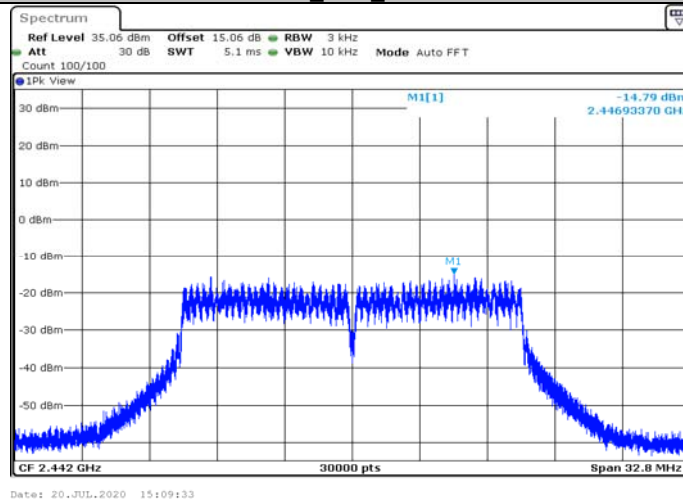

11G_Ant1_2472

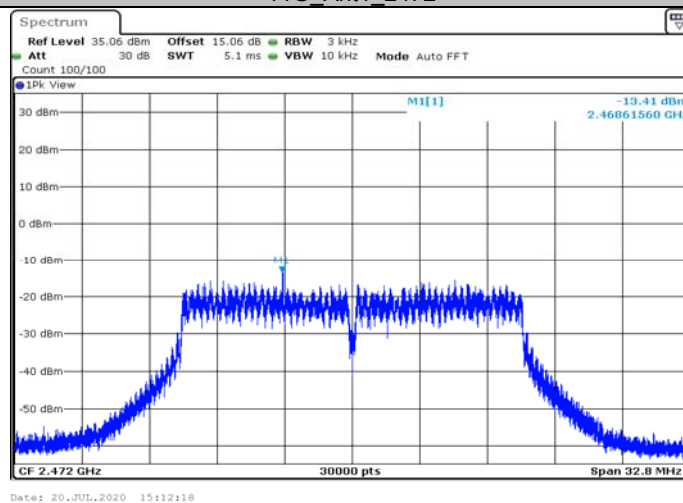


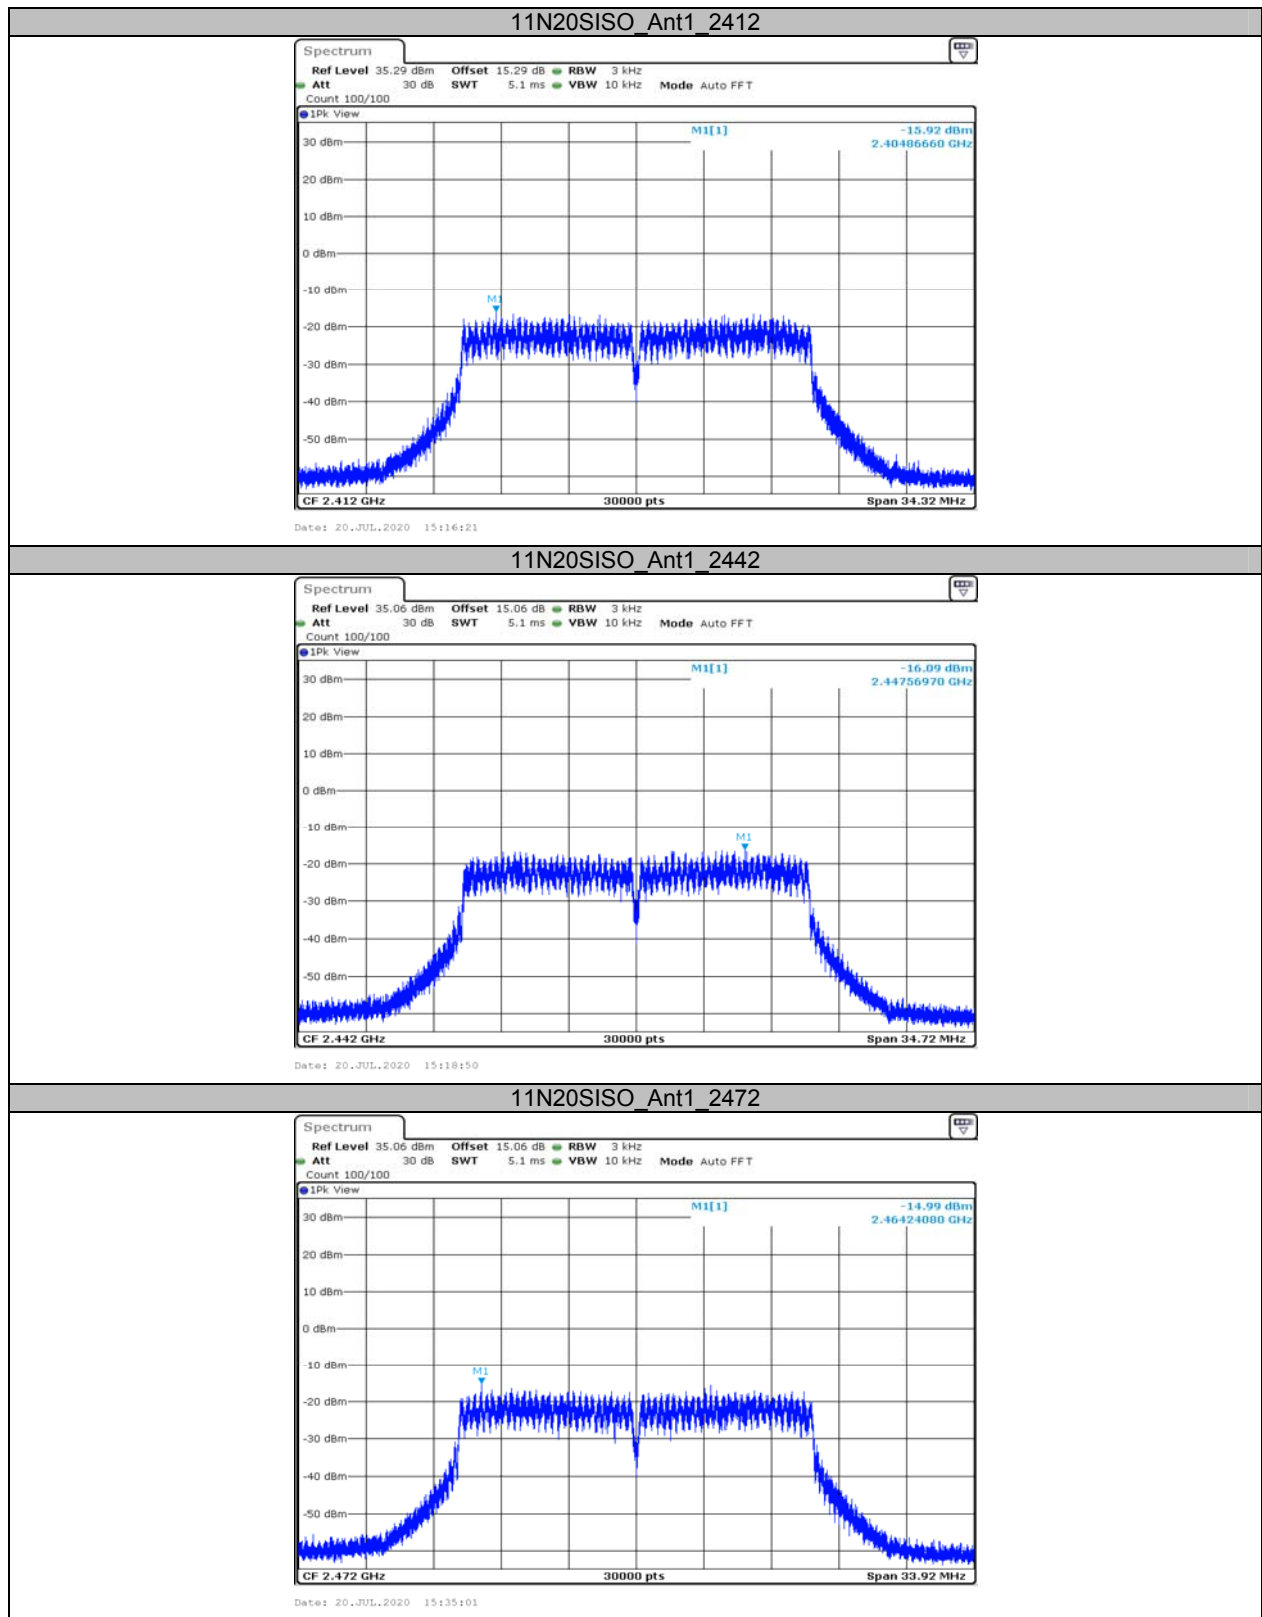

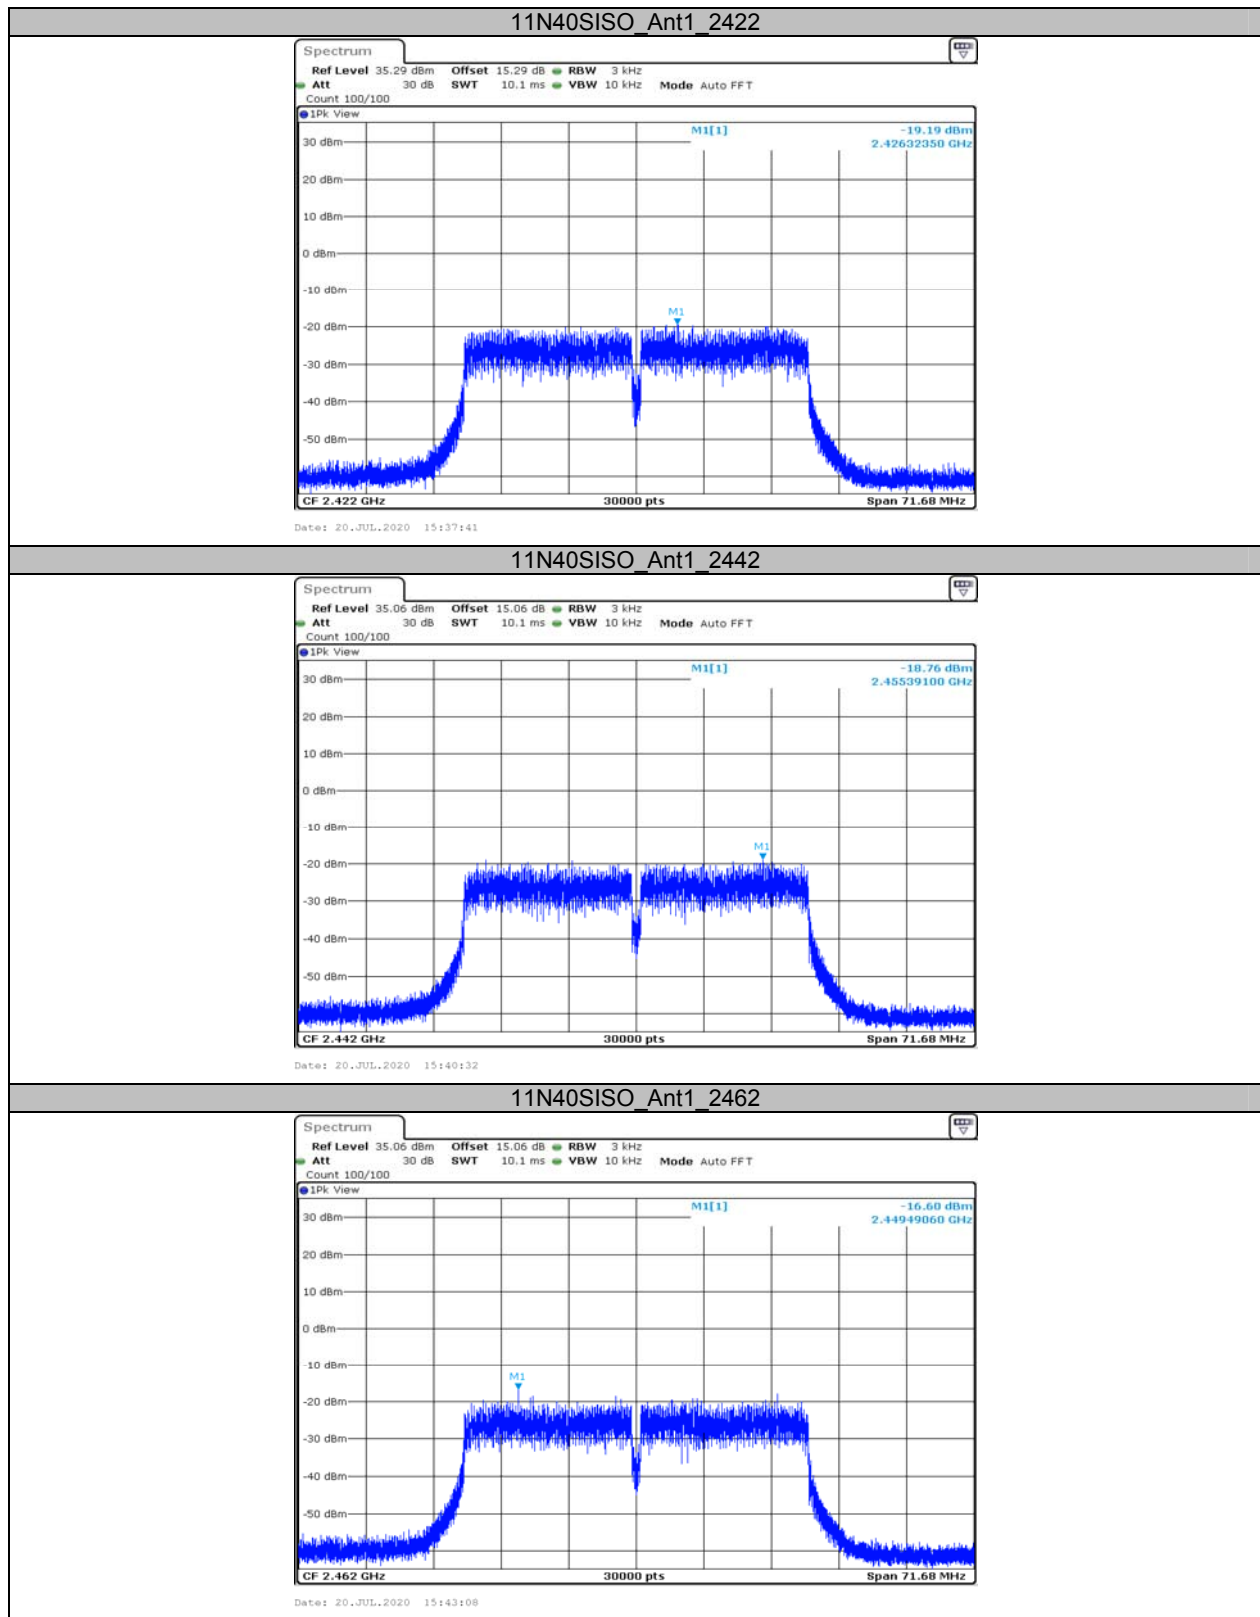

Appendix E: Band edge measurements Test Graphs


11B_Ant1_Low_2412

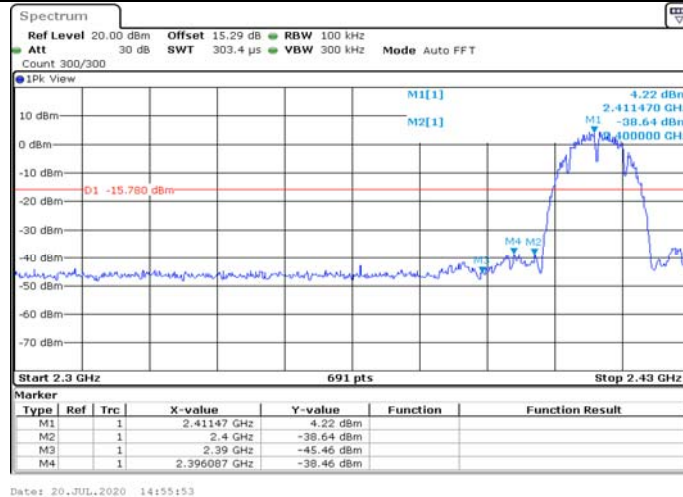


11B_Ant1_High_2472



11G_Ant1_Low_2412

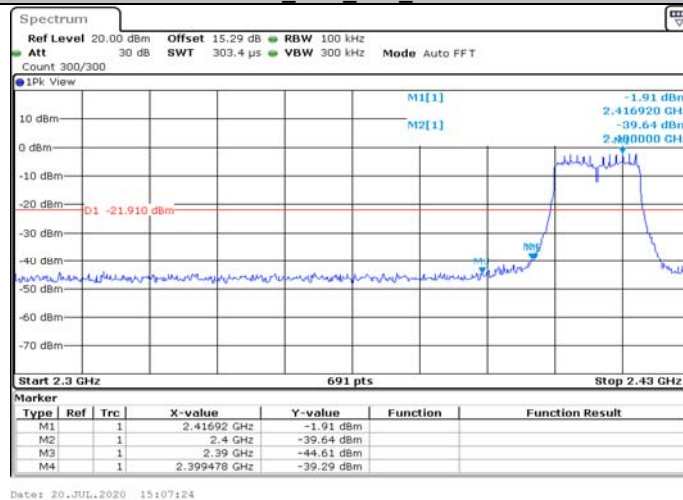

11G Ant1 High 2472

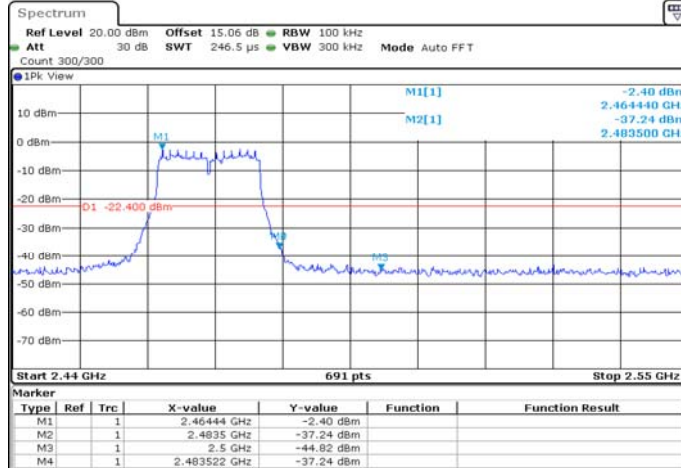


Date: 20_JUL_2020 15:12:27

11N20SISO Ant1 Low 2412




Date: 20_JUL_2020 15:16:31

11N20SISO Ant1 High 2472

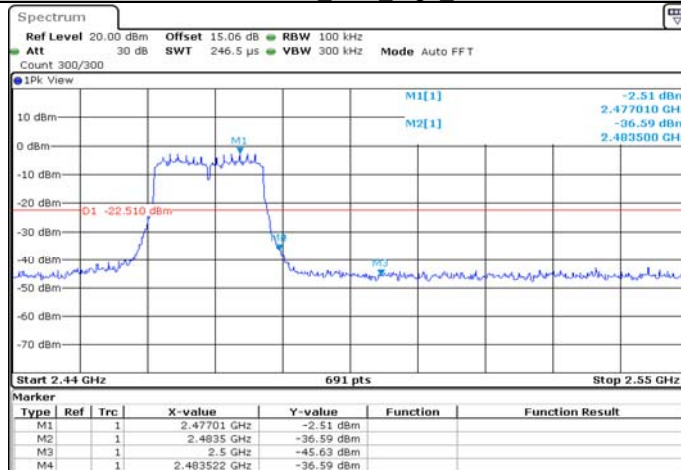

Date: 20_JUL_2020 15:35:10

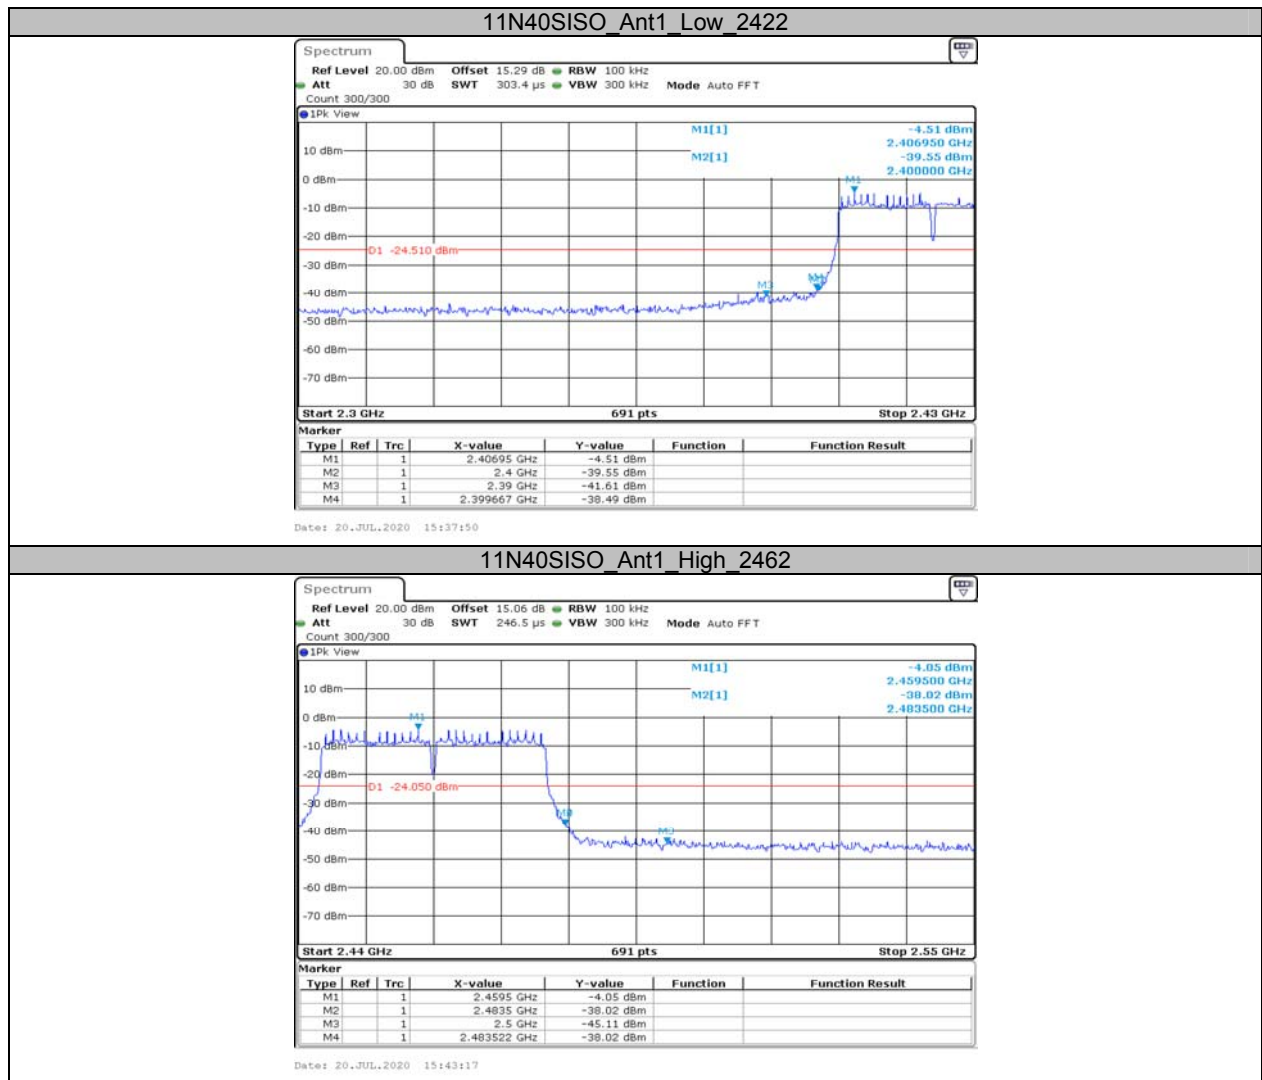


**AppendixG: DutyCycle
Test Result**

TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2442	12.40	12.52	99.04
11G	Ant1	2442	2.04	2.22	91.89
11N20SISO	Ant1	2442	1.91	2.01	95.02
11N40SISO	Ant1	2442	0.93	1.01	92.08


Test Graphs

11B_Ant1_2442

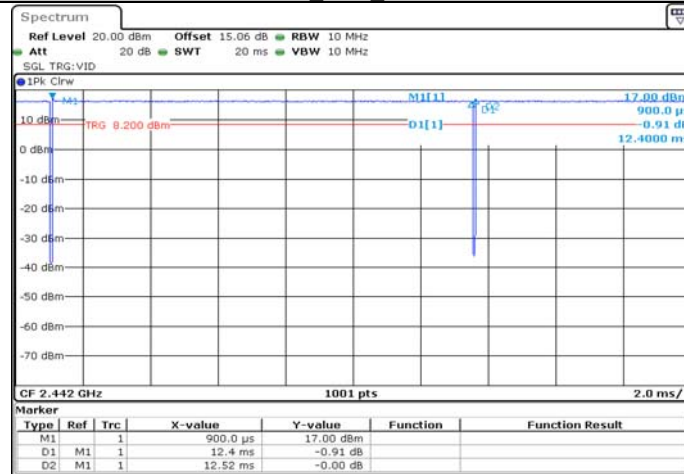


Date: 20.JUL.2020 14:57:14

11G_Ant1_2442

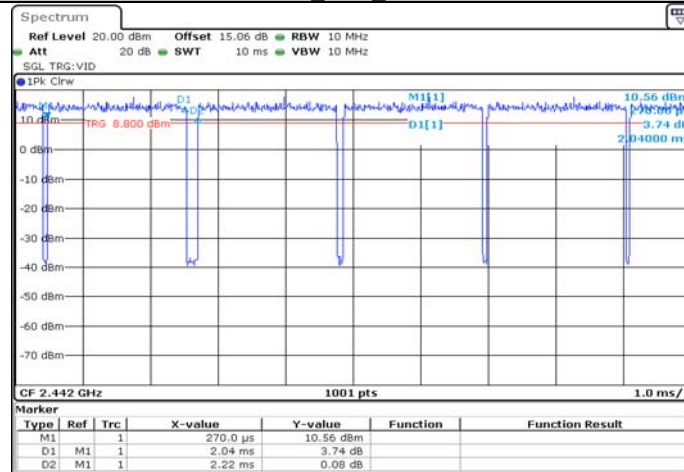


Date: 20.JUL.2020 15:08:42

11N20SISO_Ant1_2442

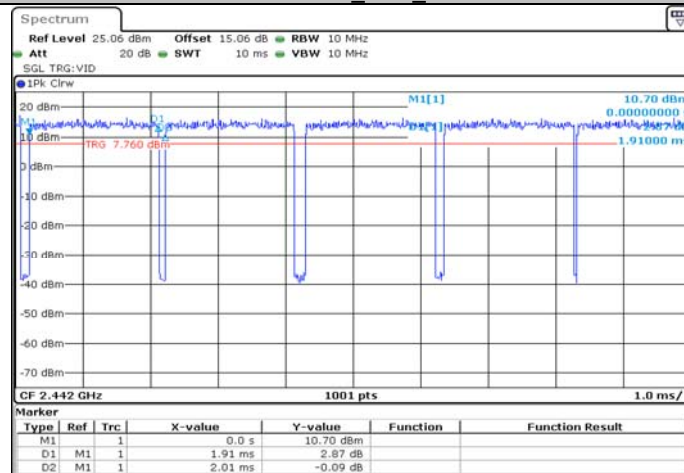


Date: 20.JUL.2020 15:18:00

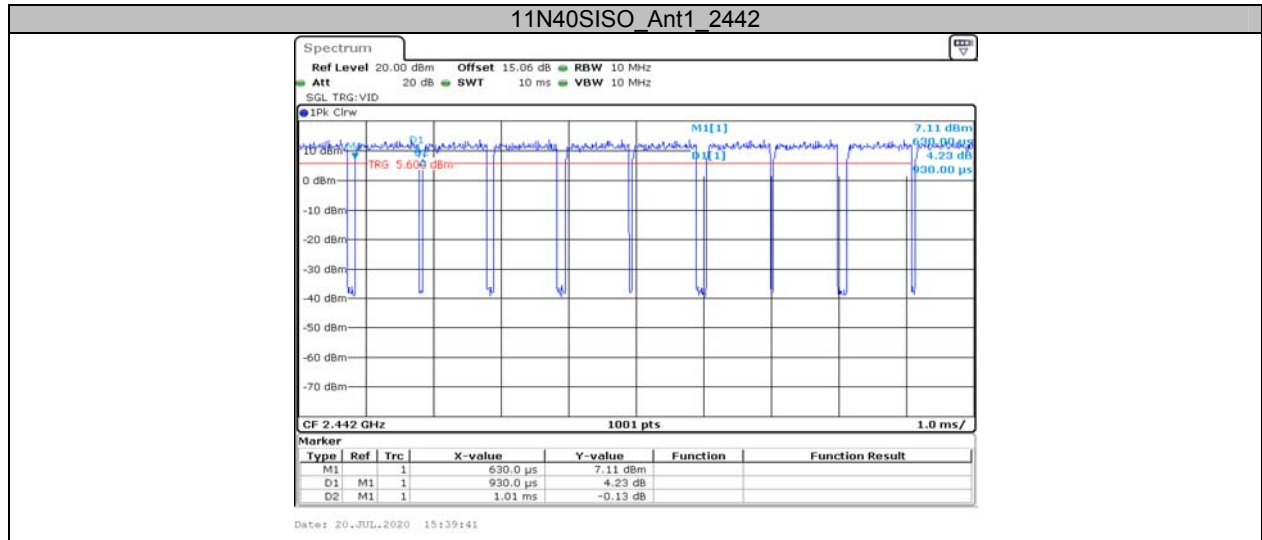

APPENDIX BLE**AppendixA: DTS Bandwidth****Test Result**

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.704	0.5	PASS
		2440	0.724	0.5	PASS
		2480	0.728	0.5	PASS

Test Graphs

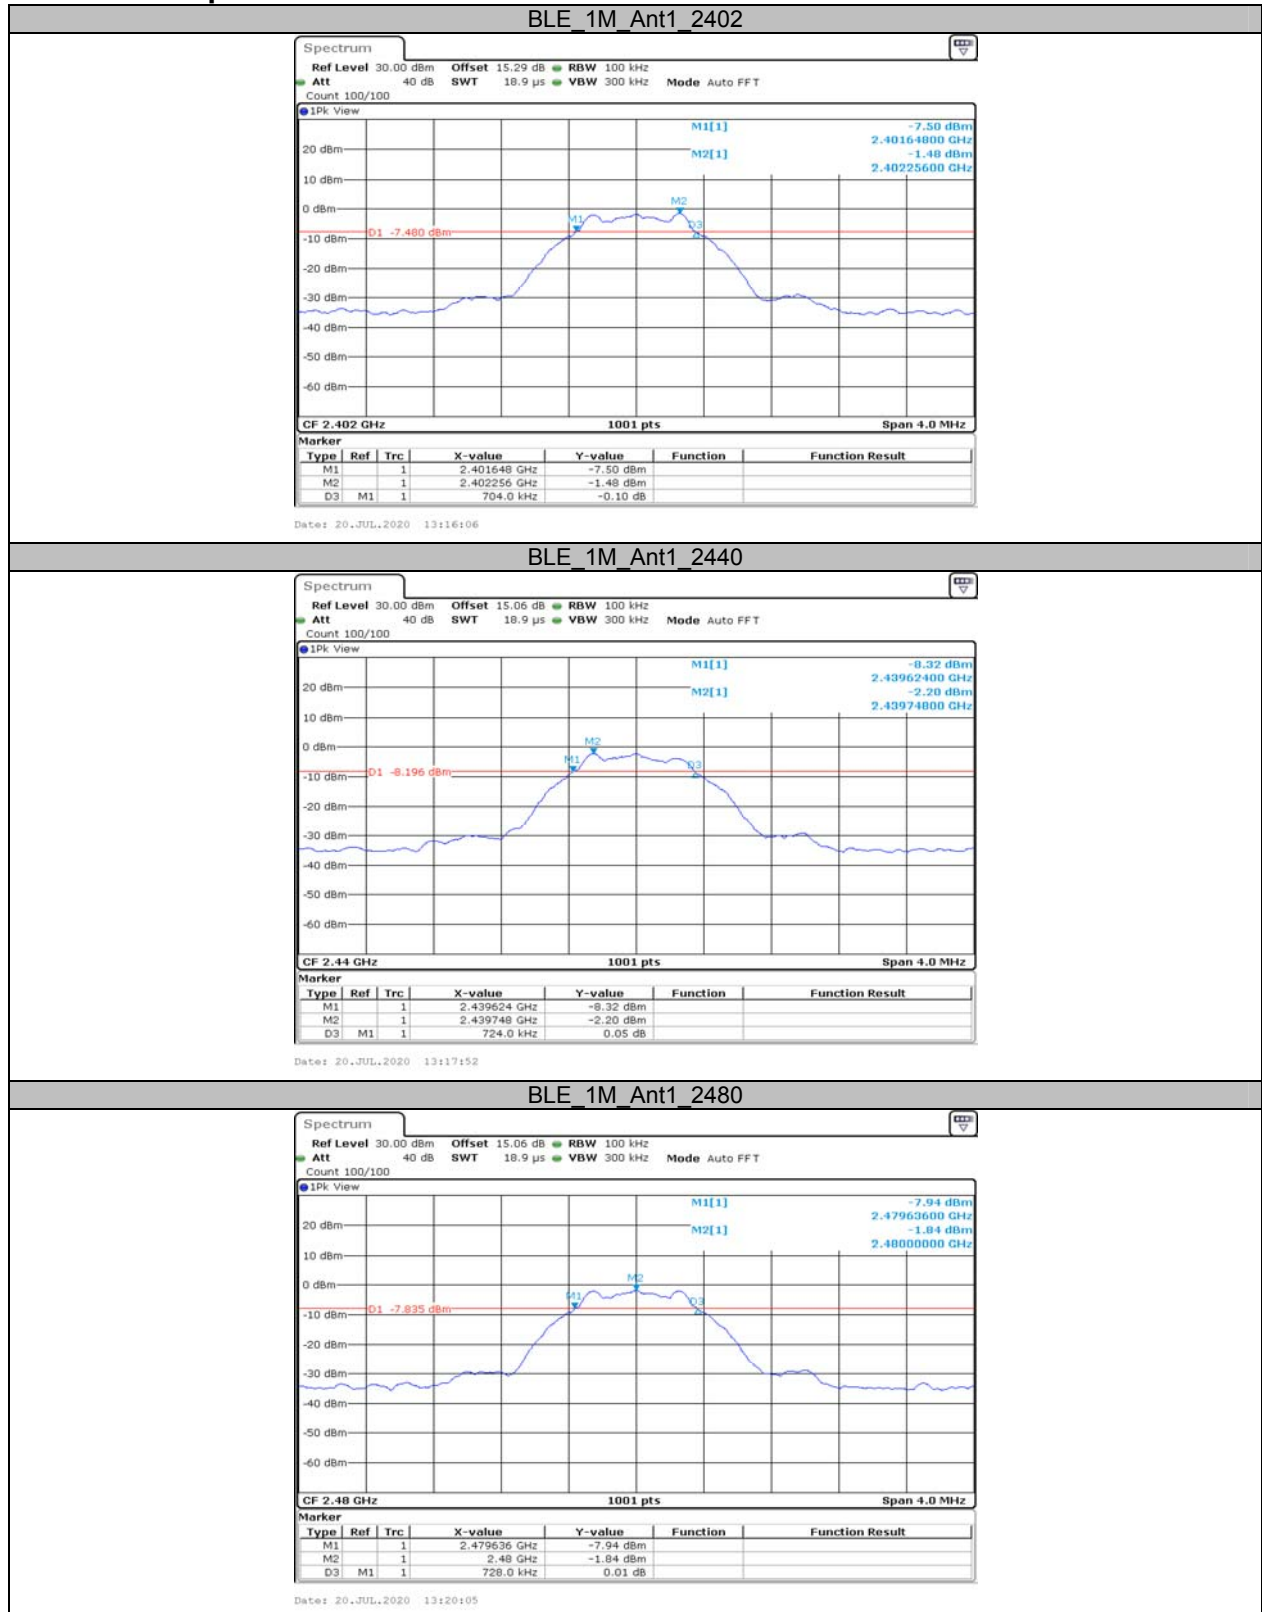

AppendixC: Maximum conducted Peak output power


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-1.68	<=30	PASS
		2440	-1.68	<=30	PASS
		2480	-1.24	<=30	PASS


**AppendixD: Maximum power spectral density
Test Result**

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-16.45	<=8	PASS
		2440	-17.57	<=8	PASS
		2480	-15.89	<=8	PASS

Test Graphs

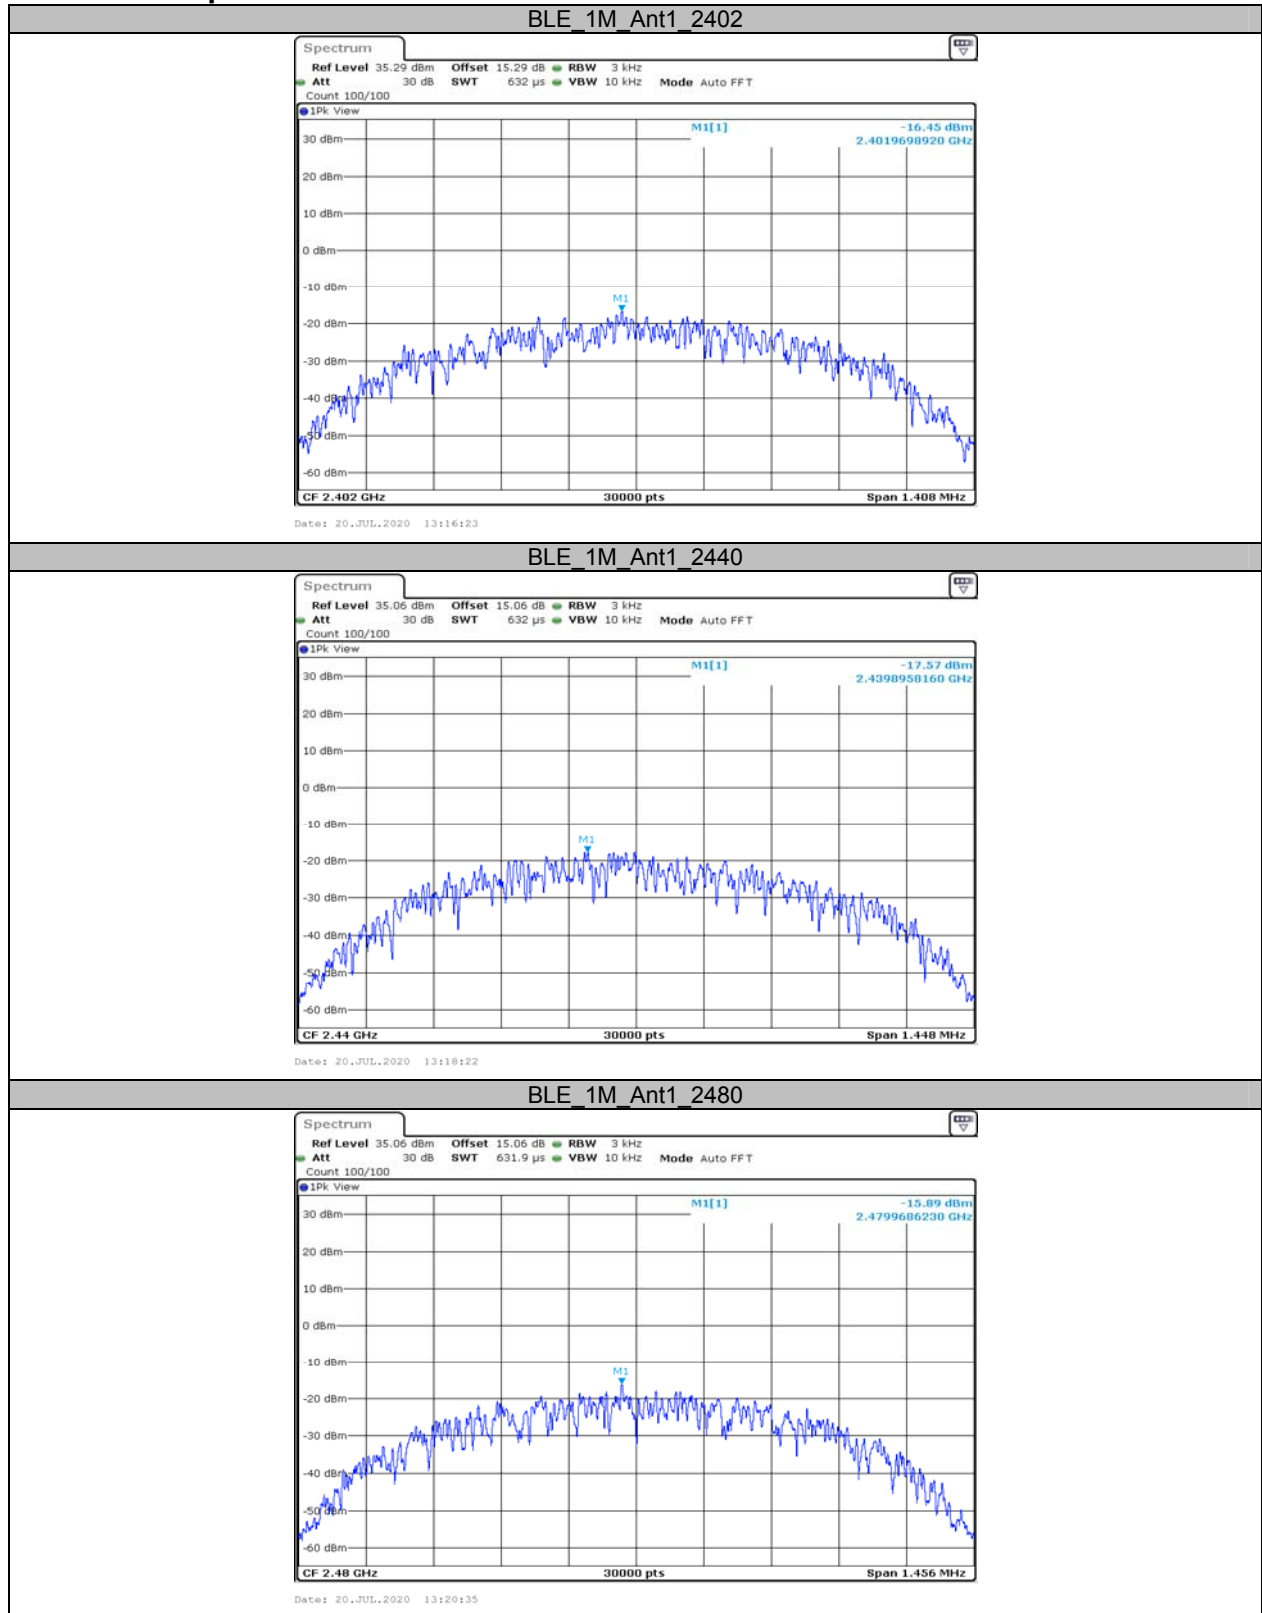


Appendix E: Band edge measurements Test Graphs

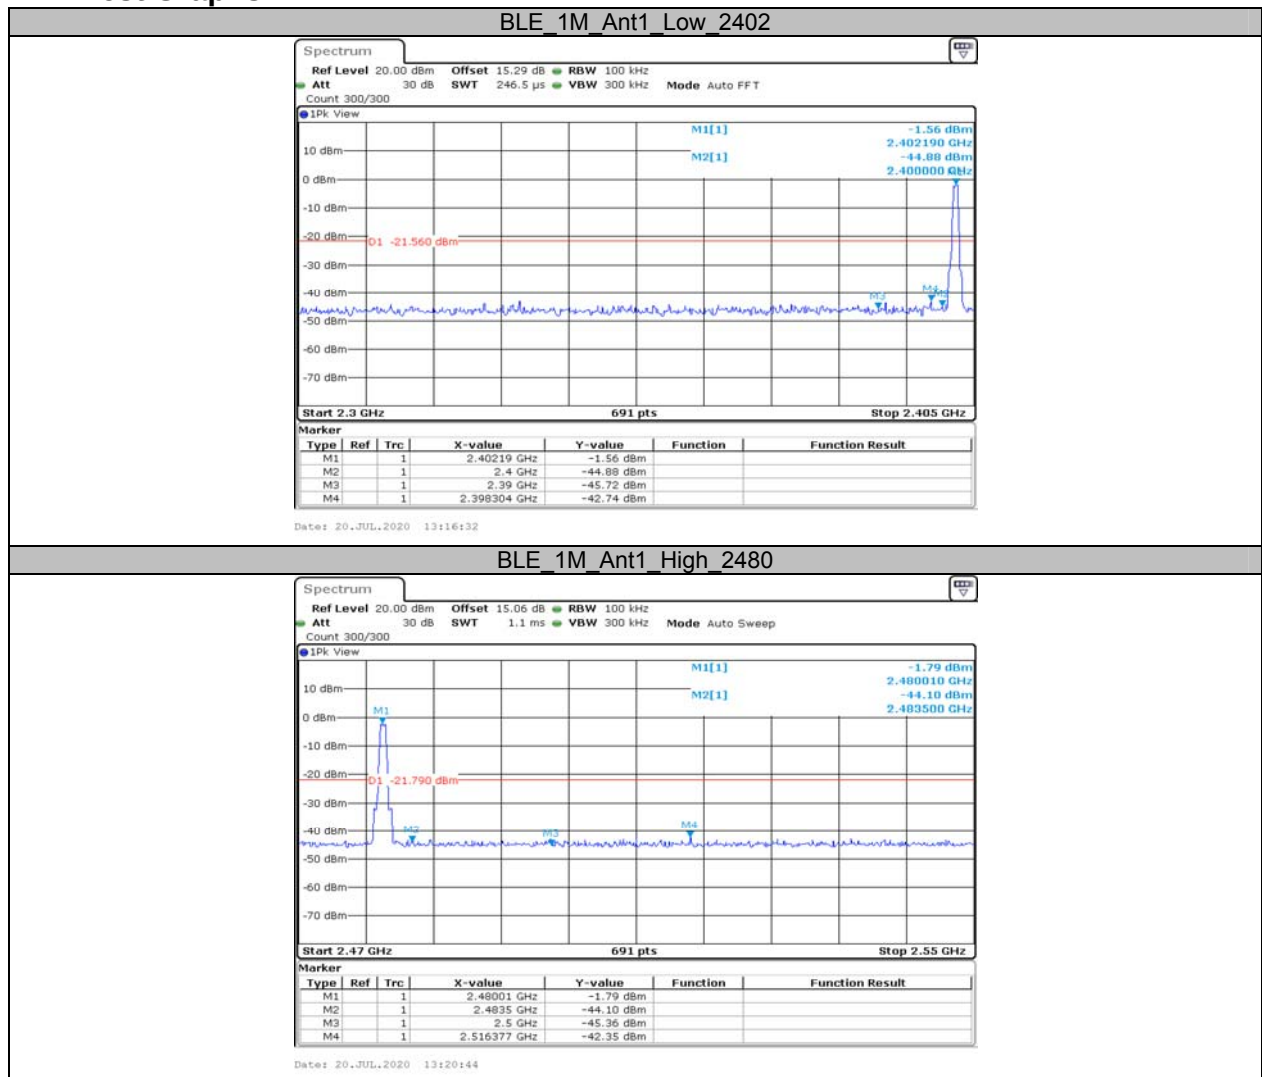

AppendixG: DutyCycle Test Result

TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2440	0.385	0.63	61.60

Test Graphs

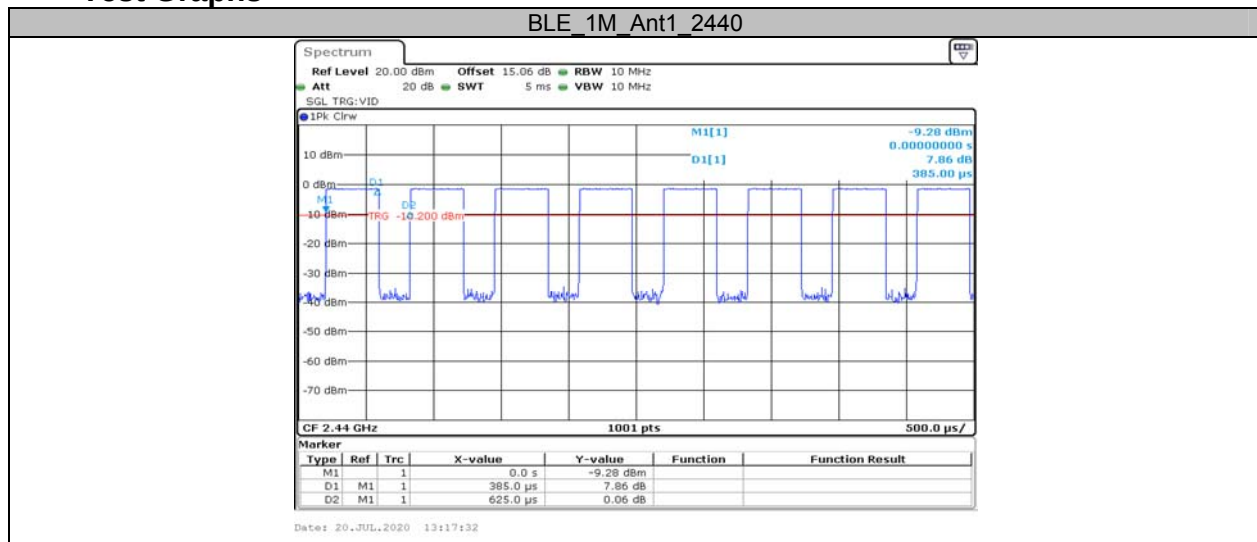

***** END OF REPORT *****