PCTEST

PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA Tel. 410.290.6652 / Fax 410.290.6554 http://www.pctestlab.com



CERTIFICATE OF COMPLIANCE FCC PART 15.247 Certification

Applicant Name: Vestac, LLC P.O. Box 7358 Shrewsbury, NJ 07702 USA Date of Testing:
May 25-26, 2009
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0905141007-R1.XC6

FCC ID: XC6220BI

APPLICANT: Vestac, LLC

Model(s): 220Bi

EUT Type: Asset Tag

Max. RF Output Power: 92.04 mW (19.64 dBm) Conducted (b)

Frequency Range: 2412 - 2462 MHz (DSSS)

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15.247

Test Device Serial No.: None

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. Test results reported herein relate only to the item(s) tested.

*This revised Test Report (S/ N: 0905141007-R1.XC6) supersedes and replaces the previously issued test report on the same subject EUT for the same type of testing as indicated. Please discard and destroy the previously issued test report (S/N: 0905141007.XC6) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is conducted.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.





FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 1 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 1 01 30



TABLE OF CONTENTS

FCC	PART 1	5.247 MEASUREMENT REPORT	3
1.0	INTR	RODUCTION	4
	1.1	EVALUATION PROCEDURE	4
	1.2	SCOPE	4
	1.3	PCTEST TEST LOCATION	4
2.0	PRO	DUCT INFORMATION	5
	2.1	EQUIPMENT DESCRIPTION	5
	2.2	EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
	2.3	LABELING REQUIREMENTS	5
3.0	DES	CRIPTION OF TEST	6
	3.1	CONDUCTED EMISSIONS	6
	3.2	RADIATED EMISSIONS	7
4.0	ANT	ENNA REQUIREMENTS	8
5.0	TES	T EQUIPMENT CALIBRATION DATA	9
6.0	TES	T RESULTS	10
	6.1	SUMMARY	10
	6.2	6DB BANDWIDTH MEASUREMENT – 802.11B/G	11
	6.3	OUTPUT POWER MEASUREMENT – 802.11B	14
	6.4	POWER SPECTRAL DENSITY (802.11B/G)	15
	6.5	CONDUCTED EMISSIONS AT THE BAND EDGE	18
	6.6	CONDUCTED SPURIOUS EMISSIONS	19
	6.7	RADIATED SPURIOUS EMISSION MEASUREMENTS	25
	6.8	RADIATED RESTRICTED BAND EDGE MEASUREMENTS	29
7.0	CON	ICLUSION	30

FCC ID: XC6220BI	PETEST INDIBITING LABORATORY, INC.	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	EST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 2 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Page 2 01 30





MEASUREMENT REPORT FCC Part 15.247



§ 2.1033 General Information

APPLICANT: Vestac, LLC
APPLICANT ADDRESS: P.O. Box 7358

Shrewsbury, NJ 07702, USA

TEST SITE: PCTEST ENGINEERING LABORATORY, INC. **TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.247

MODEL NAME: 220Bi

FCC ID: XC6220BI


Test Device Serial No.: None ☐ Production ☐ Production ☐ Engineering

FCC CLASSIFICATION: Digital Transmission System (DTS)

DATE(S) OF TEST: May 25-26, 2009 **TEST REPORT S/N:** 0905141007-R1.XC6

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.





- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

				_
FCC ID: XC6220BI	PCTEST	FCC Pt. 15.247 WLAN 802.11b TEST REPORT	VEST/C	Reviewed by:
FCC ID. AC0220BI	ENGINEERING LABORATORY, INC.	(CERTIFICATION)		Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 3 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 3 of 30

Midde



INTRODUCTION

1.1 **Evaluation Procedure**

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC procedure dated March 23, 2005 entitled "Measurements of Digital Transmission Systems Operating Under Section 15.247" were used in the measurement of the Vestac Asset Tag FCC ID: XC6220BI.

Deviation from measurement procedure.....None

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 **PCTEST Test Location**

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006.




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 4 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 4 01 30



PRODUCT INFORMATION 2.0

2.1 **Equipment Description**

The Equipment Under Test (EUT) is the Vestac Asset Tag FCC ID: XC6220BI. The Asset Tag is powered via a 3.7Vdc Lithium battery. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
Vestac / Model: 220Bi	XC6220BI	Asset Tag

Table 2-1. EUT Equipment Description

Because the EUT normally has a very low duty cycle and in order to facilitate testing the EUT was setup to continuously transmit on all three channels sequentially. No channels were transmitting at the same time. This operation is evident in the conducted spurious plots as all three channels can be seen.

2.2 **EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.3 **Labeling Requirements**

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 5 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 3 01 30



3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions




Figure 3-1. Shielded Enclosure Line-Conducted Test Facility




Figure 3-2. Line Conducted Emission Test Set-Up




Figure 3-3. Wooden Table & Bonded LISNs




Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: XC6220BI	PCTEST LABORATORY, INC.	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 6 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage o or so



3.2 Radiated Emissions




Figure 3-5. 3-Meter Test Site




Figure 3-6. Dimensions of Outdoor Test Site




Figure 3-7. Turntable and System Setup




Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using RobertsTM Dipole antennas or horn antennas (*see Figure 3-5*). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (*see Figure 3-6*). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during The EUT, support equipment and preliminary radiated measurements. interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz - 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: XC6220BI	PCTEST LABORATORY, INC.	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 7 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage / 01 30



4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna(s) of the Asset Tag are permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The Vestac Asset Tag FCC ID: XC6220BI unit complies with the requirement of §15.203.

Ch. Frequency (MHz)	
1	2412
6	2437
11	2462

Table 4-1. Frequency / Channel Operations



TEST EQUIPMENT CALIBRATION DATA 5.0

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/4/2008	Annual	12/4/2009	3439A02645
Agilent	8447D	Broadband Amplifier	N/A		N/A	1937A03348
Agilent	8447D	Broadband Amplifier	N/A		N/A	2443A01900
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/4/2008	Annual	12/4/2009	3008A00985
Agilent	85650A	Quasi-Peak Adapter	12/4/2008	Annual	12/4/2009	3303A01872
Agilent	85650A	Quasi-Peak Adapter	3/24/2009	Annual	3/24/2010	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	3/24/2009	Annual	3/24/2010	2618A02866
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	3/24/2009	Annual	3/24/2010	2542A11898
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/5/2008	Annual	12/5/2009	3638A08713
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/25/2009	Biennial	3/25/2011	MY45470194
Agilent	N9020A	MXA Signal Analyzer	9/17/2008	Annual	9/17/2009	US46470561
Emco	3115	Horn Antenna (1-18GHz)	9/24/2007	Biennial	9/24/2009	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	9/9/2008	Triennial	9/9/2011	9203-2178
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	5/14/2009	Biennial	5/14/2011	A050307
Rohde & Schwarz	FSQ 26	Spectrum Analyzer	9/29/2008	Annual	9/29/2009	200452

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 9 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		raye 3 01 30



TEST RESULTS 6.0

Summary 6.1

Company Name: Vestac, LLC

FCC ID: XC6220BI

FCC Classification: **Digital Transmission System (DTS)**

Data Rate(s) Tested: 1Mbps (b)

FCC Part Section(s)	RSS 210 Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER I	MODE (TX)					
15.247(a)(2)	RSS-210 [A8.2 (1)]	6dB Bandwidth	> 500kHz		PASS	Section 6.2
15.247(b)(3)	RSS-210 [A8.4 (4)]	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3,
15.247(e)	RSS-210 [A8.2 (2)]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band	CONDUCTED	PASS	Section 6.4
15.247(d)	RSS-210 [A8.5]	Band Edge / Out-of-Band Emissions	Conducted < 20dBc		PASS	Sections 6.5, 6.6
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)	RADIATED	PASS	Sections 6.7, 6.8
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz			N/A	N/A
RF EXPOSURE						
2.1091 / 2.1093	RSS-102	MPE	1 mW/cm² (MPE) @ 20cm	MPE	PASS	MPE Report

Table 6-1. Summary of Test Results

FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		VEST C		
Test Report S/N:	Test Dates:	EUT Type:		Page 10 of 30	
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 10 01 30	



6.2 6dB Bandwidth Measurement – 802.11b/g §15.247(a)(2); RSS-210(A8.2 (1))

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. *The minimum permissible 6dB bandwidth is 500 kHz.*

Frequency [MHz]	Channel No.	802.11 Mode	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	9.040	0.500	Pass
2437	6	b	9.600	0.500	Pass
2462	11	b	9.520	0.500	Pass

Table 6-2. Conducted Bandwidth Measurements




Figure 6-1. Test Instrument & Measurement Setup

FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		VESTIC	
Test Report S/N:	Test Dates:	EUT Type:		Page 11 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 11 01 30





Plot 6-1. 6dB Bandwidth Plot (802.11b - Ch. 1)



Plot 6-2. 6dB Bandwidth Plot (802.11b - Ch. 6)

FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		VESTAC		
Test Report S/N:	Test Dates:	EUT Type:		Page 12 of 30	
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 12 01 30	





Plot 6-3. 6dB Bandwidth Plot (802.11b - Ch. 11)

FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		VEST C	
Test Report S/N:	Test Dates:	EUT Type:		Page 13 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 13 01 30



6.3 Output Power Measurement – **802.11b** §15.247(b)(3); RSS-210(A8.4 (4))

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Peak power measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. *The maximum permissible conducted output power is 1 Watt.*

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]
2412	1	1	19.64
2437	6	1	18.98
2462	11	1	19.4

Table 6-3. Peak Conducted Output Power Measurements




Figure 6-2. Test Instrument & Measurement Setup

FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		LESI C	
Test Report S/N:	Test Dates:	EUT Type:		Page 14 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 14 01 30



6.4 Power Spectral Density (802.11b/g) §15.247(e); RSS-210(A8.2 (2))

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. *The maximum permissible power spectral density is 8 dBm in any 3 kHz band.*

Frequency	Channel	802.11	Measured Power	Maximum Permissible	Margin
[MHz]	No.	Mode	Spectral Density [dBm]	Power Density [dBm / 3kHz]	[dB]
2412	1	b	4.172	8.0	-3.8
2437	6	b	3.509	8.0	-4.5
2462	11	b	3.180	8.0	-4.8

Table 6-4. Conducted Power Density Measurements






Figure 6-3. Test Instrument & Measurement Setup

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 15 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 13 01 30



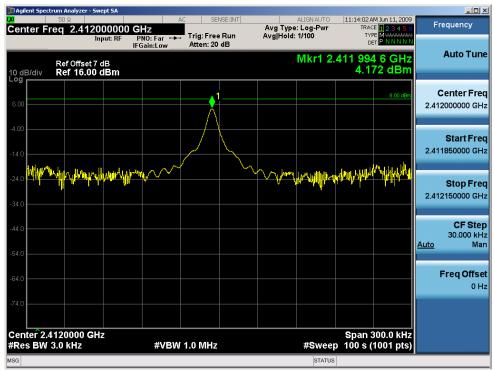


Plot 6-4. Power Spectral Density Plot (802.11b - Ch. 1)

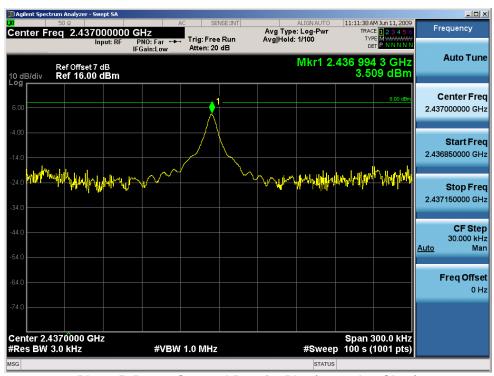

Plot 6-5. Power Spectral Density Plot (802.11b - Ch. 6)

FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		VESTIC		
Test Report S/N:	Test Dates:	EUT Type:		Page 16 of 30	
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 10 01 30	



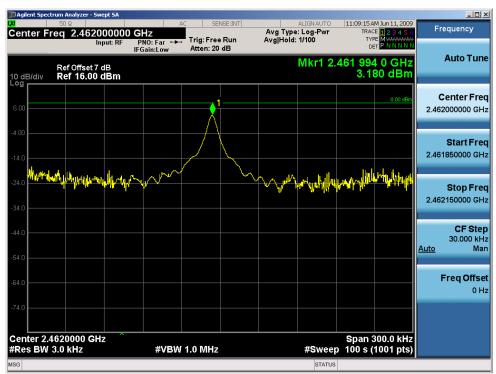

Plot 6-6. Power Spectral Density Plot (802.11b - Ch. 11)


FCC ID: XC6220BI	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		VEST/C	
Test Report S/N:	Test Dates:	EUT Type:		Page 17 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 17 01 30



6.5 Conducted Emissions at the Band Edge §15.247(d); RSS-210(A8.5)



Plot 6-7. Band Edge Plot (802.11b - Ch. 1)

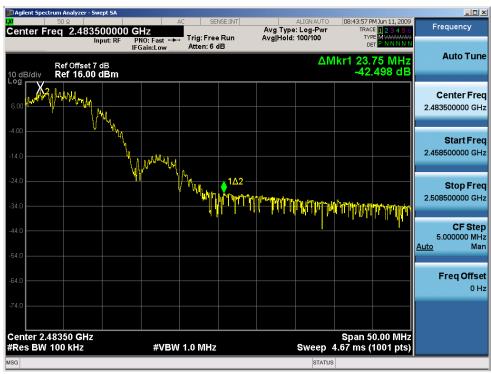


Plot 6-8. Band Edge Plot (802.11b - Ch. 11)


FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 18 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 10 01 30



6.6 Conducted Spurious Emissions §15.247(d); RSS-210(A8.5)

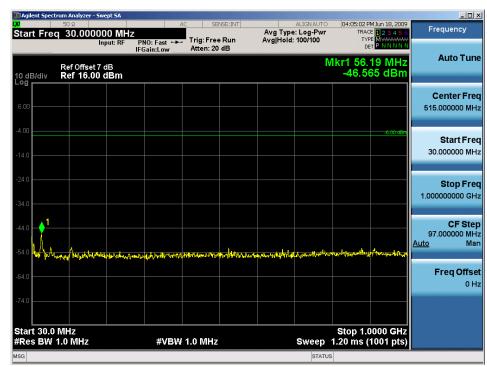


Plot 6-9. Conducted Spurious Plot (802.11b - Ch. 1)

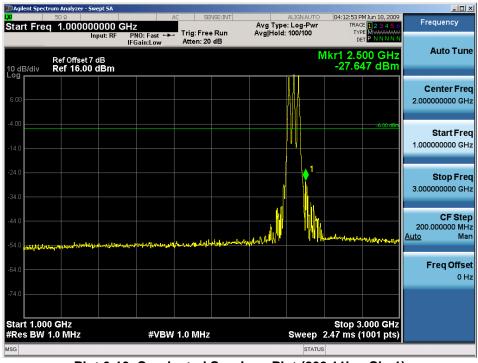


Plot 6-10. Conducted Spurious Plot (802.11b - Ch. 1)

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 19 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		rage 19 01 30



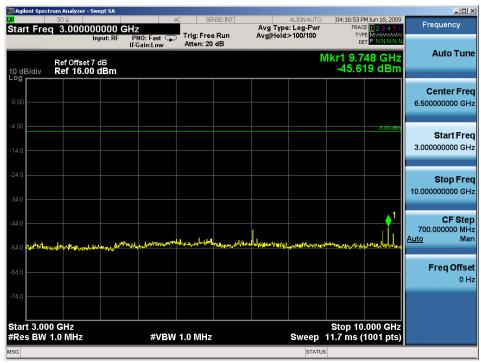


Plot 6-11. Conducted Spurious Plot (802.11b - Ch. 1)

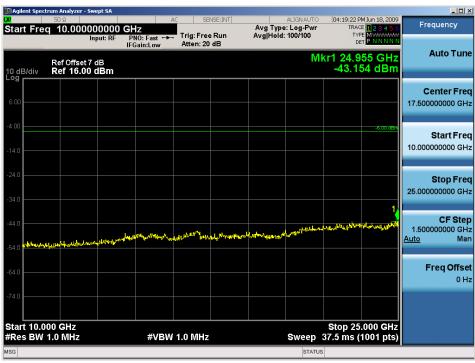


Plot 6-12. Conducted Spurious Plot (802.11b - Ch. 1)

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 20 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 20 01 30



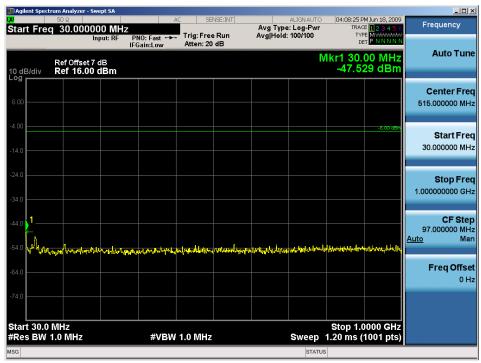


Plot 6-13. Conducted Spurious Plot (802.11b - Ch. 6)

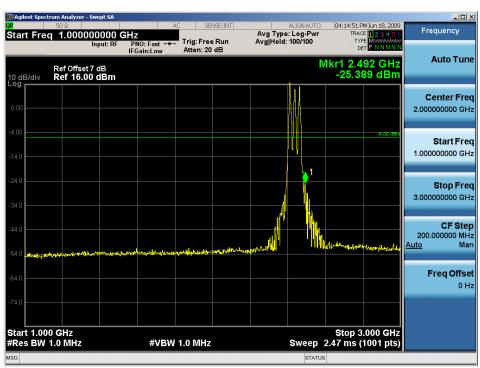

Plot 6-14. Conducted Spurious Plot (802.11b - Ch. 6)

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 21 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 21 01 30



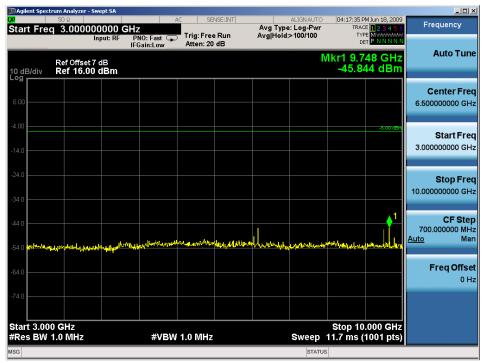


Plot 6-15. Conducted Spurious Plot (802.11b - Ch. 6)




Plot 6-16. Conducted Spurious Plot (802.11b - Ch. 6)

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 22 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 22 01 30



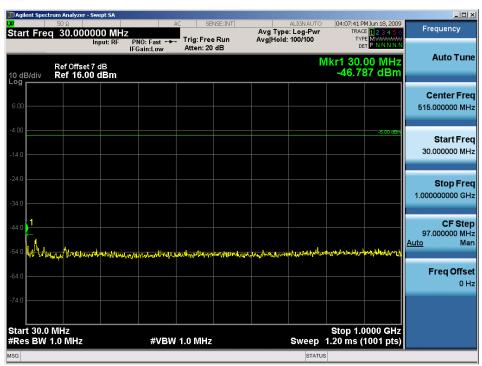


Plot 6-17. Conducted Spurious Plot (802.11b - Ch. 11)

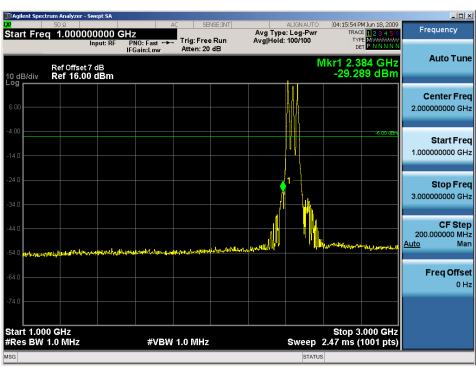

Plot 6-18. Conducted Spurious Plot (802.11b - Ch. 11)

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 23 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 23 01 30



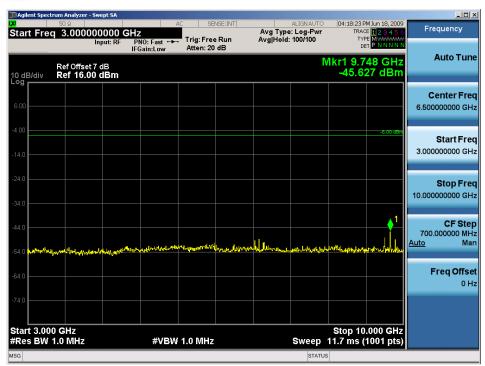

Plot 6-19. Conducted Spurious Plot (802.11b - Ch. 11)



Plot 6-20. Conducted Spurious Plot (802.11b - Ch. 11)

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 24 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 24 01 30



6.7 Radiated Spurious Emission Measurements §15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

The EUT was tested from 9kHz up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurements were taken using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-5 per Section 15.209

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-5. Radiated Limits

Sample Calculation

Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB]

Notes:

AFCL = Antenna Factor [dB] + Cable Loss [dB]

FCC ID: XC6220BI	PCTEST INCIDENCE LABORATORY, INC.	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	EST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 25 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 23 01 30



Radiated Spurious Emission Measurements (Cont'd) §15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 01

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dB _µ V/m]	Limit [dBμV/m]	Margin [dB]
4824.00	-97.90	Avg	Н	41.36	50.45	53.98	-3.52
4824.00	-87.50	Peak	Н	41.36	60.85	73.98	-13.12
12060.00	-135.00	Avg	Н	51.20	23.20	53.98	-30.78
12060.00	-125.00	Peak	Н	51.20	33.20	73.98	-40.78

Table 6-6. Radiated Measurements @ 3 meters

- 1. All emissions shown lie in the restricted bands specified in §15.205 and RSS-210 section 2.7, Table 1 and are below the limit shown in Table 6-5.
- 2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- 6. Levels at 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- 7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 26 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 20 01 30



Radiated Spurious Emission Measurements (Cont'd) §15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2437MHz

Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dB _µ V/m]	Limit [dBµV/m]	Margin [dB]
4874.00	-98.28	Avg	Н	41.45	50.16	53.98	-3.82
4874.00	-87.18	Peak	Н	41.45	61.26	73.98	-12.72
7311.00	-106.37	Avg	Н	45.54	46.17	53.98	-7.81
7311.00	-97.77	Peak	Н	45.54	54.77	73.98	-19.21
12185.00	-135.00	Avg	Н	51.27	23.27	53.98	-30.71
12185.00	-125.00	Peak	Н	51.27	33.27	73.98	-40.71

Table 6-7. Radiated Measurements @ 3 meters

- 1. All emissions shown lie in the restricted bands specified in §15.205 and RSS-210 section 2.7, Table 1 and are below the limit shown in Table 6-5.
- 2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- 6. Levels at 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- 7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 27 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 27 01 30



Radiated Spurious Emission Measurements (Cont'd) §15.247(d) / §15.205 & §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Field Strength [dB _µ V/m]	Limit [dBµV/m]	Margin [dB]
4924.00	-97.96	Avg	Н	41.53	50.57	53.98	-3.41
4924.00	-88.56	Peak	Н	41.53	59.97	73.98	-14.01
7386.00	-102.95	Avg	Н	45.70	49.75	53.98	-4.23
7386.00	-93.25	Peak	Н	45.70	59.45	73.98	-14.53
12310.00	-135.00	Avg	Н	51.35	23.35	53.98	-30.63
12310.00	-125.00	Peak	Н	51.35	33.35	73.98	-40.63

Table 6-8. Radiated Measurements @ 3 meters

- 1. All emissions shown lie in the restricted bands specified in §15.205 and RSS-210 section 2.7, Table 1 and are below the limit shown in Table 6-5.
- 2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- 6. Levels at 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- 7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 28 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 28 01 30



6.8 Radiated Restricted Band Edge Measurements §15.205 / §15.209; RSS-210(A8.5)

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB _µ V/m]	Limit [dBμV/m]	Margin [dB]
2483.50	-95.11	Avg	Н	34.24	0.00	46.13	53.98	-7.85
2483.50	-77.01	Peak	Н	34.24	0.00	64.23	73.98	-9.75
2483.92	-89.91	Avg	Н	34.24	0.00	51.33	53.98	-2.65
2483.92	-78.71	Peak	Н	34.24	0.00	62.53	73.98	-11.45
2496.73	-100.81	Avg	Н	34.24	0.00	40.43	53.98	-13.55
2496.73	-79.61	Peak	Н	34.24	0.00	61.63	73.98	-12.35

Table 6-9. Radiated Restricted Band Edge Measurements at 3-meters

- 1. All emissions shown lie in the restricted bands specified in §15.205 and RSS-210 section 2.7, Table 1 and are below the limit shown in Table 6-5.
- 2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- 6. Levels at 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- 7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: XC6220BI	PCTEST*	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	VEST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 29 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 29 01 30



7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Vestac Asset Tag FCC ID: XC6220BI** is in compliance with Part 15C of the FCC Rules.

FCC ID: XC6220BI	PCTEST INC.	FCC Pt. 15.247 WLAN 802.11b TEST REPORT (CERTIFICATION)	EST/C	Reviewed by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 30 of 30
0905141007-R1.XC6	May 25-26, 2009	Asset Tag		Fage 30 01 30