



# FCC Test Report

**APPLICANT** : Shenzhen Tinno Mobile Technology Corp.  
**EQUIPMENT** : Watch  
**MODEL NAME** : W568AA  
**FCC ID** : XD6W568AA  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification  
**TEST DATE(S)** : May 21, 2025~ May 26, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang



Approved by: Fly Liang

**Sportun International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1. GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Product Feature of Equipment Under Test .....	5
1.4. Product Specification of Equipment Under Test .....	6
1.5. Modification of EUT .....	6
1.6. Test Location.....	7
1.7. Test Software .....	7
1.8. Applicable Standards .....	7
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
2.1. Test Mode .....	8
2.2. Connection Diagram of Test System .....	9
2.3. Support Unit used in test configuration and system.....	9
2.4. EUT Operation Test Setup .....	9
<b>3. TEST RESULT.....</b>	<b>10</b>
3.1. Test of AC Conducted Emission Measurement .....	10
3.2. Test of Radiated Emission Measurement .....	14
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>19</b>
<b>5. MEASUREMENT UNCERTAINTY .....</b>	<b>20</b>

### APPENDIX A. SETUP PHOTOGRAPHS



## REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 9.14 dB at 0.52 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.87 dB at 55.22 MHz

**Conformity Assessment Condition:**

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



## 1. General Description

### 1.1. Applicant

**Shenzhen Tinno Mobile Technology Corp.**

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen ,PRC

### 1.2. Manufacturer

**Shenzhen Tinno Mobile Technology Corp.**

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen ,PRC

### 1.3. Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Watch
<b>Model Name</b>	W568AA
<b>FCC ID</b>	XD6W568AA
<b>EUT supports Radios application</b>	LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE GNSS
<b>SN Code</b>	Conduction/Radiation: 88753023 for Sample 1 3e248fc7 for Sample 2
<b>HW Version</b>	V1.0
<b>SW Version</b>	W568AAV01.05.10
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the differences between them could be referred to W568AA\_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, we chose sample 1 to perform full test and sample 2 to verify the worst cases of sample 1



## 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Rx Frequency</b>	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 66 : 2110 MHz~ 2200 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz
<b>Antenna Type</b>	WWAN : PIFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna
<b>Type of Modulation</b>	LTE: QPSK / 16QAM 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6. Test Location

Sportun International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sportun International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO02-SZ ; 03CH05-SZ	CN1256	421272

## 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LTE Band 5 Idle(Low CH) + BT Link + WLAN Link + GNSS RX + E-SIM + Adapter + USB Cable + Charging Dock + Battery for Sample 1 Mode 2: LTE Band 12 Idle(Mid CH) + BT idle + WLAN idle + GNSS RX + E-SIM + Adapter + USB Cable + Charging Dock + Battery for Sample 1 Mode 3: LTE Band 5 Idle(Low CH) + BT Link + WLAN Link + GNSS RX + E-SIM + Adapter + USB Cable + Charging Dock + Battery for Sample 2
Radiated Emissions	Mode 1: LTE Band 5 Idle(Low CH) + BT Link + WLAN Link + GNSS RX + E-SIM + Adapter + USB Cable + Charging Dock + Battery for Sample 1 Mode 2: LTE Band 12 Idle(Mid CH) + BT idle + WLAN idle + GNSS RX + E-SIM + Adapter + USB Cable + Charging Dock + Battery for Sample 1 Mode 3: LTE Band 5 Idle(Low CH) + BT idle + WLAN idle + GNSS RX + E-SIM + Battery for Sample 1 Mode 4: LTE Band 5 Idle(Low CH) + BT idle + WLAN idle + GNSS RX + E-SIM + Adapter + USB Cable + Charging Dock + Battery for Sample 2
<b>Remark:</b>	<ol style="list-style-type: none"><li>1. The worst case of AC is mode 3; only the test data of this mode is reported.</li><li>2. The worst case of RE is mode 1; only the test data of this mode is reported.</li><li>3. Pre-scanned Low/Middle/High channels, the worst channel was recorded in this report.</li></ol>

## 2.2. Connection Diagram of Test System

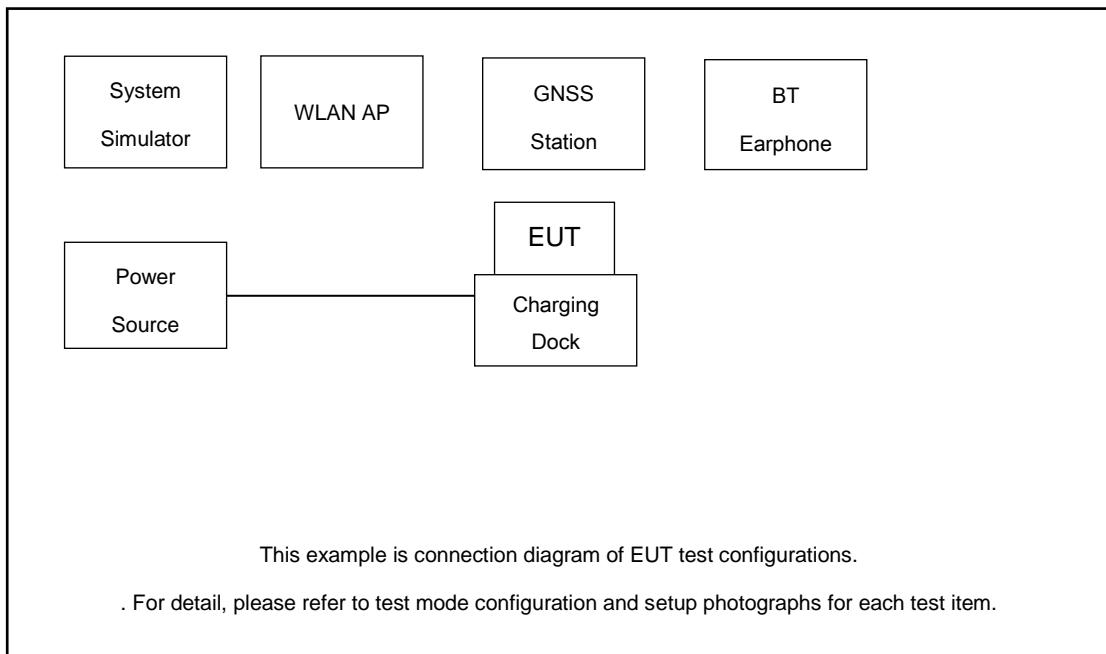

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	GNSS Station	Labsat	RLLS03-2P	N/A	N/A	Unshielded,1.8m
3.	GNSS Station	T&E	GS-50	N/A	N/A	Unshielded,1.8m
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
5.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
6.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
7.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A

## 2.4. EUT Operation Test Setup

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following program installed in the EUT was programmed during the test.

1. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

###### <Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

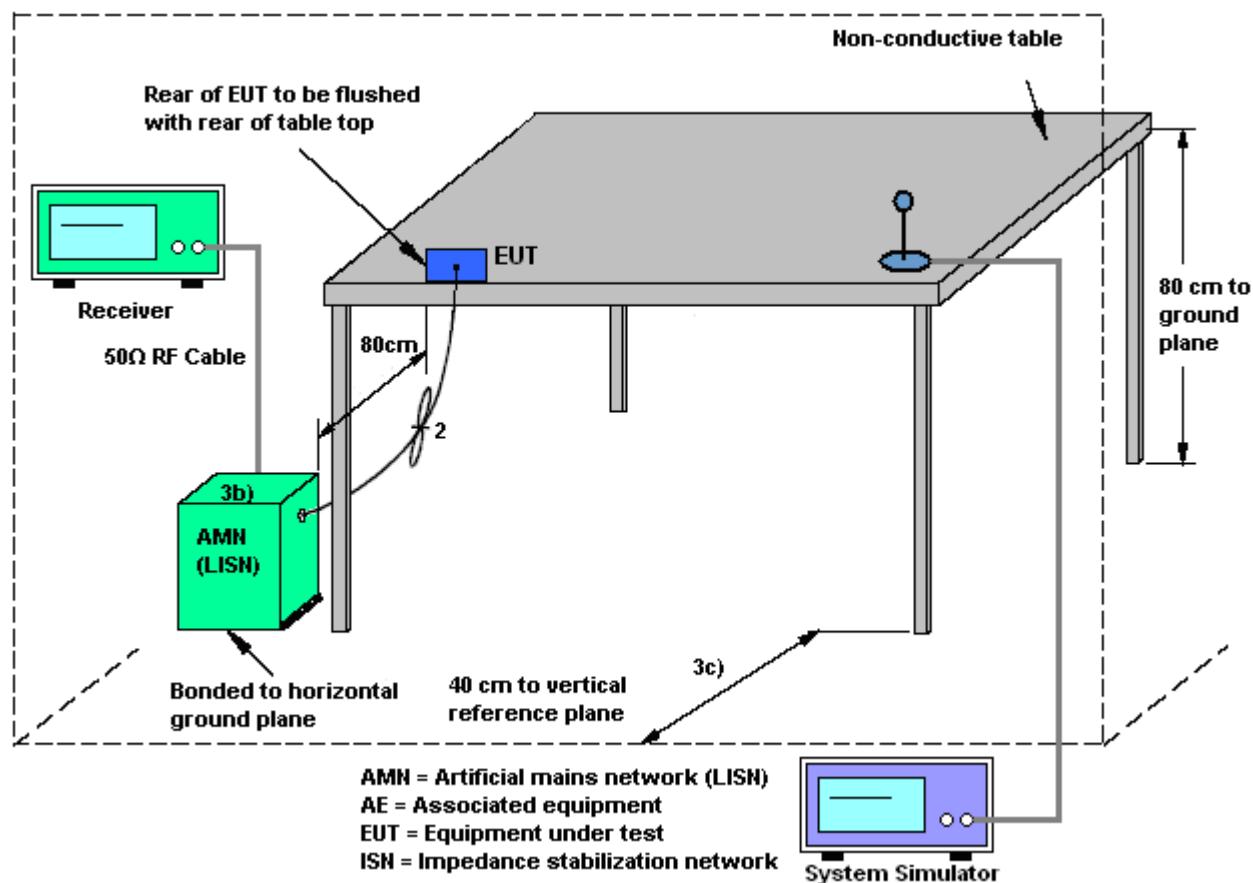



## 3.1.5 Test Result of AC Conducted Emission
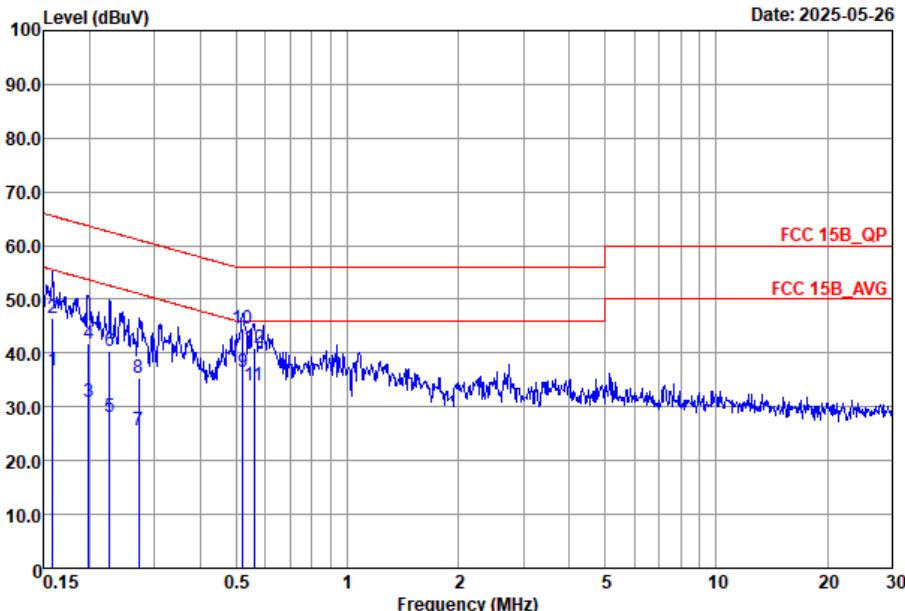
<b>Test Engineer :</b>	Nathon	<b>Temperature :</b>	22~24°C				
		<b>Relative Humidity :</b>	44~50%				
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line				
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.						
			Date: 2025-05-26				
Site	: CO02-SZ						
Condition	: FCC 15B_QP LISN_2025-L LINE						
	Freq	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.16	36.76	-18.76	55.52	16.90	9.67	10.19 Average
2	0.16	46.46	-19.06	65.52	26.60	9.67	10.19 QP
3	0.20	30.99	-22.68	53.67	11.10	9.71	10.18 Average
4	0.20	41.89	-21.78	63.67	22.00	9.71	10.18 QP
5	0.23	28.20	-24.37	52.57	8.29	9.72	10.19 Average
6	0.23	40.30	-22.27	62.57	20.39	9.72	10.19 QP
7	0.27	25.54	-25.53	51.07	5.60	9.74	10.20 Average
8	0.27	35.44	-25.63	61.07	15.50	9.74	10.20 QP
9	0.52	36.52	-9.48	46.00	16.60	9.68	10.24 Average
10 *	0.52	44.62	-11.38	56.00	24.70	9.68	10.24 QP
11	0.56	33.91	-12.09	46.00	14.00	9.67	10.24 Average
12	0.56	41.01	-14.99	56.00	21.10	9.67	10.24 QP



<b>Test Engineer :</b>	Nathon	<b>Temperature :</b>	22~24°C																																																																																																																														
		<b>Relative Humidity :</b>	44~50%																																																																																																																														
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral																																																																																																																														
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																
<p>Date: 2025-05-26</p>																																																																																																																																	
<b>Site</b>	: CO02-SZ																																																																																																																																
<b>Condition</b>	: FCC 15B_QP LISN_2025-N NEUTRAL																																																																																																																																
<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>Read Line</th> <th>LISN</th> <th>Cable Factor</th> <th>Loss</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.15</td><td>36.06</td><td>-19.76</td><td>55.82</td><td>16.29</td><td>9.58</td><td>10.19</td><td>Average</td></tr> <tr><td>2</td><td>0.15</td><td>45.76</td><td>-20.06</td><td>65.82</td><td>25.99</td><td>9.58</td><td>10.19</td><td>QP</td></tr> <tr><td>3</td><td>0.22</td><td>28.88</td><td>-23.82</td><td>52.70</td><td>9.00</td><td>9.69</td><td>10.19</td><td>Average</td></tr> <tr><td>4</td><td>0.22</td><td>41.18</td><td>-21.52</td><td>62.70</td><td>21.30</td><td>9.69</td><td>10.19</td><td>QP</td></tr> <tr><td>5</td><td>0.29</td><td>24.72</td><td>-25.87</td><td>50.59</td><td>4.71</td><td>9.81</td><td>10.20</td><td>Average</td></tr> <tr><td>6</td><td>0.29</td><td>36.62</td><td>-23.97</td><td>60.59</td><td>16.61</td><td>9.81</td><td>10.20</td><td>QP</td></tr> <tr><td>7</td><td>0.52</td><td>35.66</td><td>-10.34</td><td>46.00</td><td>15.80</td><td>9.62</td><td>10.24</td><td>Average</td></tr> <tr><td>8 *</td><td>0.52</td><td>46.86</td><td>-9.14</td><td>56.00</td><td>27.00</td><td>9.62</td><td>10.24</td><td>QP</td></tr> <tr><td>9</td><td>0.56</td><td>32.57</td><td>-13.43</td><td>46.00</td><td>12.70</td><td>9.63</td><td>10.24</td><td>Average</td></tr> <tr><td>10</td><td>0.56</td><td>44.07</td><td>-11.93</td><td>56.00</td><td>24.20</td><td>9.63</td><td>10.24</td><td>QP</td></tr> <tr><td>11</td><td>0.61</td><td>28.39</td><td>-17.61</td><td>46.00</td><td>8.50</td><td>9.65</td><td>10.24</td><td>Average</td></tr> <tr><td>12</td><td>0.61</td><td>37.39</td><td>-18.61</td><td>56.00</td><td>17.50</td><td>9.65</td><td>10.24</td><td>QP</td></tr> </tbody> </table>				Freq	Level	Over Limit	Limit	Read Line	LISN	Cable Factor	Loss	Remark	MHz	dBuV	dB	dBuV	dBuV	dB				1	0.15	36.06	-19.76	55.82	16.29	9.58	10.19	Average	2	0.15	45.76	-20.06	65.82	25.99	9.58	10.19	QP	3	0.22	28.88	-23.82	52.70	9.00	9.69	10.19	Average	4	0.22	41.18	-21.52	62.70	21.30	9.69	10.19	QP	5	0.29	24.72	-25.87	50.59	4.71	9.81	10.20	Average	6	0.29	36.62	-23.97	60.59	16.61	9.81	10.20	QP	7	0.52	35.66	-10.34	46.00	15.80	9.62	10.24	Average	8 *	0.52	46.86	-9.14	56.00	27.00	9.62	10.24	QP	9	0.56	32.57	-13.43	46.00	12.70	9.63	10.24	Average	10	0.56	44.07	-11.93	56.00	24.20	9.63	10.24	QP	11	0.61	28.39	-17.61	46.00	8.50	9.65	10.24	Average	12	0.61	37.39	-18.61	56.00	17.50	9.65	10.24	QP
Freq	Level	Over Limit	Limit	Read Line	LISN	Cable Factor	Loss	Remark																																																																																																																									
MHz	dBuV	dB	dBuV	dBuV	dB																																																																																																																												
1	0.15	36.06	-19.76	55.82	16.29	9.58	10.19	Average																																																																																																																									
2	0.15	45.76	-20.06	65.82	25.99	9.58	10.19	QP																																																																																																																									
3	0.22	28.88	-23.82	52.70	9.00	9.69	10.19	Average																																																																																																																									
4	0.22	41.18	-21.52	62.70	21.30	9.69	10.19	QP																																																																																																																									
5	0.29	24.72	-25.87	50.59	4.71	9.81	10.20	Average																																																																																																																									
6	0.29	36.62	-23.97	60.59	16.61	9.81	10.20	QP																																																																																																																									
7	0.52	35.66	-10.34	46.00	15.80	9.62	10.24	Average																																																																																																																									
8 *	0.52	46.86	-9.14	56.00	27.00	9.62	10.24	QP																																																																																																																									
9	0.56	32.57	-13.43	46.00	12.70	9.63	10.24	Average																																																																																																																									
10	0.56	44.07	-11.93	56.00	24.20	9.63	10.24	QP																																																																																																																									
11	0.61	28.39	-17.61	46.00	8.50	9.65	10.24	Average																																																																																																																									
12	0.61	37.39	-18.61	56.00	17.50	9.65	10.24	QP																																																																																																																									

## Note:

1. Level(dB $\mu$ V) = Read Level(dB $\mu$ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB $\mu$ V) – Limit Line(dB $\mu$ V)



## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

**<Class B Limit>**

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

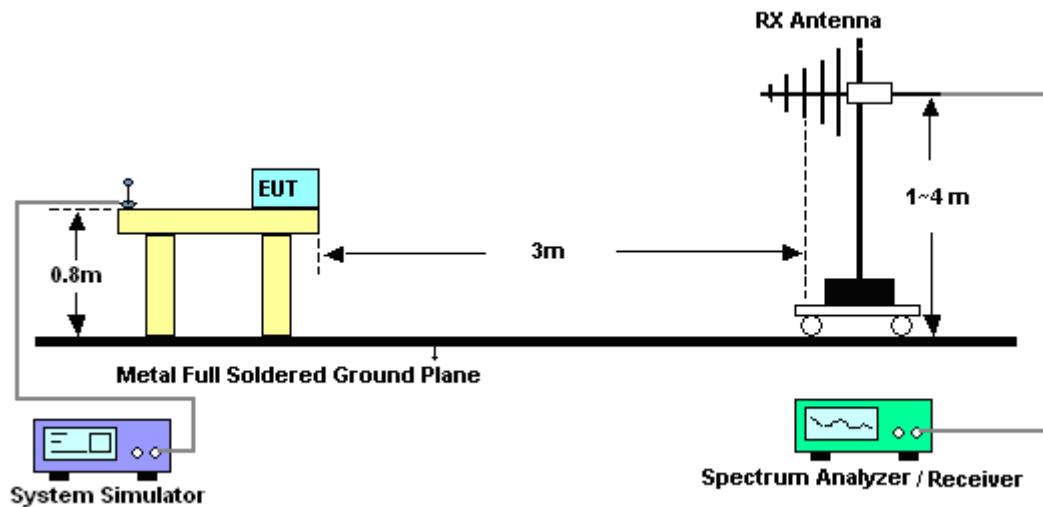


For radiated emissions above 1GHz

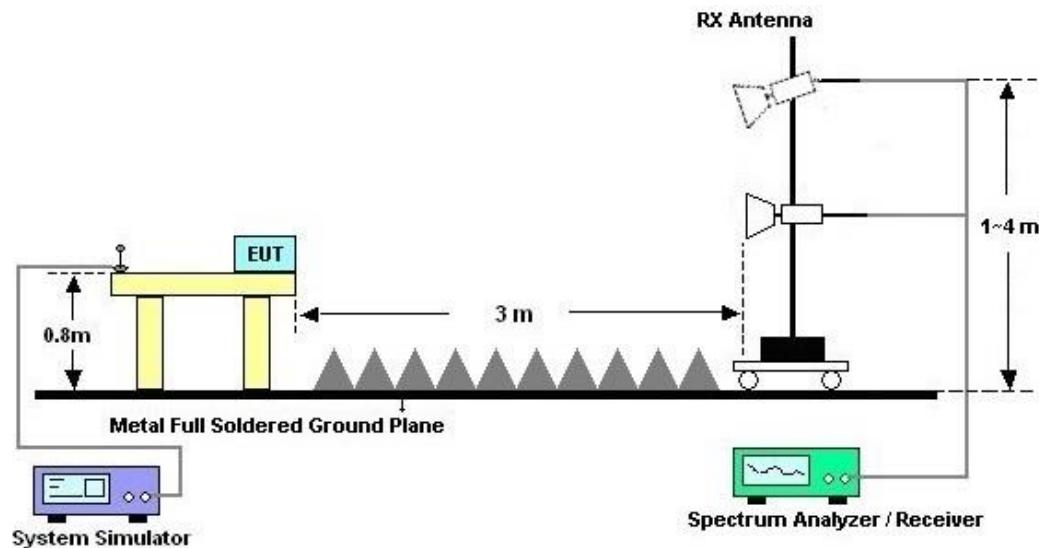



## 3.2.5. Test Result of Radiated Emission
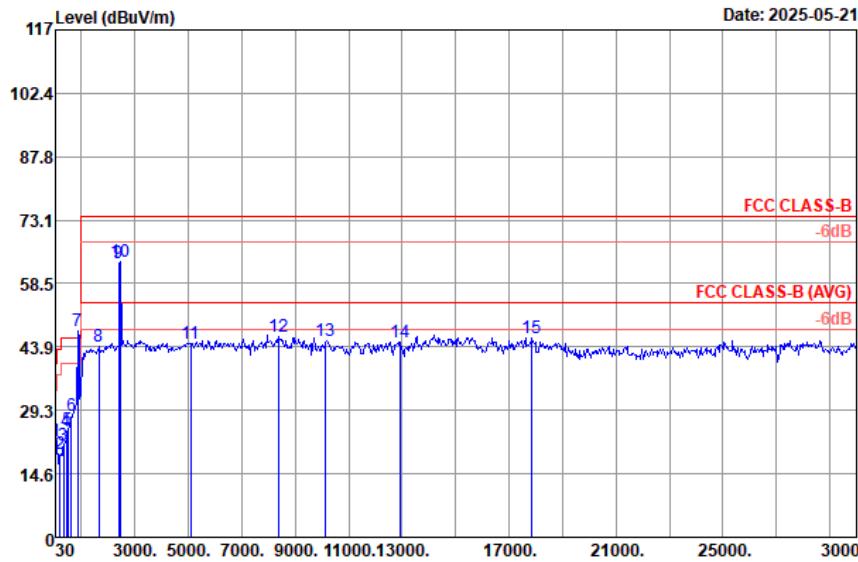
<b>Test Engineer :</b>	TaoZhang	<b>Temperature :</b>		24~25°C																																																																																																																																																																																																										
		<b>Relative Humidity :</b>		48~49%																																																																																																																																																																																																										
<b>Test Distance :</b>	3m	<b>Polarization :</b>		Horizontal																																																																																																																																																																																																										
<b>Remark :</b>	#7 is system simulator signal which can be ignored. #9 and #10 is RF signal which comes from BT/WLAN Access Point used to connect the EUT, and which can be ignored.																																																																																																																																																																																																													
 <p>Level (dBuV/m)</p> <p>Date: 2025-05-21</p> <p>Frequency (MHz)</p>																																																																																																																																																																																																														
<b>Site</b>	: 03CH05-SZ																																																																																																																																																																																																													
<b>Condition</b>	: FCC CLASS-B 3m VULB9168-01001 HORIZONTAL																																																																																																																																																																																																													
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th rowspan="2">Over Limit</th> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Antenna</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">A/Pos</th> <th rowspan="2">T/Pos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>51.34</td><td>22.07</td><td>-17.93</td><td>40.00</td><td>35.73</td><td>19.69</td><td>1.65</td><td>35.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>204.60</td><td>19.22</td><td>-24.28</td><td>43.50</td><td>35.29</td><td>16.05</td><td>2.77</td><td>34.89</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>323.91</td><td>21.28</td><td>-24.72</td><td>46.00</td><td>32.74</td><td>19.92</td><td>3.32</td><td>34.70</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>449.04</td><td>24.46</td><td>-21.54</td><td>46.00</td><td>32.61</td><td>22.98</td><td>3.47</td><td>34.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>498.51</td><td>24.70</td><td>-21.30</td><td>46.00</td><td>32.08</td><td>23.74</td><td>3.38</td><td>34.50</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>630.43</td><td>27.96</td><td>-18.04</td><td>46.00</td><td>32.41</td><td>26.31</td><td>3.64</td><td>34.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>7 *</td><td>874.00</td><td>47.60</td><td></td><td></td><td>48.13</td><td>29.10</td><td>4.40</td><td>34.03</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>8</td><td>1664.00</td><td>43.91</td><td>-30.09</td><td>74.00</td><td>61.35</td><td>29.73</td><td>6.13</td><td>53.30</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>9</td><td>2402.00</td><td>63.31</td><td></td><td></td><td>76.88</td><td>32.60</td><td>7.17</td><td>53.34</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>10</td><td>2437.00</td><td>63.57</td><td></td><td></td><td>77.04</td><td>32.67</td><td>7.22</td><td>53.36</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>11</td><td>5088.00</td><td>44.80</td><td>-29.20</td><td>74.00</td><td>52.69</td><td>35.43</td><td>9.46</td><td>52.78</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>12</td><td>8392.00</td><td>46.26</td><td>-27.74</td><td>74.00</td><td>49.78</td><td>36.68</td><td>12.01</td><td>52.21</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>13</td><td>10152.00</td><td>45.43</td><td>-28.57</td><td>74.00</td><td>45.35</td><td>38.30</td><td>13.51</td><td>51.73</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>14</td><td>12915.00</td><td>45.09</td><td>-28.91</td><td>74.00</td><td>43.67</td><td>39.50</td><td>14.12</td><td>52.20</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>15</td><td>17838.00</td><td>46.07</td><td>-27.93</td><td>74.00</td><td>40.60</td><td>43.60</td><td>15.28</td><td>53.41</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	cm	deg	1	51.34	22.07	-17.93	40.00	35.73	19.69	1.65	35.00	---	---	Peak	2	204.60	19.22	-24.28	43.50	35.29	16.05	2.77	34.89	---	---	Peak	3	323.91	21.28	-24.72	46.00	32.74	19.92	3.32	34.70	---	---	Peak	4	449.04	24.46	-21.54	46.00	32.61	22.98	3.47	34.60	---	---	Peak	5	498.51	24.70	-21.30	46.00	32.08	23.74	3.38	34.50	---	---	Peak	6	630.43	27.96	-18.04	46.00	32.41	26.31	3.64	34.40	---	---	Peak	7 *	874.00	47.60			48.13	29.10	4.40	34.03	---	---	Peak	8	1664.00	43.91	-30.09	74.00	61.35	29.73	6.13	53.30	---	---	Peak	9	2402.00	63.31			76.88	32.60	7.17	53.34	---	---	Peak	10	2437.00	63.57			77.04	32.67	7.22	53.36	---	---	Peak	11	5088.00	44.80	-29.20	74.00	52.69	35.43	9.46	52.78	---	---	Peak	12	8392.00	46.26	-27.74	74.00	49.78	36.68	12.01	52.21	---	---	Peak	13	10152.00	45.43	-28.57	74.00	45.35	38.30	13.51	51.73	---	---	Peak	14	12915.00	45.09	-28.91	74.00	43.67	39.50	14.12	52.20	---	---	Peak	15	17838.00	46.07	-27.93	74.00	40.60	43.60	15.28	53.41	---	---	Peak
Freq	Level	Over Limit	Limit	Read											Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																										
					MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																																																																
1	51.34	22.07	-17.93	40.00	35.73	19.69	1.65	35.00	---	---	Peak																																																																																																																																																																																																			
2	204.60	19.22	-24.28	43.50	35.29	16.05	2.77	34.89	---	---	Peak																																																																																																																																																																																																			
3	323.91	21.28	-24.72	46.00	32.74	19.92	3.32	34.70	---	---	Peak																																																																																																																																																																																																			
4	449.04	24.46	-21.54	46.00	32.61	22.98	3.47	34.60	---	---	Peak																																																																																																																																																																																																			
5	498.51	24.70	-21.30	46.00	32.08	23.74	3.38	34.50	---	---	Peak																																																																																																																																																																																																			
6	630.43	27.96	-18.04	46.00	32.41	26.31	3.64	34.40	---	---	Peak																																																																																																																																																																																																			
7 *	874.00	47.60			48.13	29.10	4.40	34.03	---	---	Peak																																																																																																																																																																																																			
8	1664.00	43.91	-30.09	74.00	61.35	29.73	6.13	53.30	---	---	Peak																																																																																																																																																																																																			
9	2402.00	63.31			76.88	32.60	7.17	53.34	---	---	Peak																																																																																																																																																																																																			
10	2437.00	63.57			77.04	32.67	7.22	53.36	---	---	Peak																																																																																																																																																																																																			
11	5088.00	44.80	-29.20	74.00	52.69	35.43	9.46	52.78	---	---	Peak																																																																																																																																																																																																			
12	8392.00	46.26	-27.74	74.00	49.78	36.68	12.01	52.21	---	---	Peak																																																																																																																																																																																																			
13	10152.00	45.43	-28.57	74.00	45.35	38.30	13.51	51.73	---	---	Peak																																																																																																																																																																																																			
14	12915.00	45.09	-28.91	74.00	43.67	39.50	14.12	52.20	---	---	Peak																																																																																																																																																																																																			
15	17838.00	46.07	-27.93	74.00	40.60	43.60	15.28	53.41	---	---	Peak																																																																																																																																																																																																			



<b>Test Engineer :</b>	TaoZhang	<b>Temperature :</b>		24~25°C																																				
		<b>Relative Humidity :</b>		48~49%																																				
<b>Test Distance :</b>	3m	<b>Polarization :</b>		Vertical																																				
<b>Remark :</b>	#7 is system simulator signal which can be ignored. #9 and #10 is RF signal which comes from BT/WLAN Access Point used to connect the EUT, and which can be ignored.																																							
<p>Level (dBuV/m)</p> <p>Date: 2025-05-21</p> <p>Frequency (MHz)</p> <p>FCC CLASS-B</p> <p>FCC CLASS-B (AVG)</p>																																								
<b>Site</b>	: 03CH05-SZ																																							
<b>Condition</b>	: FCC CLASS-B 3m VULB9168-01001 VERTICAL																																							
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Antenna</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </tbody> </table>										Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Limit	Line	Antenna	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos			Remark																												
		Limit	Line	Antenna	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																															
1	55.22	34.13	-5.87	40.00	47.85	19.59	1.69	35.00	---	--- Peak																														
2	196.84	24.75	-18.75	43.50	40.85	16.09	2.71	34.90	---	--- Peak																														
3	371.44	21.78	-24.22	46.00	32.17	20.93	3.38	34.70	---	--- Peak																														
4	518.88	24.93	-21.07	46.00	32.00	24.00	3.43	34.50	---	--- Peak																														
5	697.36	28.83	-17.17	46.00	32.09	27.40	3.74	34.40	---	--- Peak																														
6	801.15	31.15	-14.85	46.00	31.89	28.97	4.39	34.10	---	--- Peak																														
7 *	874.00	47.93			48.46	29.10	4.40	34.03	---	--- Peak																														
8	2064.00	42.82	-31.18	74.00	56.97	32.06	6.93	53.14	---	--- Peak																														
9	2402.00	63.37			76.94	32.60	7.17	53.34	---	--- Peak																														
10	2437.00	63.16			76.63	32.67	7.22	53.36	---	--- Peak																														
11	4072.00	45.04	-28.96	74.00	54.36	34.34	9.37	53.03	---	--- Peak																														
12	7032.00	46.39	-27.61	74.00	51.80	36.30	10.98	52.69	---	--- Peak																														
13	9180.00	44.51	-29.49	74.00	46.69	37.40	11.86	51.44	---	--- Peak																														
14	12906.00	44.96	-29.04	74.00	43.55	39.50	14.10	52.19	---	--- Peak																														
15	17082.00	45.31	-28.69	74.00	40.95	42.35	15.23	53.22	---	--- Peak																														

  |  |  |  |  |  |  |  |  |  |

Note:

1. Level(dB $\mu$ V/m) = Read Level(dB $\mu$ V) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	May 26, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	May 26, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	May 26, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 02, 2025	May 21, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 02, 2025	May 21, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2024	May 21, 2025	Jul. 07, 2025	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz ~3000MHz	Apr. 02, 2025	May 21, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	May 21, 2025	Jul. 03, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060779	1GHz~18GHz	Dec. 25, 2024	May 21, 2025	Dec. 24, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 03, 2025	May 21, 2025	Apr. 02, 2026	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 03, 2025	May 21, 2025	Apr. 02, 2027	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	May 21, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	May 21, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	May 21, 2025	NCR	Radiation (03CH05-SZ)

NCR: No Calibration Required



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
--	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
--	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
--	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.1 dB
--	--------

----- THE END -----