

**Produkte**  
*Products*
**Prüfbericht - Nr.:** **14045654 001**
*Test Report No.:*
**Seite 1 von 21**  
*Page 1 of 21*

**Auftraggeber:** **Megabyte Limited**  
**Client:** **Unit 507, Building 12W, No. 12 Science Park West Avenue**  
**Hong Kong Science Park, Shatin, N.T., Hong Kong**

**Gegenstand der Prüfung:** **UHF Portable RFID Reader**  
**Test Item:**

**Bezeichnung:** **mDongle-D1-BU** **Serien-Nr.:** **Engineering sample**  
**Identification:** **D1B-01-39, D1B-01-MB** **Serial No.:**

**Wareneingangs-Nr.:** **A000386196-008** **Eingangsdatum:** **30.06.2016**  
**Receipt No.:** **Date of Receipt:**

**Prüfort:** **TÜV Rheinland Hong Kong Ltd.**  
**Testing Location:** **8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong**  
**Hong Kong Productivity Council**  
**HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong**

**Zustand des Prüfgegenstandes bei Anlieferung:** **Test samples are not damaged and suitable for testing.**  
**Condition of test item at delivery:**

**Prüfgrundlage:** **FCC Part 15 Subpart C**  
**Test Specification:** **ANSI C63.10-2013**

**Prüfergebnis:** **Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage.**  
**Test Results:** **The above mentioned product was tested and passed.**

**Prüflaboratorium:** **TÜV Rheinland Hong Kong Ltd.**  
**Testing Laboratory:** **8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong**

**geprüft/ tested by:**
**kontrolliert/ reviewed by:**

30.11.2016	David Cheng Test Engineer		30.11.2016	Benny Lau Senior Project Manager	
Datum Date	Name/Stellung Name/Position	Unterschrift Signature	Datum Date	Name/Stellung Name/Position	Unterschrift Signature

**Sonstiges:**  
**Other Aspects**

**FCC ID: XEK-MDONGLED1**

**Abkürzungen:** **P(ass)** = **entspricht Prüfgrundlage**  
**Fail)** = **entspricht nicht Prüfgrundlage**  
**N/A** = **nicht anwendbar**  
**N/T** = **nicht getestet**

**Abbreviations:** **P(ass)** = **passed**  
**Fail)** = **failed**  
**N/A** = **not applicable**  
**N/T** = **not tested**

**Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.**  
*This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.*

## Table of Content

	Page
<b>Cover Page .....</b>	<b>1</b>
<b>Table of Content .....</b>	<b>2</b>
<b>Product information.....</b>	<b>4</b>
Manufacturers declarations .....	4
Product function and intended use.....	4
Submitted documents.....	4
Independent Operation Modes .....	4
Related Submittal(s) Grants.....	5
Remark .....	5
<b>Test Set-up and Operation Mode.....</b>	<b>6</b>
Principle of Configuration Selection .....	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
<b>Test Methodology .....</b>	<b>7</b>
Radiated Emission .....	7
Field Strength Calculation.....	7
<b>Test Setup Diagram .....</b>	<b>8</b>
<b>List of Test and Measurement Instruments.....</b>	<b>10</b>
<b>Measurement Uncertainty .....</b>	<b>11</b>
<b>Results FCC Part 15 – Subpart C .....</b>	<b>12</b>
FCC 15.203 – Antenna Requirement 1.....	Pass..... 12
FCC 15.204 – Antenna Requirement 2.....	N/A..... 12
FCC 15.207 – Conducted Emission on AC Mains .....	Pass..... 12
FCC 15.247 (b)(2) – Peak Output Power.....	Pass..... 13
FCC 15.247 (a)(1)(i) – 20 dB Bandwidth .....	Pass..... 13
FCC 15.247(a)(1) – Carrier Frequency Separation.....	Pass..... 14
FCC 15.247 (a)(1)(iii) – Number of hopping channels.....	Pass..... 14
FCC 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time).....	Pass..... 15
FCC 15.247 (a) – Hopping Sequence.....	Pass..... 15

FCC 15.247 (a) – Equal Hopping Frequency Use .....	Pass.....	15
FCC 15.247 (a) – Receiver Input Bandwidth .....	Pass.....	16
FCC 15.247 (a) – Receiver Hopping Capability.....	Pass.....	16
FCC 15.247 (d) – Spurious Conducted Emissions.....	Pass.....	16
FCC 15.205 – Radiated Emissions in Restricted Frequency Bands.....	Pass.....	17
<b>Results FCC Part 15 – Subpart B .....</b>		<b>19</b>
FCC 15.107 – Conducted Emission on AC Mains .....	Pass.....	19
FCC 15.109 – Radiated Emission.....	Pass.....	20
<b>Appendix 1 – Test protocols .....</b>		<b>17 pages</b>
<b>Appendix 2 – Test setup .....</b>		<b>3 pages</b>
<b>Appendix 3 – EUT External Photos .....</b>		<b>3 pages</b>
<b>Appendix 4 – EUT Internal Photos .....</b>		<b>6 pages</b>
<b>Appendix 5 – RF exposure information.....</b>		<b>2 pages</b>

## Product information

### Manufacturers declarations

	Transmitter
Operating frequency range	917.10 - 926.9 MHz
Type of modulation	DSB-ASK
Number of channels	50
Channel separation	200 kHz
Type of antenna	Integral Patch Antenna
Antenna gain (dBi)	4.5 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	100-240VAC/ 5VDC/ 3.7VDC
Independent Operation Modes	Transmitting, Receiving

### Product function and intended use

The equipment under test (EUT) is a portable RFID reader. It is a compact NFC and RFID reader and OS independent. It can be connected to PC through USB cable and it has Bluetooth connectivity to any mobile devices.

The manufacturer declared that the model: D1B-01-39 and D1B-01-MB are identical to the model mDongle-D1-BU except the logo plate.

FCC ID: XEK-MDONGLED1

Models	Product description
mDongle-D1-BU	
D1B-01-39, D1B-01-MB	UHF Portable RFID Reader

### Submitted documents

Circuit Diagram  
 Block Diagram  
 Technical Description  
 Bill of material  
 User manual  
 Label

### Independent Operation Modes

The basic operation modes are:

- Transmitting mode.
- Receiving mode

For further information refer to User Manual

## Related Submittal(s) Grants

- This device is a composite device.
- This is a single application for certification of the RFID transmitter.
- The Bluetooth portion is authorized under the certification procedure (refer to test report 14045652 001 and 14045653 001 issued by TÜV Rheinland HK Ltd on 30.11.2016).
- The NFC portion is authorized under the certification procedure (refer to test report 14045655 001 issued by TÜV Rheinland HK Ltd on 30.11.2016).
- The PC peripherals function is authorized under the certification procedure (refer to test report 14043219 001 issued by TÜV Rheinland HK Ltd on 30.11.2016).

## Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

## Test Set-up and Operation Mode

### Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the applicant was used to control the operating channel as well as the maximum output power level. The maximum RF output power and the operating frequencies was selected according to the instruction given by the manufacturer. The setting of the maximum RF output power and the operating frequency range expected by the customer shall be fixed on the firmware of the final end product.

### Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- AC-DC adaptor Model: EA1024AR-050 Input: 100-240 VAC 50/60 Hz; Output: 5.0VDC 2A)  
(Provided by the applicant)
- HP Notebook (Provided by TUV)

### Countermeasures to achieve EMC Compliance

- Nil

## Test Methodology

### Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013. The radiated emission measurements of the receiver part were performed according to the procedures in ANSI C63.4-2014.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

### Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.  
R = Reading of Spectrum Analyzer in dBuV.  
AF = Antenna Factor in dB.  
CF = Cable Attenuation Factor in dB.  
FA = Filter Attenuation Factor in dB.  
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


## Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

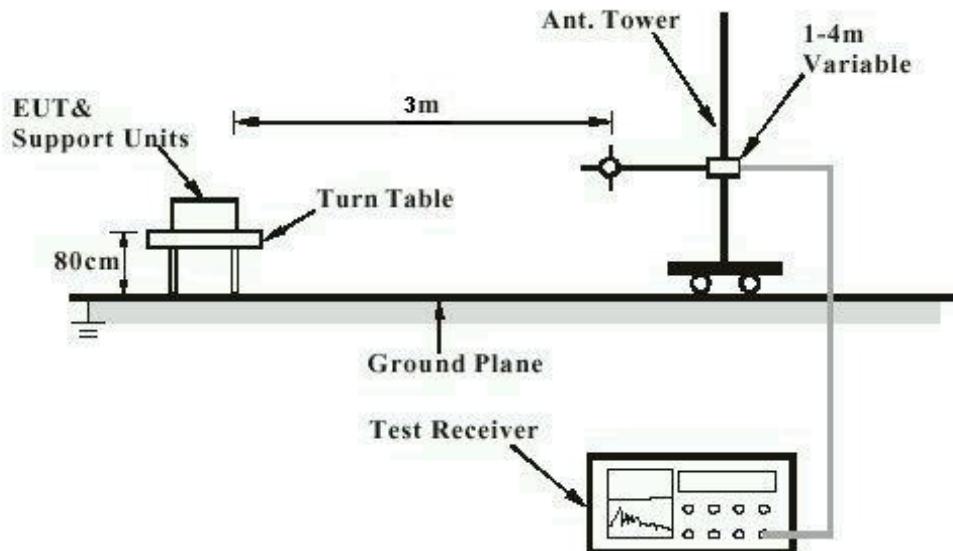


Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

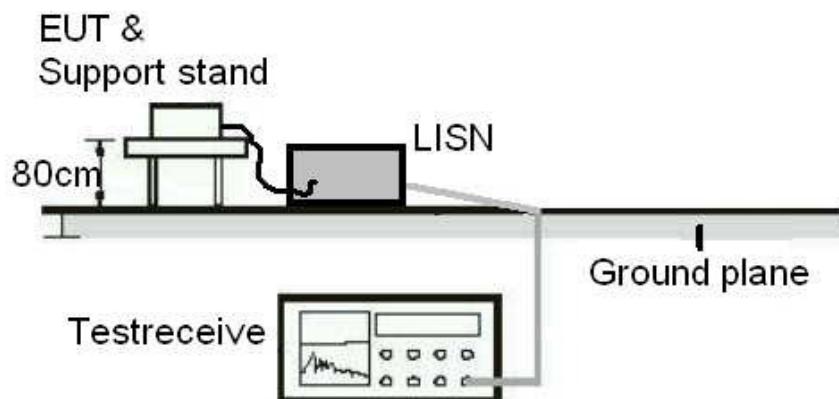

**Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)**

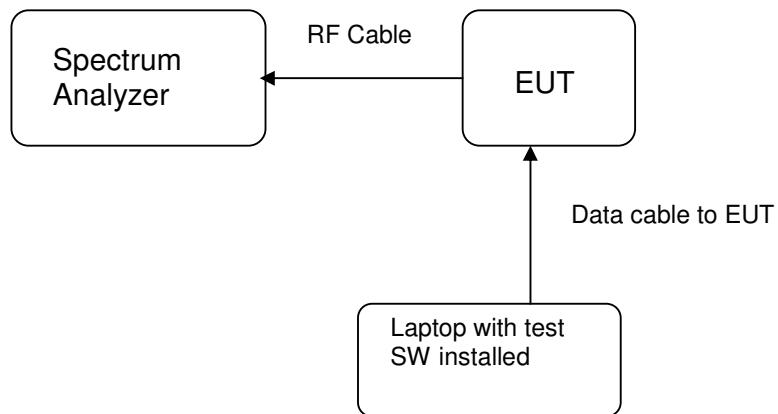

## List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC Registration number: 90656)

### Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-16	25-Apr-17
New Fully Ancheonic Chamber	TDK	N/A	19-Apr-16	19-Apr-17
Cable	Hubersuhner	SUCOFLEX 104	31-Mar-16	31-Mar-18
Test Receiver	R & S	ESU26	7-Dec-15	7-Dec-16
Bi-conical Antenna	R & S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R & S	HL223	1-Sep-15	1-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-16	18-Jul-18
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17
Horn Antenna	EMCO	3115	26-Aug-15	26-Aug-17
Active Loop Antenna	EMCO	6502	27-Oct-16	27-Oct-17

### AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Test Receiver	R & S	ESU40	7-Dec-15	7-Dec-16
RF Voltage Probe	Schwarzbeck	TK9416	11-Feb-16	11-Feb-17
LISN	R&S	ESH3-Z5	15-Jun-16	15-Jun-17
Double Shield Cable	Radiall	RG142	14-Sep-15	14-Sep-17
Pulse Limiter	R&S	ESH3-Z2	3-Jun-16	3-Jun-18

## TÜV Rheinland Hong Kong Ltd

### Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	12-Jan-15	12-Jan-2017

## Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is  $\pm 3.43\text{dB}$ .

The estimated combined standard uncertainty for radiated emissions measurements is  $\pm 5.10\text{dB}$  (30MHz to 200MHz) and  $\pm 5.08\text{dB}$  (200MHz to 1000MHz) and is  $\pm 5.10\text{dB}$  (30MHz to 200MHz) and  $\pm 5.08\text{dB}$  (above 1GHz).

The estimated combined standard uncertainty for antenna conducted emission is  $\pm 1.56\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for the level of confidence is approximately 95%.

## Results FCC Part 15 – Subpart C

<b>FCC 15.203 – Antenna Requirement 1</b>		<b>Pass</b>				
<b>FCC Requirement:</b> No antenna other than that furnished by the responsible party shall be used with the device						
<b>Results:</b>	a) Antenna type: b) Manufacturer and model no: c) Peak Gain:	Fixed Integral Patch antenna ABRACON APAE915R2540ABDB1-T 4.5 dBi				
<b>Verdict:</b>	Pass					
<b>FCC 15.204 – Antenna Requirement 2</b>		<b>N/A</b>				
<b>FCC Requirement:</b> An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.						
<b>Results:</b>	Only one integral antenna can be used.					
<b>Verdict:</b>	N/A					
<b>FCC 15.207 – Conducted Emission on AC Mains</b>		<b>Pass</b>				
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : AC Mains input port of power supply Detector : Quasi-peak and Average RBW : 9 kHz Supply voltage : 120Vac 60Hz Temperature : 23°C Humidity : 50%						
Requirement: 15.207(a)						
<b>Results:</b>	Pass					
<b>Live measurement</b>						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB $\mu$ V	Average dB $\mu$ V	Limit QP (dB $\mu$ V)	Limit AV (dB $\mu$ V)	Verdict
0,15 – 0,5	0.15	49.2	37.2	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
<b>Neutral measurement</b>						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB $\mu$ V	Average dB $\mu$ V	Limit QP (dB $\mu$ V)	Limit AV (dB $\mu$ V)	Verdict
0,15 – 0,5	0.175	47.1	32.4	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass

**Results:** Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1.

<b>FCC 15.247 (b)(2) – Peak Output Power</b>		<b>Pass</b>	
Test Specification	: ANSI C63.10 – 2013		
<b>Mode of operation</b> : Tx mode			
<b>Port of testing</b> : Temporary antenna port			
Supply voltage	: 5.0 Vdc		
Temperature	: 23°C		
Humidity	: 50%		
<b>FCC Requirement :</b>			
For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels.			
<b>Results:</b>	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.		
For test protocols please refer to Appendix 1.			
<b>Frequency (MHz)</b>	<b>Maximum peak output power (dBm)</b>	<b>Limit (dBm)</b>	<b>Verdict</b>
917.1	21.29	30.0	Pass
921.9	21.59	30.0	Pass
926.9	21.58	30.0	Pass

<b>FCC 15.247 (a)(1)(i) – 20 dB Bandwidth</b>		<b>Pass</b>	
Test Specification	: ANSI C63.10 – 2013		
Mode of operation	: Tx mode		
Port of testing	: Temporary antenna port		
Supply voltage	: 5.0 Vdc		
Temperature	: 23°C		
Humidity	: 50%		
<b>FCC Requirement :</b>			
The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.			
<b>Results:</b>	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.		
For test protocols refer to Appendix 1.			
<b>Frequency (MHz)</b>	<b>20 dB left (MHz)</b>	<b>20 dB right (MHz)</b>	<b>20dB bandwidth (kHz)</b>
917.1	917.014	917.14	126
921.9	921.815	921.94	125
926.9	926.853	926.98	127

<b>FCC 15.247(a)(1) – Carrier Frequency Separation</b>		<b>Pass</b>
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: Tx mode (hopping on)	
Port of testing	: Temporary antenna port	
Supply voltage	: 5.0 Vdc	
Temperature	: 23°C	
Humidity	: 50%	
<b>FCC Requirement:</b>		
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.		
<b>Results:</b>	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test Results plots refer to Appendix 1.	
Channel Separation (kHz)	Limit (kHz)	Verdict
201	127	Pass

<b>FCC 15.247 (a)(1)(iii) – Number of hopping channels</b>		<b>Pass</b>
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: Tx mode (hopping on)	
Port of testing	: Temporary antenna port	
Supply voltage	: 5.0 Vdc	
Temperature	: 23°C	
Humidity	: 50%	
<b>FCC Requirement:</b>		
For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.		
<b>Results:</b>	For test Results plots refer to Appendix 1.	
No. of hopping channels	Limit	Verdict
50	50	Pass

<b>FCC 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)</b>		<b>Pass</b>		
Test Specification : ANSI C63.10 – 2013				
Mode of operation : Tx mode (hopping on)				
Port of testing : Temporary antenna port				
Supply voltage : 5.0 Vdc				
Temperature : 23°C				
Humidity : 50%				
<b>FCC Requirement:</b> The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.				
<b>Results:</b>		For test Results plots refer to Appendix 1.		
No. of TX in 20 sec	TX time (ms)	Dwell Time (ms)	Limit (ms)	Verdict
1	368	368	400	Pass

<b>FCC 15.247 (a) – Hopping Sequence</b>		<b>Pass</b>
<b>FCC Requirement:</b> The system radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset, while the long-term distribution appears evenly distributed.		
As stated in the technical description, This system is controlled by microchip to generate pseudorandom frequency hopping sequence and distributed it over 50 hopping channels. The hopping sequence is generated by a 9-bit maximum length sequence with a polynomial $x^9+x^4+1$ , initially seeded with a random number, resulting in repeating 511-bit hopping sequence that hops are randomly distributed in both direction and magnitude of change in the hop set which meet the requirement specified in the definition of FCC part 2 section 2.1.		

<b>FCC 15.247 (a) – Equal Hopping Frequency Use</b>		<b>Pass</b>
<b>FCC Requirement:</b> Each of the transmitter's hopping channels is used equally on average.		
The system radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset, while the long-term distribution appears evenly distributed.		
As stated in the technical description, the formula will generate a pseudorandom repeating hopping sequence which each hopping channels is used equally on average in long term.		

<b>FCC 15.247 (a) – Receiver Input Bandwidth</b>	<b>Pass</b>
<b>FCC Requirement:</b> The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
As stated in the technical description, the associated receiver is the RFID tag which has a very broad receiving bandwidth to response to all the reader CW within the operating frequency range.	

<b>FCC 15.247 (a) – Receiver Hopping Capability</b>	<b>Pass</b>
<b>FCC Requirement:</b> The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
As stated in the technical description, the associated receiver is the RFID tag which has a very broad receiving bandwidth to response to all the reader CW within the operating frequency range. And the backscatter will be in the same frequency channel as the reader CW so the receiver portion can synchronize with the backscatter.	

<b>FCC 15.247 (d) – Spurious Conducted Emissions</b>	<b>Pass</b>				
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 5.0 Vdc Temperature : 23 °C Humidity : 50 %					
<b>FCC Requirement:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
<b>Results:</b>	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.  There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(d). For test protocols refer to Appendix 1.				
<b>Operating frequency (MHz)</b>	<b>Spurious frequency (MHz)</b>	<b>Spurious Level (dBm)</b>	<b>Reference value (dBm)</b>	<b>Delta (dB)</b>	<b>Verdict</b>
917.1	890.800	-21.49	21.32	42.81	Pass
921.9	9258.000	-21.14	21.60	42.74	Pass
926.9	7452.000	-22.01	21.62	43.63	Pass

FCC 15.205 – Radiated Emissions in Restricted Frequency Bands		Pass
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: TX mode	
Port of testing	: Enclosure	
Frequency range	: 9kHz to 10GHz	
Supply voltage	: 5VDC and/ or 3.7VDC	
Temperature	: 23°C	
Humidity	: 50%	
<b>FCC Requirement:</b>	In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).	
<b>Results:</b>	<p>Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.</p> <p>Simultaneous transmission was investigated and no new emissions were found.</p> <p>All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.</p>	
Mode: 917.1 MHz TX	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
99.803	31.80	43.5 / QP
227.651	41.00	46.0 / QP
1834.183	49.59	74.0 / PK
1834.183	41.62	54.0 / AV
Mode: 917.1 MHz TX	Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
5502.600	55.56	74.0 / PK
5502.600	44.60	54.0 / AV
Mode: 921.9 MHz TX	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
99.898	35.60	43.5 / QP
228.419	42.10	46.0 / QP
1843.816	52.18	74.0 / PK
1843.816	46.27	54.0 / AV
Mode: 921.9 MHz TX	Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1843.796	51.64	74.0 / PK
1843.796	45.99	54.0 / AV

Mode: 926.9 MHz TX		
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
99.803	31.70	43.5 / QP
228.450	41.60	46.0 / QP
1853.800	51.09	74.0 / PK
1853.800	41.43	54.0 / AV

Mode: 926.9 MHz TX		
Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
5561.400	55.56	74.0 / PK
5561.400	46.85	54.0 / AV

## Results FCC Part 15 – Subpart B

FCC 15.107 – Conducted Emission on AC Mains						Pass
Test Specification : ANSI C63.4 – 2014						
Mode of operation : RX mode						
Port of testing : AC Mains input port of power supply						
Detector : Quasi-peak and Average						
RBW : 9 kHz						
Supply voltage : 120Vac 60Hz						
Temperature : 23°C						
Humidity : 50%						
Requirement: 15.107(a)						
Results: Pass						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB $\mu$ V	Average dB $\mu$ V	Limit QP (dB $\mu$ V)	Limit AV (dB $\mu$ V)	Verdict
0,15 – 0,5	0.150	53.9	40.8	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB $\mu$ V	Average dB $\mu$ V	Limit QP (dB $\mu$ V)	Limit AV (dB $\mu$ V)	Verdict
0,15 – 0,5	0.157	53.3	40.5	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass

<b>FCC 15.109 – Radiated Emission</b>		<b>Pass</b>
Test Specification : ANSI C63.4 – 2014		
Mode of operation : RX mode		
Port of testing : Enclosure		
Frequency range : 30MHz to 5GHz		
Supply voltage : 120VAC		
Temperature : 23°C		
Humidity : 50%		
<b>FCC Requirement:</b> 15.109(a)		
<b>Results:</b>	Pass	
Vertical Polarization		
<b>Freq MHz</b>	<b>Level dBuV/m</b>	<b>Limit/ Detector dBuV/m</b>
99.930	36.9	43.5 / QP
195.540	31.4	43.5 / QP
227.651	43.2	46.0 / QP
No peak found	---	54.0 / AV
Horizontal Polarization		
<b>Freq MHz</b>	<b>Level dBuV/m</b>	<b>Limit/ Detector dBuV/m</b>
99.803	21.1	43.5 / QP
No peak found	---	54.0 / AV