

FCC & IC REPORT

(Bluetooth)

Applicant: COPPERNIC

Address of Applicant: 185 avenue Archimede, 13857 Aix en Provence, FRANCE

Equipment Under Test (EUT)

Product Name: C-One HF iClass / LF Prox

Model No.: C-One HLF HID

Trade mark: COPPERNIC

FCC ID: XGK-C-ONE-HLF-HID

Canada IC: 8402A-CONEHLFHID

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-Gen Issue 5, April 2018
RSS-247 Issue 2, February 2017

Date of sample receipt: 11 Nov., 2019

Date of Test: 12 Nov., 2019 to 10 Mar., 2020

Date of report issued: 16 Jun., 2020

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

| Version No. | Date | Description |
|-------------|---------------|-----------------|
| 00 | 30 Apr., 2020 | Original |
| 01 | 12 Jun., 2020 | Update page 4 |
| 02 | 16 Jun., 2020 | Update Model No |
| | | |
| | | |

Tested by:



Date:

16 Jun., 2020

Test Engineer

Reviewed by:



Date:

16 Jun., 2020

Project Engineer

3 Contents

| | Page |
|---------------------------------------------------|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION | 5 |
| 5.2 GENERAL DESCRIPTION OF E.U.T | 5 |
| 5.3 TEST ENVIRONMENT AND TEST MODE | 6 |
| 5.4 DESCRIPTION OF SUPPORT UNITS | 6 |
| 5.5 MEASUREMENT UNCERTAINTY | 6 |
| 5.6 LABORATORY FACILITY | 6 |
| 5.7 LABORATORY LOCATION | 6 |
| 5.8 TEST INSTRUMENTS LIST | 7 |
| 6 TEST RESULTS AND MEASUREMENT DATA | 8 |
| 6.1 ANTENNA REQUIREMENT | 8 |
| 6.2 CONDUCTED EMISSIONS | 9 |
| 6.3 CONDUCTED OUTPUT POWER | 10 |
| 6.4 20DB OCCUPY BANDWIDTH | 11 |
| 6.5 CARRIER FREQUENCIES SEPARATION | 12 |
| 6.6 HOPPING CHANNEL NUMBER | 13 |
| 6.7 DWELL TIME | 14 |
| 6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 15 |
| 6.9 BAND EDGE | 16 |
| 6.9.1 Conducted Emission Method | 16 |
| 6.9.2 Radiated Emission Method | 17 |
| 6.10 SPURIOUS EMISSION | 18 |
| 6.10.1 Conducted Emission Method | 18 |
| 6.10.2 Radiated Emission Method | 19 |
| 7 TEST SETUP PHOTO | 21 |
| 8 EUT CONSTRUCTIONAL DETAILS | 22 |

4 Test Summary

| Test Items | Section | | Result |
|---------------------------------------------------|-------------------|---------------------------------------------|--------|
| | FCC | IC | |
| Antenna Requirement | 15.203/15.247 (c) | / | Pass |
| AC Power Line Conducted Emission | 15.207 | RSS-GEN Section 8.8 | Pass* |
| Conducted Peak Output Power | 15.247 (b)(1) | RSS-247 Section 5.4 (b) | Pass* |
| 20dB Occupied Bandwidth 99% Occupied Bandwidth | 15.247 (a)(1) | RSS-247 Section 5.1 (a) | Pass* |
| Carrier Frequencies Separation | 15.247 (a)(1) | RSS-247 Section 5.1 (b) | Pass* |
| Hopping Channel Number | 15.247 (a)(1) | RSS-247 Section 5.1 (d) | Pass* |
| Dwell Time | 15.247 (a)(1) | RSS-247 Section 5.1 (d) | Pass* |
| Spurious Emission | 15.205/15.209 | RSS-GEN Section 6.13 RSS-247 Section 5.5 | Pass* |
| Band Edge | 15.247(d) | RSS-GEN Section 8.10 RSS-247 Section 5.5 | Pass* |

Note:

1. *Pass*:* please refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.
2. *Pass*:* Product FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR and another product FCC ID: XGK-C-ONE-HLF-HID, Canada IC: 8402A-CONEHLFHID; Their internal structure, circuit design, layout, components and internal wiring are the same; GSM, WCDMA, LTE and BT, WiFi circuit design and antenna are also the same. The only difference is that the RFID module is different.

5 General Information

5.1 Client Information

| | |
|---------------|------------------------------------------------------------------|
| Applicant: | COPPERNIC |
| Address: | 185 avenue Archimede, 13857 Aix en Provence, FRANCE |
| Manufacturer: | ASKEY COMPUTER Corp. |
| Address: | 10 F, N°119, JIANKANG RD., ZHONGHE DIST., New Tapei City, TAIWAN |

5.2 General Description of E.U.T.

| | |
|-----------------------------|---------------------------------------------------------------------------------|
| Product Name: | C-One HF iClass / LF Prox |
| Model No.: | C-One HLF HID |
| Operation Frequency: | 2402MHz~2480MHz |
| Transfer rate: | 1/2/3 Mbits/s |
| Number of channel: | 79 |
| Modulation type: | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Modulation technology: | FHSS |
| Antenna Type: | Internal Antenna |
| Antenna gain: | 2.52 dBi |
| Power supply: | Rechargeable Li-ion Battery DC3.7V-3300mAh |
| AC adapter with two plugs : | Model: SYS1561-1105-1 Input: AC100-240V, 50/60Hz, 1A Output: DC 5.35V, 2A |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 0 | 2402MHz | 20 | 2422MHz | 40 | 2442MHz | 60 | 2462MHz |
| 1 | 2403MHz | 21 | 2423MHz | 41 | 2443MHz | 61 | 2463MHz |
| 2 | 2404MHz | 22 | 2424MHz | 42 | 2444MHz | 62 | 2464MHz |
| 3 | 2405MHz | 23 | 2425MHz | 43 | 2445MHz | 63 | 2465MHz |
| 4 | 2406MHz | 24 | 2426MHz | 44 | 2446MHz | 64 | 2466MHz |
| 5 | 2407MHz | 25 | 2427MHz | 45 | 2447MHz | 65 | 2467MHz |
| ... | ... | ... | ... | ... | ... | ... | ... |
| 15 | 2417MHz | 35 | 2437MHz | 55 | 2457MHz | 75 | 2477MHz |
| 16 | 2418MHz | 36 | 2438MHz | 56 | 2458MHz | 76 | 2478MHz |
| 17 | 2419MHz | 37 | 2439MHz | 57 | 2459MHz | 77 | 2479MHz |
| 18 | 2420MHz | 38 | 2440MHz | 58 | 2460MHz | 78 | 2480MHz |
| 19 | 2421MHz | 39 | 2441MHz | 59 | 2461MHz | | |

Remark: Channel 0, 39 &78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.

5.3 Test environment and test mode

| Operating Environment: | |
|------------------------|-------------------------------------------------------------------------|
| Temperature: | 24.0 °C |
| Humidity: | 54 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test Modes: | |
| Non-hopping mode: | Keep the EUT in continuous transmitting mode with worst case data rate. |
| Hopping mode: | Keep the EUT in hopping mode. |
| Remark | GFSK (1 Mbps) is the worst case mode. |

The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

| Parameters | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Conducted Emission (9kHz ~ 30MHz) | ±1.60 dB (k=2) |
| Radiated Emission (9kHz ~ 30MHz) | ±3.12 dB (k=2) |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.32 dB (k=2) |
| Radiated Emission (1GHz ~ 18GHz) | ±5.38 dB (k=2) |
| Radiated Emission (18GHz ~ 40GHz) | ±3.36 dB (k=2) |

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,

Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

| Radiated Emission: | | | | | |
|--------------------|-----------------|---------------|-------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | SAEMC | 9m*6m*6m | 966 | 07-22-2017 | 07-21-2020 |
| Loop Antenna | SCHWARZBECK | FMZB1519B | 00044 | 03-18-2019 | 03-17-2020 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 497 | 03-18-2019 | 03-17-2020 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 916 | 03-18-2019 | 03-17-2020 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170582 | 11-18-2018 | 11-17-2019 |
| | | | | 11-18-2019 | 11-17-2020 |
| EMI Test Software | AUDIX | E3 | 6.110919b | N/A | N/A |
| Pre-amplifier | HP | 8447D | 2944A09358 | 03-18-2019 | 03-17-2020 |
| Pre-amplifier | CD | PAP-1G18 | 11804 | 03-18-2019 | 03-17-2020 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-18-2019 | 03-17-2020 |
| Spectrum analyzer | Rohde & Schwarz | FSP40 | 100363 | 11-18-2018 | 11-17-2019 |
| | | | | 11-18-2019 | 11-17-2020 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-18-2019 | 03-17-2020 |
| Cable | ZDECL | Z108-NJ-NJ-81 | 1608458 | 03-18-2019 | 03-17-2020 |
| Cable | MICRO-COAX | MFR64639 | K10742-5 | 03-18-2019 | 03-17-2020 |
| Cable | SUHNER | SUCOFLEX100 | 58193/4PE | 03-18-2019 | 03-17-2020 |

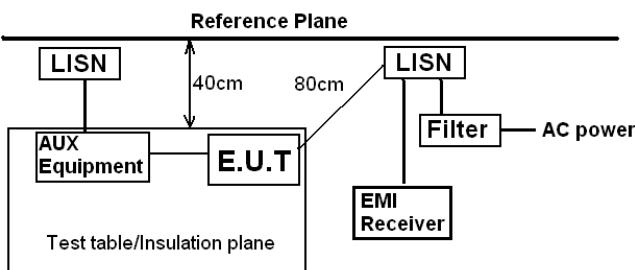
| Conducted Emission: | | | | | |
|---------------------|-----------------|------------|-------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| EMI Test Receiver | Rohde & Schwarz | ESCI | 101189 | 03-18-2019 | 03-17-2020 |
| Pulse Limiter | SCHWARZBECK | OSRAM 2306 | 9731 | 03-18-2019 | 03-17-2020 |
| LISN | CHASE | MN2050D | 1447 | 03-18-2019 | 03-17-2020 |
| LISN | Rohde & Schwarz | ESH3-Z5 | 8438621/010 | 07-21-2019 | 07-20-2020 |
| Cable | HP | 10503A | N/A | 03-18-2019 | 03-17-2020 |
| EMI Test Software | AUDIX | E3 | 6.110919b | N/A | N/A |

6 Test results and measurement data

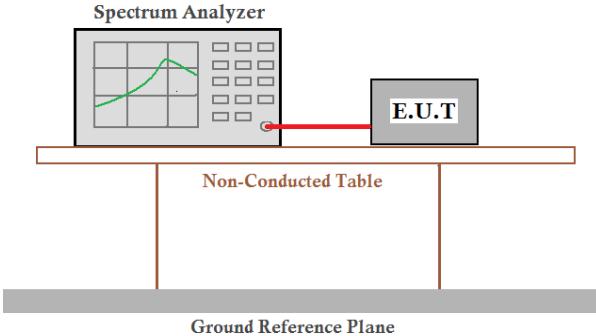
6.1 Antenna Requirement

| Standard requirement: | FCC Part 15 C Section 15.203 /247(c) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. | 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi. |
| E.U.T Antenna: | The Bluetooth antenna is an internal antenna which permanently attached, and the best case gain of the antenna is 2.52 dBi. |
| | |

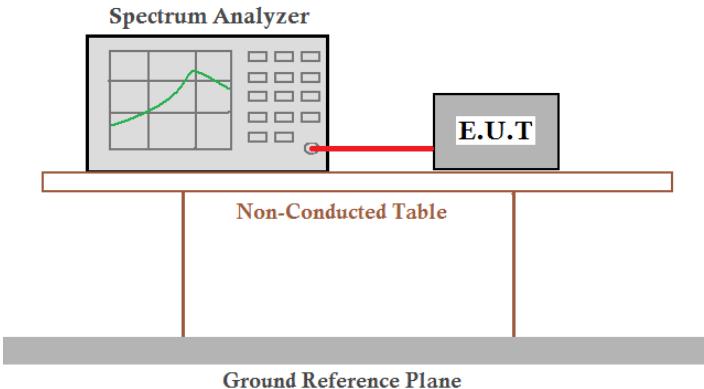
6.2 Conducted Emissions

| | | | |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement: | FCC Part 15 C Section 15.207 RSS-GEN Section 8.8 | | |
| Test Method: | ANSI C63.10:2013 | | |
| Test Frequency Range: | 150 kHz to 30 MHz | | |
| Class / Severity: | Class B | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz, Sweep time=auto | | |
| Limit: | Frequency range (MHz) | Limit (dBuV) | |
| | | Quasi-peak | Average |
| | 0.15-0.5 | 66 to 56* | 56 to 46* |
| | 0.5-5 | 56 | 46 |
| | 5-30 | 60 | 50 |
| | * Decreases with the logarithm of the frequency. | | |
| Test setup: |  <p><i>Remark</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p> | | |
| Test procedure: | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. | | |
| Test Instruments: | Refer to section 5.8 for details | | |
| Test mode: | Hopping mode | | |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONEFLAGR. | | |

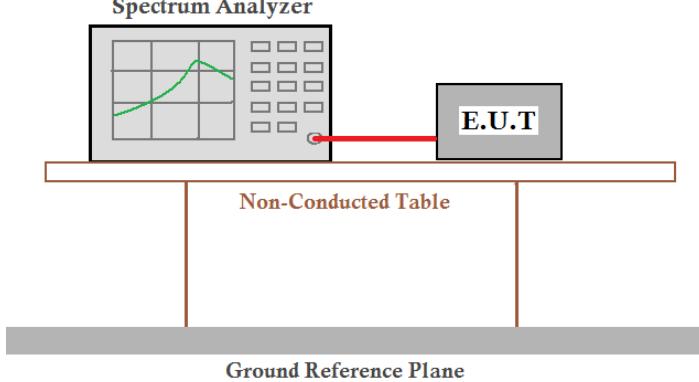
6.3 Conducted Output Power

| | |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (b)(1) RSS-247 section 5.4(b) |
| Test Method: | ANSI C63.10:2013 and DA00-705 |
| Receiver setup: | RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW \leq 1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz and < 3MHz) |
| Limit: | <p>FCC: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.</p> <p>IC: For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels.</p> |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Non-hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

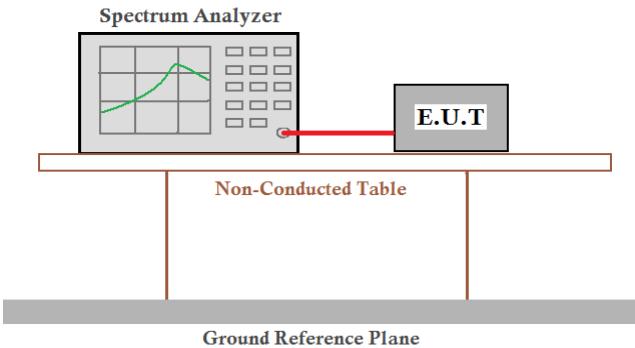
6.4 20dB Occupy Bandwidth

| | |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (a)(1) RSS-247 section 5.1(a) |
| Test Method: | ANSI C63.10:2013 and DA00-705 |
| Receiver setup: | RBW=30 kHz, VBW=100 kHz, detector=Peak |
| Limit: | N/A |
| Test setup: |  <p>The diagram illustrates the test setup for measuring the 20dB Occupy Bandwidth. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Non-hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

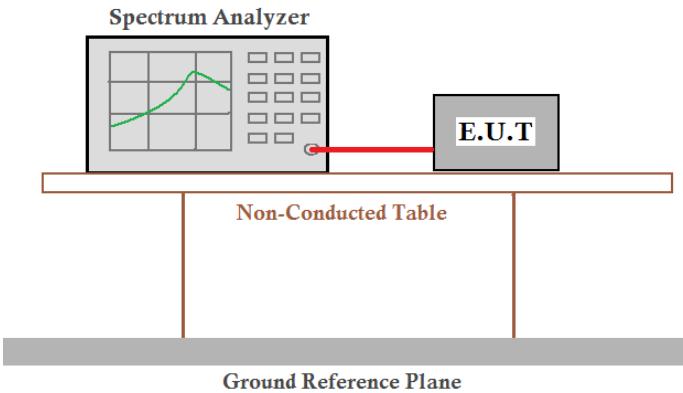
6.5 Carrier Frequencies Separation

| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (a)(1) RSS-247 section 5.1(b) |
| Test Method: | ANSI C63.10:2013 and DA00-705 |
| Receiver setup: | RBW=100 kHz, VBW=300 kHz, detector=Peak |
| Limit: | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater) |
| Test setup: | <p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p> |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

6.6 Hopping Channel Number

| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (a)(1) RSS-247 section 5.1(d) |
| Test Method: | ANSI C63.10:2013 and DA00-705 |
| Receiver setup: | RBW=100 kHz, VBW=300 kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak |
| Limit: | 15 channels |
| Test setup: | <p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p> |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

6.7 Dwell Time

| | |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (a)(1) RSS-247 section 5.1(d) |
| Test Method: | ANSI C63.10:2013 and KDB DA00-705 |
| Receiver setup: | RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak |
| Limit: | 0.4 Second |
| Test setup: |  |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

6.8 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part 15 C Section 15.247 (a)(1) and RSS 247 section 5.1 requirement:

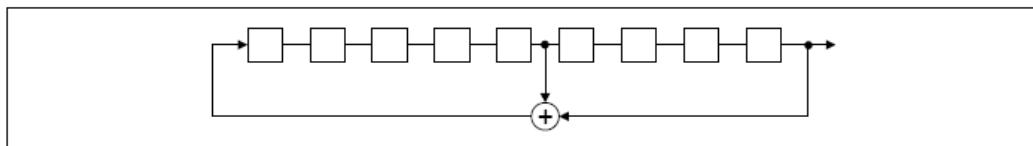
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence

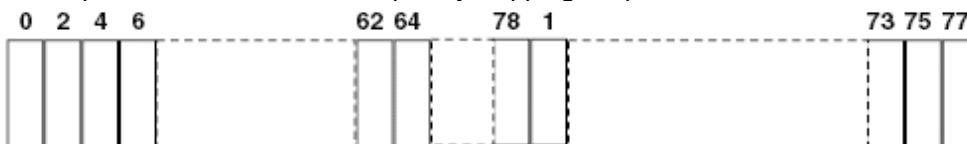
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

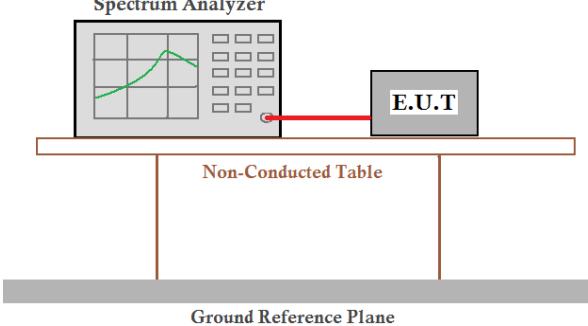


Each frequency used equally on the average by each transmitter.

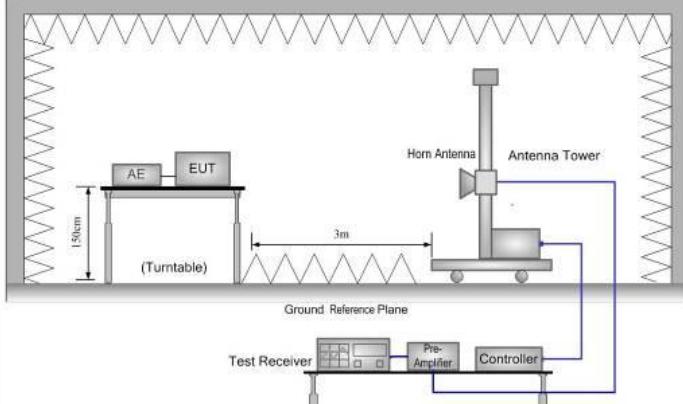
The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9 Band Edge

6.9.1 Conducted Emission Method

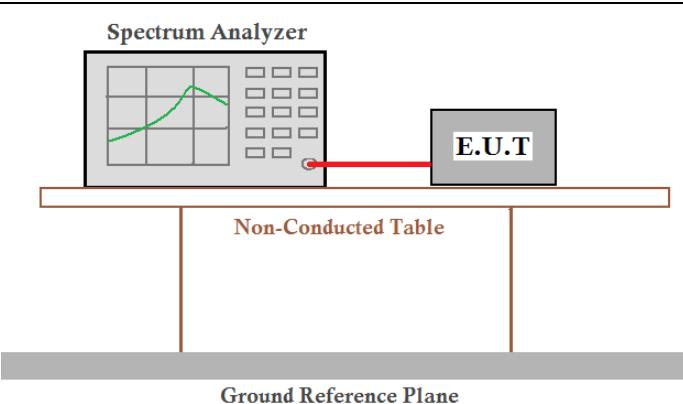
| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (d) RSS-247 section 5.5 |
| Test Method: | ANSI C63.10:2013 and DA00-705 |
| Receiver setup: | RBW=100 kHz, VBW=300 kHz, Detector=Peak |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup: | <p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p> |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Non-hopping mode and hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

6.9.2 Radiated Emission Method

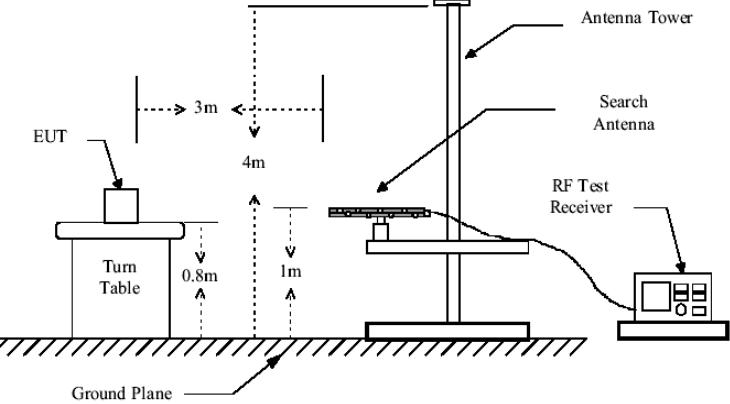
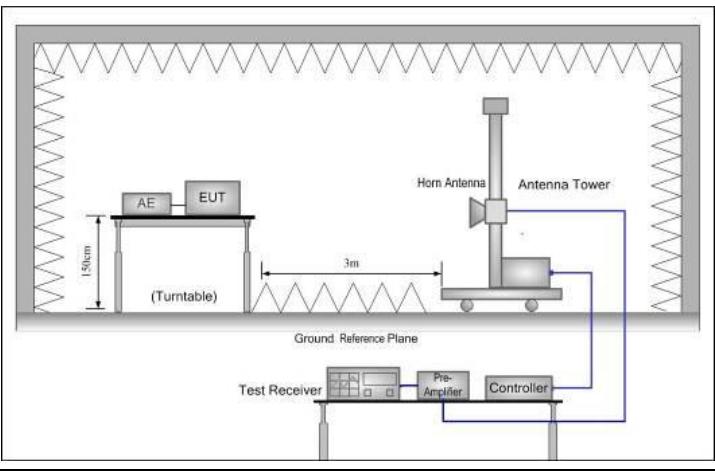
| | | | | | | | | | |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|---------------|---------------|--|--|--|--|
| Test Requirement: | FCC Part 15 C Section 15.209 and 15.205 RSS-GEN section 8.10 | | | | | | | | |
| Test Method: | ANSI C63.10: 2013 | | | | | | | | |
| Test Frequency Range: | 2.3GHz to 2.5GHz | | | | | | | | |
| Test Distance: | 3m | | | | | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark | | | | |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | | | | |
| | | RMS | 1MHz | 3MHz | Average Value | | | | |
| Limit: | Frequency | Limit (dBuV/m @ 3m) | | Remark | | | | | |
| | Above 1GHz | 54.00 | | Average Value | | | | | |
| | | 74.00 | | Peak Value | | | | | |
| Test setup: |  | | | | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | | | | |
| Test Instruments: | Refer to section 5.8 for details | | | | | | | | |
| Test mode: | Non-hopping mode | | | | | | | | |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. | | | | | | | | |

6.10 Spurious Emission

6.10.1 Conducted Emission Method

| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 15 C Section 15.247 (d) RSS-247 section 5.5 |
| Test Method: | ANSI C63.10:2013 and DA00-705 |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup: |  |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Non-hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR. |

6.10.2 Radiated Emission Method

| | | | | | |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------|------------------|------------------|
| Test Requirement: | FCC Part 15 C Section 15.209 and 15.205 RSS-Gen section 6.13 | | | | |
| Test Method: | ANSI C63.10: 2013 | | | | |
| Test Frequency Range: | 9 kHz to 25 GHz | | | | |
| Test Distance: | 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| | | RMS | 1MHz | 3MHz | Average Value |
| Limit: | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | 30MHz-88MHz | 40.0 | | Quasi-peak Value | |
| | 88MHz-216MHz | 43.5 | | Quasi-peak Value | |
| | 216MHz-960MHz | 46.0 | | Quasi-peak Value | |
| | 960MHz-1GHz | 54.0 | | Quasi-peak Value | |
| | Above 1GHz | 54.0 | | Average Value | |
| | | 74.0 | | Peak Value | |
| Test setup: | <p>Below 1GHz</p>  <p>Above 1GHz</p>  | | | | |

| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure: | <ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Non-hopping mode |
| Test results: | Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONEFAGR. |