



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

FLYING TECHNOLOGY DEVELOPMENT CO., LTD

Rm.2312, 23/F.Metropolis tower, 10 Metroplos Drive,

Hung, Hom, Kowloon.Hong Kong

FCC ID: XJS20070901

Report Type: Original Report	Product Type: GSM&GPRS Dual Standby Mobile Phone
Test Engineer:	Phoenix Liu <u>Phoenix Liu</u>
Report Number:	RSZ09062102-BT
Report Date:	2009-07-08
	Merry Zhao <u>Merry Zhao</u>
Reviewed By:	EMC Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “*” (Rev. 2)

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
CFR47 §15.247 (i) and §2.1093 – RF EXPOSURE	8
STANDARD APPLICABLE	8
RESULT:	9
CFR47 §15.203 – ANTENNA REQUIREMENT	10
STANDARD APPLICABLE	10
ANTENNA CONNECTOR CONSTRUCTION	10
CFR47 §15.207 (a) - CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP	12
TEST EQUIPMENT LIST AND DETAILS	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	13
PLOT(S) OF TEST DATA	13
CFR47 §15.205, §15.209, §15.247 – RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST EQUIPMENT LIST AND DETAILS	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	18
TEST DATA	18
CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS	22
TEST PROCEDURE	22

TEST DATA	22
CFR47 §15.247(a) (1) – 20dB BANDWIDTH TESTING	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS	25
TEST PROCEDURE	25
TEST DATA	25
CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS	28
TEST PROCEDURE	28
TEST DATA	28
CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS	30
TEST PROCEDURE	30
TEST DATA	30
CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	37
APPLICABLE STANDARD	37
TEST EQUIPMENT LIST AND DETAILS	37
TEST PROCEDURE	37
TEST DATA	38
CFR47 §15.247(d) - BAND EDGES TESTING	40
APPLICABLE STANDARD	40
TEST EQUIPMENT LIST AND DETAILS	40
TEST PROCEDURE	40
TEST DATA	41
DECLARATION LETTER	43

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *FIYING TECHNOLOGY DEVELOPMENT CO., LTD*'s product, model number: *F8, F009, F999, D9A*(*FCC ID: XJS20070901*) or the "EUT" as referred to in this report is a *GSM&GPRS Dual Standby Mobile Phone*, which measures approximately: 10.3 cm L x 5.1 cm W x 1.8 cm H, rated input voltage: DC 3.7V battery.

Frequency Range:

Cellular Band: 824-849 MHz (TX), 869-894 MHz (RX)
PCS Band: 1850-1910 MHz (TX), 1930-1990 MHz (RX)
Bluetooth: 2400-2483.5 MHz (TX/RX)
WiFi: 2412-2462 MHz (TX/RX)

Modulation Mode: GMSK (GSM850/PCS1900), GFSK (Bluetooth) , Wi-Fi (DSSS/OFDM)

Transmitter Output Power:

Cellular Band: 33±2 dBm
PCS Band: 30±2 dBm
Bluetooth: -10~4 dBm
Wi-Fi: 10±2 dBm

All measurement and test data in this report was gathered from production sample serial number: 0906082(Assigned by BACL, Shenzhen). The EUT was received on 2009-06-21.

**Note: The series products, model F8, F009, F999, D9A, we select F8 to test, the difference of these models is in model name, there is no electrical change has been made to the equipment, which was explained in the attached Declaration Letter.*

Objective

This Type approval report is prepared on behalf of *FIYING TECHNOLOGY DEVELOPMENT CO., LTD* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

This measurement and test report only pertains to the Bluetooth portion of the EUT; for measurement and test results to the GSM 1900 function please refer to report RSZ09031601-2224 issued by Shenzhen BACL.

Related Submittal(s)/Grant(s)

FCC Part 15.247 (Wi-Fi), Part 22H and 24E submission with FCC ID: XJS20070901.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at
<http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).


Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
R & S	Universal Radio Commutation Tester	CMU200	109038	DoC

Configuration of Test Setup

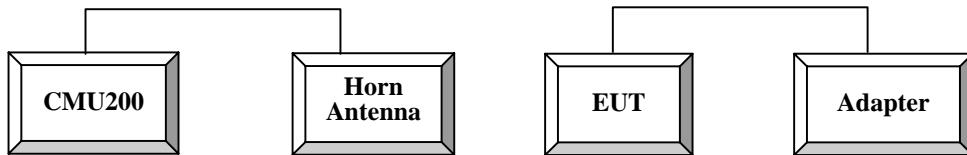

Block Diagram of Test Setup

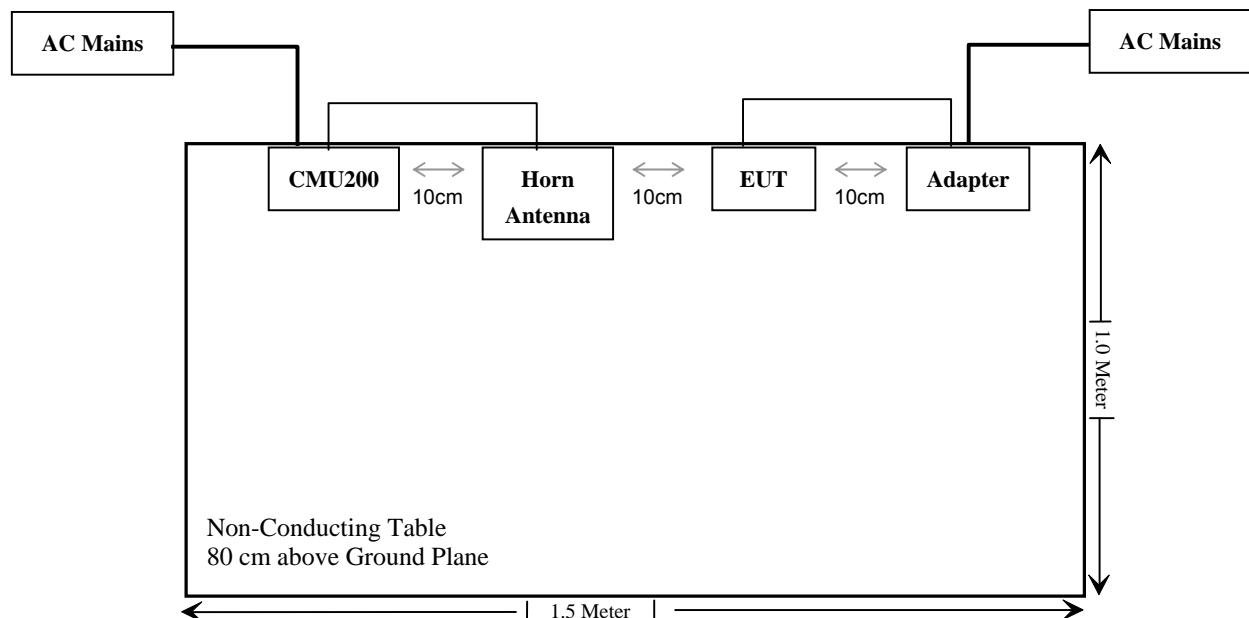

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.109, §15.247(d)	Radiated Emissions	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

CFR47 §15.247 (i) and §2.1093 – RF EXPOSURE

Standard Applicable

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<u>SAR not required:</u> <u>Unlicensed only</u> o when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas
Unlicensed Transmitters	<p><u>When there is no simultaneous transmission –</u></p> <ul style="list-style-type: none"> o output $\leq 60/f$: SAR not required o output $> 60/f$: stand-alone SAR required <p><u>When there is simultaneous transmission –</u></p> <p><u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> o output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas o output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas o output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <p><u>Otherwise stand-alone SAR is required</u></p> <p><u>When stand-alone SAR is required</u></p> <ul style="list-style-type: none"> o test SAR on highest output channel for each wireless mode and exposure condition o if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures 	<u>Licensed & Unlicensed</u> <ul style="list-style-type: none"> o when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas o when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 <p><u>SAR required:</u> <u>Licensed & Unlicensed</u> antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> o when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues o position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Three antennas are available for the EUT, one is PCS antenna, the other is Wifi antenna and the third is Bluetooth antenna, the distance between GSM/PCS and Bluetooth is less than 2.5 cm, the distance between Wi-Fi and Bluetooth is more than 5 cm. according to FCC KDB 648474 D01 SAR Handsets Multi Xmitter and ant, V01r05 released on September 2008, the Max peak output power is $0.119 \text{ mW} < P_{\text{Ref}}$ (12 mw) stand-alone SAR is not required for Bluetooth antenna.

Result:

The SAR measurement is exempt for Bluetooth.

CFR47 §15.203 – ANTENNA REQUIREMENT

Standard Applicable

According to CFR47 § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has 3 antennas; one is for Bluetooth, the gain is -2 dBi; one is for Wi-Fi, the gain is 0 dBi; other is for GSM850/PCS1900, the gain of PCS1900 is 1 dBi, the gain of GSM850 is 2 dBi. All antennas are permanently attached.

Result: Compliant.

CFR47 §15.207 (a) - CONDUCTED EMISSIONS

Applicable Standard


CFR47 §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

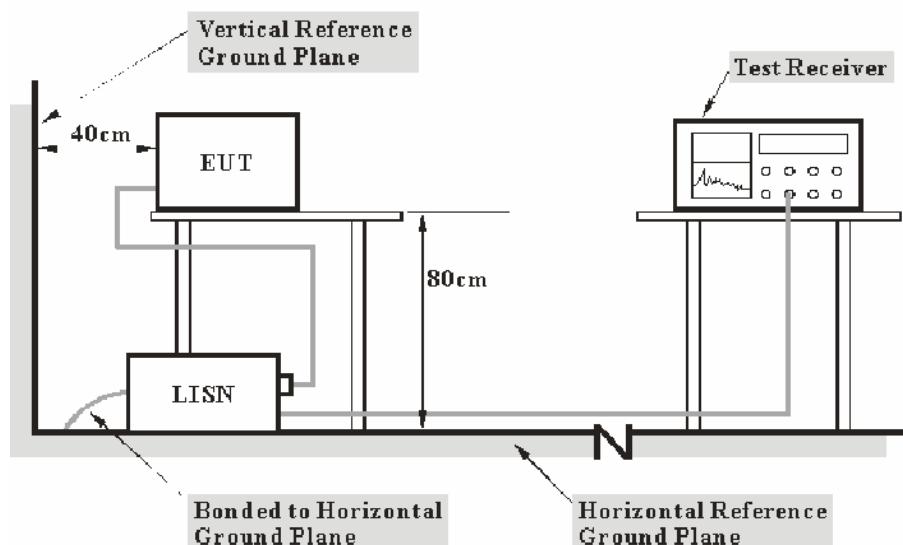

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2009-04-28	2010-04-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-04-28	2010-04-27

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

20.40 dB at 0.7350 MHz in the Neutral conductor mode

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Phoenix Liu on 2009-07-08.

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dB μ V)	Detector (QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.7350	25.60	AV	Neutral	46.00	20.40
0.2450	29.10	AV	Neutral	51.92	22.82
0.3250	26.00	AV	Neutral	49.58	23.58
0.1650	41.60	QP	Neutral	65.21	23.61
0.2450	37.80	QP	Neutral	61.92	24.12
4.2350	31.80	QP	Neutral	56.00	24.20
2.3600	31.70	QP	Neutral	56.00	24.30
2.3650	21.70	AV	Neutral	46.00	24.30
0.7350	31.20	QP	Neutral	56.00	24.80
4.2350	20.30	AV	Neutral	46.00	25.70
0.6500	20.10	AV	Line	46.00	25.90
0.1650	29.20	AV	Neutral	55.21	26.01
0.5700	29.90	QP	Line	56.00	26.10
0.3250	33.40	QP	Neutral	59.58	26.18
0.5700	19.50	AV	Line	46.00	26.50
0.6500	29.40	QP	Line	56.00	26.60
0.3250	22.60	AV	Line	49.58	26.98
0.1650	38.20	QP	Line	65.21	27.01
0.2450	34.80	QP	Line	61.92	27.12
0.2450	24.50	AV	Line	51.92	27.42
0.4050	30.30	QP	Line	57.75	27.45
0.4050	19.90	AV	Line	47.75	27.85
0.3250	31.60	QP	Line	59.58	27.98
0.1650	24.90	AV	Line	55.21	30.31


Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

Conducted emission

FCC PART 15


EUT: GSM&GPAS Dual Standby Mobile Phone
Manuf: FIYING
Op Cond: Operating&charging
Operator: Phoenix
Test Spec: AC 120/60Hz L
Comment: Temp: 25 Hum: 56%
BACL

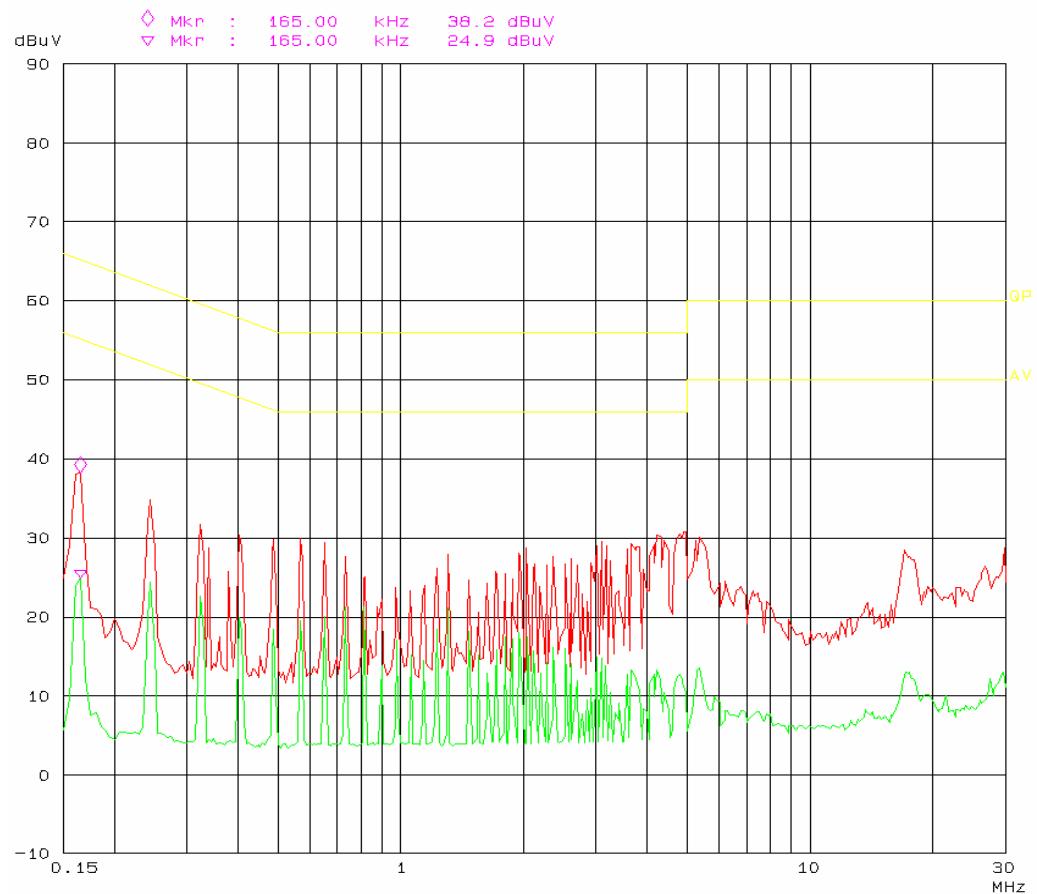

Conducted emission

FCC PART 15

EUT: GSM&GPRS Dual Standby Mobile Phone
Manuf: FIYING
Op Cond: Operating&charging
Operator: Phoenix
Test Spec: AC 120/60Hz N
Comment: Temp: 25 Hum: 56%
BACL

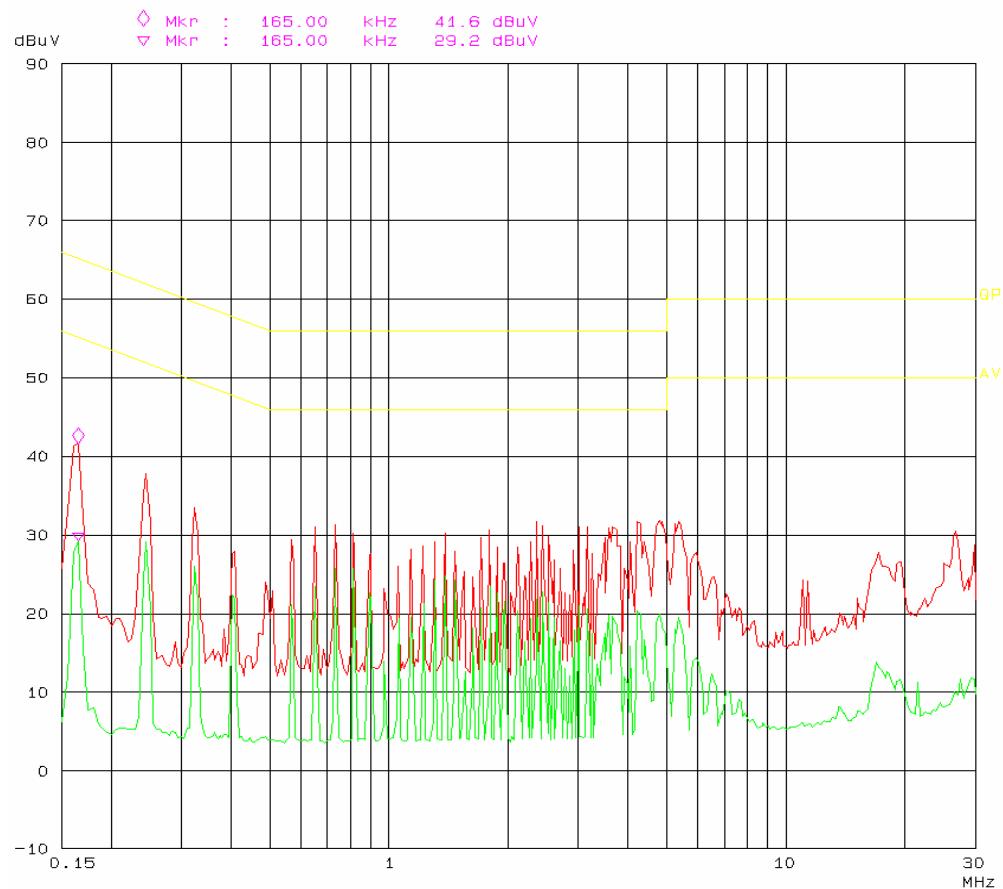


CFR47 §15.205, §15.209, §15.247 – RADIATED EMISSIONS**Applicable Standard**

CFR47 §15.205; §15.209; §15.247 (d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

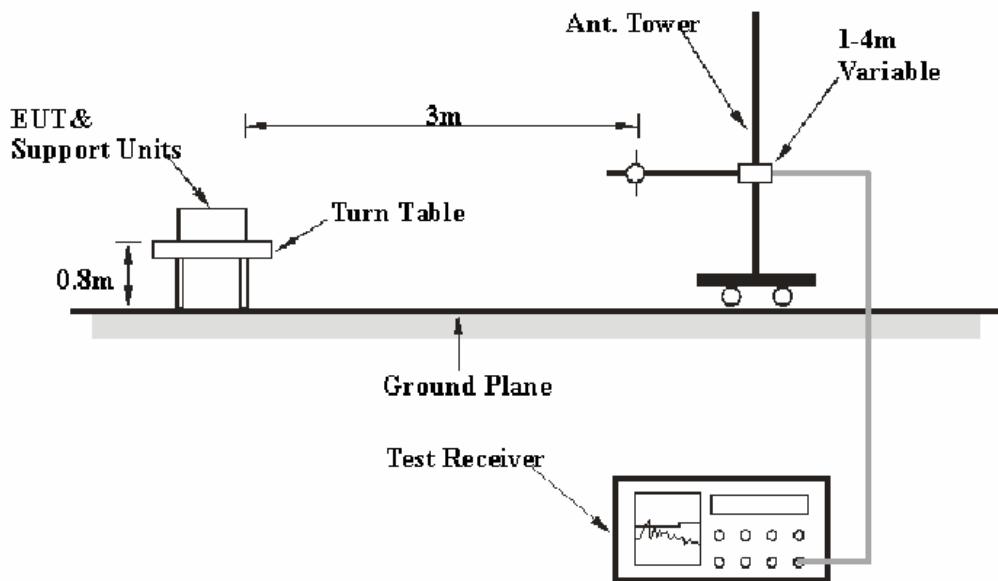EUT Setup

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2008-08-02	2009-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
HP	Amplifier	8449B	3008A00277	2008-09-12	2009-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2008-09-25	2009-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2008-08-28	2009-08-27

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

Transmitting mode (Below 1GHz):

8.8 dB at 36.034525 MHz in the **Vertical** polarization

Transmitting mode (Above 1 GHz):

11.75 dB at 4804.00 MHz in the **Horizontal** polarization (Low Channel)
11.79 dB at 4882.00 MHz in the **Horizontal** polarization (Middle Channel)
9.49 dB at 4960.00 MHz in the **Horizontal** polarization (High Channel)


Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Phoenix Liu on 2009-07-01.

Test Mode: Transmitting (below 1 GHz)

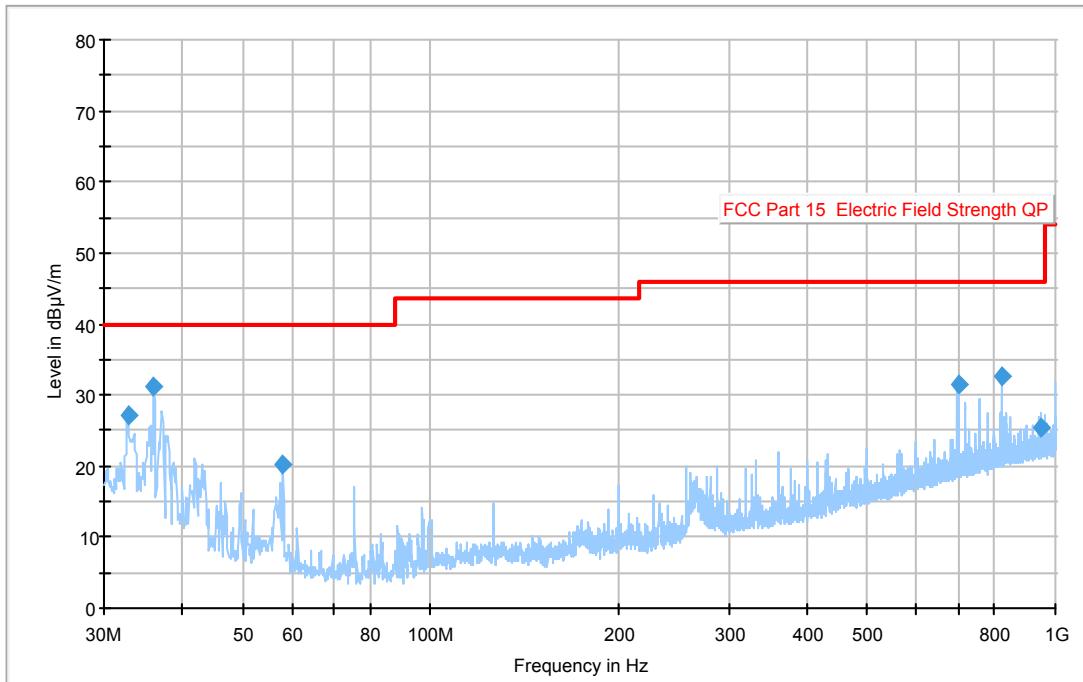

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
36.034525	31.2	109.0	V	162.0	-12.7	40.0	8.8
32.733725	27.1	174.0	V	157.0	-10.4	40.0	12.9
818.984775	32.6	109.0	V	158.0	-4.9	46.0	13.4
700.358925	31.5	111.0	V	166.0	-6.9	46.0	14.5
57.763125	20.1	109.0	V	128.0	-21.5	40.0	19.9
950.631600	25.5	143.0	H	206.0	-3.0	46.0	20.5

Test Mode: Transmitting (Above 1 GHz)

Frequency (MHz)	S.A. Reading (dB μ V/m)	Detector PK/QP/AV	Direction Degree	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	Remarks
Low Channel (2402 MHz)												
4804.00	30.79	AV	160	1.0	H	36.3	8.86	33.7	42.25	54	11.75	harmonic
7206.00	30.21	AV	80	1.0	H	39.2	5.11	33.6	40.92	54	13.08	harmonic
4804.00	28.88	AV	150	1.2	V	35.0	8.86	33.7	39.04	54	14.96	harmonic
7206.00	28.70	AV	70	1.2	V	38.0	5.11	33.6	38.21	54	15.79	harmonic
4804.00	44.30	PK	180	1.0	H	36.3	8.86	33.7	55.76	74	18.24	harmonic
7206.00	43.10	PK	70	1.0	H	39.2	5.11	33.6	53.81	74	20.19	harmonic
4804.00	42.93	PK	180	1.2	V	35.0	8.86	33.7	53.09	74	20.91	harmonic
1134.26	37.30	AV	12	1.0	H	25.9	2.77	34.8	31.17	54	22.83	spurious
7206.00	40.78	PK	60	1.2	V	38.0	5.11	33.6	50.29	74	23.71	harmonic
1134.26	37.11	AV	35	1.2	V	24.8	2.77	34.8	29.88	54	24.12	spurious
1134.26	49.14	PK	20	1.0	H	25.9	2.77	34.8	43.01	74	30.99	spurious
1134.26	50.11	PK	20	1.2	V	24.8	2.77	34.8	42.88	74	31.12	spurious
Middle Channel (2441 MHz)												
4882.00	30.75	AV	175	1.0	H	36.3	8.86	33.7	42.21	54	11.79	harmonic
7323.00	29.92	AV	15	1.1	H	39.2	5.11	33.6	40.63	54	13.37	harmonic
4882.00	30.25	AV	185	1.1	V	35.0	8.86	33.7	40.41	54	13.59	harmonic
7323.00	29.14	AV	10	1.0	V	38.0	5.11	33.6	38.65	54	15.35	harmonic
4882.00	45.18	PK	180	1.2	H	36.3	8.86	33.7	56.64	74	17.36	harmonic
4882.00	44.02	PK	180	1.2	V	35.0	8.86	33.7	54.18	74	19.82	harmonic
7323.00	42.61	PK	0	1.0	H	39.2	5.11	33.6	53.32	74	20.68	harmonic
7323.00	41.57	PK	0	1.2	V	38.0	5.11	33.6	51.08	74	22.92	harmonic
1448.89	31.74	AV	45	0.0	V	25.8	5.37	34.6	28.31	54	25.69	spurious
1260.52	31.85	AV	30	1.0	H	25.9	2.77	34.8	25.72	54	28.28	spurious
1448.89	44.53	PK	30	1.0	V	25.8	5.37	34.6	41.10	74	32.90	spurious
1260.52	46.55	PK	45	1.2	H	25.9	2.77	34.8	40.42	74	33.58	spurious
High Channel (2480 MHz)												
4960.00	33.05	AV	0	1.0	H	36.3	8.86	33.7	44.51	54	9.49	harmonic
4960.00	31.34	AV	20	1.0	V	35.0	8.86	33.7	41.50	54	12.50	harmonic
7440.00	29.74	AV	0	1.1	H	39.2	5.11	33.6	40.45	54	13.55	harmonic
7440.00	29.12	AV	15	1.0	V	38.0	5.11	33.6	38.63	54	15.37	harmonic
4960.00	46.8	PK	20	1.2	H	36.3	8.86	33.7	58.26	74	15.74	harmonic
4960.00	45.23	PK	0	1.2	V	35.0	8.86	33.7	55.39	74	18.61	harmonic
7440.00	43.12	PK	10	1.0	H	39.2	5.11	33.6	53.83	74	20.17	harmonic
1450.90	33.61	AV	30	1.0	H	26.7	5.37	34.6	31.08	54	22.92	spurious
7440.00	40.84	PK	10	1.2	V	38.0	5.11	33.6	50.35	74	23.65	harmonic
1450.90	30.67	AV	0	1.0	V	25.8	5.37	34.6	27.24	54	26.76	harmonic
1450.90	48.35	PK	0	1.2	H	26.7	5.37	34.6	45.82	74	28.18	spurious
1450.90	44.72	PK	30	1.0	V	25.8	5.37	34.6	41.29	74	32.71	spurious

Spurious emission in restricted band

Frequency (MHz)	S.A. Reading (dB μ V/m)	Detector PK/QP/AV	Direction Degree	Test Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	Remarks
2387.45	33.47	AV	0	1.0	V	33.9	7.9	30.3	44.97	54	9.03	spurious
2484.89	33.53	AV	0	1.0	H	33.9	7.9	30.9	44.43	54	9.57	spurious
2484.89	32.35	AV	0	1.0	V	33.9	7.9	30.3	43.85	54	10.15	spurious
2387.45	31.93	AV	0	1.0	H	33.9	7.9	30.9	42.83	54	11.17	spurious
2387.45	47.35	PK	30	1.2	V	33.9	7.9	30.3	58.85	74	15.15	spurious
2484.89	47.2	PK	10	1.0	H	33.9	7.9	30.9	58.10	74	15.90	spurious
2484.89	45.91	PK	0	1.2	V	33.9	7.9	30.3	57.41	74	16.59	spurious
2387.45	45.26	PK	20	1.2	H	33.9	7.9	30.9	56.16	74	17.84	spurious

CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Phoenix Liu on 2009-07-07.

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.004	0.696	Pass
Adjacent Channel	2403			
Mid Channel	2441	1.004	0.696	Pass
Adjacent Channel	2442			
High Channel	2480	1.004	0.696	Pass
Adjacent Channel	2479			

Please refer to the following plots.


Low Channel

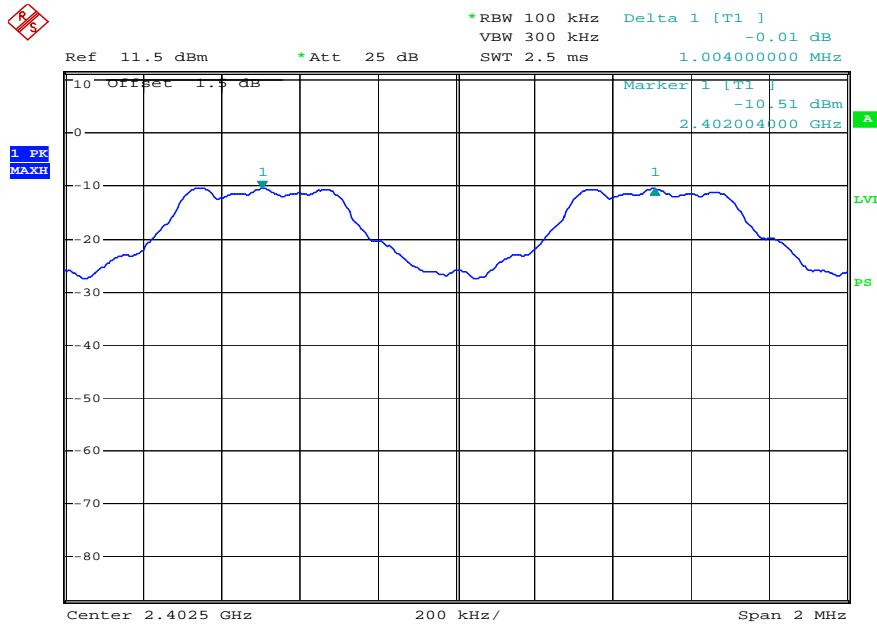

Date: 7.JUL.2009 09:06:28

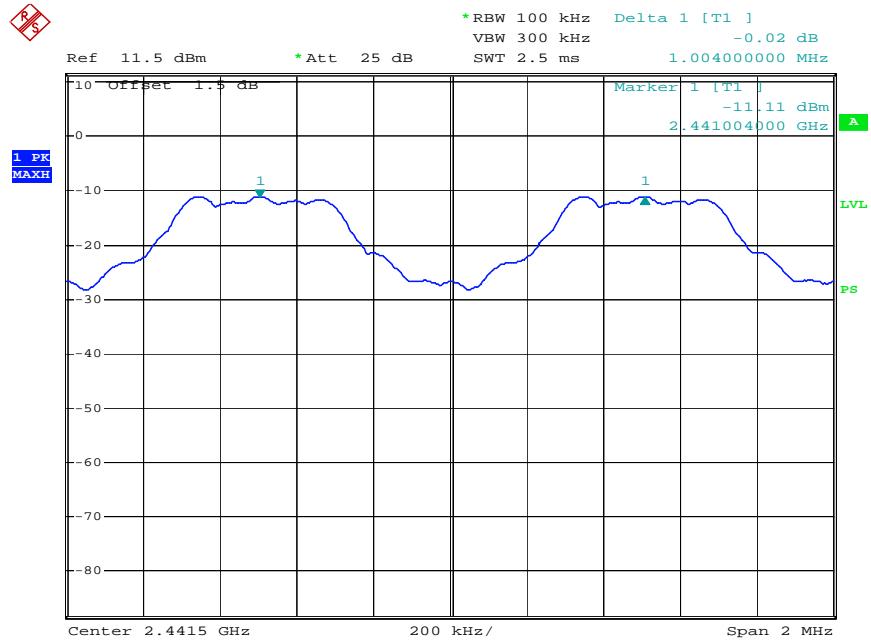Middle Channel

Date: 7.JUL.2009 09:07:46

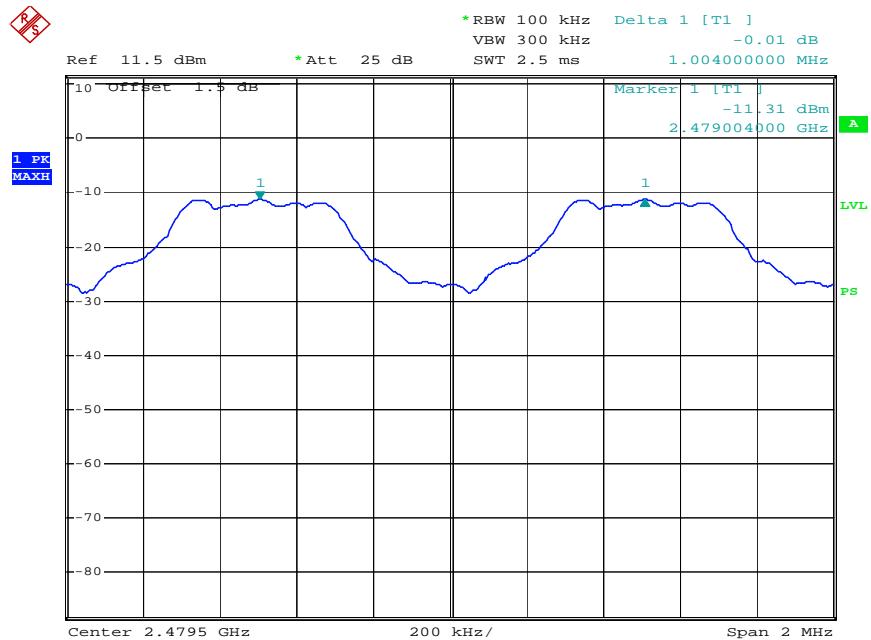High Channel

Date: 7.JUL.2009 09:08:50

CFR47 §15.247(a) (1) – 20dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Phoenix Liu on 2009-07-07.

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.044
Middle	2441	1.044
High	2480	1.044


Please refer to the following plots.

Low Channel

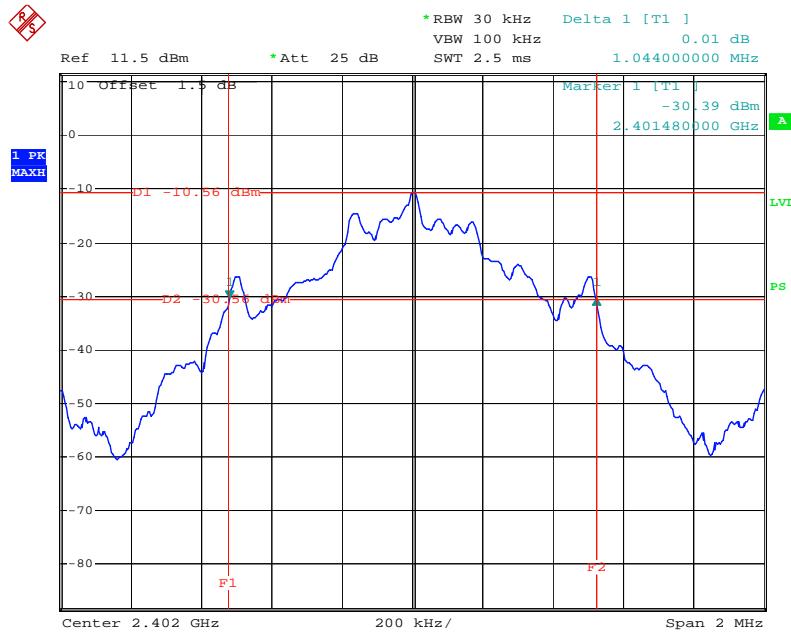


Date: 7.JUL.2009 09:10:19

Middle Channel

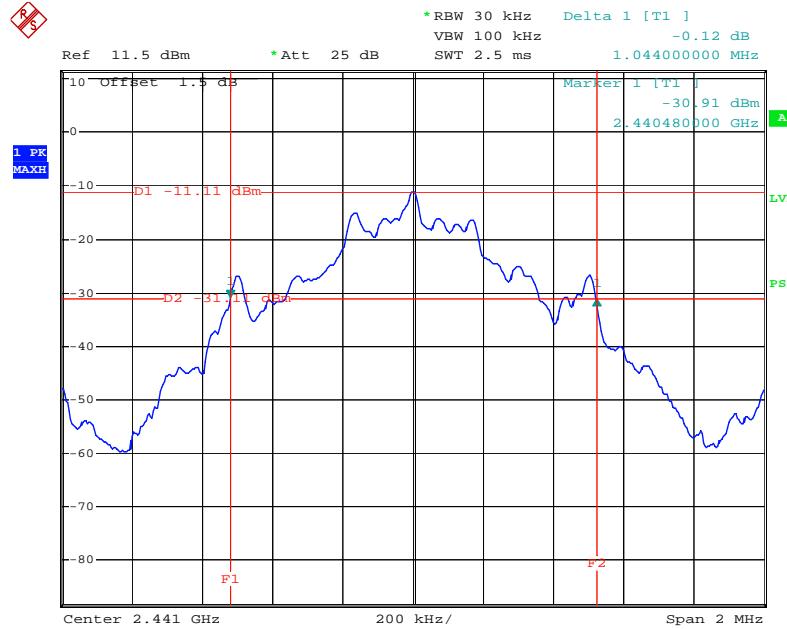

Date: 7.JUL.2009 09:11:28

High Channel

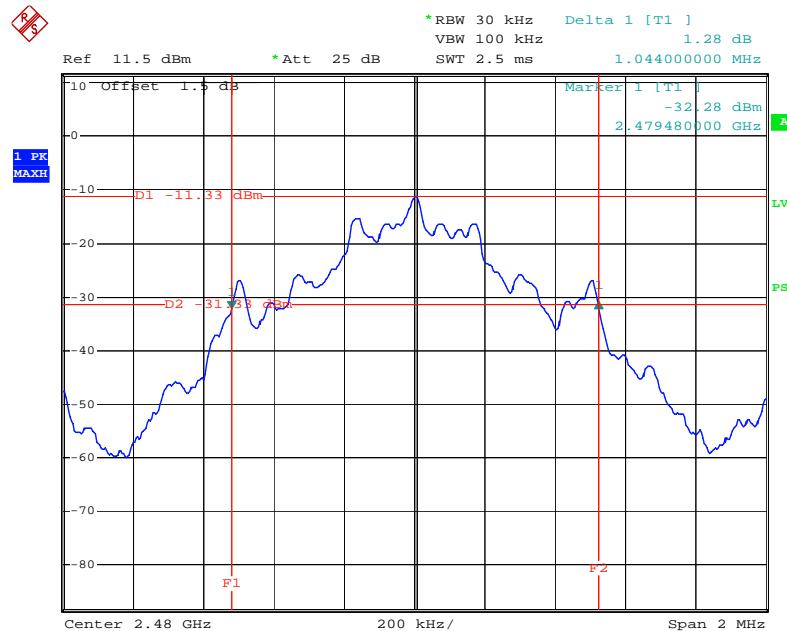

Date: 7.JUL.2009 09:12:35

CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Phoenix Liu on 2009-07-02.


Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

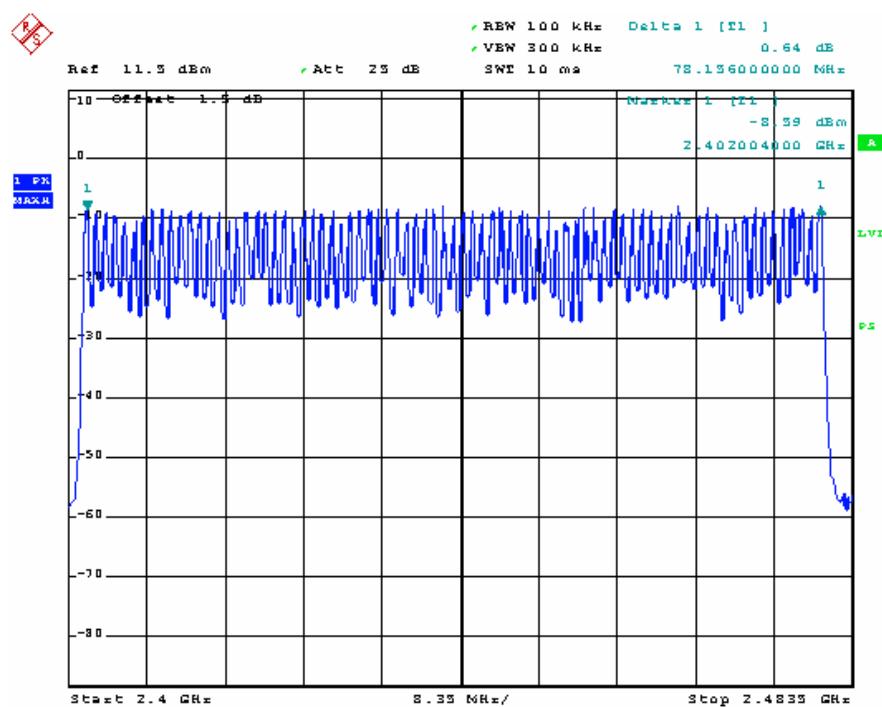

Date: 2.JUL.2009 06:15:53

CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s

Hop rate=1600/s

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

** The testing was performed by Phoenix Liu on 2009-07-02.*

Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

DH 1 Mode:

Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low	0.390	0.1248	0.4	Pass
Middle	0.390	0.1248	0.4	Pass
High	0.390	0.1248	0.4	Pass

Note: Dwell time=Pulse width (ms) \times (1600 \div 2 \div 79) \times 31.6 Second

DH 3 Mode:

Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low	1.656	0.2650	0.4	Pass
Middle	1.656	0.2650	0.4	Pass
High	1.668	0.2669	0.4	Pass

Note: Dwell time=Pulse width (ms) \times (1600 \div 4 \div 79) \times 31.6 Second


DH 5 Mode:

Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low	2.912	0.3106	0.4	Pass
Middle	2.912	0.3106	0.4	Pass
High	2.912	0.3106	0.4	Pass

Note: Dwell time=Pulse width (ms) \times (1600 \div 6 \div 79) \times 31.6 Second


Please refer to the following plots.

Low Channel for DH1

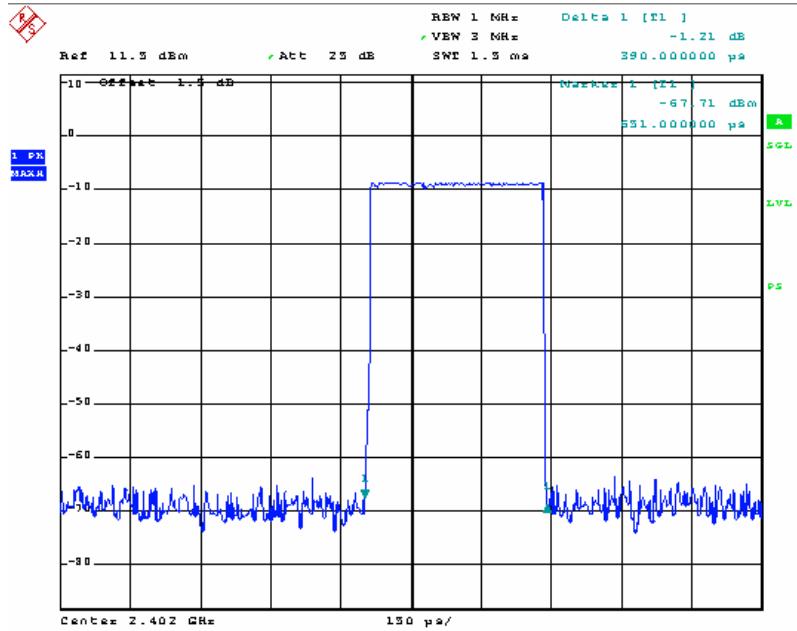


Date: 2.JUL.2009 06:40:45


Middle Channel for DH1

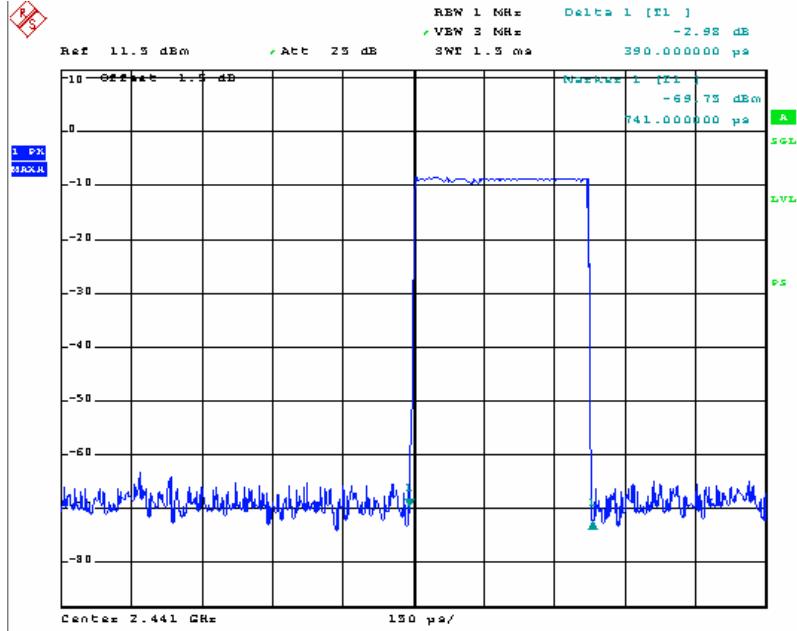

Date: 2.JUL.2009 06:41:27

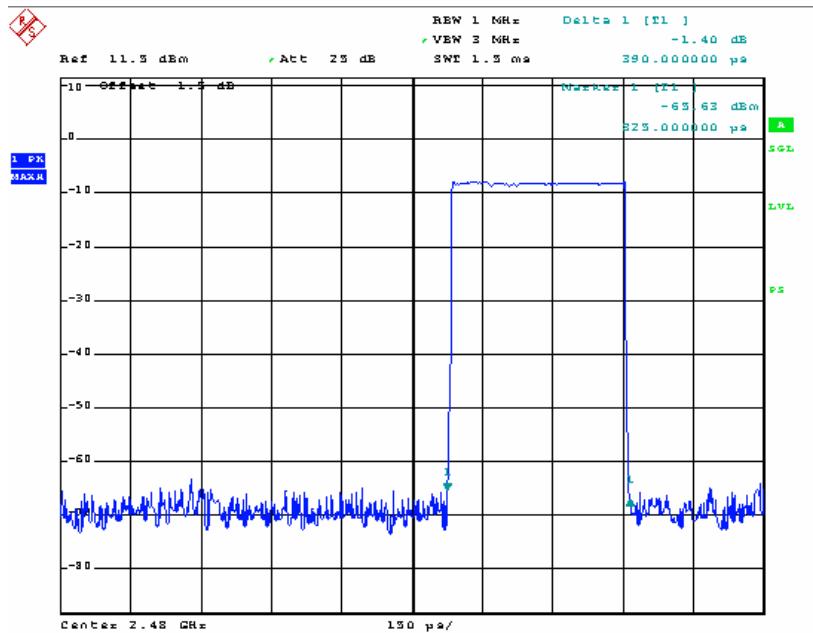
High Channel for DH1

Date: 2.JUL.2009 06:42:00

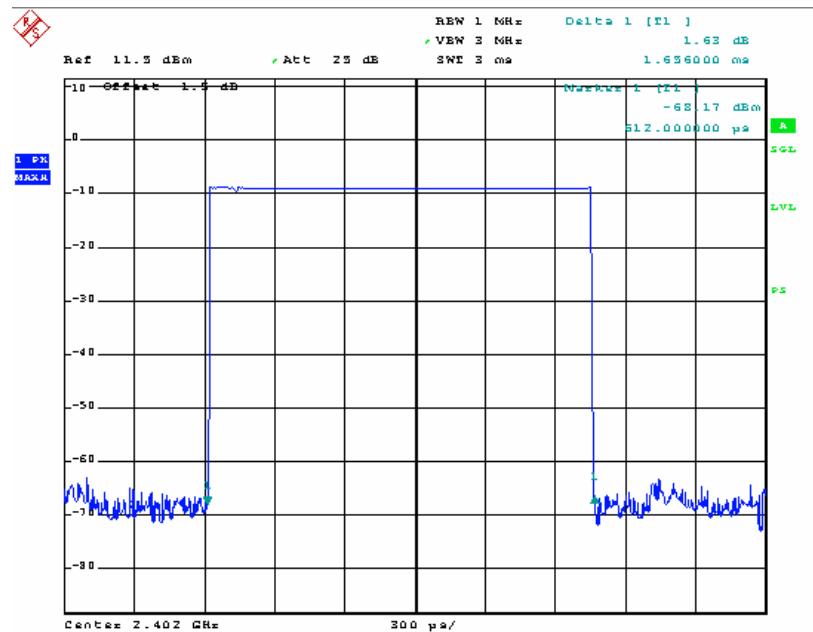Low Channel for DH3


Date: 2.JUL.2009 06:43:17

Middle Channel for DH3

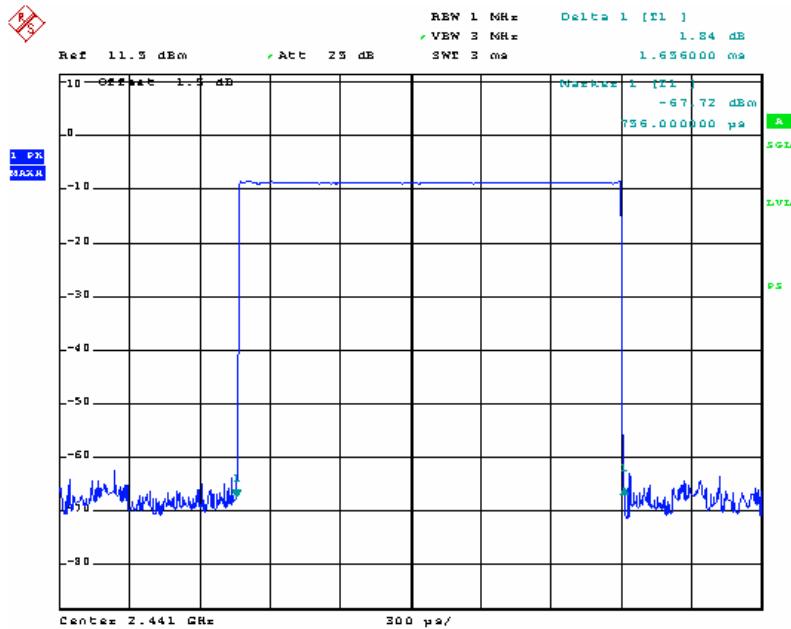


Date: 2.JUL.2009 06:43:52


High Channel for DH3

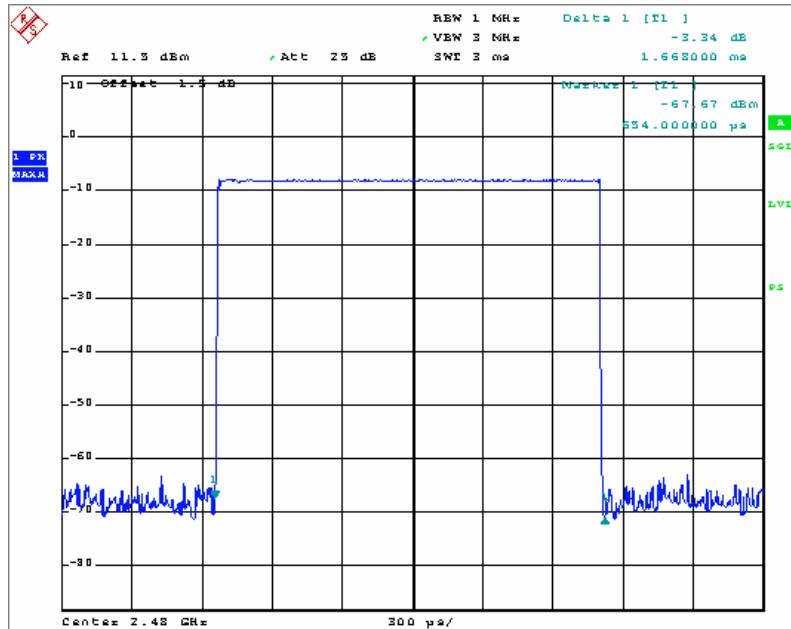

Date: 2.JUL.2009 06:44:25

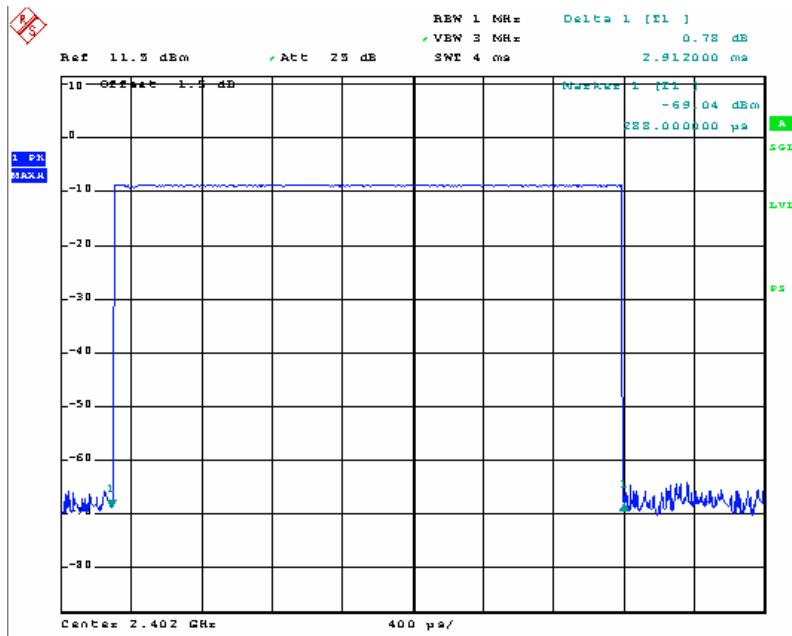
Low Channel for DH5

Date: 2.JUL.2009 06:45:37

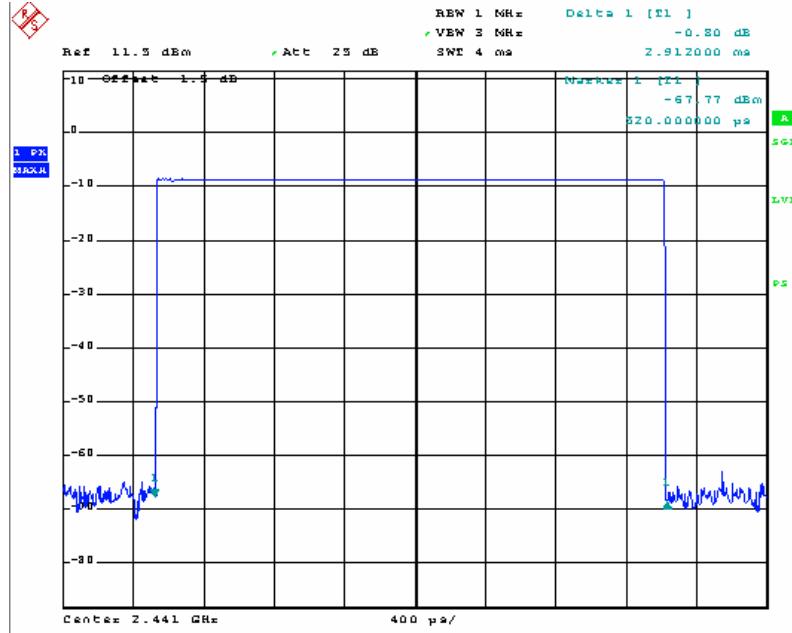Middle Channel for DH5

Date: 2.JUL.2009 06:46:22

High Channel for DH5

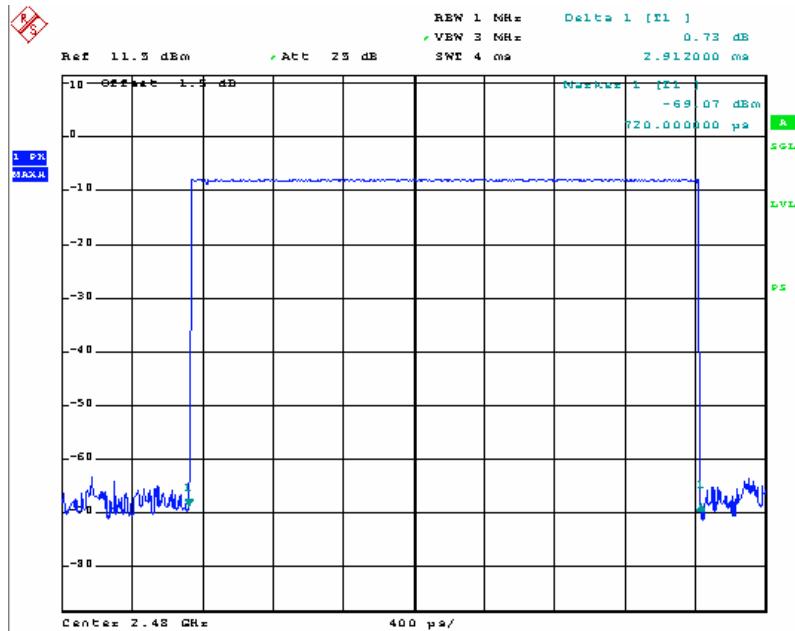

Date: 2.JUL.2009 06:47:08

CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

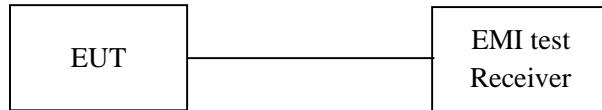

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


* The testing was performed by Phoenix Liu on 2009-07-07.

Test Result: Compliant.


Test Mode: Transmitting

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mw)	Limit (mw)
Low	2402	-9.23	0.119	125
Middle	2441	-9.90	0.102	125
High	2480	-9.77	0.105	125


Low Channel

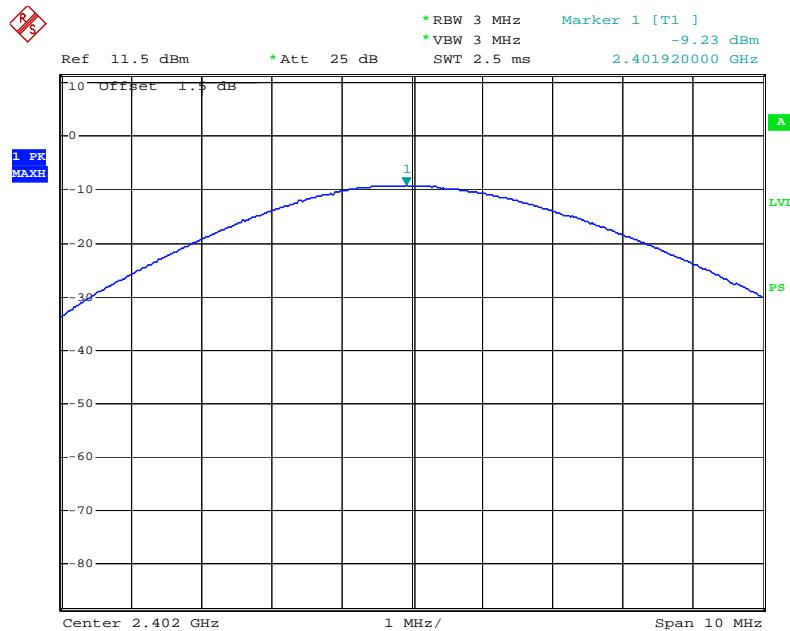

Date: 7.JUL.2009 09:14:30

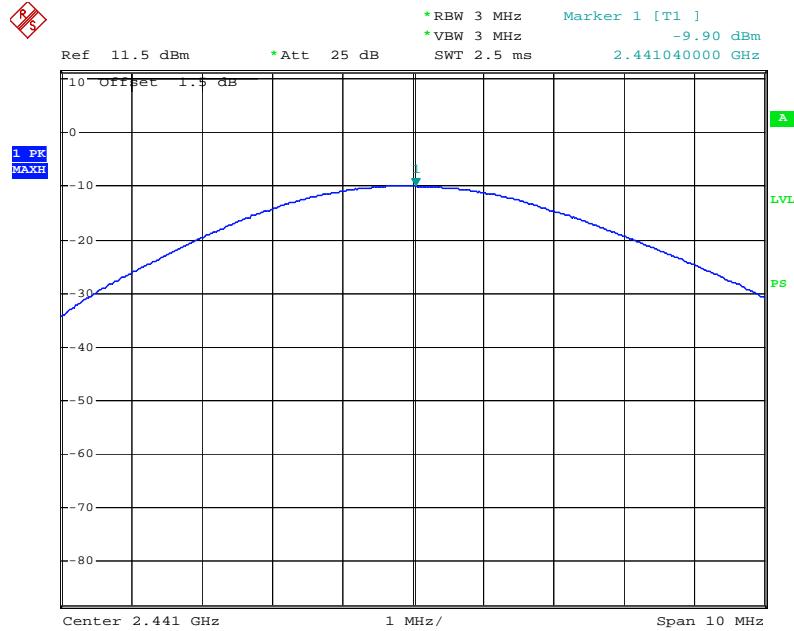Middle Channel

Date: 7.JUL.2009 09:14:10

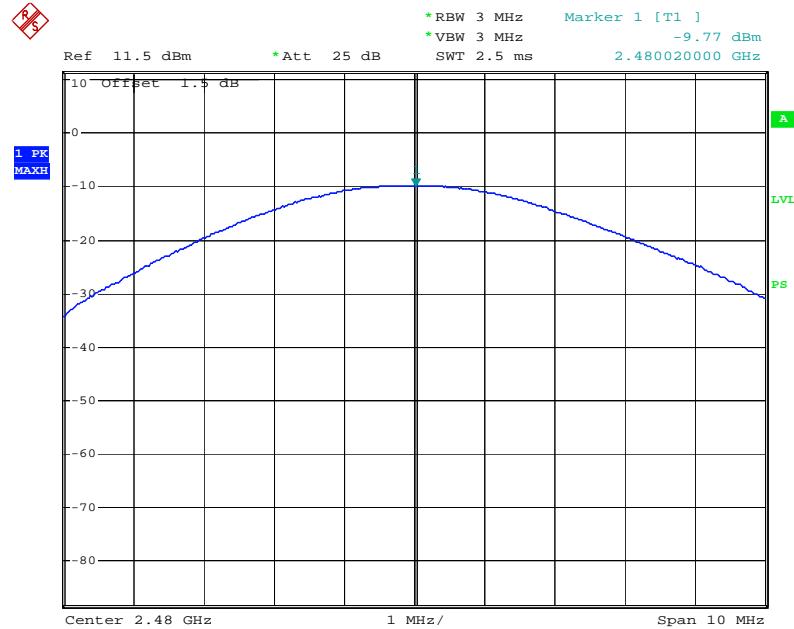High Chanel

Date: 7.JUL.2009 09:13:33

CFR47 §15.247(d) - BAND EDGES TESTING**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

*The testing was performed by Phoenix Liu on 2009-06-25.


Test Result: Compliant

Please refer to the following table and plots.

Test Mode: Transmitting


Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.490	45.01	20
2485.384	45.95	20

Band Edge: Left Side

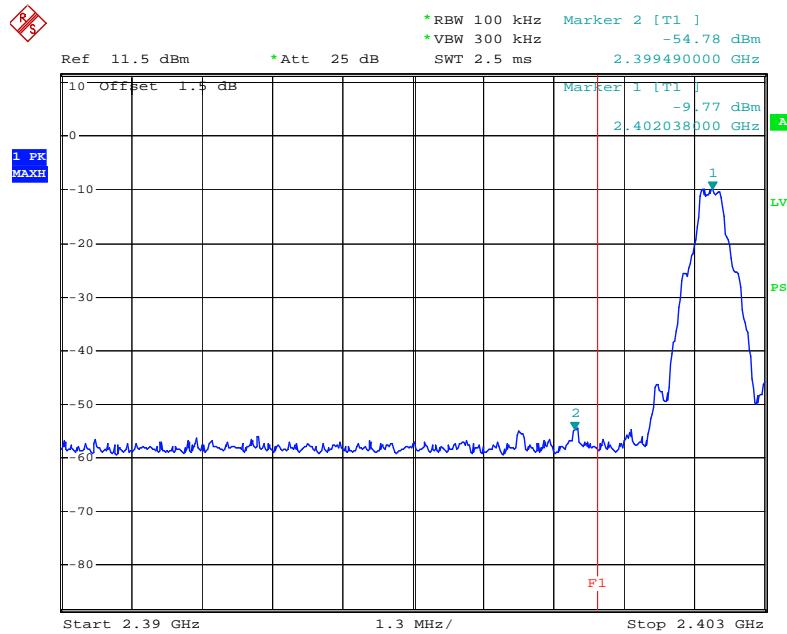

Date: 7.JUL.2009 09:16:15

Band Edge: Right Side

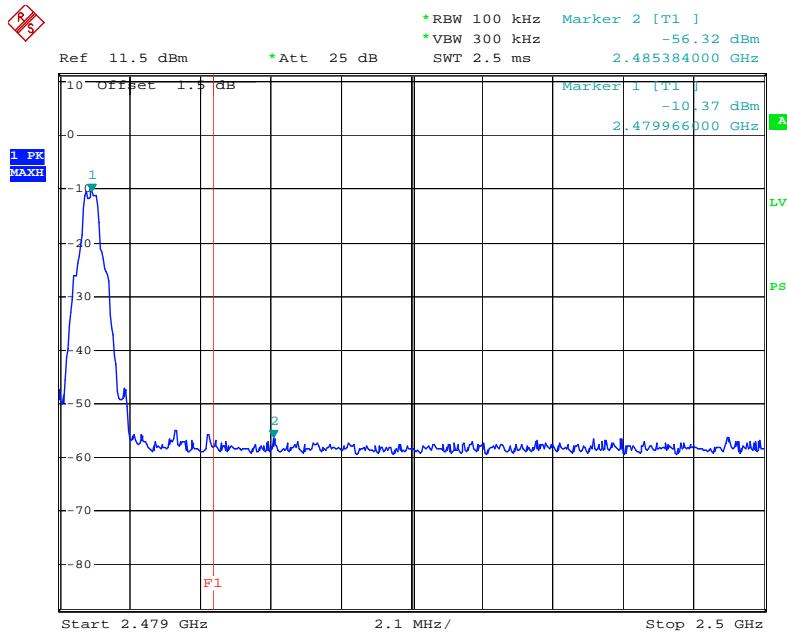

Date: 7.JUL.2009 09:17:52

DECLARATION LETTER



Product Similarity Declaration

To Whom It May Concern,

We, FLYING TECHNOLOGY DEVELOPMENT CO., LTD, hereby declare that our GSM&GPRS Dual Standby Mobile Phone, Model Number: F009, F999, D9A are electrically identical with the Model Number: F8 that was certified by BACL. F009, F999, D9A and F8 are named differently due to marketing purposes.

Please contact me if you have any question.

Signature:

Print Name: Yuanjian Hu



Title: Engineering Manager

Date: 2009-07-06

***** END OF REPORT *****