



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15C

TEST REPORT

For

INGENICO

9 Avenue de la gare - Rovatain TGV, Valence Cedex 9, 26958, France

FCC ID: XKB-APOSA8AMLEWF

Report Type: Original Report	Product Type: Smart POS Terminal
Report Number: <u>RXM191226052-00C</u>	
Report Date:	<u>2020-04-09</u>
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	.3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
DECLARATIONS.....	4
SYSTEM TEST CONFIGURATION.....	.5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT CABLE LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS6
FCC §15.203- ANTENNA REQUIREMENT.....	.7
APPLICABLE STANDARD	7
ANTENNA CONNECTED CONSTRUCTION	7
FCC §15.207 (A)- AC LINE CONDUCTED EMISSIONS8
APPLICABLE STANDARD	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST DATA	10
FCC§15.225, §15.205 & §15.209- RADIATED EMISSIONS12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC§15.225(E) - FREQUENCY STABILITY.....	.19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	20
FCC §15.215(C)- 20 DB BANDWIDTH&99% OCCUPIED BANDWIDTH TEST.....	.21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	22

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

EUT Name:		Smart POS Terminal
EUT Model:		APOS A8
Operation Frequency:		13.56 MHz
Modulation Type:		ASK
Rated Input Voltage:		DC 7.2V from battery or DC 5V from USB port
Adapter#1 Information:	Manufacturer:	Something High Electric(Xiamen) Company Inc.
	Model:	P12GUSB050200
	Input:	AC 100-240V, 50/60Hz, 0.3A
	Output:	DC 5.0V, 2.0A
Adapter#2 Information:	Manufacturer:	Jiangxi Jian Aohai Technology Co.,Ltd
	Model:	A8-050200U-US3
	Input:	AC 100-240V, 50/60Hz, 0.35A
	Output:	DC 5V, 2A
Serial Number:		RXM191226052-RF-S4,RXM191226052-RF-S25
EUT Received Date:		2019.12.31
EUT Received Status:		Good

Note: Per pre-test of FCC Part 15B test, the adapter#1 and EUT configuration #1 was the worst, and was selected to perform the test items in this report. The EUT configuration information as below, and more please refer to the Product similarify declaration.

EUT Configuration	Screen Model	Manufacturer	Serial Number
#1	MDT0550B	SKYWORTH LCD MODULES(SHENZHEN) CO., LTD	RXM191226052-RF-S4
#2	MDT0550B	TIANMA MICRO-ELECTRONICS Corporation	RXM191226052-RF-S25

Objective

This type approval report is prepared on behalf of **INGENICO** in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS, DSS, 15B JAB, Part 22H, 24E,27,90 PCB submissions with FCC ID: XKB-APOSA8AMLEWF.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
radiated Emissions	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “ \triangle ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a test mode.

EUT Exercise Software

No software used in test.


Equipment Modifications

No modification was made to the EUT.

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	No	No	1.0	Adapter	EUT

Block Diagram of Test Setup

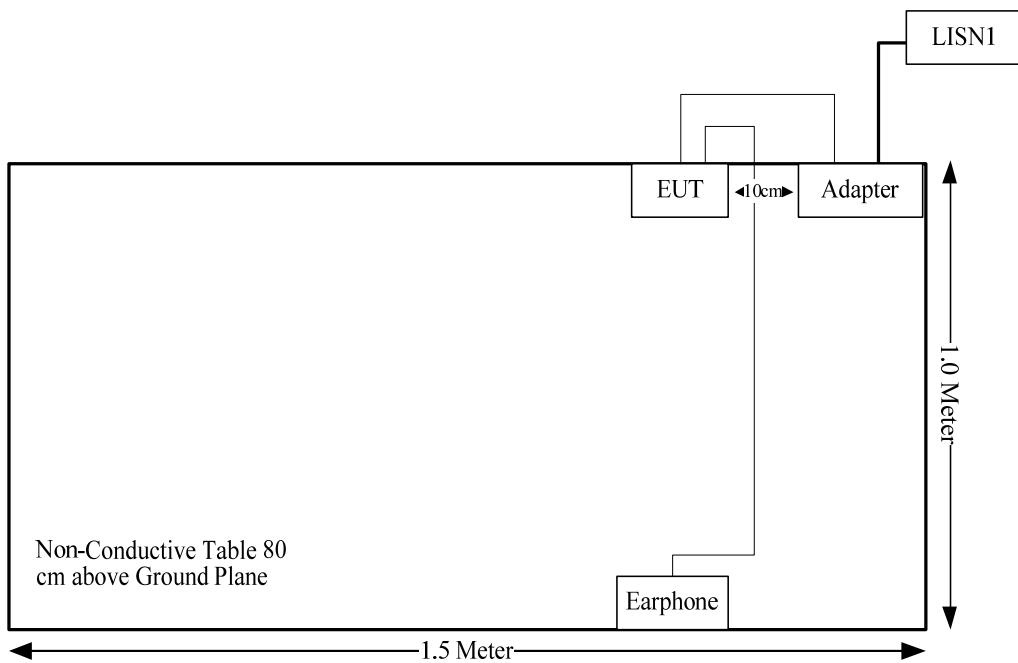

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.203	Antenna Requirement	Compliance
FCC§15.207 (a)	Conducted Emissions	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Bandwidth&99% Occupied Bandwidth	Compliance

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connected Construction

The EUT has one Loop antenna arrangement for NFC, fulfill the requirement of this section. Please refer to below information and the EUT photos:


Result: Compliance.

FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

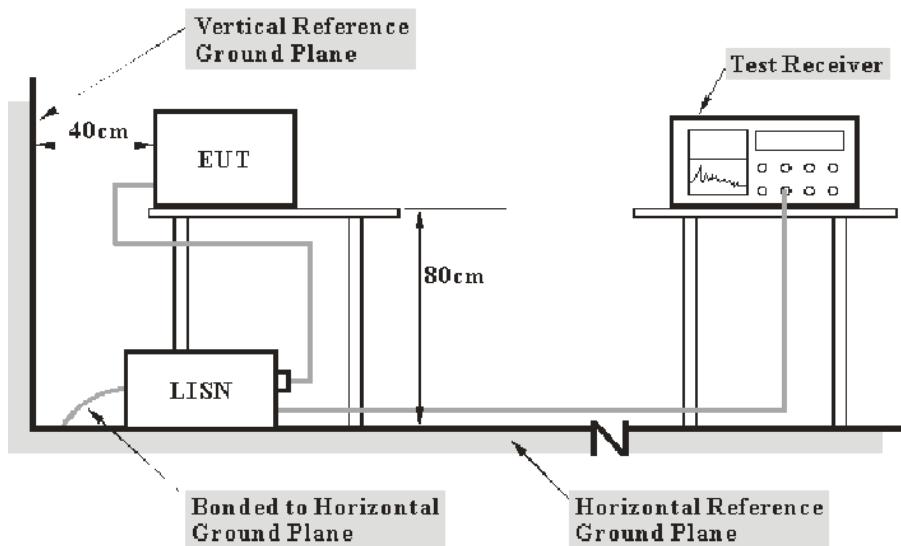

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2019-09-12	2020-09-12
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_c + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	61 %
ATM Pressure:	102.1 kPa
Tester:	Sem Xiang
Test Date:	2020-01-10

*Test Mode: Transmitting
AC120 V, 60 Hz, Line:*

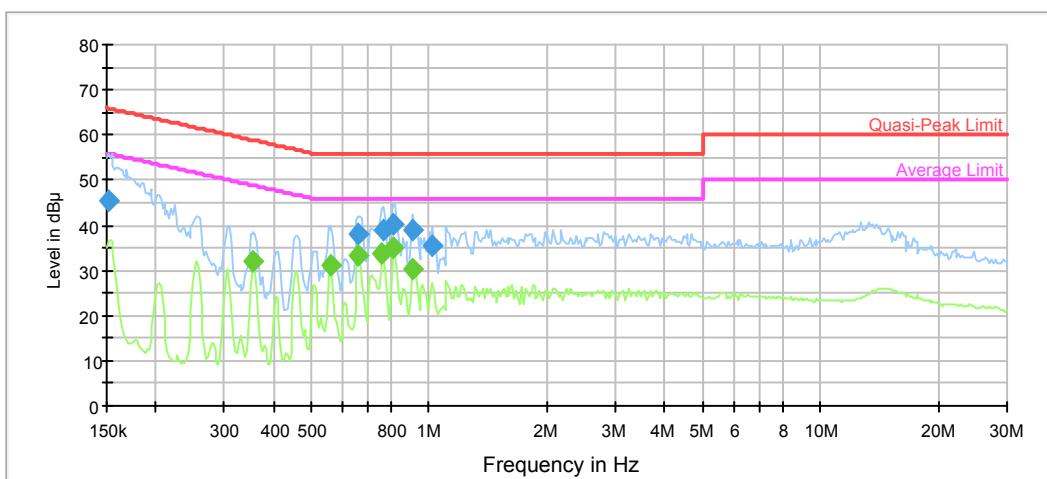

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.151500	45.6	9.000	L1	9.7	20.3	65.9
0.660657	38.1	9.000	L1	9.7	17.9	56.0
0.767003	38.8	9.000	L1	9.7	17.2	56.0
0.806127	40.3	9.000	L1	9.7	15.7	56.0
0.908365	38.7	9.000	L1	9.7	17.3	56.0
1.023568	35.3	9.000	L1	9.7	20.7	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.356493	32.0	9.000	L1	9.7	16.8	48.8
0.557844	31.3	9.000	L1	9.7	14.7	46.0
0.660657	33.2	9.000	L1	9.7	12.8	46.0
0.759409	33.7	9.000	L1	9.7	12.3	46.0
0.814189	34.8	9.000	L1	9.7	11.2	46.0
0.908365	30.1	9.000	L1	9.7	15.9	46.0

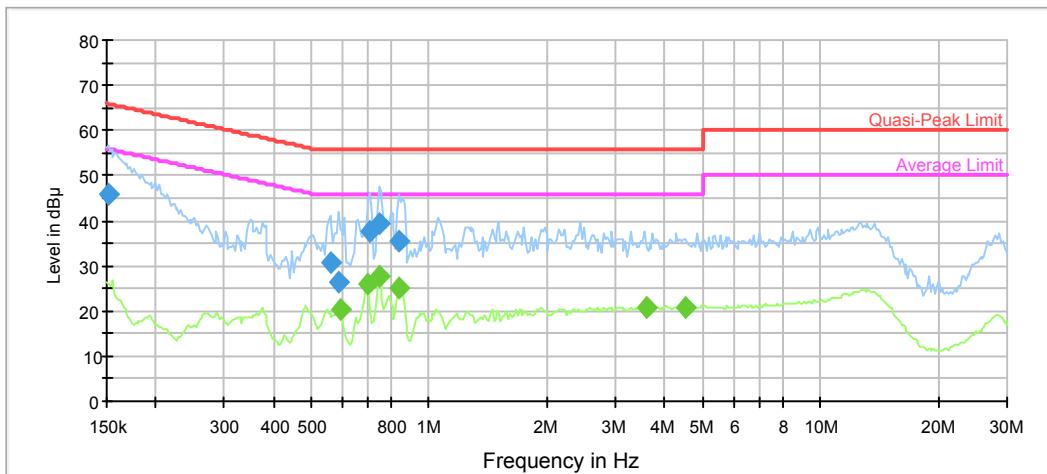AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.151500	45.8	9.000	N	9.7	20.1	65.9
0.557844	30.7	9.000	N	9.6	25.3	56.0
0.586300	26.5	9.000	N	9.6	29.5	56.0
0.708314	37.7	9.000	N	9.6	18.3	56.0
0.744445	39.1	9.000	N	9.6	16.9	56.0
0.838859	35.5	9.000	N	9.6	20.5	56.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.592163	20.3	9.000	N	9.6	25.7	46.0
0.694357	25.8	9.000	N	9.6	20.2	46.0
0.744445	27.6	9.000	N	9.6	18.4	46.0
0.838859	24.9	9.000	N	9.6	21.1	46.0
3.585996	20.6	9.000	N	9.6	25.4	46.0
4.508181	20.7	9.000	N	9.7	25.3	46.0


FCC§15.225, §15.205 & §15.209- RADIATED EMISSIONS

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

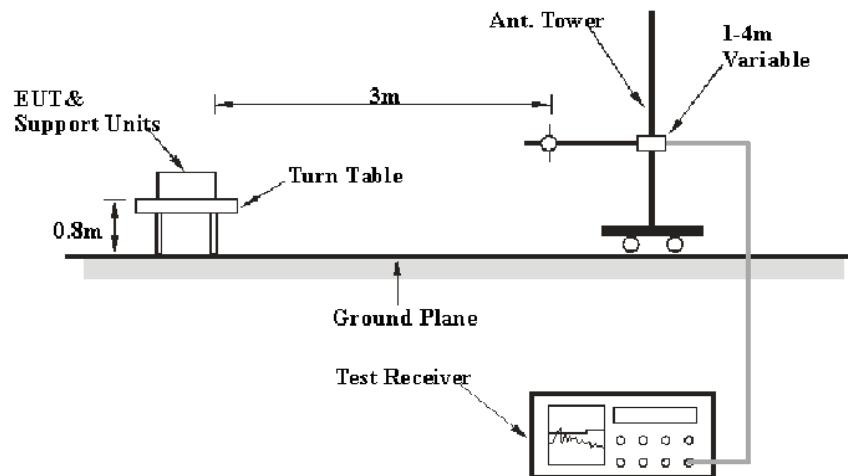

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP measurement

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-04
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Test Items	Radiation Below 1GHz
Temperature:	23.1°C
Relative Humidity:	41 %
ATM Pressure:	101.9 kPa
Tester:	Tyler Pan
Test Date:	2020-01-16

Test mode: Transmitting

1) 9 kHz~30 MHz:




Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
0.0240	-7.77	peak	79.02	71.25	120.00	48.75
0.0424	1.05	peak	74.78	75.83	115.06	39.23
0.0752	7.25	peak	69.22	76.47	110.08	33.61
0.1111	-0.51	peak	66.18	65.67	106.69	41.02
0.1275	-0.83	peak	65.24	64.41	105.49	41.08
0.1486	-5.14	peak	64.04	58.90	104.16	45.26

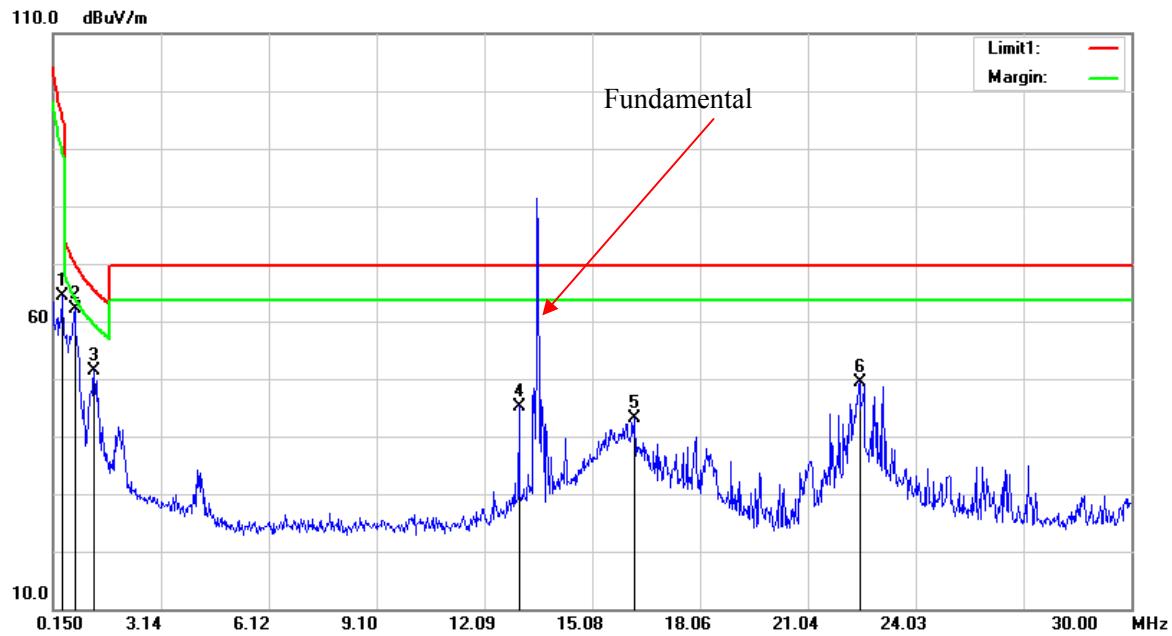


Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
0.3887	34.84	peak	29.49	64.33	95.81	31.48
0.7470	37.99	peak	24.13	62.12	70.13	8.01
1.2843	31.02	peak	20.32	51.34	65.42	14.08
13.0452	35.88	peak	9.37	45.25	69.54	24.29
16.2392	33.92	peak	9.26	43.18	69.54	26.36
22.4778	40.39	peak	9.05	49.44	69.54	20.10

Fundamental:

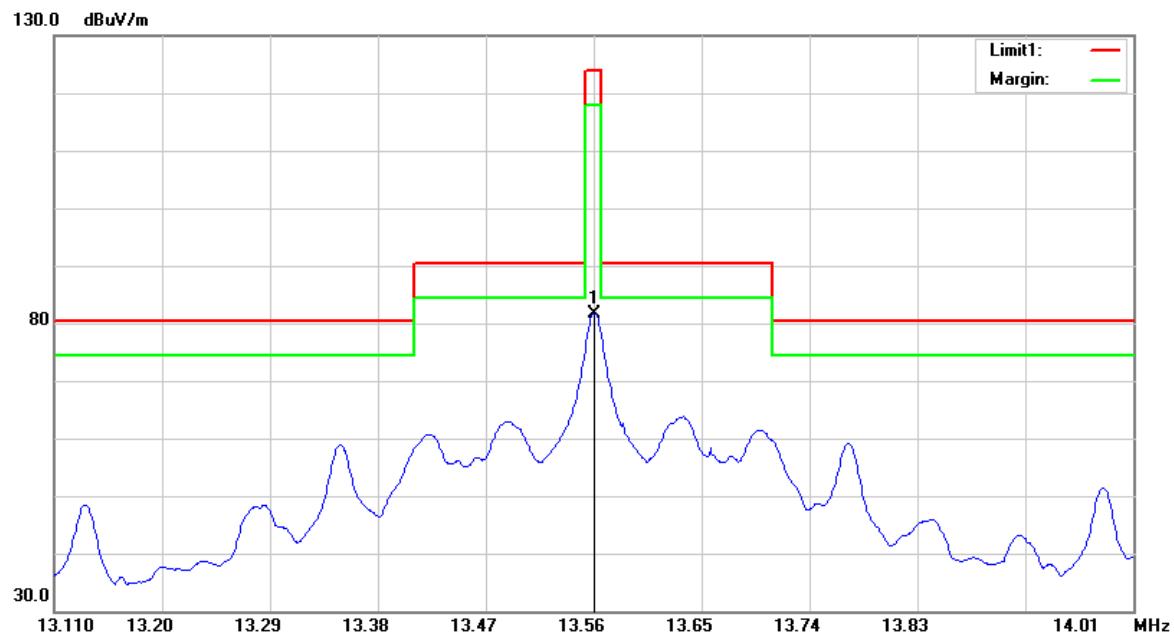

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
13.5610	72.33	peak	9.36	81.69	124.00	42.31

30MHz-1GHz

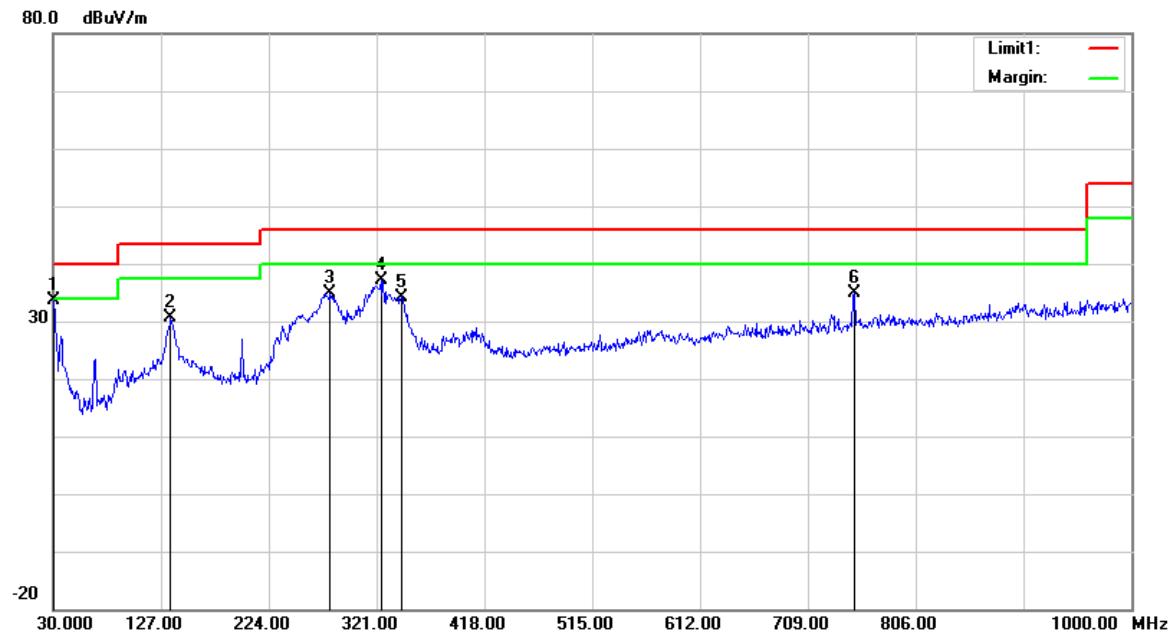Horizontal

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	32.02	peak	1.72	33.74	40.00	6.26
135.7300	35.87	peak	-5.15	30.72	43.50	12.78
279.2900	39.03	peak	-4.14	34.89	46.00	11.11
324.8800	40.58	peak	-3.35	37.23	46.00	8.77
343.3100	37.56	peak	-3.31	34.25	46.00	11.75
750.7100	31.26	peak	3.66	34.92	46.00	11.08

Vertical

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.9700	32.15	QP	0.91	33.06	40.00	6.94
36.7900	37.31	peak	-3.38	33.93	40.00	6.07
137.6700	32.78	peak	-5.44	27.34	43.50	16.16
277.3500	36.97	peak	-4.12	32.85	46.00	13.15
750.7100	30.18	peak	3.66	33.84	46.00	12.16
903.0000	33.76	peak	0.16	33.92	46.00	12.08

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

As per FCC Part 15.225:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to the end point of the battery. The output frequency was recorded for each voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-04
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2019-07-23	2020-07-23
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	55%
ATM Pressure:	101.8 kPa
Tester:	Tyler Pan
Test Date:	2020-01-16

Test Mode: Transmitting

Test Result: Pass

$f_0 = 13.56 \text{ MHz}$				
Temperature	Voltage	Measured frequency	Frequency Error	Limit
°C	V _{DC}	MHz	Hz	Hz
-20	7.2	13.56077	770	±1356
-10		13.56062	620	±1356
0		13.56080	800	±1356
10		13.56078	780	±1356
20		13.56040	400	±1356
25		13.56067	673	±1356
30		13.56071	710	±1356
40		13.56062	620	±1356
50		13.56084	840	±1356
20	6.4	13.56075	750	±1356
20	8.4	13.56057	570	±1356

FCC §15.215(c)– 20 dB BANDWIDTH&99% Occupied Bandwidth Test

Applicable Standard

Per FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-04
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	55%
ATM Pressure:	101.4 kPa
Tester:	Tyler Pan
Test Date:	2020-04-01

Test Mode: Transmitting

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
13.56	1.551	3.936

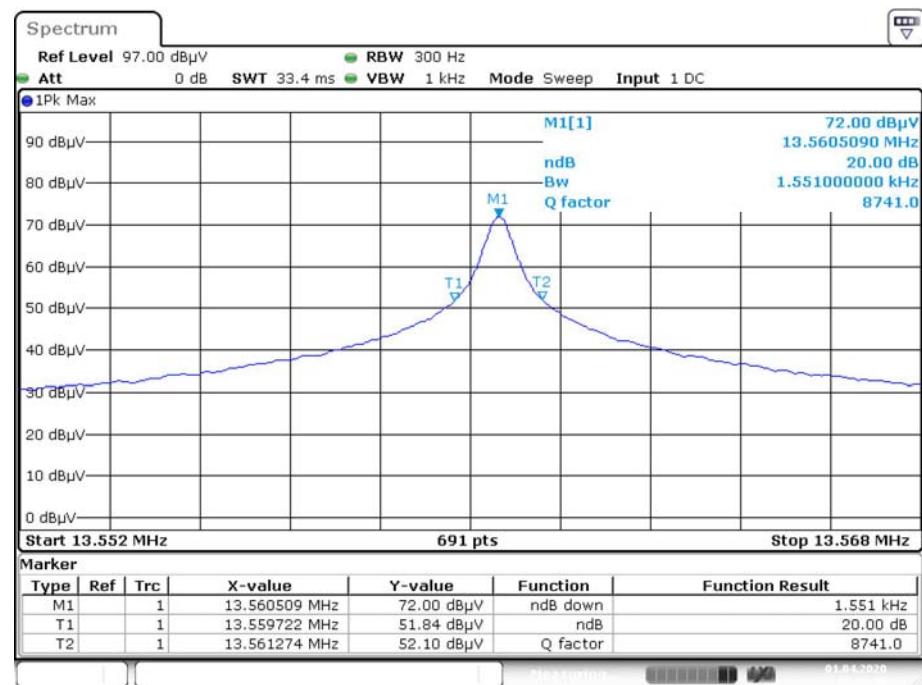20 dB Bandwidth

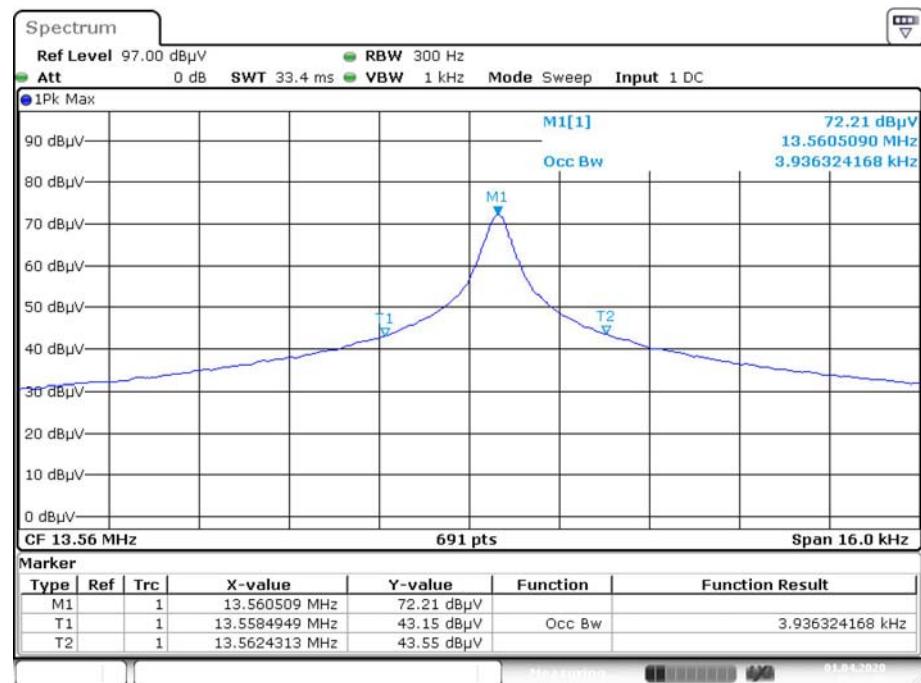99% Occupied Bandwidth

Date: 1.APR.2020 10:42:05

******* END OF REPORT *******