



Report Reference ID:	296393-1TRFWL
----------------------	---------------

Test specification:	Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter B – Common carrier services Part 27 – Miscellaneous wireless communications services
---------------------	---

Applicant:	TEKO Telecom Srl. Via Meucci, 24/a I-40024 Castel S. Pietro Terme (BO) (Italy)
Apparatus:	Very High Power Module Amplifier
Model:	MVHPA0001LTE2G3-D2
FCC ID:	XM2-VHPA23

Testing laboratory:	Nemko Italy Spa Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221
---------------------	--

	Name and title	Date
Tested by:	 G. Curioni, Wireless/EMC Specialist	2015-11-12
Reviewed by:	 P. Barbieri, Wireless/EMC Specialist	2015-11-12

**Nemko Spa, 20853 Biassono (MB) - Italy. All rights reserved.**

This publication may be reproduced in whole for non-commercial purposes as long as Nemko Spa is acknowledged as copyright owner and source of the material. Nemko Spa takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This test report may not be partially reproduced, except with the prior written permission of Nemko Spa. The test report merely corresponds to the test sample. The phase of sampling / collection of equipment under test is carried out by the customer.

This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

## Table of contents

<b>Section 1: Report summary .....</b>	<b>4</b>
1.1 Test specification.....	4
1.2 Statement of compliance .....	4
1.3 Exclusions .....	4
1.4 Registration number .....	4
1.5 Test report revision history .....	4
1.6 Limits of responsibility.....	4
<b>Section 2: Summary of test results .....</b>	<b>5</b>
2.1 FCC Part 27, test results .....	5
<b>Section 3: Equipment under test (EUT) and application details.....</b>	<b>6</b>
3.1 Applicant details .....	6
3.2 Modular equipment.....	6
3.3 Product details.....	6
3.4 Application purpose .....	6
3.5 Composite/related equipment.....	7
3.6 Sample information.....	7
3.7 EUT technical specifications .....	7
3.8 Accessories and support equipment.....	8
The following information identifies accessories used to exercise the EUT during testing:.....	8
3.9 Operation of the EUT during testing.....	9
3.10 EUT setup diagram.....	9
<b>Section 4: Engineering considerations .....</b>	<b>10</b>
4.1 Modifications incorporated in the EUT .....	10
4.2 Deviations from laboratory tests procedures.....	10
4.3 Technical judgment .....	10
<b>Section 5: Test conditions .....</b>	<b>11</b>
5.1 Deviations from laboratory tests procedures.....	11
5.2 Test conditions, power source and ambient temperatures .....	11
5.3 Measurement uncertainty .....	12
5.4 Test equipment.....	12
<b>Appendix A: Test results.....</b>	<b>13</b>
Clause 935210 D05v01 (3.2) AGC threshold .....	13
Clause 935210 D05v01 (3.3) Out of band rejection .....	14
Clause 2.1049 Occupied bandwidth.....	15
Clause 27.50(a) Peak output power at RF antenna connector .....	17



Clause 27.53(a) Spurious emissions at RF antenna connector, continued.....	20
Clause 27.53(a) Radiated Spurious emissions.....	27
<b>Appendix B: Block diagrams of test set-ups .....</b>	<b>35</b>
<b>Appendix C: EUT Photos.....</b>	<b>36</b>



## Section 1: Report summary

### 1.1 Test specification

Specifications	Part 27 – Miscellaneous wireless communications services
----------------	--

### 1.2 Statement of compliance

Compliance	In the configuration tested the EUT was found compliant Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Canada Inc. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 27. Radiated tests were conducted in accordance with ANSI C63.4-2003.
------------	---

### 1.3 Exclusions

Exclusions	None
------------	------

### 1.4 Registration number

Test site FCC ID number	176392 (3 m Semi anechoic chamber)
-------------------------	------------------------------------

### 1.5 Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued
R1TRF	----

### 1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



## Section 2: Summary of test results

### 2.1 FCC Part 27, test results

Part	Methods	Test description	Verdict
	§ 935210 D05v01 (3.2)	AGC threshold	Pass
	§ 935210 D05v01 (3.3)	Out of band rejection	Pass
§2.1049	§ 935210 D05v01 (3.4)	Occupied bandwidth	Pass
§27.50(a)	§ 935210 D05v01 (3.5)	Peak output power at RF antenna connector	Pass
§27.53(a)	§ 935210 D05v01 (3.6)	Spurious emissions at RF antenna connector, continued	Pass
§27.53(a)	§ 935210 D05v01 (3.8)	Radiated spurious emissions	Pass
§27.54	§ 935210 D05v01 (3.7)	Frequency stability	N/A a)

#### Notes:

- a) NOT APPLICABLE: Modulation/frequency conversion circuitry not in use. No frequency change in EUT (input and output have same frequency)



## Section 3: Equipment under test (EUT) and application details

### 3.1 Applicant details

<b>Applicant complete business name</b>	Name:	Teko Telecom Srl
	Federal Registration Number (FRN):	0018963462
	Grantee code	XM2
<b>Mailing address</b>	Address: City: Province/State: Post code: Country:	Via Meucci, 24/a Castel S. Pietro Terme Bologna 40024 Italy

### 3.2 Modular equipment

<b>a) Single modular approval</b>	Single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>b) Limited single modular approval</b>	Limited single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

### 3.3 Product details

<b>FCC ID</b>	Grantee code:	XM2
	Product code:	-VHPA23
<b>Equipment class</b>	B2I	
<b>Description of product as it is marketed</b>	Booster	
	Model name/number:	MVHPA0001LTE2G3-D2
	Serial number:	na

### 3.4 Application purpose

<b>Type of application</b>	<input checked="" type="checkbox"/> Original certification
	<input type="checkbox"/> Change in identification of presently authorized equipment
	Original FCC ID: <input type="text"/> Grant date: <input type="text"/>
	<input type="checkbox"/> Class II permissive change or modification of presently authorized equipment



## Section 3: Equipment under test

## 3.5 Composite/related equipment

<b>a) Composite equipment</b>	The EUT is a composite device subject to an additional equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>b) Related equipment</b>	The EUT is part of a system that operates with, or is marketed with, another device that requires an equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>c) Related FCC ID</b>	If either of the above is "yes": <input type="checkbox"/> has been granted under the FCC ID(s) listed below: <input type="checkbox"/> is in the process of being filled under the FCC ID(s) listed below: <input type="checkbox"/> is pending with the FCC ID(s) listed below: <input type="checkbox"/> has a mix of pending and granted statuses under the FCC ID(s) listed below: i FCC ID: ii FCC ID:

## 3.6 Sample information

<b>Receipt date:</b>	2015-11-09
<b>Nemko sample ID number:</b>	-----

## 3.7 EUT technical specifications

<b>Operating band:</b>	Down Link: 2350–2360 MHz, Up Link: 2305-2315 MHz
<b>Operating frequency:</b>	Wideband
<b>Modulation type:</b>	LTE (QAM and QPSK)
<b>Occupied bandwidth:</b>	LTE: 5 MHz, 10 MHz
<b>Channel spacing:</b>	standard
<b>Emission designator:</b>	LTE: D7W
<b>RF Output</b>	Down Link: 43dBm (20W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Gain</b>	Down Link: 48dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Antenna type:</b>	External Antenna is not provided, equipment that has an external 50 Ω RF connector
<b>Power source:</b>	28-30 Vdc



### Section 3: Equipment under test

#### 3.8 Accessories and support equipment

The following information identifies accessories used to exercise the EUT during testing:

##### Item # 1

Type of equipment:	Power Supply
Brand name:	TDK Lambda
Model name or number:	Z36-24-L-E
Serial number:	LOC-535A218-0001
Nemko sample number:	-----
Connection port:	To supply amplifier
Cable length and type:	-----

##### Item # 2

Type of equipment:	Power supply
Brand name:	DF
Model name or number:	DF1731SB
Serial number:	na
Nemko sample number:	na
Connection port:	To supply cooling fan of heatsink
Cable length and type:	-----

##### Item # 3

Type of equipment:	
Brand name:	
Model name or number:	
Serial number:	
Nemko sample number:	
Connection port:	
Cable length and type:	

##### Item # 4

Type of equipment:	
Brand name:	
Model name or number:	
Serial number:	
Nemko sample number:	
Connection port:	
Cable length and type:	

### 3.9 Operation of the EUT during testing

<b>Details:</b>	In down-link direction, normal working at max gain with max RF power output.
-----------------	--

### 3.10 EUT setup diagram

In this system, Very High Power Amplifier is the EUT and it is intended for mounting in Remote Unit and Digital Service Front-End (optical system with Master Unit that includes only management module and optical module, to convert RF signal in optical signal in down link direction and viceversa optical signal in RF signal in up link direction). As described in “Operational description”, master unit is connected directly to base station, so the system doesn’t use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF input connector

#### Test setup for output power, occupied bandwidth, spurious emissions:



#### Procedure

Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.



## Section 4: Engineering considerations

### 4.1 Modifications incorporated in the EUT

<b>Modifications</b>	Modifications performed to the EUT during this assessment None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> performed by Client <input type="checkbox"/> or Nemko <input type="checkbox"/> Details:
----------------------	---

### 4.2 Deviations from laboratory tests procedures

<b>Deviations</b>	Deviations from laboratory test procedures None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> - details are listed below:
-------------------	---

### 4.3 Technical judgment

<b>Judgment</b>	None
-----------------	------

## Section 5: Test conditions

### 5.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

### 5.2 Test conditions, power source and ambient temperatures

Normal temperature, humidity and air pressure test conditions	Temperature: 15–30 °C Relative humidity: 20–75 % Air pressure: 86–106 kPa  When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$ , for which the equipment was designed.

**Section 5: Test conditions, continued**

### 5.3 Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements". All calculations can be found in Nemko S.p.A. document WML1002.

### 5.4 Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Agilent	N5172B EXG	MY53051238	Jan 2018
Vector Signal Generator	Agilent	E4438C ESG	MY45094485	Ago 2016
Spectrum Analyzer	Agilent	N9030A PXA	MY53120882	Jun 2016
Network Analyzer	Agilent	E5071C ENA	MY46106183	Jun 2016
V-network	R & S	ESH2-Z5	872 460/041	11/2016
Trilog Broad Band Antenna 25-2000 MHz	Schwarzbeck	VULB 9168	VULB 9168-242	06/2018
Trilog Broad Band Antenna 25-8000 MHz	Schwarzbeck	VULB 9162	VULB 9162-25	07/2018
Antenna 1-18 GHz	Schwarzbeck	STLP 9148	STPL 9148-123	06/2018
Double ridge waveguide horn	RFspin	DRH40	061106A40	08/2016
Preamplifier 18-40 GHz	Miteq	JS44	1648665	11/2015
Broadband preamplifier 1-18 GHz	Schwarzbeck	BBV 9718	9718-137	10/2016
EMI receiver 20 Hz ÷ 8 GHz	R&S	ESU8	100202	04/2016
EMI receiver 20 Hz ÷ 3 GHz	R&S	ESCI	100888	09/2016
Hydraulic revolving platform	Nemko	RTPL 01	4.233	NCR
Turning-table	R&S	HCT	835 803/03	NCR
Antenna mast	R&S	HCM	836 529/05	NCR
Controller	R&S	HCC	836 620/7	NCR
Spectrum Analyzer 9kHz ÷ 40GHz	R&S	FSEK	848255/005	11/2016
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	09/2016
Shielded room	Siemens	10m control room	1947	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	70	NCR
Shielded Room	Siemens	3m semi-anechoic chamber	3	NCR
Motor controller	Emco	1051-25	9012-1559	NCR
Motor controller	Emco	1061-1.521	9012-1508	NCR
Antenna Tower	Emco	2071-2	9601-1940	NCR
Controller pole/table	Emco	2090	9511-1099	NCR

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

## Appendix A: Test results

### Clause 935210 D05v01 (3.2) AGC threshold

Measure of EUT AGC Threshold


Test date: **2015-11-09**

Test results: **Pass**


### Special notes

- Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)

### Test data

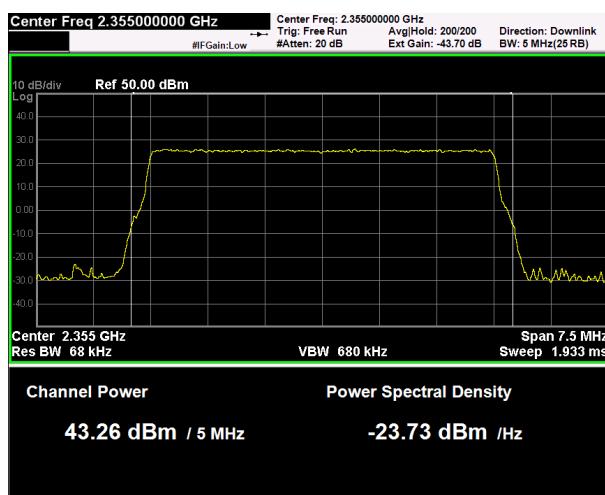

**AWGN signal, nominal input signal**

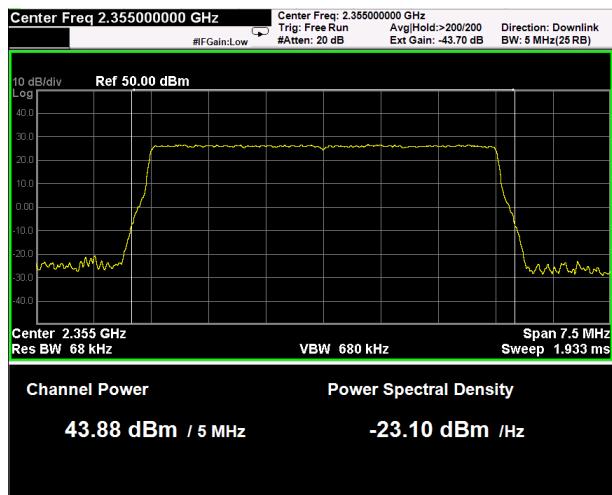

**AWGN signal, nominal input signal +1 dB**

### Clause 935210 D05v01 (3.3) Out of band rejection

Out of Band Rejection – Test for rejection of out of band signals.


Test date: 2015-11-09

Test results: Pass

### Special notes

—

### Test data

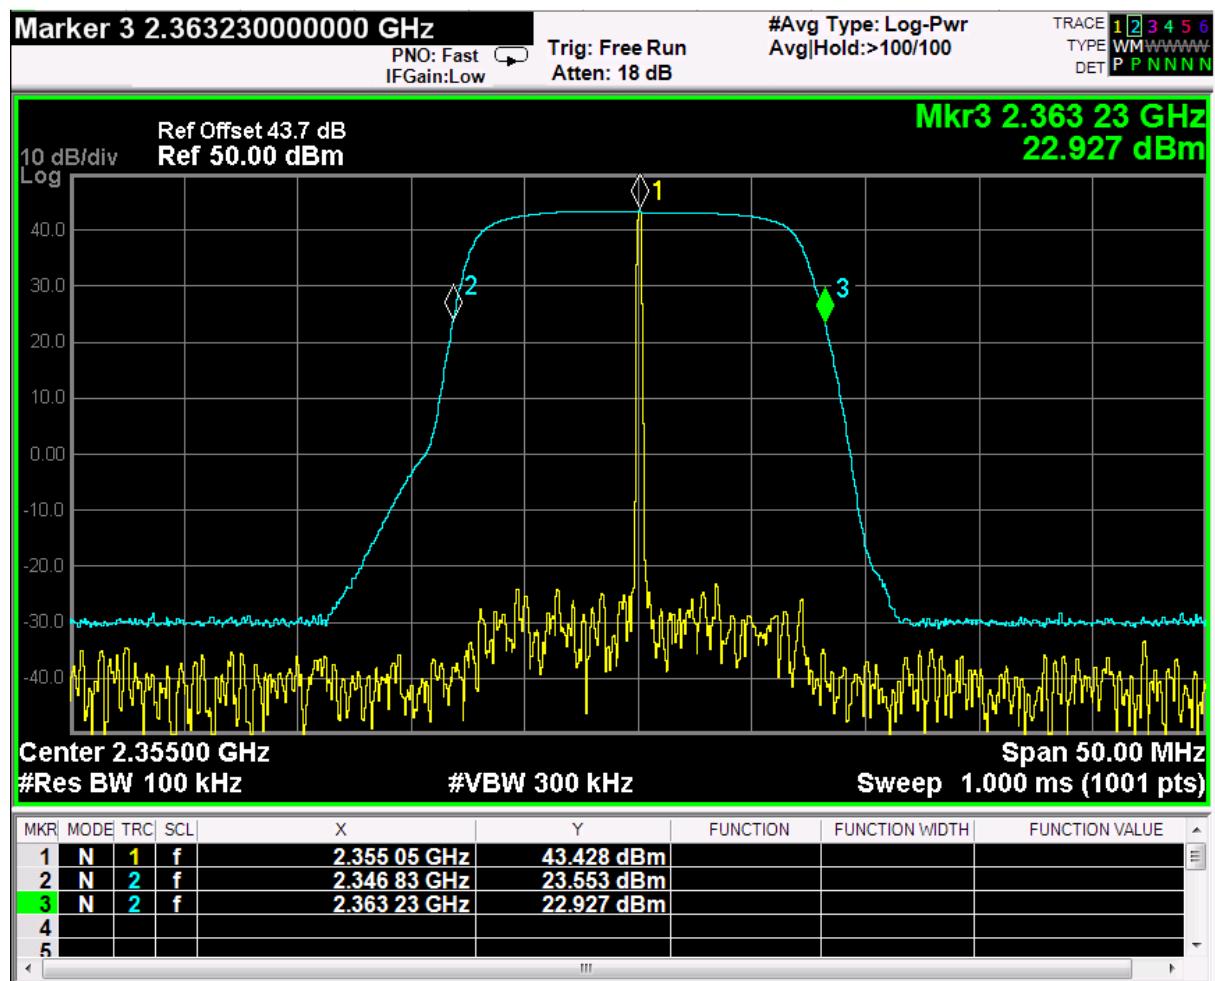

## Clause 2.1049 Occupied bandwidth





The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: [2015-11-09](#)

Test results: [Pass](#)

### Special notes

- Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)

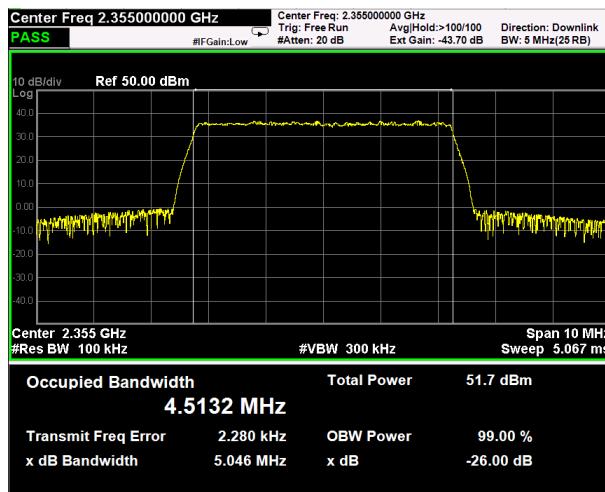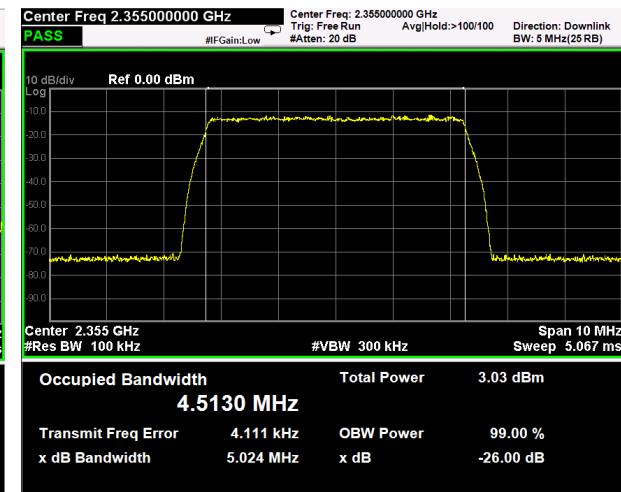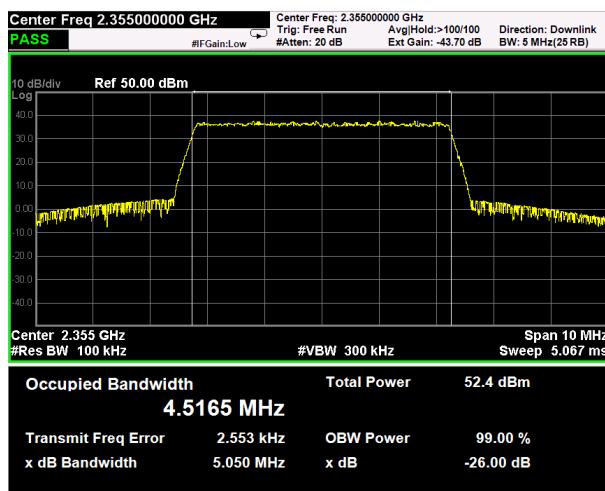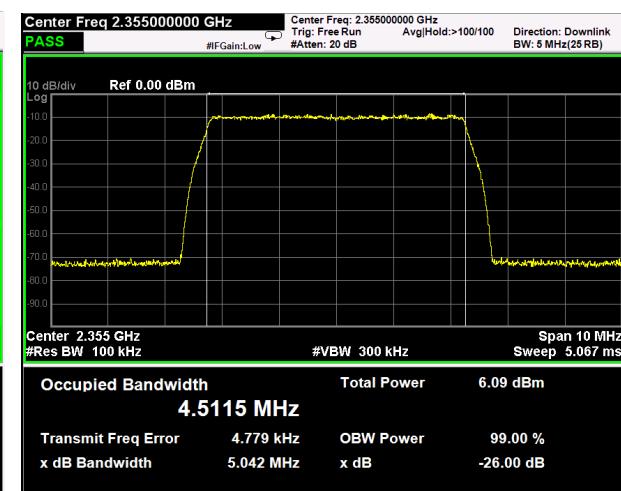**Clause 2.1049 Occupied bandwidth, continued**
**Test data**
**AWGN signal, nominal input signal**

**Output**

**Input**
**AWGN signal, nominal input signal + 3dB**

**Output**

**Input**



## Clause 27.50(a) Peak output power at RF antenna connector

**§ 27.50(a) The following power limits and related requirements apply to stations transmitting in the 2305-2320 MHz band or the 2345-2360 MHz band:**

(1) Base and fixed stations.

(i) For base and fixed stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band:

(A) The average equivalent isotropically radiated power (EIRP) must not exceed 2,000 watts within any 5 megahertz of authorized bandwidth and must not exceed 400 watts within any 1 megahertz of authorized bandwidth.

(B) The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

Test date: **2015-11-09**



Test results: **Pass**

### Special notes

- Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)

**Clause 27.50(a) Peak output power at RF antenna connector**
**Test data**
**AWGN signal, nominal input signal**


Test data						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	AWGN (LTE, 5MHz)	2355.0	43.26	21.18	4.24	10.62

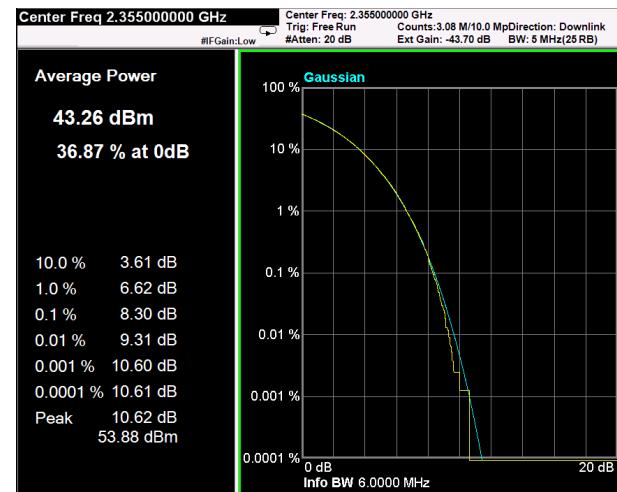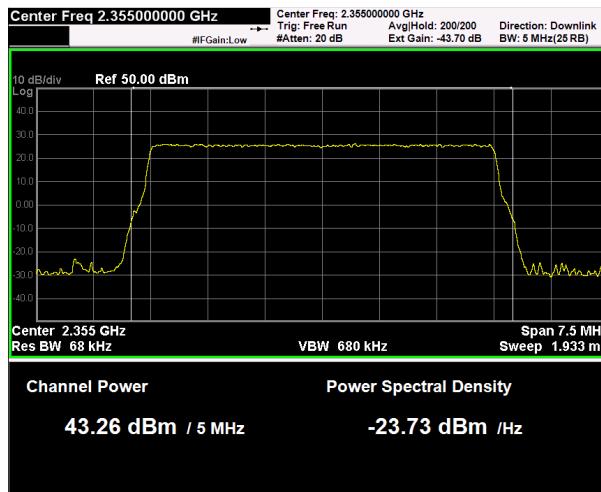

PAR measure is performed by the "CCDF" function installed on Spectrum analyzer that provides average power (the same measured with "Channel power" function), peak power and PAR.

**AWGN signal, nominal input signal + 3dB**

Test data					
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)
Down-link	AWGN (LTE, 5MHz)	2355.0	43,88	24,43	4,89

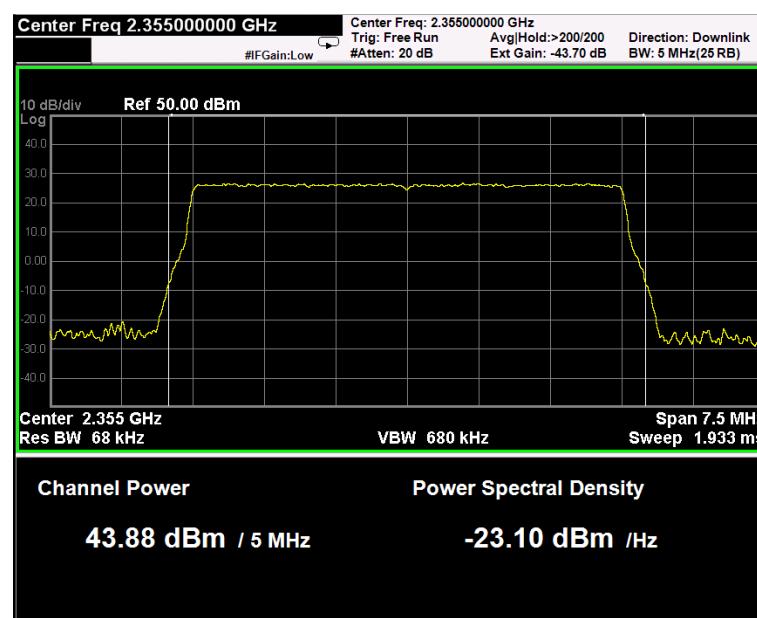

## Clause 27.53(a) Spurious emissions at RF antenna connector, continued

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(1) For base and fixed stations' operations in the 2305-2320 MHz band and the 2345-2360 MHz band:

- (i) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than  $75 + 10 \log (P)$  dB on all frequencies between 2320 and 2345 MHz;
- (ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $70 + 10 \log (P)$  dB on all frequencies between 2287.5 and 2300 MHz,  $72 + 10 \log (P)$  dB on all frequencies between 2285 and 2287.5 MHz, and  $75 + 10 \log (P)$  dB below 2285 MHz;
- (iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2362.5 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2362.5 and 2365 MHz,  $70 + 10 \log (P)$  dB on all frequencies between 2365 and 2367.5 MHz,  $72 + 10 \log (P)$  dB on all frequencies between 2367.5 and 2370 MHz, and  $75 + 10 \log (P)$  dB above 2370 MHz.

(5) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(7) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power;

Test date: 2015-11-09

Test results: Pass

### Special notes

- Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)



## Clause 27.53 (h) Spurious emissions at RF antenna connector, continued

## Test data





## See Plots below


## Spurious emissions measurement results:

Frequency (MHz)	Spurious emission (dBm)	Limit (dBm)	Margin (dB)
Low channel			
First channel	Negligible	-13	
Mid channel			
2355 MHz	Negligible	-13	
High channel			
Last channel	Negligible	-13	


**Test data: spurious emissions at antenna terminal**
**AWGN signal**

(Plots are referred to modulated carrier at the Middle Channel)

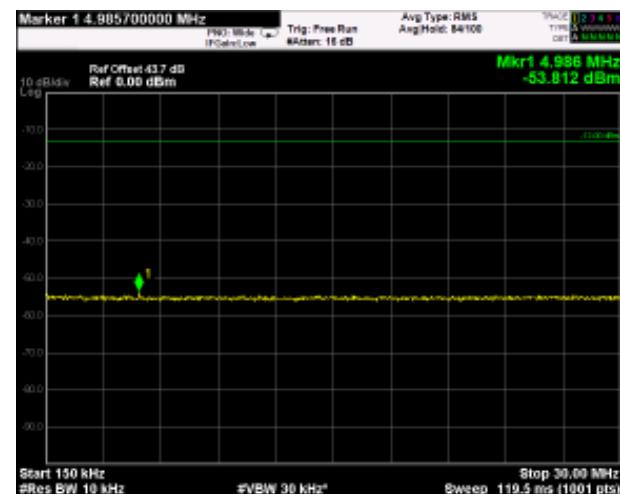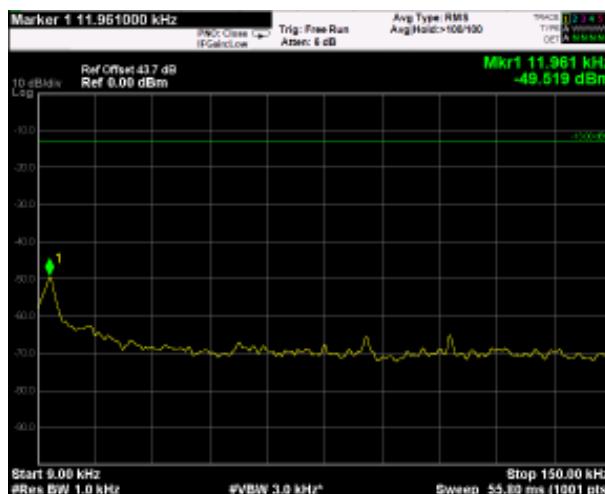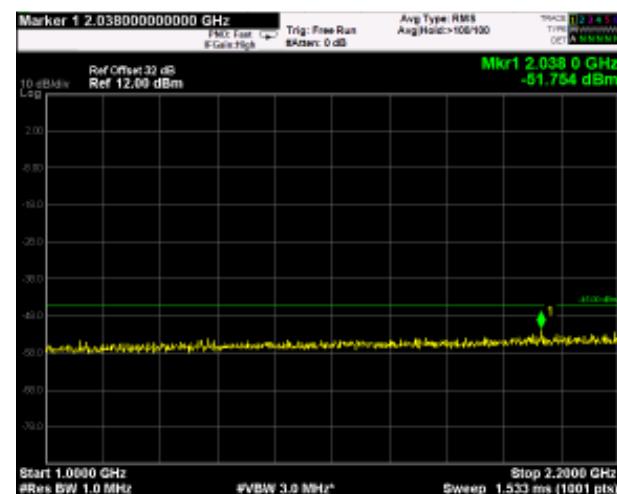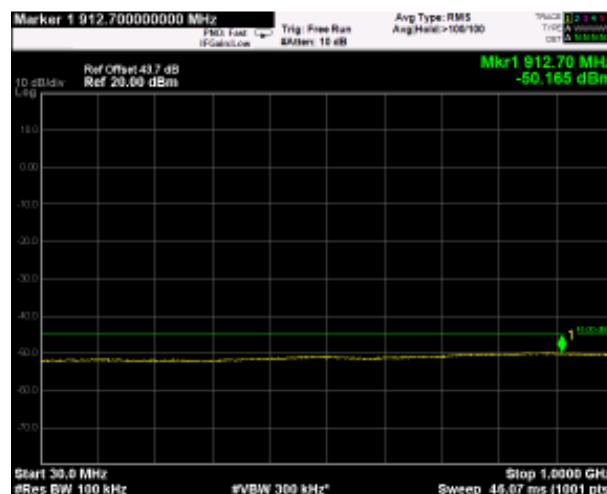

**9kHz-150kHz**
**150kHz-30MHz**

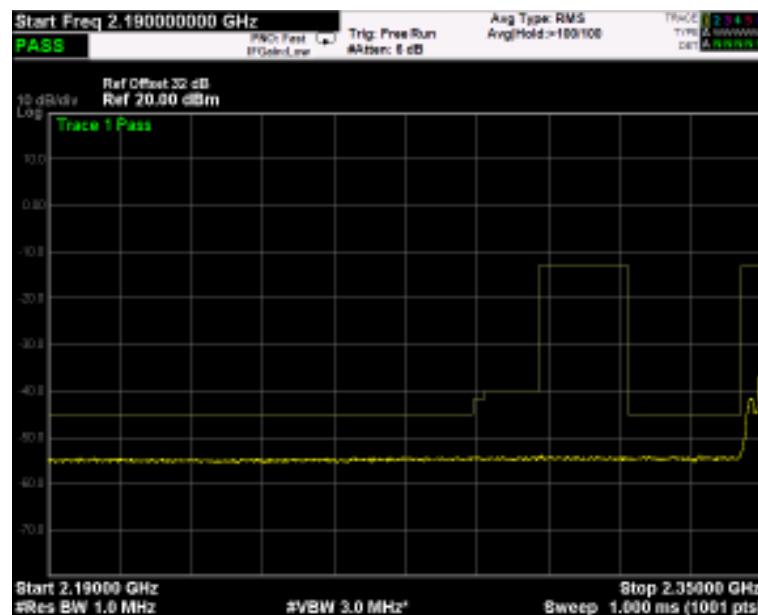**30MHz-1GHz**
**1GHz-2.2GHz, carrier notched**

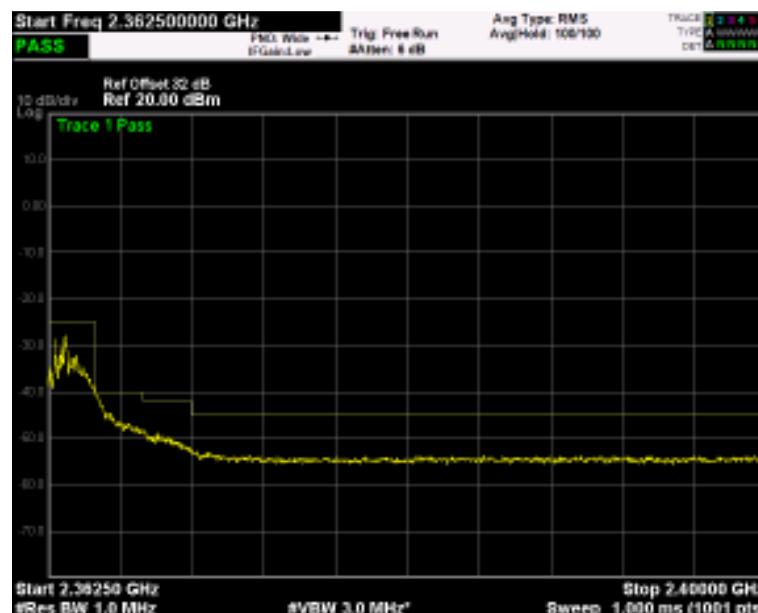

2.190GHz-2.350GHz, Carrier notched


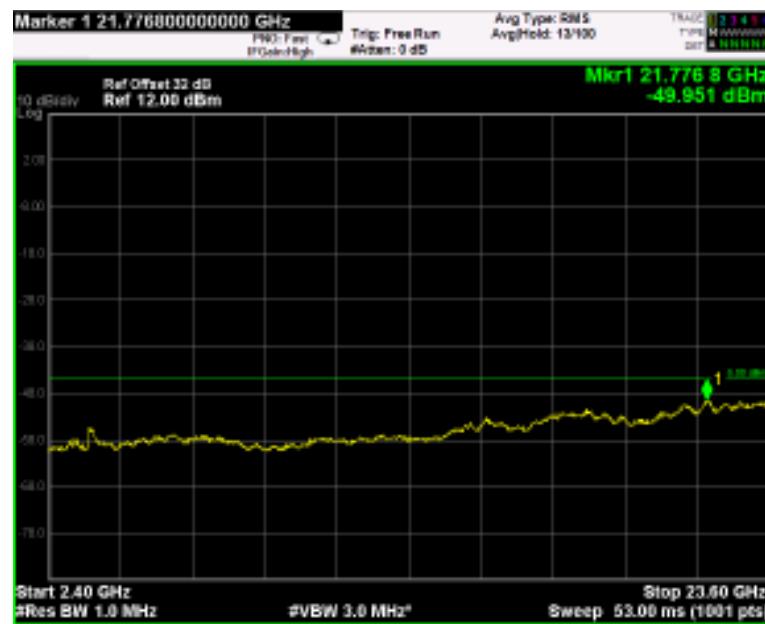




2.3625GHz-2.400GHz, Carrier notched



## Test data, continued: band edges Inter modulation

## AWGN signal, nominal input signal

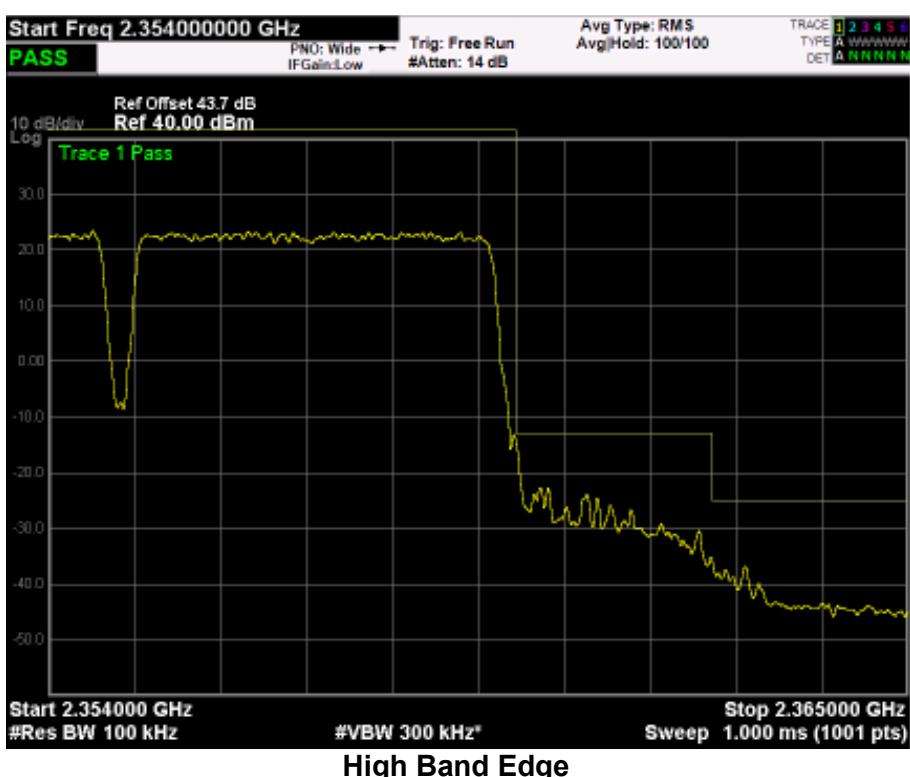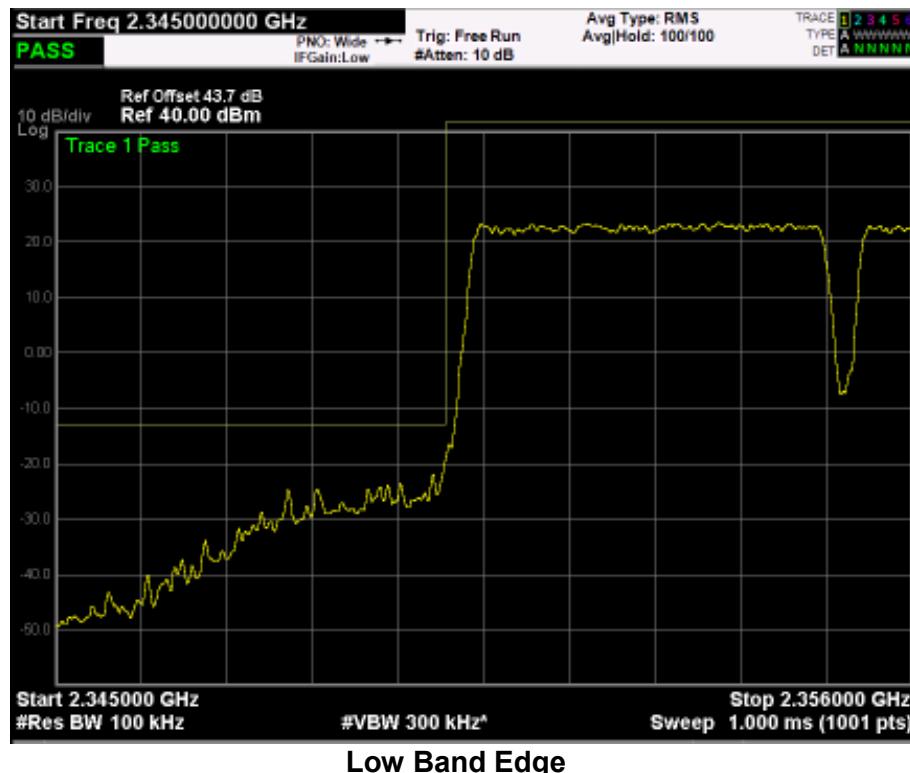

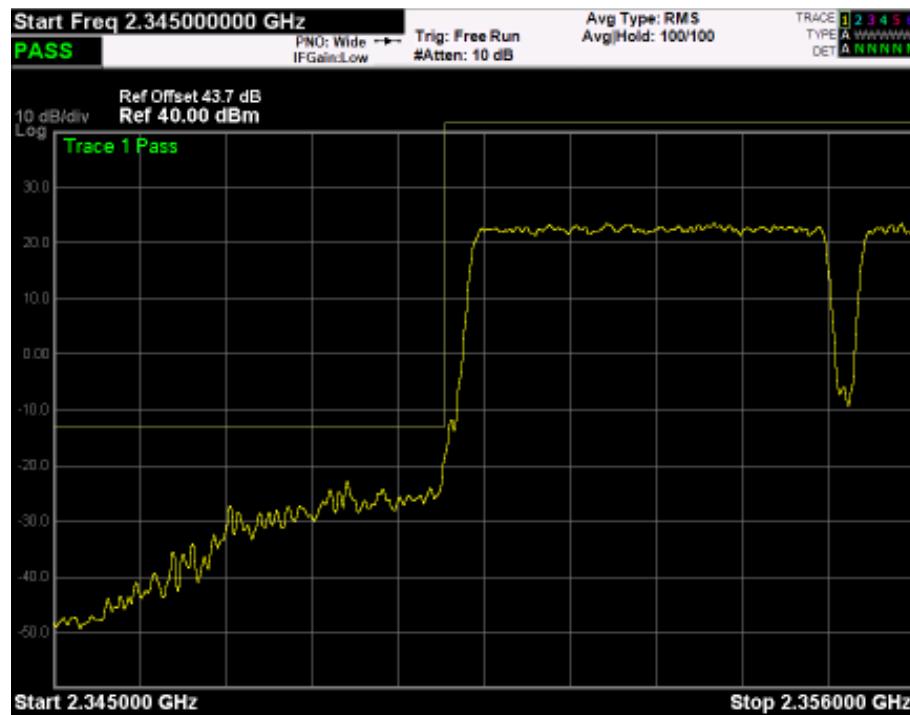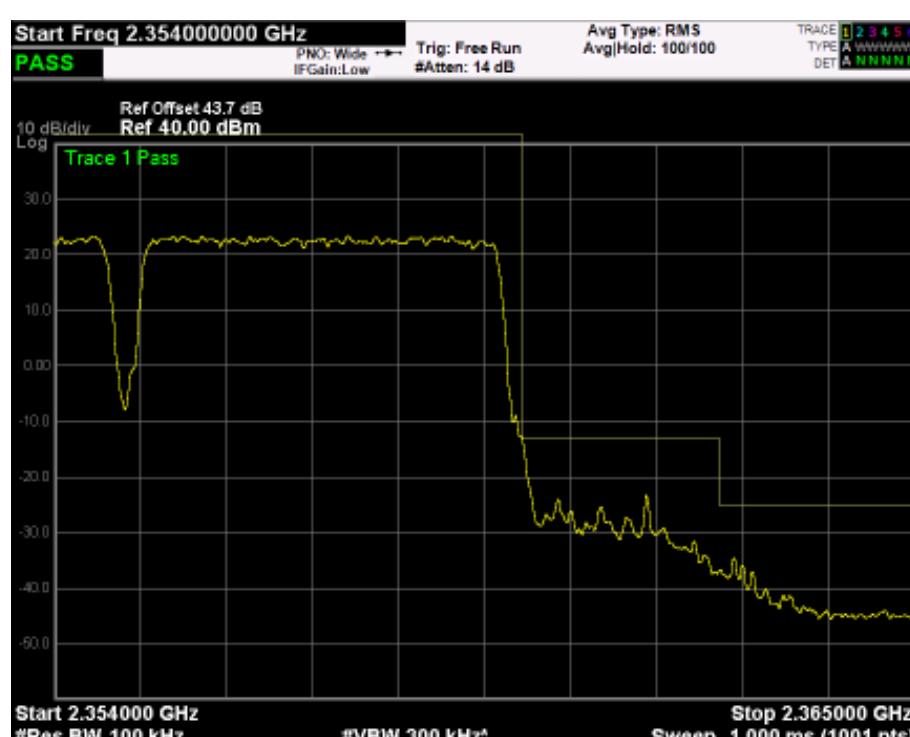**AWGN signal, nominal input signal + 3dB**

**Low Band Edge**

**High Band Edge**

## Clause 27.53(a) Radiated Spurious emissions

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power  $P$  (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(1) For base and fixed stations' operations in the 2305-2320 MHz band and the 2345-2360 MHz band:

- (i) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than  $75 + 10 \log (P)$  dB on all frequencies between 2320 and 2345 MHz;
- (ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $70 + 10 \log (P)$  dB on all frequencies between 2287.5 and 2300 MHz,  $72 + 10 \log (P)$  dB on all frequencies between 2285 and 2287.5 MHz, and  $75 + 10 \log (P)$  dB below 2285 MHz;
- (iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2362.5 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2362.5 and 2365 MHz,  $70 + 10 \log (P)$  dB on all frequencies between 2365 and 2367.5 MHz,  $72 + 10 \log (P)$  dB on all frequencies between 2367.5 and 2370 MHz, and  $75 + 10 \log (P)$  dB above 2370 MHz.

(5) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(7) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power;

Test date: 2015-11-09/10

Test results: Pass

Special notes

## Clause 27.53(a) Radiated spurious emissions, continued

## Test data

The D.U.T. was positioned according to the radiated emissions set-up

The D.U.T. antenna connector was terminated by a  $50 \Omega$  shielded dummy load.


The spectrum was searched from 30 MHz to 1 GHz (RBW 100 kHz) & 1 GHz (RBW 1 MHz) to the tenth harmonic of the carrier.

There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

## Spurious emissions measurement results:


Frequency (MHz)	Polarization. V/H	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low channel				
Mid channel				
High channel				

Note: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

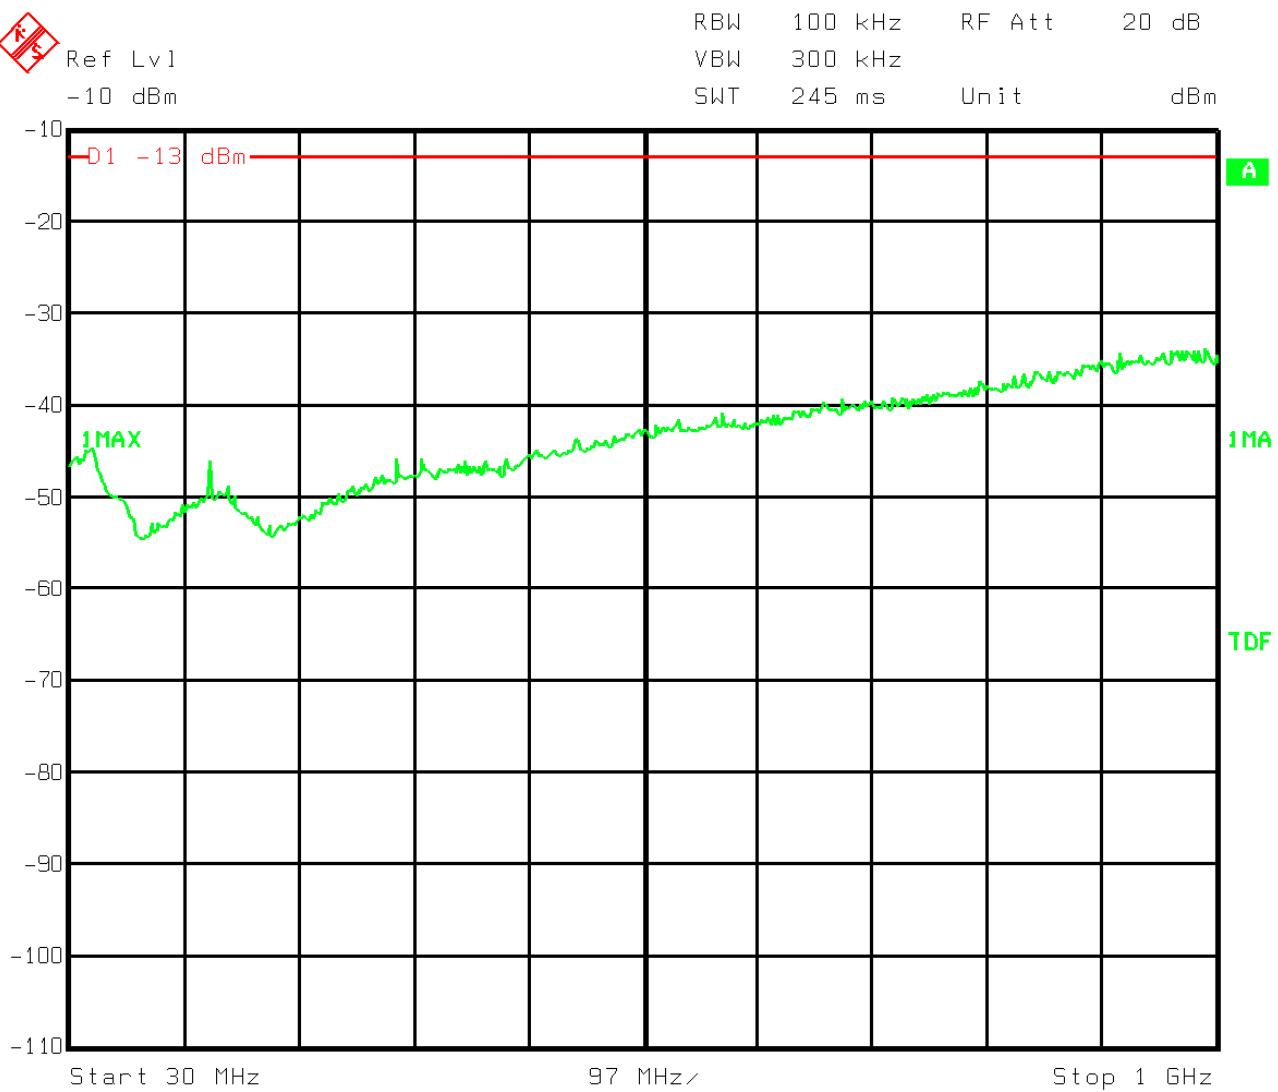


Date: 09.NOV.2015 16:41:38


**30MHz-1GHz – H Pol**

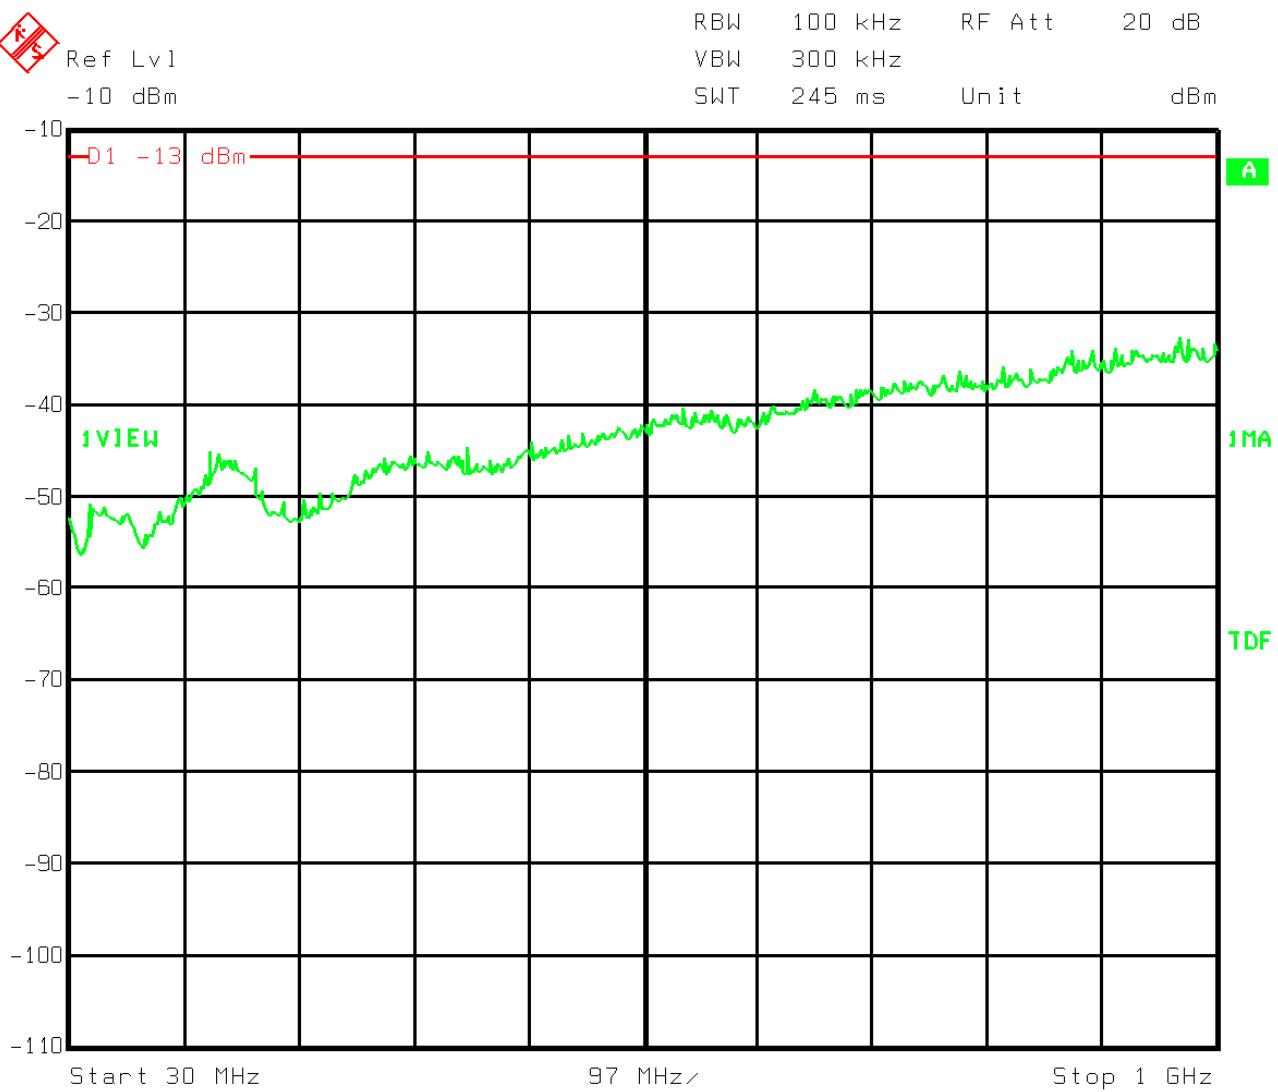

Date: 09.NOV.2015 16:45:45


**30MHz-1GHz – V Pol**

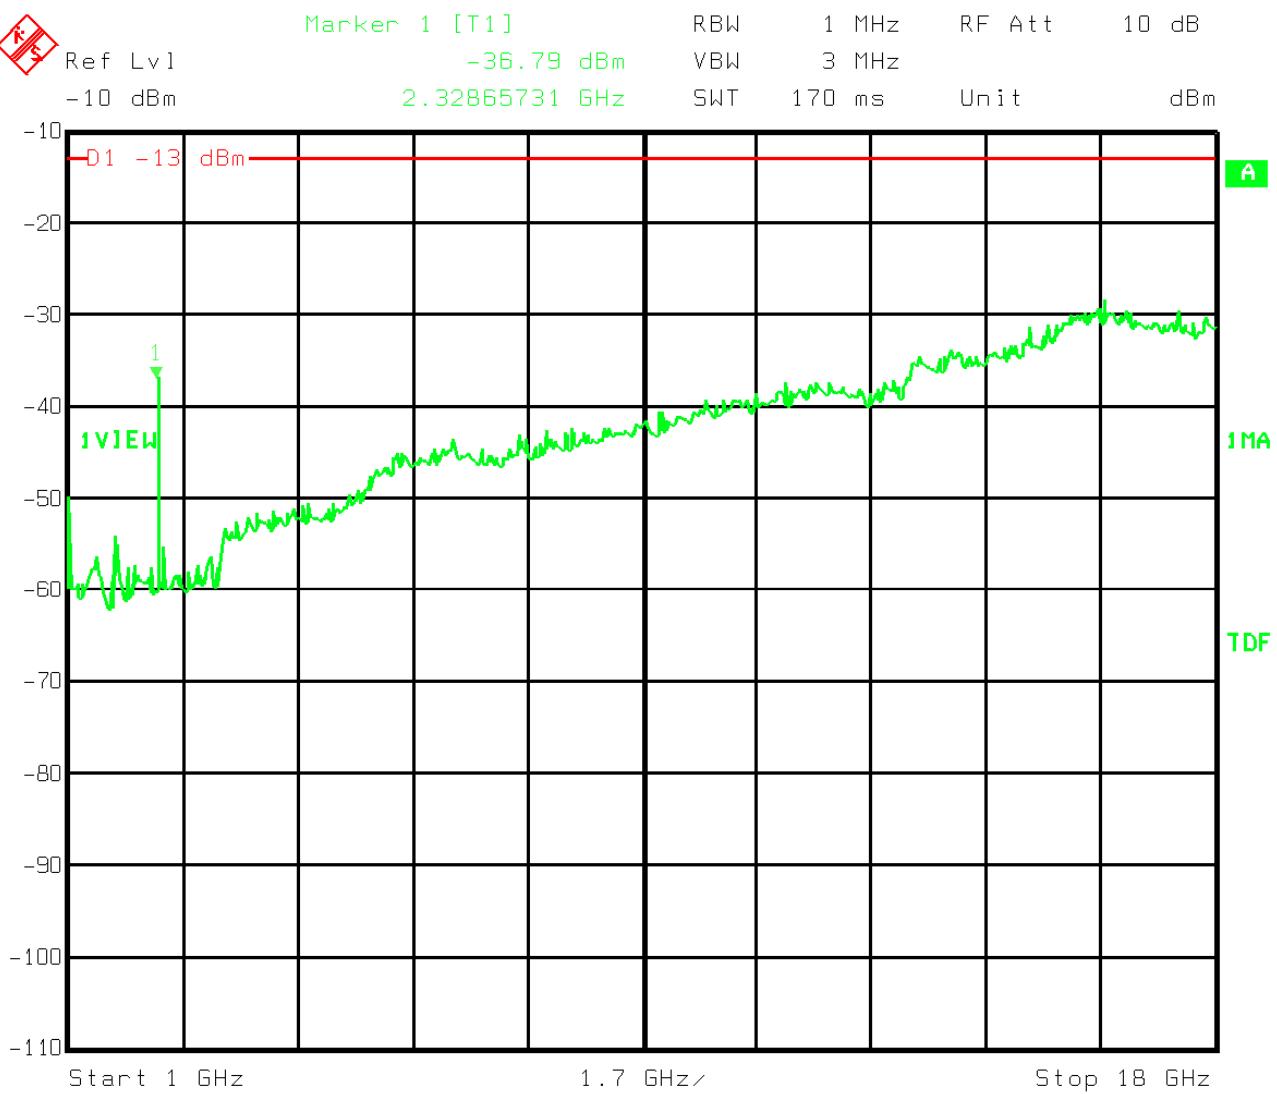

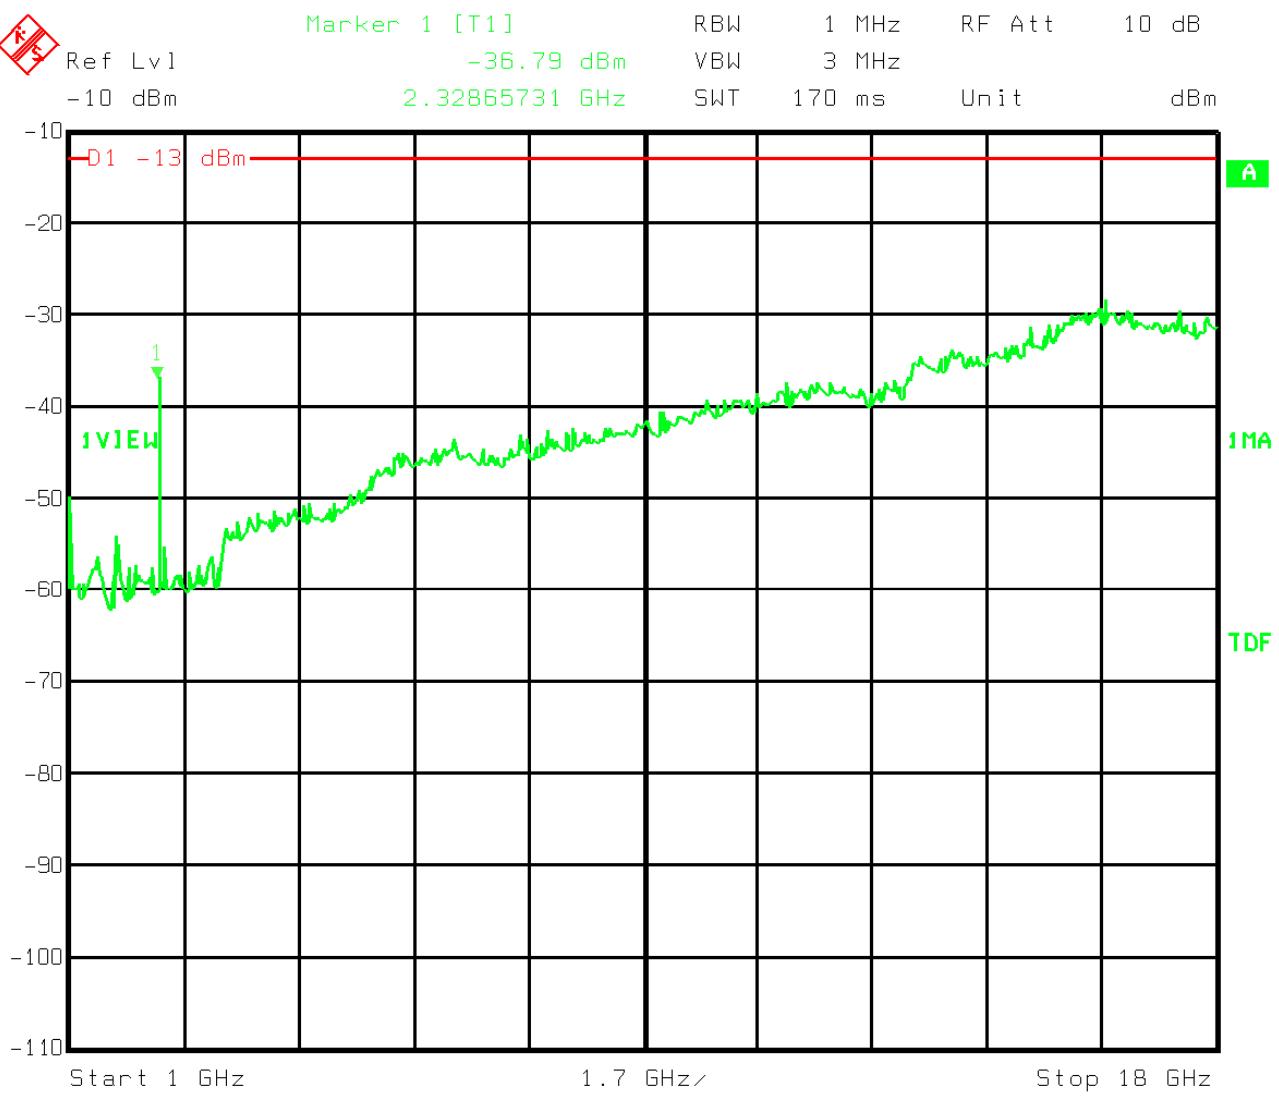


Date: 09.NOV.2015 18:02:06

**1GHz-18GHz – V Pol**

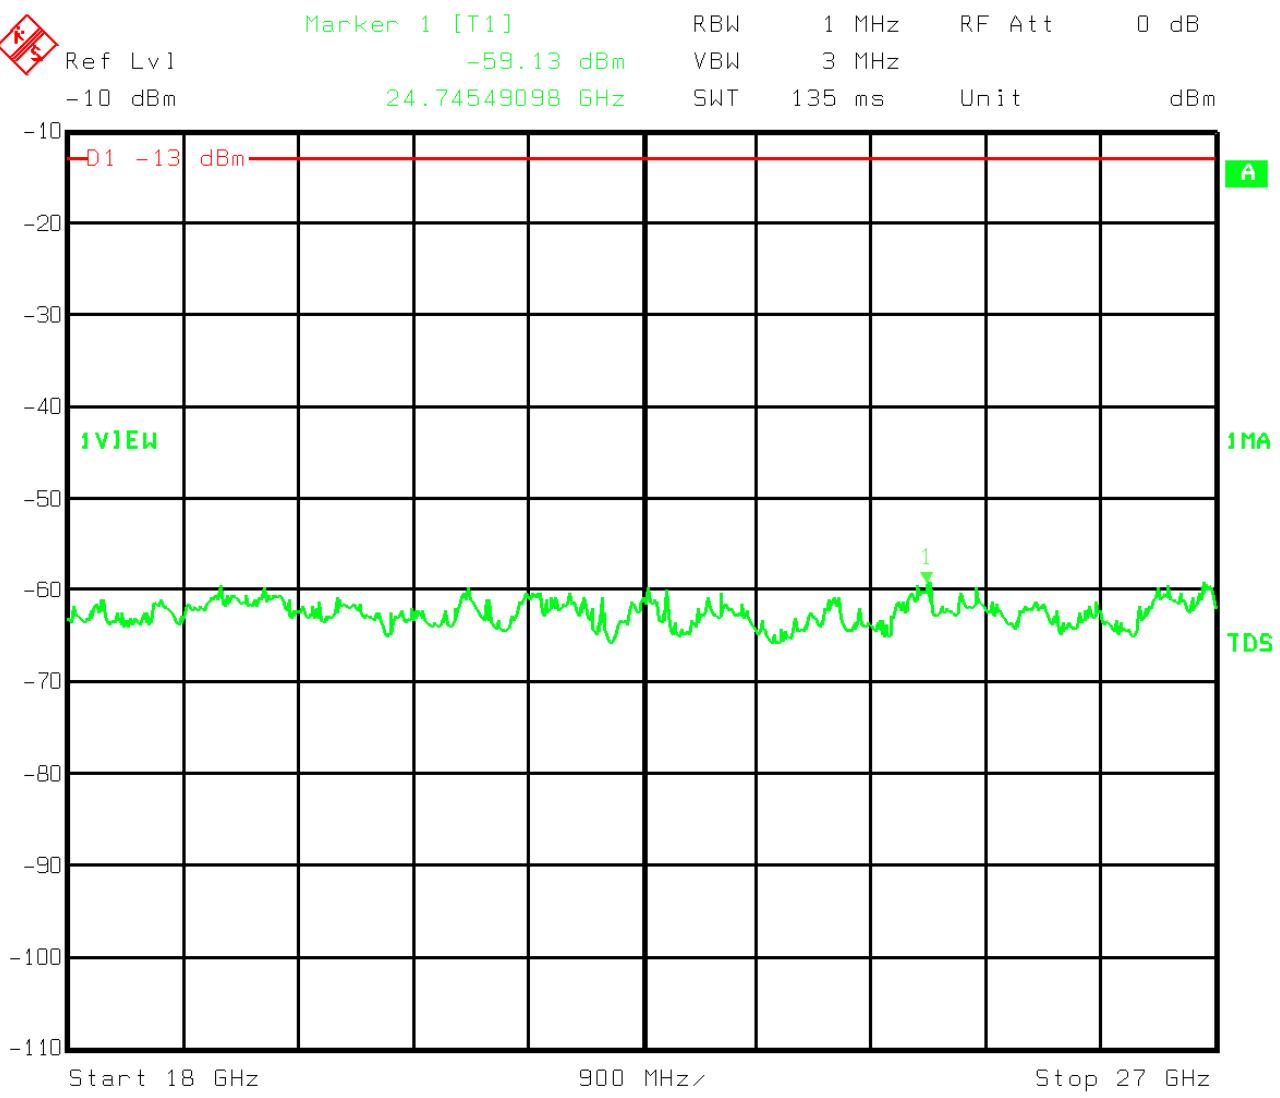

Date: 10.NOV.2015 11:40:06

**18GHz-27GHz – H Pol**

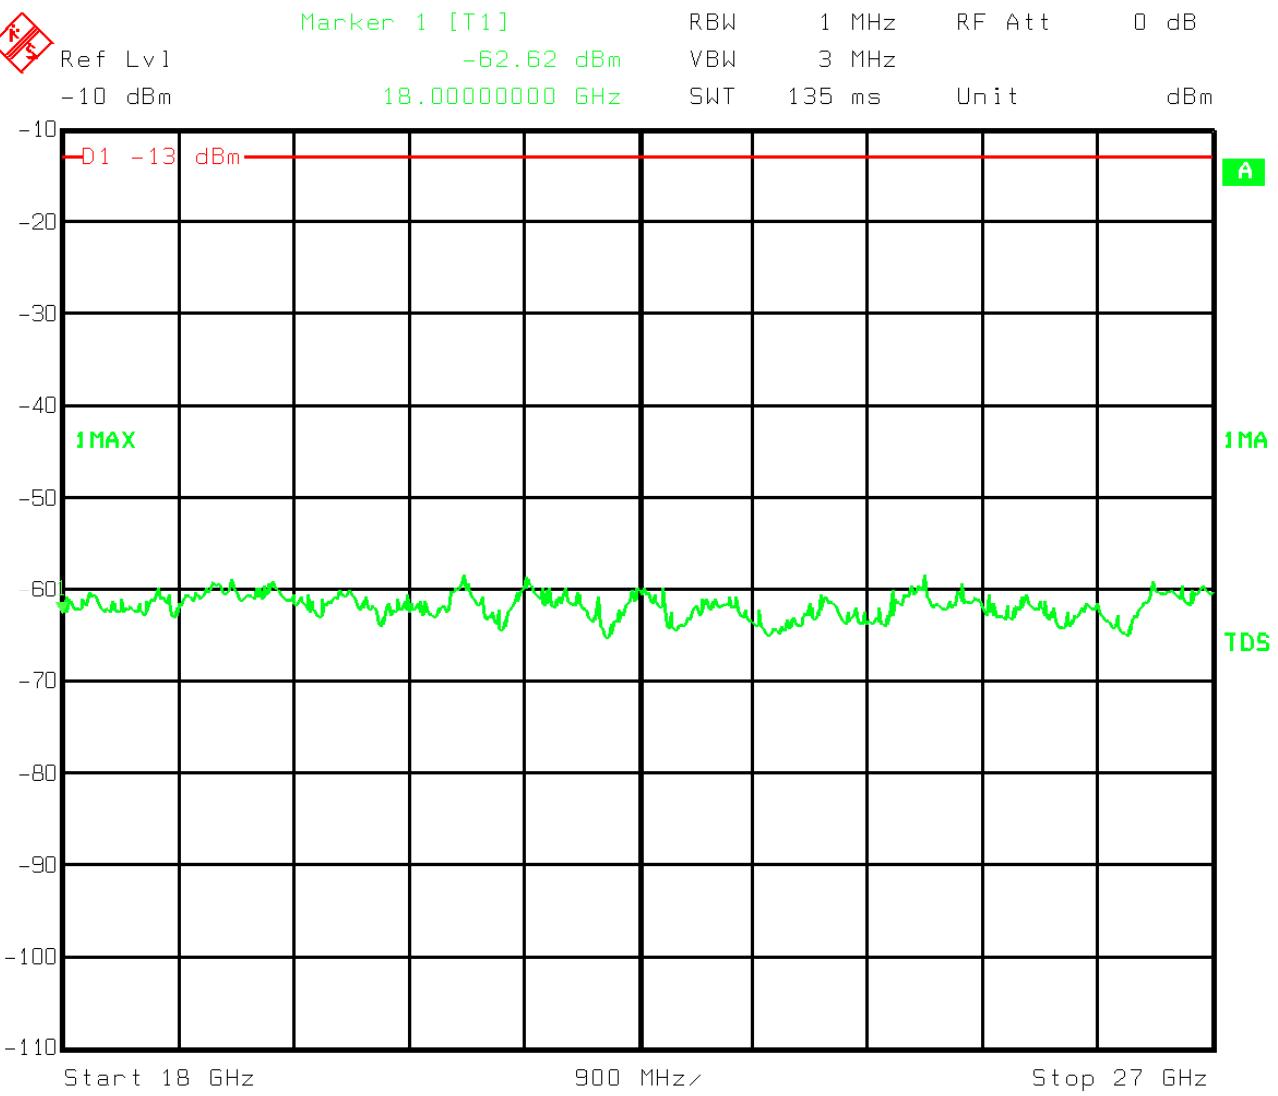


Date: 10.NOV.2015 11:35:42


**18GHz-27GHz – V Pol**

## Appendix B: Block diagrams of test set-ups

### Radiated emissions set-up

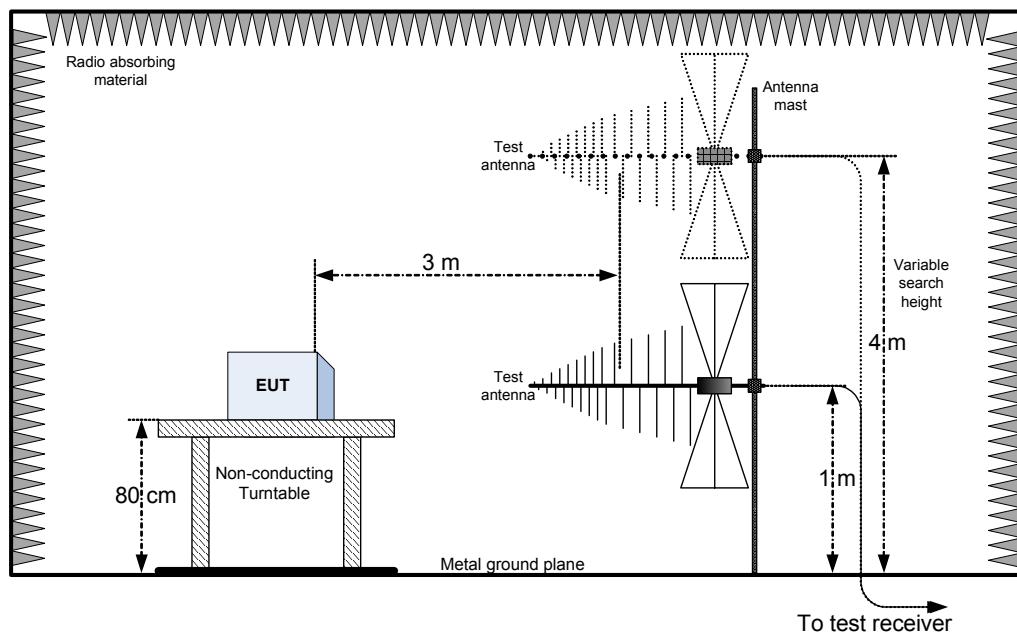

### Substitution method set-up

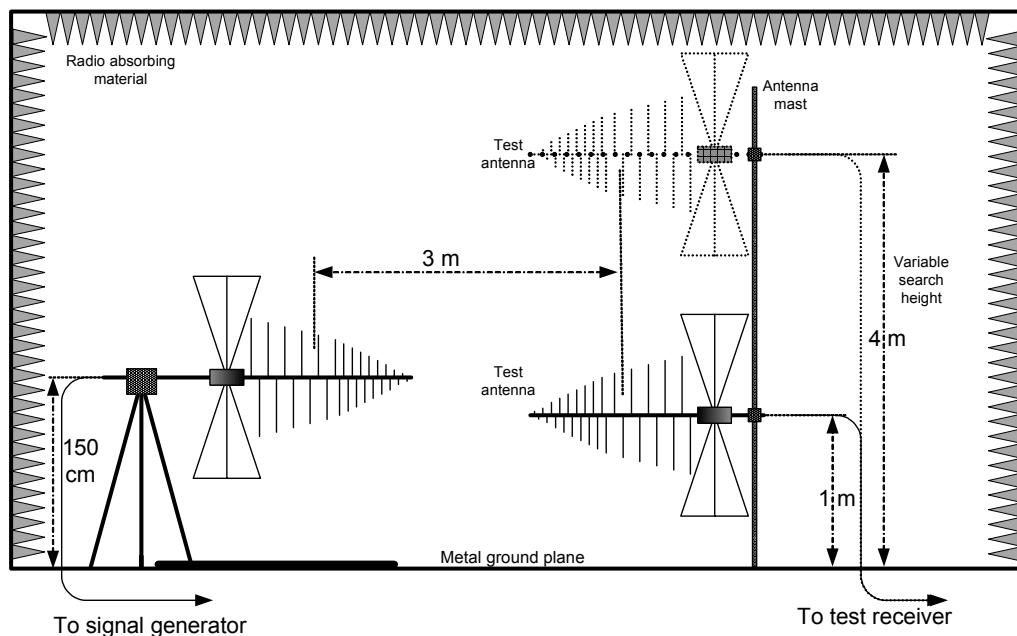

## Appendix C: EUT Photos

### Photo Set up







## Photo EUT



