

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM151100681001
Page: 1 of 31

1

FCC REPORT

Application No.:	SZEM1511006810CR
Applicant:	SHENZHEN YIROKA ELECTRONIC CO., LTD
Manufacturer/Factory:	SHENZHEN YIROKA ELECTRONIC CO., LTD
Product Name:	WIRELESS DOORBELL
Model No.(EUT):	A-290D A-288, A-289, A-291, A-298, A-299, A-289D, A-291D; B-288, B-289, B-291, B-298, B-299, B-289D, B-290D, B-291D; T-288, T-289, T-291, T-298, T-299, T-289D, T-290D, T-291D; E-288, E-289, E-291, E-298, E-299, E-289D, E-290D, E-291D; H-518, H-528, H-538, H-558, H-518D, H-528D, L-518, L-528, L-538, L-558, L-518D, L-528D; Z-288, Z-289, Z-291, Z-298, Z-299, Z-518, Z-528, Z-538, Z-558, Z-289D, Z-290D, Z-291D, Z-518D, Z-528D; F-288, F-289, F-291, F-298, F-299, F-518, F-528, F-538, F-558, F-289D, F-290D, 2F-91D, F-518D, F-528D, WZ-01 008A
Add Model No.:	
Trade Mark:	YIROKA
FCC ID:	XQKYIROKADOORBELL
Standards:	47 CFR Part 15, Subpart C (2014)
Date of Receipt:	2015-11-10
Date of Test:	2015-11-13 to 2015-11-20
Date of Issue:	2015-11-26

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-11-26		Original

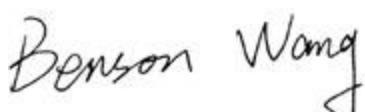Authorized for issue by:			
Tested By	 (Benson Wang) /Project Engineer	2015-11-20	Date
Prepared By	 (Jade Chen) /Clerk	2015-11-26	Date
Checked By	 (Eric Fu) /Reviewer	2015-11-26	Date

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10(2009)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.231 (b)	ANSI C63.10(2009)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.231 (b)/15.209	ANSI C63.10(2009)	PASS
20dB Bandwidth	47 CFR Part 15, Subpart C Section 15.231 (c)	ANSI C63.10(2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.231 (a)	ANSI C63.10(2009)	PASS

Remark:

Model No.:

A-288, A-289, A-291, A-298, A-299, A-289D, A-291D; B-288, B-289, B-291, B-298, B-299, B-289D, B-290D, B-291D; T-288, T-289, T-291, T-298, T-299, T-289D, T-290D, T-291D; E-288, E-289, E-291, E-298, E-299, E-289D, E-290D, E-291D; H-518, H-528, H-538, H-558, H-518D, H-528D, L-518, L-528, L-538, L-558, L-518D, L-528D; Z-288, Z-289, Z-291, Z-298, Z-299, Z-518, Z-528, Z-538, Z-558, Z-289D, Z-290D, Z-291D, Z-518D, Z-528D; F-288, F-289, F-291, F-298, F-299, F-518, F-528, F-538, F-558, F-289D, F-290D, 2F-91D, F-518D, F-528D, WZ-01 008A

Only the Model A-290D was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on appearance and Model No..

4 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 TEST LOCATION	6
5.6 TEST FACILITY	7
5.7 DEVIATION FROM STANDARDS.....	7
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
5.10 EQUIPMENT LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	10
6.1 ANTENNA REQUIREMENT	10
6.2 SPURIOUS EMISSIONS	11
6.2.1 <i>Duty Cycle</i>	11
6.2.2 <i>Spurious Emissions</i>	14
6.3 20dB BANDWIDTH	22
6.4 DWELL TIME	24
7 PHOTOGRAPHS - TEST SETUP	26
7.1 RADIATED EMISSION.....	26
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	27-31

5 General Information

5.1 Client Information

Applicant:	SHENZHEN YIROKA ELECTRONIC CO.,LTD
Address of Applicant:	(2nd Floor, 15th) the 6th – 19th Building, Xinxing Industrial Park, Citianpu Gongming Guangming
Manufacturer:	SHENZHEN YIROKA ELECTRONIC CO.,LTD
Address of Manufacturer:	(2nd Floor, 15th) the 6th – 19th Building, Xinxing Industrial Park, Citianpu Gongming Guangming
Factory:	SHENZHEN YIROKA ELECTRONIC CO.,LTD
Address of Factory:	(2nd Floor, 15th) the 6th – 19th Building, Xinxing Industrial Park, Citianpu Gongming Guangming

5.2 General Description of EUT

Product Name:	WIRELESS DOORBELL
Mode No.:	A-290D
Trade Mark:	YIROKA
Sample Type:	Fixed production
Operation Frequency:	315MHz
Channel Numbers:	1
Antenna Type:	Integral
Antenna Gain:	2dBi
Battery:	12V DC (1 x 12V ALKALINE Battery)

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Equipment List

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-09-16	2016-09-16
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-05-13	2016-05-13
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2015-05-13	2016-05-13
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	2015-10-24	2016-10-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0005	2015-05-16	2018-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24	2016-10-24
9	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24	2016-10-24
10	Band filter	Amindeon	Asi 3314	SEL0094	2015-05-13	2016-05-13
11	Loop Antenna	ETS-LINDGREN	6502	SEL0802	2015-08-14	2016-08-14




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM151100681001
Page: 9 of 31

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25
8	POWER METER	R & S	NRVS	SEL0144	2015-10-09	2016-10-09
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25


6 Test results and Measurement Data

6.1 Antenna Requirement

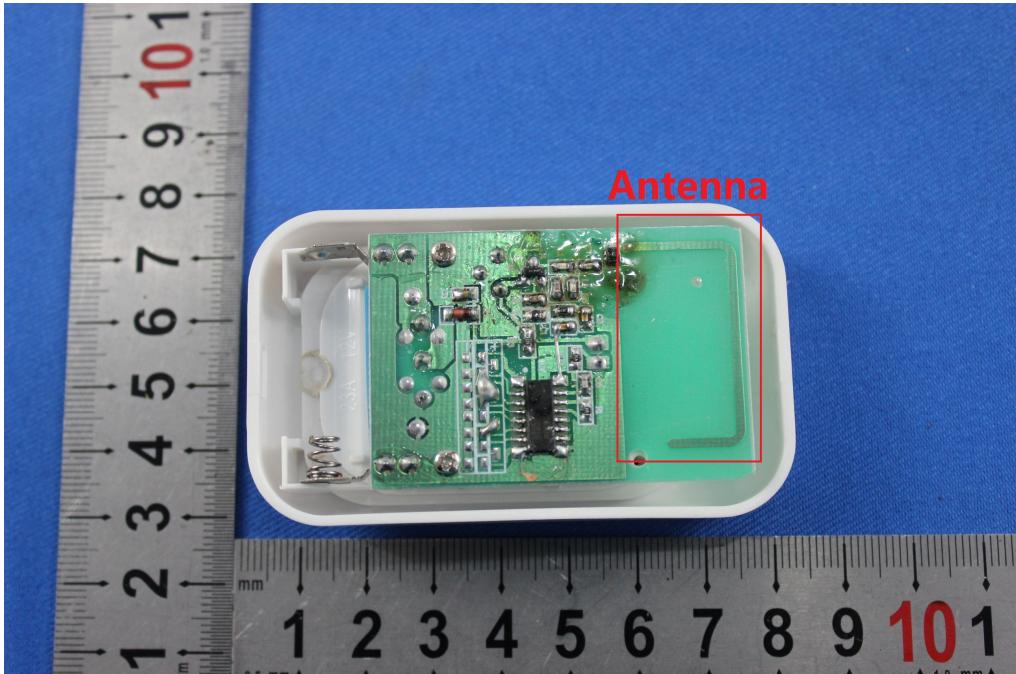Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	 <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.</p>

6.2 Spurious Emissions


6.2.1 Duty Cycle

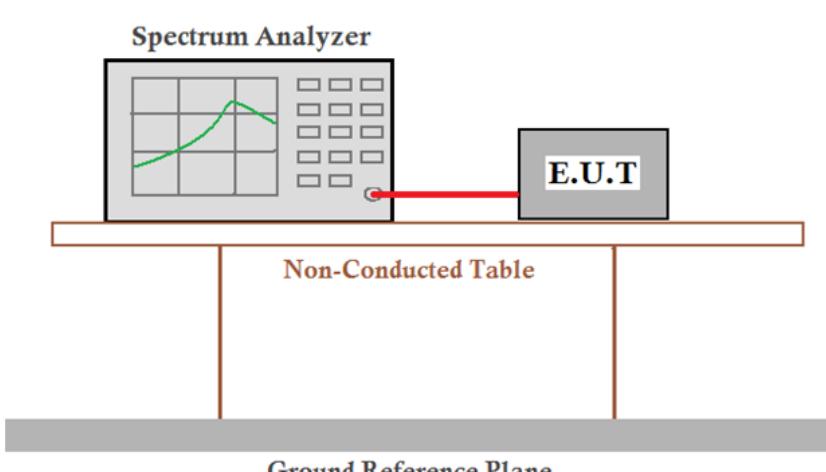Test Requirement:	47 CFR Part 15C Section 15.35 (c)
Test Method:	ANSI C63.10:2009
Test Setup:	
Limit:	N/A
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






Test plot as follows:

Duty cycle numbers

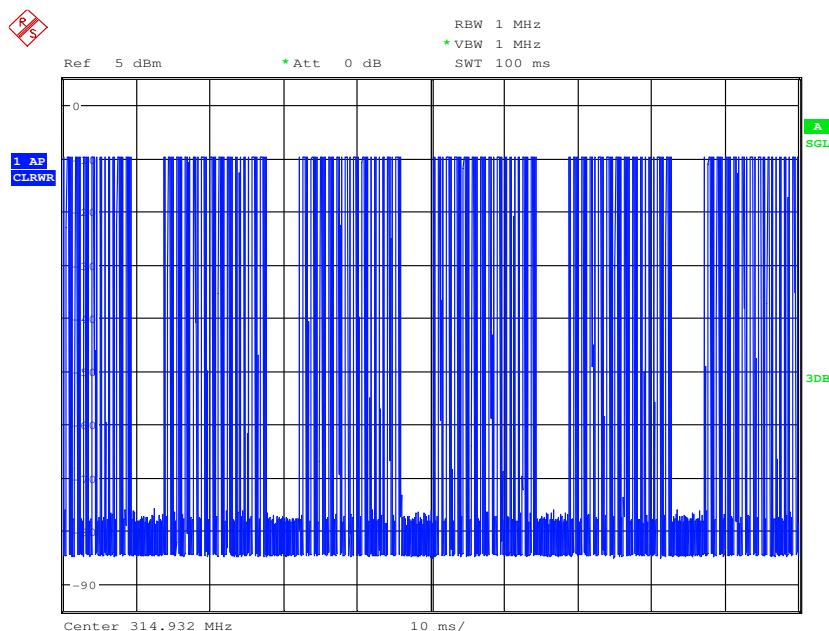

Time slot:

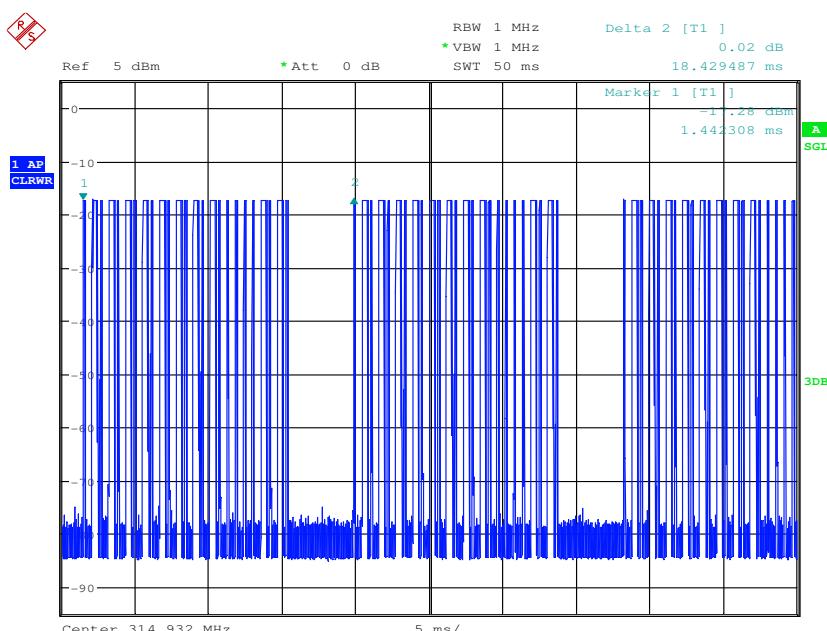

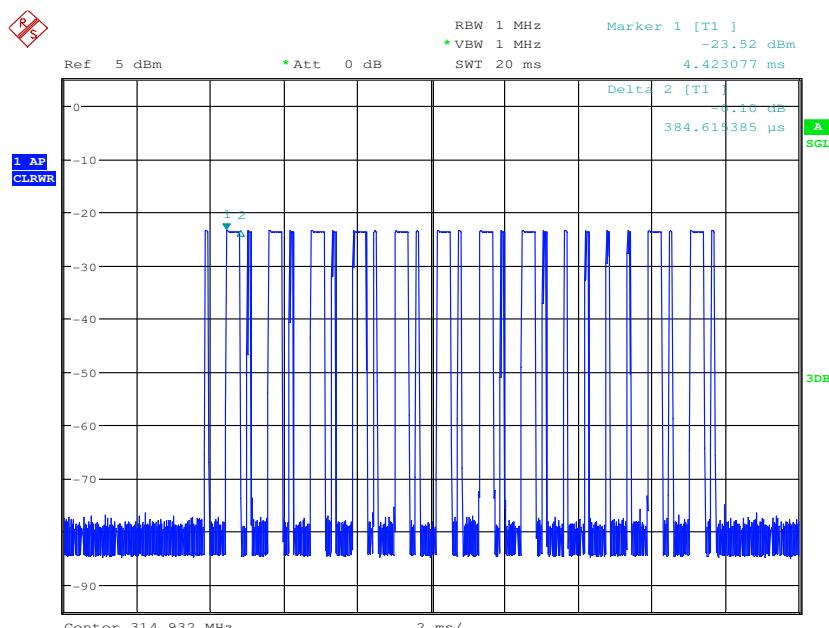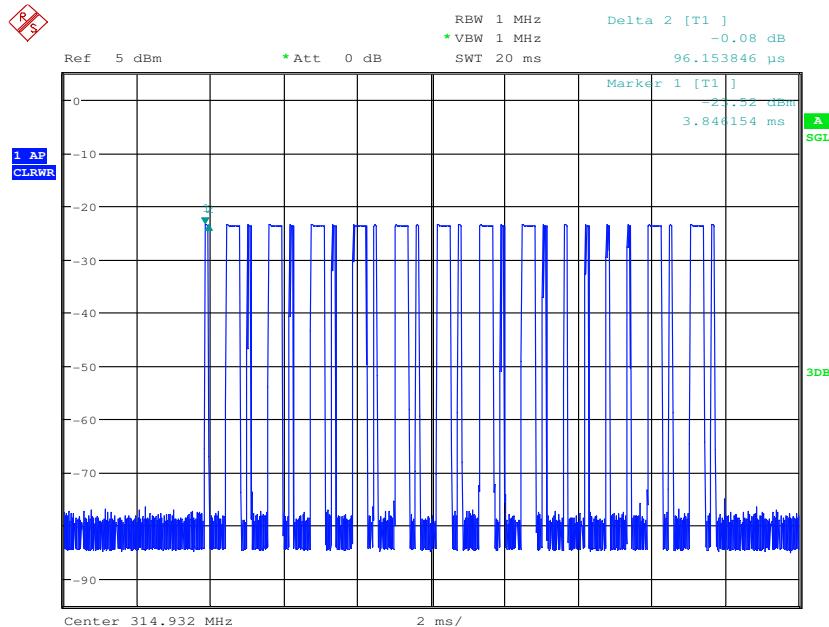

6.2.2 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209				
Test Method:	ANSI C63.10: 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	314.932MHz	75.70		Average Value	
		95.70		Peak Value	

Test Procedure:	<ol style="list-style-type: none"> a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Setup:	

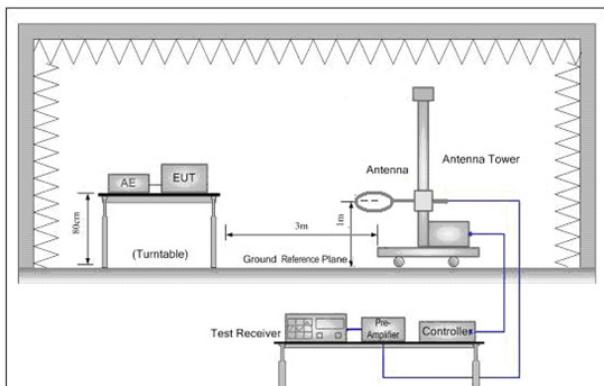


Figure 1. Below 30MHz

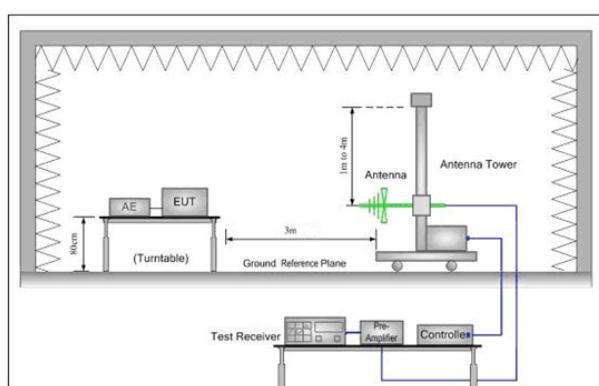


Figure 2. 30MHz to 1GHz

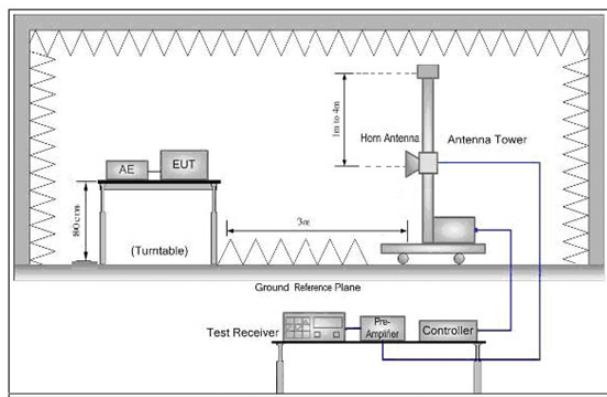


Figure 3. Above 1 GHz

Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

6.2.2.1 Field Strength Of The Fundamental Signal

Peak value:								
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
314.932	1.95	14.35	26.52	79.12	68.90	95.70	-26.80	Horizontal
314.932	1.95	14.33	26.52	92.97	80.73	95.70	-14.97	Vertical

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	T on time =5.288ms
	T period =18.429ms
	Average value= PK+20 log(Duty cycle)


Average value= PK value+20 log(Duty cycle)

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
314.932	58.06	75.70	-13.32	Horizontal
314.932	69.89	75.70	-16.63	Vertical

6.2.2.2 Spurious Emissions

Below 1GHz

QP value:

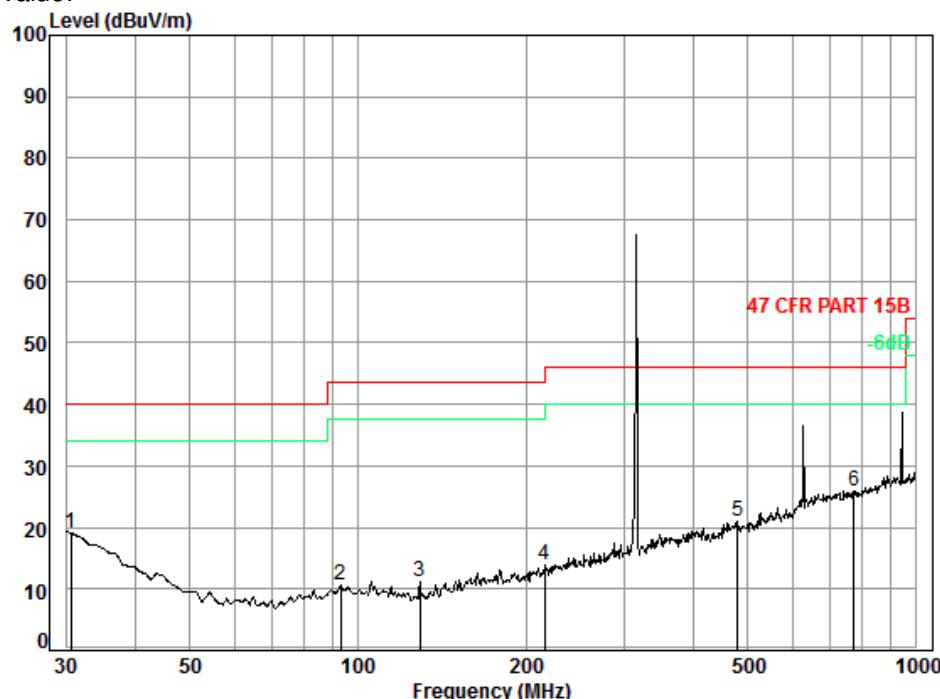


Condition: 47 CFR PART 15B 3m 3142C Horizontal

Job No. : 6810CR

Test Mode: TX mode

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
1	30.53	0.60	18.65	27.35	27.16	19.06	40.00	-20.94
2	93.11	1.13	8.90	27.21	27.94	10.76	43.50	-32.74
3	129.01	1.28	7.92	27.02	28.86	11.04	43.50	-32.46
4	216.02	1.50	10.99	26.64	27.96	13.81	46.00	-32.19
5	478.85	2.52	17.68	27.60	28.44	21.04	46.00	-24.96
6	774.16	3.12	21.89	27.33	28.29	25.97	46.00	-20.03

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
629.864	2.76	20.32	27.5	41.06	36.64	75.62	-38.98	Horizontal
944.796	3.65	23.24	26.58	38.33	38.64	75.62	-36.98	Horizontal

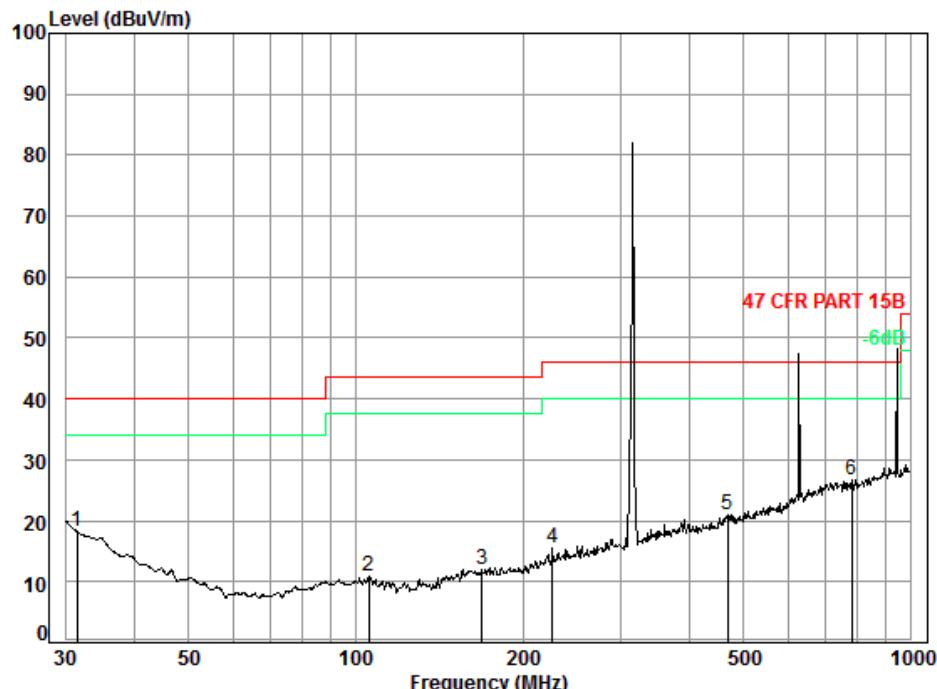

Condition: 47 CFR PART 15B 3m 3142C Vertical

Job No. : 6810CR

Test Mode: TX mode

Freq	Cable	Ant	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 31.40	0.60	18.08	27.35	26.87	18.20	40.00	-21.80
2 105.64	1.22	8.87	27.16	27.87	10.80	43.50	-32.70
3 169.01	1.35	9.52	26.82	27.94	11.99	43.50	-31.51
4 226.10	1.55	11.44	26.61	29.05	15.43	46.00	-30.57
5 467.24	2.48	17.46	27.54	28.61	21.01	46.00	-24.99
6 782.35	3.15	21.93	27.32	28.83	26.59	46.00	-19.41

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
629.864	2.76	20.32	27.5	51.85	47.43	75.62	-28.19	Vertical
944.796	3.65	23.24	26.58	47.87	48.18	75.62	-27.44	Vertical

Above 1GHz

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1259.728	-20.70	25.30	0.00	41.20	45.80	74	-28.20	Vertical
1574.660	-20.40	26.80	0.00	37.80	44.20	74	-29.80	Vertical
1889.592	-19.10	28.70	0.00	38.90	48.50	74	-25.50	Vertical
2204.524	-19.30	30.90	0.00	42.70	54.30	74	-19.70	Vertical
2519.456	-18.90	32.70	0.00	38.50	52.30	74	-21.70	Vertical
2834.388	-19.20	33.80	0.00	42.10	56.70	74	-17.30	Vertical
3149.320	-30.60	32.10	0.00	45.60	47.10	74	-26.90	Vertical
3464.252	-31.30	32.30	0.00	43.00	44.00	74	-30.00	Vertical
3779.184	-31.20	33.20	0.00	45.70	47.70	74	-26.30	Vertical
4094.116	-31.00	33.80	0.00	44.70	47.50	74	-26.50	Vertical
4409.048	-30.50	33.70	0.00	42.20	45.40	74	-28.60	Vertical
4723.980	-30.40	34.50	0.00	41.80	45.90	74	-28.10	Vertical

Average Value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Average Factor (-dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1259.728	-20.70	25.30	0.00	41.20	10.84	34.96	54	-19.04	Vertical
1574.660	-20.40	26.80	0.00	37.80	10.84	33.36	54	-20.64	Vertical
1889.592	-19.10	28.70	0.00	38.90	10.84	37.66	54	-16.34	Vertical
2204.524	-19.30	30.90	0.00	42.70	10.84	43.46	54	-10.54	Vertical
2519.456	-18.90	32.70	0.00	38.50	10.84	41.46	54	-12.54	Vertical
2834.388	-19.20	33.80	0.00	42.10	10.84	45.86	54	-8.14	Vertical
3149.320	-30.60	32.10	0.00	45.60	10.84	36.26	54	-17.74	Vertical
3464.252	-31.30	32.30	0.00	43.00	10.84	33.16	54	-20.84	Vertical
3779.184	-31.20	33.20	0.00	45.70	10.84	36.86	54	-17.14	Vertical
4094.116	-31.00	33.80	0.00	44.70	10.84	36.66	54	-17.34	Vertical
4409.048	-30.50	33.70	0.00	42.20	10.84	34.56	54	-19.44	Vertical
4723.980	-30.40	34.50	0.00	41.80	10.84	35.06	54	-18.94	Vertical

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1259.728	-20.70	25.30	0.00	55.00	59.60	74	-14.40	Horizontal
1574.660	-20.20	27.10	0.00	49.00	55.90	74	-18.10	Horizontal
1889.592	-19.10	29.30	0.00	49.10	59.30	74	-14.70	Horizontal
2204.524	-19.30	30.90	0.00	49.40	61.00	74	-13.00	Horizontal
2519.456	-18.90	32.70	0.00	46.70	60.50	74	-13.50	Horizontal
2834.388	-19.20	33.80	0.00	49.00	63.60	74	-10.40	Horizontal
3149.320	-30.50	31.90	0.00	42.00	43.40	74	-30.60	Horizontal
3464.252	-31.40	32.20	0.00	43.50	44.30	74	-29.70	Horizontal
3779.184	-31.20	33.20	0.00	42.80	44.80	74	-29.20	Horizontal
4094.116	-30.90	34.00	0.00	42.80	45.90	74	-28.10	Horizontal
4409.048	-30.40	33.80	0.00	45.70	49.10	74	-24.90	Horizontal
4723.980	-30.30	34.60	0.00	42.50	46.80	74	-27.20	Horizontal

Average Value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Average Factor (-dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1259.728	-20.70	25.30	0.00	55.00	10.84	48.76	54	-5.24	Horizontal
1574.660	-20.20	27.10	0.00	49.00	10.84	45.06	54	-8.94	Horizontal
1889.592	-19.10	29.30	0.00	49.10	10.84	48.46	54	-5.54	Horizontal
2204.524	-19.30	30.90	0.00	49.40	10.84	50.16	54	-3.84	Horizontal
2519.456	-18.90	32.70	0.00	46.70	10.84	49.66	54	-4.34	Horizontal
2834.388	-19.20	33.80	0.00	49.00	10.84	52.76	54	-1.24	Horizontal
3149.320	-30.50	31.90	0.00	42.00	10.84	32.56	54	-21.44	Horizontal
3464.252	-31.40	32.20	0.00	43.50	10.84	33.46	54	-20.54	Horizontal
3779.184	-31.20	33.20	0.00	42.80	10.84	33.96	54	-20.04	Horizontal
4094.116	-30.90	34.00	0.00	42.80	10.84	35.06	54	-18.94	Horizontal
4409.048	-30.40	33.80	0.00	45.70	10.84	38.26	54	-15.74	Horizontal
4723.980	-30.30	34.60	0.00	42.50	10.84	35.96	54	-18.04	Horizontal

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



6.3 20dB Bandwidth

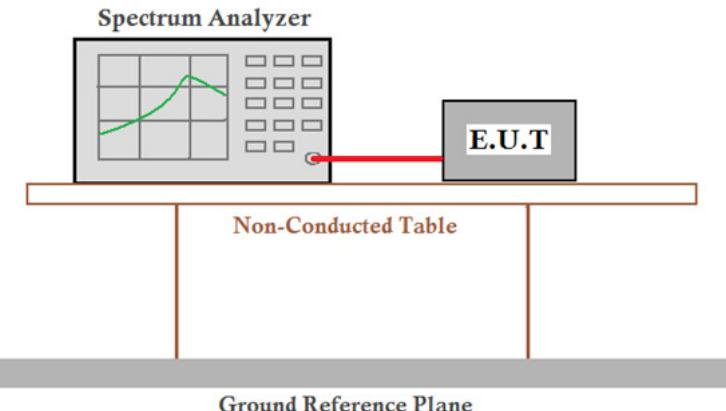
Test Requirement:	47 CFR Part 15C Section 15.231 (c)
Test Method:	ANSI C63.10:2009
Test Setup:	
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data


20dB bandwidth (KHz)	Limit (KHz)	Results
48.0	787.33	PASS

Remark:

The bandwidth limit is $314.932 \times 0.0025 = 787.33\text{KHz}$

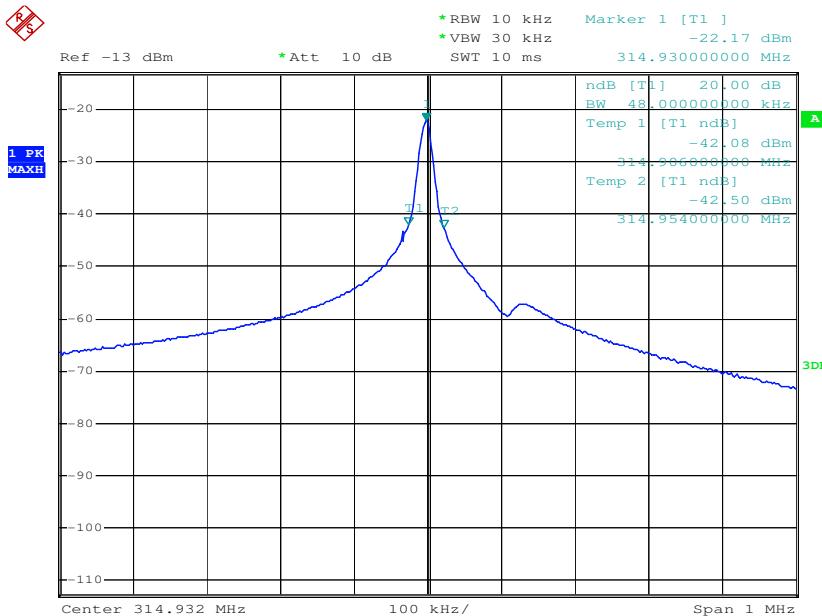Test plot as follows:


6.4 Dwell Time

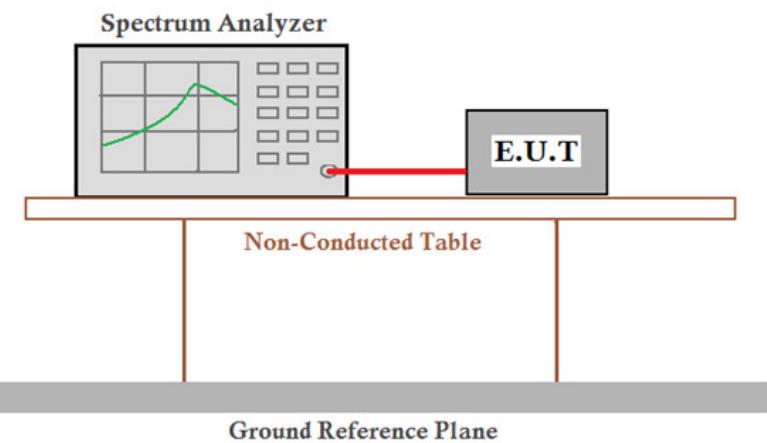Test Requirement:	47 CFR Part 15C Section 15.231 (a) (1)	
Test Method:	ANSI C63.10:2009	
Test Setup:		
Limit:	Not more than 5 seconds	
Test Mode:	Transmitting mode	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

Measurement Data

Test item	Limit (MHz)	Results
Transmitting time	≤5S	Pass

Test plot as follows:

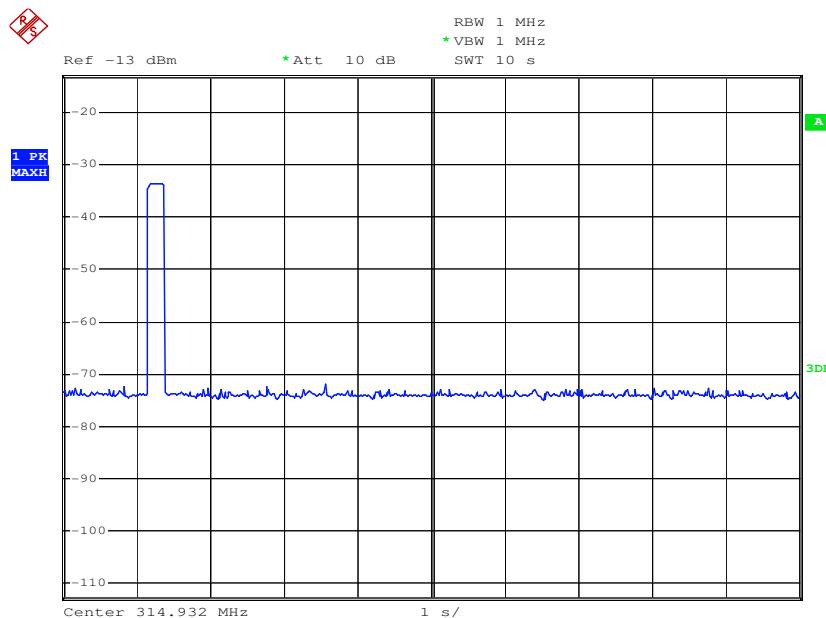


7 Photographs - Test setup

Test Model No.: A-290D

7.1 Radiated Emission



Radiated Spurious Emission

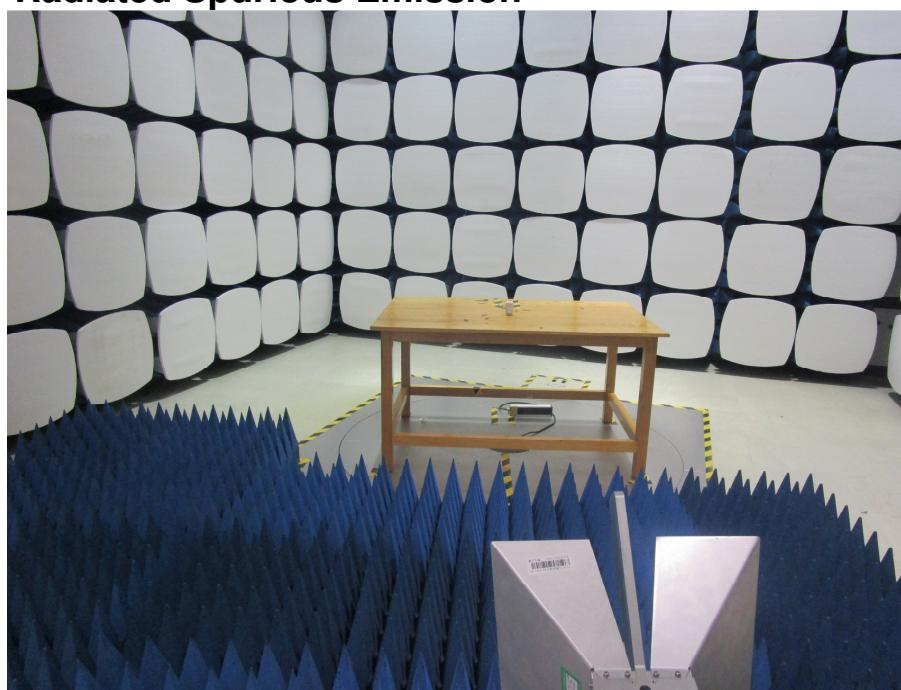

8 Photographs - EUT Constructional Details







